



Appendix B. SAR Measurement Plots

Table of contents
GSM 850 MHz Head
GSM 850 MHz body
GSM 1900 MHz Head
GSM 1900 MHz body
WCDMA 1700 MHz Head
WCDMA 1700 MHz body
WiFi 802.11 Head
WiFi 802.11 body

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 190CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.68 V/m; Power Drift = 0.152 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

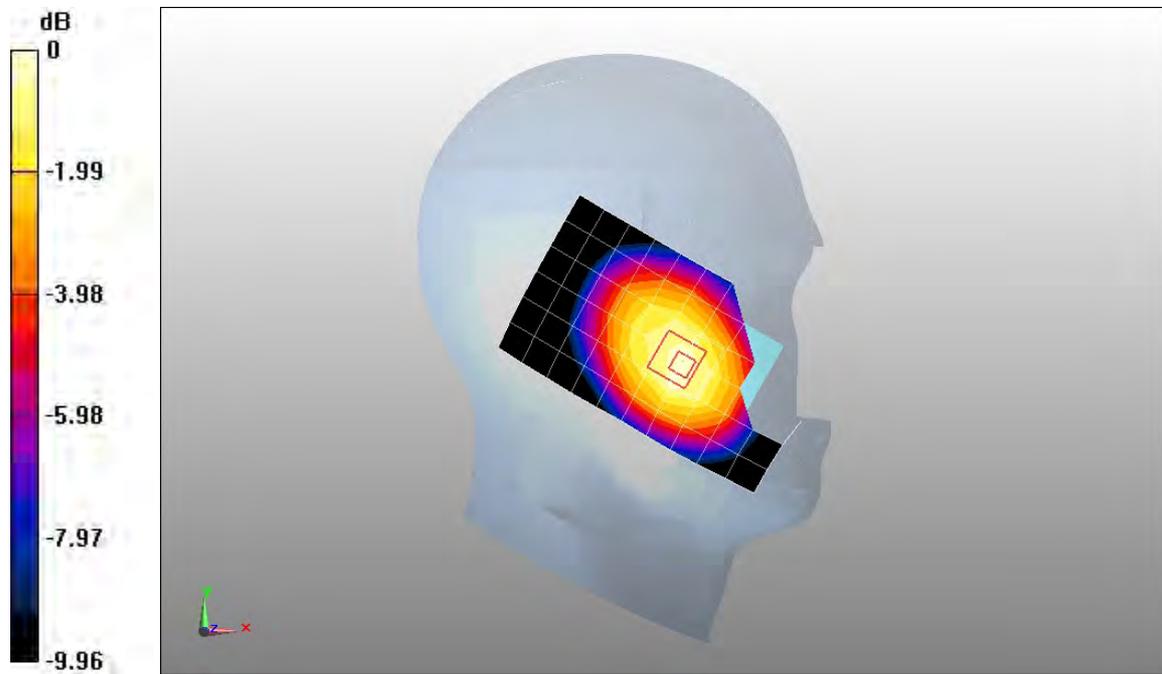

0 dB = 0.275mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 190CH Left hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.221 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.224 mW/g

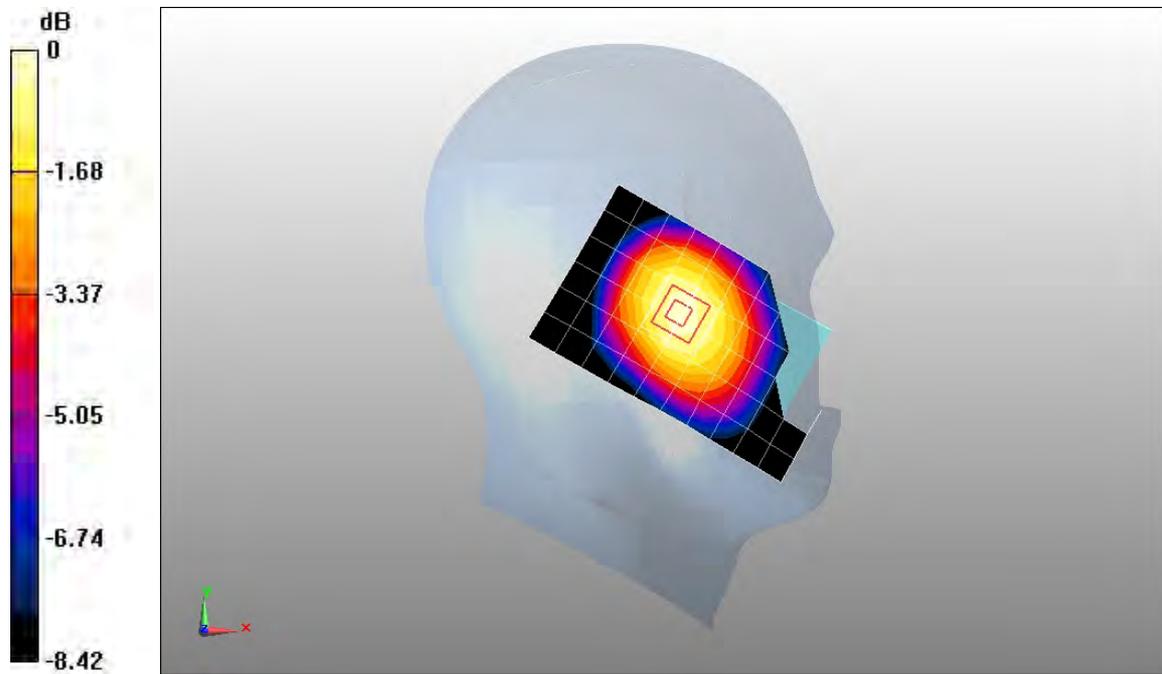

0 dB = 0.224mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 190CH Right hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.255 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.31 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.178 mW/g

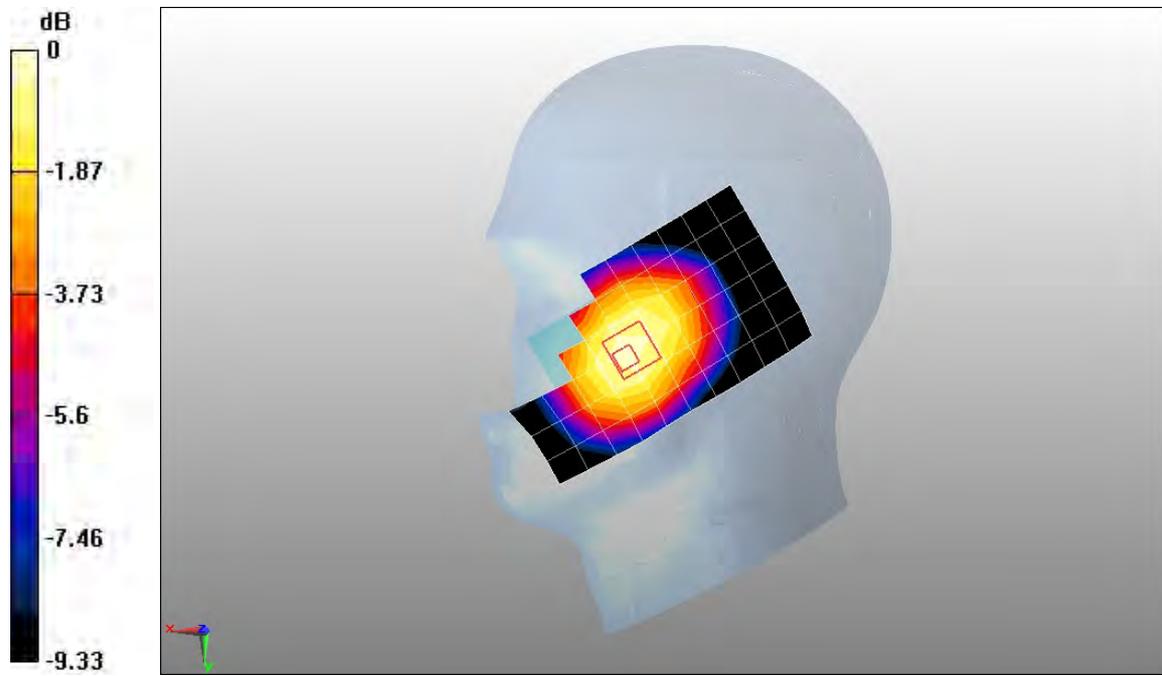

0 dB = 0.255mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 190CH Right hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.215 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.52 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.218 mW/g

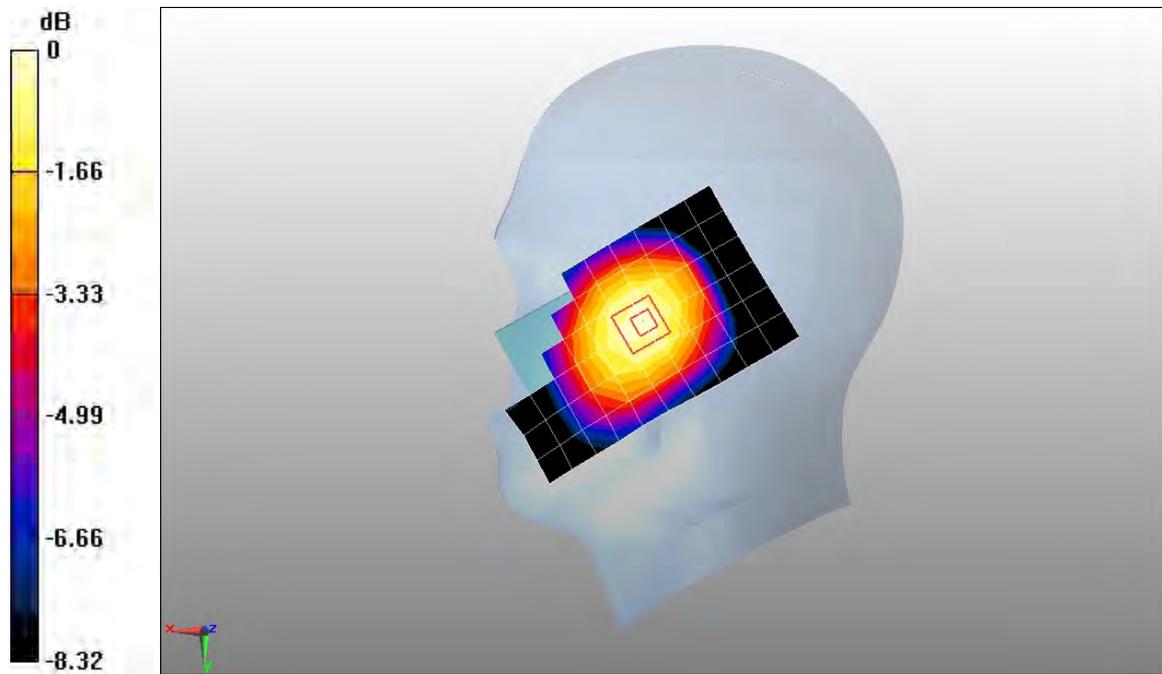

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 251CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.256 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.41 V/m; Power Drift = 0.136 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

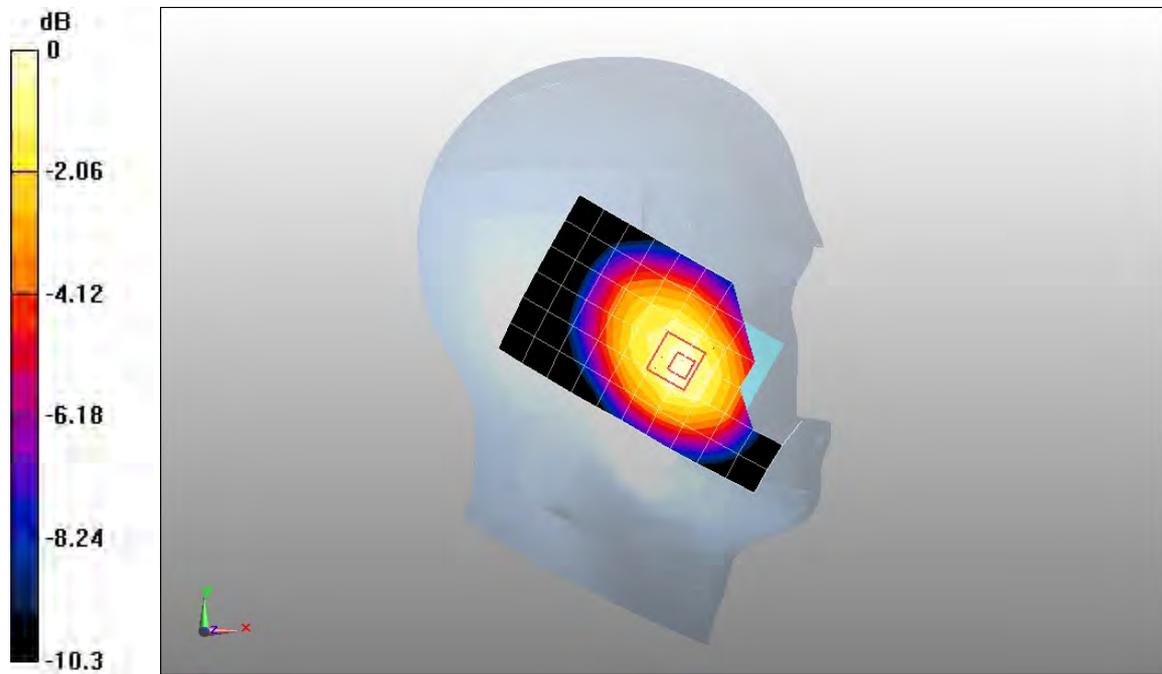

0 dB = 0.262mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 128CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.881$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.273 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.2 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.194 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.283 mW/g

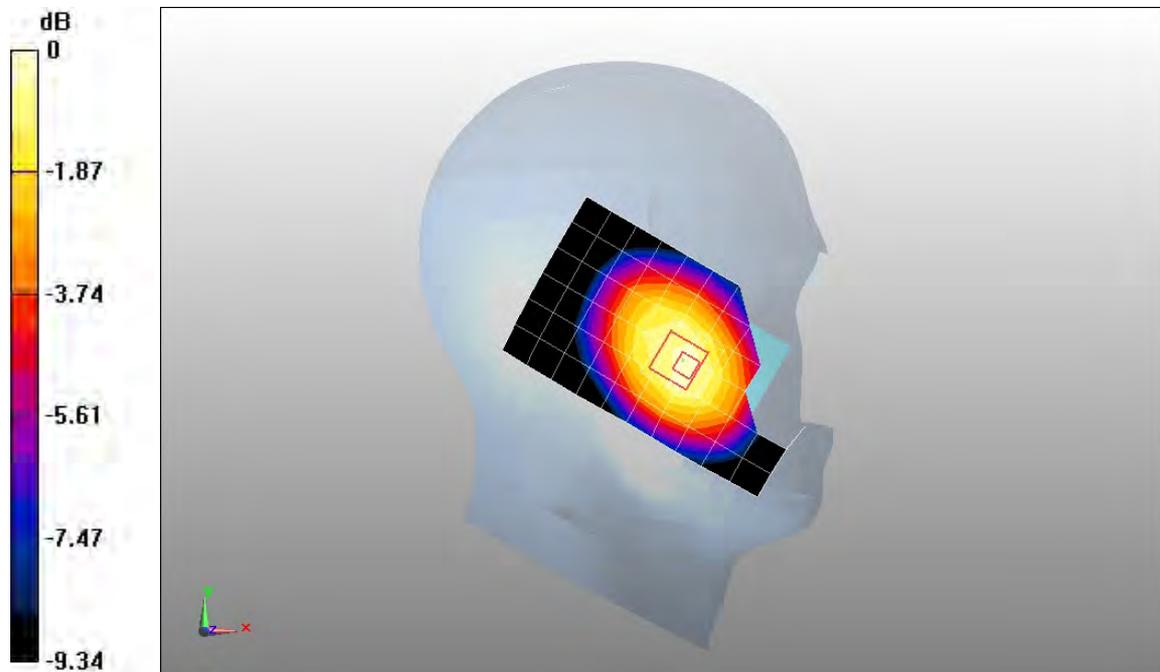

0 dB = 0.283mW/g



Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 1TS 190CH Toward Phontam 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.400 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.293 mW/g

Maximum value of SAR (measured) = 0.409 mW/g

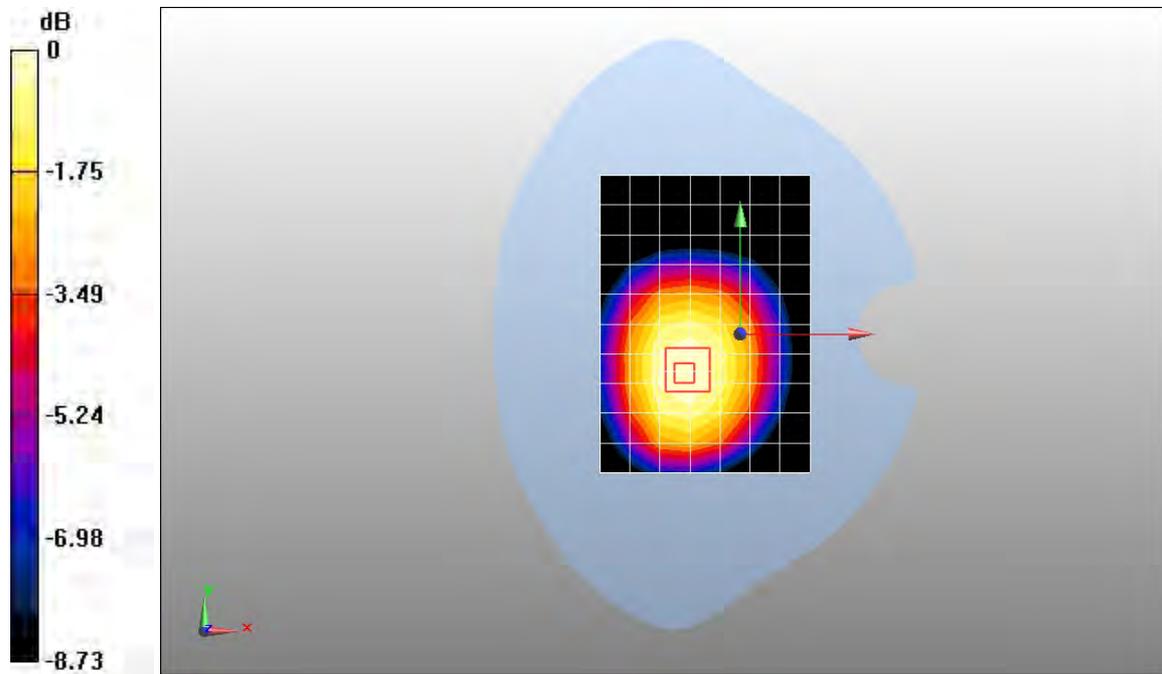

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 2TS 190CH Toward Phontam 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.599 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.8 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 0.604 mW/g

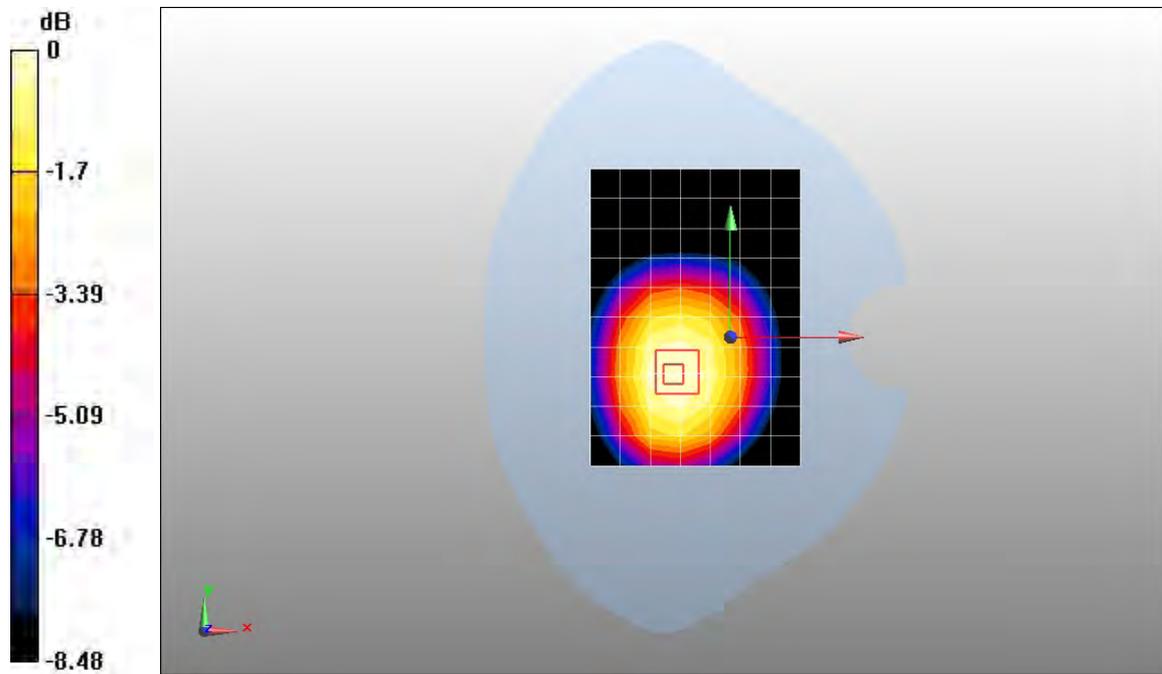

0 dB = 0.604mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 2TS 190CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.778 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.560 mW/g

Maximum value of SAR (measured) = 0.794 mW/g

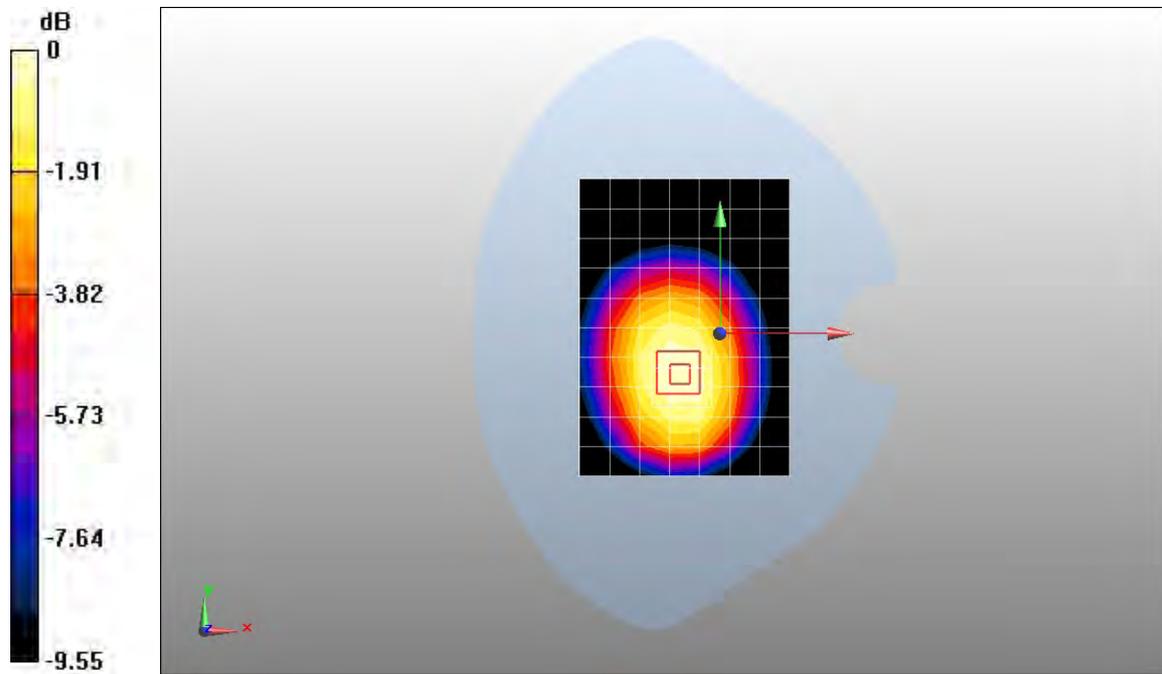

0 dB = 0.794mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 2TS 190CH Left side 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.485 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.482 mW/g

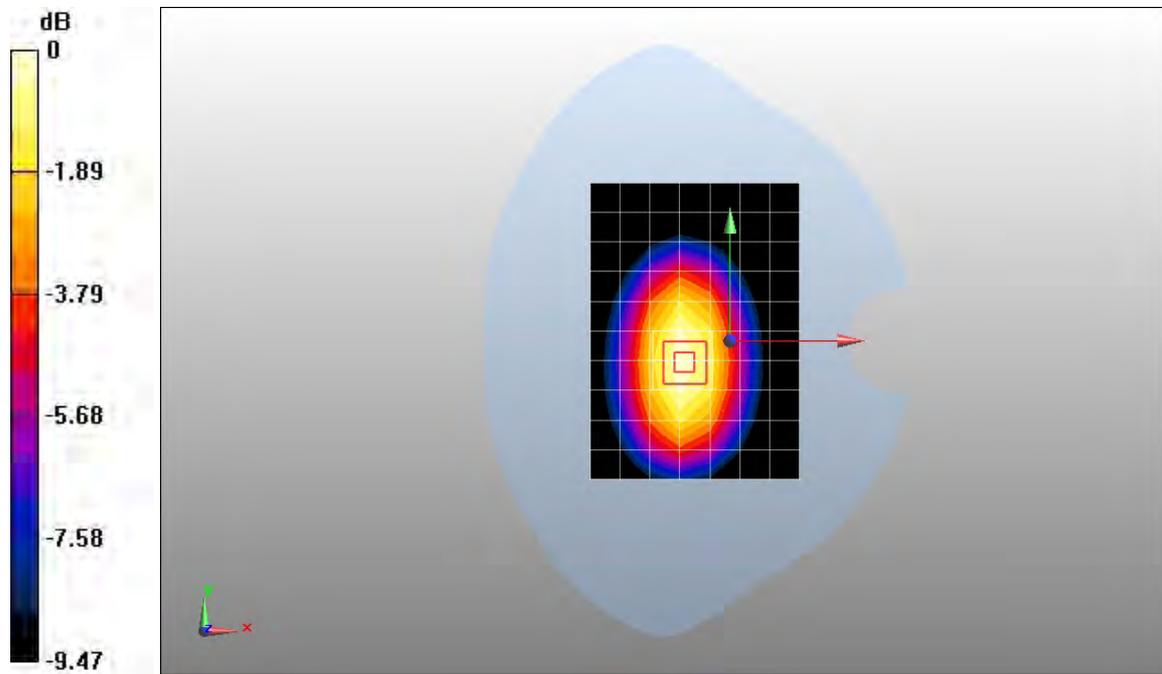

0 dB = 0.482mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 2TS 190CH Right side 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.436 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.2 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

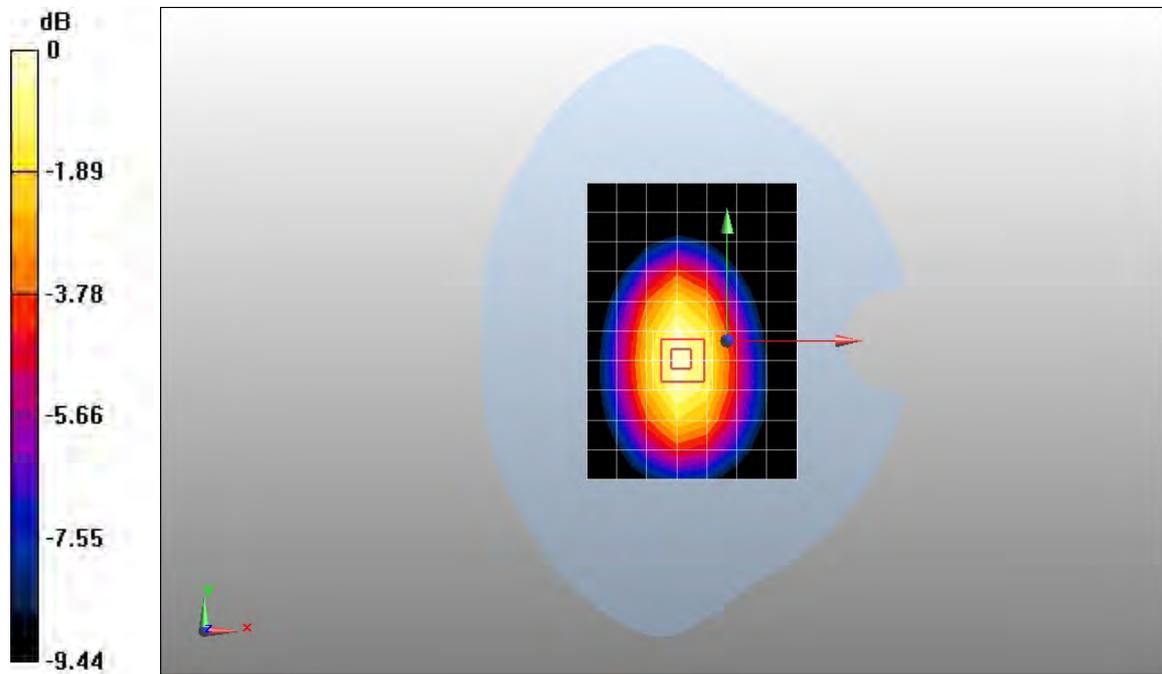

0 dB = 0.440mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 2TS 190CH Bottom side 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.081 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.84 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

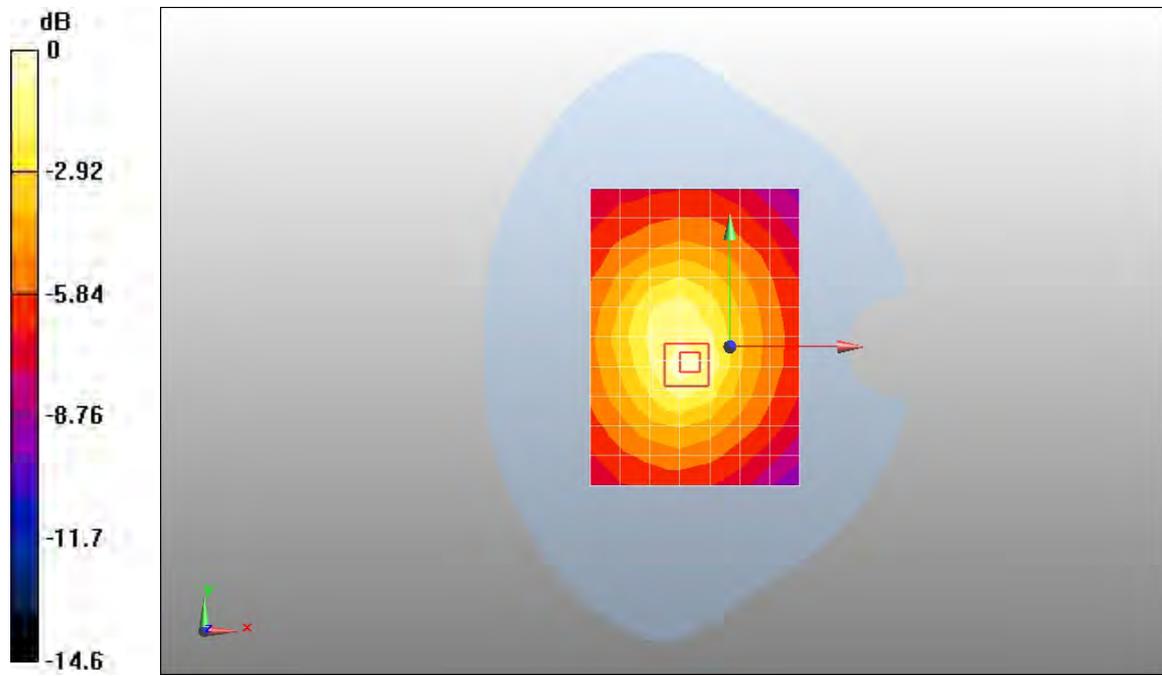

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 2TS 251CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.781 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.3 V/m; Power Drift = -0.00462 dB


Peak SAR (extrapolated) = 0.996 W/kg

SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.566 mW/g

Maximum value of SAR (measured) = 0.800 mW/g

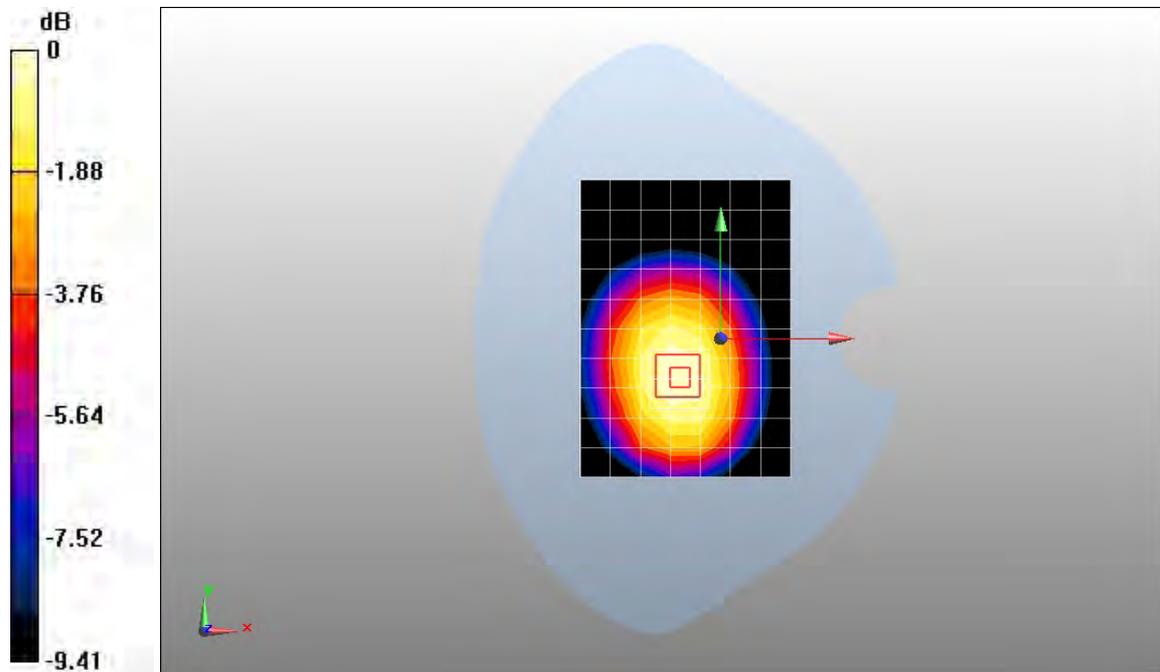

0 dB = 0.800mW/g

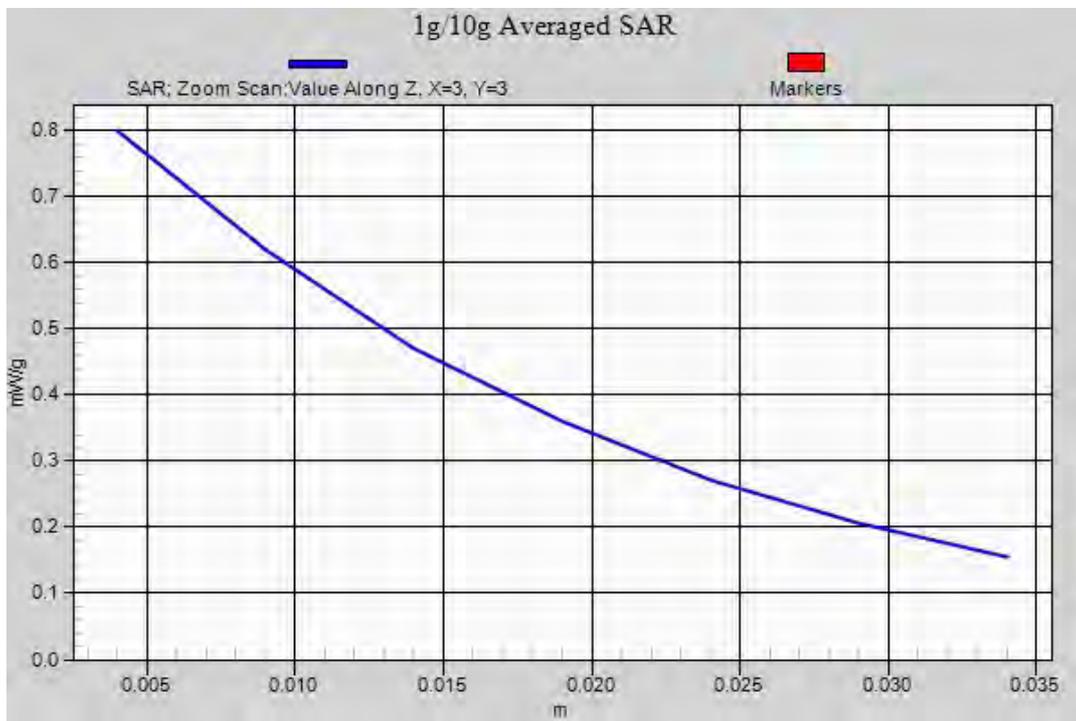

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 GPRS 2TS 128CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.952$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.770 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.1 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.742 mW/g; SAR(10 g) = 0.551 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.779 mW/g

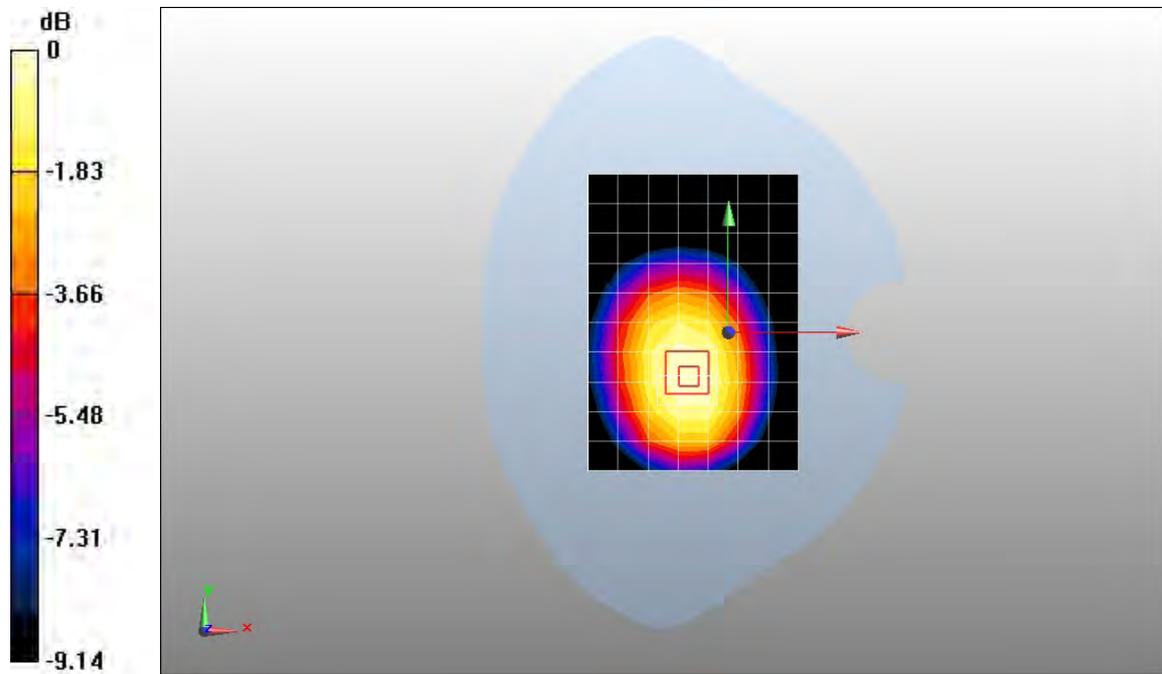

0 dB = 0.779mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 EGPRS 1TS 190CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.524 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.517 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.544 mW/g

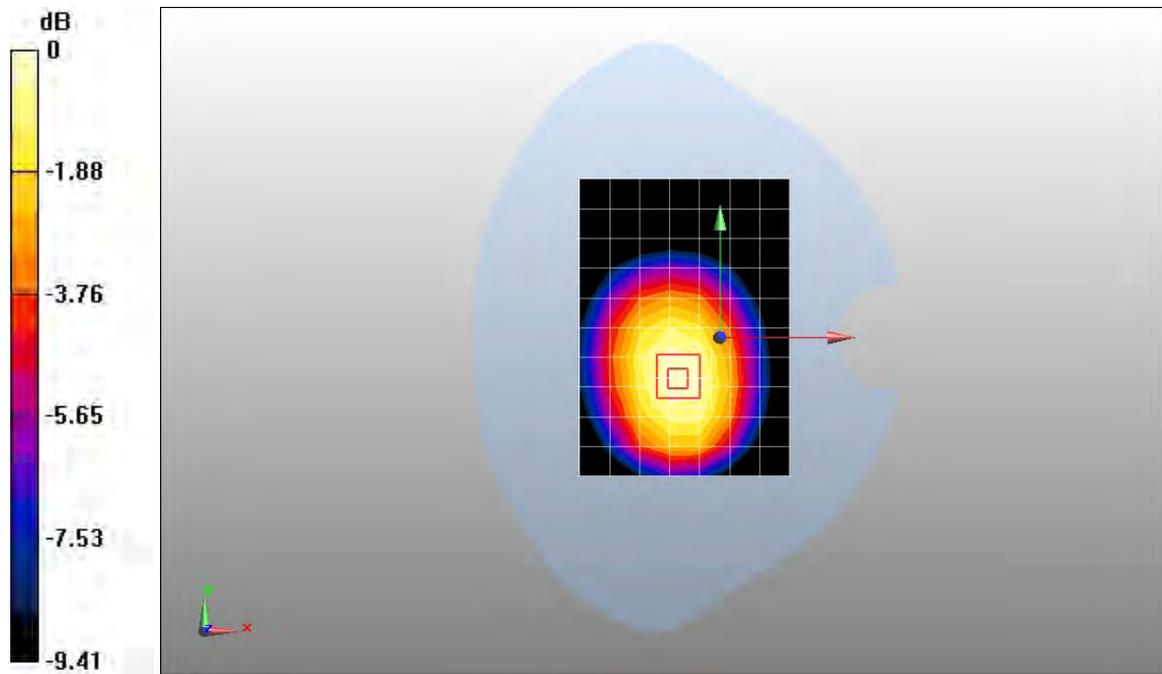

0 dB = 0.544mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 EGPRS 2TS 190CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.791 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 0.804 mW/g

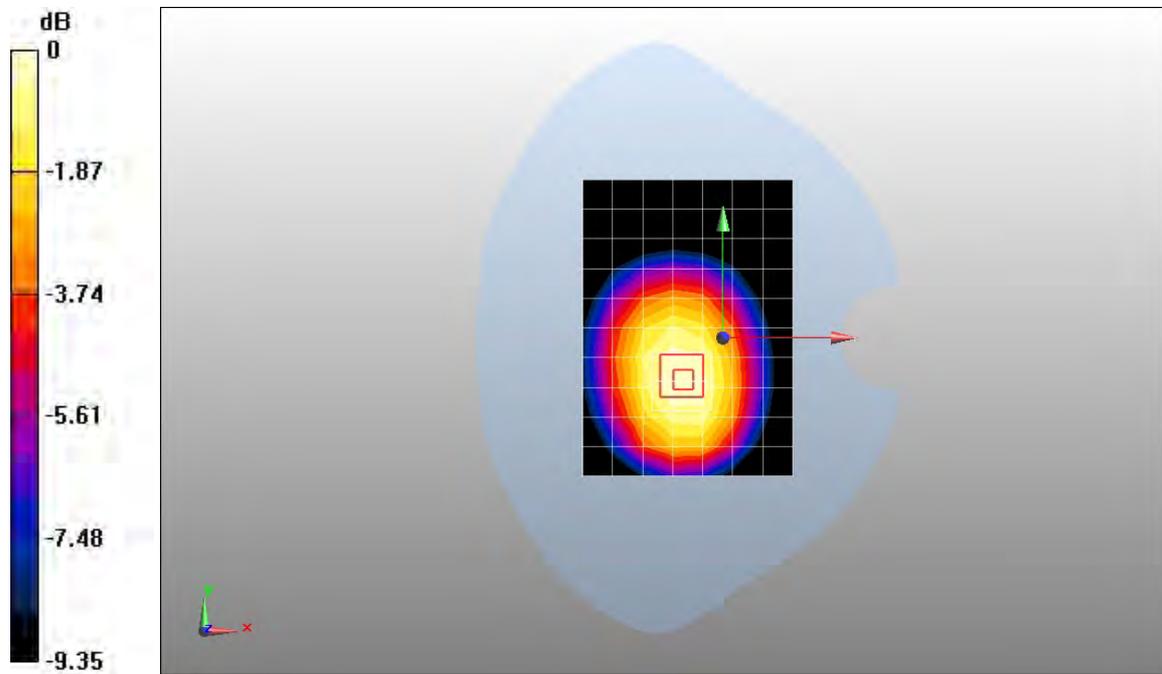

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 EGPRS 2TS 251CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.799 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.559 mW/g

Maximum value of SAR (measured) = 0.801 mW/g

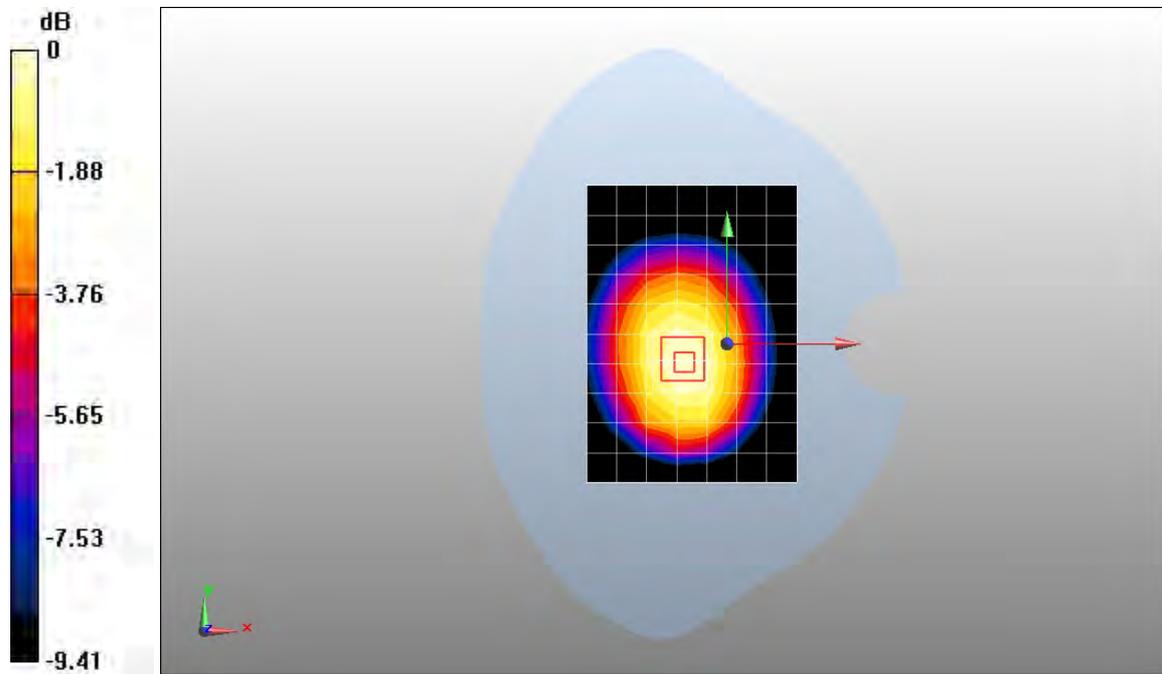

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 EGPRS 2TS 128CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 824.2 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.952$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.770 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 27.7 V/m; Power Drift = -0.00478 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.551 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.787 mW/g

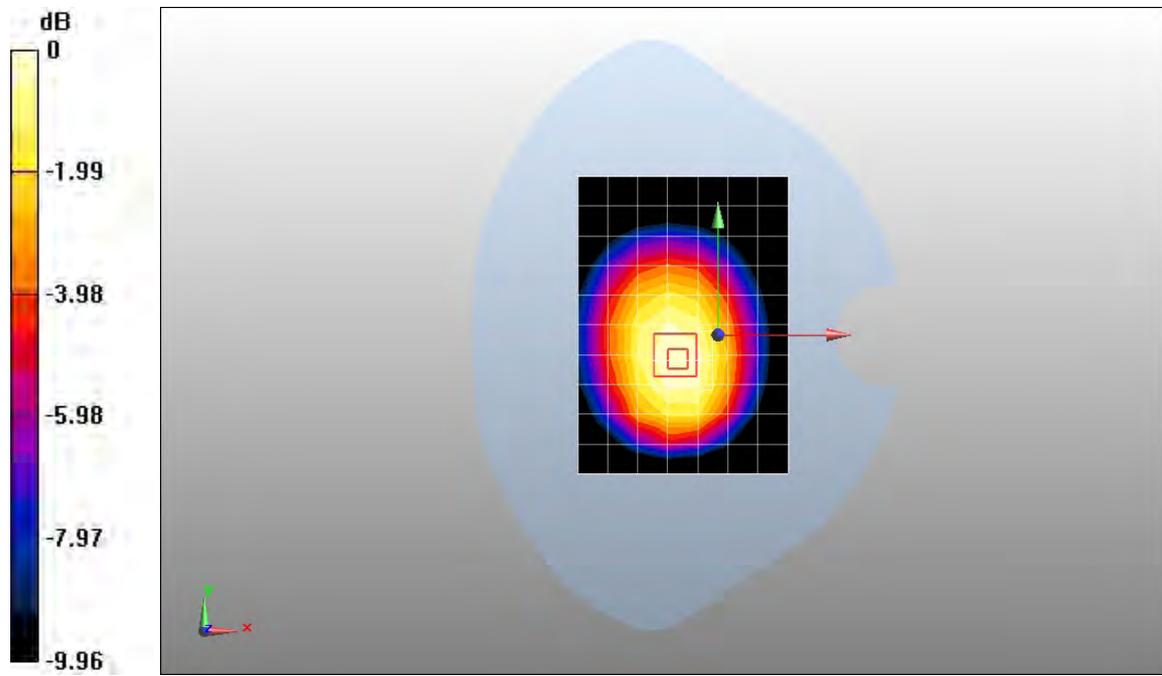

0 dB = 0.787mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM850 251CH Toward Ground 10mm with Headset

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 848.8 MHz

Medium parameters used: $f = 849$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.428 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.1 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.436 mW/g

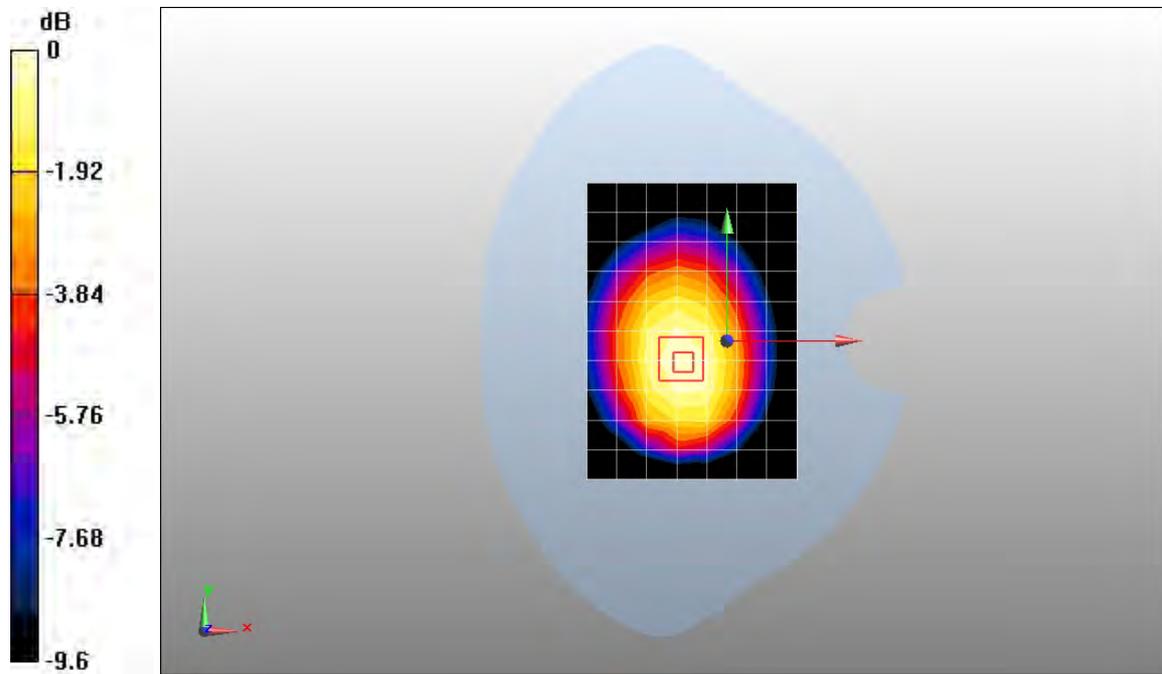

0 dB = 0.436mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 661CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.558 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.93 V/m; Power Drift = -0.021 dB


Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.554 mW/g

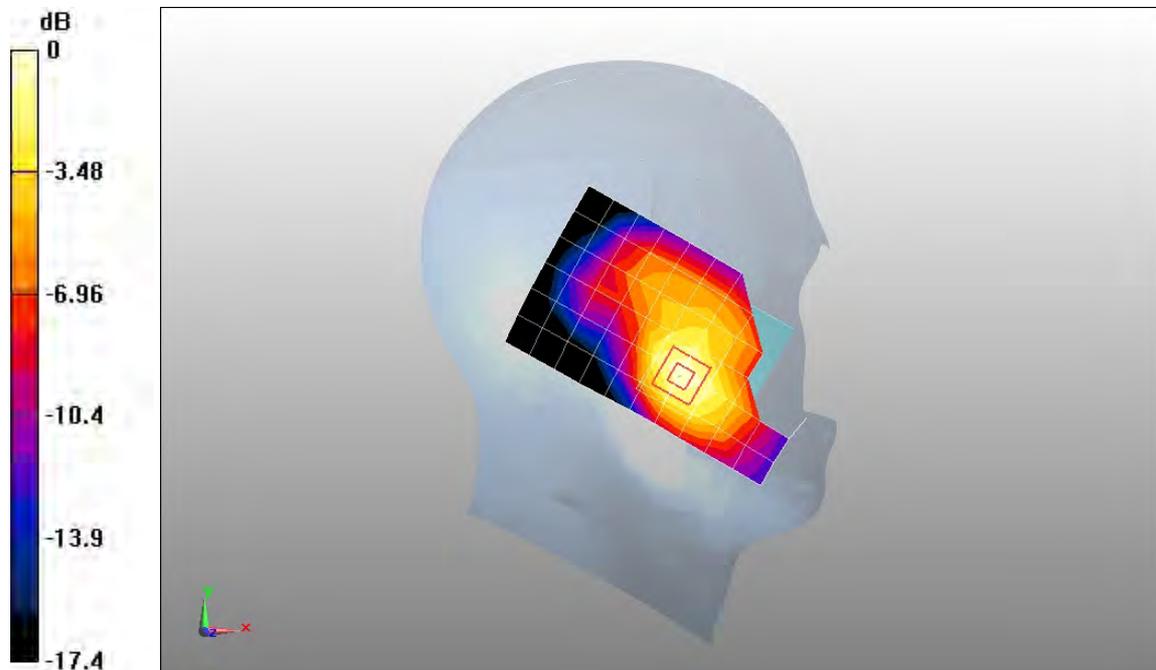

0 dB = 0.554mW/g

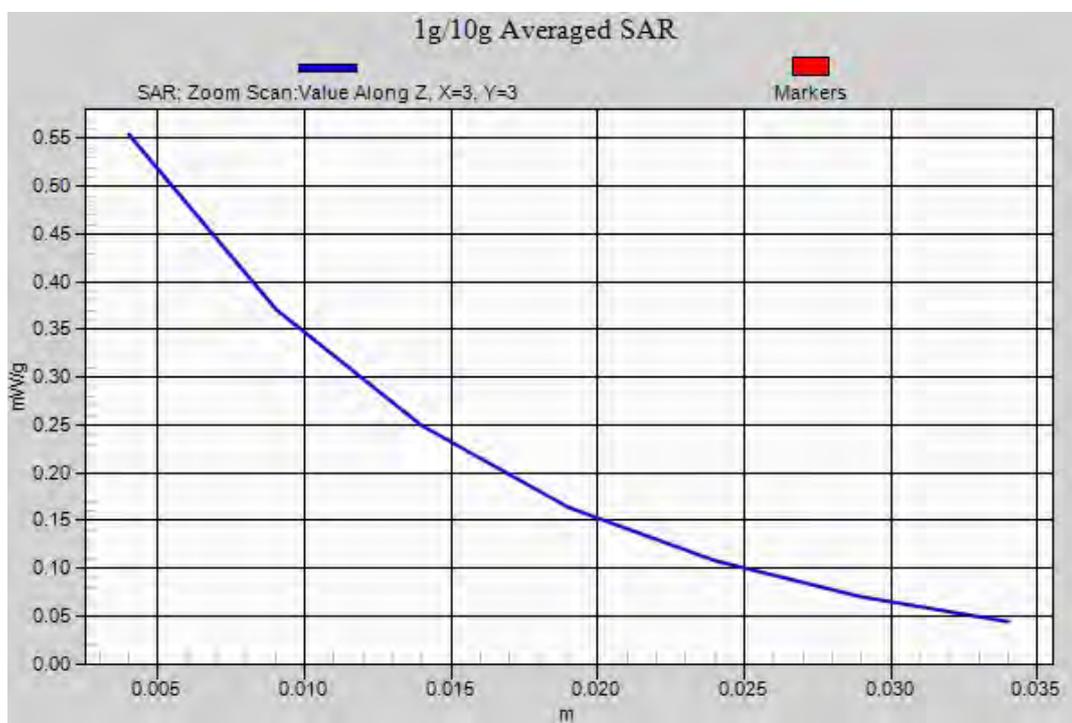

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 661CH Left hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.195 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.201 mW/g

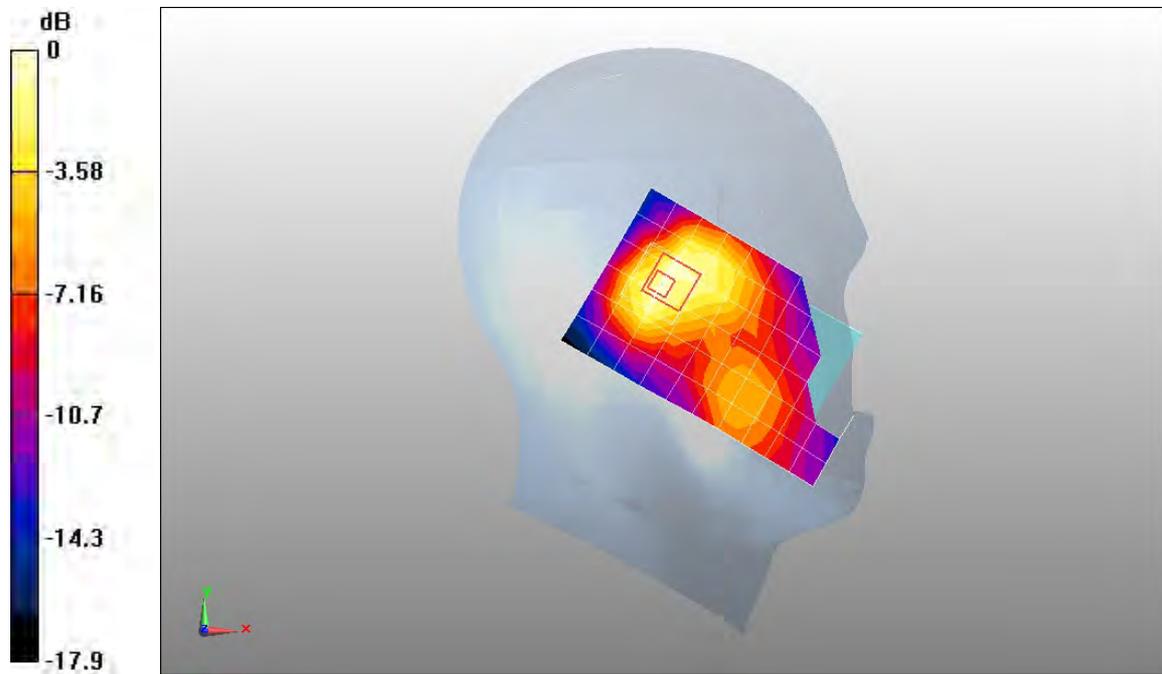

0 dB = 0.201mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 661CH Right hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.368 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.55 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

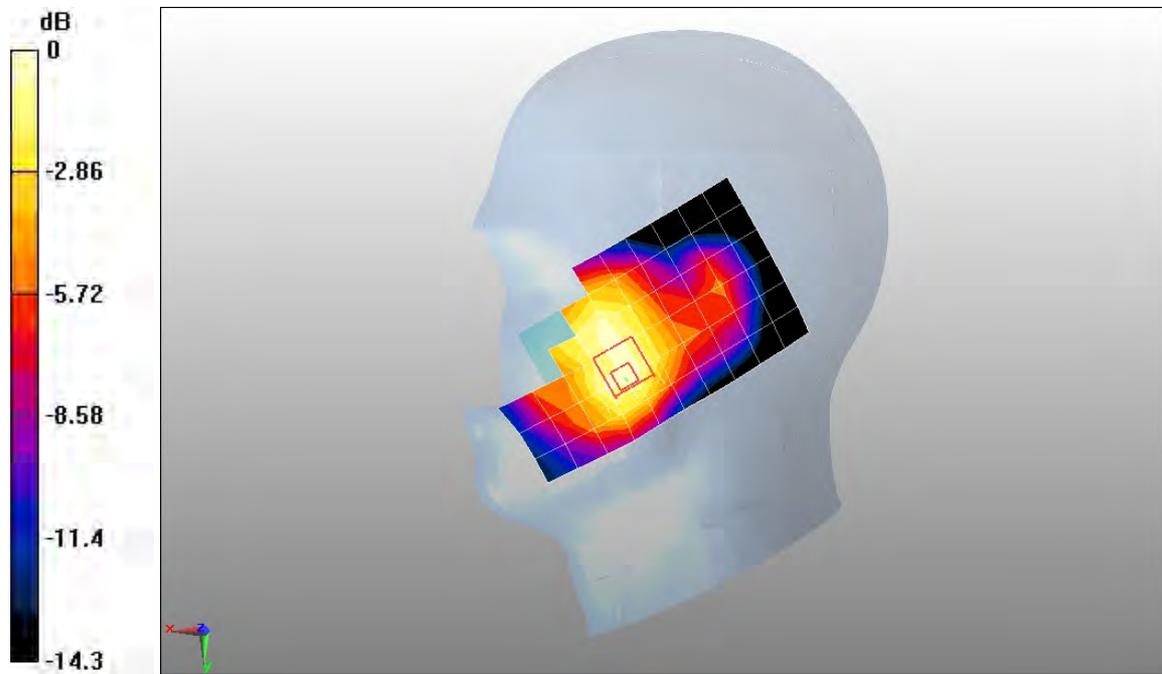

0 dB = 0.383mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 661CH Right hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.222 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.224 mW/g

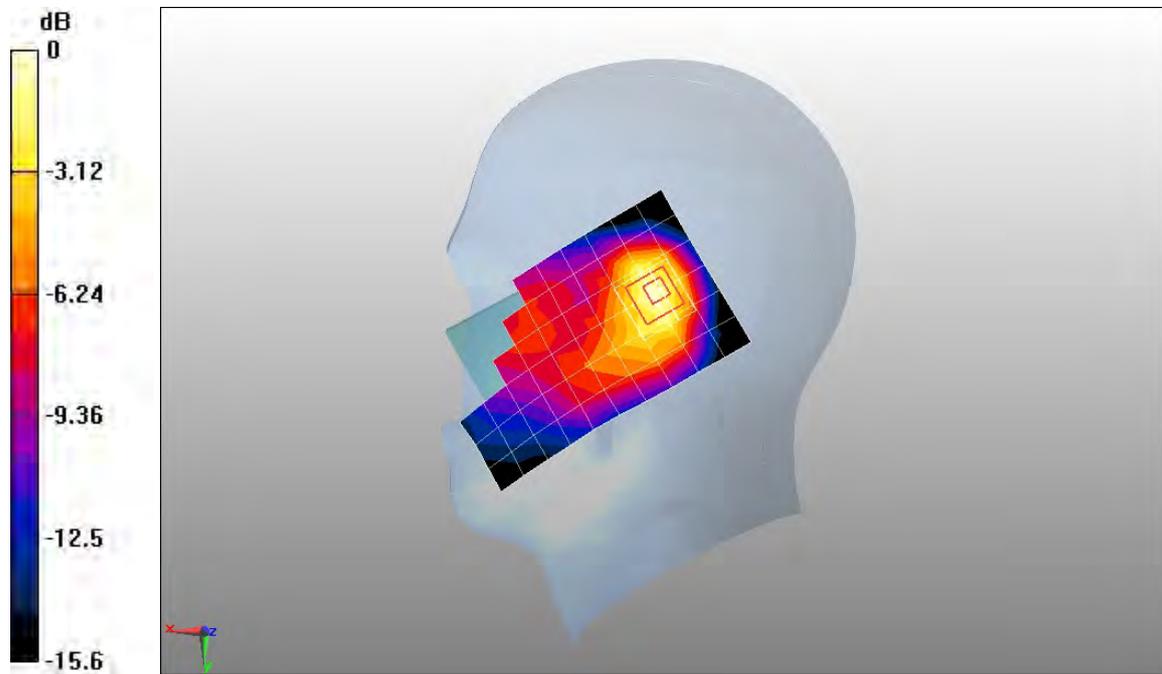

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 810CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.417 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.09 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.415 mW/g

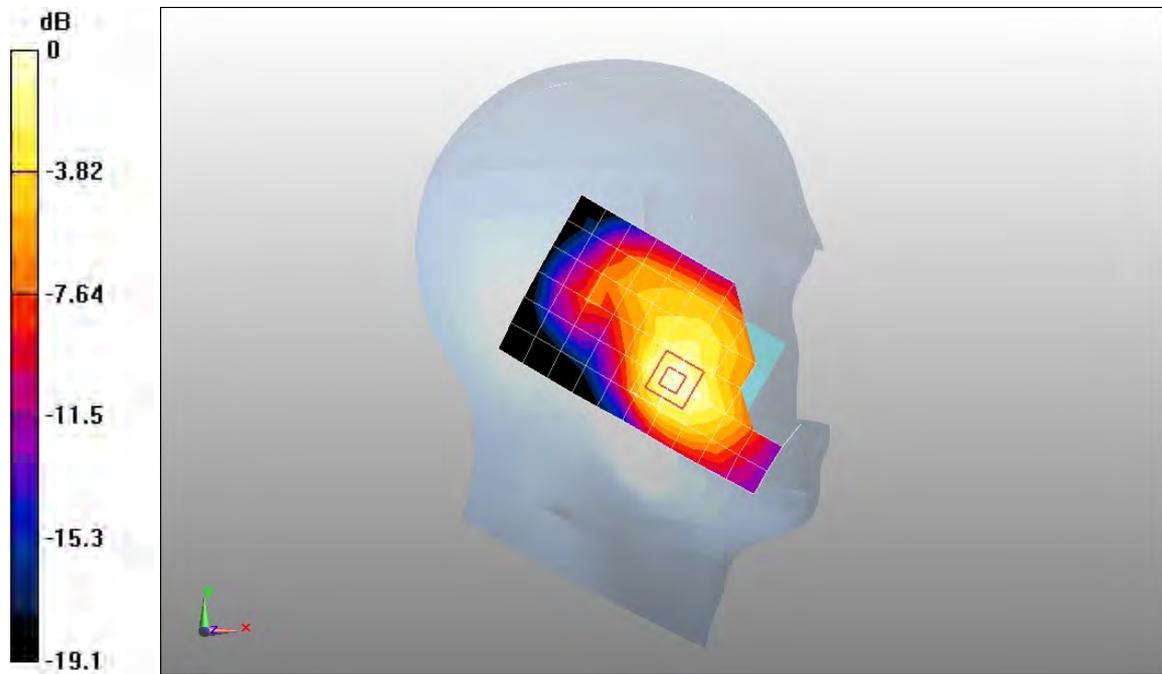

0 dB = 0.415mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 512CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1850.2 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.460 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.8 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.257 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.459 mW/g

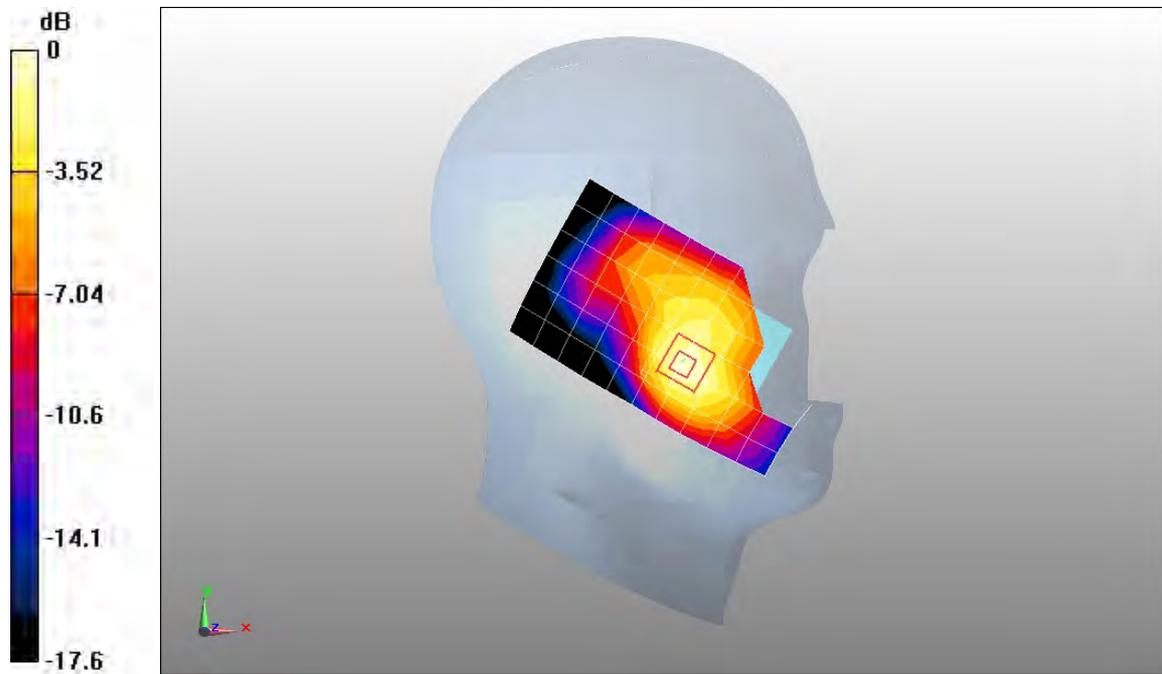

0 dB = 0.459mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 1TS 661CH Toward Phontam 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.443 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.62 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

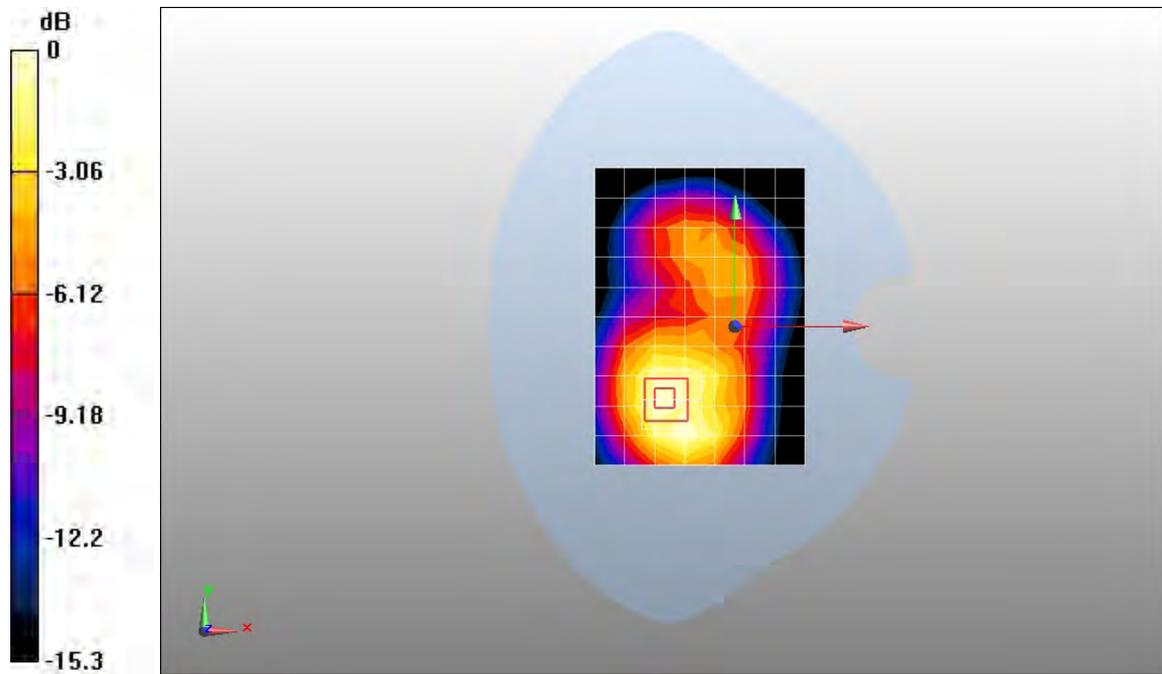

0 dB = 0.455mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 661CH Toward Phontam 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.659 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.627 mW/g; SAR(10 g) = 0.378 mW/g

Maximum value of SAR (measured) = 0.681 mW/g

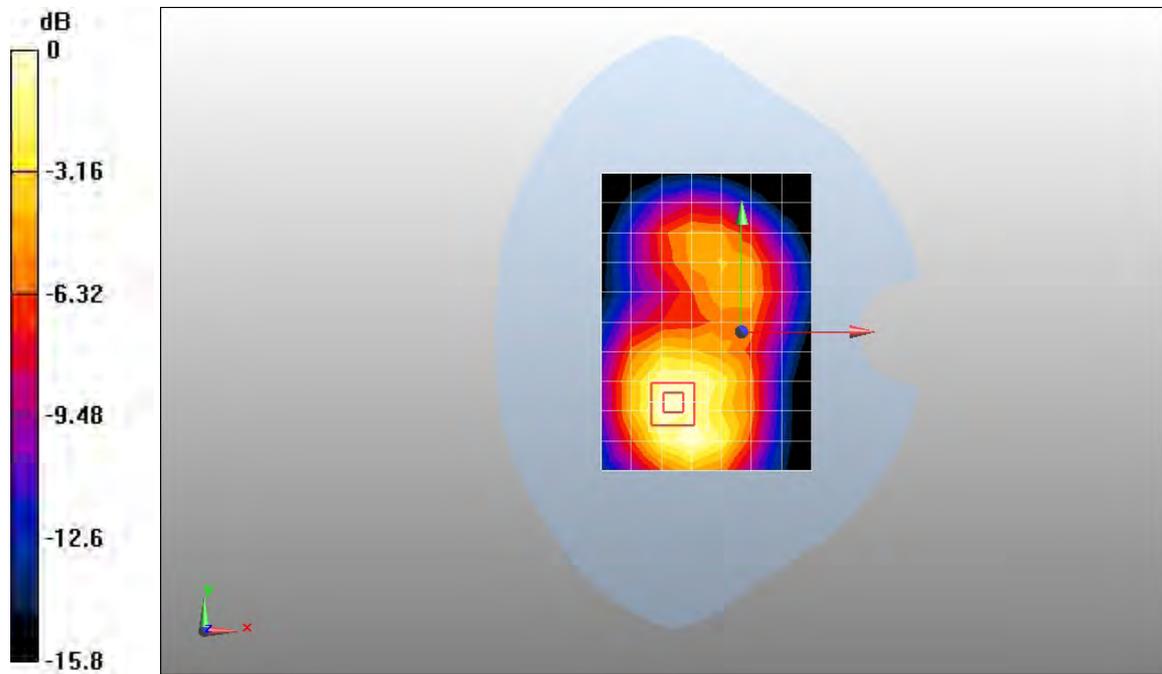

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 661CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.917 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.936 mW/g; SAR(10 g) = 0.525 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

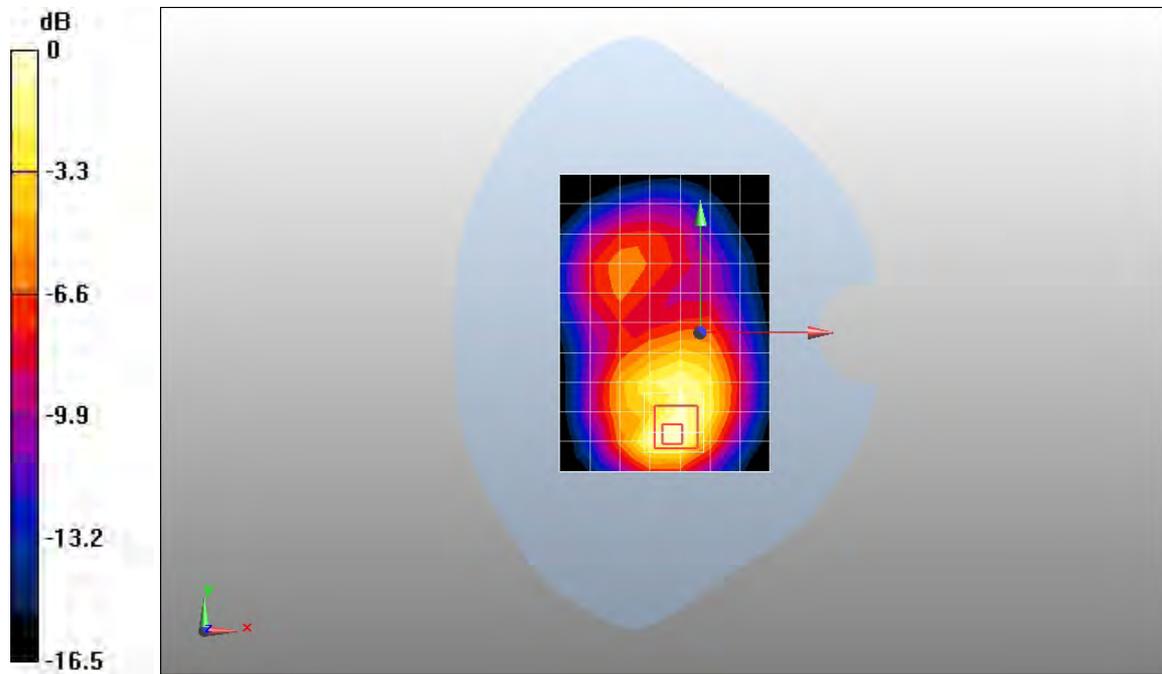

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 661CH Left edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.201 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.87 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.199 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.87 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.143 mW/g

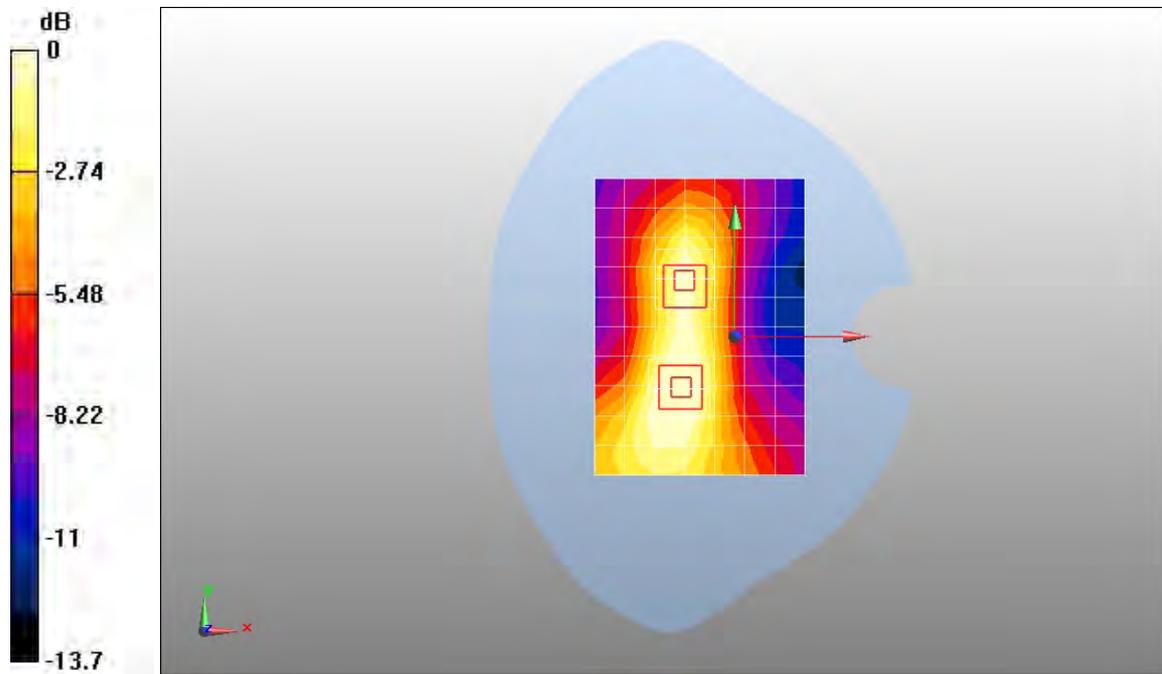

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 661CH Right edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.211 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.11 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.217 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.11 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.146 mW/g

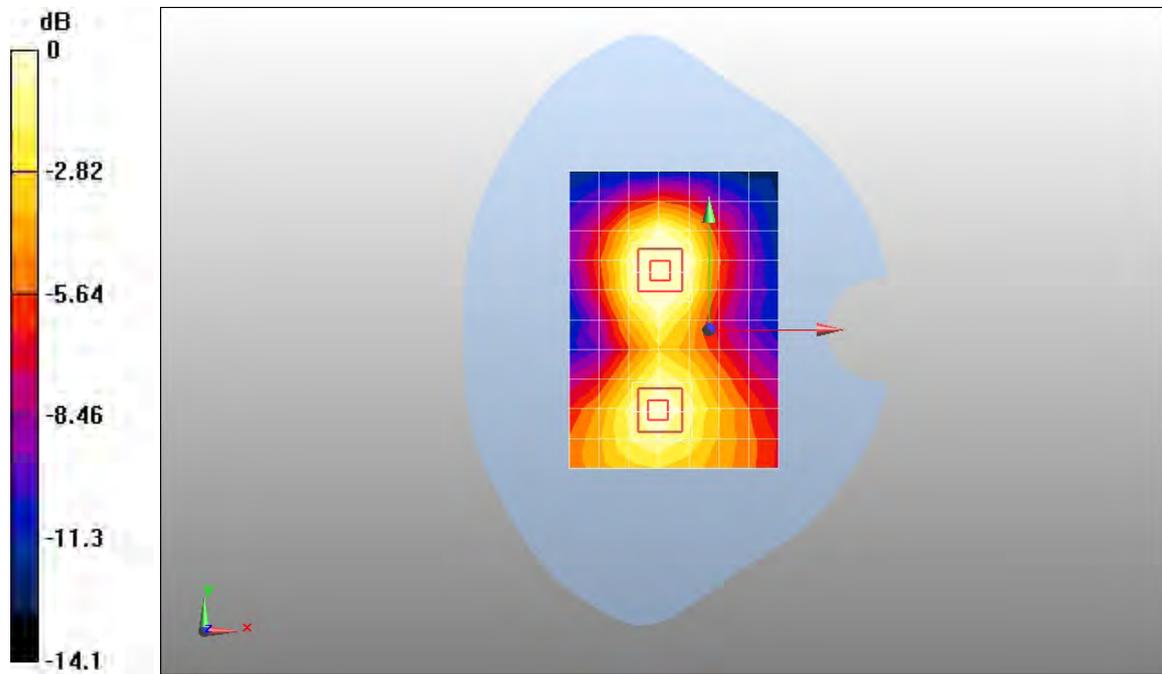

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 661CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.492 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

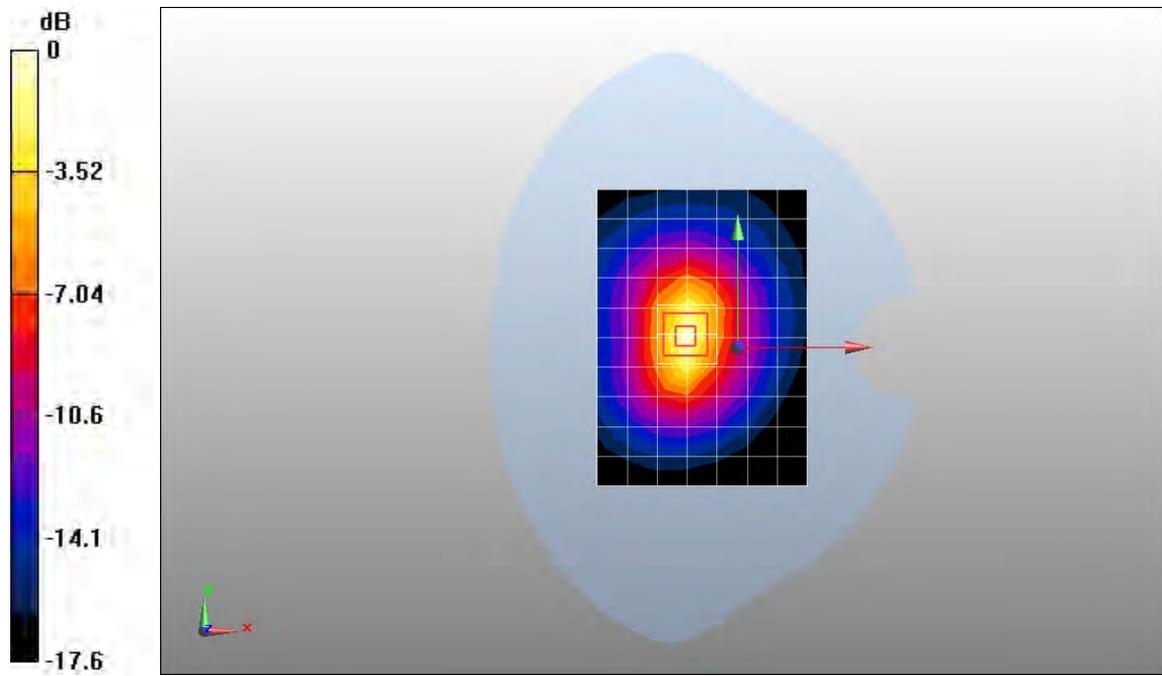

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 810CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.863 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.500 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

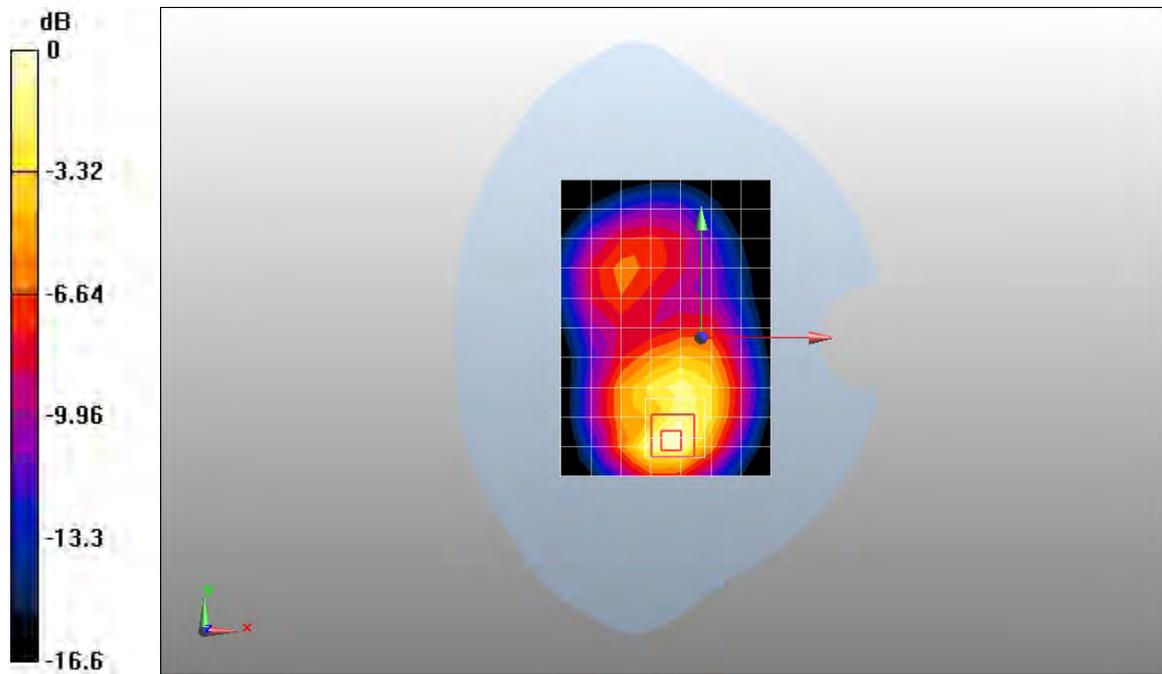

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 512CH Toward Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1850.2 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.830 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 10.9 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.794 mW/g; SAR(10 g) = 0.473 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.887 mW/g

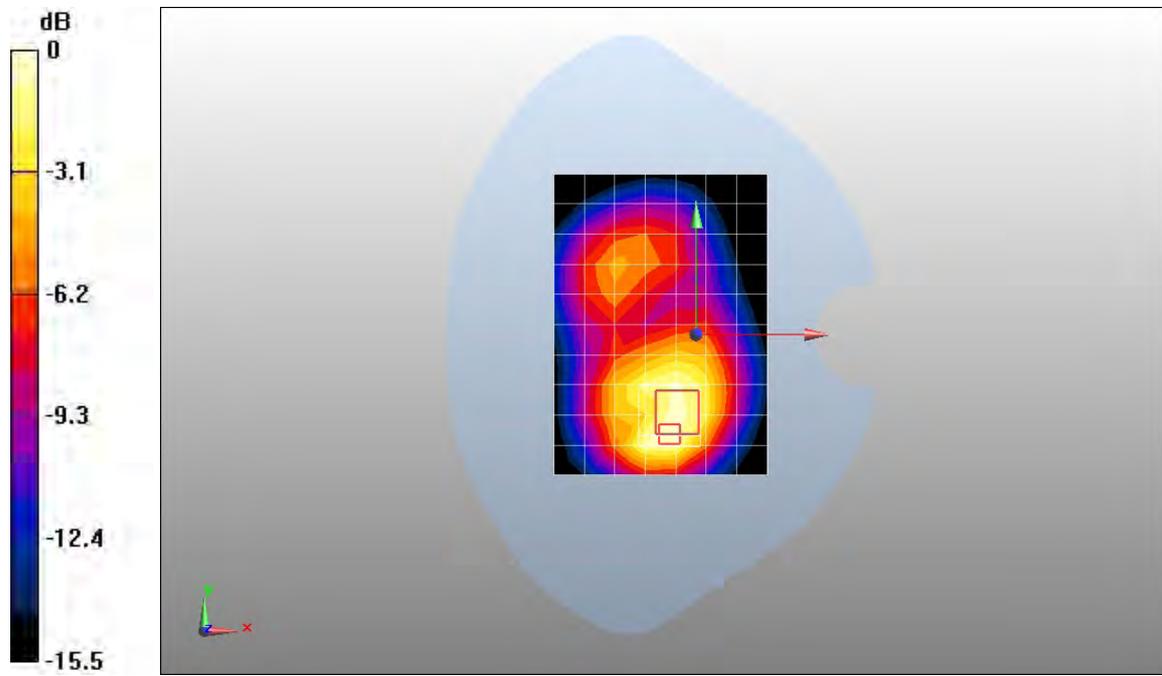

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 810CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19 V/m; Power Drift = -0.00392 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.978 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

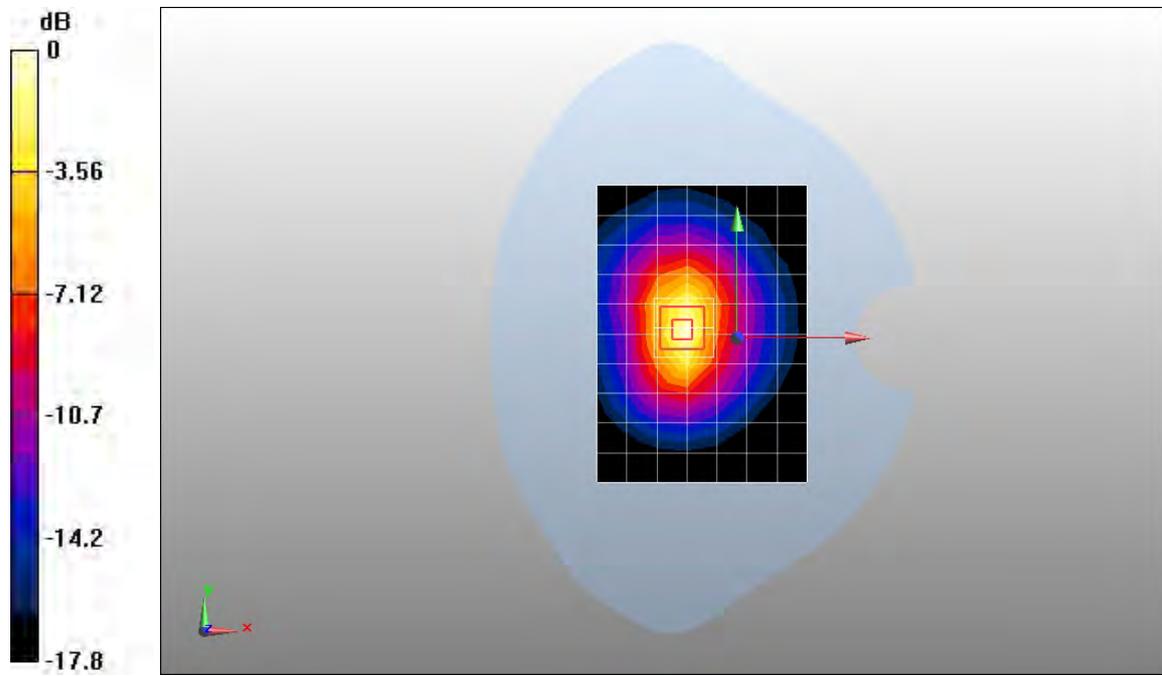

0 dB = 1.11mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 GPRS 2TS 512CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1850.2 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.828 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 17.5 V/m; Power Drift = 0.00649 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.403 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.854 mW/g

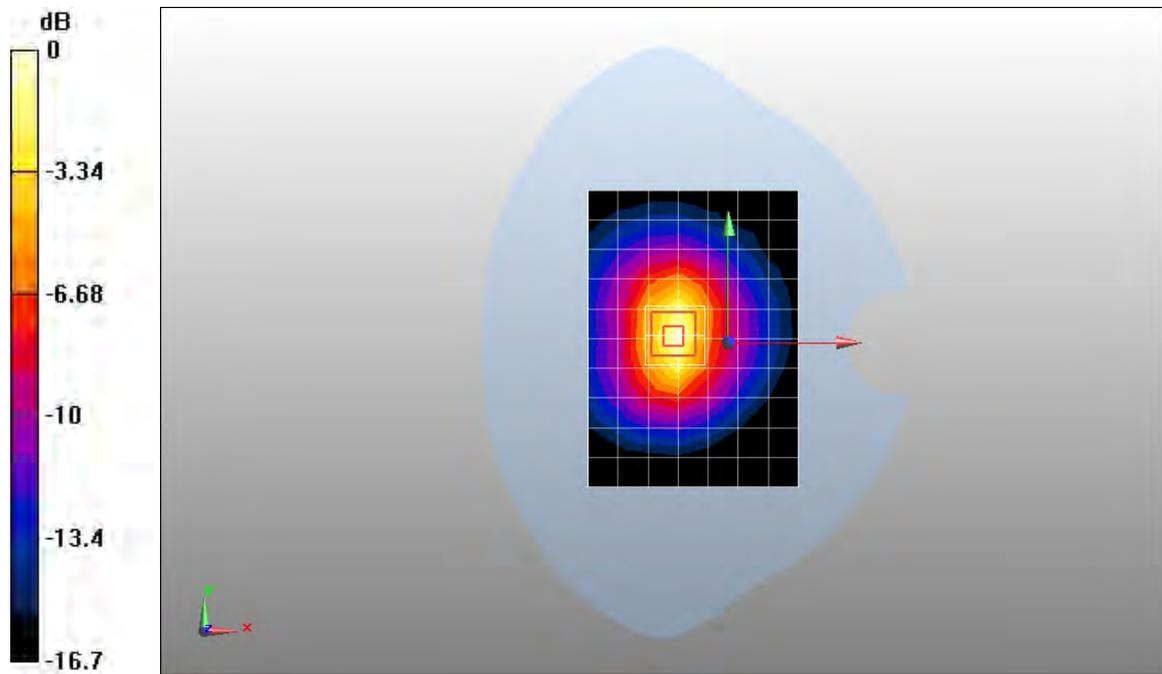

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 EGPRS 1TS 661CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.692 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.691 mW/g

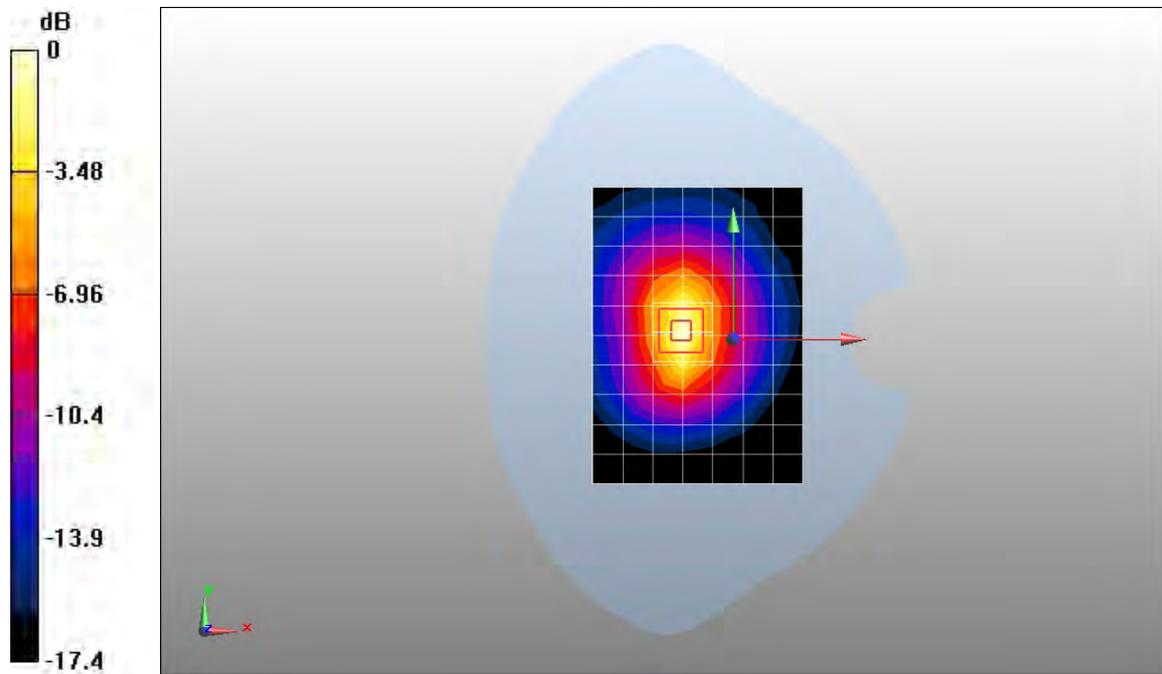

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 EGPRS 2TS 661CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.935 mW/g; SAR(10 g) = 0.492 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

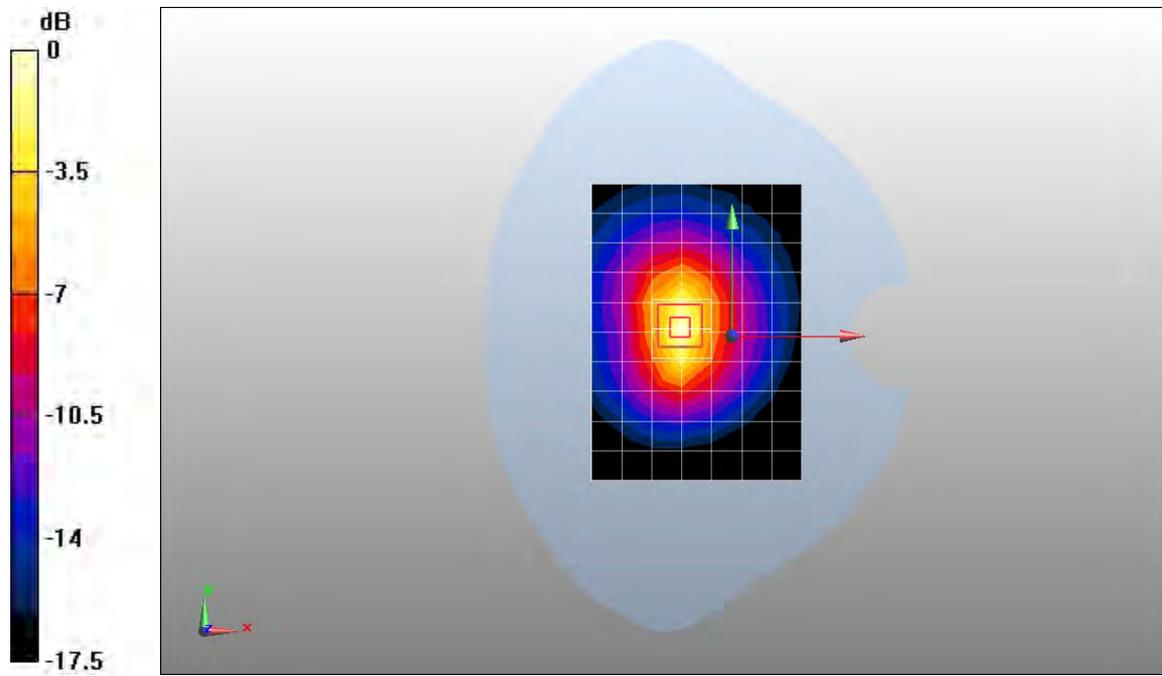

0 dB = 1.08mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 EGPRS 2TS 810CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.16 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21 V/m; Power Drift = 0.00337 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

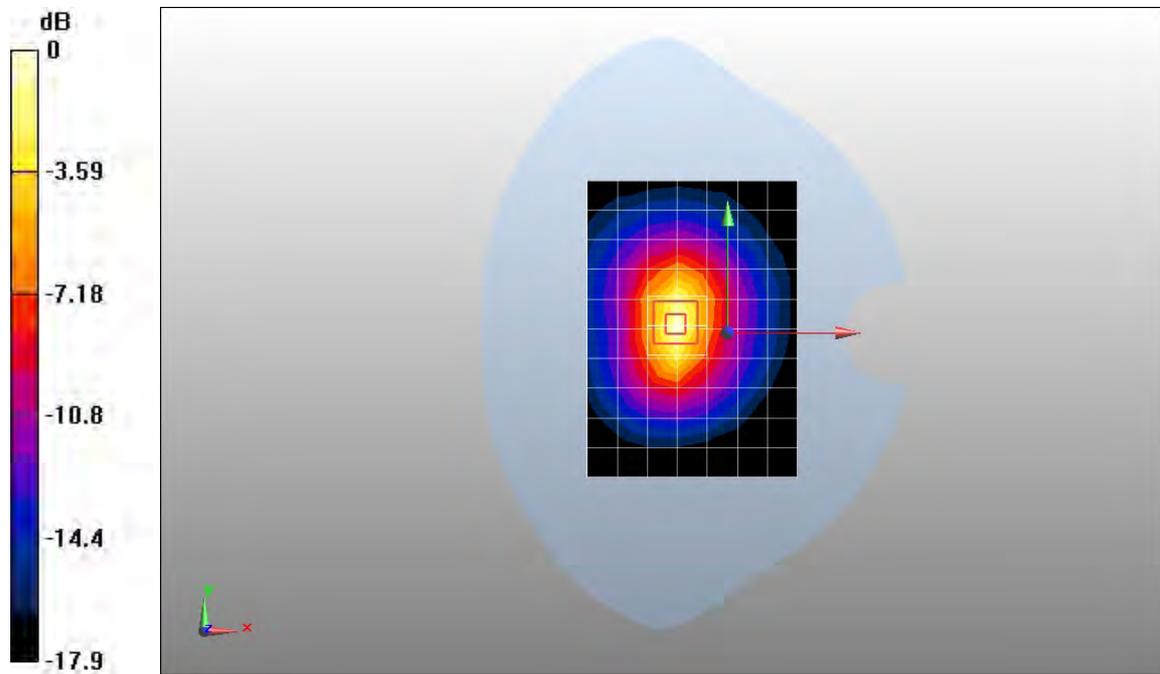

0 dB = 1.17mW/g



Test Laboratory: Huawei SAR Lab

U8350-3 GSM1900 EGPRS 2TS 512CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1850.2 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.888 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.9 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.413 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.887 mW/g

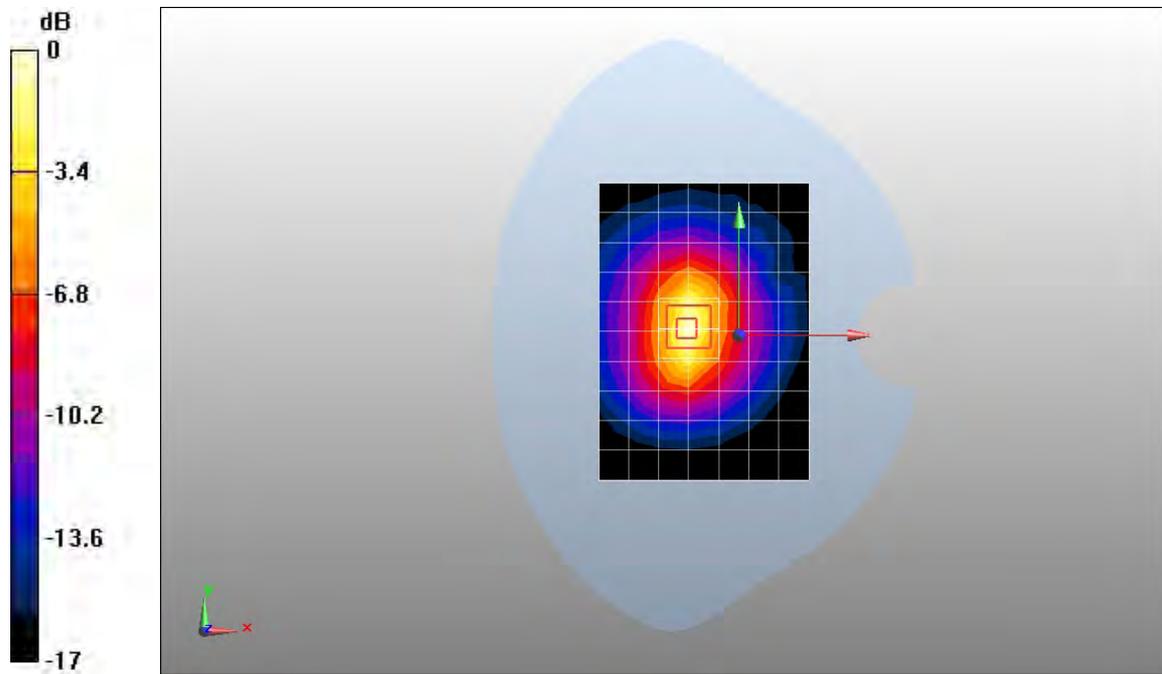

0 dB = 0.887mW/g

Date/Time: 2011-8-8 14:20:42, Date/Time: 2011-8-8 14:29:53

Test Laboratory: HUAWEI SAR Lab

U8350-3 GSM1900 661CH Toward Ground 10mm with Headset

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -GSM/GPRS/EDGE 1TS; Communication System Band: PCS 1900; Frequency: 1880 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.600 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.31 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.556 mW/g; SAR(10 g) = 0.303 mW/g

Maximum value of SAR (measured) = 0.619 mW/g

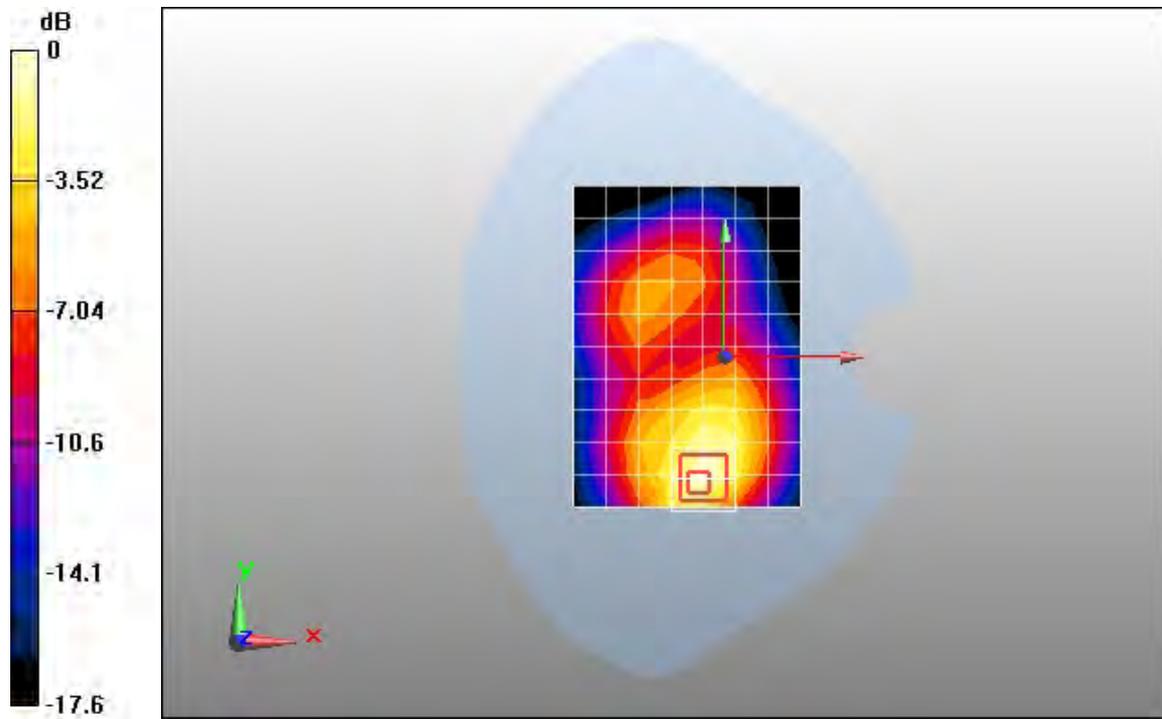

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.25, 8.25, 8.25); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.714 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.98 V/m; Power Drift = -0.144 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.731 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 0.800 mW/g

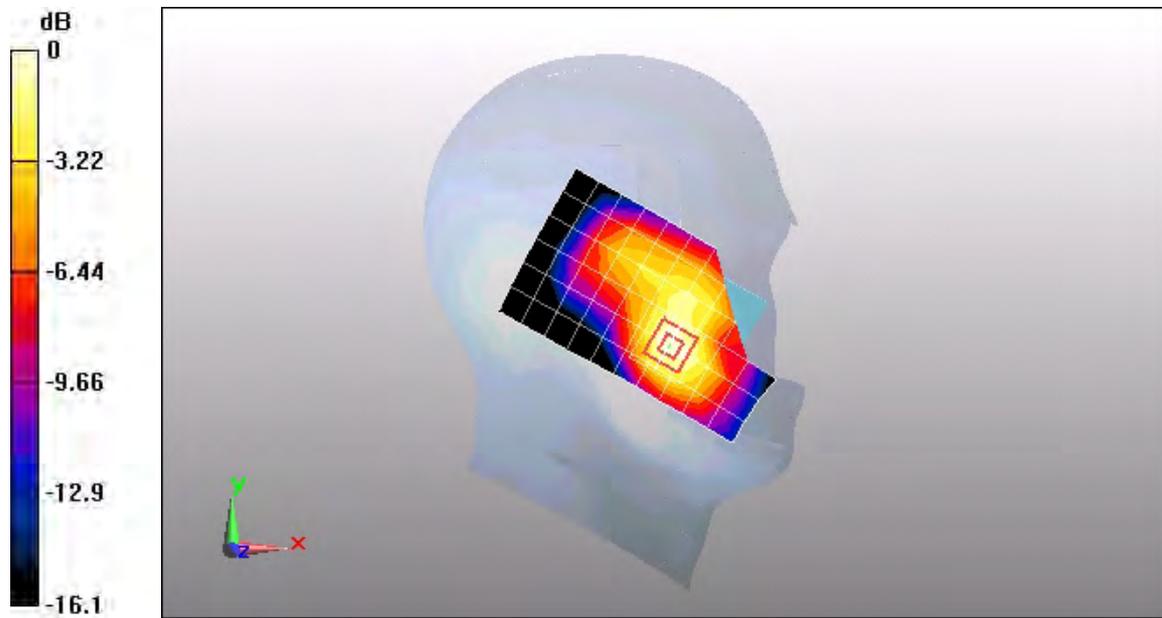

0 dB = 0.800mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Left hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.25, 8.25, 8.25); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.374 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.354 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

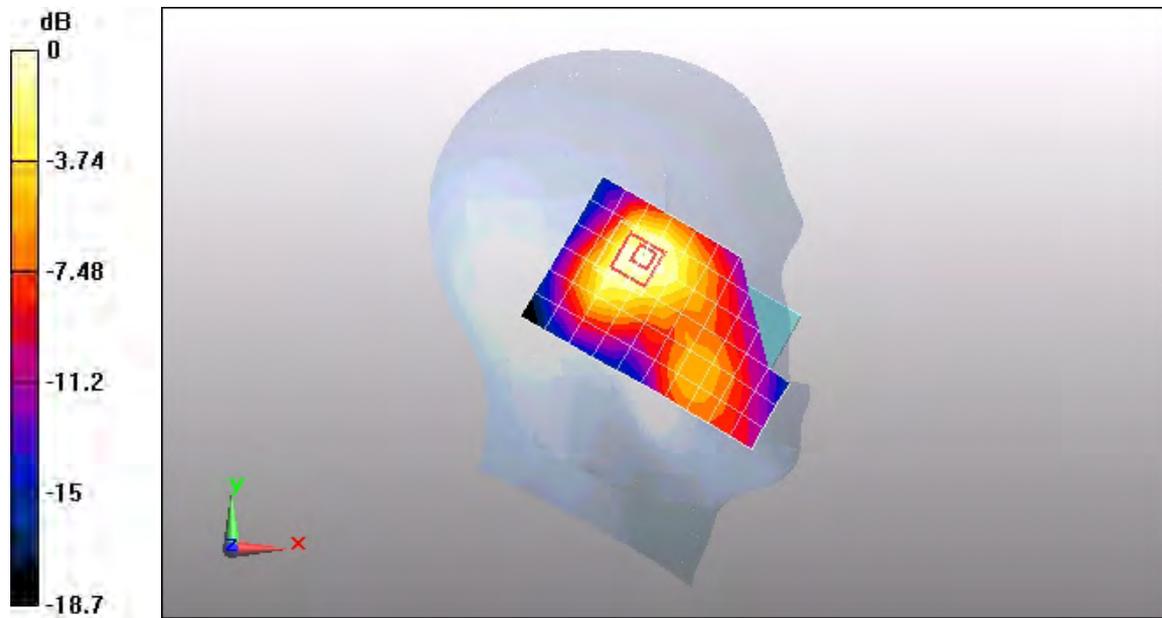

0 dB = 0.383mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Right hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.25, 8.25, 8.25); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.722 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 0.764 mW/g

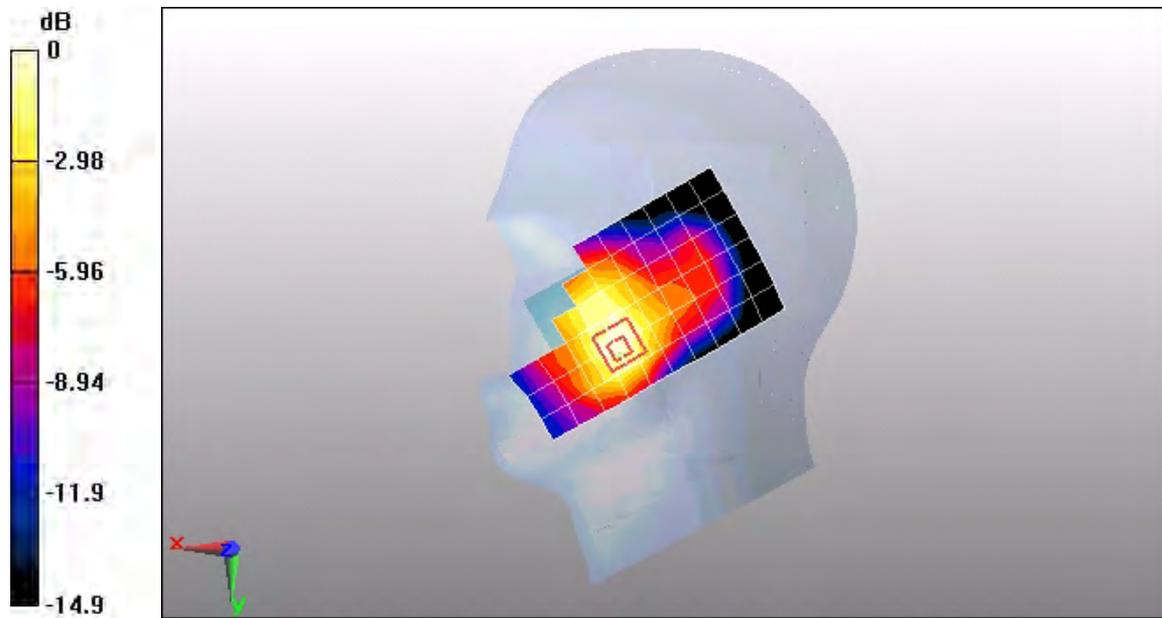

0 dB = 0.764mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Right hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.25, 8.25, 8.25); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.352 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.355 mW/g

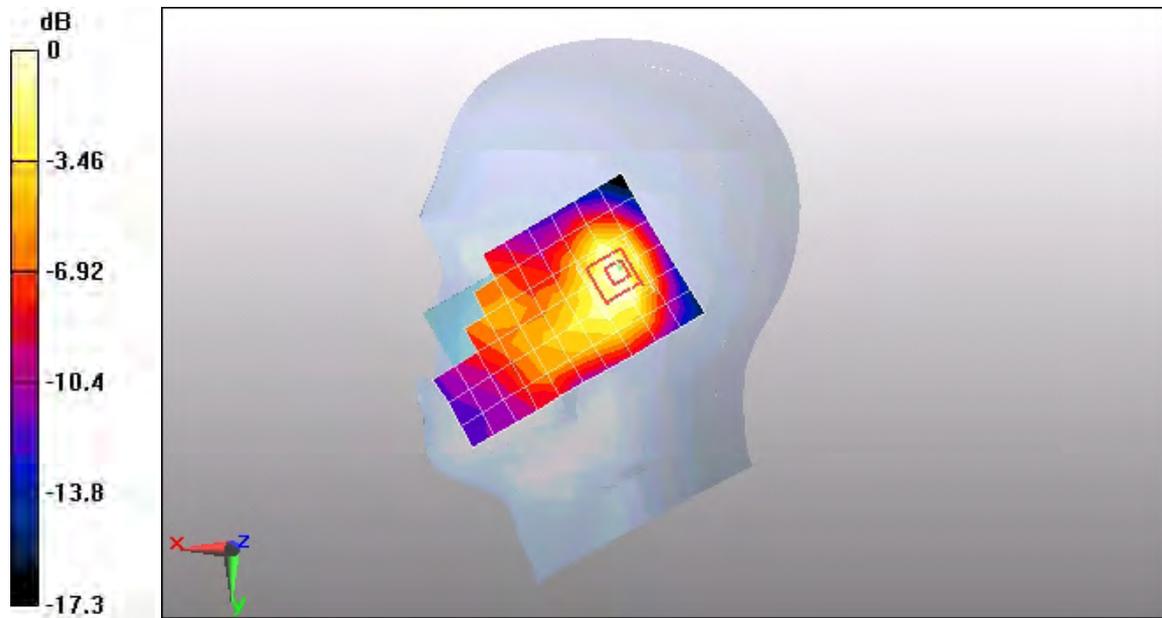

0 dB = 0.355mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1513CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.25, 8.25, 8.25); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.853 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.39 V/m; Power Drift = -0.016 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.506 mW/g

Maximum value of SAR (measured) = 0.916 mW/g

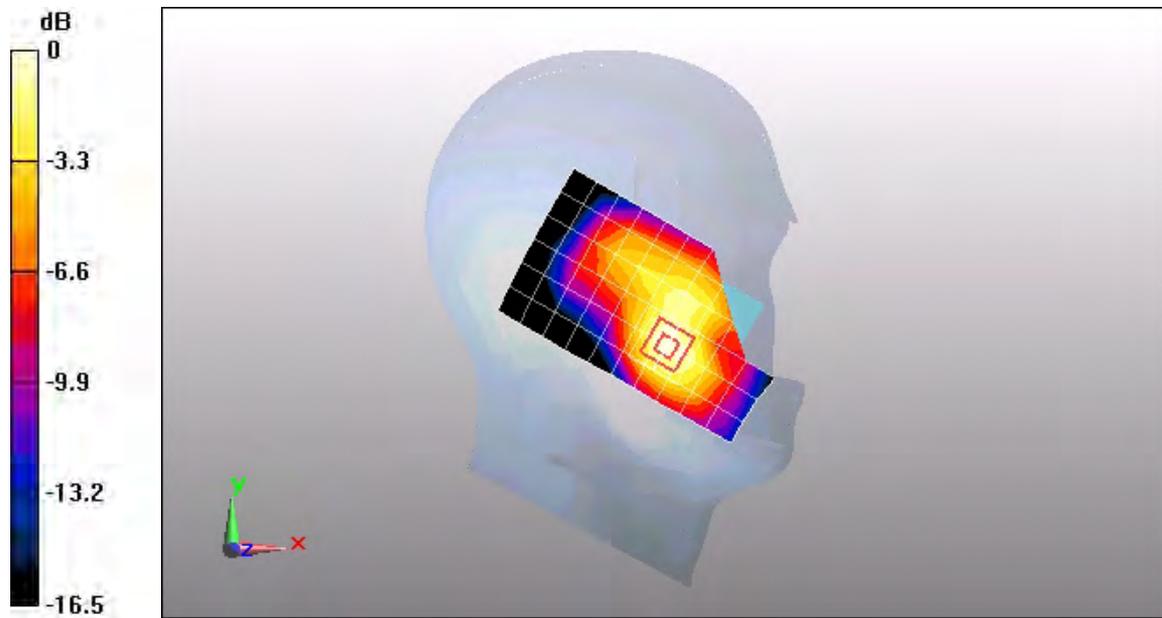

0 dB = 0.916mW/g

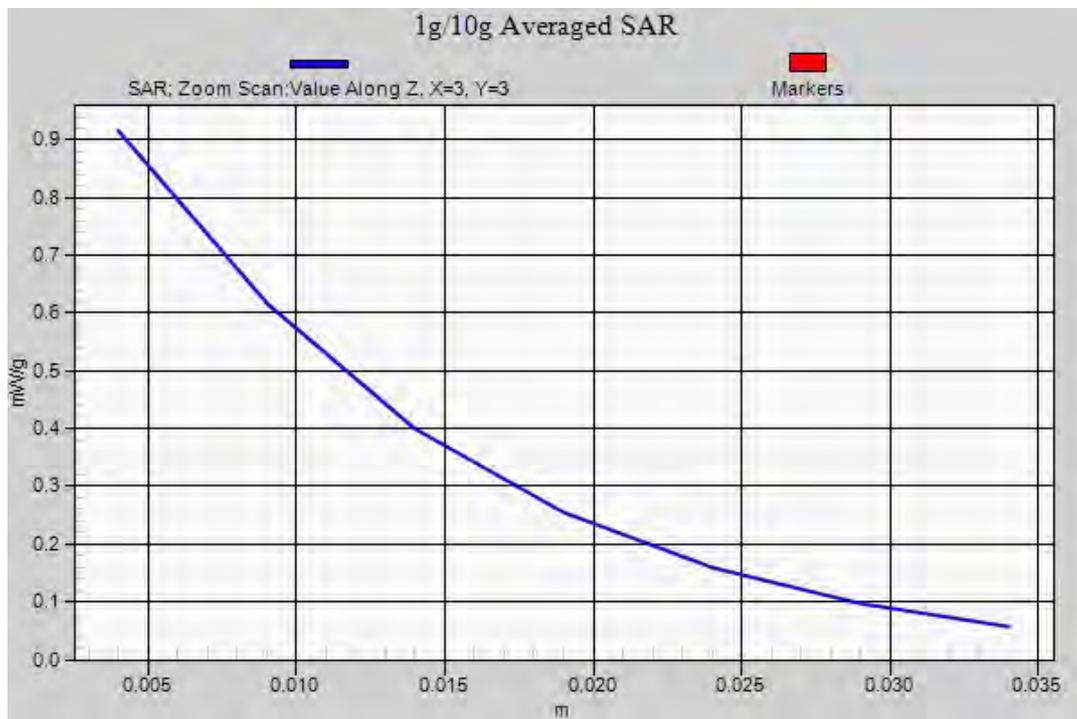

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1312CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(8.25, 8.25, 8.25); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.720 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.7 V/m; Power Drift = -0.00375 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.435 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.775 mW/g

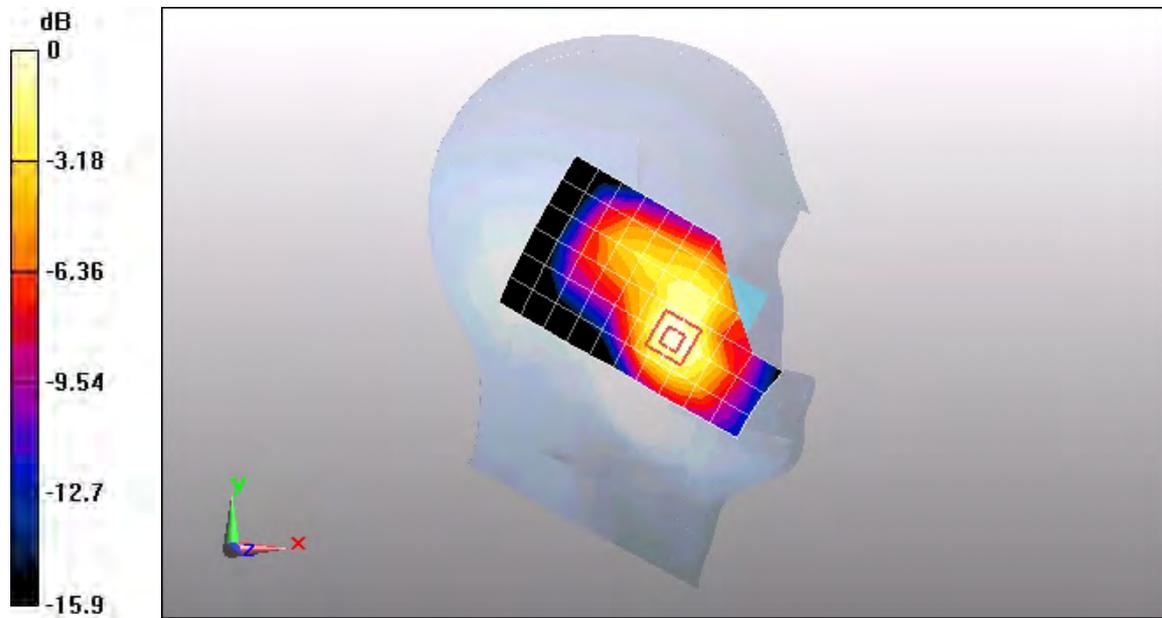

0 dB = 0.775mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Toward Phontam 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.664 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 0.713 mW/g

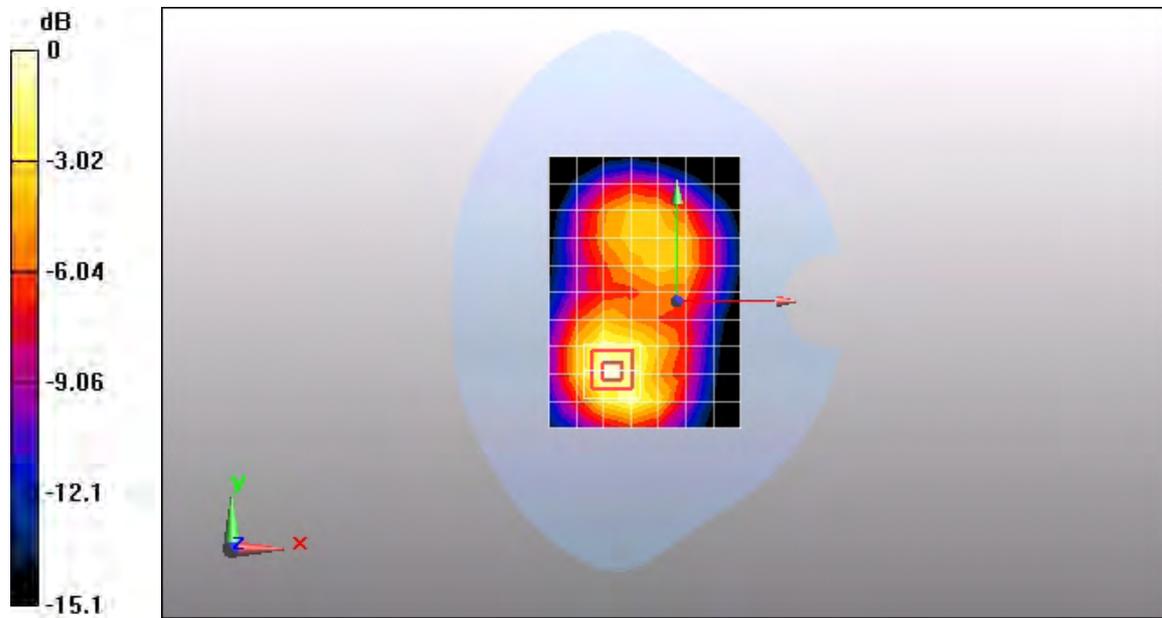

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Towards Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.1 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

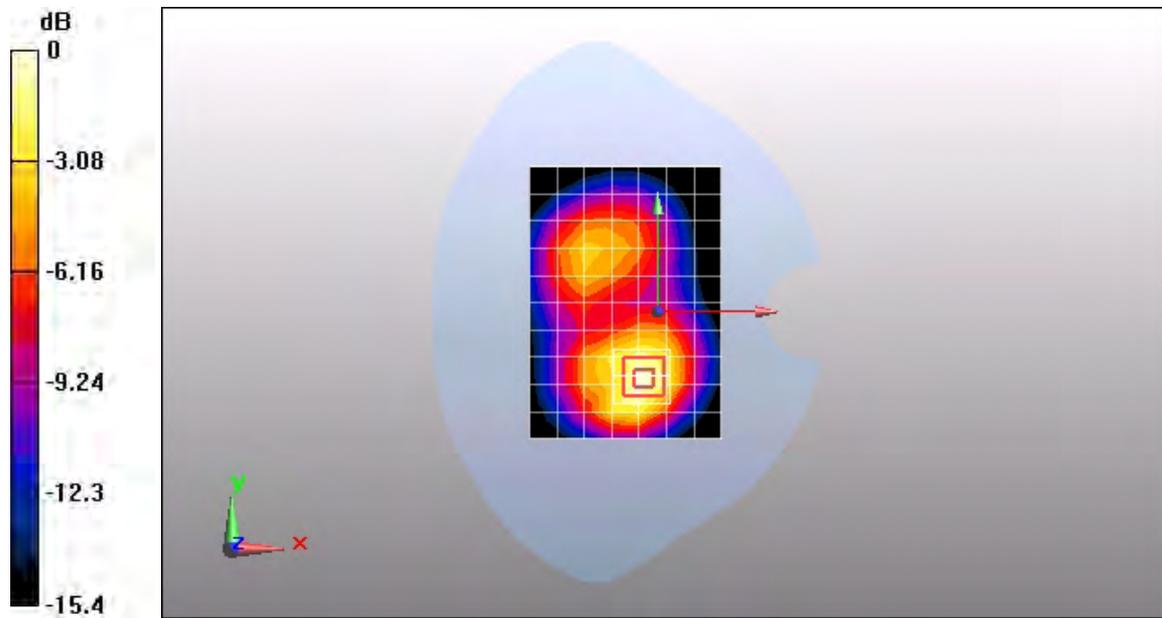

0 dB = 1.14mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1513CH Towards Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.28 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 2 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.684 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

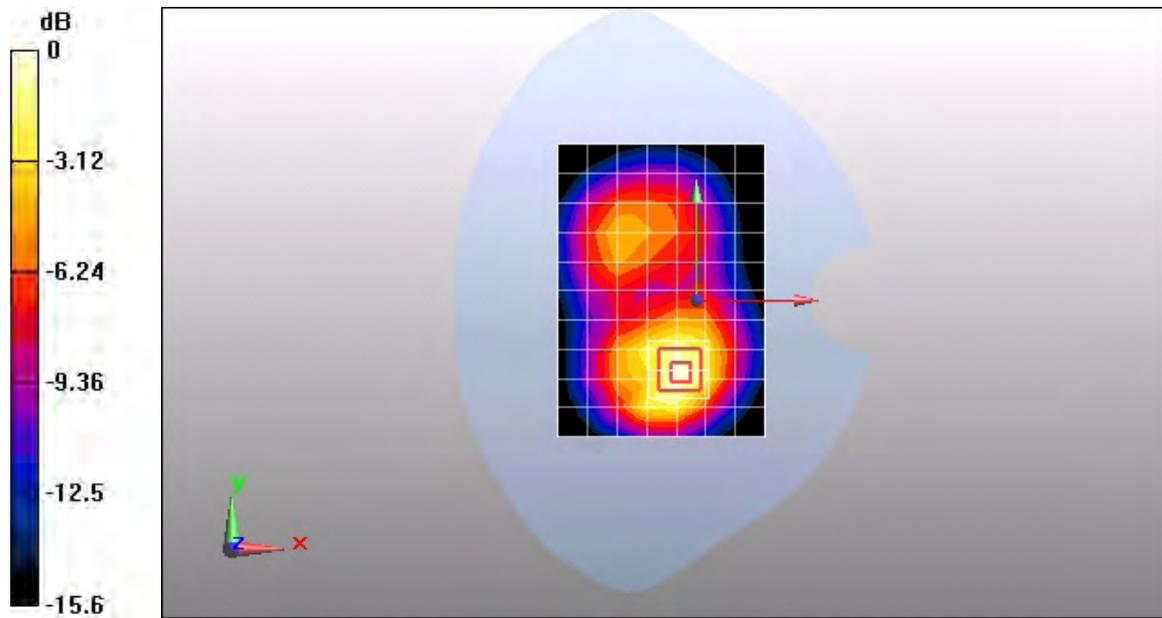

0 dB = 1.31mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1312CH Towards Ground 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.1 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.656 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.28 mW/g

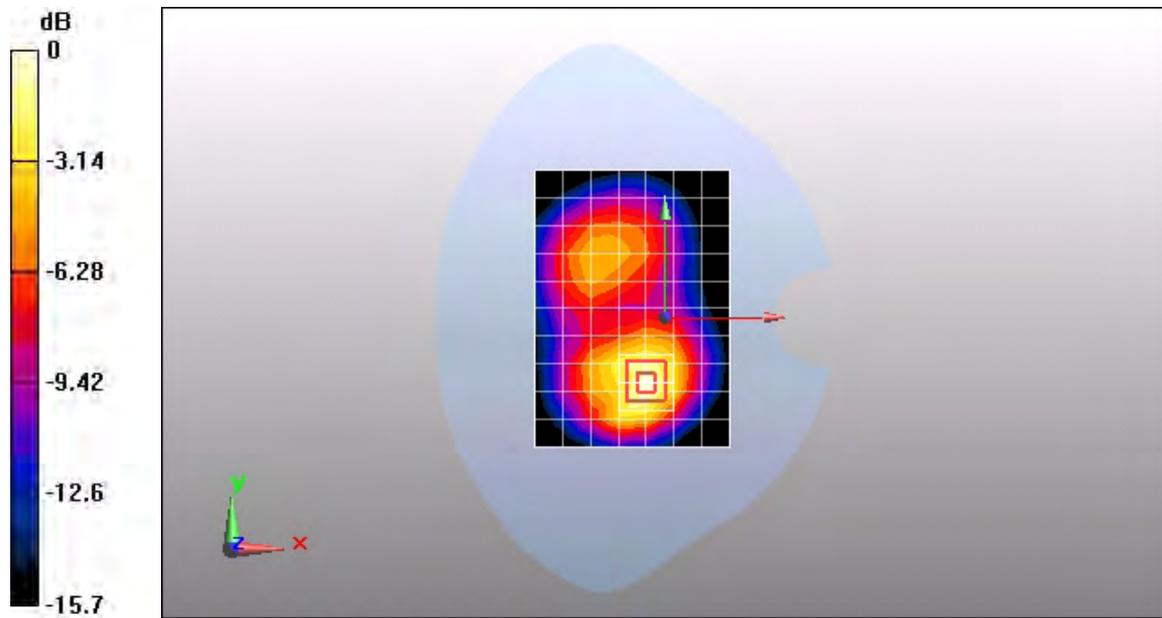

0 dB = 1.28mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Left edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.263 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.115 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

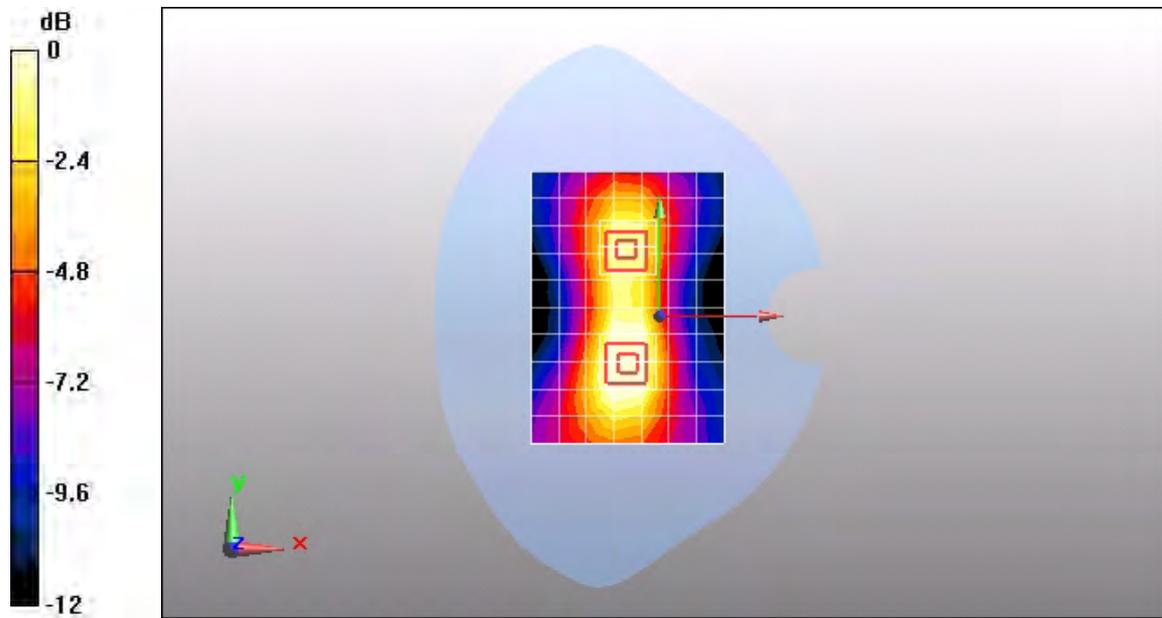

0 dB = 0.174mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Right edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.293 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

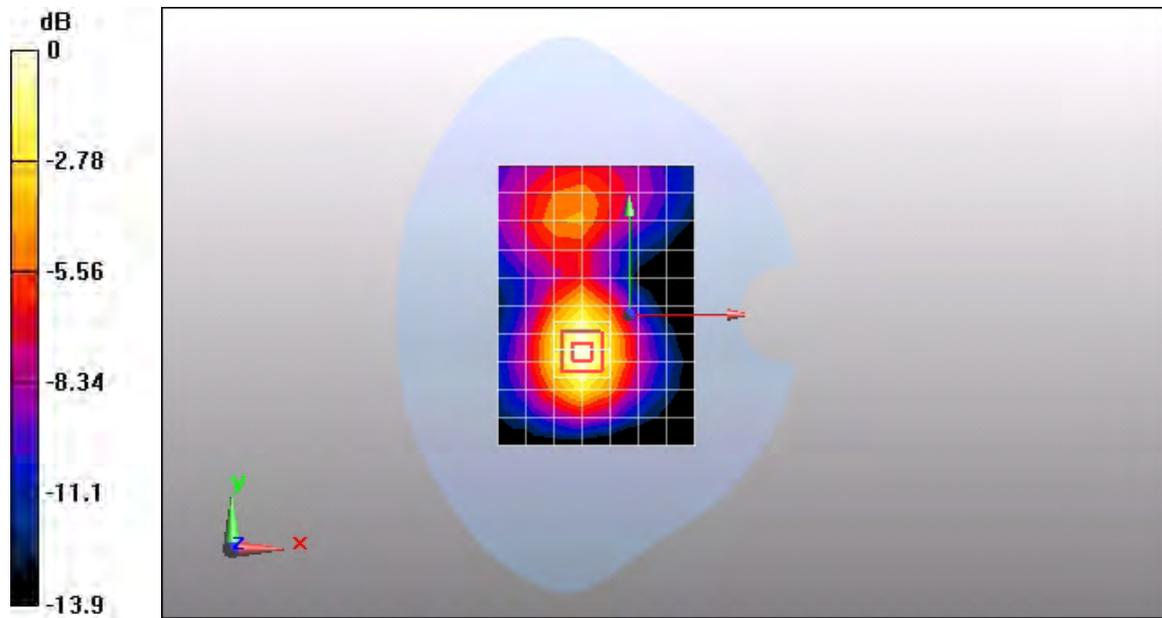

0 dB = 0.298mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1413CH Bottom edge 10mm

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.637 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = 0.00157 dB

Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.598 mW/g; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 0.685 mW/g

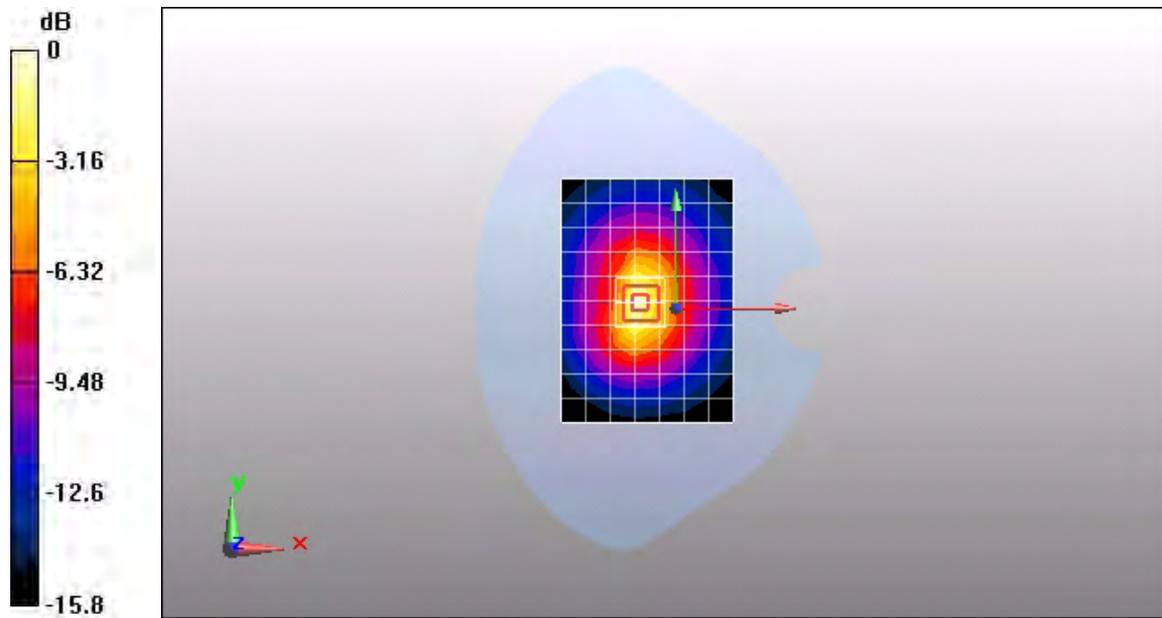

0 dB = 0.685mW/g

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1513CH Towards Ground 10mm with HSDPA

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = 0.020 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.693 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

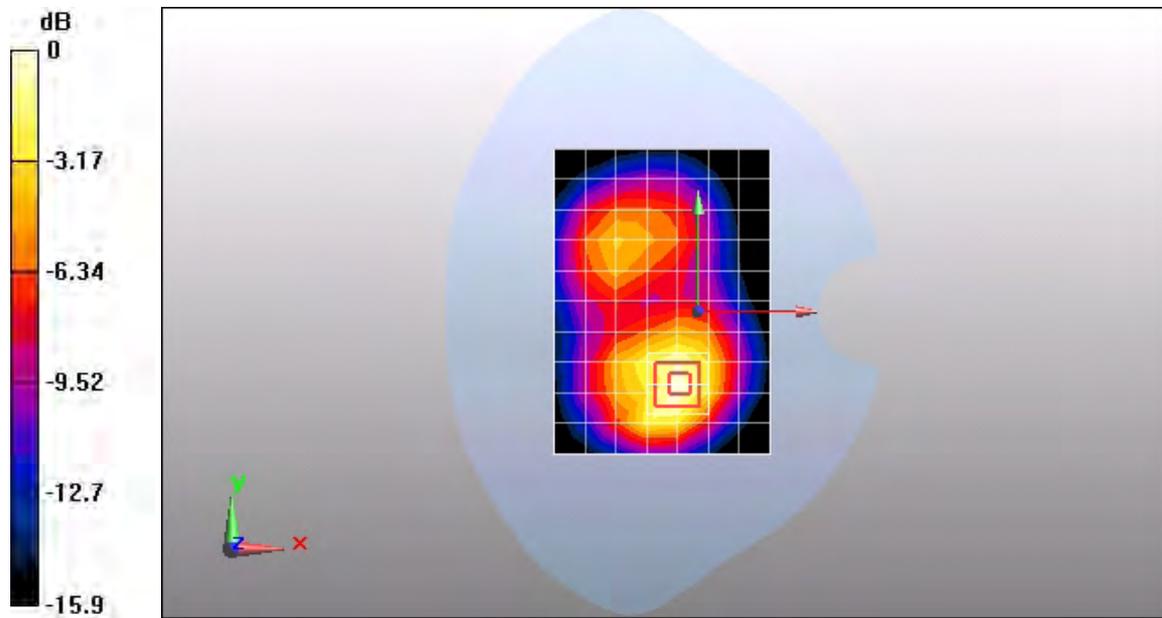

0 dB = 1.33mW/g

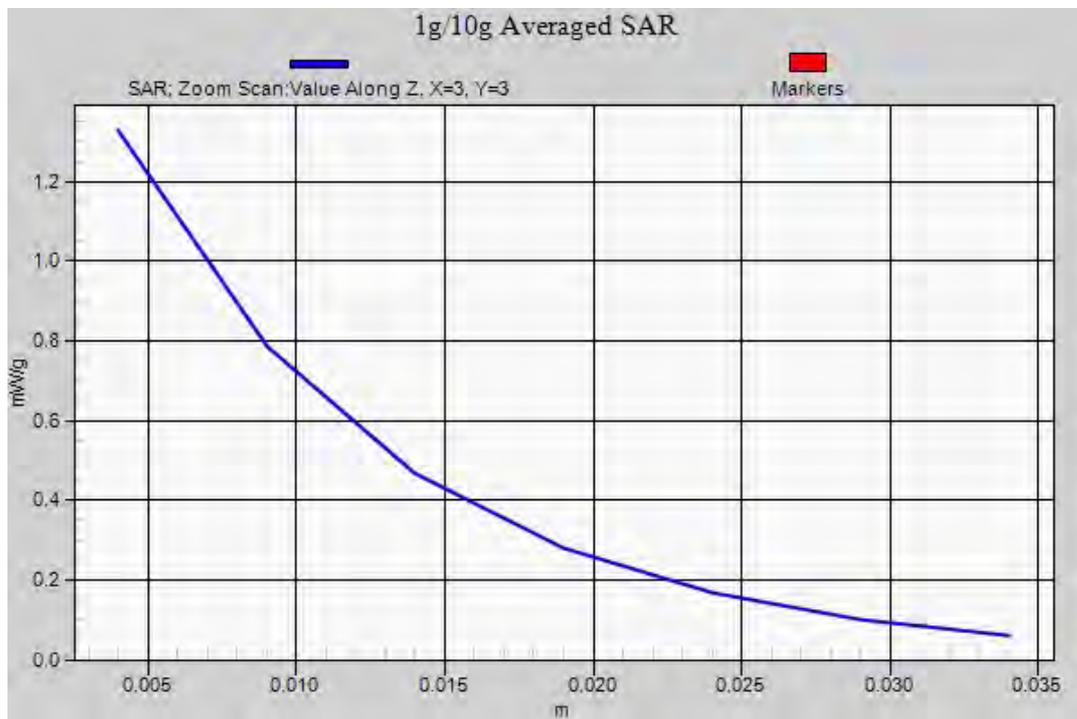

Test Laboratory: Huawei SAR Lab

U8350-3 WCDMA1700 1513CH Towards Ground 10mm with Headset

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: HW -UMTS-FDD; Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.48, 7.48, 7.48); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.21 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11 V/m; Power Drift = -0.0059 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.632 mW/g

Maximum value of SAR (measured) = 1.2 mW/g

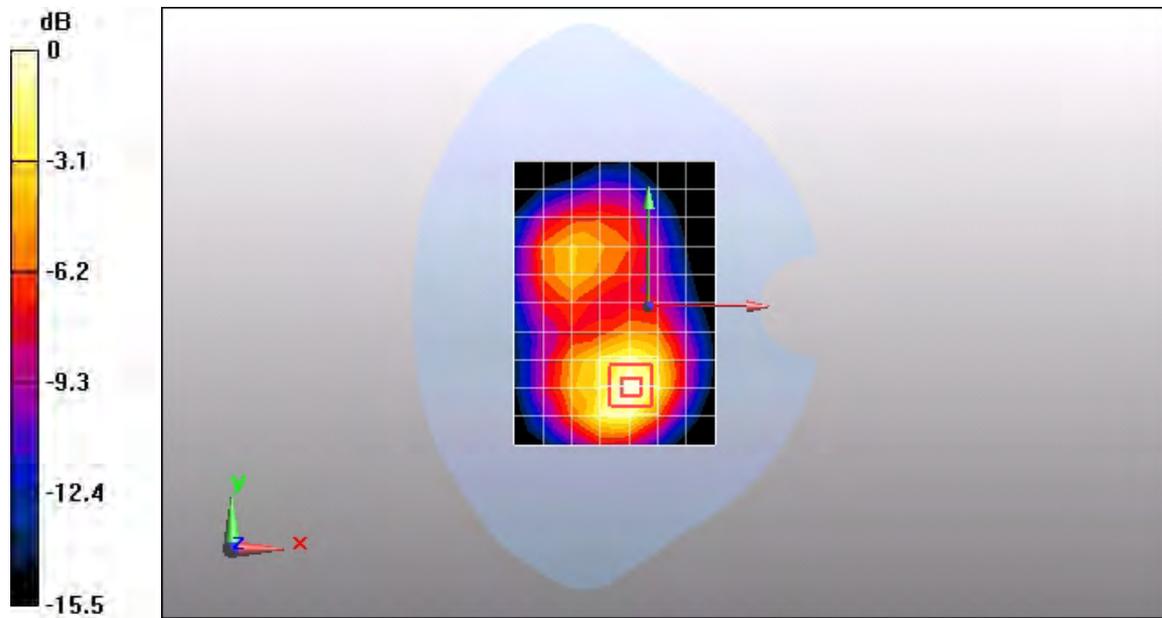

0 dB = 1.2mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Left hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.040 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.45 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.062 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

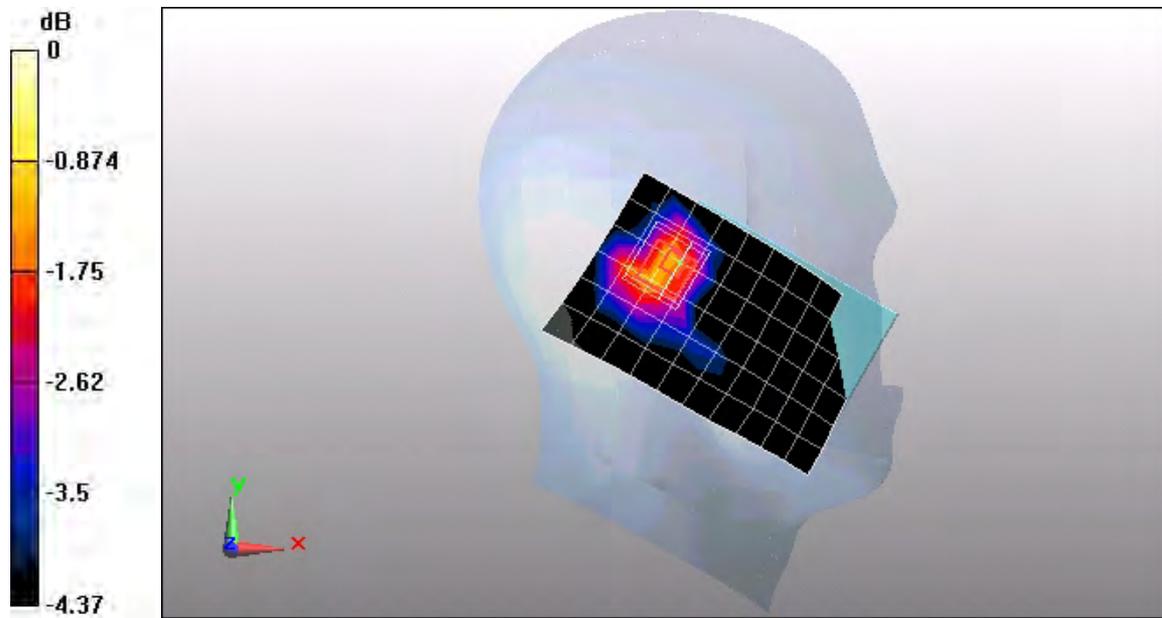

0 dB = 0.052mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Left hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.052 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.33 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

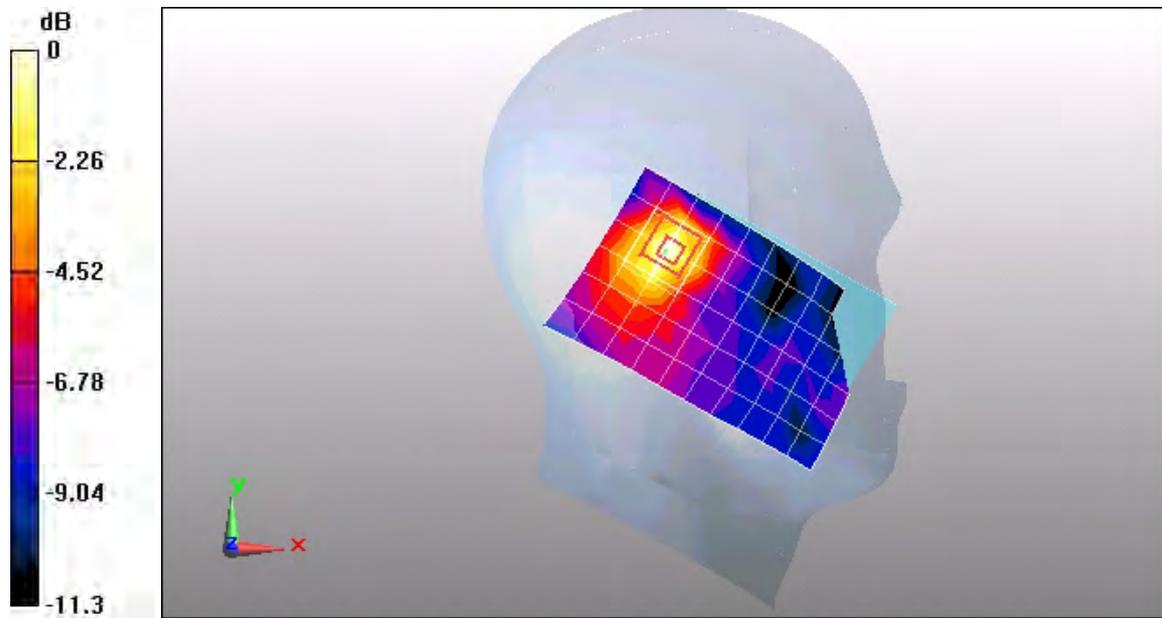

0 dB = 0.047mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Right hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.057 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.93 V/m; Power Drift = -0.030 dB


Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

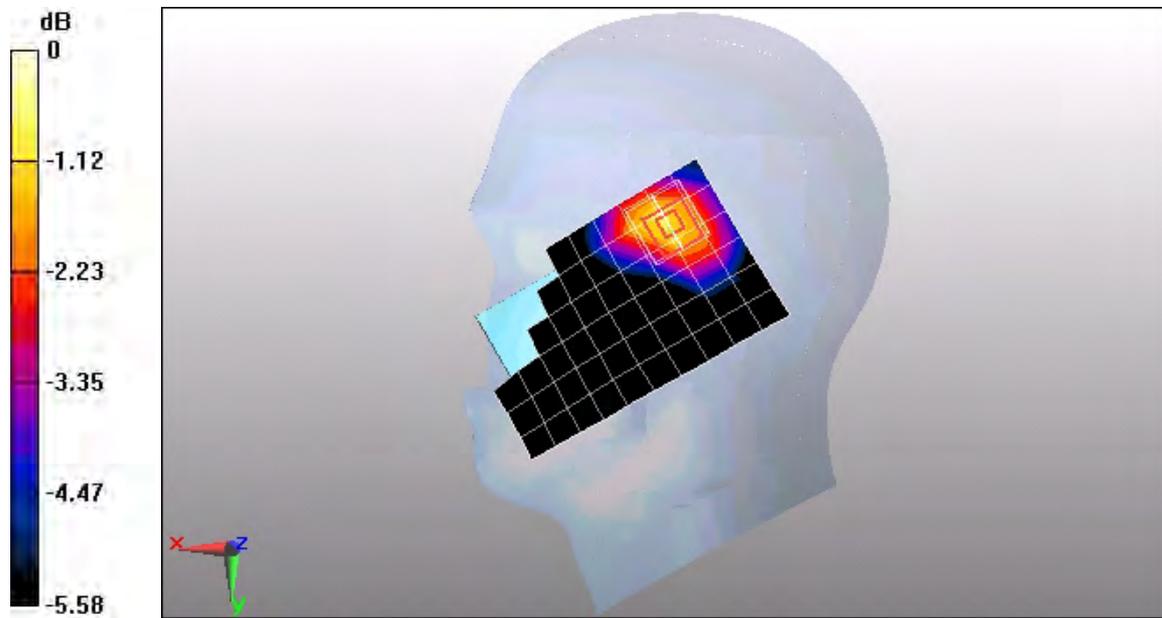

0 dB = 0.069mW/g

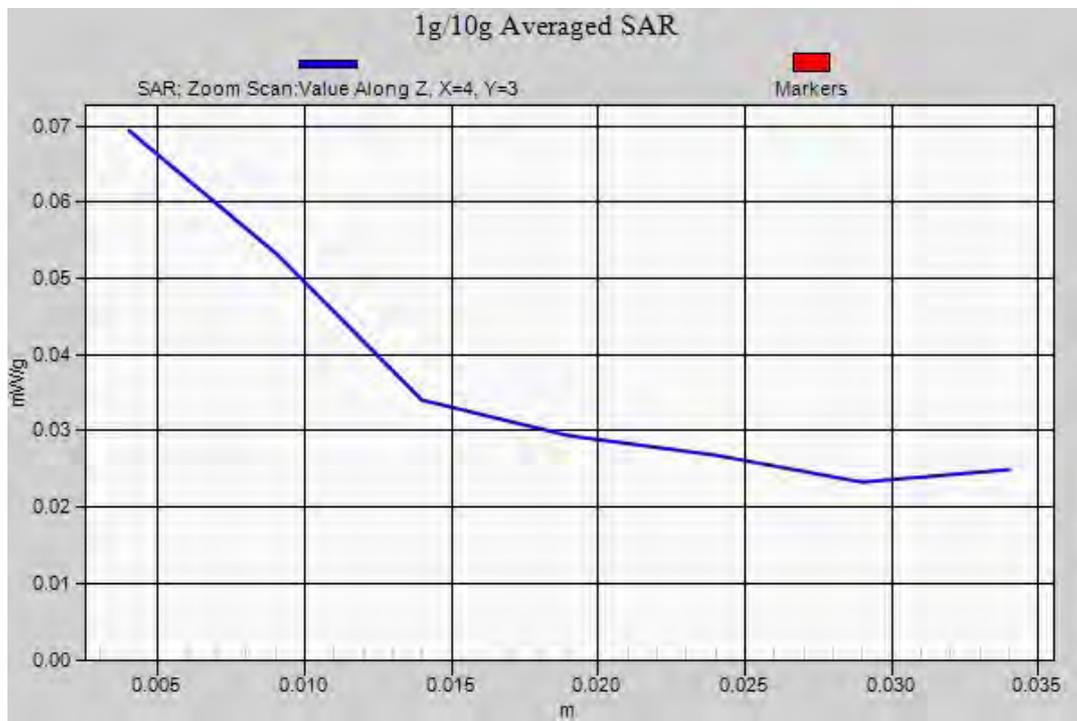

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Right hand tilt 15 degree

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.040 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.54 V/m; Power Drift = 0.161 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

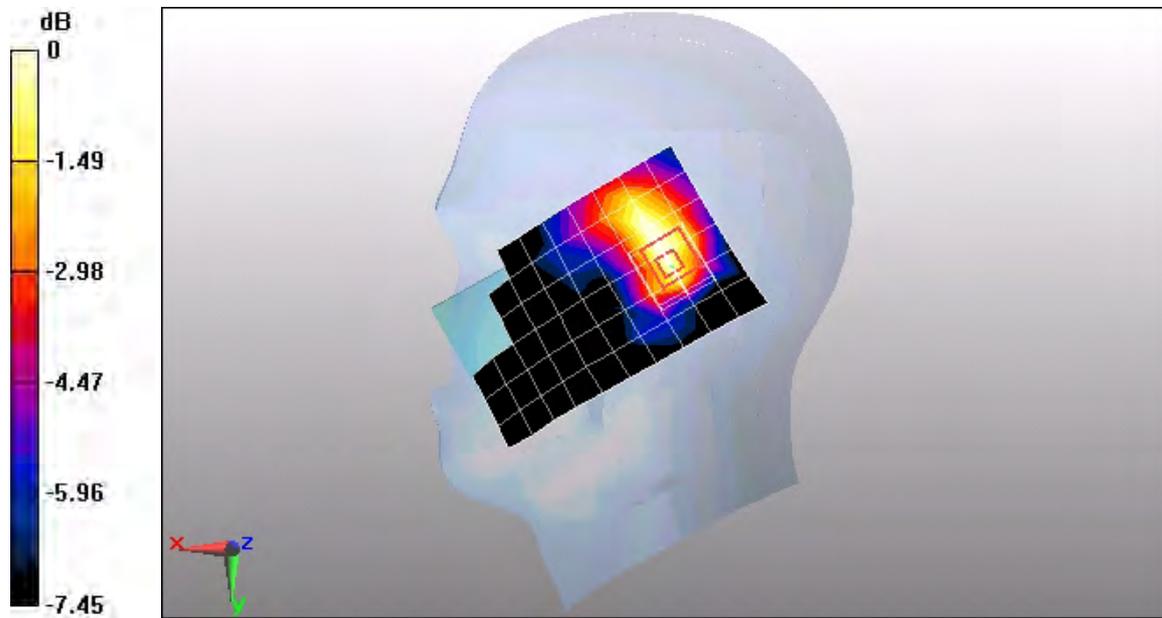

0 dB = 0.038mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 6CH Right hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.050 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.06 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 0.090 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

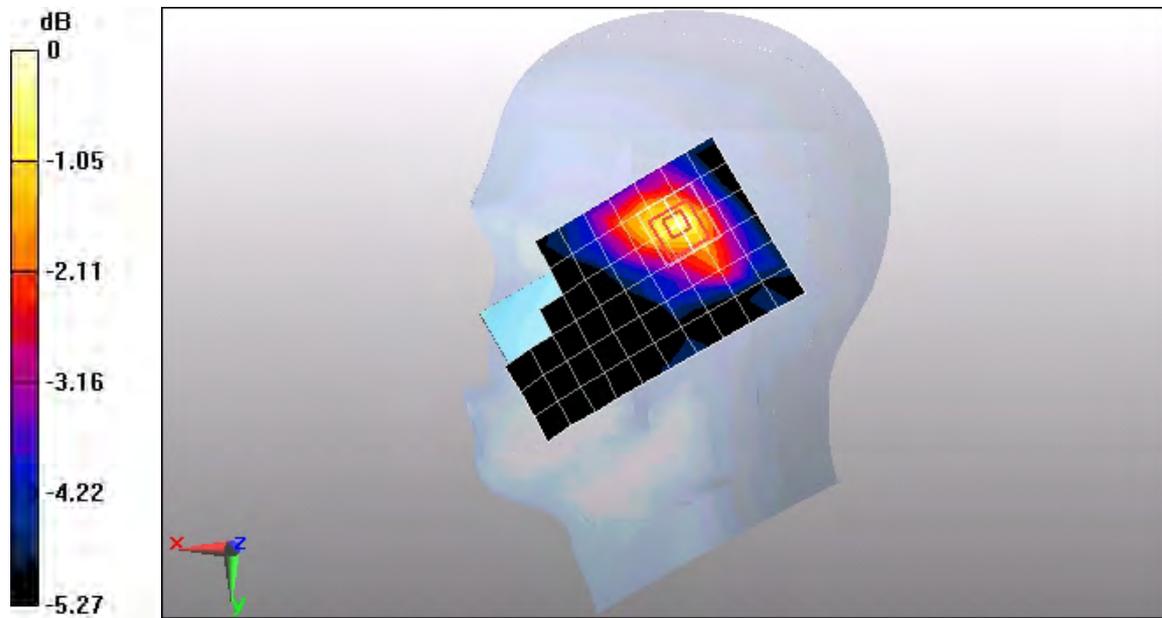

0 dB = 0.055mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 1CH Right hand touch check

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.76$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.044 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.93 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.053 mW/g

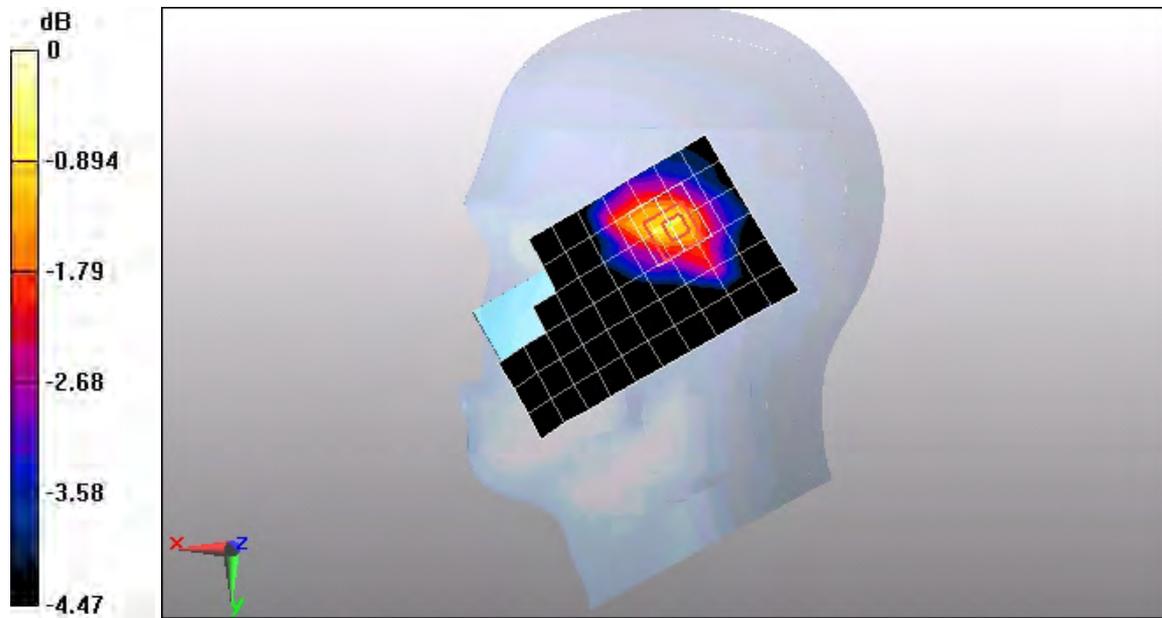

0 dB = 0.053mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Towards Phantom 10m

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.023 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.08 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

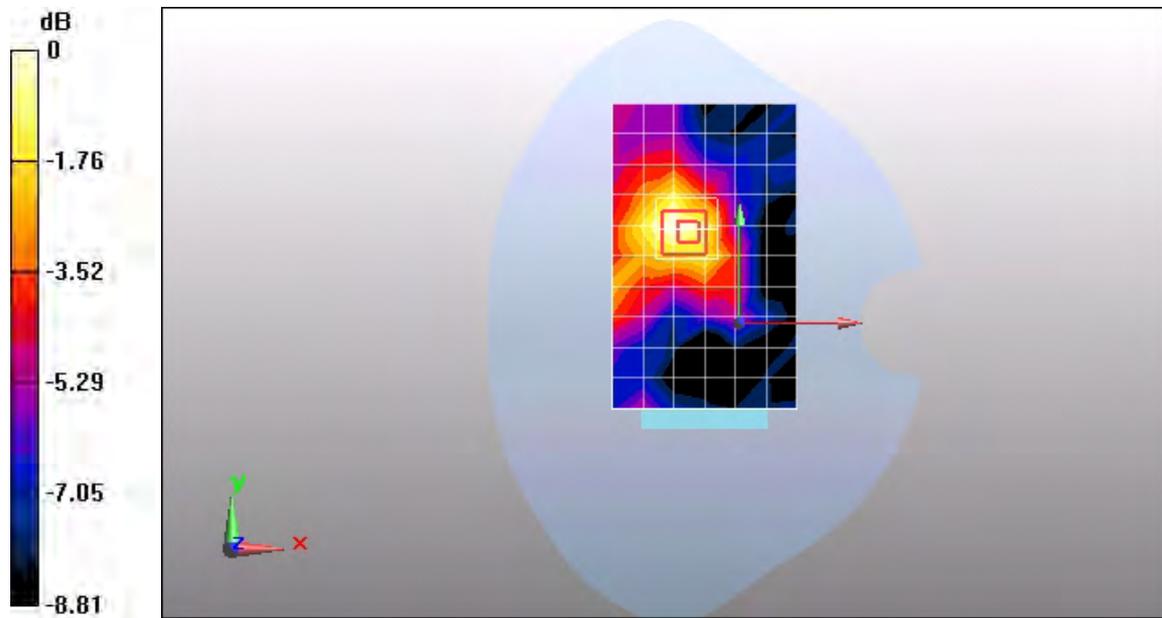

0 dB = 0.022mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Towards Ground 10m

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.078 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.35 V/m; Power Drift = 0.018 dB


Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

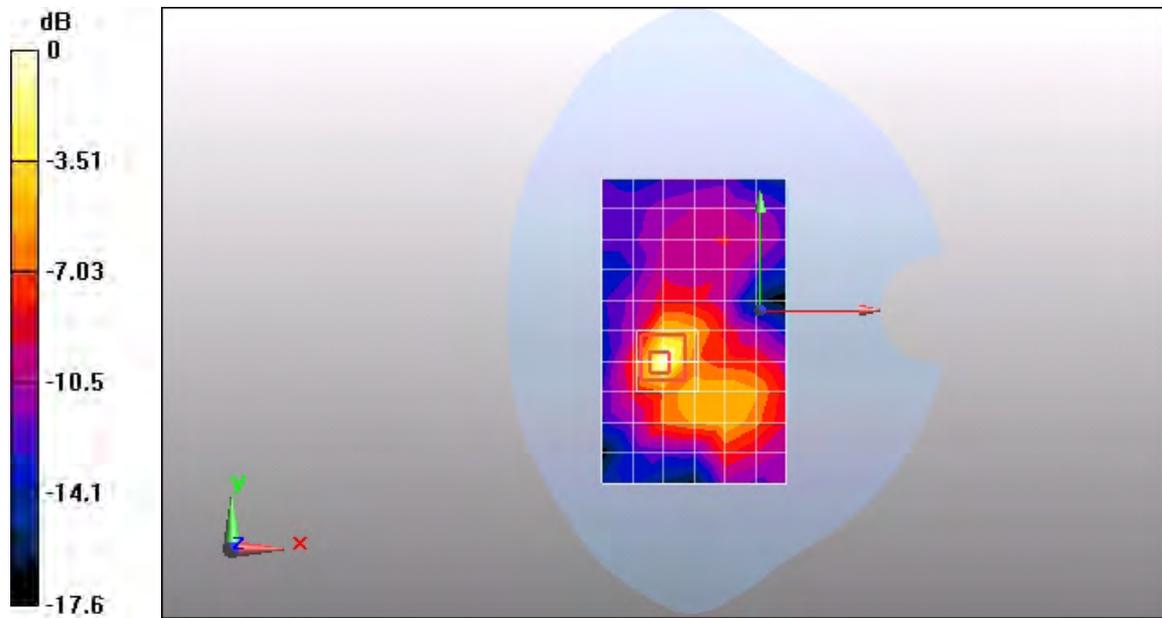

0 dB = 0.080mW/g

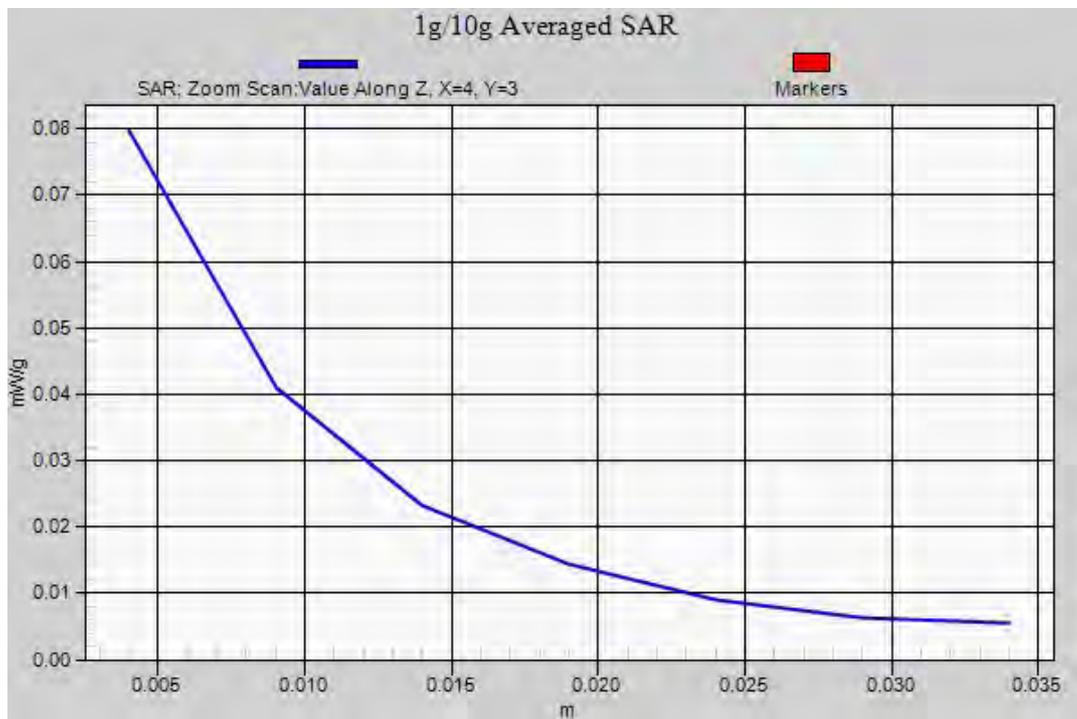

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Left edge 10m

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.031 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.35 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.033 mW/g

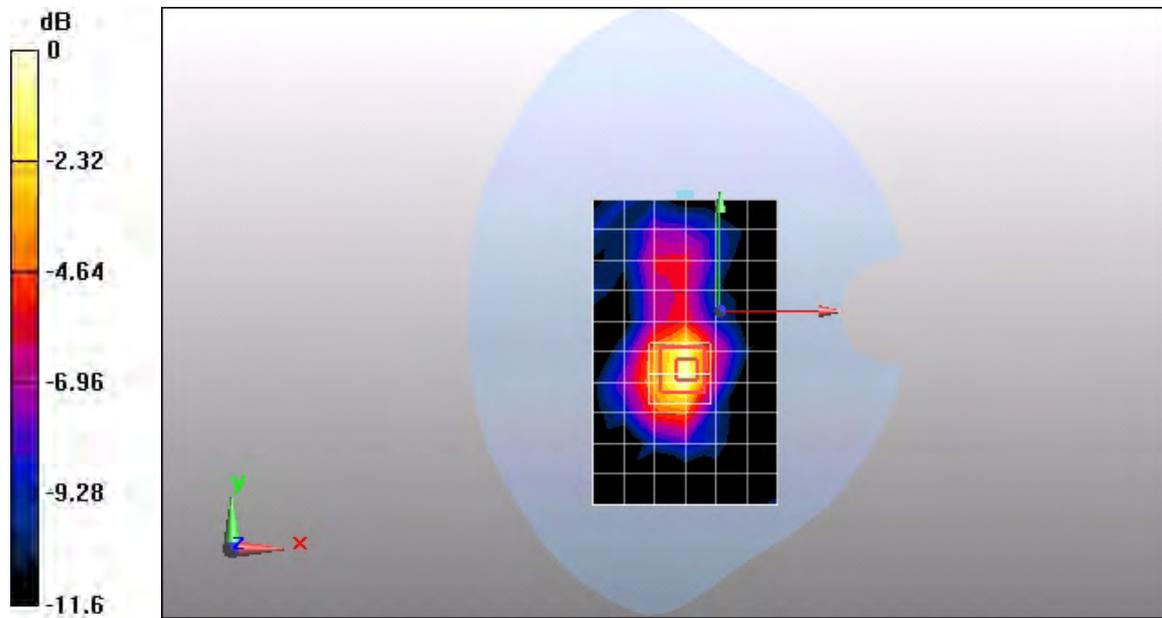

0 dB = 0.033mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 11CH Top edge 10m

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2462 MHz

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.030 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.15 V/m; Power Drift = 0.183 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.038 mW/g

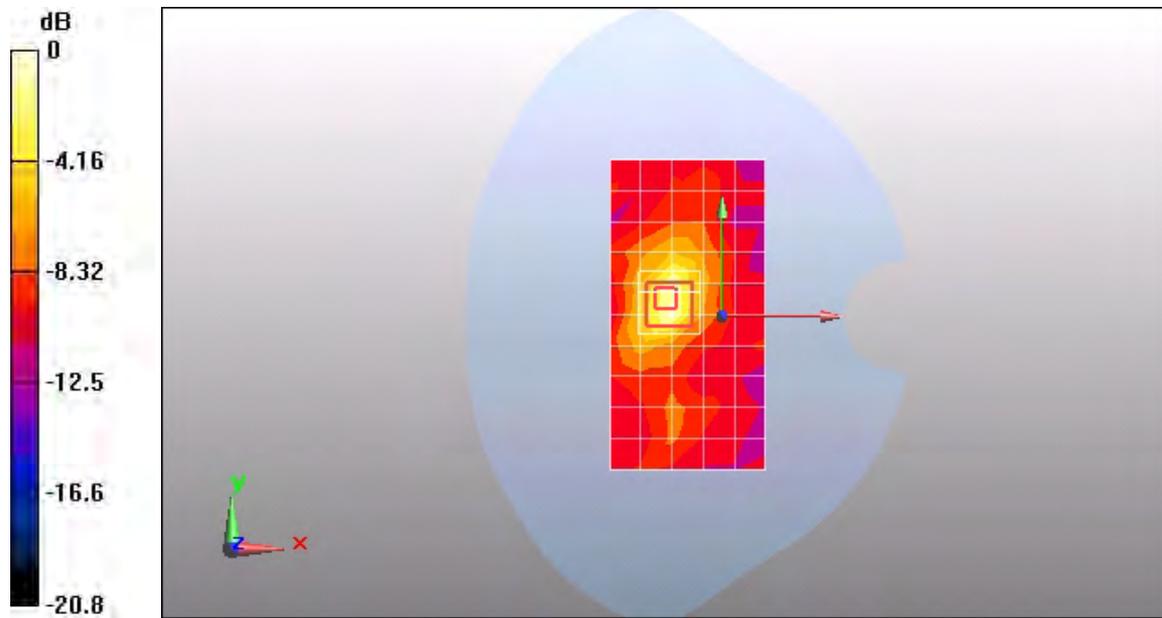

0 dB = 0.038mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 6CH Towards Ground 10m

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.071 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.28 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

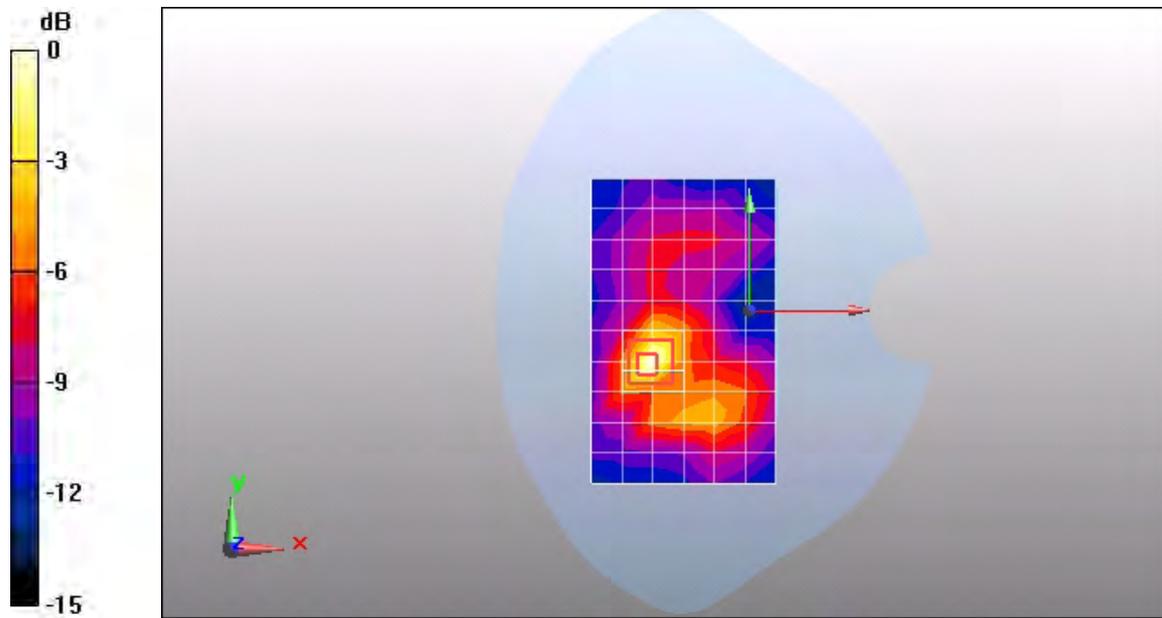

0 dB = 0.067mW/g

Test Laboratory: HUAWEI SAR Lab

U8350-3 WiFi 11b 1CH Towards Ground 10m

DUT: U8350-3; Type: Mobile Phone ; Serial: D4J2A11161600173

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 12/13/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.066 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.13 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.071 mW/g

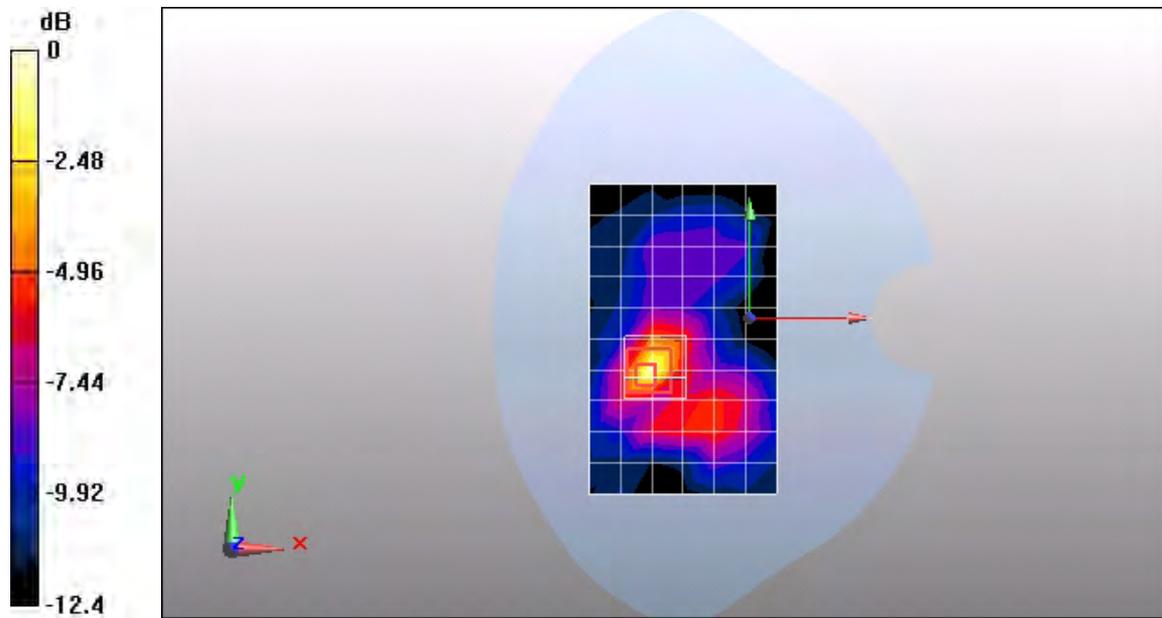

0 dB = 0.071mW/g