

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 1TS 661CH Towards Phantom 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.429 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.127 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.6540

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.452 mW/g

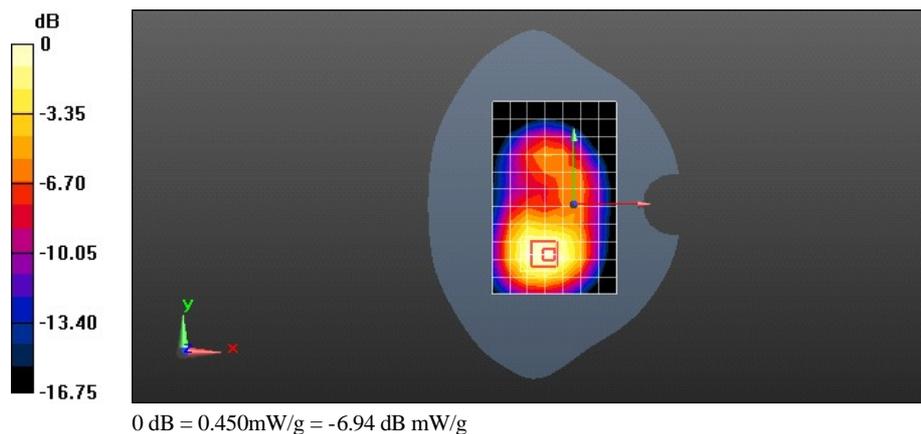

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Towards Phantom 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.805 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.919 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.2080

SAR(1 g) = 0.766 mW/g; SAR(10 g) = 0.472 mW/g

Maximum value of SAR (measured) = 0.835 mW/g

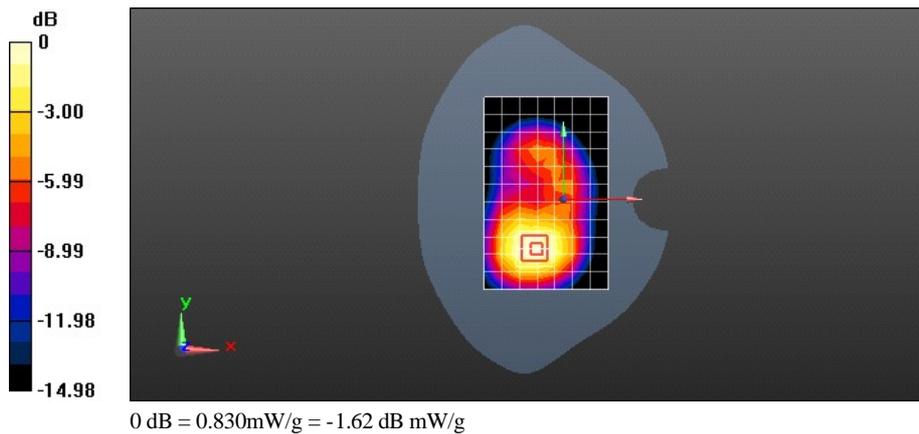

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 810CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.554$ mho/m; $\epsilon_r = 52.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.121 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.807 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.6990

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.630 mW/g

Maximum value of SAR (measured) = 1.151 mW/g

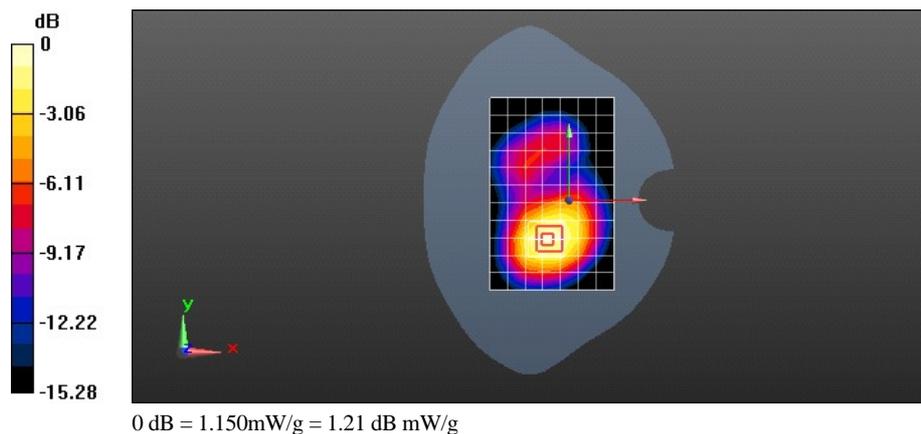

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.071 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.192 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.6850

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.627 mW/g

Maximum value of SAR (measured) = 1.119 mW/g

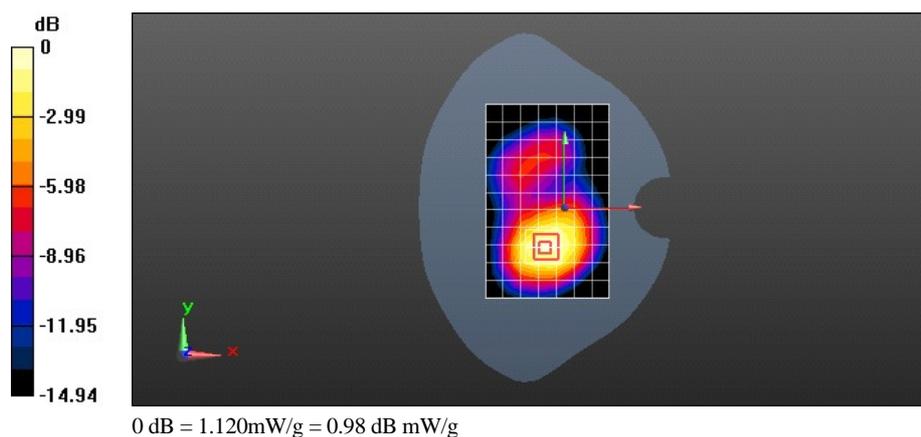

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 512CH Towards Ground 10 mm**DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1850.2 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 53.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.028 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.982 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.5140

SAR(1 g) = 0.964 mW/g; SAR(10 g) = 0.603 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.034 mW/g

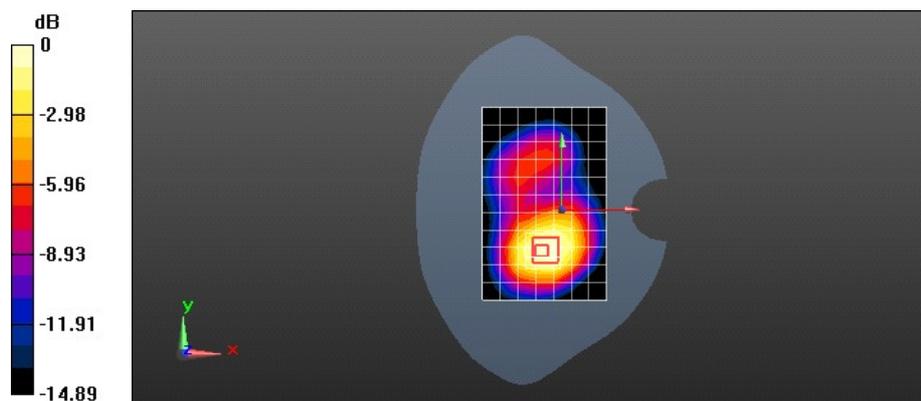

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Left edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.375 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.789 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.5690

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

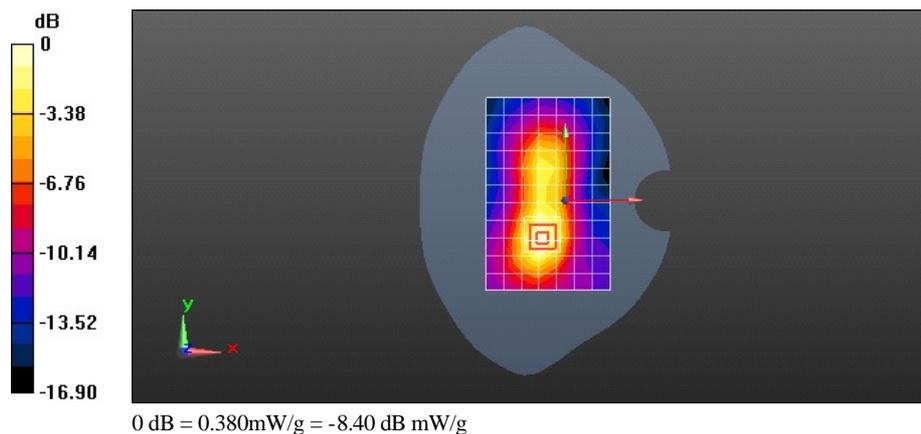

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Right edge 10mm**DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.168 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.657 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.2780

SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.190 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.657 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.2620

SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

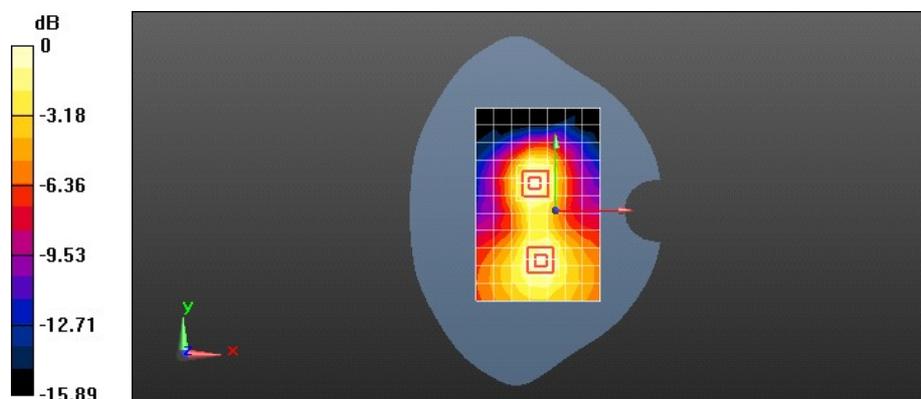

0 dB = 0.170mW/g = -15.39 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 GPRS 2TS 661CH Bottom edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.844 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.267 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.2450

SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 0.819 mW/g

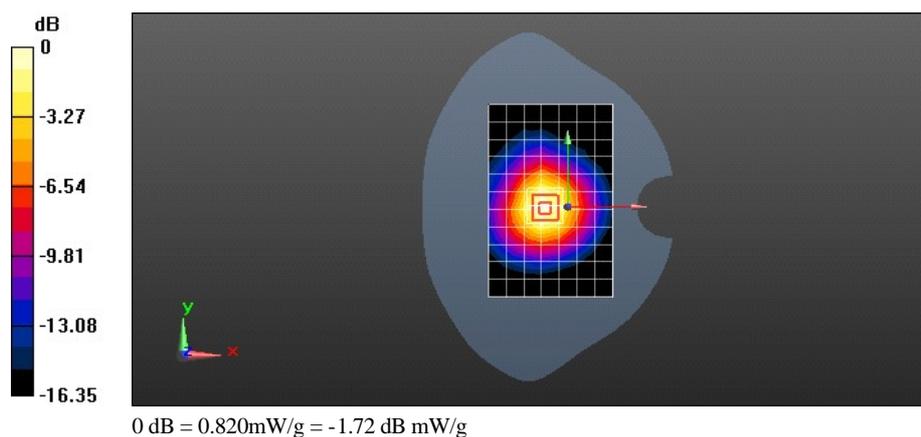

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 1TS 661CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.589 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.066 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.0150

SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.365 mW/g

Maximum value of SAR (measured) = 0.663 mW/g

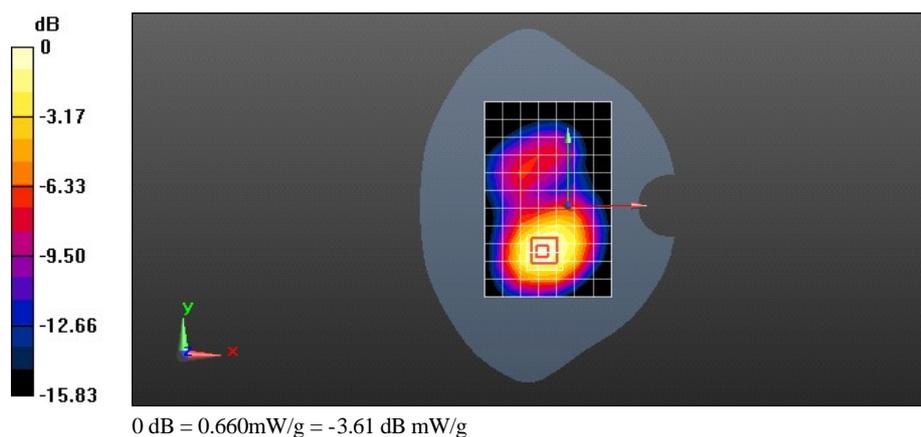

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 810CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.554$ mho/m; $\epsilon_r = 52.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.151 mW/g



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.454 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.9340

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.658 mW/g

Maximum value of SAR (measured) = 1.241 mW/g

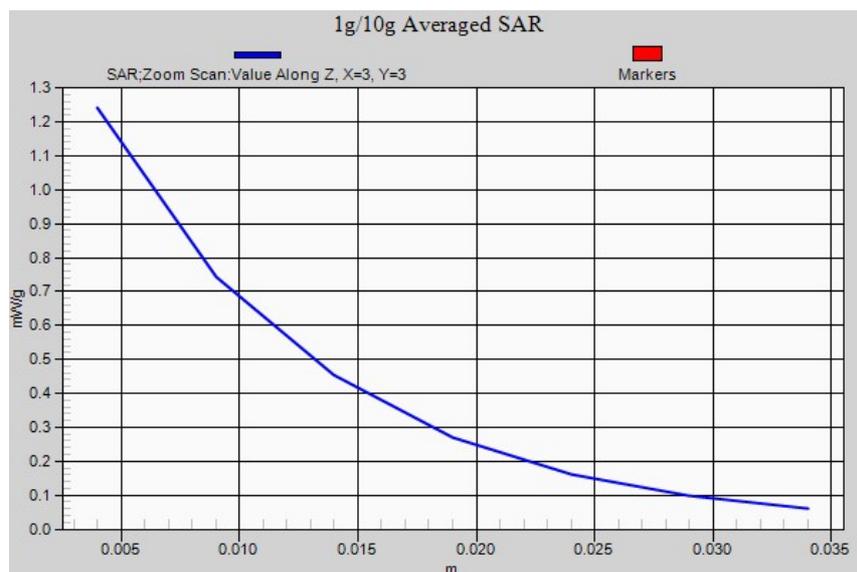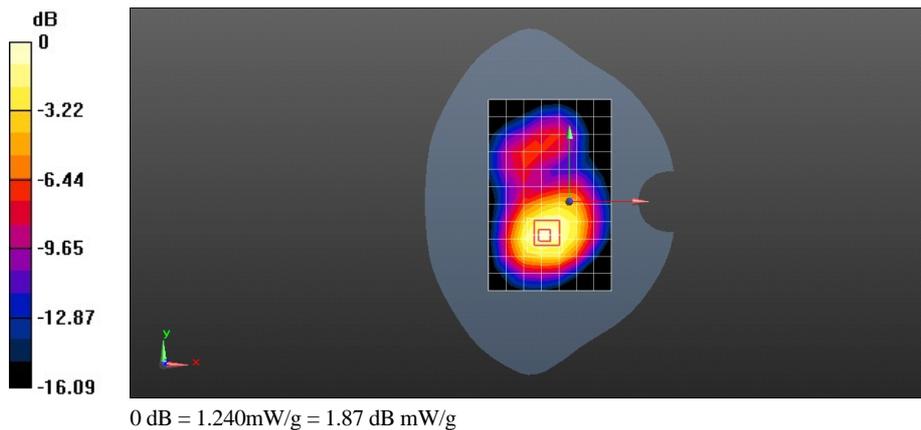

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 661CH Towards Ground 10 mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.521$ mho/m; $\epsilon_r = 53.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.065 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.229 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.7070

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.650 mW/g

Maximum value of SAR (measured) = 1.183 mW/g

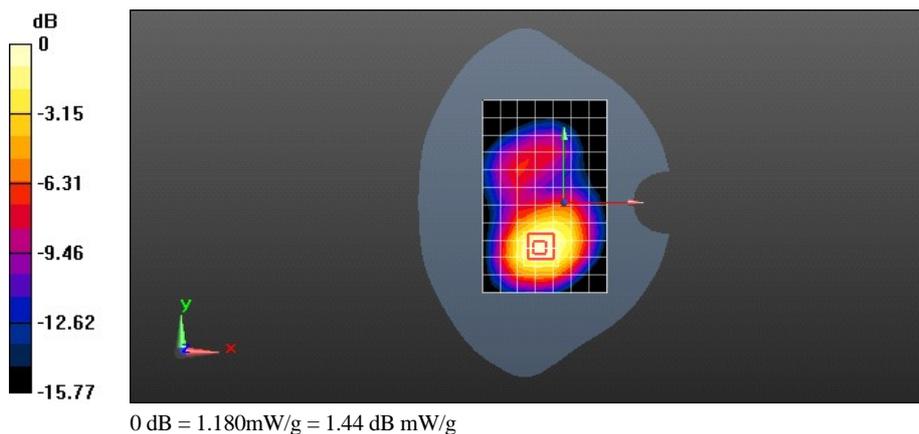

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 512CH Towards Ground 10 mm**DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1**

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1850.2 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.488$ mho/m; $\epsilon_r = 53.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.941 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.009 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.6120

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.615 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.103 mW/g

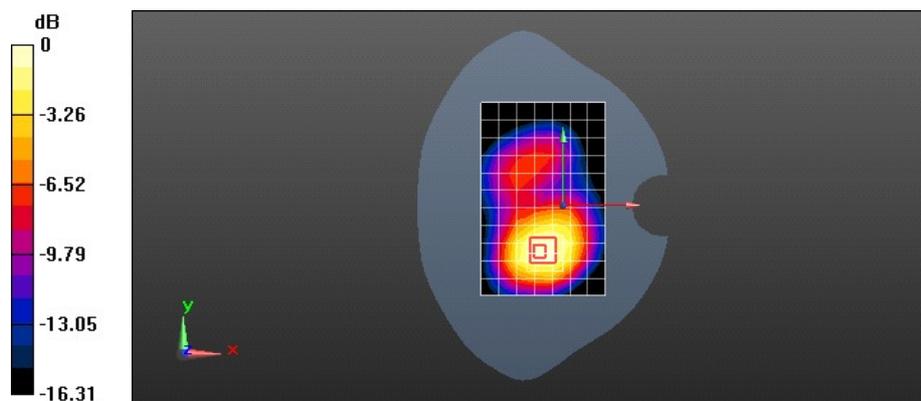

0 dB = 1.100mW/g = 0.83 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 810CH Towards Ground 10 mm with Headset

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-1TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.554$ mho/m; $\epsilon_r = 52.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.215 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.9500

SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 0.624 mW/g

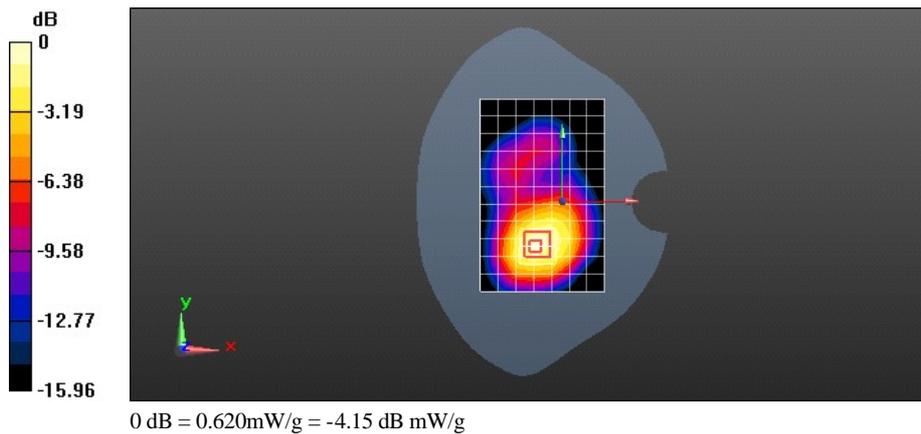

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 810CH Towards Ground 10 mm with The battery GAGB916XC37L1127(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.554$ mho/m; $\epsilon_r = 52.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.124 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.964 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.8230

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.662 mW/g

Maximum value of SAR (measured) = 1.223 mW/g

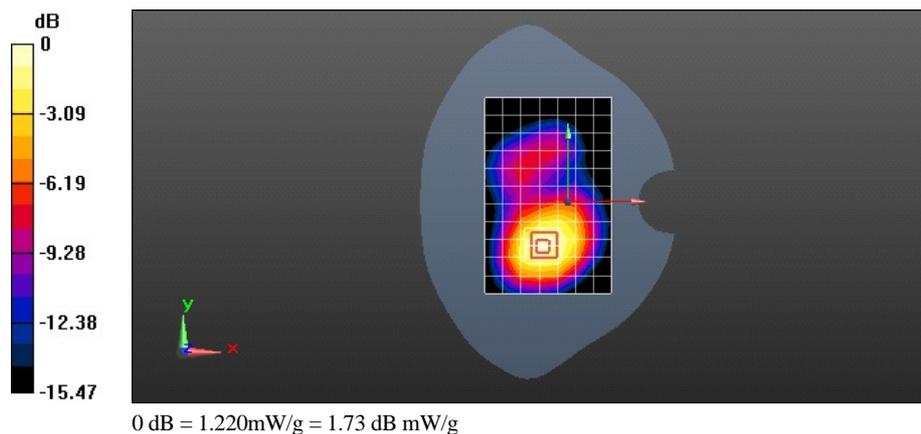

Test Laboratory: HUAWEI SAR Lab

U8655-1 GSM1900 EDGE 2TS 810CH Towards Ground 10 mm with The battery BAAC214F97400361(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: HW-GSM\GPRS\EGPRS-2TS; Frequency: 1909.8 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.554$ mho/m; $\epsilon_r = 52.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.011 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.195 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.6940

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 1.112 mW/g

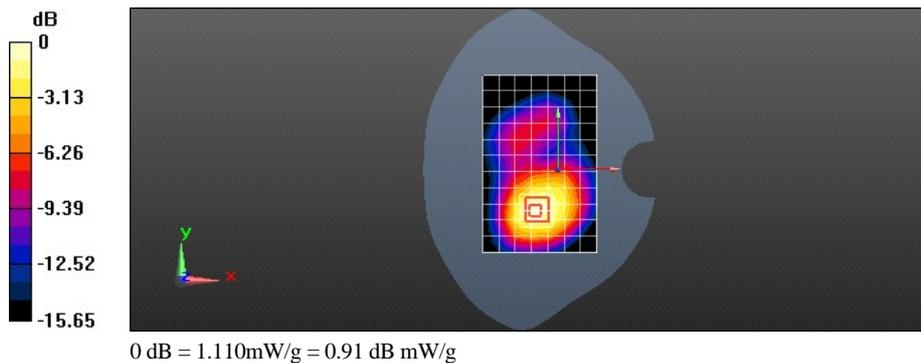

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Left hand touch cheek

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.072 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.115 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.1260

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

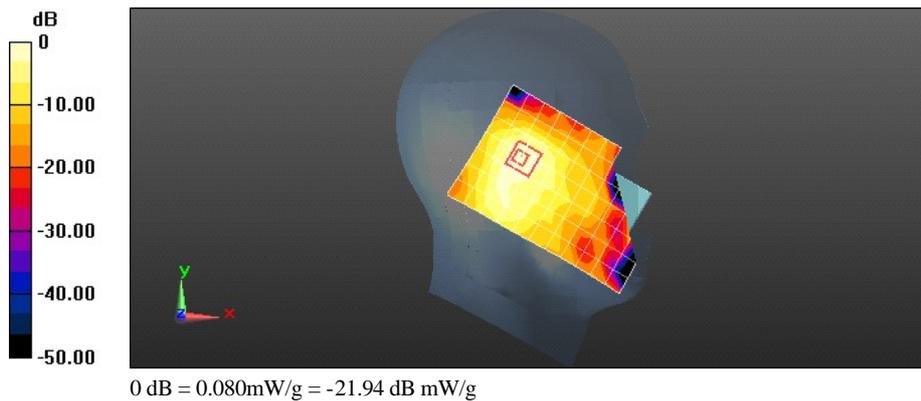

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Left hand tilt 15 degree

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.064 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.804 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.1180

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.070 mW/g

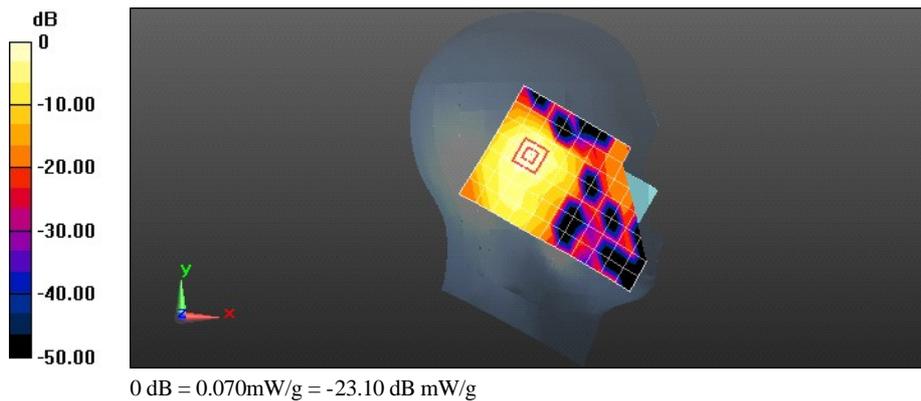

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand touch cheek

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.116 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.647 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.2880

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.141 mW/g

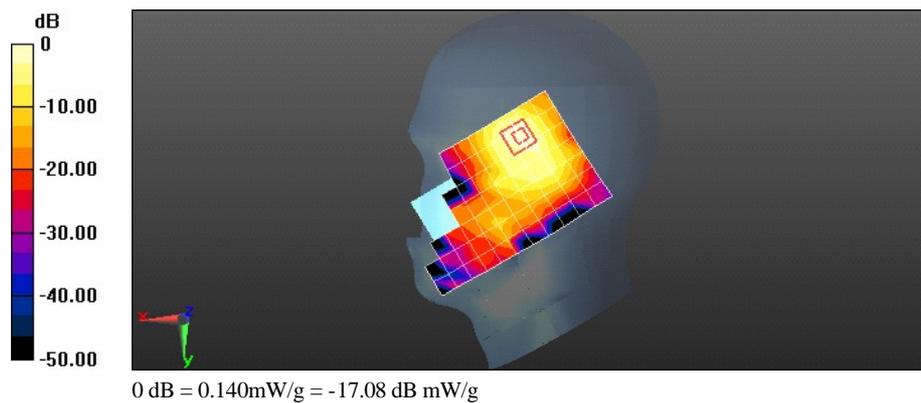

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand tilt 15 degree

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.066 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.298 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.1520

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.072 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.298 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0930

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.056 mW/g

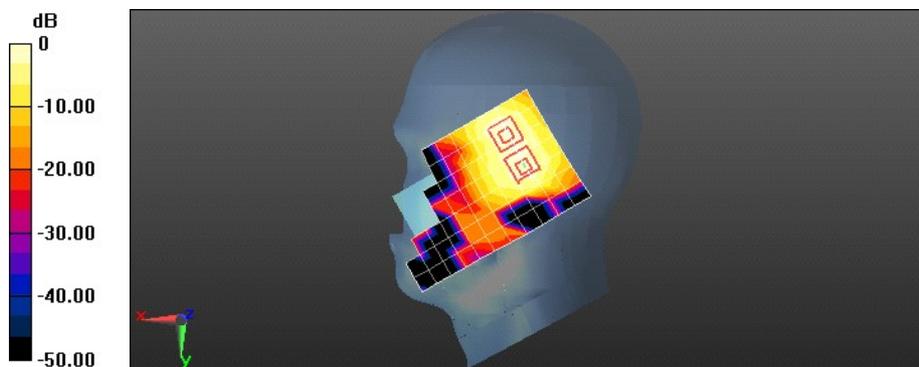

0 dB = 0.060mW/g = -24.44 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand touch cheek with The battery GAGB916XC37L1127(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1



Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.118 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.398 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.2960
SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.058 mW/g
 Maximum value of SAR (measured) = 0.141 mW/g

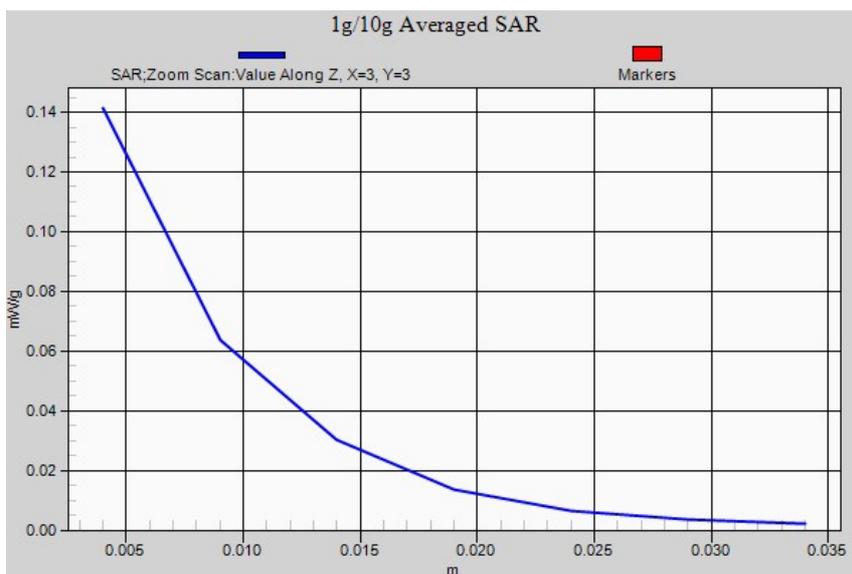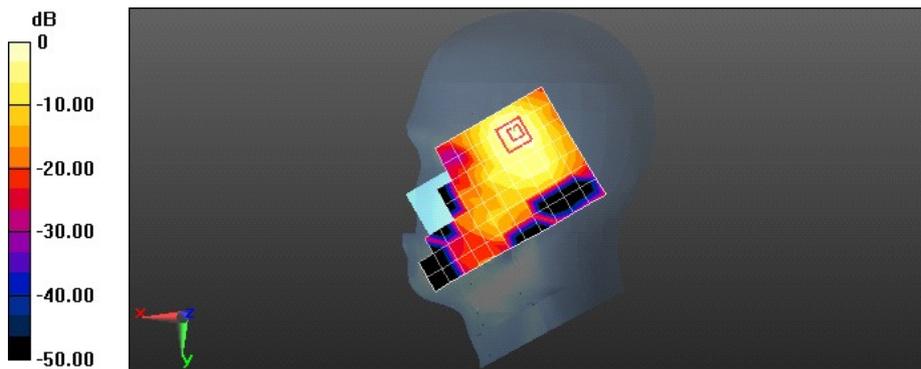

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Right hand touch cheek with The battery BAAC214F97400361(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.86, 6.86, 6.86); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.109 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.471 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.2680

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.133 mW/g

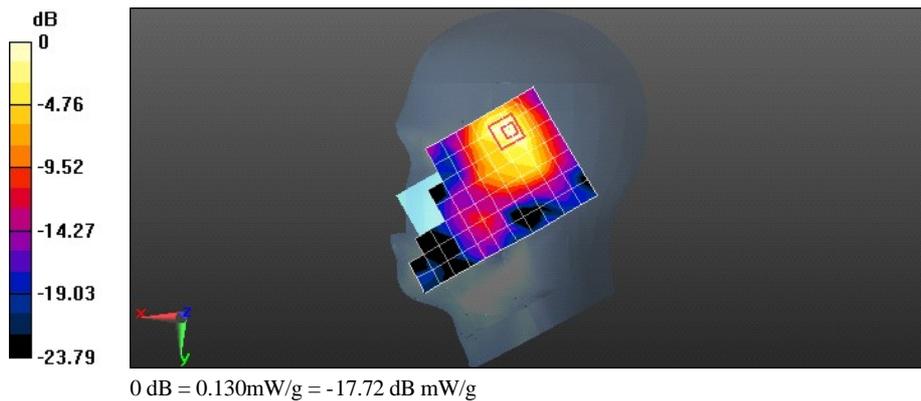

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Phantom 10mm**DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1**

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.984$ mho/m; $\epsilon_r = 51.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.033 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.852 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0530

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.035 mW/g

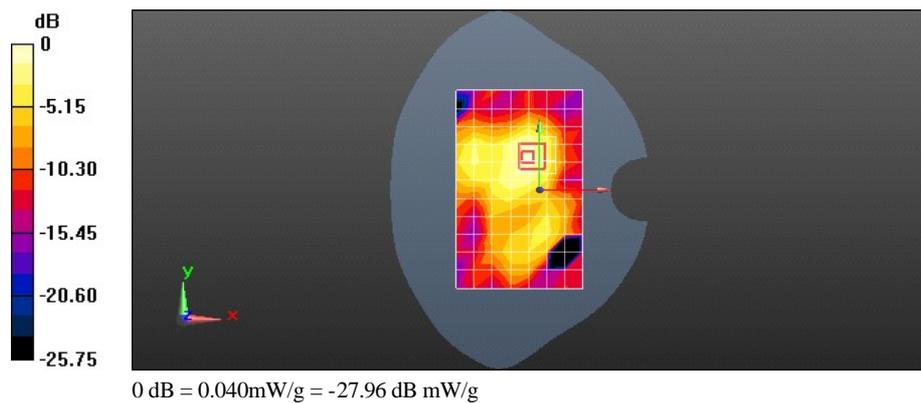

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Ground 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.984$ mho/m; $\epsilon_r = 51.274$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)


Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.125 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.873 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.2790
SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.060 mW/g
 Maximum value of SAR (measured) = 0.149 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.873 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.2160
SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.052 mW/g
 Maximum value of SAR (measured) = 0.123 mW/g

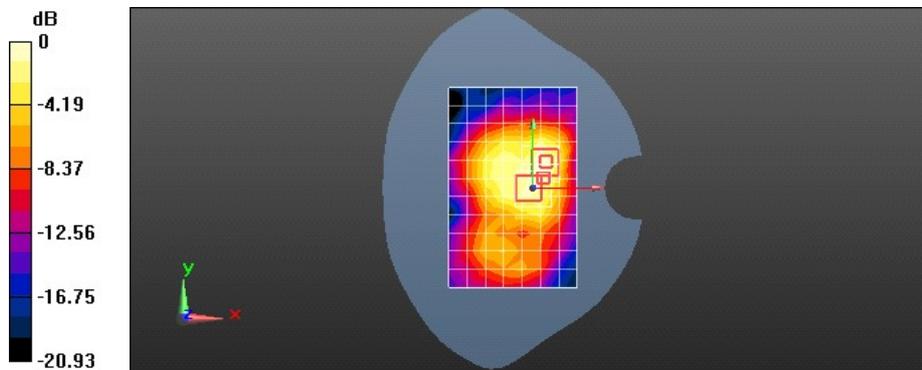

0 dB = 0.120mW/g = -18.42 dB mW/g

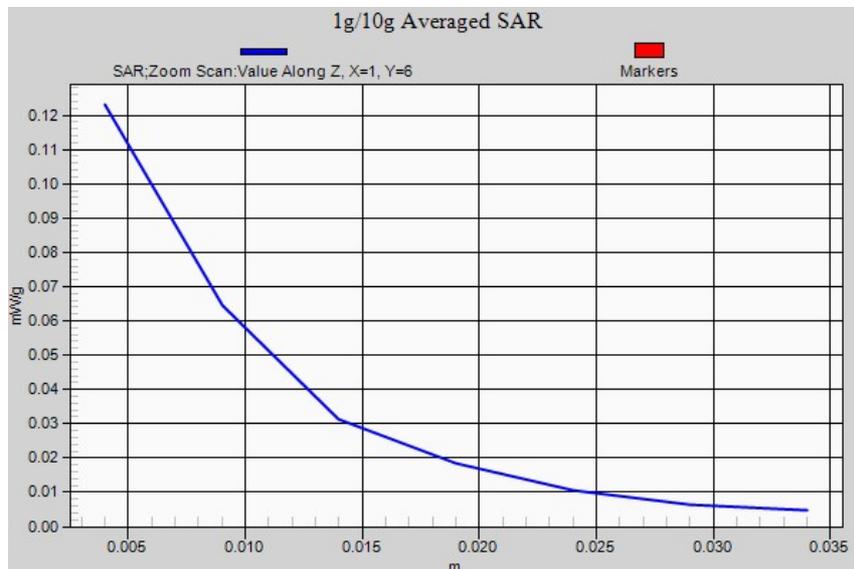

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Left edge 10mm

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.984$ mho/m; $\epsilon_r = 51.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.089 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.648 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.1760

SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.101 mW/g

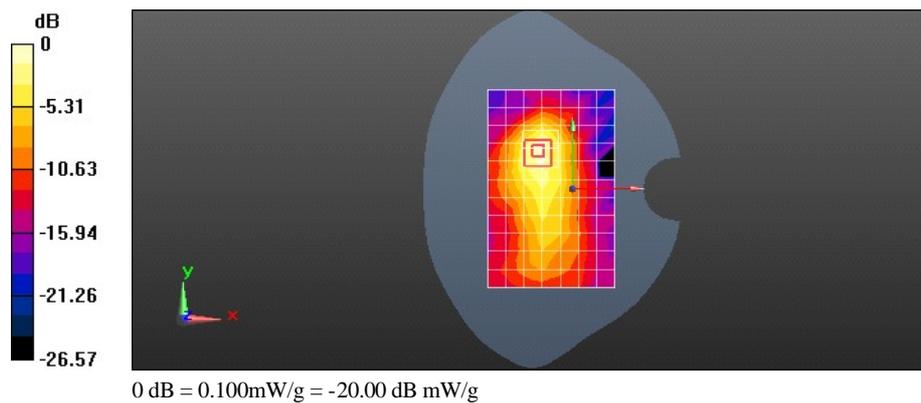

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Top edge 10mm**DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1**

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.984$ mho/m; $\epsilon_r = 51.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.037 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.230 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0710

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.039 mW/g

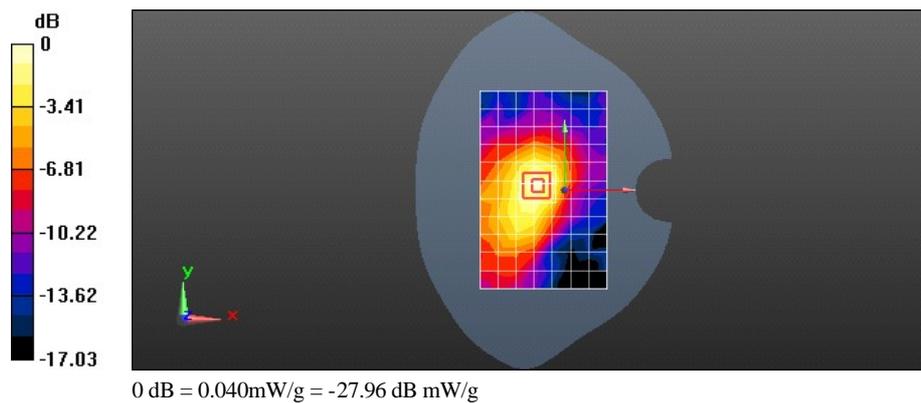

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Ground 10mm with The battery GAGB916XC37L1127(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.984$ mho/m; $\epsilon_r = 51.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.128 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.180 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.2580

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.144 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.180 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.2140

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.122 mW/g

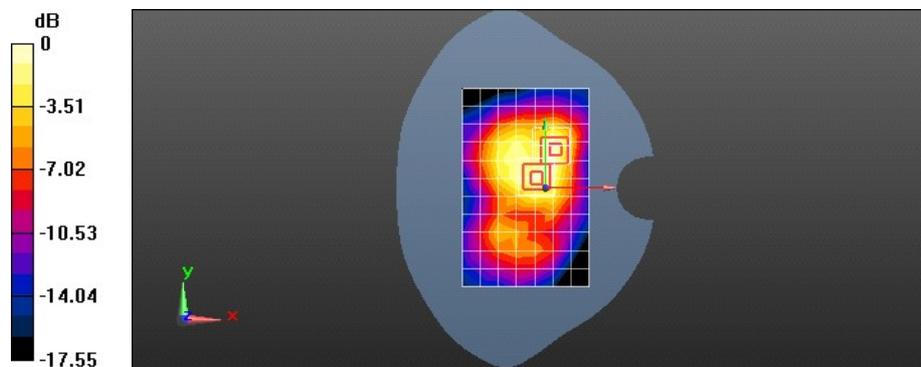

0 dB = 0.120mW/g = -18.42 dB mW/g

Test Laboratory: HUAWEI SAR Lab

U8655-1 WiFi 11b 6CH Toward Ground 10mm with The battery BAAC214F97400361(1250mAh)

DUT: U8655-1; Type: HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; webphones Android" by sfr STARTRAIL II; HUAWEI ASCEND Y200; ASCEND Y200; Serial: SAR1

Communication System: WiFi(802.11b/g/n); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.984$ mho/m; $\epsilon_r = 51.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(6.98, 6.98, 6.98); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.114 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.735 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.2560

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.058 mW/g

Maximum value of SAR (measured) = 0.143 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.735 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.1580

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

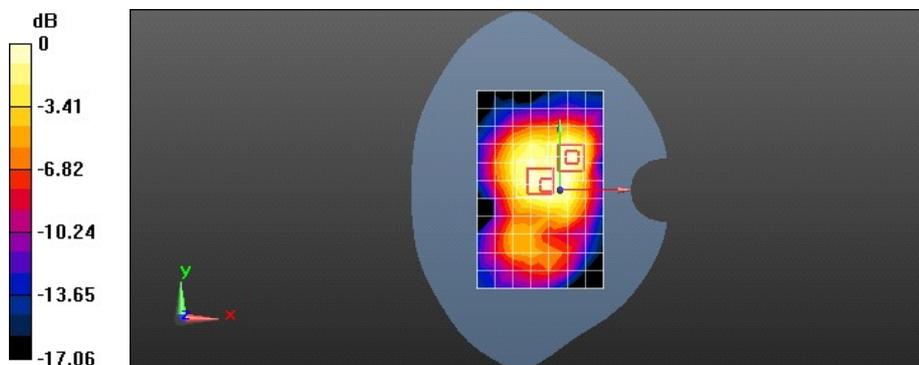

0 dB = 0.100mW/g = -20.00 dB mW/g