

ANNEX I: The EUT Appearances and Test Configuration



a: EUT

TA Technology (Shanghai) Co., Ltd.
Test Report



b-1: Battery (SN: WHCBB22HI46N1976)




b-2: Battery (SN: GAGB916XC37L1150)




b-3: Battery (SN: BAABB27F97400267)

b: Battery

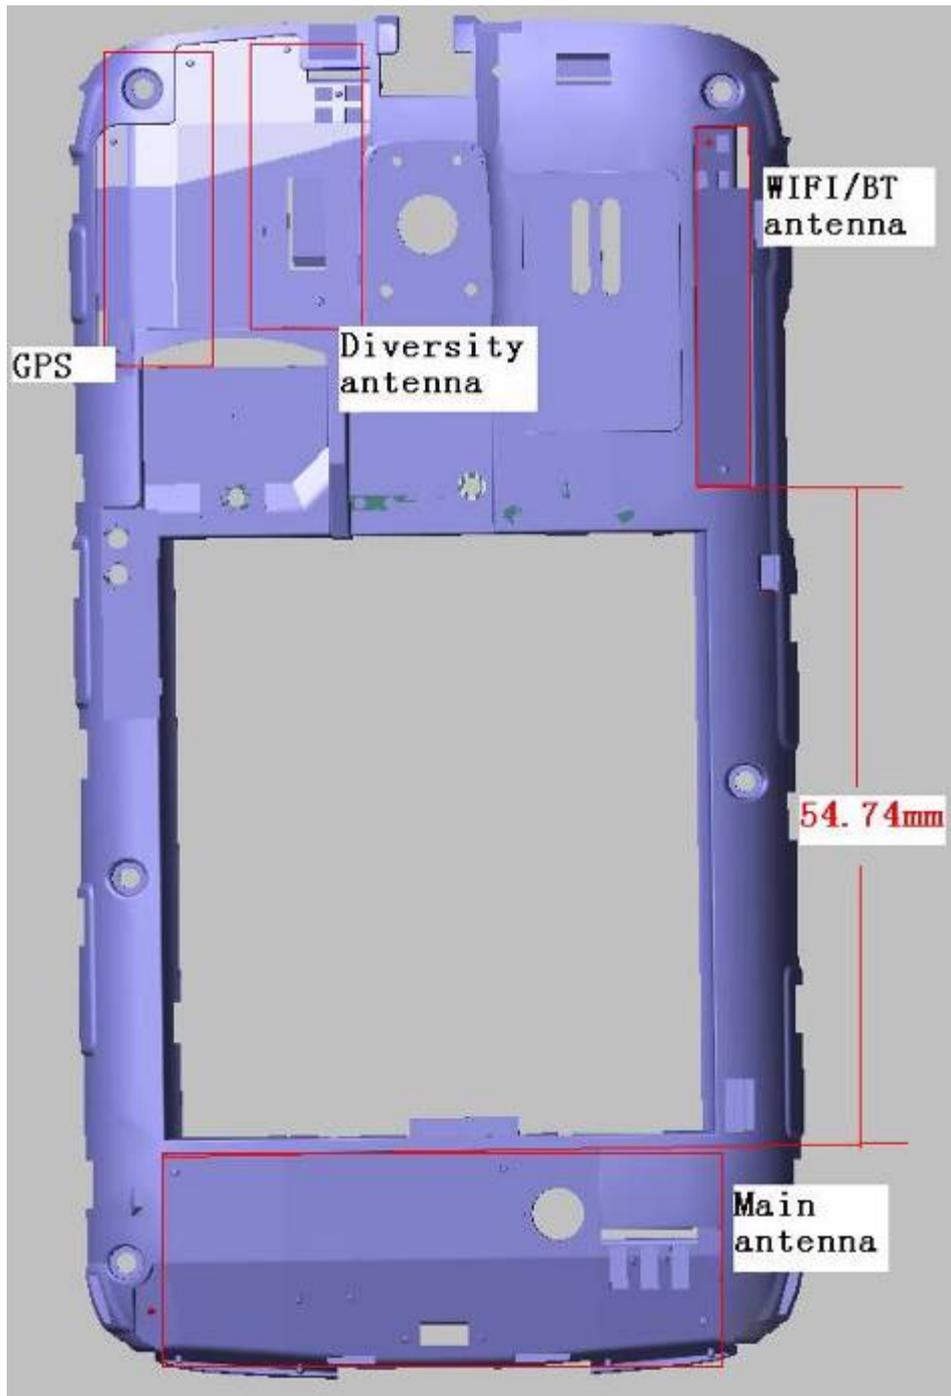


c: Back View

Picture 8: Constituents of EUT

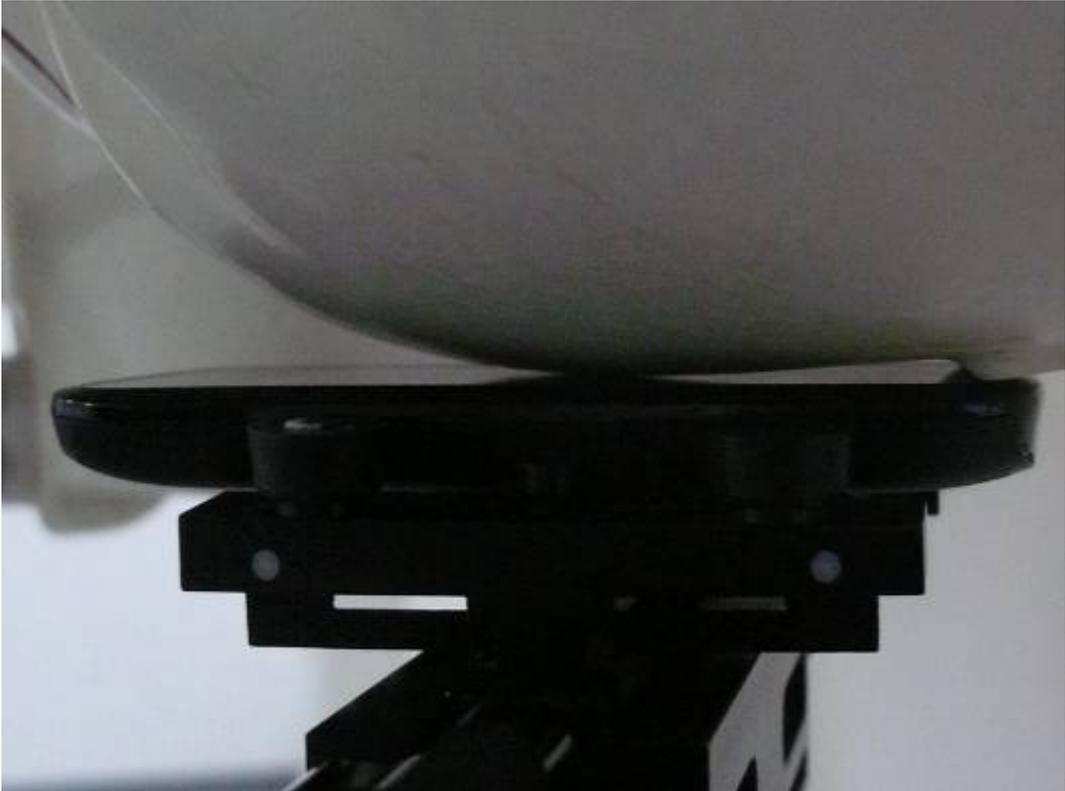


Picture 9: Left Hand Touch Cheek Position

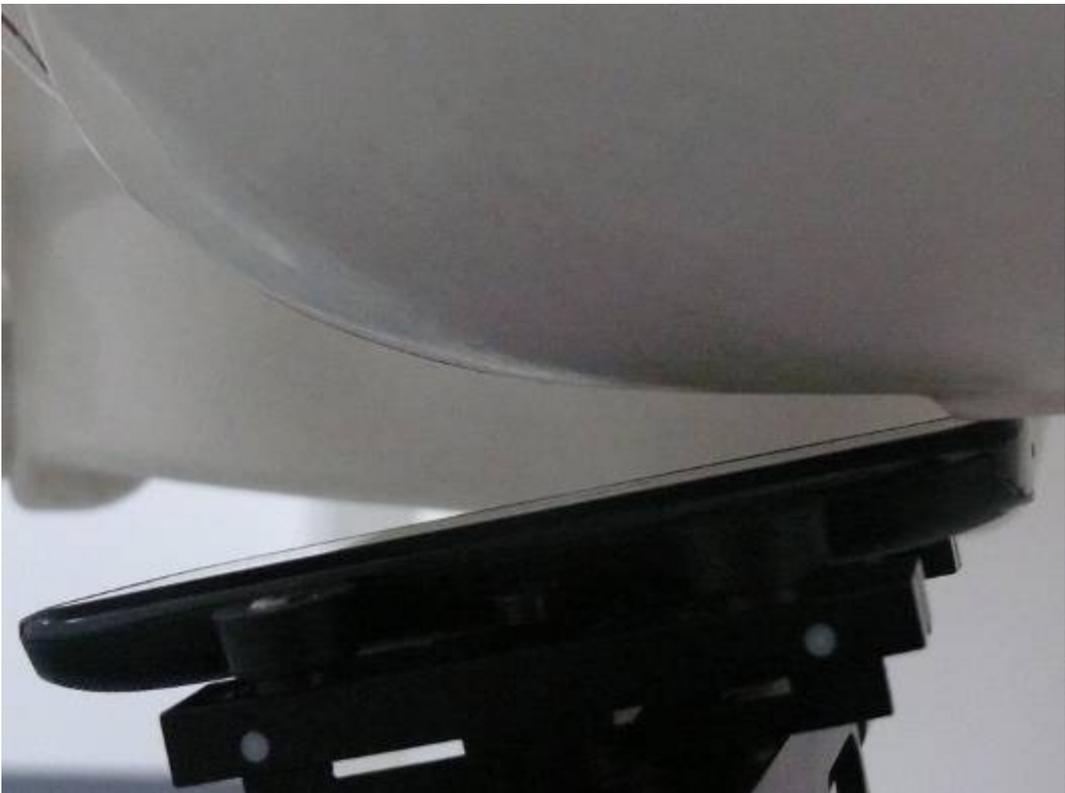


Picture 10: Left Hand Tilt 15 Degree Position




Picture 11: Right Hand Touch Cheek Position

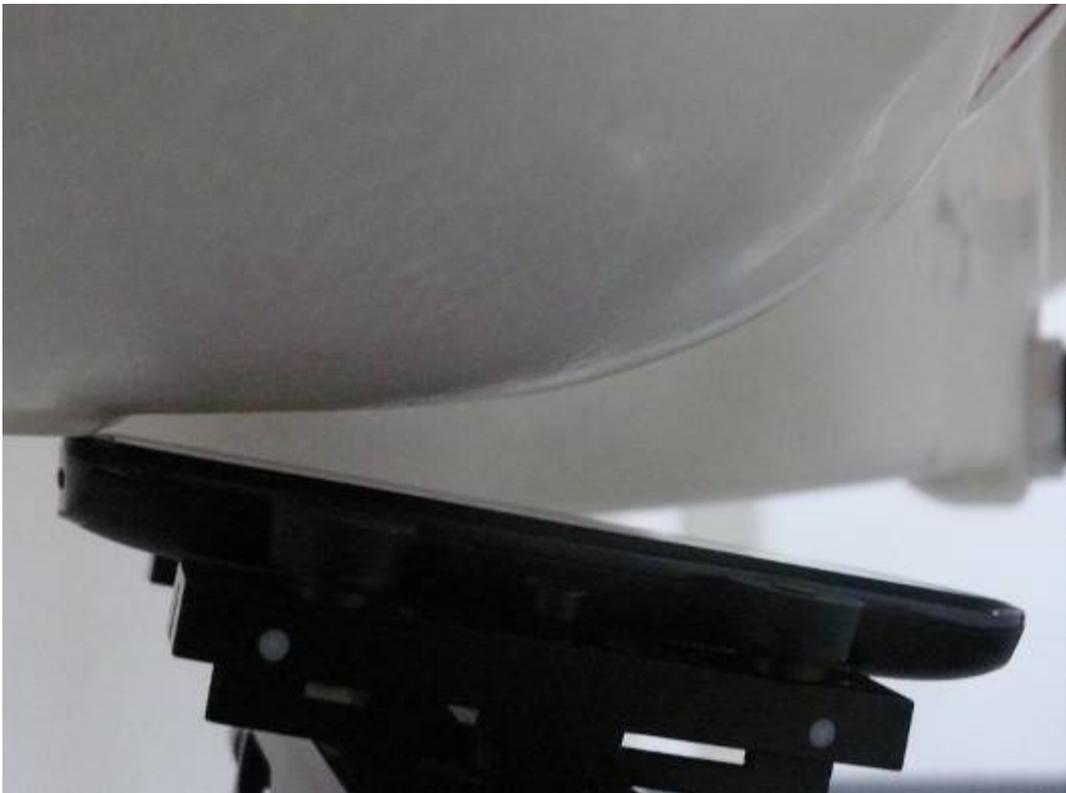

Picture 12: Right Hand Tilt 15 Degree Position

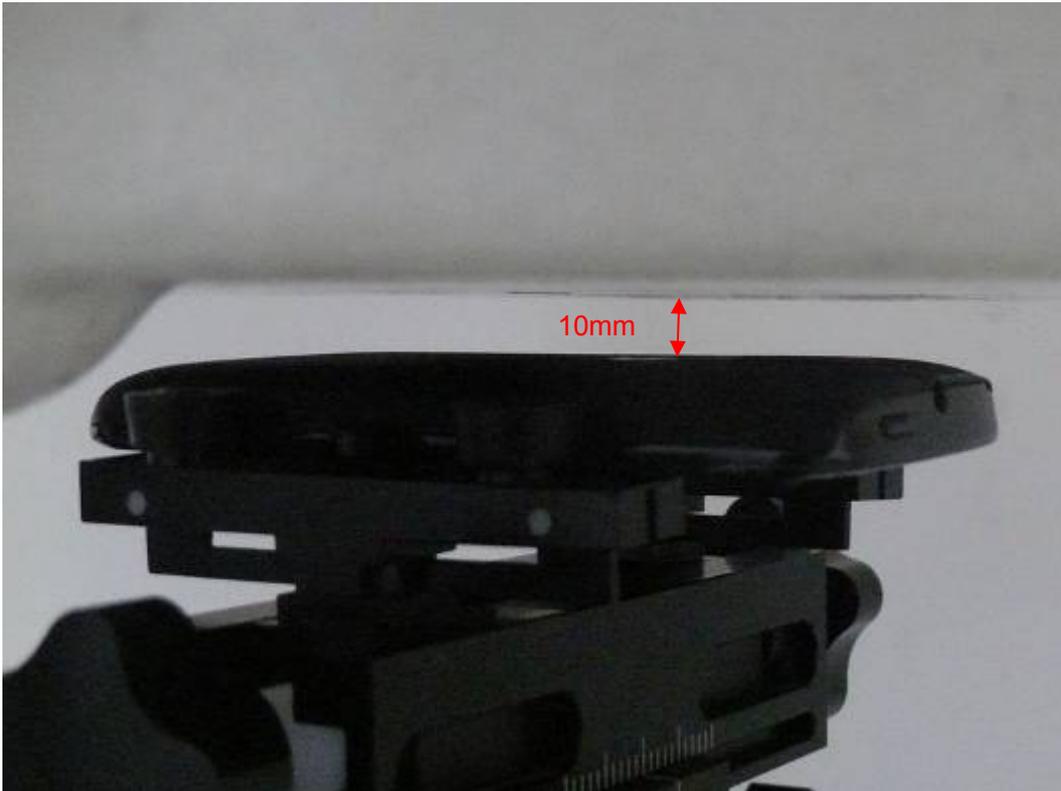

Picture 13: Back Side, the distance from handset to the bottom of the Phantom is 10mm

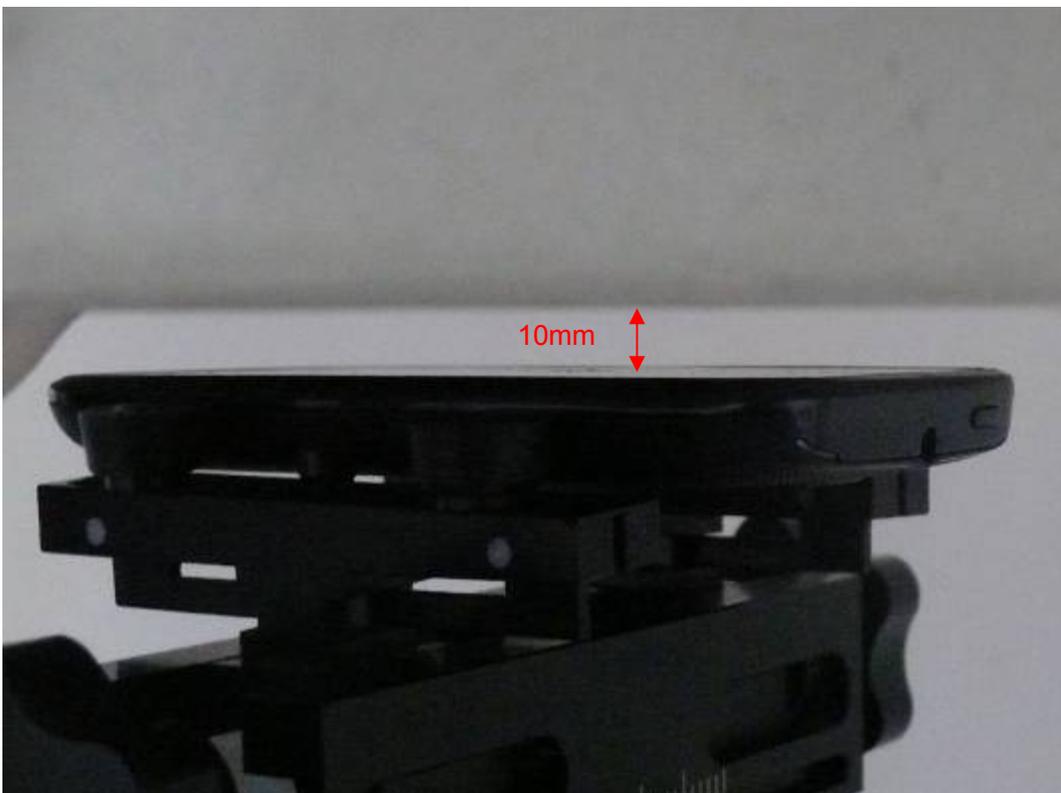

Picture 14: Front Side, the distance from handset to the bottom of the Phantom is 10mm



Picture 15: Left Edge, the distance from handset to the bottom of the Phantom is 10mm



Picture 16: Right Edge, the distance from handset to the bottom of the Phantom is 10mm

TA Technology (Shanghai) Co., Ltd.
Test Report



Picture 17: Top Edge, the distance from handset to the bottom of the Phantom is 10mm



Picture 18: Bottom Edge, the distance from handset to the bottom of the Phantom is 10mm



Picture 19: Back Side with earphone, the distance from handset to the bottom of the Phantom is 10mm