



FCC RF Test Report

**Product Name: HUAWEI Ascend Y 201 Pro; Skyline mini;
HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth**

Model Number: HUAWEI U8666E-1,U8666E-1

Report No: SYBH(Z-RF)001062012-2001

FCC ID: QISU8666E-1

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China
Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant:	Huawei Technologies Co., Ltd.
Address:	Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China
Date of Receipt Test Item:	Jun., 01, 2012
Start Date of Test:	Jun., 03, 2012
End Date of Test:	Jun., 08, 2012
Test Result:	Pass

Approved By Senior Engineer Aug., 13, 2012 Dai Linjun
 Date Name Signature

Reviewed By Aug., 13, 2012 Cousy Xu
 Date Name Signature

Operated By Aug., 13, 2012 Huang Qiuliang
 Date Name Signature



Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Test Description</u>	9
4.1	SUPPORTED FREQUENCY RANGE	9
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	9
4.3	ANTENNA GAIN.....	10
4.4	POWER SUPPLY	10
5	<u>General Test Conditions / Configurations</u>	11
5.1	RF CHANNELS UNDER TEST.....	11
5.2	TEST MODES.....	11
5.3	TEST ENVIRONMENT	11
5.4	TEST SETUP.....	12
5.5	TEST CONDITIONS	16
6	<u>Main Test Instruments</u>	18
7	<u>Test Results</u>	19
8	<u>Measurement Uncertainty</u>	19

1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 22:2011, Subpart H ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 2.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 1.5 ppm	Pass

3 Product Description

3.1 Product Information

3.1.1 General Description

HUAWEI U8666E-1, U8666E-1 is subscriber equipment in the WCDMA/GSM system. The HSDPA/UMTS frequency band is Band I and Band VIII. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only GSM850 band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSDPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board Information

Table 2 Board Information

HUAWEI Ascend Y 201 Pro; Skyline mini; HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth		
HUAWEI U8666E-1,U8666E-1		
Board and Module		
Equipment Designation / Description	Software	Hardware
Main board of Mobile Phone	U8666E-1V100R001C00B918	HD2U8655M

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

AC/DCAdapter Model	HW-050100A1W
--------------------	--------------



Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V \equiv 1A
Rated Power	5W

AC/DCAdapter Model	HW-050100E1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V \equiv 1A
Rated Power	5W

AC/DCAdapter Model	HW-050100B1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V \equiv 1A
Rated Power	5W

3.1.4 Battery Technical Data

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB5K1 Rated capacity: 1250mAh Nominal Voltage: \equiv +3.7V Charging Voltage: \equiv +4.2V

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB5K1H Rated capacity: 1400mAh Nominal Voltage: \equiv +3.7V Charging Voltage: \equiv +4.2V

4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz
Uplink	824 to 849 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM
TX Output Power (per Antenna Port)	GSM system: 33dBm
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz
Designation of Emissions	GSM system: 246KGXW (GMSK modulation), 243KG7W (8PSK modulation)

4.3 Antenna Gain

Antenna Gain(dBi)	2.7
Antenna Gain(dBd)	0.55

4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: \approx 3.7 V DC Voltage Range: \approx 3.6 V to 4.2 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 120 V (50/60 Hz) AC Voltage Range: ~100-240V

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation

5.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.6V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltage
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= normal temperature

5.4 Test Setup


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

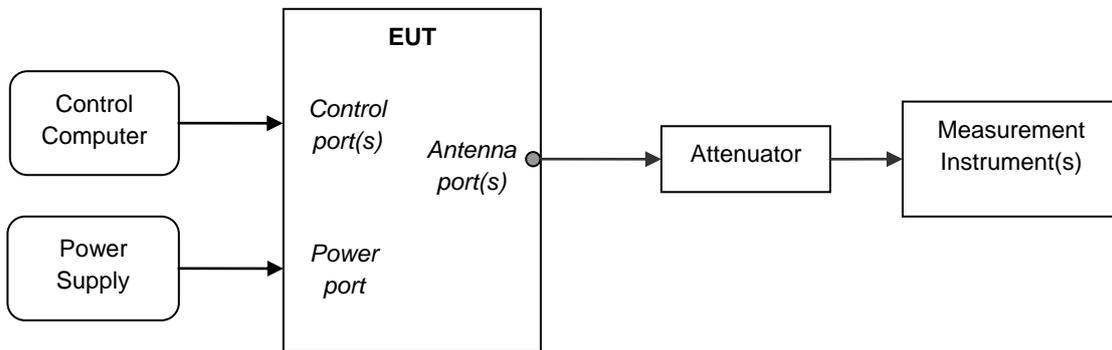

5.4.3 Test Setup 2

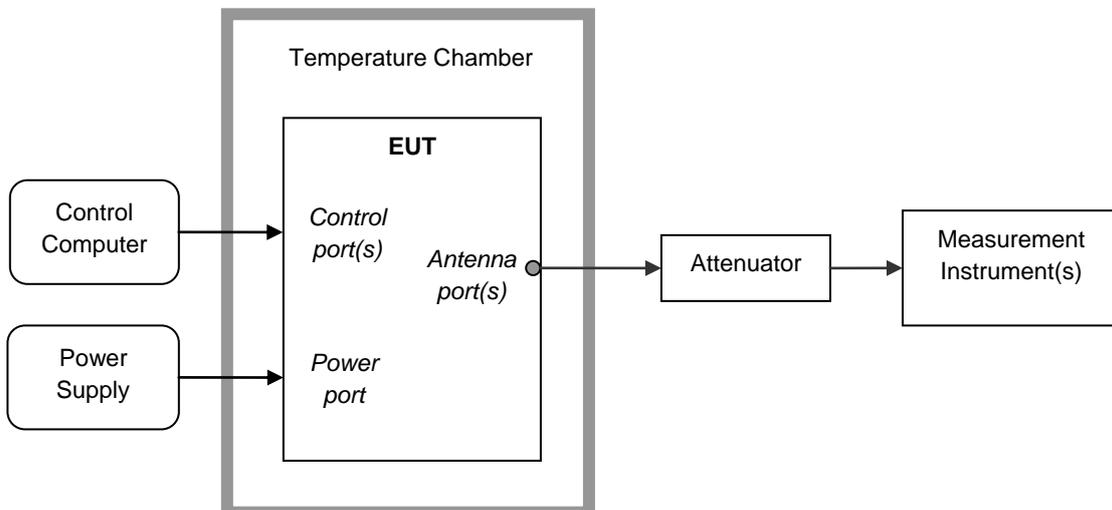


5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test to find the Maximum ERP or EIRP

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency; the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel L, M, H respectively.
Complete the test data.

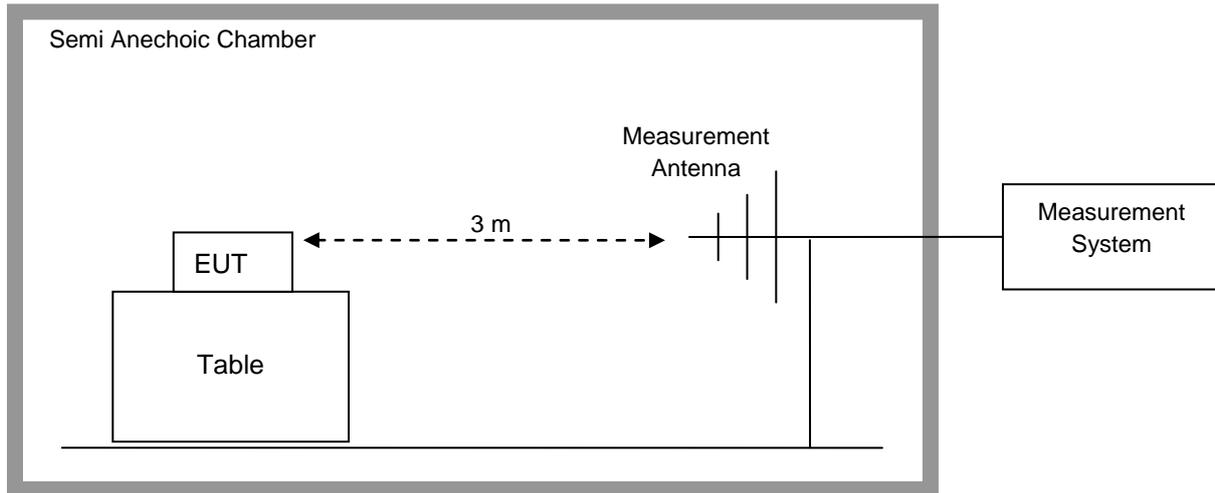

Step 2: Substitution method to verify the maximum ERP or EIRP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above item 5). Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

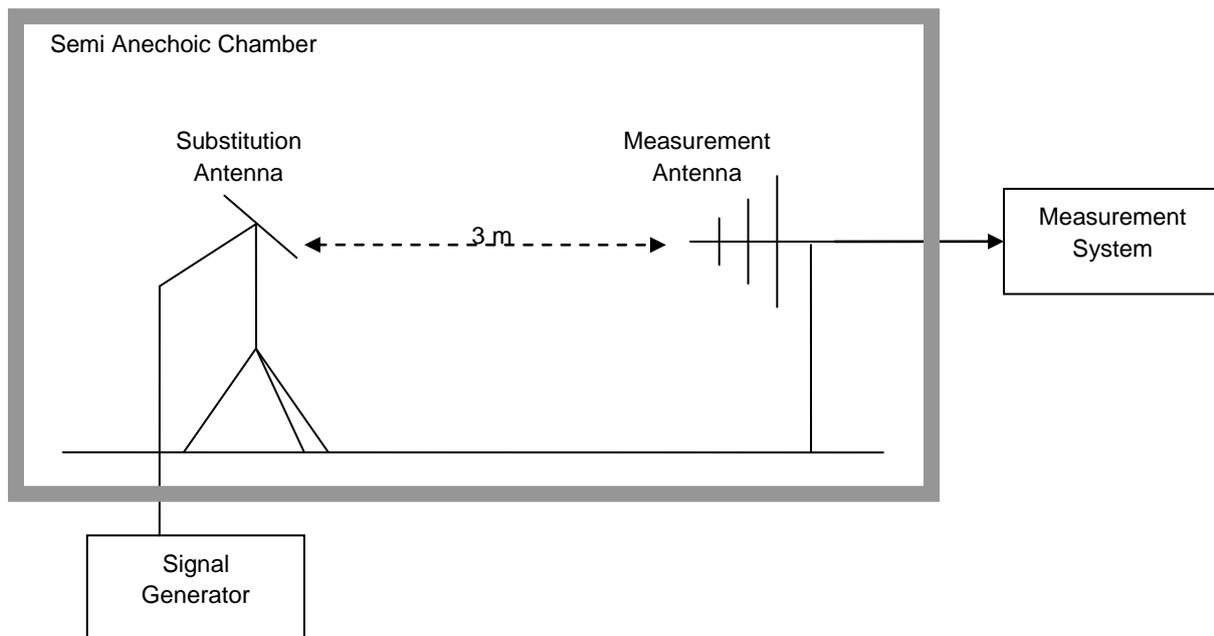

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	L, H
	Test Mode	TM1/TM2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M



Test Case	Test Conditions	
	Test Mode	TM1/TM2

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan.12.2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Jul.17,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2012
Spectrum analyzer	R&S	FSU3	200474	Mar., 05, 2013
Spectrum analyzer	R&S	FSU43	100144	Mar., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	Apr., 05, 2013
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	Jul., 07, 2012
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	Feb., 27, 2013
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	Feb.,27, 2013

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Radiated spurious emission	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Radiated spurious emission	Appendix H

NOTE: There is no test data in Appendix H, only Photos of Test Setup for Field Strength of Spurious Radiation.

8 Measurement Uncertainty

For a 95% confidence level ($k=2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power According to FCC Part 2.1046 & Part 22.913



Conducted Power of Transmitter

Table 1 Measurement Results

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel128(B)		Channel192(M)		Channel251(T)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
T_{nom} / V_{nom}	Measure d	Limit	Measured	Limit	Measured	Limit
TM1	32.35	38.50	32.36	38.50	32.42	38.50
TM2	27.09	38.50	27.16	38.50	27.21	38.50



Peak-to-Average Ratio

Table 1 Measurement Results


TEST CONDITIONS	Channel128(B)		Channel192(M)		Channel251(T)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
T_{nom} / V_{nom}	Measured	Limit	Measured	Limit	Measured	Limit
TM1	9.43	13.0	9.74	13.0	9.56	13.0
TM2	12.56	13.0	12.88	13.0	12.61	13.0



Test Plot of Peak-to-Average Ratio

Note: All relevant operation modes have been tested, and the worst case Plot is included in this report.

TM1

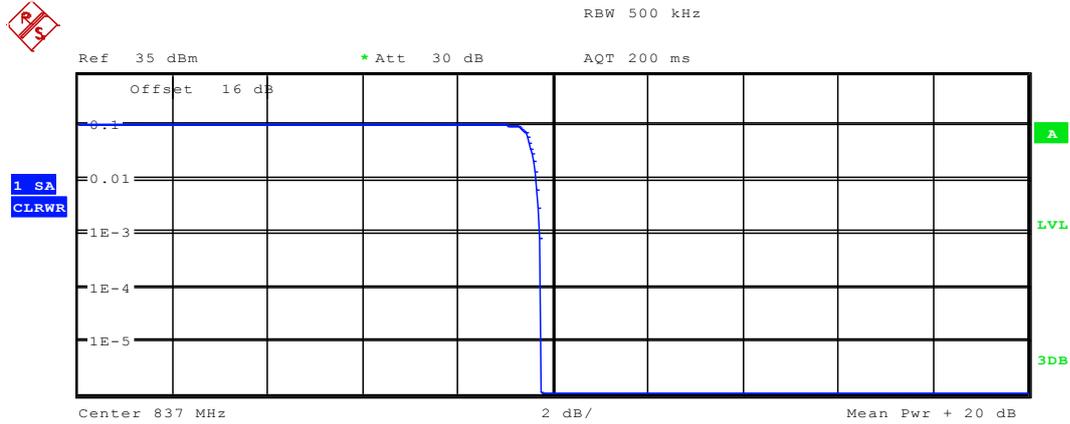

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 424kHz


Trace 1	
Mean	19.96 dBm
Peak	29.70 dBm
Crest	9.74 dB
10 %	9.29 dB
1 %	9.68 dB
.1 %	9.74 dB
.01 %	9.78 dB



TM2



1 SA
 CLRWR

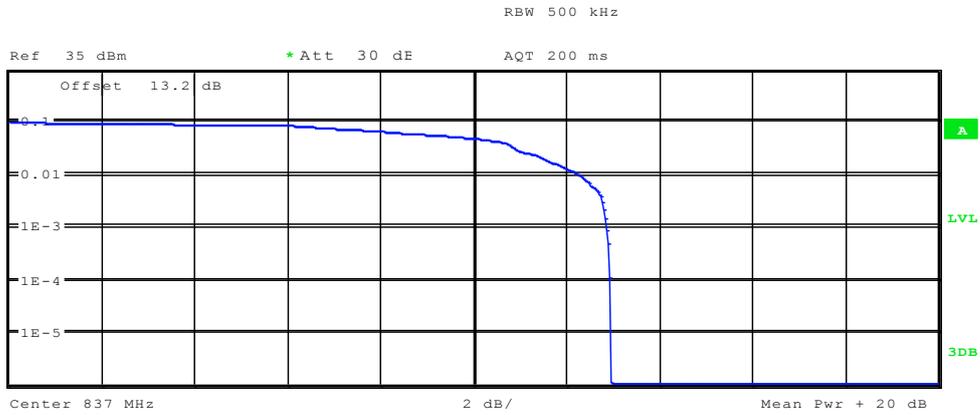

Complementary Cumulative Distribution Function
 NOF samples: 100000, Usable BW: 424kHz

Trace 1	
Mean	17.61 dBm
Peak	30.55 dBm
Crest	12.94 dB
10 %	2.05 dB
1 %	12.28 dB
.1 %	12.88 dB
.01 %	12.95 dB



Effective Radiated Power of Transmitter (ERP)

Table 2 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	32.90	Dipole Ant.	36.30	-2.75	0.6	32.95	38.5	Pass
TM1	837.0	32.91	Dipole Ant.	36.37	-2.87	0.6	32.90	38.5	Pass
TM1	848.8	32.97	Dipole Ant.	36.39	-2.85	0.6	32.94	38.5	Pass
TM2	824.2	27.64	Dipole Ant.	30.95	-2.75	0.6	27.60	38.5	Pass
TM2	837.0	27.71	Dipole Ant.	31.19	-2.87	0.6	27.72	38.5	Pass
TM2	848.8	27.76	Dipole Ant.	31.20	-2.85	0.6	27.75	38.5	Pass

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b, SGP=Signal Generator Level

-----The END-----




Appendix B

Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H




Channel 192 (TM1:GPRS/GSM)

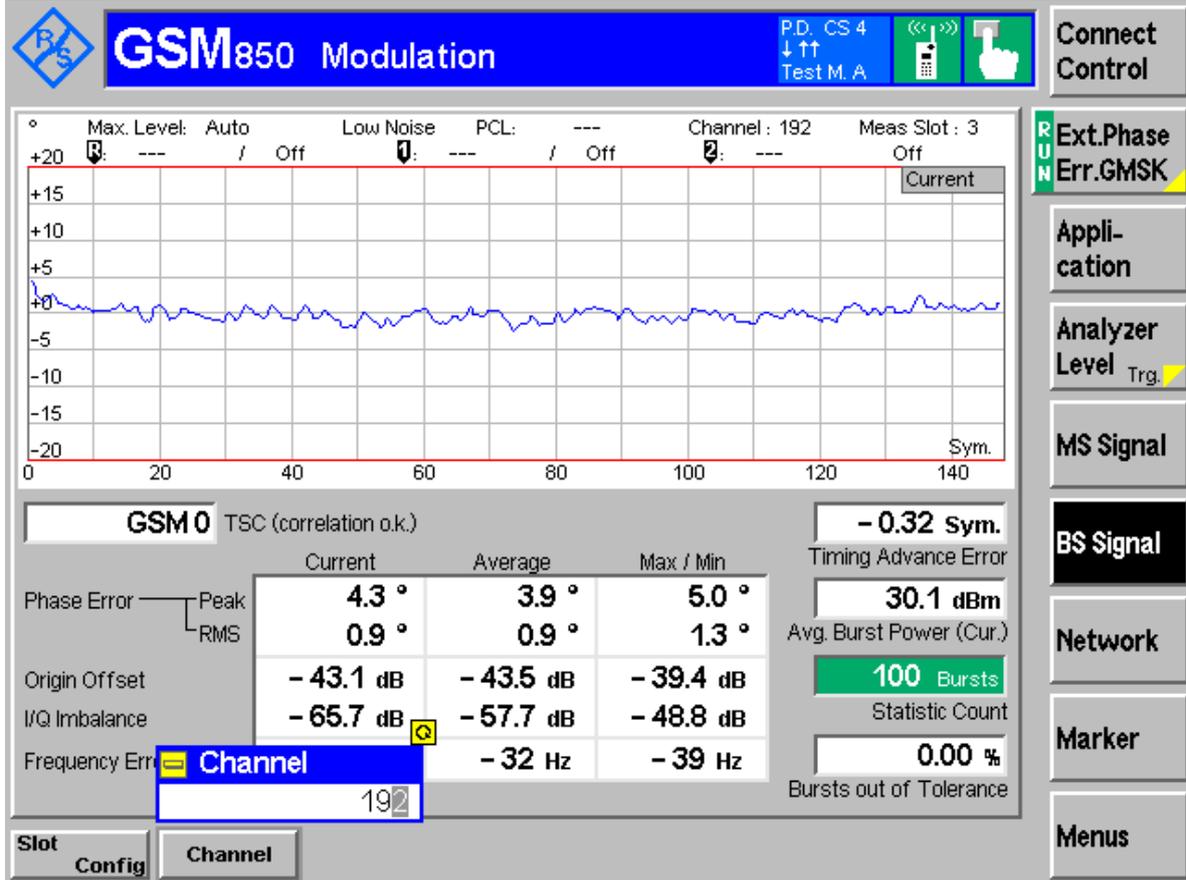



Channel 192 (TM2:EDGE)

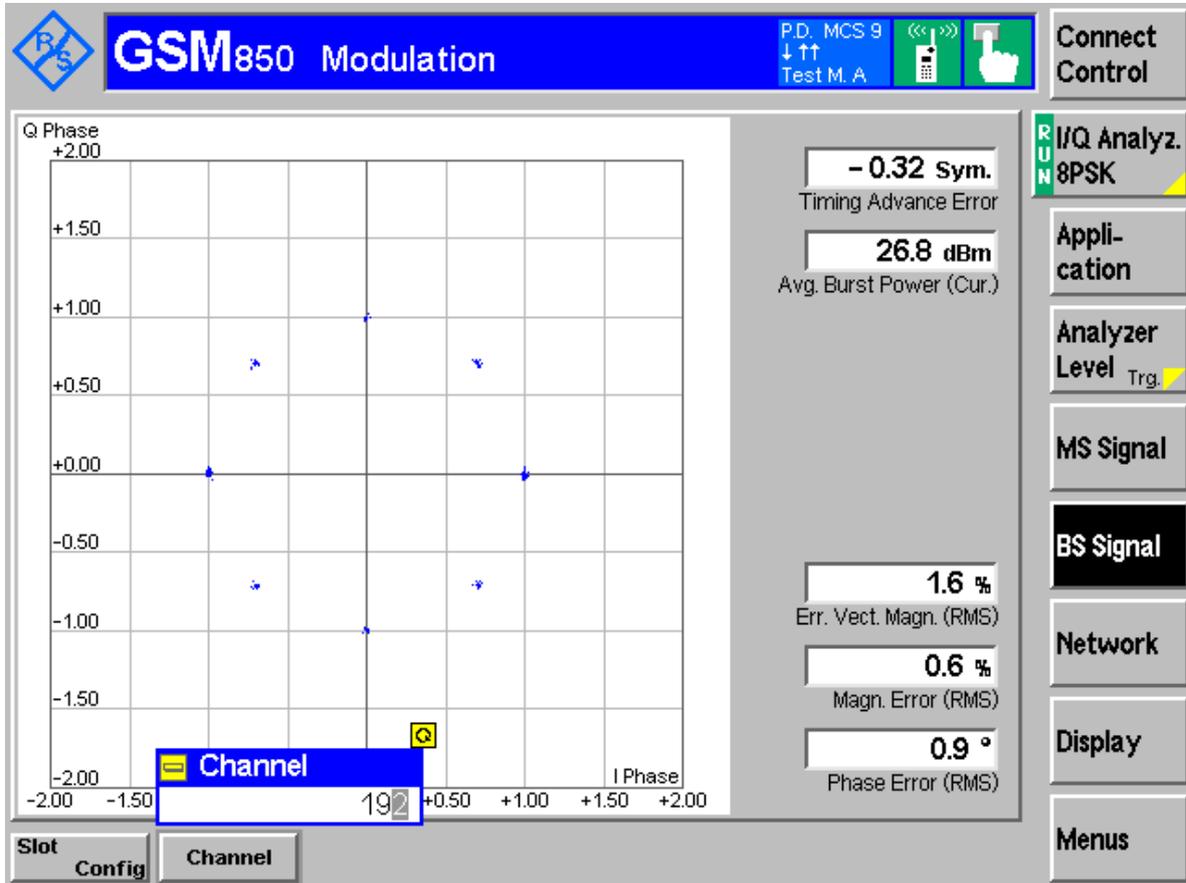

-----The END-----



Appendix C

Occupied Bandwidth According to FCC Part 2.1049 & Part 22 Subpart H



Result Table

Table 1 Measurement Results


Test Mode	RF Channel	Occupied Bandwidth [kHz]	Verdict
TM1	128	245.19	Pass
	192	246.79	Pass
	251	241.99	Pass
TM2	128	240.38	Pass
	192	241.99	Pass
	251	243.59	Pass



Channel 128 (TM1:GPRS/GSM)



Ref 35 dBm Att 25 dB RBW 3 kHz Marker 1 [T1] 21.70 dBm
 VBW 10 kHz SWT 115 ms 824.203205128 MHz

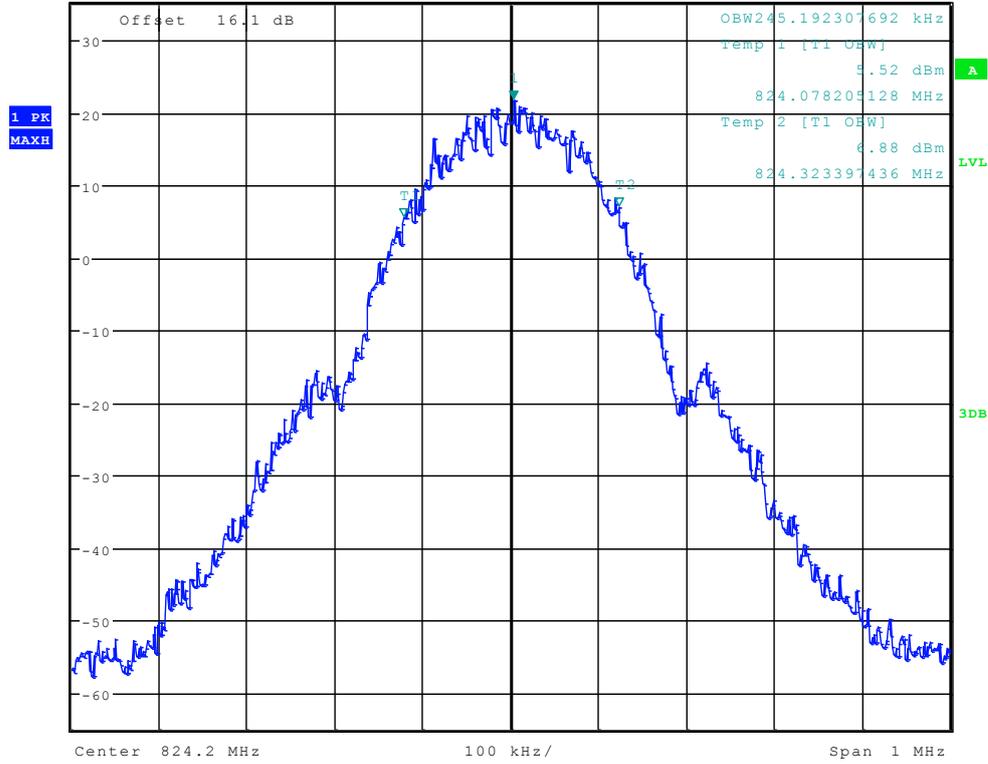




Channel 128 (TM2:EDGE)



Ref 35 dBm Att 25 dB RBW 3 kHz Marker 1 [T1] 19.30 dBm
 VBW 10 kHz SWT 115 ms 824.267307692 MHz

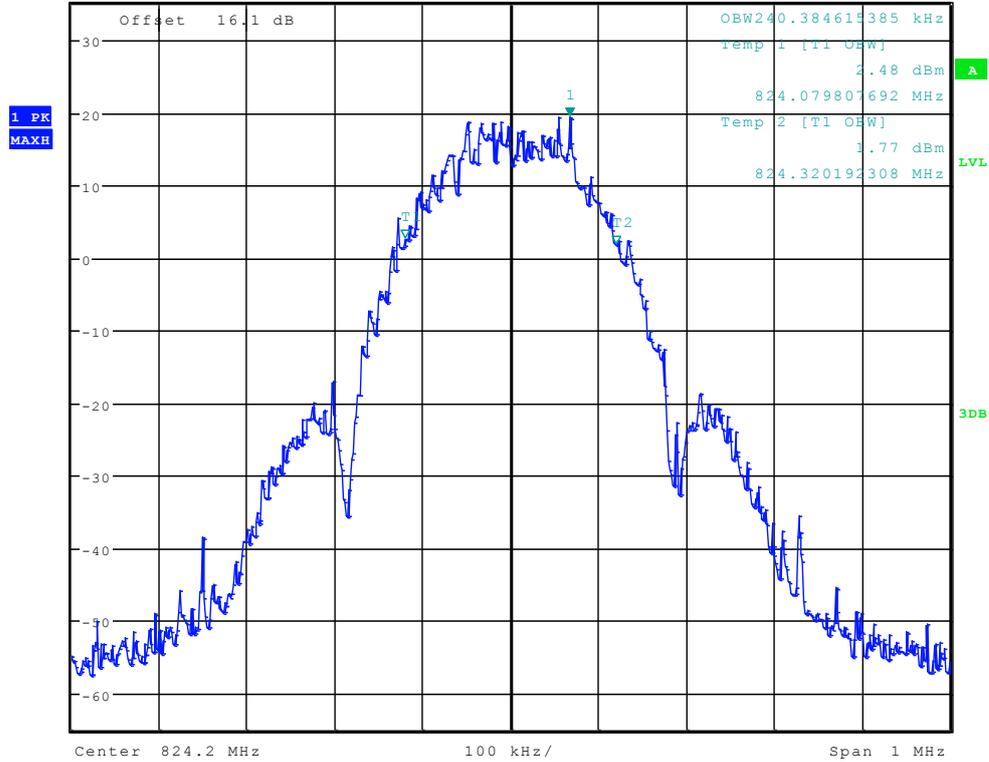




Channel 192 (TM1:GPRS/GSM)




Ref 35 dBm Att 25 dB SWT 115 ms Marker 1 [T1] 22.51 dBm
 *RBW 3 kHz *VBW 10 kHz 836.987179487 MHz

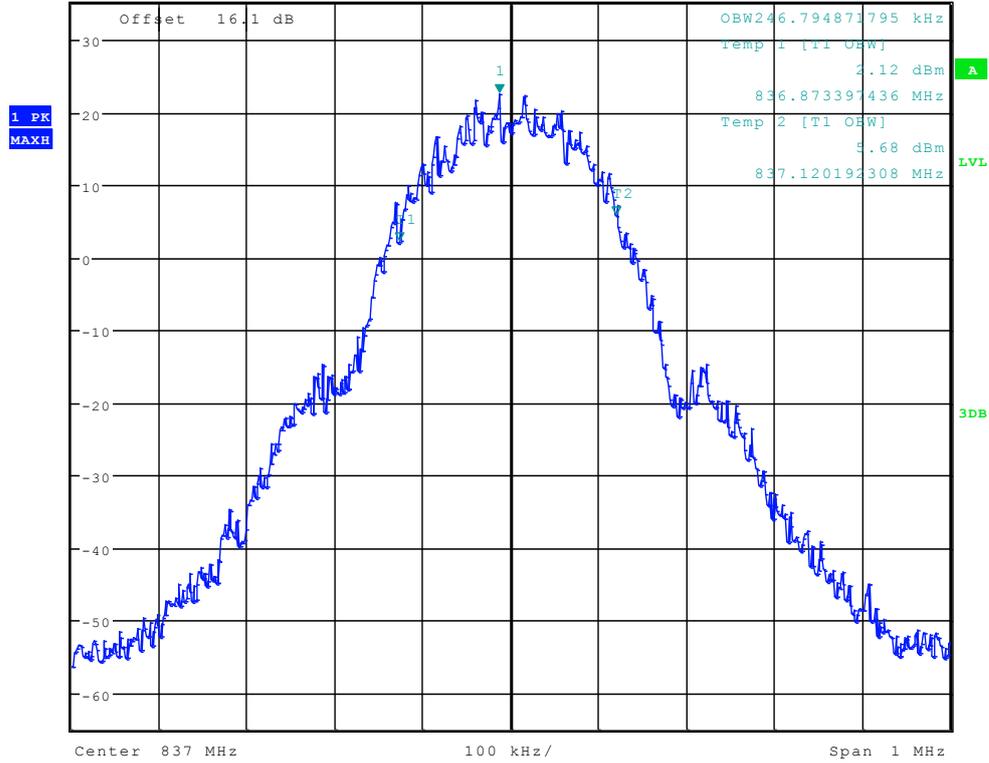




Channel 192 (TM2:EDGE)

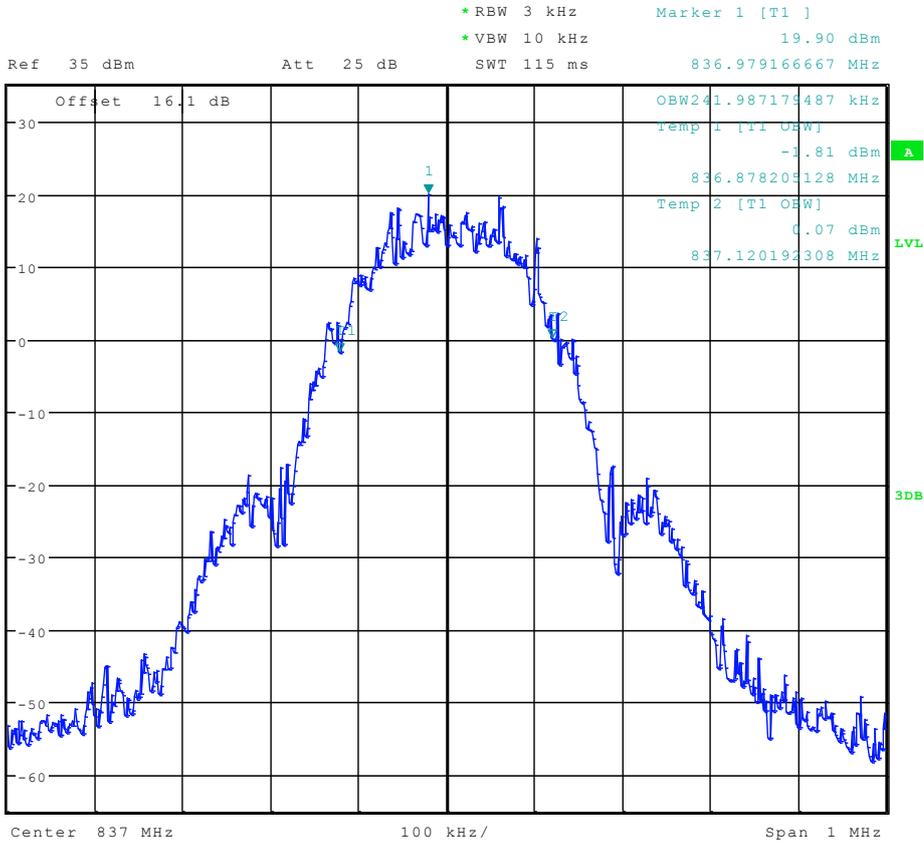




Channel 251 (TM1:GPRS/GSM)

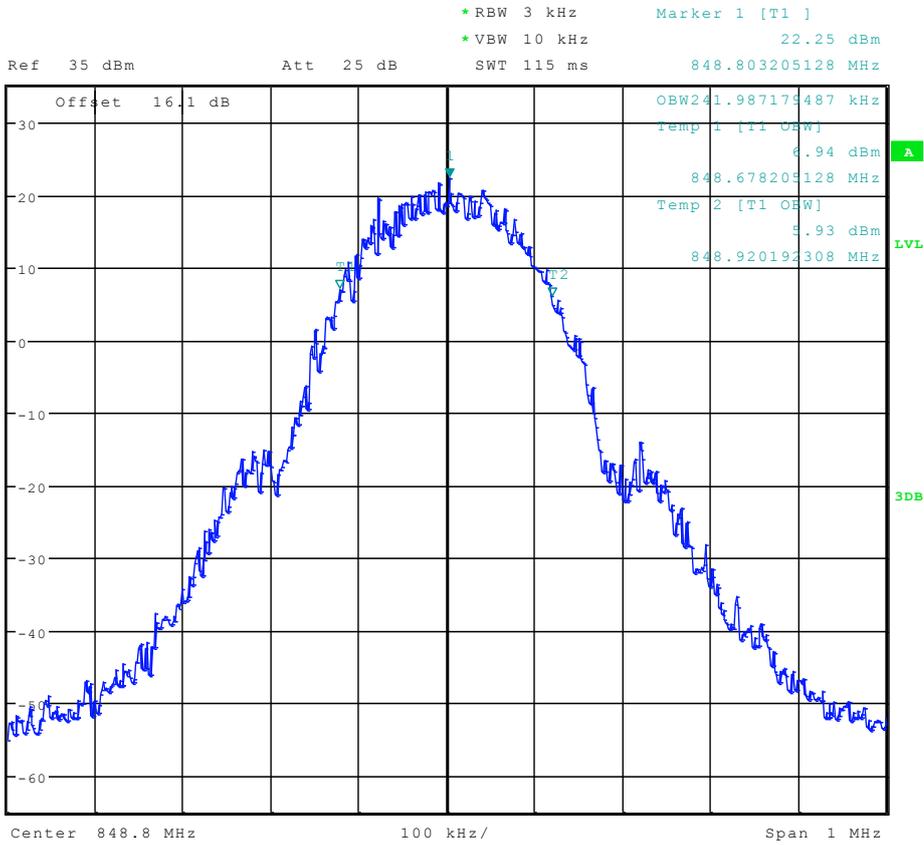



Channel 251 (TM2:EDGE)

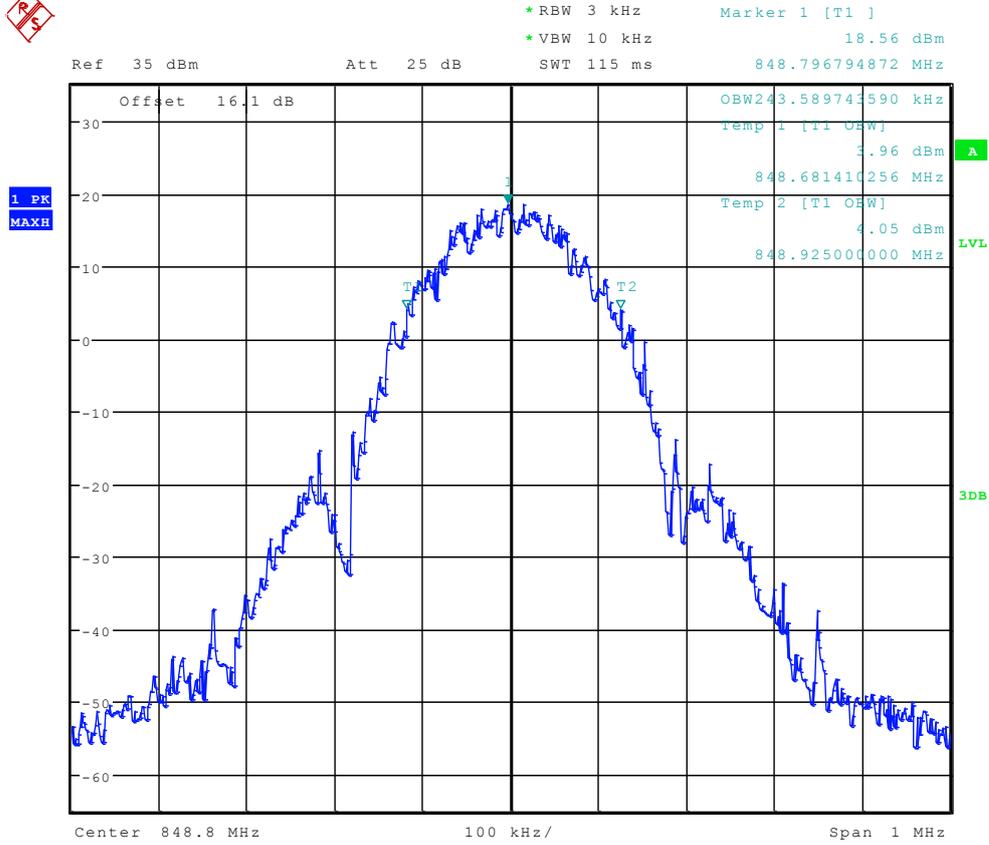

The END



Appendix D

Band Edges Compliance


According to FCC Part 2.1051 & Part 22 Subpart H



TM1:GPRS/GSM

Left Edge

Channel 128

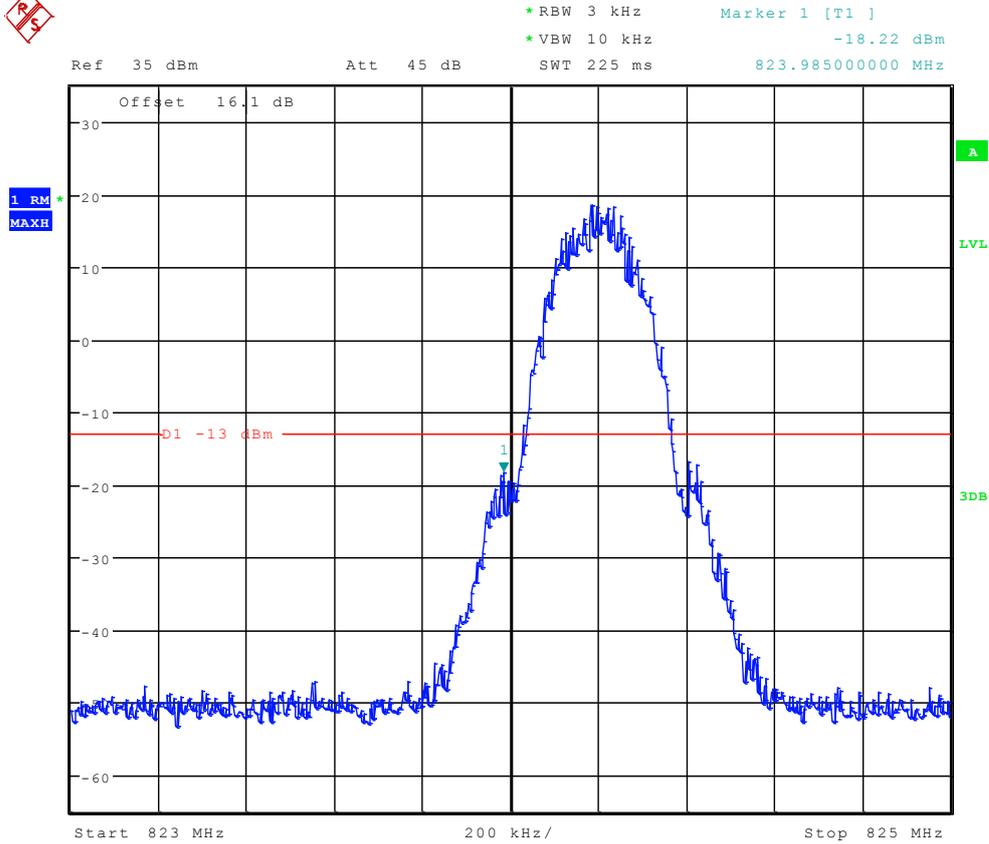




Right Edge Channel 251



Ref 35 dBm Att 45 dB SWT 225 ms 849.02000000 MHz
*RBW 3 kHz Marker 1 [T1] -17.15 dBm
*VBW 10 kHz

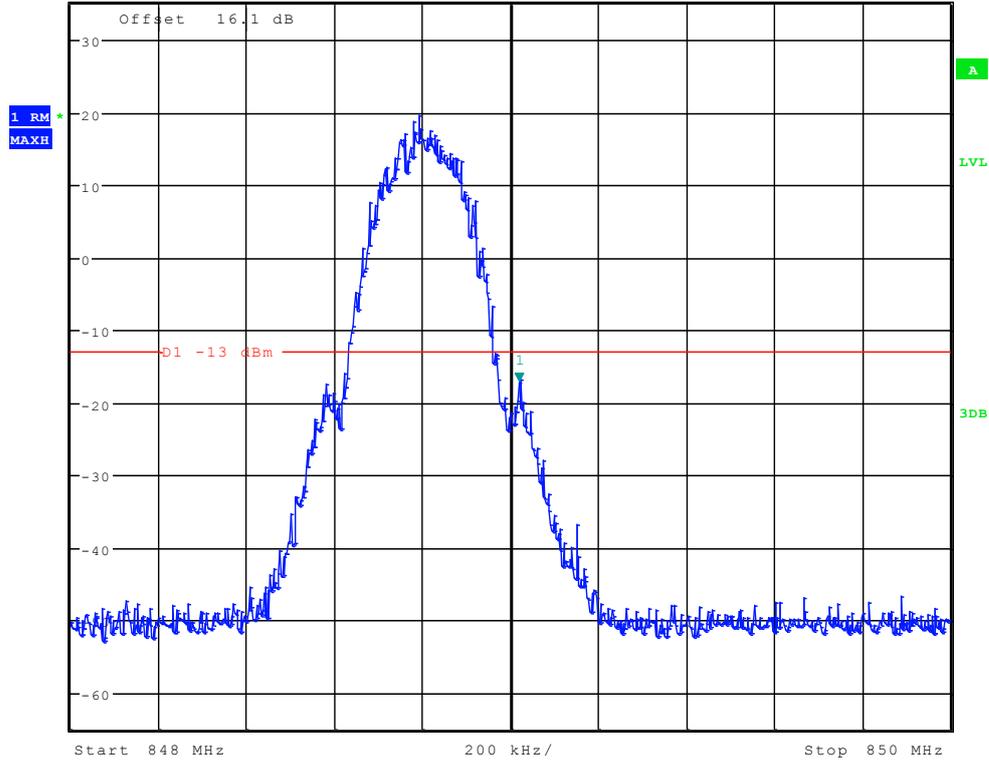




TM2:EDGE

Left Edge

Channel 128



Ref 35 dBm Att 45 dB SWT 225 ms Marker 1 [T1] -22.53 dBm
*RBW 3 kHz *VBW 10 kHz 823.975000000 MHz

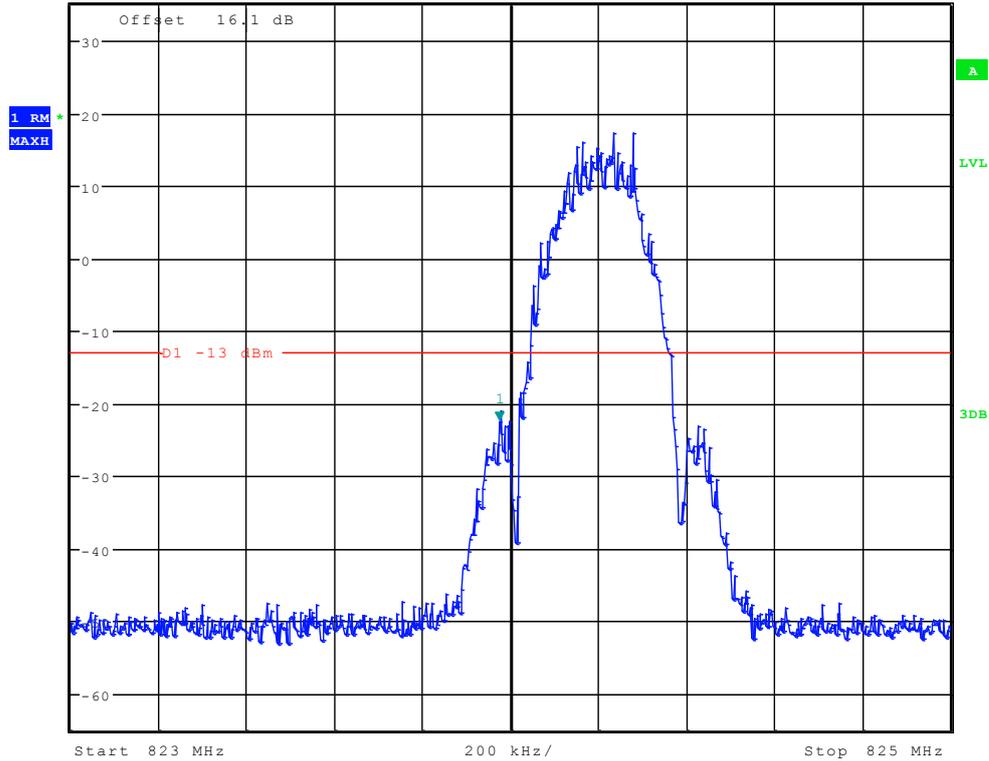




Right Edge Channel 251



Ref 35 dBm Att 45 dB RBW 3 kHz Marker 1 [T1] -23.06 dBm
* VBW 10 kHz 849.01500000 MHz
SWT 225 ms

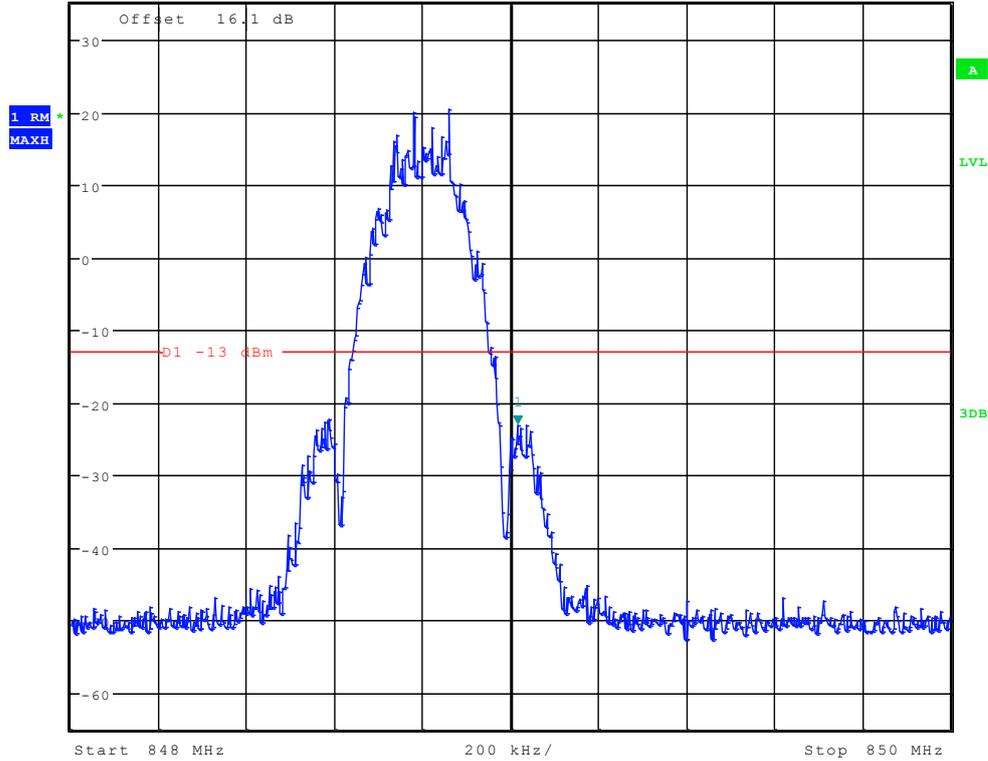

The END



Appendix E

Spurious Emission at Antenna Terminal


According to FCC Part 2.1051 & Part 22 Subpart H



TM1:GPRS/GSM Channel 128




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -37.48 dBm
SWT 145 ms 9.677884615 kHz

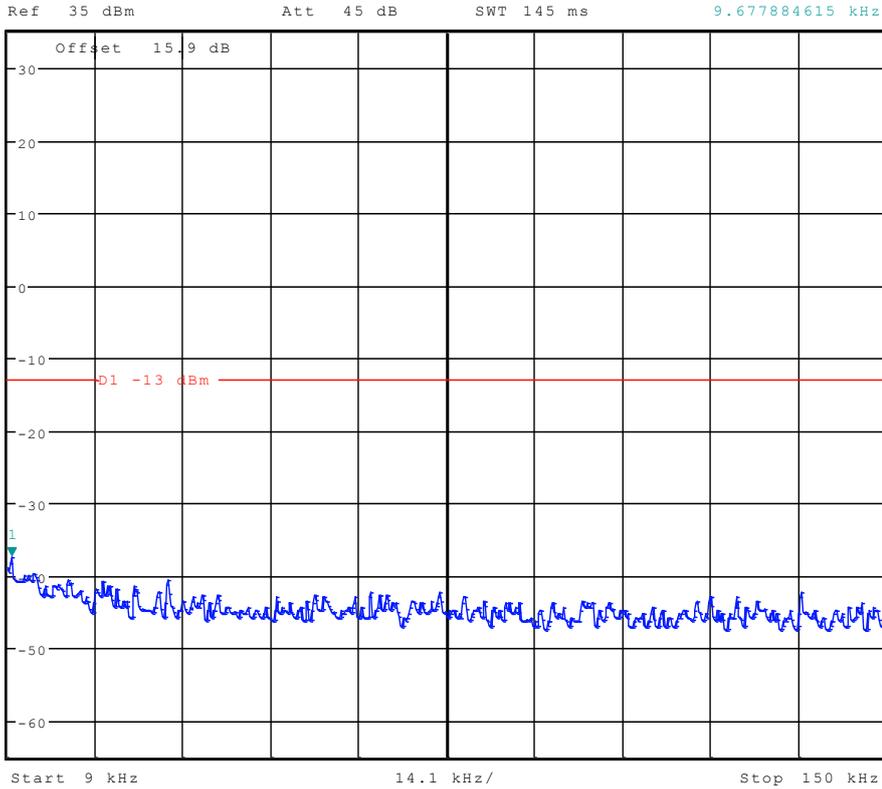




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -32.80 dBm
 Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

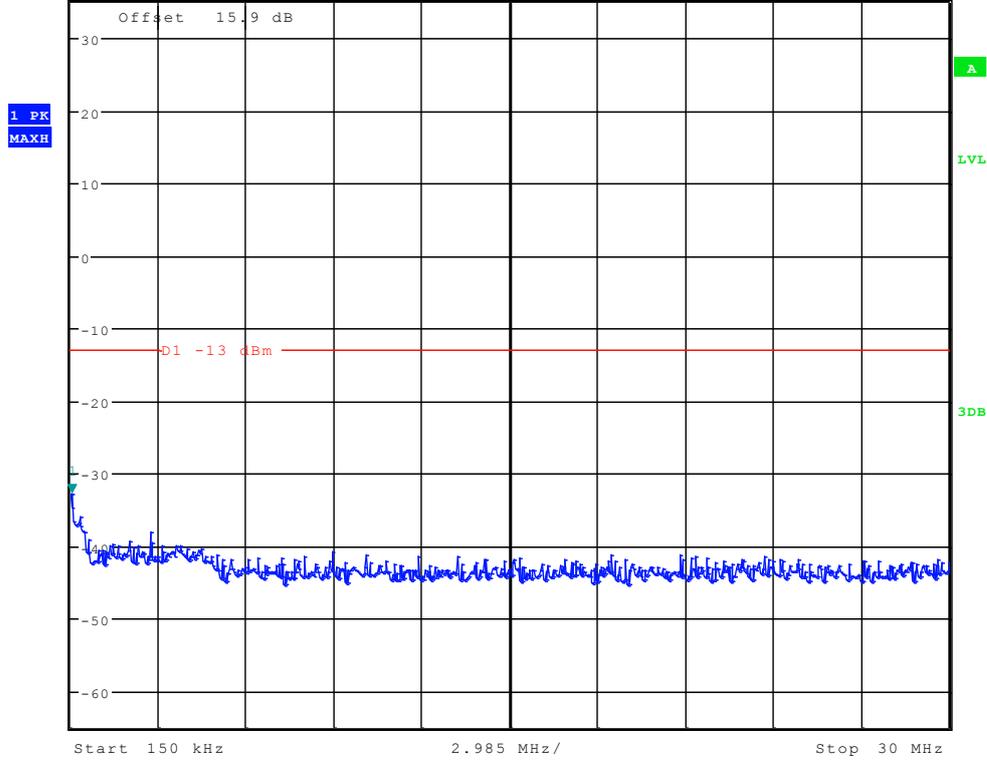



* RBW 1 MHz Marker 1 [T1]
 * VBW 3 MHz -15.92 dBm
 Ref 35 dBm Att 45 dB SWT 70 ms 2.694711538 GHz

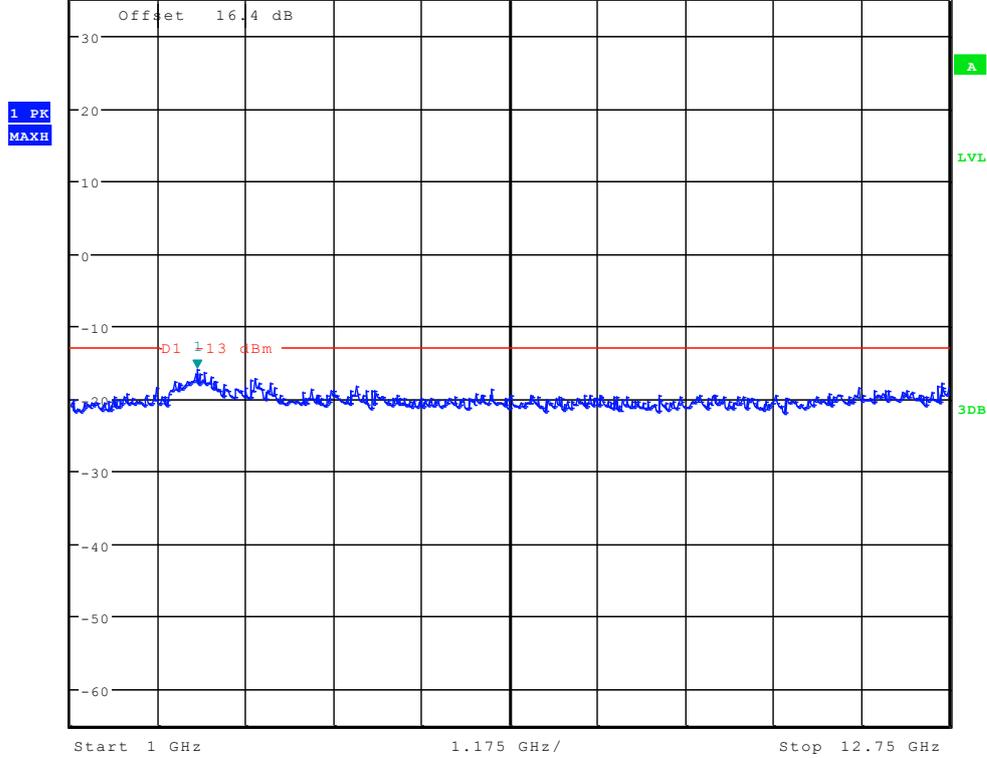




Channel 192




Ref 35 dBm Att 45 dB *RBW 1 kHz Marker 1 [T1] -37.31 dBm
*VBW 10 kHz SWT 145 ms 9.000000000 kHz

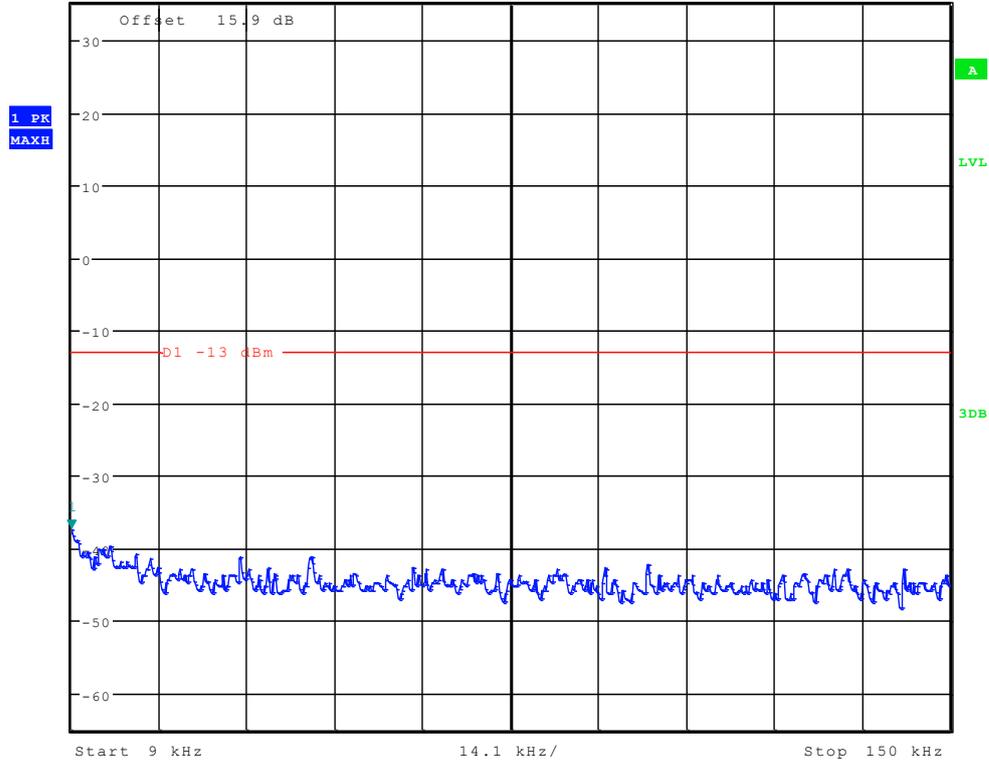




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -32.80 dBm
 Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

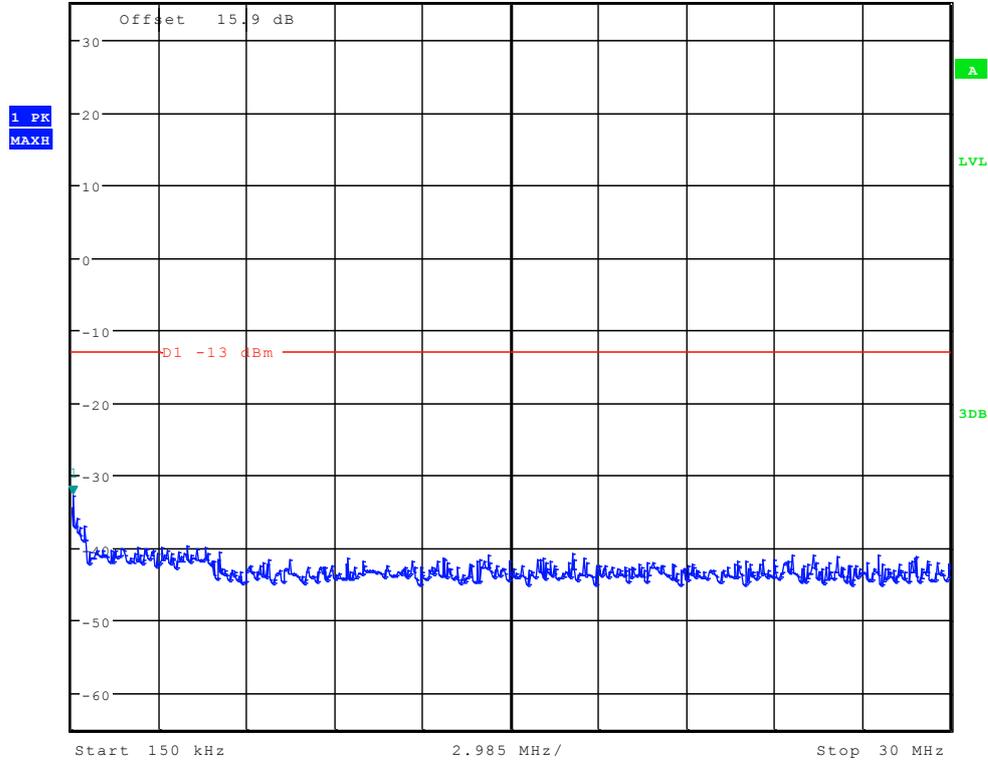




*RBW 100 kHz Marker 1 [T1]
 *VBW 300 kHz 30.32 dBm
 Ref 35 dBm Att 45 dB SWT 100 ms 838.333333333 MHz

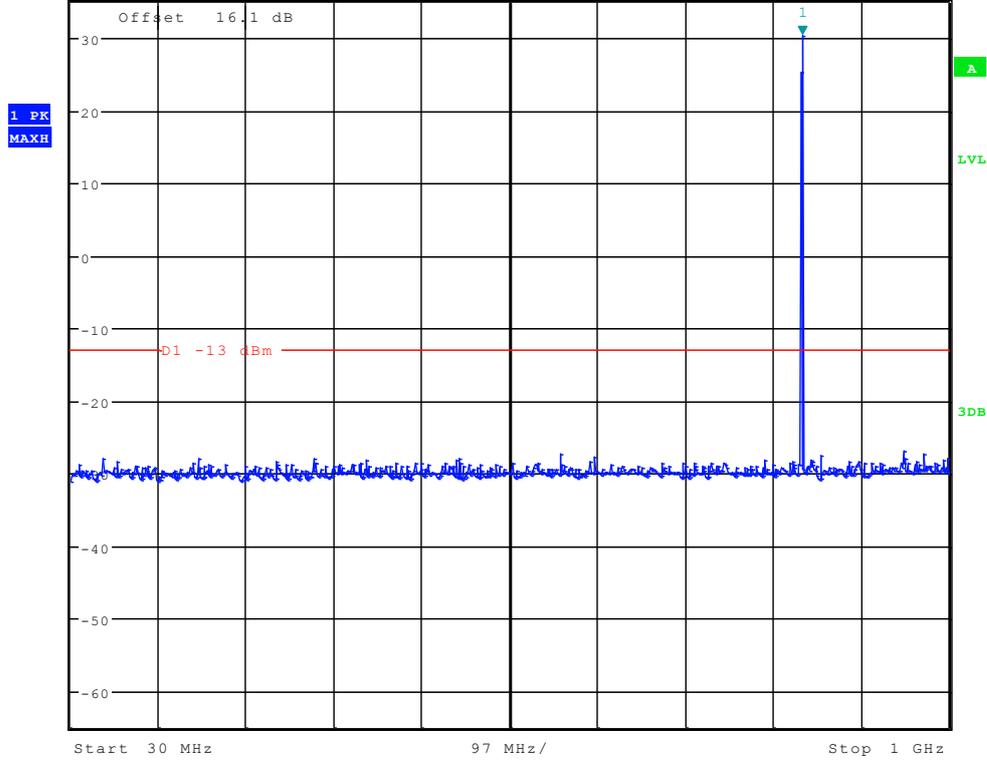



* RBW 1 MHz Marker 1 [T1]
 * VBW 3 MHz -16.42 dBm
 Ref 35 dBm Att 45 dB SWT 70 ms 2.732371795 GHz

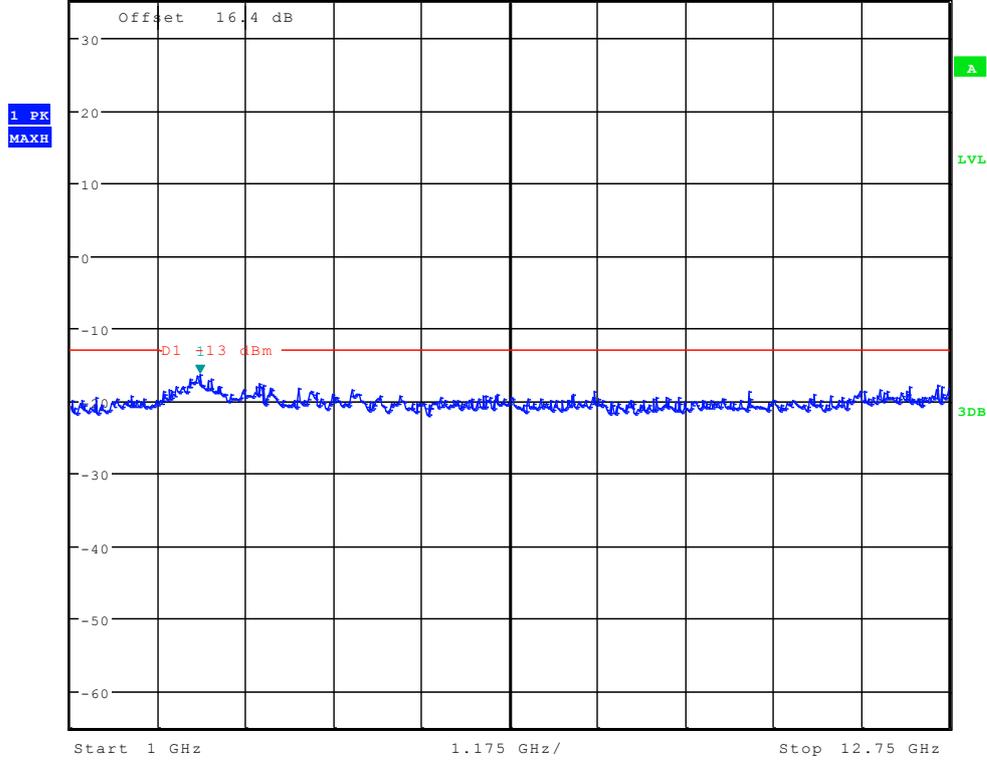




Channel 251




Ref 35 dBm Att 45 dB RBW 1 kHz Marker 1 [T1] -37.31 dBm
VBW 10 kHz SWT 145 ms 9.000000000 kHz

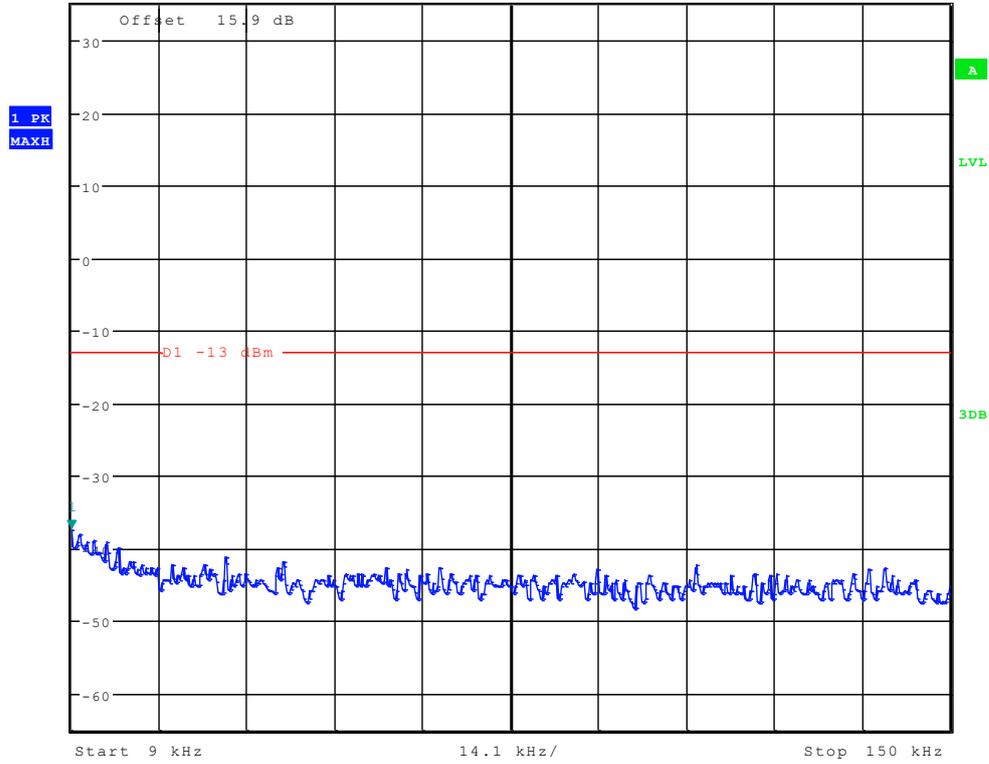




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -35.02 dBm
 Ref 35 dBm Att 45 dB SWT 300 ms 150.00000000 kHz

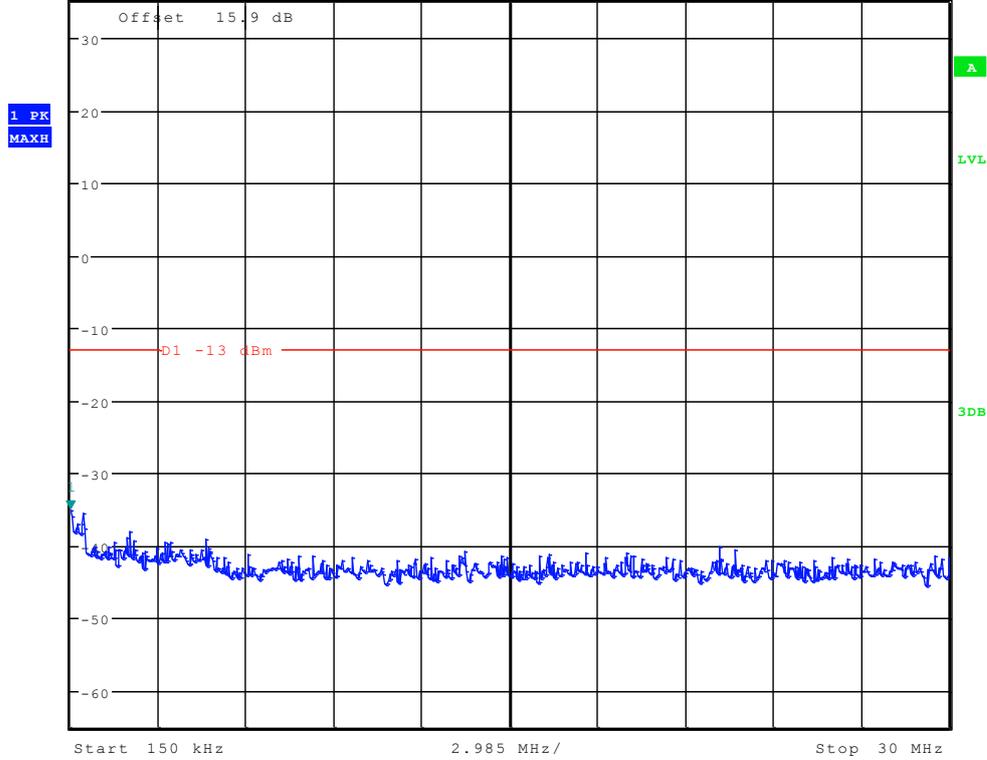




* RBW 100 kHz Marker 1 [T1]
 * VBW 300 kHz 30.34 dBm
 Ref 35 dBm Att 45 dB SWT 100 ms 849.214743590 MHz

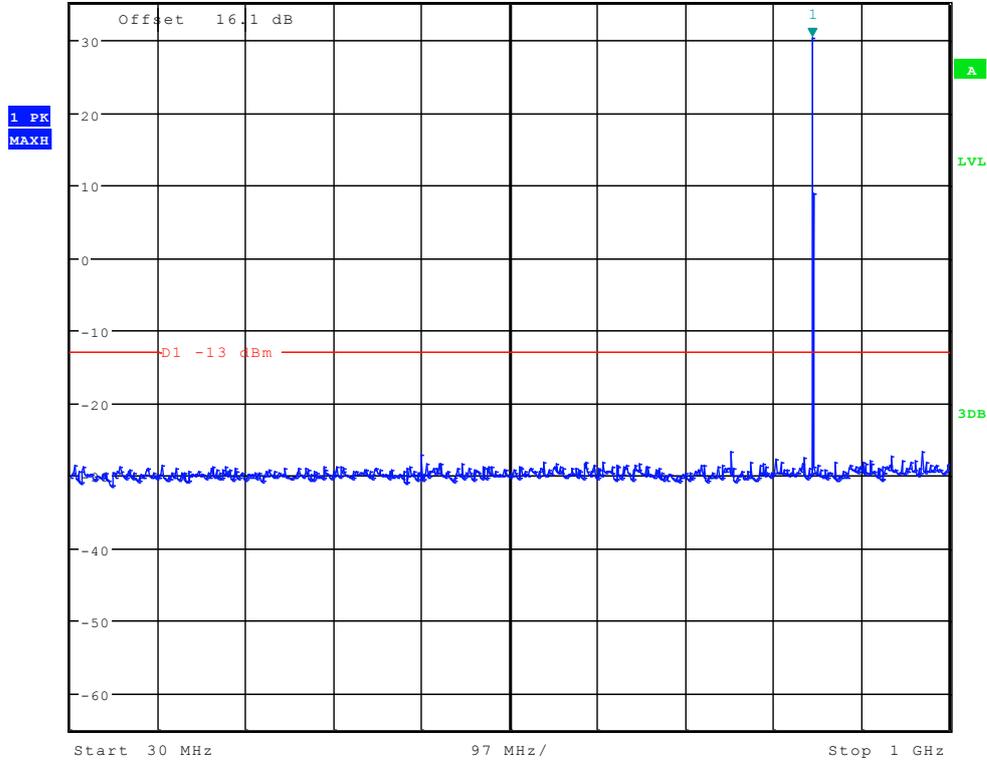



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -16.63 dBm
 Ref 35 dBm Att 45 dB SWT 70 ms 3.560897436 GHz

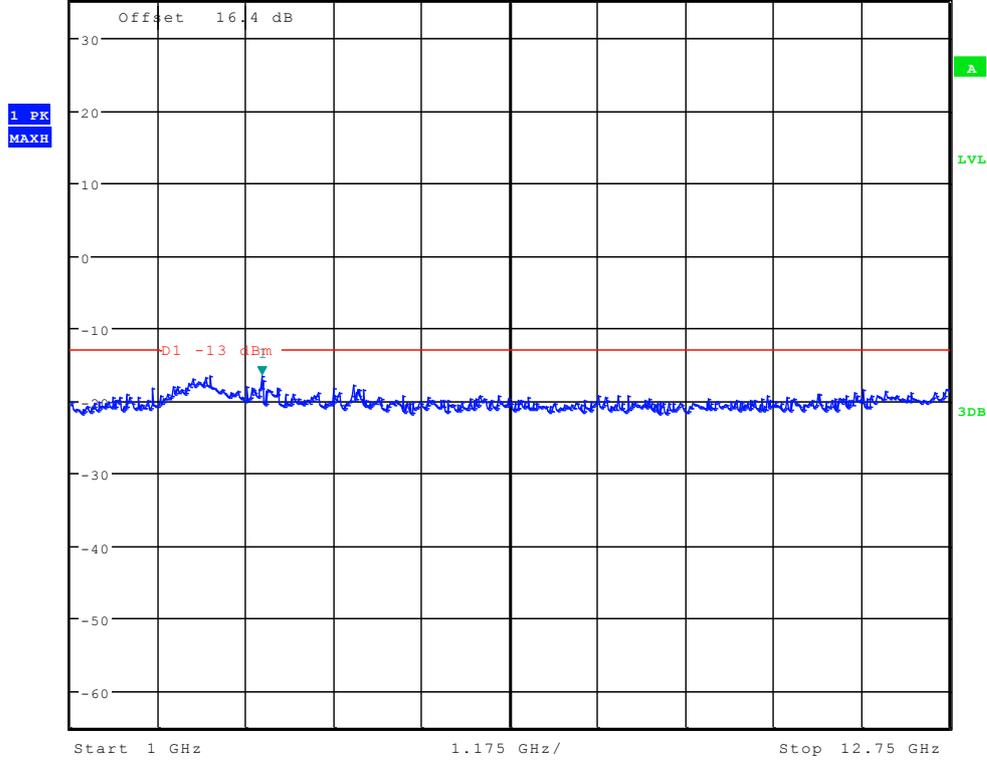




TM2:EDGE

Channel 128




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -37.74 dBm
 Ref 35 dBm Att 45 dB SWT 145 ms 10.355769231 kHz

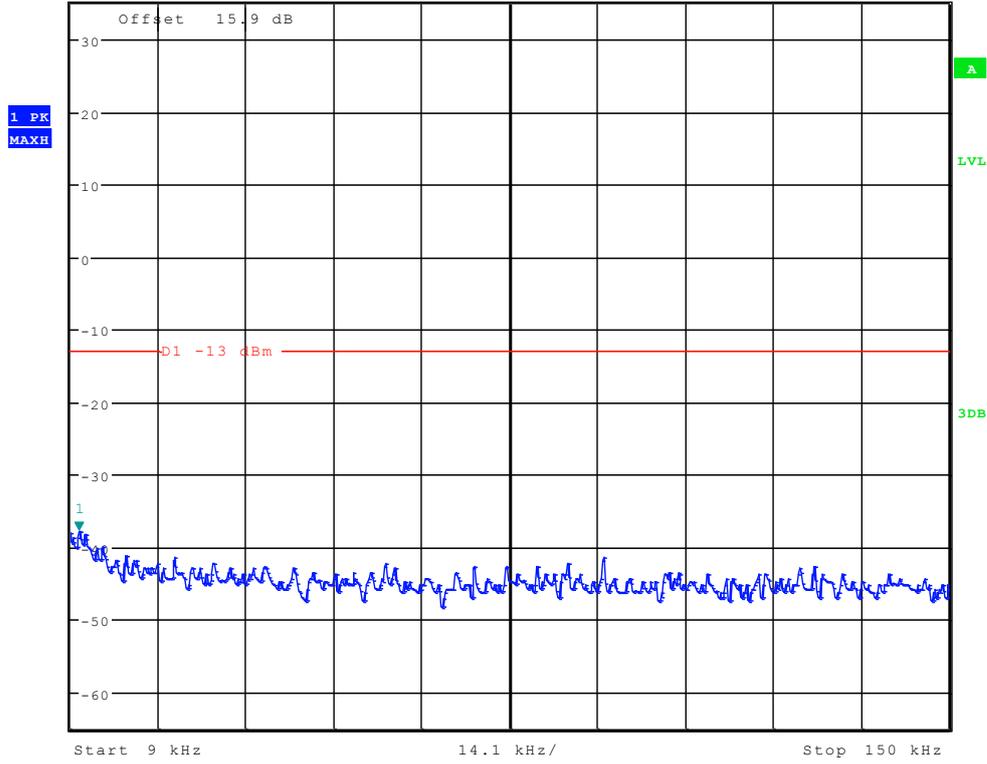




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -32.13 dBm
 Ref 35 dBm Att 45 dB SWT 300 ms 150.00000000 kHz

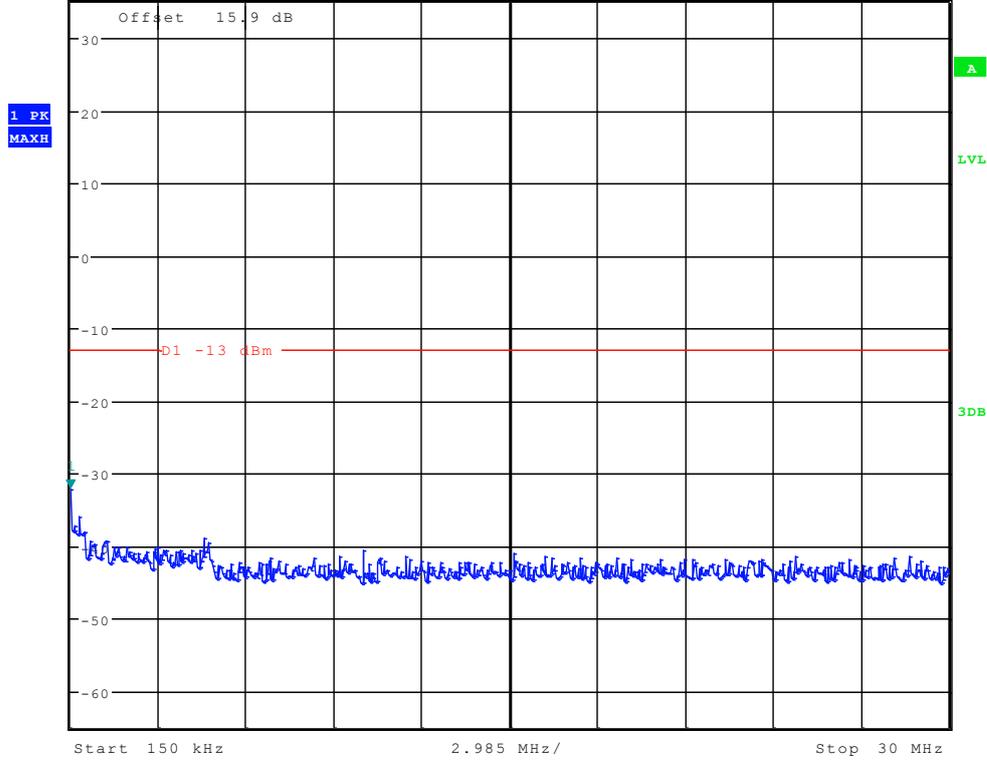




*RBW 100 kHz Marker 1 [T1]
 *VBW 300 kHz 29.78 dBm
 Ref 35 dBm Att 45 dB SWT 100 ms 825.897435897 MHz

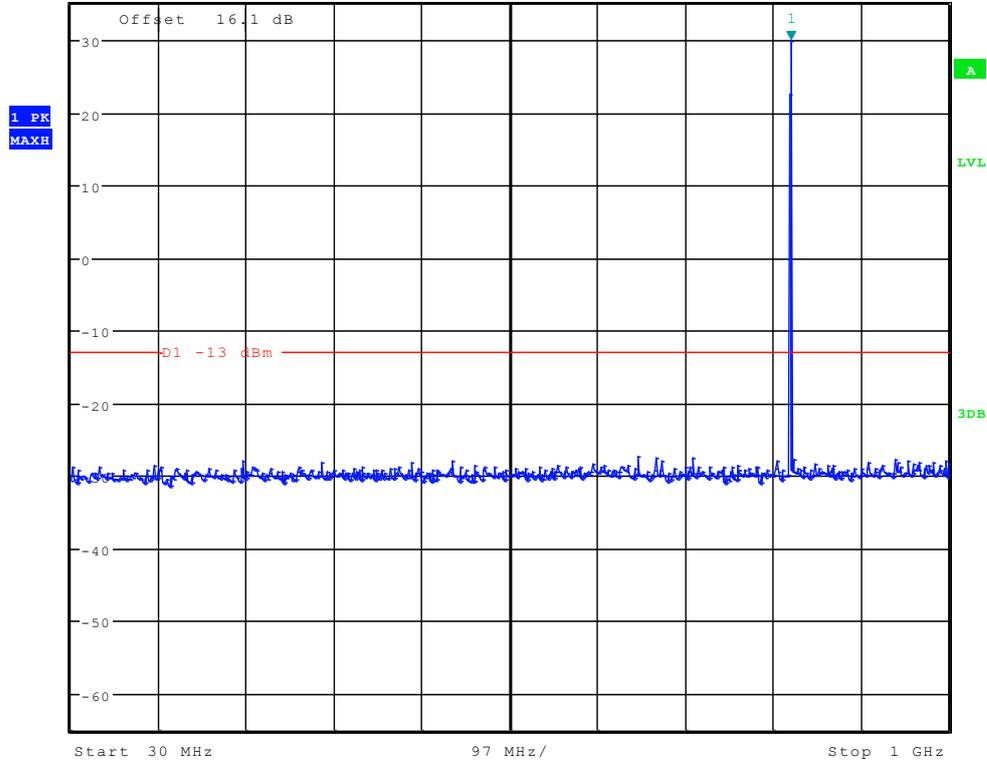



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -16.67 dBm
 Ref 35 dBm Att 45 dB SWT 70 ms 2.713541667 GHz

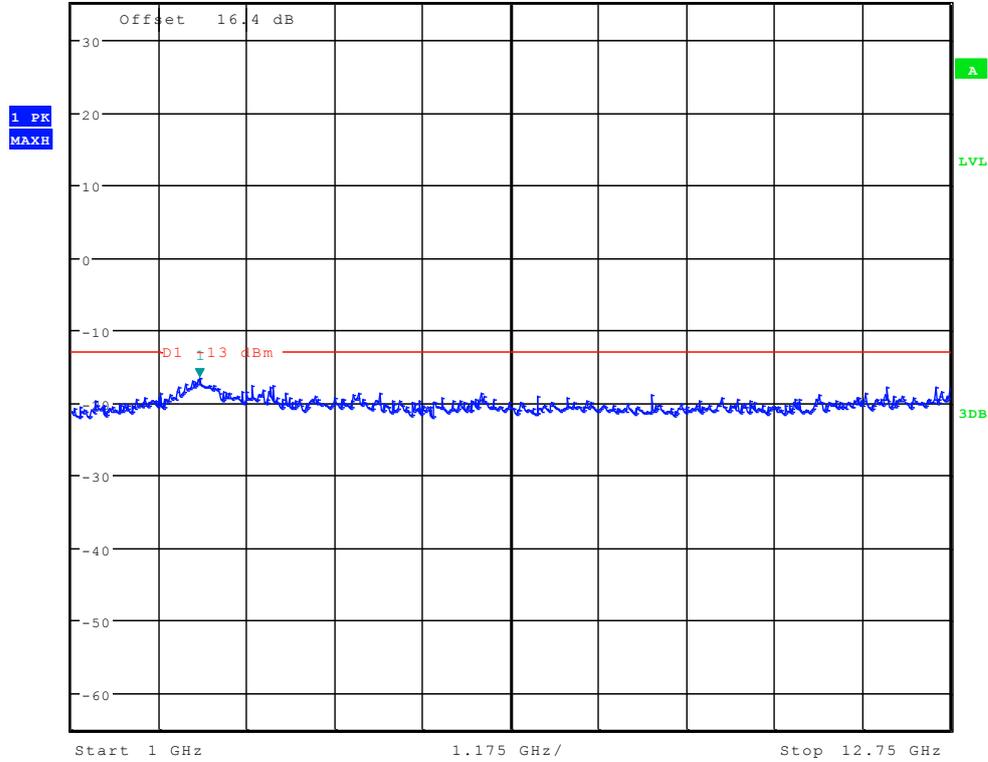




Channel 192




Ref 35 dBm Att 45 dB *RBW 1 kHz Marker 1 [T1] -37.48 dBm
*VBW 10 kHz SWT 145 ms 9.225961538 kHz

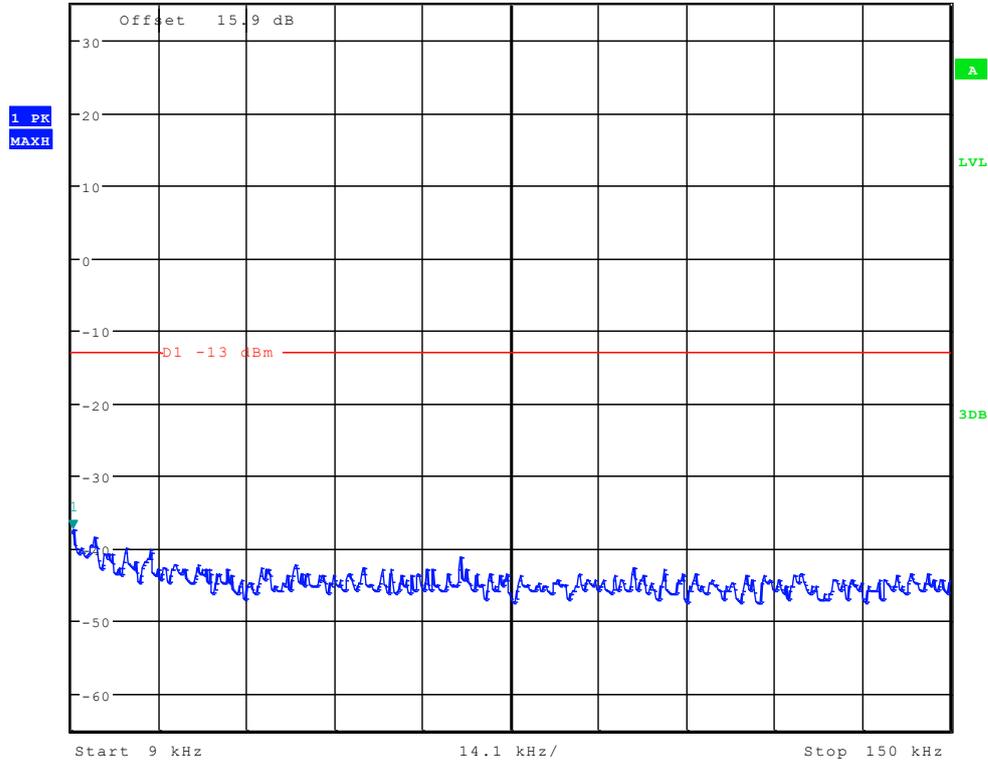




*RBW 10 kHz Marker 1 [T1]
 *VBW 30 kHz -33.06 dBm
 Ref 35 dBm Att 45 dB SWT 300 ms 197.836538462 kHz

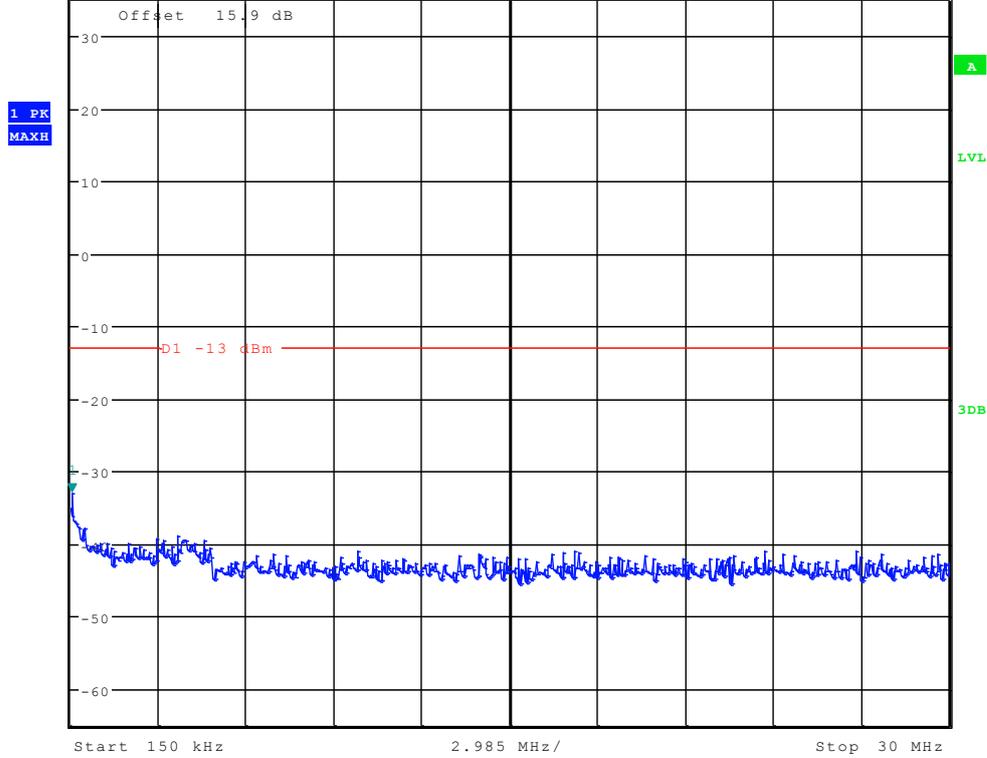




* RBW 100 kHz Marker 1 [T1]
 * VBW 300 kHz 28.17 dBm
 Ref 35 dBm Att 45 dB SWT 100 ms 838.333333333 MHz

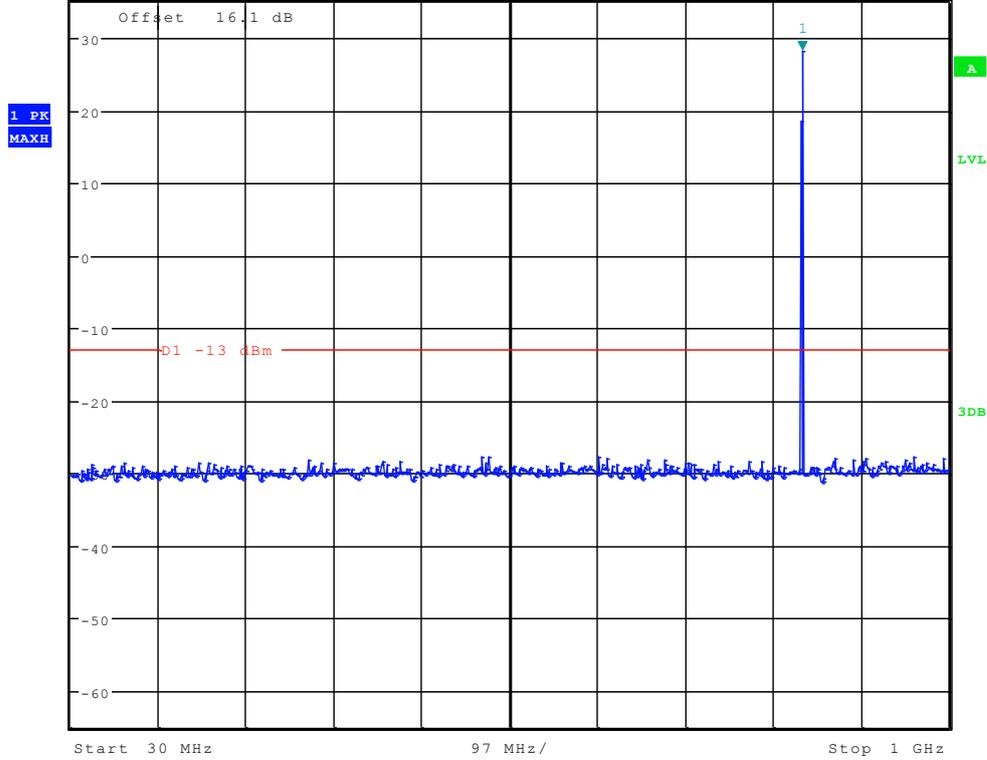



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -16.11 dBm
 Ref 35 dBm Att 45 dB SWT 70 ms 2.901842949 GHz

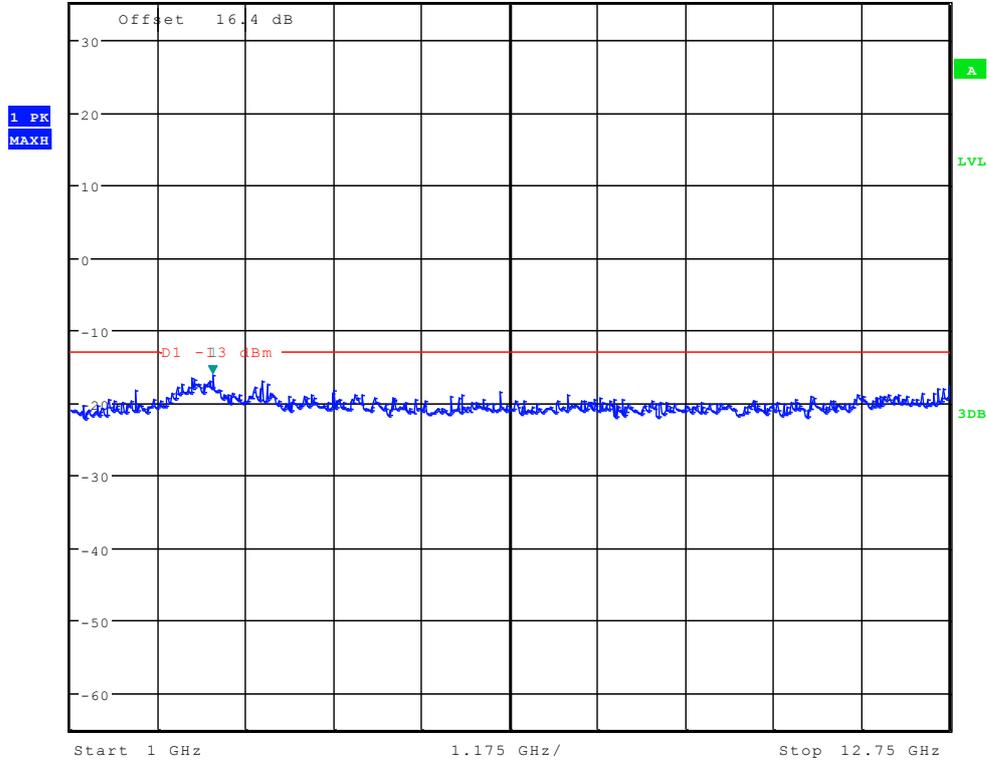




Channel 251




Ref 35 dBm Att 45 dB *RBW 1 kHz Marker 1 [T1] -38.87 dBm
 *VBW 10 kHz SWT 145 ms 9.225961538 kHz

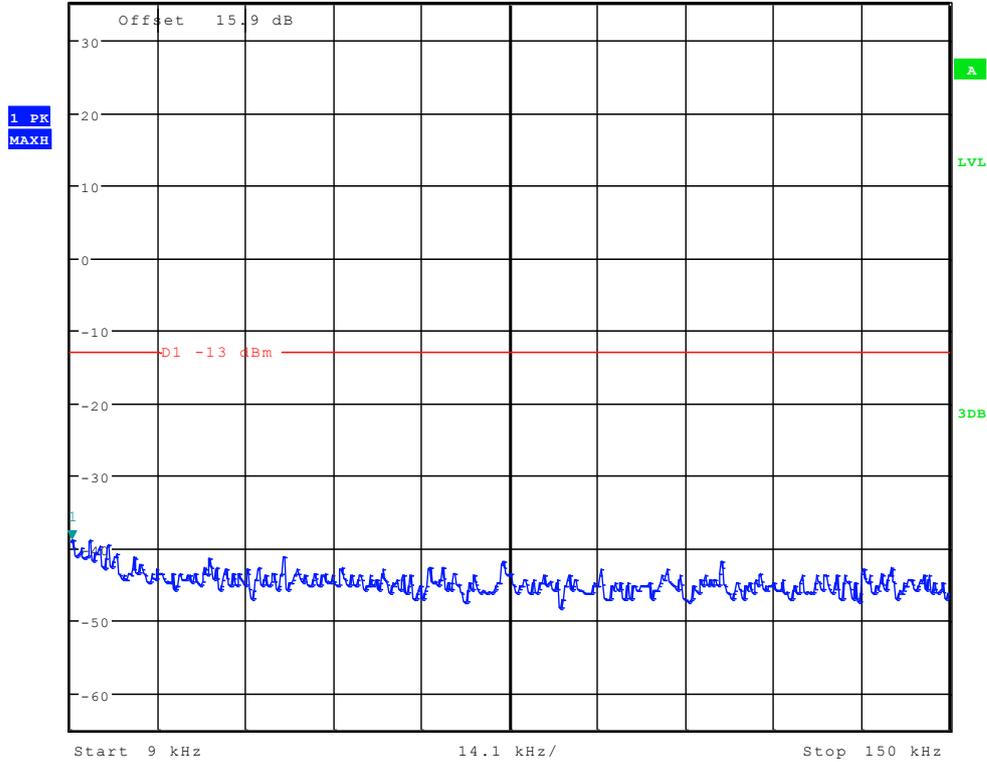




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -33.53 dBm
 Ref 35 dBm Att 45 dB SWT 300 ms 150.00000000 kHz

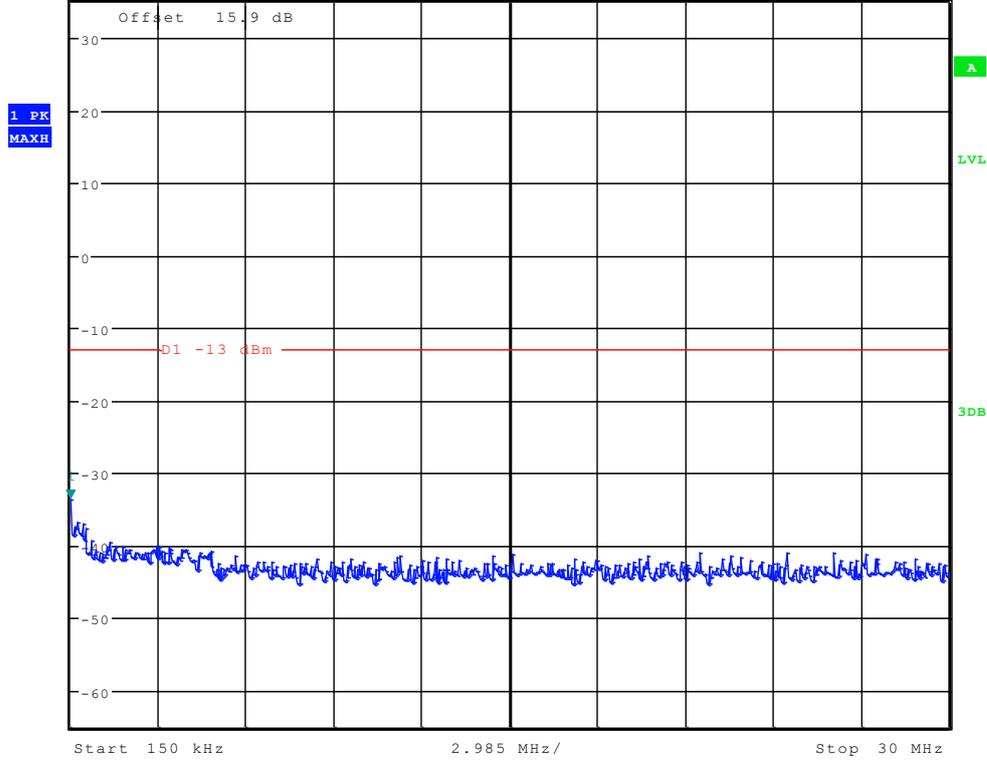




*RBW 100 kHz Marker 1 [T1]
 *VBW 300 kHz 28.37 dBm
 Ref 35 dBm Att 45 dB SWT 100 ms 849.214743590 MHz

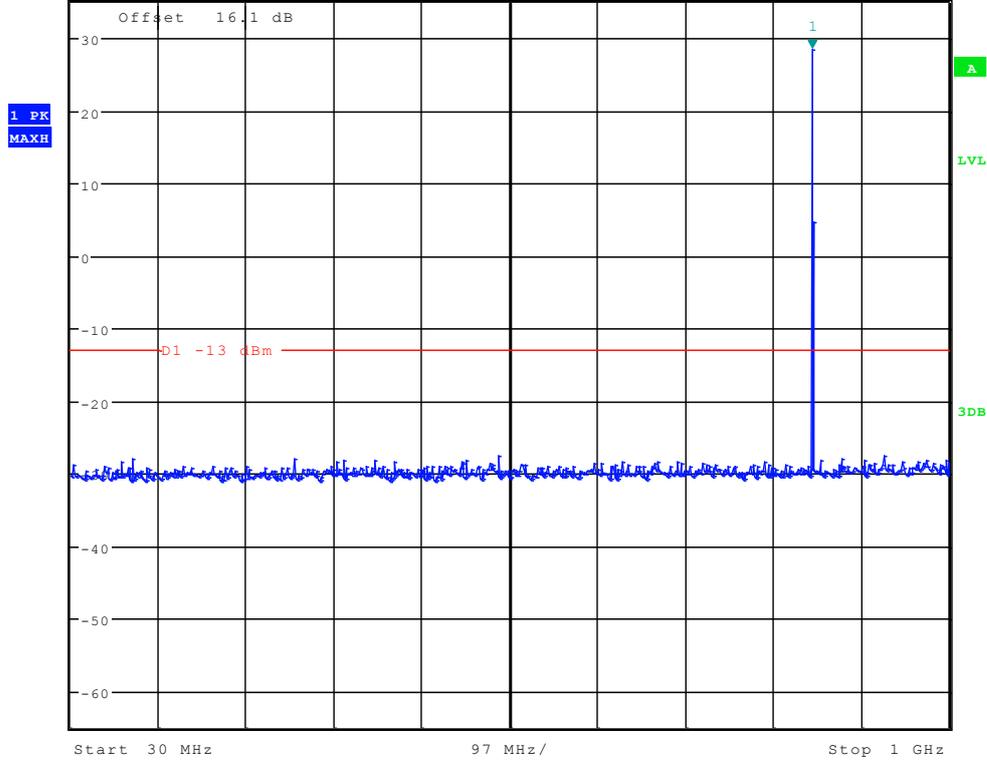



*RBW 1 MHz Marker 1 [T1]
 *VBW 3 MHz -17.06 dBm
 Ref 35 dBm Att 45 dB SWT 70 ms 2.675881410 GHz

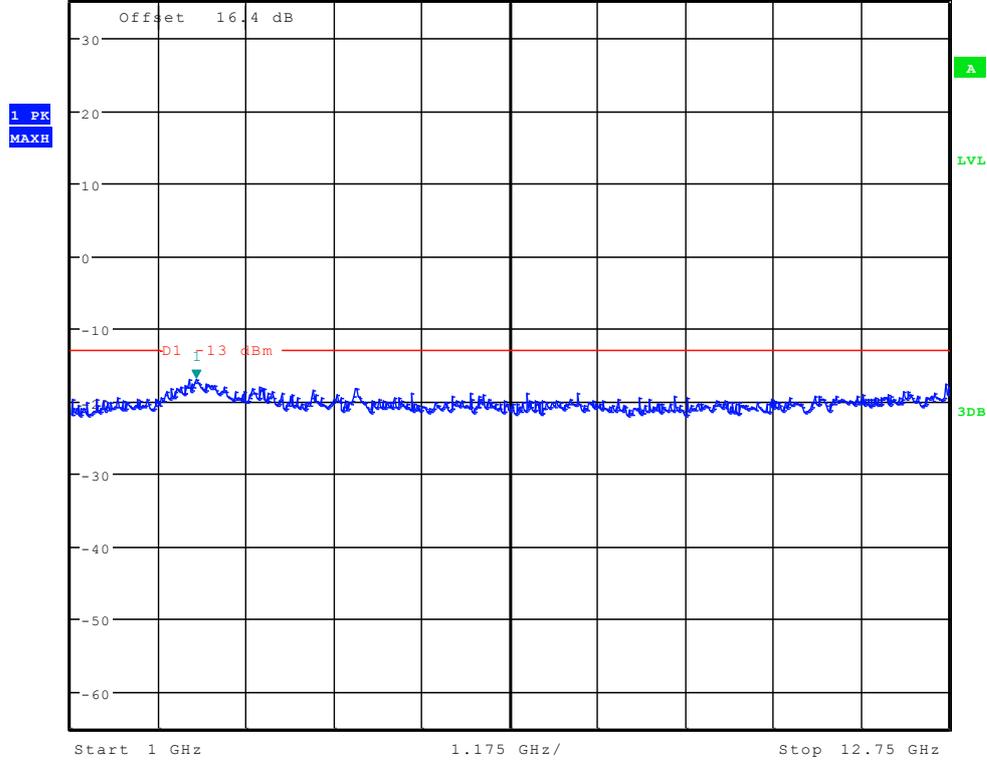

The END



Appendix F


Radiated spurious emission

According to FCC Part 2.1053& Part 22.917




GSM850

(9kHz~30MHz)

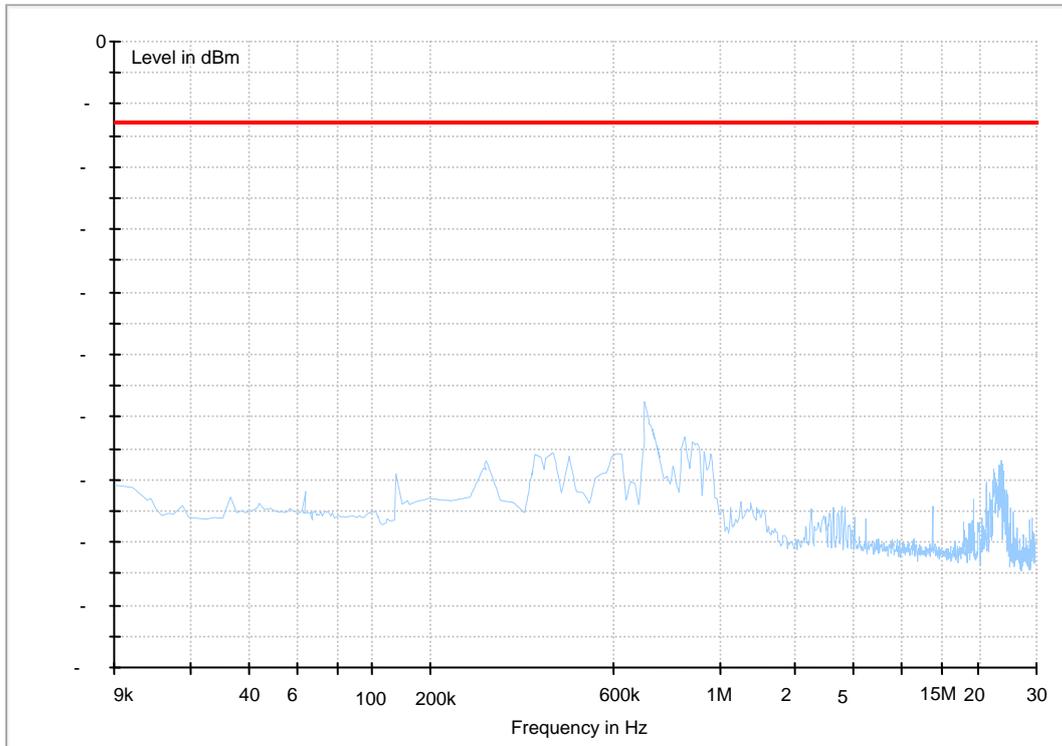




(30MHz~3GHz)

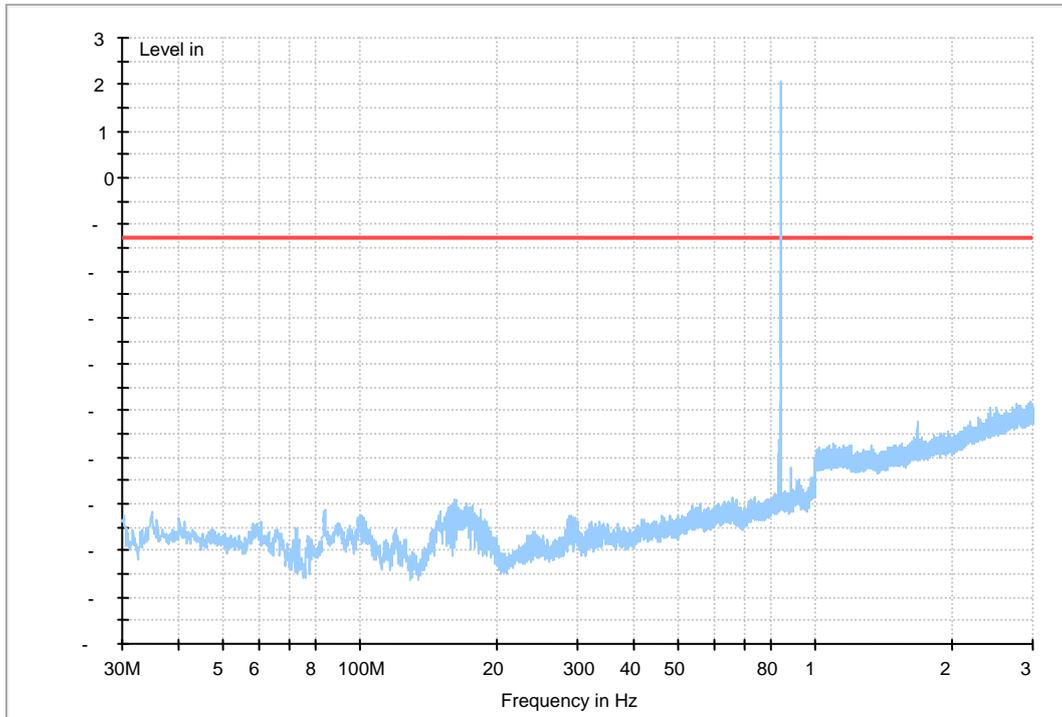




(3GHz~18GHz)

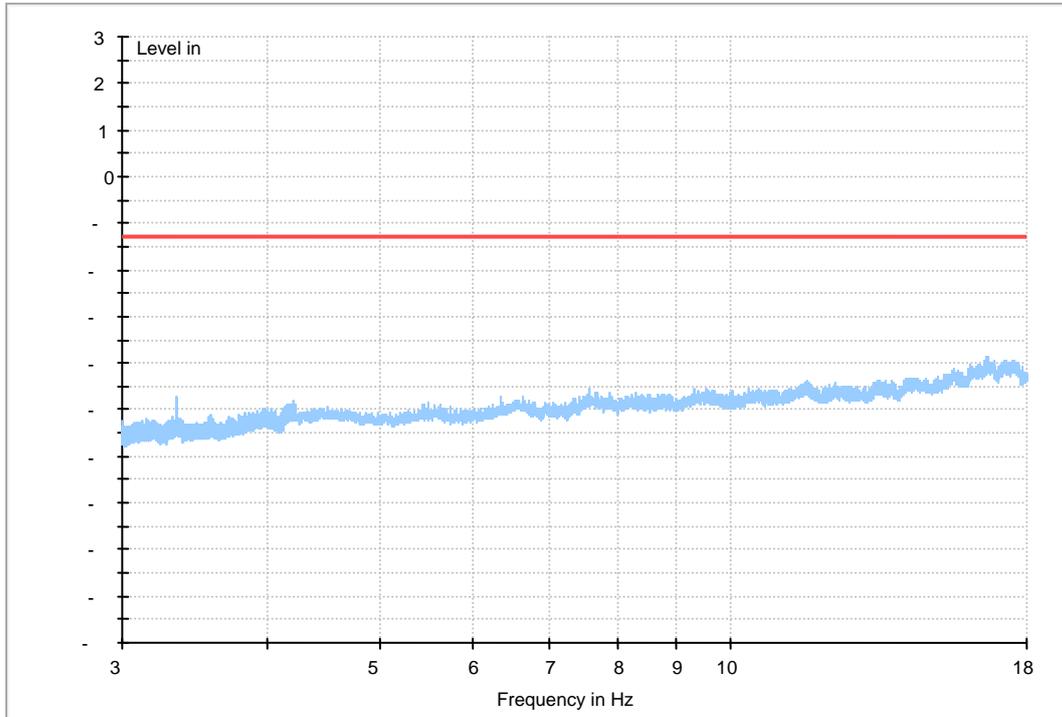




GPRS 850

(9kHz~30MHz)

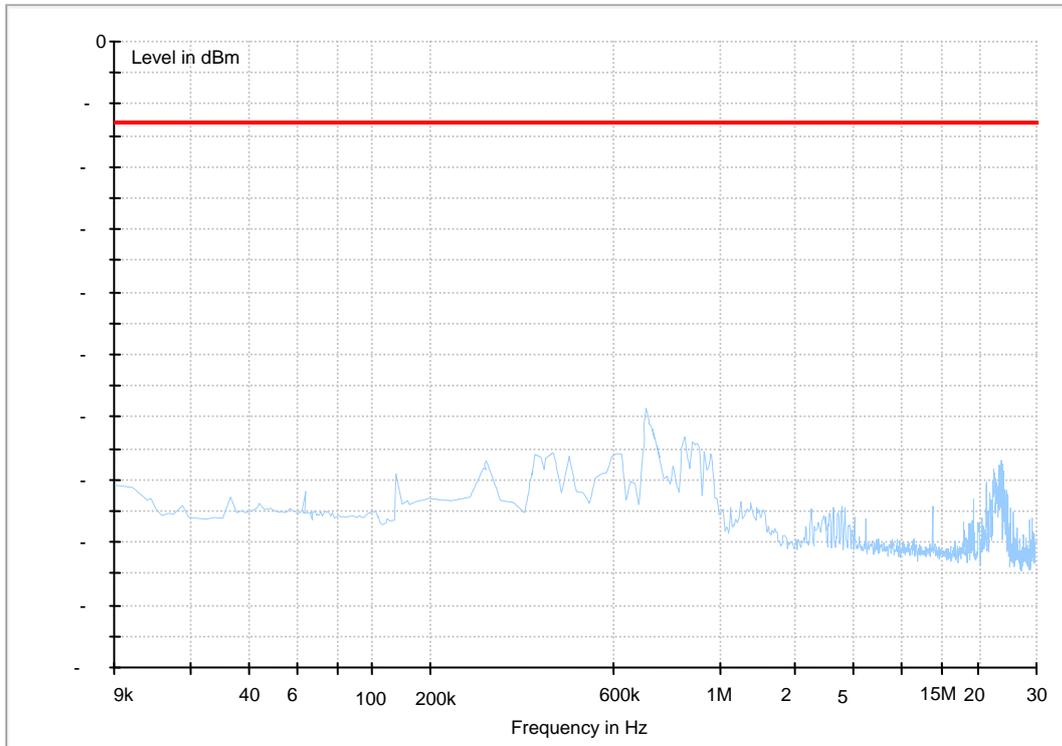




(30MHz~3GHz)

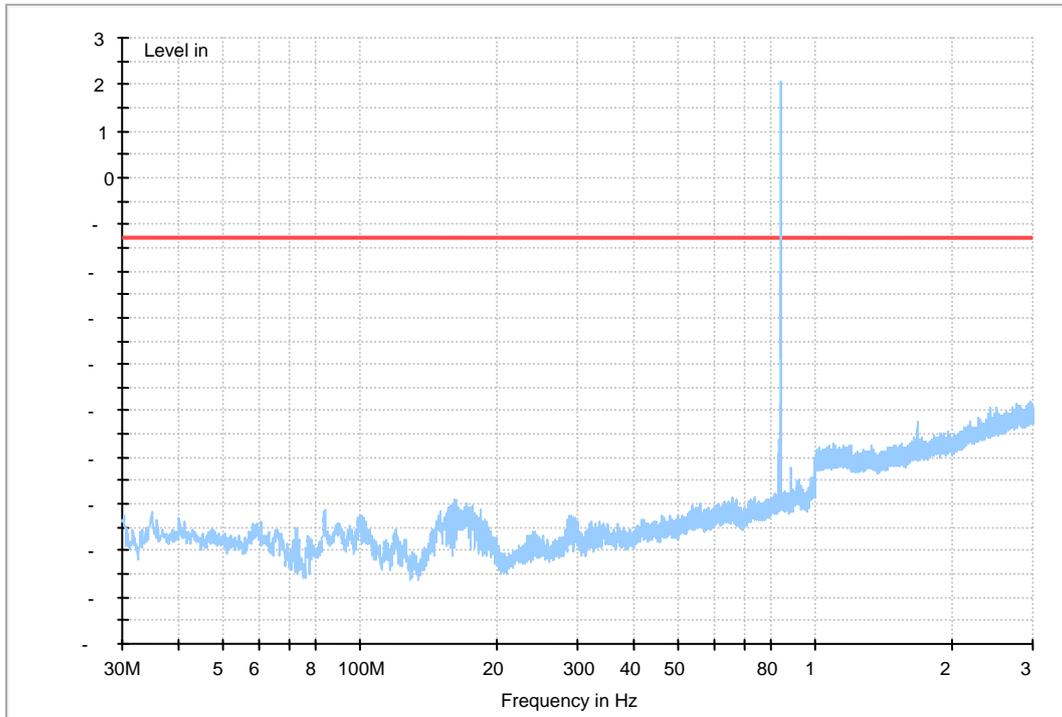




(3GHz~18GHz)

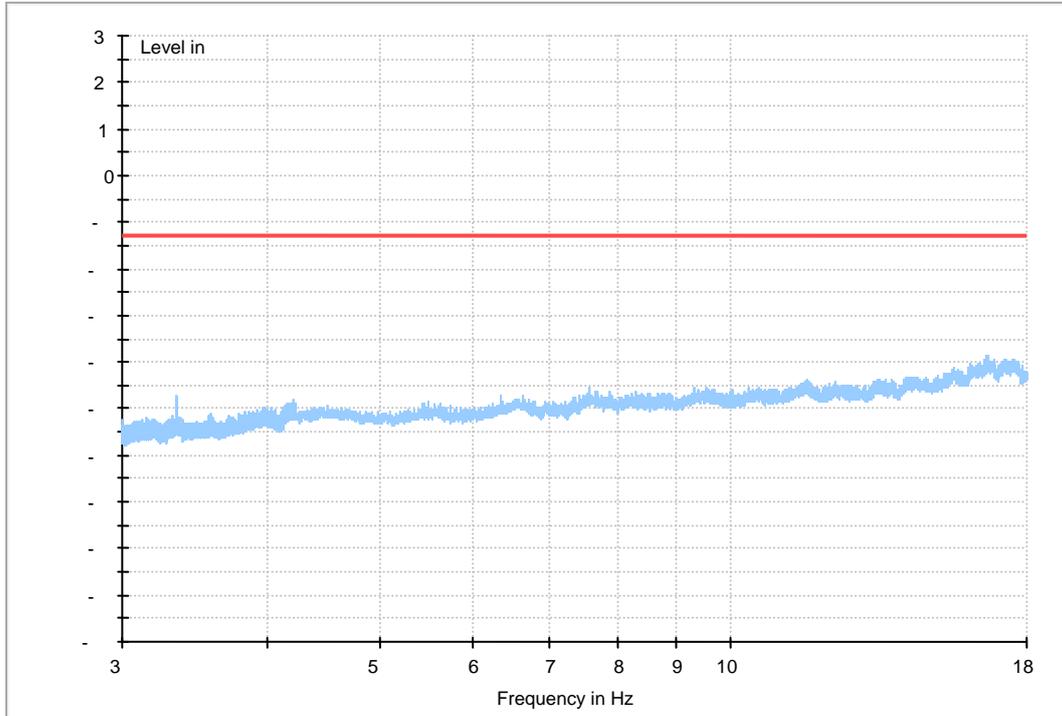




EDGE 850

(9kHz~30MHz)

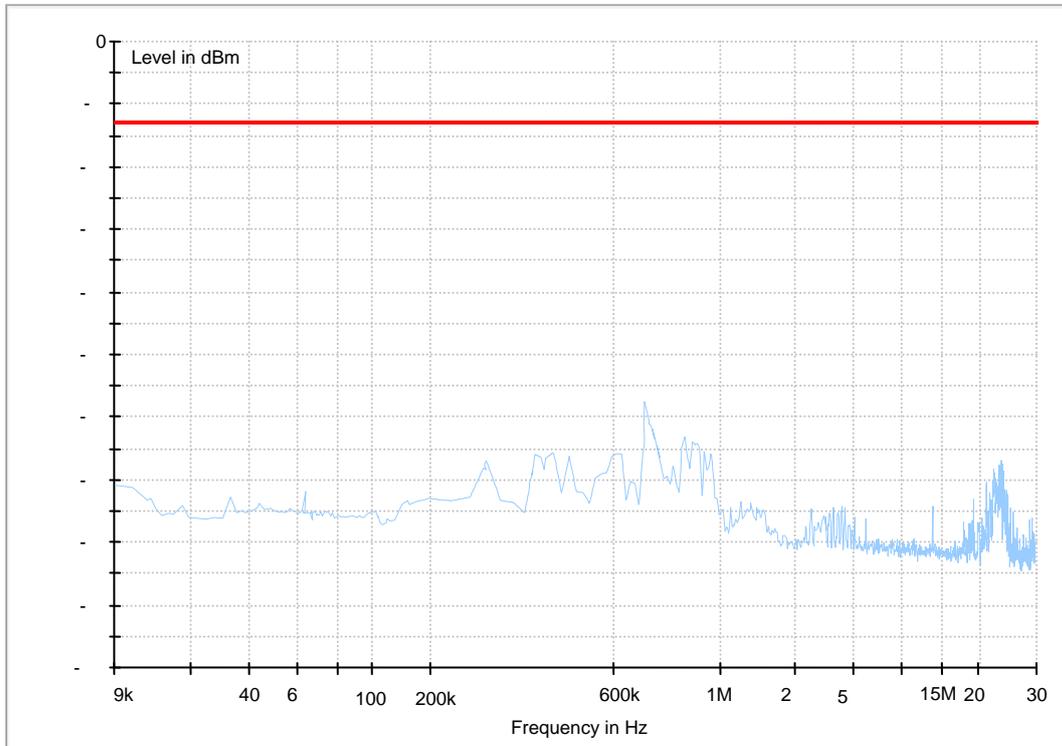




(30MHz~3GHz)

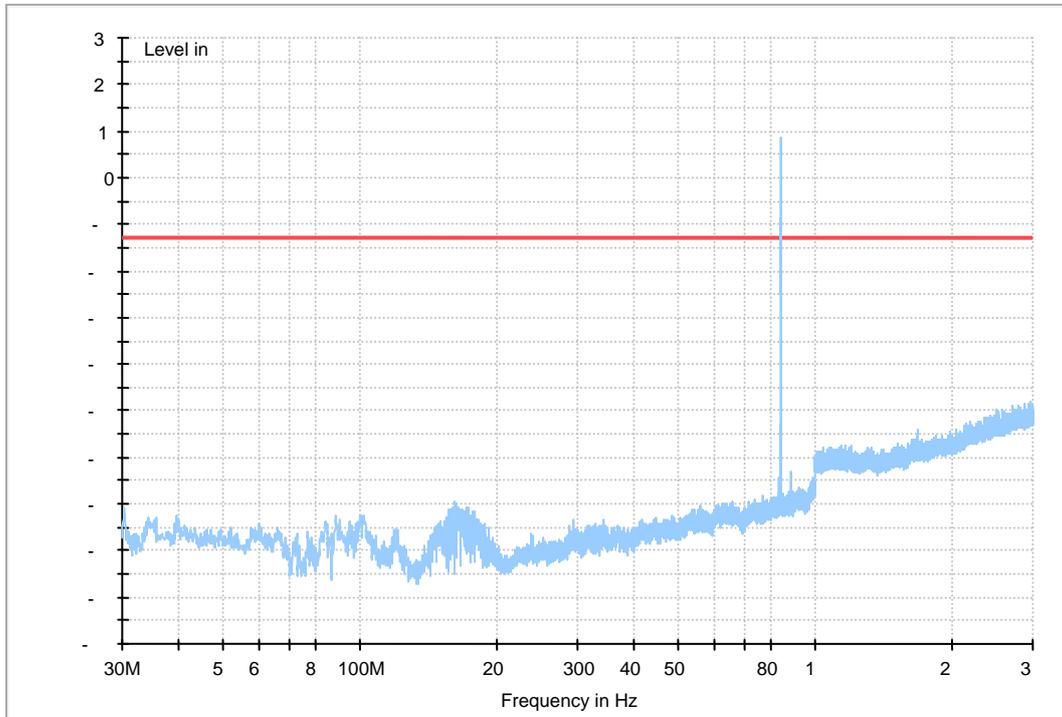



(3GHz~18GHz)

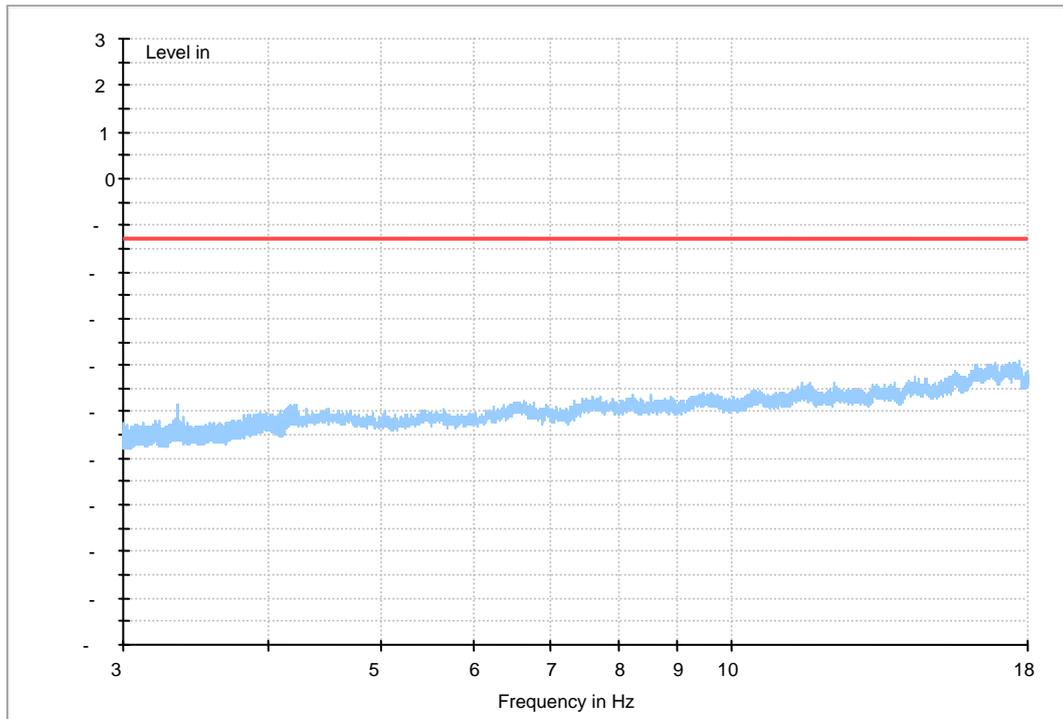

The END



Appendix G

Frequency Stability According to FCC Part 2.1055& Part 22.355



Frequency Error vs. Temperature:

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	-16	-0.01912	---	±2.5	Pass
			-20 °C	19	0.0227	---	±2.5	Pass
			-10 °C	-12	-0.01434	---	±2.5	Pass
			0 °C	12	0.014337	---	±2.5	Pass
			10 °C	21	0.02509	---	±2.5	Pass
			20 °C	-9	-0.01075	---	±2.5	Pass
			30 °C	-11	-0.01314	---	±2.5	Pass
			40 °C	14	0.016726	---	±2.5	Pass
			50 °C	-14	-0.01673	---	±2.5	Pass
TM 2	M	VN	-30 °C	14	0.016726	---	±2.5	Pass
			-20 °C	-9	-0.01075	---	±2.5	Pass
			-10 °C	20	0.023895	---	±2.5	Pass
			0 °C	-10	-0.01195	---	±2.5	Pass
			10 °C	19	0.0227	---	±2.5	Pass
			20 °C	19	0.0227	---	±2.5	Pass
			30 °C	-13	-0.01553	---	±2.5	Pass
			40 °C	16	0.019116	---	±2.5	Pass
			50 °C	18	0.021505	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.(V)	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	20 °C	VL	18	0.0215	---	±2.5	Pass
			VN	-13	-0.0155	---	±2.5	Pass
			VH	-15	-0.0179	---	±2.5	Pass
TM 2	M	20 °C	VL	20	0.0239	---	±2.5	Pass
			VN	-14	-0.0167	---	±2.5	Pass
			VH	13	0.0155	---	±2.5	Pass

-----The END-----