

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : Mobile phone  
**Brand Name** : HUAWEI  
**Model No.** : HUAWEI U8815N, U8815N  
**MARKETING NAME** : HUAWEI Ascend G 300 NFC; Ascend G 300 NFC  
**Filing Type** : New Application  
**Applicant** : Huawei Technologies Co., Ltd.  
Bantian, Longgang District, Shenzhen,  
518129 Guangdong, P.R.China  
**FCC ID** : QISU8815N  
**Manufacturer** : Huawei Technologies Co., Ltd.  
Bantian, Longgang District, Shenzhen,  
518129 Guangdong, P.R.China  
**Received Date** : Mar. 24, 2012  
**Final Test Date** : May 22, 2012

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International (Kunshan) Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



***SPORTON International (Kunshan) Inc.***

*No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.*

## Table of Contents

<b>1. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2. GENERAL INFORMATION.....</b>	<b>3</b>
2.1 Product Details.....	3
2.2 Accessories.....	4
2.3 Table for Test Modes.....	5
2.4 Table for Testing Locations.....	5
2.5 Table for Supporting Units.....	5
2.6 Test Configurations.....	6
<b>3. TEST RESULT .....</b>	<b>7</b>
3.1 AC Power Line Conducted Emissions Measurement.....	7
3.2 Field Strength of Fundamental Emissions and Mask Measurement.....	11
3.3 20dB Spectrum Bandwidth Measurement.....	14
3.4 Radiated Emissions Measurement.....	16
3.5 Frequency Stability Measurement.....	22
3.6 Antenna Requirements.....	24
<b>4. LIST OF MEASURING EQUIPMENTS.....</b>	<b>25</b>
<b>5. TEST LOCATION.....</b>	<b>26</b>
<b>6. TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>27</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A2</b>
<b>APPENDIX B. PHOTOGRAPHS OF EUT .....</b>	<b>B1 ~ B59</b>



# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : **Mobile phone**  
**Brand Name** : **HUAWEI**  
**Model No.** : **HUAWEI U8815N, U8815N**  
**MARKETING NAME** : **HUAWEI Ascend G 300 NFC; Ascend G 300 NFC**  
**Applicant** : **Huawei Technologies Co., Ltd.**  
Bantian, Longgang District, Shenzhen, 518129  
Guangdong, P.R.China

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 24, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



---

**Jones Tsai / Manager**

***SPORTON International (Kunshan) Inc.***

*No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.*

## 1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	-0.76dB at 13.62MHz
3.2	15.225(a)	Field Strength of Fundamental Emissions	Complies	-69.80dB at 13.56MHz
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	
3.4	15.225(d)	Radiated Emissions	Complies	-1.08dB at 40.53MHz
3.5	15.225(e)	Frequency Stability	Complies	
3.6	15.203	Antenna Requirements	Complies	

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2. GENERAL INFORMATION

### 2.1 Product Details

For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	5Vdc from Adapter 3.7Vdc from Li-ion Battery
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	2.240kHz
Max. Field Strength	54.19dBuV/m
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (Ch. 1)
Antenna	Integrate Antenna (Without any antenna connector)

## 2.2 Accessories

Specification of Accessory		
AC Adapter 1	Brand Name	HUAWEI (HK)
	Model Name	HW-050100U1W
AC Adapter 2	Brand Name	HUAWEI (TPI)
	Model Name	HW-050100U1W
AC Adapter 3	Brand Name	HUAWEI (HK)
	Model Name	HW-050100B1W
AC Adapter 4	Brand Name	HUAWEI (TPI)
	Model Name	HW-050100B1W
AC Adapter 5	Brand Name	HUAWEI (HK)
	Model Name	HW-050100E1W
AC Adapter 6	Brand Name	HUAWEI (TPI)
	Model Name	HW-050100E1W
AC Adapter 7	Brand Name	HUAWEI (HK)
	Model Name	HW-050100A1W
Battery 1	Brand Name	HUAWEI
	Model Name	HB5N1
	Serial Number	BAAC106998080028
Battery 2	Brand Name	HUAWEI
	Model Name	HB5N1H
	Serial Number	UBDC303X97500557
Battery 3	Brand Name	HUAWEI
	Model Name	HB5N1
	Serial Number	GAGC228z98004229
Battery 4	Brand Name	HUAWEI
	Model Name	HB5N1H
	Serial Number	WLCB8186I3201302
Earphone 1	Manufacturer	Lianchuang
	Signal Line	1.2 meter, non-shielded cable
Earphone 2	Manufacturer	Quancheng
	Signal Line	1.2 meter, non-shielded cable
USB Cable 1	Manufacturer	Pengyi
	Signal Line	1.2 meter, shielded cable, without core
USB Cable 2	Manufacturer	Liansheng
	Signal Line	1.2 meter, shielded cable, without core

## Remark:

Only adapter 2, battery 2 and earphone 2 are used to testing subjective to this standard.

**2.3 Table for Test Modes**

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	CTX	-
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~30MHz	CTX	1
Radiated Emissions 9kHz~10 <sup>th</sup> Harmonic Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note:

- 1, CTX=continuously transmitting.
- 2, The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.

**2.4 Table for Testing Locations**

Test Site No.	Site Category	Location
CO01-KS	Conduction	Kun Shan
TH01-KS	OVEN Room	Kun Shan
03CH07-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).


**2.5 Table for Supporting Units**

Support Unit	Manufacturer	Model	FCC ID
Earphone 2	Quancheng	N/A	N/A
USB Cable 2	Liansheng	N/A	N/A

**Note** : Above support units was provided by client

## 2.6 Test Configurations


For conducted emissions

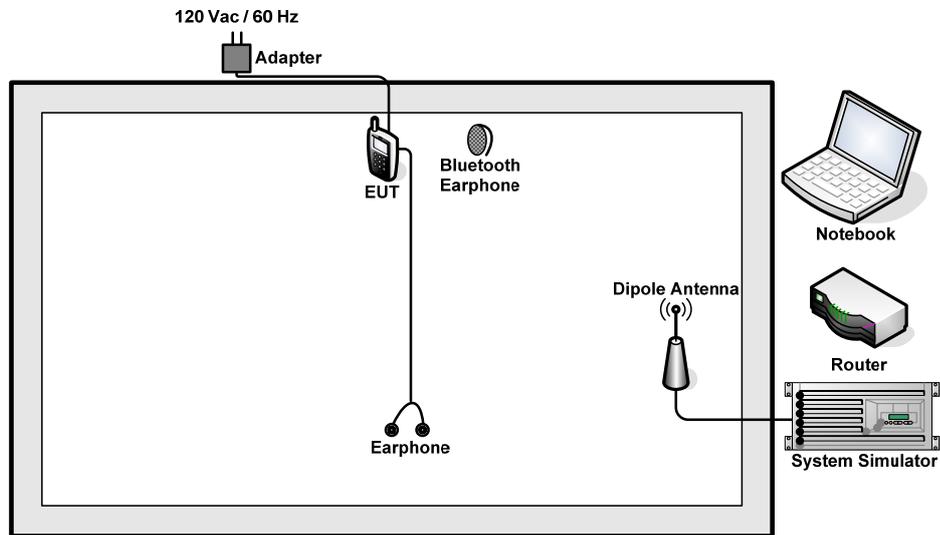

Fundamental Emissions and Mask Measurement/

For radiated emissions 9kHz~30MHz/

For radiated emissions 30MHz~1GHz

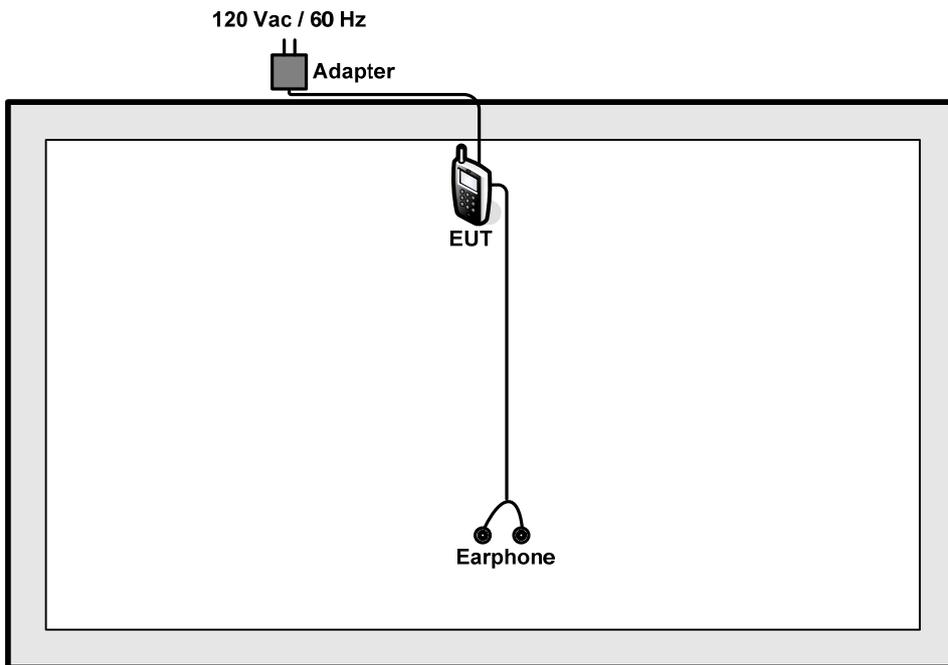

### 3. TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

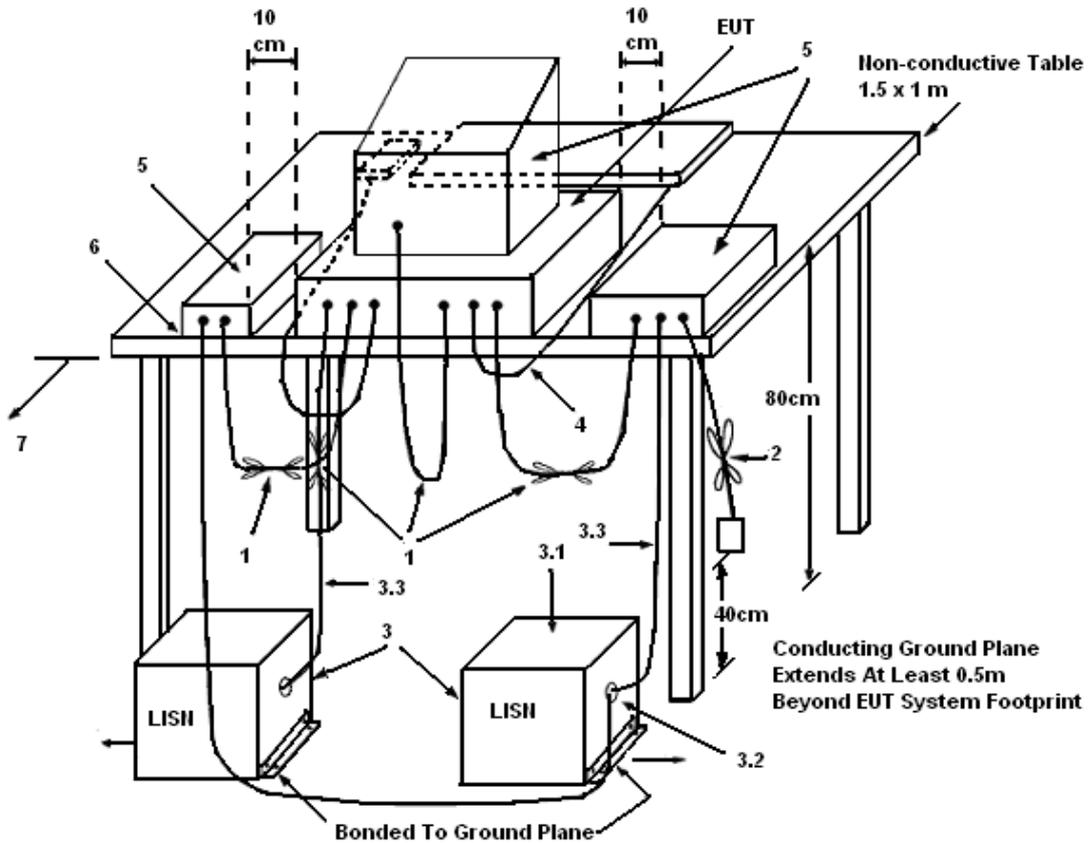

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in transmitting function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement

<b>Final Test Date</b>	May 11, 2012	<b>Test Site No.</b>	CO01-KS
<b>Temperature</b>	24~26°C	<b>Humidity</b>	46~47%
<b>Test Engineer</b>	Tom Wang	<b>Configuration</b>	Transmitting Mode (13.56MHz)
<b>Mode</b>	GSM850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone 2 + Camera + Battery 2 with Antenna		


Line

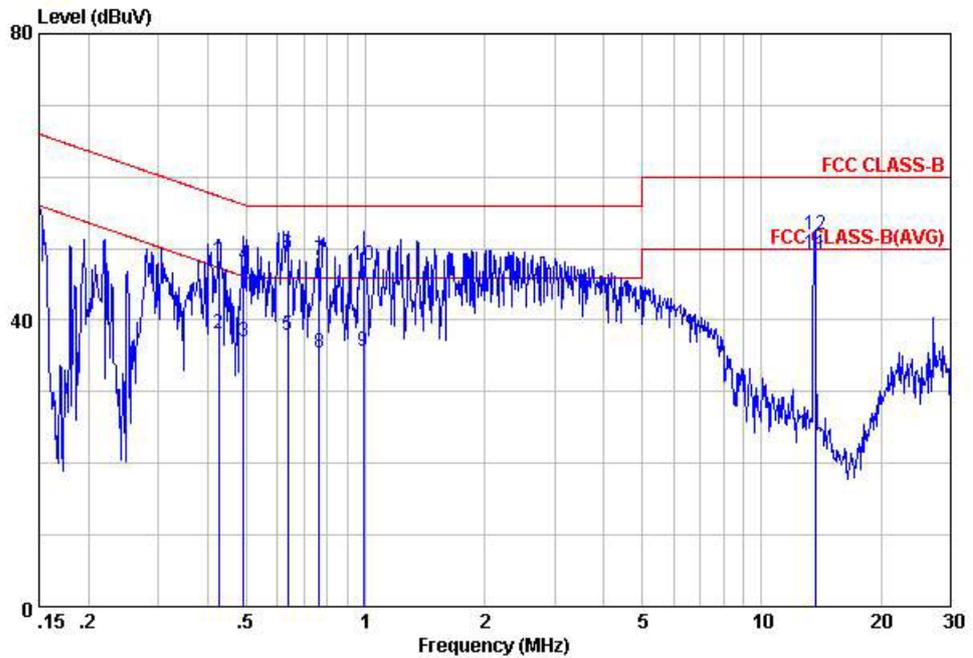

Site : C001-KS  
 Condition: FCC CLASS-B LISN-100807 LINE  
 Project : (FD) 232401  
 mode : Mode 1  
 IMEI : 864678010000857

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.43	48.32	-9.01	57.33	38.20	-0.08	10.20	QP
2	0.43	38.12	-9.21	47.33	28.00	-0.08	10.20	Average
3	0.49	37.03	-9.11	46.14	26.90	-0.08	10.21	Average
4	0.49	47.63	-8.51	56.14	37.50	-0.08	10.21	QP
5	0.64	37.84	-8.16	46.00	27.70	-0.09	10.23	Average
6	0.64	49.34	-6.66	56.00	39.20	-0.09	10.23	QP
7	0.76	48.25	-7.75	56.00	38.10	-0.09	10.24	QP
8	0.76	35.45	-10.55	46.00	25.30	-0.09	10.24	Average
9	0.99	35.76	-10.24	46.00	25.60	-0.10	10.26	Average
10	0.99	47.76	-8.24	56.00	37.60	-0.10	10.26	QP
11	13.62	49.24	-0.76	50.00	38.80	-0.06	10.50	Average
12	13.62	51.84	-8.16	60.00	41.40	-0.06	10.50	QP

Neutral

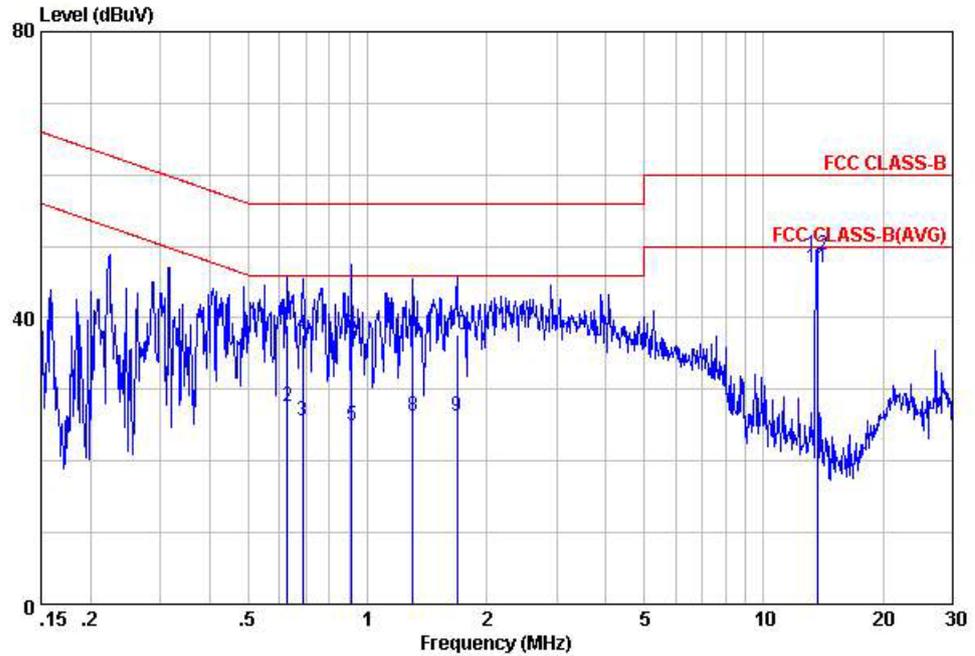

Site : C001-KS  
 Condition: FCC CLASS-B LISN-100807 NEUTRAL  
 Project : (FD) 232401  
 mode : Mode 1  
 IMEI : 864678010000857

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.63	38.95	-17.05	56.00	28.80	-0.08	10.23	QP
2	0.63	27.65	-18.35	46.00	17.50	-0.08	10.23	Average
3	0.69	25.65	-20.35	46.00	15.50	-0.08	10.23	Average
4	0.69	37.65	-18.35	56.00	27.50	-0.08	10.23	QP
5	0.91	24.87	-21.13	46.00	14.70	-0.09	10.26	Average
6	0.91	37.67	-18.33	56.00	27.50	-0.09	10.26	QP
7	1.30	37.39	-18.61	56.00	27.20	-0.10	10.29	QP
8	1.30	26.39	-19.61	46.00	16.20	-0.10	10.29	Average
9	1.68	26.21	-19.79	46.00	16.01	-0.11	10.31	Average
10	1.68	37.61	-18.39	56.00	27.41	-0.11	10.31	QP
11	13.62	46.93	-3.07	50.00	36.50	-0.07	10.50	Average
12	13.62	48.73	-11.27	60.00	38.30	-0.07	10.50	QP

Note:  
 Level = Read Level + LISN Factor + Cable Loss.

### 3.2 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.2.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Field Strength (dBµV/m) at 10m	Field Strength (dBµV/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask limit:

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength (uV/m) at 30m	Field Strength (dBuV/m) at 30m	Field Strength (dBuV/m) at 10m	Field Strength (dBuV/m) at 3m
	1.705~13.110	30	29.5	48.58	69.5
	13.110~13.410	106	40.5	59.58	80.5
	13.410~13.553	334	50.5	69.58	90.5
	13.553~13.567	15848	84.0	103.08	124.0
	13.567~13.710	334	50.5	69.58	90.5
	13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5	

#### 3.2.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.


Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 kHz
Detector	QP

#### 3.2.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz

for the band 13.553~13.567MHz.

**3.2.4 Test Setup Layout**

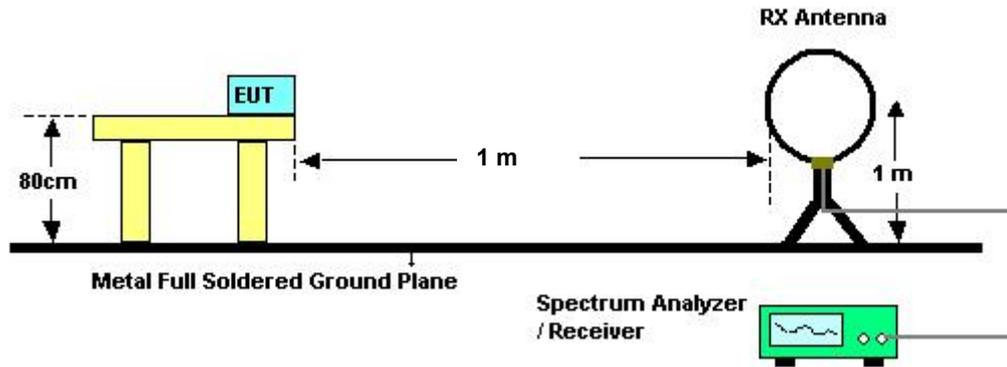

**3.2.5 Test Deviation**

There is no deviation with the original standard.


**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Field Strength of Fundamental Emissions

<b>Final Test Date</b>	May 16, 2012	<b>Test Site No.</b>	03CH07-HY
<b>Temperature</b>	24.4~26°C	<b>Humidity</b>	45% ~ 49%
<b>Test Engineer</b>	Kyle	<b>Configurations</b>	Ch. 1

Freq. (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m) at 3m	Remark
13.56 MHz	54.19	69.8	123.99	

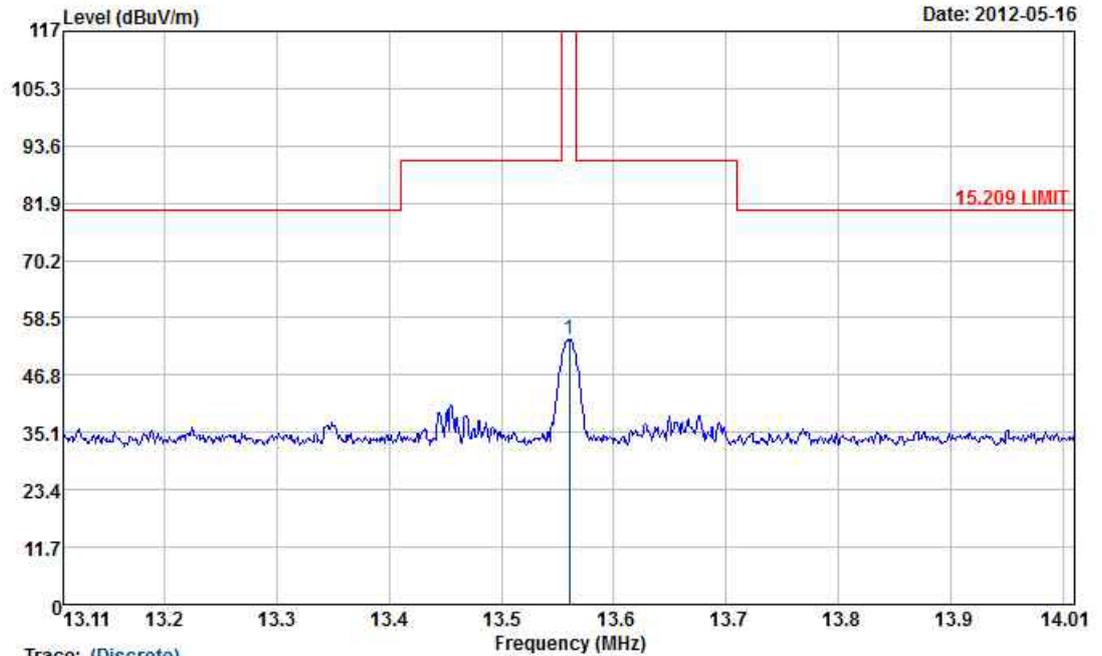

Trace: (Discrete)

Site : 03CH07-HY  
 Condition : 15.209 LIMIT 3m LOOP ANT(120516)-H HORIZONTAL  
 Project : FR 240209  
 Mode : Mode 1  
 Plane : H

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	13.56	54.19	-69.80	123.99	33.28	20.51	0.40	0.00	---	Peak

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Measured distance is 3m.

All emissions emit form non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

**3.3 20dB Spectrum Bandwidth Measurement**

**3.3.1 Limit**

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameters</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	1 kHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

**3.3.4 Test Setup Layout**

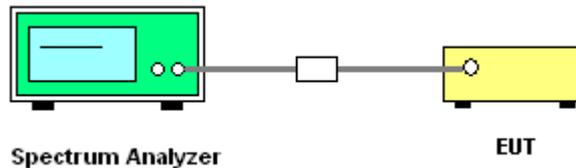

**3.3.5 Test Deviation**

There is no deviation with the original standard.

**3.3.6 EUT Operation during Test**


The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of 20dB Spectrum Bandwidth


<b>Final Test Date</b>	May 08, 2012	<b>Test Site No.</b>	TH01-KS
<b>Temperature</b>	24~26°C	<b>Humidity</b>	46~47%
<b>Test Engineer</b>	Zhi Lu	<b>Configurations</b>	Ch. 1

Frequency	20dB BW (kHz)	99% OBW (kHz)	Frequency range (MHz) f <sub>L</sub> > 13.553MHz	Frequency range (MHz) f <sub>H</sub> < 13.567MHz	Test Result
13.56 MHz	2.640	2.240	13.55980	13.55981	Complies

20 dB / 99% Bandwidth Plot on 13.56 MHz

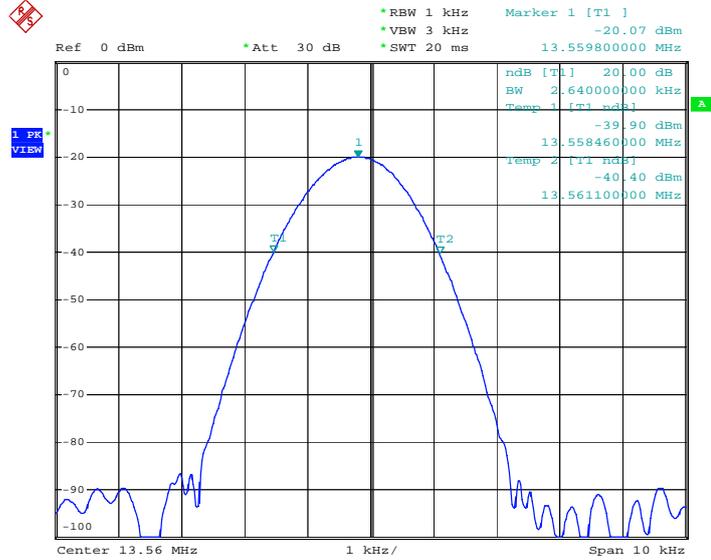

Date: 8.MAY.2012 13:08:46

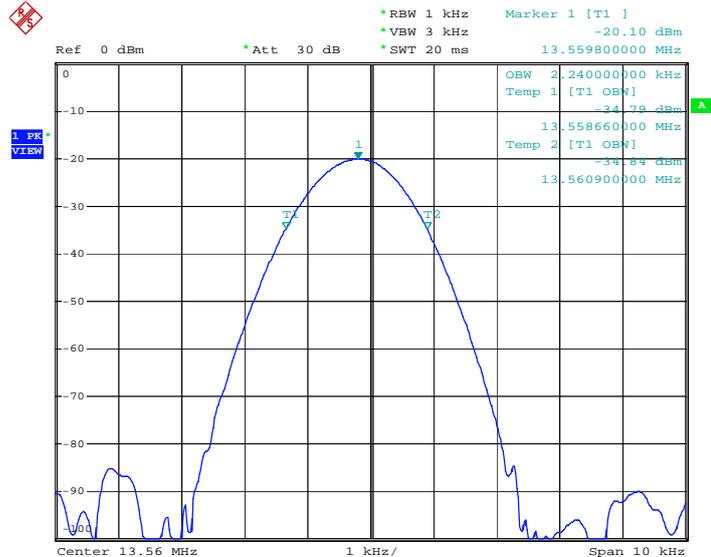

Date: 8.MAY.2012 13:09:06

**3.4 Radiated Emissions Measurement**

**3.4.1 Limit**

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits in Section 15.209(a)

<b>Frequencies (MHz)</b>	<b>Field Strength (micровolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.4.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.4.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4 Test Setup Layout

For radiated emissions below 30MHz

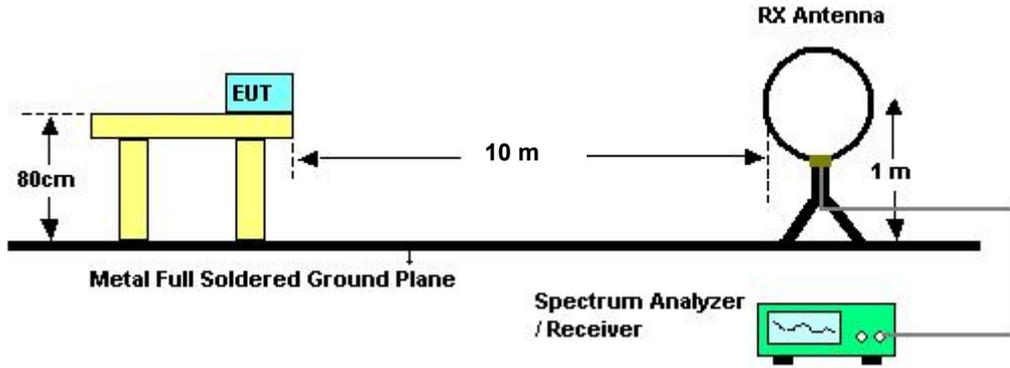

For radiated emissions above 30MHz

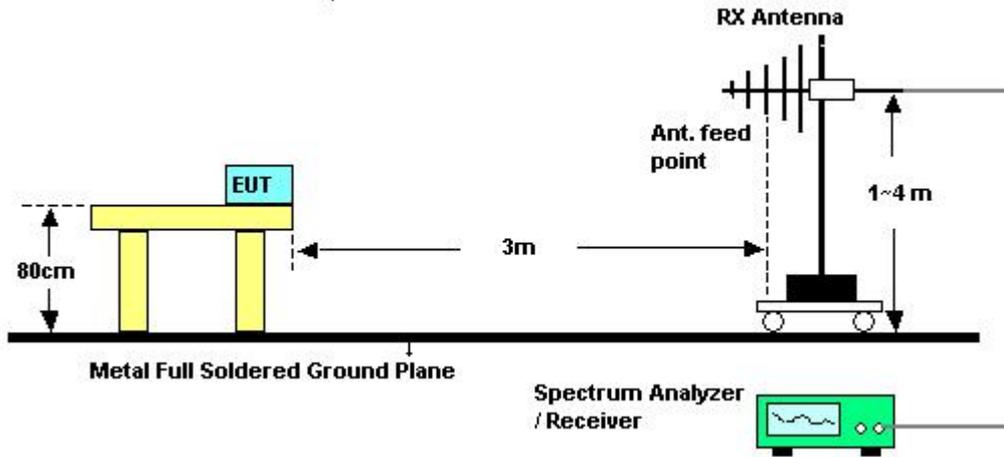

3.4.5 Test Deviation

There is no deviation with the original standard.


3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	May 22, 2012	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	47~48%
Test Engineer	KAI Wang	Configurations	Ch. 1

9KHz~30MHz  
Horizontal

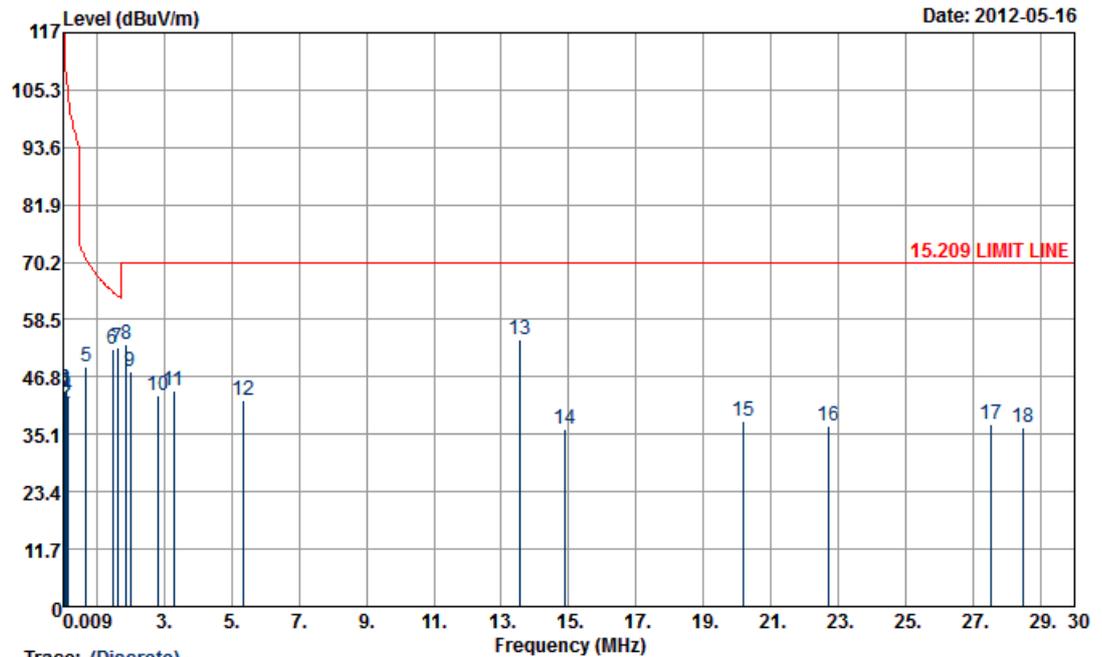


Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : 15.209 LIMIT LINE 3m LOOP ANT(120516)-H HORIZONTAL  
 Project : FR 240209  
 Mode : Mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	0.06	44.10	-68.10	112.20	24.81	19.00	0.29	0.00	---	Peak
2	0.09	41.25	-67.26	108.51	22.16	18.80	0.29	0.00	---	Peak
3	0.10	44.39	-63.21	107.60	25.30	18.80	0.29	0.00	---	Peak
4	0.13	42.90	-62.29	105.19	23.82	18.79	0.29	0.00	---	Peak
5	0.70	48.81	-21.90	70.71	29.78	18.72	0.31	0.00	---	Peak
6	1.49	52.45	-11.72	64.17	33.24	18.90	0.31	0.00	---	Peak
7	1.63	52.94	-10.44	63.38	33.71	18.90	0.33	0.00	---	Peak
8	1.89	53.36	-16.64	70.00	34.13	18.90	0.33	0.00	---	Peak
9	2.00	47.96	-22.04	70.00	28.73	18.90	0.33	0.00	---	Peak
10	2.84	43.12	-26.88	70.00	23.88	18.90	0.34	0.00	---	Peak
11	3.29	44.15	-25.85	70.00	24.90	18.91	0.34	0.00	---	Peak
12	5.35	41.90	-28.10	70.00	22.48	19.06	0.36	0.00	---	Peak
13	13.56	54.54	-15.46	70.00	33.63	20.51	0.40	0.00	---	Peak
14	14.90	36.11	-33.89	70.00	14.92	20.78	0.41	0.00	---	Peak
15	20.16	37.69	-32.31	70.00	15.45	21.81	0.43	0.00	---	Peak
16	22.72	36.86	-33.14	70.00	14.46	21.96	0.44	0.00	---	Peak
17	27.54	37.00	-33.00	70.00	14.25	22.25	0.50	0.00	---	Peak
18	28.48	36.55	-33.45	70.00	13.74	22.31	0.50	0.00	---	Peak

Note: remark 13 is transmitter's fundamental signal.

Vertical

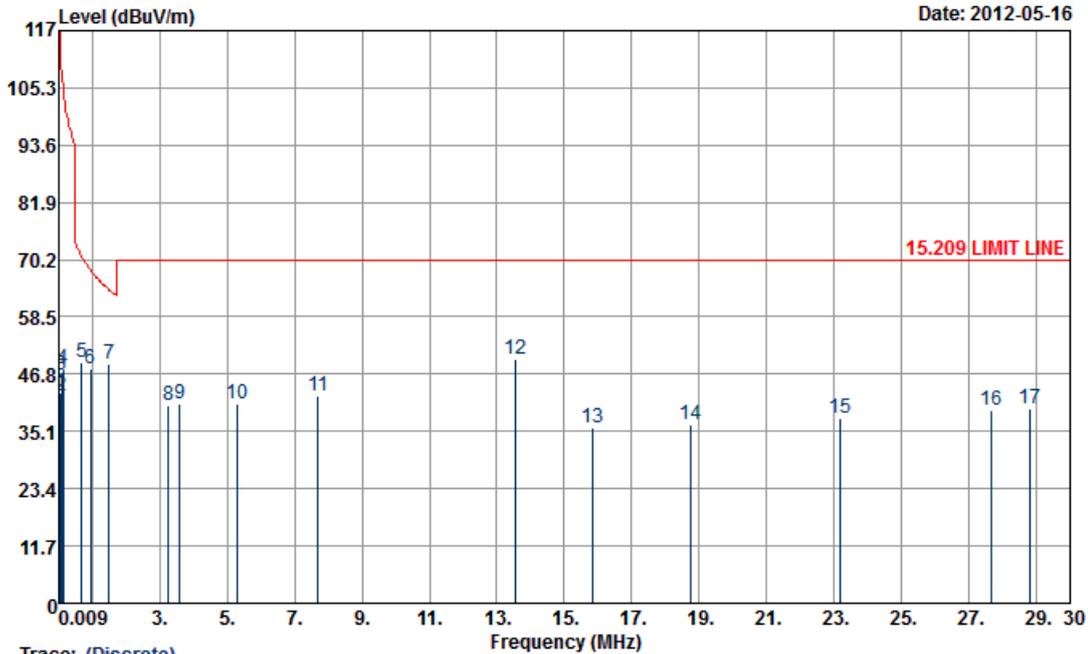

Trace: (Discrete)  
 Site : 03CH07-HY  
 Condition : 15.209 LIMIT LINE 3m LOOP ANT(120516)-V VERTICAL  
 Project : FR 240209  
 Mode : Mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	cm	deg	
			dB	dBuV/m	dBuV	dB	dB			
1	0.06	42.99	-68.47	111.46	23.70	19.00	0.29	0.00	---	Peak
2	0.08	42.22	-67.87	110.09	22.93	19.00	0.29	0.00	---	Peak
3	0.10	46.73	-61.10	107.83	27.64	18.80	0.29	0.00	---	Peak
4	0.13	47.85	-57.35	105.20	28.77	18.79	0.29	0.00	---	Peak
5	0.68	49.33	-21.59	70.92	30.31	18.71	0.31	0.00	---	Peak
6	0.95	47.84	-20.25	68.09	28.67	18.86	0.31	0.00	---	Peak
7	1.50	48.82	-15.26	64.08	29.61	18.90	0.31	0.00	---	Peak
8	3.25	40.40	-29.60	70.00	21.15	18.91	0.34	0.00	---	Peak
9	3.60	40.82	-29.18	70.00	21.54	18.93	0.35	0.00	---	Peak
10	5.31	40.62	-29.38	70.00	21.21	19.05	0.36	0.00	---	Peak
11	7.69	42.47	-27.53	70.00	22.66	19.43	0.38	0.00	---	Peak
12	13.56	49.89	-20.11	70.00	28.98	20.51	0.40	0.00	---	Peak
13	15.85	35.90	-34.10	70.00	14.52	20.97	0.41	0.00	---	Peak
14	18.74	36.36	-33.64	70.00	14.38	21.55	0.43	0.00	---	Peak
15	23.18	37.67	-32.33	70.00	15.24	21.99	0.44	0.00	---	Peak
16	27.66	39.50	-30.50	70.00	16.74	22.26	0.50	0.00	---	Peak
17	28.82	39.76	-30.24	70.00	16.92	22.33	0.51	0.00	---	Peak

Note:

1. Remark 12 is transmitter's fundamental signal.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.4.8 Results for Radiated Emissions (30MHz~1GHz)

<b>Final Test Date</b>	May 22, 2012	<b>Test Site No.</b>	03CH07-HY
<b>Temperature</b>	22~24°C	<b>Humidity</b>	47~48%
<b>Test Engineer</b>	KAI Wang	<b>Configurations</b>	Ch.1

Horizontal

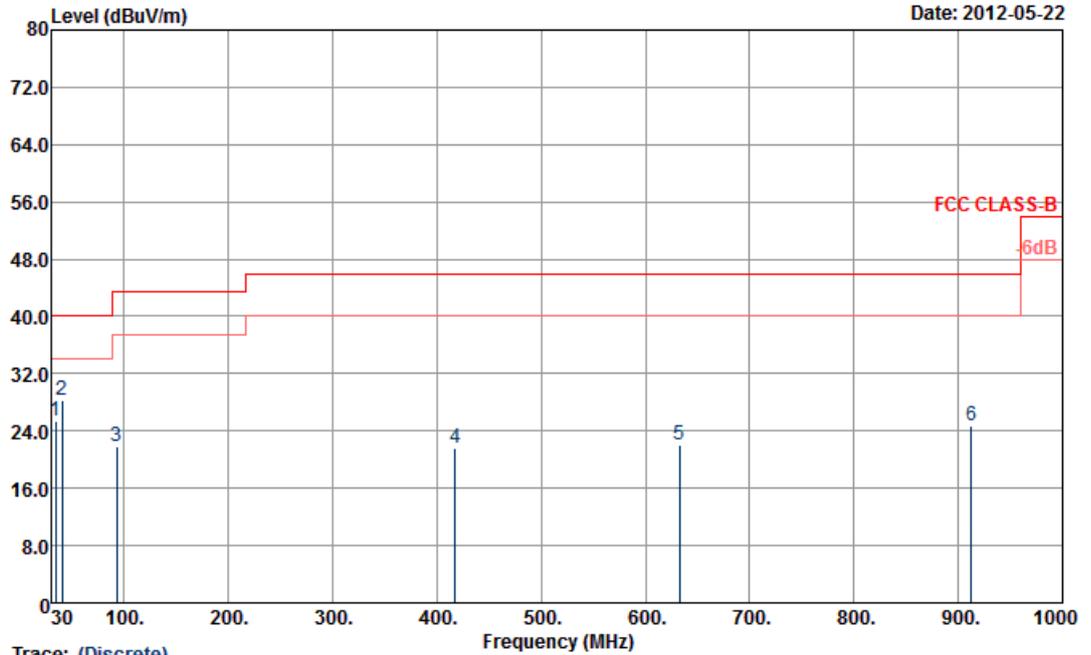


Trace: (Discrete)

Site : 03CH07-HY  
 Condition : FCC CLASS-B 3m LF-ANT(111116) HORIZONTAL  
 Project : FR 240209  
 Mode : Mode 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	34.05	25.31	-14.69	40.00	39.50	17.12	0.57	31.88	---	---	Peak
2	40.53	28.33	-11.67	40.00	46.58	12.90	0.63	31.78	100	132	Peak
3	92.64	21.83	-21.67	43.50	43.57	8.96	0.96	31.66	---	---	Peak
4	417.60	21.58	-24.42	46.00	34.28	16.38	2.20	31.28	---	---	Peak
5	632.50	22.02	-23.98	46.00	29.59	20.06	2.79	30.42	---	---	Peak
6	912.50	24.84	-21.16	46.00	29.01	23.29	3.37	30.83	---	---	Peak

Vertical

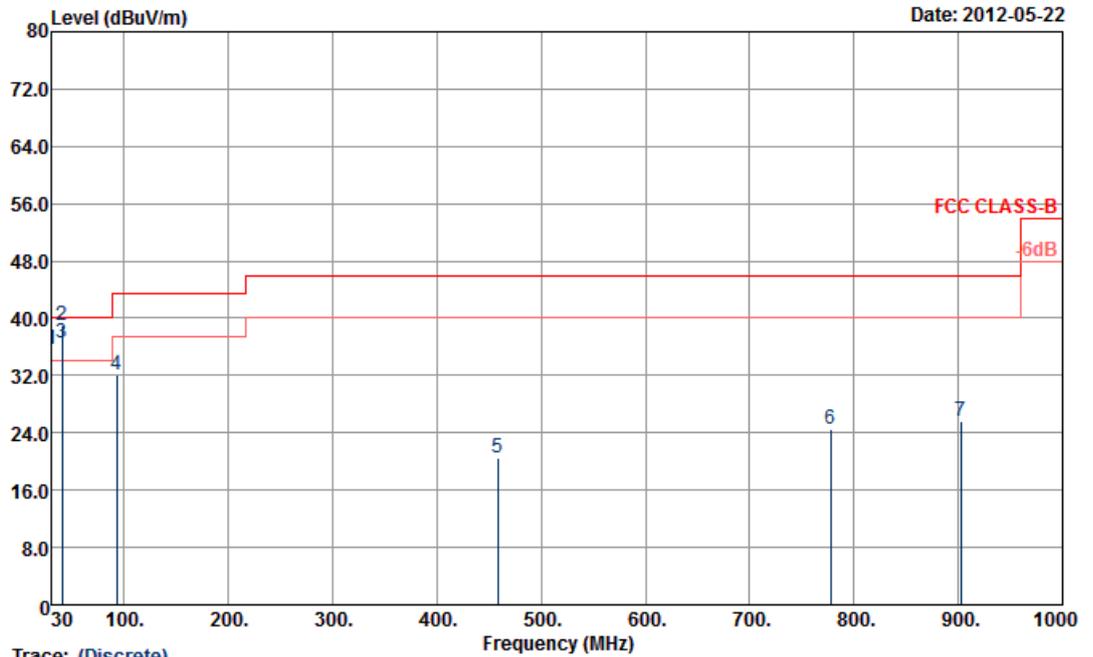

Trace: (Discrete)

Site : 03CH07-HY  
 Condition : FCC CLASS-B 3m LF-ANT(111116) VERTICAL  
 Project : FR 240209  
 Mode : Mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	35.60	-4.40	40.00	46.94	20.00	0.53	31.87	---	---	Peak
2	40.53	38.92	-1.08	40.00	57.17	12.90	0.63	31.78	102	134	Peak
3	40.53	36.65	-3.35	40.00	54.90	12.90	0.63	31.78	102	134	QP
4	92.64	32.15	-11.35	43.50	53.89	8.96	0.96	31.66	---	---	Peak
5	458.20	20.61	-25.39	46.00	32.25	17.21	2.32	31.17	---	---	Peak
6	777.40	24.50	-21.50	46.00	29.96	21.77	3.10	30.33	---	---	Peak
7	902.70	25.59	-20.41	46.00	29.93	23.14	3.35	30.83	---	---	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.5 Frequency Stability Measurement**

**3.5.1 Limit**

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**3.5.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

**3.5.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

**3.5.4 Test Setup Layout**

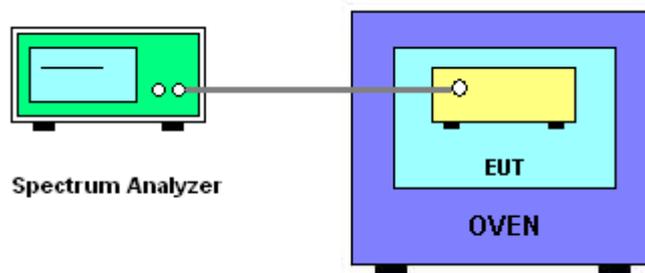

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously un-modulation transmitting mode.

**3.5.7 Test Result of Frequency Stability**

<b>Final Test Date</b>	May 08, 2012	<b>Test Site No.</b>	TH01-KS
<b>Temperature</b>	24~26°C	<b>Humidity</b>	46~47%
<b>Test Engineer</b>	Zhi Lu	<b>Configurations</b>	Ch. 1

**Voltage vs. Frequency Stability**

<b>Voltage(V)</b>	<b>Measurement Frequency (MHz)</b>
3.7	13.559800
3.4	13.559800
4.2	13.559820
Max. Deviation (MHz)	0.000200
Max. Deviation (ppm)	14.7496

**Temperature vs. Frequency Stability**

<b>Temperature (°C)</b>	<b>Measurement Frequency (MHz)</b>
	<b>13.56 MHz</b>
-20	13.559800
-10	13.559880
0	13.559800
10	13.559800
20	13.559840
30	13.559800
40	13.559800
50	13.559820
Max. Deviation (MHz)	0.000200
Max. Deviation (ppm)	14.7496

### **3.6 Antenna Requirements**

#### **3.6.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.6.2 Antenna Connector Construction**

Integrate Antenna (Without any antenna connector).

**4. LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	Jun. 02, 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	N/A	Nov. 16, 2011	Conduction (CO01-KS)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 23, 2011	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 23, 2011	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 23, 2011	Conducted (TH01-KS)

Note: Calibration Interval of instruments listed above is one year.

**For Radiated emissions 9kHz~1GHz**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 22, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 10, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5GHz	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10 ~ 1000MHz 32dB GAIN	Feb. 27, 2012	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/00	9kHz~30 MHz	Jul. 28, 2011	Radiation (03CH07-HY)

Note: Calibration Interval of instruments listed above is one year.

## 5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085
KUNSHAN	ADD : No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL : +86-0512-5790-0158 FAX : +86-0512-5790-0958

## 6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.****EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory for Commodities Inspection  
Accreditation Program for Telecommunication Equipment Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

A handwritten signature in blue ink that reads 'Jay-San Chen'.

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 11, 2011

P1, total 24 pages