

SAR Test Report

Product Name : HSPA/UMTS/GSM/GPRS/EDGE Mobile
Phone with Bluetooth
Model No. : HUAWEI U8850-5/U8850-5
Marketing Name : HUAWEI U8850/U8850/ HUAWEI VISION/
Huawei Vision/ HUAWEI VISION U8850
FCC ID : QISU8850-5

Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang
District, Shenzhen 518129

Date of Receipt : 23/11/2011
Date of Test : 25/11/2011~27/11/2011
Issued Date : 13/12/2011
Report No. : 11BS064R-HP-US-P03V01
Report Version : V2.1

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date: 13/12/2011

Report No: 11BS064R-HP-US-P03V01



Product Name : HSPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth

Applicant : Huawei Technologies Co., Ltd.

Address : Administration Building, Huawei Base, Bantian, Longgang District, Shenzhen 518129

Manufacturer : Huawei Technologies Co., Ltd.

Address : Administration Building, Huawei Base, Bantian, Longgang District, Shenzhen 518129

Model No. : HUAWEI U8850-5/U8850-5

Marketing Name : HUAWEI VISION/ Huawei Vision/ HUAWEI VISION U8850/ UAWEI U8850-5/ U8850-5

FCC ID : QISU8850-5

Brand Name : HUAWEI

EUT Voltage : DC 3.7V

Applicable Standard : FCC Oet65 Supplement C June 2001
IEEE Std. 1528-2003,47CFR § 2.1093

Test Result : Max. SAR Measurement (1g)

Head: 1.050 W/kg

Body: 1.230 W/kg

Performed Location : Quietek Corporation (Linkou Laboratory)
No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.

TEL:+866-2-8601-3788 / FAX:+886-2-8601-3789

Documented By : Alice Ni
(Engineering ADM: Alice Ni)Reviewed By : Robin Wu
(Engineering Supervisor: Robin Wu)Approved By : Marlin Chen
(Engineering Manager: Marlin Chen)

Laboratory Information

We, **QuieTek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	: BSMI, NCC, TAF
Germany	: TUV Rheinland
Norway	: Nemko, DNV
USA	: FCC, NVLAP
Japan	: VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>
The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

**LinKou Testing Laboratory :**

No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

**Suzhou (China) Testing Laboratory :**

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.
TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. EUT Description	5
1.2. Test Environment.....	8
2. SAR Measurement System	9
2.1. DASY5 System Description.....	9
2.1.1. Applications	10
2.1.2. Area Scans	10
2.1.3. Zoom Scan (Cube Scan Averaging)	10
2.1.4. Uncertainty of Inter-/Extrapolation and Averaging	10
2.2. DASY5 E-Field Probe.....	11
2.2.1 Isotropic E-Field Probe Specification.....	11
2.3. Boundary Detection Unit and Probe Mounting Device	12
2.4. DATA Acquisition Electronics (DAE) and Measurement Server	12
2.5. Robot.....	13
2.6. Light Beam Unit.....	13
2.7. Device Holder.....	14
2.8. SAM Twin Phantom.....	14
3. Tissue Simulating Liquid	15
3.1. The composition of the tissue simulating liquid	15
3.2. Tissue Calibration Result.....	16
3.3. Tissue Dielectric Parameters for Head and Body Phantoms.....	18
4. SAR Measurement Procedure	19
4.1. SAR System Validation.....	19
4.1.1. Validation Dipoles	19
4.1.2. Validation Result	20
4.2. SAR Measurement Procedure.....	22
5. SAR Exposure Limits	23
6. Test Equipment List.....	24
7. Measurement Uncertainty	33
8. Conducted Power Measurement	34
9. Test Results.....	37
9.1. SAR Test Results Summary	37
Appendix A. SAR System Validation Data	49
Appendix B. SAR measurement Data	49
Appendix C. Test Setup Photographs & EUT Photographs.....	113
Appendix D. Probe Calibration Data	121
Appendix E. Dipole Calibration Data.....	132
Appendix F. DAE Calibration Data.....	159

1. General Information

1.1. EUT Description

Product Name	HSPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth
Model No.	HUAWEI U8850-5/U8850-5
Marketing Name	HUAWEI VISION/ Huawei Vision/ HUAWEI VISION U8850/ UAWEI U8850-5/ U8850-5
IMEI	862446010004712
Hardware Version	PR2
Software Version	U8850V100R001C00B237SP00
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GPS	
Operate Frequency	1575.42MHz
Type of modulation	BPSK
2G	
Support Band	GSM850/GSM900/DCS1800/PCS1900
GPRS Type	Class B
GPRS Class	Class 10
Tx Frequency Range	GSM 850: 824~849MHz PCS 1900: 1850~1910MHz
Rx Frequency Range	GSM 850: 869~894MHz PCS 1900: 1930~1990MHz
Release Version	GSM: R99
Type of modulation	GMSK for GSM/GPRS; 8PSK for EDGE
Antenna Gain	-0.77dBi for 824~849MHz 1.6dBi for 1850~1910MHz
Max. Output Power (Avg. Power)	GSM850: 32.65 dBm PCS1900: 29.55 dBm
Max. Output Power (Radiated)	GSM850: 30.86 dBm- ERP PCS1900: 30.65 dBm- EIRP
3G	
Support Band	WCDMA Band II/WCDMA BAND V
Frequency Range Tx	WCDMA Band V: 824~849MHz

	WCDMA Band II: 1850~1910MHz
Frequency Range Rx	WCDMA Band V: 869~894MHz WCDMA Band II: 1930~1990MHz
UE Category	HSDPA: Category 10 HSUPA: Category 6
Release Version	UMTS FDD: Rel-6
Type of modulation(Uplink)	QPSK
Antenna Gain	-0.77dBi for 824~849MHz 1.6dBi for 1850~1910MHz
Max. Output Power (Avg. Power)	WCDMA Band II: 23.51dBm WCDMA Band V: 23.47 dBm
Max. Output Power (Radiated)	WCDMA Band II: 23.93 dBm- EIRP WCDMA Band V: 21.45 dBm- ERP
Bluetooth	
Bluetooth Frequency	2402~2480MHz
Bluetooth Version	V2.1 + EDR
Type of modulation	FHSS
Data Rate	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK)
Antenna Gain	0.5dBi
Wi-Fi	
Wi-Fi Frequency	2412~2462MHz
Hotspots Function	YES
Type of modulation	802.11b: DSSS; 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11 Mbps 802.11g: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 65 Mbps
Antenna Gain	0.5dBi
Max. Output Power (Avg. Power)	Wi-Fi: 14.39 dBm
Components	
Headset #1	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co., LTD M/N: MEMD1532A726012
Headset #2	Manufacturer: QUANCHENG ELECTRONIC CO., LTD M/N: MEMD1532A726012
Battery	Brand Name: HUAWEI M/N: HB5K1H

	Rated Voltage and Capacitance: 3.7V/1400mAh
Adapter #1	Manufacturer: SHENZHEN HUNTKEY ELECTRIC CO., LTD M/N: HW-050100U1W Input: 100-240V~50/60Hz 0.2A Output: 5Vdc, 1.0A
Adapter #2	Manufacturer: TECH-POWER INTERNATIONAL CO., LTD. M/N: HW-050100U1W Input: 100-240V~50/60Hz 0.2A Output: 5Vdc, 1.0A


1.2. Test Environment

Ambient conditions in the laboratory:

Items	Required	Actual
Temperature (°C)	18-25	21.5± 2
Humidity (%RH)	30-70	52

2. SAR Measurement System

2.1. DASY5 System Description

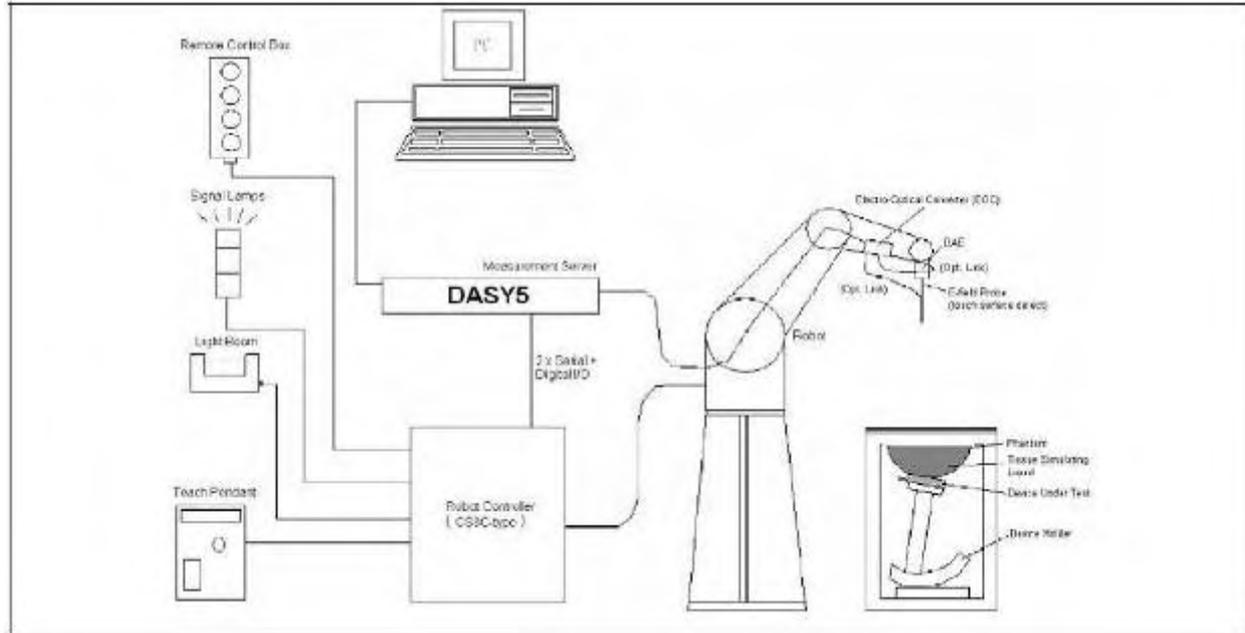

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

2.1.1. Applications

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEEE 1528, OET 65, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383 and others.

2.1.2. Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm^2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

2.1.3. Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m^3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of $7\times 7\times 7$ (5mmx5mmx5mm) providing a volume of 30mm in the X & Y axis, and 30mm in the Z axis.

2.1.4. Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY5 allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x, y, z) = Ae^{-\frac{z}{2a}} \cos^2 \left(\frac{\pi \sqrt{x'^2 + y'^2}}{2 \cdot 5a} \right)$$

$$f_2(x, y, z) = Ae^{-\frac{z}{a}} \frac{a^2}{a^2 + x'^2} \left(3 - e^{-\frac{2z}{a}} \right) \cos^2 \left(\frac{\pi y'}{2 \cdot 3a} \right)$$

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

2.2. DASY5 E-Field Probe


The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO 17025. The calibration data are in Appendix D.

2.2.1. Isotropic E-Field Probe Specification

Model	EX3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 µW/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

2.3. Boundary Detection Unit and Probe Mounting Device

The DASY probes use a precise connector and an additional holder for the probe, consisting of a plastic tube and a flexible silicon ring to center the probe. The connector at the DAE is flexibly mounted and held in the default position with magnets and springs. Two switching systems in the connector mount detect frontal and lateral probe collisions and trigger the necessary software response.

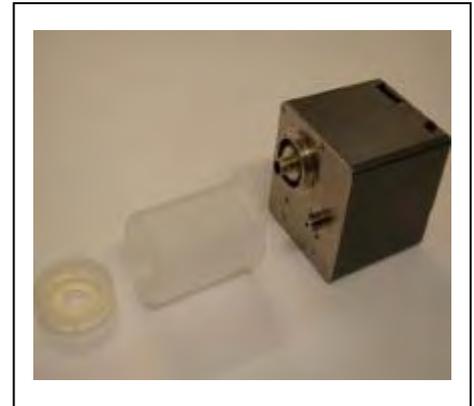

2.4. DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit.

Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chipdisk and 128MB RAM. The necessary circuits for communication with the DAE electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



2.5. Robot

The DASY5 system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY5 system, the CS8C robot controller version from Stäubli is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



2.6. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



2.7. Device Holder

The DASY5 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY5 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



2.8. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

3. Tissue Simulating Liquid

3.1. The composition of the tissue simulating liquid

INGREDIENT (% Weight)	835MHz Head	835MHz Body	1900MHz Head	1900MHz Body	2450MHz Head	2450MHz Body
Water	40.45	52.4	54.90	40.5	46.7	73.2
Salt	1.45	1.40	0.18	0.50	0.00	0.04
Sugar	57.6	45.0	0.00	58.0	0.00	0.00
HEC	0.40	1.00	0.00	0.50	0.00	0.00
Preventol	0.10	0.20	0.00	0.50	0.00	0.00
DGBE	0.00	0.00	44.92	0.00	53.3	26.7

3.2. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using DASY5 Dielectric Probe Kit and Agilent Vector Network Analyzer E5071C

Head Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
835 MHz	Reference result ± 5% window	41.5 39.425 to 43.575	0.92 0.874 to 0.966	N/A
	25-11-2011	40.94	0.89	21.0

Body Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
835 MHz	Reference result ± 5% window	55.2 52.44 to 57.96	0.97 0.92 to 1.02	N/A
	25-11-2011	53.57	0.97	21.0

Head Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
1900 MHz	Reference result ± 5% window	40 38 to 42	1.4 1.33 to 1.47	N/A
	26-11-2011	38.56	1.45	21.0

Body Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
1900 MHz	Reference result ± 5% window	53.3 50.64 to 55.97	1.52 1.44 to 1.60	N/A
	26-11-2011	52.42	1.55	21.0

Head Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
2450MHz	Reference result ± 5% window	39.2 37.24 to 41.16	1.80 1.71 to 1.89	N/A
	27-11-2011	38.64	1.84	21.0

Body Tissue Simulant Measurement				
Frequency [MHz]	Description	Dielectric Parameters		Tissue Temp. [°C]
		ϵ_r	σ [s/m]	
2450MHz	Reference result ± 5% window	52.7 50.07 to 55.34	1.95 1.85 to 2.05	N/A
	27-11-2011	52.29	2.00	21.0

3.3. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

4. SAR Measurement Procedure

4.1. SAR System Validation

4.1.1. Validation Dipoles

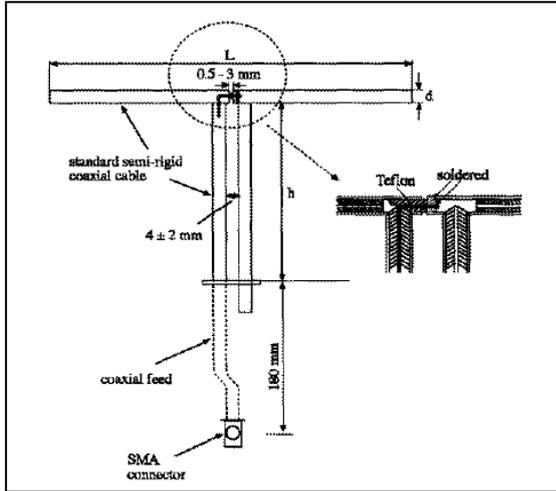

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
835MHz	161.0	89.9	3.6
1900MHz	68.0	39.5	3.6
2450MHz	51.5	30.4	3.6

4.1.2. Validation Result

System Performance Check at 835MHz &1900MHz for Head				
Validation Kit: ASL-D-835				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
835 MHz	Reference result ± 10% window	9.28 8.352 to 10.208	6.04 5.436 to 6.644	N/A
	25-11-2011	9.24	6.00	21.0
Validation Kit: ASL-D-1900				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
1900 MHz	Reference result ± 10% window	38.6 34.74 to 42.46	20.0 18 to 22	N/A
	26-11-2011	42.00	21.44	21.0
Note: All SAR values are normalized to 1W forward power.				
System Performance Check at 835MHz &1900MHz for Body				
Validation Kit: ASL-D-835				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
835 MHz	Reference result ± 10% window	9.84 8.856 to 10.824	6.44 5.796 to 7.084	N/A
	25-11-2011	9.64	6.24	21.0
Validation Kit: ASL-D-1900				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
1900 MHz	Reference result ± 10% window	40.4 34.36 to 44.44	21.7 19.53 to 23.87	N/A
	26-11-2011	42.40	21.64	21.0
Note: All SAR values are normalized to 1W forward power.				

System Performance Check at 2450MHz for Head				
Validation Dipole: D2450V2				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
2450 MHz	Reference result ± 10% window	51.2 46.08 to 56.32	23.9 21.51 to 26.29	N/A
	27-11-2011	52.40	23.36	21.0
System Performance Check at 2450MHz for Body				
Validation Dipole: D2450V2				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp. [°C]
2450 MHz	Reference result ± 10% window	52 46.8 to 57.2	24.4 21.96 to 26.84	N/A
	27-11-2011	51.20	23.80	21.0
Note: All SAR values are normalized to 1W forward power.				

4.2. SAR Measurement Procedure

The DASY5 calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ : represents the simulated tissue conductivity

ρ : represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm^2) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm^3).

5. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg
Spatial Average SAR (whole body)	0.08 W/kg
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00 W/kg

6. Test Equipment List


Instrument	Manufacturer	Model No.	Serial No.	Last Calibration	Next Calibration
Stäubli Robot TX60L	Stäubli	TX60L	F09/5BL1A1/A06	May. 2009	only once
Controller	Speag	CS8c	N/A	May. 2009	only once
Aprèl Reference Dipole 835Mhz	Aprèl	ALS-D-835	QTK-315	May. 2010	May. 2012
Aprèl Reference Dipole 1900Mhz	Aprèl	ALS-D-1900	QTK-318	May. 2010	May. 2012
Reference Dipole 2450Mhz	Speag	D2450V2	839	Mar. 2010	Mar. 2012
SAM Twin Phantom	Speag	QD000 P40 CA	Tp 1515	N/A	N/A
Device Holder	Speag	N/A	N/A	N/A	N/A
Data Acquisition Electronic	Speag	DAE4	1207	May. 2011	May. 2012
E-Field Probe	Speag	EX3DV4	3698	Jul. 2011	Jul. 2012
SAR Software	Speag	DASY52	Version 52.6.2	N/A	N/A
Aprèl Dipole Spaccer	Aprèl	ALS-DS-U	QTK-295	N/A	N/A
Power Amplifier	Mini-Circuit	ZHL-42	D051404-20	N/A	N/A
Directional Coupler	Agilent	778D-012	50550	N/A	N/A
Universal Radio Communication Tester	R&S	CMU 200	104846	May. 2011	May. 2012
Vector Network	Anritsu	MS4623B	992801	Jul. 2011	Jul. 2012
Signal Generator	Anritsu	MG3692A	042319	Jun. 2011	Jun. 2012
Power Meter	Anritsu	ML2487A	6K00001447	Nov. 2011	Nov. 2012
Wide Bandwidth Sensor	Anritsu	MA2491	034457	Nov. 2011	Nov. 2012

Note:


Per KDB 450824 D02 requirements for dipole calibration, the following are recommended FCC procedures for SAR dipole calibration.

1. After a dipole is damaged and properly repaired to meet required specifications
2. When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions;
3. When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification


	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	835	Head	-40.3	Within 20%	2011.06.20
Measurement	835	Head	-39.37		

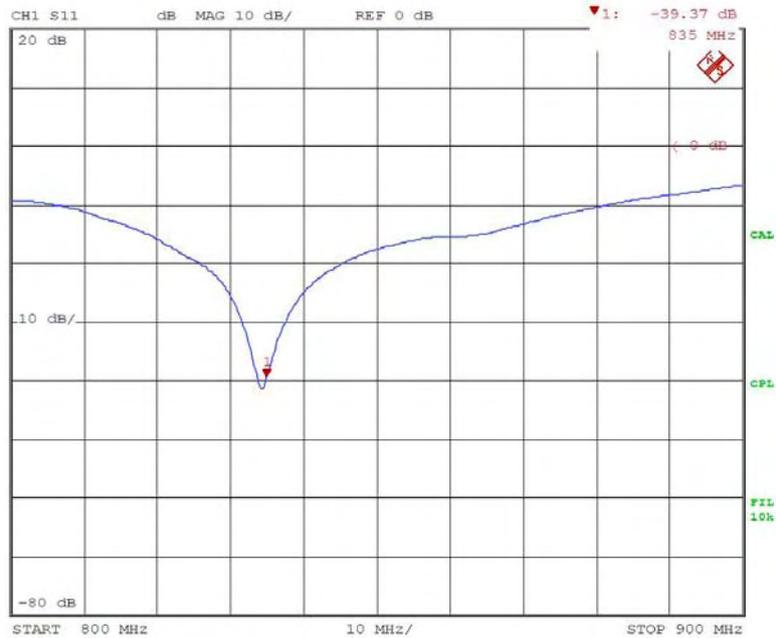


	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	835	Body	-24.8	Within 20%	2011.06.20
Measurement	835	Body	-26.21		

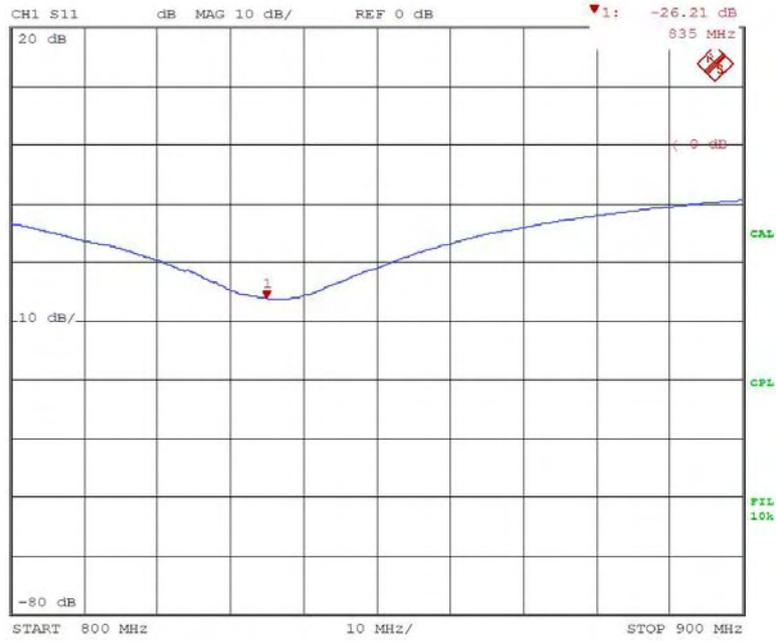


	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	1900	Head	-23.9	Within 20%	2011.06.20
Measurement	1900	Head	-25.58		

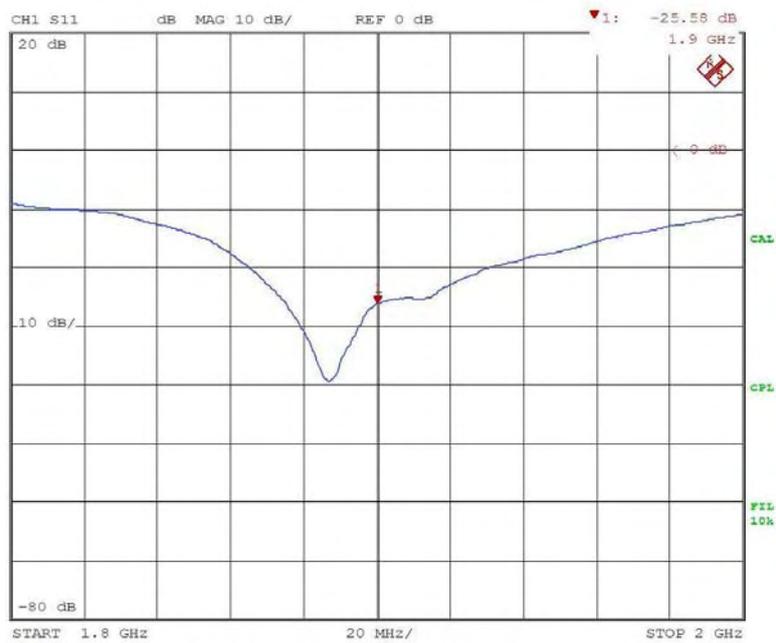


	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	1900	Body	-20.3	Within 20%	2011.06.20
Measurement	1900	Body	-21.38		

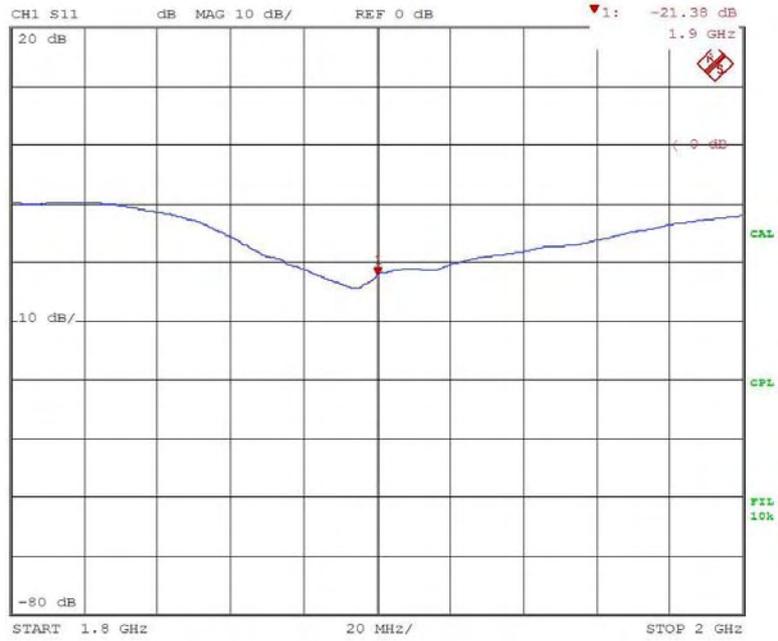

	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	2450	Head	-29.4	Within 20%	2011.06.20
Measurement	2450	Head	-31.2		

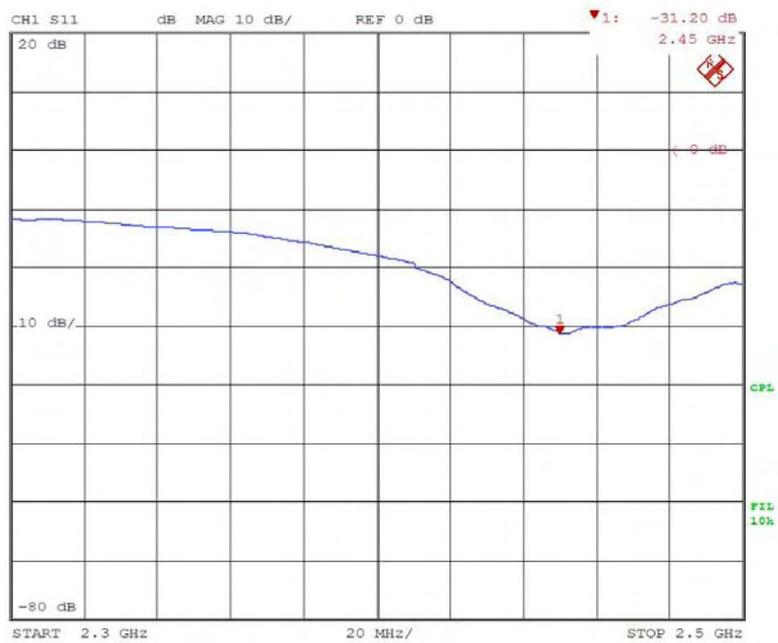


	Frequency	Tissue	Return loss	Limit	Verified Date
Calibration	2450	Body	-40.8	Within 20%	2011.06.20
Measurement	2450	Body	-42.22		

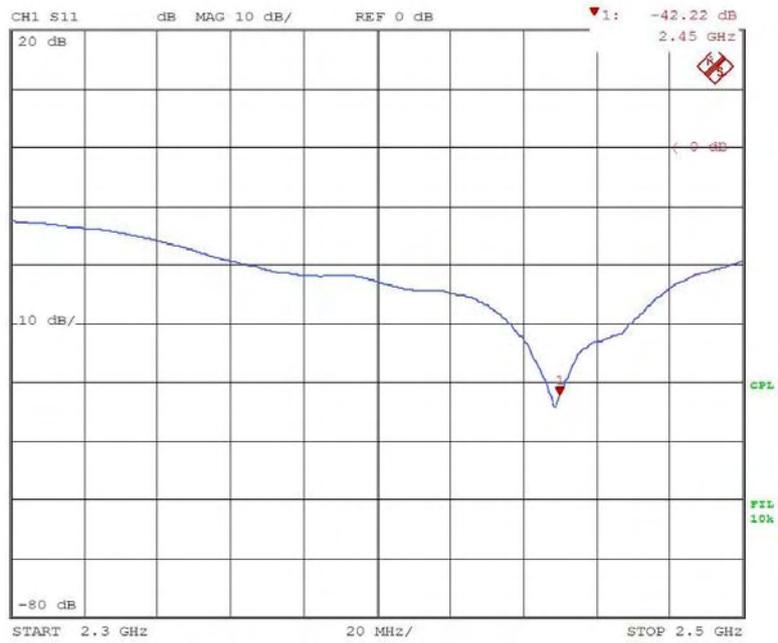


- When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement


	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	835	Head	49.2	Within 5 Ω	2011.06.20
Measurement	835	Head	48.23		

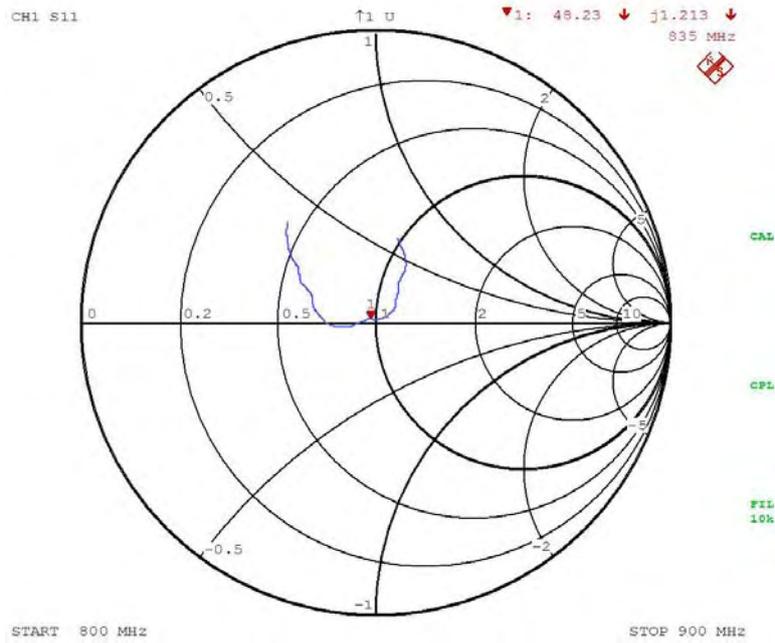


	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	835	Body	44.8	Within 5Ω	2011.06.20
Measurement	835	Body	44.17		

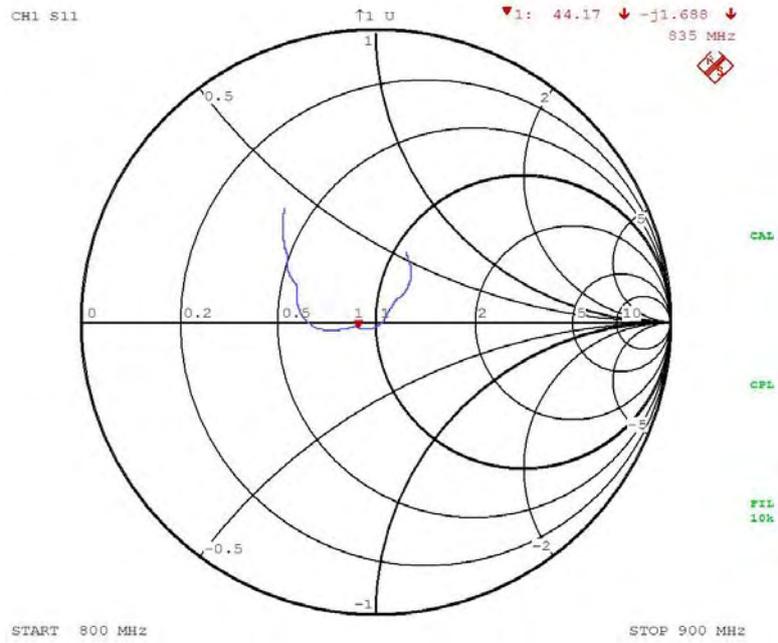


	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	1900	Head	49.2	Within 5Ω	2011.06.20
Measurement	1900	Head	49.22		

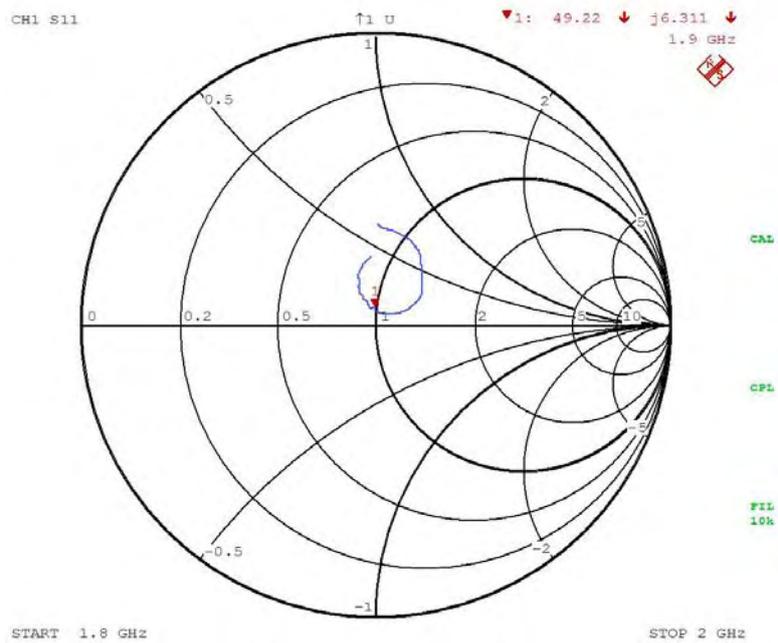


	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	1900	Body	45.2	Within 5Ω	2011.06.20
Measurement	1900	Body	45.16		

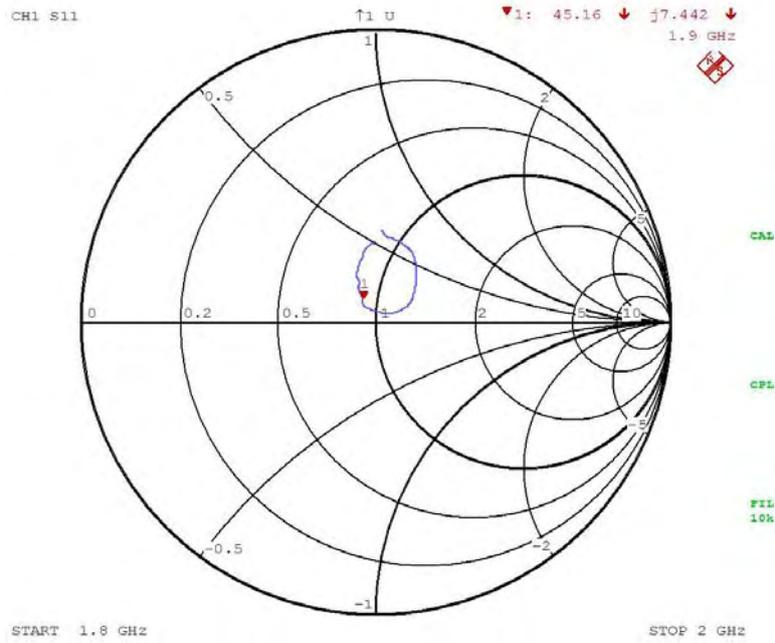

	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	2450	Head	53.5	Within 5Ω	2011.06.20
Measurement	2450	Head	53.79		

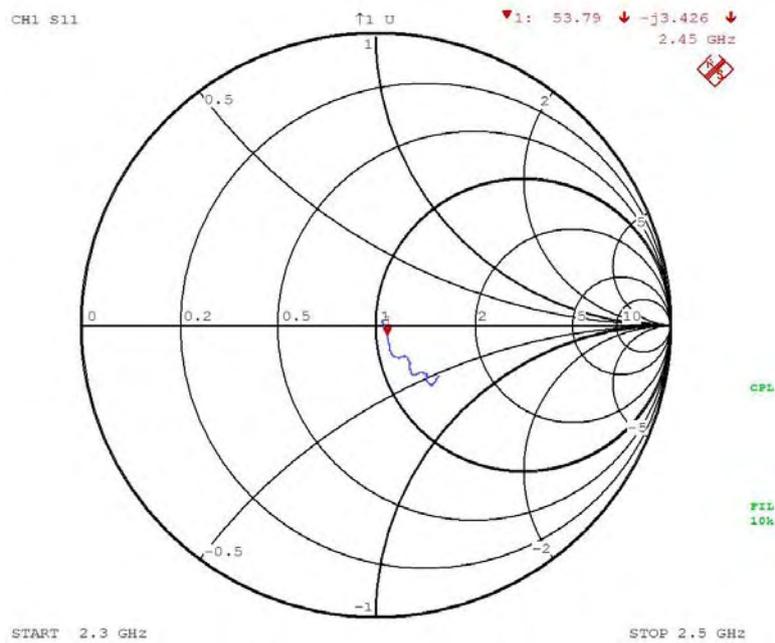

	Frequency	Tissue	Impedance	Limit	Verified Date
Calibration	2450	Body	50Ω	Within 5Ω	2011.06.20
Measurement	2450	Body	50.36Ω		

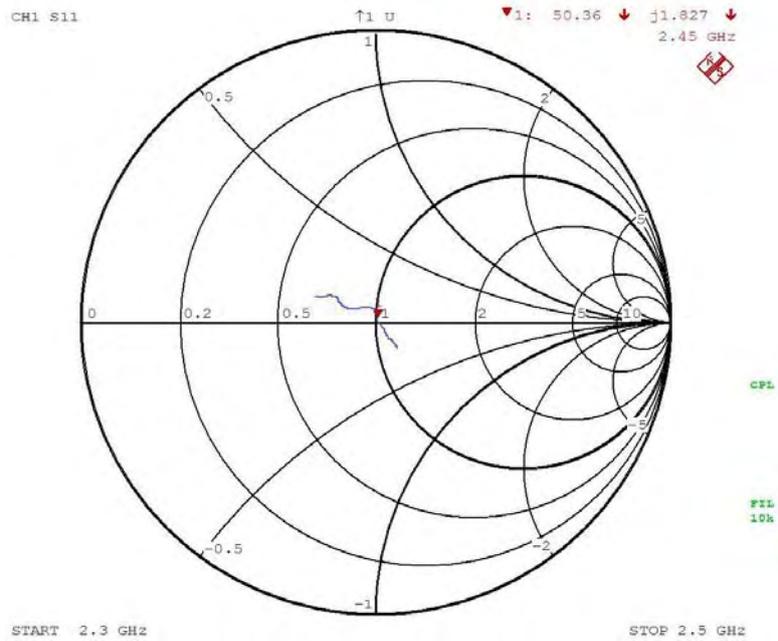

7. Measurement Uncertainty

DASY5 Uncertainty								
Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram / 10 gram.								
Error Description	Uncert. value	Prob. Dist.	Div.	(c) 1g	(c) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) V _{eff}
Measurement System								
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial Isotropy	±4.7%	R	√3	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	√3	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	±0.8%	R	√3	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
RF Ambient Reflections	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	√3	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	√3	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	√3	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom Uncertainty	±4.0%	R	√3	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	√3	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	√3	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±10.9%	±10.7%	387
Expanded STD Uncertainty						±21.9%	±21.4%	

8. Conducted Power Measurement

Mode	Frequency (MHz)	Avg. Burst Power (dBm)	Duty Cycle Factor (dB)	Frame Power (dBm)
Maximum Power				
GSM850	824.2	32.65	-9	23.65
	836.4	32.28	-9	23.18
	848.8	32.41	-9	23.41
GPRS850(1 Slot)	824.2	32.30	-9	23.30
	836.4	32.19	-9	23.29
	848.8	32.40	-9	23.40
GPRS850(2 Slot)	824.2	30.58	-6	24.58
	836.4	30.70	-6	24.70
	848.8	30.52	-6	24.52
EGPRS850(1 Slot)	824.2	26.16	-9	17.16
	836.4	26.08	-9	17.08
	848.8	25.96	-9	16.96
EDGE850 (2slot)	824.2	25.98	-6	19.98
	836.4	25.90	-6	19.90
	848.8	25.81	-6	19.81
PCS1900	1850.2	29.17	-9	20.17
	1880.0	29.36	-9	20.36
	1909.8	29.55	-9	20.55
GPRS1900(1 Slot)	1850.2	29.07	-9	20.07
	1880.0	29.18	-9	20.18
	1909.8	29.37	-9	20.37
GPRS1900(2 Slot)	1850.2	28.32	-6	22.32
	1880.0	28.06	-6	22.06
	1909.8	28.10	-6	22.10
EDGE1900(1 Slot)	1850.2	25.24	-9	16.24
	1880.0	25.22	-9	16.22
	1909.8	25.40	-9	16.40
EDGE 1900 (2slot)	1850.2	25.02	-6	19.02
	1880.0	24.88	-6	18.88
	1909.8	25.30	-6	19.30

Note : According to the output value listed above, the EDGE mode was not determined for SAR testing, refer to KDB 941225.

Mode	3GPP Subtest	Band II (1900MHz) Channel						MPR
		Conducted Power (dBm)			EIRP (dBm)			
		9262	9400	9538	9262	9400	9538	
WCDMA R99	1	23.38	23.01	23.51	23.28	22.79	22.86	N/A
Rel5 HSDPA	1	23.42	23.12	23.22	23.93	23.15	23.09	0
	2	23.39	23.07	23.15	---	---	---	0
	3	22.97	22.48	22.85	---	---	---	0.5
	4	22.93	22.37	22.76	---	---	---	0.5
Rel6 HSUPA	1	23.26	23.11	23.30	24.08	22.79	22.76	0.0
	2	21.27	21.26	21.43	---	---	---	2.0
	3	22.02	21.87	22.19	---	---	---	1.0
	4	21.19	21.20	21.47	---	---	---	2.0
	5	23.11	23.08	23.25	---	---	---	0.0
Mode	3GPP Subtest	Band V (850MHz) Channel						MPR
		Conducted Power (dBm)			ERP (dBm)			
		4132	4182	4233	4132	4182	4233	
WCDMA R99	1	23.51	23.17	23.06	20.45	19.29	19.08	N/A
Rel5 HSDPA	1	23.28	23.25	23.12	21.19	20.30	20.90	0
	2	23.20	23.21	23.10	---	---	---	0
	3	22.70	22.82	22.83	---	---	---	0.5
	4	22.64	22.74	22.80	---	---	---	0.5
Rel6 HSUPA	1	23.33	23.26	23.15	21.10	20.00	20.79	0.0
	2	21.41	21.16	21.22	---	---	---	2.0
	3	22.54	22.19	22.03	---	---	---	1.0
	4	21.39	21.08	21.30	---	---	---	2.0
	5	23.30	23.18	23.11	---	---	---	0.0

Note : According to the output value listed above, the HSDPA/HSUPA mode were not determined for SAR testing, refer to KDB 941225.

WLAN output power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)
802.11b	11	01	2412	19.24	14.20
		06	2437	19.26	14.32
		11	2462	19.28	14.39
802.11g	6	01	2412	19.40	12.48
		06	2437	19.53	12.63
		11	2462	19.55	12.69
802.11n (20MHz)	6.5	01	2412	15.68	8.85
		06	2437	15.70	8.96
		11	2462	15.72	9.07

Note : According to the KDB 248227. SAR is not required for 802.11g/n channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels

9. Test Results

9.1. SAR Test Results Summary

9.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE1528, and Body SAR was performed with the device 10mm from the phantom. Body SAR was also performed with the headset attached and without.

9.1.2. Body SAR with Headset

Testing with the headset was performed at the position and channels that resulted in the highest body SAR. This testing was performed with GPRS transmitting with 2 uplink timeslots. This operation mode represents the maximum SAR situation, when downloading data via GPRS and listening to music by headset. SAR without the headset attached was significantly higher than with the headset, and also was verified several times and confirmed, so the final test data shown were the worst case without headset.

In the Body SAR test result table, body-worn means display of device down, body-front means display of device up.

9.1.3. GPRS Operation Mode

This is a multislots class 10 device capable of 2 uplink timeslots. During the head SAR test, the device was transmitting with 1 uplink timeslot; during the body SAR test, it was transmitting with 2 uplink timeslots. Additionally, this device doesn't support dual transfer mode (DTM).

9.1.4. Simultaneous Transmission Configure

Configure mode	Bluetooth	WWAN	WLAN
1	X	X	
2		X	X

Note : Bluetooth output power is 2.47dBm. Referring to KDB 648474

- 1, The power is less than Pref.
- 2, 9cm away from WWAN antenna.
- 3, Bluetooth shares the same antenna with WLAN, they cannot transmit simultaneously.

Therefore, standalone SAR and simultaneous SAR for Bluetooth is not required.

9.1.5. Simultaneous Transmission SAR Analysis

Reference document: KDB 447498 and KDB 648474, KDB 248227.

Head Max SAR value and the sum of the 1-g SAR for WLAN & WWAN.

Max 1-g SAR (W/kg)		Σ 1-g SAR (W/kg)
WLAN	WWAN	
0.187	1.157	1.344

Body SAR value and the sum of the 1-g SAR for WLAN & WWAN.

Max 1-g SAR (W/kg)		Σ 1-g SAR (W/kg)
WLAN	WWAN	
0.108	1.415	1.523

Conclusion:

Simultaneous Transmission
WLAN & WWAN

Require for Simultaneous Transmission SAR with Volume Scans
No (The sum of the 1-g SAR is < 1.6 W/kg)

9.1.6. Hot Spot test requirement

Referring to KDB 941225 D06 v01, the EUT size > 9cm x 5cm, thus, test separation of 10 mm is required. GSM/WCDMA antenna is less than 25 mm away from mobile phone bottom and side, WLAN antenna is less than 25 mm away from mobile phone top and left side, so SAR should be measured these sides.

9.1.7. Test Result

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: GSM850							
Test Position Head	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Left-Cheek	Fixed	128	824.2	23.65	--	--	1.6
Left-Cheek	Fixed	189	836.4	23.18	0.160	0.796	1.6
Left-Cheek	Fixed	251	848.8	23.41	--	--	1.6
Left-Tilted	Fixed	189	836.4	23.18	0.048	0.487	1.6
Right-Cheek	Fixed	128	824.2	23.65	--	--	1.6
Right-Cheek	Fixed	189	836.4	23.18	0.033	0.639	1.6
Right-Cheek	Fixed	251	848.8	23.41	--	--	1.6
Right-Tilted	Fixed	189	836.4	23.18	0.053	0.491	1.6
Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225.							
Note 2: According to tune up procedure, the max SAR scaled value is 0.961W/kg.							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: GSM850							
Test Position Body (1cm Gap)	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Body-worn	Fixed	128	824.2	23.65	--	--	1.6
Body-worn	Fixed	189	836.4	23.18	0.182	0.714	1.6
Body-worn	Fixed	251	848.8	23.41	--	--	1.6
Test Mode: GPRS850-2slot							
Body-worn	Fixed	128	824.2	24.58	--	--	1.6
Body-worn	Fixed	189	836.4	24.70	-0.149	0.791	1.6
Body-worn	Fixed	251	848.8	24.52	--	--	1.6
Body-front	Fixed	189	836.4	24.70	-0.052	0.575	1.6
Body-worn (With Headset)	Fixed	189	836.4	24.70	0.012	0.689	1.6
Body-bottom	Fixed	189	836.4	24.70	-0.185	0.131	1.6
Body-right side	Fixed	189	836.4	24.70	-0.044	0.430	1.6
Body-left side	Fixed	189	836.4	24.70	-0.186	0.492	1.6
<p>Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225.</p> <p>Note 2: GSM antenna is less than 25 mm away from mobile phone bottom and side, so that should be tested, refer to KDB 941225.</p> <p>Note 3: According to tune up procedure, the max SAR scaled value is 0.862W/kg.</p>							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: PCS1900							
Test Position Head	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Left-Cheek	Fixed	512	1850.2	20.17	--	--	1.6
Left-Cheek	Fixed	661	1880.0	20.36	-0.052	0.429	1.6
Left-Cheek	Fixed	810	1909.8	20.55	--	--	1.6
Left-Tilted	Fixed	661	1880.0	20.36	-0.086	0.312	1.6
Right-Cheek	Fixed	512	1850.2	20.17	--	--	1.6
Right-Cheek	Fixed	661	1880.0	20.36	0.094	0.774	1.6
Right-Cheek	Fixed	810	1909.8	20.55	--	--	1.6
Right-Tilted	Fixed	661	1880.0	20.36	-0.007	0.248	1.6
Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225.							
Note 2: According to tune up procedure, the max SAR scaled value is 0.897W/kg.							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: PCS1900							
Test Position Body (1cm Gap)	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Body-worn	Fixed	512	1850.2	20.17	--	--	1.6
Body-worn	Fixed	661	1880.0	20.36	0.134	0.772	1.6
Body-worn	Fixed	810	1909.8	20.55	--	--	1.6
Test Mode: GPRS1900-2slot							
Body-worn	Fixed	512	1850.2	22.32	-0.181	1.210	1.6
Body-worn	Fixed	661	1880.0	22.06	-0.147	1.110	1.6
Body-worn	Fixed	810	1909.8	22.10	0.139	0.958	1.6
Body-front	Fixed	661	1880.0	22.06	0.052	0.808	1.6
Body-worn (With Headset)	Fixed	661	1880.0	22.06	-0.186	1.040	1.6
Body-bottom	Fixed	661	1880.0	22.06	-0.198	0.305	1.6
Body-right side	Fixed	661	1880.0	22.06	-0.196	0.324	1.6
Body-left side	Fixed	661	1880.0	22.06	0.019	0.125	1.6
<p>Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225.</p> <p>Note 2: GSM antenna is less than 25 mm away from mobile phone bottom and side, so that should be tested, refer to KDB 941225.</p> <p>Note 3: According to tune up procedure, the max SAR scaled value is 1.415W/kg.</p>							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: WCDMA Band II							
Test Position Head	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Left-Cheek	Fixed	9262	1852.4	23.38	--	--	1.6
Left-Cheek	Fixed	9400	1880.0	23.01	-0.025	0.534	1.6
Left-Cheek	Fixed	9538	1907.6	23.51	--	--	1.6
Left-Tilt	Fixed	9400	1880.0	23.01	0.029	0.375	1.6
Right-Cheek	Fixed	9262	1852.4	23.38	-0.104	1.050	1.6
Right-Cheek	Fixed	9400	1880.0	23.01	0.080	0.884	1.6
Right-Cheek	Fixed	9538	1907.6	23.51	0.002	0.868	1.6
Right-Tilt	Fixed	9400	1880.0	23.01	0.038	0.298	1.6
Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225. Note 2: According to tune up procedure, the max SAR scaled value is 1.157W/kg.							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: WCDMA Band II							
Test Position Body (1cm Gap)	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Body-worn	Fixed	9262	1852.4	23.38	-0.128	1.230	1.6
Body-worn	Fixed	9400	1880.0	23.01	-0.006	1.100	1.6
Body-worn	Fixed	9538	1907.6	23.51	-0.060	0.994	1.6
Body-front	Fixed	9400	1880.0	23.01	0.197	0.787	1.6
Body- worn (With Headset)	Fixed	9400	1880.0	23.01	0.171	1.070	1.6
Body-bottom	Fixed	9400	1880.0	23.01	-0.050	0.345	1.6
Body-right side	Fixed	9400	1880.0	23.01	0.172	0.313	1.6
Body-left side	Fixed	9400	1880.0	23.01	0.003	0.117	1.6
<p>Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225.</p> <p>Note 2: WCDMA antenna is less than 25 mm away from mobile phone bottom and side, so that should be tested, refer to KDB 941225.</p> <p>Note 3: According to tune up procedure, the max SAR scaled value is 1.355W/kg.</p>							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: WCDMA Band V							
Test Position Head	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Left-Cheek	Fixed	4132	826.4	23.51	--	--	1.6
Left-Cheek	Fixed	4180	836.0	23.17	-0.126	0.694	1.6
Left-Cheek	Fixed	4233	846.6	23.06	--	--	1.6
Left-Tilt	Fixed	4180	836.0	23.17	-0.008	0.408	1.6
Right-Cheek	Fixed	4132	826.4	23.51	--	--	1.6
Right-Cheek	Fixed	4180	836.0	23.17	0.060	0.573	1.6
Right-Cheek	Fixed	4233	846.6	23.06	--	--	1.6
Right-Tilt	Fixed	4180	836.0	23.17	0.117	0.415	1.6
Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225. Note 2: According to tune up procedure, the max SAR scaled value is 0.802W/kg.							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: WCDMA Band V							
Test Position Body (1cm Gap)	Antenna Position	Frequency		Frame Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Body-worn	Fixed	4132	826.4	23.51	--	--	1.6
Body-worn	Fixed	4180	836.0	23.17	0.020	0.678	1.6
Body-worn	Fixed	4233	846.6	23.06	--	--	1.6
Body-front	Fixed	4180	836.0	23.17	0.013	0.528	1.6
Body-worn (With Headset)	Fixed	4180	836.0	23.17	-0.063	0.577	1.6
Body-bottom	Fixed	4180	836.0	23.17	-0.071	0.074	1.6
Body-right side	Fixed	4180	836.0	23.17	-0.007	0.427	1.6
Body-left side	Fixed	4180	836.0	23.17	0.032	0.472	1.6
<p>Note 1: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional, refer to KDB 9412225.</p> <p>Note 2: WCDMA antenna is less than 25 mm away from mobile phone bottom and side, so that should be tested, refer to KDB 941225.</p> <p>Note 3: According to tune up procedure, the max SAR scaled value is 0.784W/kg.</p>							

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: 802.11b							
Test Position Head	Antenna Position	Frequency		Average Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Left-Cheek	Fixed	1	2412	14.20	--	--	1.6
Left-Cheek	Fixed	6	2437	14.32	--	--	1.6
Left-Cheek	Fixed	11	2462	14.39	-0.036	0.103	1.6
Right-Cheek	Fixed	1	2412	14.20	--	--	1.6
Right-Cheek	Fixed	6	2437	14.32	--	--	1.6
Right-Cheek	Fixed	11	2462	14.39	0.164	0.187	1.6

Note: When the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required, refer to KDB 447498.

SAR MEASUREMENT							
Ambient Temperature (°C): 21.5 ±2				Relative Humidity (%): 52			
Liquid Temperature (°C): 21.0 ±2				Depth of Liquid (cm):>15			
Product: Mobile Phone							
Test Mode: 802.11b							
Test Position Body (1cm Gap)	Antenna Position	Frequency		Average Power (dBm)	Power Drift (<±0.2)	SAR 1g (W/kg)	Limit (W/kg)
		Channel	MHz				
Body-worn	Fixed	1	2412	14.20	--	--	1.6
Body-worn	Fixed	6	2437	14.32	--	--	1.6
Body-worn	Fixed	11	2462	14.39	0.077	0.080	1.6
Body-front	Fixed	11	2462	14.39	0.184	0.034	1.6
Body-top	Fixed	11	2462	14.39	0.078	0.067	1.6
Body-left side	Fixed	11	2462	14.39	-0.140	0.108	1.6
<p>Note 1: When the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required, refer to KDB 447498.</p> <p>Note 2: WLAN antenna is less than 25 mm away from mobile phone top and left side, so that should be tested, refer to KDB 941225.</p>							

Appendix A. SAR System Validation Data

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

System Check Head 835MHz

DUT: Dipole 835 MHz; Type: ALS-D-835-S-2

Communication System: CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1;

Frequency: 835 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/System Check GSM850 Head/Area Scan (6x19x1): Measurement grid: dx=10mm, dy=10mm, Maximum value of SAR (measured) = 2.34 mW/g

Configuration/System Check GSM850 Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm, Reference Value = 52.9 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.31 mW/g; SAR(10 g) = 1.5 mW/g Maximum value of SAR (measured) = 2.49 mW/g

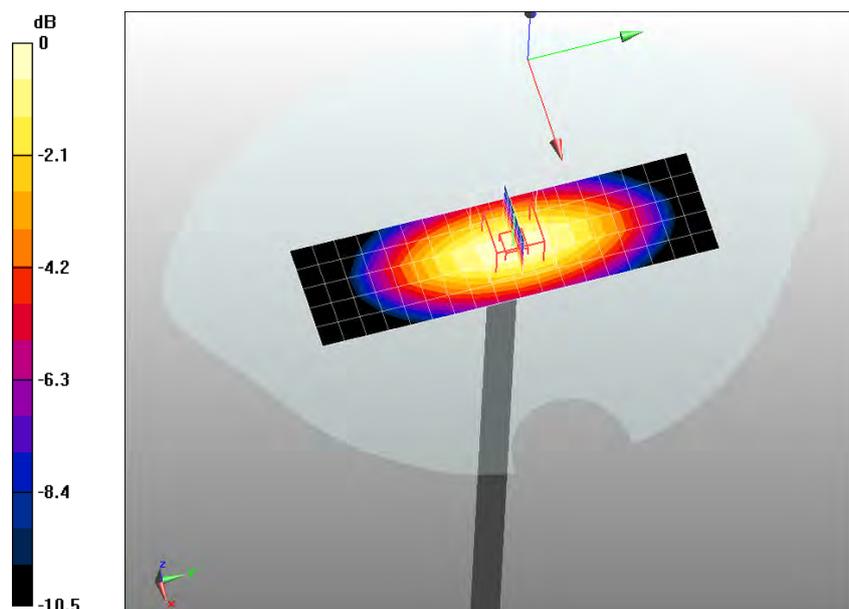

0 dB = 2.49mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

System Check Body 835MHz

DUT: Dipole 835 MHz; Type: ALS-D-835-S-2

Communication System: CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1;

Frequency: 835 MHz; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/System Check GSM835 Body/Area Scan (8x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.49 mW/g

Configuration/System Check GSM835 Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm, Reference Value = 51.5 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.56 mW/g Maximum value of SAR (measured) = 2.6 mW/g

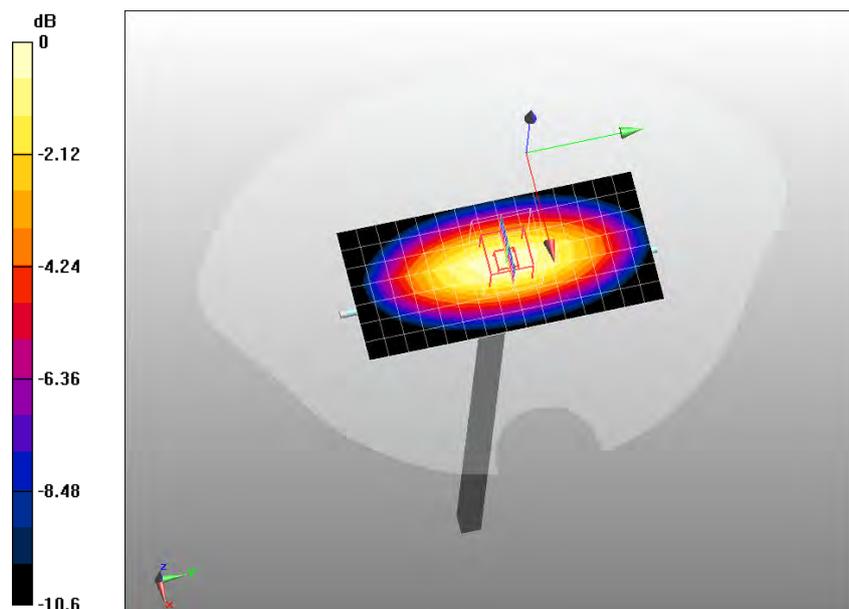

0 dB = 2.6mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

System Check Head 1900MHz

DUT: Dipole 1900 MHz; Type: ALS-D-1900-S-2

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle: 1:1;

Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/System Check PCS1900 Head/Area Scan (6x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11 mW/g

Configuration/System Check PCS1900 Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm, Reference Value = 90.8 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.36 mW/g Maximum value of SAR (measured) = 11.9 mW/g

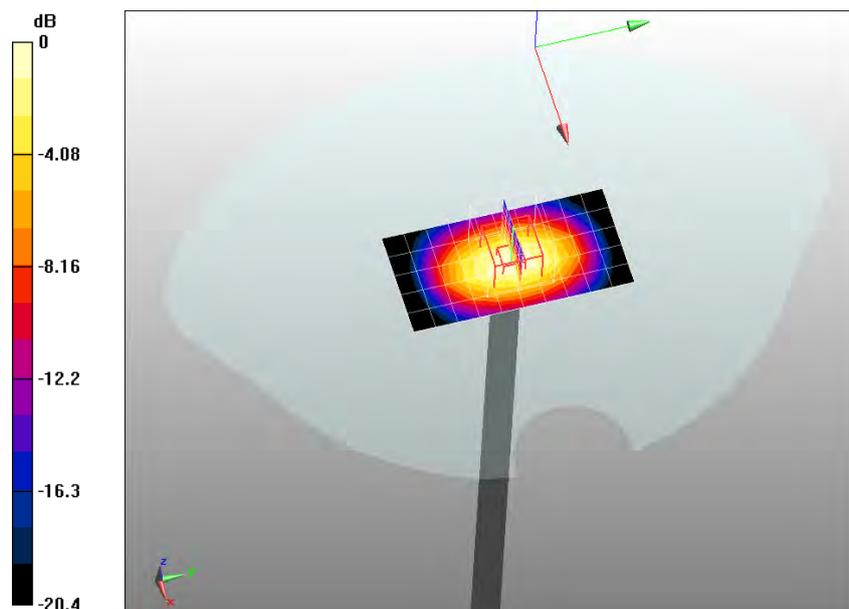

0 dB = 11.9mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

System Check Body 1900MHz

DUT: Dipole 1900 MHz; Type: ALS-D-1900-S-2

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle: 1:1;

Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/System Check PCS1900 Body/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11.9 mW/g

Configuration/System Check PCS1900 Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm, Reference Value = 87.6 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 19.9 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.41 mW/g Maximum value of SAR (measured) = 11.9 mW/g

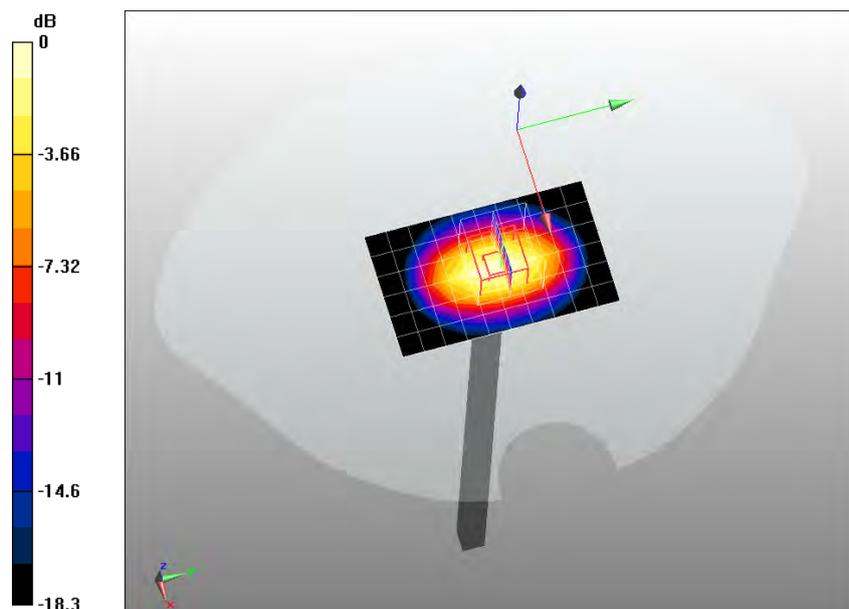

0 dB = 11.9mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

System Check Head 2450MHz

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1;

Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.51, 6.51, 6.51); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/Head 2450MHz/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.3 mW/g

Configuration/Head 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm, Reference Value = 89.6 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 5.84 mW/g Maximum value of SAR (measured) = 14.8 mW/g

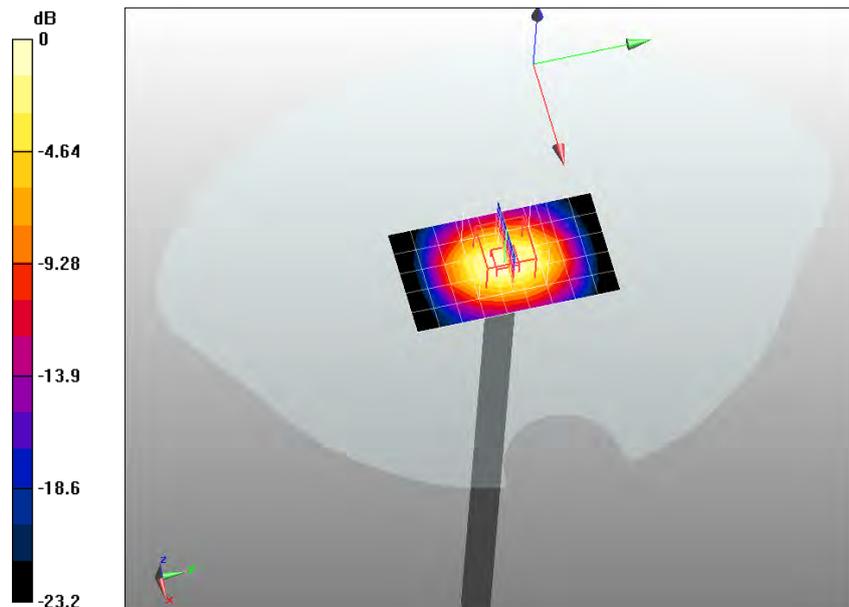

0 dB = 14.8mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

System Check Body 2450MHz

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1;

Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section ; Input Power=250mW

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.6, 6.6, 6.6); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/Body 2450MHz/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13 mW/g

Configuration/Body 2450MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm, Reference Value = 85.6 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.95 mW/g Maximum value of SAR (measured) = 14.8 mW/g

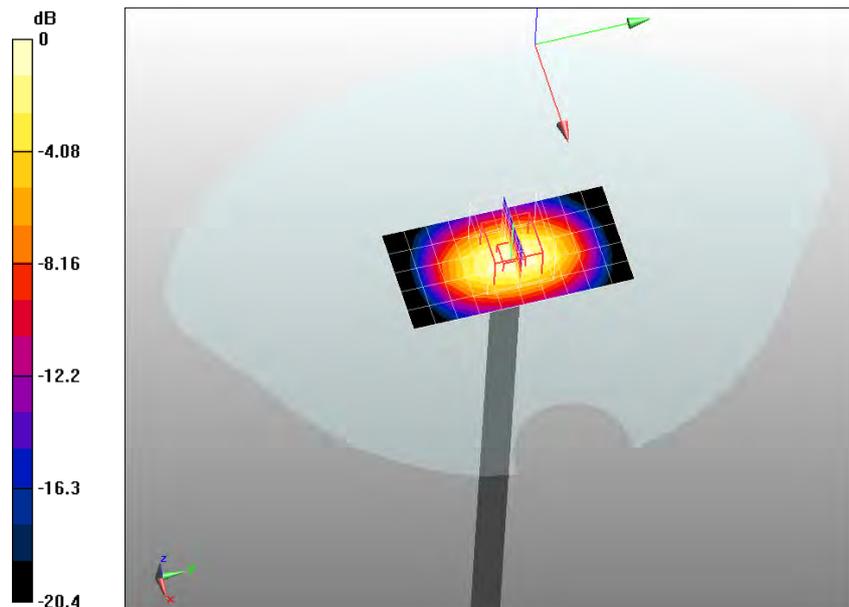

0 dB = 14.8mW/g

Appendix B. SAR measurement Data

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GSM850 Mid Touch-Left

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Duty Cycle: 1:8.3; Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³ ; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GSM850 Mid Touch-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm


Maximum value of SAR (measured) = 0.792 mW/g

Configuration/GSM850 Mid Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm, Reference Value = 7.45 V/m; Power Drift = 0.160 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.582 mW/g Maximum value of SAR (measured) = 0.850 mW/g

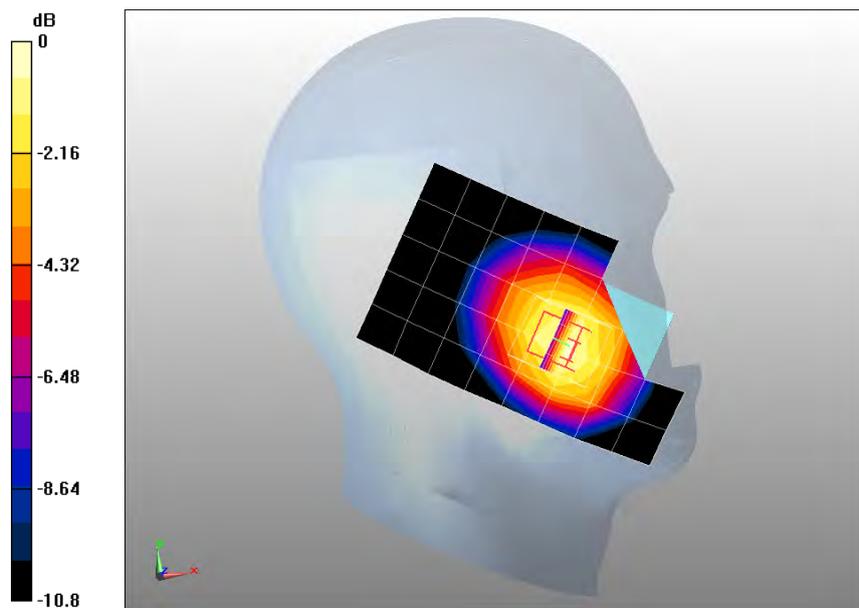

0 dB = 0.850mW/g

Z-Axis Plot

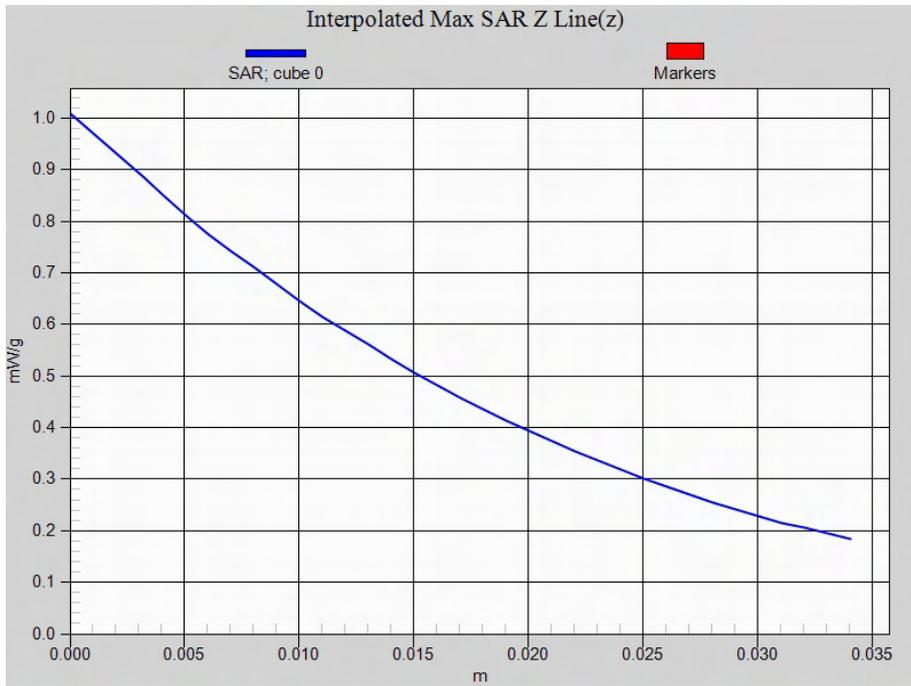

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GSM850 Mid Tilt-Left

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Duty Cycle: 1:8.3; Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³ ; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GSM850 Mid Tilt-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.517 mW/g

Configuration/GSM850 Mid Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 17 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.373 mW/g Maximum value of SAR (measured) = 0.509 mW/g

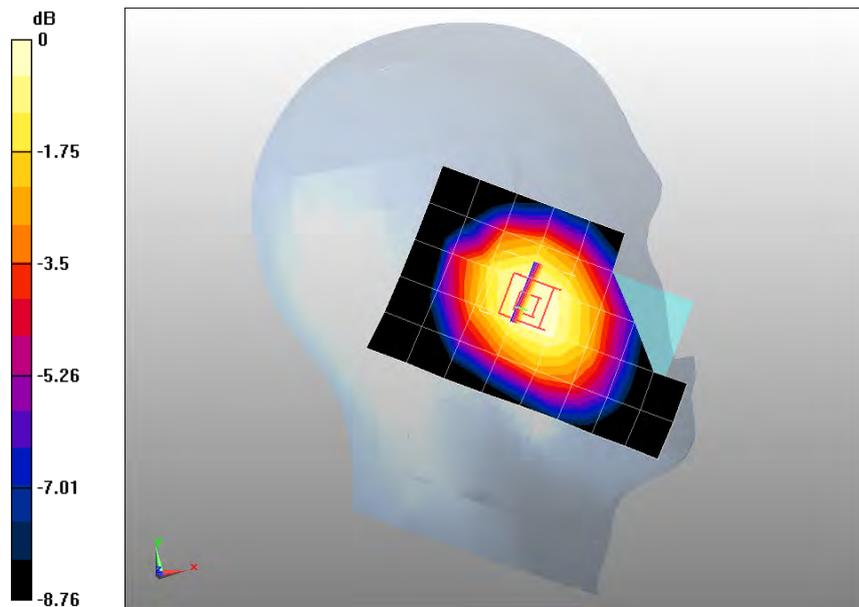

0 dB = 0.509mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GSM850 Mid Touch-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Duty Cycle: 1:8.3; Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³ ; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GSM850 Mid Touch-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.663 mW/g

Configuration/GSM850 Mid Touch-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 6.73 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.486 mW/g Maximum value of SAR (measured) = 0.677 mW/g

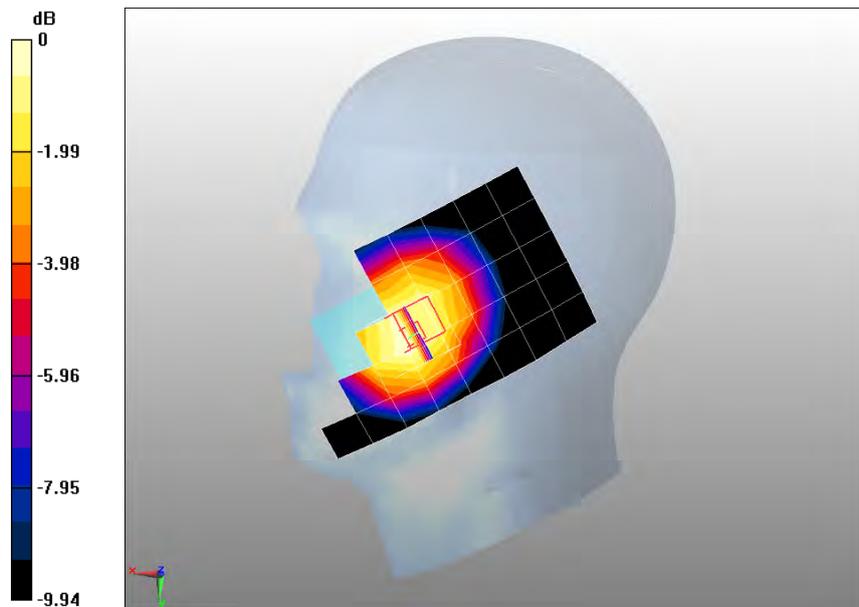

0 dB = 0.677mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GSM850 Mid Tilt-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Duty Cycle: 1:8.3; Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³ ; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GSM850 Mid Tilt-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.508 mW/g

Configuration/GSM850 Mid Tilt-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 16.9 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.378 mW/g Maximum value of SAR (measured) = 0.513 mW/g

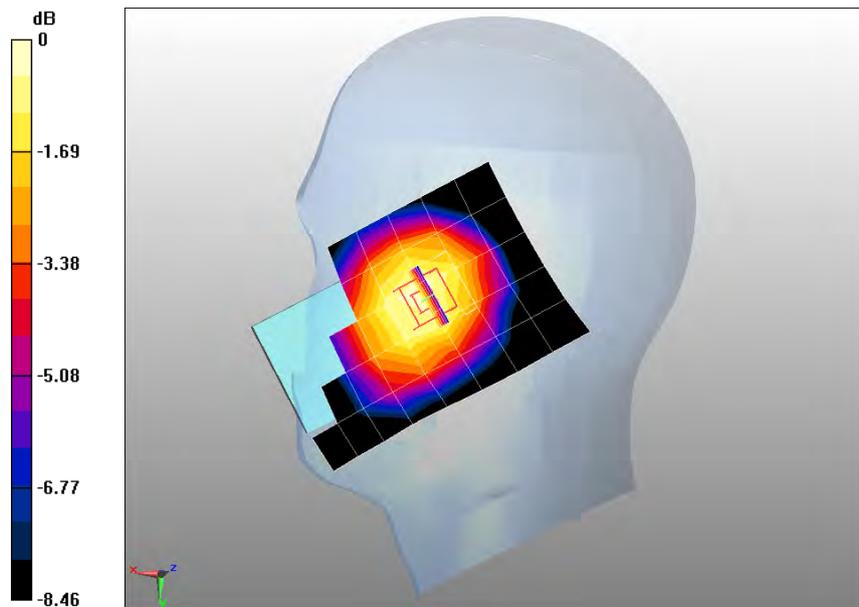

0 dB = 0.513mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GSM850 Mid Body-Back

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Duty Cycle: 1:8.3; Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GSM850 Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.675 mW/g

Configuration/GSM850 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 6.91 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.497 mW/g Maximum value of SAR (measured) = 0.747 mW/g

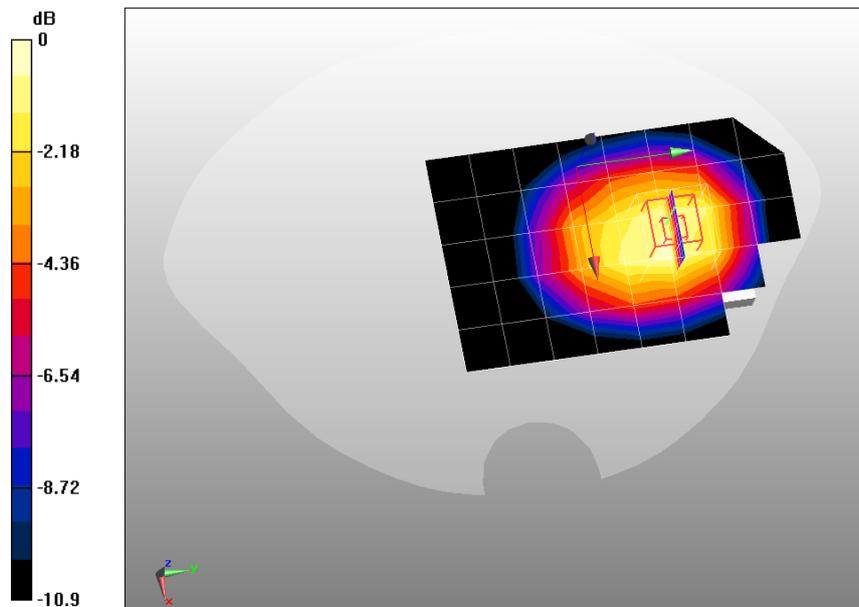

0 dB = 0.747mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GPRS850 Mid Body-Back(2up)

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: GSM850; Duty Cycle: 1:4.2 ;
 Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS850 Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.845 mW/g

Configuration/GPRS850 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 9.78 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.791 mW/g; SAR(10 g) = 0.578 mW/g Maximum value of SAR (measured) = 0.863 mW/g

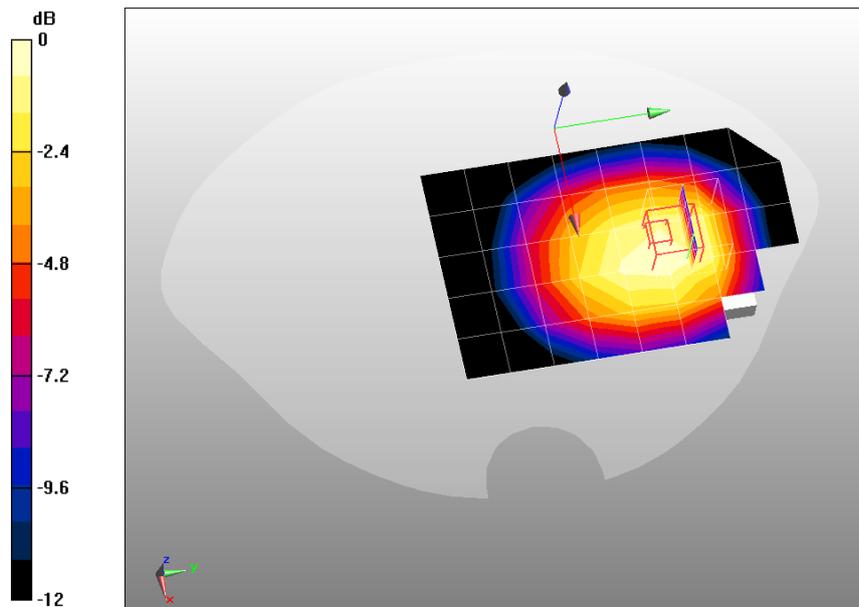

0 dB = 0.863mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GPRS850 Mid Body-Front(2up)

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: GSM850; Duty Cycle: 1:4.2 ;
 Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS850 Mid Body-Front/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.626 mW/g

Configuration/GPRS850 Mid Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 7.47 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.798 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.418 mW/g Maximum value of SAR (measured) = 0.604 mW/g

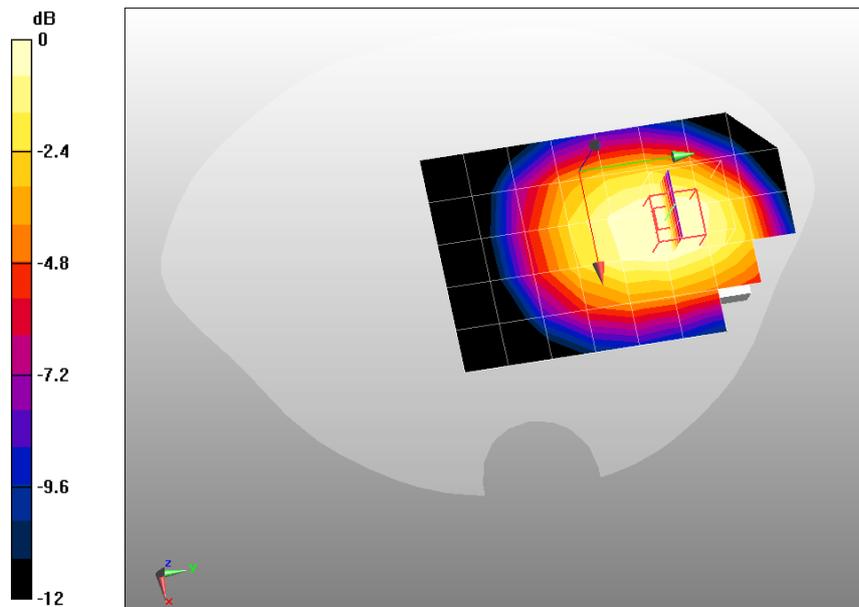

0 dB = 0.604mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GPRS850 Mid Body-Back(2up)(With headset)

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: GSM850; Duty Cycle: 1:4.2 ; Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS850 Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.641 mW/g

Configuration/GPRS850 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 9.07 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.993 W/kg

SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.481 mW/g Maximum value of SAR (measured) = 0.738 mW/g

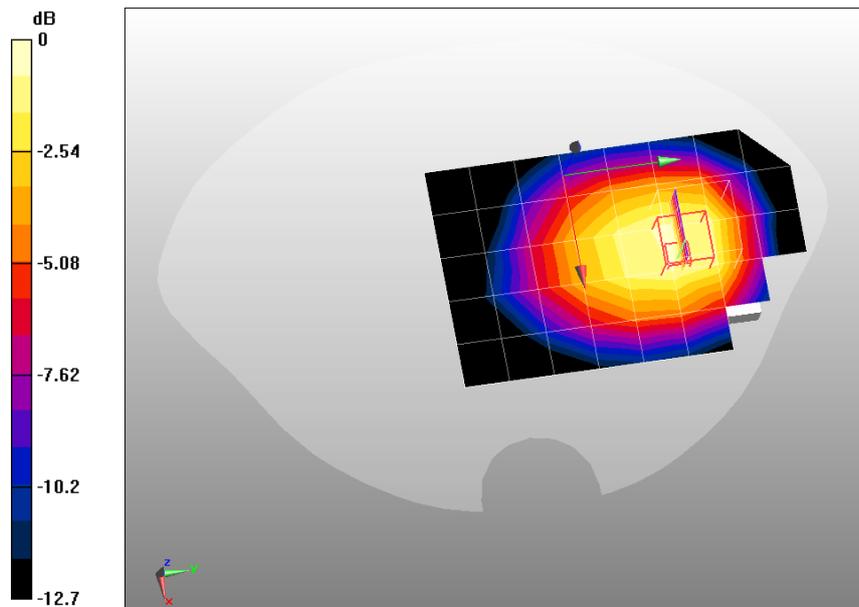

0 dB = 0.738mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GPRS850 Mid Body-Bottom(2up)

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: GSM850; Duty Cycle: 1:4.2 ;
 Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$
 kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS850 Mid Body-Bottom/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.132 mW/g

Configuration/GPRS850 Mid Body-Bottom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 12.6 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.076 mW/g Maximum value of SAR (measured) = 0.139 mW/g

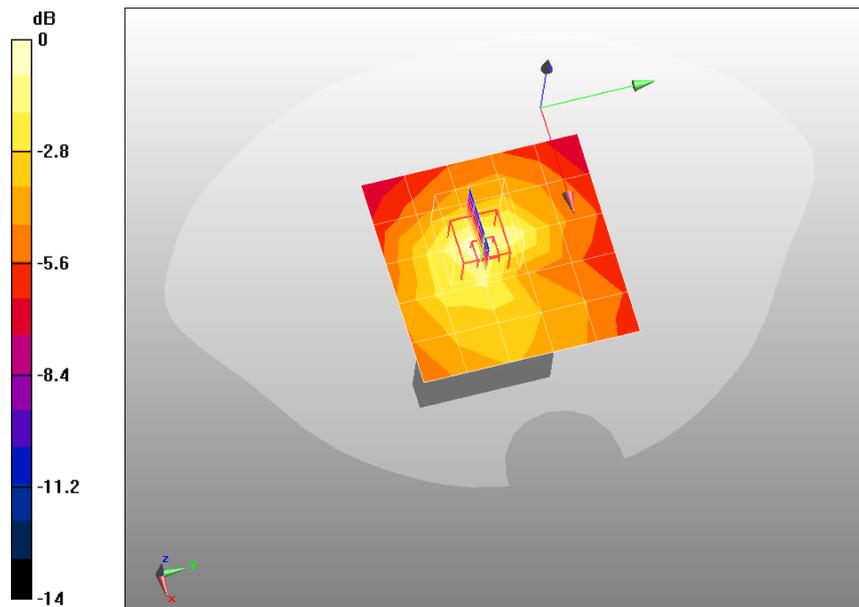

0 dB = 0.139mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GPRS850 Mid Body-Right side(2up)

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: GSM850; Duty Cycle: 1:4.2 ; Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GPRS850 Mid Body-Right side/Area Scan (6x7x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.411 mW/g

Configuration/GPRS850 Mid Body-Right side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 15.6 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.285 mW/g Maximum value of SAR (measured) = 0.458 mW/g

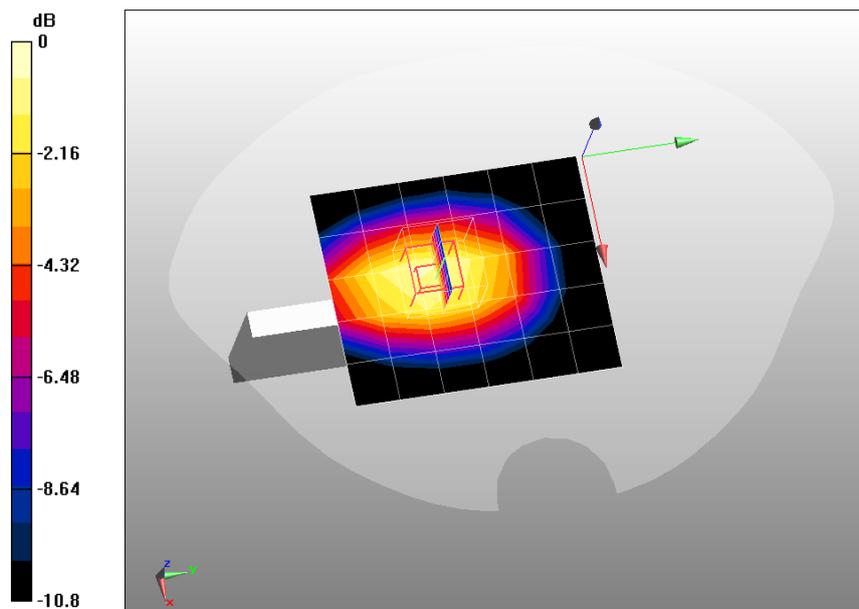

0 dB = 0.458mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

GPRS850 Mid Body-Left side(2up)

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: GSM850; Duty Cycle: 1:4.2 ;
 Frequency: 836.4 MHz; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GPRS850 Mid Body-Left side/Area Scan (6x7x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.459 mW/g

Configuration/GPRS850 Mid Body-Left side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 19.1 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 0.729 W/kg

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.328 mW/g Maximum value of SAR (measured) = 0.526 mW/g

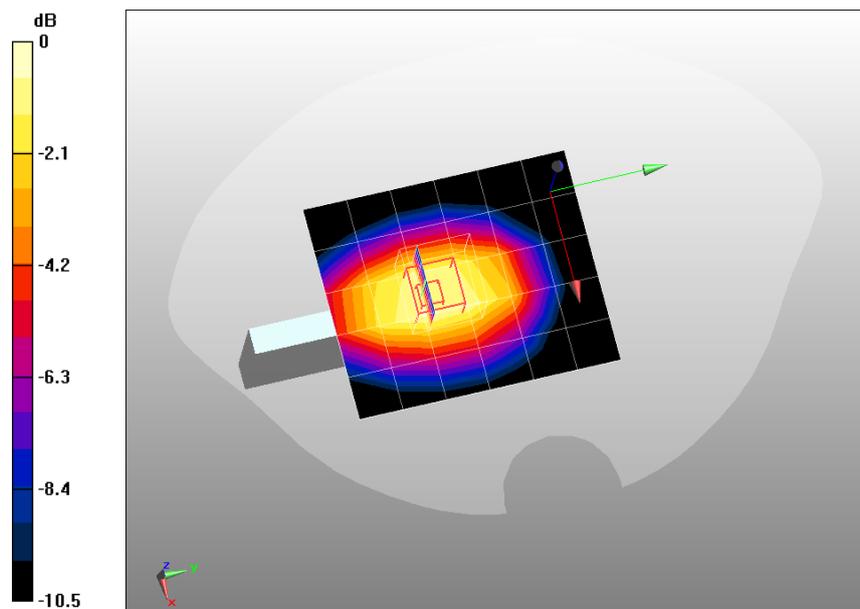

0 dB = 0.526mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

PCS1900 Mid Touch-Left

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);
 Duty Cycle: 1:8.3; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³ ; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/PCS1900 Mid Touch-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.393 mW/g

Configuration/PCS1900 Mid Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 6.03 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.274 mW/g Maximum value of SAR (measured) = 0.457 mW/g

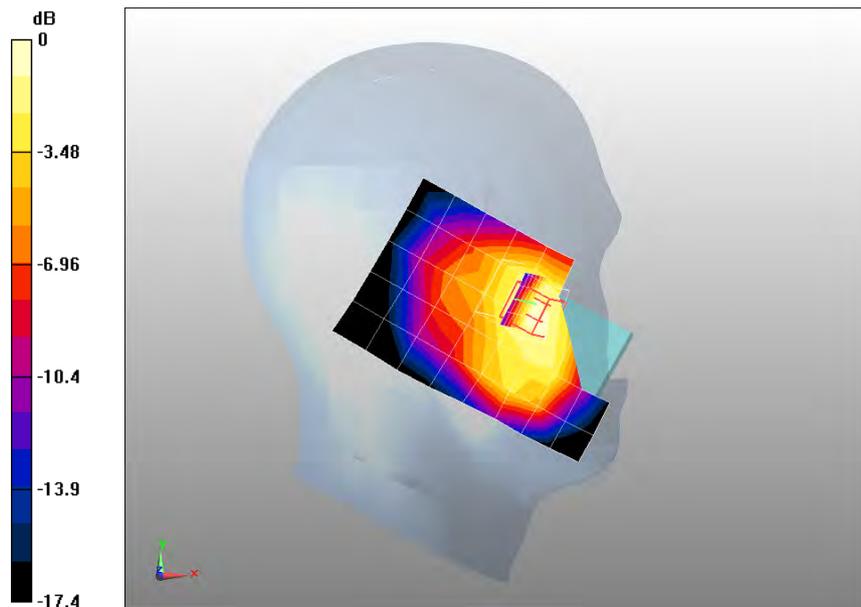

0 dB = 0.457mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

PCS1900 Mid Tilt-Left

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);
 Duty Cycle: 1:8.3; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³ ; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/PCS1900 Mid Tilt-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.304 mW/g

Configuration/PCS1900 Mid Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 12.5 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.183 mW/g Maximum value of SAR (measured) = 0.322 mW/g

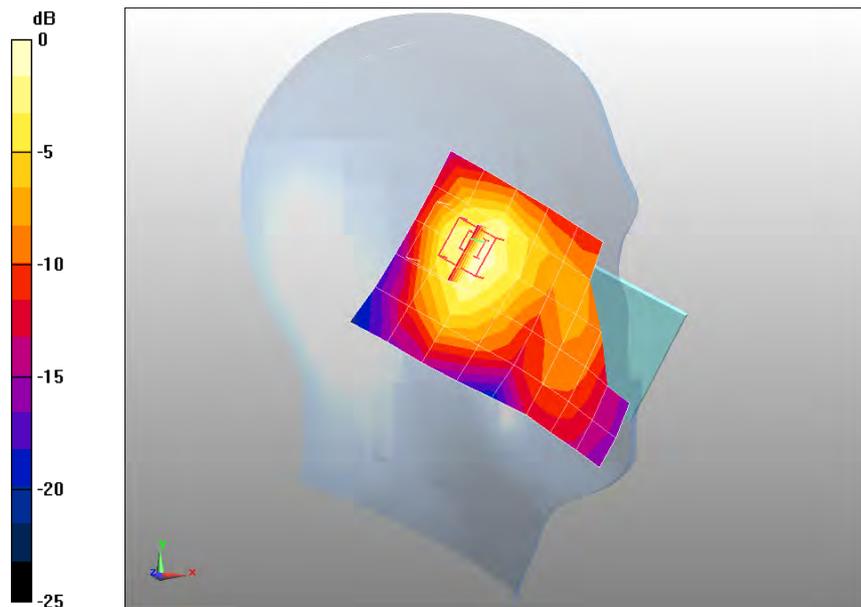

0 dB = 0.322mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

PCS1900 Mid Touch-Right

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);
 Duty Cycle: 1:8.3; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³ ; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/PCS1900 Mid Touch-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.637 mW/g

Configuration/PCS1900 Mid Touch-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 5.28 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.458 mW/g Maximum value of SAR (measured) = 0.840 mW/g

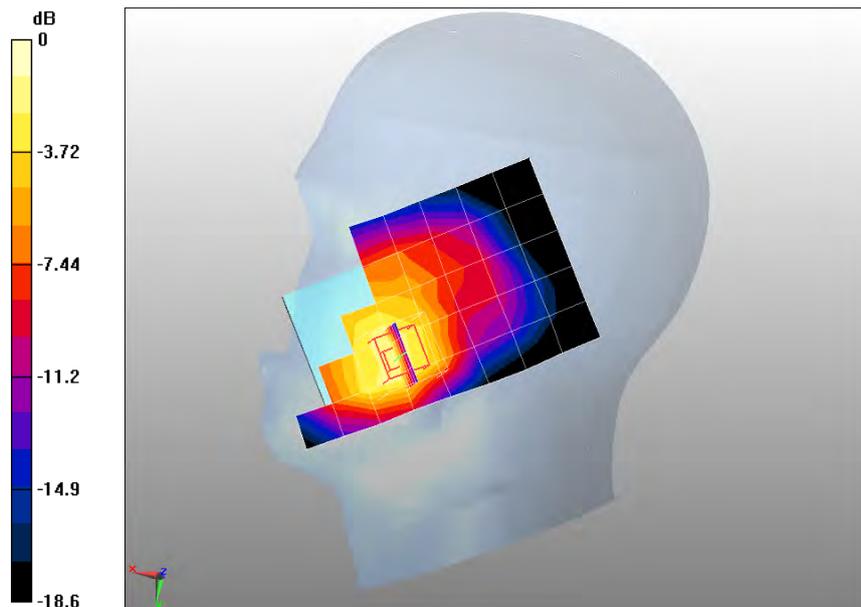

0 dB = 0.840mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

PCS1900 Mid Tilt-Right

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);
 Duty Cycle: 1:8.3; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³ ; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/PCS1900 Mid Tilt-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.253 mW/g

Configuration/PCS1900 Mid Tilt-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 11.7 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.248 mW/g; SAR(10 g) = 0.157 mW/g Maximum value of SAR (measured) = 0.269 mW/g

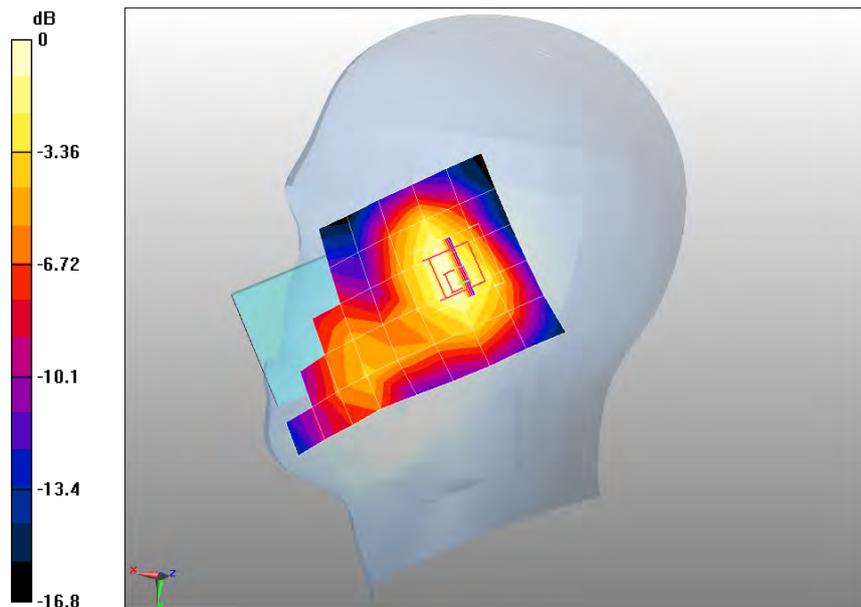

0 dB = 0.269mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

PCS1900 Mid Body-Back

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);
 Duty Cycle: 1:8.3; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/PCS1900 Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.636 mW/g

Configuration/PCS1900 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 8.95 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 0.772 mW/g; SAR(10 g) = 0.380 mW/g Maximum value of SAR (measured) = 0.854 mW/g

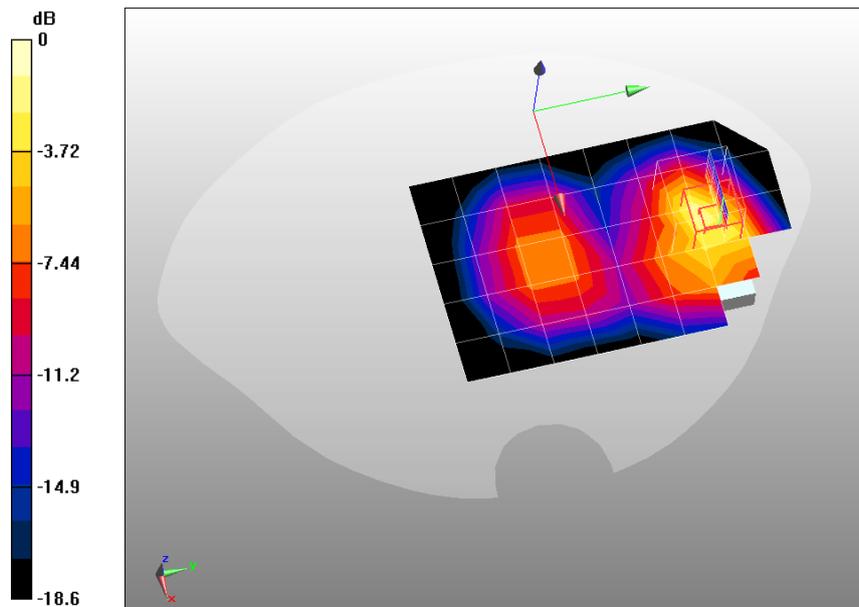

0 dB = 0.854mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 Low Body-Back(2up)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;
 Frequency: 1850.2 MHz; Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS1900 Low Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 1.01 mW/g

Configuration/GPRS1900 Low Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 10.1 V/m; Power Drift = -0.181 dB


Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.607 mW/g Maximum value of SAR (measured) = 1.26 mW/g

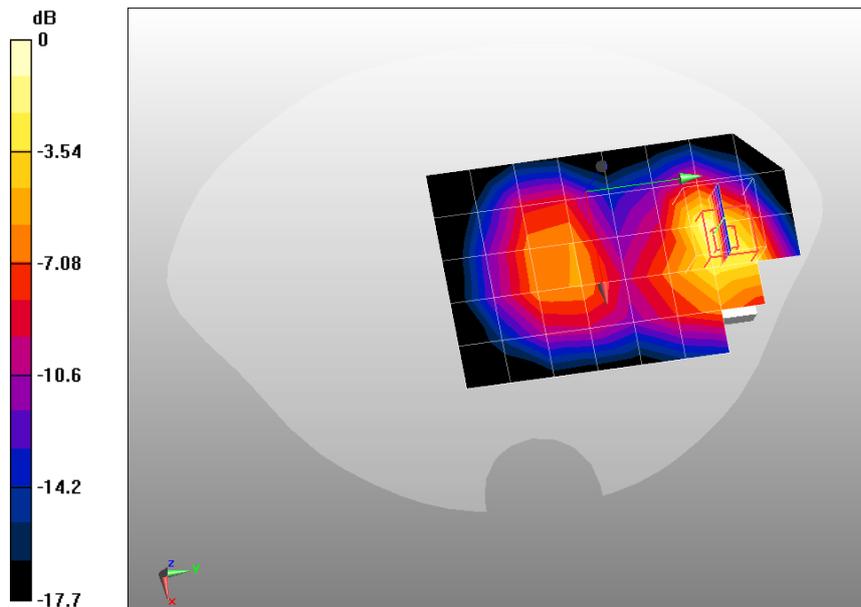

0 dB = 1.26mW/g

Z-Axis Plot

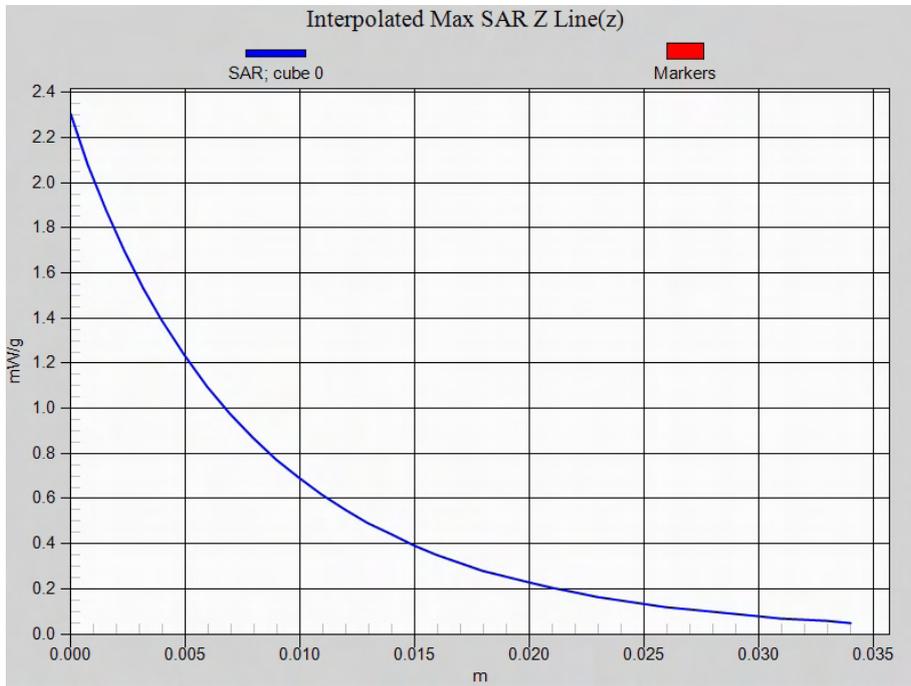

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 Mid Body-Back(2up)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;

Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GPRS1900 Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm


Maximum value of SAR (measured) = 1.01 mW/g

Configuration/GPRS1900 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm, Reference Value = 11.5 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.552 mW/g Maximum value of SAR (measured) = 1.19 mW/g

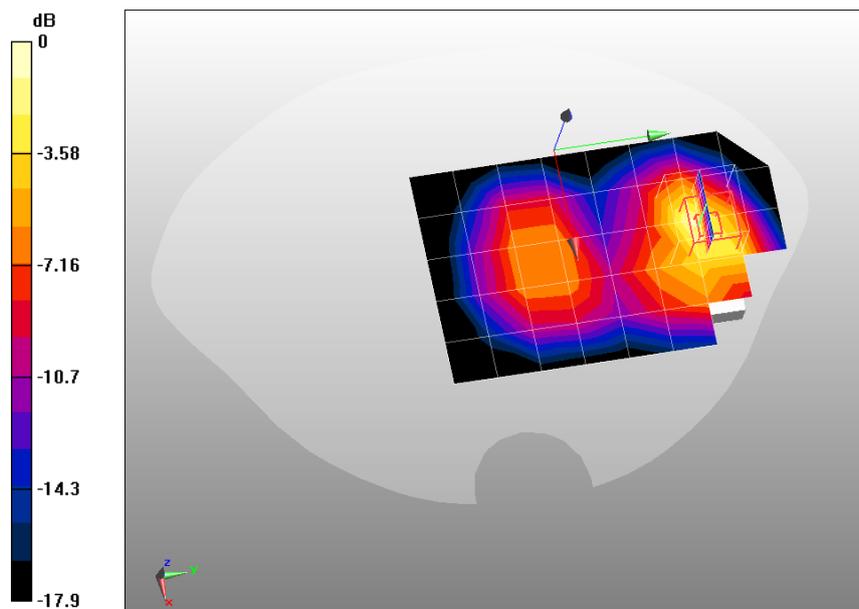

0 dB = 1.19mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 High Body-Back(2up)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;
 Frequency: 1909.8 MHz; Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS1900 High Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.725 mW/g

Configuration/GPRS1900 High Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 10.1 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.958 mW/g; SAR(10 g) = 0.473 mW/g Maximum value of SAR (measured) = 1.03 mW/g

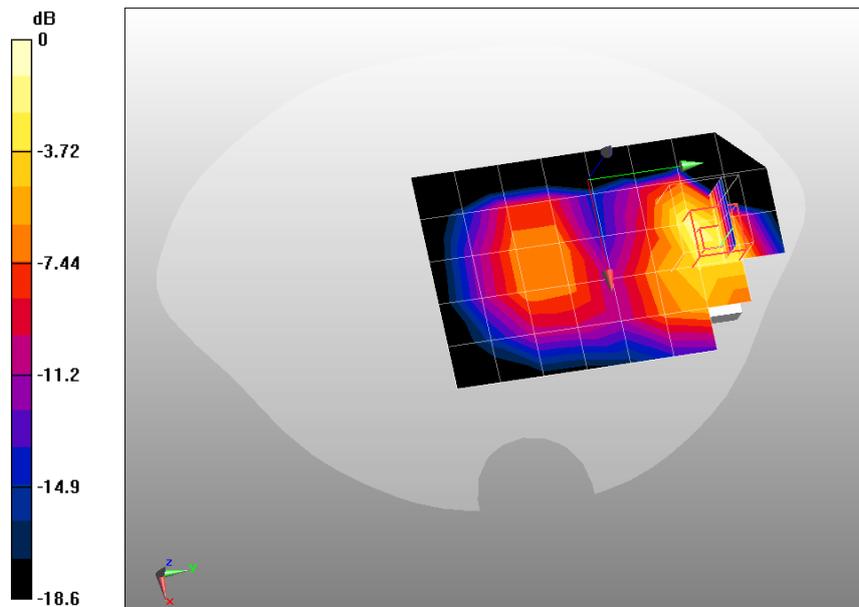

0 dB = 1.03mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 Mid Body-Front(2up)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;

Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GPRS1900 Mid Body-Front/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm


Maximum value of SAR (measured) = 0.651 mW/g

Configuration/GPRS1900 Mid Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm, Reference Value = 10.1 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.433 mW/g Maximum value of SAR (measured) = 0.887 mW/g

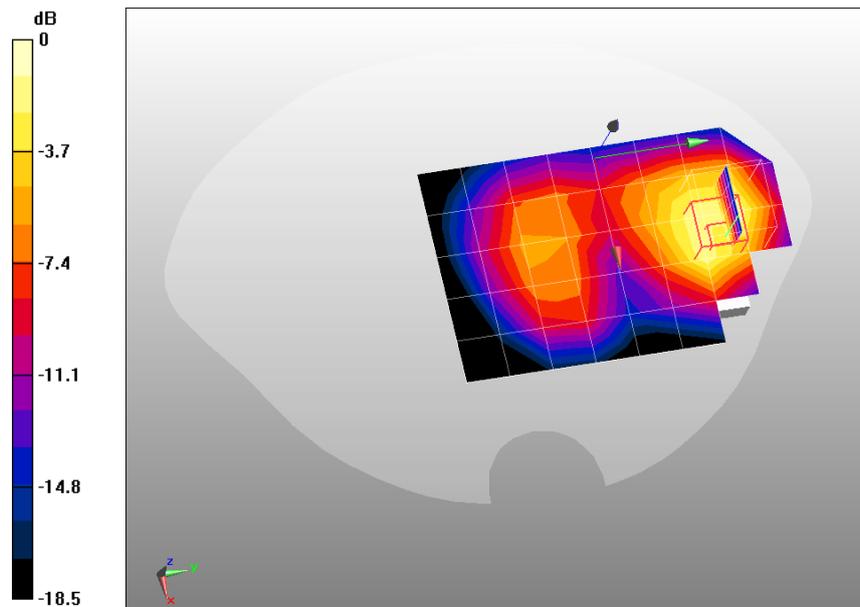

0 dB = 0.887mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 Mid Body-Back(2up)(With headset)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;

Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS1900 Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.815 mW/g

Configuration/GPRS1900 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 10.3 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.513 mW/g Maximum value of SAR (measured) = 1.14 mW/g

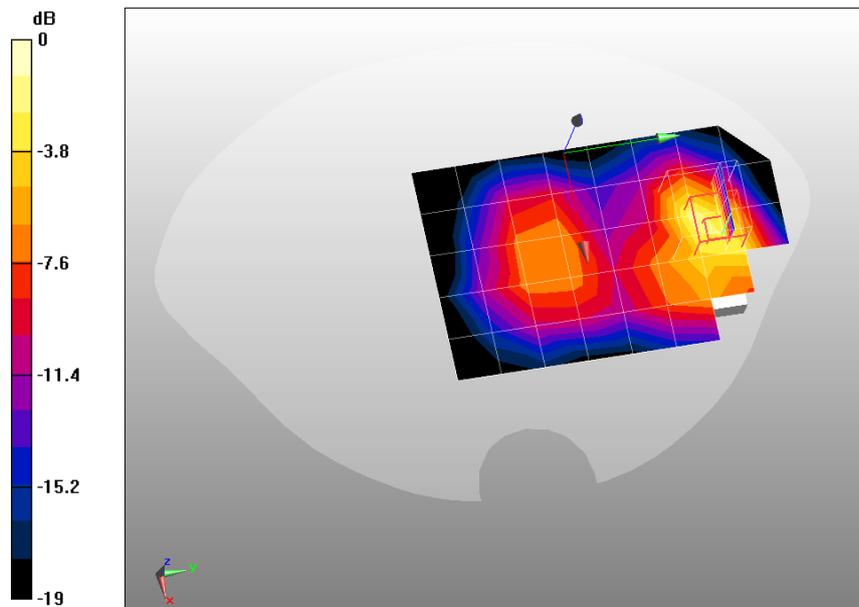

0 dB = 1.14mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 Mid Body-Bottom(2up)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;

Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GPRS1900 Mid Body-Back/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm


Maximum value of SAR (measured) = 0.238 mW/g

Configuration/GPRS1900 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm, Reference Value = 13 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.162 mW/g Maximum value of SAR (measured) = 0.319 mW/g

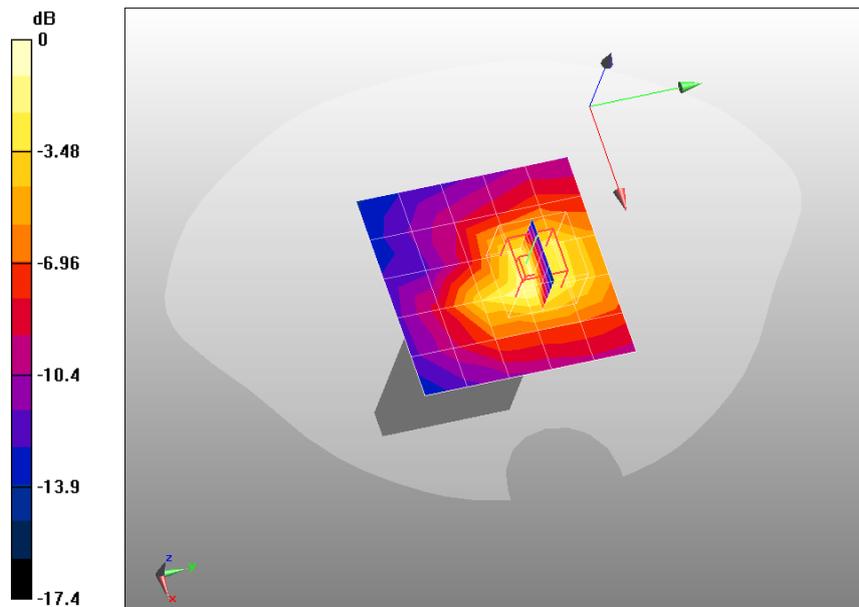

0 dB = 0.319mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 Mid Body-Right Side(2up)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;

Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/GPRS1900 Mid Body-Right Side/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.246 mW/g

Configuration/GPRS1900 Mid Body-Right Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 18.4 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 0.542 W/kg

SAR(1 g) = 0.324 mW/g; SAR(10 g) = 0.188 mW/g Maximum value of SAR (measured) = 0.351 mW/g

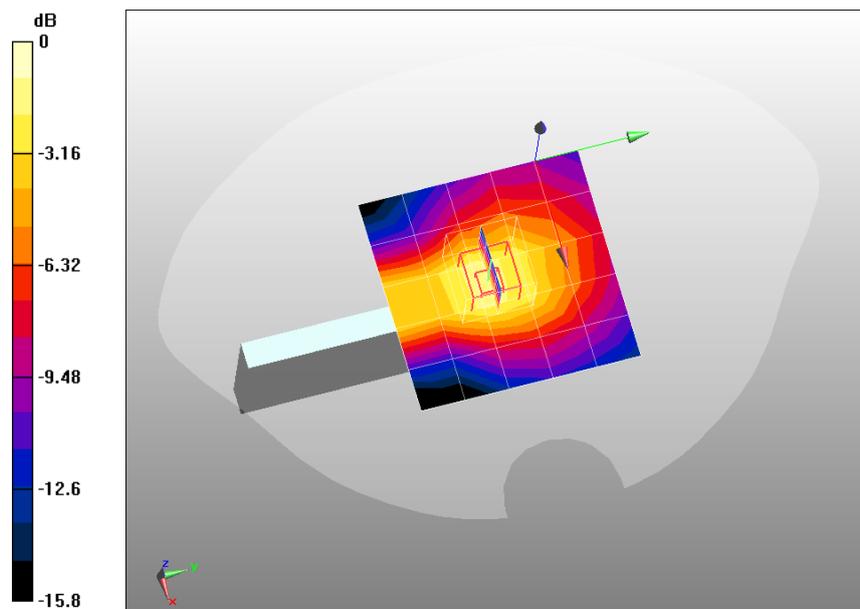

0 dB = 0.351mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

GPRS1900 Mid Body-Left Side(2up)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: GPRS/EGPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;
 Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/GPRS1900 Mid Body-Back/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.098 mW/g

Configuration/GPRS1900 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 11 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.071 mW/g Maximum value of SAR (measured) = 0.137 mW/g

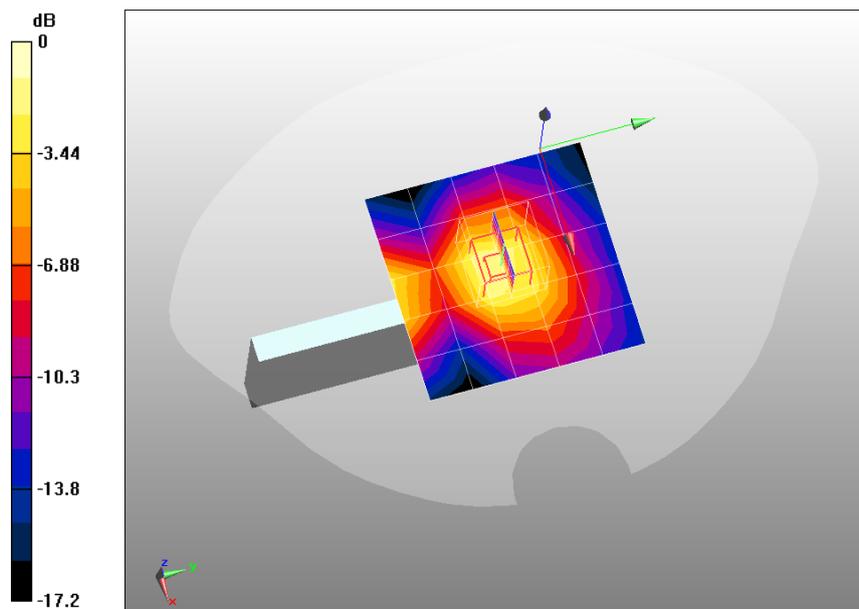

0 dB = 0.137mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Touch-Left

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$;
 $\rho = 1000$ kg/m³ ; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Touch-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.516 mW/g

Configuration/WCDMA Band II Mid Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 6.61 V/m; Power Drift = -0.025 dB
 Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.344 mW/g Maximum value of SAR (measured) = 0.566 mW/g

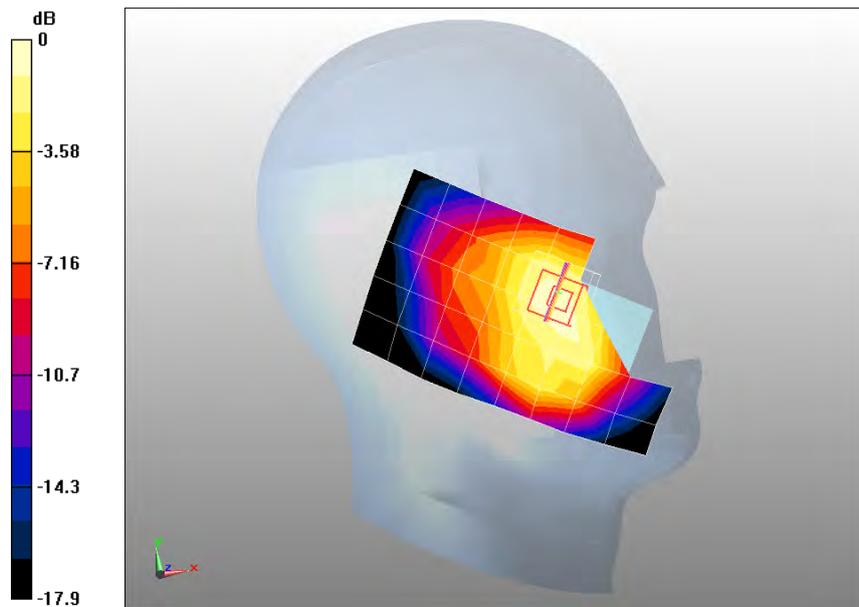

0 dB = 0.566mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Tilt-Left

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$;
 $\rho = 1000$ kg/m³ ; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/WCDMA Band II Mid Tilt-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.371 mW/g

Configuration/WCDMA Band II Mid Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 13.8 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.222 mW/g Maximum value of SAR (measured) = 0.388 mW/g

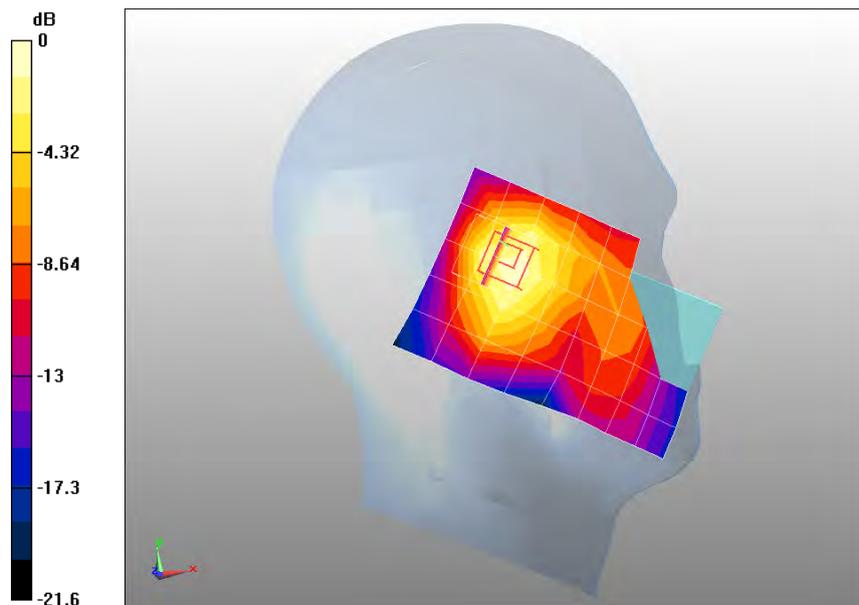

0 dB = 0.388mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Low Touch-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1852.4 MHz; Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³ ; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Low Touch-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.903 mW/g

Configuration/WCDMA Band II Low Touch-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 6.55 V/m; Power Drift = -0.104 dB
 Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.621 mW/g Maximum value of SAR (measured) = 1.11 mW/g

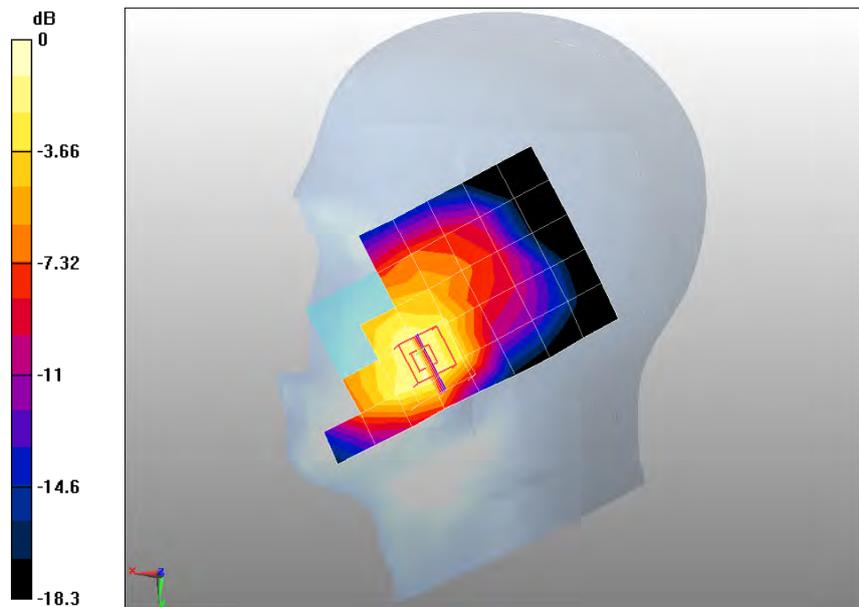

0 dB = 1.11mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Touch-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.6$;
 $\rho = 1000$ kg/m³ ; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Touch-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.742 mW/g

Configuration/WCDMA Band II Mid Touch-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 5.84 V/m; Power Drift = 0.080 dB
 Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.884 mW/g; SAR(10 g) = 0.527 mW/g Maximum value of SAR (measured) = 0.945 mW/g

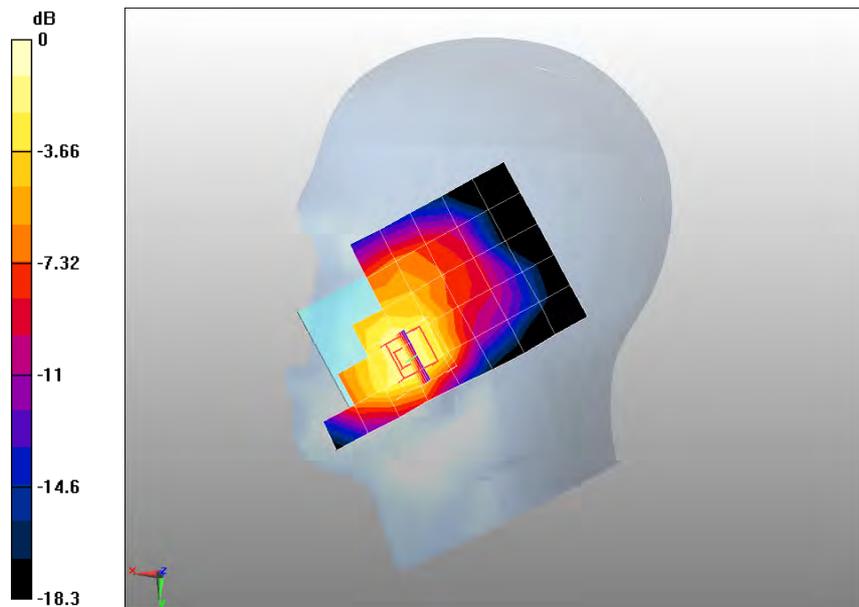

0 dB = 0.945mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II High Touch-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1907.6 MHz; Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³ ; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II High Touch-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.737 mW/g

Configuration/WCDMA Band II High Touch-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 5.81 V/m; Power Drift = 0.002 dB
 Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.868 mW/g; SAR(10 g) = 0.514 mW/g Maximum value of SAR (measured) = 0.910 mW/g

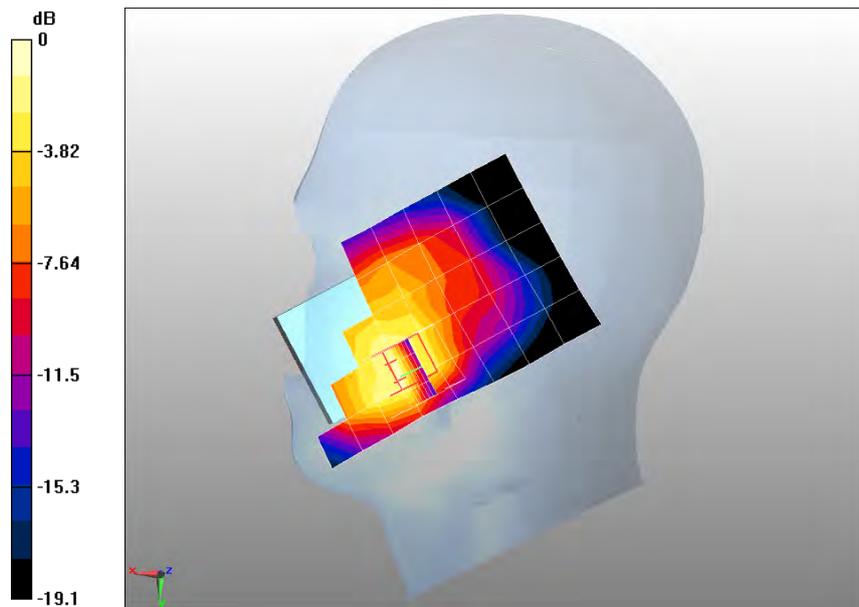

0 dB = 0.910mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Tilt-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 38.6$;
 $\rho = 1000 \text{ kg/m}^3$; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(7.18, 7.18, 7.18); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Tilt-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.293 mW/g

Configuration/WCDMA Band II Mid Tilt-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 13.7 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.183 mW/g Maximum value of SAR (measured) = 0.319 mW/g

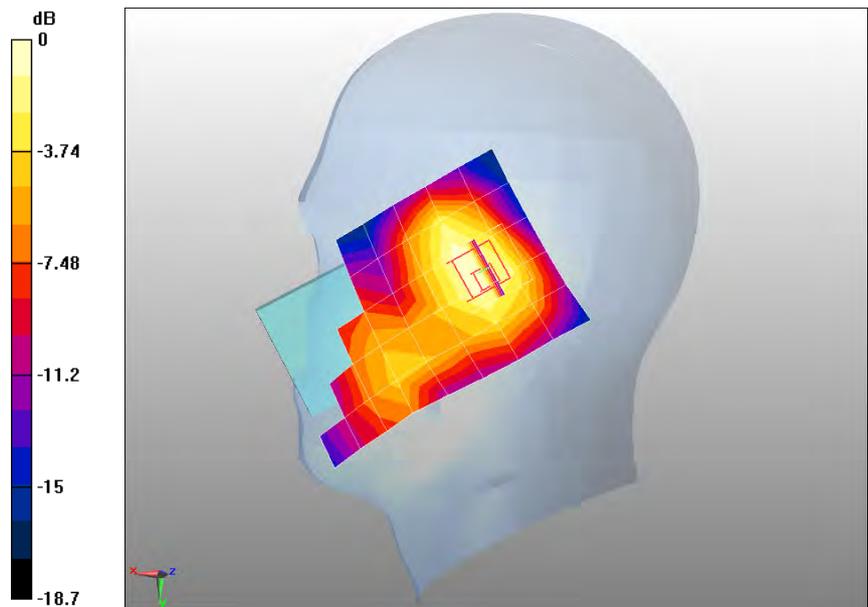

0 dB = 0.319mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Low Body-Back

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1852.4 MHz; Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Low Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 1.01 mW/g


Configuration/WCDMA Band II Low Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 10.6 V/m; Power Drift = -0.128 dB
 Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.627 mW/g Maximum value of SAR (measured) = 1.33 mW/g

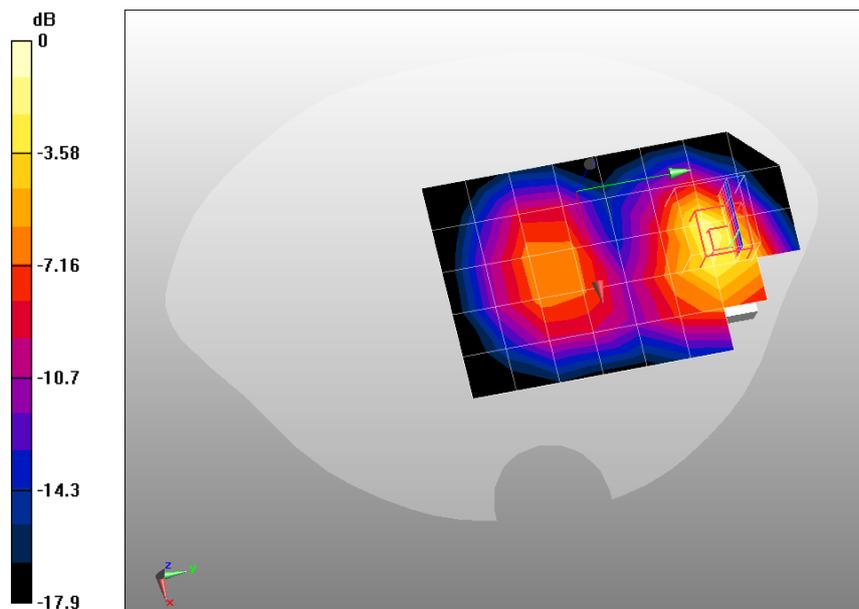

0 dB = 1.33mW/g

Z-Axis Plot

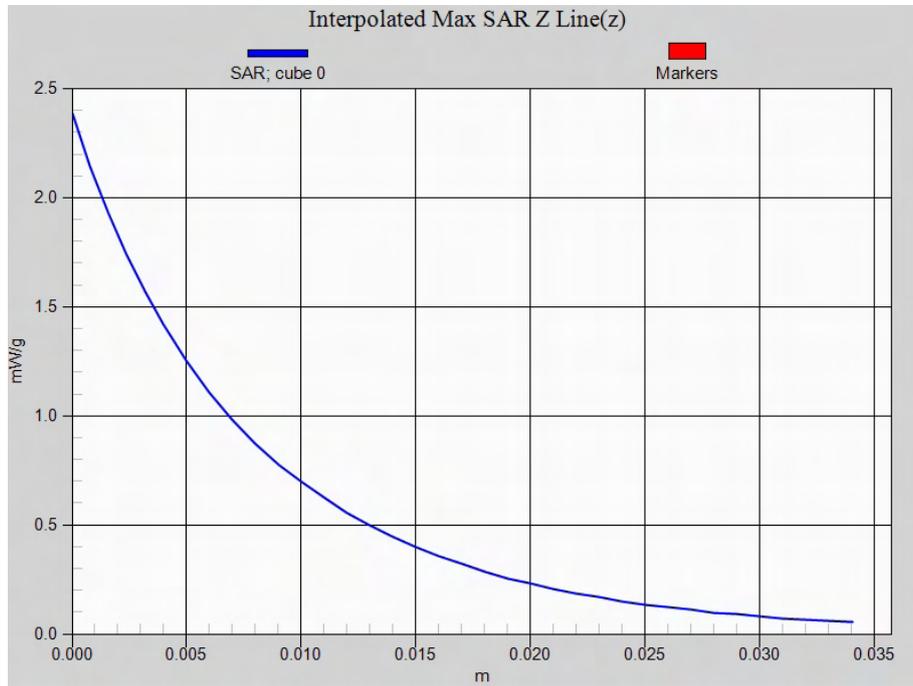

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Body-Back

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$;
 $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.975 mW/g

Configuration/WCDMA Band II Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 12.8 V/m; Power Drift = -0.006 dB
 Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.566 mW/g Maximum value of SAR (measured) = 1.15 mW/g

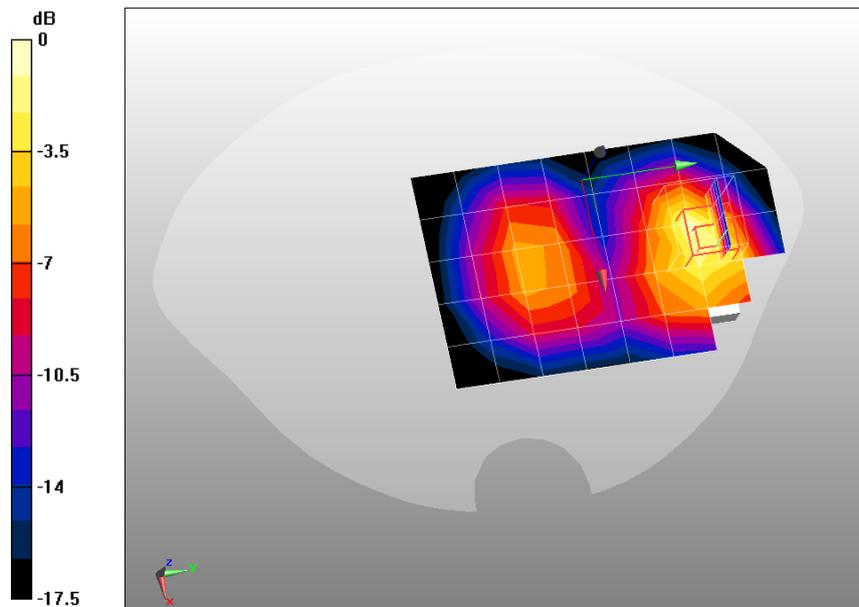

0 dB = 1.15mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II High Body-Back

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1907.6 MHz; Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II High Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.877 mW/g

Configuration/WCDMA Band II High Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 12.3 V/m; Power Drift = -0.060 dB
 Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.994 mW/g; SAR(10 g) = 0.508 mW/g Maximum value of SAR (measured) = 1.05 mW/g

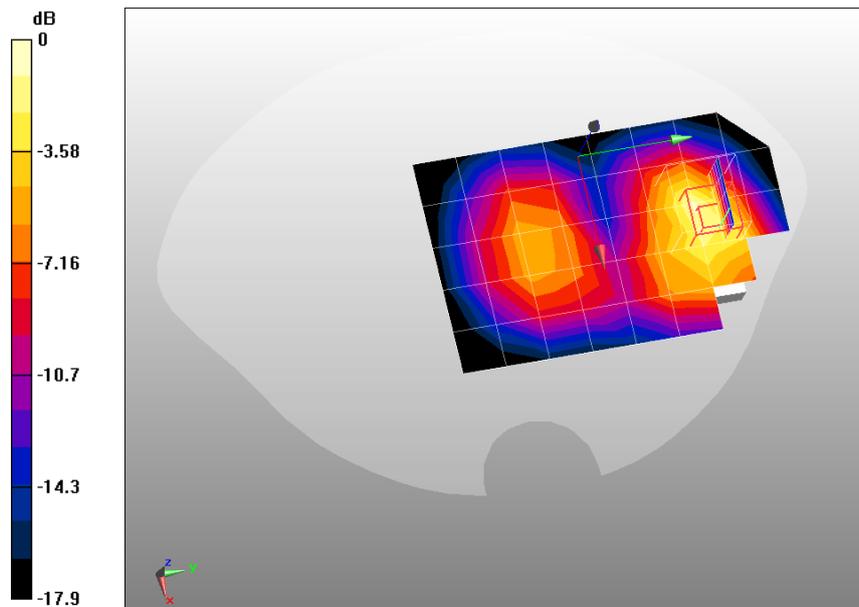

0 dB = 1.05mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Body-Front

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$;
 $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Body-Front/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.643 mW/g

Configuration/WCDMA Band II Mid Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 10.2 V/m; Power Drift = 0.197 dB
 Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.417 mW/g Maximum value of SAR (measured) = 0.886 mW/g

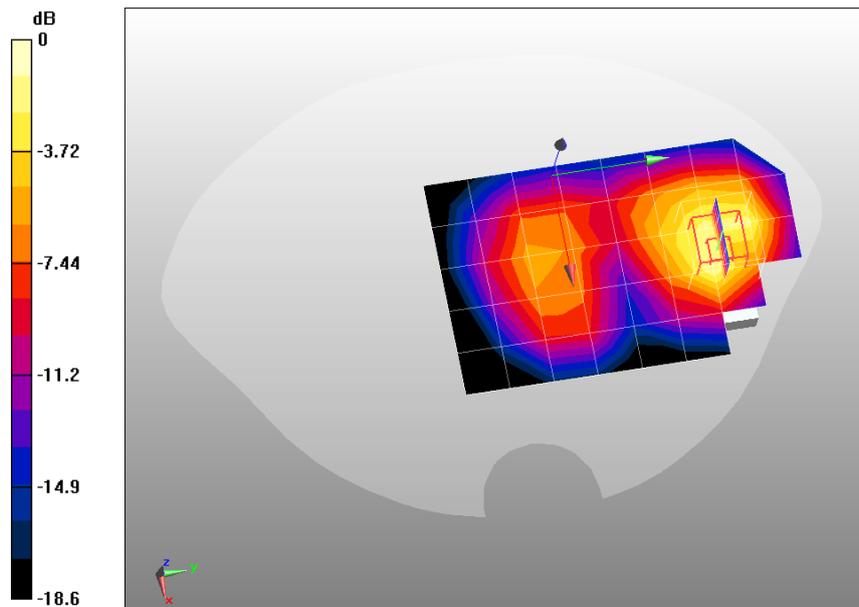

0 dB = 0.886mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Body-Back(With headset)

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 52.5$;
 $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.885 mW/g

Configuration/WCDMA Band II Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 10.5 V/m; Power Drift = 0.171 dB
 Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.533 mW/g Maximum value of SAR (measured) = 1.1 mW/g

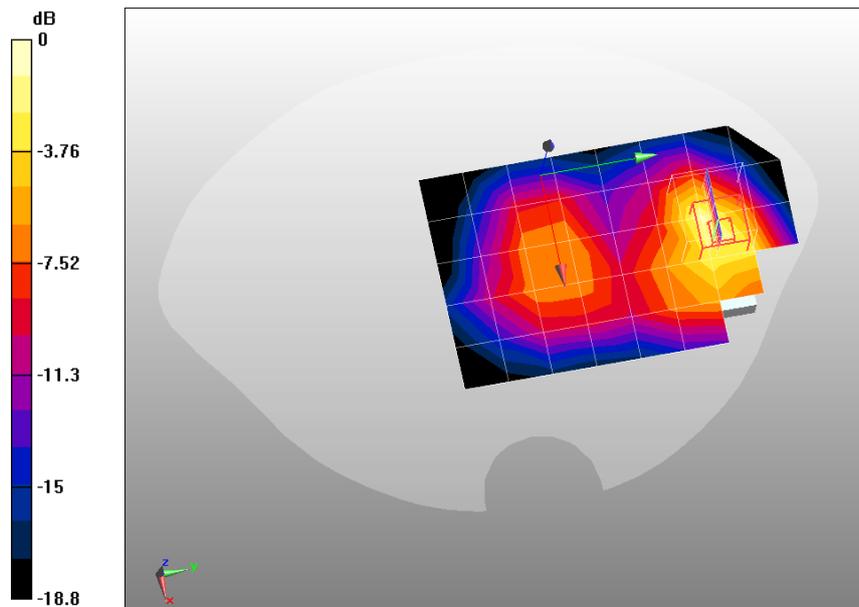

0 dB = 1.1mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Body-Bottom

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$;
 $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Body-Bottom/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.216 mW/g

Configuration/WCDMA Band II Mid Body-Bottom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 13 V/m; Power Drift = -0.050 dB
 Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.345 mW/g; SAR(10 g) = 0.177 mW/g Maximum value of SAR (measured) = 0.396 mW/g

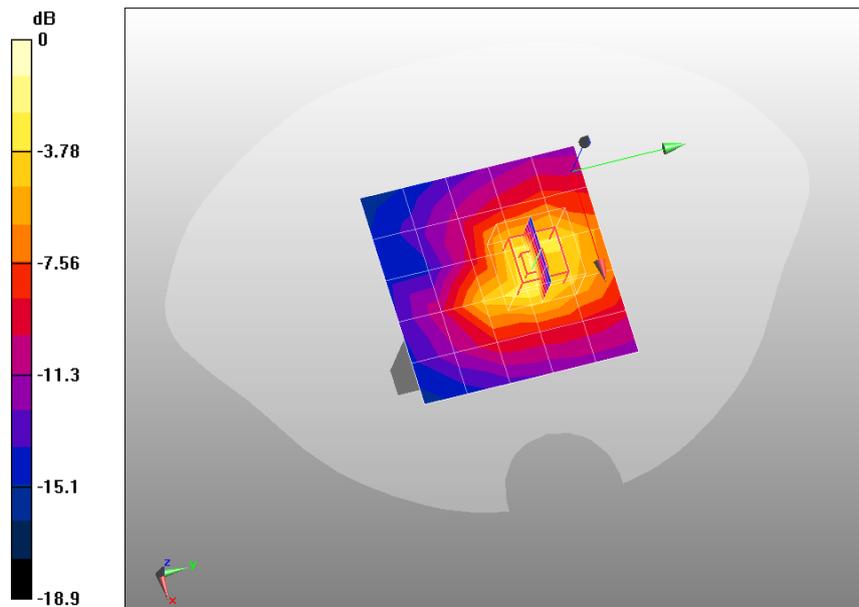

0 dB = 0.396mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Body-Right Side

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$;
 $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Body-Right Side/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.238 mW/g

Configuration/WCDMA Band II Mid Body-Right Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 17.5 V/m; Power Drift = 0.172 dB

Peak SAR (extrapolated) = 0.531 W/kg

SAR(1 g) = 0.313 mW/g; SAR(10 g) = 0.179 mW/g Maximum value of SAR (measured) = 0.344 mW/g

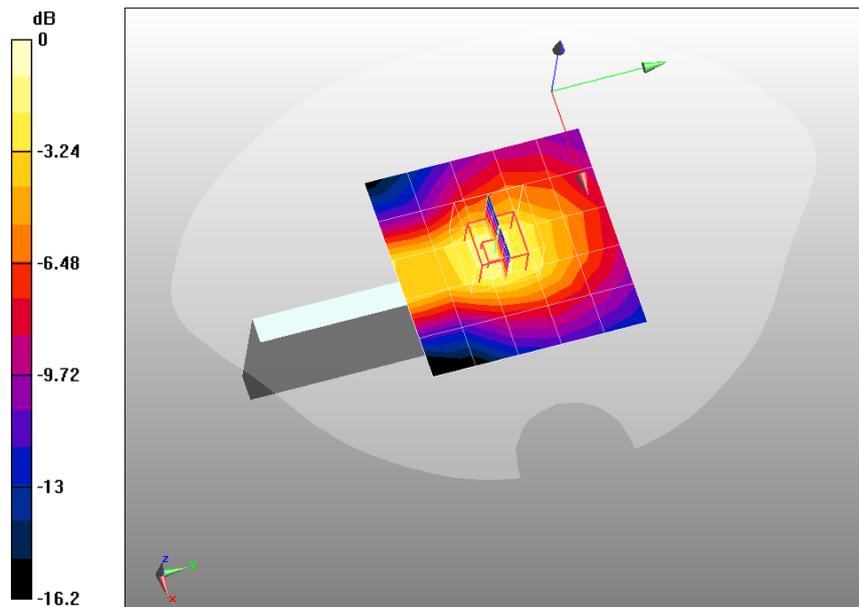

0 dB = 0.344mW/g

Date/Time: 26-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band II Mid Body-Left Side

DUT: GSM Mobile Phone; Type: U8850-5

Communication System: UMTS; Communication System Band: Band II, UTRA/FDD (1850.0-1910.0MHz);
 Duty Cycle: 1:1; Frequency: 1880 MHz; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.5$;
 $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.74, 6.74, 6.74); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band II Mid Body-Left Side/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.092 mW/g

Configuration/WCDMA Band II Mid Body-Left Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 10.7 V/m; Power Drift = 0.003 dB
 Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.067 mW/g Maximum value of SAR (measured) = 0.128 mW/g

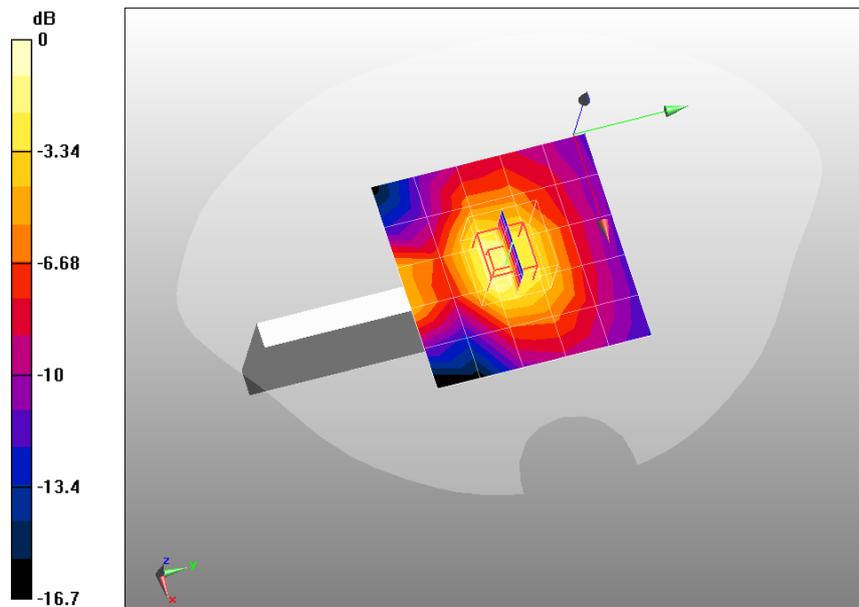

0 dB = 0.128mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Touch-Left

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Touch-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.718 mW/g

Configuration/WCDMA Band V Mid Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 7.08 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.519 mW/g Maximum value of SAR (measured) = 0.726 mW/g

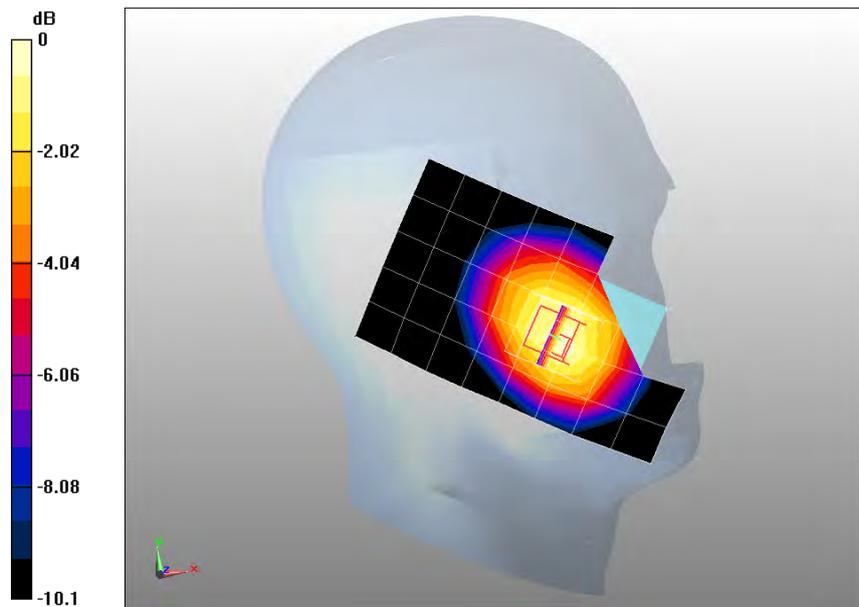

0 dB = 0.726mW/g

Z-Axis Plot



Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Tilt-Left

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/WCDMA Band V Mid Tilt-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.395 mW/g

Configuration/WCDMA Band V Mid Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 15.3 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.312 mW/g Maximum value of SAR (measured) = 0.432 mW/g

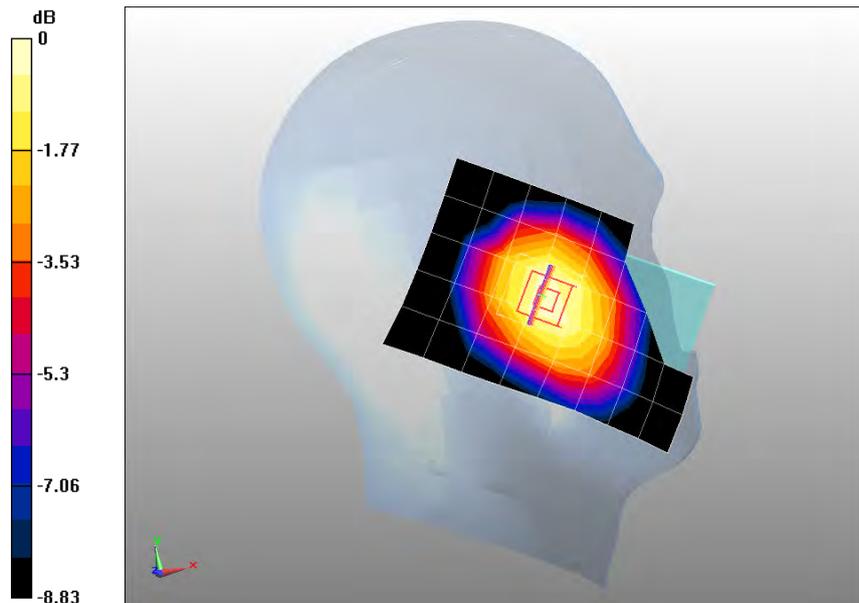

0 dB = 0.432mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Touch-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Touch-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.593 mW/g

Configuration/WCDMA Band V Mid Touch-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 5.96 V/m; Power Drift = 0.060 dB
Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.436 mW/g Maximum value of SAR (measured) = 0.605 mW/g

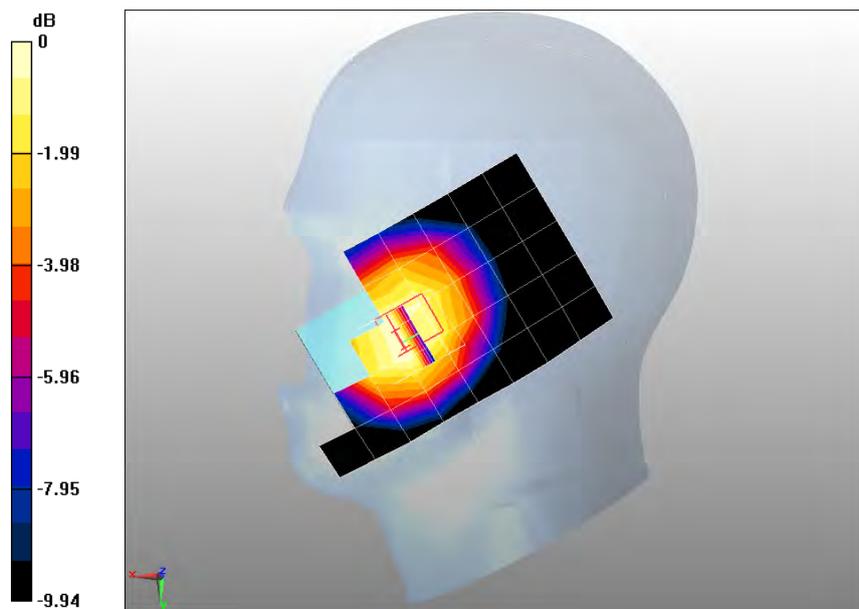

0 dB = 0.605mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Tilt-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.4, 8.4, 8.4); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Tilt-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.430 mW/g

Configuration/WCDMA Band V Mid Tilt-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 15.1 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.317 mW/g Maximum value of SAR (measured) = 0.435 mW/g

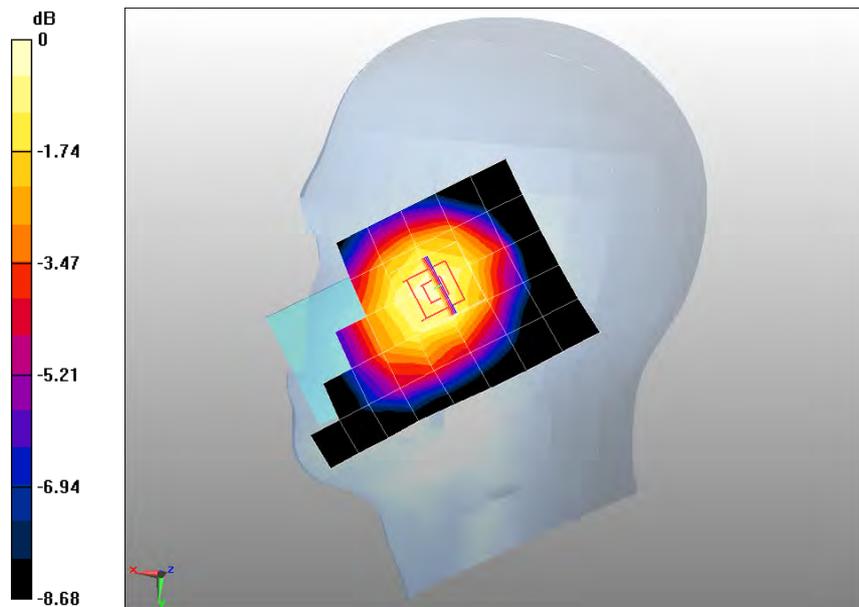

0 dB = 0.435mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Body-Back

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.700 mW/g

Configuration/WCDMA Band V Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 8.22 V/m; Power Drift = 0.020 dB
Peak SAR (extrapolated) = 0.937 W/kg

SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.489 mW/g Maximum value of SAR (measured) = 0.706 mW/g

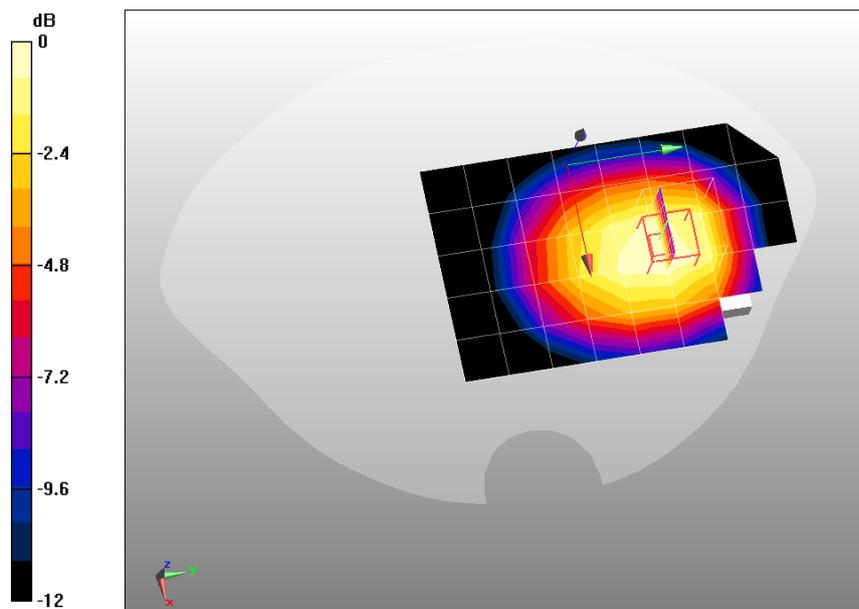

0 dB = 0.706mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Body-Front

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Body-Front/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.523 mW/g

Configuration/WCDMA Band V Mid Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 8.6 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.386 mW/g Maximum value of SAR (measured) = 0.553 mW/g

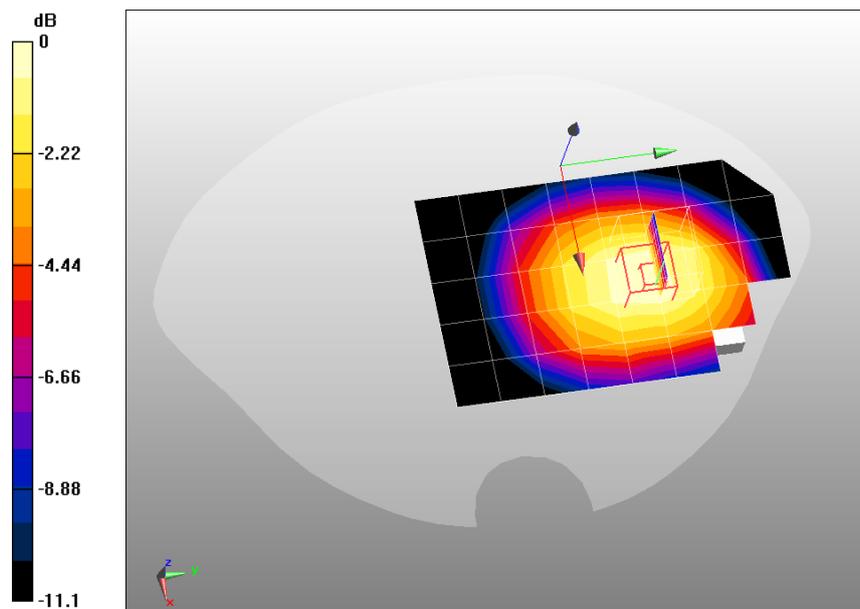

0 dB = 0.553mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Body-Back(With headset)

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.584 mW/g

Configuration/WCDMA Band V Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 8.31 V/m; Power Drift = -0.063 dB
Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.577 mW/g; SAR(10 g) = 0.407 mW/g Maximum value of SAR (measured) = 0.602 mW/g

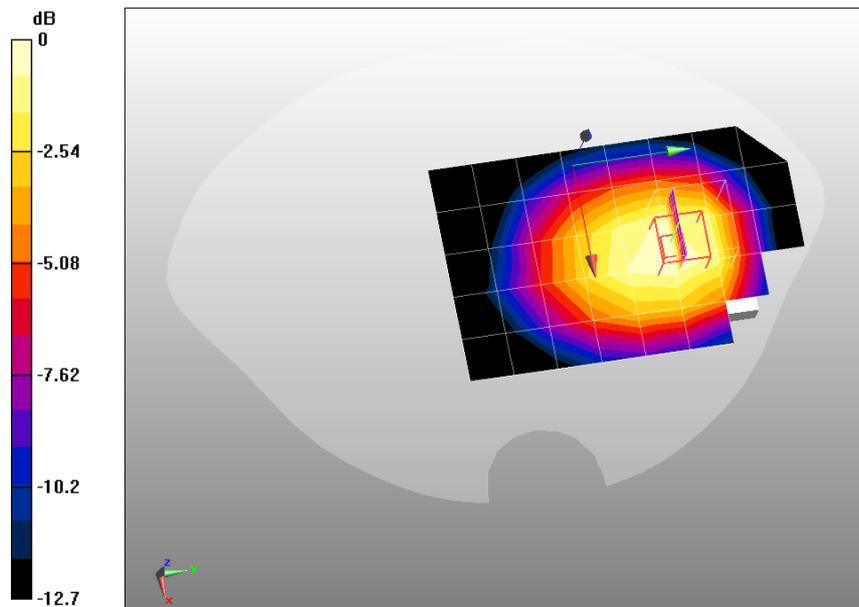

0 dB = 0.602mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Body-Bottom

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0


DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Body-Bottom/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.056 mW/g

Configuration/WCDMA Band V Mid Body-Bottom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 8.41 V/m; Power Drift = -0.071 dB
Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.044 mW/g Maximum value of SAR (measured) = 0.081 mW/g

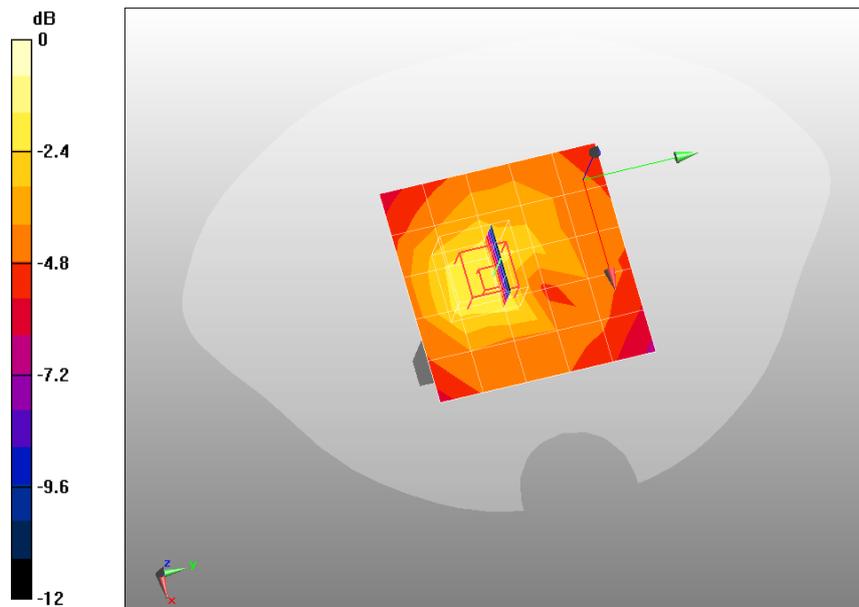

0 dB = 0.081mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Body-Right side

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Body-Right Side/Area Scan (6x7x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.412 mW/g

Configuration/WCDMA Band V Mid Body-Right Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 16.5 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.284 mW/g Maximum value of SAR (measured) = 0.454 mW/g

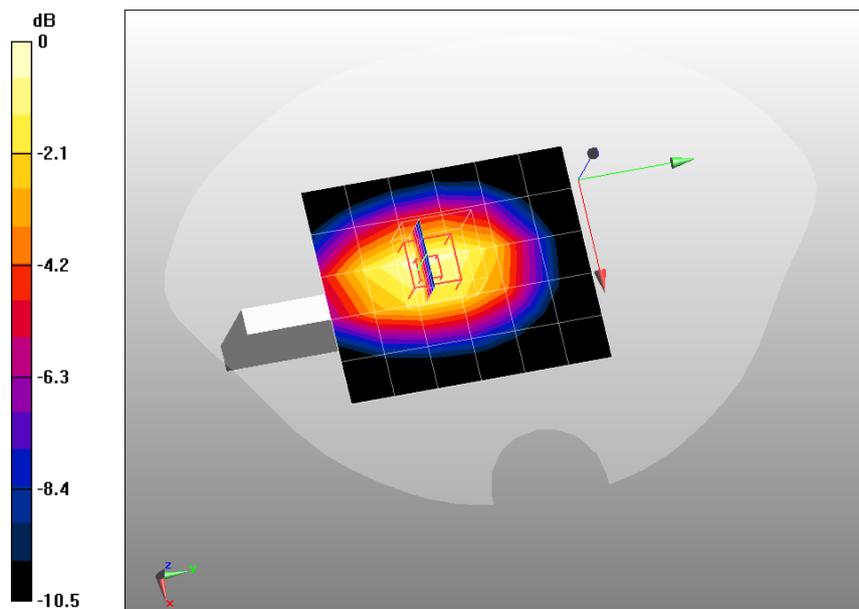

0 dB = 0.454mW/g

Date/Time: 25-11-2011

Test Laboratory: QuieTek Lab

WCDMA Band V Mid Body-Left side

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: UMTS; Communication System Band: Band V, UTRA/FDD (824.0-849.0MHz);

Duty Cycle: 1:1; Frequency: 836 MHz; Medium parameters used: $f = 836$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³ ; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(8.59, 8.59, 8.59); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with right table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/WCDMA Band V Mid Body-Left Side/Area Scan (6x7x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.425 mW/g

Configuration/WCDMA Band V Mid Body-Left Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 16.9 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.315 mW/g Maximum value of SAR (measured) = 0.500 mW/g

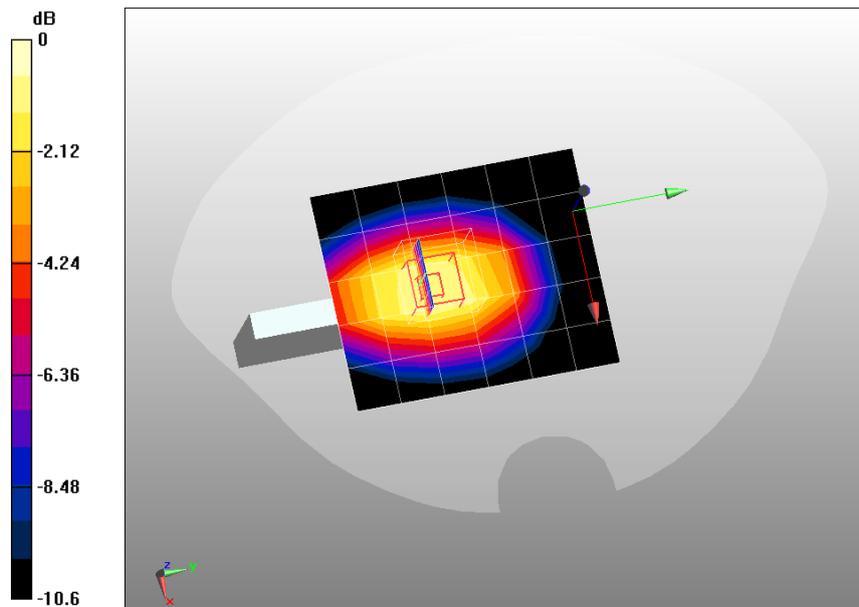

0 dB = 0.500mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

802.11b 2462MHz Touch-Left

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³; Phantom section: Left Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.51, 6.51, 6.51); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/802.11b High Touch-Left/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.085 mW/g

Configuration/802.11b High Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 6.64 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.056 mW/g Maximum value of SAR (measured) = 0.114 mW/g

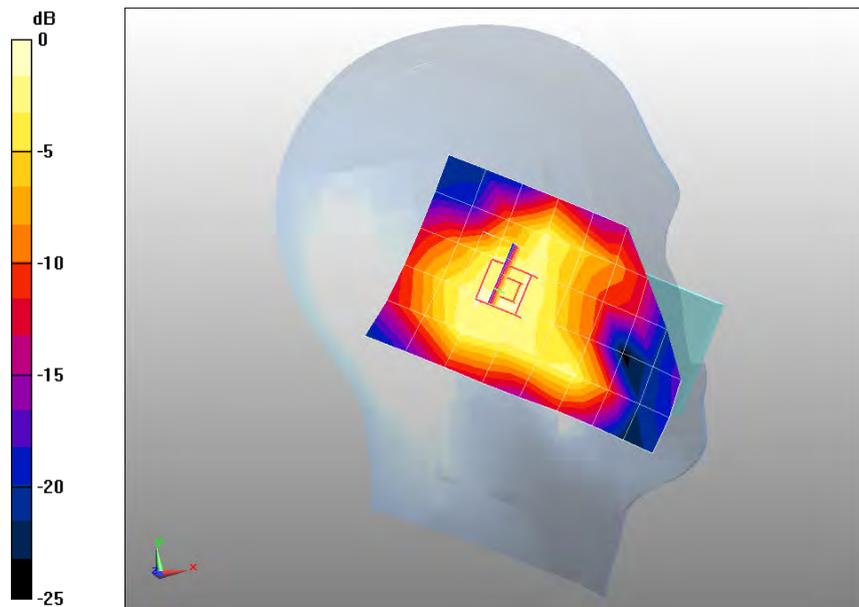

0 dB = 0.114mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

802.11b 2462MHz Touch-Right

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 1.86$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³; Phantom section: Right Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.51, 6.51, 6.51); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/802.11b High Touch-Right/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.143 mW/g

Configuration/802.11b High Touch-Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 6.84 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.086 mW/g Maximum value of SAR (measured) = 0.206 mW/g

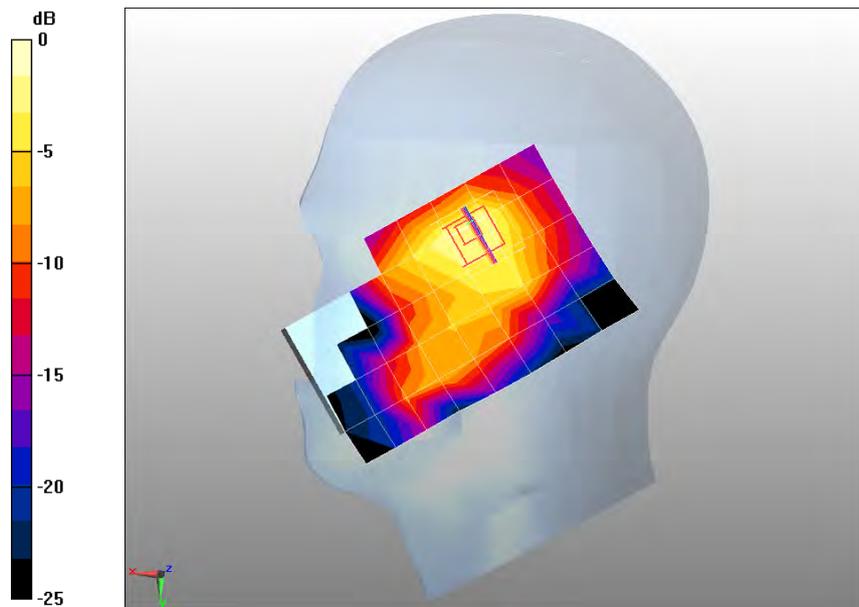

0 dB = 0.206mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

802.11b 2462MHz Body-Back

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.6, 6.6, 6.6); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/802.11b High Body-Back/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.088 mW/g

Configuration/802.11b High Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 5.6 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.040 mW/g Maximum value of SAR (measured) = 0.087 mW/g

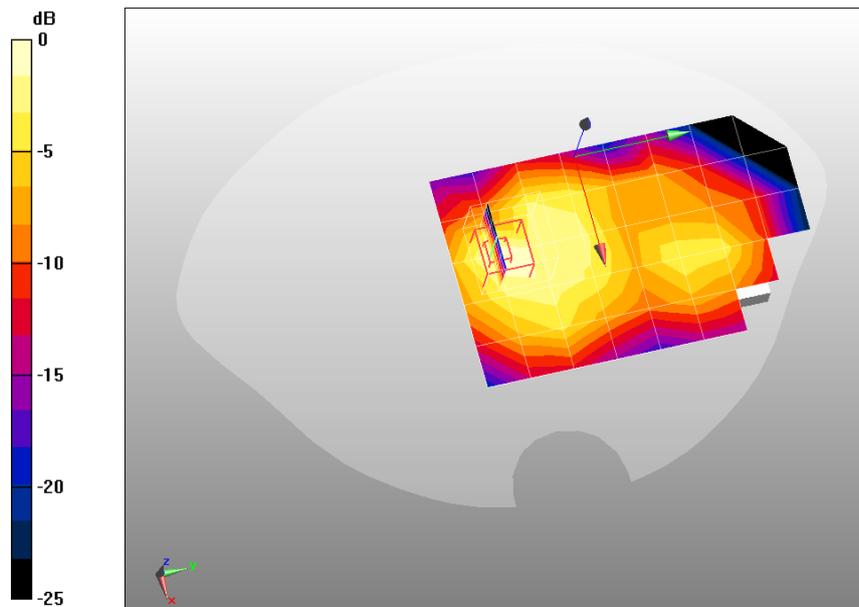

0 dB = 0.087mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

802.11b 2462MHz Body-Front

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.6, 6.6, 6.6); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/802.11b High Body-Front/Area Scan (6x9x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.043 mW/g

Configuration/802.11b High Body-Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 4.44 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.061 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.016 mW/g Maximum value of SAR (measured) = 0.043 mW/g

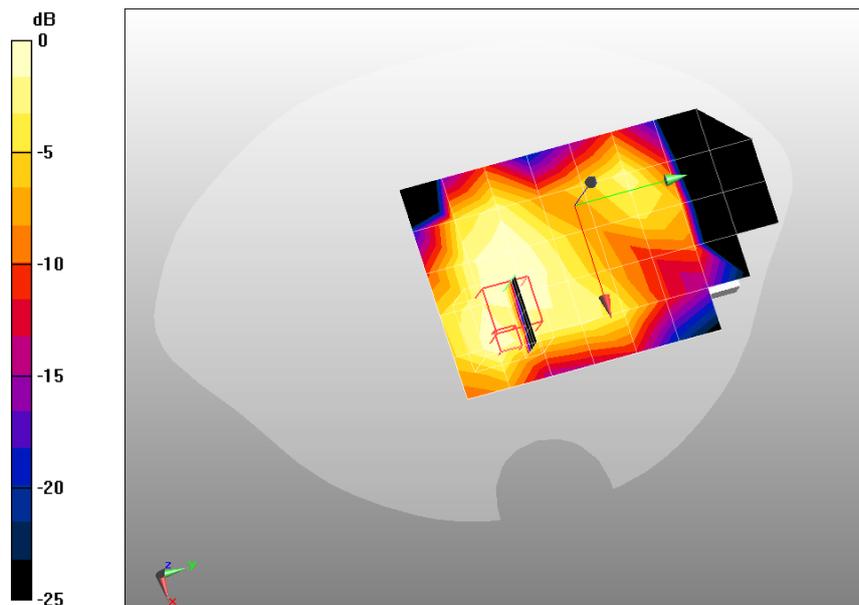

0 dB = 0.043mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

802.11b 2462MHz Body-Top

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(6.6, 6.6, 6.6); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)


Configuration/802.11b High Body-Top/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.046 mW/g

Configuration/802.11b High Body-Top/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 5.83 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.034 mW/g Maximum value of SAR (measured) = 0.072 mW/g

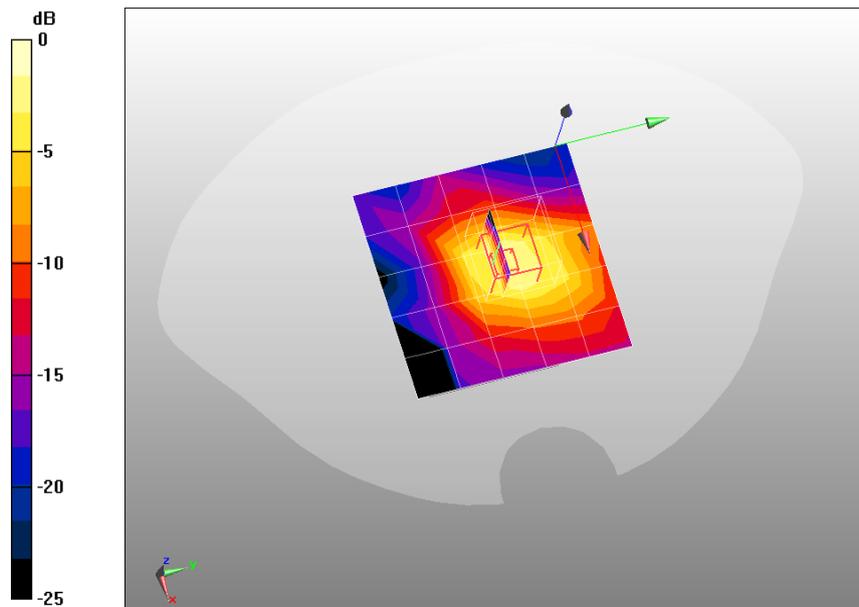

0 dB = 0.072mW/g

Date/Time: 27-11-2011

Test Laboratory: QuieTek Lab

802.11b 2462MHz Body-Left Side

DUT: GSM Mobile Phone ; Type: U8850-5

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Frequency: 2462 MHz; Medium parameters used: $f = 2462$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³; Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

DASY5 Configuration:


- Probe: EX3DV4 - SN3698; ConvF(6.6, 6.6, 6.6); Calibrated: 2011/7/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2011/5/19
- Phantom: SAM with left table; Type: SAM
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Configuration/802.11b High Body-Left Side/Area Scan (6x6x1): Measurement grid: dx=20mm, dy=20mm, Maximum value of SAR (measured) = 0.071 mW/g

Configuration/802.11b High Body-Left Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm, Reference Value = 7.02 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.052 mW/g Maximum value of SAR (measured) = 0.123 mW/g

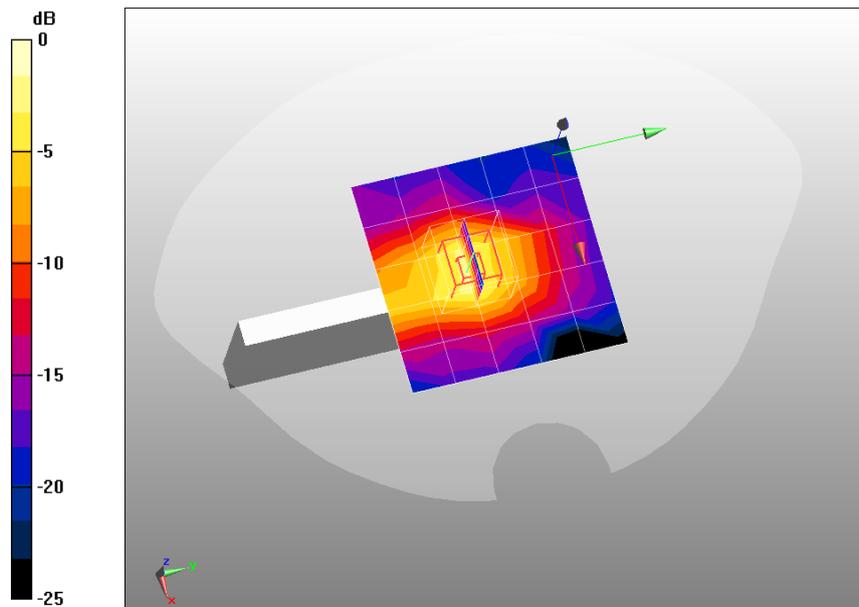

0 dB = 0.123mW/g

Appendix D. Probe Calibration Data

1155

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Quietek (Auden)**

Certificate No: **EX3-3698_Jul11**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3698**

Calibration procedure(s): **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 28, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature
Approved by:	Name Niels Kuster	Function Quality Manager	

Issued: July 28, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kallbrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from Isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 – SN:3698

July 28, 2011

Probe EX3DV4

SN:3698

Manufactured: April 22, 2009
Calibrated: July 28, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3698

July 28, 2011

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3698

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.51	0.44	0.45	± 10.1 %
DCP (mV) ^B	99.1	98.8	101.0	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	115.2	±2.5 %
			Y	0.00	0.00	1.00	105.0	
			Z	0.00	0.00	1.00	108.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3698

July 28, 2011

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3698

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	8.77	8.77	8.77	0.80	0.67	± 12.0 %
835	41.5	0.90	8.40	8.40	8.40	0.69	0.74	± 12.0 %
900	41.5	0.97	8.29	8.29	8.29	0.64	0.76	± 12.0 %
1750	40.1	1.37	7.38	7.38	7.38	0.80	0.60	± 12.0 %
1900	40.0	1.40	7.18	7.18	7.18	0.80	0.60	± 12.0 %
2450	39.2	1.80	6.51	6.51	6.51	0.80	0.61	± 12.0 %
2600	39.0	1.96	6.39	6.39	6.39	0.74	0.63	± 12.0 %
3500	37.9	2.91	6.41	6.41	6.41	0.20	1.60	± 13.1 %
5200	36.0	4.66	4.80	4.80	4.80	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.58	4.58	4.58	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.48	4.48	4.48	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.16	4.16	4.16	0.45	1.80	± 13.1 %
5800	35.3	5.27	4.22	4.22	4.22	0.45	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

EX3DV4- SN:3698

July 28, 2011

DASY/EASY - Parameters of Probe: EX3DV4- SN:3698

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	8.56	8.56	8.56	0.80	0.71	± 12.0 %
835	55.2	0.97	8.59	8.59	8.59	0.80	0.68	± 12.0 %
900	55.0	1.05	8.31	8.31	8.31	0.74	0.75	± 12.0 %
1750	53.4	1.49	7.09	7.09	7.09	0.80	0.68	± 12.0 %
1900	53.3	1.52	6.74	6.74	6.74	0.80	0.65	± 12.0 %
2450	52.7	1.95	6.60	6.60	6.60	0.80	0.60	± 12.0 %
2600	52.5	2.16	6.40	6.40	6.40	0.80	0.50	± 12.0 %
3500	51.3	3.31	5.73	5.73	5.73	0.23	1.90	± 13.1 %
5200	49.0	5.30	3.95	3.95	3.95	0.55	1.90	± 13.1 %
5300	48.9	5.42	3.74	3.74	3.74	0.55	1.90	± 13.1 %
5500	48.6	5.65	3.68	3.68	3.68	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.42	3.42	3.42	0.60	1.90	± 13.1 %
5800	48.2	6.00	3.74	3.74	3.74	0.60	1.90	± 13.1 %


^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

EX3DV4- SN:3698

July 28, 2011

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

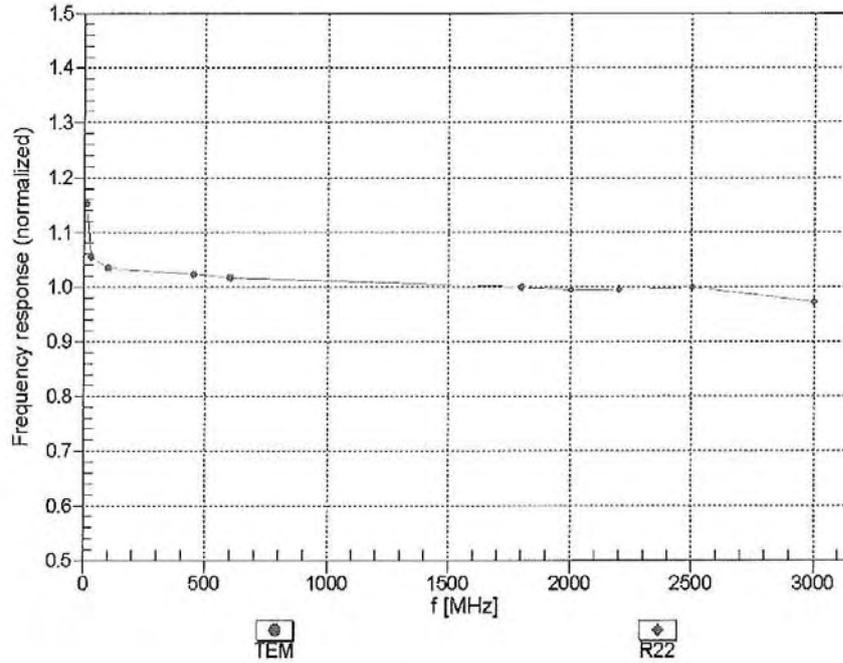


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4-- SN:3698



July 28, 2011

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

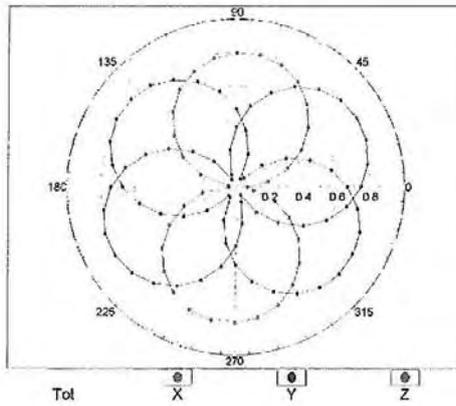

f=1800 MHz,R22

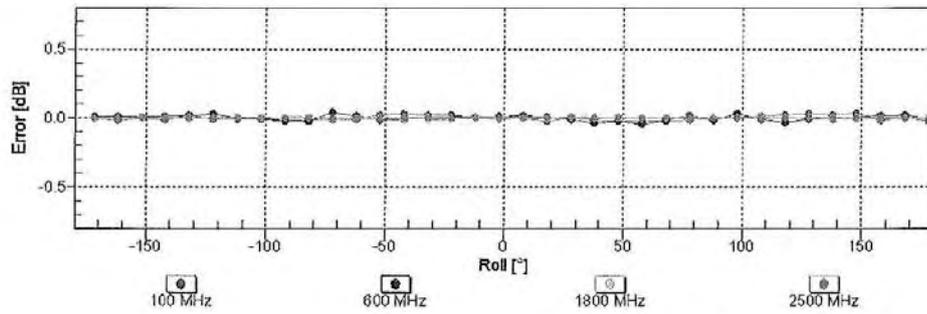
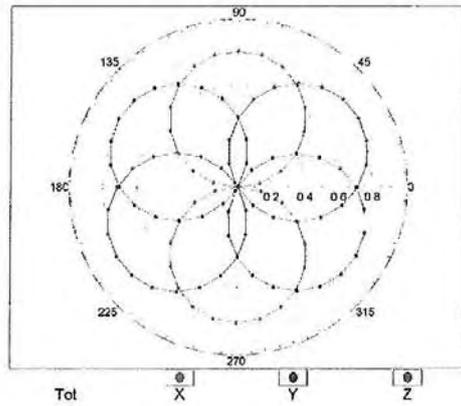


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3698

July 28, 2011

Dynamic Range f(SAR_{head})
(TEM cell , f = 900 MHz)

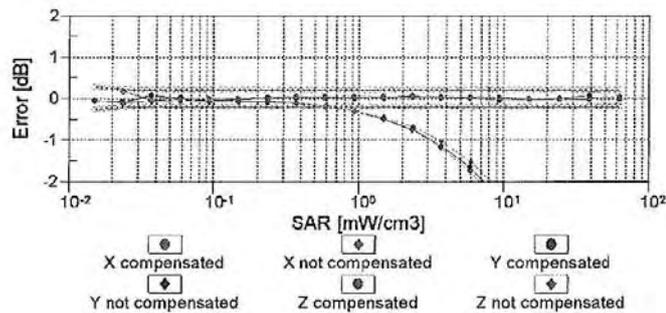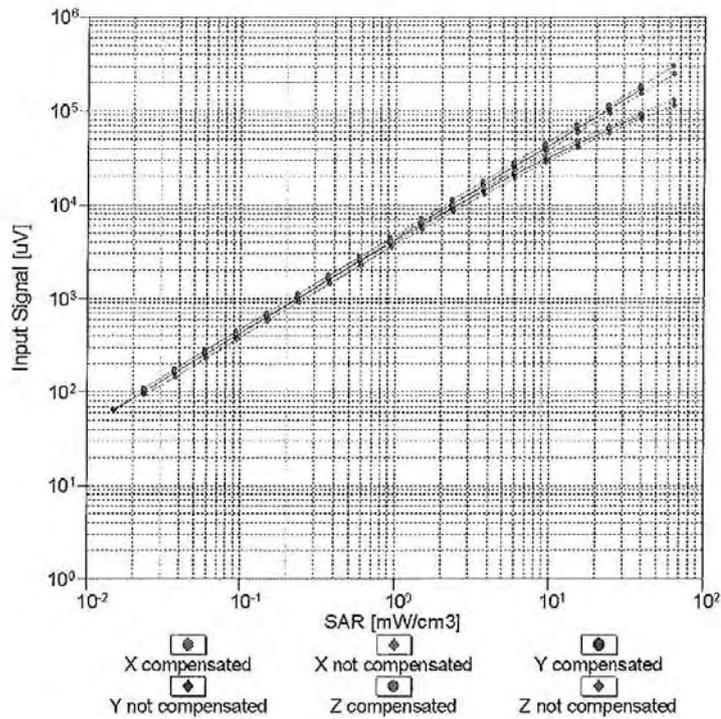


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4- SN:3698



July 28, 2011

Conversion Factor Assessment

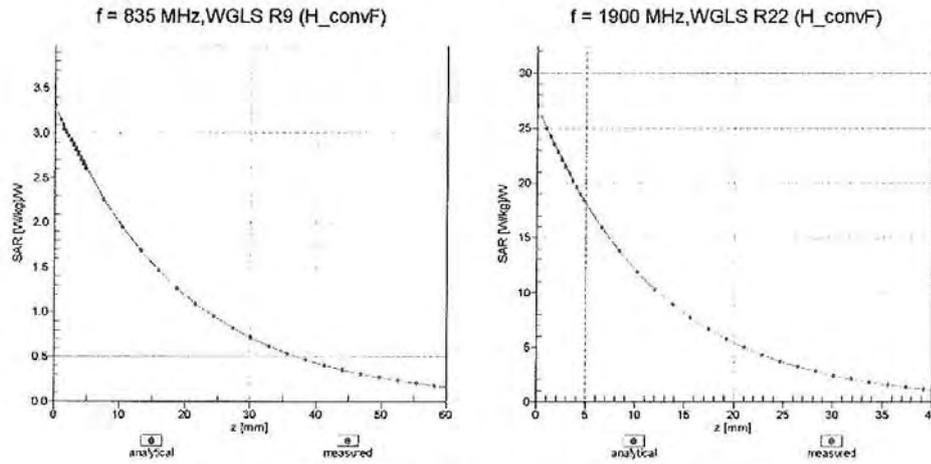

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

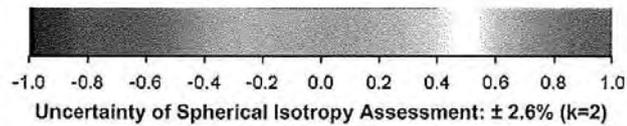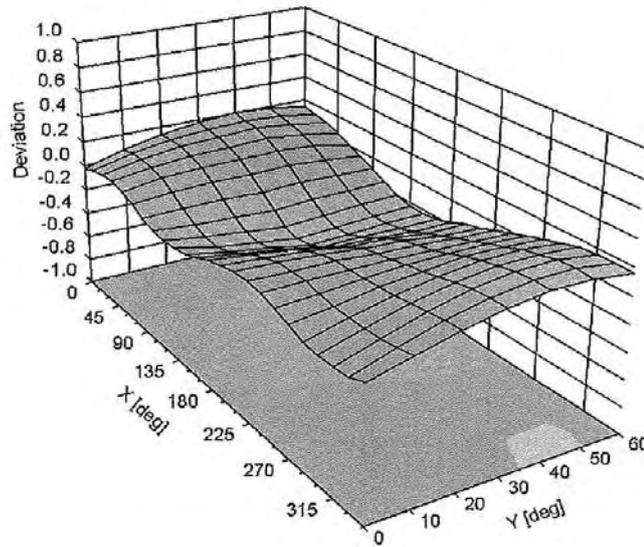

EX3DV4-- SN:3698

July 28, 2011

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3698

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Appendix E. Dipole Calibration Data

51

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Quietek (Auden)**

Certificate No: **ALS-835-QTK-315_May10**

CALIBRATION CERTIFICATE																																															
Object	ALS-D-835 - SN: QTK-315																																														
Calibration procedure(s)	QA CAL-05.v7 Calibration procedure for dipole validation kits																																														
Calibration date:	May 21, 2010																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-142A</td> <td>GB37480704</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20g)</td> <td>30-Mar-10 (No. 217-01158)</td> <td>Mar-11</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.2 / 06327</td> <td>30-Mar-10 (No. 217-01162)</td> <td>Mar-11</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>30-Apr-10 (No. ES3-3205_Apr10)</td> <td>Apr-11</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>02-Mar-10 (No. DAE4-601_Mar10)</td> <td>Mar-11</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-09)</td> <td>In house check: Oct-10</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-142A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10	Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10	Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11	Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11	Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11	DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11	RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																												
Power meter EPM-142A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10																																												
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10																																												
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11																																												
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11																																												
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11																																												
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11																																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																												
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11																																												
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11																																												
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10																																												
Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 																																												
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 																																												
			Issued: May 26, 2010																																												
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																															

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.7 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature during test	(22.5 ± 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.32 mW / g
SAR normalized	normalized to 1W	9.28 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.22 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.51 mW / g
SAR normalized	normalized to 1W	6.04 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.01 mW / g ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.2 ± 6 %	0.98 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	—	—

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.46 mW / g
SAR normalized	normalized to 1W	9.84 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.72 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.61 mW / g
SAR normalized	normalized to 1W	6.44 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.39 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.2 Ω + 0.5 j Ω
Return Loss	- 40.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.8 Ω - 1.4 j Ω
Return Loss	- 24.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.583 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	APREL
Manufactured on	Not available

DASY5 Validation Report for Head TSL

Date/Time: 21.05.2010 11:41:57

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: ALS-D-835; Serial: ALS-D-835 - SN:QTK-315

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.1 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 3.46 W/kg


SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.71 mW/g

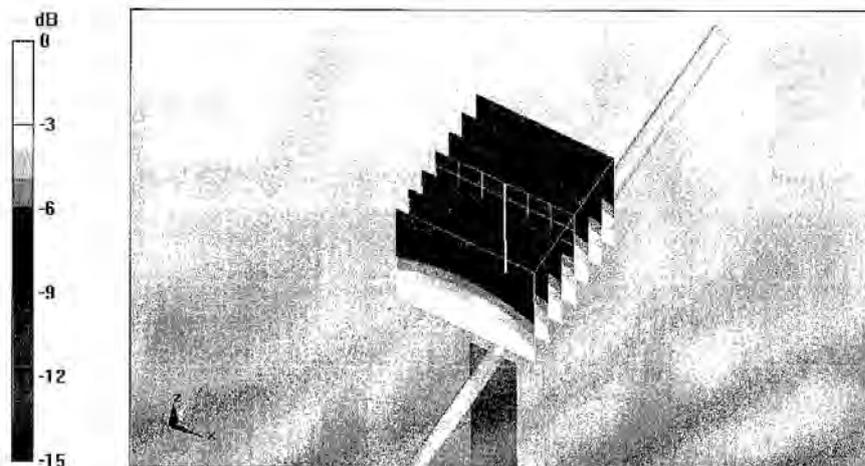

0 dB = 2.71mW/g

Impedance Measurement Plot for Head TSL

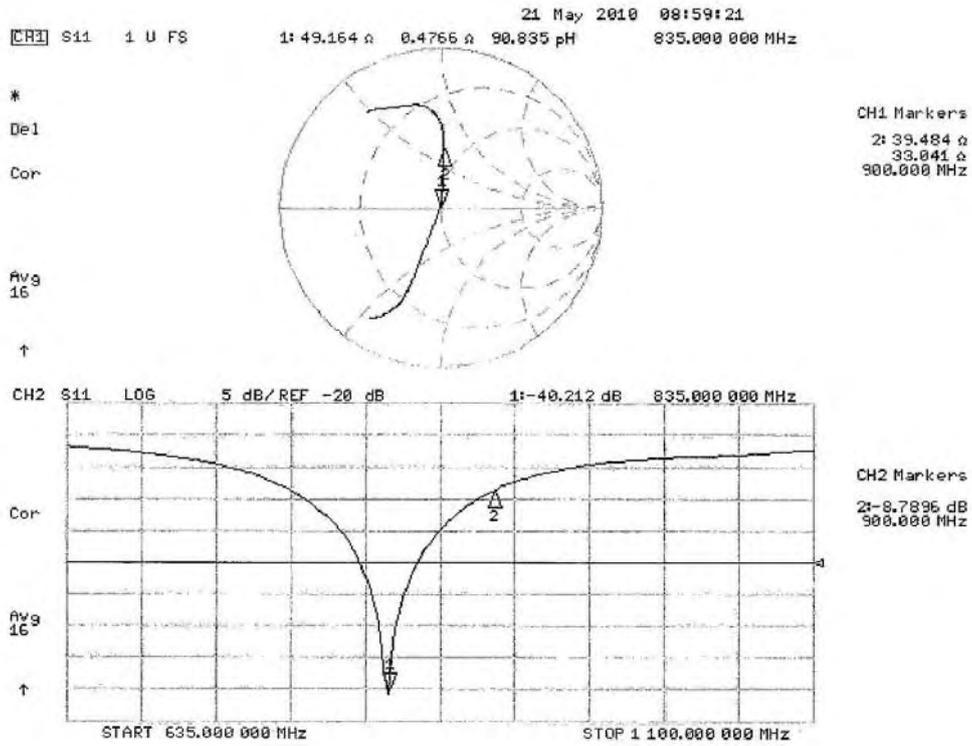

DASY5 Validation Report for Body

Date/Time: 21.05.2010 14:29:41

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: ALS-D-835; Serial: ALS-D-835 - SN:QTK-315

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

Pin250 mW/d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 3.62 W/kg


SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.87 mW/g

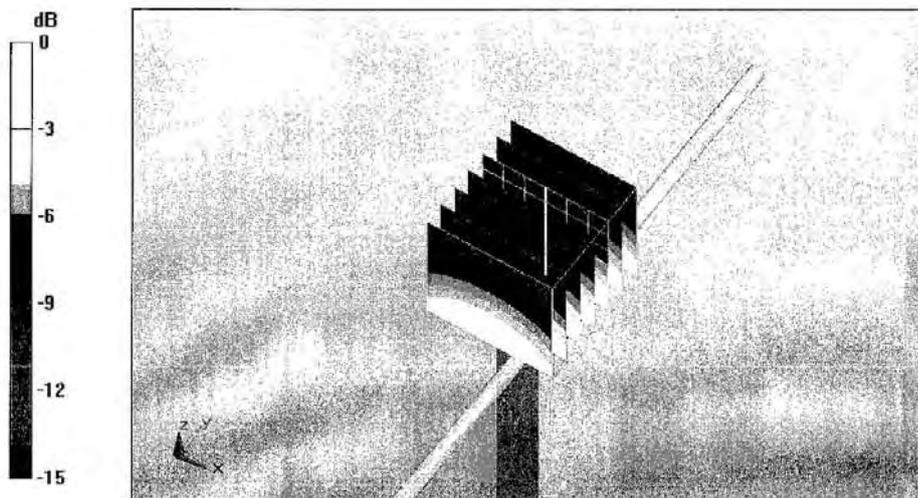

0 dB = 2.87mW/g

Impedance Measurement Plot for Body TSL

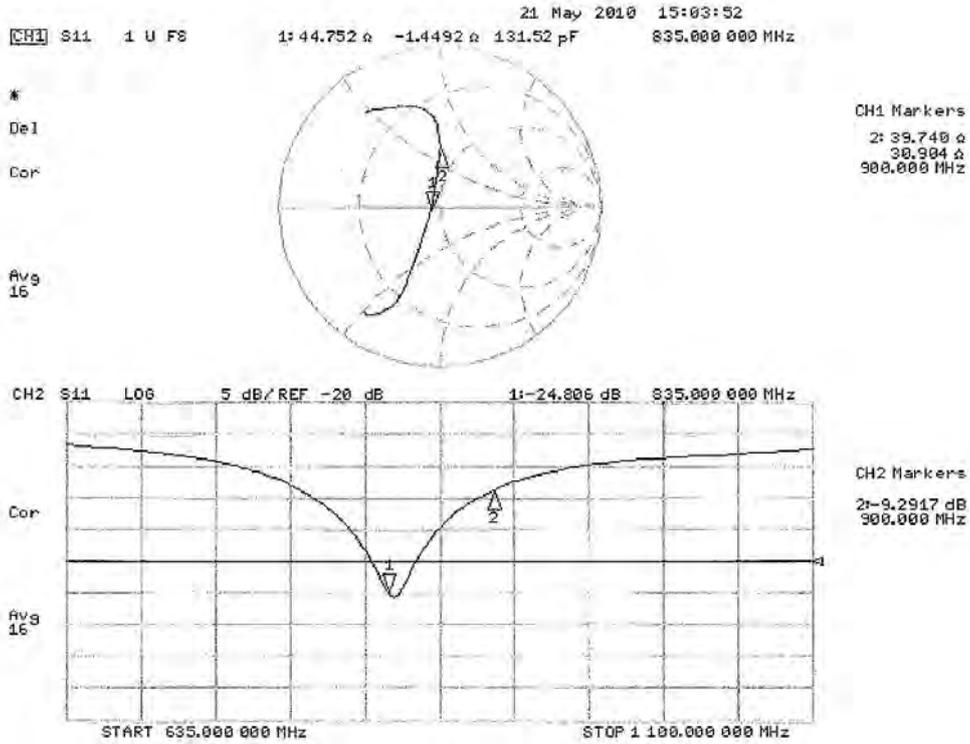

54

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeuhausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Quietek (Auden)**

Certificate No: **ALS-1900-QTK-318_May10**

CALIBRATION CERTIFICATE

Object: **ALS-D-1900-SN: QTK-318**

Calibration procedure(s): **QA CAL-05.v7
Calibration procedure for dipole validation kits**

Calibration date: **May 26, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Dimce Iliev** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Issued: May 28, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.7 ± 6 %	1.41 mho/m ± 6 %
Head TSL temperature during test	(21.5 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.65 mW / g
SAR normalized	normalized to 1W	38.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	38.4 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.00 mW / g
SAR normalized	normalized to 1W	20.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	19.9 mW / g ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	1.52 mho/m ± 6 %
Body TSL temperature during test	(21.6 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR normalized	normalized to 1W	40.4 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	40.5 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.42 mW / g
SAR normalized	normalized to 1W	21.7 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.7 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.2 Ω + 6.3 j Ω
Return Loss	- 23.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.2 Ω + 7.9 j Ω
Return Loss	- 20.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.246 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	APREL
Manufactured on	Not available

DASY5 Validation Report for Head TSL

Date/Time: 25.05.2010 12:56:48

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:QTK-318

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.8 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 17.8 W/kg


SAR(1 g) = 9.65 mW/g; SAR(10 g) = 5 mW/g

Maximum value of SAR (measured) = 12.1 mW/g

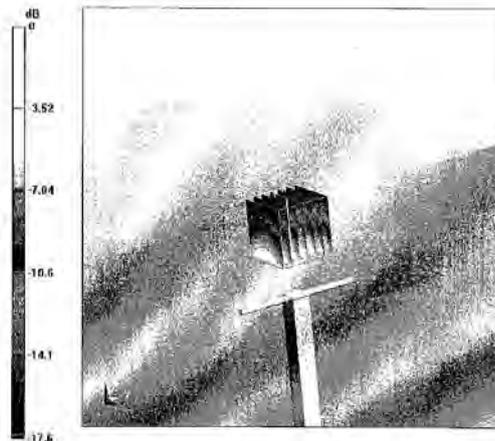

0 dB = 12.1mW/g

Impedance Measurement Plot for Head TSL

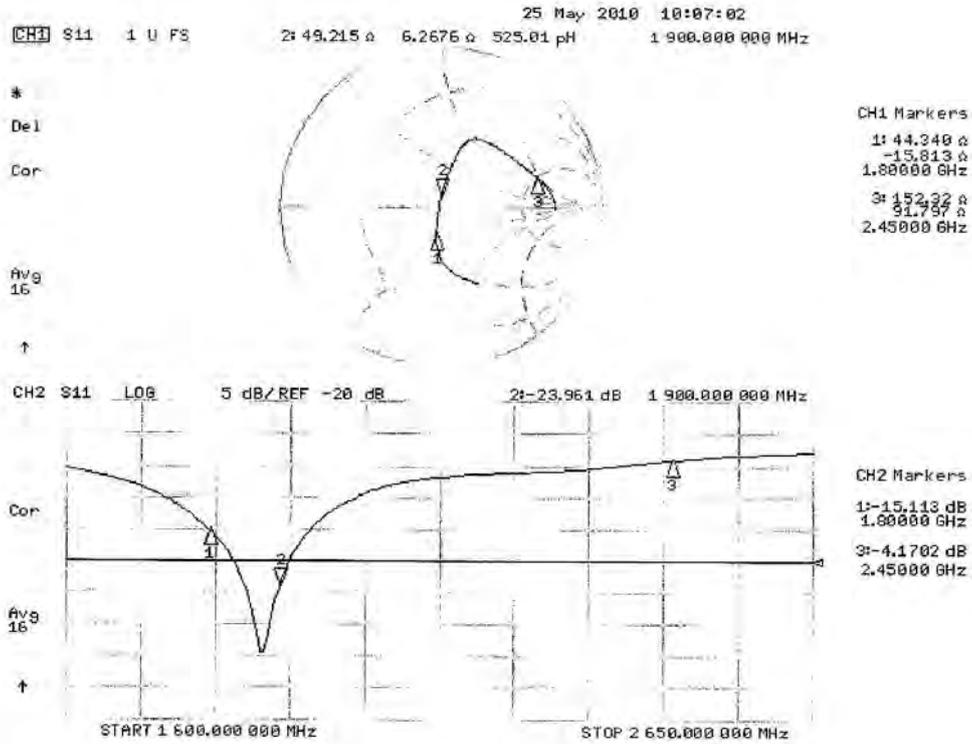

DASY5 Validation Report for Body

Date/Time: 26.05.2010 15:36:22

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:QTK-318

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U11 BB

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 96.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 16.9 W/kg


SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.42 mW/g

Maximum value of SAR (measured) = 12.7 mW/g

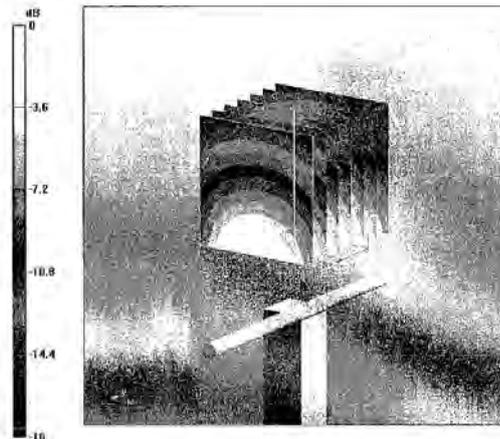

0 dB = 12.7mW/g

Impedance Measurement Plot for Body TSL

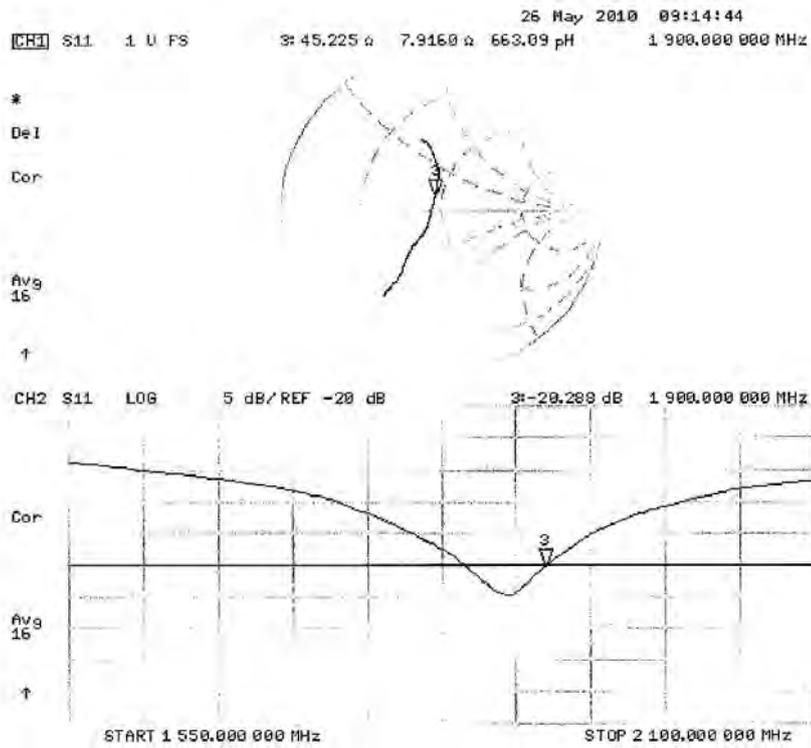

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Quietek (Auden)**

Certificate No: **D2450V2-839_Mar10**

CALIBRATION CERTIFICATE																																															
Object	D2450V2 - SN: 839																																														
Calibration procedure(s)	QA CAL-05.v7 Calibration procedure for dipole validation kits																																														
Calibration date:	March 12, 2010																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>06-Oct-09 (No. 217-01086)</td> <td>Oct-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20g)</td> <td>31-Mar-09 (No. 217-01025)</td> <td>Mar-10</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.2 / 06327</td> <td>31-Mar-09 (No. 217-01029)</td> <td>Mar-10</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>26-Jun-09 (No. ES3-3205_Jun09)</td> <td>Jun-10</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>02-Mar-10 (No. DAE4-601_Mar10)</td> <td>Mar-11</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>4-Aug-99 (in house check Oct-09)</td> <td>In house check: Oct-11</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-09)</td> <td>In house check: Oct-10</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10	Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10	Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10	Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10	Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10	DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11	RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																												
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10																																												
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10																																												
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10																																												
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10																																												
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10																																												
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11																																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																												
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11																																												
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11																																												
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10																																												
Calibrated by:	Name Mike Meili	Function Laboratory Technician	Signature 																																												
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 																																												
			Issued: March 18, 2010																																												
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																															

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DAS4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.4 ± 6 %	1.80 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	52.3 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.11 mW / g
SAR normalized	normalized to 1W	24.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	24.5 mW /g ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.4 ± 6 %	2.00 mho/m ± 6 %
Body TSL temperature during test	(21.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	51.6 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.06 mW / g
SAR normalized	normalized to 1W	24.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	24.2 mW / g ± 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.5 Ω - 0.6 j Ω
Return Loss	- 29.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.0 Ω + 0.9 j Ω
Return Loss	- 40.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.134 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 20, 2009

DASY5 Validation Report for Head TSL

Date/Time: 12.03.2010 13:24:52

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:839

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Head/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.1 V/m; Power Drift = 0.060 dB


Peak SAR (extrapolated) = 26.5 W/kg

SAR(1 g) = 13 mW/g; SAR(10 g) = 6.11 mW/g

Maximum value of SAR (measured) = 16.5 mW/g

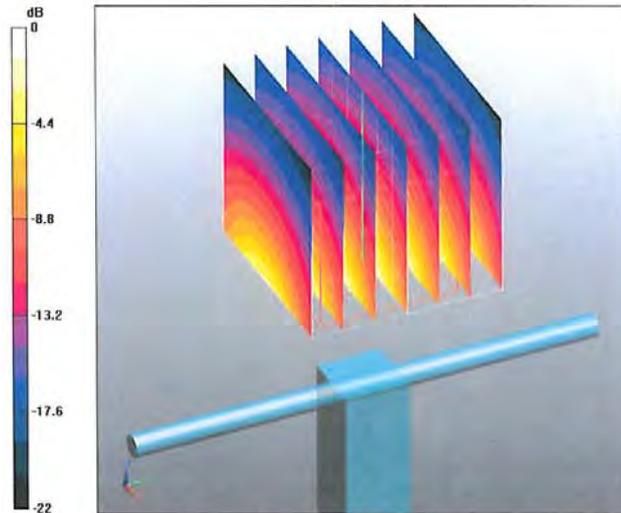

Impedance Measurement Plot for Head TSL

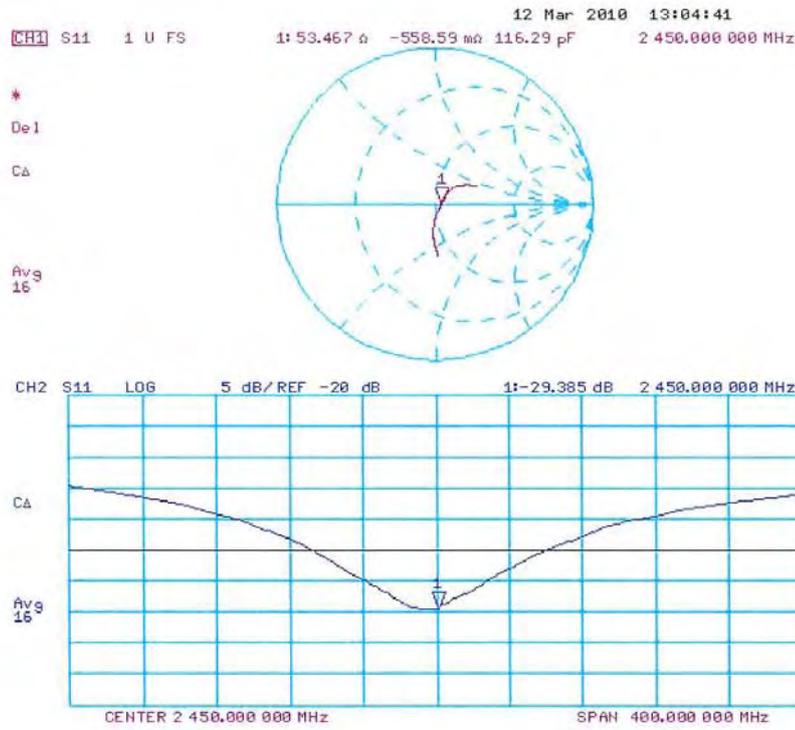

DASY5 Validation Report for Body

Date/Time: 12.03.2010 15:25:35

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:839

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.01 \text{ mho/m}$; $\epsilon_r = 54.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 26.06.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.03.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Body/d=10mm, Pin250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.9 V/m; Power Drift = -0.0047 dB

Peak SAR (extrapolated) = 27.1 W/kg


SAR(1 g) = 13 mW/g; SAR(10 g) = 6.06 mW/g

Maximum value of SAR (measured) = 17.2 mW/g

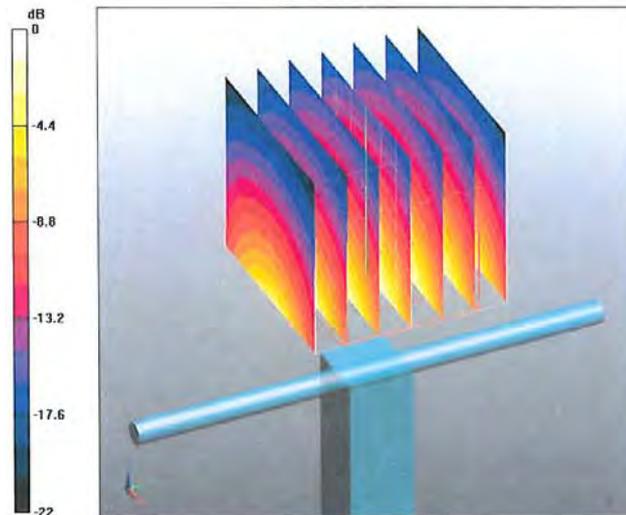

0 dB = 17.2mW/g

Impedance Measurement Plot for Body TSL

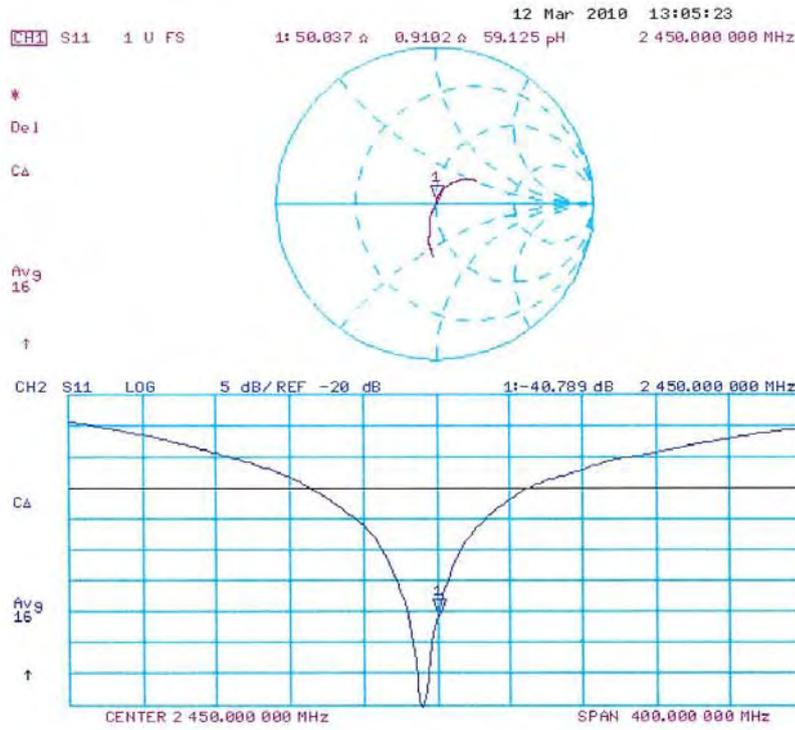

Appendix F. DAE Calibration Data

1128

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Quietek (Auden)**

Certificate No: **DAE4-1207_May11**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D0 BJ - SN: 1207**

Calibration procedure(s) **QA CAL-06.v23
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **May 19, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

Calibrated by: **Name** Andrea Guntli **Function** Technician **Signature**

Approved by: **Name** Fin Bomholt **Function** R&D Director **Signature**

Issued: May 19, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
 Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	403.870 \pm 0.1% (k=2)	404.137 \pm 0.1% (k=2)	403.707 \pm 0.1% (k=2)
Low Range	3.97902 \pm 0.7% (k=2)	3.99298 \pm 0.7% (k=2)	3.99487 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	161.0 $^{\circ}$ \pm 1 $^{\circ}$
---	-------------------------------------

Appendix

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	199990.6	-2.44	-0.00
Channel X + Input	20001.49	2.19	0.01
Channel X - Input	-19997.73	1.67	-0.01
Channel Y + Input	200001.4	-0.66	-0.00
Channel Y + Input	19998.67	-1.13	-0.01
Channel Y - Input	-20000.23	-0.93	0.00
Channel Z + Input	199999.6	-1.70	-0.00
Channel Z + Input	19997.12	-2.68	-0.01
Channel Z - Input	-20000.21	-0.81	0.00

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.4	0.47	0.02
Channel X + Input	199.13	-0.87	-0.43
Channel X - Input	-199.24	0.66	-0.33
Channel Y + Input	2000.0	0.05	0.00
Channel Y + Input	198.77	-1.03	-0.51
Channel Y - Input	-200.75	-0.65	0.32
Channel Z + Input	2000.3	0.39	0.02
Channel Z + Input	198.59	-1.51	-0.76
Channel Z - Input	-201.53	-1.63	0.81

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	2.73	1.00
	- 200	-0.40	-2.24
Channel Y	200	4.08	3.30
	- 200	-4.60	-5.00
Channel Z	200	12.25	12.29
	- 200	-14.10	-14.06

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	4.77	1.16
Channel Y	200	1.31	-	5.16
Channel Z	200	3.75	0.51	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15816	13759
Channel Y	16013	16749
Channel Z	16215	16003

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	-0.12	-1.79	0.99	0.55
Channel Y	-0.70	-1.77	0.35	0.43
Channel Z	-1.07	-3.14	1.05	0.60

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9