

FCC Test Report

APPLICANT : Huawei Technologies Co., Ltd.
EQUIPMENT : Smart Phone
BRAND NAME : Huawei
MODEL NAME : 007HW
PRODUCTING NAME : VISION/ HUAWEI
U8850-91/U8850-91
FCC ID : QISU8850-91
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on May 11, 2011 and completely tested on Jul. 04, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Feature of Equipment Under Test..... 5

 1.4. Test Site 6

 1.5. Applied Standards 6

 1.6. Ancillary Equipment List..... 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1. Test Mode 8

 2.2. Connection Diagram of Test System 10

 2.3. Test Software 12

3. TEST RESULT 13

 3.1. Test of AC Conducted Emission Measurement 13

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 21

5. UNCERTAINTY OF EVALUATION 22

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	7.2.2	AC Conducted Emission	< 15.107 limits < RSS-Gen table 2 limits	PASS	Under limit 14.1 dB at 0.19 MHz
3.2	15.109	7.2.3.2	Radiated Emission	< 15.109 limits or < RSS-Gen table 1 limits (Section 6)	PASS	Under limit 1.79 dB at 240.06 MHz

1. General Description

1.1. Applicant

Huawei Technologies Co., Ltd.

Bantian, Longgang District, Shenzhen, 51829 Guangdong, P.R.China

1.2. Manufacturer

Huawei Technologies Co., Ltd.

Bantian, Longgang District, Shenzhen, 51829 Guangdong, P.R.China

1.3. Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart Phone
Brand Name	Huawei
Model Name	007HW
Producing Name	VISION/ HUAWEI U8850-91/U8850-91
FCC ID	QISU8850-91
Tx Frequency Range	GSM1900 : 1850 MHz ~ 1910 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz
Rx Frequency Range	GSM1900 : 1930 MHz ~ 1990 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz GPS : 1.57542 GHz
Antenna Type	WWAN : Fixed Internal Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna
HW Version	PR 2.5
SW Version	V2.15
Type of Modulation	GSM / GPRS : GMSK EDGE : 8PSK Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK 802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) GPS : BPSK
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Test Site

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	CO05-HY	03CH07- HY

1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC RSS-Gen Issue 3

Remark:

- 1, All test items were verified and recorded according to the standards and without any deviation during the test.
- 2, This report is intention of applying for FCC 15B Certification only.



1.6. Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
3.	FM Signal Generator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
5.	Router	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
7.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
9.	iPod	Apple	A1285	FCC DoC	Unshielded, 1.0 m	N/A

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	Note 1
2.	Charging Mode (EUT with notebook)	☒	☒	☒

Abbreviations:



- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Note 1: Testing for this mode is not required or not the worst case.


Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + Adapter + Earphone + Camera Mode 2: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + Adapter + Earphone + GPS Rx + FM RX Mode 3: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with Notebook) + Earphone Mode 4: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + Adapter + Earphone + MPEG4
Radiated Emissions < 1GHz	1/2	Mode 1: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + Adapter + Earphone + Camera Mode 2: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + Adapter + Earphone + GPS Rx + FM RX Mode 3: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with Notebook) + Earphone Mode 4: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + Adapter + Earphone + MPEG4
Radiated Emissions ≥ 1GHz	2	Mode 1: GSM 1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with Notebook) + Earphone
Remark: <ol style="list-style-type: none"> The worst case of AC Conducted Emission is mode 3; only the test data of this mode was reported. The worst case of RE < 1G is mode 3; only the test data of this mode was reported. 		

2.2. Connection Diagram of Test System

<EUT with Adapter Mode>

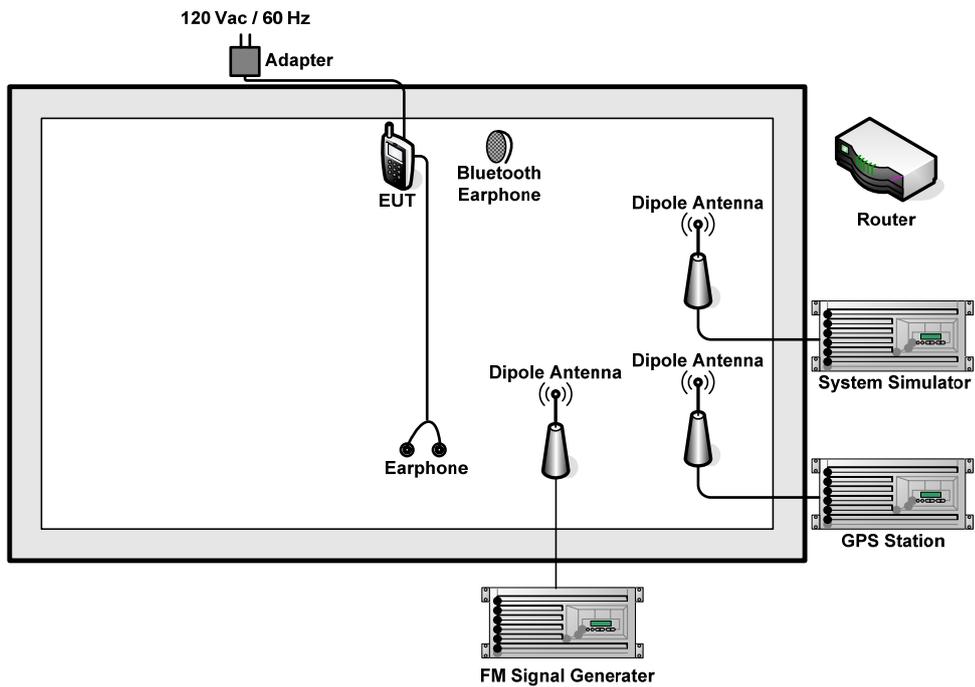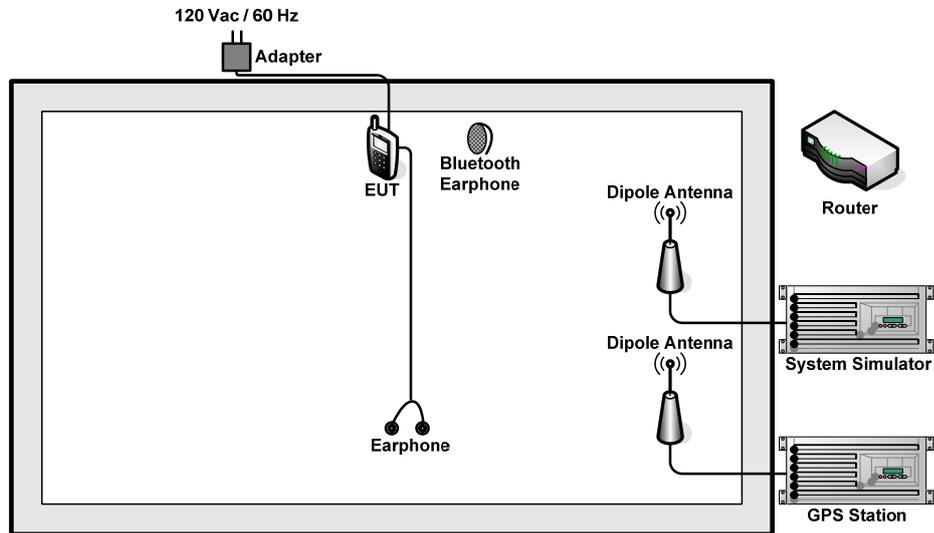

<EUT with USB Cable (Link with Notebook) Mode>

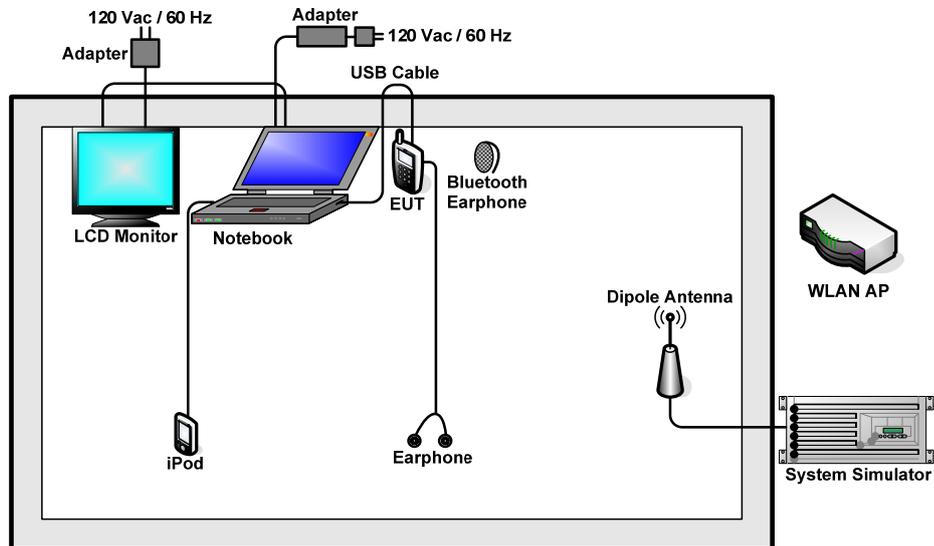



2.3. Test Software

The EUT was in GSM idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or Router/WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Execute the program, "Winthrax", installed in notebook for active sync files transfer with EUT via USB cable / iPod.
2. Execute "GPS Test" to make the EUT receive signals from GPS station continuously.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.
5. Turn on FM function and receive signals from Signal Generator continuously.
6. To keep EUT receiving signals continuously from Base station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.1.4 Test Setup

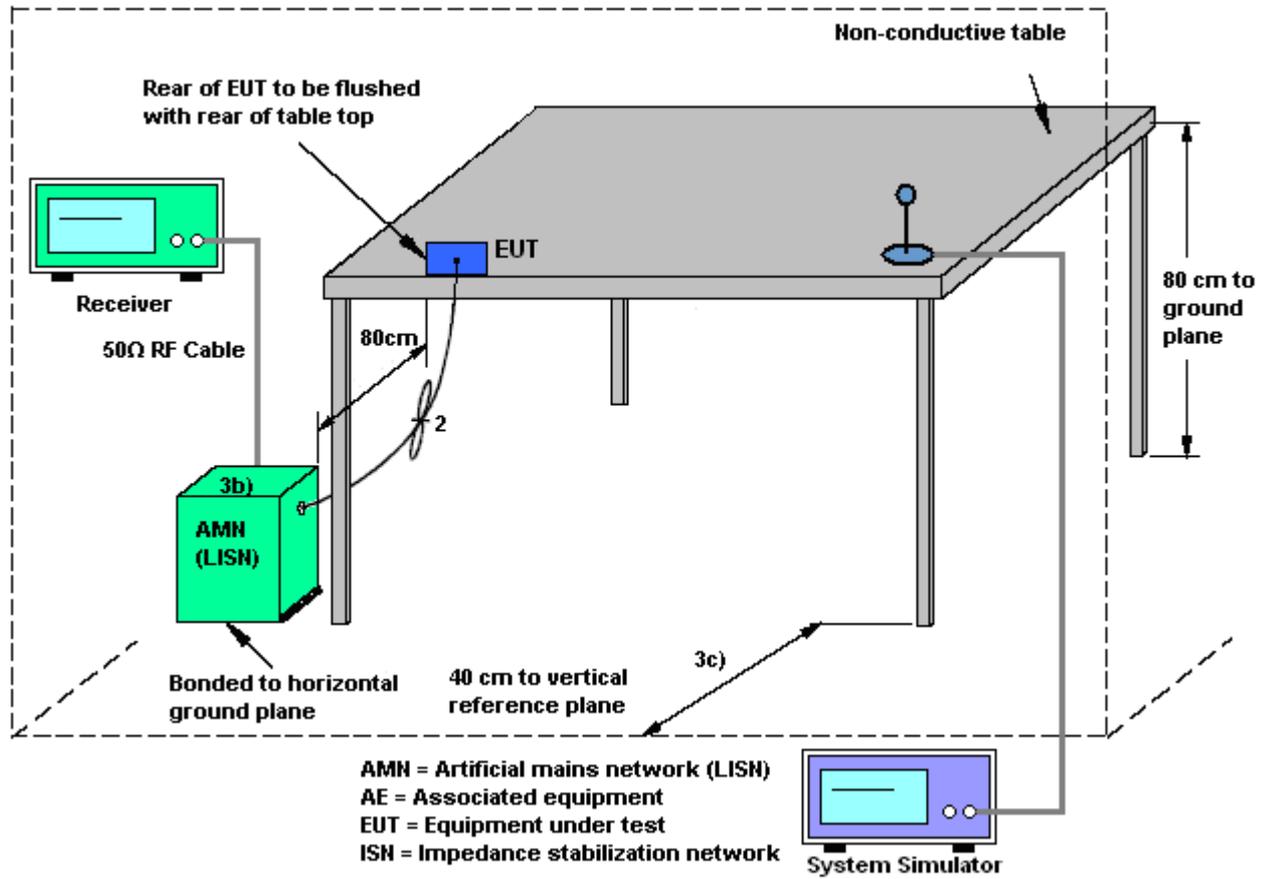




3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 3	Temperature :	21~23°C
Test Engineer :	Novic Chiang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM 1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with Notebook) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

ENV216 Auto Test

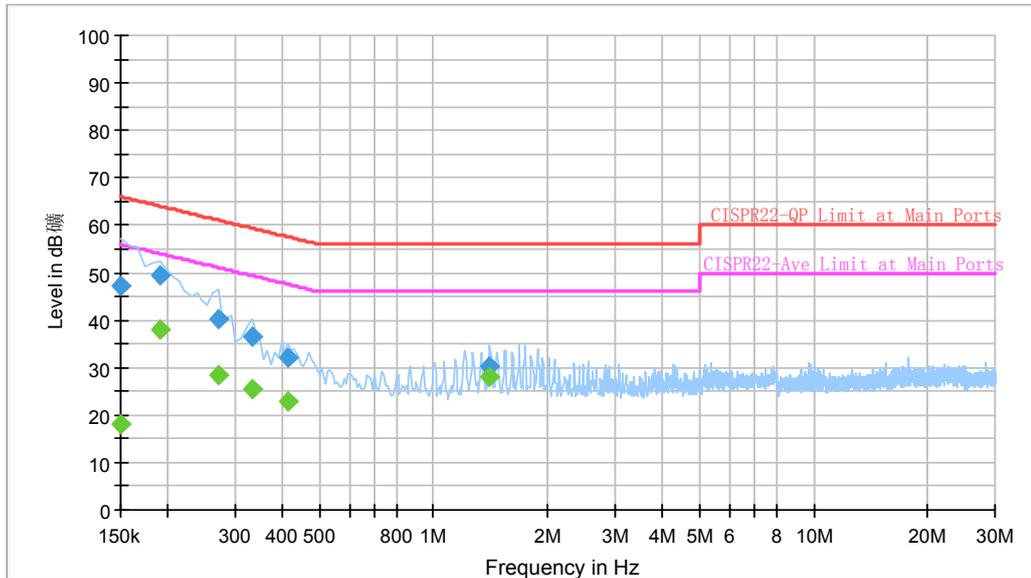

Final Result 1

Frequency	QuasiPeak	Filter	Line	Corr.	Margin	Limit
0.150000	47.2	Off	L1	19.4	18.8	66.0
0.190000	49.4	Off	L1	19.4	14.6	64.0
0.270000	40.3	Off	L1	19.3	20.8	61.1
0.334000	36.5	Off	L1	19.3	22.9	59.4
0.414000	32.0	Off	L1	19.4	25.6	57.6
1.406000	30.3	Off	L1	19.4	25.7	56.0


Final Result 2

Frequency	Average	Filter	Line	Corr.	Margin	Limit
0.150000	18.1	Off	L1	19.4	37.9	56.0
0.190000	37.9	Off	L1	19.4	16.1	54.0
0.270000	28.5	Off	L1	19.3	22.6	51.1
0.334000	25.4	Off	L1	19.3	24.0	49.4
0.414000	22.8	Off	L1	19.4	24.8	47.6
1.406000	27.9	Off	L1	19.4	18.1	46.0



Test Mode :	Mode 3	Temperature :	21~23°C
Test Engineer :	Novic Chiang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM 1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with Notebook) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

ENV216 Auto Test

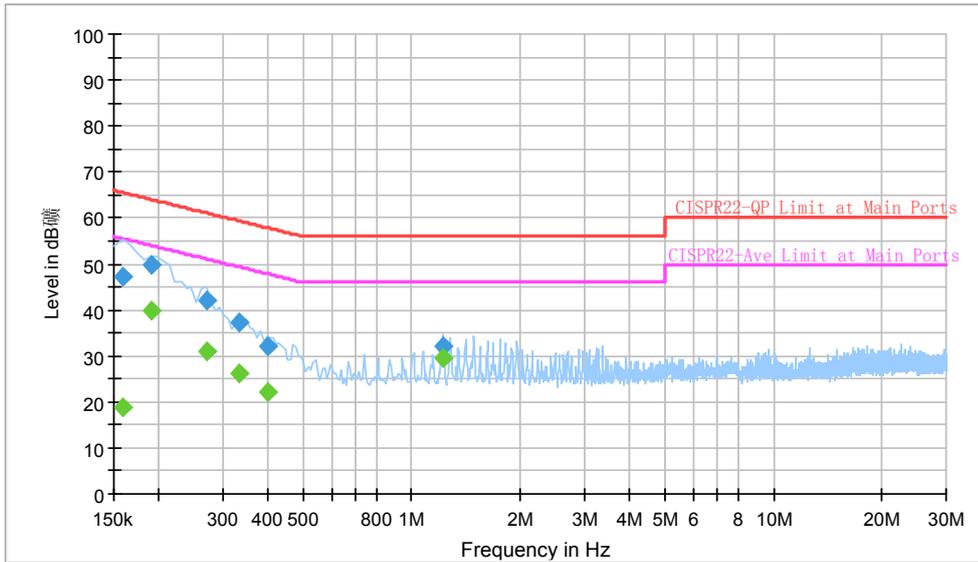

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	47.3	Off	N	19.4	18.3	65.6
0.190000	49.9	Off	N	19.4	14.1	64.0
0.270000	42.0	Off	N	19.3	19.1	61.1
0.334000	37.1	Off	N	19.3	22.3	59.4
0.398000	32.2	Off	N	19.4	25.7	57.9
1.214000	32.2	Off	N	19.5	23.8	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	18.7	Off	N	19.4	36.9	55.6
0.190000	39.8	Off	N	19.4	14.2	54.0
0.270000	31.1	Off	N	19.3	20.0	51.1
0.334000	26.3	Off	N	19.3	23.1	49.4
0.398000	22.3	Off	N	19.4	25.6	47.9
1.214000	29.5	Off	N	19.5	16.5	46.0



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


3.2.2. Measuring Instruments

See list of measuring instruments of this test report.

3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


3.2.4. Test Setup of Radiated Emission

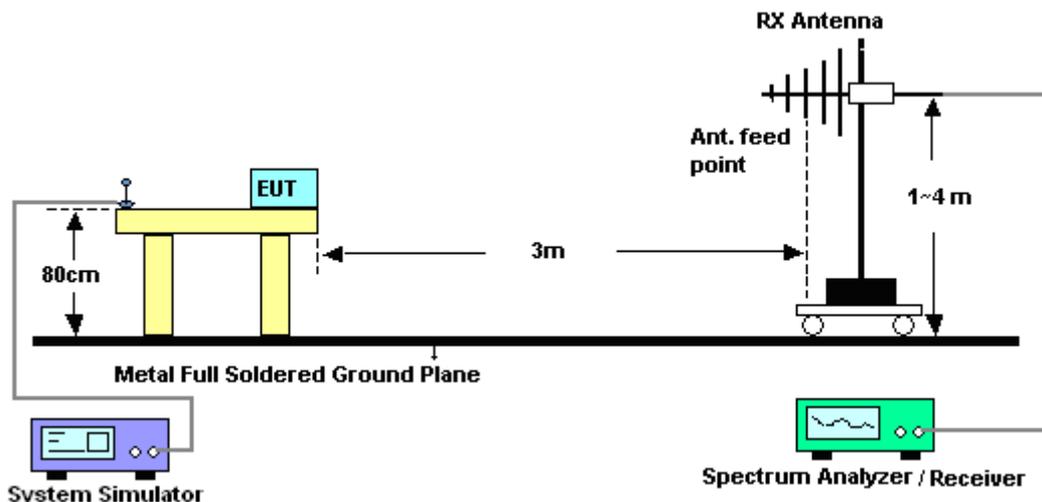



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 3	Temperature :	22~24°C
Test Engineer :	David	Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM 1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with Notebook) + Earphone		

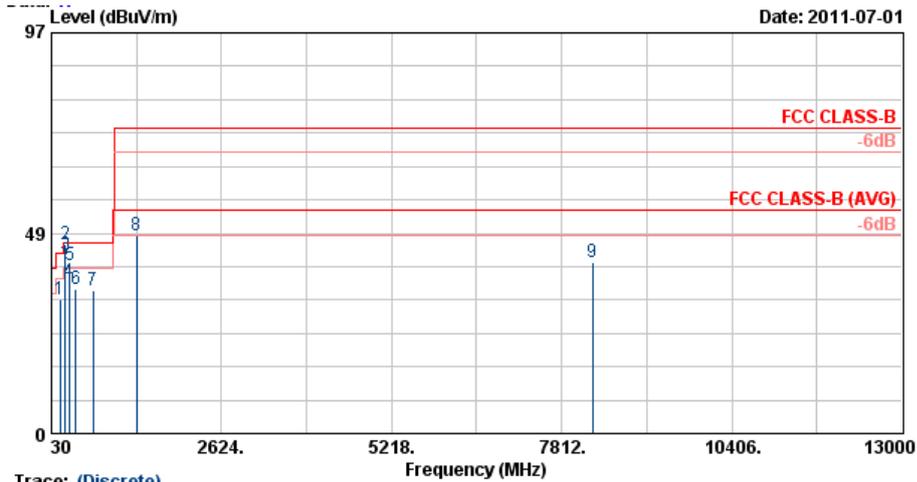


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	165.54	32.52	-10.98	43.50	52.80	10.02	1.23	31.52	---	---	Peak
2 !	240.06	45.68	-0.32	46.00	63.58	11.98	1.53	31.42	128	227	Peak
3 !	240.06	43.12	-2.88	46.00	61.03	11.98	1.53	31.42	128	227	QP
4	297.30	36.87	-9.13	46.00	53.01	13.43	1.75	31.33	---	---	Peak
5 !	312.60	40.91	-5.09	46.00	56.59	13.85	1.79	31.32	---	---	Peak
6	397.30	34.97	-11.03	46.00	47.52	16.50	2.14	31.19	---	---	Peak
7	663.30	34.48	-11.52	46.00	41.99	20.48	2.87	30.86	---	---	Peak
8	1332.00	47.82	-26.18	74.00	74.50	27.84	4.31	58.83	100	0	Peak
9	8278.00	41.57	-32.43	74.00	53.22	35.56	10.92	58.12	100	0	Peak



Test Mode :	Mode 3	Temperature :	22~24°C
Test Engineer :	David	Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM 1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with Notebook) + Earphone		

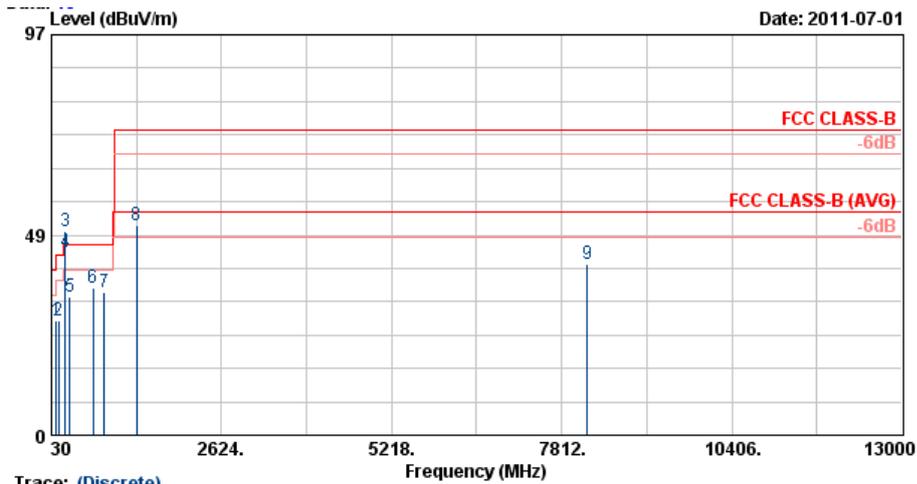

Site : 03CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	106.41	27.71	-15.79	43.50	47.85	10.37	1.03	31.55	---	---	Peak
2	138.54	27.82	-15.68	43.50	46.59	11.60	1.20	31.55	---	---	Peak
3 @	240.06	49.45	3.45	46.00	67.35	11.98	1.53	31.42	100	135	Peak
4 !	240.06	44.21	-1.79	46.00	62.12	11.98	1.53	31.42	100	135	QP
5	313.30	33.71	-12.29	46.00	49.35	13.88	1.80	31.32	---	---	Peak
6	666.10	35.75	-10.25	46.00	43.22	20.51	2.87	30.85	---	---	Peak
7	833.40	34.79	-11.21	46.00	39.42	22.85	3.23	30.71	---	---	Peak
8	1326.00	50.83	-23.17	74.00	77.53	27.83	4.31	58.85	100	0	Peak
9	8198.00	41.49	-32.51	74.00	53.19	35.54	10.89	58.13	100	0	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2010	Oct. 30, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH07-HY)

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP151102 as below.