



Appendix B. SAR Measurement Plots

Table of contents
GSM 850 MHz Head
GSM 850 MHz Body
GSM 1900 MHz Head
GSM 1900 MHz Body
WiFi 802.11b Head
WiFi 802.11b Body

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 190CH Left hand touch cheek

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.233 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.6 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

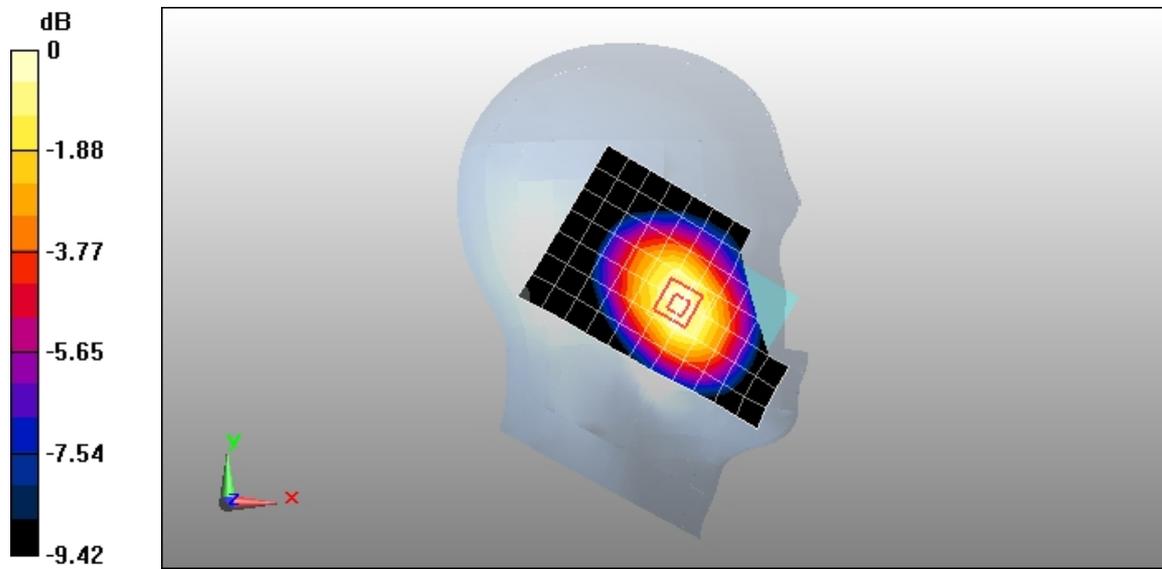

0 dB = 0.236mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 190CH Left hand tilt 15 degree

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.187 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.136 mW/g

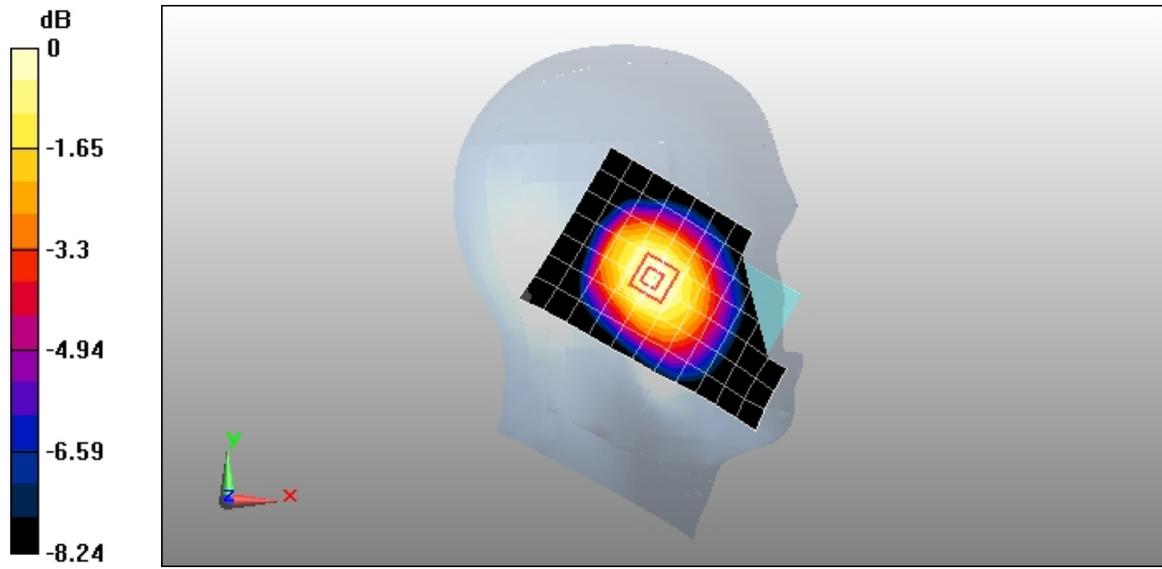

0 dB = 0.187mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 190CH Right hand touch cheek

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.31 V/m; Power Drift = -0.011 dB


Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.266 mW/g

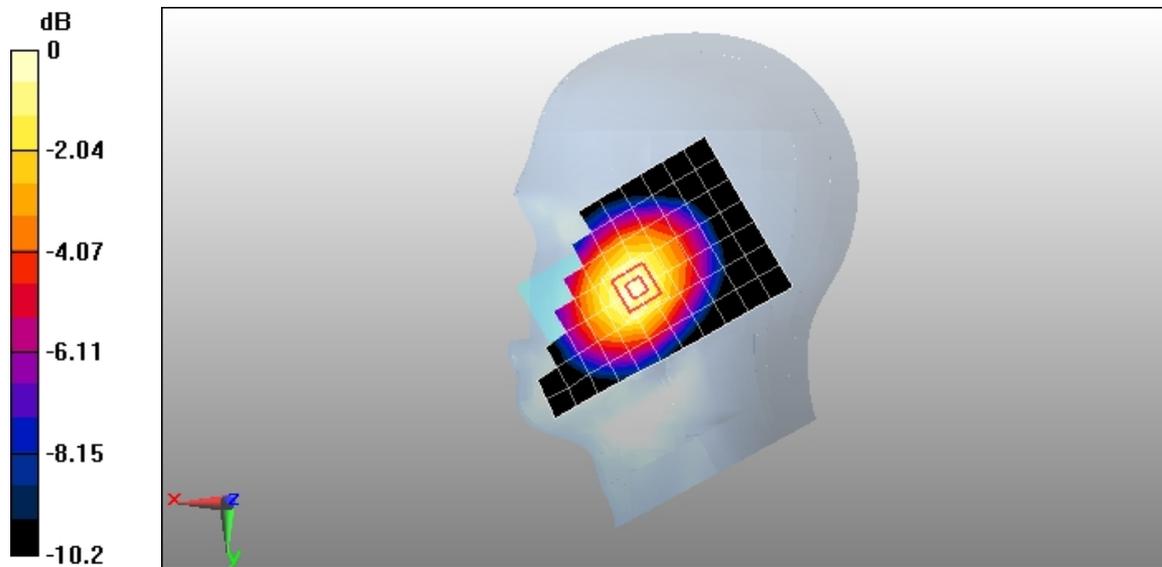

0 dB = 0.266mW/g

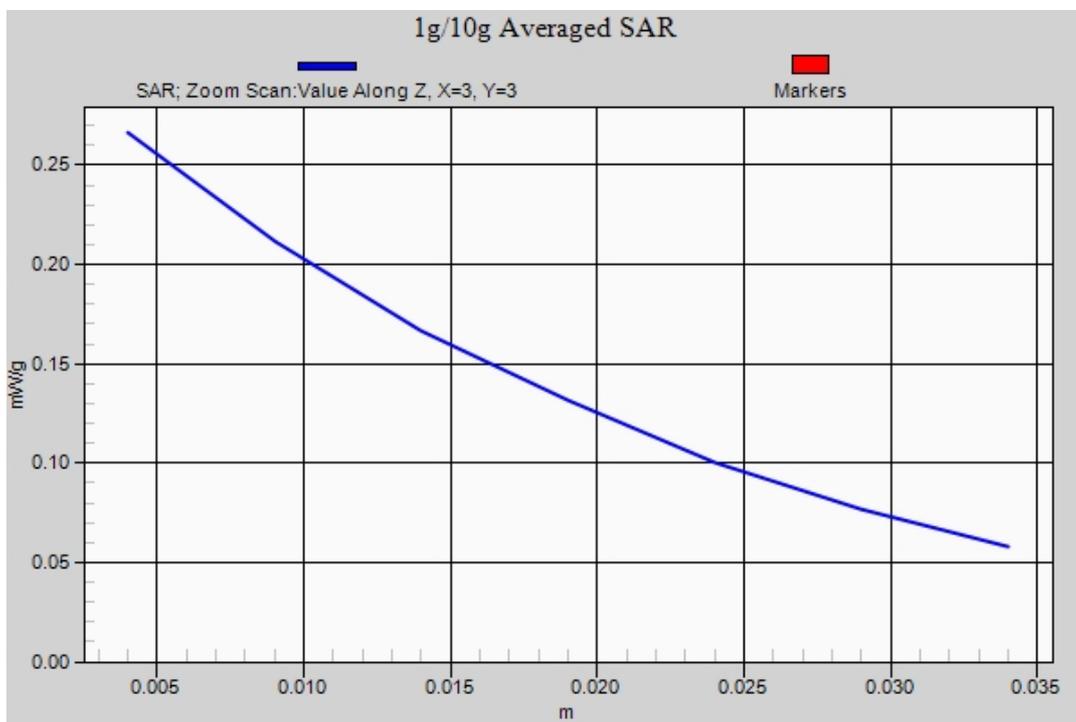

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 190CH Right hand tilt 15 degree

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.190 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.194 mW/g

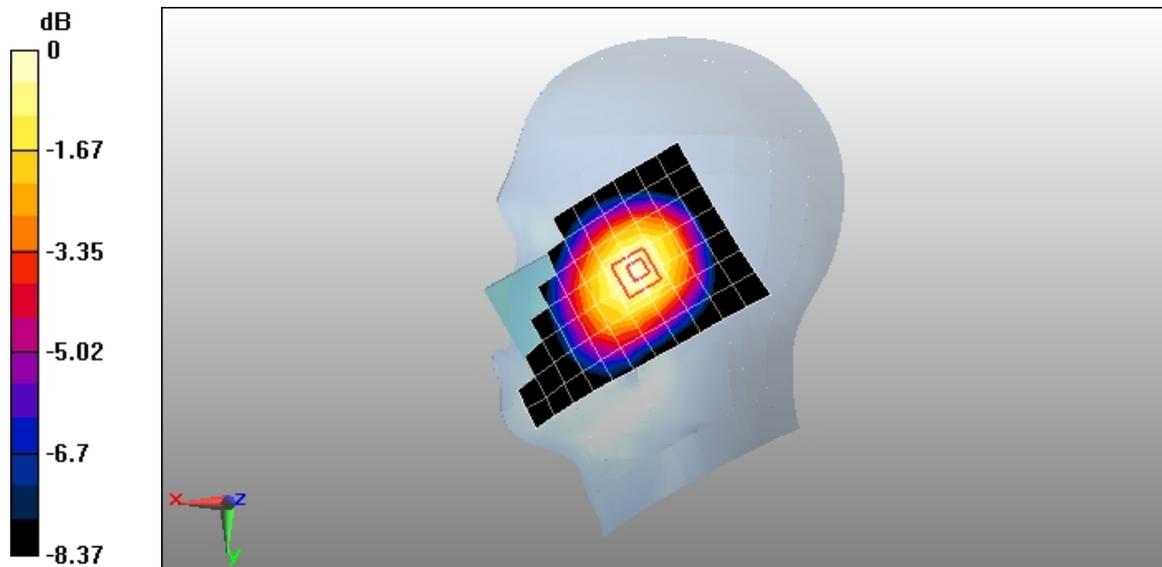

0 dB = 0.194mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 190CH Right hand touch check with black shell

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.06, 9.06, 9.06); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.220 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.93 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

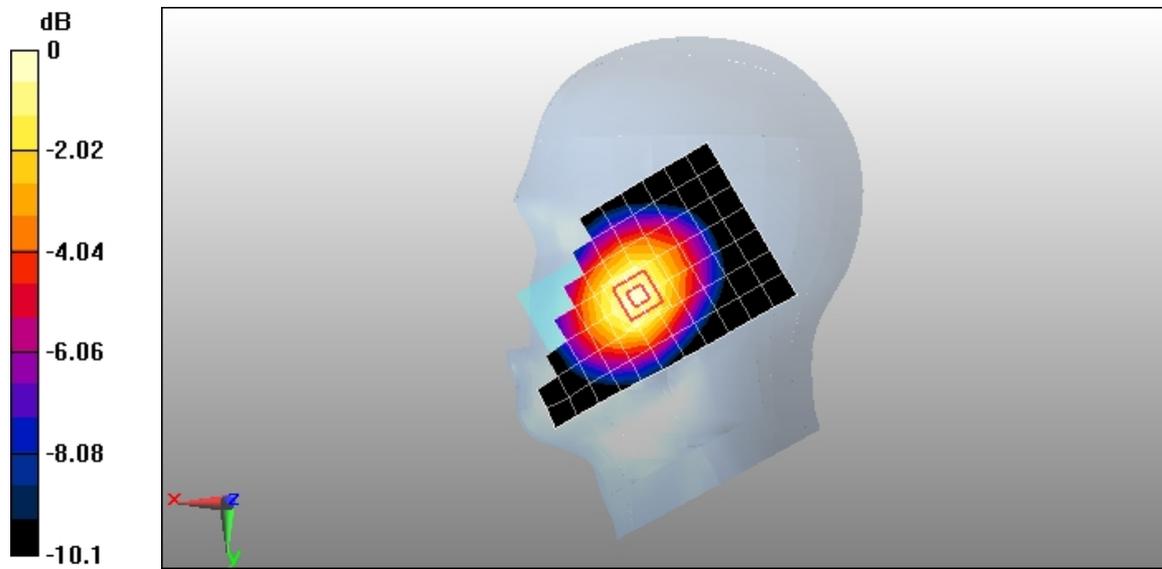

0 dB = 0.236mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 GPRS 1TS 190CH Towards Phantom 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.293 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

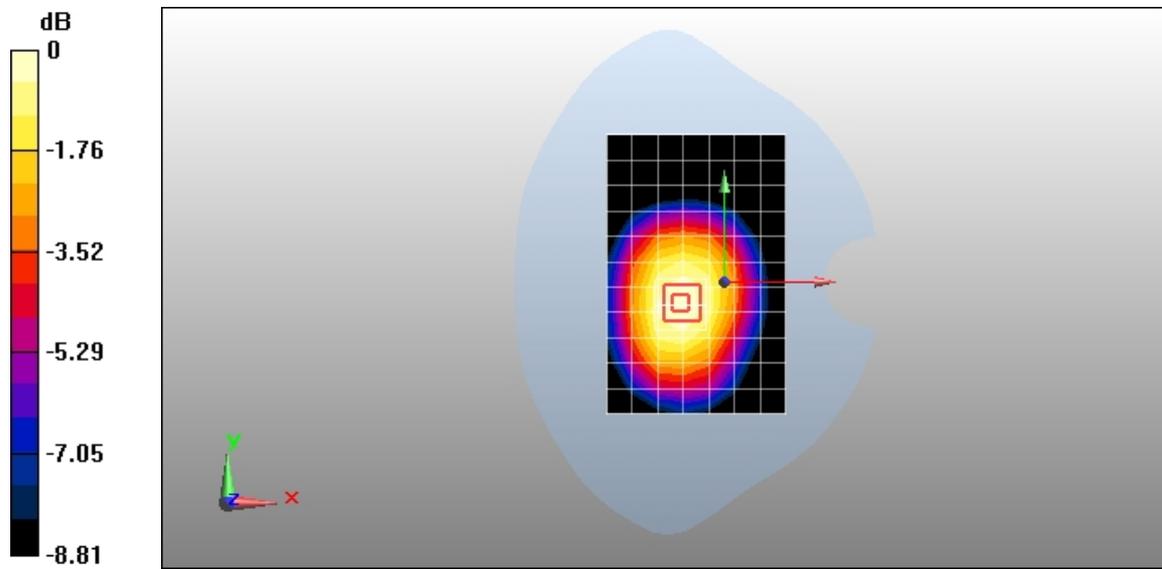

0 dB = 0.298mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 GPRS 2TS 190CH Towards Phantom 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.386 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.390 mW/g

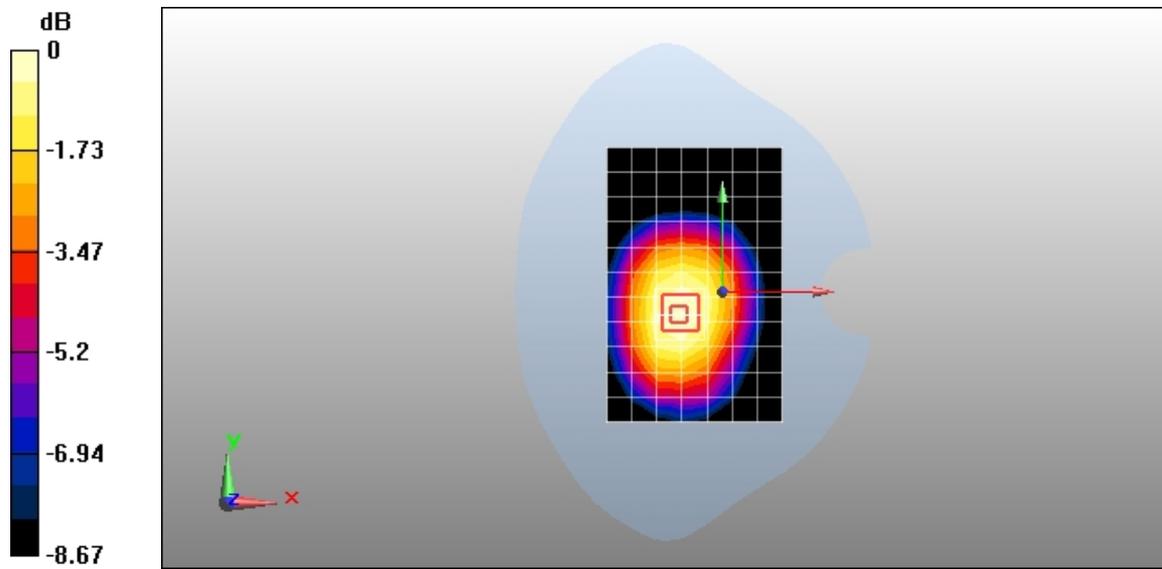

0 dB = 0.390mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 GPRS 2TS 190CH Towards Ground 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.653 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.00125 dB


Peak SAR (extrapolated) = 0.800 W/kg

SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.465 mW/g

Maximum value of SAR (measured) = 0.659 mW/g

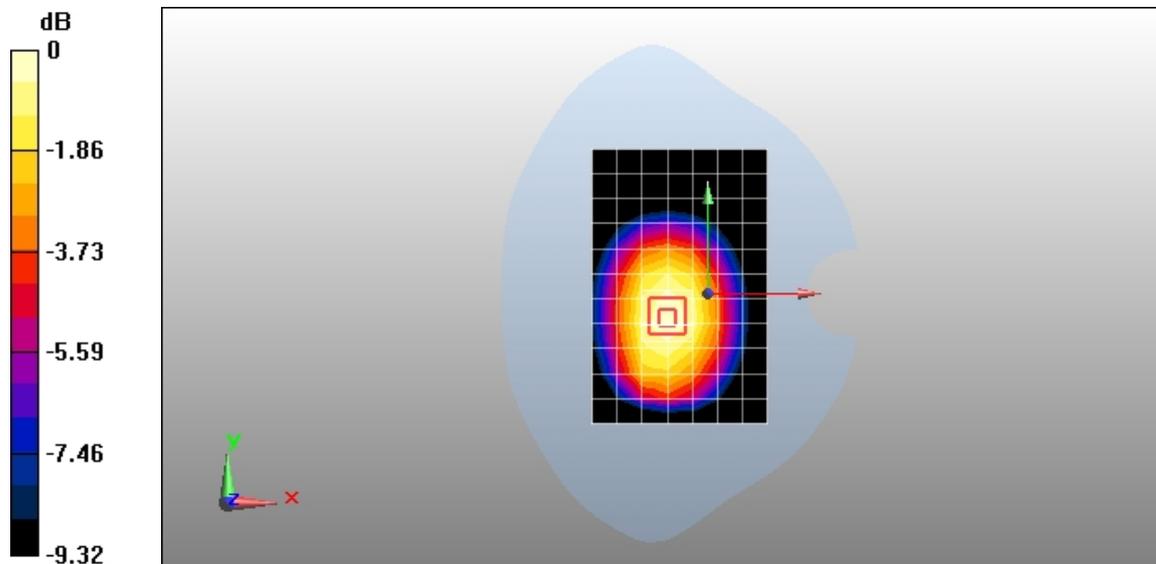

0 dB = 0.659mW/g

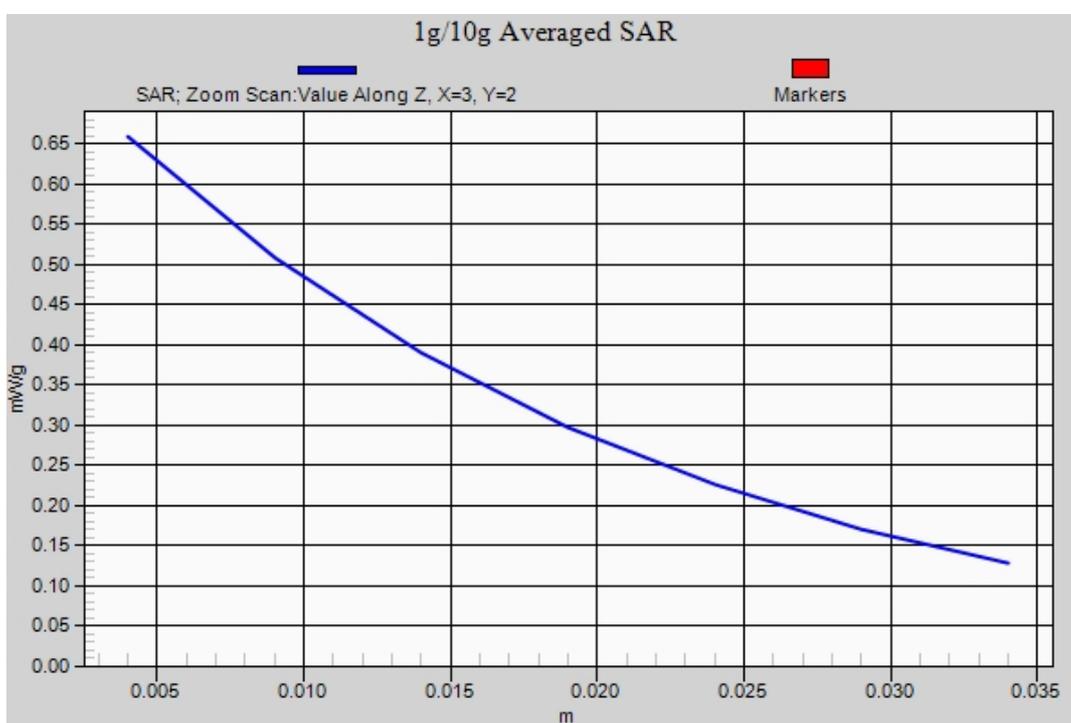

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 GPRS 2TS 190CH Left edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.395 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.260 mW/g

Maximum value of SAR (measured) = 0.405 mW/g

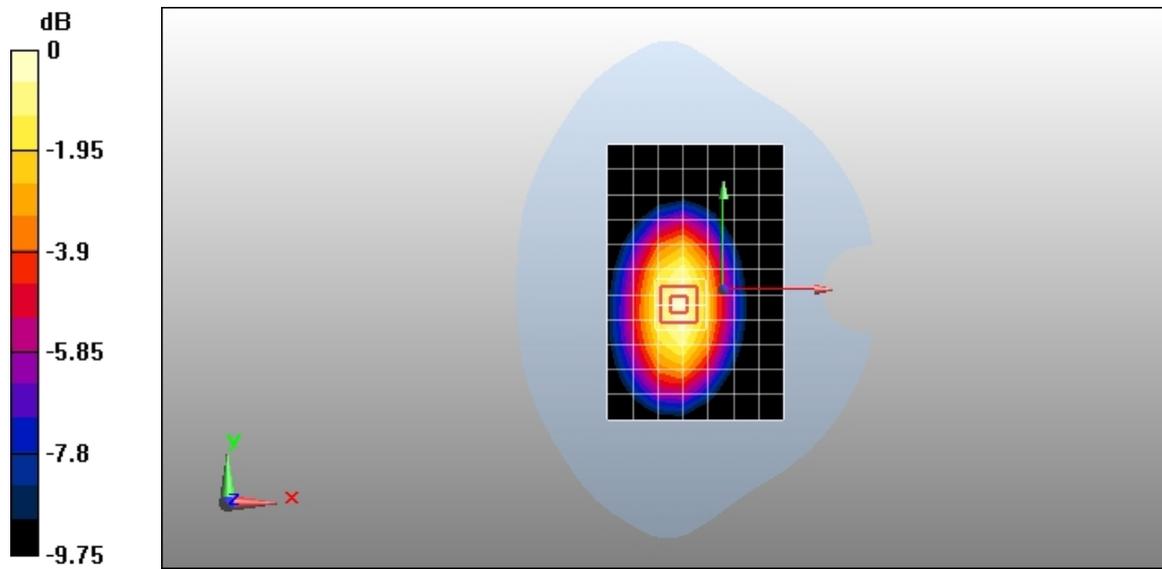

0 dB = 0.405mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 GPRS 2TS 190CH Right edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.543 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.7 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.560 mW/g

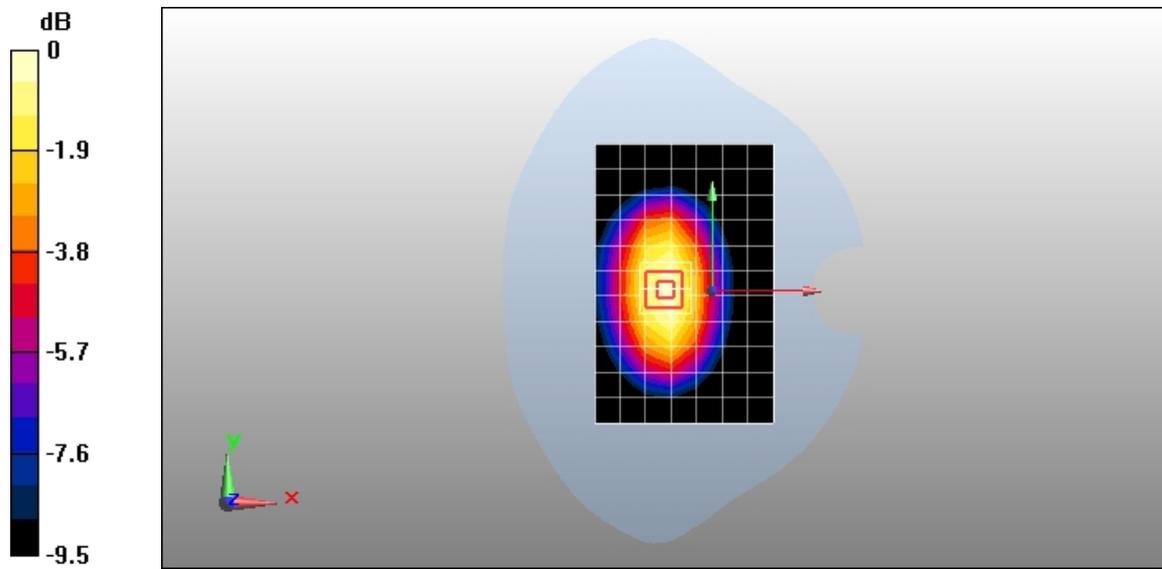

0 dB = 0.560mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 GPRS 2TS 190CH Bottom edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.065 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.06 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

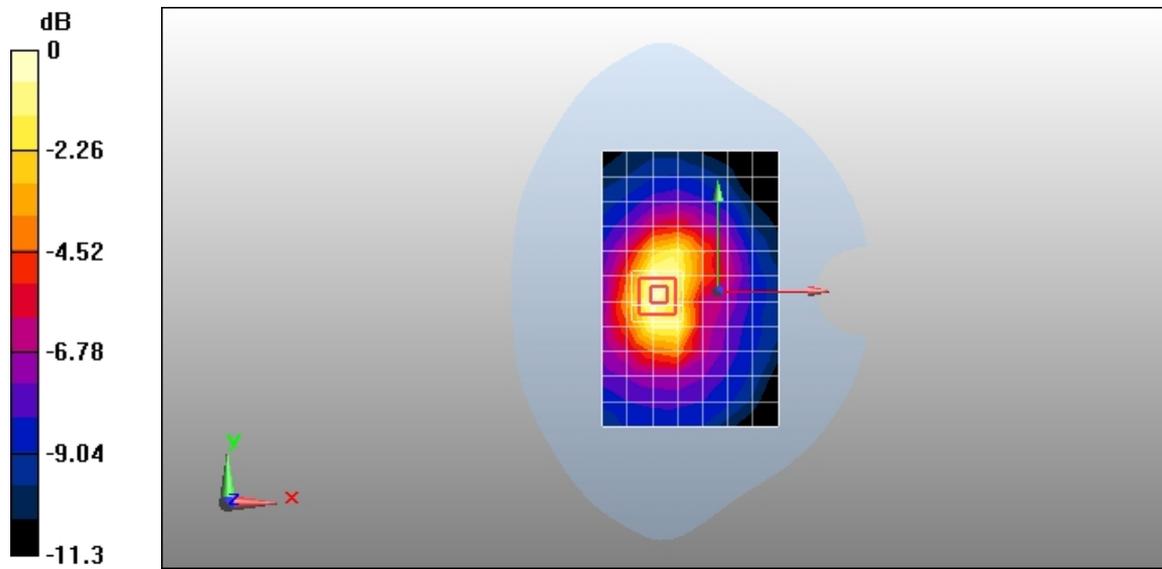

0 dB = 0.068mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 EGPRS 1TS 190CH Towards Ground 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.511 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.488 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.513 mW/g

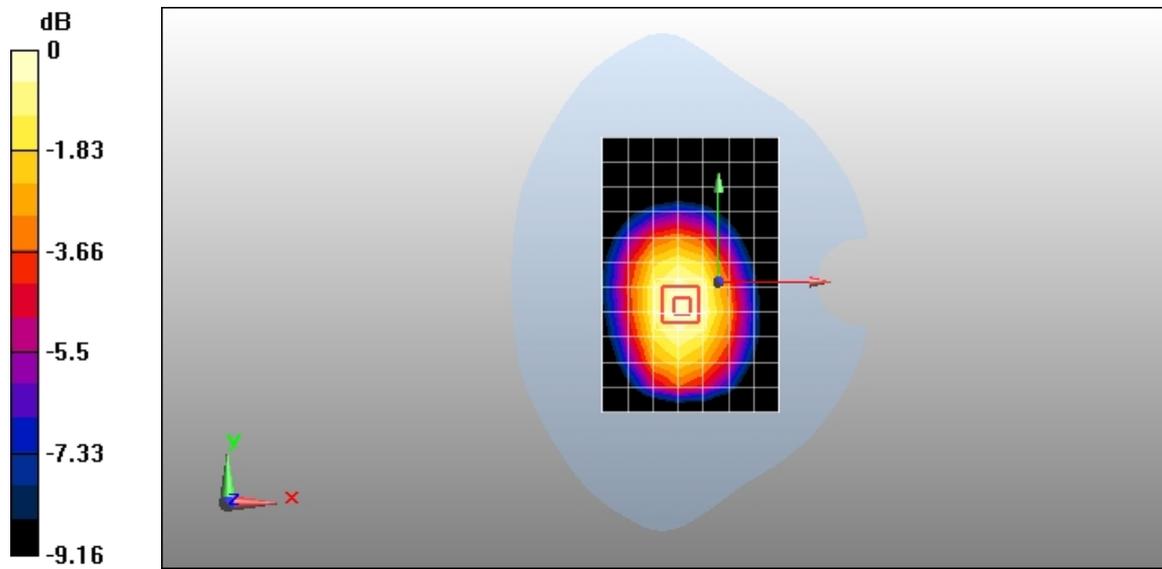

0 dB = 0.513mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 EGPRS 2TS 190CH Towards Ground 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.644 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.8 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.450 mW/g

Maximum value of SAR (measured) = 0.637 mW/g

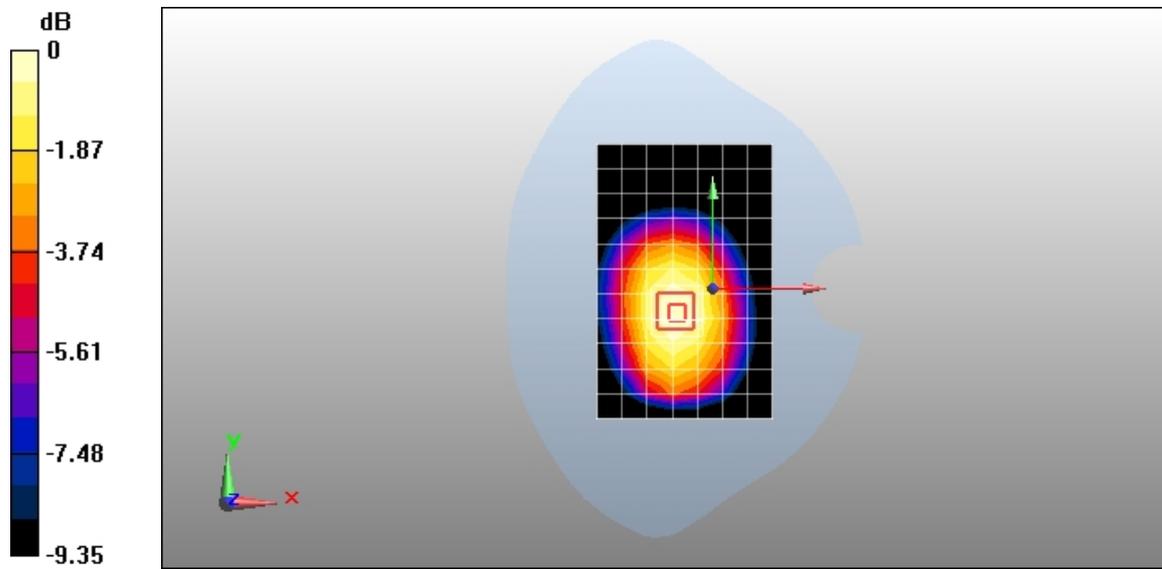

0 dB = 0.637mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 190CH Towards Ground 10mm with Headset

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.452 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.2 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.315 mW/g

Maximum value of SAR (measured) = 0.450 mW/g

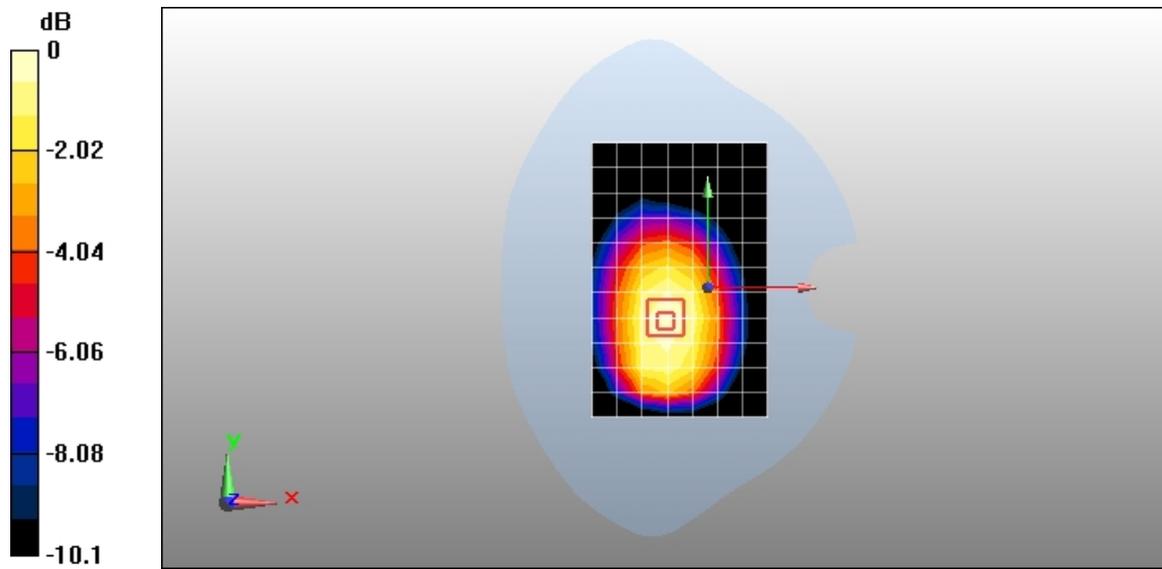

0 dB = 0.450mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM850 GPRS 2TS 190CH Towards Ground 10mm with black shell

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(9.07, 9.07, 9.07); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.600 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.417 mW/g

Maximum value of SAR (measured) = 0.595 mW/g

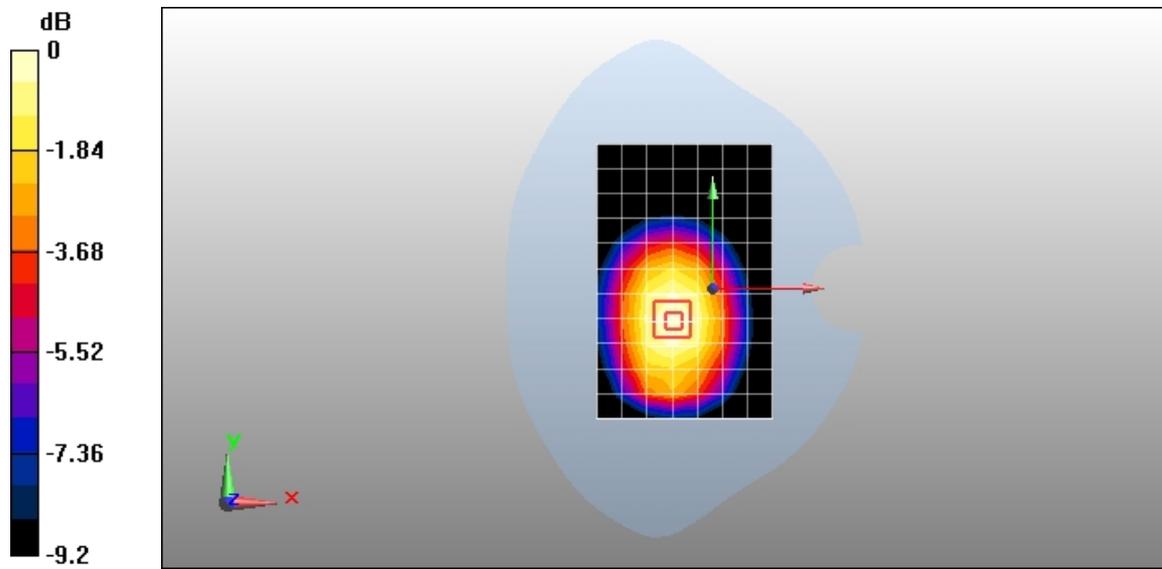

0 dB = 0.595mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 661CH Left hand touch cheek

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.326 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.86 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.203 mW/g

Maximum value of SAR (measured) = 0.368 mW/g

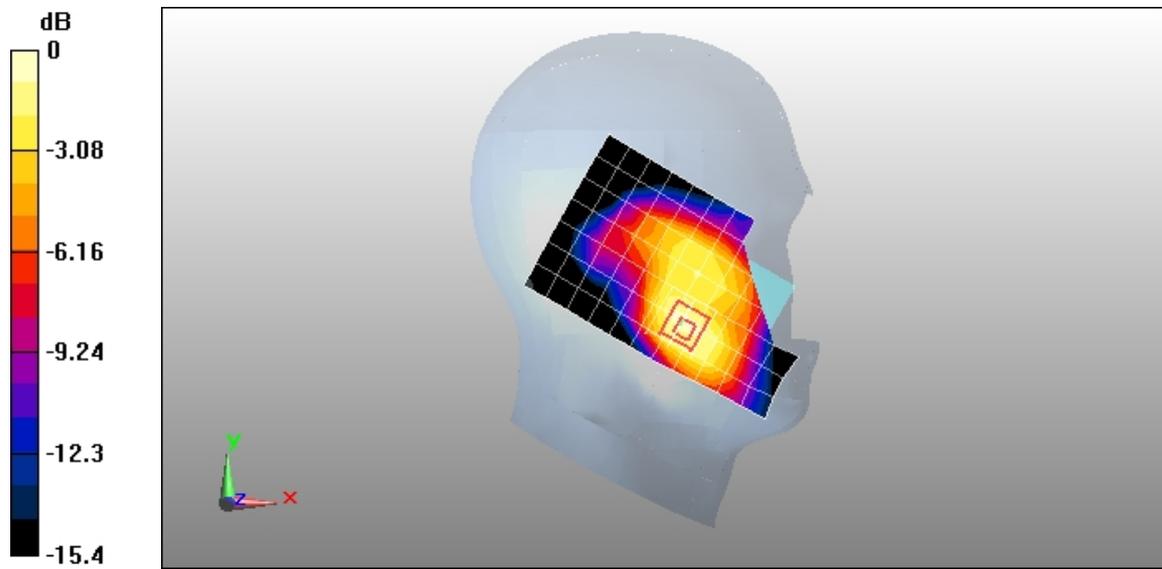

0 dB = 0.368mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 661CH Left hand tilt 15 degree

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.127 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.62 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.137 mW/g

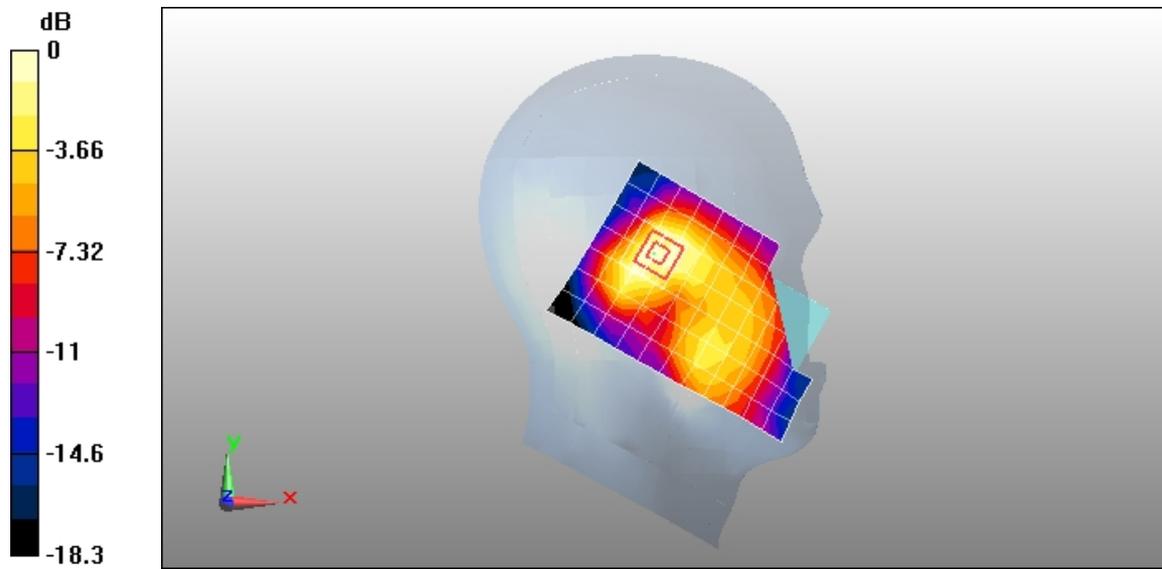

0 dB = 0.137mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 661CH Right hand touch cheek

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.430 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.49 V/m; Power Drift = 0.048 dB


Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.419 mW/g

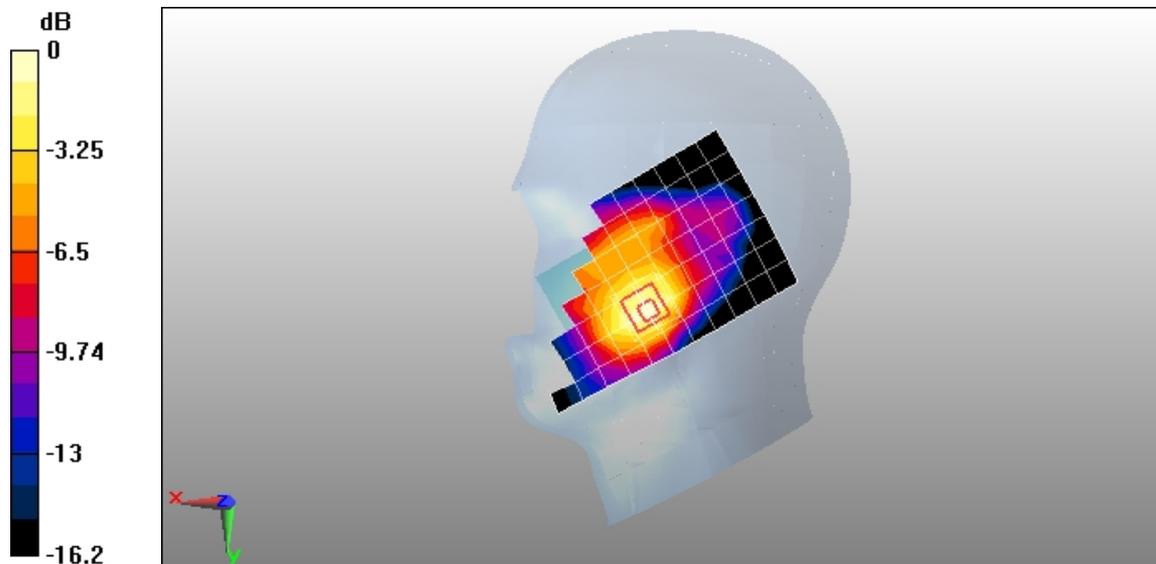

0 dB = 0.419mW/g

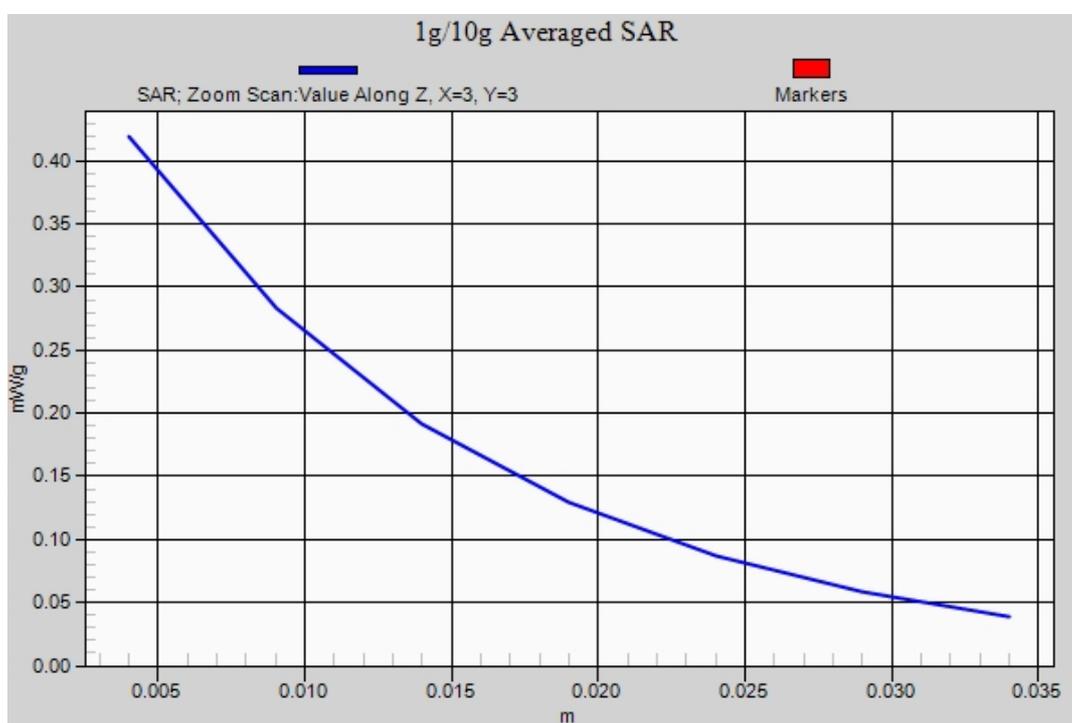

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 661CH Right hand tilt 15 degree

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.114 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.47 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

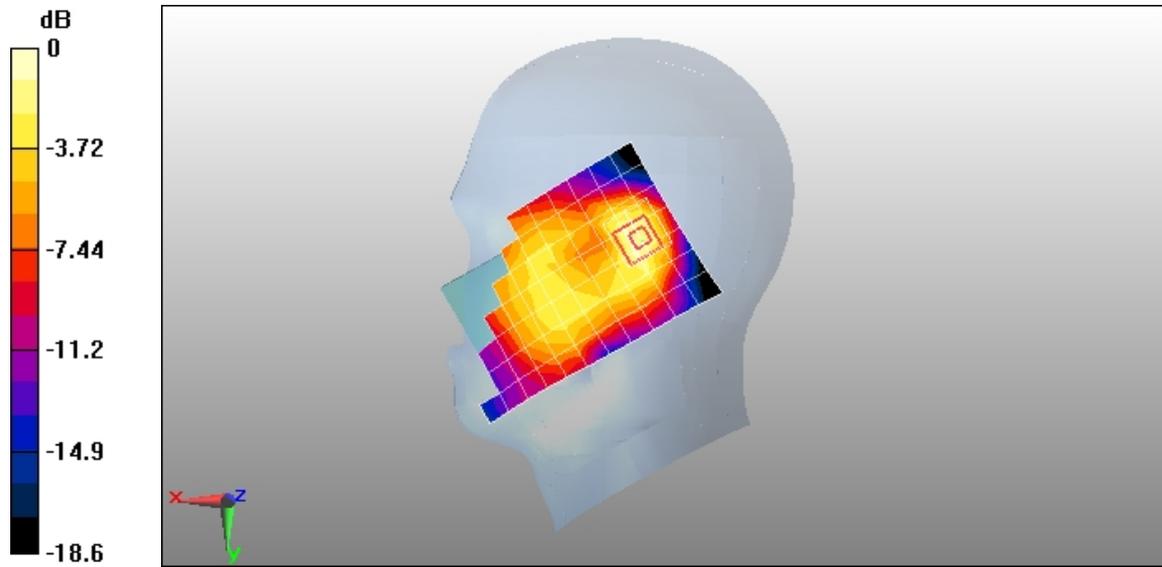

0 dB = 0.131mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 661CH Right hand touch check with black shell

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.9, 7.9, 7.9); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.419 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.74 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.415 mW/g

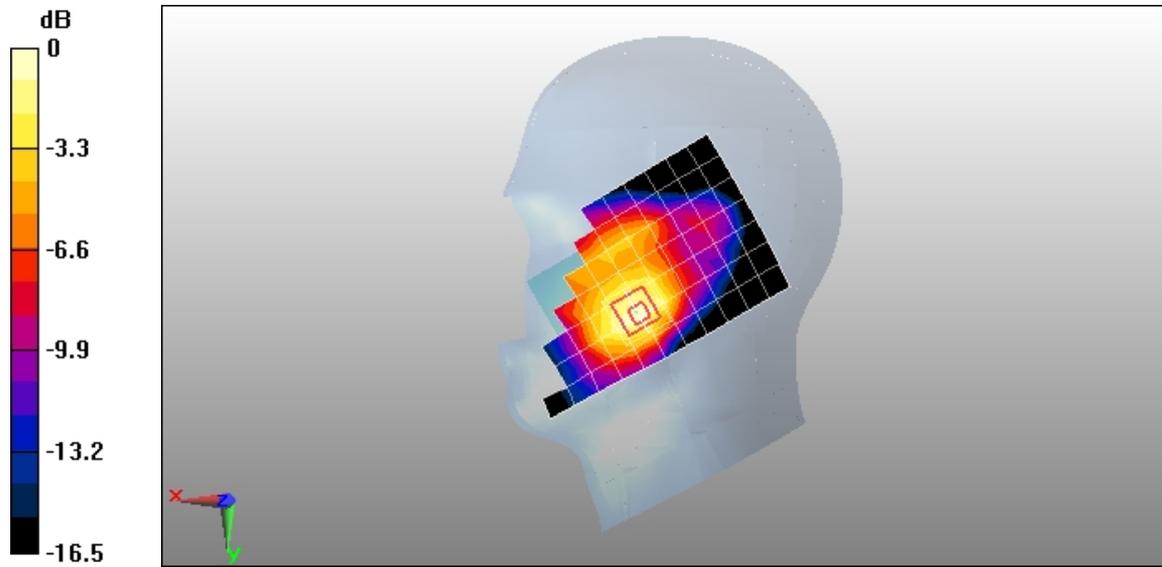

0 dB = 0.415mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 GPRS 1TS 661CH Towards Phantom 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.449 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.1 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.471 mW/g

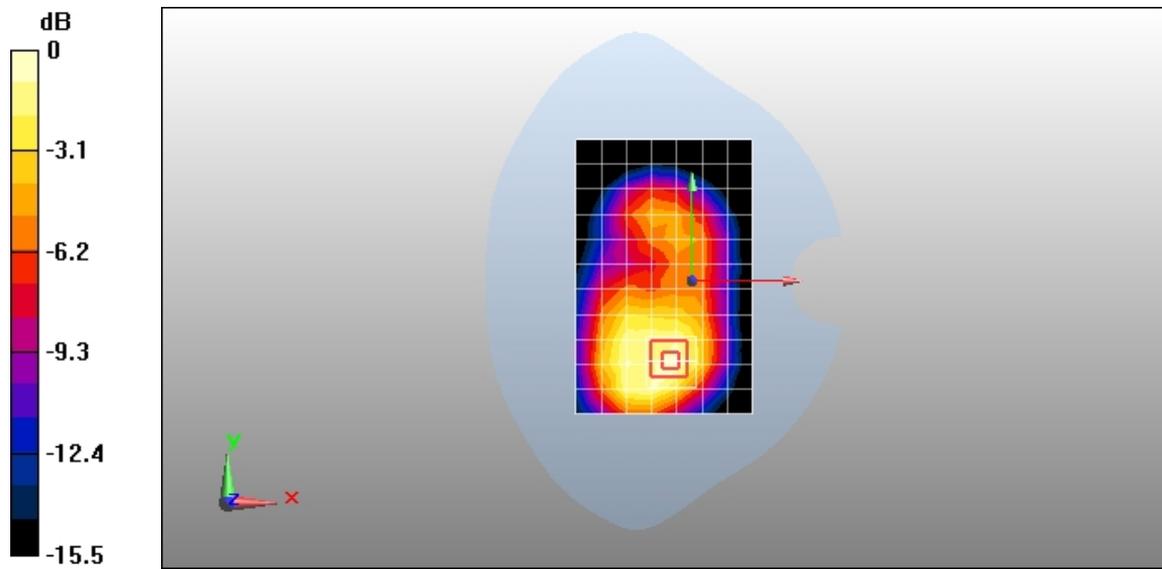

0 dB = 0.471mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 GPRS 2TS 661CH Towards Phantom 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.453 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.07 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.470 mW/g

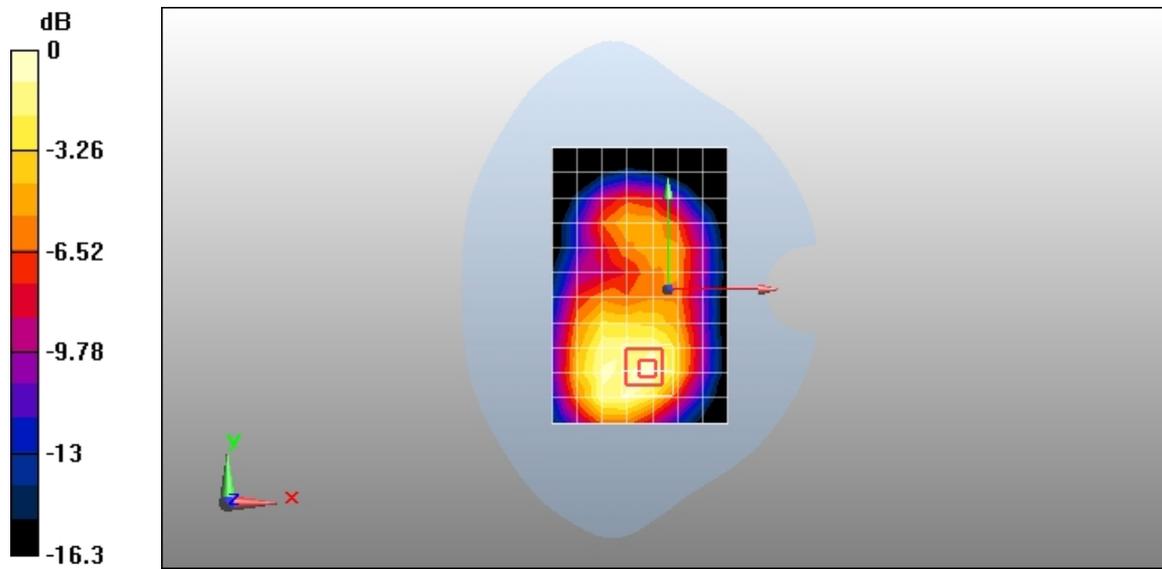

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 GPRS 1TS 661CH Towards Ground 10mm

DUT:U8860; Type:HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.423 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.26 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.422 mW/g

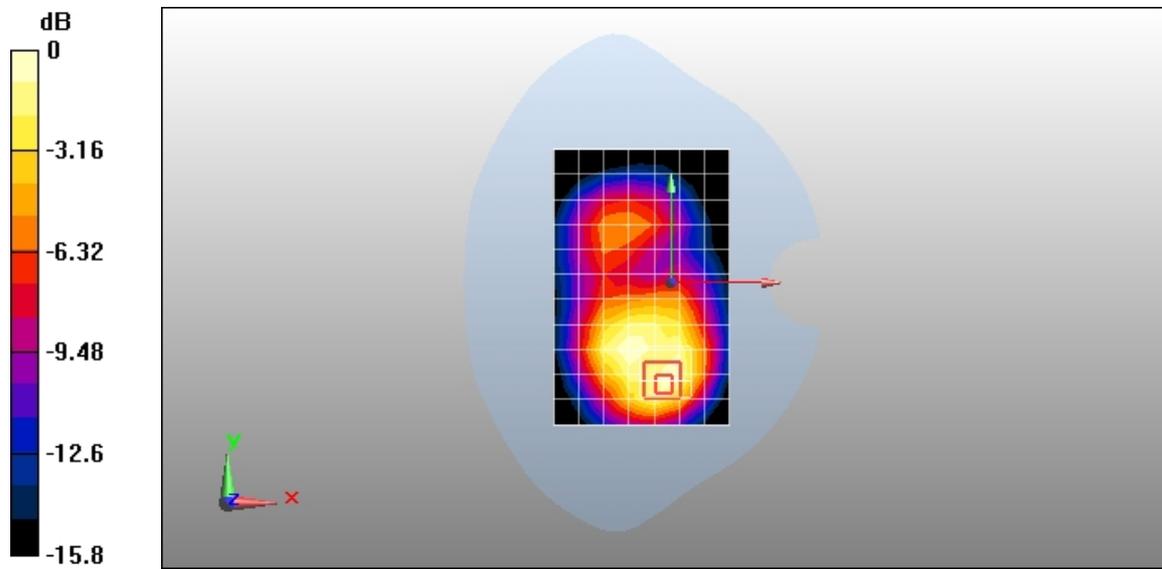

0 dB = 0.422mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 GPRS 1TS 661CH Left edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (5x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.78 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.140 mW/g

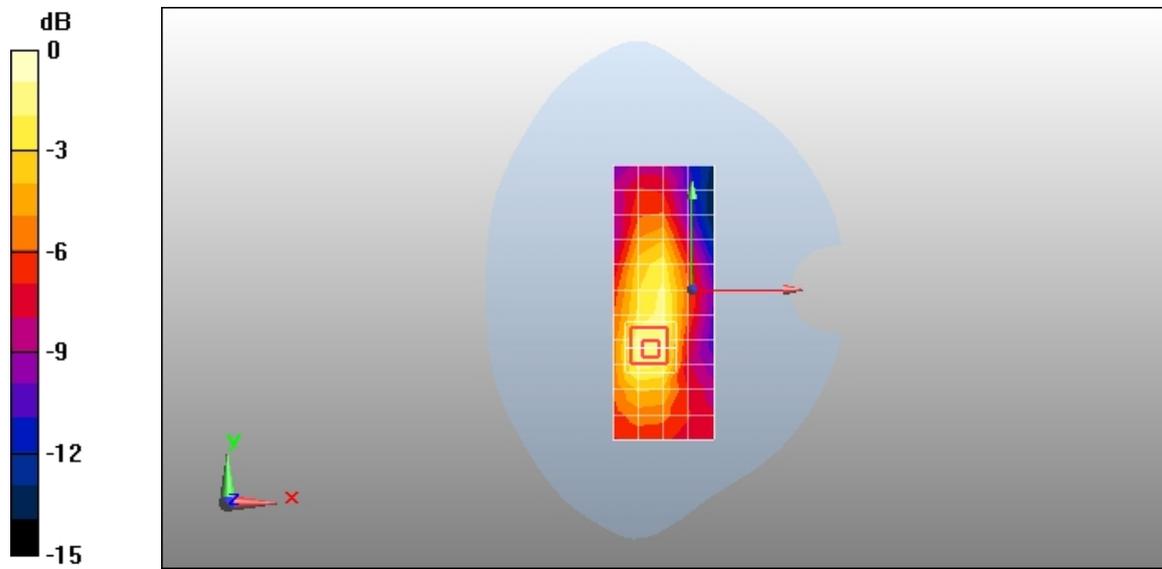

0 dB = 0.140mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 GPRS 1TS 661CH Right edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (5x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.114 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.97 V/m; Power Drift = 0.00424 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.111 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.97 V/m; Power Drift = 0.00424 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

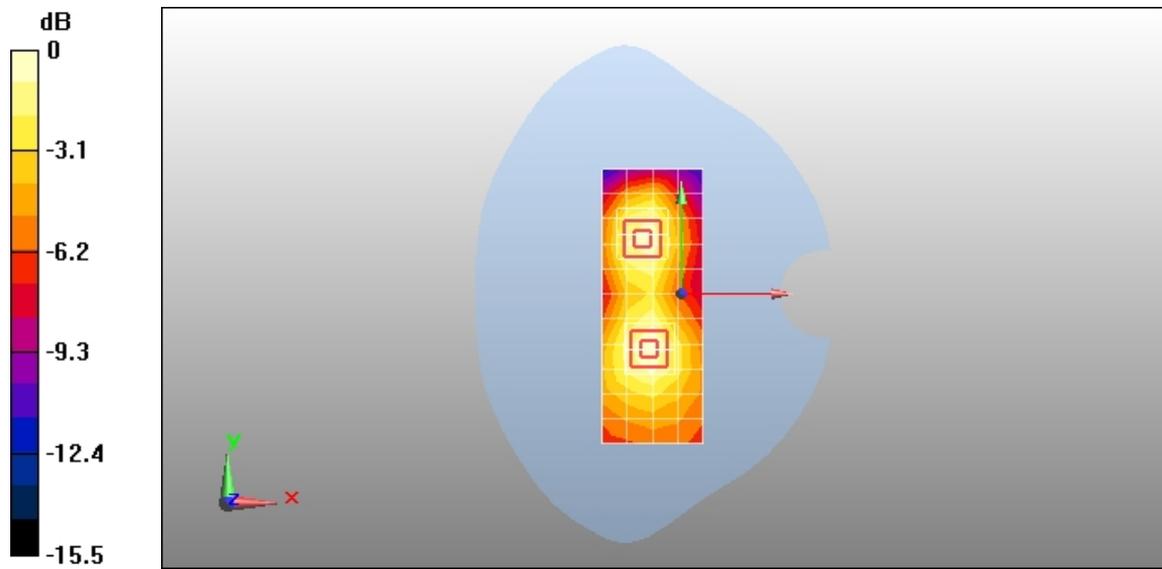

0 dB = 0.106mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 GPRS 1TS 661CH Bottom edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.669 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.757 mW/g

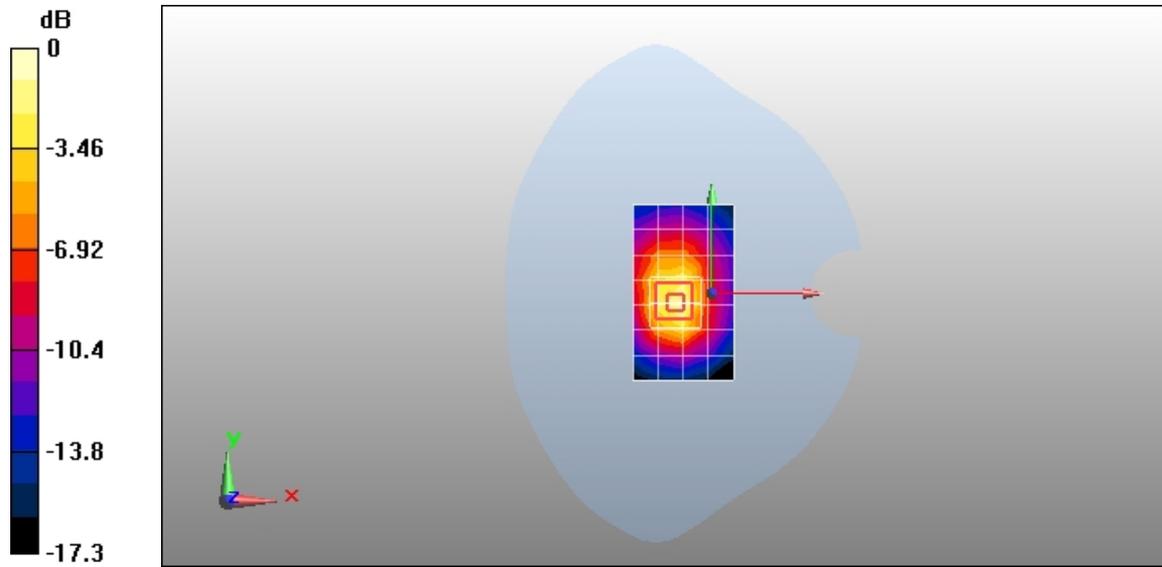

0 dB = 0.757mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 EGPRS 1TS 661CH Bottom edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.586 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.698 mW/g

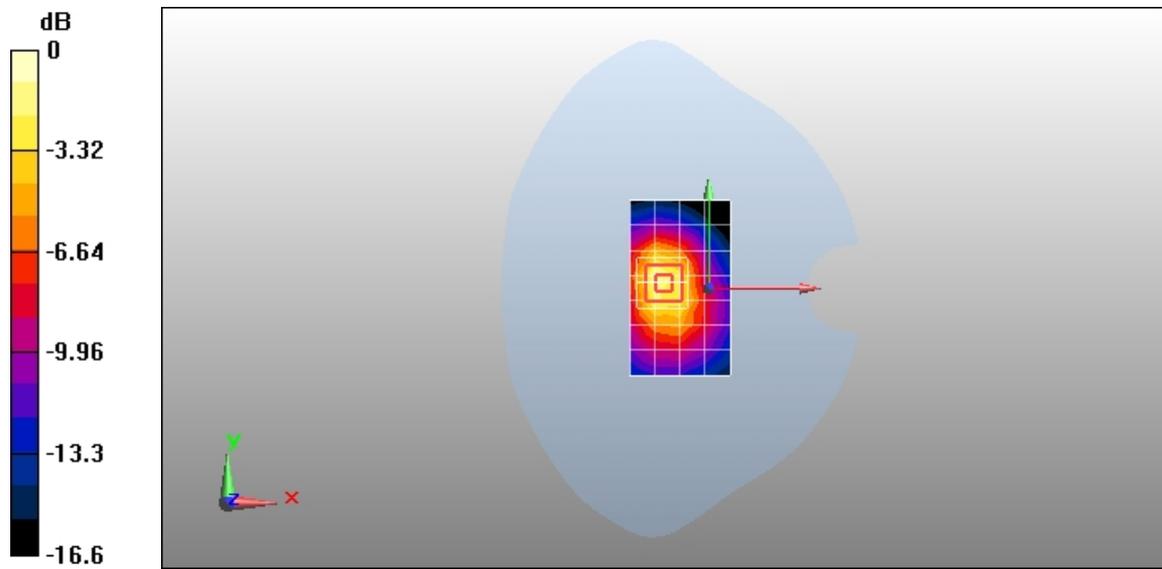

0 dB = 0.698mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 EGPRS 2TS 661CH Bottom edge 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.621 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.730 mW/g

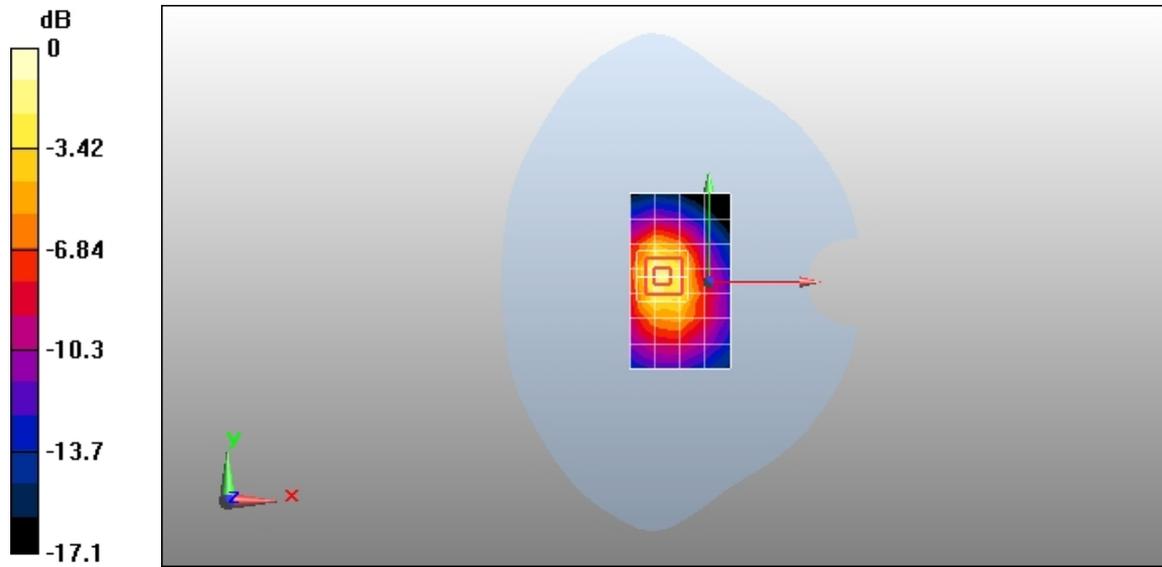

0 dB = 0.730mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 661CH Towards Phantom 10mm wiht Headset

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.500 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.808 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.510 mW/g

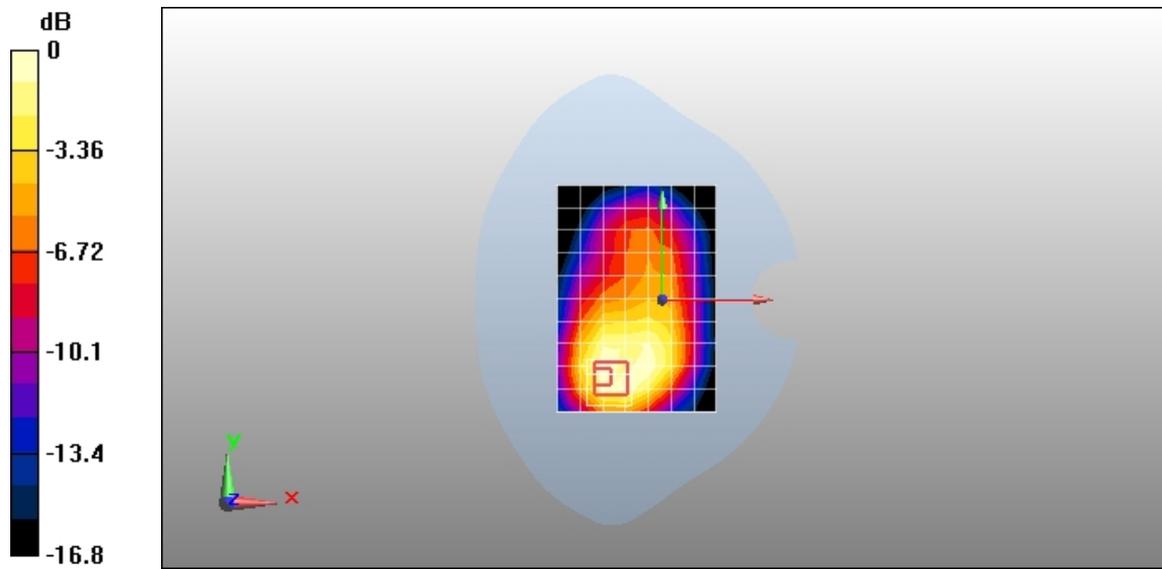

0 dB = 0.510mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 GSM1900 GPRS 1TS 661CH Bottom edge 10mm with black shell

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.17, 7.17, 7.17); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.815 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = -0.023 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.428 mW/g

Maximum value of SAR (measured) = 0.982 mW/g

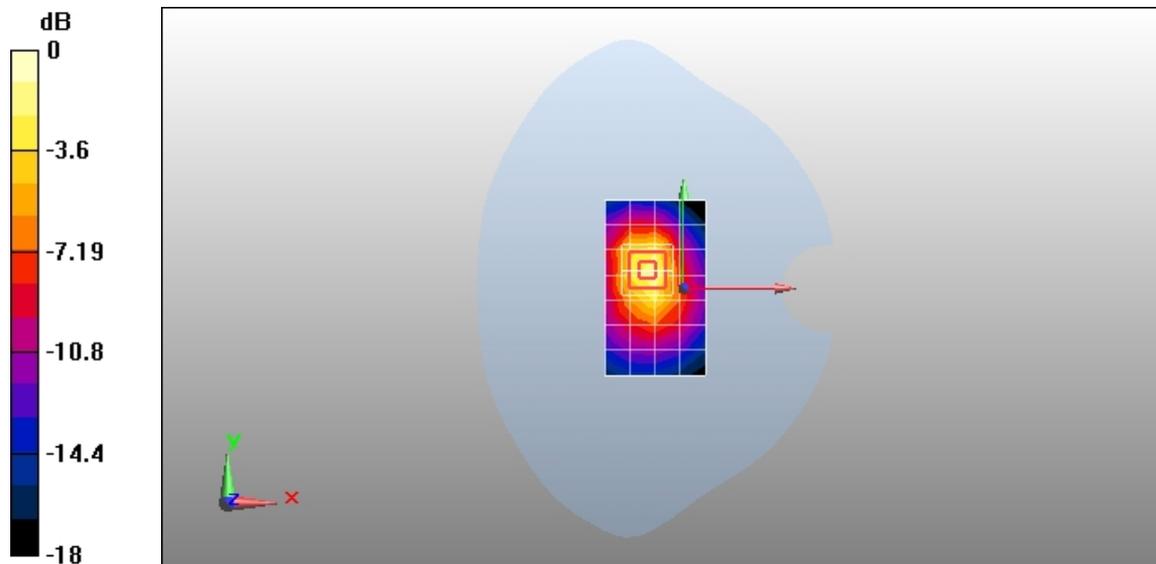

0 dB = 0.982mW/g

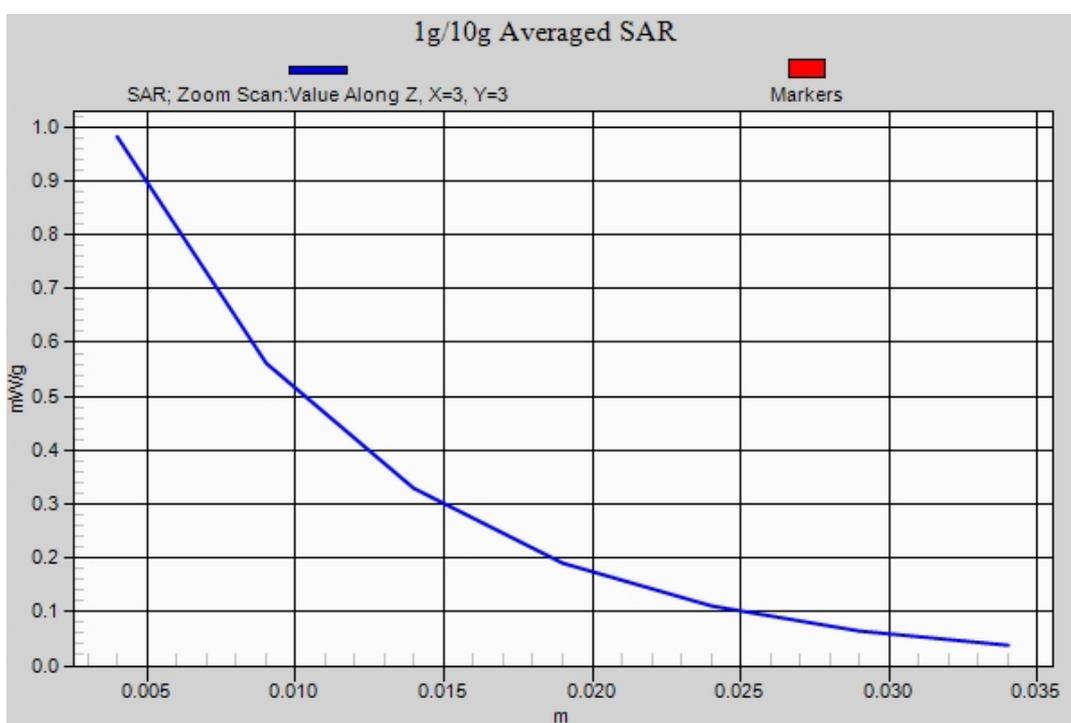

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Left Hand Touch Cheek

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.385 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.95 V/m; Power Drift = 0.146 dB


Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.418 mW/g

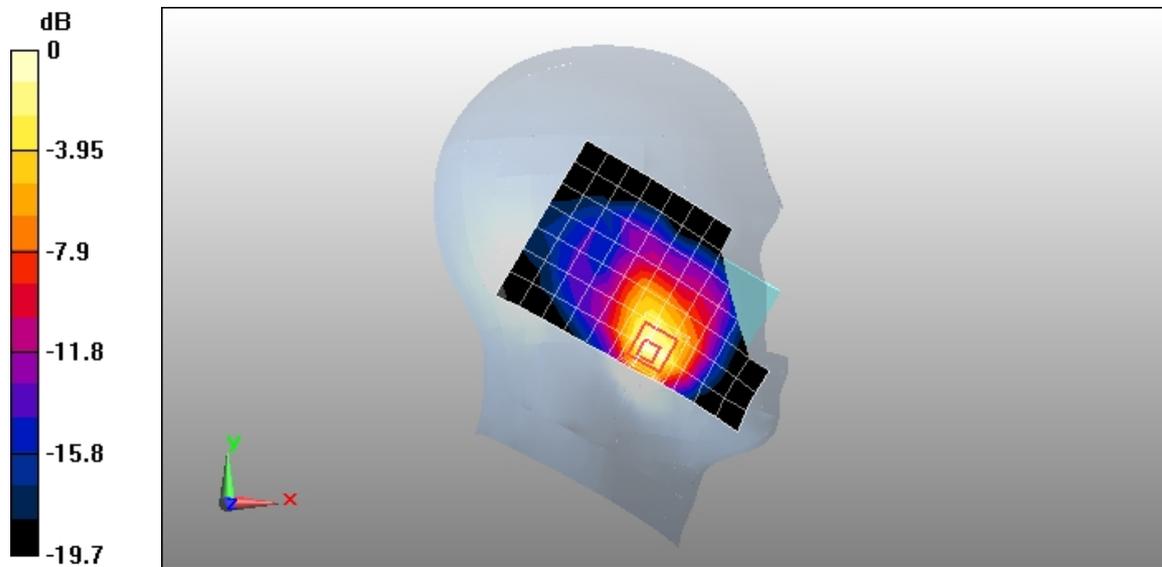

0 dB = 0.418mW/g

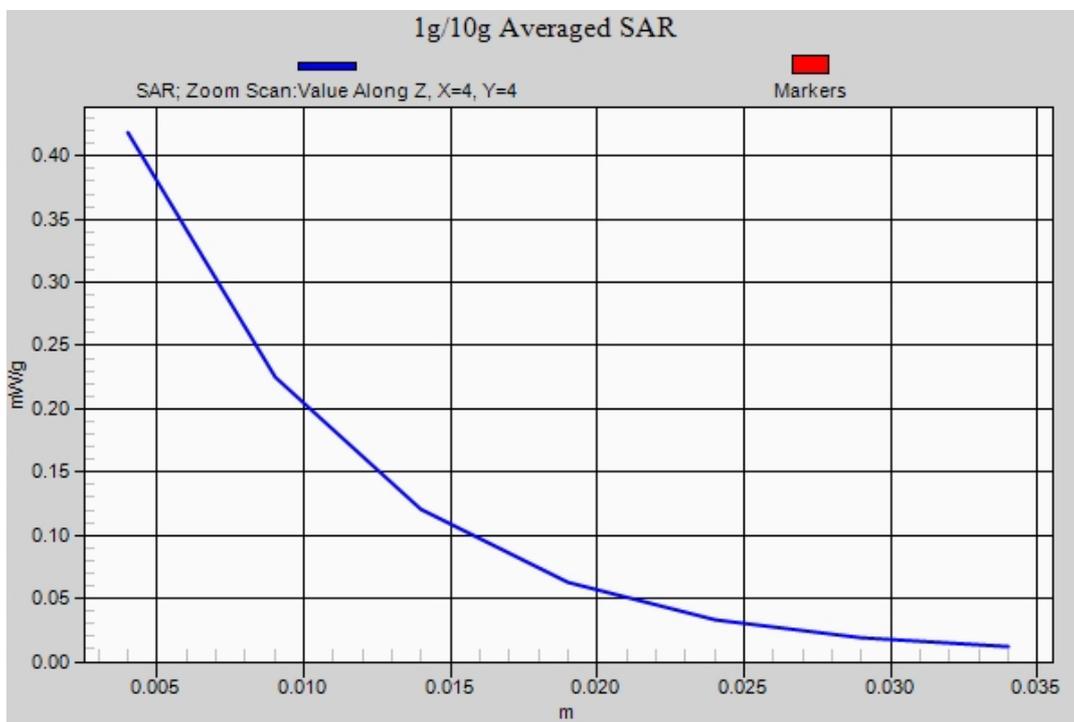

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Left Hand tilt 15 degree

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.052 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.03 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.095 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

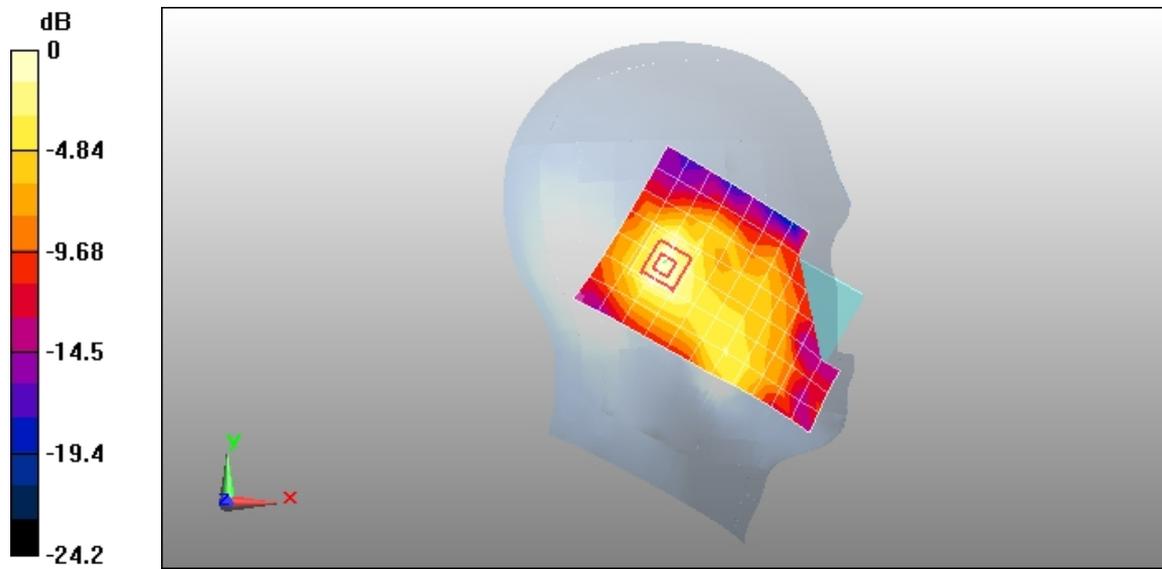

0 dB = 0.055mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Right Hand Touch Cheek

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.42 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.134 mW/g

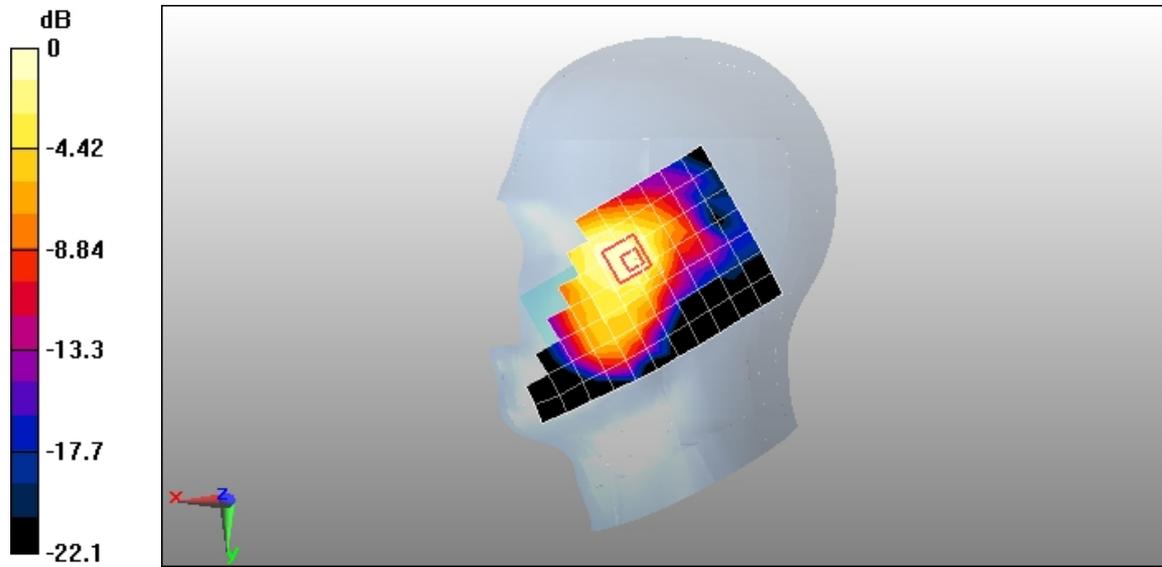

0 dB = 0.134mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Right Hand tilt 15 degree

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.051 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.2 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.072 mW/g

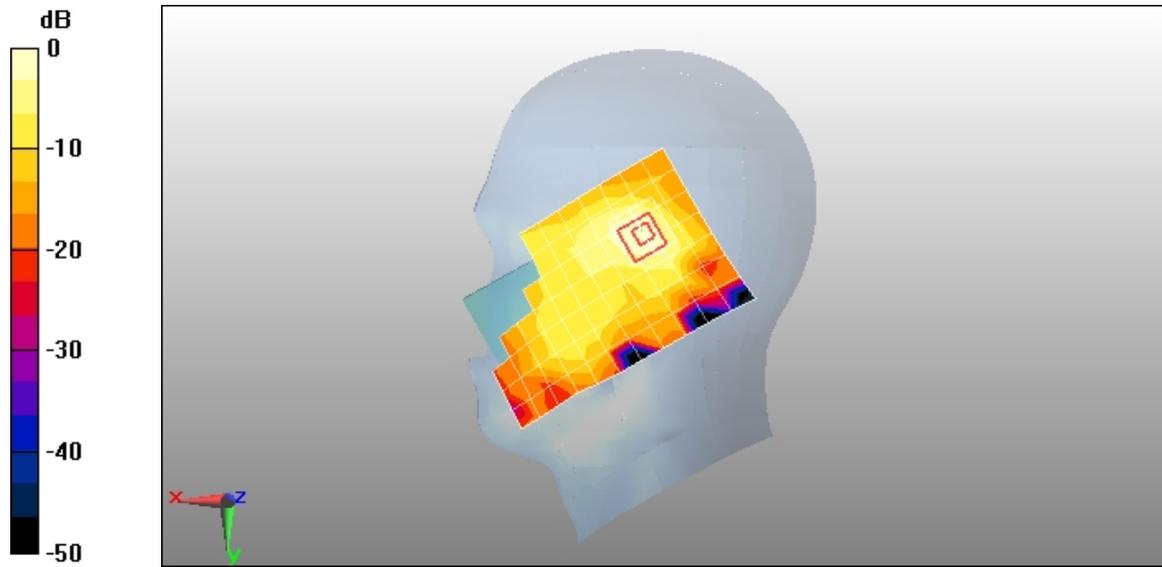

0 dB = 0.072mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Left Hand Touch Cheek with Black Shell

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.79$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(7.11, 7.11, 7.11); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.265 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.67 V/m; Power Drift = -0.00662 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

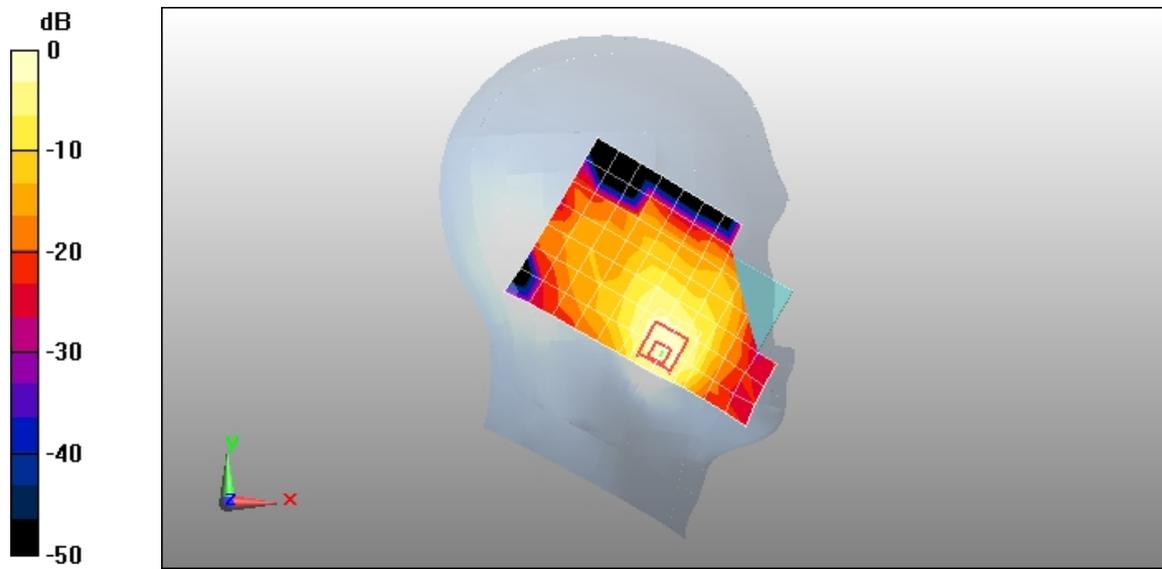

0 dB = 0.308mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Toward Phantom with 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.046 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.01 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.056 mW/g

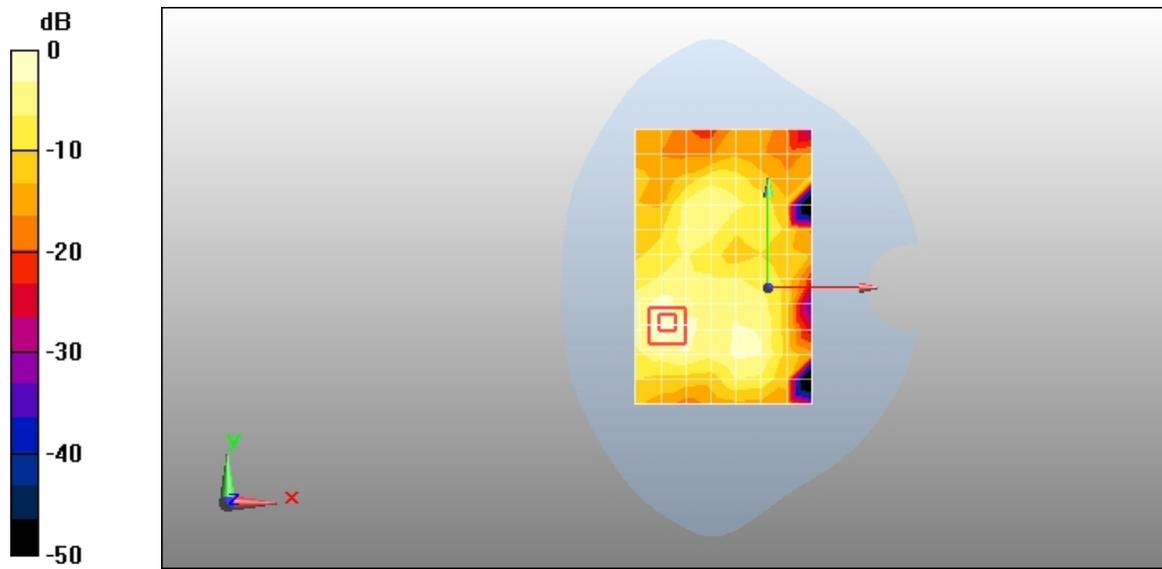

0 dB = 0.056mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Toward Ground with 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.41 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.097 mW/g

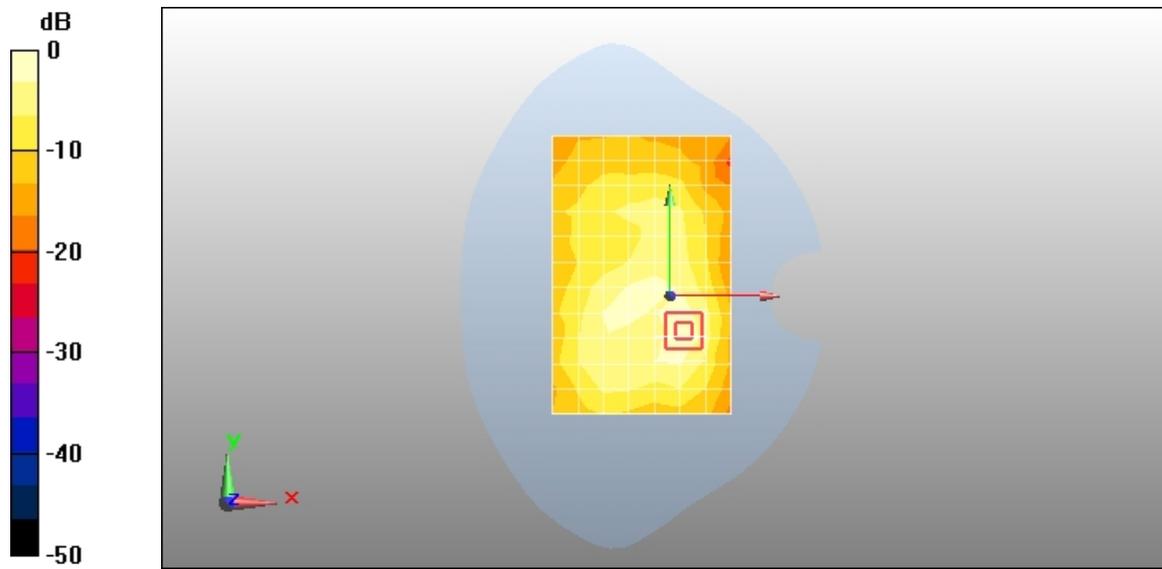

0 dB = 0.097mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Left side with 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.08 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

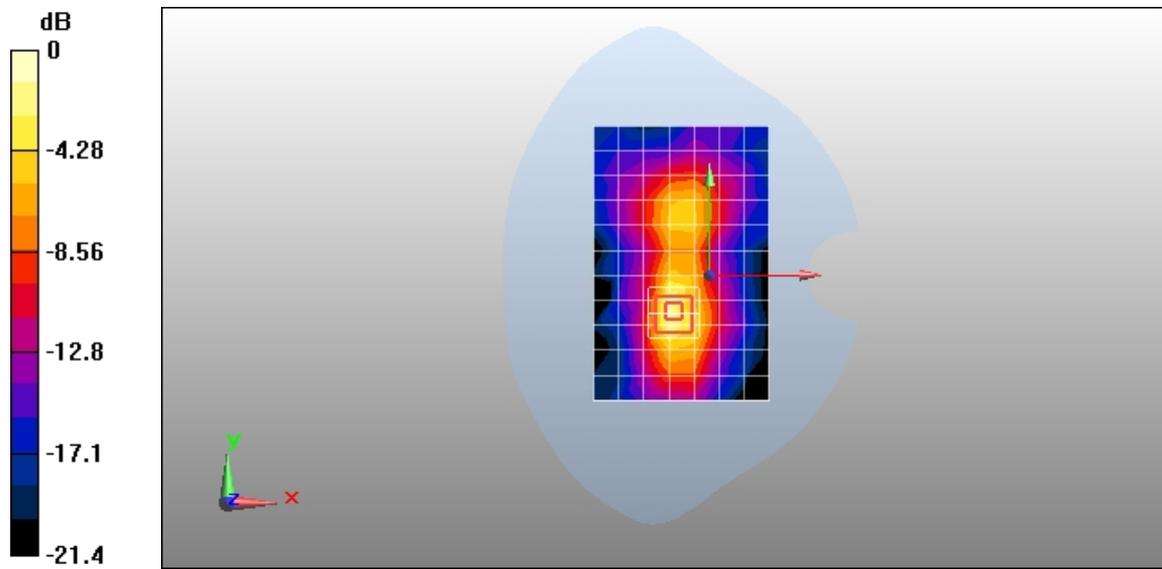

0 dB = 0.144mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Bottom side with 10mm

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.010 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.86 V/m; Power Drift = 0.195 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00766 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

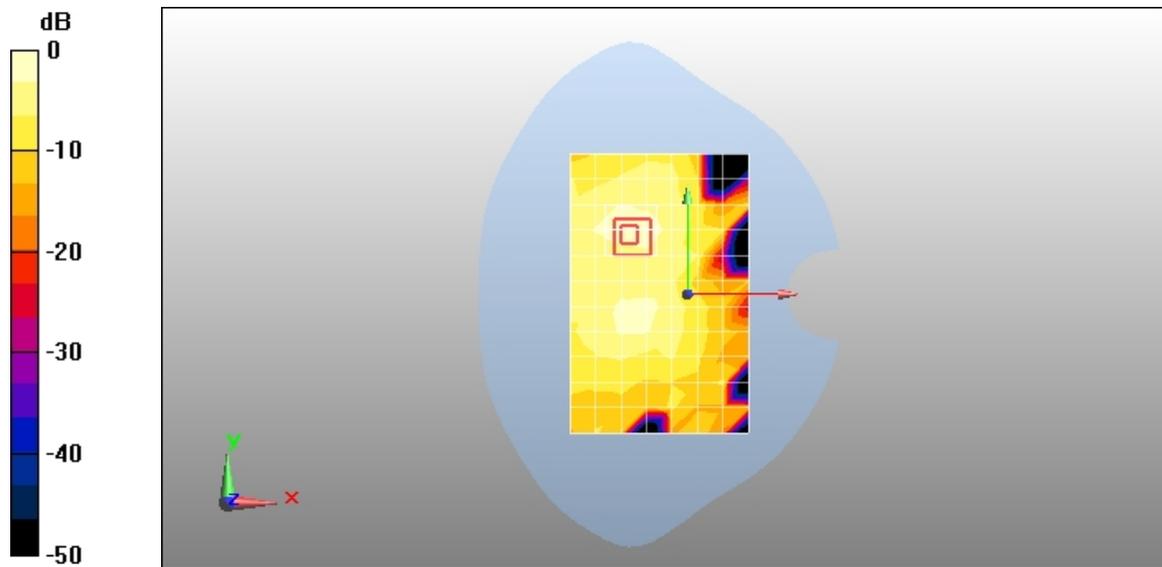

0 dB = 0.016mW/g

Test Laboratory: HUAWEI SAR Lab

U8860 WiFi 802.11b 6CH Left side with 10mm with Black Shell

DUT: U8860; Type: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Serial: N8G2A11172500036

Communication System: WiFi (802.11*); Frequency: 2437 MHz

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.9$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3753; ConvF(6.91, 6.91, 6.91); Calibrated: 2010-12-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1236; Calibrated: 2010-10-26
- Phantom: SAM2; Type: SAM; Serial: TP-1474
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.64 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.163 mW/g

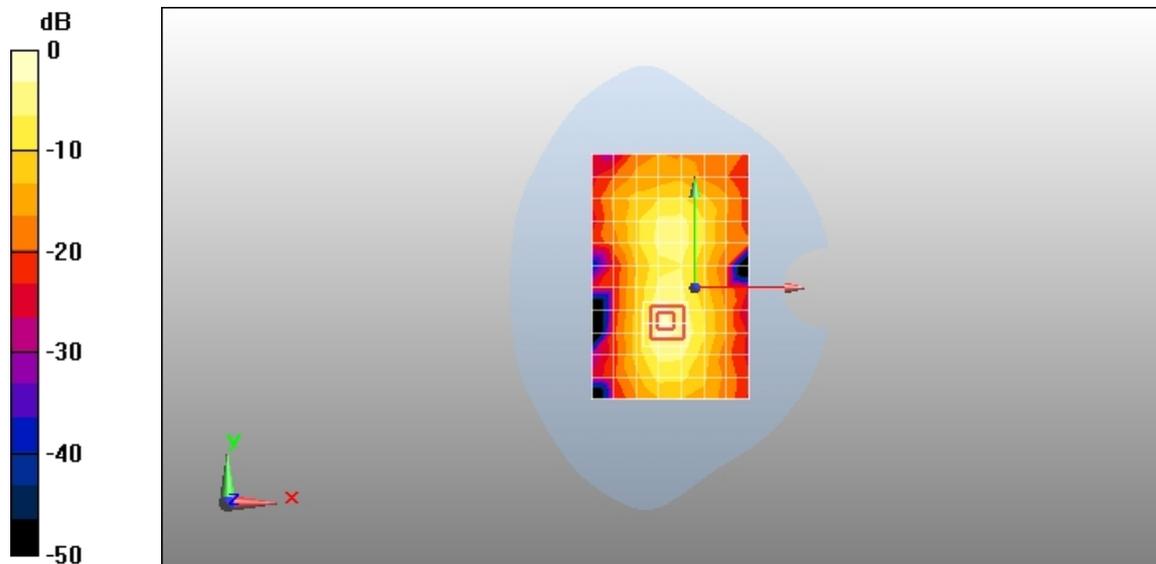

0 dB = 0.163mW/g

