



EMC Test Report

**Product Name: Ascend P1;
HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile
Phone with Bluetooth**

Model Number: HUAWEI U9200, U9200, U9200-1, U9200-51

Report No:SYBH(Z-EMC)026072012-2

FCC ID:QISU9200

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
5. The test report is invalid if not marked with "exclusive stamp for the test report".
6. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei
Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Date of Receipt Test Item: Jun.25, 2012
Start Date of Test: Jun.28, 2012
End Date of Test: Jul.02, 2012

Test Result: Pass

**Approved By
(Lab Manager)**

2012-07-07
Date

Liuchunlin
Name

Signature

Operator

2012-07-07
Date

Daniel
Name

Signature



Modification Record

| No. | Last Report No. | Modification Description |
|-----|-----------------|--------------------------|
| 1 | NA | First report |



TABLE OF CONTENT

| | | |
|-----|---|----|
| 1 | General Information | 6 |
| 1.1 | EUT Description | 6 |
| 1.2 | Test Site Information | 8 |
| 1.3 | Applied Standards | 8 |
| 2 | Summary of Results | 9 |
| 3 | System Configuration during EMC Test | 10 |
| 3.1 | Test Mode | 10 |
| 3.2 | Test System Configuration | 10 |
| 3.3 | Cables Used during Test | 13 |
| 3.4 | Associated Equipment Used during Test | 13 |
| 4 | Electromagnetic Interference (EMI) | 14 |
| 4.1 | Radiated Disturbance 30MHz to 18GHz | 14 |
| 4.2 | Conducted Disturbance 0.15 MHz to 30MHz | 17 |
| 5 | Main Test Instruments | 18 |
| 6 | System Measurement Uncertainty | 18 |
| 7 | Graph and Data of Test | 19 |
| 7.1 | Radiated Disturbance | 19 |
| 7.2 | Conducted Disturbance | 21 |



1 General Information

1.1 EUT Description

| EUT Description | |
|---------------------|--|
| Product Name | Ascend P1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth |
| Model Number | HUAWEI U9200, U9200, U9200-1, U9200-51 |
| Serials Number | F5B7NB1261600264 |
| TX Frequency | GSM850:824MHz To 849MHz; GSM1900:1850MHz To 1910MHz; WCDMA BAND II: 1850MHz To 1910MHz; WCDMA BAND IV: 1710 MHz To 1755MHz; WCDMA BAND V: 824MHz To 849MHz; Bluetooth: 2400MHz To 2483.5MHz; WIFI: 2400MHz To 2483.5MHz; |
| RX Frequency | GSM850:869MHz To 894MHz; GSM1900:1930MHz To 1990MHz WCDMA BAND II: 1930MHz To 1990MHz WCDMA BAND IV: 2110 MHz To 2155MHz; WCDMA BAND V: 869MHz To 894MHz; Bluetooth: 2400MHz To 2483.5MHz; WIFI: 2400MHz To 2483.5MHz; GPS: 1575.42MHz; |
| HW Version | Ver.B |
| SW Version | U9200-1V100R001C02B006 |
| EUT Accessory | |
| Data cable | Data Cable USB A Male to Micro Usb, Black |
| Adapter | Manufacturer: Huawei Technologies Co., Ltd. Model: HW-050100U3W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A Rated Power: 5W S/N:BYAAC41600009 |
| Adapter | Manufacturer: Huawei Technologies Co., Ltd. Model: HW-050100E3W Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A Rated Power: 5W S/N: BYAABC2600745 |
| Rechargeable Li-ion | Manufacturer: Huawei Technologies Co., Ltd. Battery Model: HB4Q1 Rated capacity: 1670mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V S/N: ALCC216997600482 S/N:GAGC116Z97600578 |
| Rechargeable Li-ion | Manufacturer: Huawei Technologies Co., Ltd. Battery Model: HB4Q1HV |



| | |
|--|---|
| | Rated capacity: 1800mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V S/N: LAIC524X09700470 |
|--|---|

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.2 Test Site Information

| | |
|---------------------|---|
| Site 1: | RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD. |
| Test Site Location: | Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C |

1.3 Applied Standards

APPLIED STANDARD

47 CFR FCC Part 15:2011, Subpart B



2 Summary of Results

| Summary of Results | | | | |
|---|---|---|--------|-------|
| Test Items | Test Mode | Performance Class & Required Performance Criteria | Result | Site |
| <u>Radiated Emissions</u> Enclosure Port | Mode1~ Mode2 Mode4 Mode6 Mode8~ Mode10 | CLASS B | Pass | Site1 |
| <u>Conducted Emissions</u> <input checked="" type="checkbox"/> DC Power Port <input checked="" type="checkbox"/> AC Power Port <input type="checkbox"/> Telecommunication Ports | Mode1~ Mode4 | CLASS B | Pass | Site1 |
| Note: 1, Measurement taken is within the measurement uncertainty of measurement system. 2, <input checked="" type="checkbox"/> The item has been tested; <input type="checkbox"/> The item has not been tested. | | | | |

During the measurement, the environmental conditions complied with the range listed as below.

| Item | Required |
|----------------------|----------------|
| Ambient temperature | 15°C ~ 35°C |
| Relative humidity | 25% ~ 75% |
| Atmospheric pressure | 86kPa ~ 106kPa |

3 System Configuration during EMC Test

3.1 Test Mode


Huawei has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was in this test report and defined as:

| Test Mode | |
|-----------|---|
| Mode 1: | Adapter + earphone + Camera On + Idle |
| Mode 2: | Adapter + earphone + MP3 + Idle |
| Mode 3: | Adapter + earphone +Traffic |
| Mode 4: | Adapter + earphone + FM + Idle |
| Mode 5: | Adapter +Traffic |
| Mode 6: | USB Copy(EUT with PC) + earphone + Idle |
| Mode 7: | Traffic |
| Mode 8: | Camera On + earphone + Idle |
| Mode 9: | Earphone + MP3 + Idle |
| Mode 10: | Earphone + FM + Idle |


Remark: When the EUT have multiple adapters, need separate test with multiple adapters . All test modes are performed, only the worst cases are recorded in this report.

3.2 Test System Configuration


Connection Diagram (Mode 1~Mode 5)

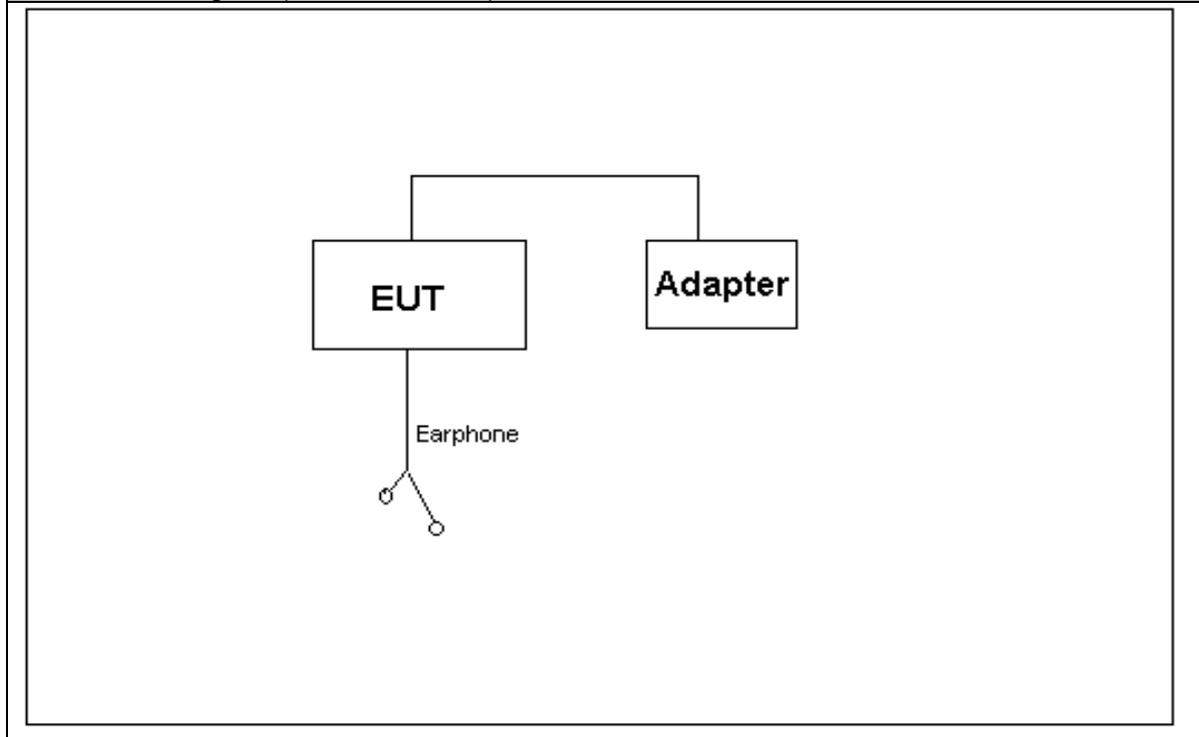

Connection Diagram (Mode 6)

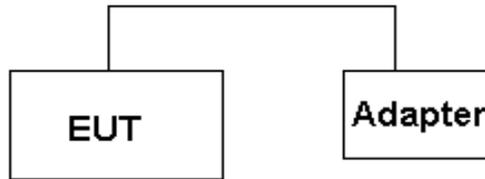


Connection Diagram (Mode 7)

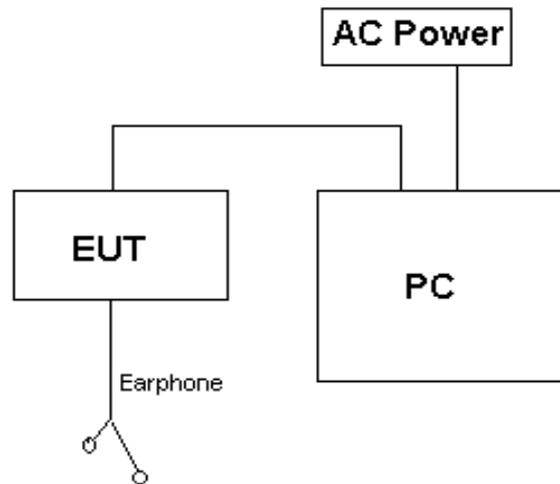




Connection Diagram (Mode 8)



Connection Diagram (Mode 8~Mode 10)

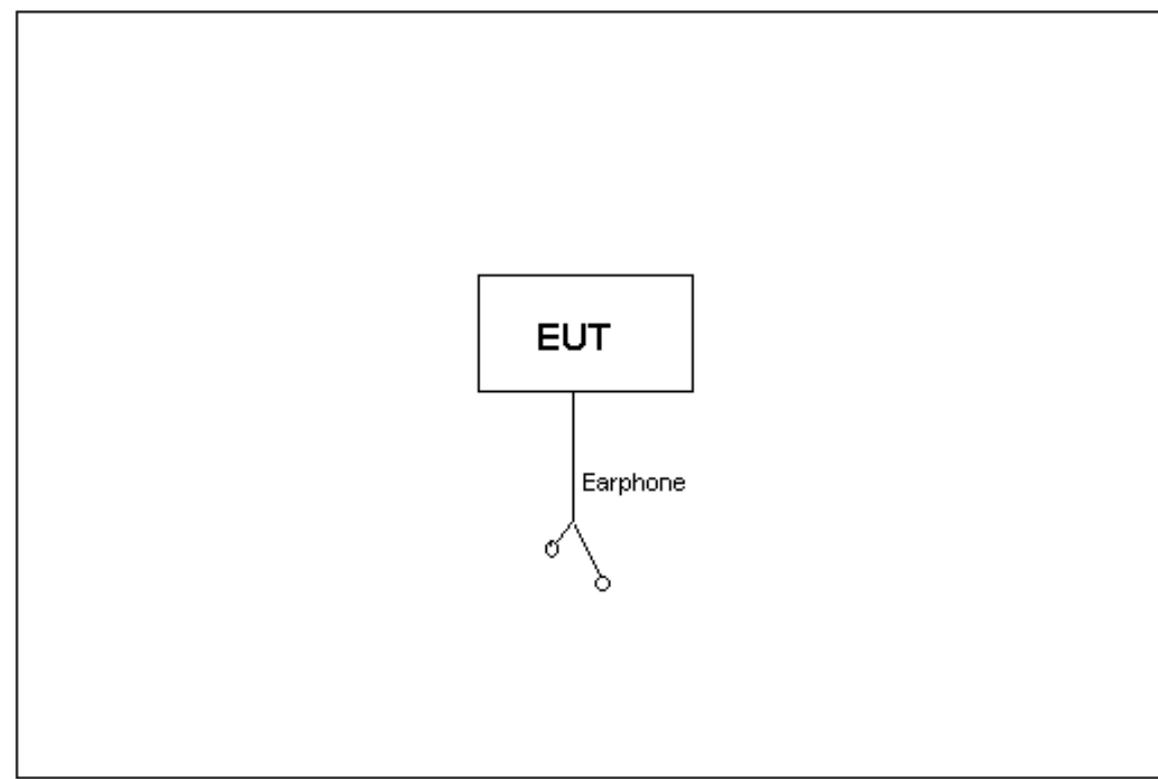



3.3 Cables Used during Test

| Cable | Quantity | Length | Type of Cable |
|----------|----------|--------|---------------|
| USB | 1 | <3m | shielded |
| Earphone | 1 | <3m | Unshielded |

3.4 Associated Equipment Used during Test

| Name | Model | Manufacturer | S/N | Calibrated Deadline |
|----------------------------|--------|--------------|------------|---------------------|
| Radio Communication Tester | CMU200 | R&S | 3608105673 | 2012-11-06 |
| Notebook | T61 | IBM | 3108052508 | N/A |

4 Electromagnetic Interference (EMI)

4.1 Radiated Disturbance 30MHz to 18GHz



Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4-2009. The test distance was 3m. The set-up and test methods were according to ANSI C63.4-2009.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18 GHz by using test script of software; the emissions were measured using Quasi-Peak Detector (30MHz~1GHz) and AV/PK detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m; the azimuth range of turntable was 0° to 360°. The receiving antenna has two polarizations V and H.

EUT was configured in idle mode and the test performed at worst emission state.

Test setup

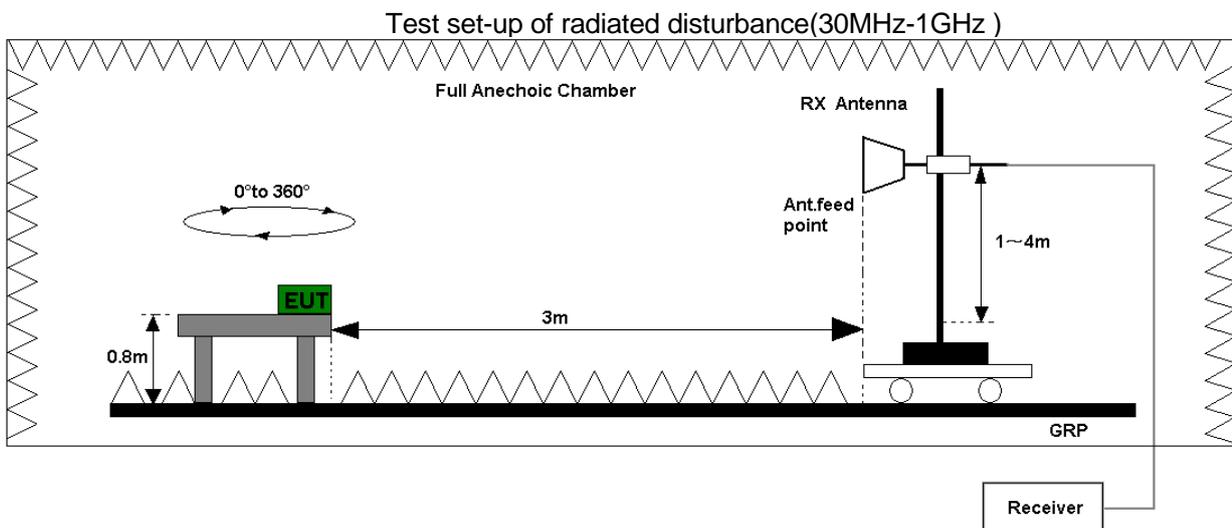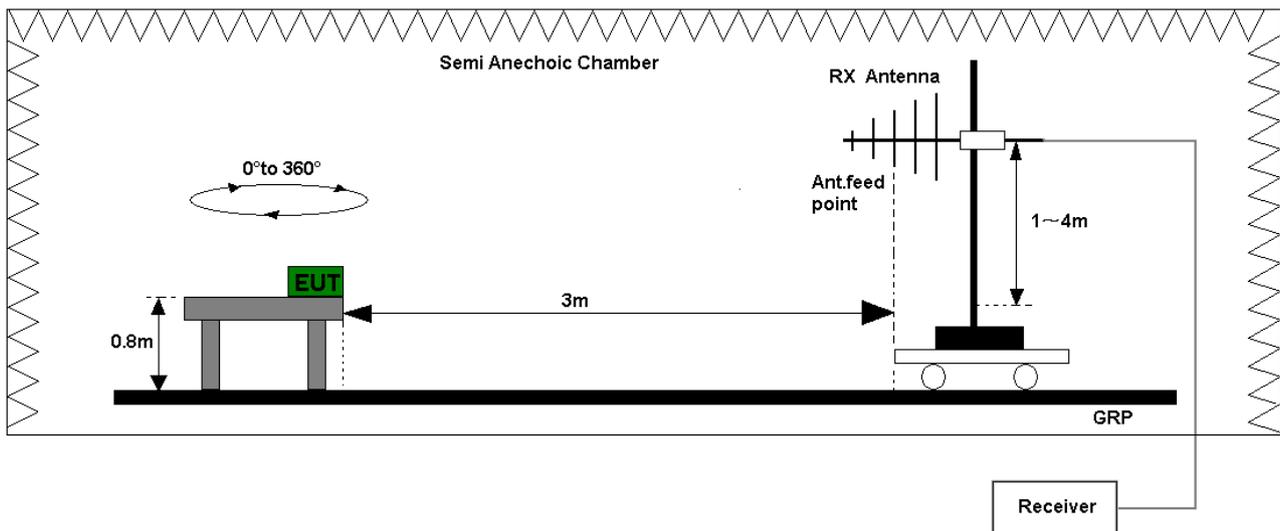

Test set-up of radiated disturbance(above 1GHz)





Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.
The test data see section 7.1 of this report.

| Test Limits | | | | |
|--------------------------------|------------------|------|--------------------|----|
| Frequency of Emission (MHz) | Radiated Limit | | | |
| | Unit(μ V/m) | | Unit(dB μ V/m) | |
| 30-88 | 100 | | 40 | |
| 88-216 | 150 | | 43.5 | |
| 216-960 | 200 | | 46 | |
| Above 960 | 500 | | 54 | |
| Above 1000 | AV | PK | AV | PK |
| | 500 | 5000 | 54 | 74 |

4.2 Conducted Disturbance 0.15 MHz to 30MHz

Test Procedure


The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm away from LISN. The set-up and test methods were according to ANSI C63.4-2009. Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

EUT was communicated with the simulator through Air interface, the simulator controls the EUT to transmitter the maximum power which defined in specification of product. The EUT operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

The EUT was setup in the shielded chamber and operated under nominal conditions.

Test Setup

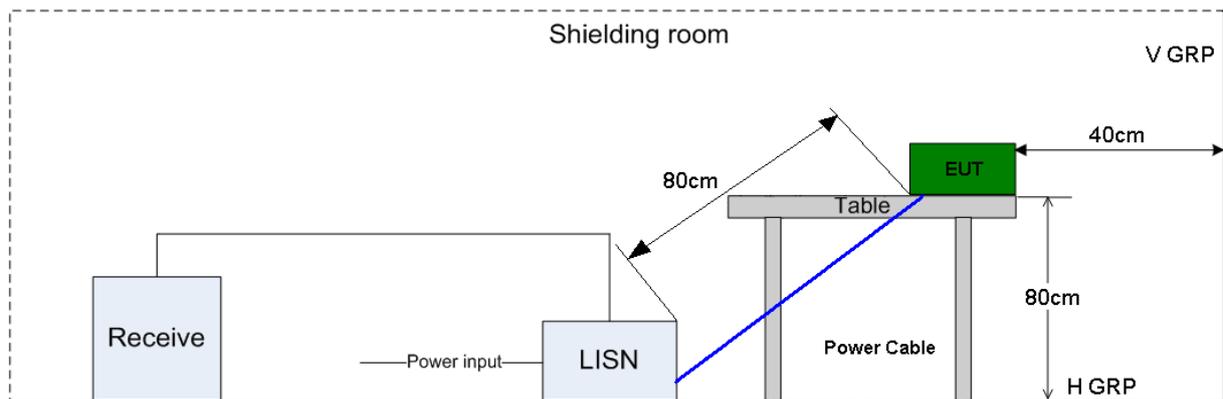

Test Set-up of conducted disturbance

Test Results

The EUT has met requirements for Conducted disturbance of power lines.

The test data see section 7.2 of this report.

| Test Limit of AC Power Port | | |
|-----------------------------|-----------------|------------------|
| Frequency range | 150kHz ~ 30MHz | |
| Frequency | Voltage limits | |
| | QP | AV |
| 0.15MHz~0.5MHz | 66-56dB μ V | 56-46 dB μ V |
| 0.5MHz-5MHz | 56dB μ V | 46 dB μ V |
| 5MHz~30MHz | 60dB μ V | 50 dB μ V |



5 Main Test Instruments

| Main Test Equipments | | | | | |
|----------------------|--------------------------|--------------|----------|-----------------|---------------------|
| Test item | Test Instrument | Model | S/N | Manufacturer | Calibrated Deadline |
| RE | EMI Test receiver | ESU26 | 100150 | R&S | May.27, 2013 |
| | Broadband Antenna | VULB 9163 | 9163-941 | SCHWARZBEC K | Jul.07, 2013 |
| | Horn Antenna | HF906 | 100683 | R&S | May.15, 2013 |
| CE | EMI Test receiver | ESCI | 101163 | R&S | Mar. 05, 2013 |
| | Artificial Mains Network | ENV216 | 100382 | R&S | Mar.21, 2013 |
| Software Information | | | | | |
| Test Item | Software Name | Manufacturer | | Version | |
| RE | ES-K1 | R&S | | 1.7.1 | |
| CE | EMC32 | R&S | | V8.52.0 | |

6 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| System Measurement Uncertainty | | |
|--------------------------------|----------------------------------|--------------|
| Items | Extended Uncertainty | |
| RE(30MHz-1GHz) | Field strength (dB μ V/m) | U=4.1dB; k=2 |
| RE(1GHz-18GHz) | Field strength (dB μ V/m) | U=5.1dB; k=2 |
| CE | Disturbance Voltage (dB μ V) | U=2.6dB; k=2 |




7 Graph and Data of Test

Only the worst test result was shown in this report.

7.1 Radiated Disturbance

30MHz~1GHz

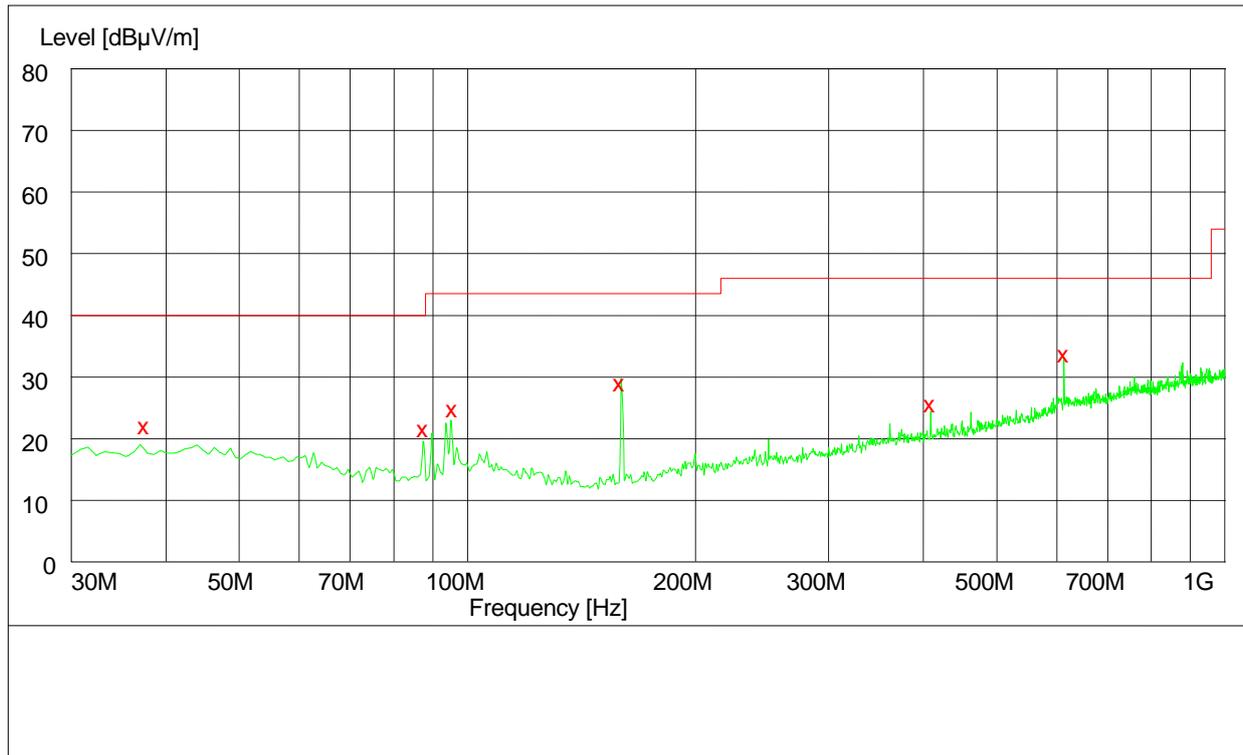

MEASUREMENT RESULT: QP Detector

| Frequency MHz | Level dBµV/m | Transducer dB | Limit dBµV/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------|---------------|--------------|-----------|-----------|-------------|--------------|
| 37.500000 | 21.90 | 15.2 | 40.0 | 18.1 | 151.0 | 181.00 | VERTICAL |
| 87.780000 | 21.40 | 11.5 | 40.0 | 18.6 | 100.0 | 69.00 | VERTICAL |
| 95.820000 | 24.60 | 13.0 | 43.5 | 18.9 | 104.0 | 112.00 | VERTICAL |
| 159.420000 | 28.90 | 10.1 | 43.5 | 14.6 | 100.0 | 302.00 | VERTICAL |
| 409.140000 | 25.40 | 17.6 | 46.0 | 20.6 | 131.0 | 173.00 | HORIZONTAL |
| 613.680000 | 33.50 | 21.6 | 46.0 | 12.5 | 100.0 | 212.00 | HORIZONTAL |


Note:

Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.



1GHz~18GHz

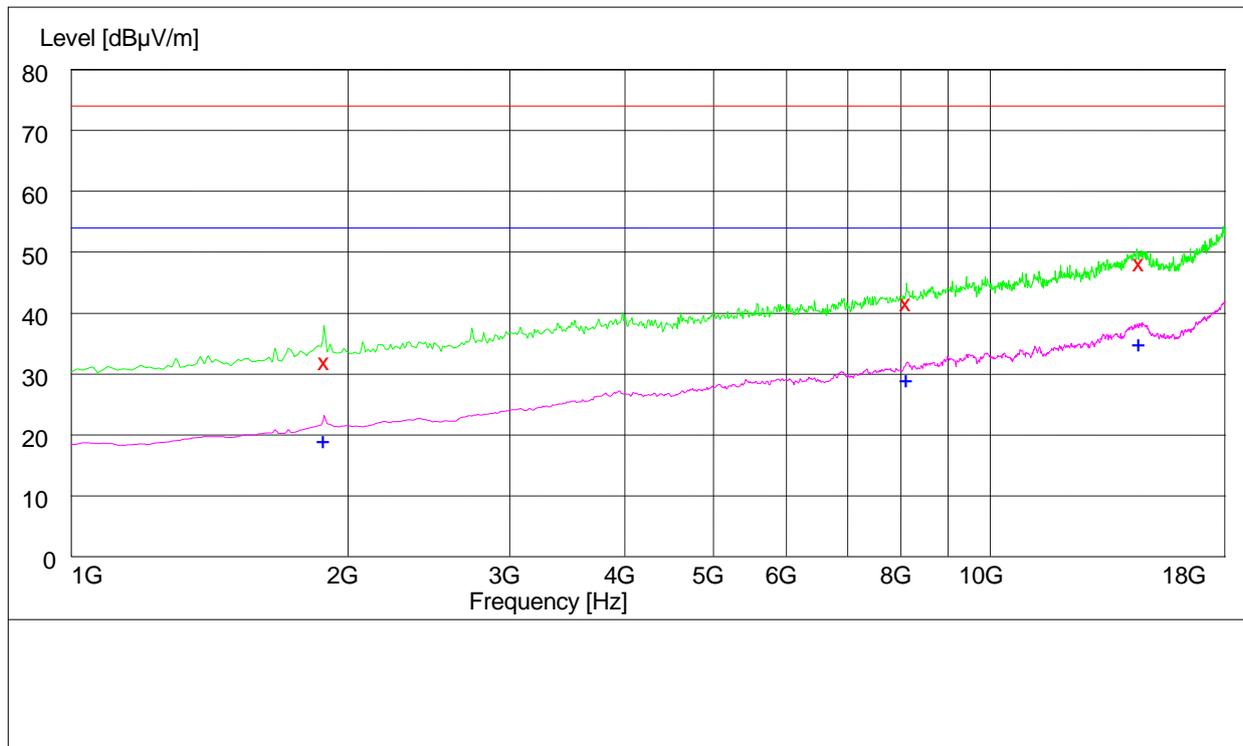

MEASUREMENT RESULT: PK Detector

| Frequency MHz | Level dBµV/m | Transducer dB | Limit dBµV/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------|---------------|--------------|-----------|-----------|-------------|--------------|
| 1890.000000 | 32.60 | -12.2 | 74.0 | 41.4 | 114.0 | 80.00 | VERTICAL |
| 8105.300000 | 42.30 | 4.9 | 74.0 | 31.7 | 100.0 | 53.00 | VERTICAL |
| 14546.600000 | 48.80 | 14.5 | 74.0 | 25.2 | 118.0 | 280.00 | HORIZONTAL |

MEASUREMENT RESULT: AV Detector

| Frequency MHz | Level dBµV/m | Transducer dB | Limit dBµV/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------|---------------|--------------|-----------|-----------|-------------|--------------|
| 1883.500000 | 19.70 | -12.2 | 54.0 | 34.3 | 194.0 | 77.00 | VERTICAL |
| 8114.300000 | 29.70 | 5.0 | 54.0 | 24.3 | 200.0 | 212.00 | HORIZONTAL |
| 14524.500000 | 35.60 | 14.5 | 54.0 | 18.4 | 199.0 | 235.00 | HORIZONTAL |

Note:


Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is used to calculate by software which is not shown in the sheet.



7.2 Conducted Disturbance

AC Port Test Data

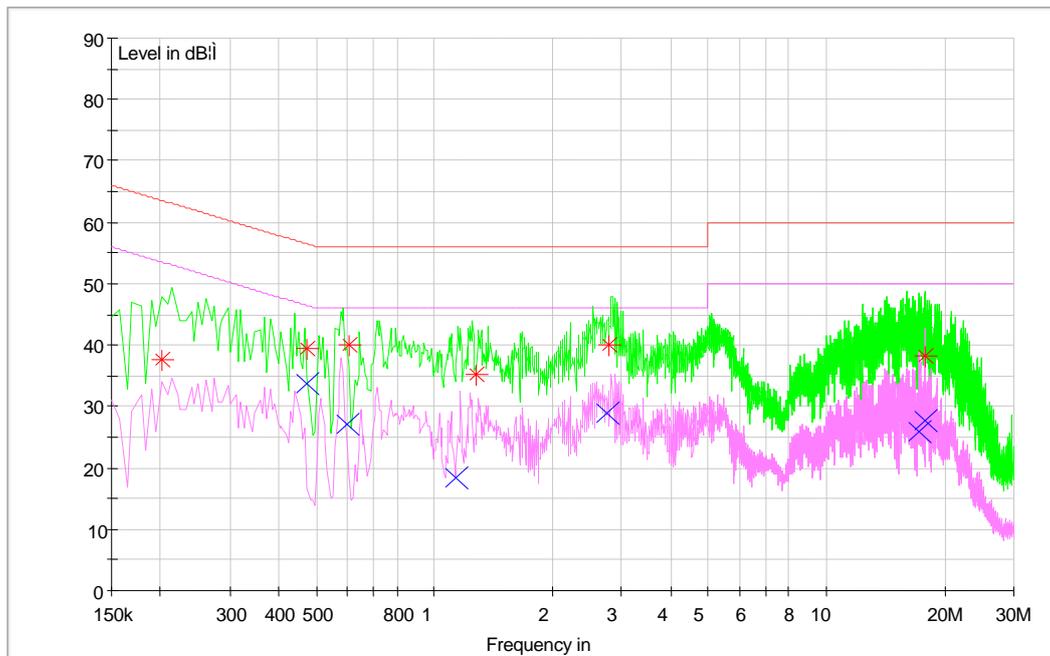

MEASUREMENT RESULT: QP Detector

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Line | PE |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.201706 | 37.7 | 9.7 | 63.5 | 25.8 | L1 | FLO |
| 0.472966 | 39.5 | 9.7 | 56.5 | 17.0 | L1 | FLO |
| 0.603904 | 40.1 | 9.7 | 56.0 | 15.9 | L1 | FLO |
| 1.278964 | 35.1 | 9.7 | 56.0 | 20.9 | N | FLO |
| 2.783711 | 39.9 | 9.7 | 56.0 | 16.1 | N | FLO |
| 17.780764 | 38.3 | 10.1 | 60.0 | 21.7 | N | FLO |

MEASUREMENT RESULT: AV Detector

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Line | PE |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.471796 | 33.6 | 9.7 | 46.5 | 12.9 | L1 | FLO |
| 0.599906 | 27.0 | 9.7 | 46.0 | 19.0 | N | FLO |
| 1.137566 | 18.5 | 9.7 | 46.0 | 27.5 | N | FLO |
| 2.766642 | 28.8 | 9.7 | 46.0 | 17.2 | N | FLO |
| 17.243801 | 25.8 | 10.1 | 50.0 | 24.2 | N | FLO |
| 17.849842 | 27.8 | 10.1 | 50.0 | 22.2 | N | FLO |

Note:

Level= Reading level+ Transd (cable loss + correction factor)

The reading level is used to calculate by software which is not shown in the sheet.



-----**END**-----