

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.706 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.615 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.086 mW/g

SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.404 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.728 W/kg

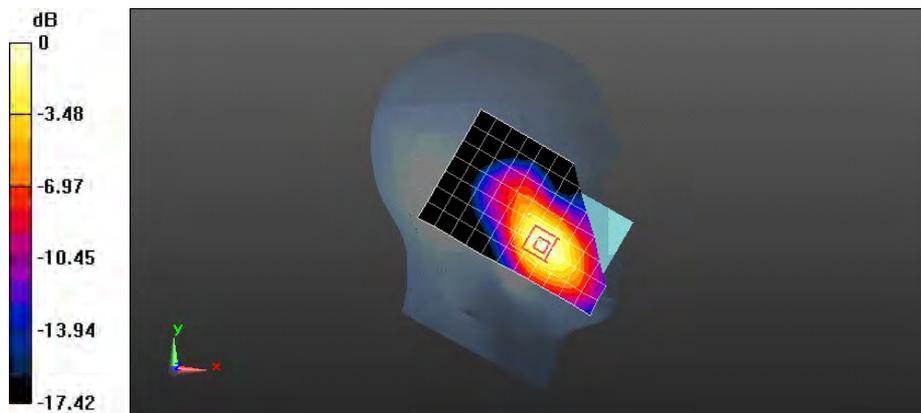

0 dB = 0.728 W/kg = -2.76 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.188 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.225 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.273 mW/g

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.110 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.189 W/kg

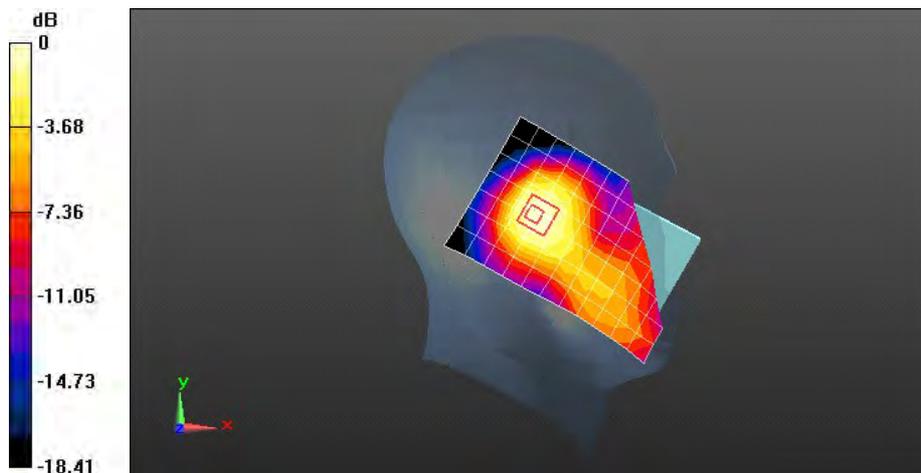

0 dB = 0.189 W/kg = -14.47 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Right hand touch check

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.398 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.237 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.574 mW/g

SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.234 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.404 W/kg

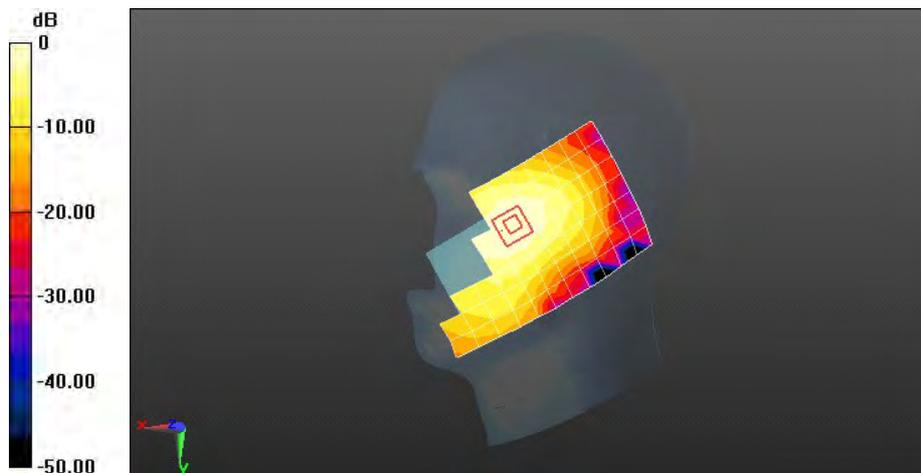

0 dB = 0.398 W/kg = -8.00 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.201 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 9.240 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.299 mW/g

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.121 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.215 W/kg

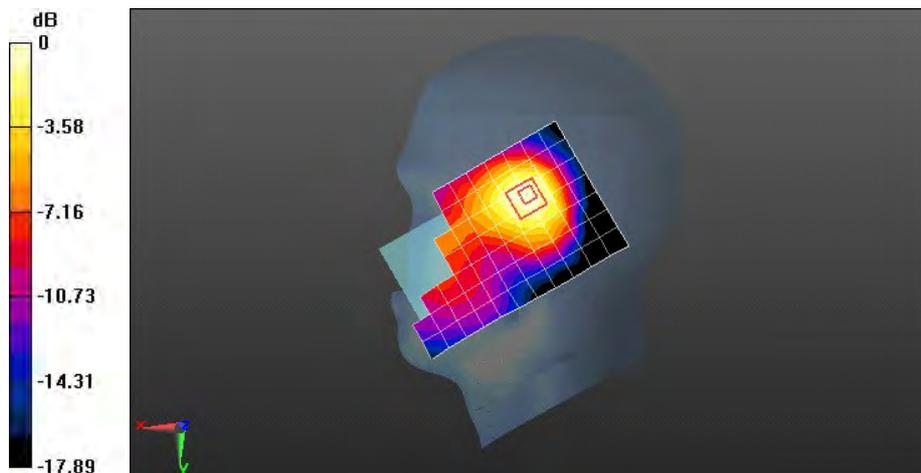

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 40.652$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.966 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.115 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.421 mW/g

SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.551 mW/g

Maximum value of SAR (measured) = 0.972 W/kg

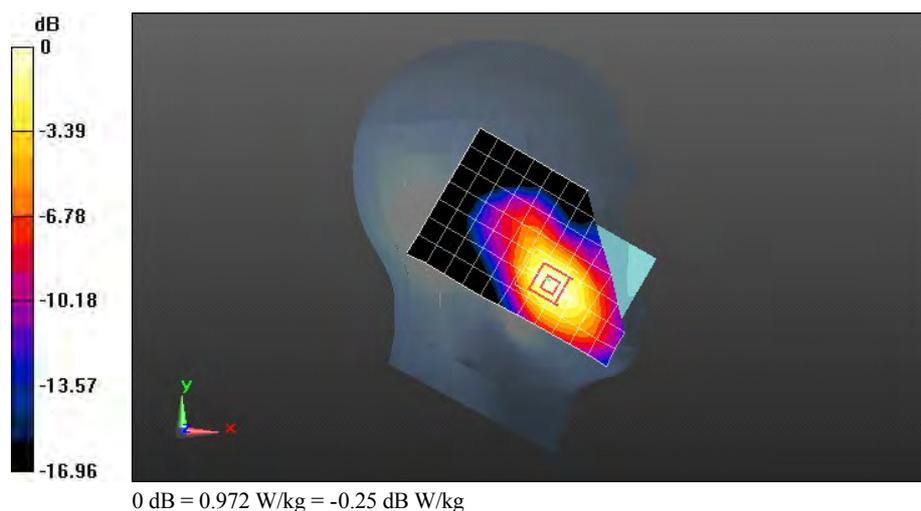

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 40.652$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.261 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.572 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.382 mW/g

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.265 W/kg

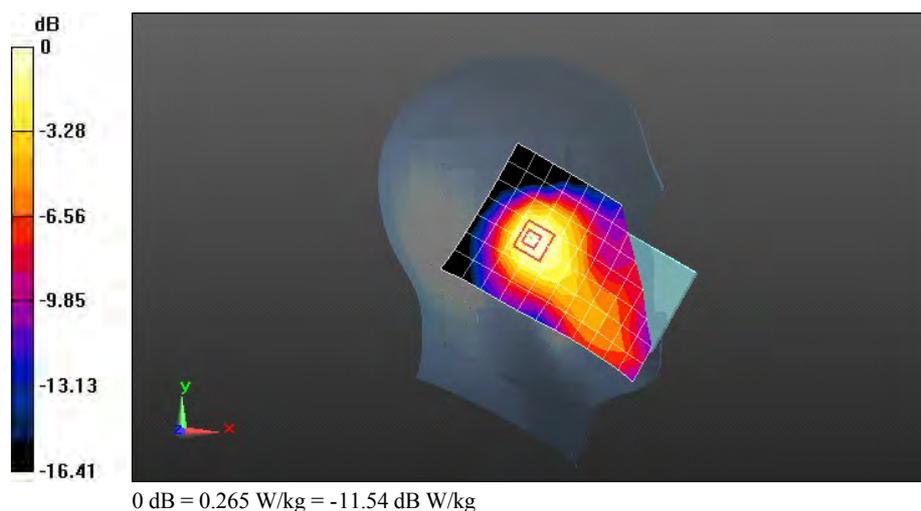

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 40.652$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.606 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.567 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.875 mW/g

SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.386 mW/g

Maximum value of SAR (measured) = 0.628 W/kg

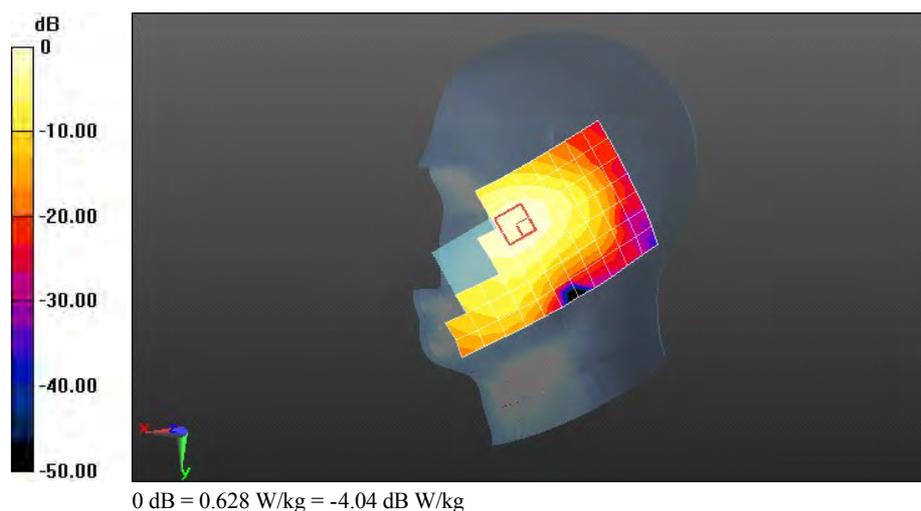

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.368$ mho/m; $\epsilon_r = 40.652$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.880 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.384 mW/g

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.275 W/kg

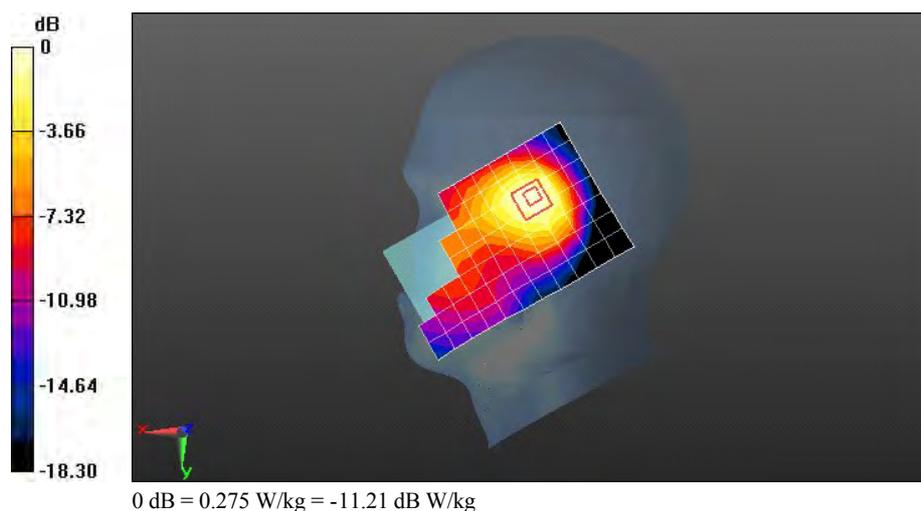

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.990 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.572 mW/g

SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.566 mW/g

Maximum value of SAR (measured) = 1.05 W/kg

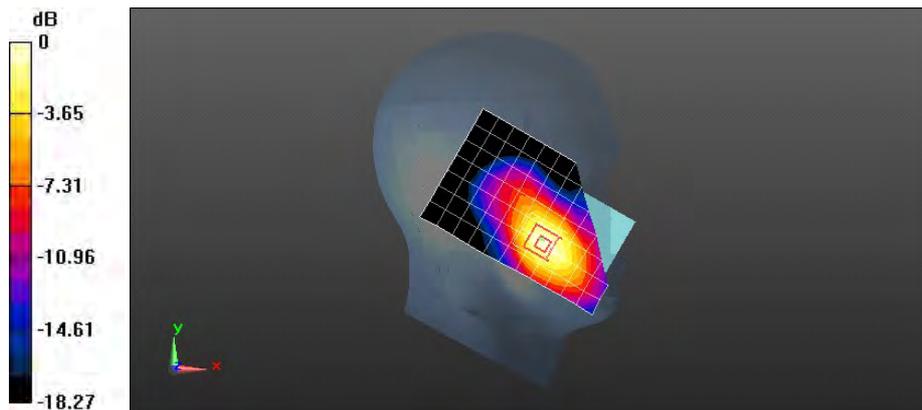

0 dB = 1.05 W/kg = 0.42 dB W/kg



Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.256 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.695 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.362 mW/g

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.258 W/kg

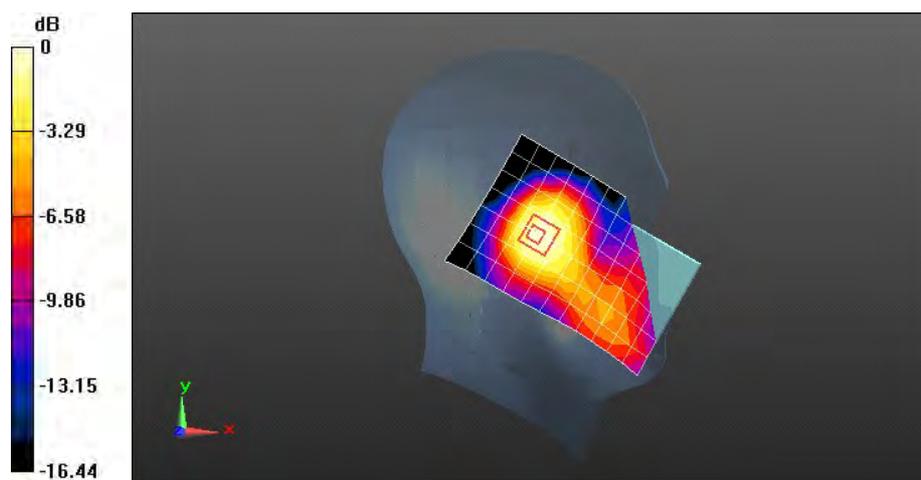

0 dB = 0.258 W/kg = -11.77 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.523 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.456 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.783 mW/g

SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.306 mW/g

Maximum value of SAR (measured) = 0.535 W/kg

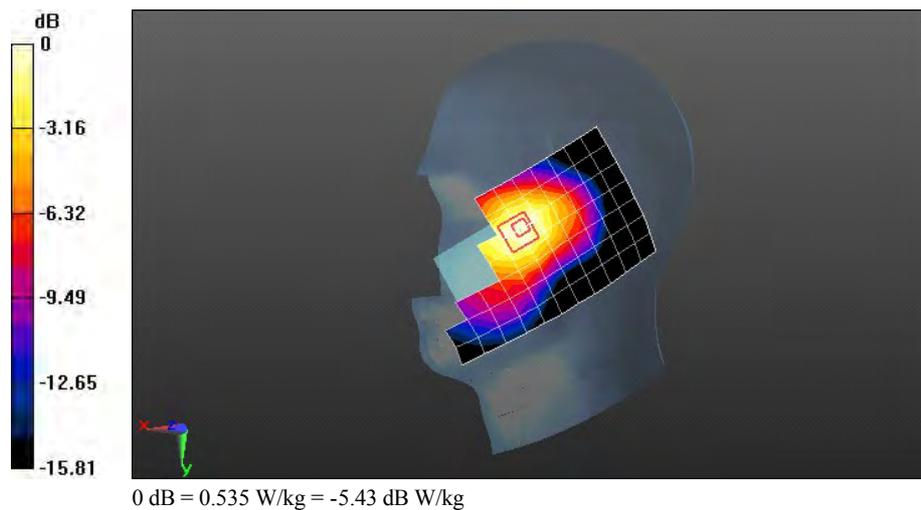

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Right hand tilt 15 degree**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.130 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.391 mW/g

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.278 W/kg

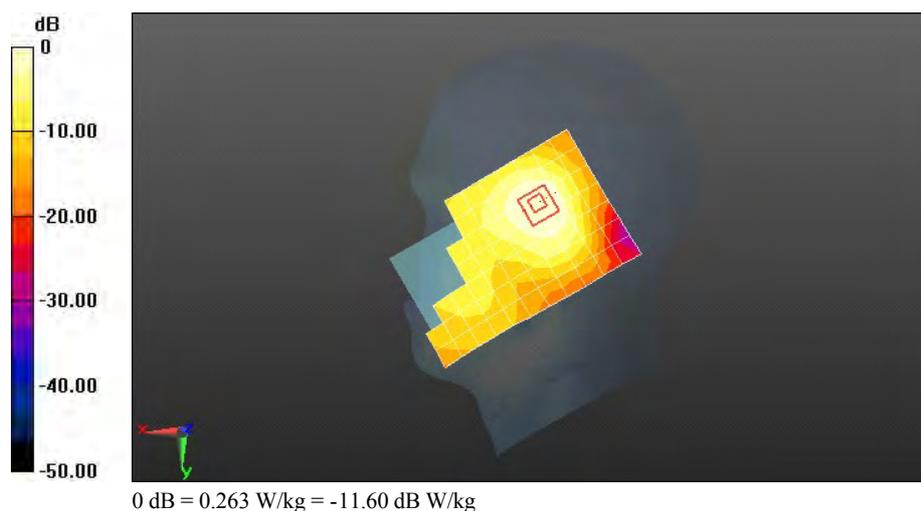

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Left hand touch check

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA,50%RB, 20 MHz, QPSK/16QAM; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.614 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.059 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.933 mW/g

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.337 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.617 W/kg

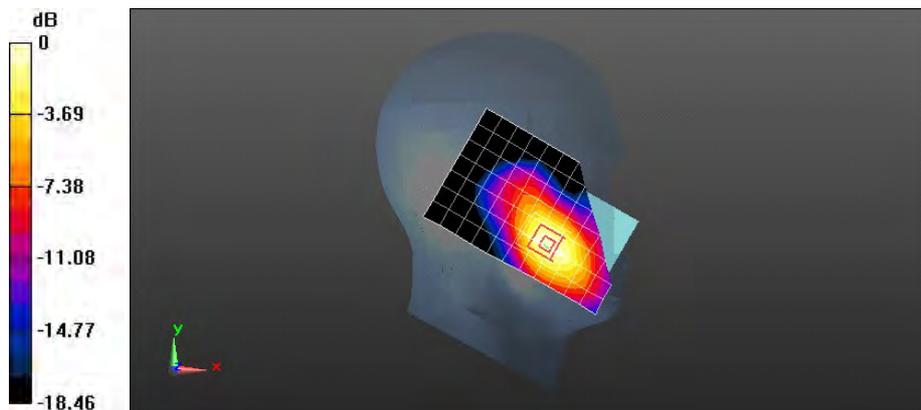

0 dB = 0.617 W/kg = -4.19 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA,50%RB, 20 MHz, QPSK/16QAM; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.139 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.129 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.204 mW/g

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.081 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.142 W/kg

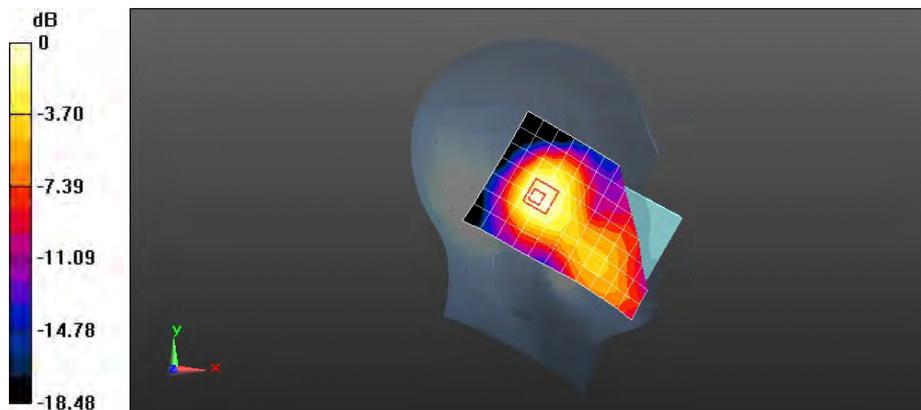

0 dB = 0.142 W/kg = -16.95 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Right hand touch check

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50%RB, 20 MHz, QPSK/16QAM; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.338 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.058 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.502 mW/g

SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.197 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.347 W/kg

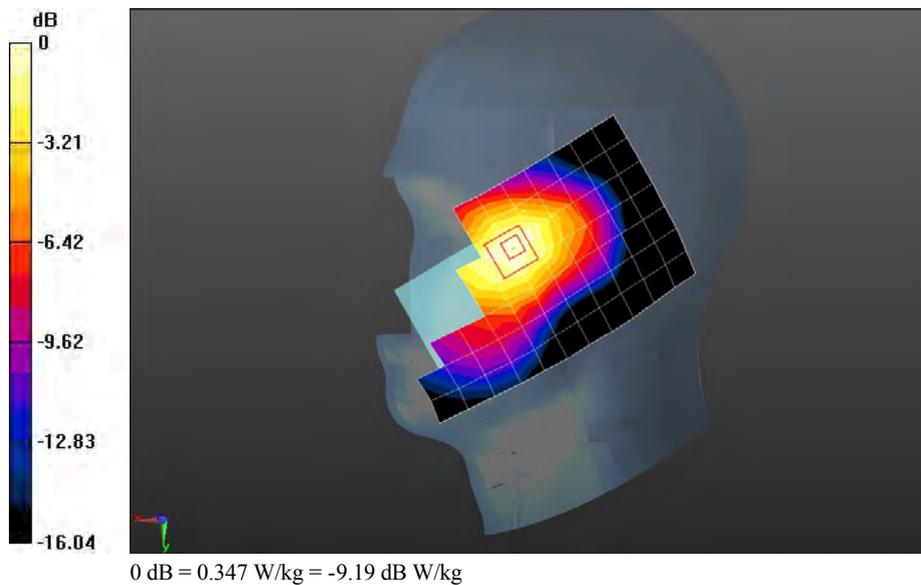

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA,50%RB, 20 MHz, QPSK/16QAM; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.568$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.157 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.986 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.241 mW/g

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.093 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.168 W/kg

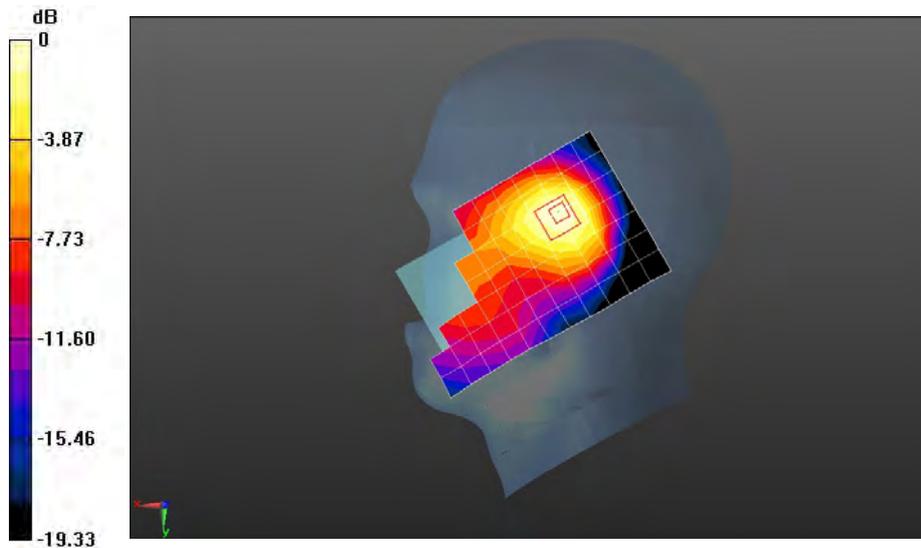

0 dB = 0.168 W/kg = -15.49 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Left hand touch check

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.806 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.999 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.256 mW/g

SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 0.821 W/kg

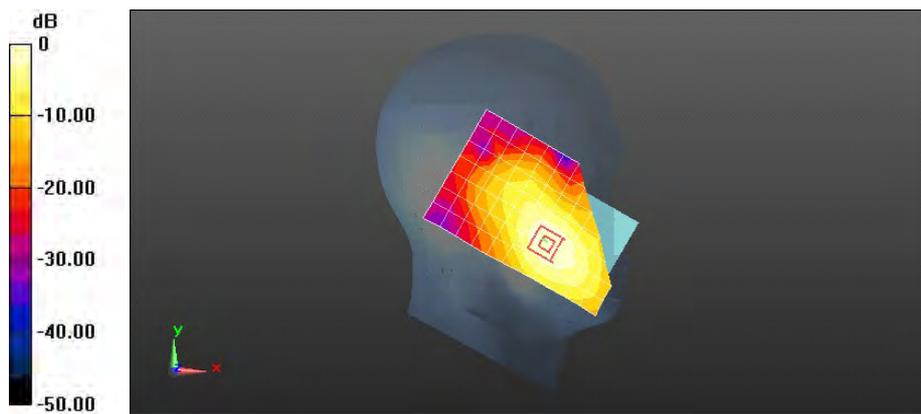

0 dB = 0.821 W/kg = -1.71 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.198 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.386 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.295 mW/g

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.203 W/kg

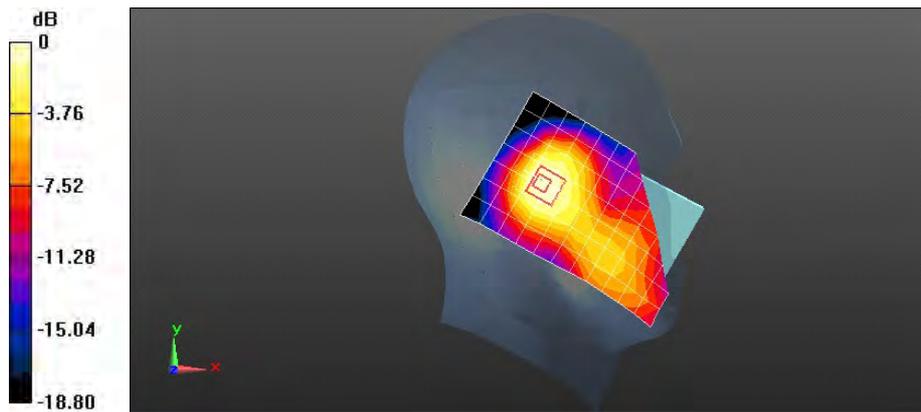

0 dB = 0.203 W/kg = -13.85 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Right hand touch check

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.459 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.440 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.681 mW/g

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.471 W/kg

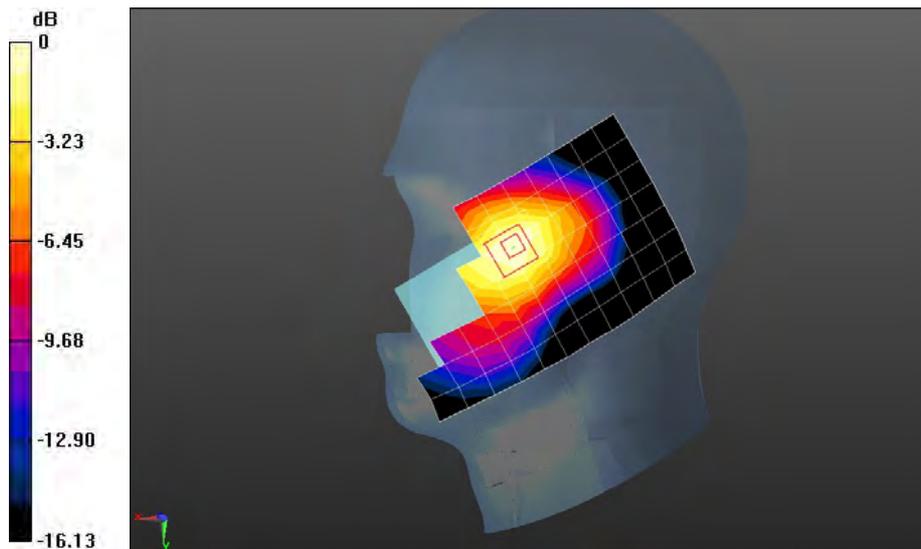

0 dB = 0.471 W/kg = -6.54 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.285 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.325 mW/g

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.227 W/kg

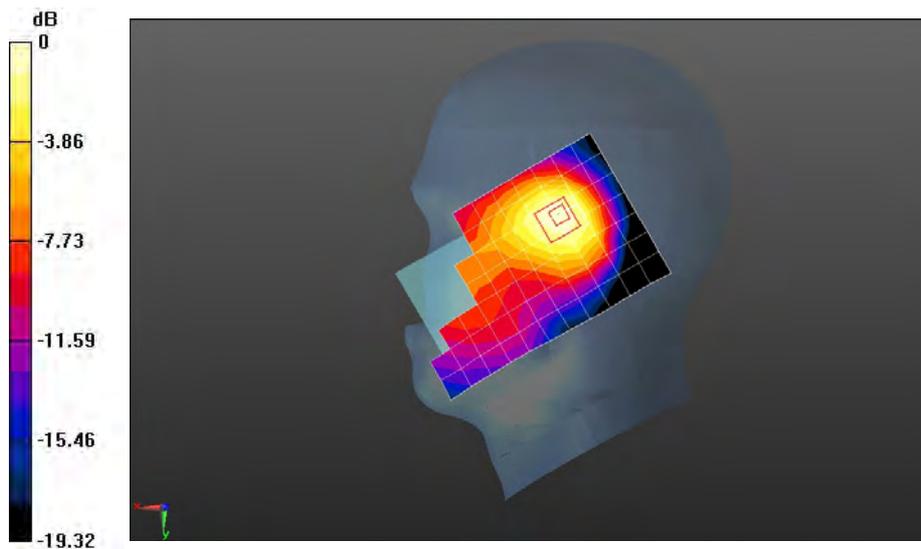

0 dB = 0.227 W/kg = -12.88 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.766 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.052 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.188 mW/g

SAR(1 g) = 0.725 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.785 W/kg

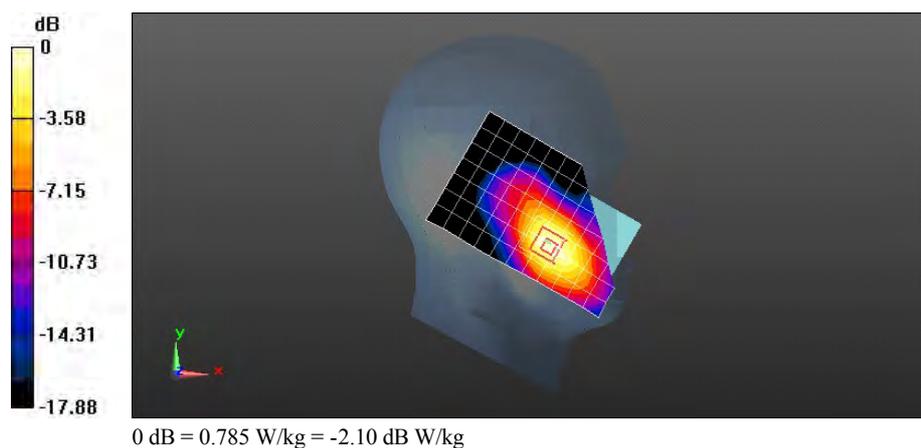

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Left hand tilt 15 degree**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.196 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.108 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.292 mW/g

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.200 W/kg

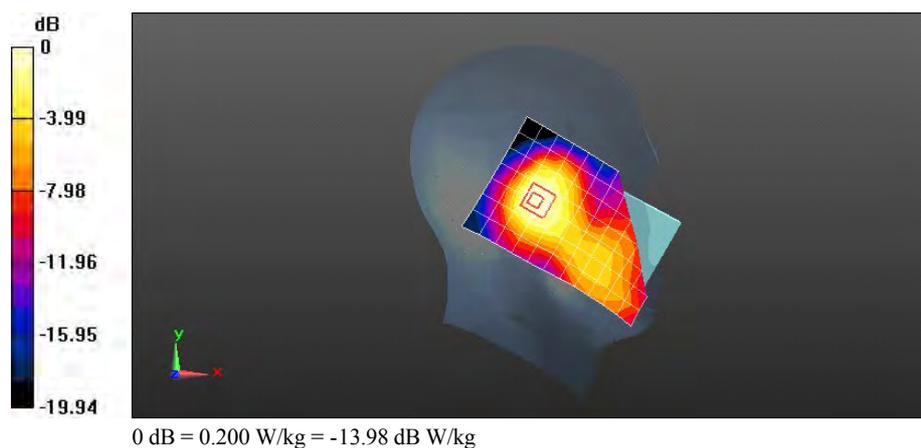

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.439 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.458 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.644 mW/g

SAR(1 g) = 0.409 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.442 W/kg

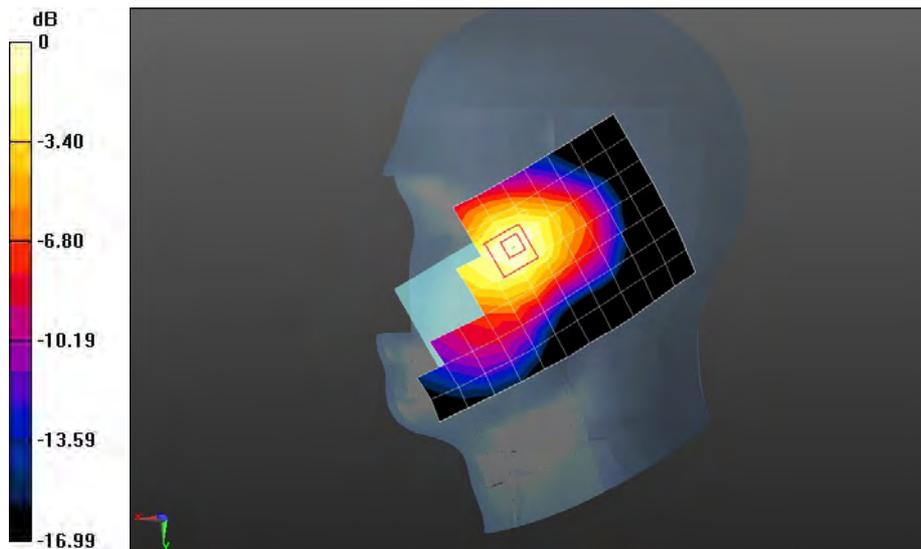

0 dB = 0.442 W/kg = -7.09 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ mho/m; $\epsilon_r = 40.545$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(8, 8, 8); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.220 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.233 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.330 mW/g

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.231 W/kg

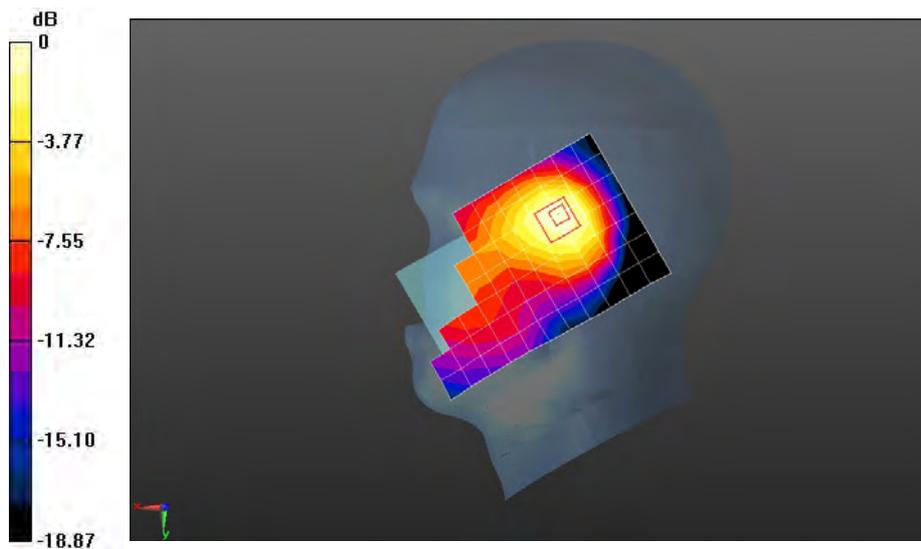

0 dB = 0.231 W/kg = -12.73 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 51.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.620 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.763 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.943 mW/g

SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.349 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.634 W/kg

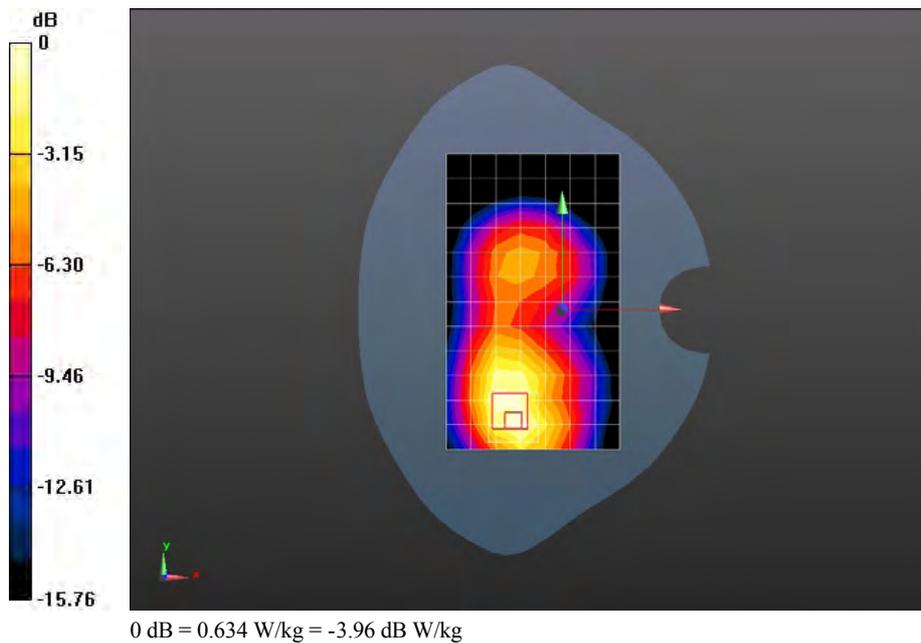

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 51.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.637 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.478 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.060 mW/g

SAR(1 g) = 0.659 mW/g; SAR(10 g) = 0.389 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.720 W/kg

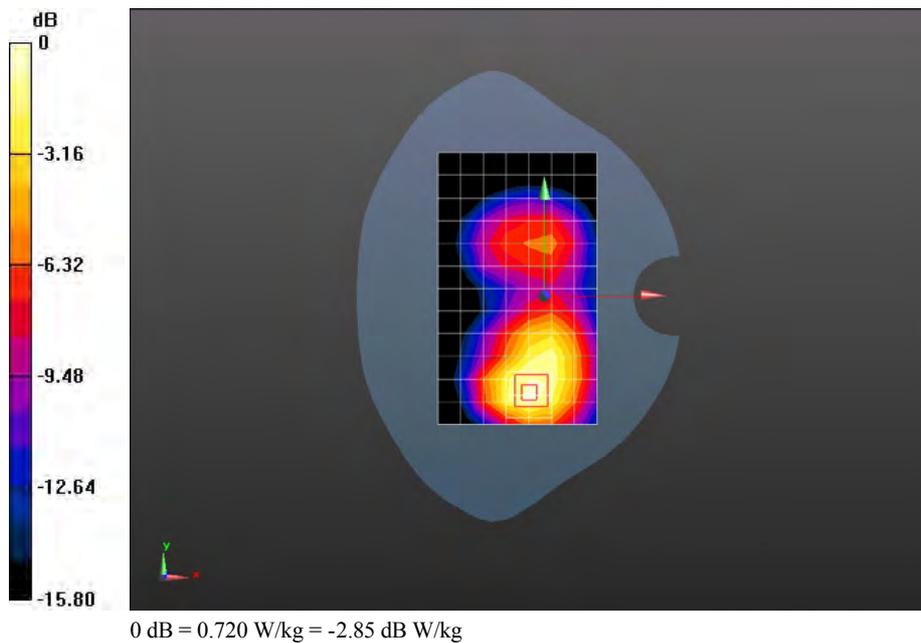

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 51.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.255 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.196 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.394 mW/g

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.145 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.267 W/kg

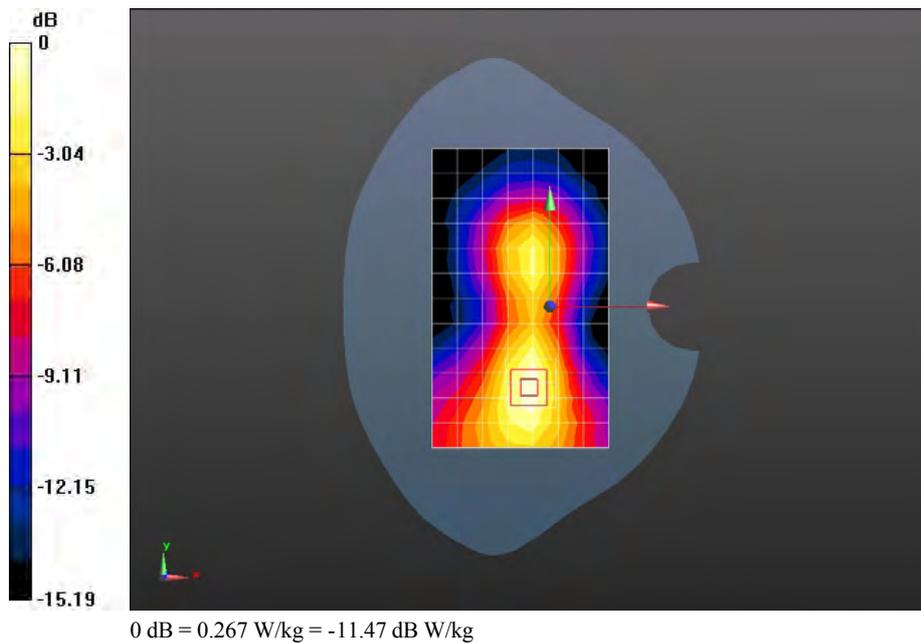

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 51.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0558 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.652 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.089 mW/g

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.033 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0610 W/kg

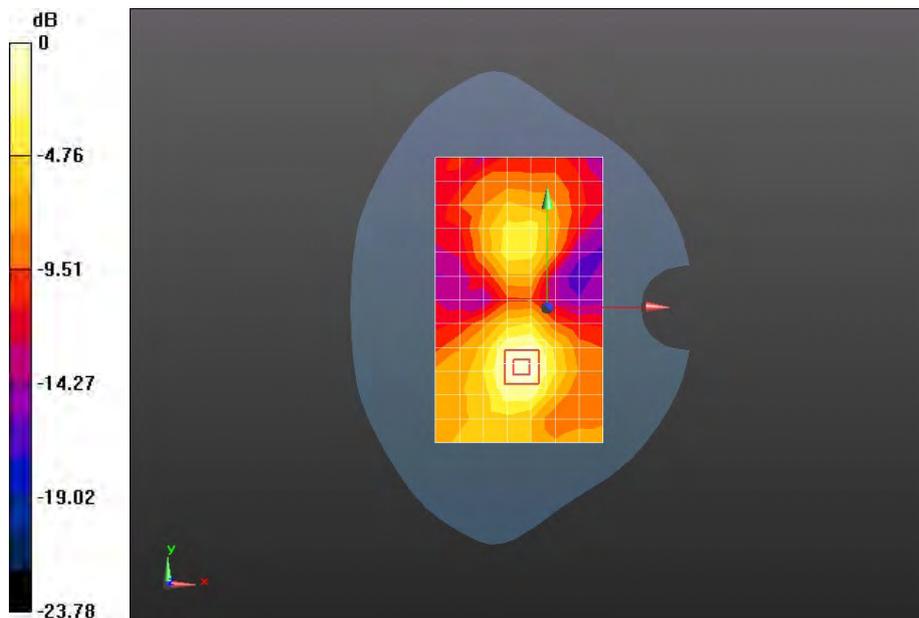

0 dB = 0.0610 W/kg = -24.29 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 50%RB#25 20175CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 51.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.621 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.092 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.033 mW/g

SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.324 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.676 W/kg

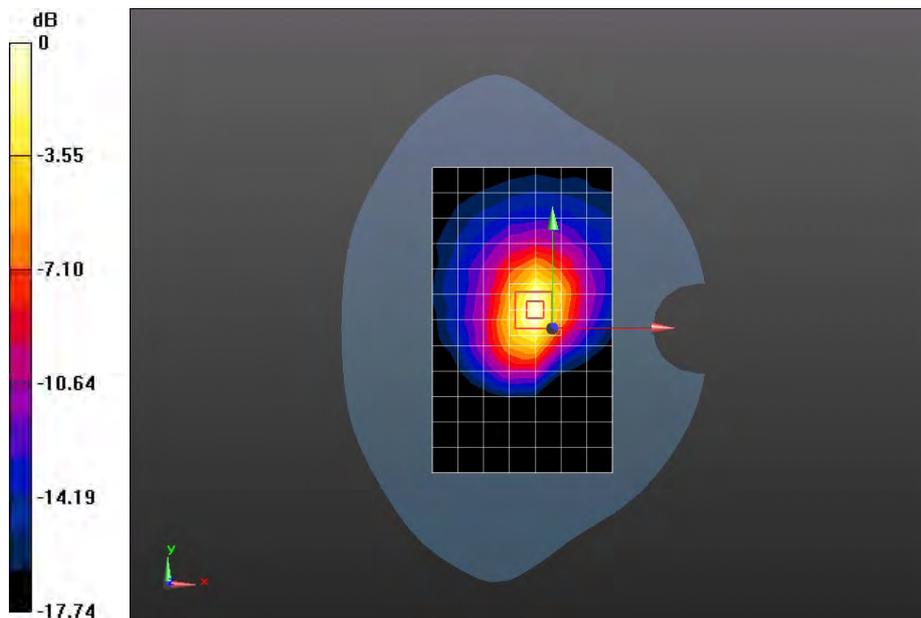

0 dB = 0.676 W/kg = -3.40 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.886 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.237 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.360 mW/g

SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.916 W/kg

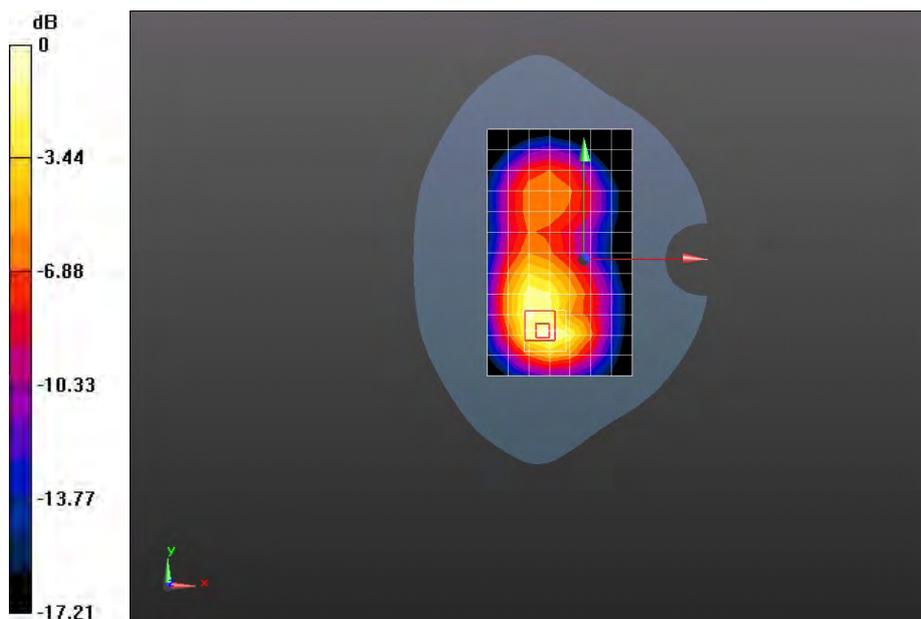

0 dB = 0.916 W/kg = -0.76 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Towards Ground 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.952 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.396 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.560 mW/g

SAR(1 g) = 0.969 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 1.07 W/kg

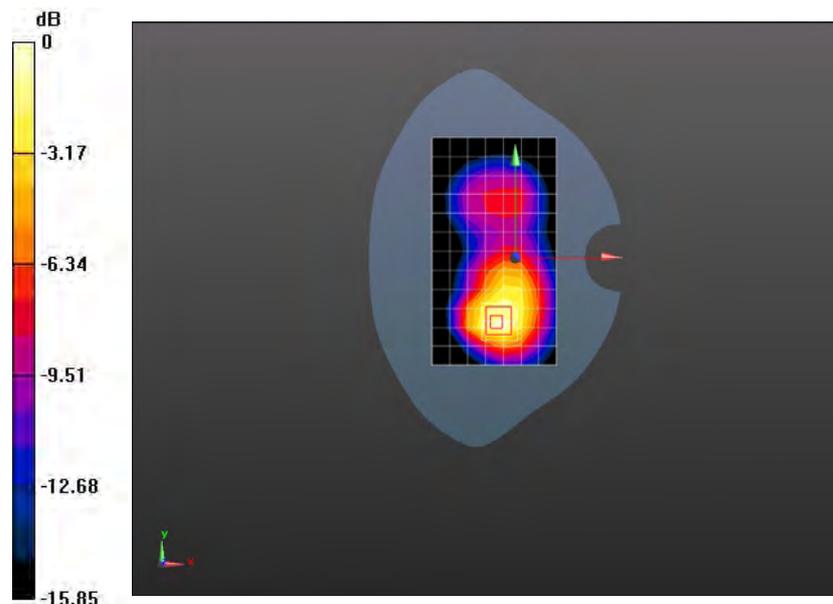

0 dB = 1.07 W/kg = 0.59 dB W/kg

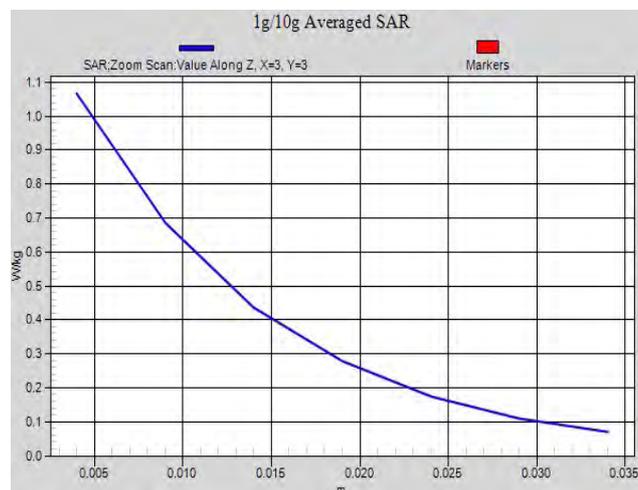

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.305 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.719 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.544 mW/g

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.362 W/kg

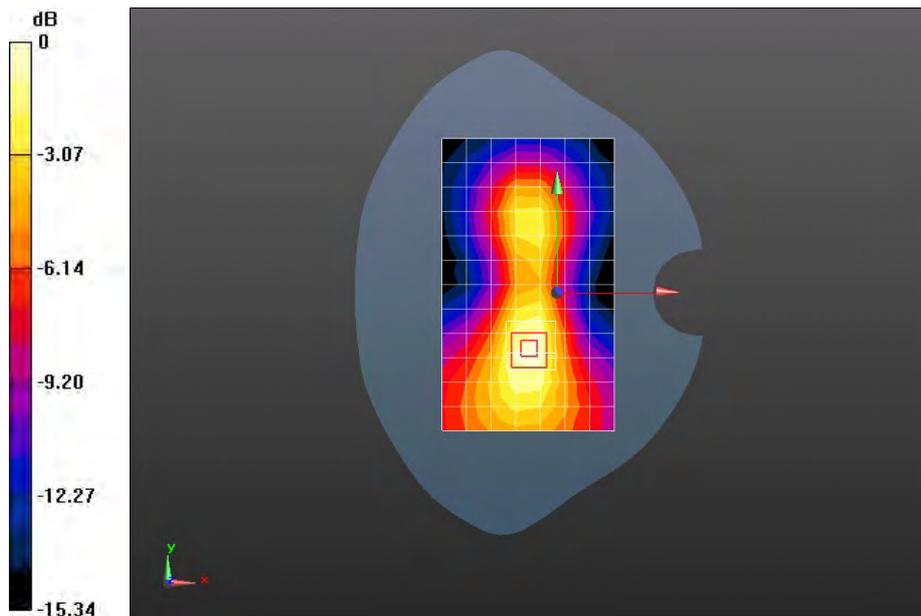

0 dB = 0.362 W/kg = -8.83 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0744 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.892 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.120 mW/g

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.0801 W/kg

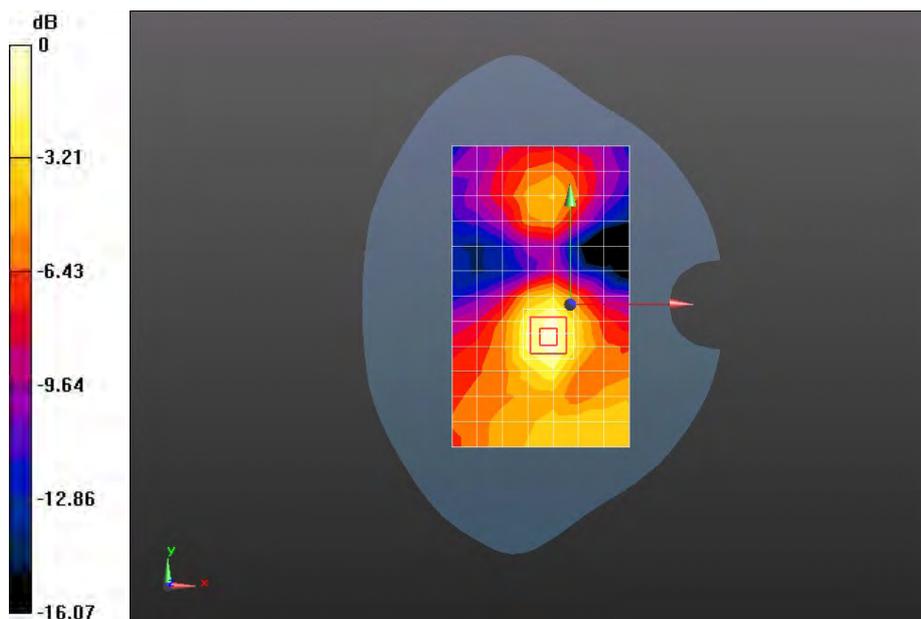

0 dB = 0.0801 W/kg = -21.93 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#0 20050CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.950 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.794 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.577 mW/g

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.487 mW/g

Maximum value of SAR (measured) = 1.02 W/kg

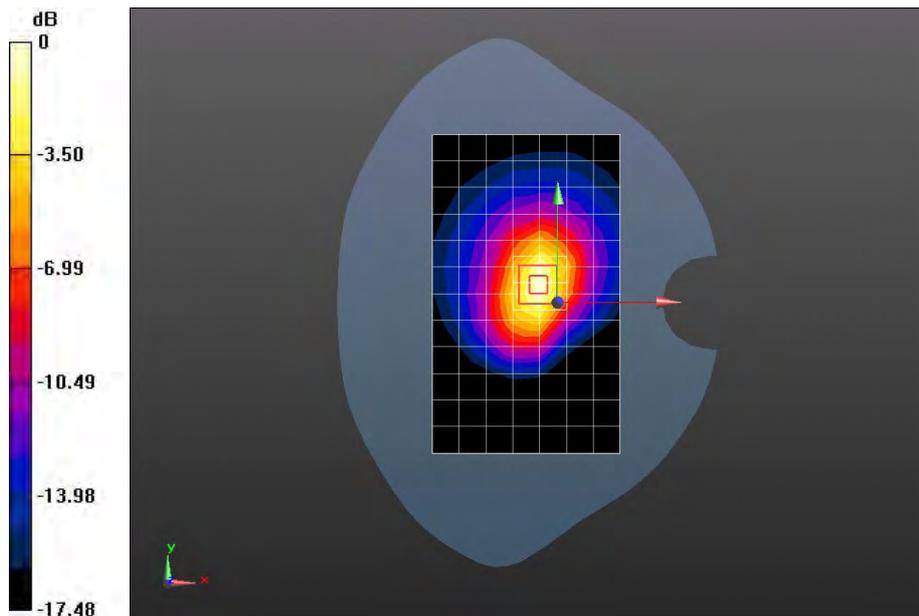

0 dB = 1.02 W/kg = 0.17 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Towards Phantom 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.341$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.774 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.772 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.206 mW/g

SAR(1 g) = 0.754 mW/g; SAR(10 g) = 0.453 mW/g

Maximum value of SAR (measured) = 0.815 W/kg

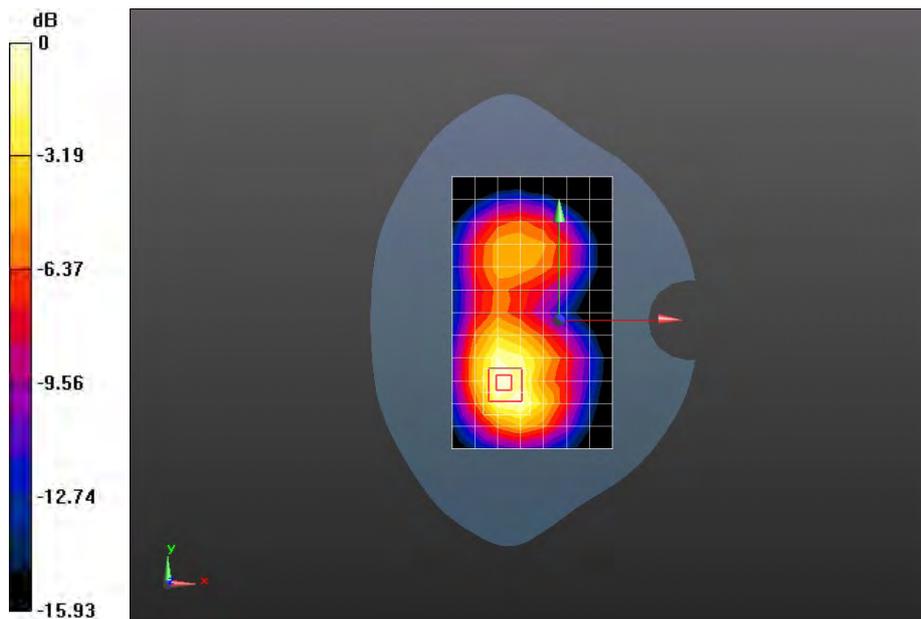

0 dB = 0.815 W/kg = -1.78 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.341$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.747 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.321 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.194 mW/g

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.453 mW/g

Maximum value of SAR (measured) = 0.833 W/kg

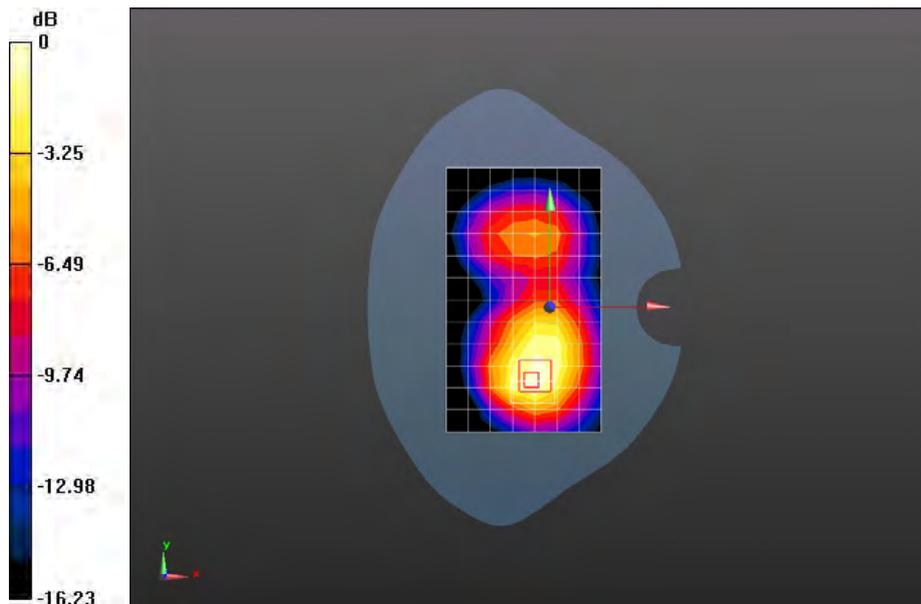

0 dB = 0.833 W/kg = -1.59 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.341$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.327 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.138 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.577 mW/g

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.389 W/kg

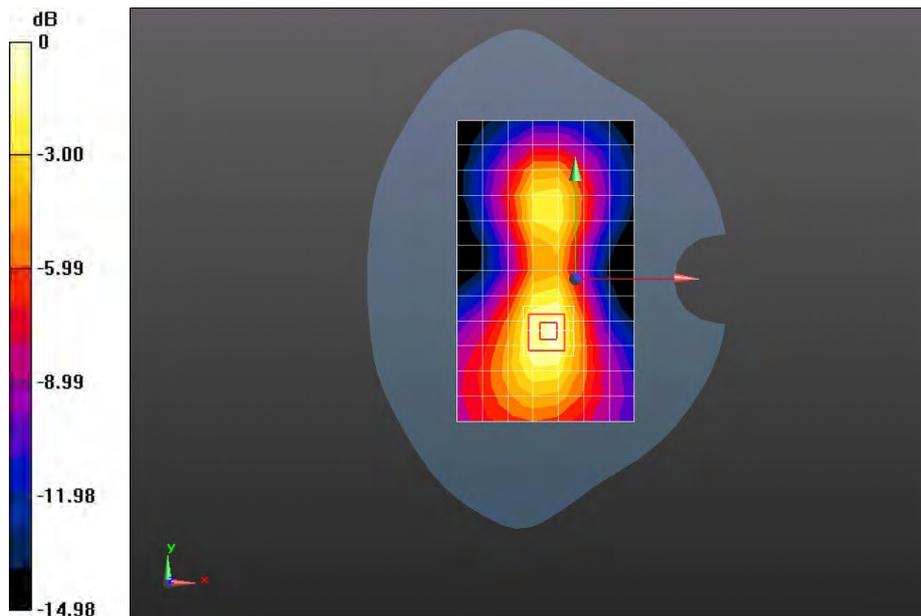

0 dB = 0.389 W/kg = -8.20 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.341$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0739 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.250 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.115 mW/g

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.0758 W/kg

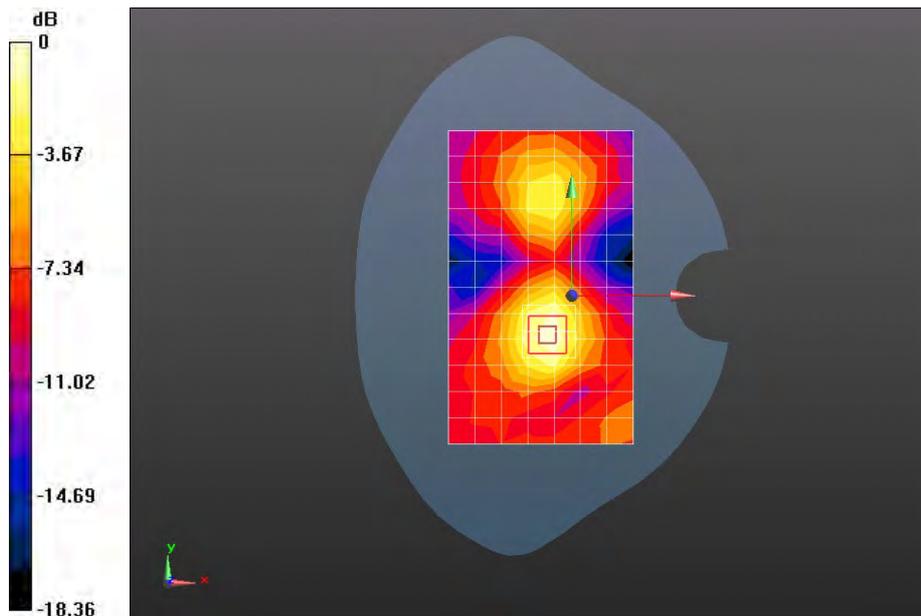

0 dB = 0.0758 W/kg = -22.41 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M QPSK 1RB#99 20300CH Bottom edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK/16QAM); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 51.341$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.832 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.123 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.322 mW/g

SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.414 mW/g

Maximum value of SAR (measured) = 0.853 W/kg

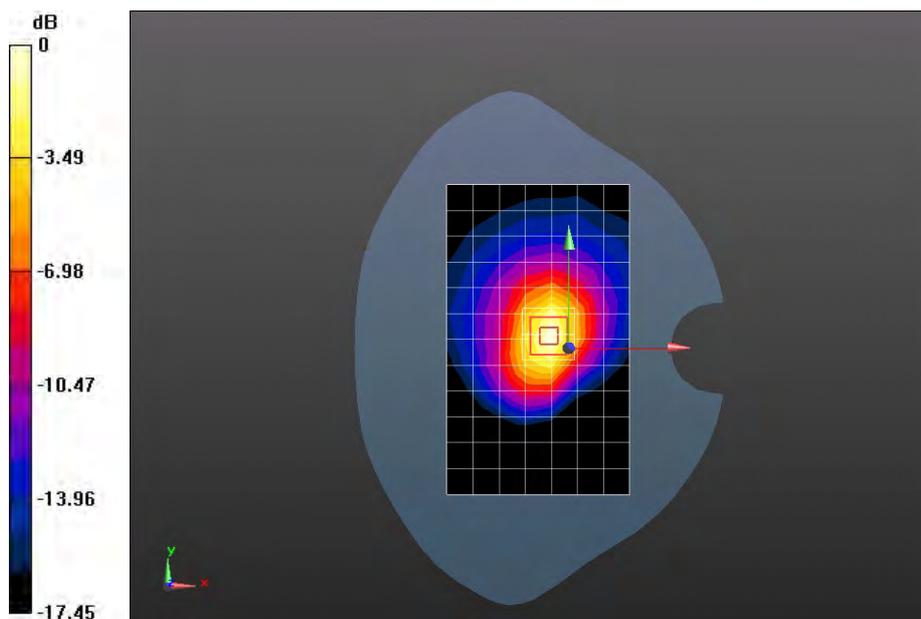

0 dB = 0.853 W/kg = -1.38 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 51.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.547 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.472 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.836 mW/g

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.299 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.554 W/kg

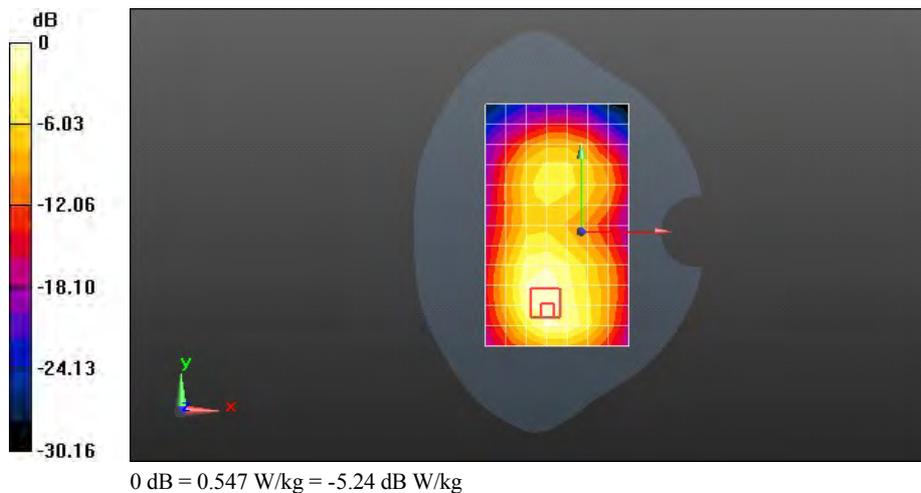

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Towards Ground 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.497 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.628 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.837 mW/g

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.311 mW/g[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.581 W/kg

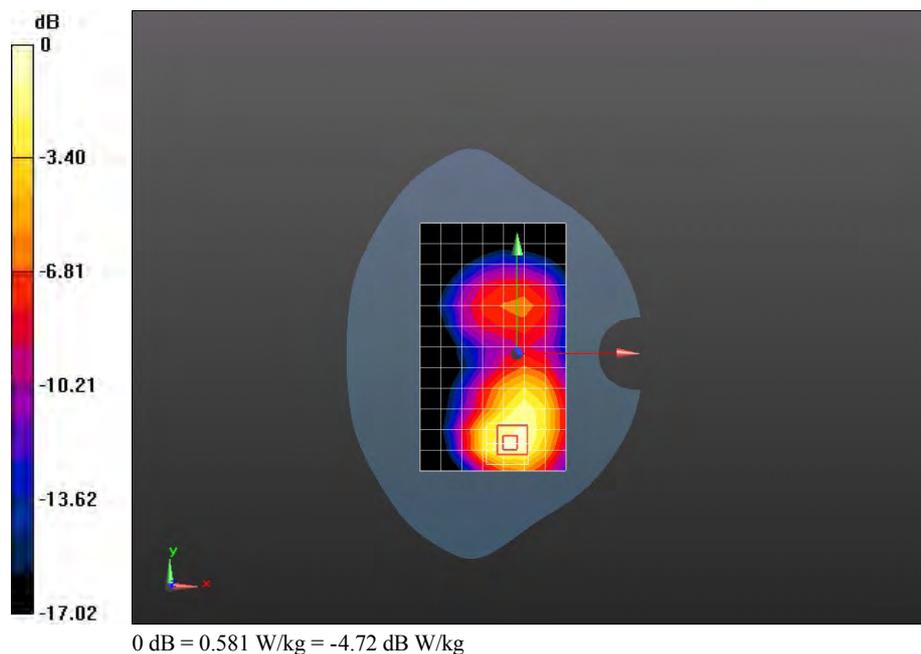

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.197 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.805 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.289 mW/g

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.108 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.195 W/kg

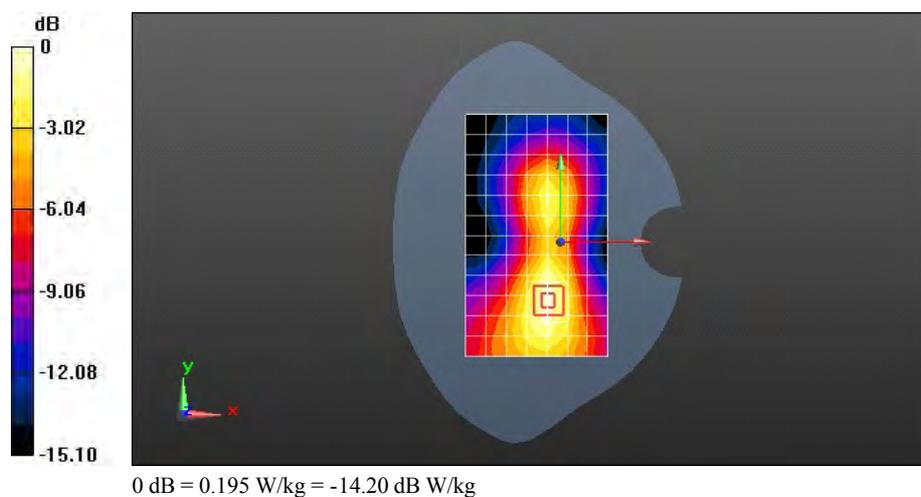

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.878$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0438 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 2.928 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.073 mW/g

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.026 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0487 W/kg

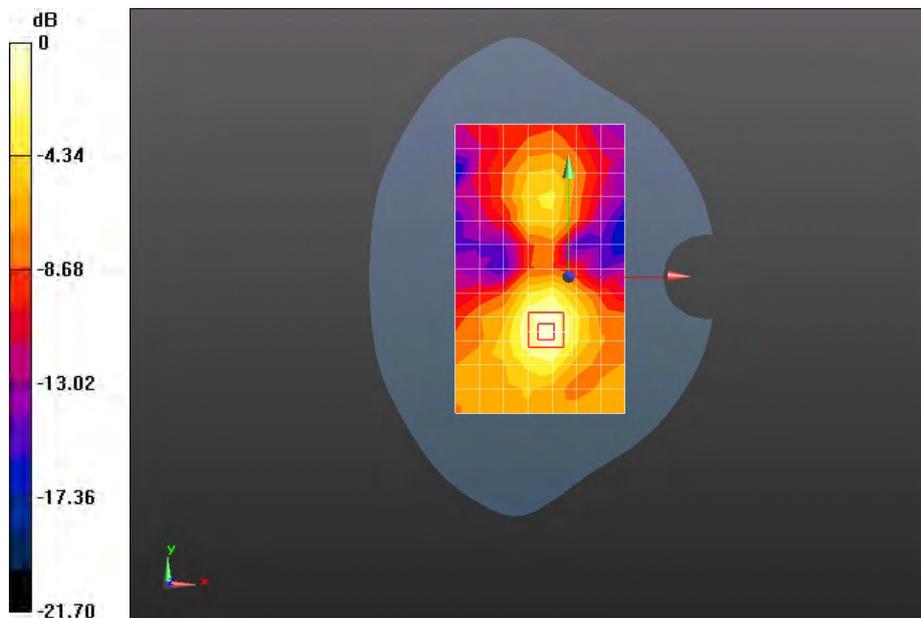

0 dB = 0.0487 W/kg = -26.25 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 50%RB#25 20175CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50%RB, 20 MHz, QPSK/16QAM); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 51.346$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.541 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 18.037 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.849 mW/g

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.265 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.551 W/kg

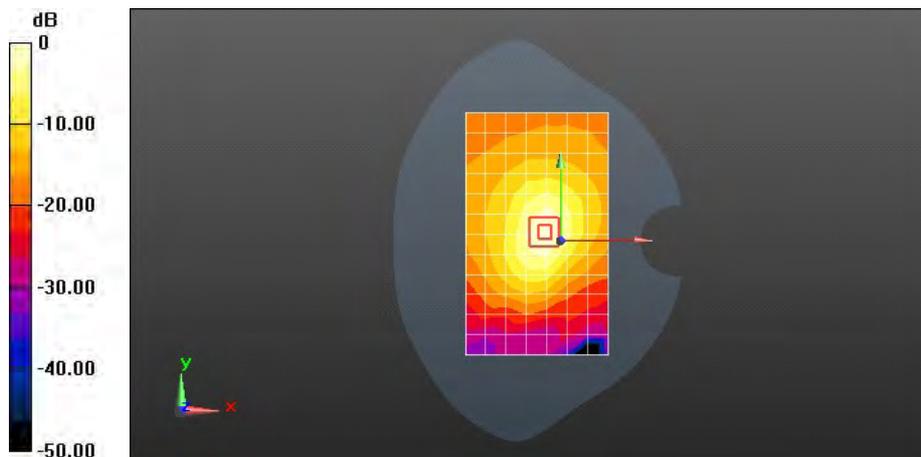

0 dB = 0.541 W/kg = -5.34 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.655 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.335 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.003 mW/g

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.370 mW/g

Maximum value of SAR (measured) = 0.677 W/kg

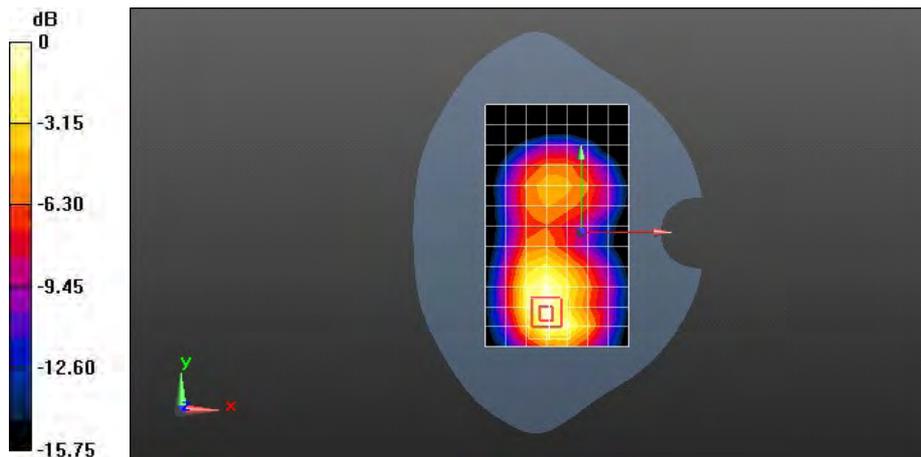

0 dB = 0.677 W/kg = -3.39 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.715 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.100 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.093 mW/g

SAR(1 g) = 0.689 mW/g; SAR(10 g) = 0.405 mW/g

Maximum value of SAR (measured) = 0.751 W/kg

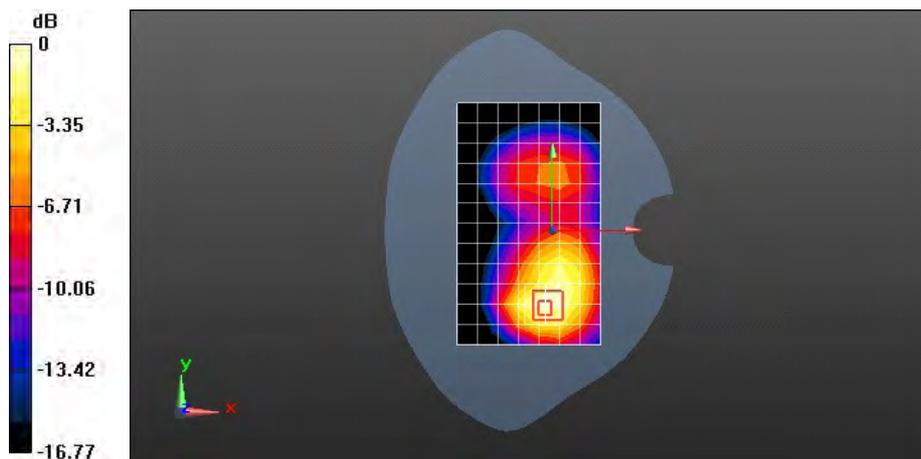

0 dB = 0.751 W/kg = -2.49 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.591 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.414 mW/g

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.277 W/kg

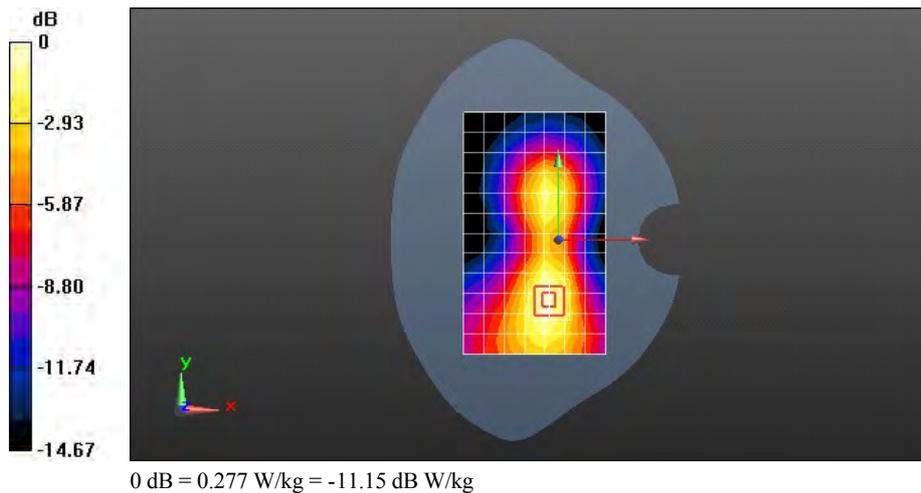

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0595 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.280 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.099 mW/g

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.0653 W/kg

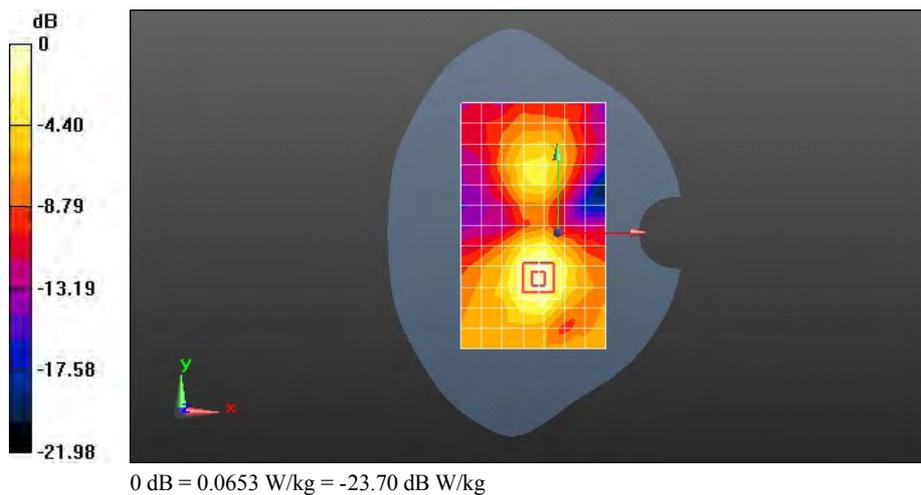

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#0 20300CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.621 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.686 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.154 mW/g

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.351 mW/g

Maximum value of SAR (measured) = 0.736 W/kg

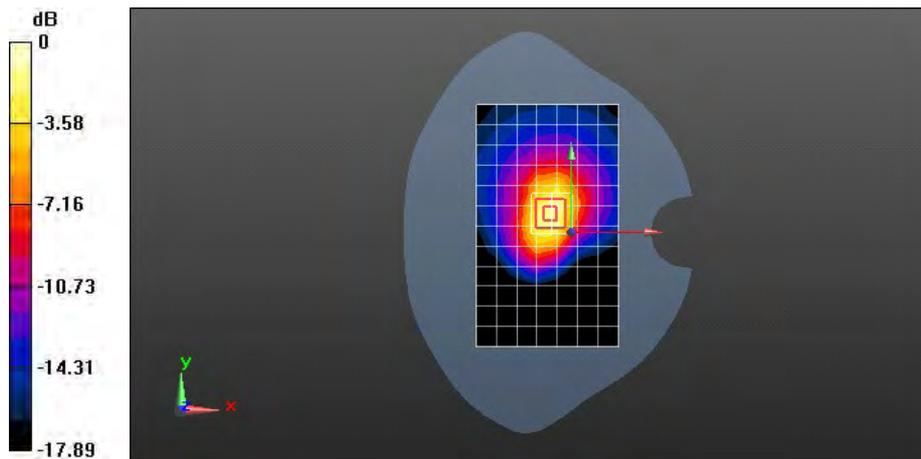

0 dB = 0.736 W/kg = -2.66 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.631 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.757 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.938 mW/g

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.636 W/kg

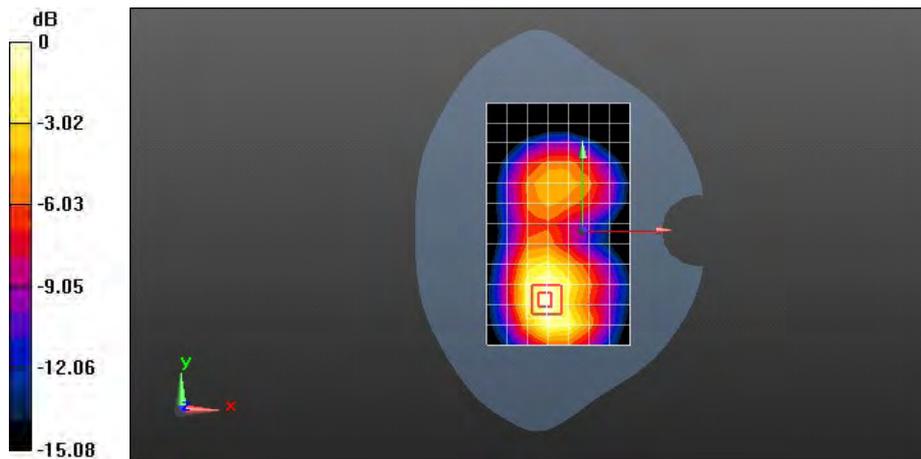

0 dB = 0.636 W/kg = -3.93 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.586 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.882 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.942 mW/g

SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.652 W/kg

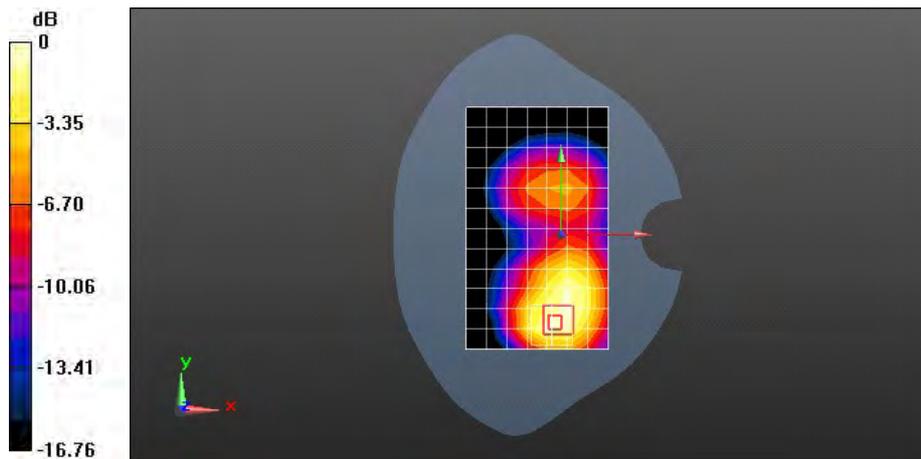

0 dB = 0.652 W/kg = -3.72 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.271 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.792 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.415 mW/g

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.281 W/kg

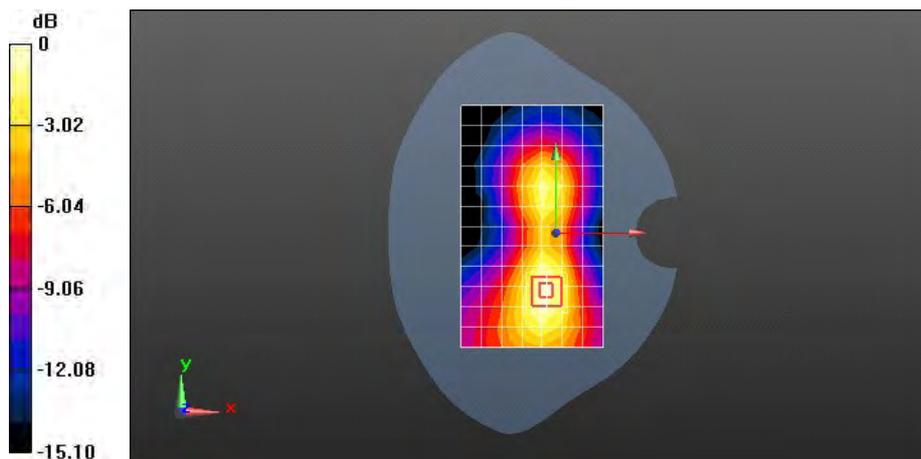

0 dB = 0.281 W/kg = -11.03 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0591 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.077 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.094 mW/g

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.0641 W/kg

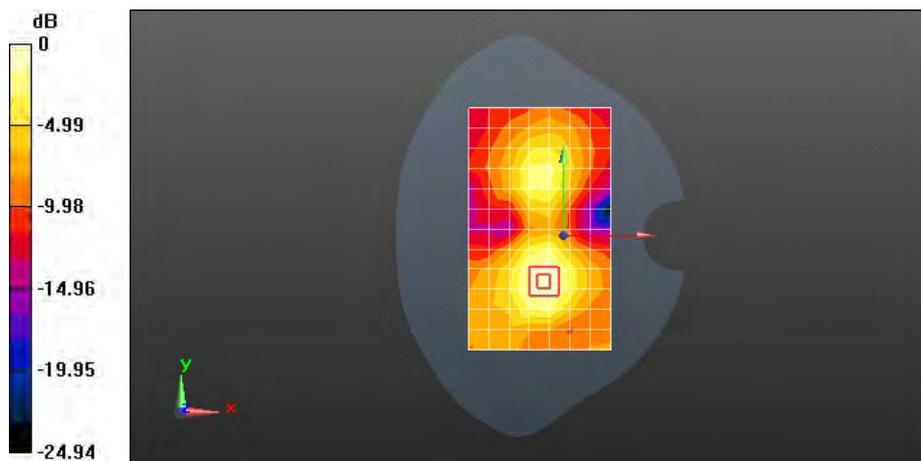

0 dB = 0.0591 W/kg = -24.57 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band IV 20M 16QAM 1RB#99 20300CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 20 MHz, QPSK); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.476$ mho/m; $\epsilon_r = 51.873$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.58, 7.58, 7.58); Calibrated: 7/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn851; Calibrated: 7/25/2012
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.551 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.203 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.008 mW/g

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.308 mW/g

Maximum value of SAR (measured) = 0.642 W/kg

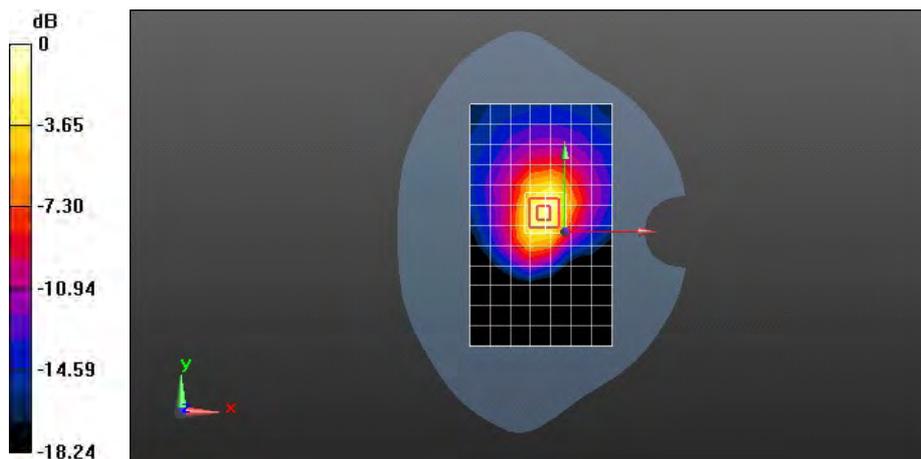

0 dB = 0.642 W/kg = -3.85 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA,50%RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.274 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.283 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.334 mW/g

SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.282 W/kg

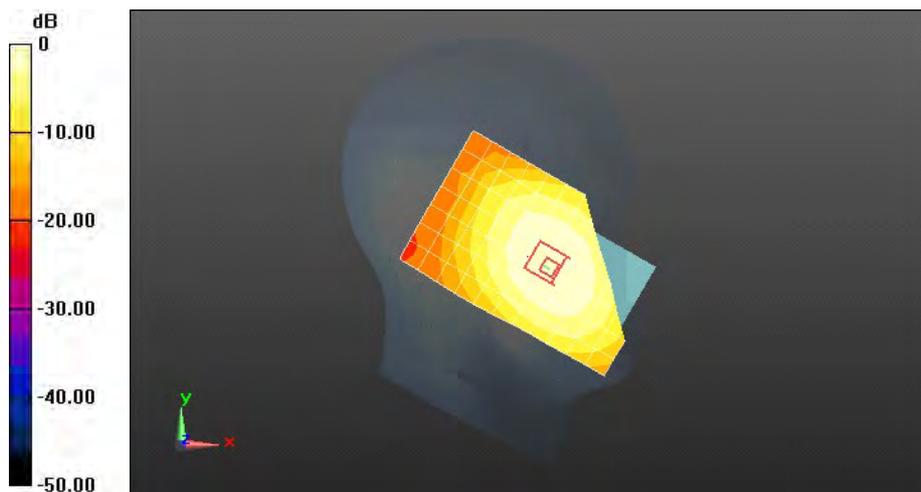

0 dB = 0.274 W/kg = -11.24 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA,50%RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.155 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.866 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.182 mW/g

SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.159 W/kg

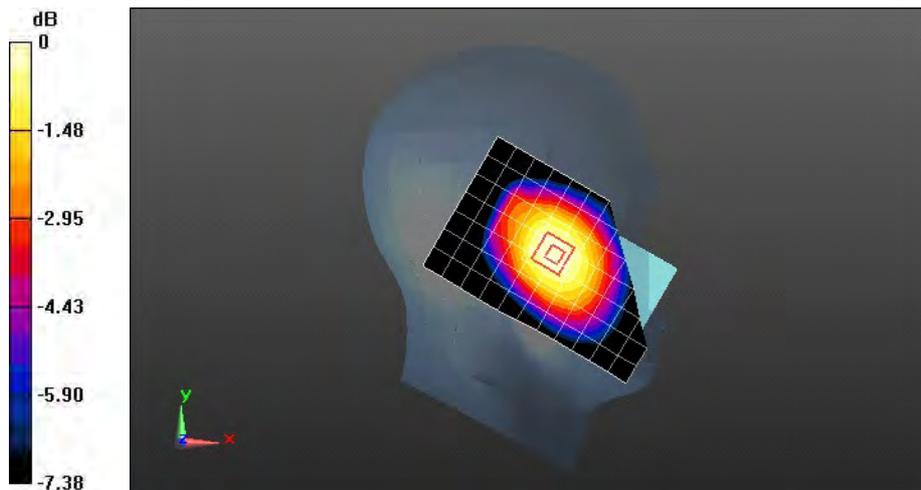

0 dB = 0.159 W/kg = -15.97 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA,50%RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.264 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.116 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.313 mW/g

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.275 W/kg

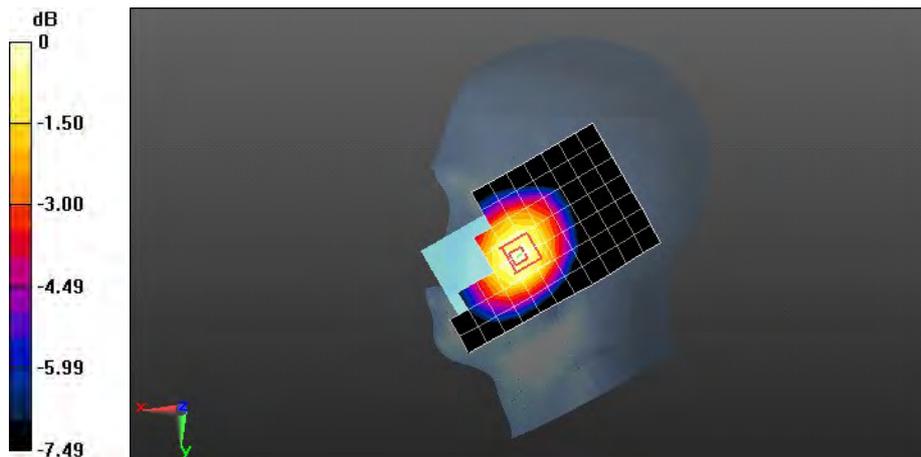

0 dB = 0.275 W/kg = -11.21 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA,50%RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.157 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.600 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.183 mW/g

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.162 W/kg

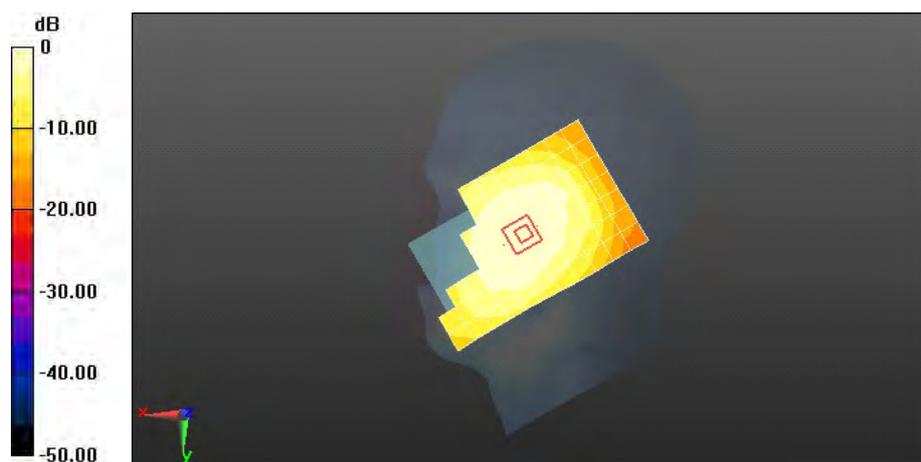

0 dB = 0.157 W/kg = -16.08 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.430 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.689 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.524 mW/g

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.331 mW/g

Maximum value of SAR (measured) = 0.448 W/kg

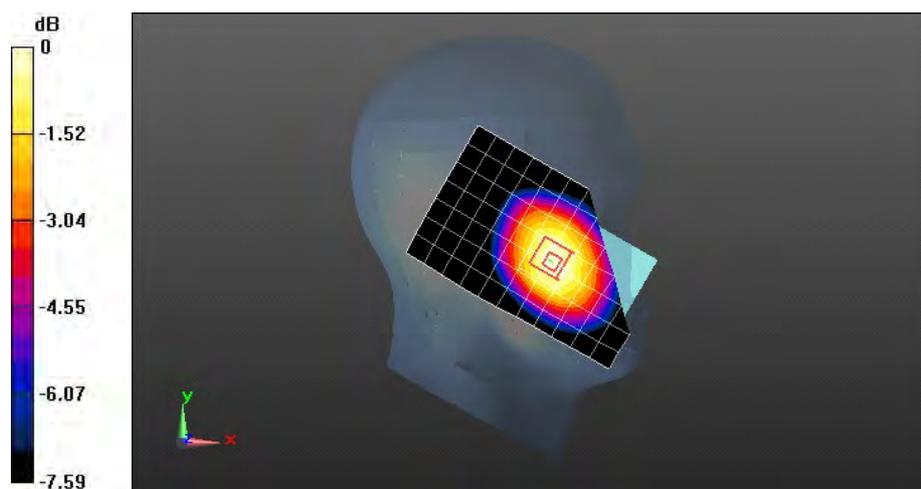

0 dB = 0.448 W/kg = -6.97 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.611 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.285 mW/g

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.193 mW/g

Maximum value of SAR (measured) = 0.252 W/kg



0 dB = 0.247 W/kg = -12.15 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Right hand touch cheek**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.416 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.718 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.492 mW/g

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.427 W/kg

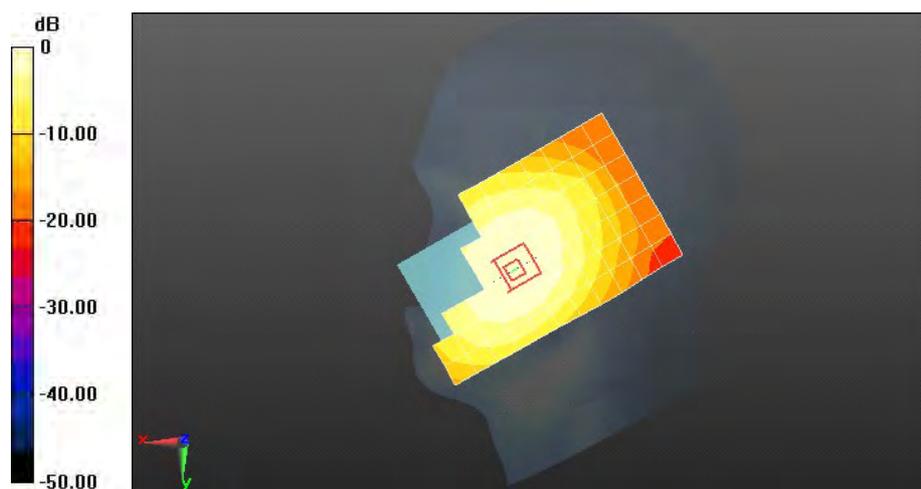

0 dB = 0.416 W/kg = -7.62 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Right hand tilt 15 degree**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.238 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.598 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.278 mW/g

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.247 W/kg

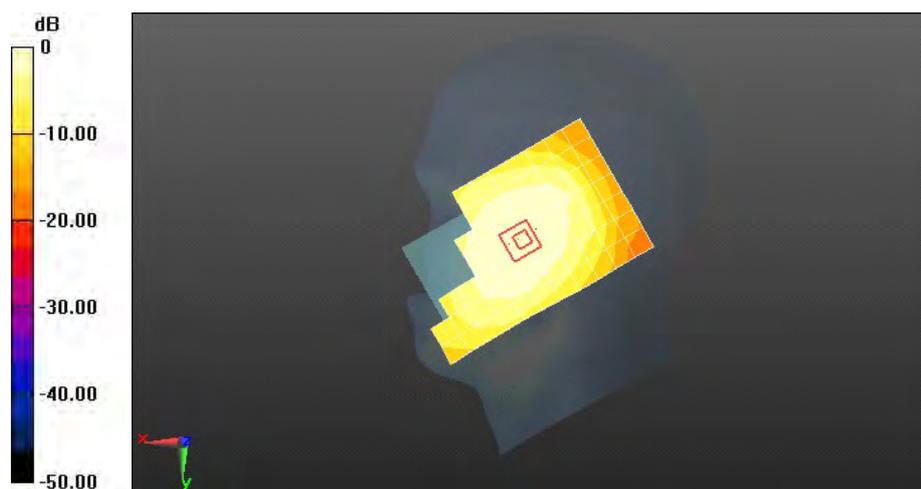

0 dB = 0.238 W/kg = -12.47 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.849 \text{ mho/m}$; $\epsilon_r = 41.158$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.469 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.955 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.572 mW/g

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.491 W/kg

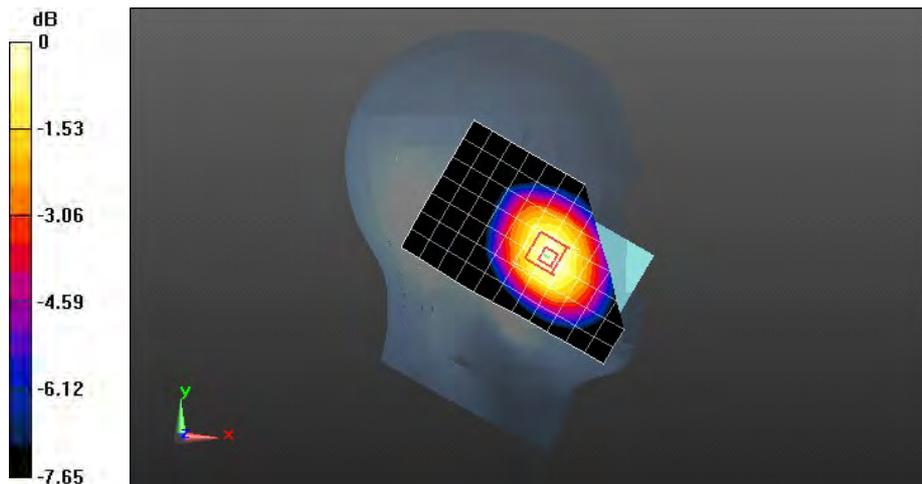

0 dB = 0.491 W/kg = -6.18 dB W/kg

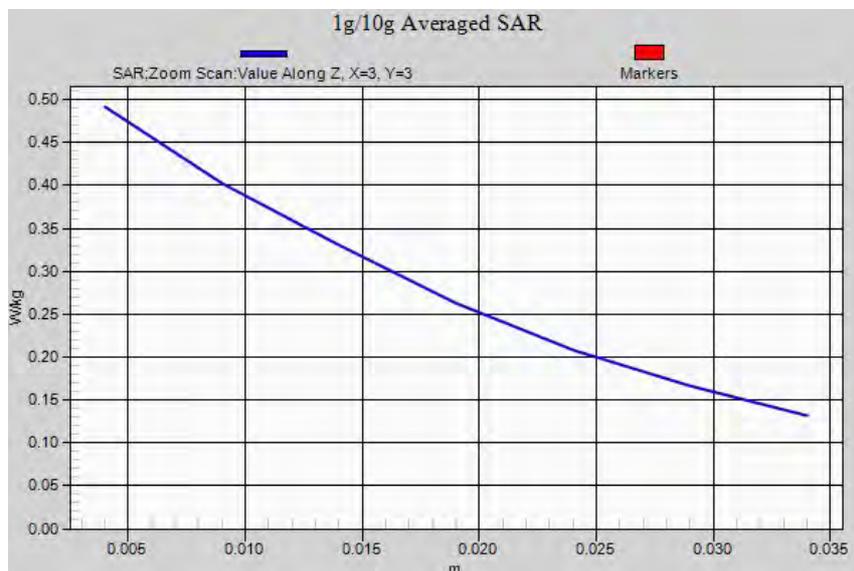

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.267 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.049 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.314 mW/g

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.271 W/kg



0 dB = 0.267 W/kg = -11.47 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.059 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.538 mW/g

SAR(1 g) = 0.445 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.465 W/kg

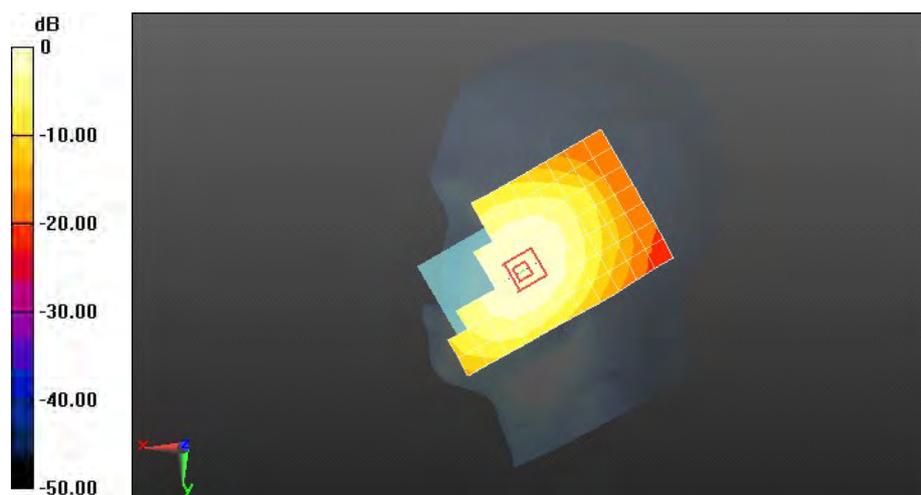

0 dB = 0.446 W/kg = -7.01 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.262 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.116 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.599 mW/g

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.269 W/kg

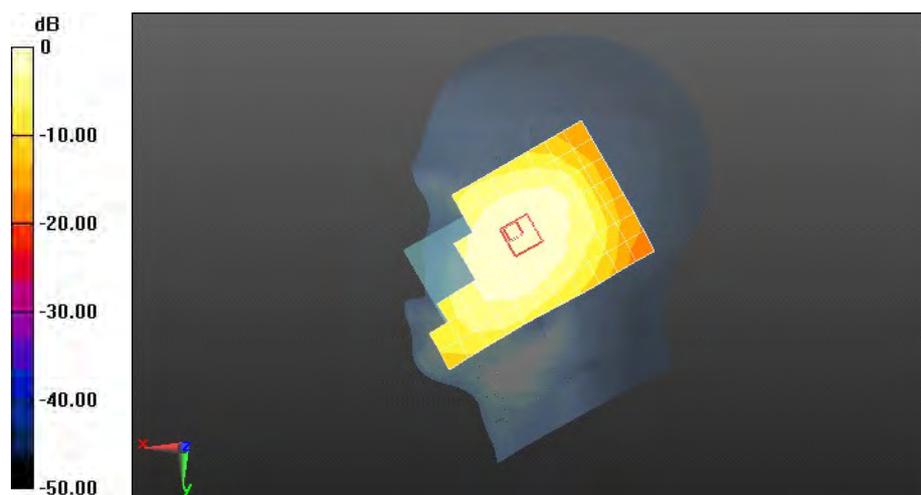

0 dB = 0.269 W/kg = -11.40 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Left hand touch cheek**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.001 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.264 mW/g

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.227 W/kg

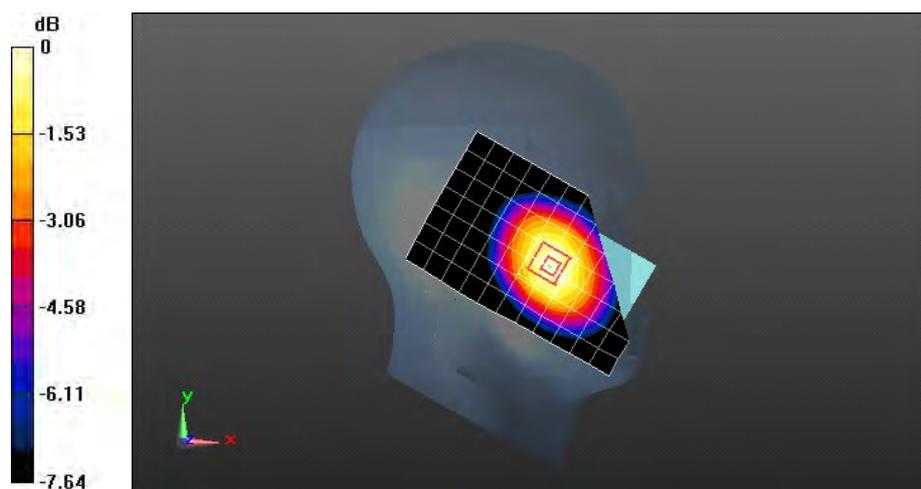

0 dB = 0.227 W/kg = -12.88 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.136 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.017 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.161 mW/g

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.138 W/kg

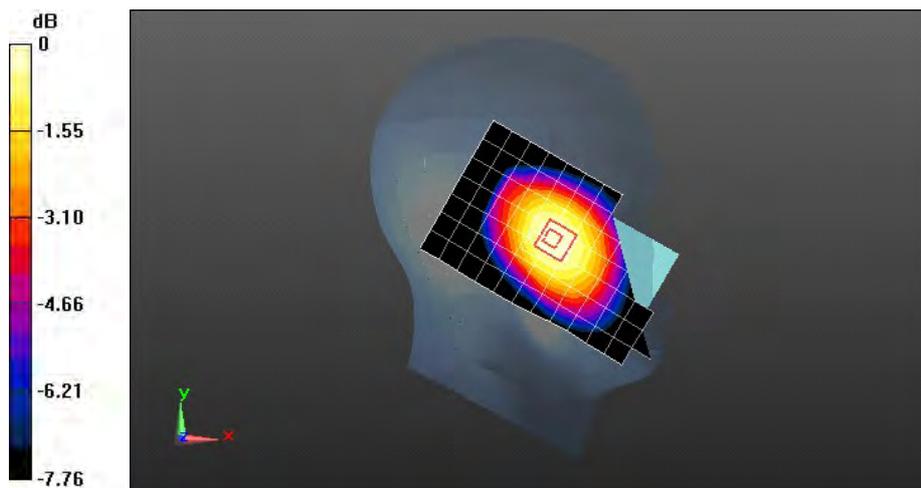

0 dB = 0.138 W/kg = -17.20 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.211 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.055 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.251 mW/g

SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.218 W/kg

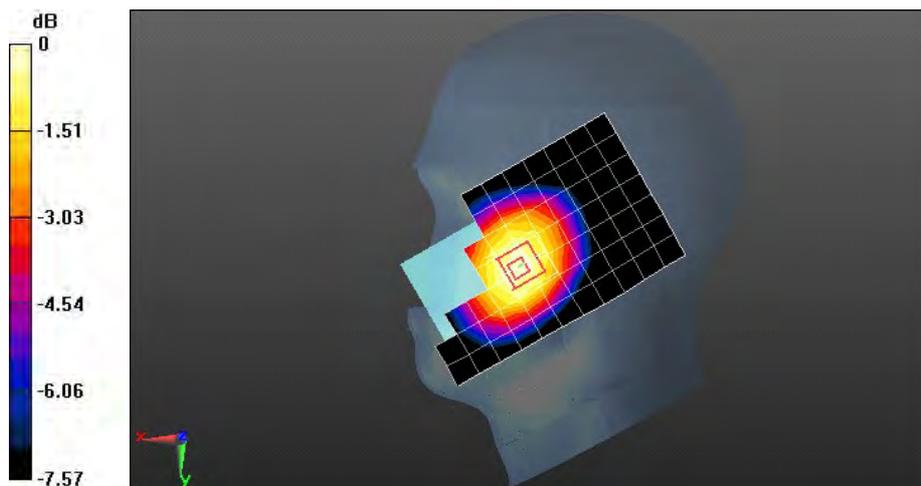

0 dB = 0.218 W/kg = -13.23 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 41.158$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.140 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.561 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.177 mW/g

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.152 W/kg

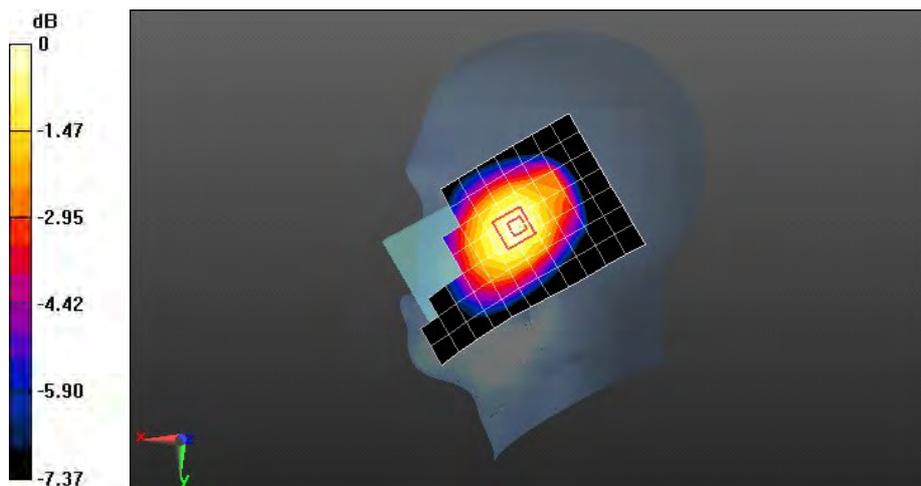

0 dB = 0.152 W/kg = -16.36 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.313 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.857 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.377 mW/g

SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 0.326 W/kg

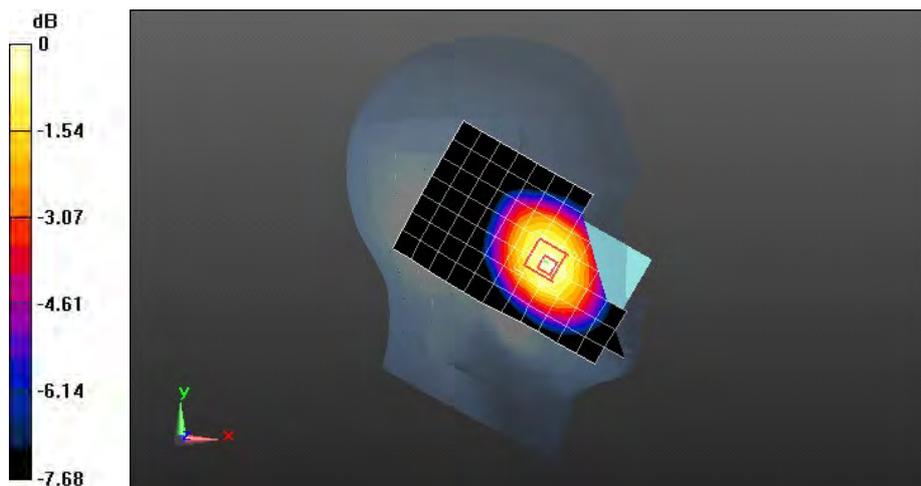

0 dB = 0.326 W/kg = -9.74 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.660 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.223 mW/g

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.197 W/kg

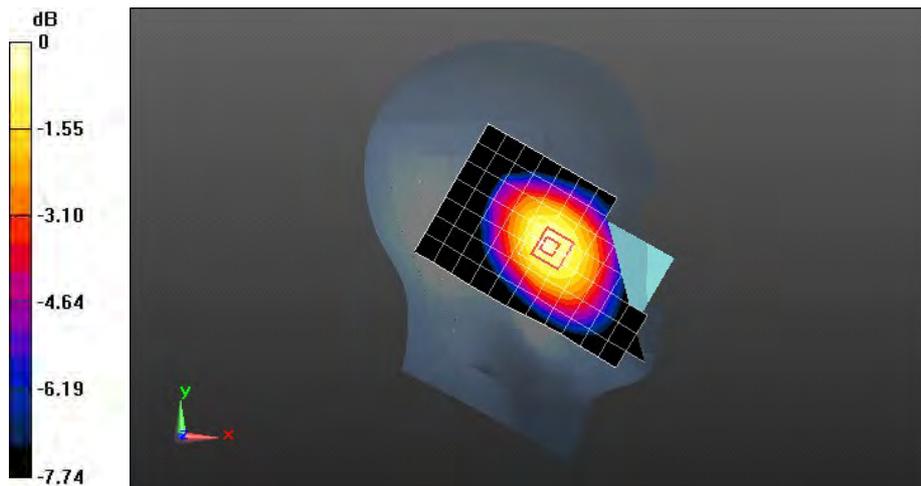

0 dB = 0.197 W/kg = -14.11 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.324 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.045 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.390 mW/g

SAR(1 g) = 0.324 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.339 W/kg

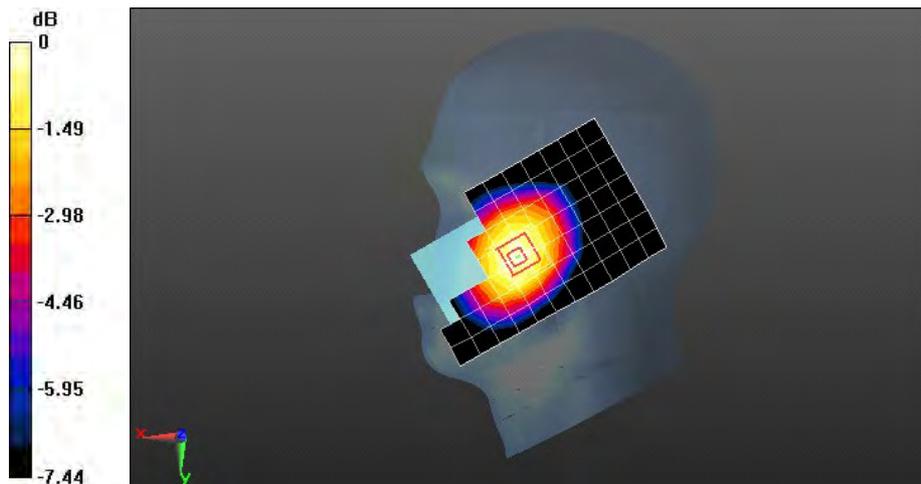

0 dB = 0.339 W/kg = -9.40 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 41.049$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.493 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.249 mW/g

SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.165 mW/g

Maximum value of SAR (measured) = 0.217 W/kg

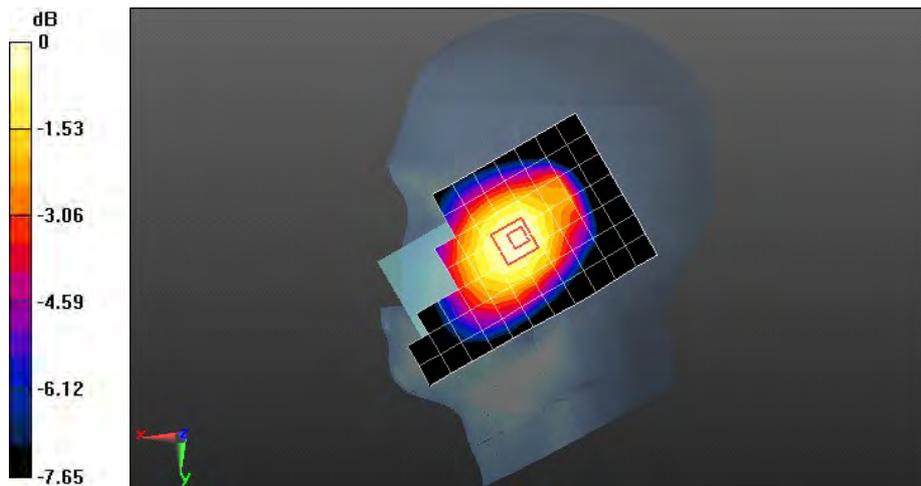

0 dB = 0.217 W/kg = -13.27 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.858$ mho/m; $\epsilon_r = 41.031$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.021 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.426 mW/g

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.365 W/kg

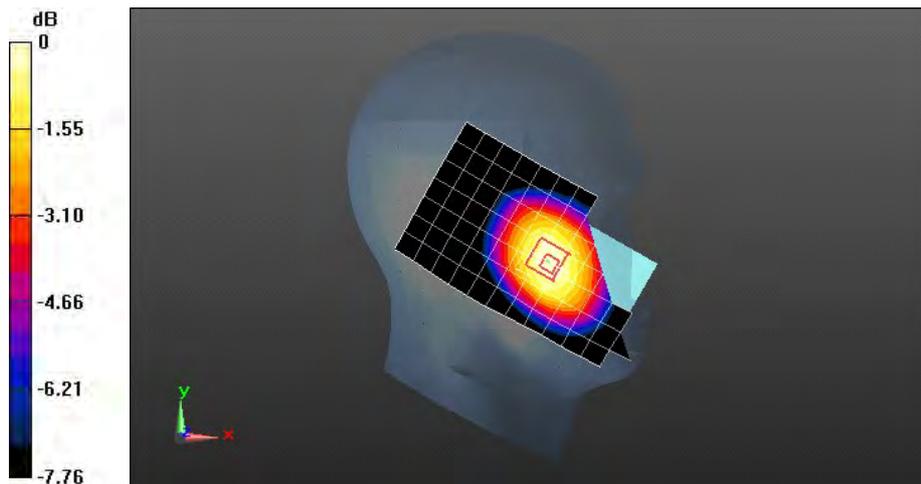

0 dB = 0.365 W/kg = -8.75 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Right hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.858$ mho/m; $\epsilon_r = 41.031$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.336 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.929 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.402 mW/g

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 0.348 W/kg

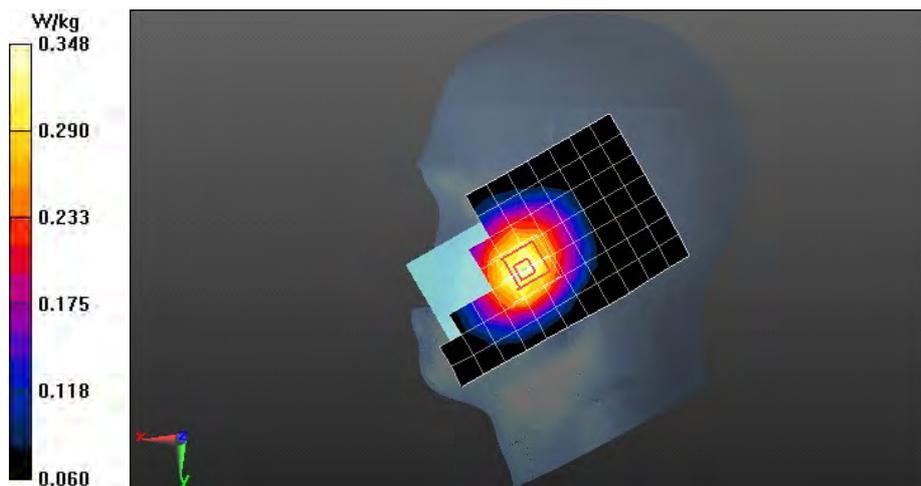

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Right hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.858$ mho/m; $\epsilon_r = 41.031$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.210 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.566 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.259 mW/g

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.224 W/kg

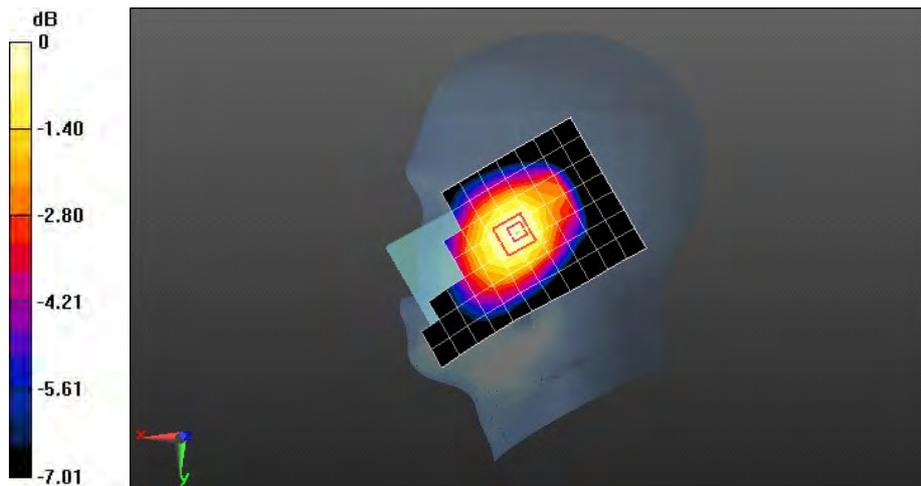

0 dB = 0.224 W/kg = -13.00 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Left hand tilt 15 degree

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.858$ mho/m; $\epsilon_r = 41.031$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.41, 9.41, 9.41); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.159 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.256 mW/g

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.222 W/kg

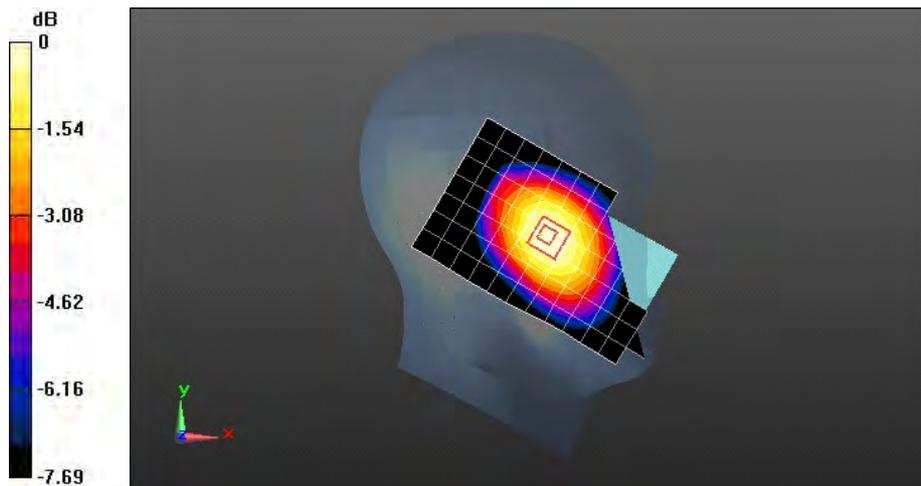

0 dB = 0.222 W/kg = -13.07 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.332 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.301 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.426 mW/g

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.340 W/kg

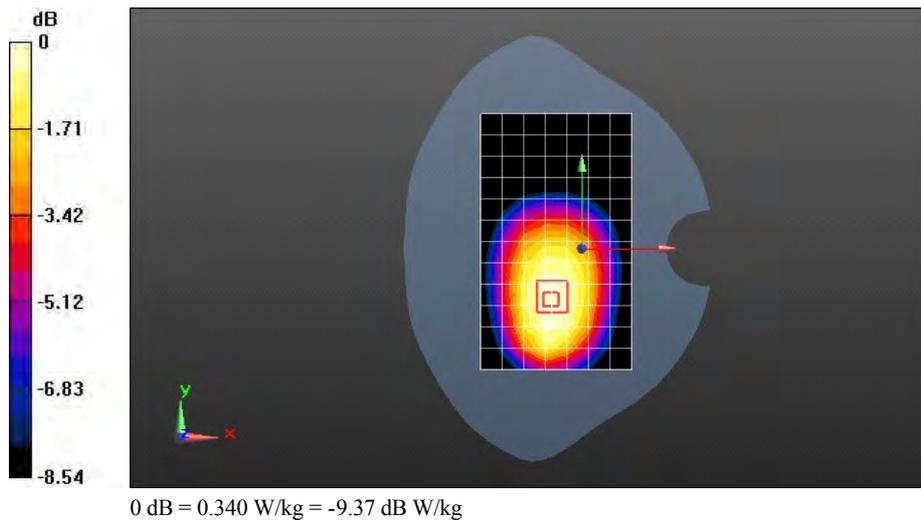

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Towards Ground 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.469 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.599 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.578 mW/g

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.490 W/kg

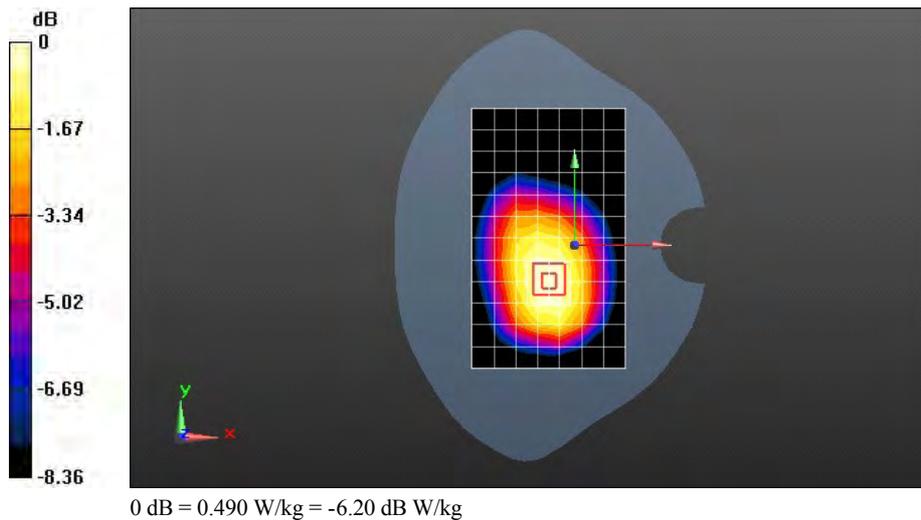

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.234 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.222 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.344 mW/g

SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.174 mW/g

Maximum value of SAR (measured) = 0.262 W/kg

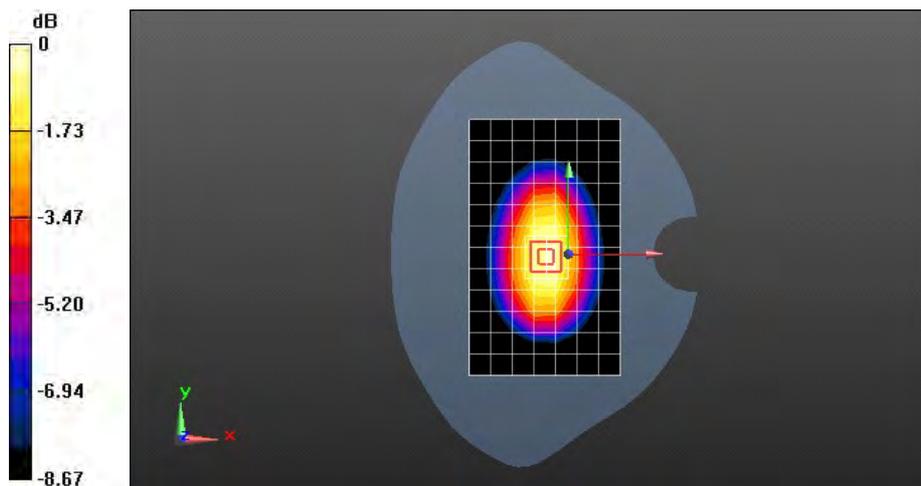

0 dB = 0.262 W/kg = -11.63 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Right edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.258 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.376 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.334 mW/g

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.256 W/kg

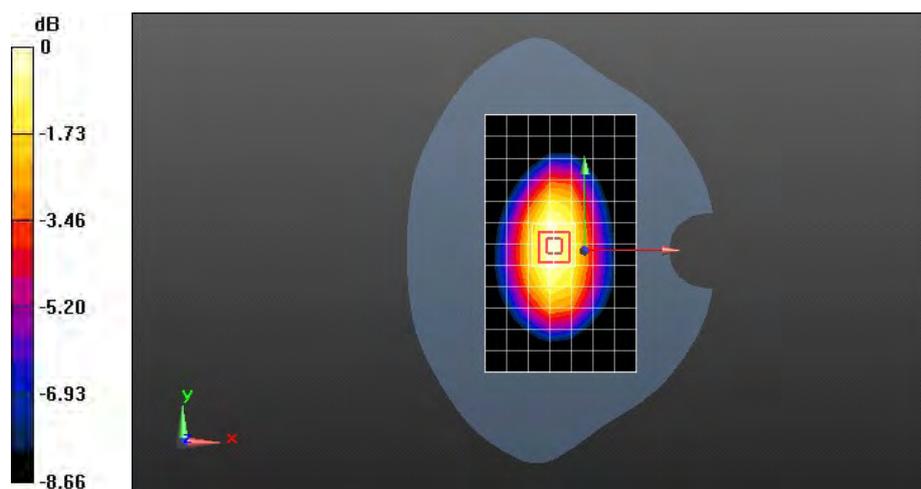

0 dB = 0.256 W/kg = -11.84 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 50%RB#13 23790CH Bottom edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0355 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.056 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.060 mW/g

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.0405 W/kg



0 dB = 0.0405 W/kg = -27.85 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.511 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.974 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.634 mW/g

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.382 mW/g

Maximum value of SAR (measured) = 0.519 W/kg

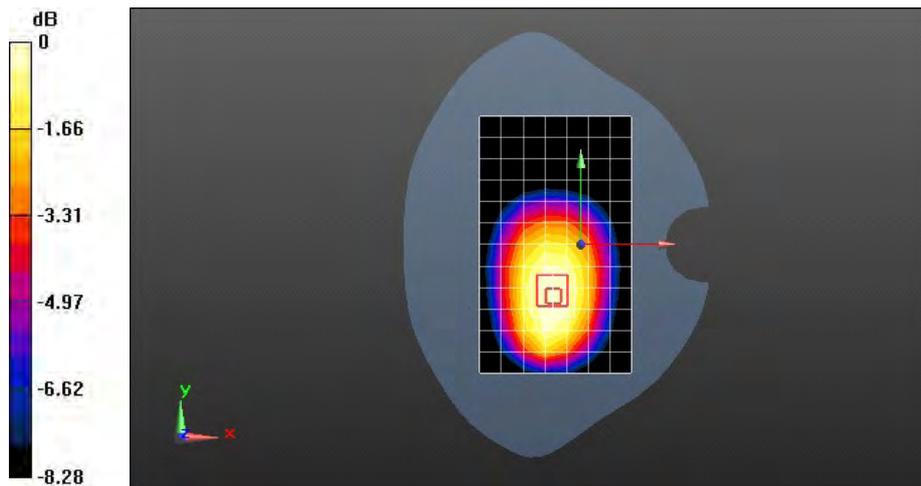

0 dB = 0.519 W/kg = -5.70 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.672 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.332 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.832 mW/g

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 0.698 W/kg

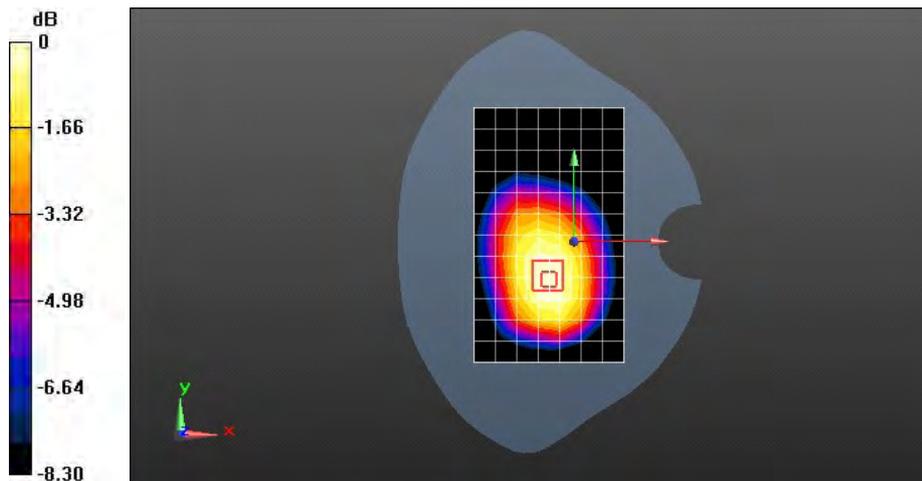

0 dB = 0.698 W/kg = -3.12 dB W/kg

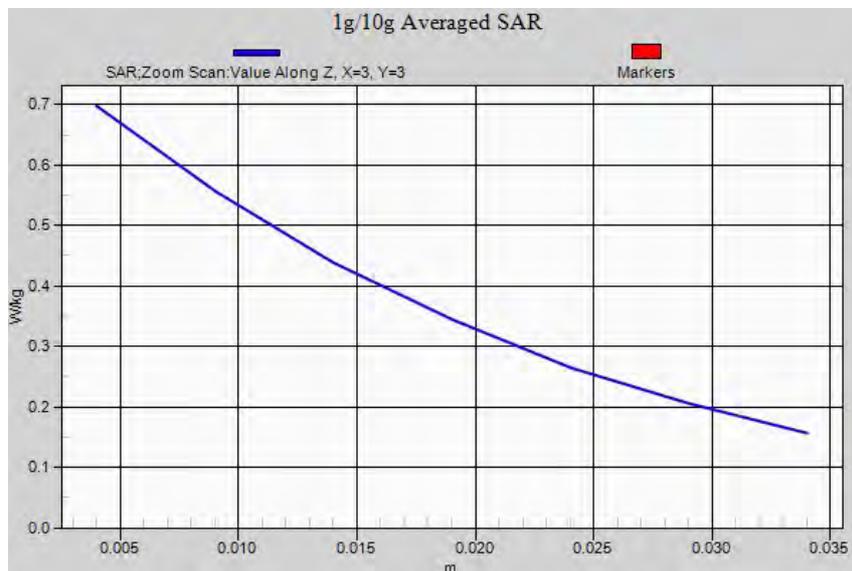

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.359 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.280 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.524 mW/g

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.404 W/kg

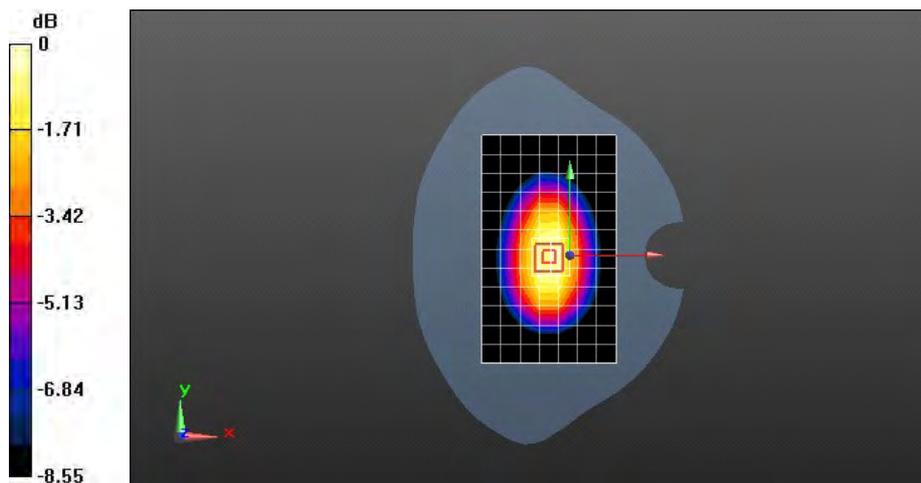

0 dB = 0.404 W/kg = -7.87 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.373 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.480 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.493 mW/g

SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.383 W/kg

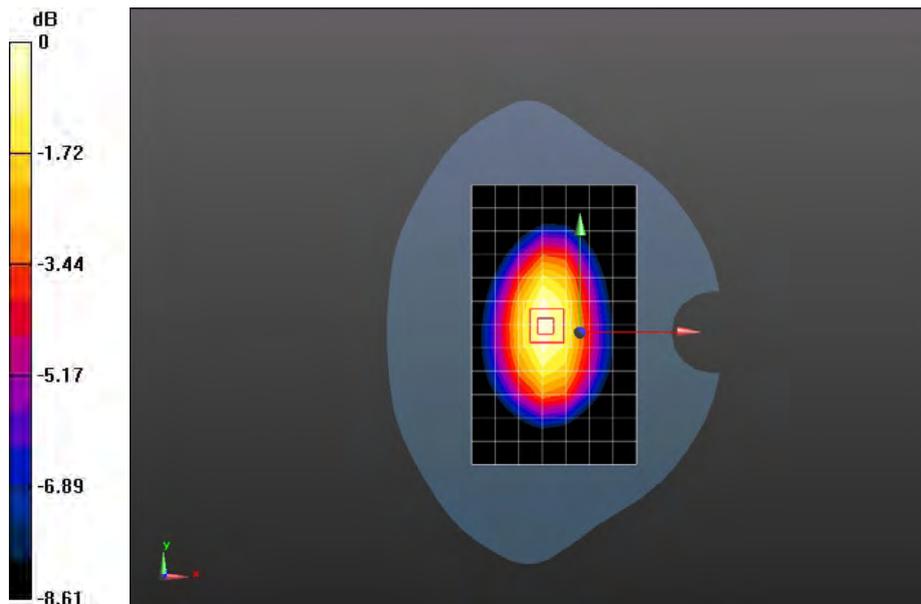

0 dB = 0.383 W/kg = -8.34 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#0 23800CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0638 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.871 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.102 mW/g

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.0711 W/kg

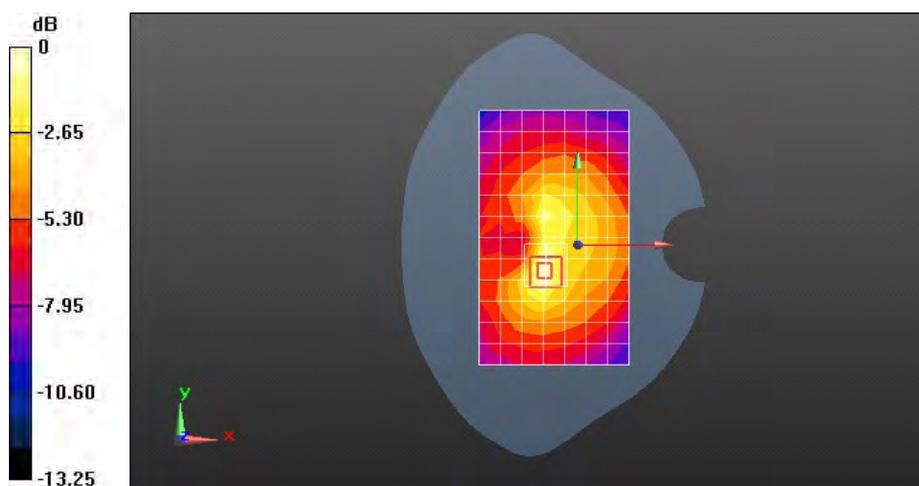

0 dB = 0.0711 W/kg = -22.96 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.549 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.016 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.667 mW/g

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.414 mW/g

Maximum value of SAR (measured) = 0.567 W/kg

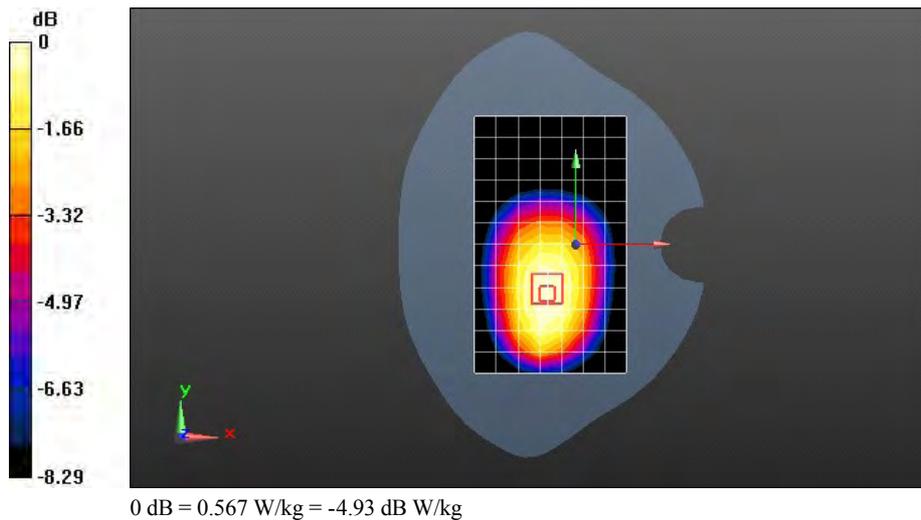

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.642 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.140 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.782 mW/g

SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.485 mW/g

Maximum value of SAR (measured) = 0.663 W/kg

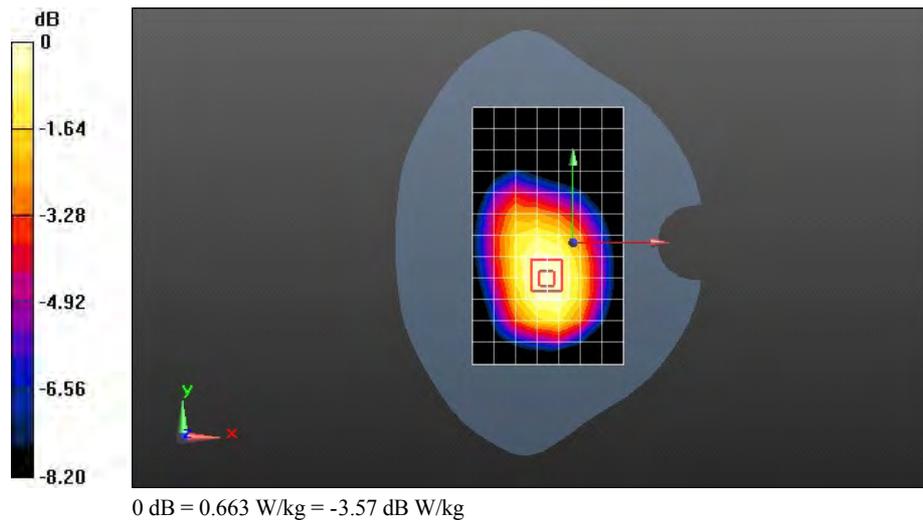

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.388 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.338 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.565 mW/g

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.438 W/kg

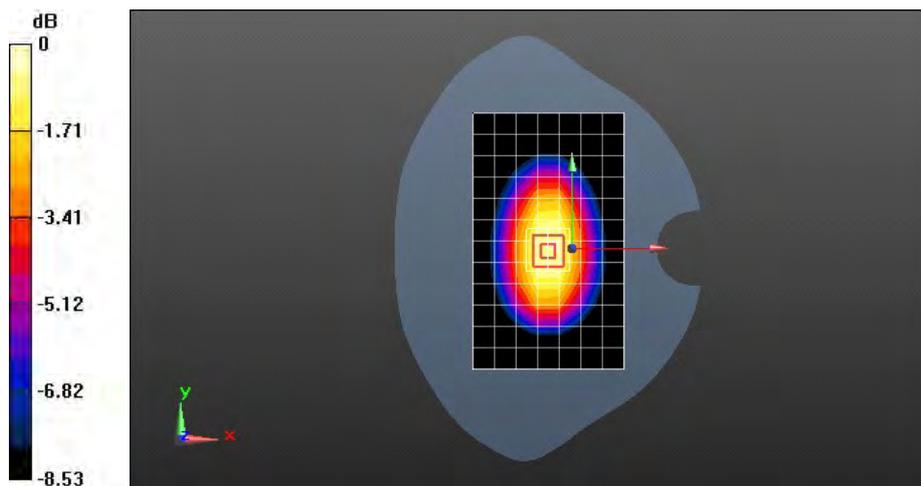

0 dB = 0.438 W/kg = -7.17 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Right edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.434 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.313 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.579 mW/g

SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.445 W/kg

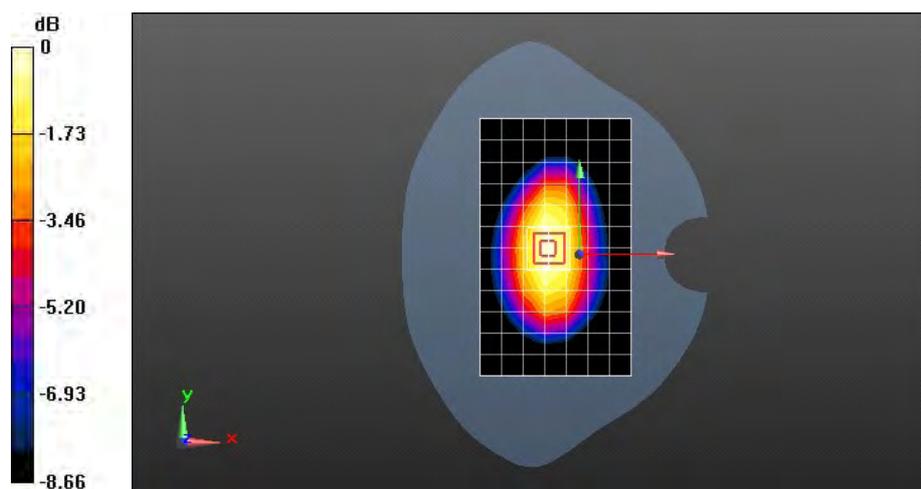

0 dB = 0.445 W/kg = -7.03 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M QPSK 1RB#49 23790CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0668 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.937 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.104 mW/g

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.0721 W/kg

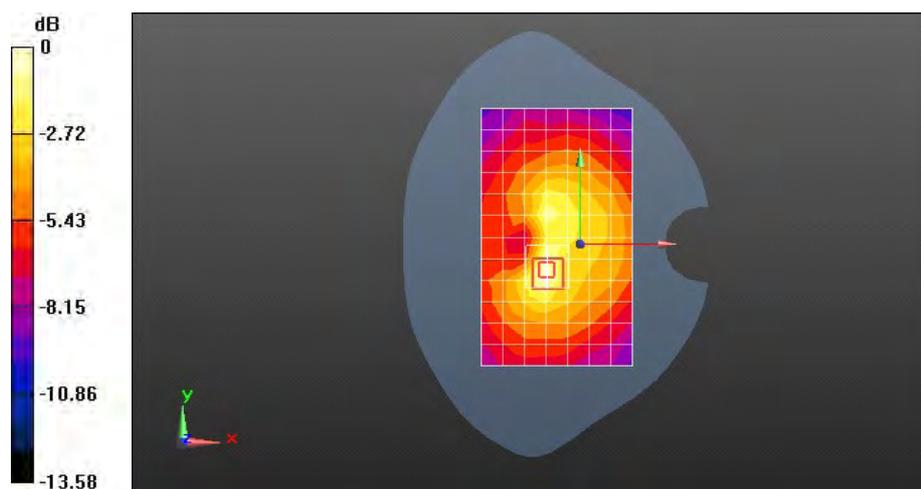

0 dB = 0.0721 W/kg = -22.84 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.257 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.247 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.316 mW/g

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.265 W/kg

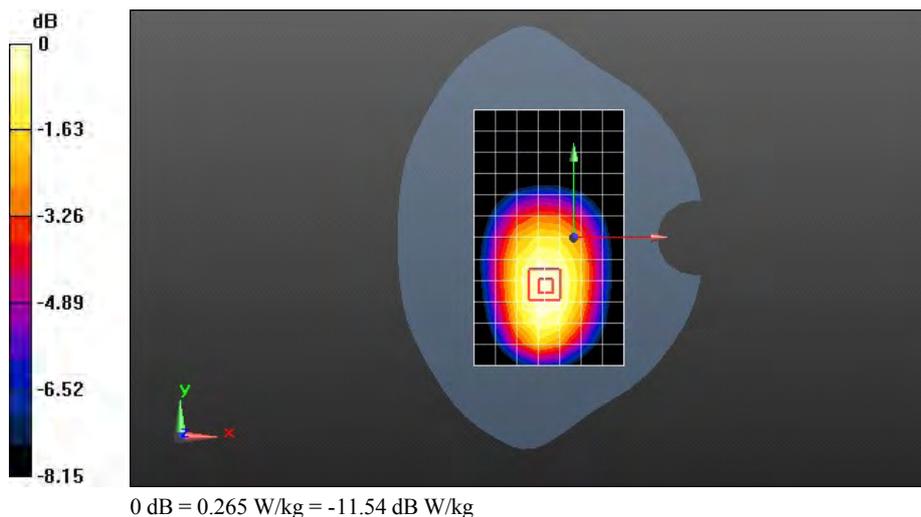

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.378 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.547 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.464 mW/g

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.392 W/kg

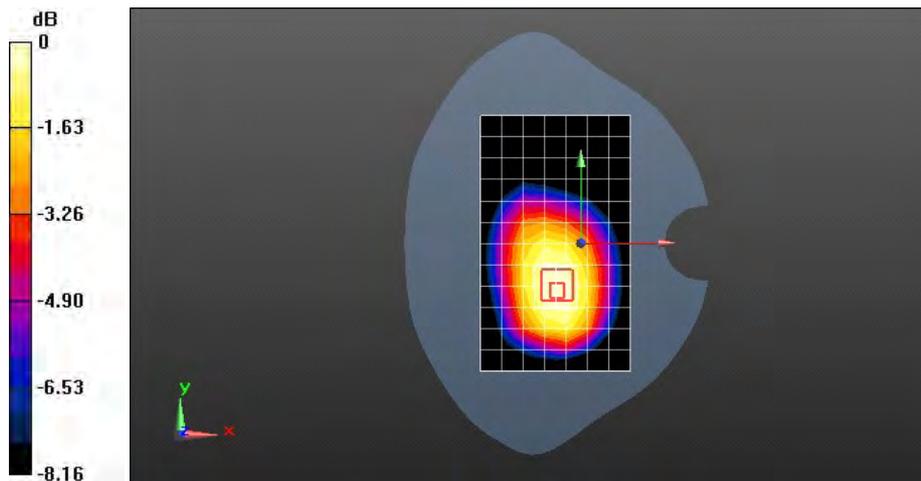

0 dB = 0.392 W/kg = -8.13 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Left edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.193 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.748 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.272 mW/g

SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.210 W/kg

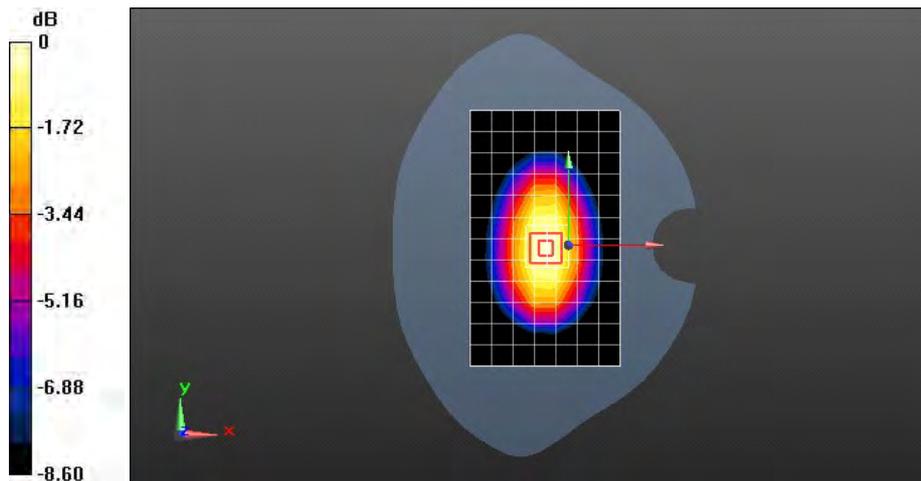

0 dB = 0.210 W/kg = -13.56 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Right edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.429 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.262 mW/g

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.203 W/kg

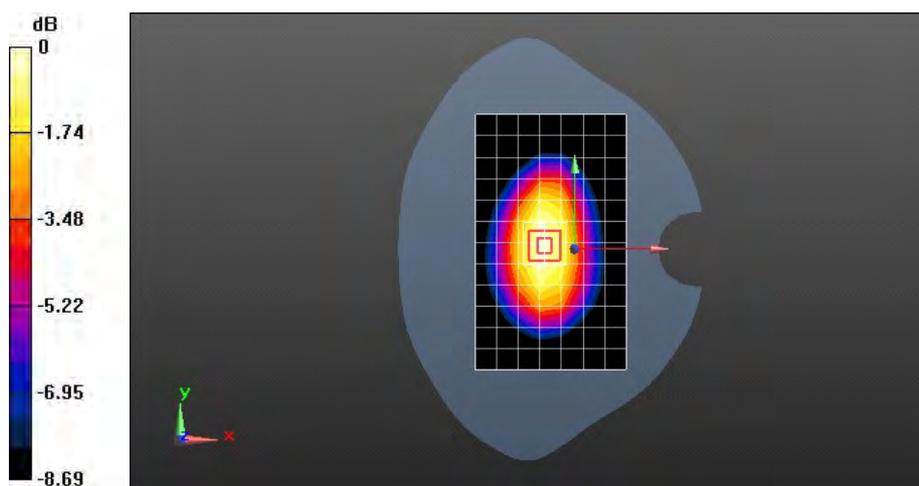

0 dB = 0.203 W/kg = -13.85 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 50%RB#13 23790CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 55.428$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0337 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.093 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.054 mW/g

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.0371 W/kg

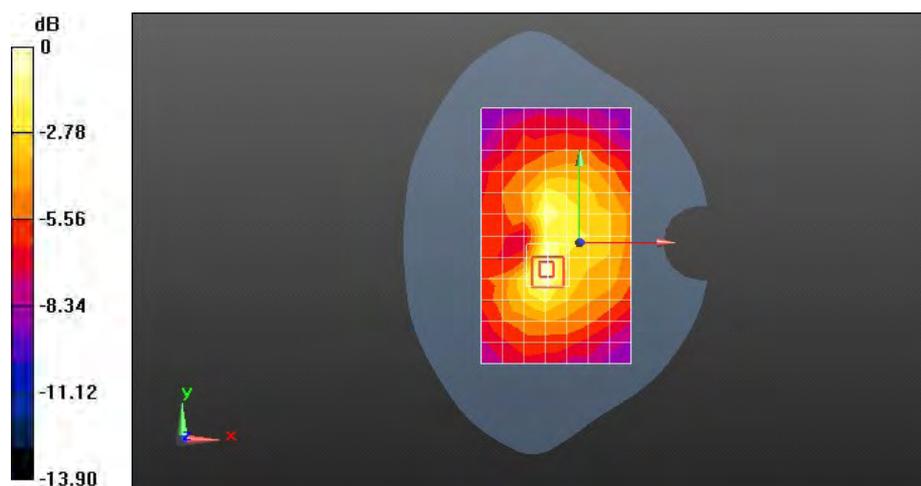

0 dB = 0.0371 W/kg = -28.61 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Towards Phantom 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.392 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.556 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.510 mW/g

SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.303 mW/g

Maximum value of SAR (measured) = 0.416 W/kg

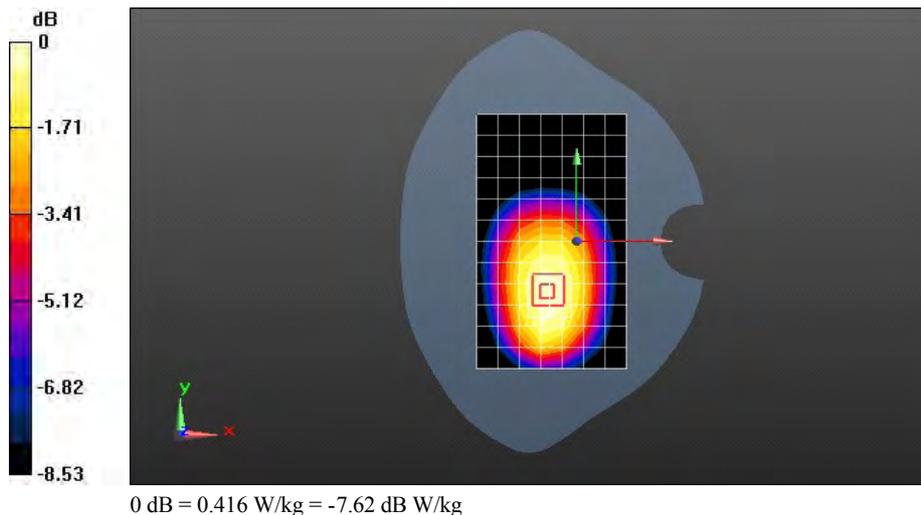

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.853 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.645 mW/g

SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 0.548 W/kg

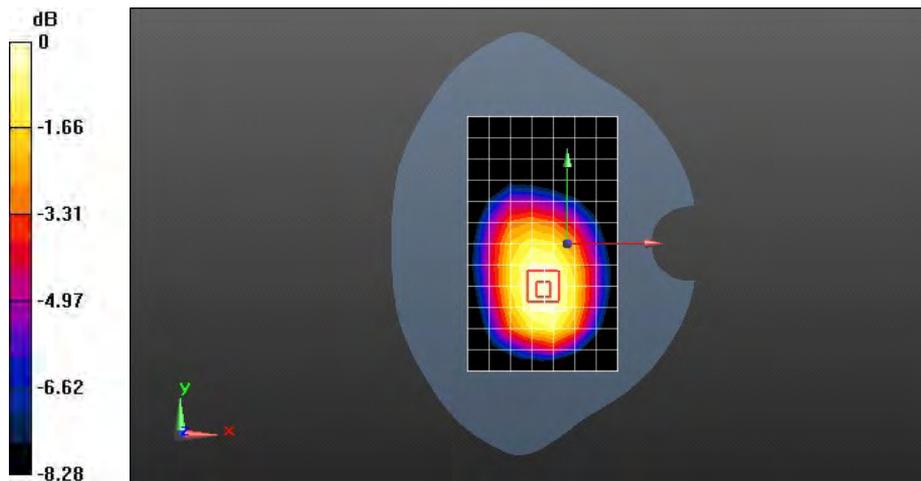

0 dB = 0.548 W/kg = -5.22 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.280 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.845 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.394 mW/g

SAR(1 g) = 0.289 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.307 W/kg

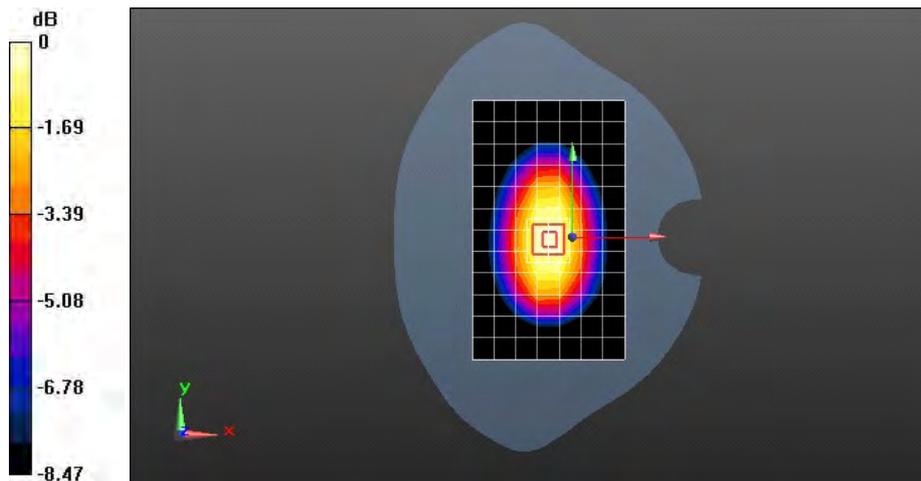

0 dB = 0.307 W/kg = -10.26 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Right edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.304 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.684 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.408 mW/g

SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 0.308 W/kg

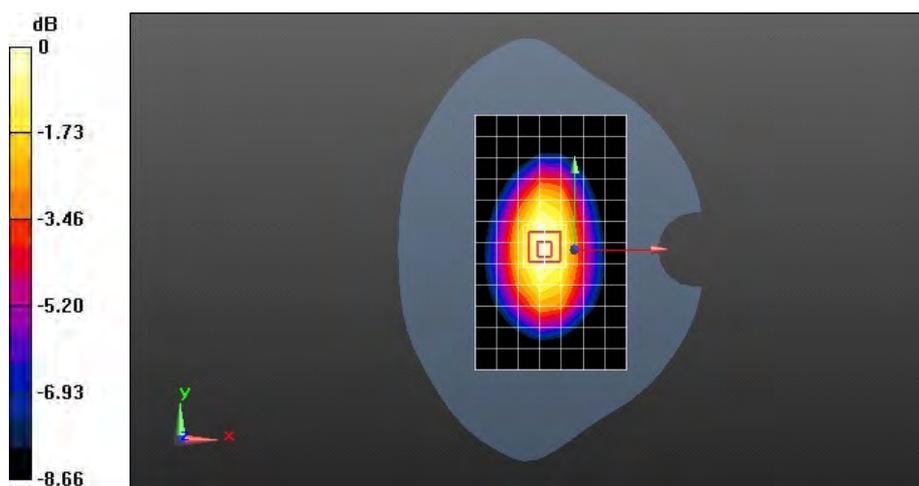

0 dB = 0.308 W/kg = -10.23 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#0 23800CH Bottom edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.408$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0495 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.133 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.078 mW/g

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.0538 W/kg

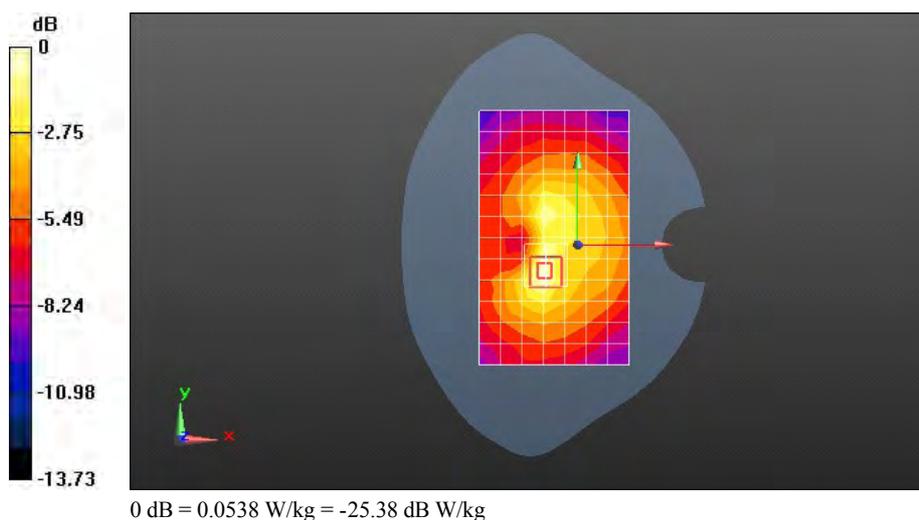

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Towards Phantom 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.949$ mho/m; $\epsilon_r = 55.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.405 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.051 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.493 mW/g

SAR(1 g) = 0.399 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.418 W/kg

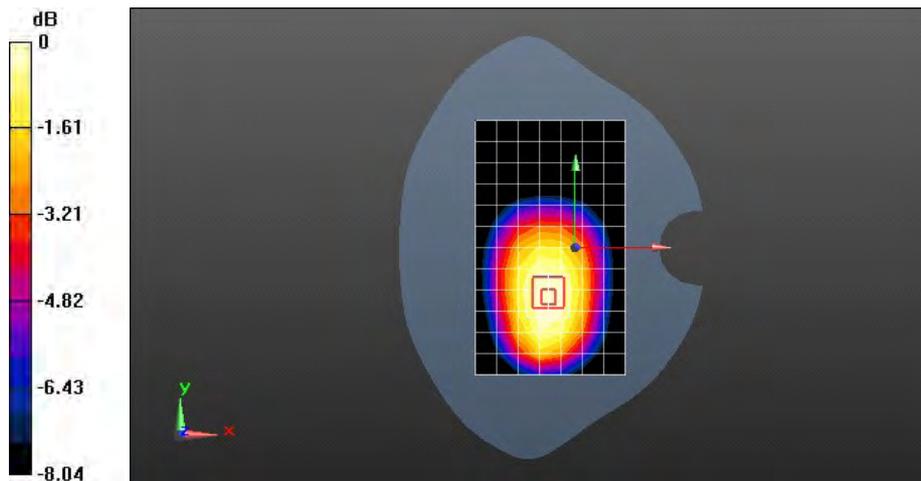

0 dB = 0.418 W/kg = -7.58 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Towards Ground 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.949$ mho/m; $\epsilon_r = 55.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.516 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.614 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.631 mW/g

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 0.537 W/kg

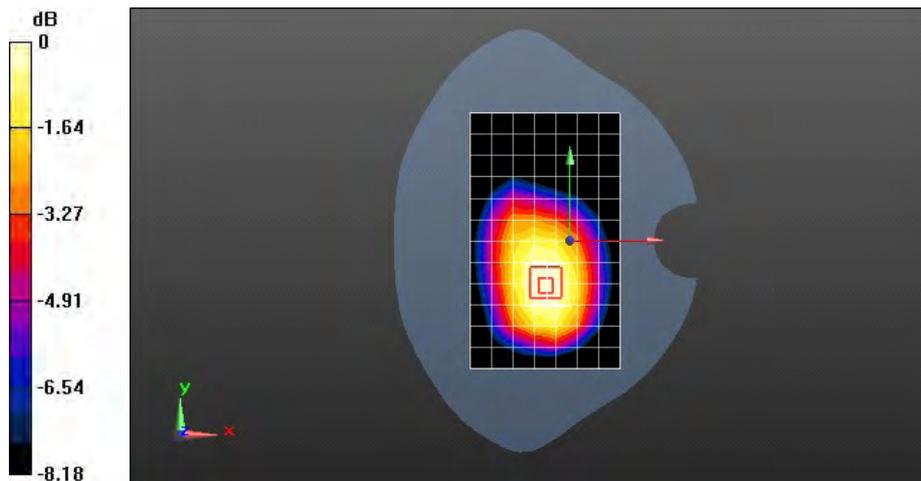

0 dB = 0.537 W/kg = -5.40 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Left edge 10mm

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.949$ mho/m; $\epsilon_r = 55.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.287 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.198 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.409 mW/g

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.314 W/kg

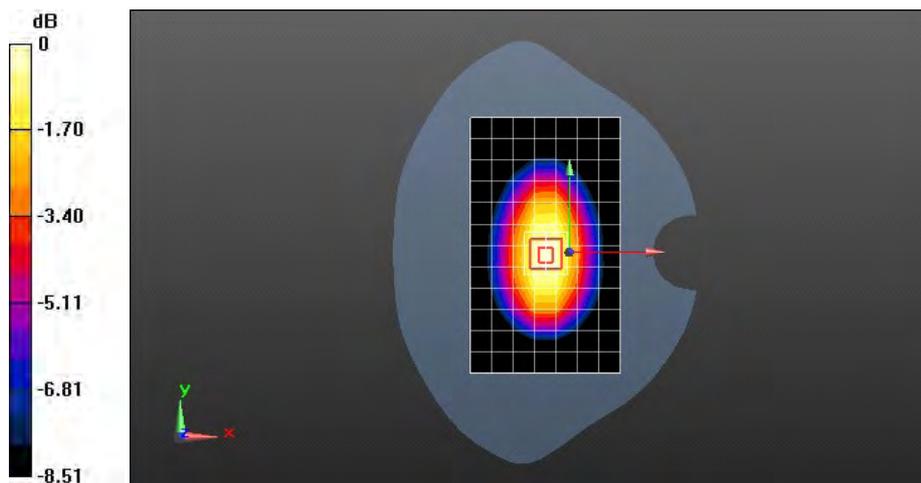

0 dB = 0.314 W/kg = -10.06 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Right edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.949$ mho/m; $\epsilon_r = 55.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.308 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.782 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.398 mW/g

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 0.310 W/kg

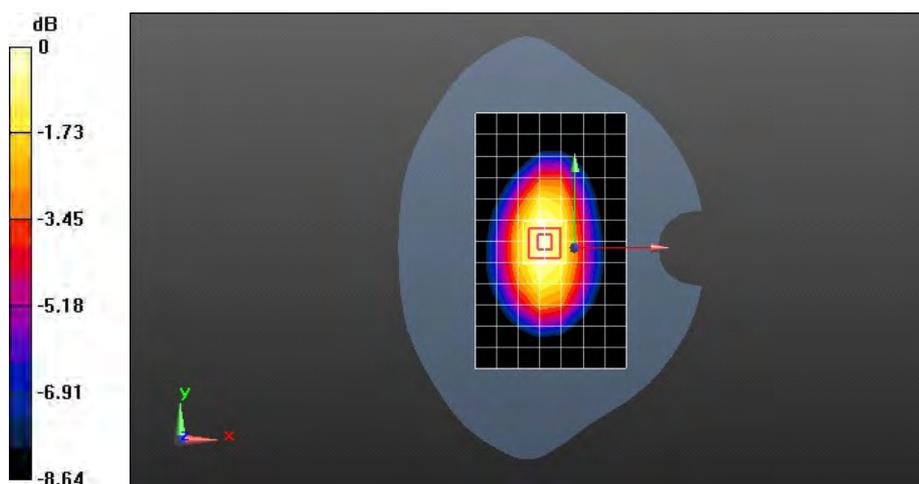

0 dB = 0.310 W/kg = -10.17 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 LTE Band XVII 10M 16QAM 1RB#49 23780CH Bottom edge 10mm**DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR2**

Communication System: LTE-FDD (SC-FDMA, 1RB, 10 MHz, QPSK/16QAM); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709$ MHz; $\sigma = 0.949$ mho/m; $\epsilon_r = 55.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.2, 9.2, 9.2); Calibrated: 4/26/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0437 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.693 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.068 mW/g

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.0470 W/kg

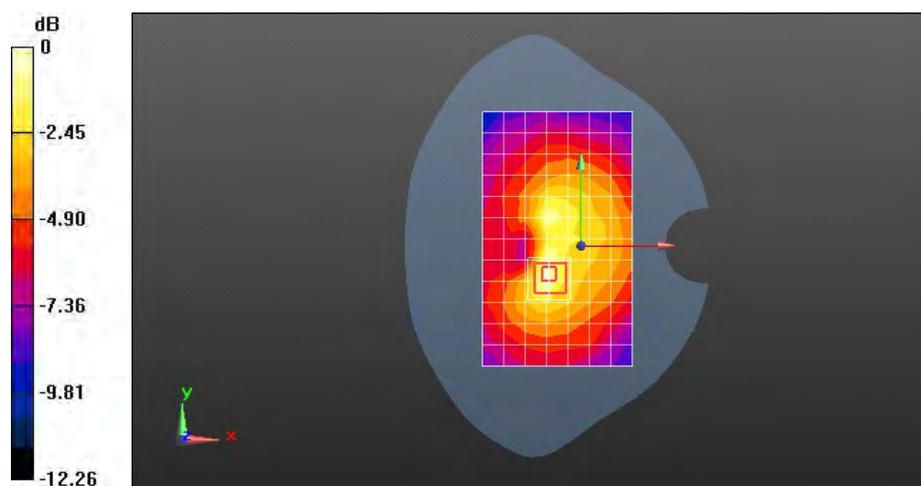

0 dB = 0.0470 W/kg = -26.56 dB W/kg

Test Laboratory: HUAWEI SAR Lab

U9202L-3 WiFi 11b 1CH Left hand touch cheek

DUT: U9202L-3; Type: LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth; Serial: SAR1

Communication System: WiFi (802.11*); Frequency: 2412 MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.787$ mho/m; $\epsilon_r = 39.152$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3661; ConvF(7.48, 7.48, 7.48); Calibrated: 1/27/2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn679; Calibrated: 12/23/2011
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.133 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.504 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.297 mW/g

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.146 mW/g

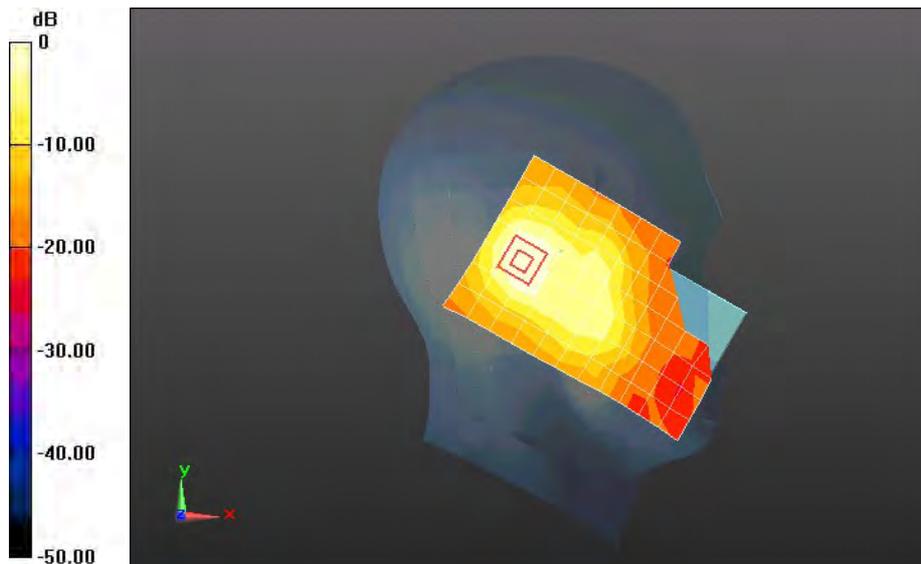

0 dB = 0.133 mW/g = -17.51 dB mW/g