



FCC RF Test Report

**Product Name: Ascend D1;
HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone
with Bluetooth**

**Model Number: HUAWEI U9500, U9500,
HUAWEI U9500-1, U9500-1, HUAWEI U9500-51, U9500-51**

**Report No: SYBH(Z-RF)013032012-2001
FCC ID: QISU9500**

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Huawei Base, Bantian, Longgang District, Shenzhen
 518129, P.R. China
Date of Receipt Test Item: Mar.02, 2012
Start Date of Test: Mar.03, 2012
End Date of Test: Mar.15, 2012

Test Result: Pass

Approved By Senior Engineer Mar.17, 2012 Dai Linjun *Dailinjun*
 Date Name Signature

Reviewed By Mar.17, 2012 Cousy Xu *Cousy XU*
 Date Name Signature

Operator Mar.17, 2012 Huang Qiuliang *Huang Qiuliang*
 Date Name Signature

Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENT CONDITION	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCTION INFORMATION	7
4	<u>Test Description</u>	9
4.1	SUPPORTED FREQUENCY RANGE	9
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	9
4.3	ANTENNA GAIN.....	9
4.4	POWER SUPPLY	9
5	<u>General Test Conditions / Configurations</u>	10
5.1	RF CHANNELS UNDER TEST.....	10
5.2	TEST MODES.....	10
5.3	TEST ENVIRONMENTS	10
5.4	TEST SETUPS.....	11
5.5	TEST CONDITIONS	13
6	<u>Main Test Instruments</u>	15
7	<u>Test Results</u>	16
8	<u>Measurement Uncertainty</u>	16

1 General Information

1.1 Applied Standard

Applied Rules:	47 CFR FCC Part 2:2010, Subpart J 47 CFR FCC Part 22:2010, Subpart H ANSI/TIA 603C:2004
----------------	---

1.2 Test Location

Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

1.3 Test Environment Condition

Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W Peak-to-average ratio not exceed 13 dB	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 2.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 2.5 ppm	Pass

3 Product Description

3.1 Production Information

3.1.1 General Description

HUAWEI U9500, U9500, HUAWEI U9500-1, U9500-1, HUAWEI U9500-51, U9500-51 is subscriber equipment in the WCDMA/GSM system. The HSPA+/HSUPA/HSDPA/UMTS frequency band is Band I, Band II, Band IV, Band V and Band VIII. Band V can be used in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only GSM850MHz band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA+/HSUPA/HSDPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board Information

Table 2 Board Information

Ascend D1; HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth	
HUAWEI U9500, U9500, HUAWEI U9500-1, U9500-1, HUAWEI U9500-51, U9500-51	
Board and Module	
Hardware Version	Software Version
Ver.B	U9500-1V100R001CHNC00B200-WMC

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050100E3W
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V === 1A
Rated Power	5W

AC/DCAdapter Model	HW-050100U3W
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V === 1A
Rated Power	5W

AC/DCAdapter Model	HW-050100B3W
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

3.1.4 Battery Technical Data

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB4Q1 Rated capacity: 1670mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V

4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz;
Uplink	824 to 849 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM UMTS
TX Output Power (per Antenna Port)	GSM system: 33dBm; UMTS system: 24dBm;
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz UMTS system: 5 MHz
Designation of Emissions	GSM system: 247KGXW (GMSK modulation), 257KG7W (8PSK modulation) UMTS system: 4M10F9W

4.3 Antenna Gain

Antenna Gain(dBi)	-2.48
Antenna Gain(dBd)	-4.63

4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: \approx 3.7 V DC Voltage Range: \approx 3.5 V to 4.2 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 120 V (50/60 Hz) AC Voltage Range: ~100-240V

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz
TM3/TM4/TM5	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4MHz	846.6MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4MHz	881.4MHz	891.6MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation
TM3	WCDMA, QPSK modulation
TM4	HSDPA, QPSK modulation
TM5	HSUPA, QPSK modulation

5.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.5V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltages
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= normal temperature

5.4 Test Setups


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

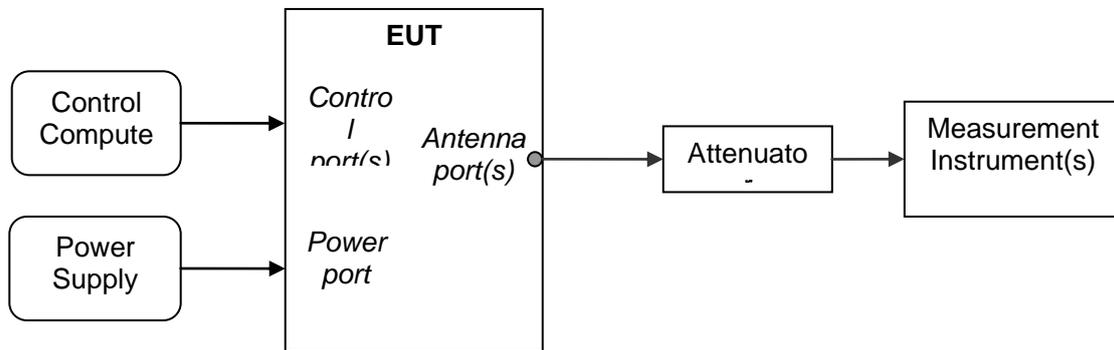


5.4.3 Test Setup 2

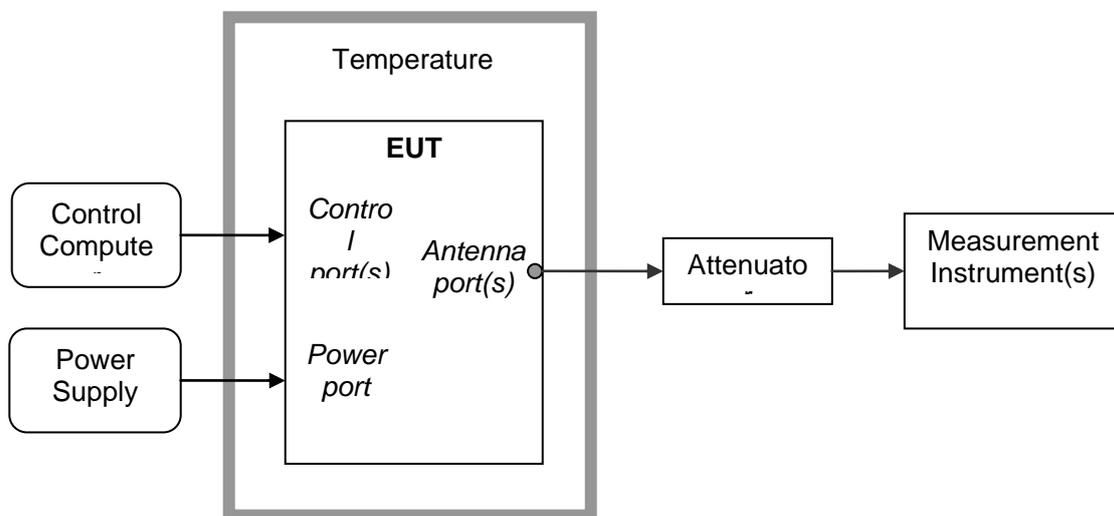


5.4.4 Test Setup 3

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

Step 1: Pre-test

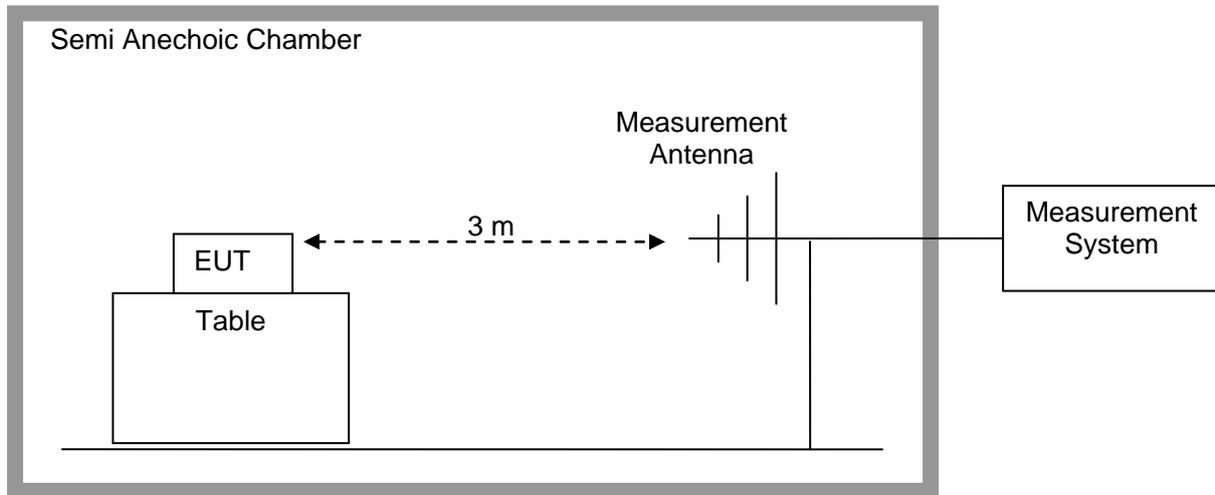

Step 2: Substitution method to verify the maximum ERP

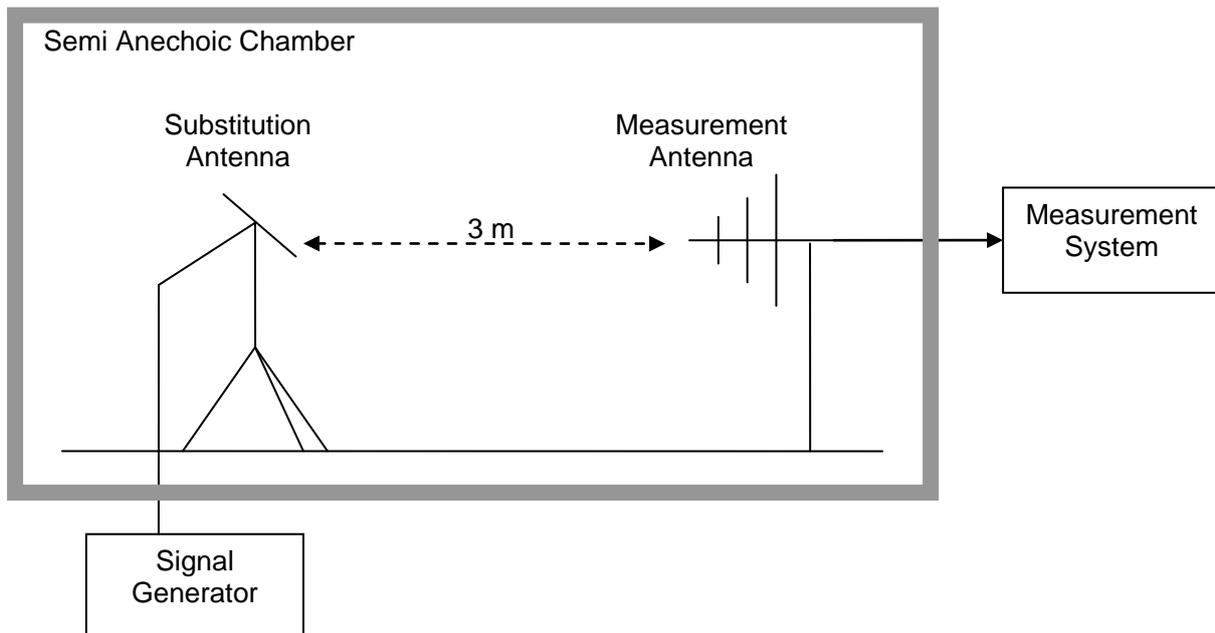

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2/TM3/TM4/TM5
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2/TM3
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM2/TM3
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2/TM3
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4/TM5
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2



Test Case	Test Conditions	
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan.12.2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.20,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2012
Test receiver	R&S	ESU26	100150	May.29.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Jan.29.2013
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Jan.29.2013
Horn Antenna	R & S	HF906	100683	May.15, 2012
Horn Antenna	R & S	HF906	100684	Jul.01, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	May.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	May.15, 2012

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Field Strength of Spurious Radiation	Appendix H

NOTE: The Appendix H only photos of Field Strength of Spurious Radiation, no test data.

8 Measurement Uncertainty

For a 95% confidence level (k=2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power According to FCC Part 2.1046 & Part 22.913



Conducted Power of Transmitter

Table 1 Measurement Results

		RF Output Power (Conducted)					
TEST CONDITIONS		Channel128(B) 824.2MHz		Channel192(M) 837.0MHz		Channel251(T) 848.8MHz	
		dBm		dBm		dBm	
T_{nom} / V_{nom}		Measured	Limit	Measured	Limit	Measured	Limit
TM1		32.24	38.50	32.28	38.50	32.31	38.50
TM2		26.72	38.50	26.74	38.50	26.78	38.50
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
T_{nom} / V_{nom}		Measured	Limit	Measured	Limit	Measured	Limit
TM3		23.51	38.50	23.31	38.50	23.33	38.50
TM4	Case1	23.13	38.50	23.02	38.50	23.04	38.50
	Case2	21.87	38.50	21.72	38.50	21.70	38.50
	Case3	21.53	38.50	21.41	38.50	21.38	38.50
	Case4	21.25	38.50	21.14	38.50	21.12	38.50
TM5	Case1	21.89	38.50	21.85	38.50	21.86	38.50
	Case2	19.58	38.50	19.54	38.50	19.51	38.50
	Case3	20.98	38.50	20.81	38.50	20.58	38.50
	Case4	20.23	38.50	20.04	38.50	20.07	38.50
	Case5	22.12	38.50	22.02	38.50	22.03	38.50



Effective Radiated Power of Transmitter (ERP)

Table 2 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	27.61	Dipole Ant.	31.43	-2.75	0.6	27.68	38.5	Pass
TM1	837.0	27.65	Dipole Ant.	31.56	-2.87	0.6	27.69	38.5	Pass
TM1	848.8	27.68	Dipole Ant.	31.58	-2.85	0.6	27.73	38.5	Pass
TM2	824.2	22.09	Dipole Ant.	25.86	-2.75	0.6	22.11	38.5	Pass
TM2	837.0	22.11	Dipole Ant.	26.03	-2.87	0.6	22.16	38.5	Pass
TM2	848.8	22.15	Dipole Ant.	25.98	-2.85	0.6	22.13	38.5	Pass
TM3	826.4	18.88	Dipole Ant.	22.64	-2.75	0.6	18.89	38.5	Pass
TM3	836.4	18.68	Dipole Ant.	22.60	-2.87	0.6	18.73	38.5	Pass
TM3	846.6	18.70	Dipole Ant.	22.63	-2.85	0.6	18.78	38.5	Pass

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b, SGP=Signal Generator Level

-----The END-----



Appendix B

Modulation Characteristics


According to FCC Part 2.1047 & Part22 Subpart H



1 Test Plot

1.1 Test Mode = TM 1


Channel 192 (GPRS/GSM)

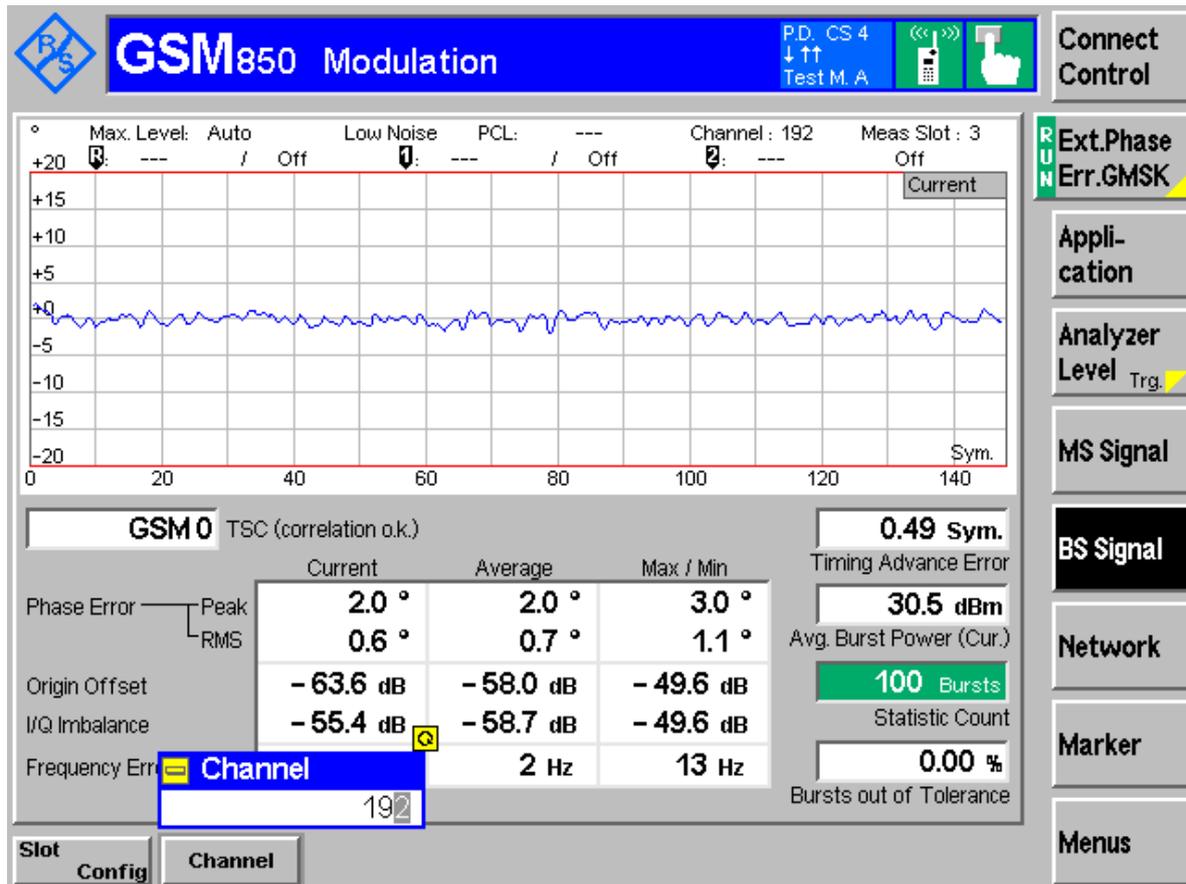



1.2 Test Mode = TM 2


Channel 192 (EDGE)

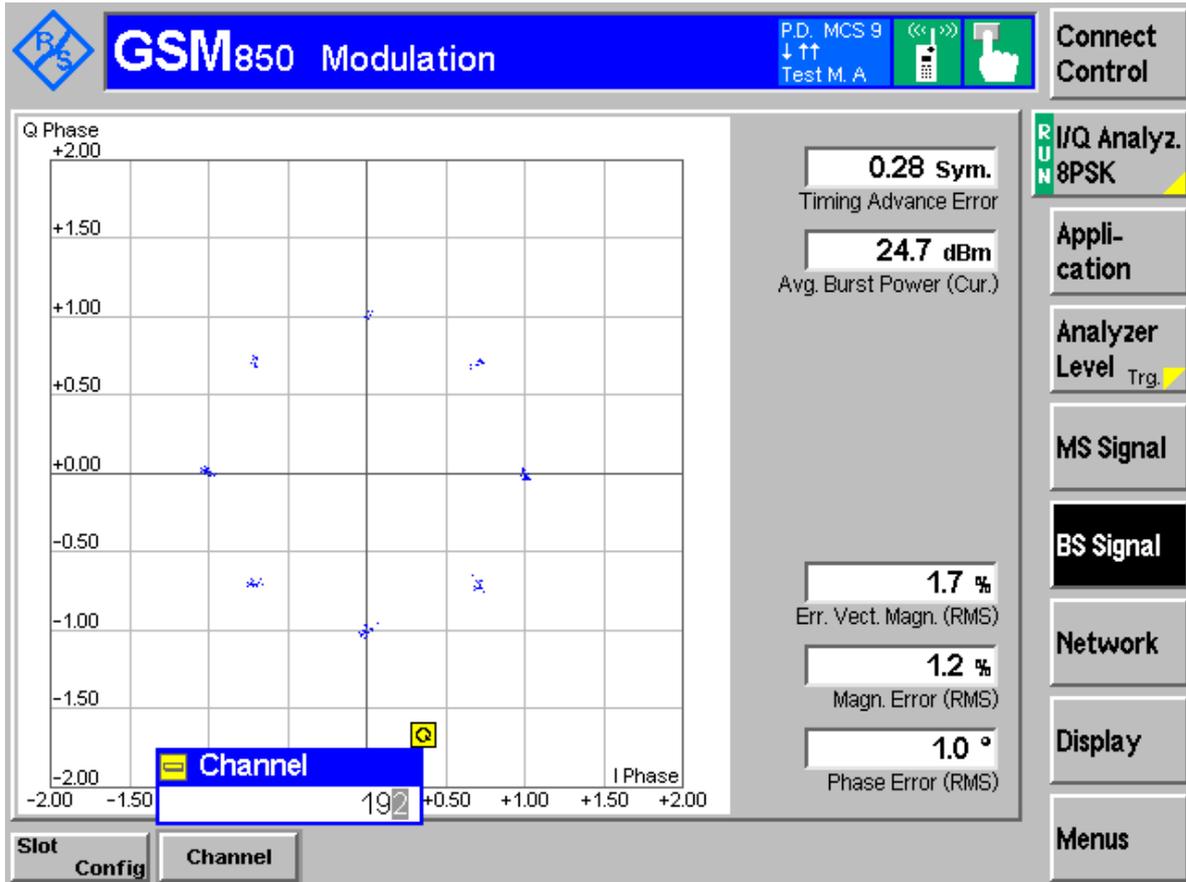



1.3 Test Mode = TM 3

Channel 4182 (WCDMA)

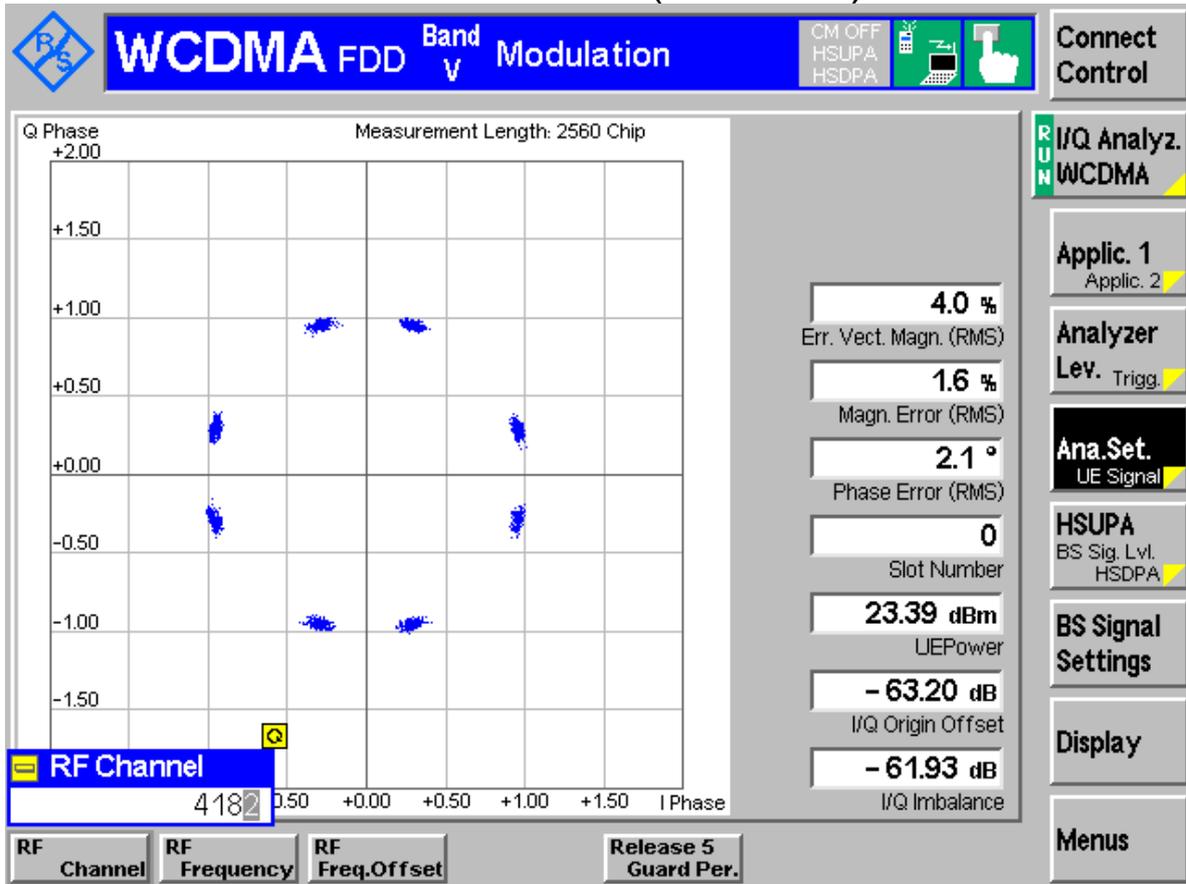

-----The END-----



Appendix C

Occupied Bandwidth According to FCC Part 2.1049 & Part 22 Subpart H




Result Table

Table 1 Measurement Results

Test Mode	RF Channel	Occupied Bandwidth [kHz]	Verdict
TM1	128	243.6	Pass
	192	246.8	Pass
	251	245.2	Pass
TM2	128	240.4	Pass
	192	248.4	Pass
	251	256.4	Pass
Test Mode	RF Channel	Occupied Bandwidth [MHz]	Verdict
TM3	4132	4.09	Pass
	4182	4.07	Pass
	4233	4.07	Pass




Channel 128 (TM1:GPRS/GSM)

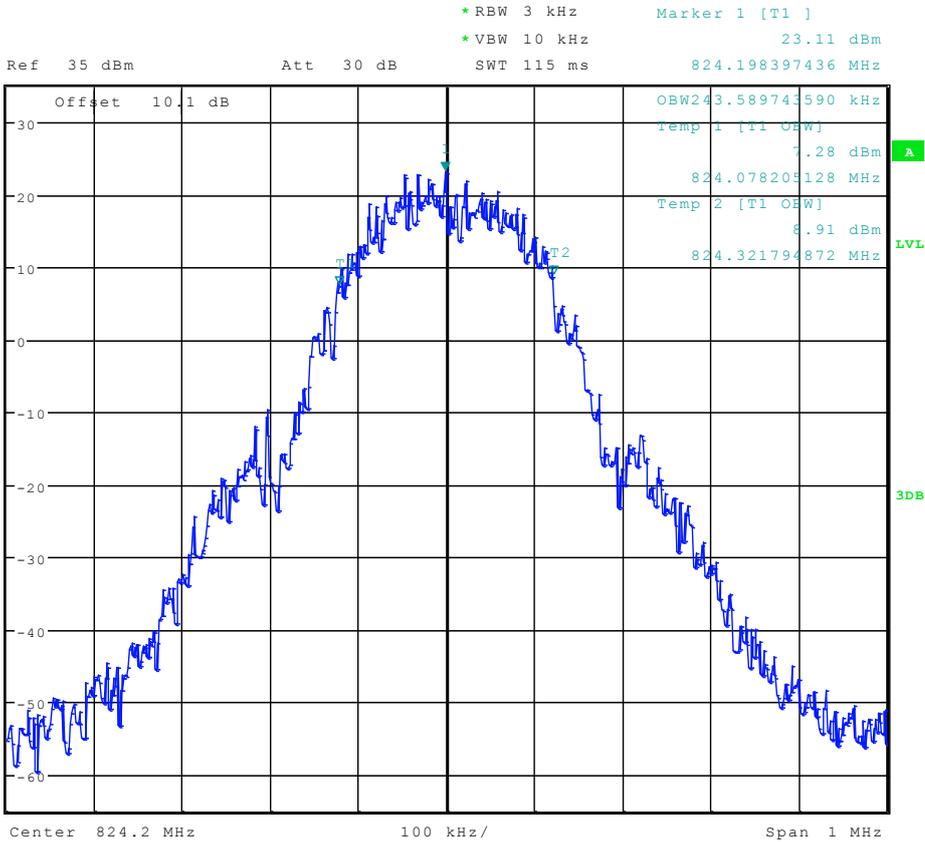

Date: 5.MAR.2012 00:09:02




Channel 128 (TM2:EDGE)

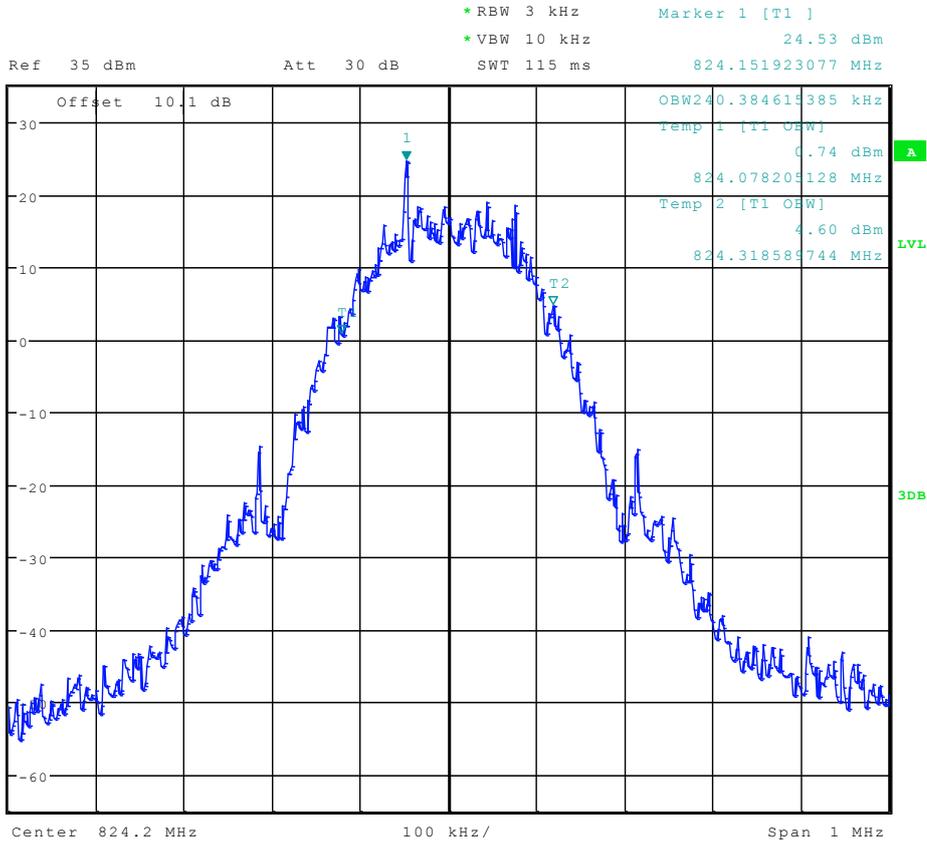

Date: 5.MAR.2012 00:15:12




Channel 4132 (TM3: WCDMA)

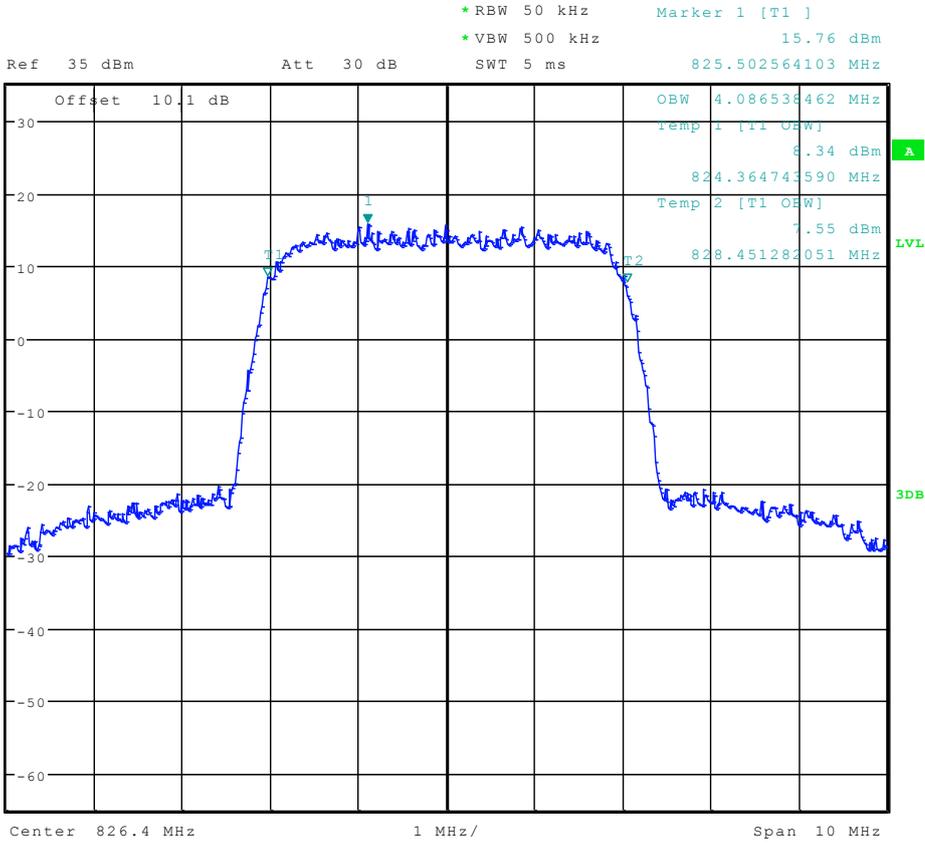

Date: 5.MAR.2012 00:22:25




Channel 192 (TM2:EDGE)

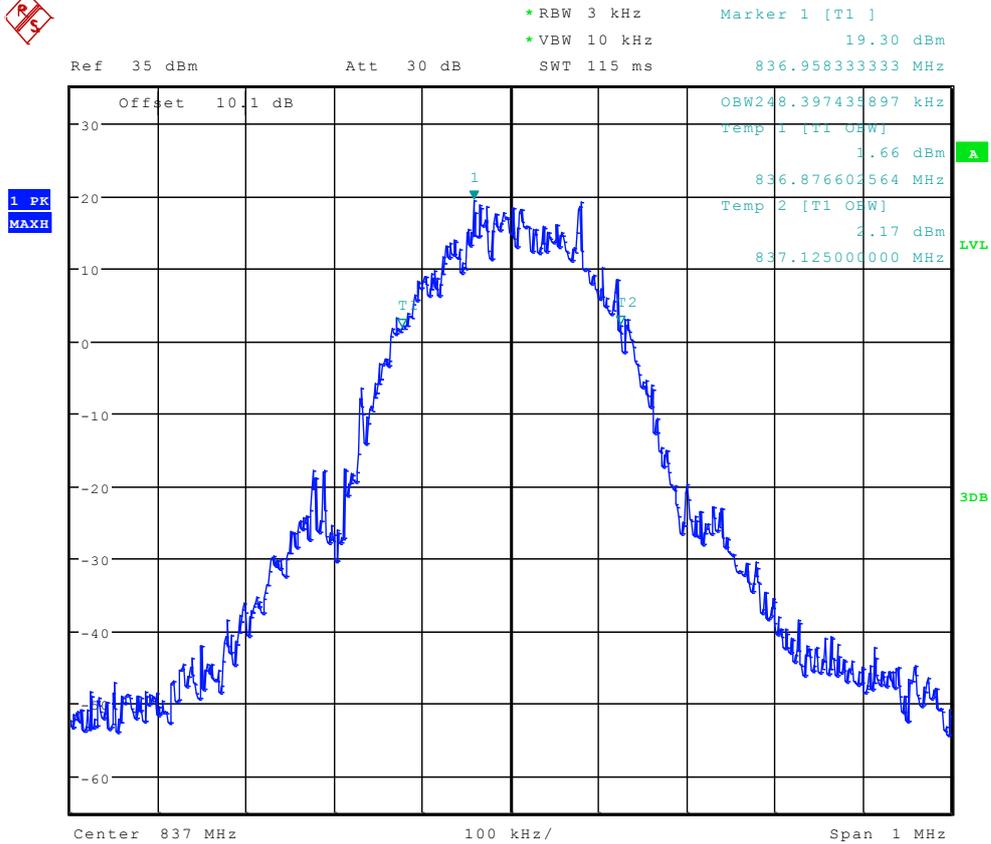

Date: 5.MAR.2012 00:15:26




Channel 4182 (TM3: WCDMA)

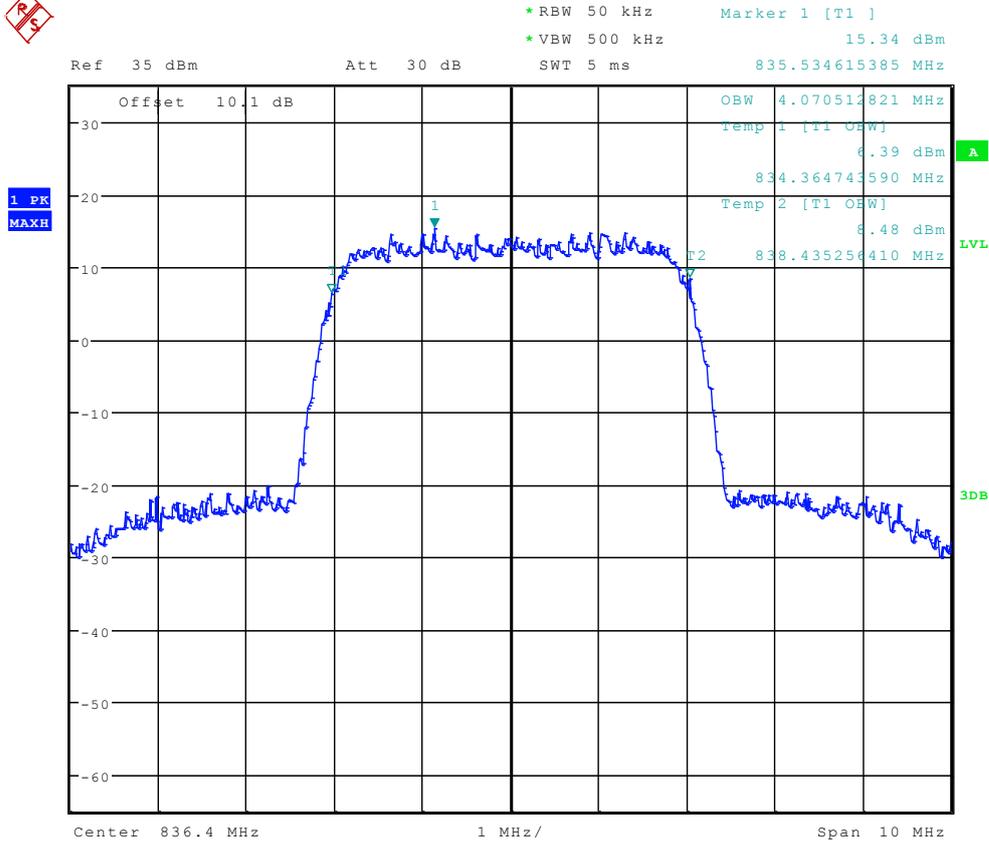

Date: 5.MAR.2012 00:22:39




Channel 251 (TM1:GPRS/GSM)

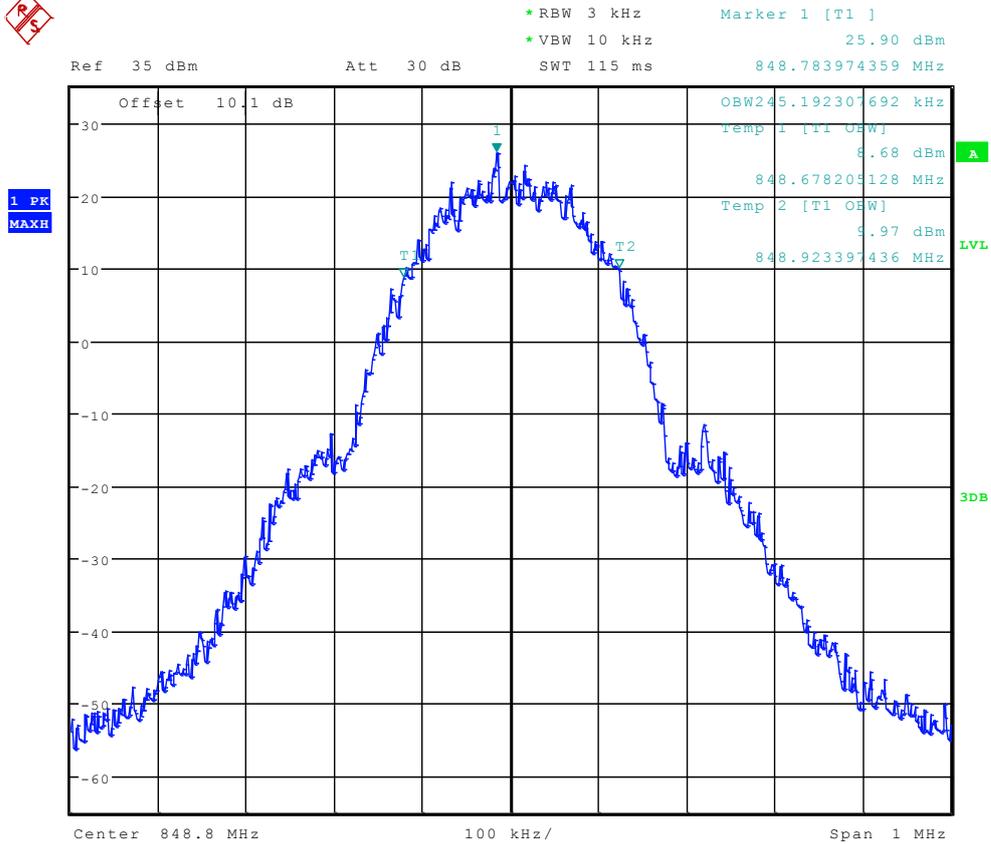

Date: 5.MAR.2012 00:09:29




Channel 251 (TM2:EDGE)

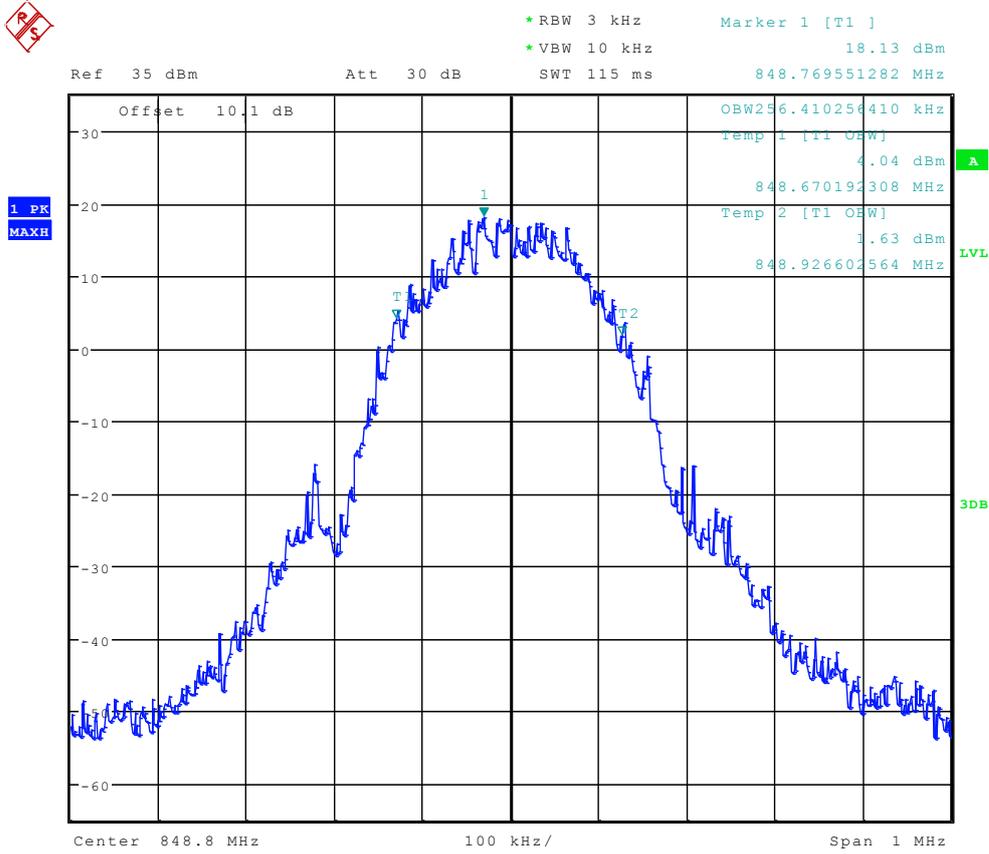

Date: 5.MAR.2012 00:15:40



Channel 4233 (TM3: WCDMA)

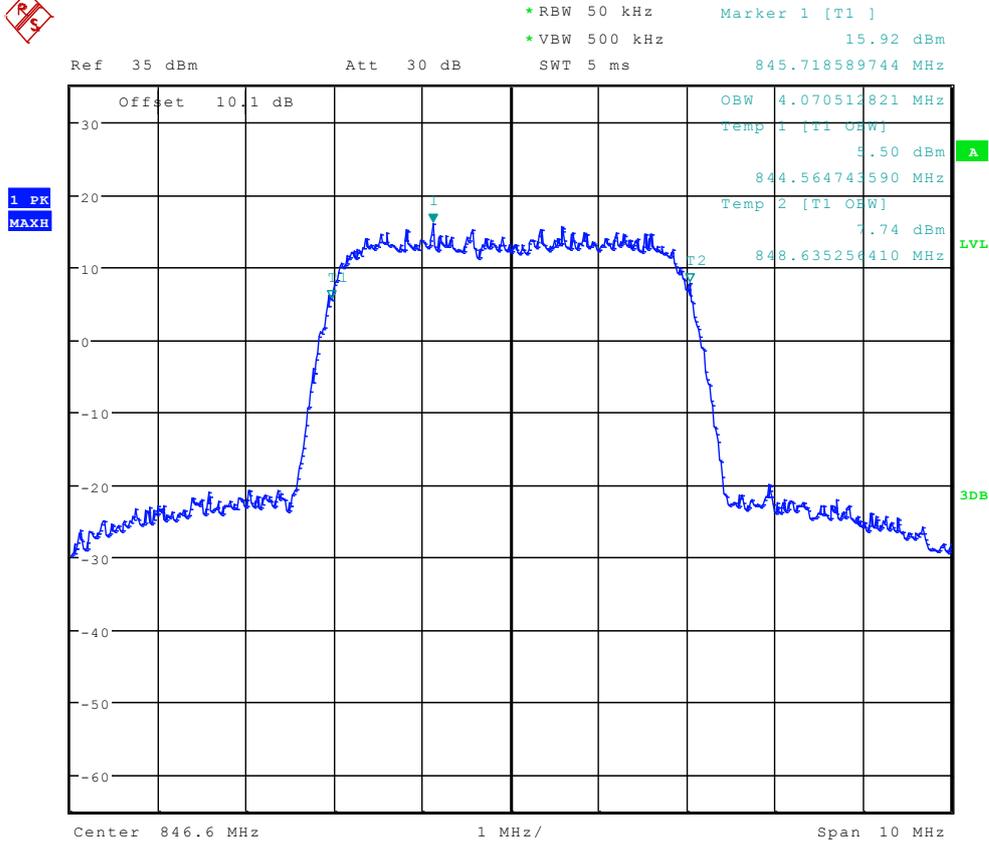

Date: 5.MAR.2012 00:22:52

-----The END-----



Appendix D

Band Edges Compliance


According to FCC Part 2.1051 & Part 22 Subpart H



TM1:GPRS/GSM

Left Edge


Channel 128

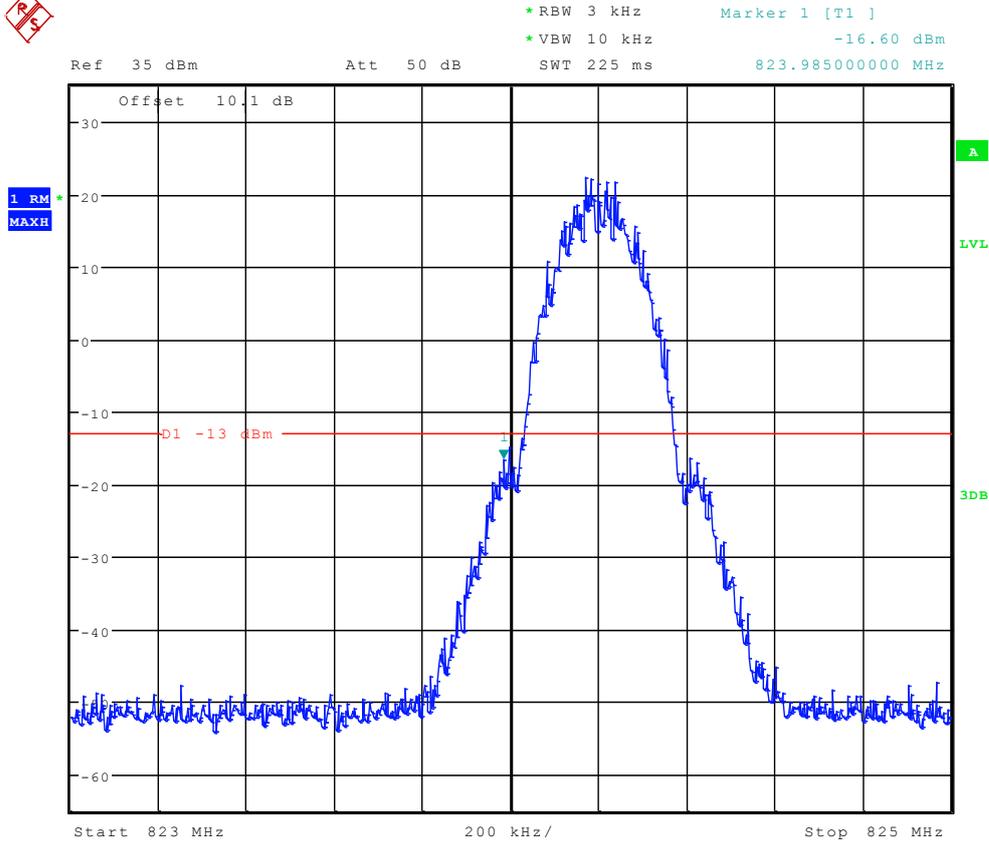

Date: 5.MAR.2012 00:12:39



Right Edge Channel 251

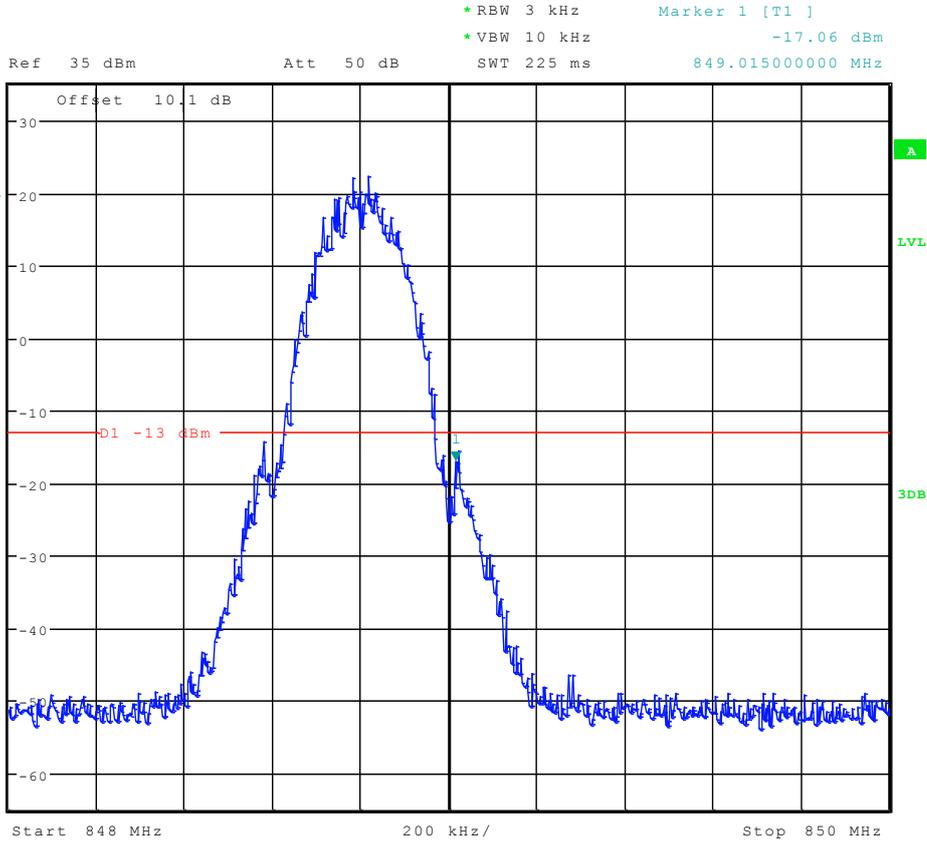


Date: 5.MAR.2012 00:12:52



TM2:EDGE

Left Edge


Channel 128

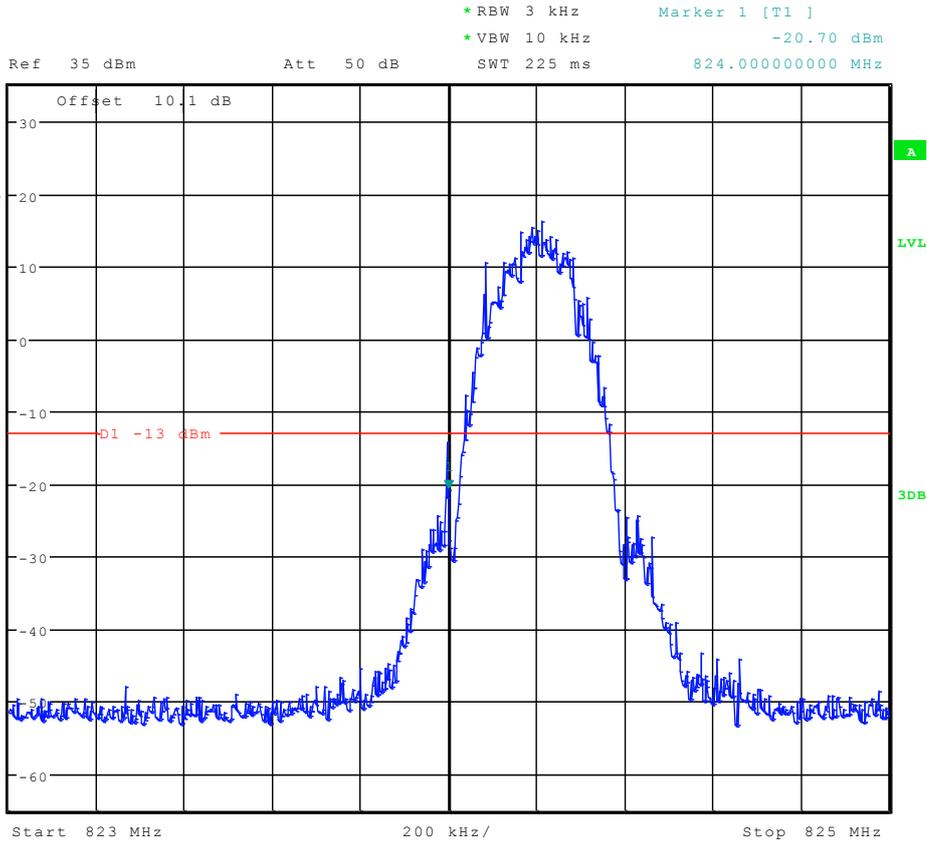

Date: 5.MAR.2012 00:18:52



Right Edge Channel 251

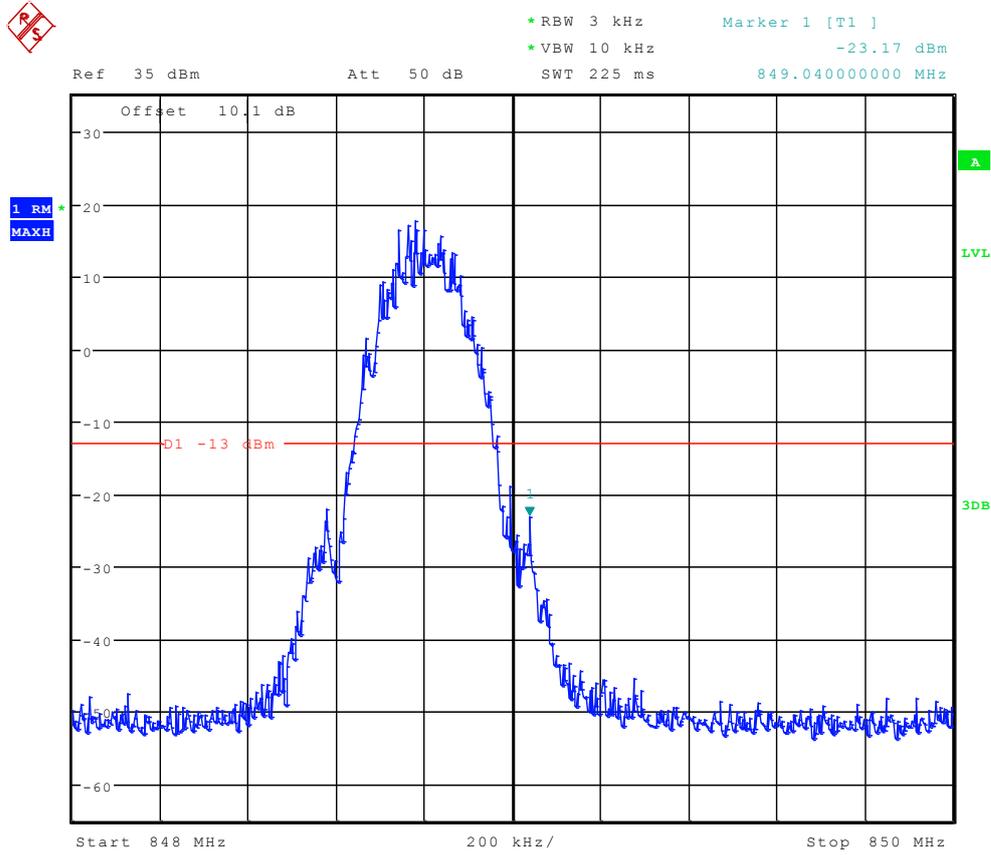

Date: 5.MAR.2012 00:19:06




TM3: WCDMA

Left Edge

Channel 4132



Ref 35 dBm Att 50 dB SWT 2.5 ms
*RBW 50 kHz *VBW 200 kHz
Marker 1 [T1] -17.58 dBm
824.000000000 MHz

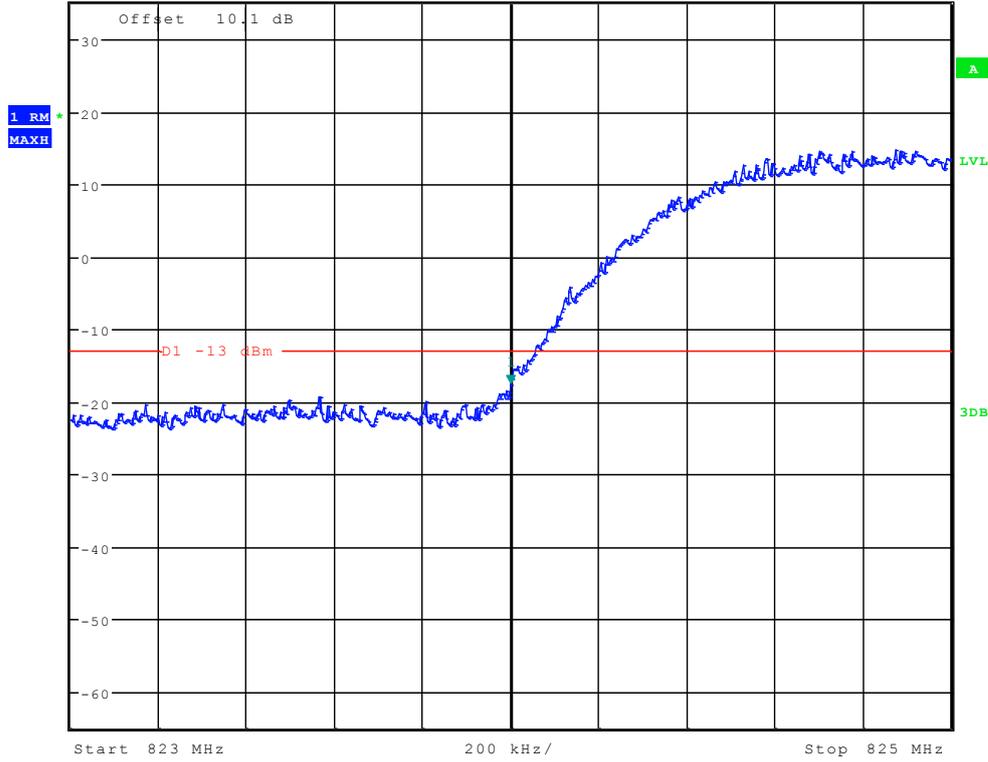

Date: 5.MAR.2012 00:26:02


Right Edge



Channel 4233



*RBW 50 kHz Marker 1 [T1]
 *VBW 200 kHz -18.47 dBm
 Ref 35 dBm Att 50 dB SWT 2.5 ms 849.000000000 MHz

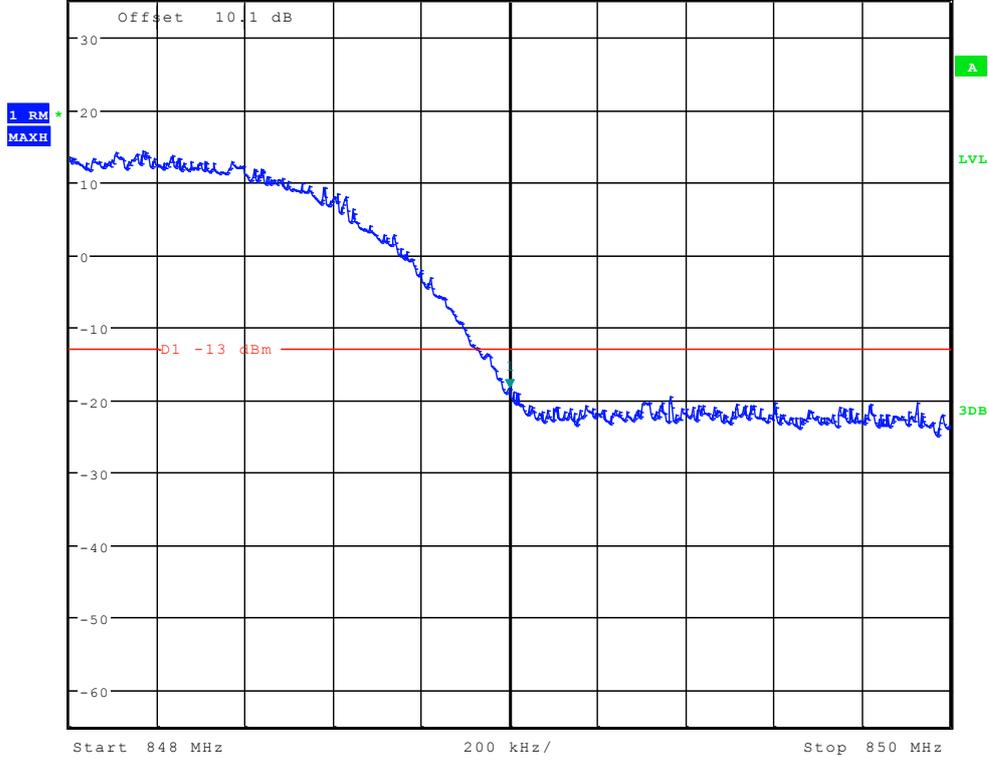

Date: 5.MAR.2012 00:26:16

-----The END-----




Appendix E

Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part 22 Subpart H




TM1:GPRS/GSM Channel 128

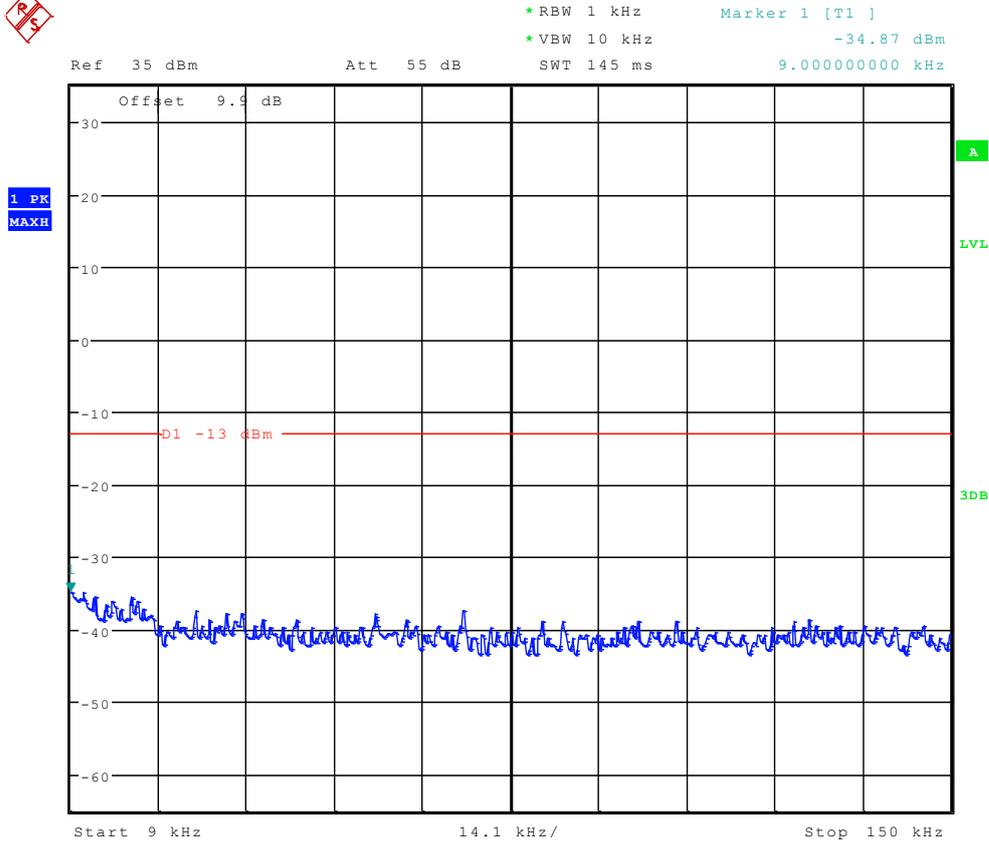


Date: 5.MAR.2012 00:09:44



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -29.32 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

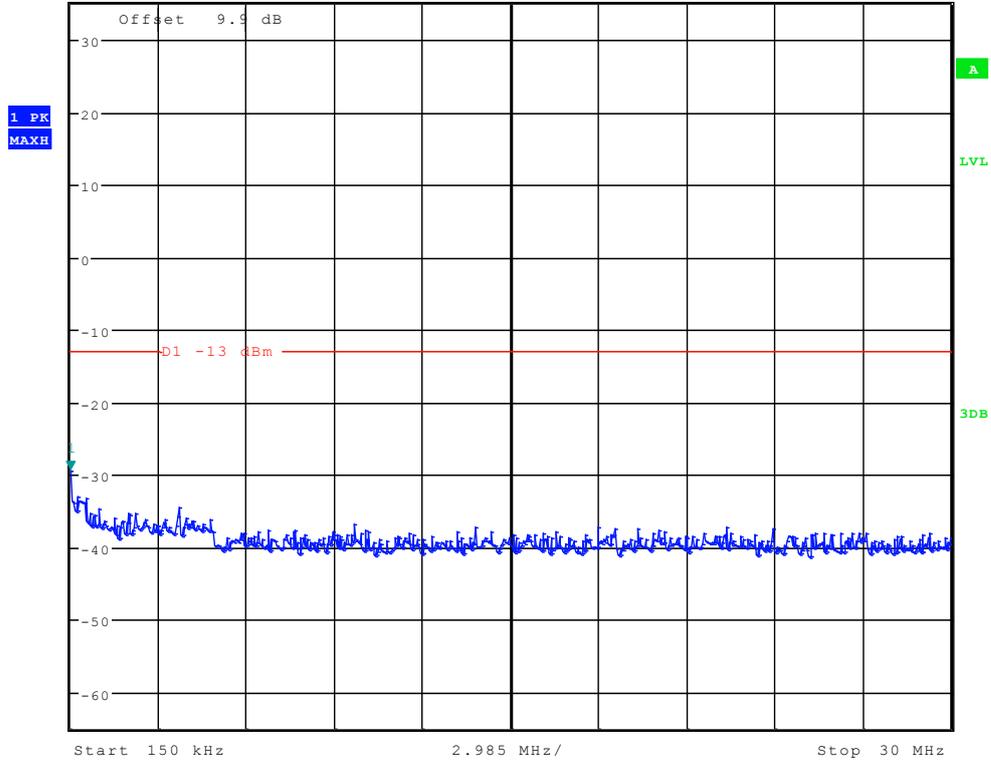


Date: 5.MAR.2012 00:10:28

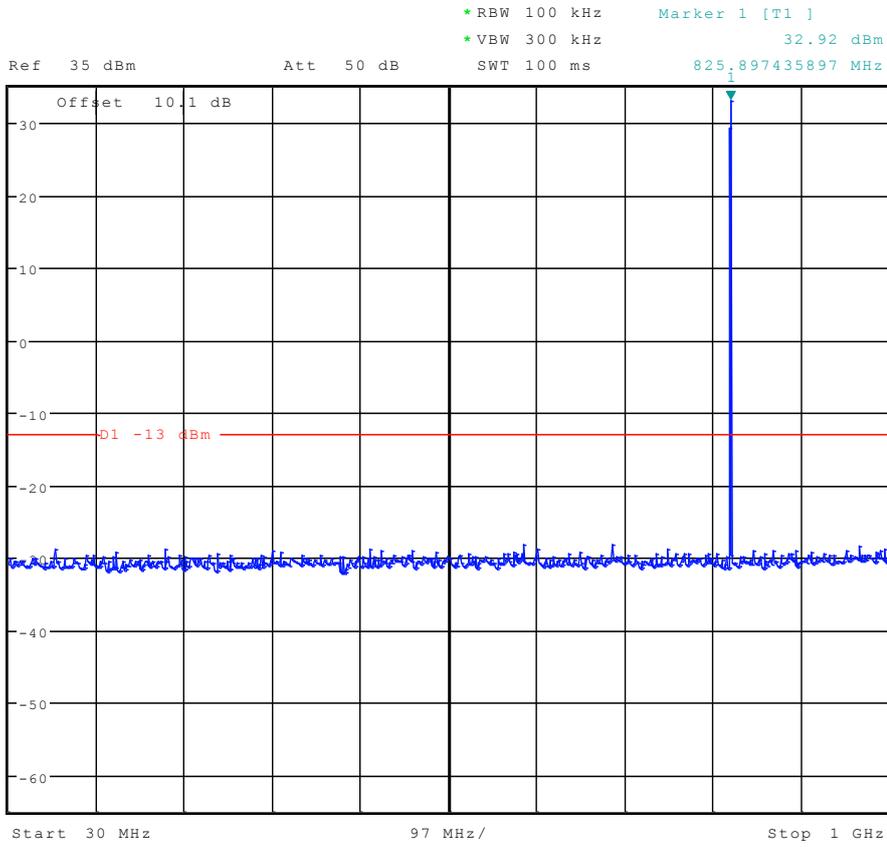

Date: 5.MAR.2012 00:11:12




Ref 35 dBm Att 50 dB SWT 70 ms Marker 1 [T1] -17.29 dBm
*RBW 1 MHz *VBW 3 MHz 2.788862179 GHz

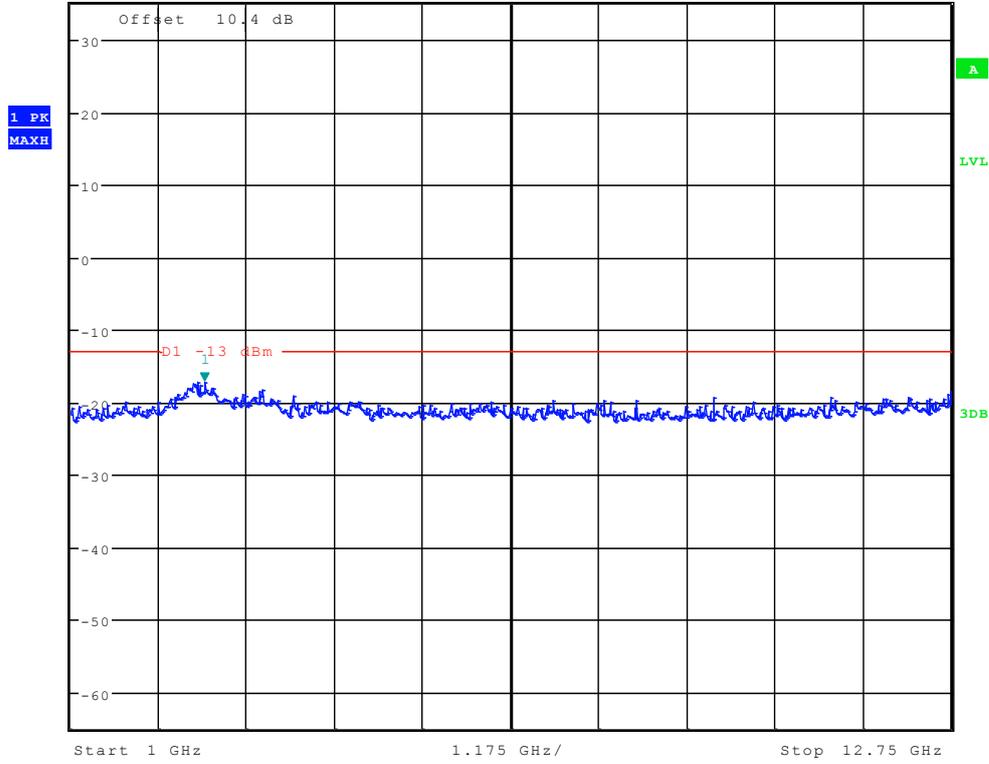

Date: 5.MAR.2012 00:11:55




Channel 192

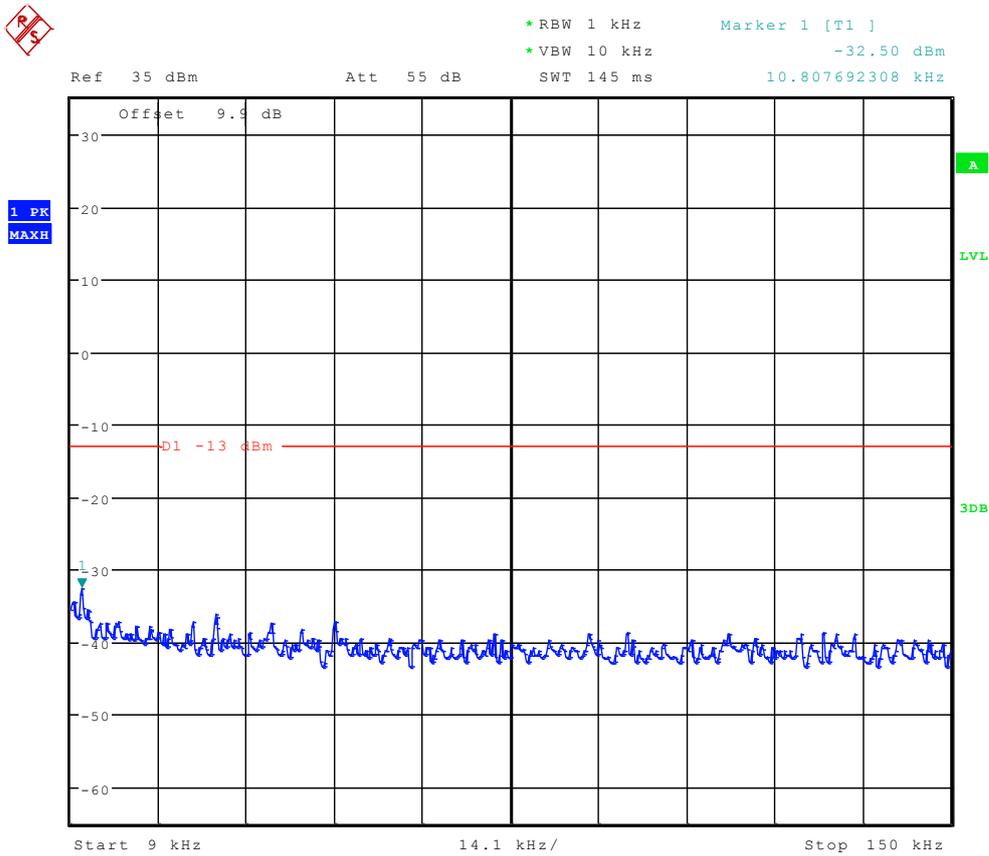


Date: 5.MAR.2012 00:09:59



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -30.28 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

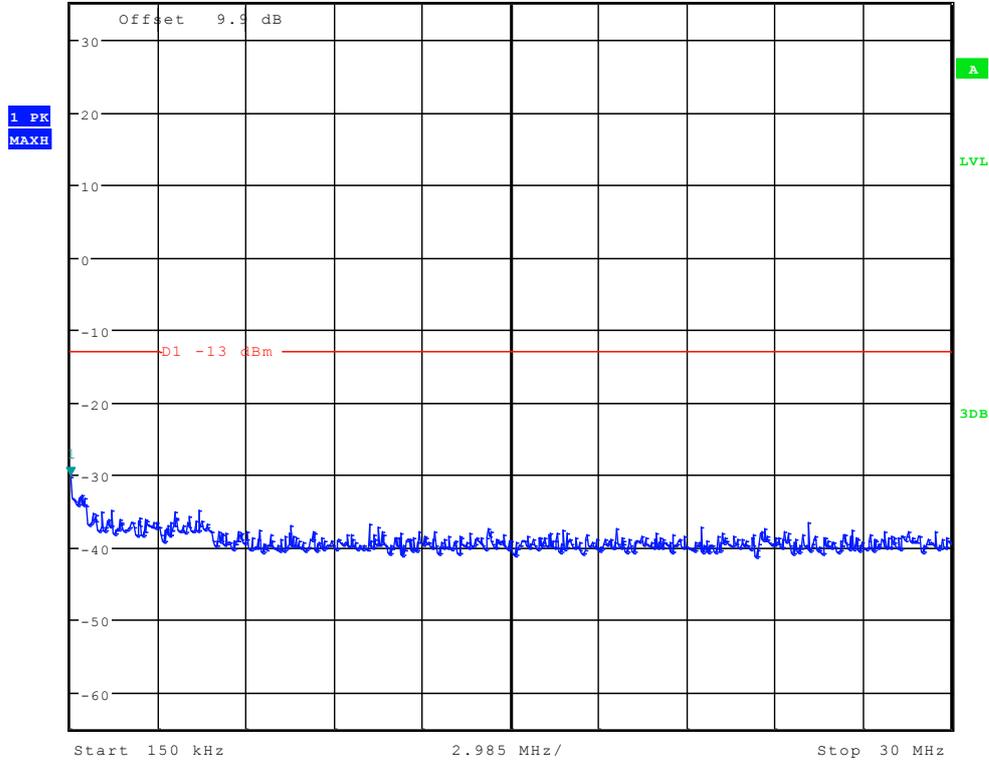


Date: 5.MAR.2012 00:10:42

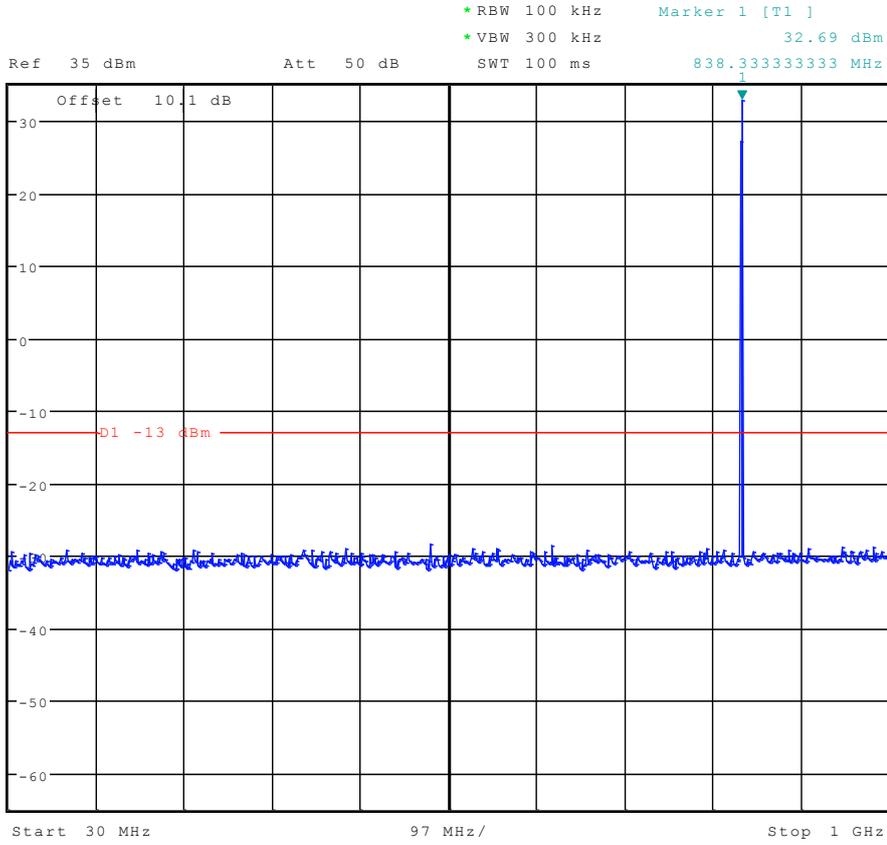

Date: 5.MAR.2012 00:11:26




Ref 35 dBm Att 50 dB SWT 70 ms Marker 1 [T1] -16.70 dBm
2.826522436 GHz

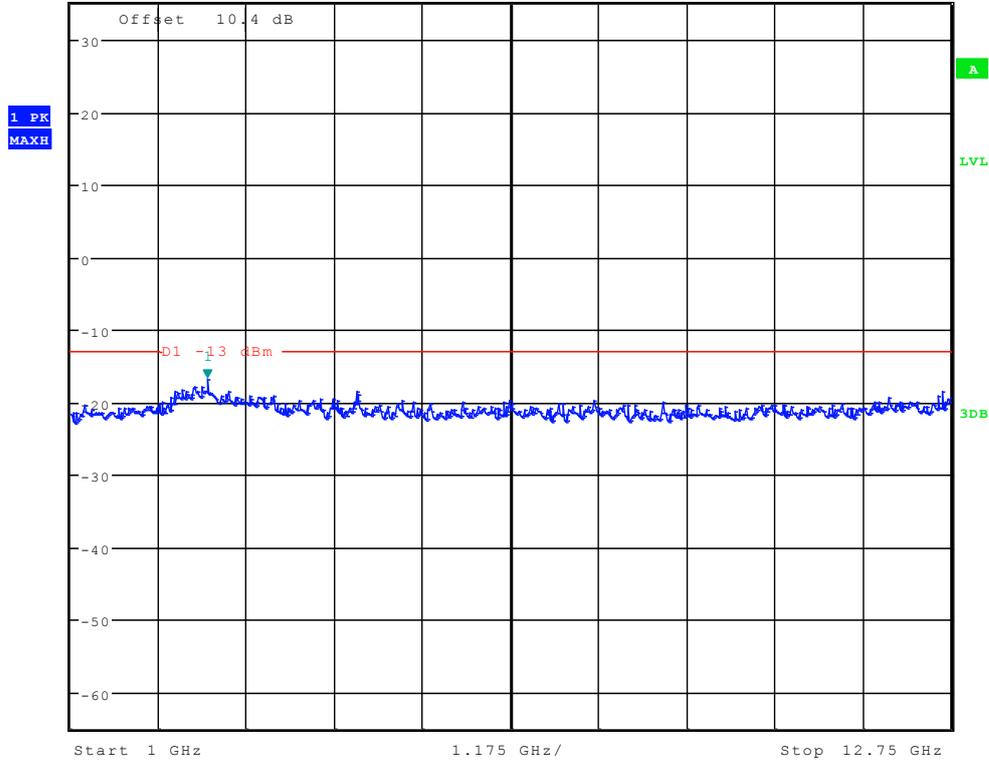

Date: 5.MAR.2012 00:12:10




Channel 251

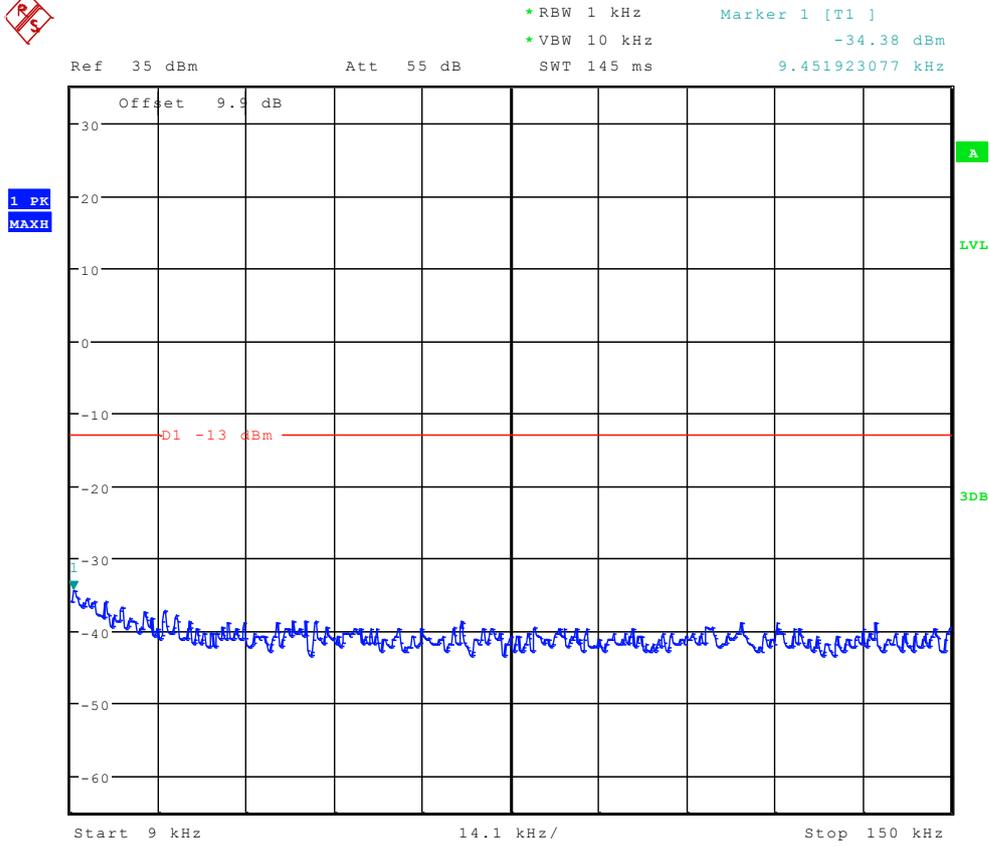


Date: 5.MAR.2012 00:10:13



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -28.60 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

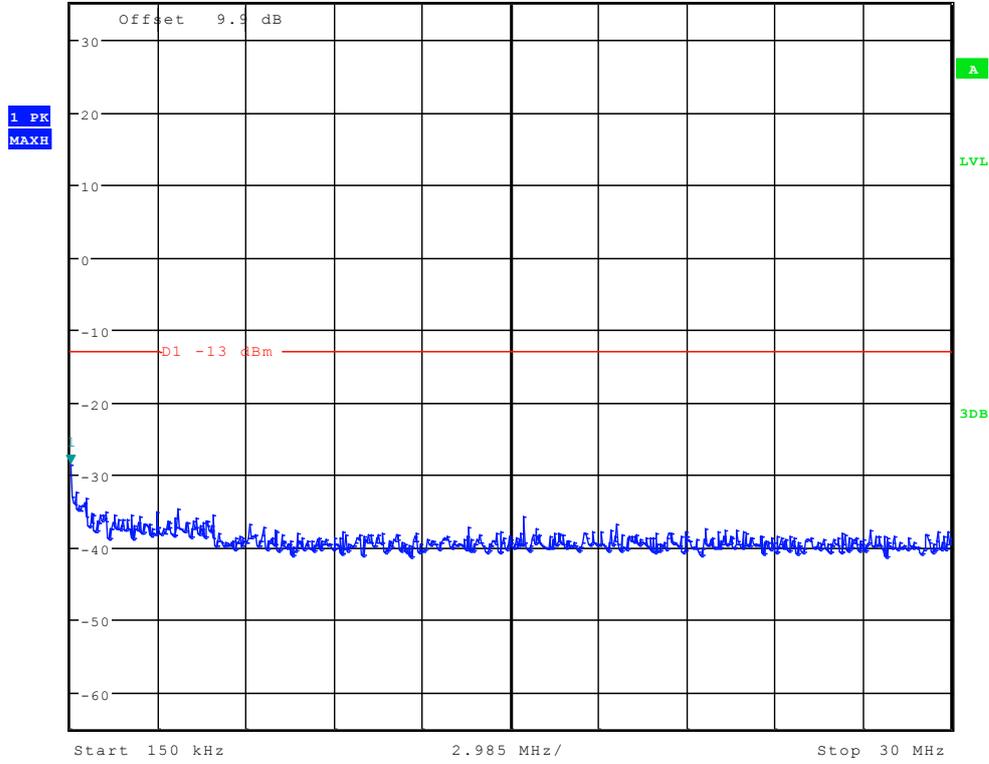


Date: 5.MAR.2012 00:10:57

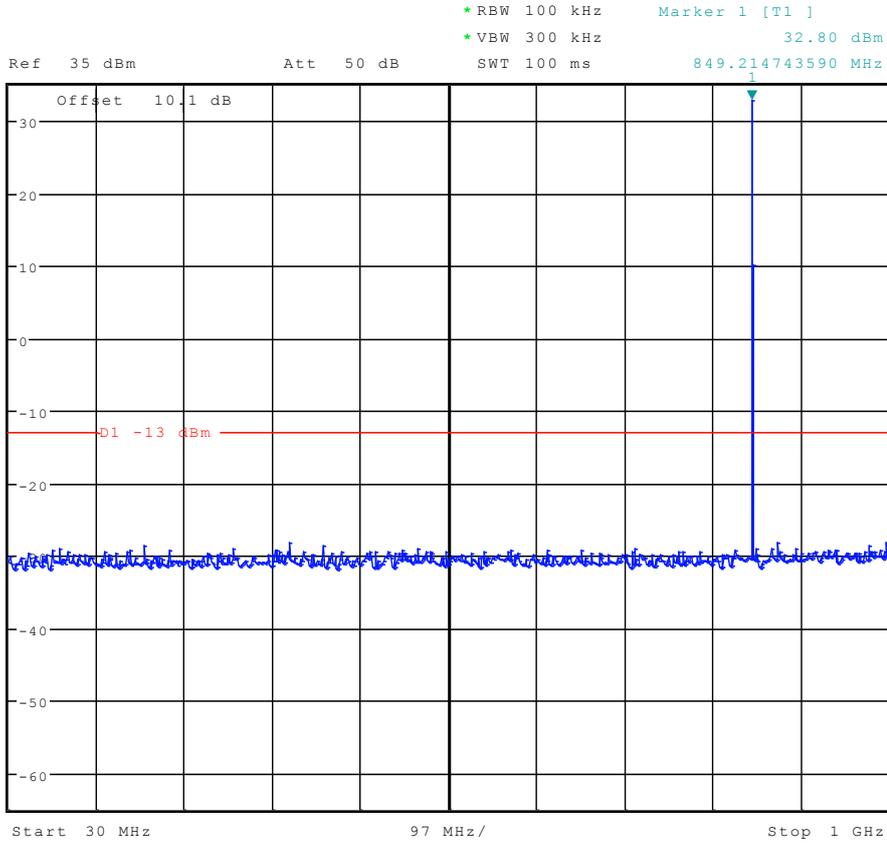

Date: 5.MAR.2012 00:11:40




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -16.75 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 3.579727564 GHz

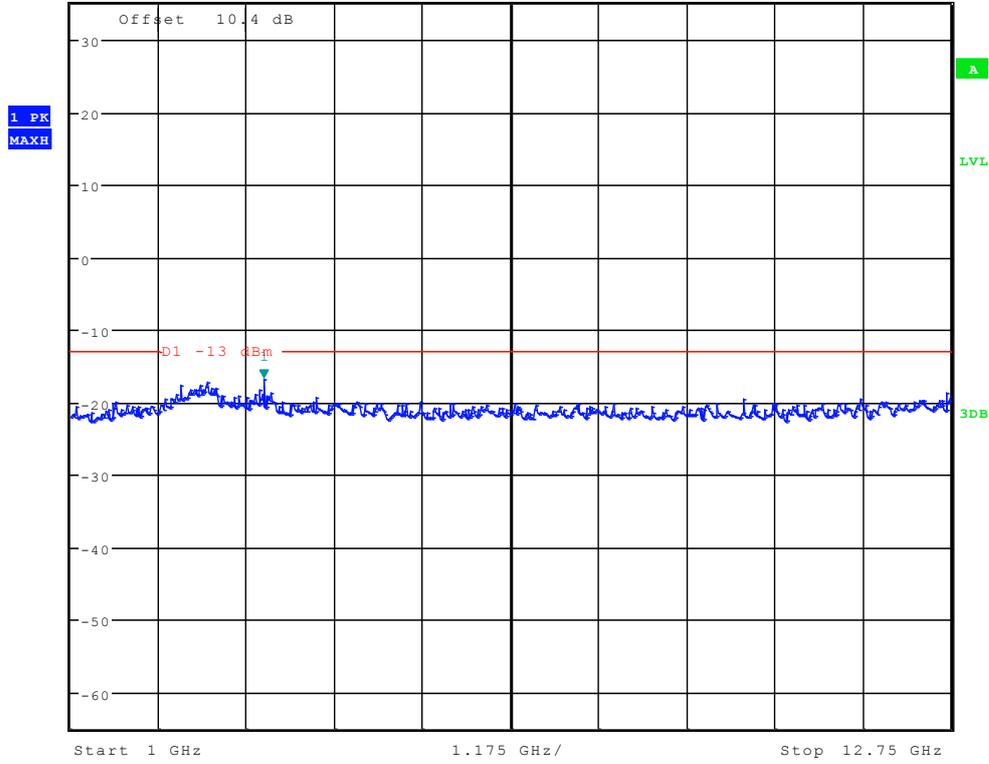

Date: 5.MAR.2012 00:12:25




TM2:EDGE Channel 128

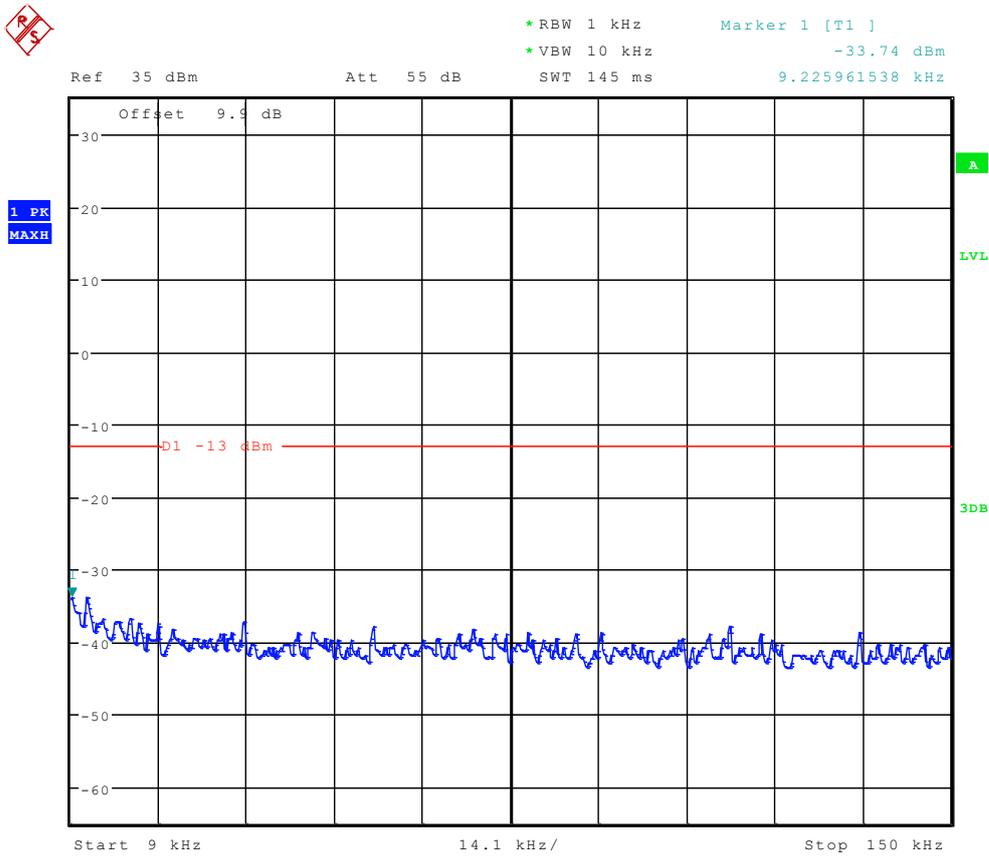


Date: 5.MAR.2012 00:15:55



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -29.43 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 197.836538462 kHz

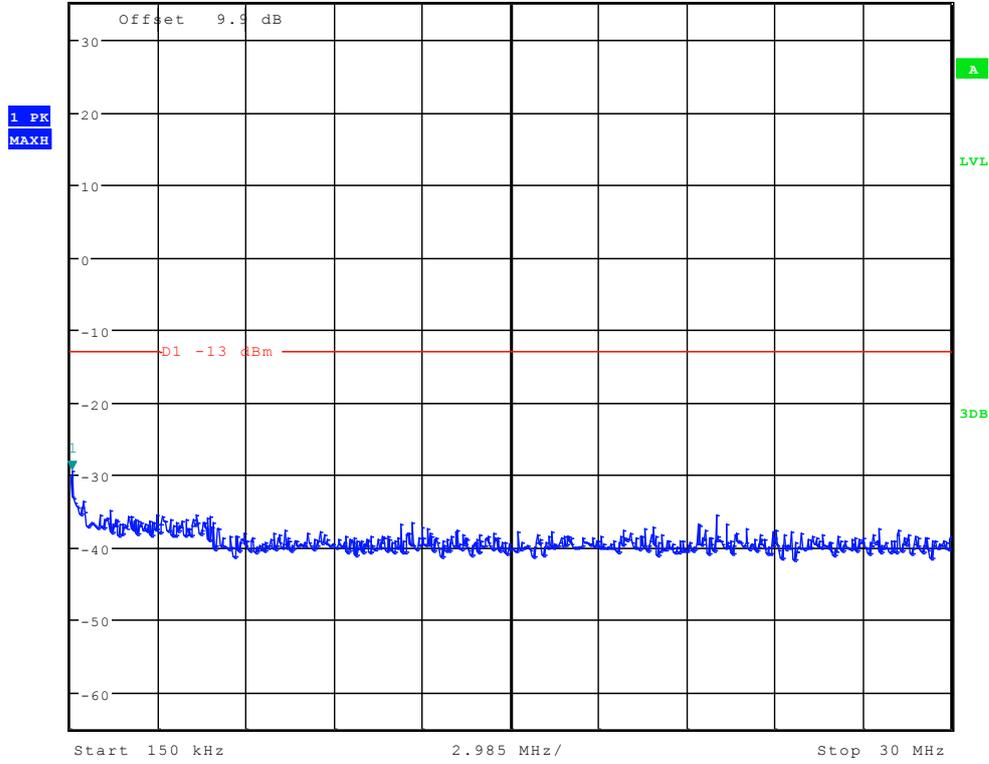


Date: 5.MAR.2012 00:16:38

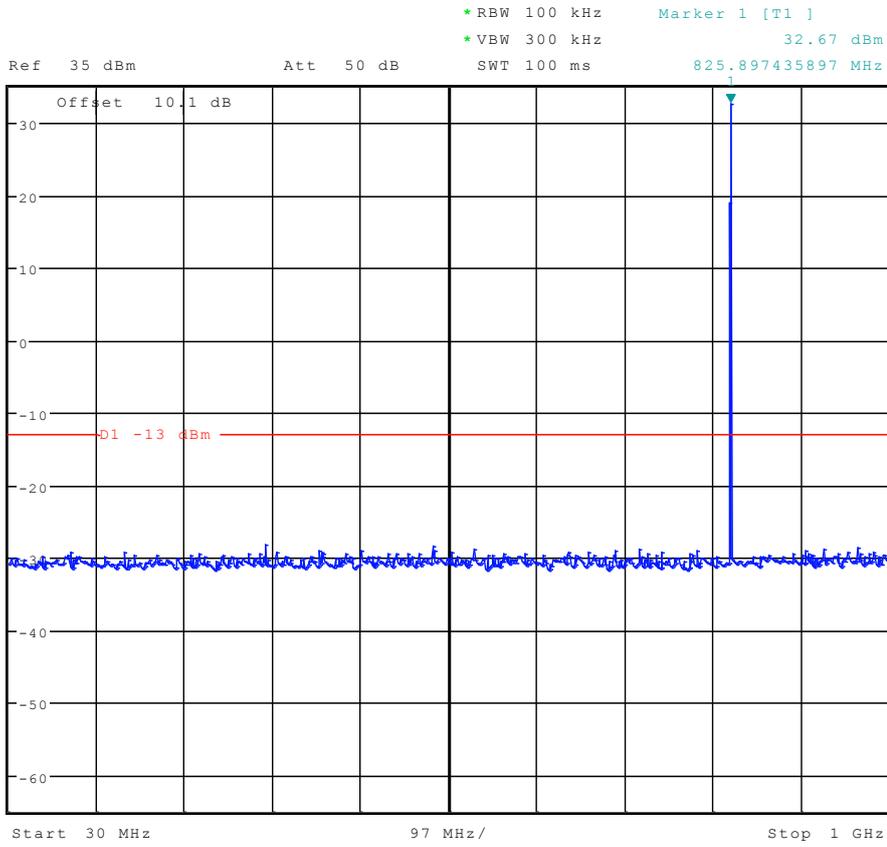

Date: 5.MAR.2012 00:17:22




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.71 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.864182692 GHz

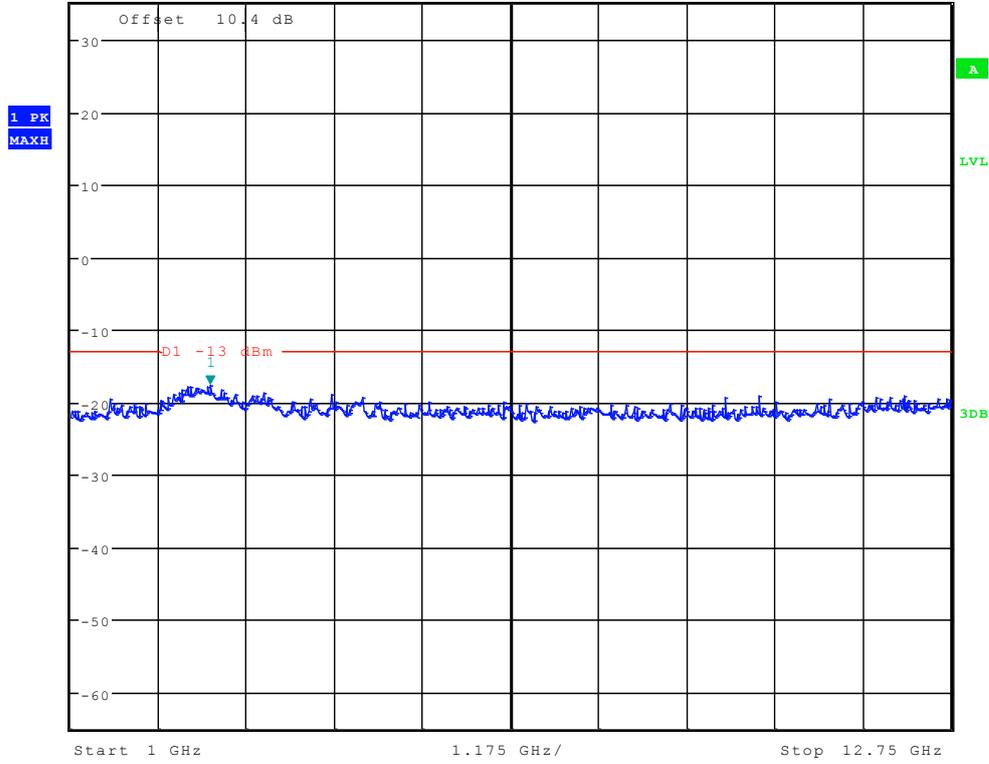

Date: 5.MAR.2012 00:18:06



Channel 192

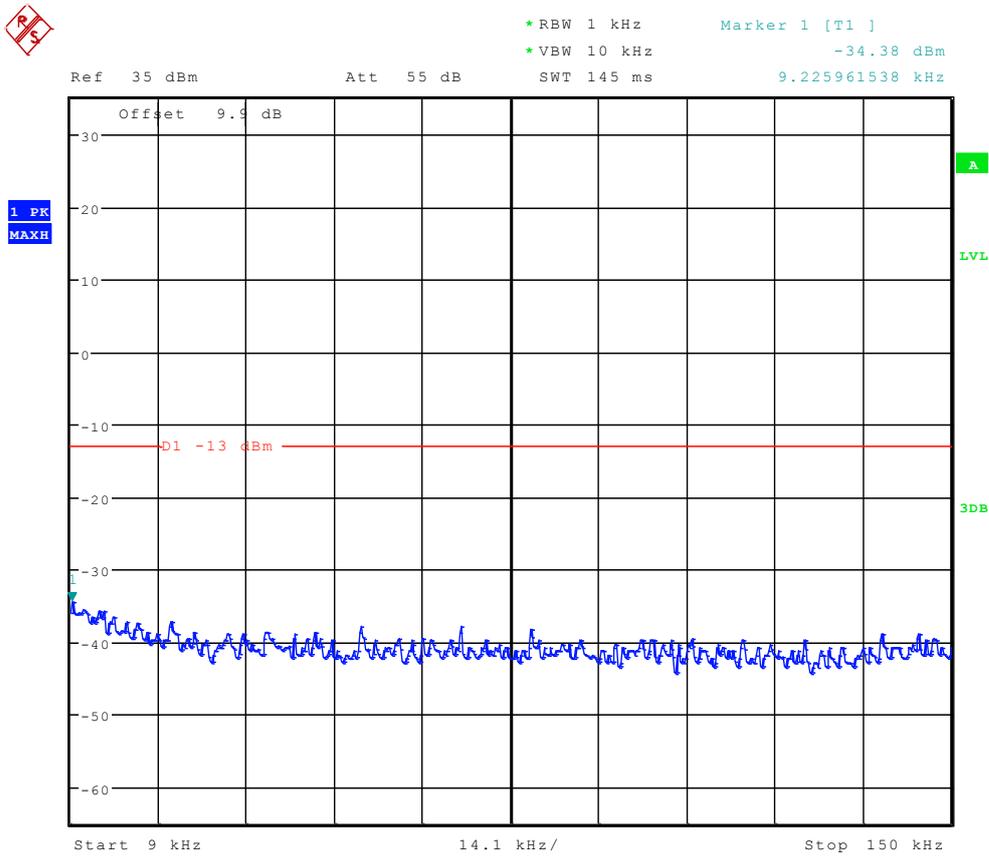


Date: 5.MAR.2012 00:16:09




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -29.59 dBm

Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

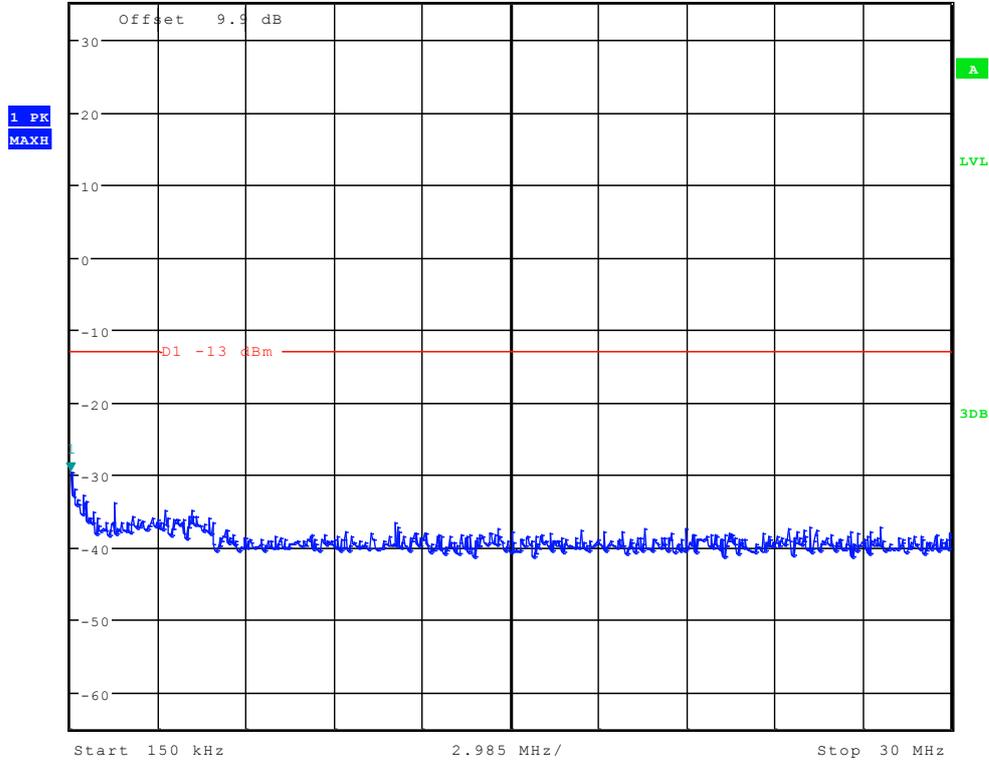

Date: 5.MAR.2012 00:16:53

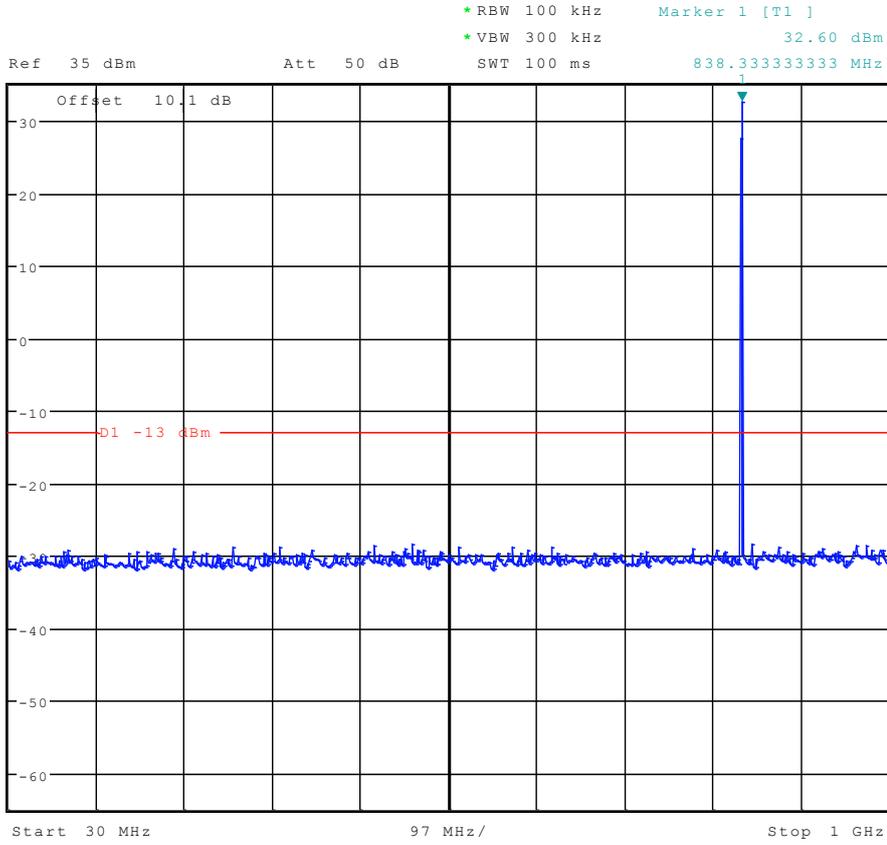


Date: 5.MAR.2012 00:17:36



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -16.57 dBm
2.694711538 GHz


Ref 35 dBm Att 50 dB SWT 70 ms

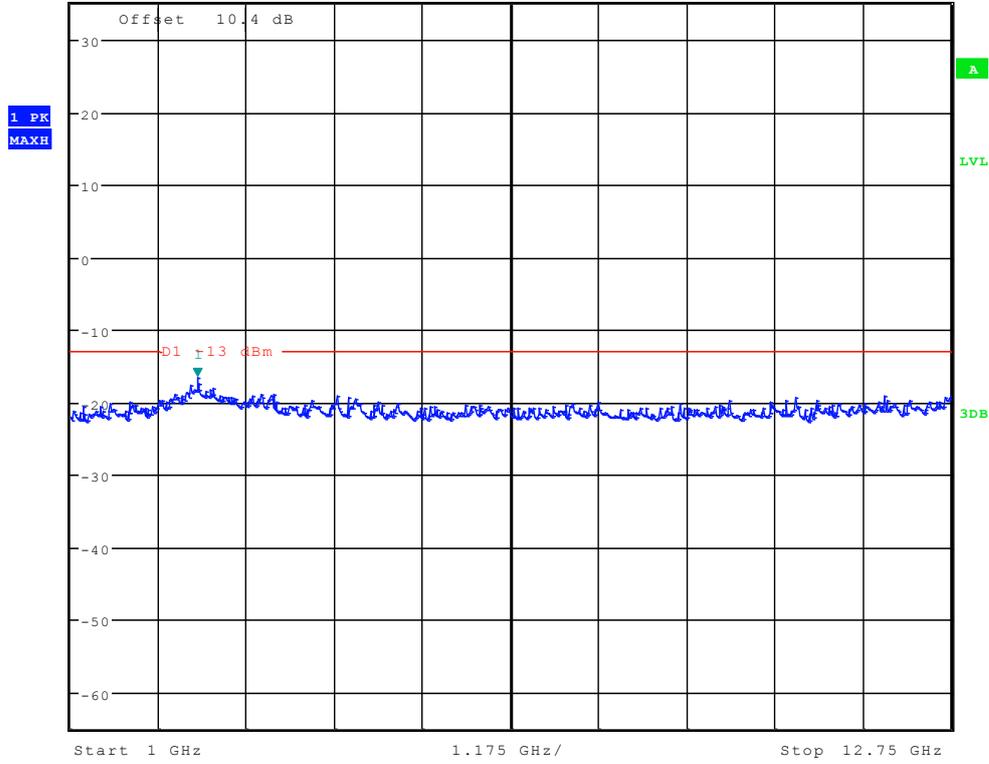

Date: 5.MAR.2012 00:18:20



Channel 251

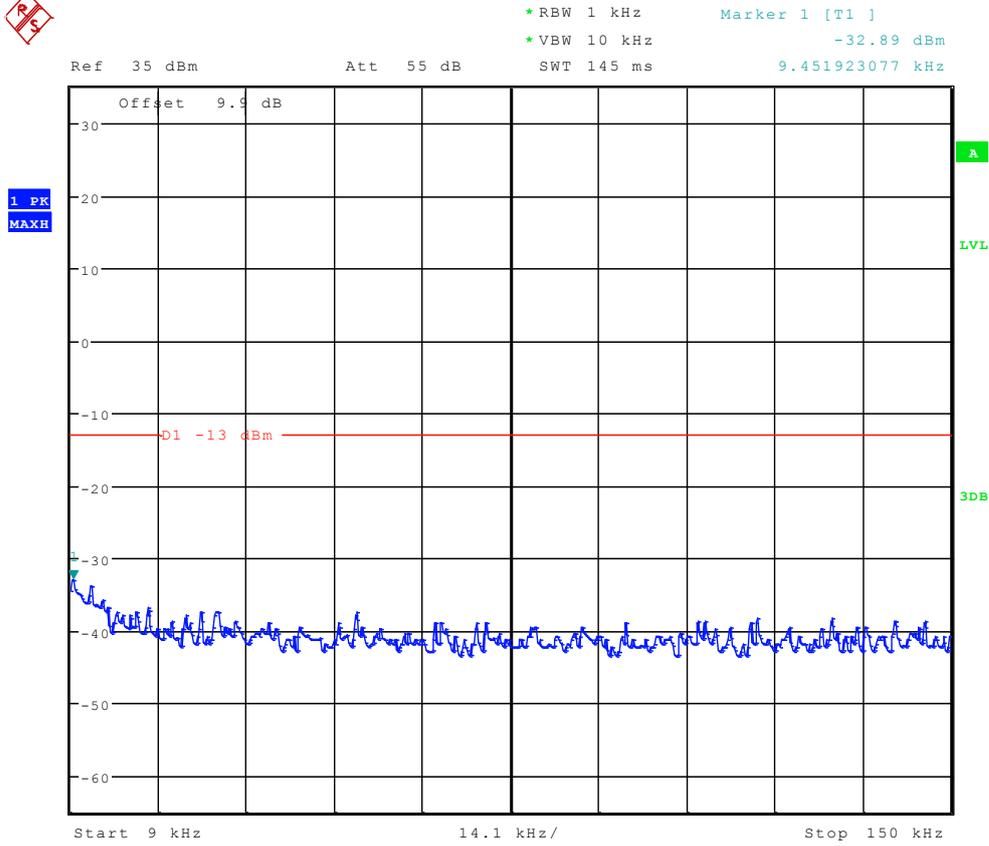


Date: 5.MAR.2012 00:16:23



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -30.22 dBm


Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

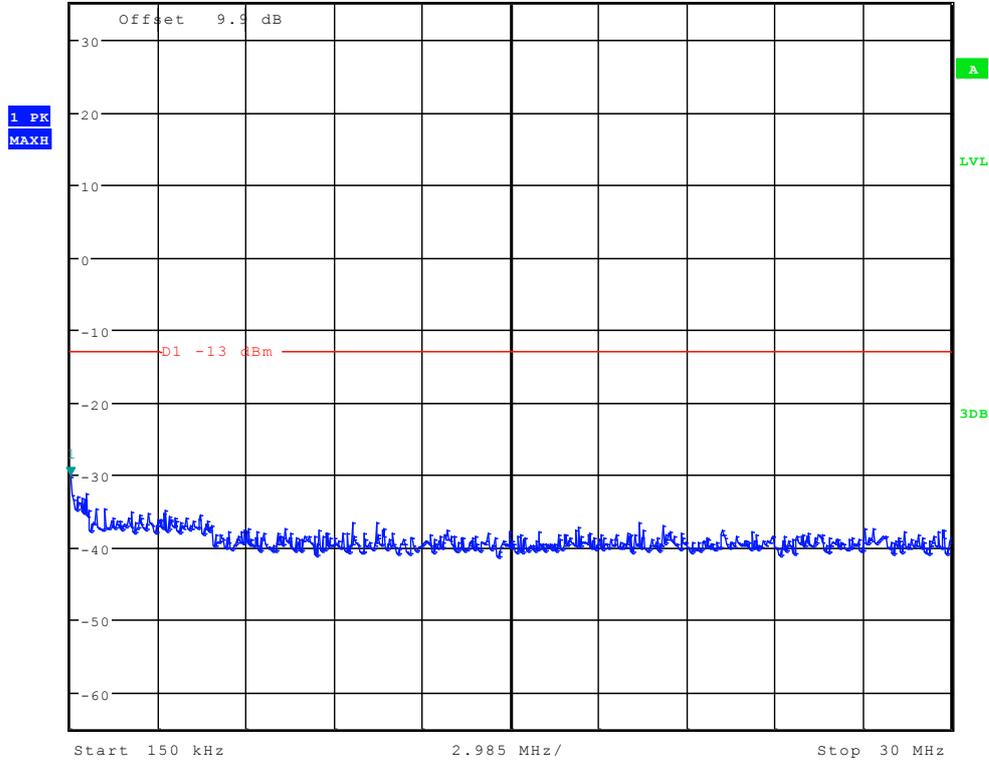

Date: 5.MAR.2012 00:17:07



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 27.61 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 849.214743590 MHz

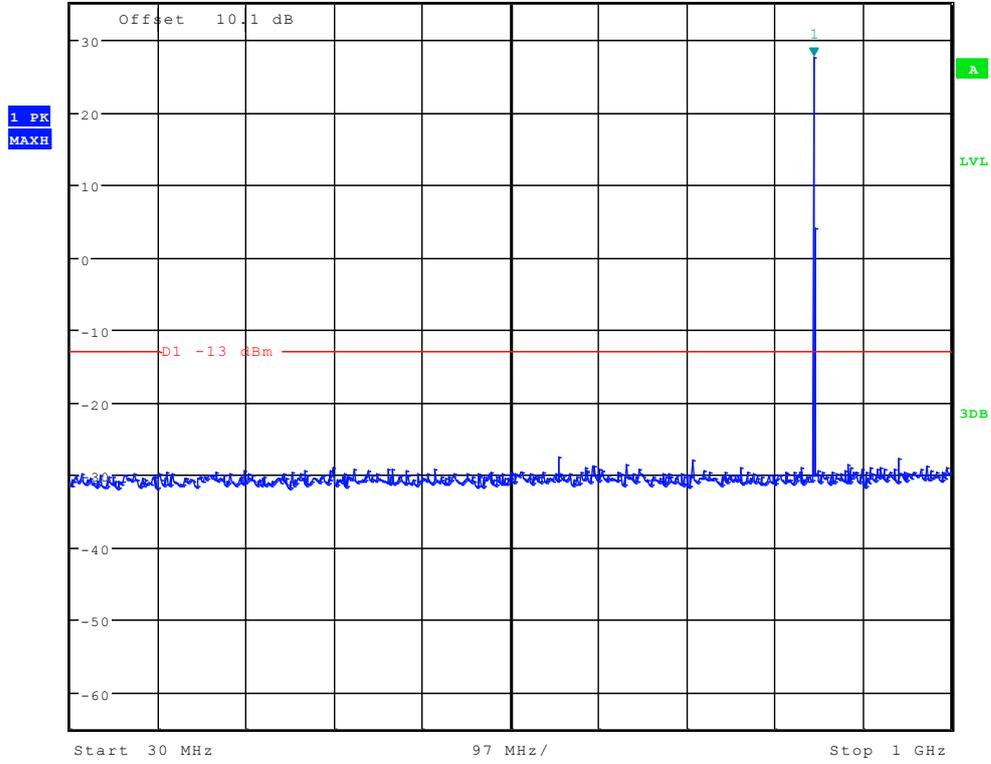


Date: 5.MAR.2012 00:17:51



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.86 dBm
2.826522436 GHz

Ref 35 dBm Att 50 dB SWT 70 ms

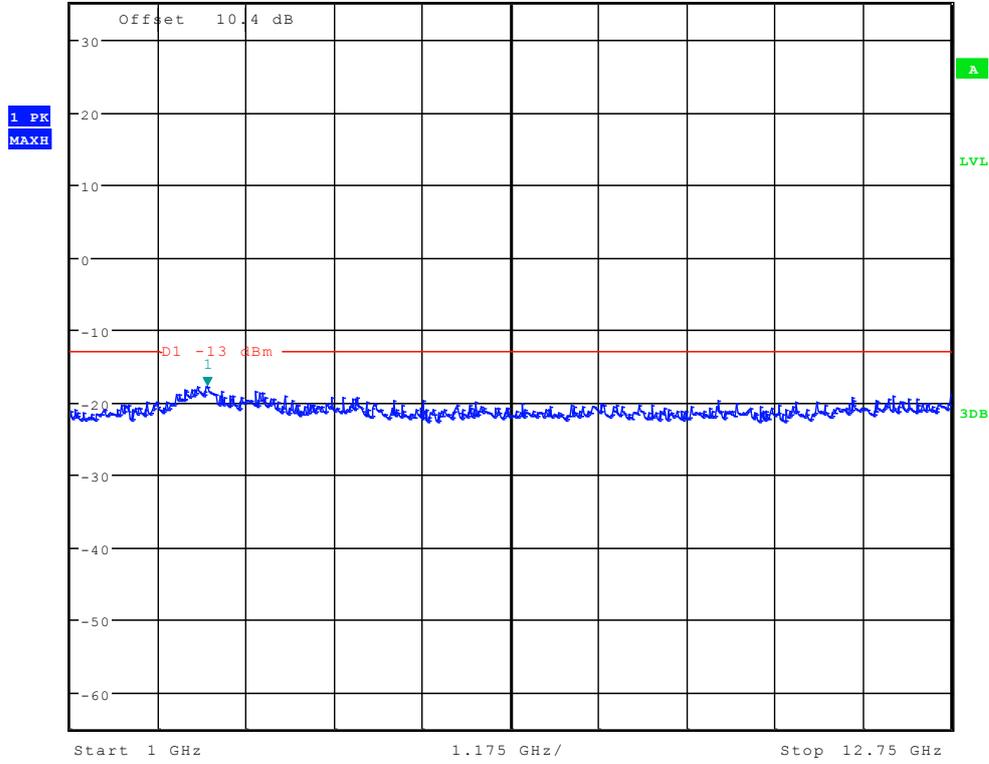


Date: 5.MAR.2012 00:18:35



TM3: WCDMA Channel 4132



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -35.08 dBm
Ref 35 dBm Att 55 dB SWT 145 ms 9.225961538 kHz

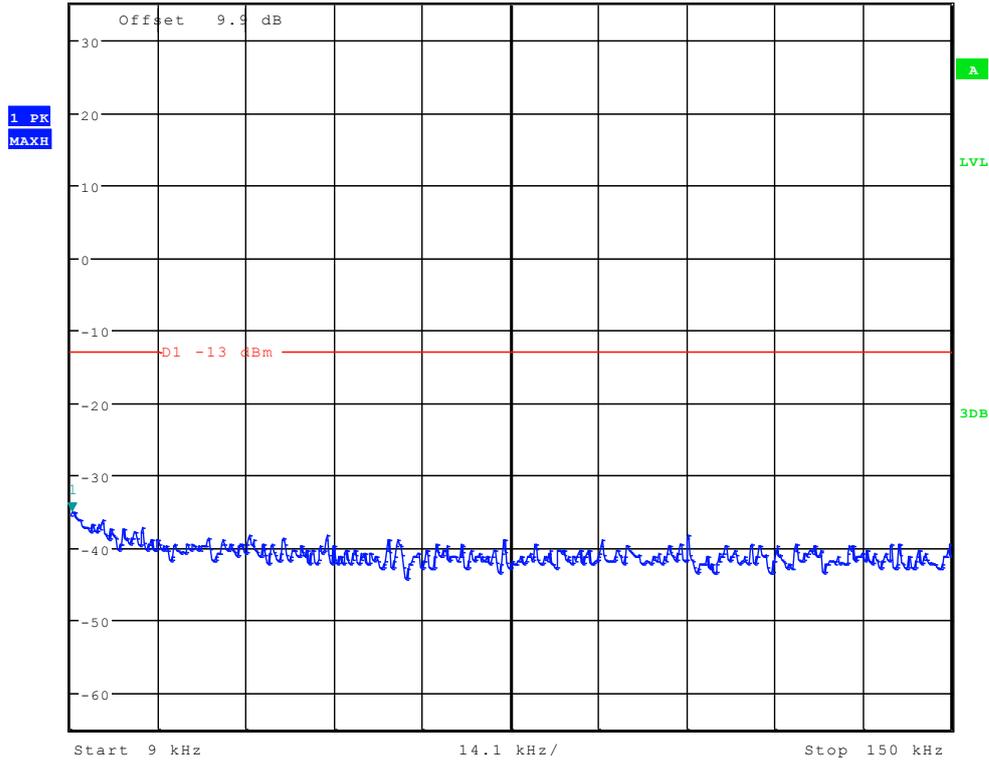


Date: 5.MAR.2012 00:23:07



*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -29.87 dBm


Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz

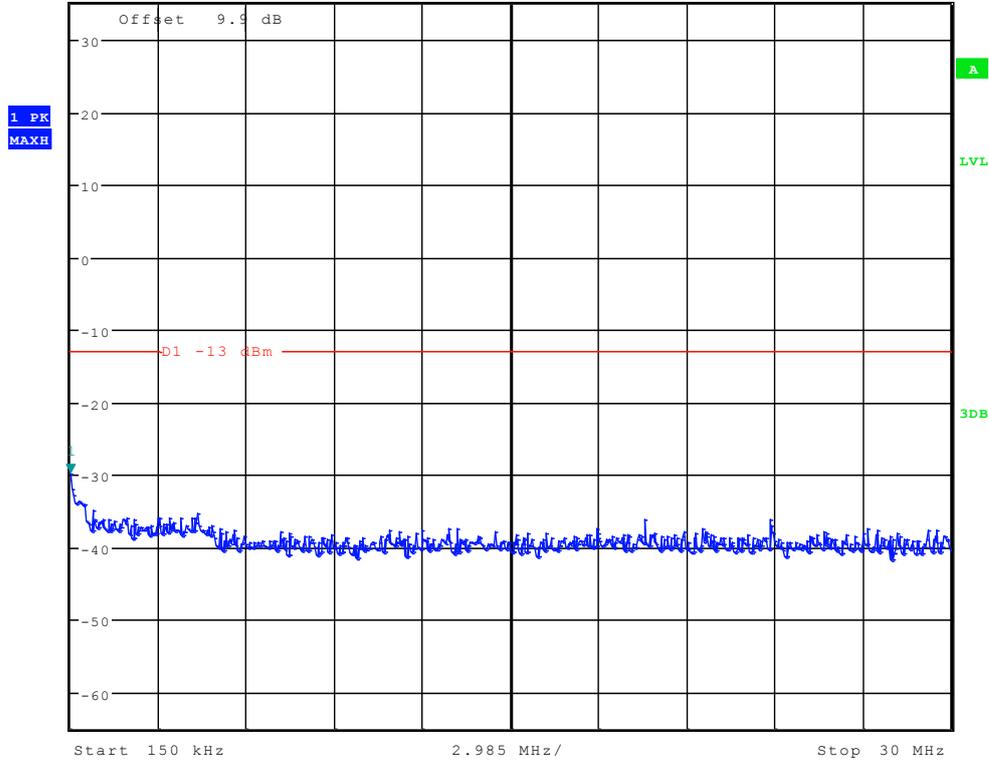

Date: 5.MAR.2012 00:23:51



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 16.57 dBm
Ref 35 dBm Att 50 dB SWT 100 ms 827.451923077 MHz

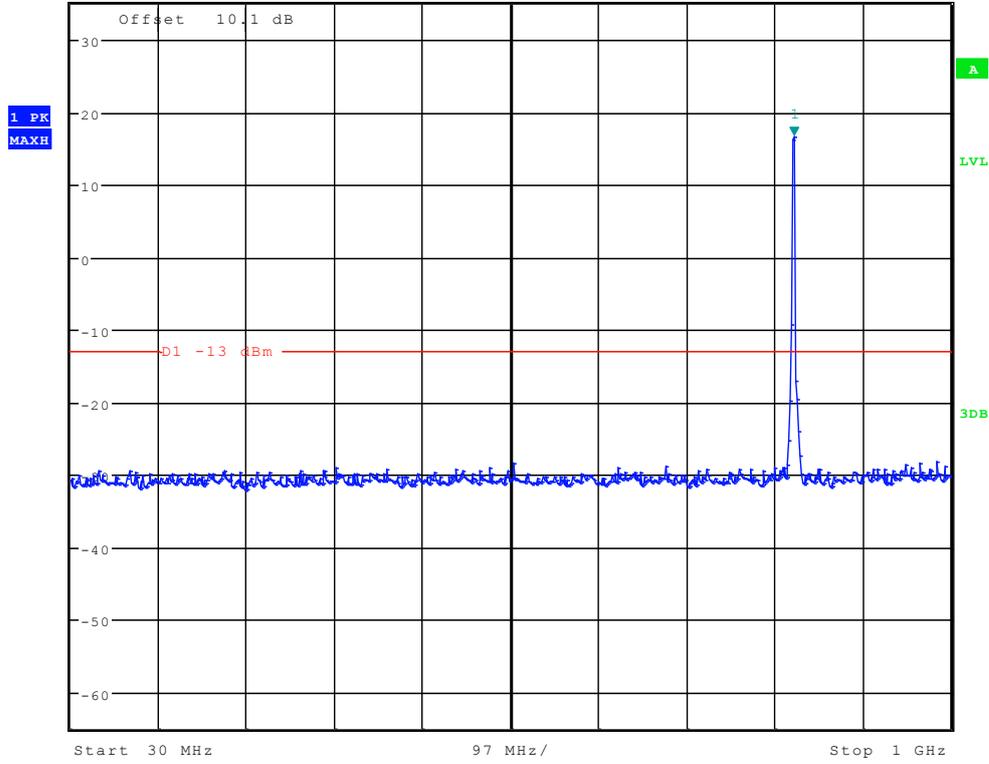


Date: 5.MAR.2012 00:24:35



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.48 dBm
2.431089744 GHz

Ref 35 dBm Att 50 dB SWT 70 ms

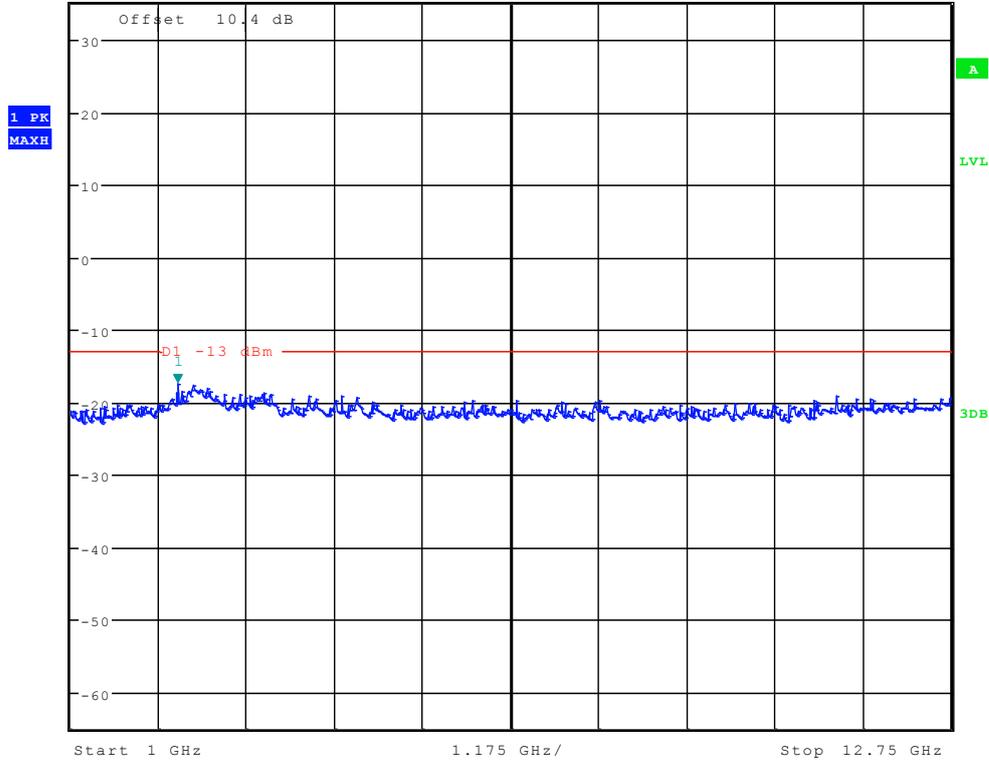


Date: 5.MAR.2012 00:25:19



Channel 4182




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -34.38 dBm
SWT 145 ms 9.225961538 kHz

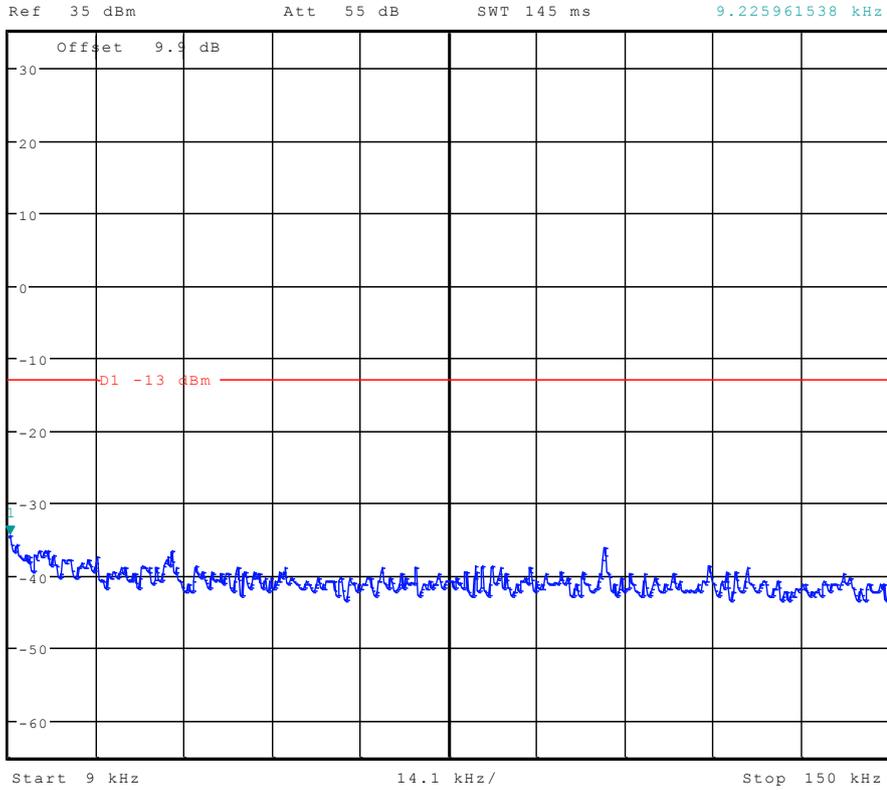

Date: 5.MAR.2012 00:23:22




Ref 35 dBm Att 55 dB SWT 300 ms 197.836538462 kHz
*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -28.75 dBm

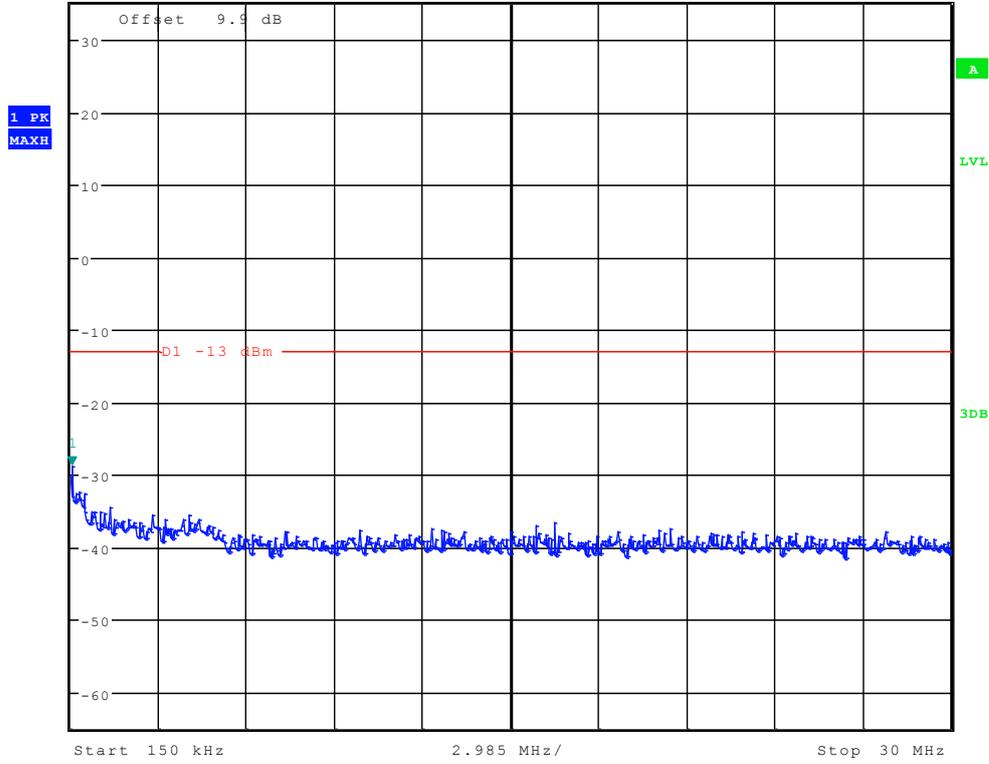

Date: 5.MAR.2012 00:24:05




Ref 35 dBm Att 50 dB SWT 100 ms 836.778846154 MHz
*RBW 100 kHz Marker 1 [T1] 16.48 dBm
*VBW 300 kHz

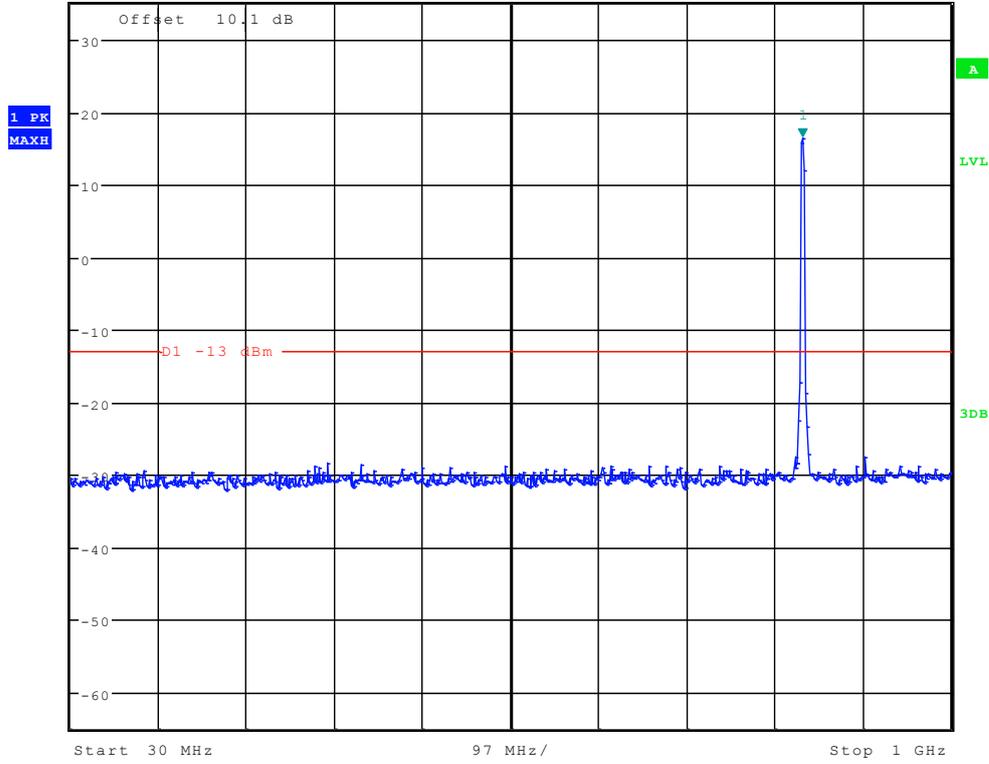

Date: 5.MAR.2012 00:24:49



* RBW 1 MHz Marker 1 [T1]
* VBW 3 MHz -17.20 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.638221154 GHz

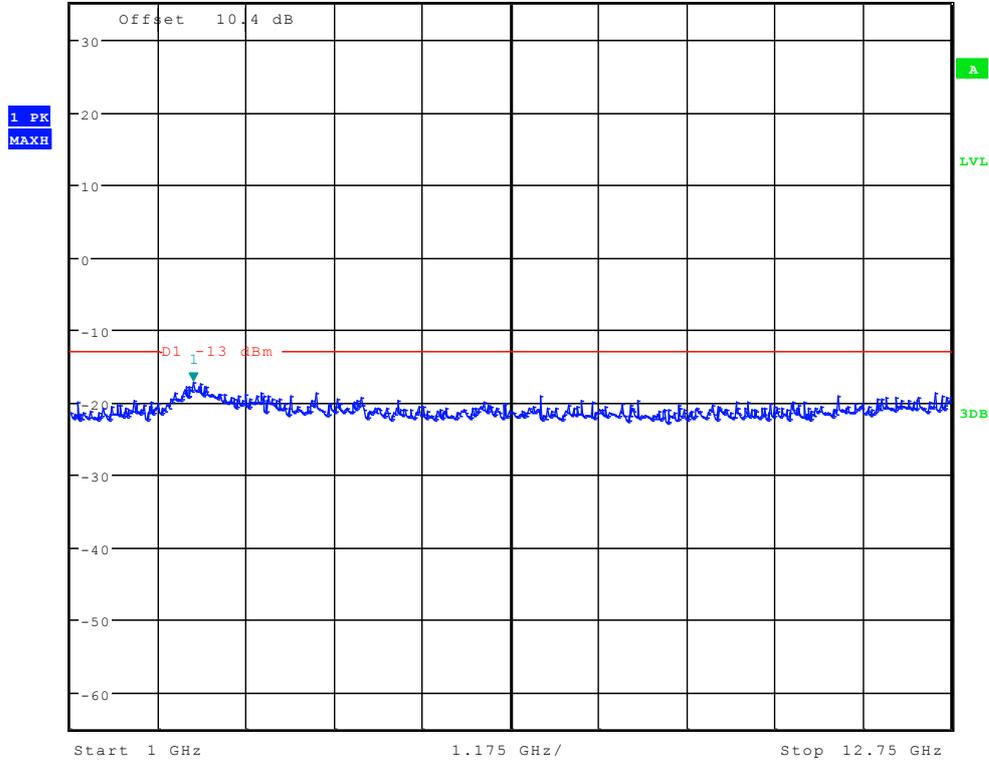


Date: 5.MAR.2012 00:25:33



Channel 4233




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -34.67 dBm
SWT 145 ms 9.225961538 kHz

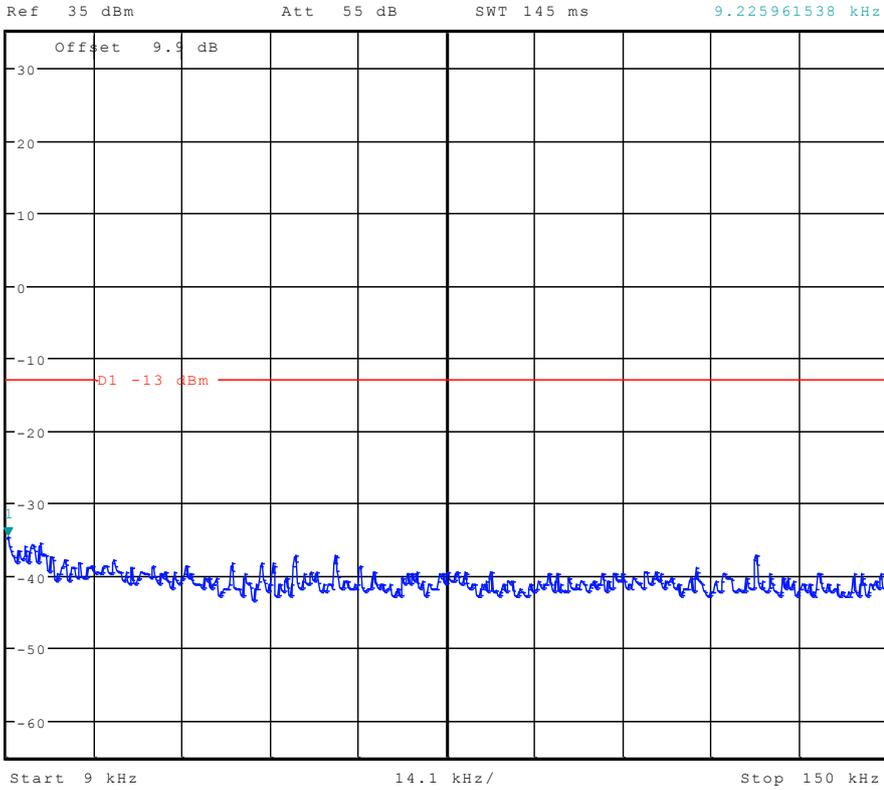

Date: 5.MAR.2012 00:23:36




*RBW 10 kHz Marker 1 [T1]
*VBW 30 kHz -30.70 dBm
Ref 35 dBm Att 55 dB SWT 300 ms 197.836538462 kHz

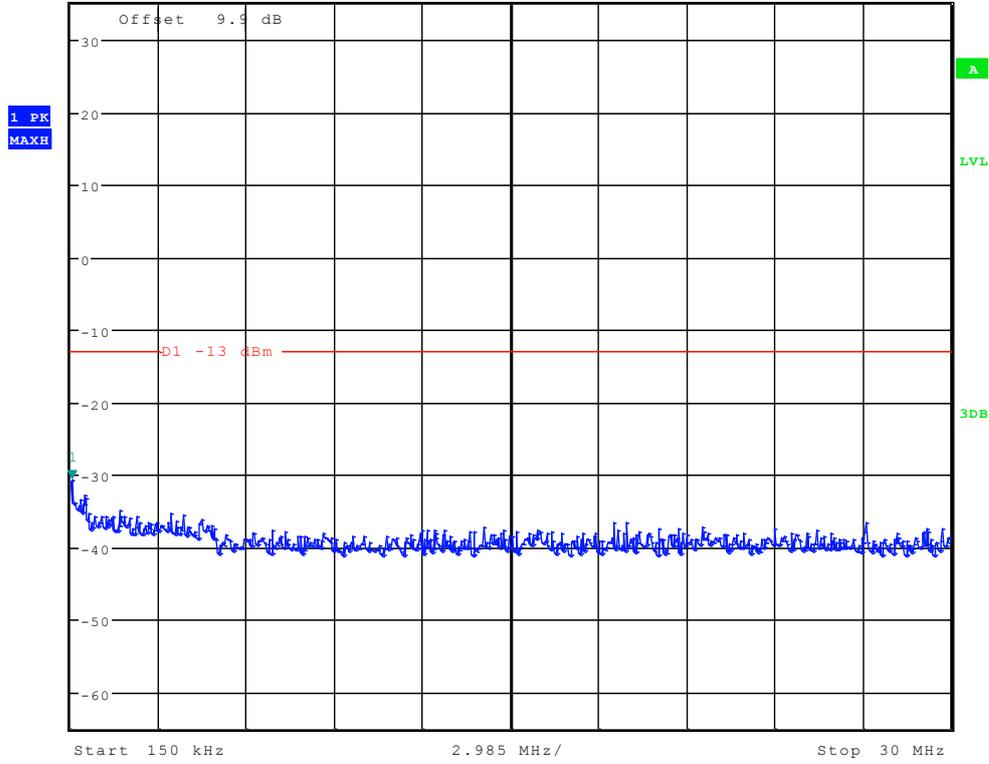

Date: 5.MAR.2012 00:24:20




Ref 35 dBm Att 50 dB SWT 100 ms 846.105769231 MHz
*RBW 100 kHz Marker 1 [T1] 17.17 dBm
*VBW 300 kHz

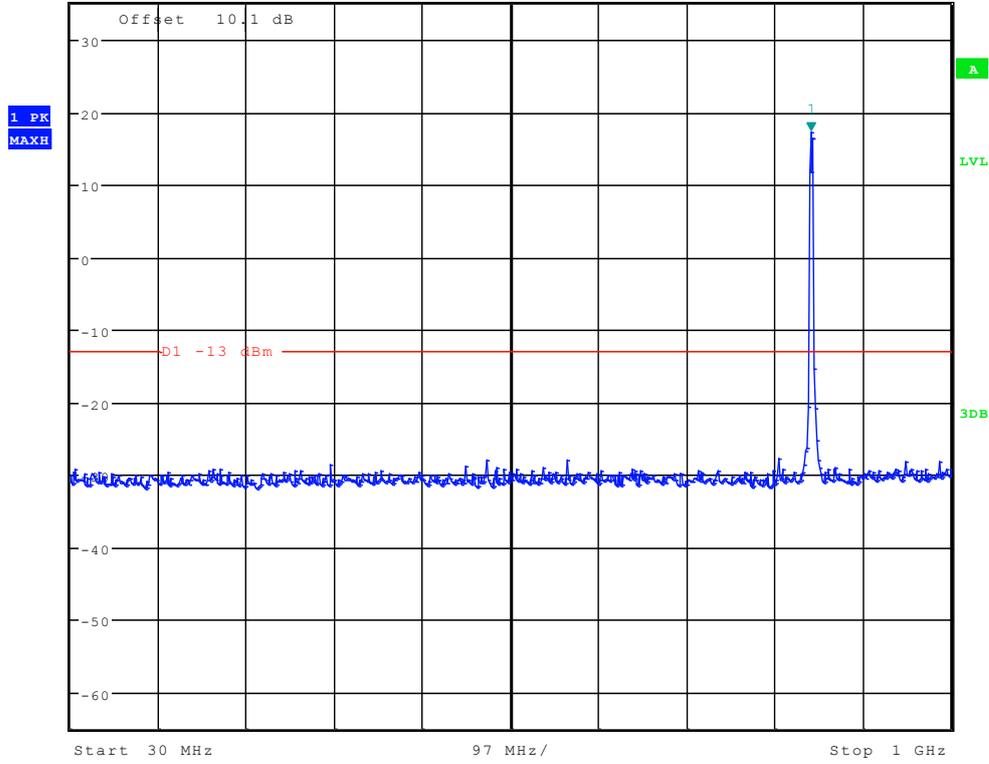

Date: 5.MAR.2012 00:25:04



* RBW 1 MHz Marker 1 [T1]
* VBW 3 MHz -16.78 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.788862179 GHz

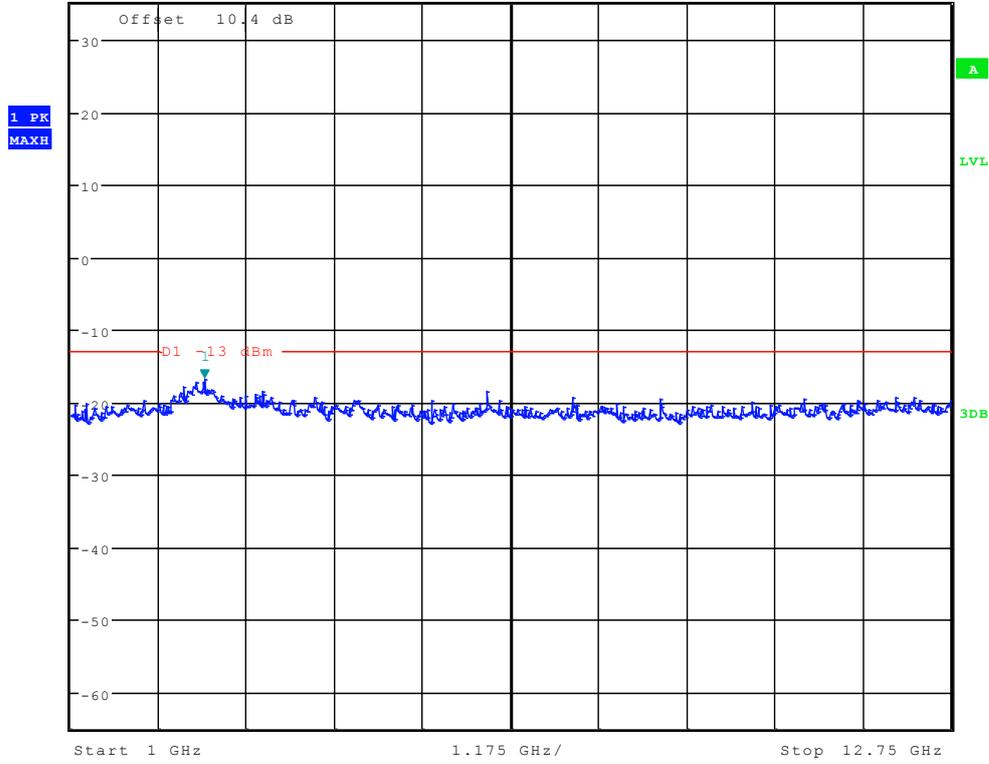

Date: 5.MAR.2012 00:25:48

-----The END-----



Appendix F


Radiated Spurious Emissions

According to FCC Part 2.1053 & Part22.917




GSM 850

Traffic Mode (9kHz-30MHz)

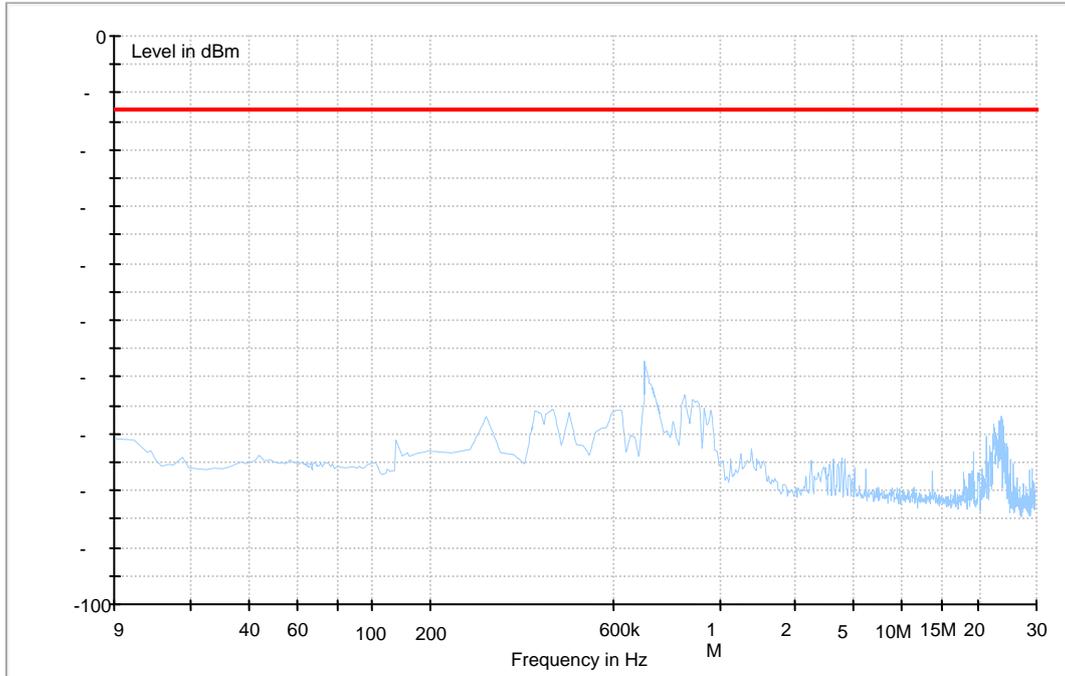




Traffic Mode (30MHz-3GHz)

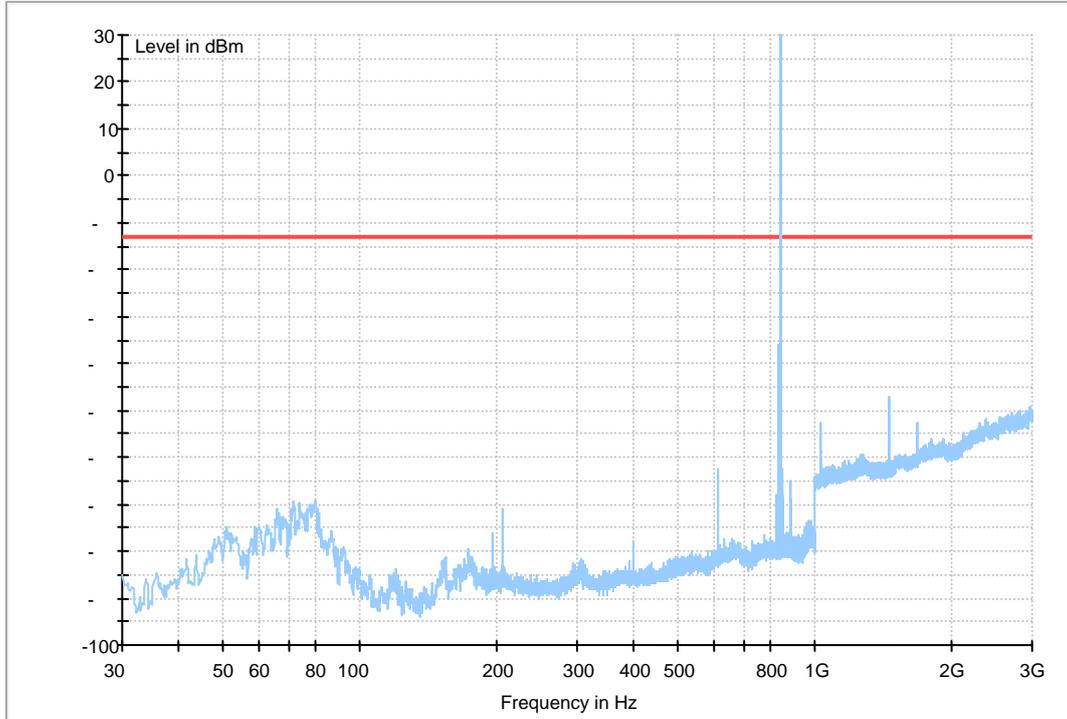




Traffic Mode (3GHz-18GHz)

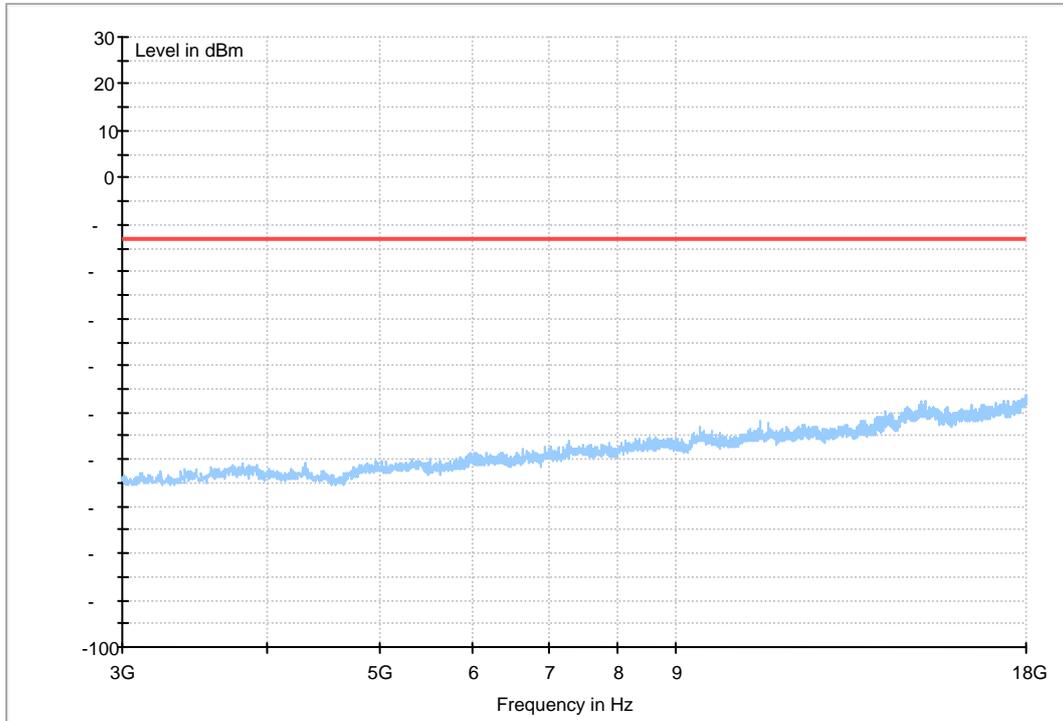




GPRS 850

Traffic Mode (9kHz-30MHz)

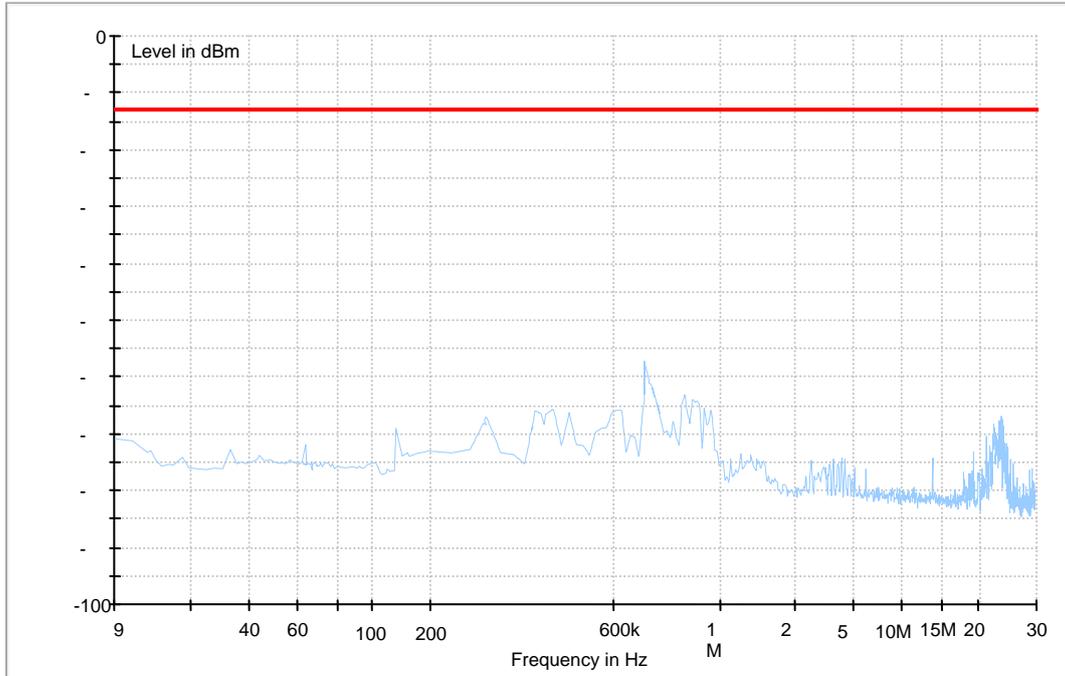




Traffic Mode (30MHz-3GHz)

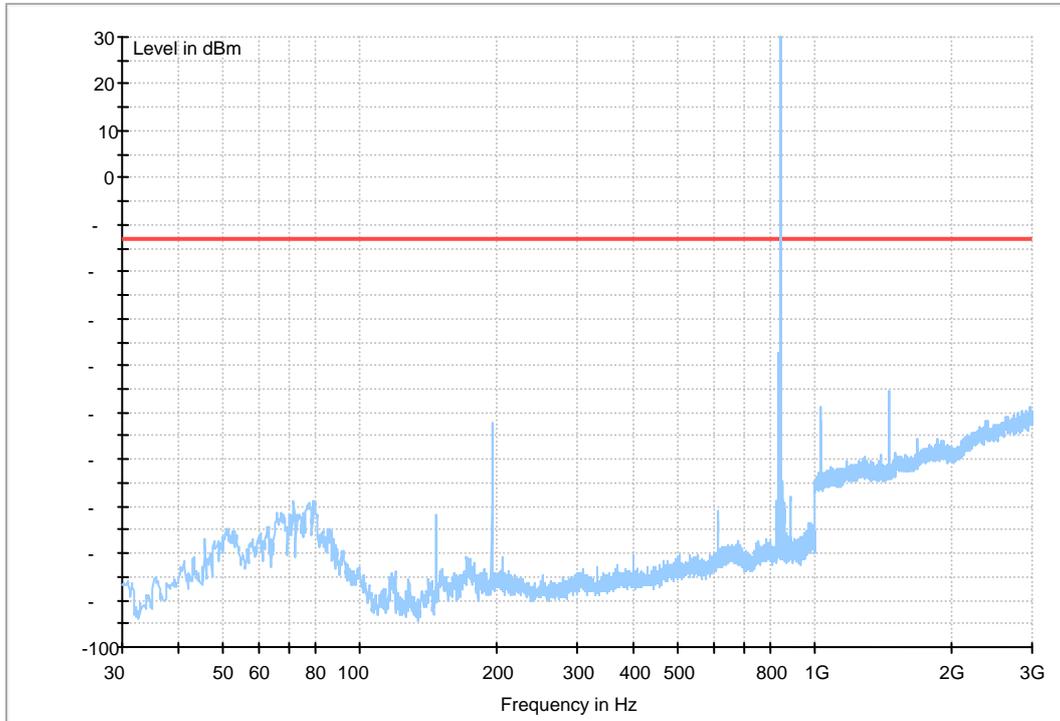




Traffic Mode (3GHz-18GHz)

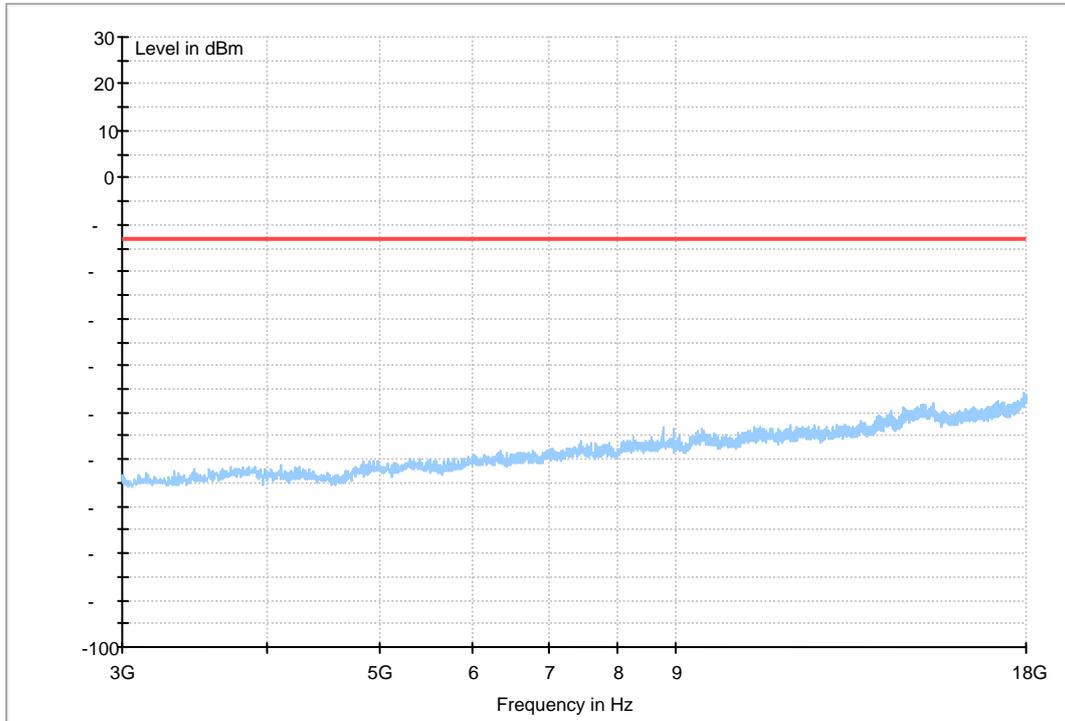




EDGE 850

Traffic Mode (9kHz-30MHz)

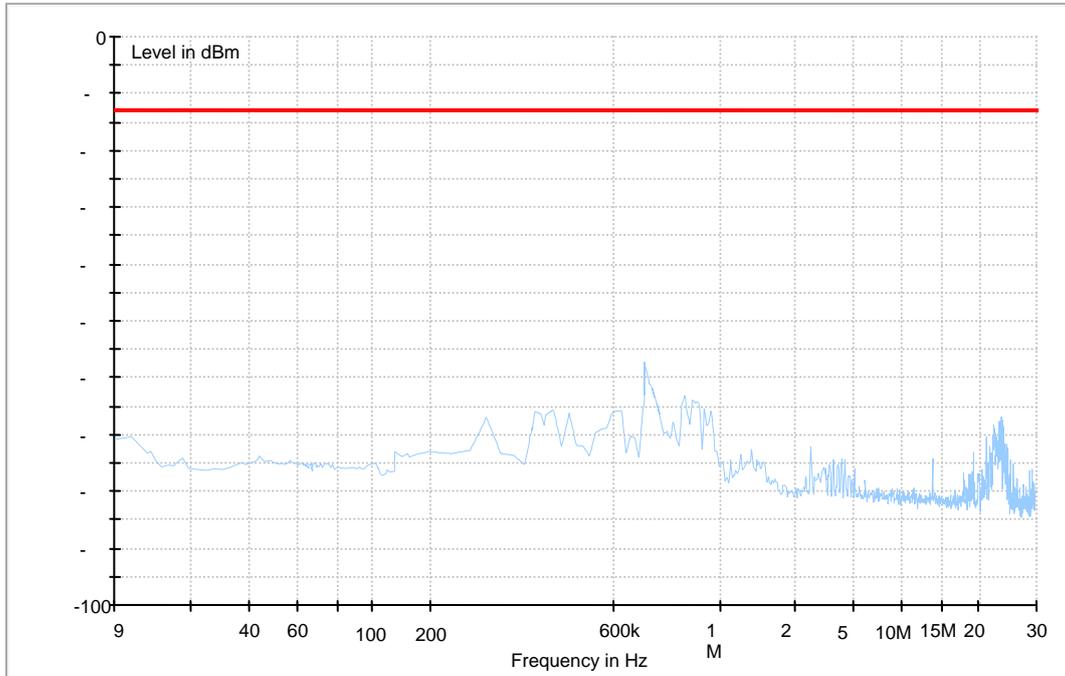




Traffic Mode (30MHz-3GHz)

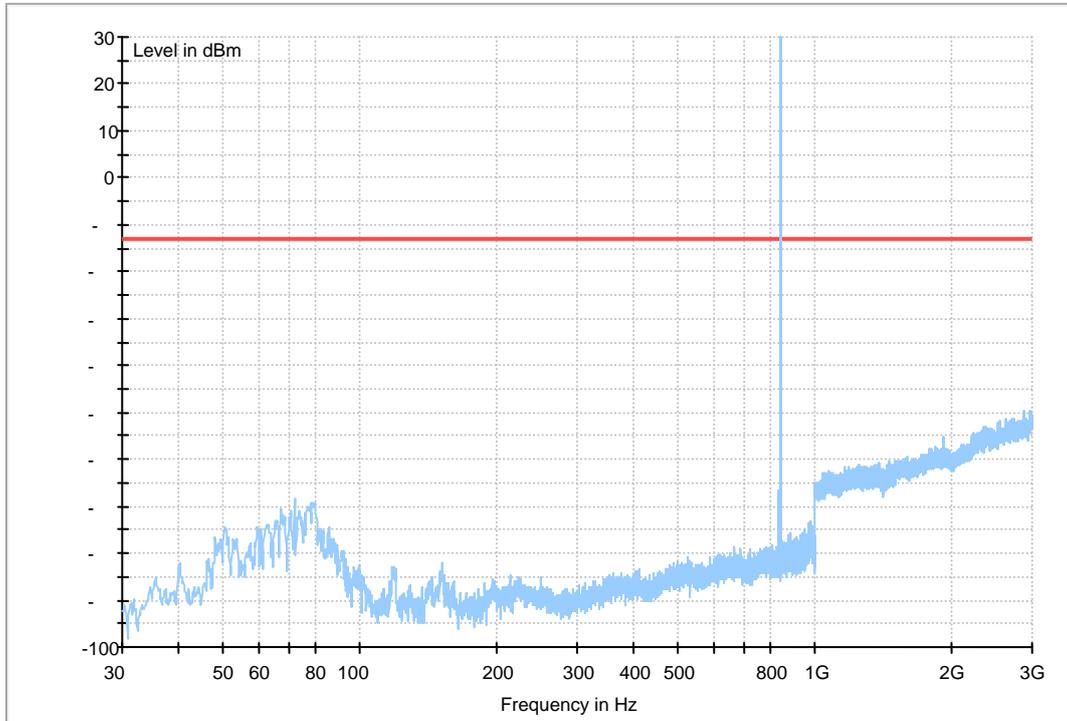




Traffic Mode (3GHz-18GHz)

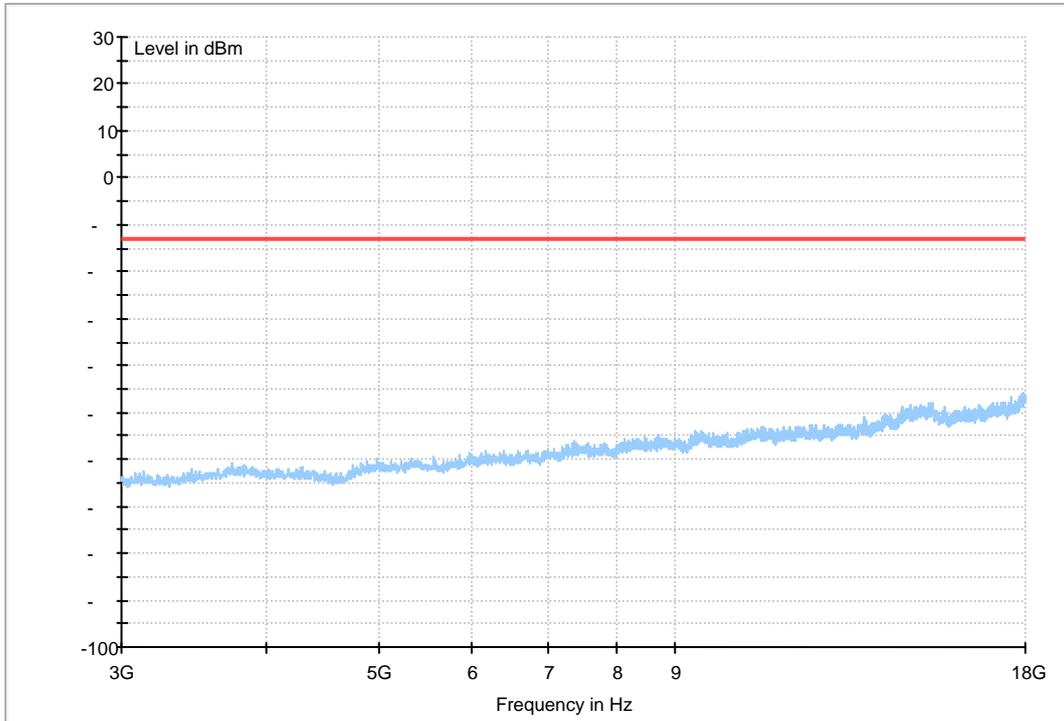




WCDMA 850

Traffic Mode (9kHz-30MHz)

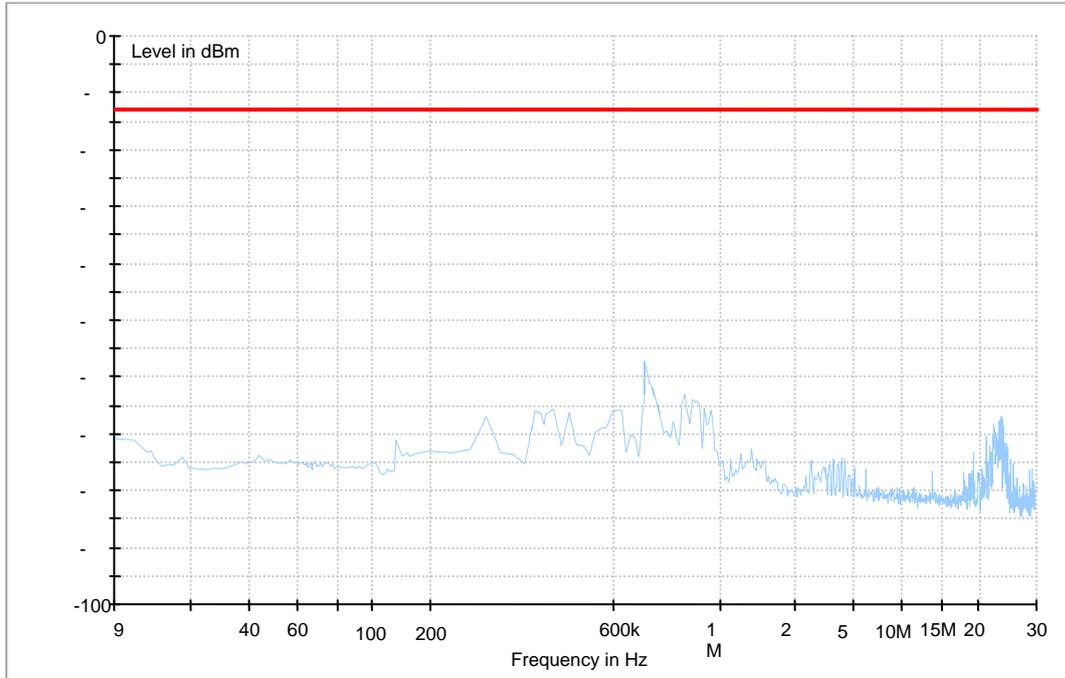




Traffic Mode (30MHz-3GHz)

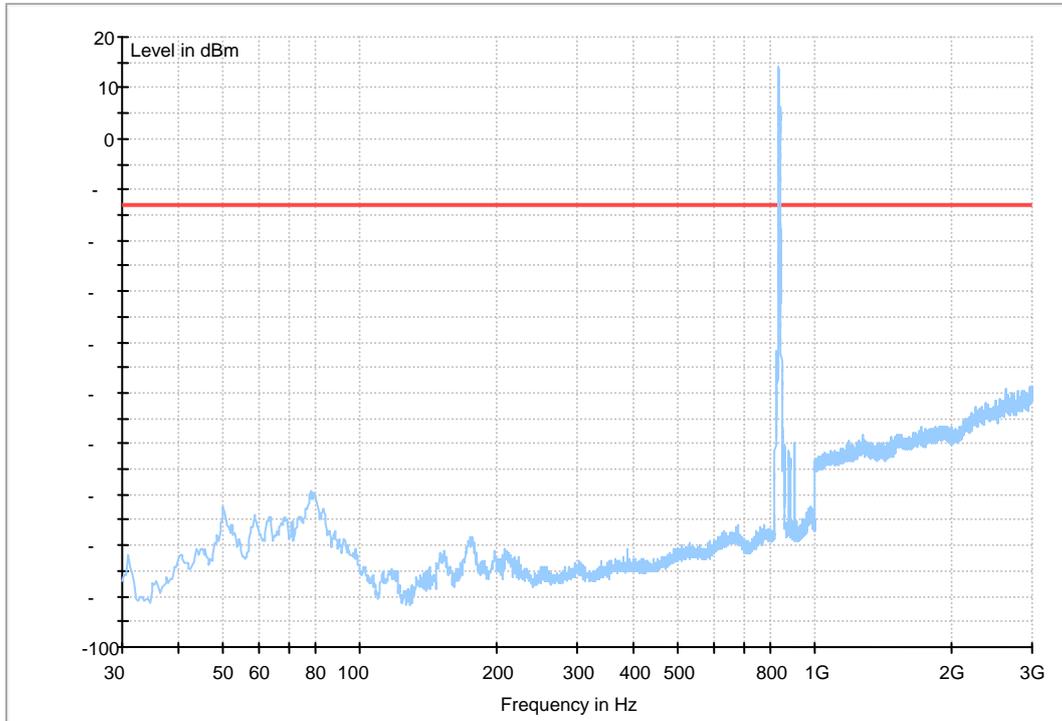




Traffic Mode (3GHz-18GHz)

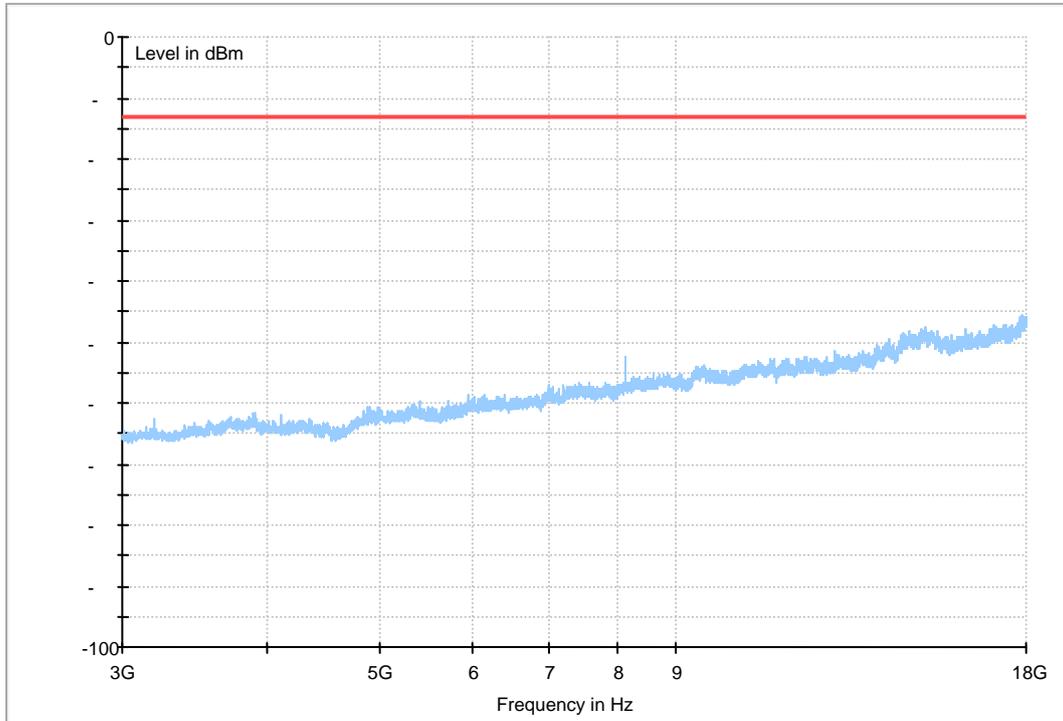




HSDPA 850

Traffic Mode (9kHz-30MHz)

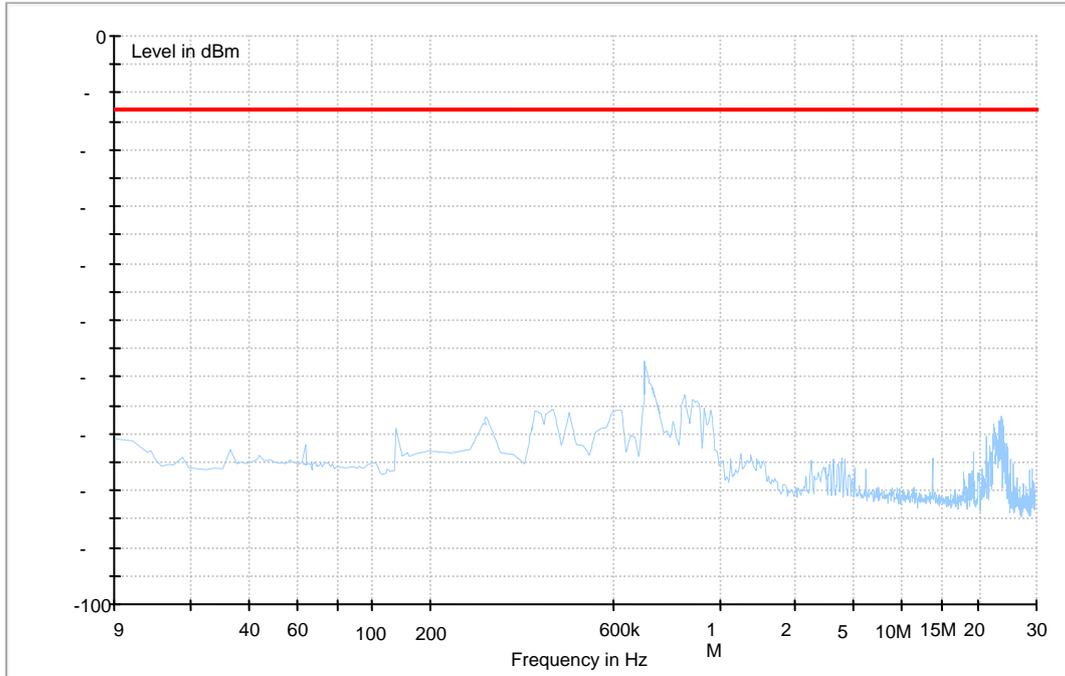




Traffic Mode (30MHz-3GHz)

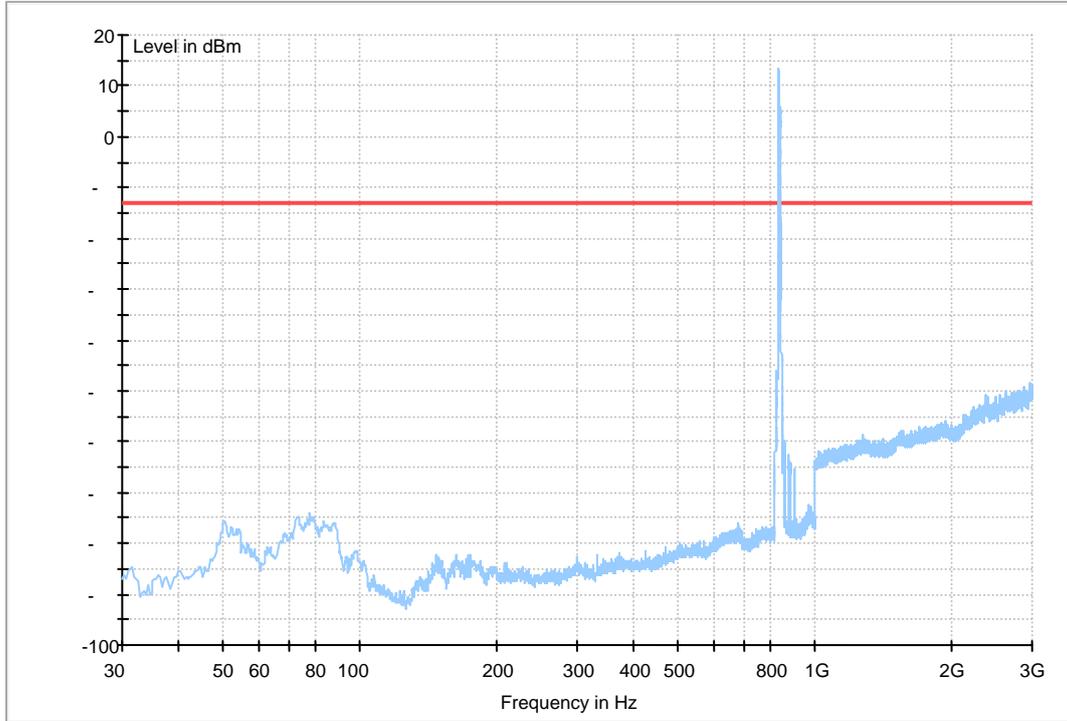




Traffic Mode (3GHz-18GHz)

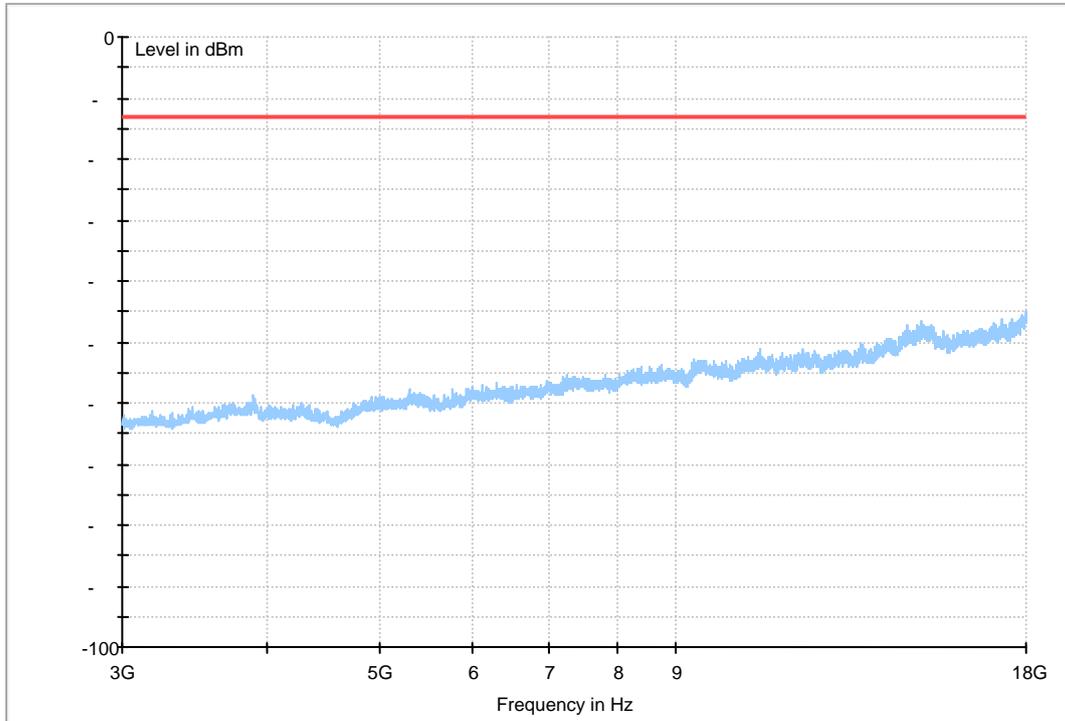




HSUPA 850

Traffic Mode (9kHz-30MHz)

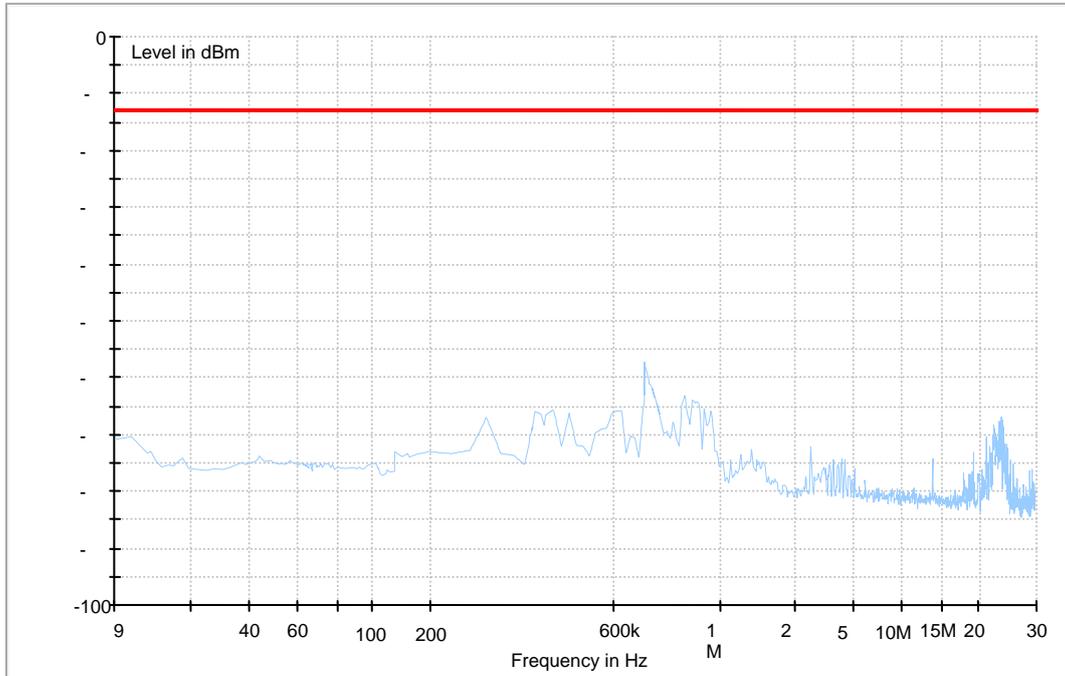




Traffic Mode (30MHz-3GHz)

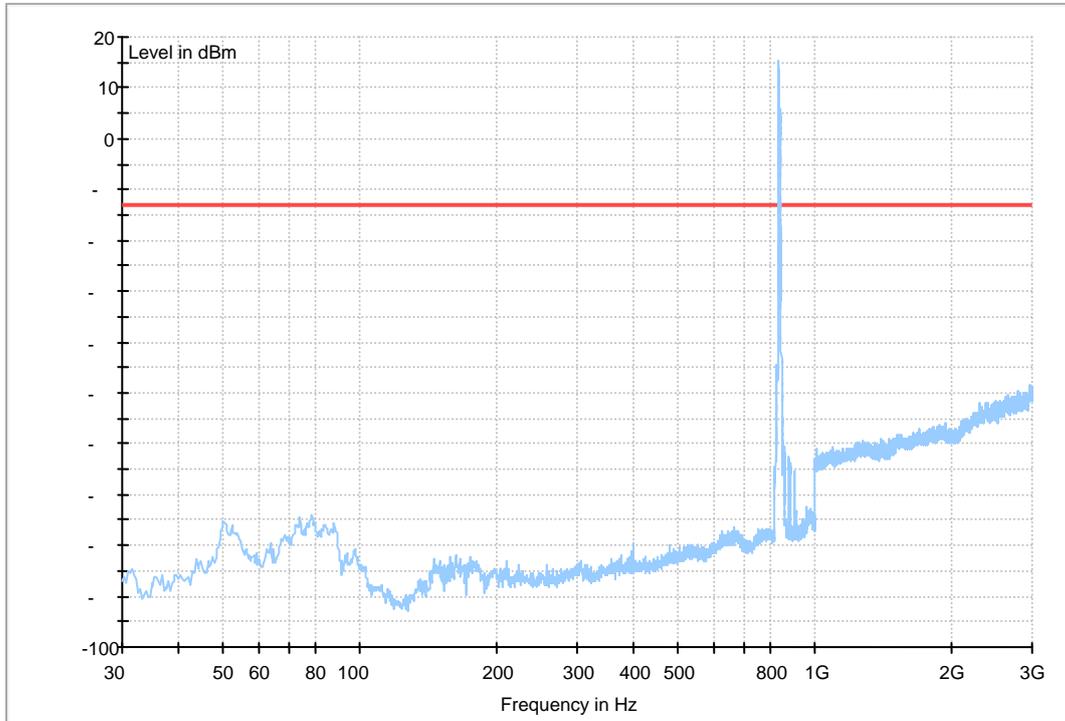



Traffic Mode (3GHz-18GHz)

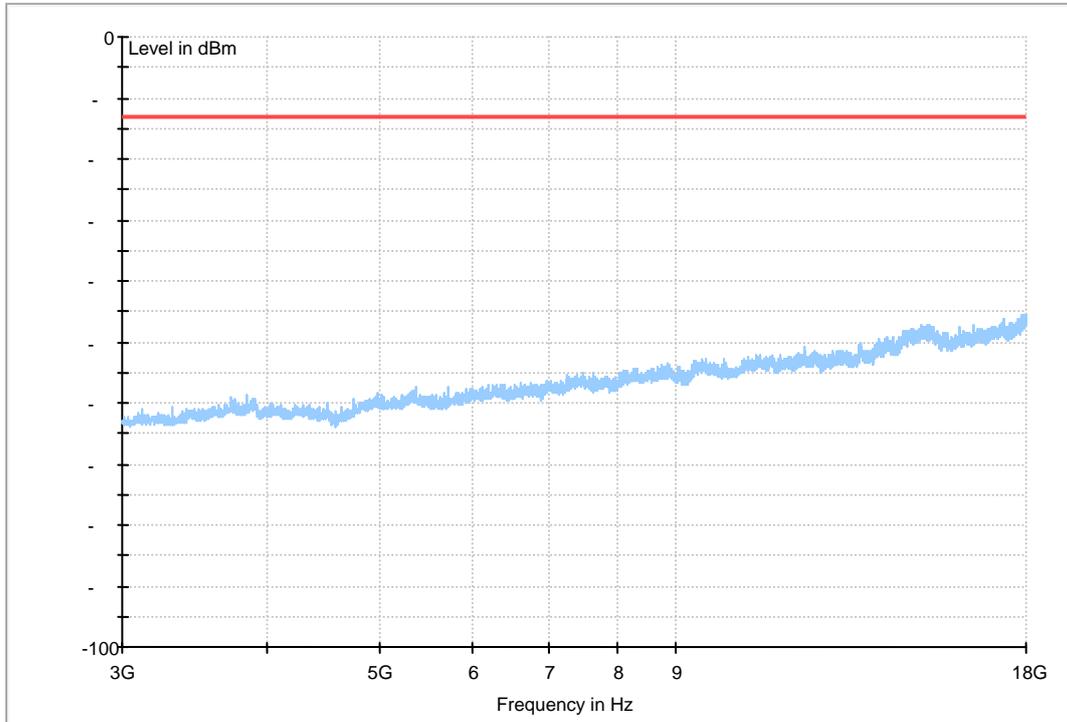

-----The END-----



Appendix G

Frequency Stability According to FCC Part 2.1055& Part 22.355



Frequency Error vs. Temperature:

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	13	0.015532	---	±2.5	Pass
			-20 °C	-10	-0.011947	---	±2.5	Pass
			-10 °C	15	0.017921	---	±2.5	Pass
			0 °C	-16	-0.019116	---	±2.5	Pass
			10 °C	-18	-0.021505	---	±2.5	Pass
			20 °C	12	0.014337	---	±2.5	Pass
			30 °C	-16	-0.019116	---	±2.5	Pass
			40 °C	13	0.015532	---	±2.5	Pass
			50 °C	-19	-0.022700	---	±2.5	Pass
TM 2	M	VN	-30 °C	-12	-0.014337	---	±2.5	Pass
			-20 °C	14	0.016726	---	±2.5	Pass
			-10 °C	-13	-0.015532	---	±2.5	Pass
			0 °C	19	0.022700	---	±2.5	Pass
			10 °C	-10	-0.011947	---	±2.5	Pass
			20 °C	-12	-0.014337	---	±2.5	Pass
			30 °C	16	0.019116	---	±2.5	Pass
			40 °C	-17	-0.020311	---	±2.5	Pass
			50 °C	11	0.013142	---	±2.5	Pass
TM 3	M	VN	-30 °C	-16	-0.019130	---	±2.5	Pass
			-20 °C	11	0.013152	---	±2.5	Pass
			-10 °C	-13	-0.015543	---	±2.5	Pass
			0 °C	12	0.014347	---	±2.5	Pass
			10 °C	-18	-0.021521	---	±2.5	Pass
			20 °C	-17	-0.020325	---	±2.5	Pass
			30 °C	-12	-0.014347	---	±2.5	Pass
			40 °C	13	0.015543	---	±2.5	Pass
			50 °C	14	0.016738	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	20 °C	VL	17	0.020311	---	±2.5	Pass
			VN	-16	-0.019116	---	±2.5	Pass
			VH	-9	-0.010753	---	±2.5	Pass
TM 2	M	20 °C	VL	11	0.013142	---	±2.5	Pass
			VN	-15	-0.017921	---	±2.5	Pass
			VH	12	0.014337	---	±2.5	Pass
TM 3	M	20 °C	VL	-17	-0.020325	---	±2.5	Pass
			VN	17	0.020325	---	±2.5	Pass
			VH	-16	-0.019130	---	±2.5	Pass

-----The END-----