



No.: RZA2008-1100FCC



OET 65

TEST REPORT

Test name	Electromagnetic Field (Specific Absorption Rate)
Product	HSDPA /UMTS/GPRS/GSM/ Mobile Phone with Bluetooth
FCC ID	QISV830I
Model	V830i/Vodafone 830i
Client	Huawei Technologies Co., Ltd.

TA Technology (Shanghai) Co., Ltd.



GENERAL TERMS

1. The test report is invalid if not marked with “exclusive stamp for the data report” or the stamp of the TA.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of TA.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center within 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of TA.

Address: Room4, No.399, Cailun Rd, Zhangjiang Hi-Tech Park, Pudong Shanghai, China

Post code: 201203

Telephone: +86-021-50791141/2/3

Fax : +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: service@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2008-1100FCC

Page 3 of 169

GENERAL SUMMARY

Product	HSDPA /UMTS/GPRS/GSM/ Mobile Phone with Bluetooth	Model	V830i/Vodafone 830i
Client	Huawei Technologies Co., Ltd.	Type of test	Entrusted
Manufacturer	Huawei Technologies Co., Ltd.	Arrival Date of sample	August 14 th , 2008
Place of sampling	(Blank)	Carrier of the samples	Yan Xie
Quantity of the samples	One	Date of product	(Blank)
Base of the samples	(Blank)	Items of test	SAR
Series number	J67NAD1880400050		
Standard(s)	<p>EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.</p> <p>BS EN 62209-1:2006: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)</p> <p>ANSI C95.1–2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-2 : Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the body.</p>		
Conclusion	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: September 3rd, 2008</p>		
Comment	The test result only responds to the measured sample.		

Approved by

杨伟中

Weizhong Yang

Revised by

凌敏宝

Minbao Ling

Performed by

石峰

feng Shi

TABLE OF CONTENT

1. COMPETENCE AND WARRANTIES.....	6
2. GENERAL CONDITIONS.....	6
3. DESCRIPTION OF EUT	7
3.1. ADDRESSING INFORMATION RELATED TO EUT	7
3.2. CONSTITUENTS OF EUT	7
3.3. GENERAL DESCRIPTION	7
3.4. TEST ITEM	8
4. OPERATIONAL CONDITIONS DURING TEST	9
4.1. GENERAL DESCRIPTION OF TEST PROCEDURES	9
4.2. GSM TEST CONFIGURATION.....	9
5. SAR MEASUREMENTS SYSTEM CONFIGURATION	10
5.1. SAR MEASUREMENT SET-UP.....	10
5.2. DASY4 E-FIELD PROBE SYSTEM	11
5.2.1. ET3DV6 Probe Specification	11
5.2.2. E-field Probe Calibration.....	12
5.3. OTHER TEST EQUIPMENT	12
5.3.1. Device Holder for Transmitters	12
5.3.2. Phantom	13
5.4. SCANNING PROCEDURE.....	14
5.5. DATA STORAGE AND EVALUATION.....	15
5.5.1. Data Storage.....	15
5.5.2. Data Evaluation by SEMCAD	15
5.6. SYSTEM SPECIFICATIONS	17
5.6.1. Robotic System Specifications.....	17
5.7. SYSTEM VALIDATION.....	18
5.8. EQUIVALENT TISSUES.....	19
6. LABORATORY ENVIRONMENT.....	19
7. CHARACTERISTICS OF THE TEST	20
7.1. APPLICABLE LIMIT REGULATIONS	20
7.2. APPLICABLE MEASUREMENT STANDARDS.....	20
8. CONDUCTED OUTPUT POWER MEASUREMENT	21
8.1. SUMMARY.....	21
8.2. POWER DRIFT.....	21
8.3. CONDUCTED POWER.....	21
8.3.1. Measurement Methods	21
8.3.2. Measurement result	21
9. TEST RESULTS.....	22

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1100FCC

Page 5 of 169

9.1.	DIELECTRIC PERFORMANCE	22
9.2.	SYSTEM VALIDATION RESULTS	22
9.3.	SUMMARY OF MEASUREMENT RESULTS.....	23
9.4.	CONCLUSION	26
10.	MEASUREMENT UNCERTAINTY.....	27
11.	MAIN TEST INSTRUMENTS.....	28
12.	TEST PERIOD.....	28
13.	TEST LOCATION	28
ANNEX A : MEASUREMENT PROCESS		29
ANNEX B : TEST LAYOUT		30
ANNEX C : GRAPH RESULTS		32
ANNEX D : SYSTEM VALIDATION RESULTS		136
ANNEX E : PROBE CALIBRATION CERTIFICATE		137
ANNEX F : D1900V2 DIPOLE CALIBRATION CERTIFICATE.....		146
ANNEX G : DAE4 CALIBRATION CERTIFICATE.....		155
ANNEX H : THE EUT APPEARANCES AND TEST CONFIGURATION.....		160

1. COMPETENCE AND WARRANTIES

TA Technology (Shanghai) Co., Ltd. is a test laboratory competent to carry out the tests described in this test report.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

2. GENERAL CONDITIONS

This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This document is only valid if complete; no partial reproduction can be made without written approval of **TA Technology (Shanghai) Co., Ltd.**

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

TA Technology (Shanghai) Co., Ltd.

Test Report

No. RZA2008-1100FCC

Page 7 of 169

3. DESCRIPTION OF EUT

3.1. Addressing Information Related to EUT

Table 1: Applicant (The Client)

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

Table 2: Manufacturer

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

3.2. Constituents of EUT

Table 3: Constituents of Samples

Description	Model	Serial Number	Manufacturer
Handset	V830i/Vodafone 830i	J67NAD1880400050	Huawei Technologies Co.,Ltd.
Lithium Battery	HB5B2H	YAC8426HI1601859	FMT Electronics Co.,Ltd.
AC/DC Adapter	TPCA-050065AY	TPI732800288	TECH-POWER INTERNATIONAL CO.,LTD
	CHG5065-3C	HKY7C2200056	Shen Zhen Huntkey Power Technology Co.,Ltd
	HS-050040E2	HKA812200034	Huawei Technologies Co., Ltd.

Note:

The EUT appearances see ANNEXH.

3.3. General Description

Equipment Under Test (EUT) is a model of HSDPA /UMTS/GPRS/GSM/ Mobile Phone with internal antenna. It consists of Handset, Lithium Battery and AC/DC Adapter The detail about Mobile phone, Lithium Battery and AC/DC Adapter is in Table 3. SAR is tested for GSM 1900. It has the GPRS function, the GPRS class is 10.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1100FCC

Page 8 of 169

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

3.4. Test item

Table 4: Test item of EUT

Device type :	portable device	
Exposure category:	uncontrolled environment / general population	
Device operating configurations :		
Operating mode(s):	GSM900; GSM1800; GSM1900; (tested) WCDMA Band I; WCDMA Band VIII;	
Modulation:	GMSK,	
GPRS mobile station class :	A	
GPRS multislots class :	10	
Maximum no.of timeslots in uplink:	2	
Standard output power	(33dBm,2W)GSM900; (30dBm,1W)GSM1800; (30dBm,1W)GSM1900; (tested) (24dBm,0.25W)WCDMA Band I (24dBm,0.25W)WCDMA Band VIII	
Operating frequency range(s)	transmitter frequency range	receiver frequency range
GSM900:	880.2 MHz ~ 914.8 MHz	925.2 MHz ~ 959.8 MHz
GSM1800:	1710.2 MHz ~ 1784.8 MHz	1805.2 MHz ~ 1879.8 MHz
GSM1900: (tested)	1850.2 MHz ~ 19.9.8 MHz	1930.2 MHz ~ 1989.8 MHz
WCDMA Band I:	1922.4 MHz ~ 1977.6 MHz	2112.4 MHz ~ 2167.6 MHz
WCDMA Band VIII:	882.4 MHz ~ 912.6 MHz	927.4 MHz ~ 957.6 MHz
Power class	GSM 900: 4, tested with power level 5	
	GSM 1800: 1, tested with power level 0	
	GSM 1900: 1, tested with power level 0	
	WCDMA Band I: 3, tested with maximum output power	
	WCDMA Band VIII: 3, tested with maximum output power	
Test channel (Low –Middle –High)	975 -38 – 124 (GSM900) 512 - 698 – 885 (GSM1800) 512 - 661 – 810 (GSM1900) (tested) 9612 -9750 -9888 (WCDMA Band I) 2712 -2787 -2863 (WCDMA Band VIII)	
Hardware version:	Ver.D	
Software version:	U7300V100R001ENG02B115	
Antenna type:	integrated antenna	

4. OPERATIONAL CONDITIONS DURING TEST

4.1. General description of test procedures

The EUT is tested using a E5515C communications tester as controller unit to set test channels and maximum output power to the EUT, as well as for measuring the conducted peak power. Test positions as described in ANNEX H are in accordance with the specified test standard. Conducted output power was measured using an integrated RF connector and attached RF cable.

To make the mobile emits maximum power; the output power of E5515C would be adjusted to minimum power with the sensitivity of the mobile station to build steady connection with mobile station. The power level control parameter "0" of GSM1900 .It means that requires mobile station to emit with maximum power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

4.2. GSM Test Configuration

SAR tests for GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to "0" in head SAR and body SAR of GSM1900,

The test in the band of GSM 1900 is performed in the mode of speech transfer function and GPRS. And since the GPRS class is 10 for this EUT, it has at most 2 timeslots in uplink.

5. SAR MEASUREMENTS SYSTEM CONFIGURATION

5.1. SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick) and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2003 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, meCHanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

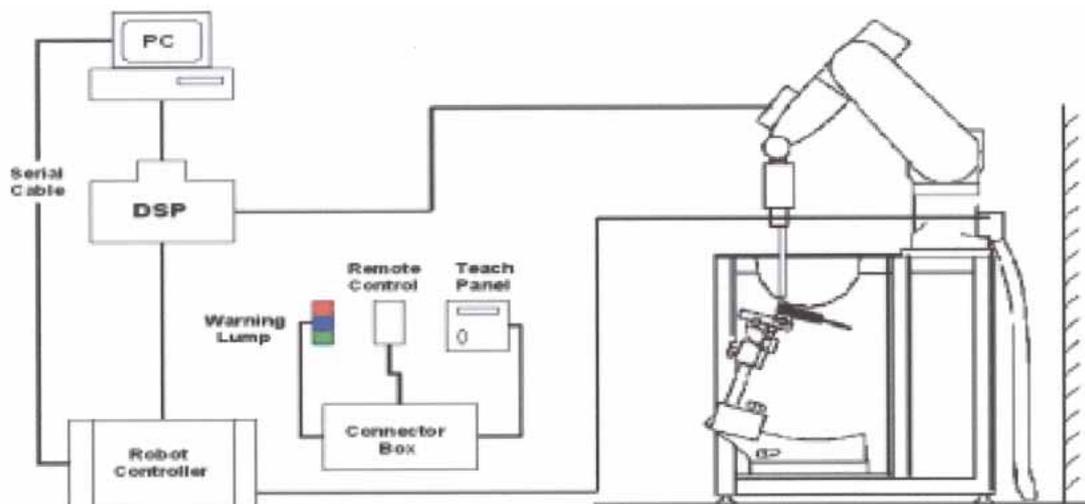


Figure 1. SAR Lab Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

5.2. Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

5.2.1. ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System (ET3DV6 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 900MHz, 1750MHz, 1950MHz and 2450MHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to 2.5 GHz; Linearity: $\pm 0.2\text{ dB}$ (30 MHz to 2.5 GHz)
Directivity	$\pm 0.2\text{ dB}$ in brain tissue (rotation around probe axis) $\pm 0.4\text{ dB}$ in brain tissue (rotation around probe axis)
Dynamic Range	5u W/g to > 100mW/g; Linearity: $\pm 0.2\text{ dB}$
Surface Detection	$\pm 0.2\text{ mm}$ repeatability in air and clear liquids over diffuse reflecting surface
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 2.5GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

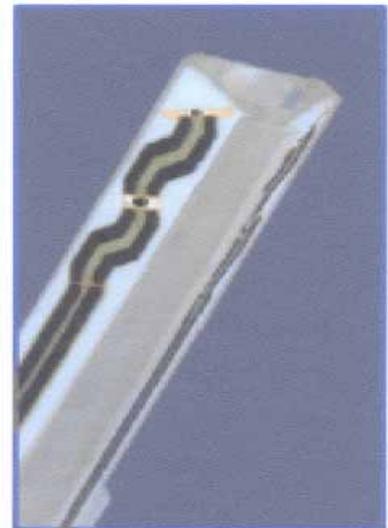


Figure 2. ET3DV6 E-field Probe

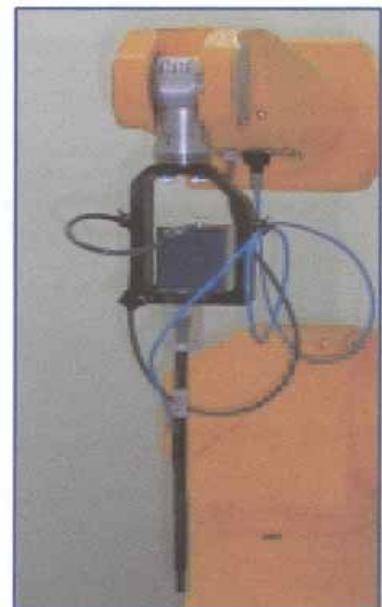


Figure 3. ET3DV6 E-field probe

5.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test Chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

5.3. Other Test Equipment

5.3.1. Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

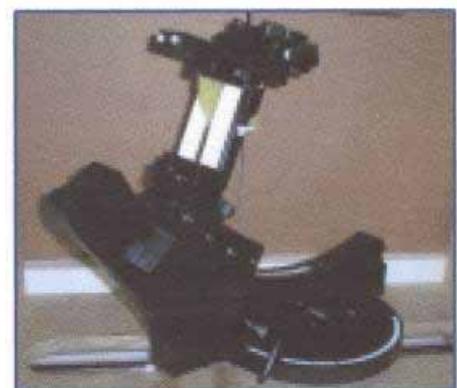


Figure 4. Device Holder

5.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5. Generic Twin Phantom

5.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process.
They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary $\max \pm 5\%$.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The "area scan" measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.
- A "7x7x7 zoom scan" measures the field in a volume around the 2D peak SAR value acquired in the previous "coarse" scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5mm in x and y-direction and 5 mm in z-direction. DASY4 is also able to perform repeated zoom scans if more than 1 peak is found during area scan.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps.

5.5. Data Storage and Evaluation

5.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai ₀ , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1100FCC

Page 16 of 169

peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

5.6. System Specifications

5.6.1. Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ±0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2003

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info. Optical uplink for commands and clock.

5.7. System validation

System validation is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the validation to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

Validation results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System validation is performed regularly on all frequency bands where tests are performed with the DASY 4 system. Results are stored to have a long time overview of system performance and are shown in EN test reports at request.

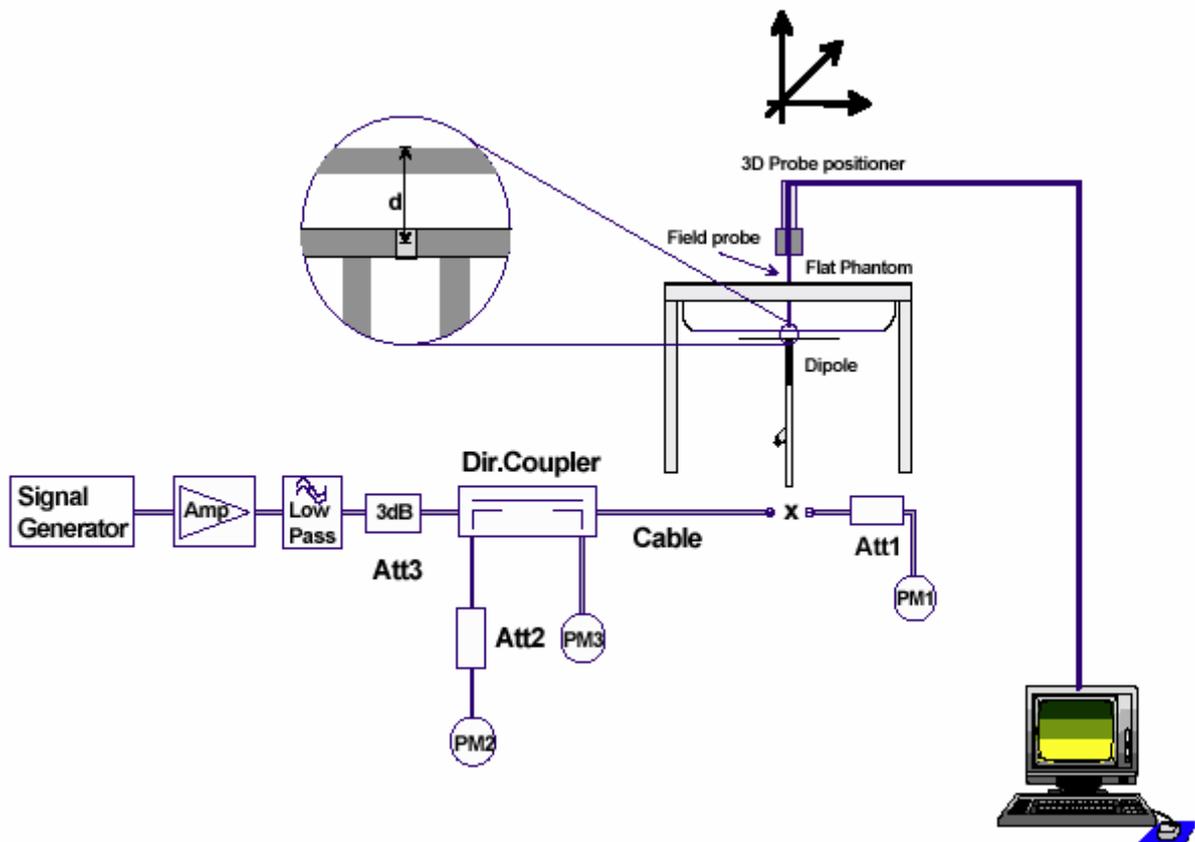


Figure 6. System validation Set-up

5.8. Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt, Preventol, Glycol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 5 and Table 6 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

Table 5: Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

Table 6: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)1900MHz
Water	69.91
Glycol	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

6. LABORATORY ENVIRONMENT

Table 7: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7. CHARACTERISTICS OF THE TEST

7.1. Applicable Limit Regulations

EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of 2.0 W/kg as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

ANSI C95.1–2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

7.2. Applicable Measurement Standards

BS EN 62209-1:2006: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-2: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the body.

8. CONDUCTED OUTPUT POWER MEASUREMENT

8.1. Summary

During the process of testing, the EUT was controlled via Digital Radio Communication tester to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

8.2. Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 12 to Table 15 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 0.21dB.

8.3. Conducted Power

8.3.1. Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured. The measurements were done both before and after SAR tests for each test band.

8.3.2. Measurement result

Table 8: Conducted Power Measurement Results

GSM 1900	Conducted Power		
	Channel 512	Channel 661	Channel 810
	1850.2MHz	1880MHz	1909.8MHz
Before Test (dBm)	29.67	29.71	29.61
After Test (dBm)	29.64	29.74	29.62
GSM 1900+GPRS	Conducted Power		
	Channel 512	Channel 661	Channel 810
	1850.2MHz	1880MHz	1909.8MHz
Before Test (dBm)	29.57	29.58	29.65
After Test (dBm)	29.54	29.61	29.59

9. TEST RESULTS

9.1. Dielectric Performance

Table 9: Dielectric Performance of Head Tissue Simulating Liquid

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C				
Frequency (MHz)		Target value	Measurement value	Difference percentage
1900 (Brain)	Permittivity ϵ_r	40.00	40.18	0.45 %
	Conductivity σ	1.40	1.43	2.14 %

Table 10: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C				
Frequency (MHz)		Target value	Measurement value	Difference percentage
1900 (Body)	Permittivity ϵ_r	53.30	52.09	-0.75 %
	Conductivity σ	1.52	1.50	-1.32 %

9.2. System Validation Results

Table 11: System Validation

Measurement is made at temperature 23.2 °C, relative humidity 50%, and input power 250 mW. Liquid temperature during the test: 22.3°C							
Liquid parameters	Frequency	Permittivity ϵ		Conductivity σ (S/m)			
	1900MHz	40.18		1.43			
Verification results	Frequency	Target value (W/kg)		Measurement value (W/kg)		Difference percentage	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1g Average
	1900MHz	4.98	9.45	4.93	9.36	-1.00%	-0.90%

Note :

1. Target Values used derive from the SPEAG calibration certificate and 250 mW is used as feeding power to the validation dipole (SPEAG using).
2. The graph results see ANNEX D.

TA Technology (Shanghai) Co., Ltd.
Test Report

9.3. Summary of Measurement Results

Table 12: SAR Values (GSM1900, Head, Open)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Left hand, Touch cheek	High	0.144	0.221	-0.034	Figure 8
	Middle	0.144	0.223	-0.045	Figure 10
	Low	0.133	0.206	-0.107	Figure 12
Left hand, Tilt 15 Degree	High	0.109	0.180	-0.044	Figure 14
	Middle	0.103	0.168	-0.080	Figure 16
	Low	0.093	0.150	-0.072	Figure 18
Right hand, Touch cheek	High	0.168	0.274	-0.023	Figure 20
	Middle	0.160	0.257	-0.039	Figure 22
	Low	0.156	0.252	-0.027	Figure 24
Right hand, Tilt 15 Degree	High	0.092	0.146	-0.010	Figure 26
	Middle	0.080	0.127	0.004	Figure 28
	Low	0.077	0.120	-0.038	Figure 30

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 13: SAR Values (GSM1900, Body, Open, Distance 15mm)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Towards Ground	High	0.180	0.316	-0.008	Figure 32
	Middle	0.169	0.265	-0.001	Figure 34
	Low	0.166	0.260	-0.021	Figure 36
Towards Phantom	High	0.100	0.156	-0.015	Figure 38
	Middle	0.089	0.138	0.002	Figure 40
	Low	0.090	0.140	-0.040	Figure 42
Worst case position of Body with Earphone					
Towards Ground	High	0.159	0.296	-0.009	Figure 44
Worst case position of Body with Bluetooth Earphone					
Towards Ground	High	0.205	0.357	0.008	Figure 46
Test Case of Body with GPRS(2 timeslots in uplink)					
Towards Ground	High	0.358	0.616	-0.106	Figure 48
	Middle	0.339	0.532	0.035	Figure 50
	Low	0.330	0.514	0.001	Figure 52
Towards Phantom	High	0.163	0.256	-0.073	Figure 54
	Middle	0.147	0.230	0.069	Figure 56
	Low	0.148	0.232	-0.011	Figure 58

1. Tests in body position were performed with 15 mm air gap between DUT and Phantom to simulate the use of a non-metallic belt-clip or holster.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1100FCC

Page 25 of 169

Table 14: SAR Values (GSM1900, Head, Close)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Left hand, Touch cheek	High	0.269	0.428	-0.143	Figure 60
	Middle	0.261	0.415	-0.131	Figure 62
	Low	0.219	0.353	0.098	Figure 64
Left hand, Tilt 15 Degree	High	0.091	0.146	0.031	Figure 66
	Middle	0.086	0.138	-0.043	Figure 68
	Low	0.068	0.109	-0.070	Figure 70
Right hand, Touch cheek	High	0.218	0.325	-0.095	Figure 72
	Middle	0.218	0.325	0.043	Figure 74
	Low	0.181	0.270	-0.172	Figure 76
Right hand, Tilt 15 Degree	High	0.106	0.171	0.014	Figure 78
	Middle	0.092	0.147	-0.018	Figure 80
	Low	0.067	0.106	-0.027	Figure 82

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 15: SAR Values (GSM1900, Body, Close, Distance 15mm)

Liquid Temperature: 22.5					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.2	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Towards Ground	High	0.298	0.501	-0.135	Figure 84
	Middle	0.291	0.492	-0.015	Figure 86
	Low	0.217	0.367	-0.014	Figure 88
Towards Phantom	High	0.083	0.133	0.021	Figure 90
	Middle	0.077	0.124	0.017	Figure 92
	Low	0.059	0.095	-0.100	Figure 94
Worst case position of Body with Earphone					
Towards Ground	High	0.257	0.448	-0.019	Figure 96
Worst case position of Body with Bluetooth Earphone					
Towards Ground	High	0.340	0.575	-0.041	Figure 98
Test Case of Body with GPRS(2 timeslots in uplink)					
Towards Ground	High	0.511	0.862	-0.167	Figure 100
	Middle	0.481	0.817	-0.067	Figure 102
	Low	0.382	0.646	0.020	Figure 104
Towards Phantom	High	0.126	0.201	-0.138	Figure 106
	Middle	0.122	0.195	-0.011	Figure 108
	Low	0.096	0.154	-0.019	Figure 110

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Tests in body position were performed with 15 mm air gap between DUT and Phantom to simulate the use of a non-metallic belt-clip or holster.

9.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1100FCC

Page 27 of 169

10. MEASUREMENT UNCERTAINTY

No.	a	Type	c	d	e=f(d, k)	f	h=cxf / e	k
	Uncertainty Component		Tol. (±%)	Prob. Dist	Div.	c ₁ (1g)	1g u (± %)	v ₁
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial isotropy	B	4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	4.3	∞
4	Hemisphere Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{C_P}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test Sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation-SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity-measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity- measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty							11.25	
Expanded Uncertainty (95 % CONFIDENCE INTERVAL)							22.5	

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2008-1100FCC

Page 28 of 169

11. MAIN TEST INSTRUMENTS

Table 16: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 15, 2007	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2008	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2008	One year
05	Signal Generator	HP 8341B	2730A00804	September 15, 2007	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	GB46490218	September 15, 2007	One year
08	E-field Probe	ET3DV6	1531	January 29, 2008	One year
09	DAE	DAE4	452	July 21, 2008	One year
10	Validation Kit 1900MHz	D1900V2	5d018	March 21, 2008	One year

12. TEST PERIOD

The test is performed from September 1, 2008 to September 2, 2008.

13. TEST LOCATION

The test is performed at TA Technology (Shanghai) Co., Ltd.

*******END OF REPORT BODY*******

ANNEX A : MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15 mm x 15 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

- a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
- c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.


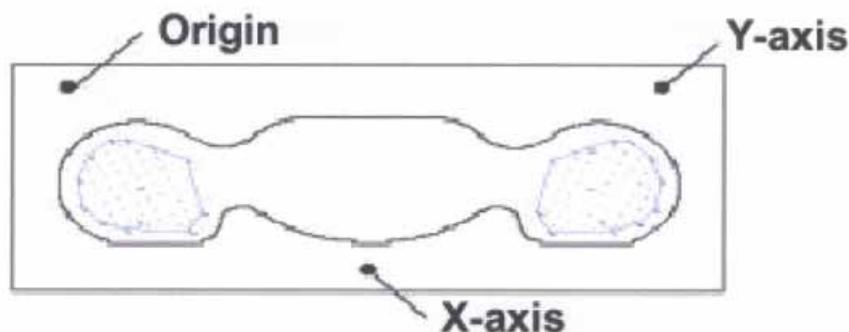


Figure 7 SAR Measurement Points in Area Scan

ANNEX B : TEST LAYOUT



Picture 1: Specific Absorption Rate Test Layout

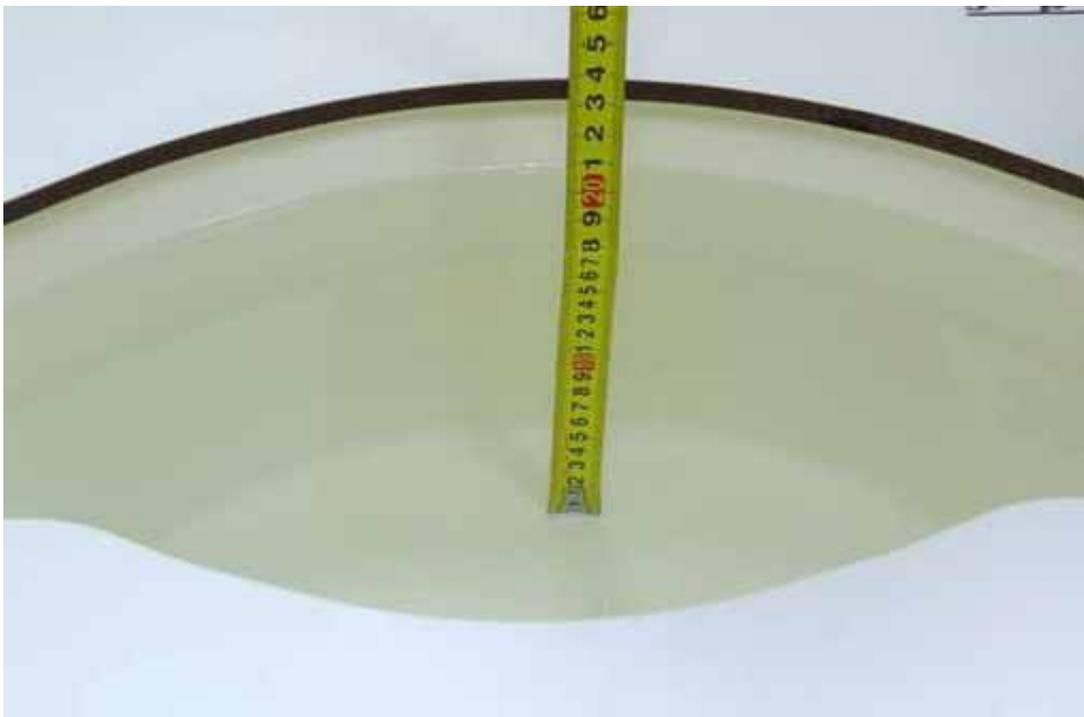

Picture 2: Liquid depth in the Phantom (1900 MHz)



Picture 3: liquid depth in the head Phantom (1900 MHz)

ANNEX C : GRAPH RESULTS

GSM 1900 Left Cheek High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.242 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.81 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.221 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.243 mW/g

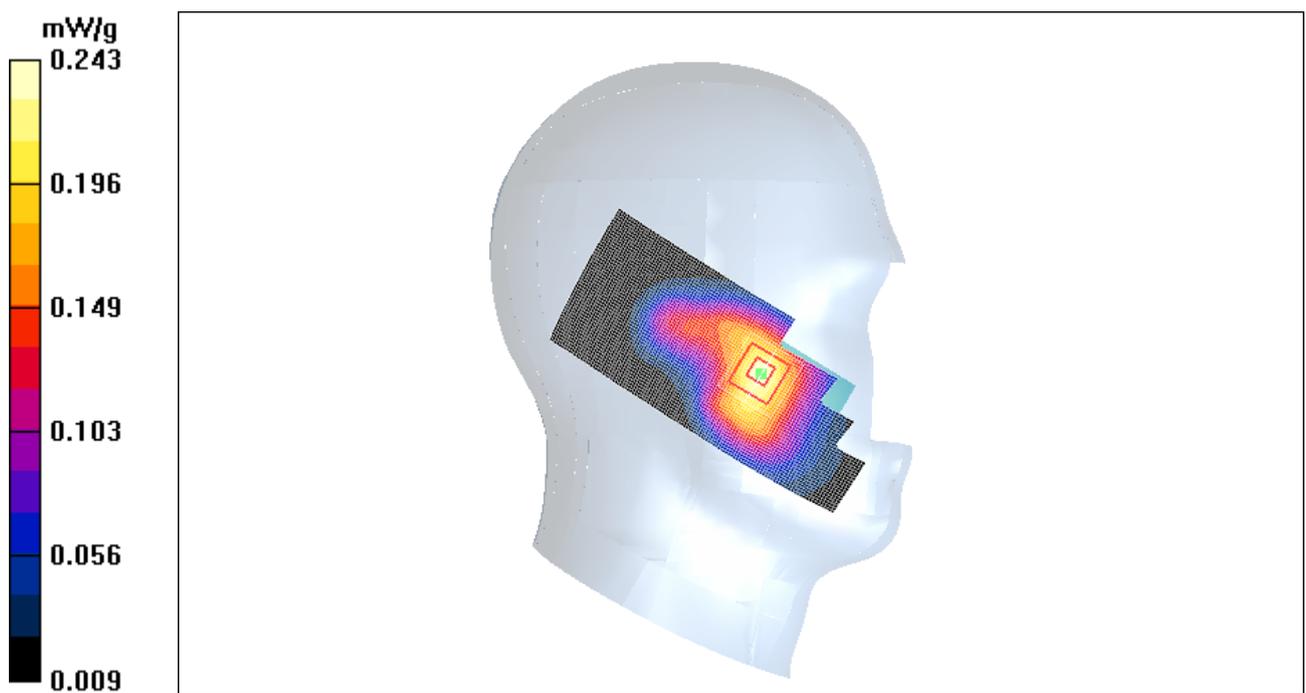


Figure 8 Left Hand Touch Cheek Open GSM 1900 Channel 810

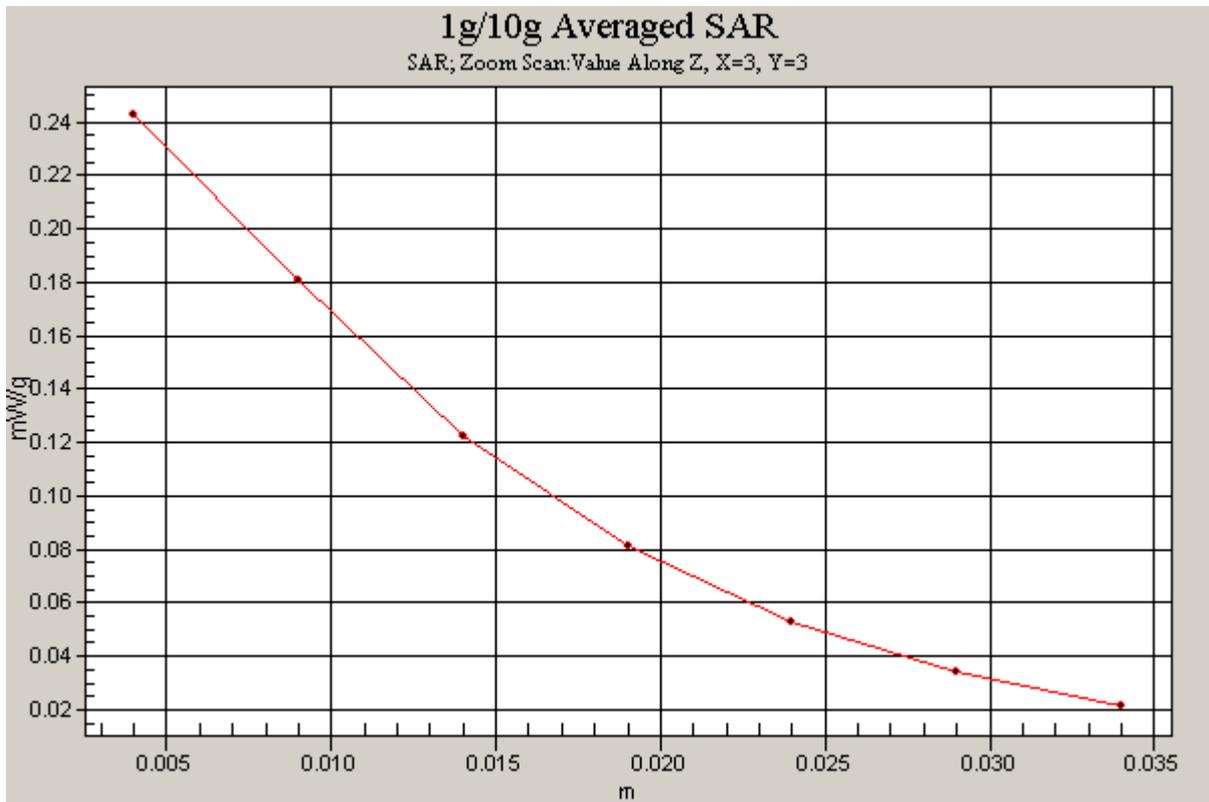


Figure 9 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 1900 Channel 810)

GSM 1900 Left Cheek Middle Open

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.247 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

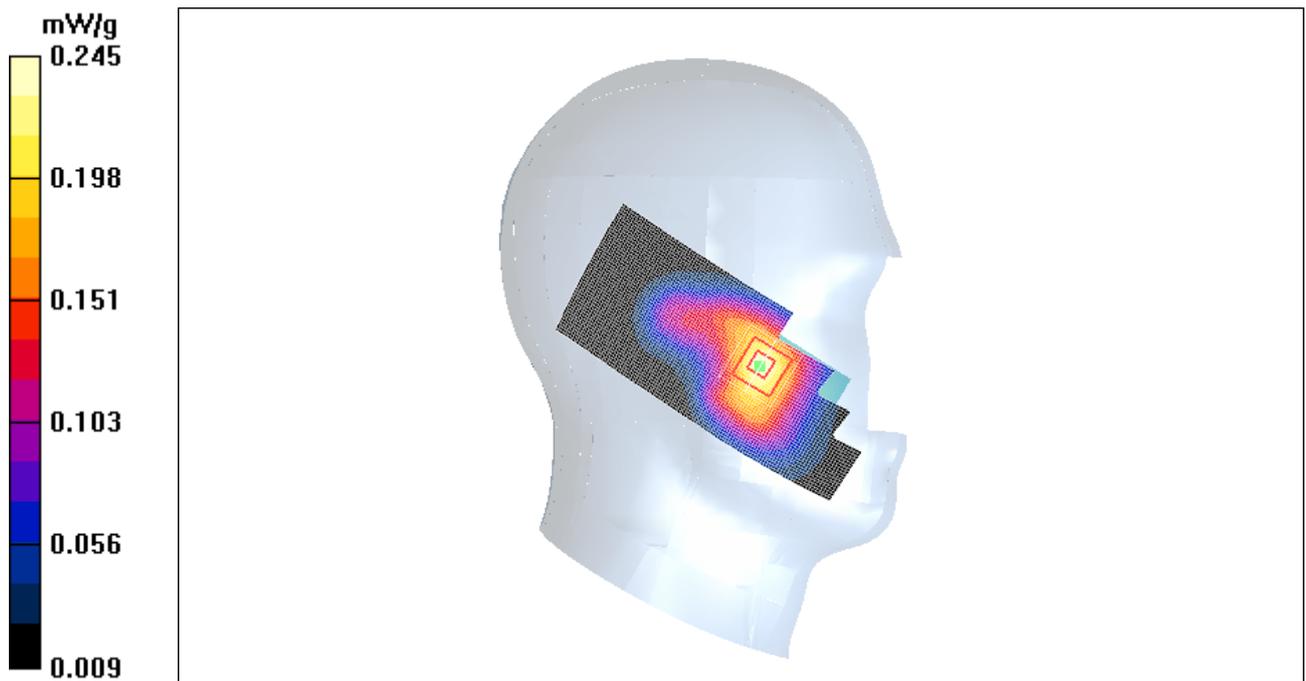


Figure 10 Left Hand Touch Cheek Open GSM 1900 Channel 661

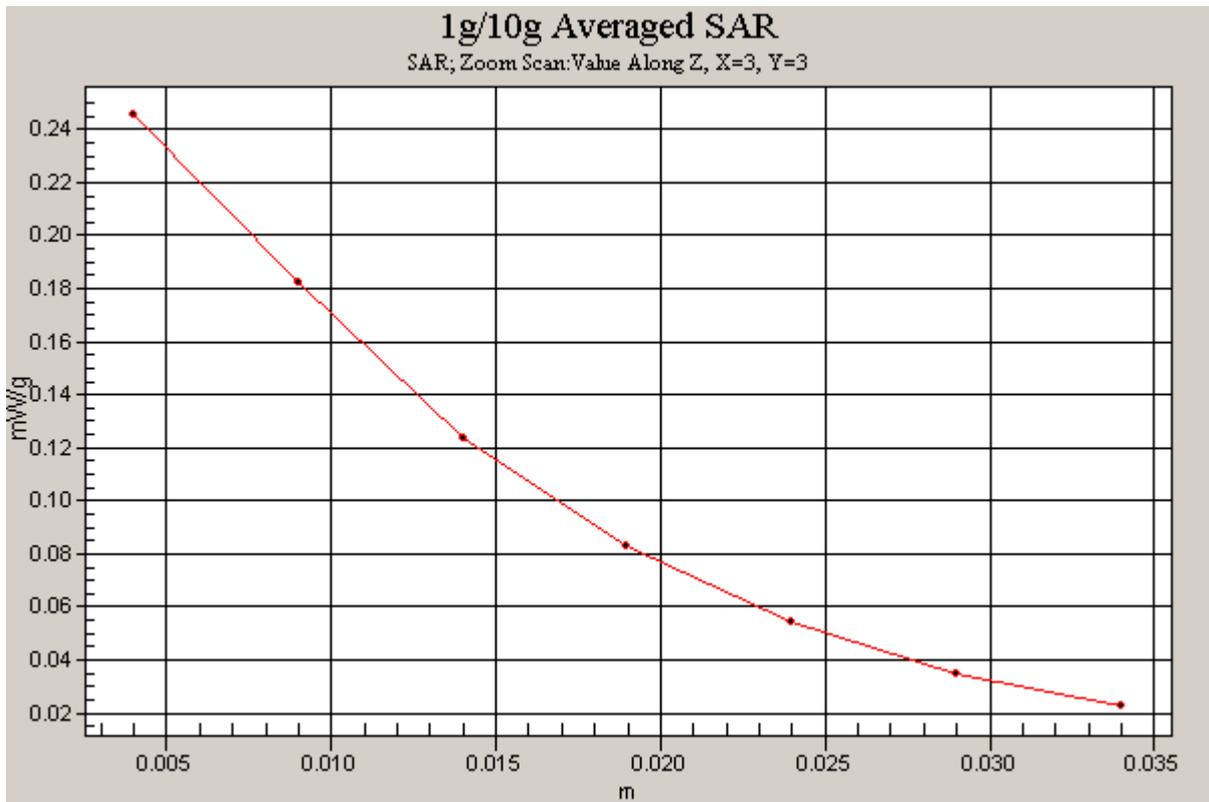


Figure 11 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 1900 Channel 661)

GSM 1900 Left Cheek Low Open

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.227 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.55 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.133 mW/g

Maximum value of SAR (measured) = 0.224 mW/g

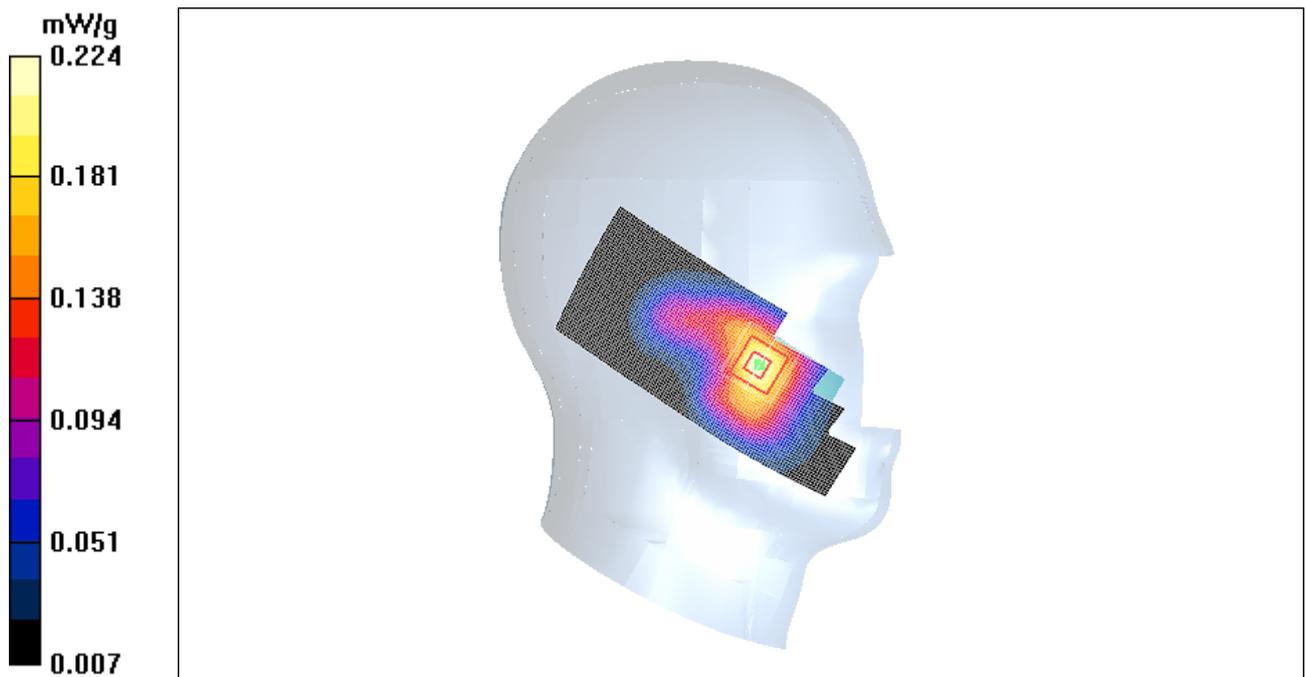


Figure 12 Left Hand Touch Cheek Open GSM 1900 Channel 512

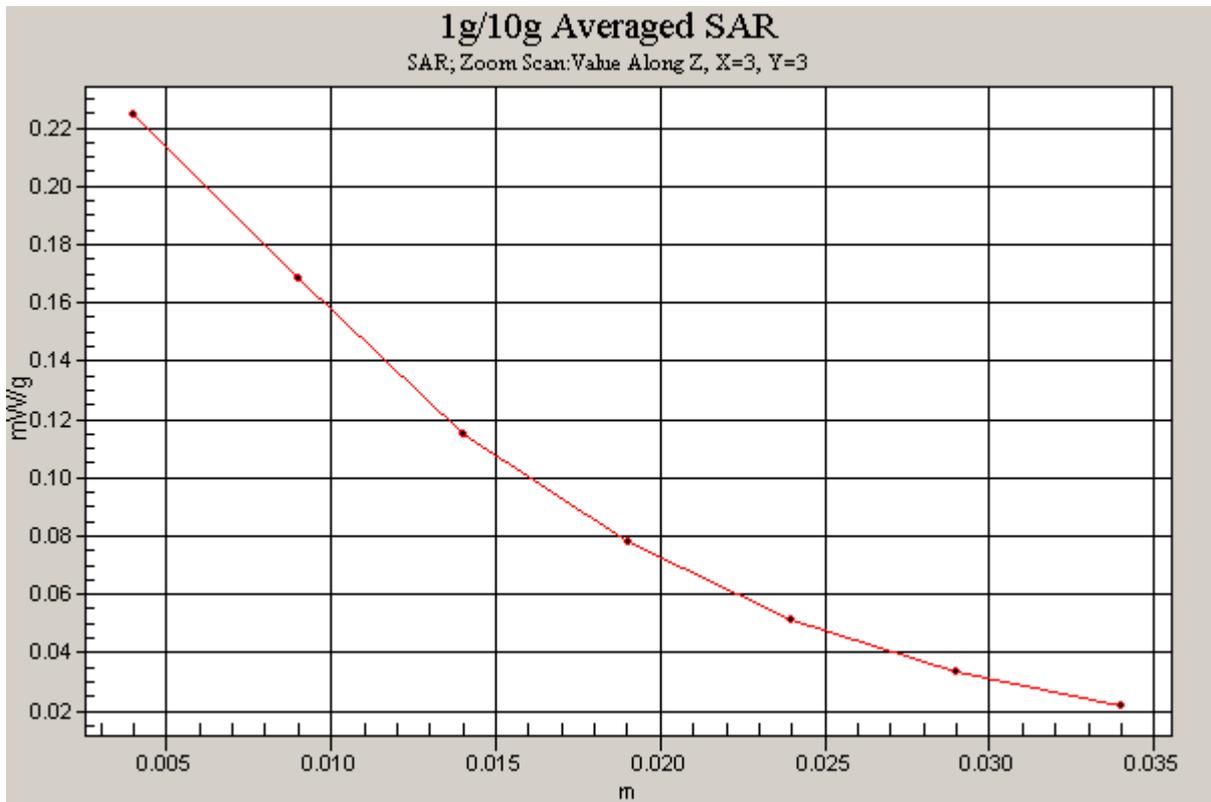


Figure 13 Z-Scan at power reference point (Left Hand Touch Cheek Open GSM 1900 Channel 512)

GSM 1900 Left Tilt High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.208 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.28 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

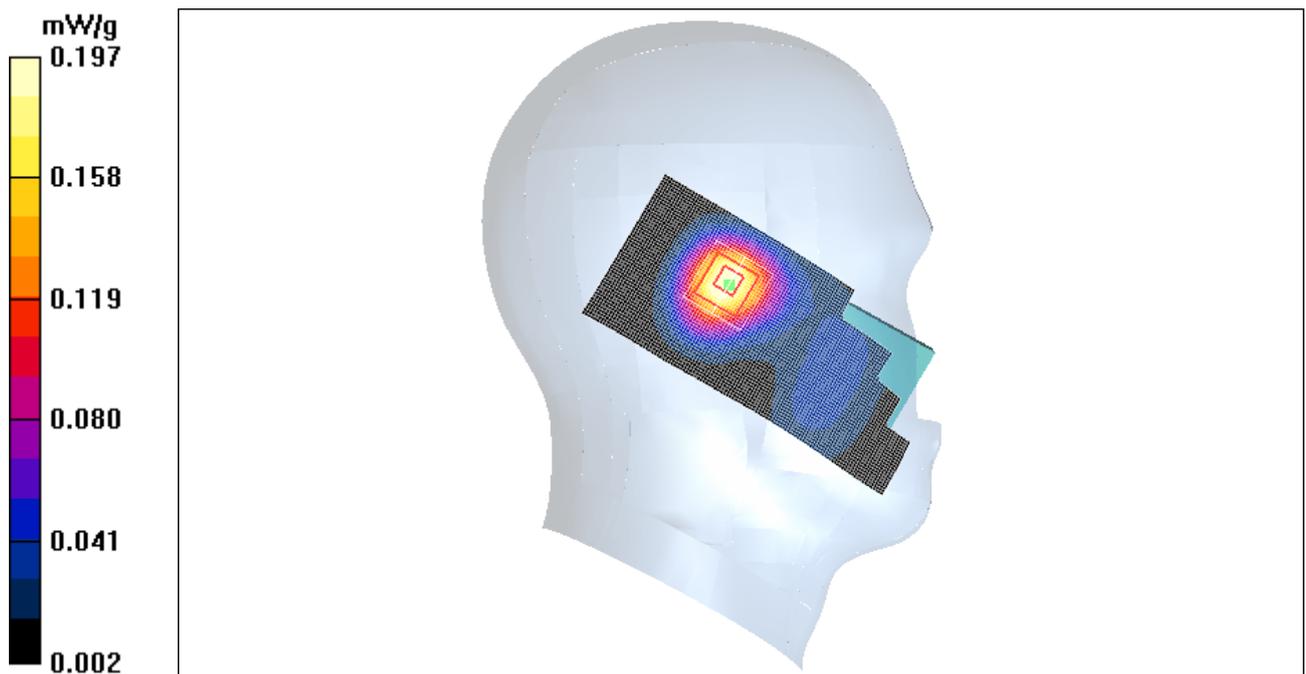


Figure 14 Left Hand Tilt 15°Open GSM 1900 Channel 810

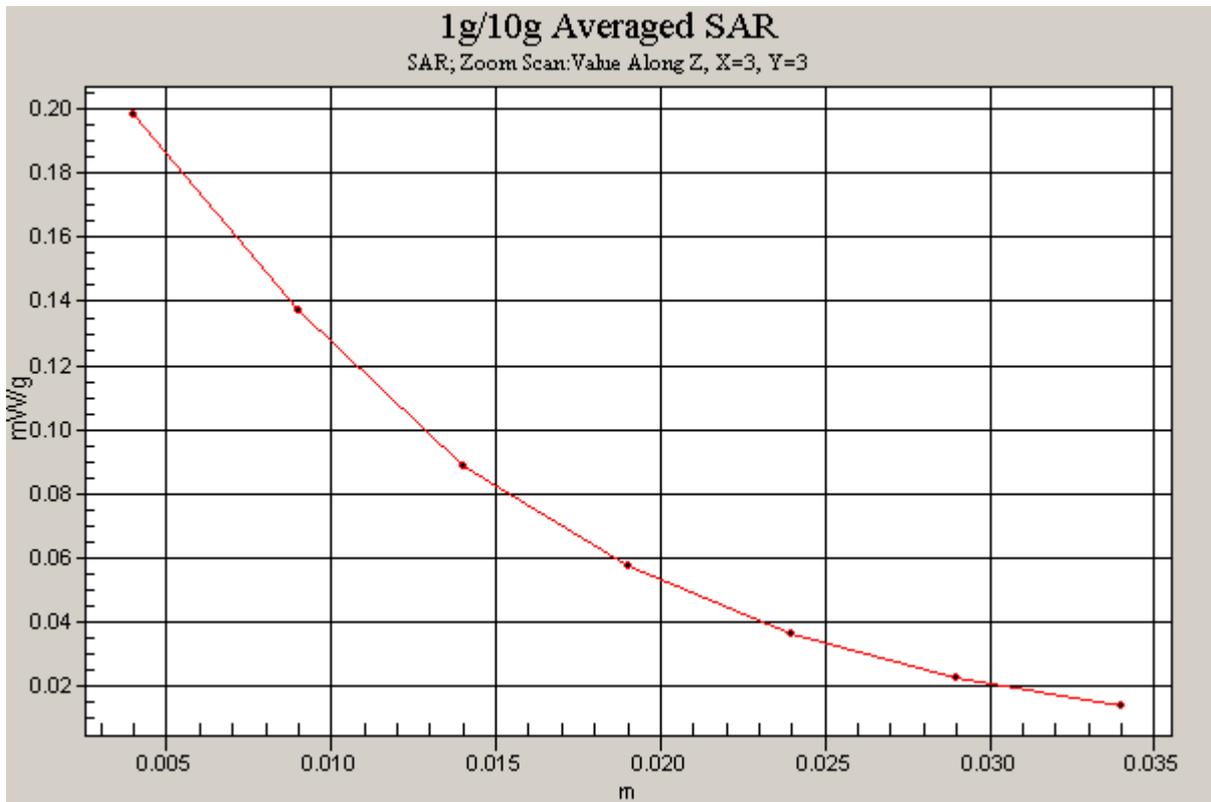


Figure 15 Z-Scan at power reference point (Left Hand Tilt 15° Open GSM 1900 Channel 810)

GSM 1900 Left Tilt Middle Open

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.194 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.13 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

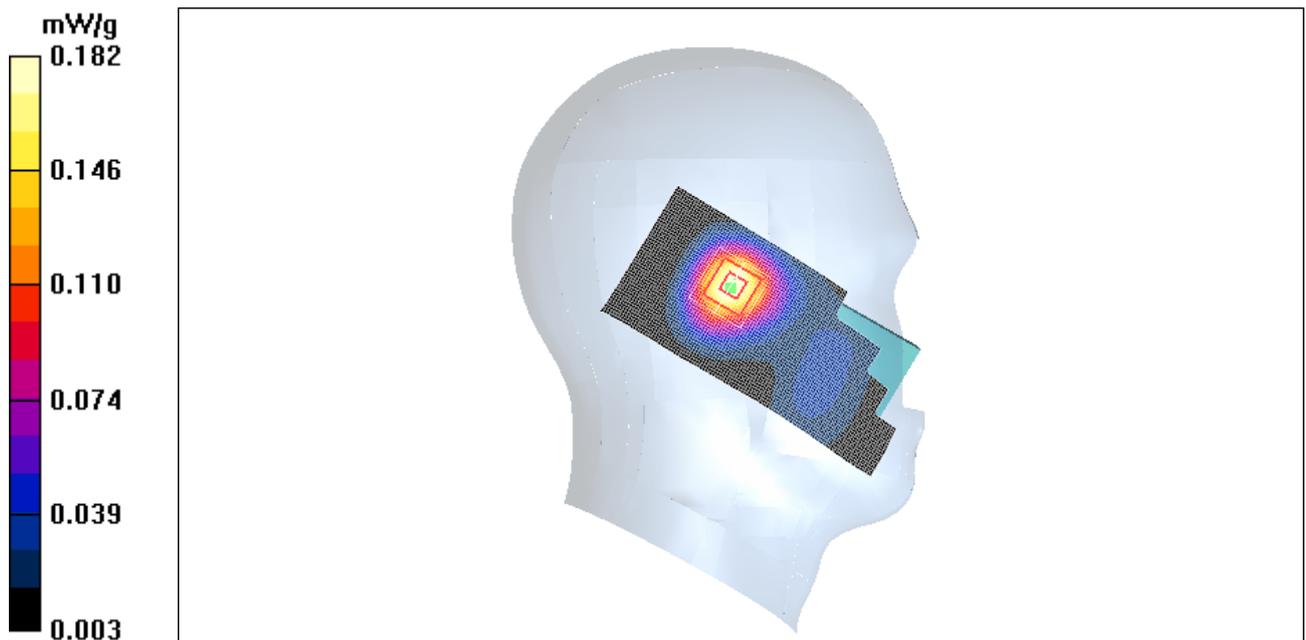


Figure 16 Left Hand Tilt 15 ° Open GSM 1900 Channel 661

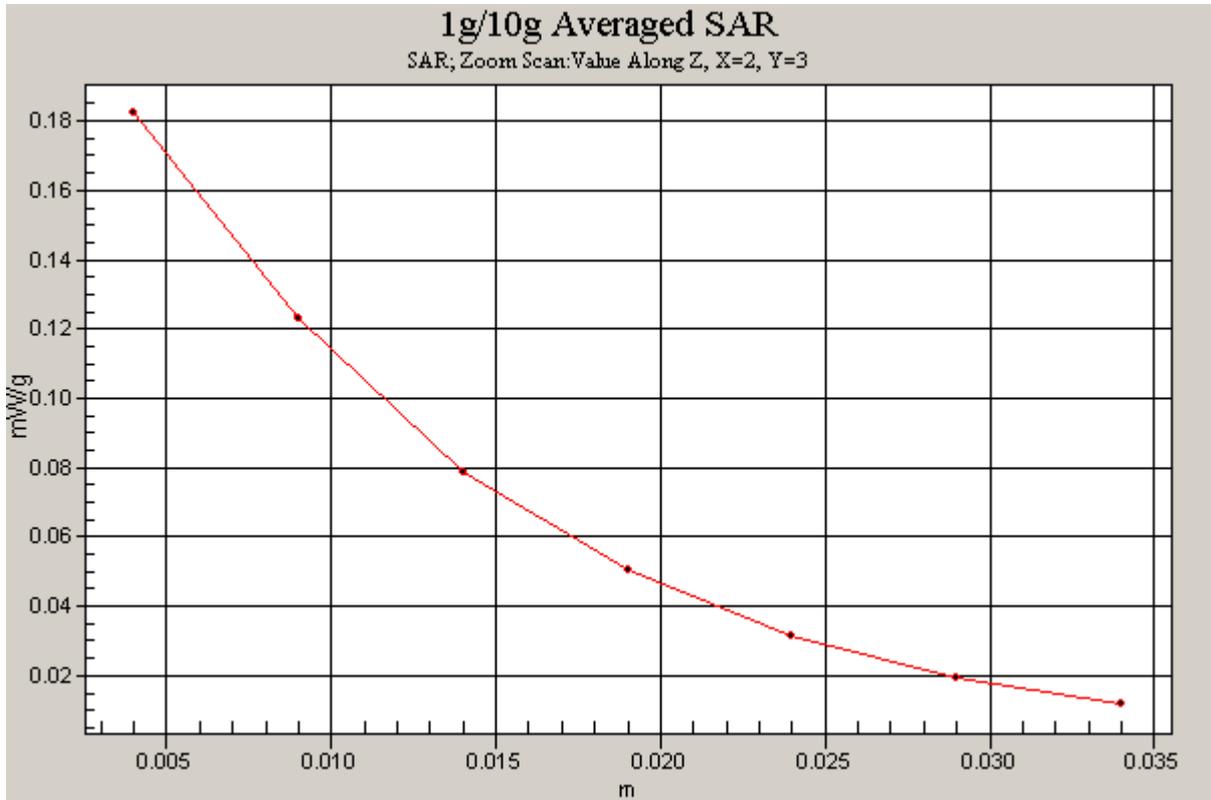


Figure 17 Z-Scan at power reference point (Left Hand Tilt 15 ° Open GSM 1900 Channel 661)

GSM 1900 Left Tilt Low Open

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.177 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.12 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

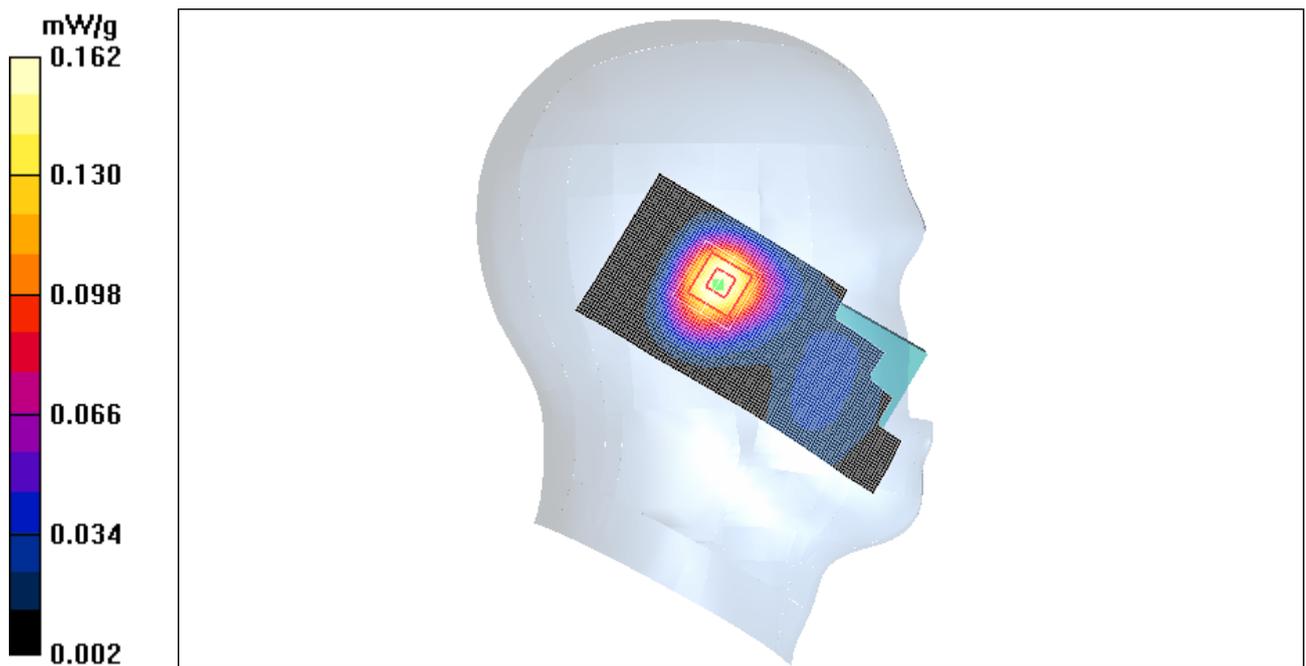


Figure 18 Left Hand Tilt 15 ° Open GSM 1900 Channel 512

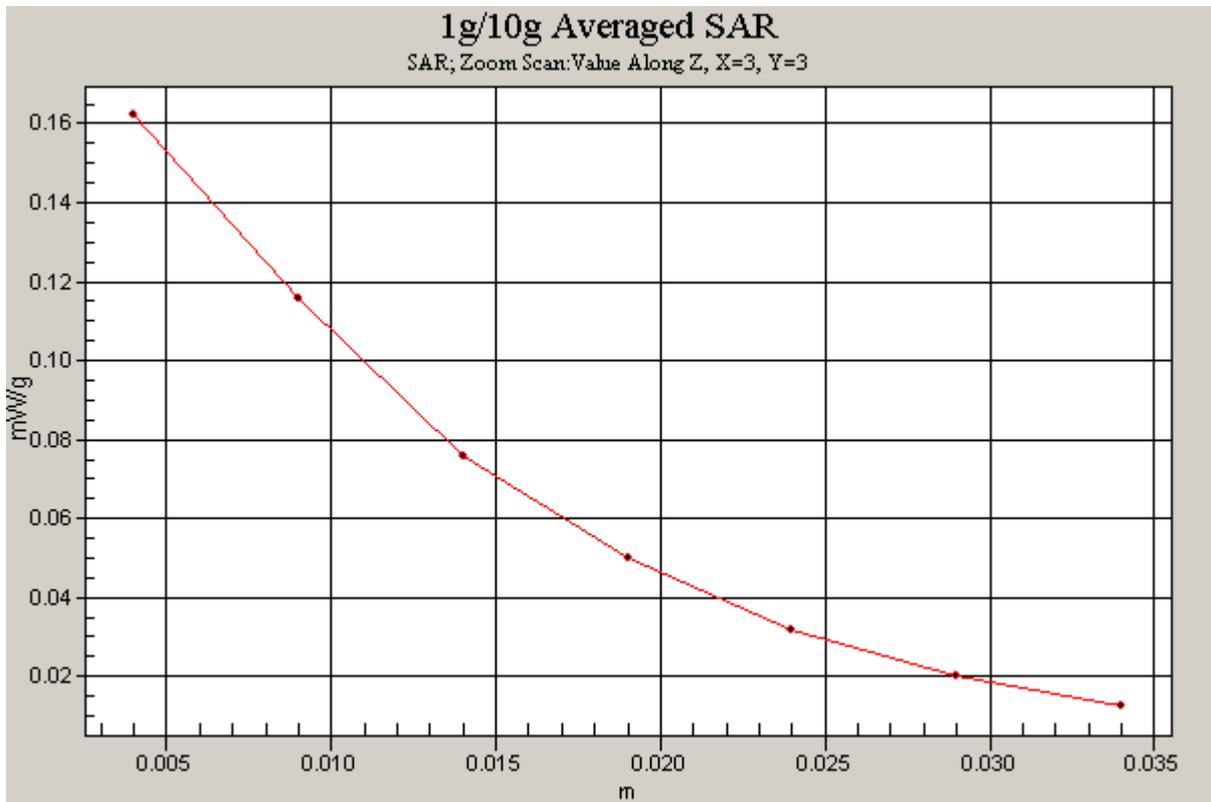


Figure 19 Z-Scan at power reference point (Left Hand Tilt 15 ° Open GSM 1900 Channel 512)

GSM 1900 Right Cheek High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.295 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.96 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.302 mW/g

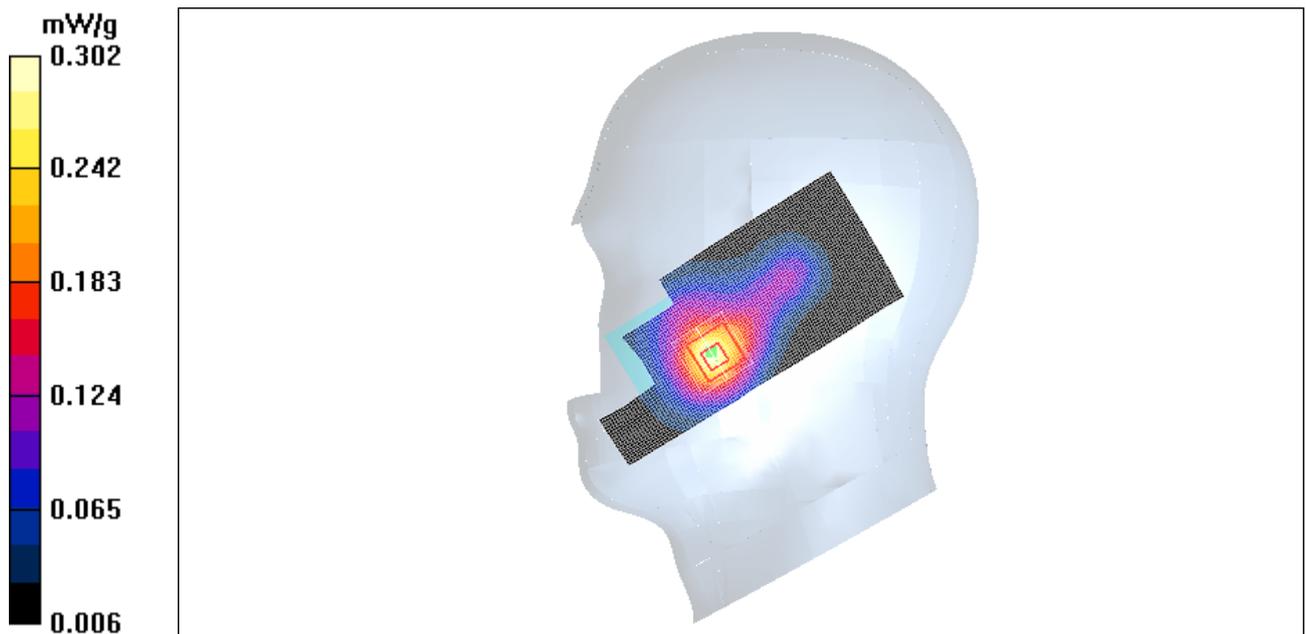


Figure 20 Right Hand Touch Cheek Open GSM 1900 Channel 810

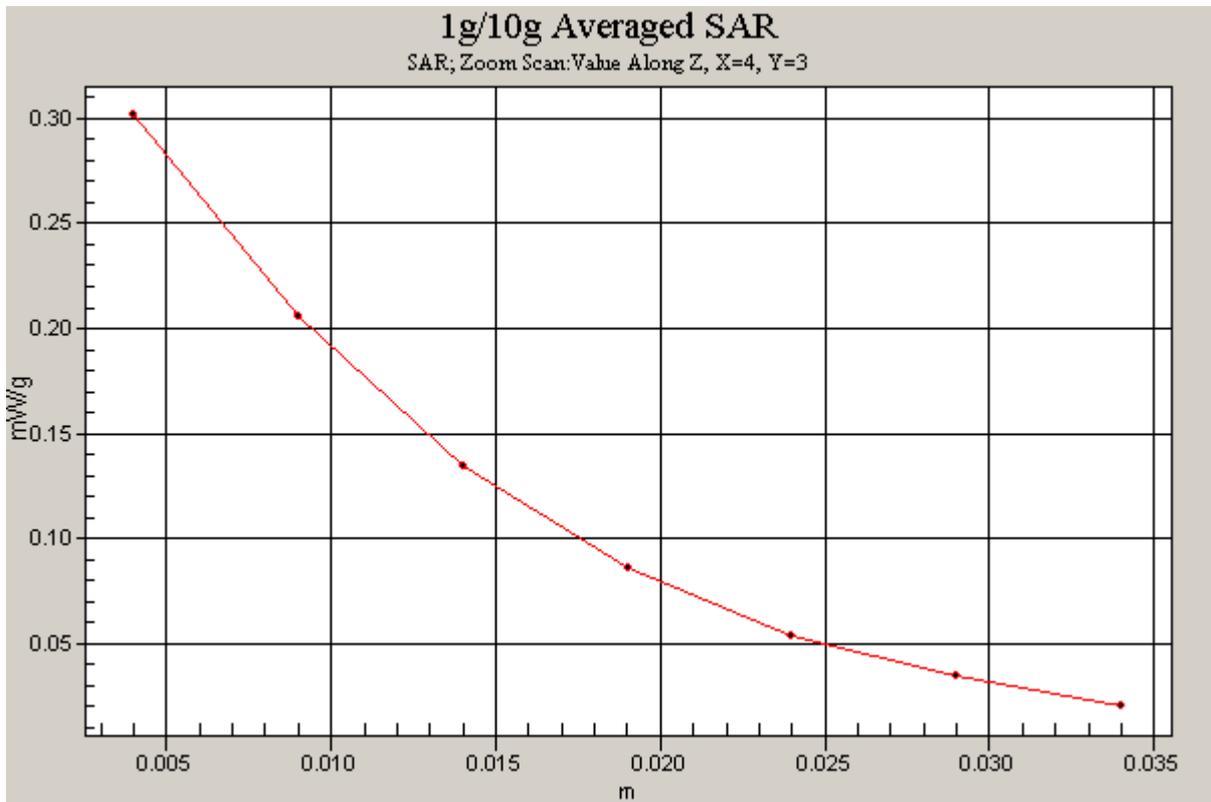


Figure 21 Z-Scan at power reference point (Right Hand Touch Cheek Open GSM 1900 Channel 810)

GSM 1900 Right Cheek Middle Open

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.277 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.38 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

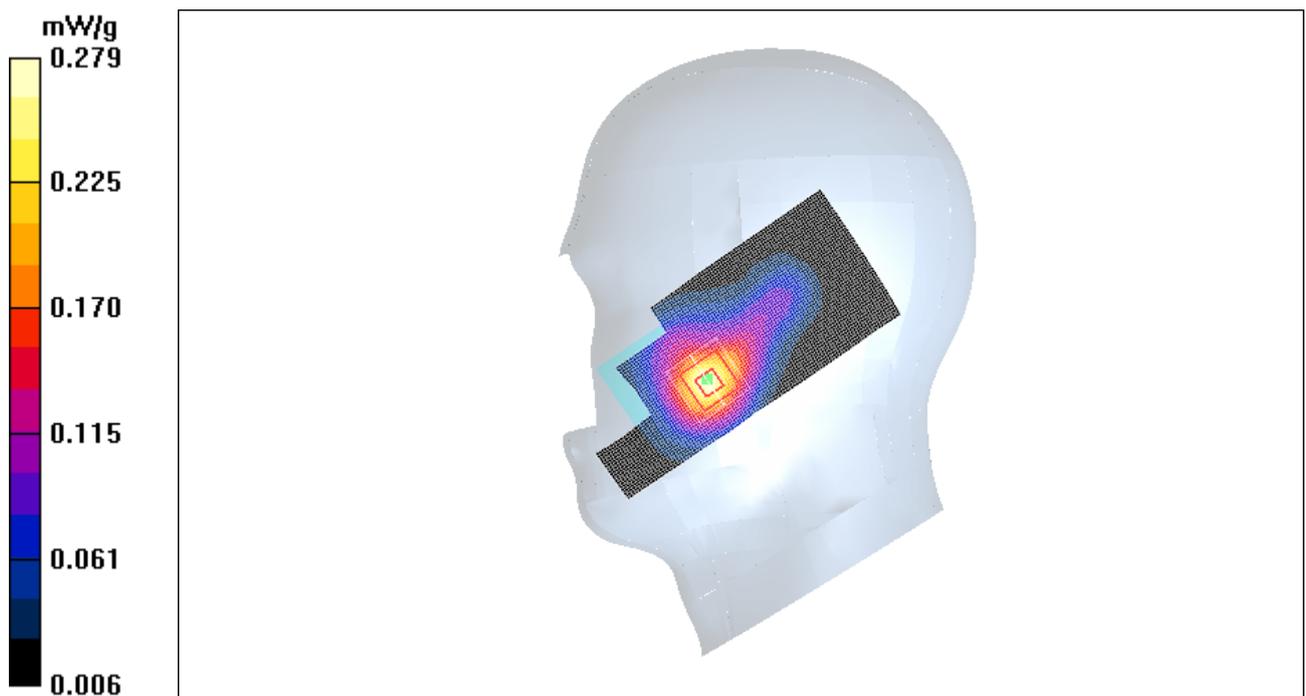


Figure 22 Right Hand Touch Cheek Open GSM 1900 Channel 661

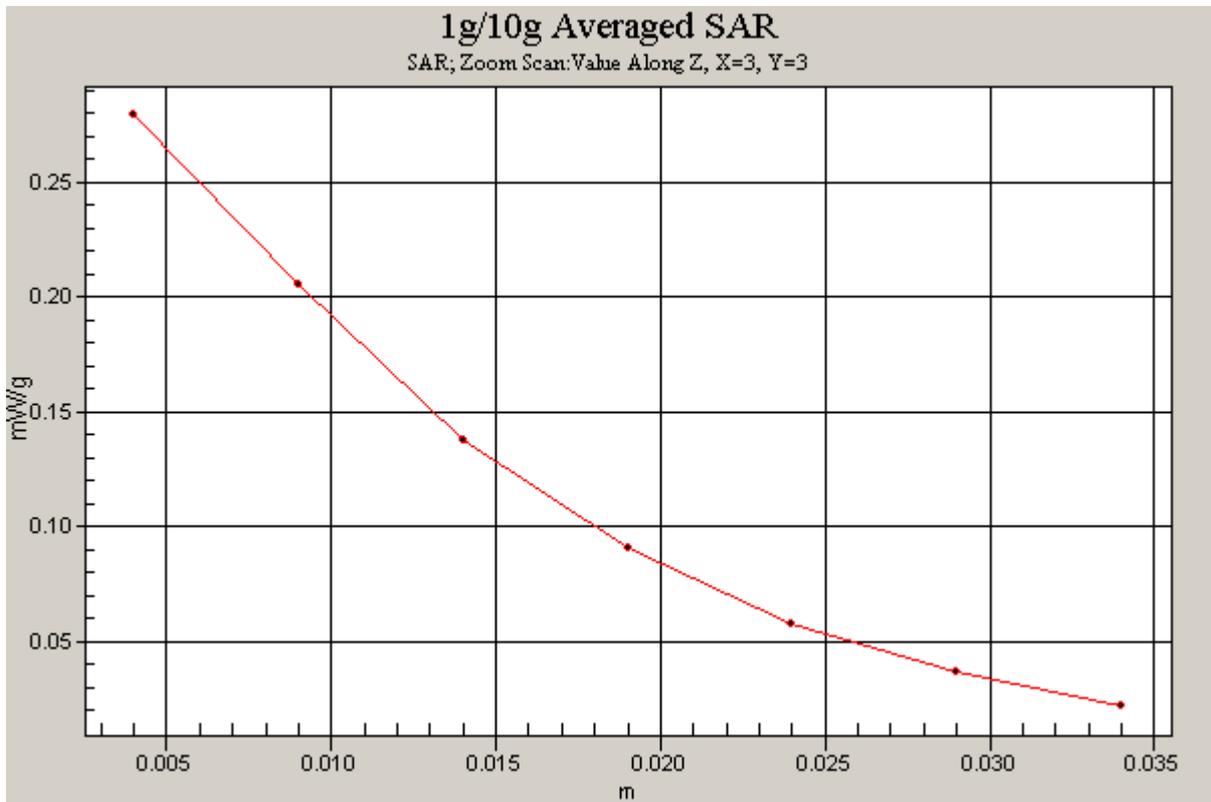


Figure 23 Z-Scan at power reference point (Right Hand Touch Cheek Open GSM 1900 Channel 661)

GSM 1900 Right Cheek Low Open

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.42 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

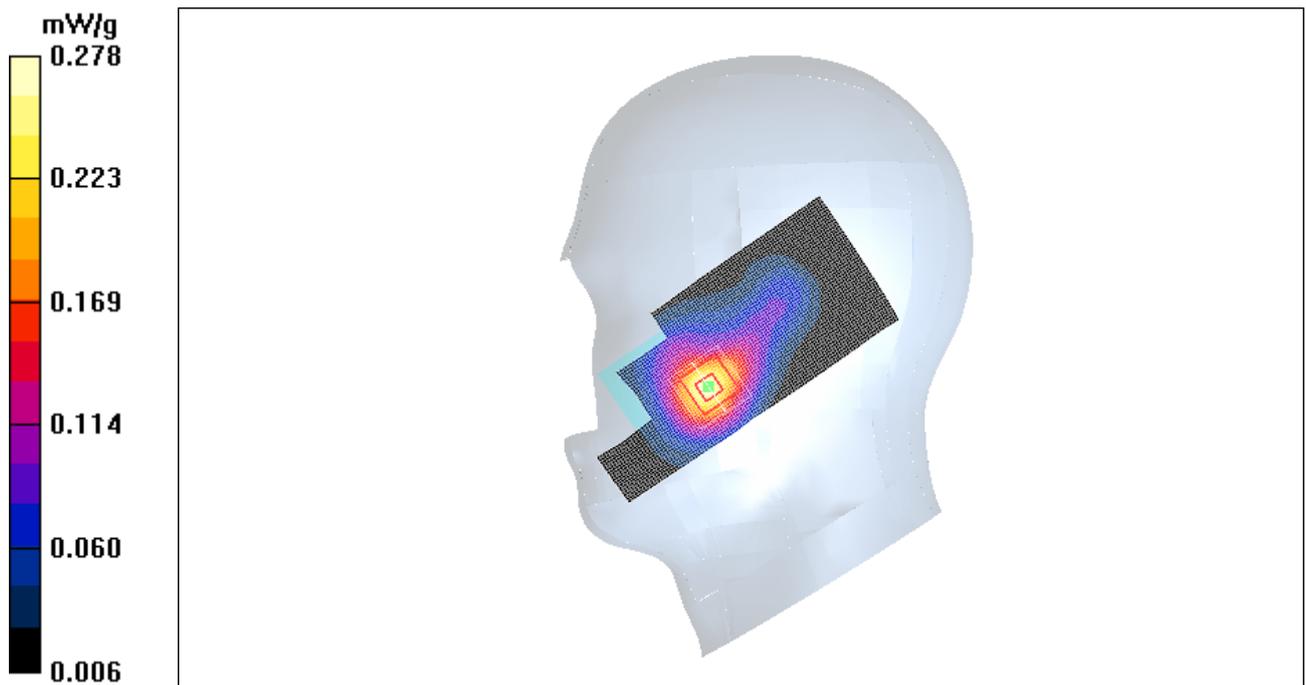


Figure 24 Right Hand Touch Cheek Open GSM 1900 Channel 512

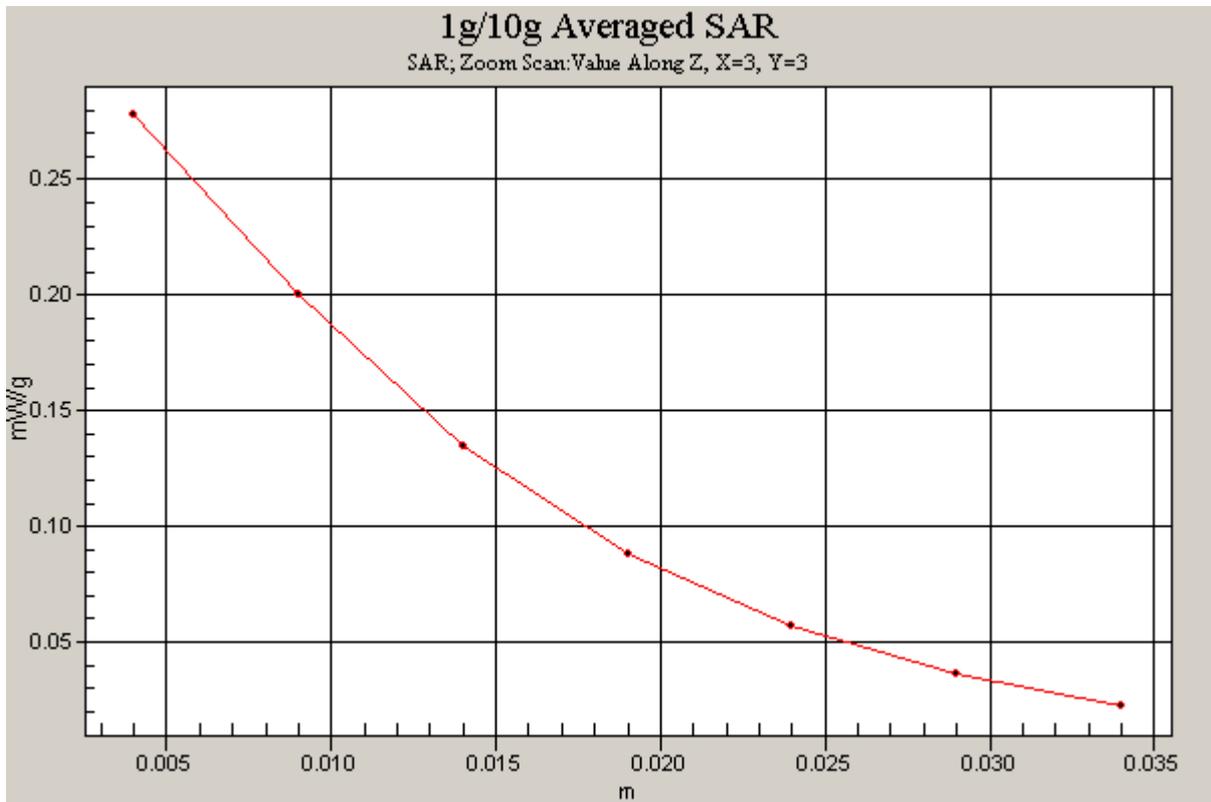


Figure 25 Z-Scan at power reference point (Right Hand Touch Cheek Open GSM 1900 Channel 512)

GSM 1900 Right Tilt High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.178 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.159 mW/g

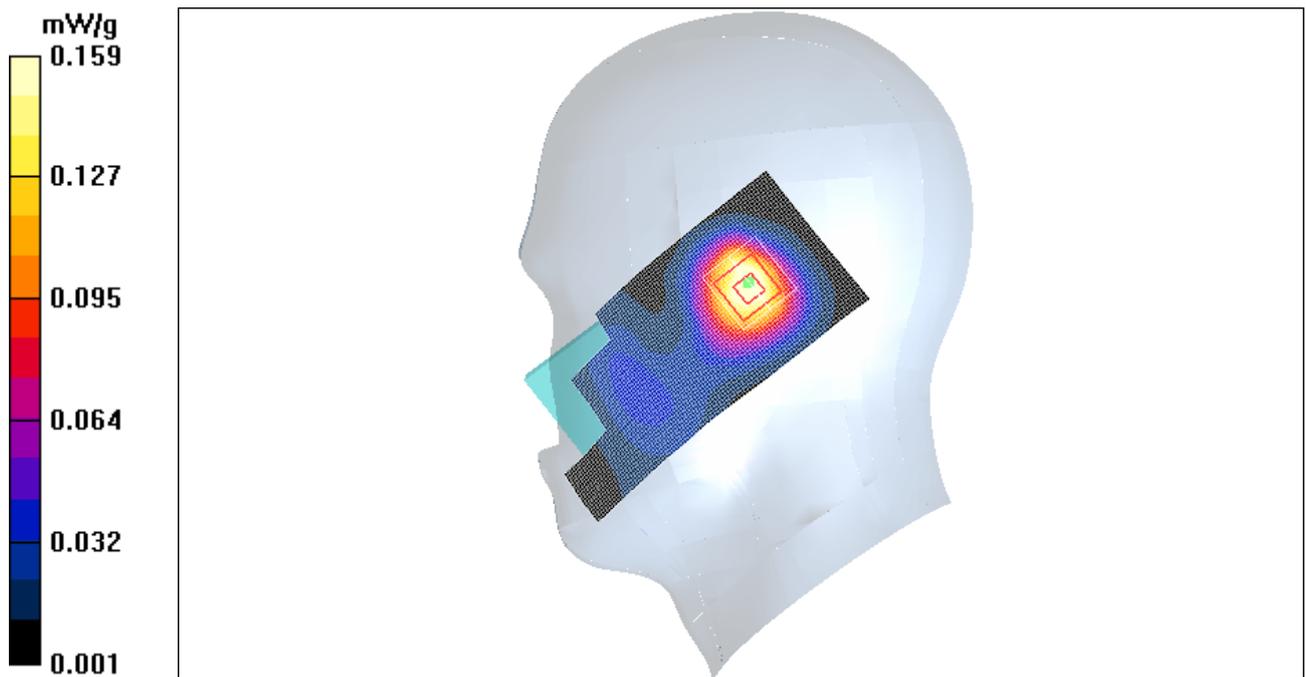


Figure 26 Right Hand Tilt 15 ° Open GSM 1900 Channel 810

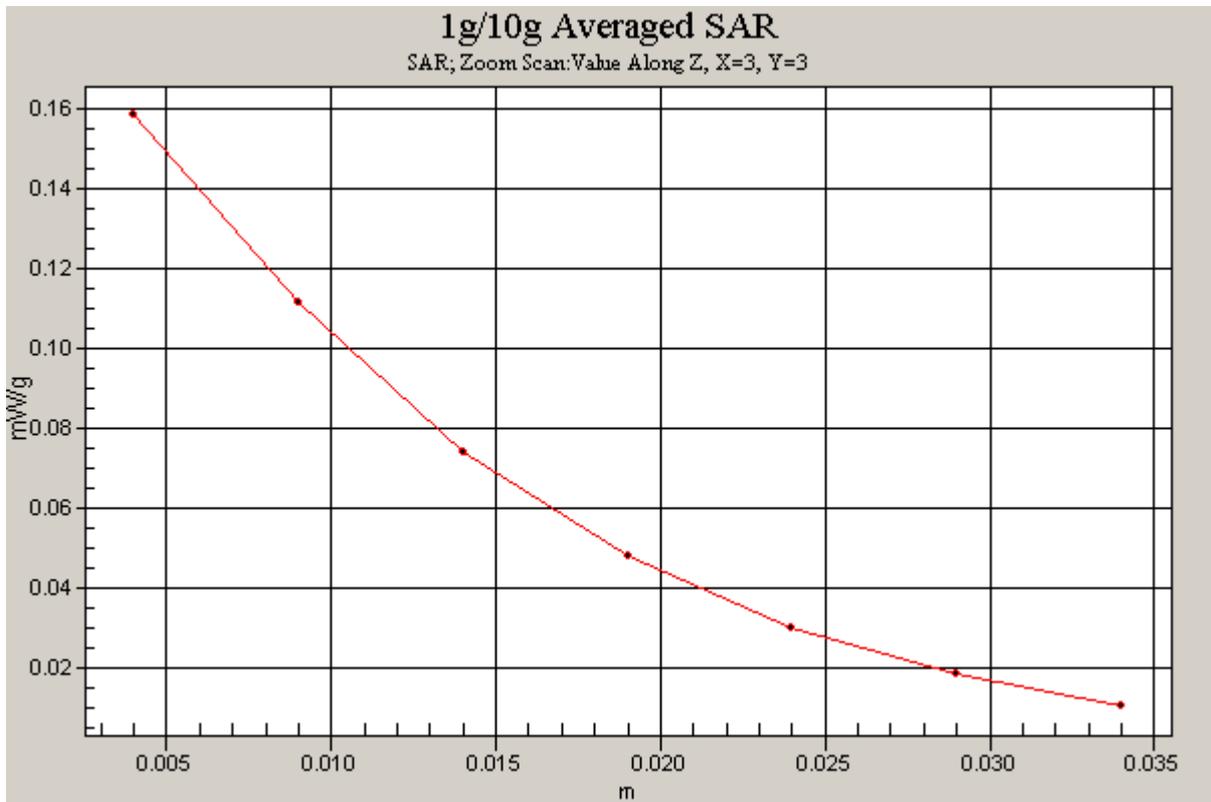


Figure 27 Z-Scan at power reference point (Right Hand Tilt 15 ° Open GSM 1900 Channel 810)

GSM 1900 Right Tilt Middle Open

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.154 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.37 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.139 mW/g

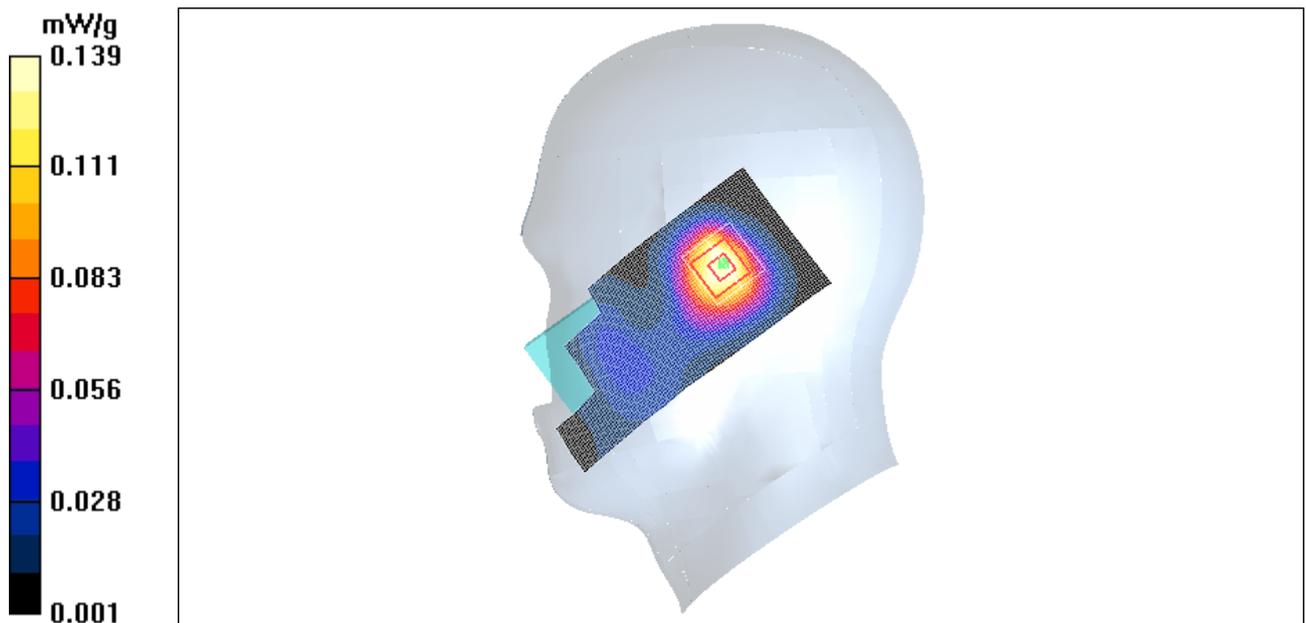


Figure 28 Right Hand Tilt 15 ° Open GSM 1900 Channel 661

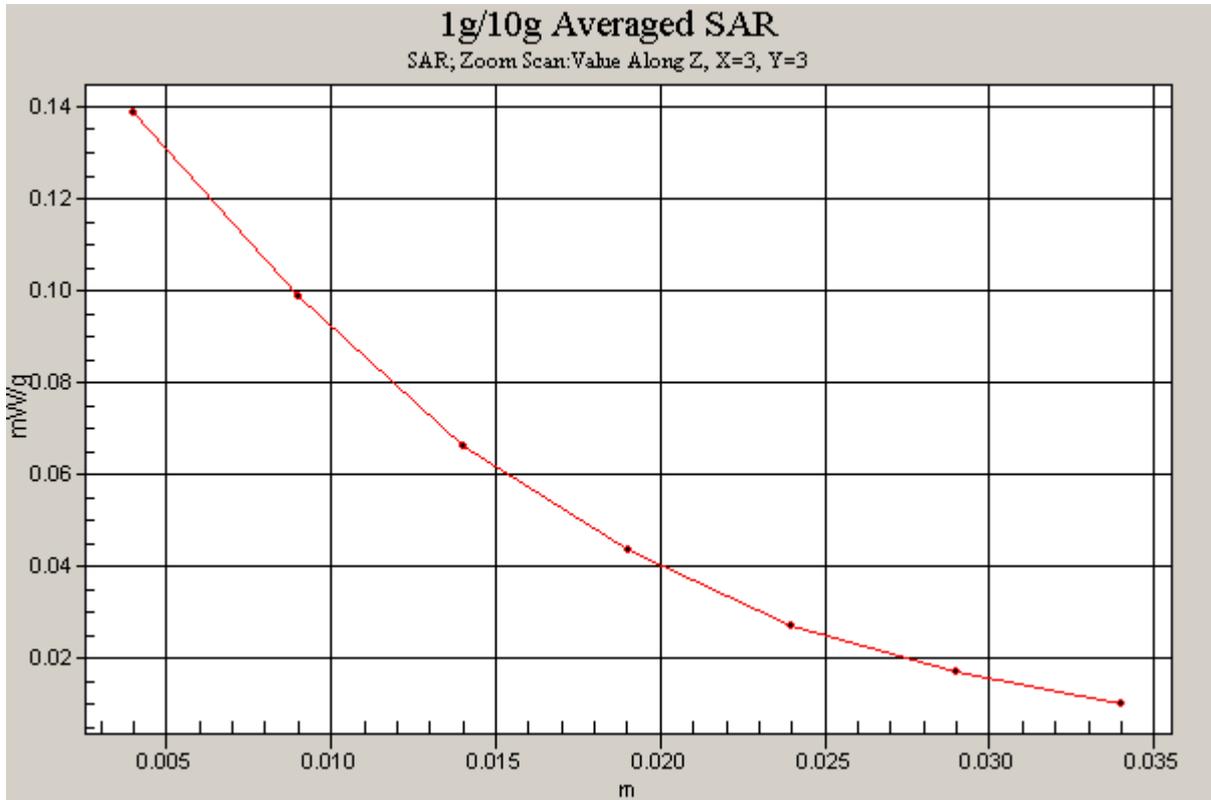


Figure 29 Z-Scan at power reference point (Right Hand Tilt 15 ° Open GSM 1900 Channel 661)

GSM 1900 Right Tilt Low Open

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.150 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.11 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.129 mW/g

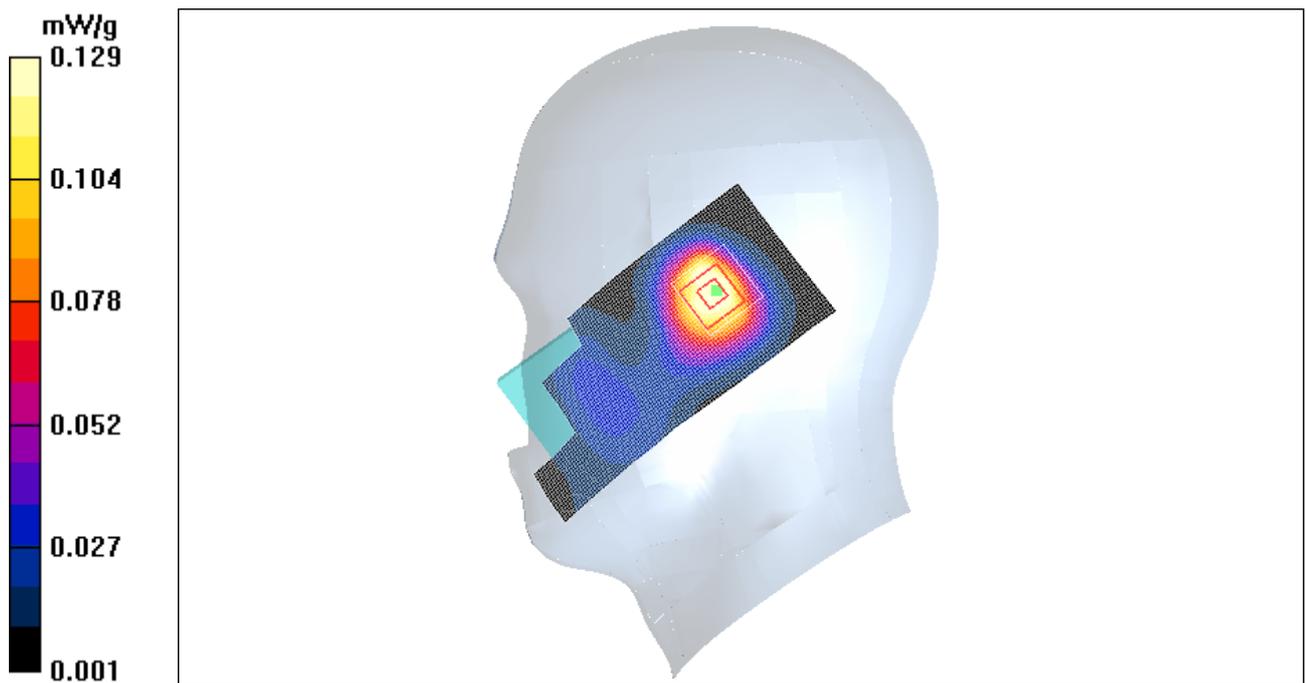


Figure 30 Right Hand Tilt 15 ° Open GSM 1900 Channel 512

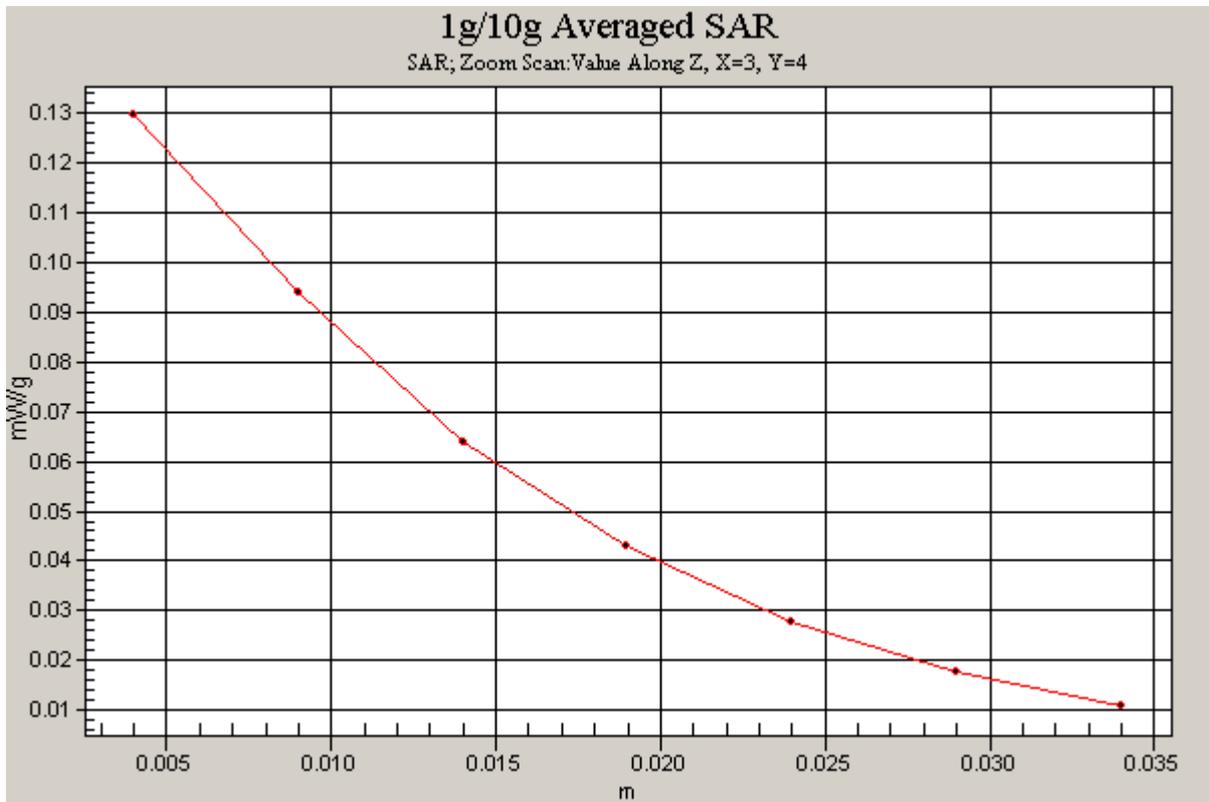


Figure 31 Z-Scan at power reference point (Right Hand Tilt 15 ° Open GSM 1900 Channel 512)

GSM 1900 Towards Ground High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.357 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.49 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.351 mW/g

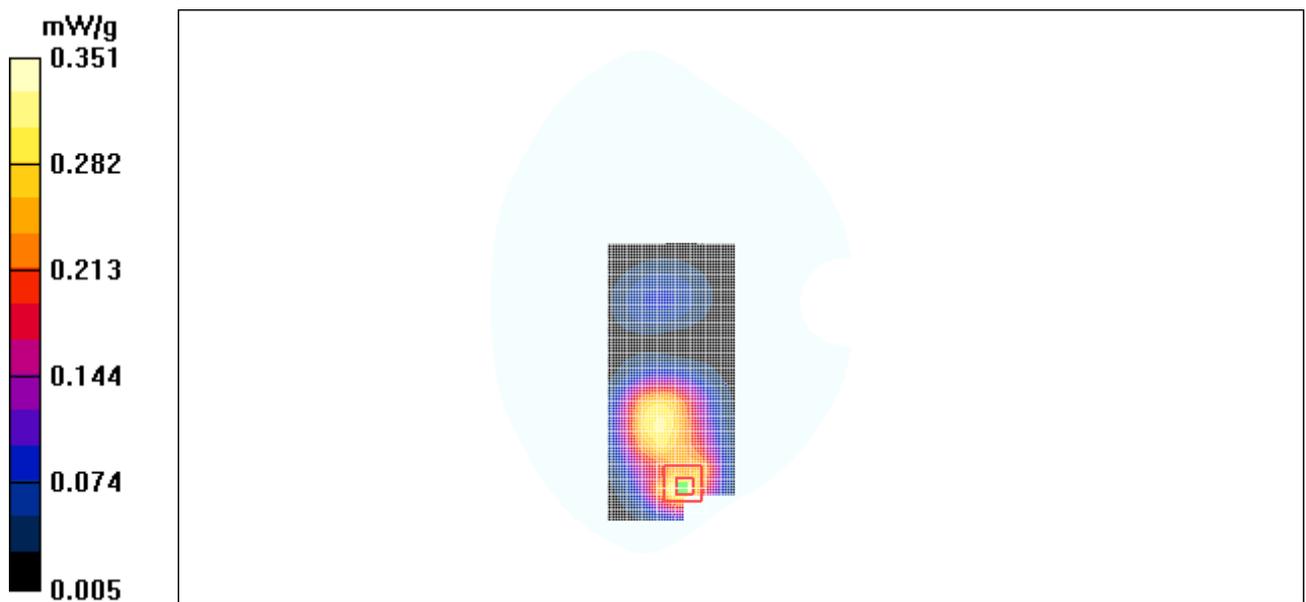


Figure 32 Body, Towards Ground, Open GSM 1900 Channel 810

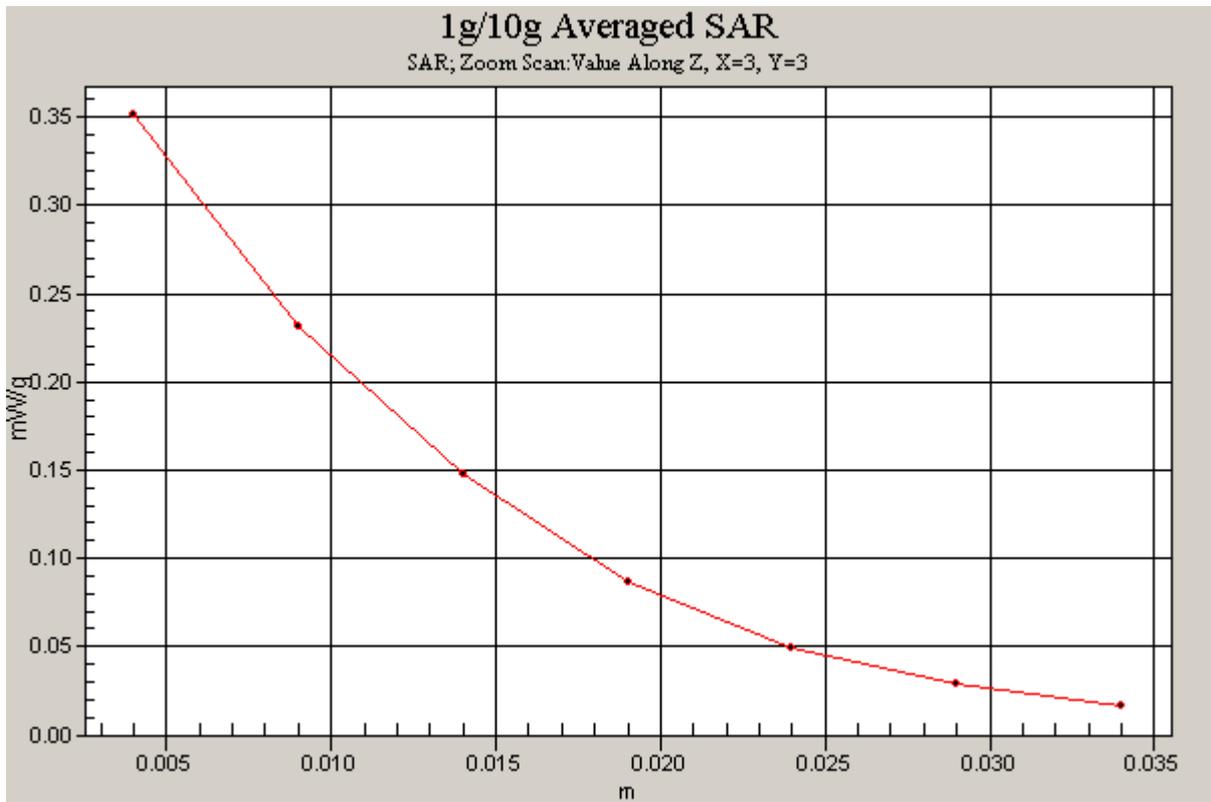


Figure 33 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 Channel 810)

GSM 1900 Towards Ground Middle Open

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.61 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.284 mW/g

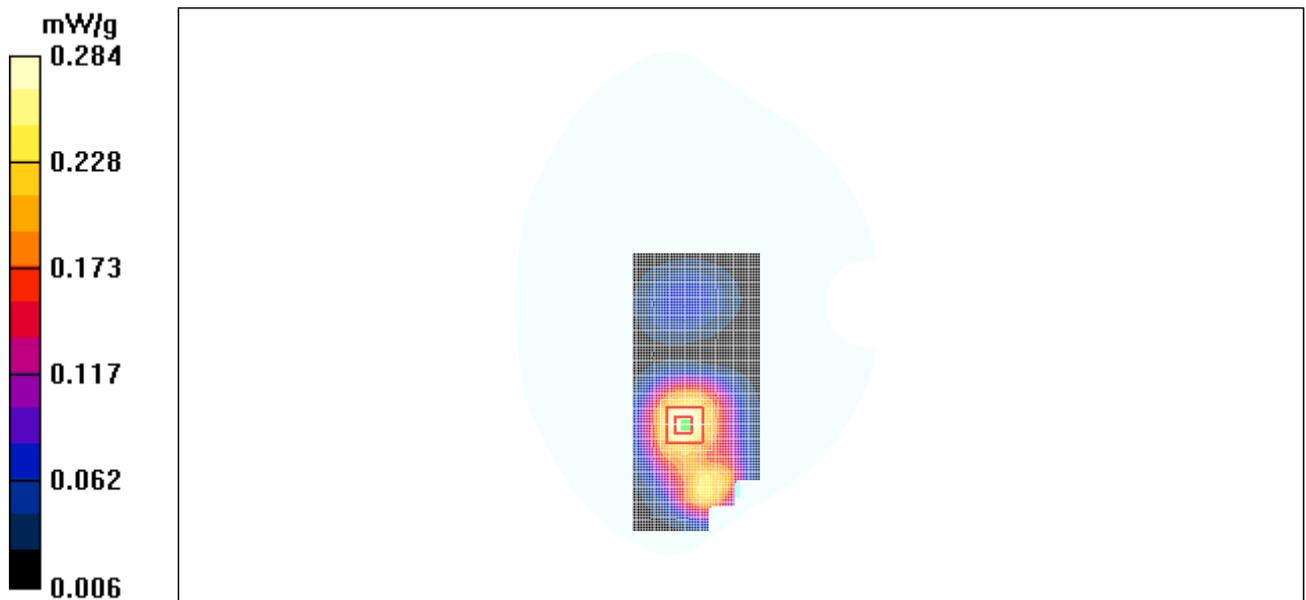


Figure 34 Body, Towards Ground, Open GSM 1900 Channel 661

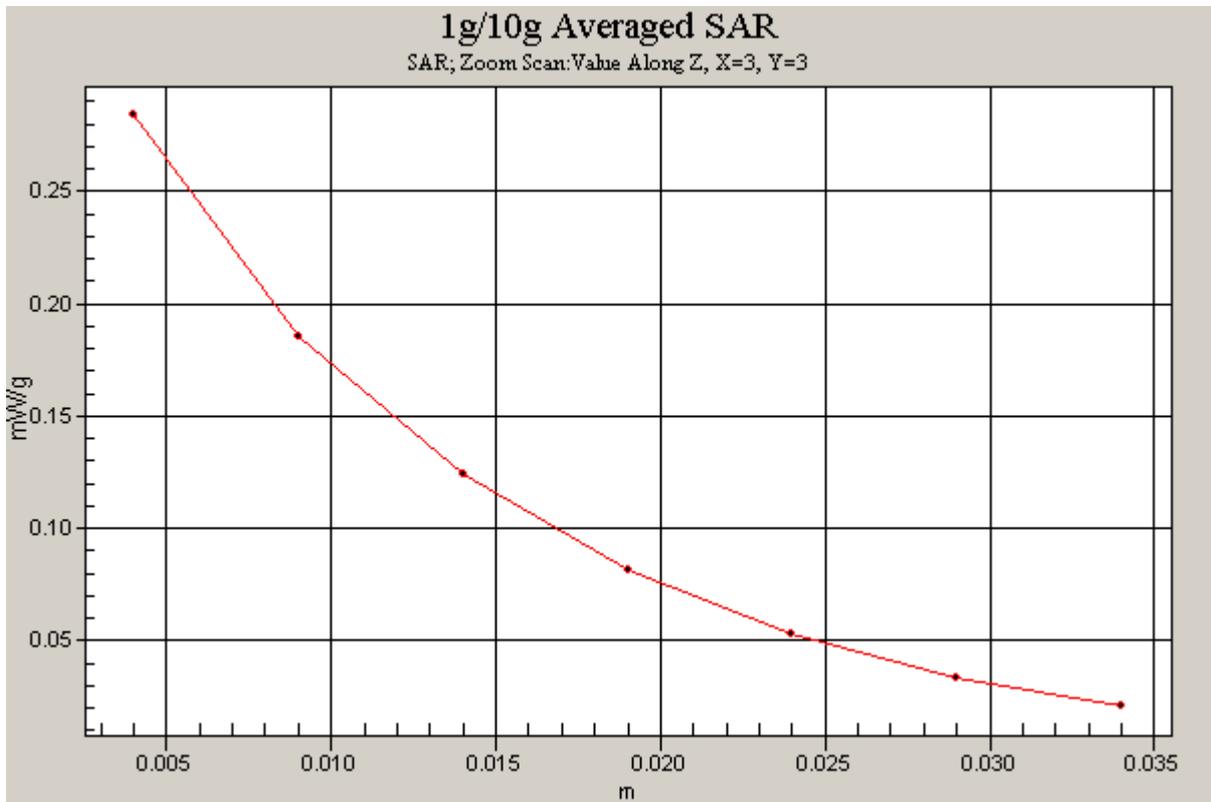


Figure 35 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 Channel 661)

GSM 1900 Towards Ground Low Open

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.283 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.04 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

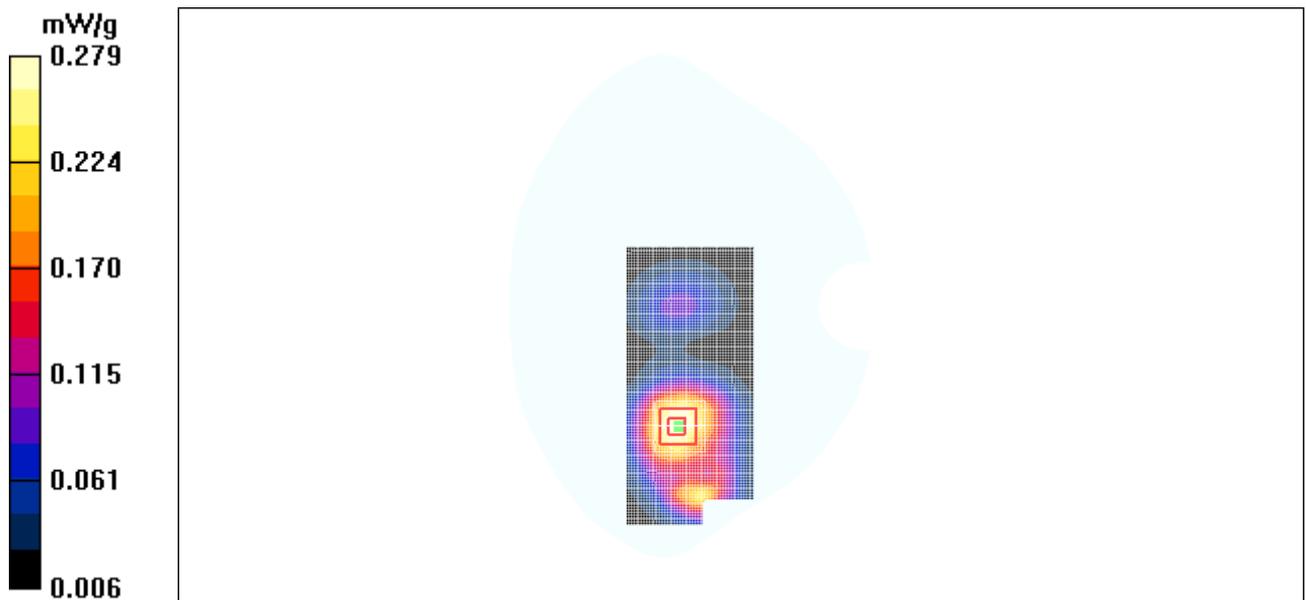


Figure 36 Body, Towards Ground, Open GSM 1900 Channel 512

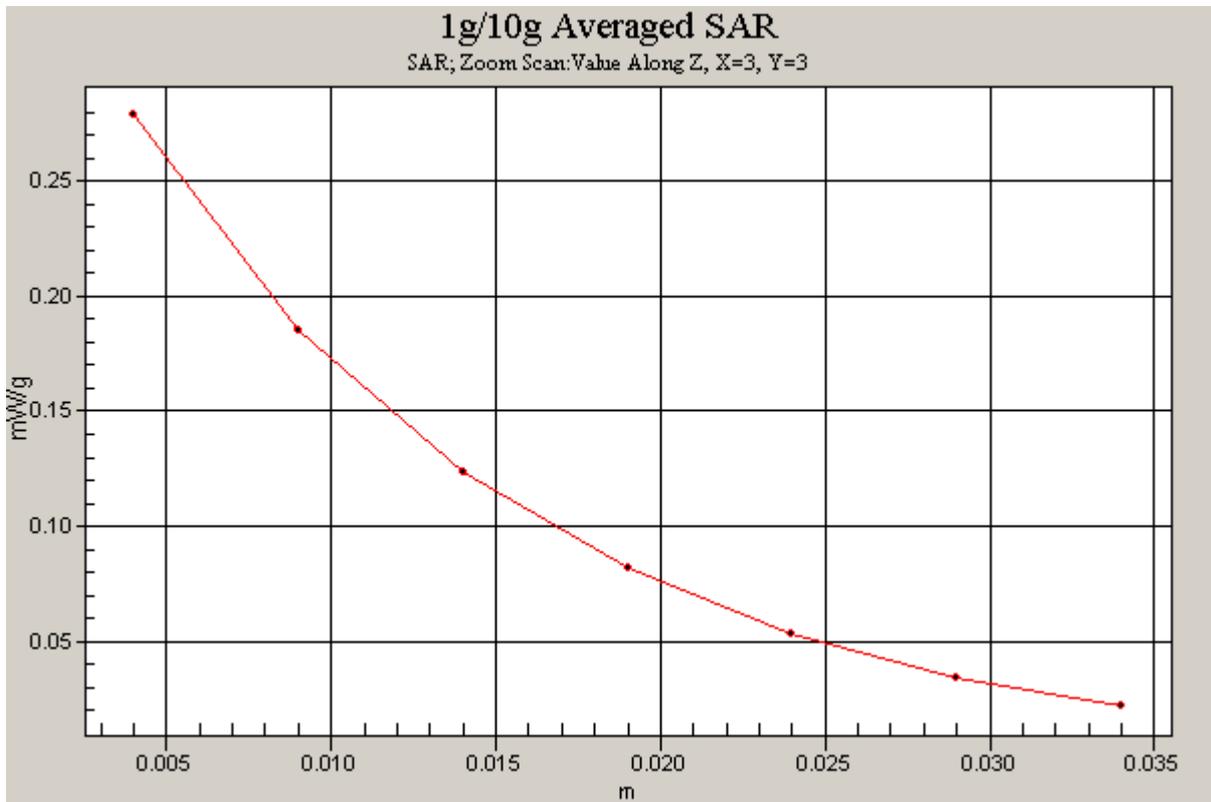


Figure 37 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 Channel 512)

GSM 1900 Towards Phantom High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.171 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.61 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

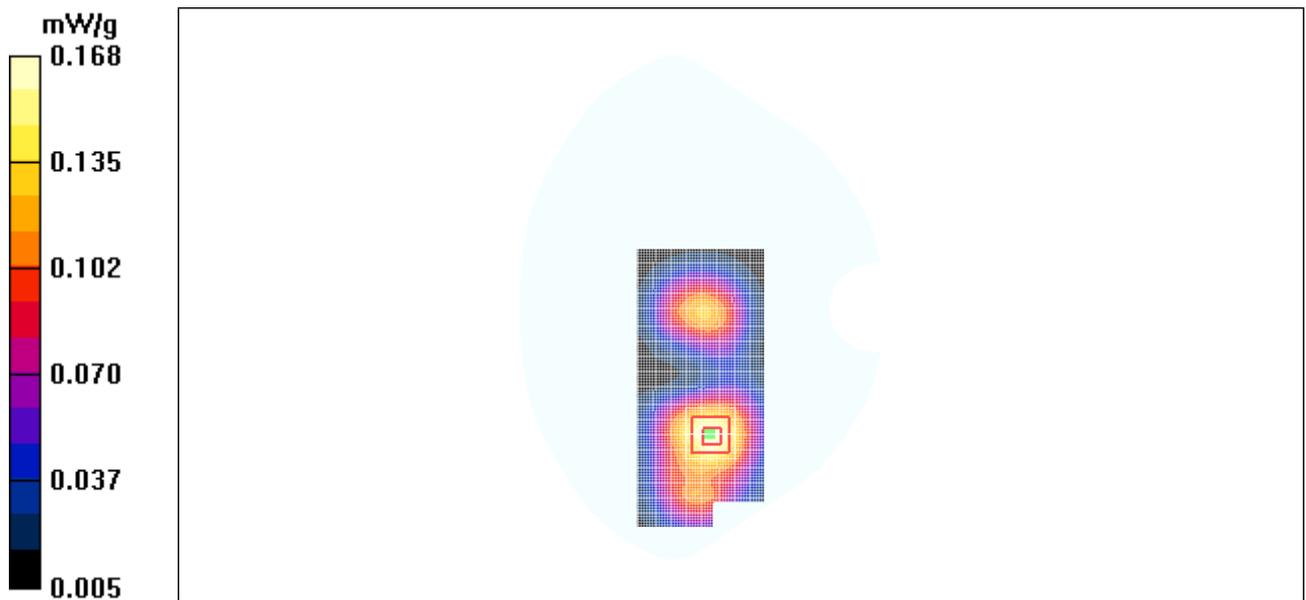


Figure 38 Body, Towards Phantom, Open GSM 1900 Channel 810

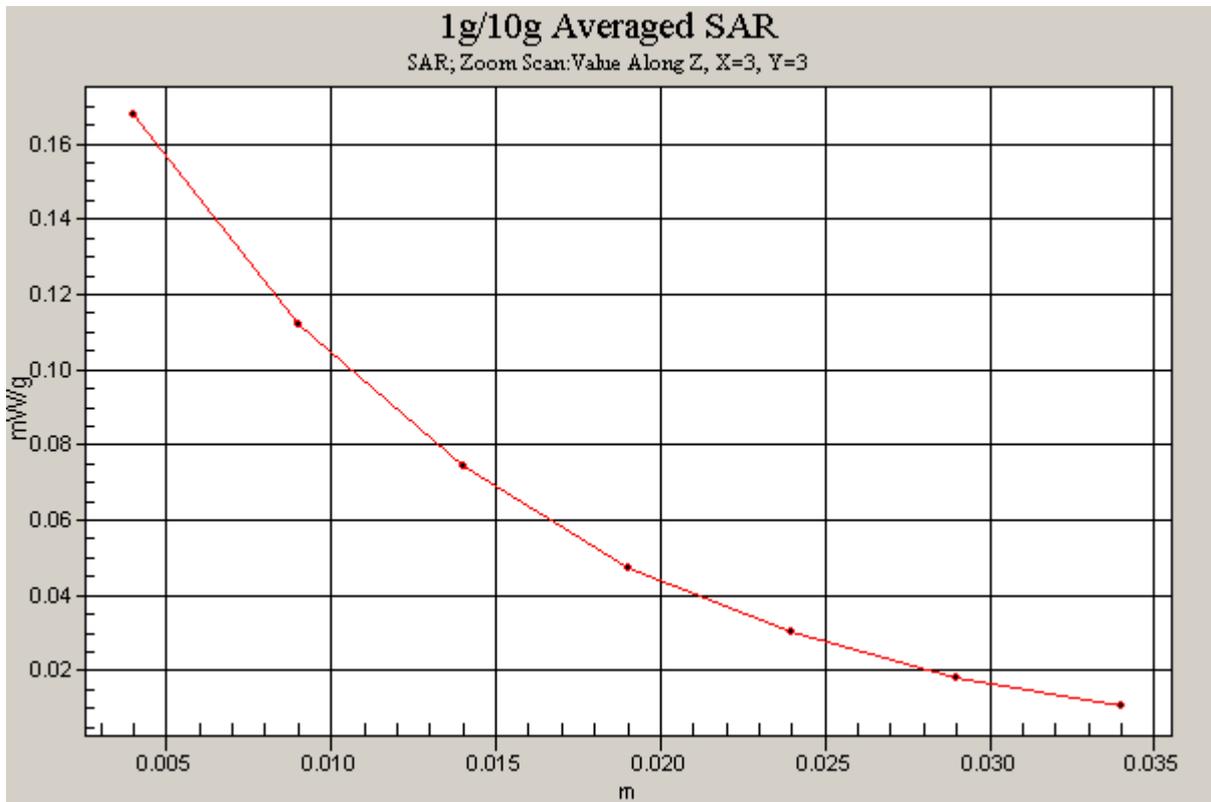


Figure 39 Z-Scan at power reference point (Body, Towards Phantom, Open GSM 1900 Channel 810)

GSM 1900 Towards Phantom Middle Open

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.153 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.54 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.150 mW/g

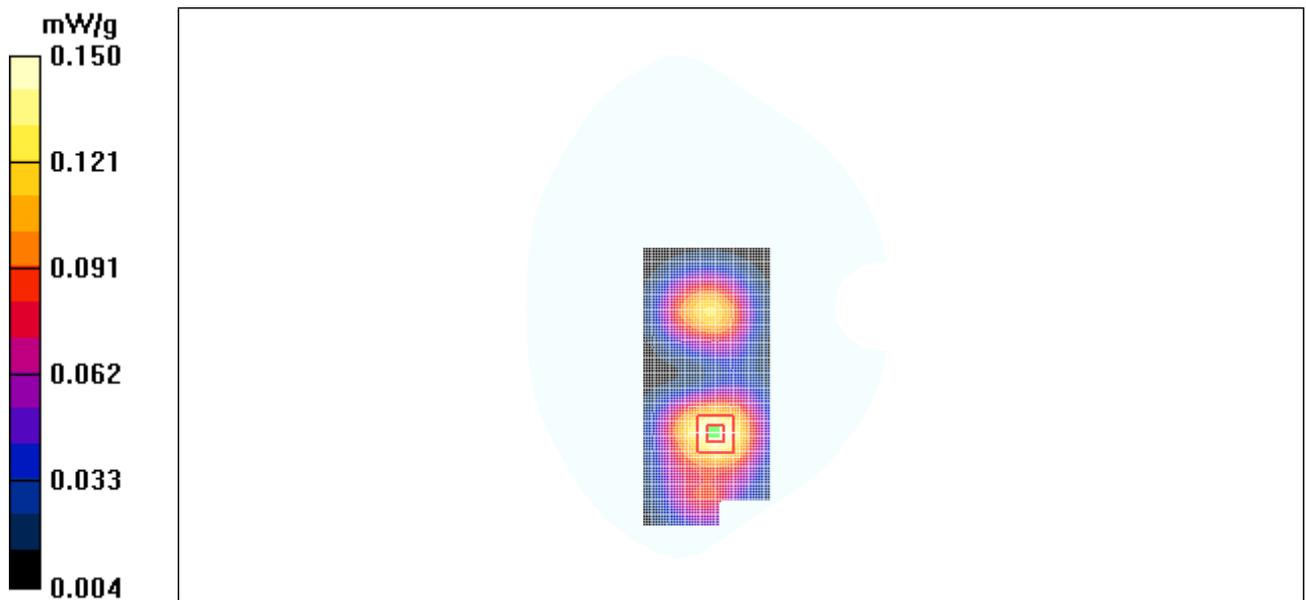


Figure 40 Body, Towards Phantom, Open GSM 1900 Channel 661

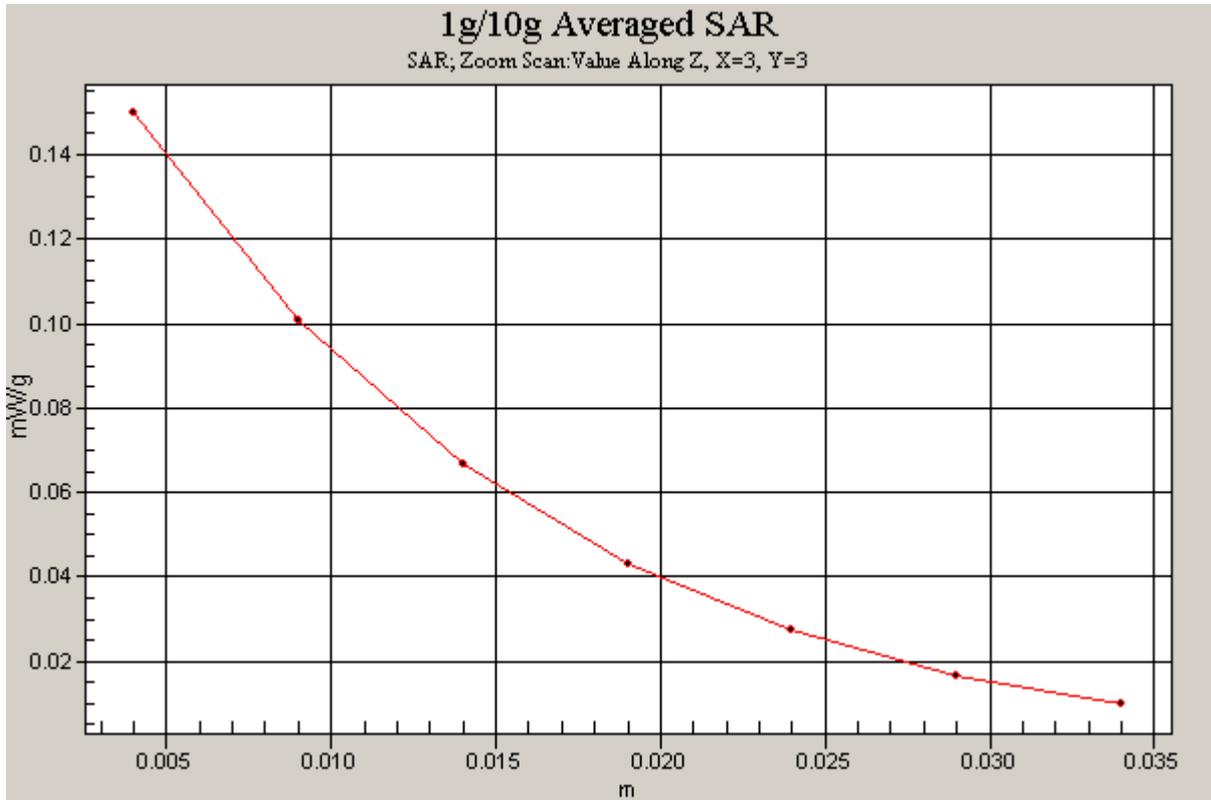


Figure 41 Z-Scan at power reference point (Body, Towards Phantom, Open GSM 1900 Channel 661)

GSM 1900 Towards Phantom Low Open

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.154 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.76 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.151 mW/g

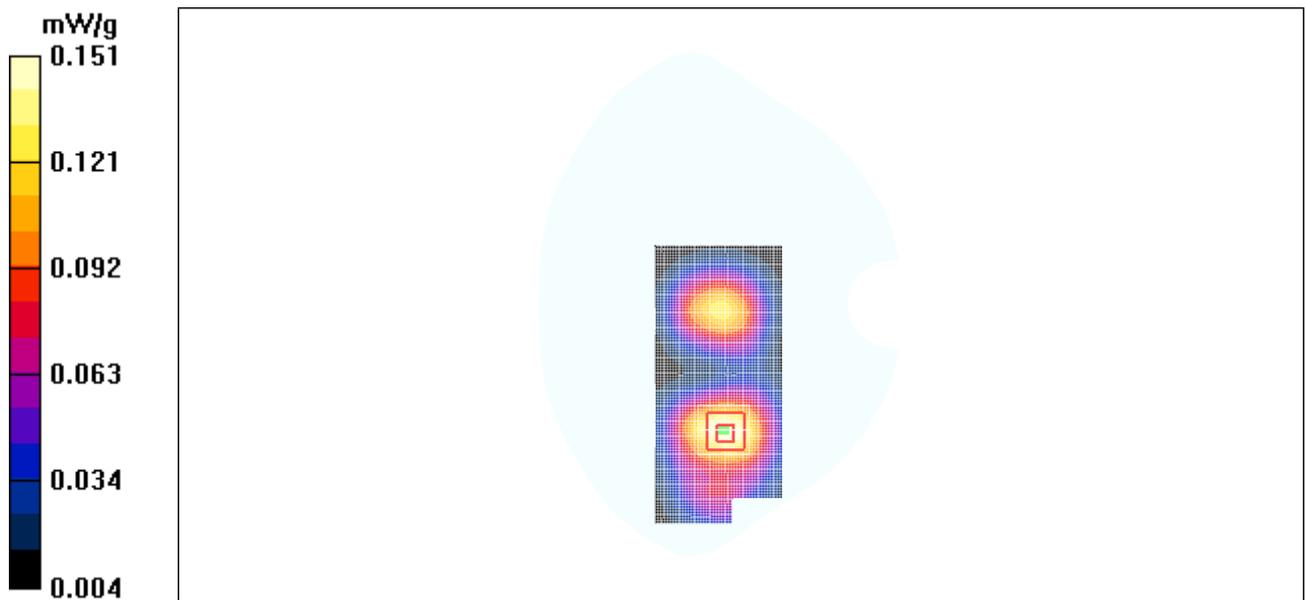


Figure 42 Body, Towards Phantom, Open GSM 1900 Channel 512

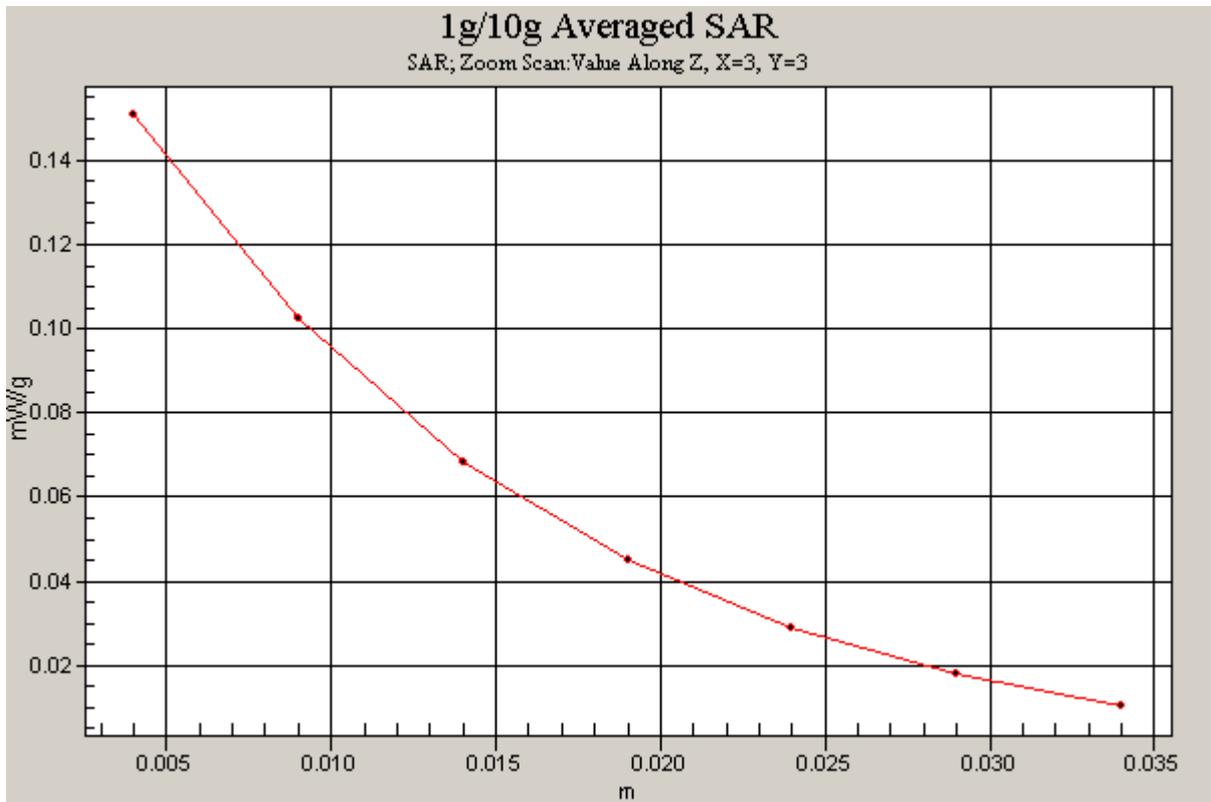


Figure 43 Z-Scan at power reference point (Body with Earphone, Towards Ground, Open GSM 1900, Channel 512)

GSM 1900 Earphone Towards Ground High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.335 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.03 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.334 mW/g

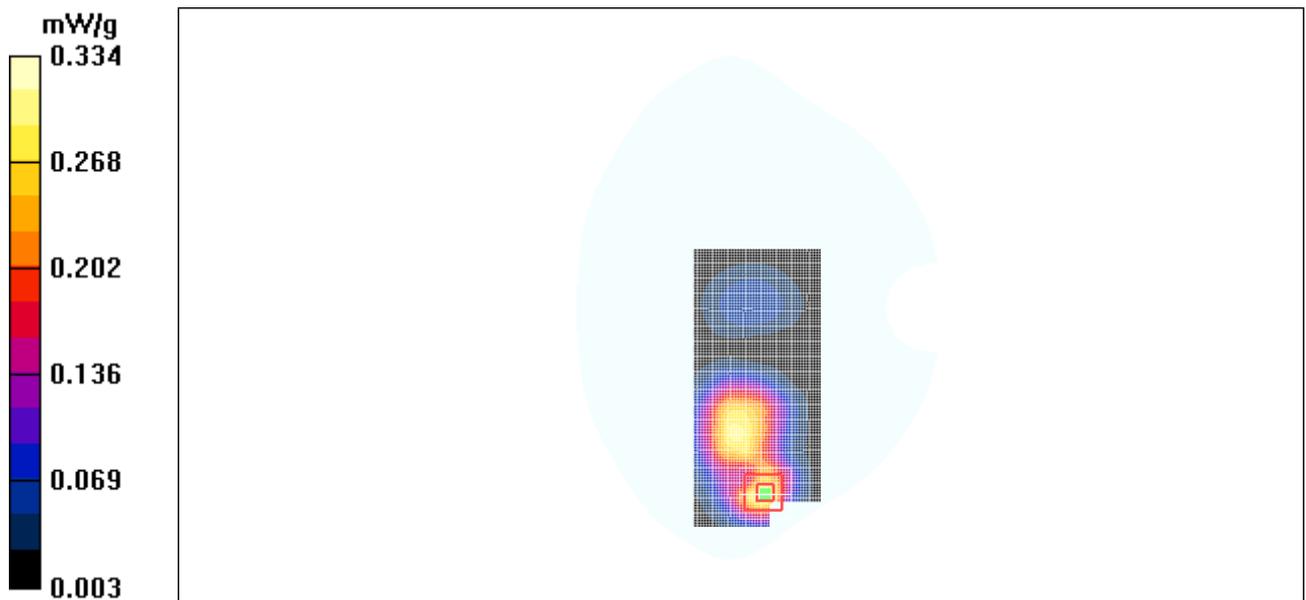


Figure 44 Body with Earphone, Towards Ground, Open GSM 1900, Channel 810

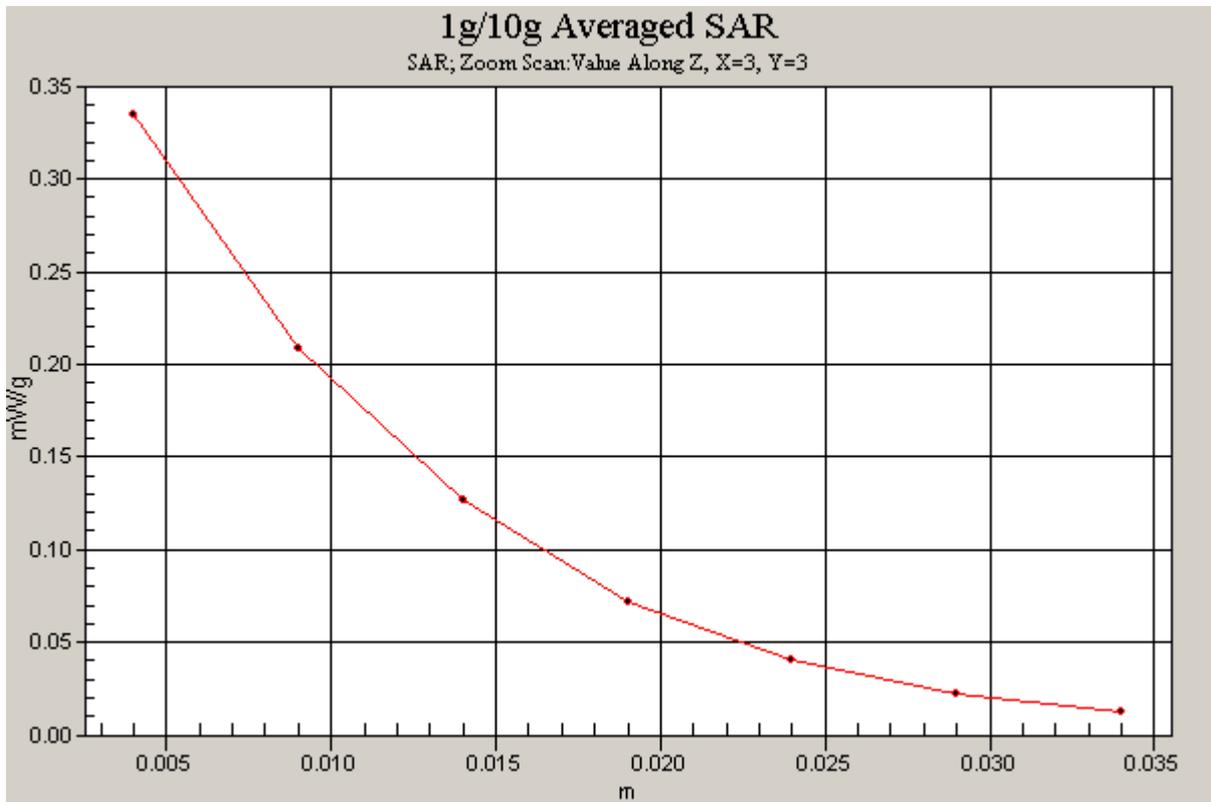


Figure 45 Z-Scan at power reference point (Body with Earphone, Towards Ground, Open GSM 1900, Channel 810)

GSM 1900 Bluetooth Earphone Towards Ground High Open

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.391 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.38 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

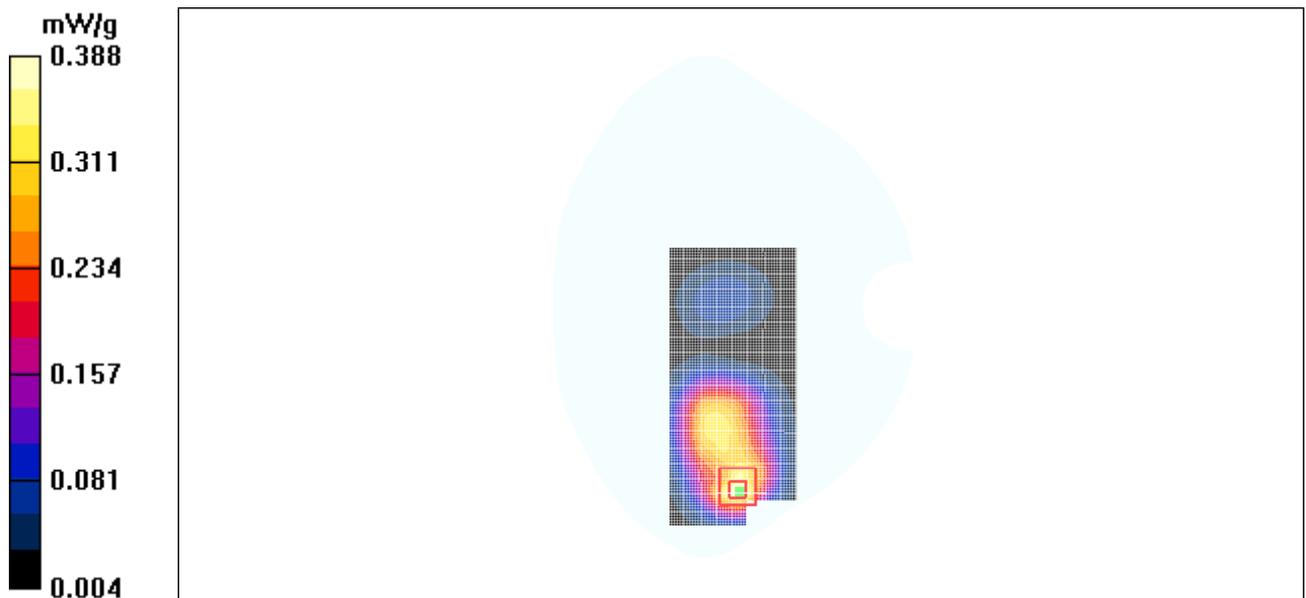


Figure 46 Body with Bluetooth earphone, Towards Ground, Open GSM 1900, Channel 810

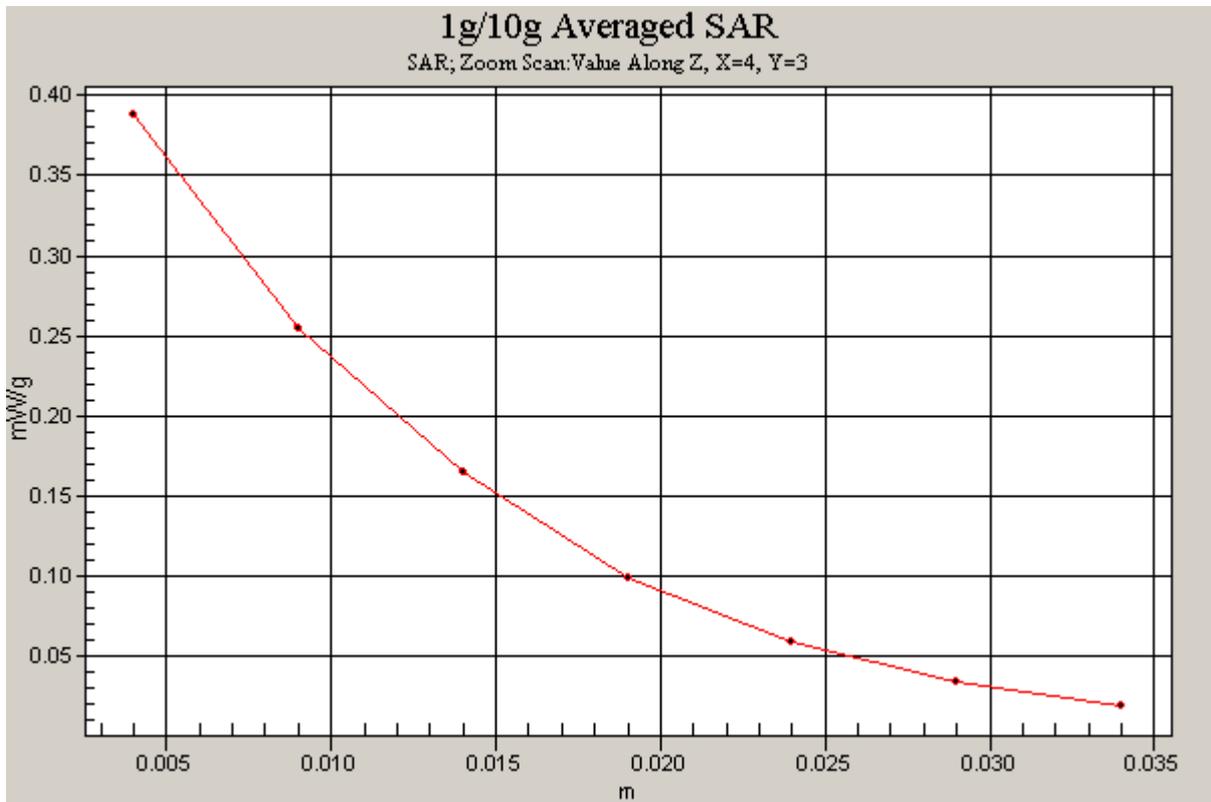


Figure 47 Z-Scan at power reference point (Body with Bluetooth earphone, Towards Ground, Open GSM 1900, Channel 810)

GSM 1900 GPRS Towards Ground High Open

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.652 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.679 mW/g

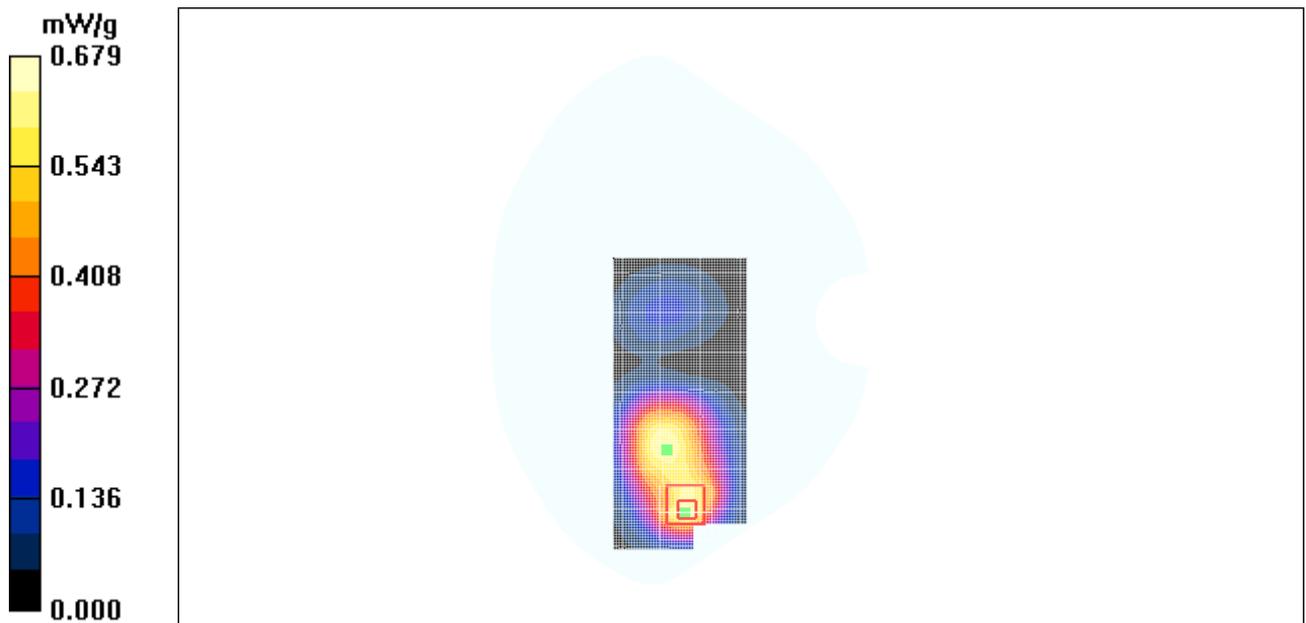


Figure 48 Body, Towards Ground, Open GSM 1900 GPRS, Channel 810

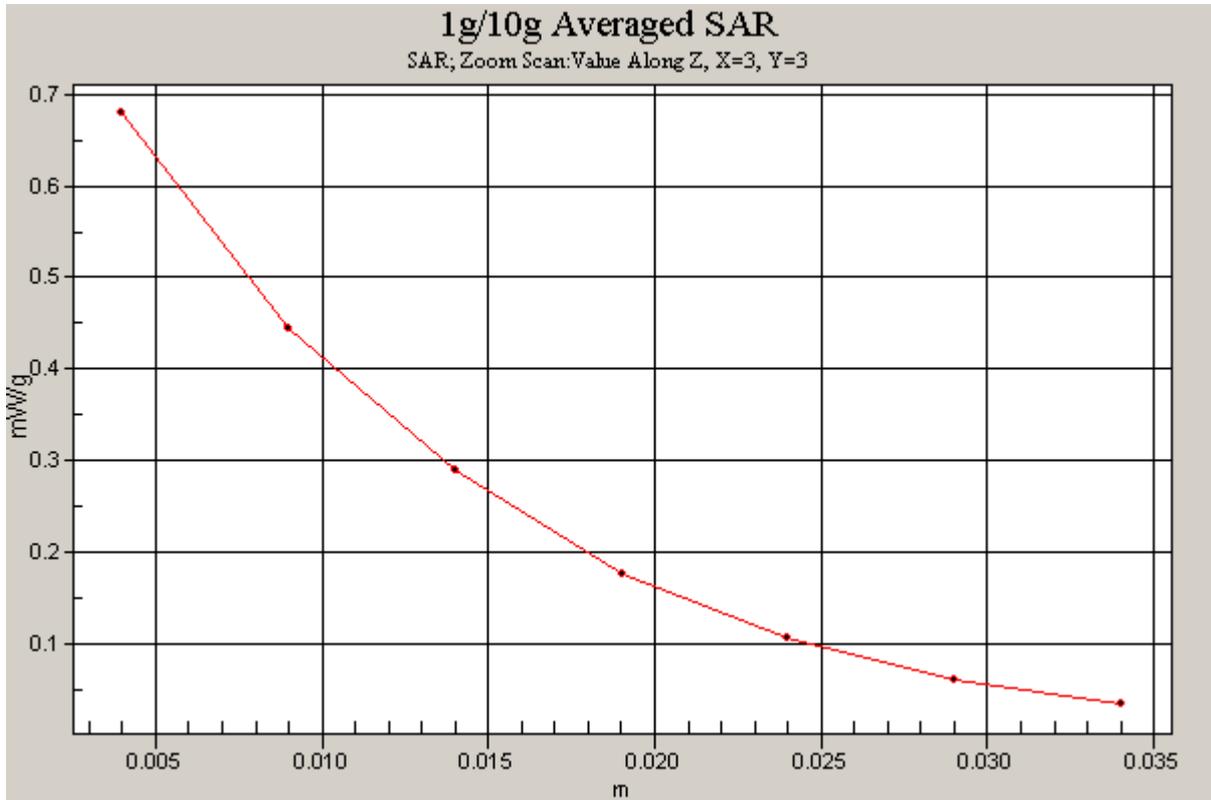


Figure 49 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Ground Middle Open

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.570 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.532 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.566 mW/g

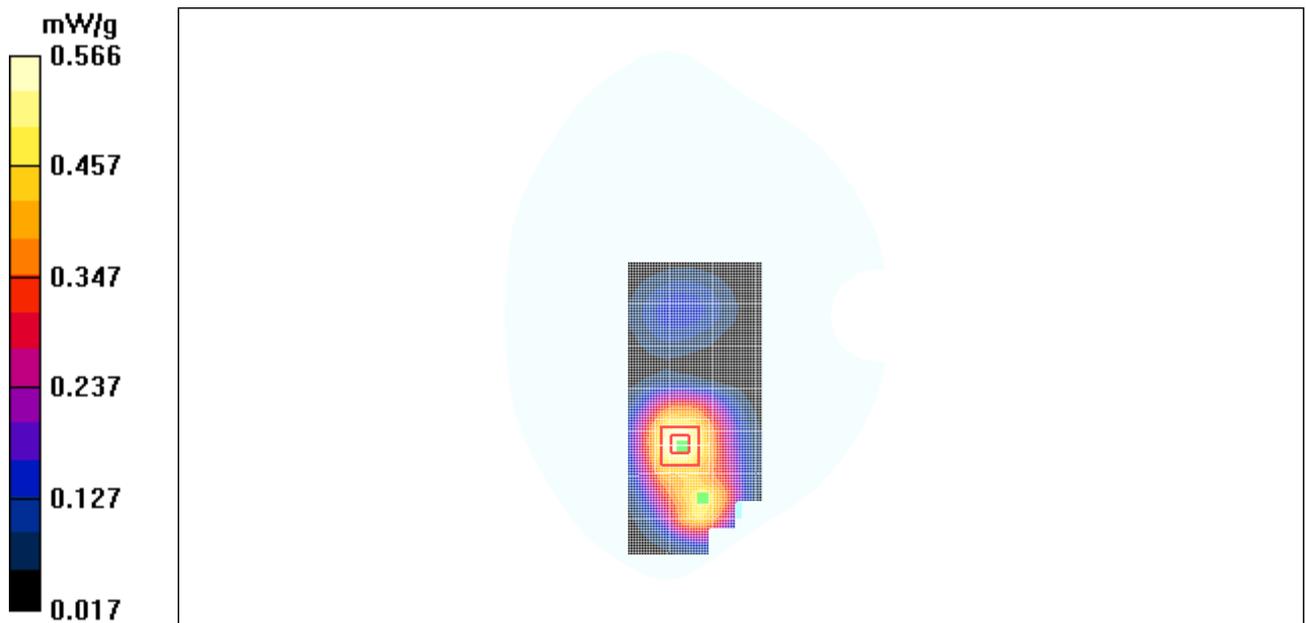


Figure 50 Body, Towards Ground, Open GSM 1900 GPRS Channel 661

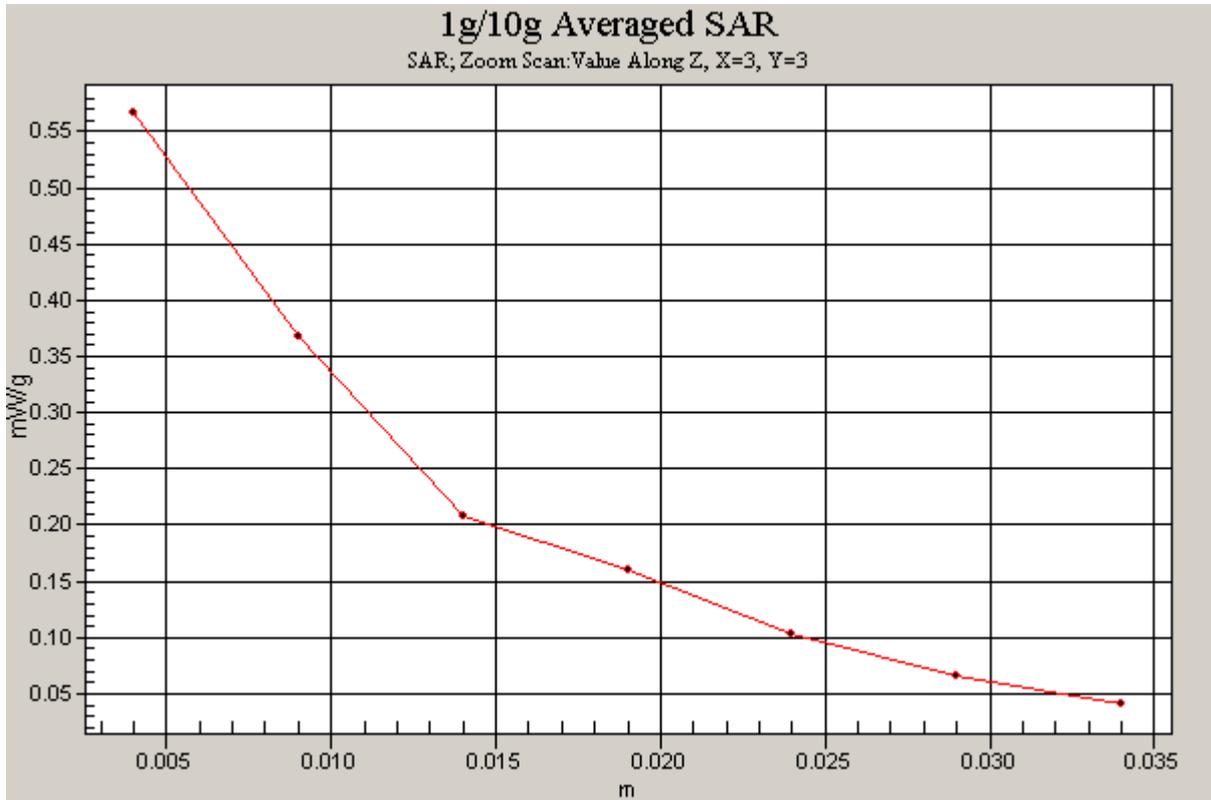


Figure 51 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 GPRS Channel 661)

GSM 1900 GPRS Towards Ground Low Open

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.551 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.330 mW/g

Maximum value of SAR (measured) = 0.551 mW/g

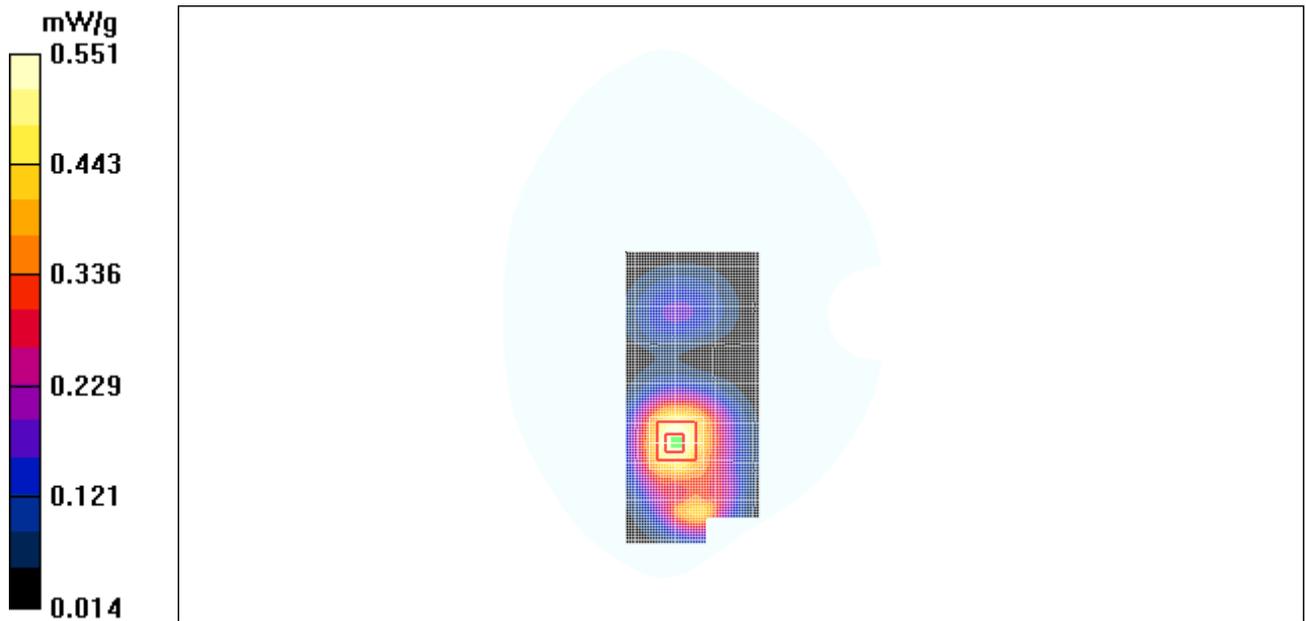


Figure 52 Body, Towards Ground, Open GSM 1900 GPRS Channel 512

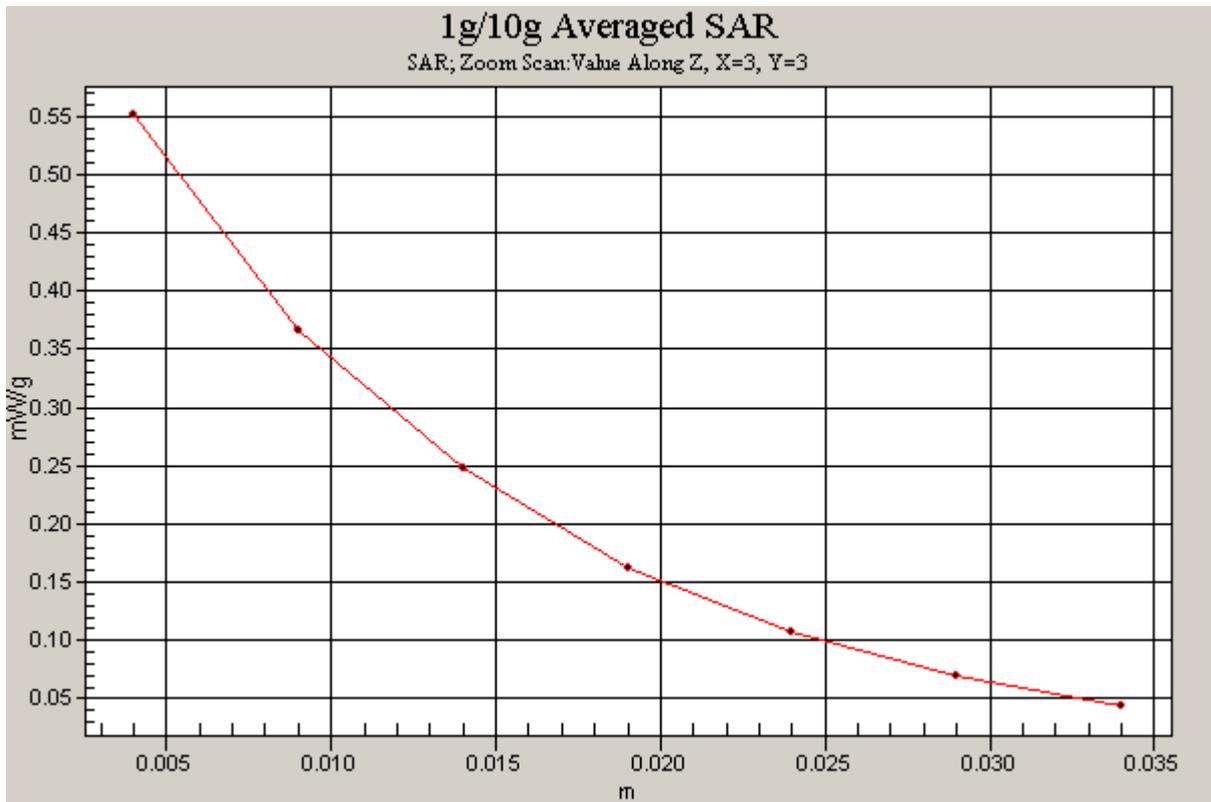


Figure 53 Z-Scan at power reference point (Body, Towards Ground, Open GSM 1900 GPRS Channel 512)

GSM 1900 GPRS Towards Phantom High Open

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom High/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.281 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.276 mW/g

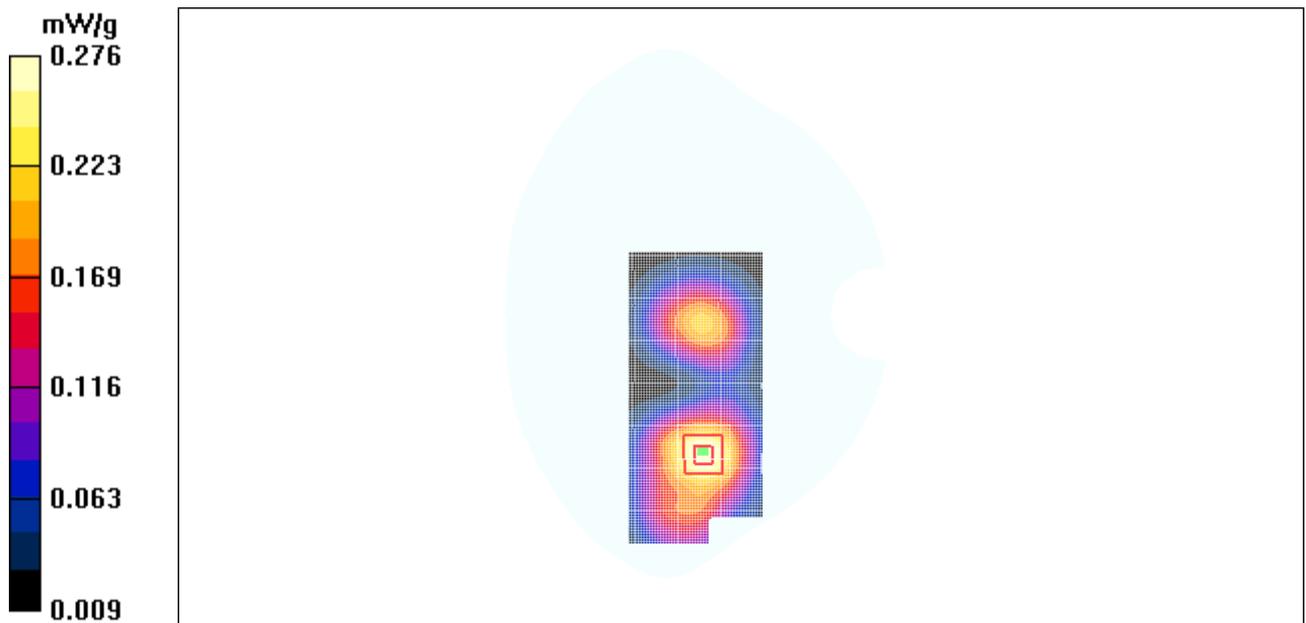


Figure 54 Body, Towards Phantom, Open GSM 1900 GPRS, Channel 810

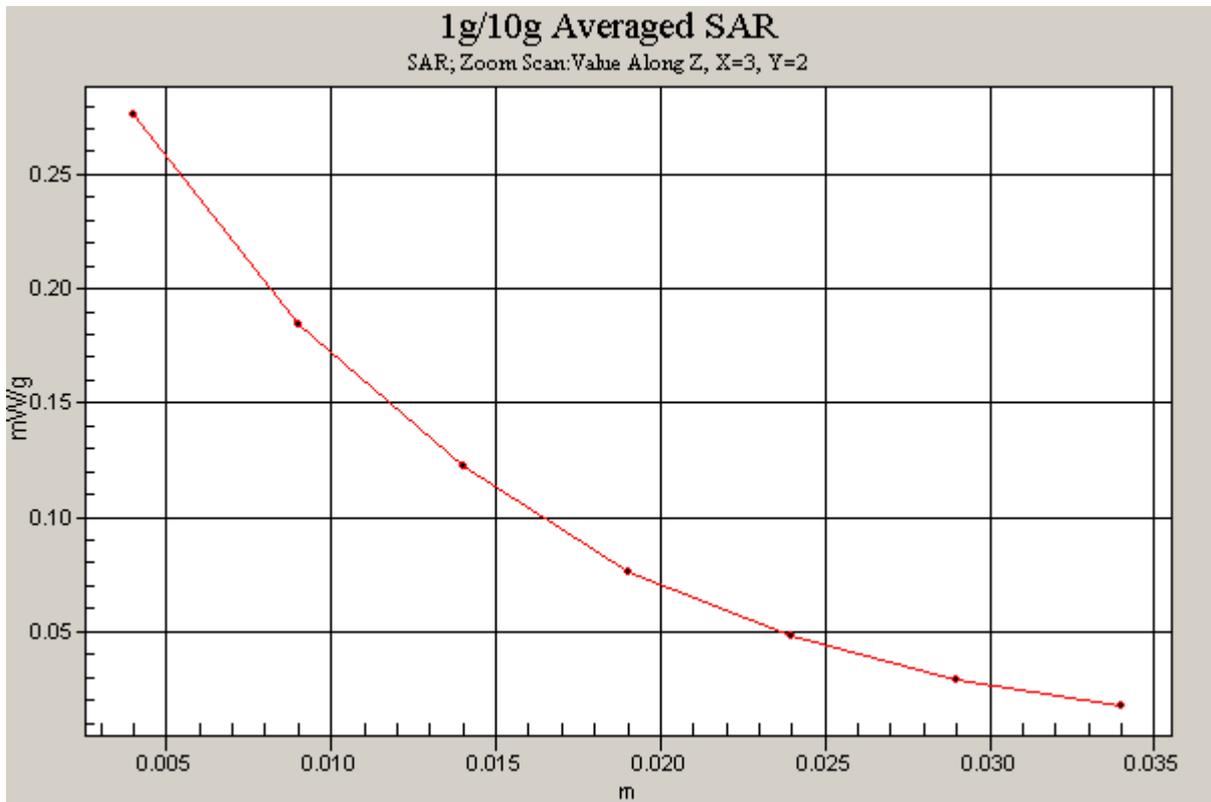


Figure 55 Z-Scan at power reference point (Body, Towards Phantom, Open GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Phantom Middle Open

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Middle/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.253 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.147 mW/g

Maximum value of SAR (measured) = 0.247 mW/g

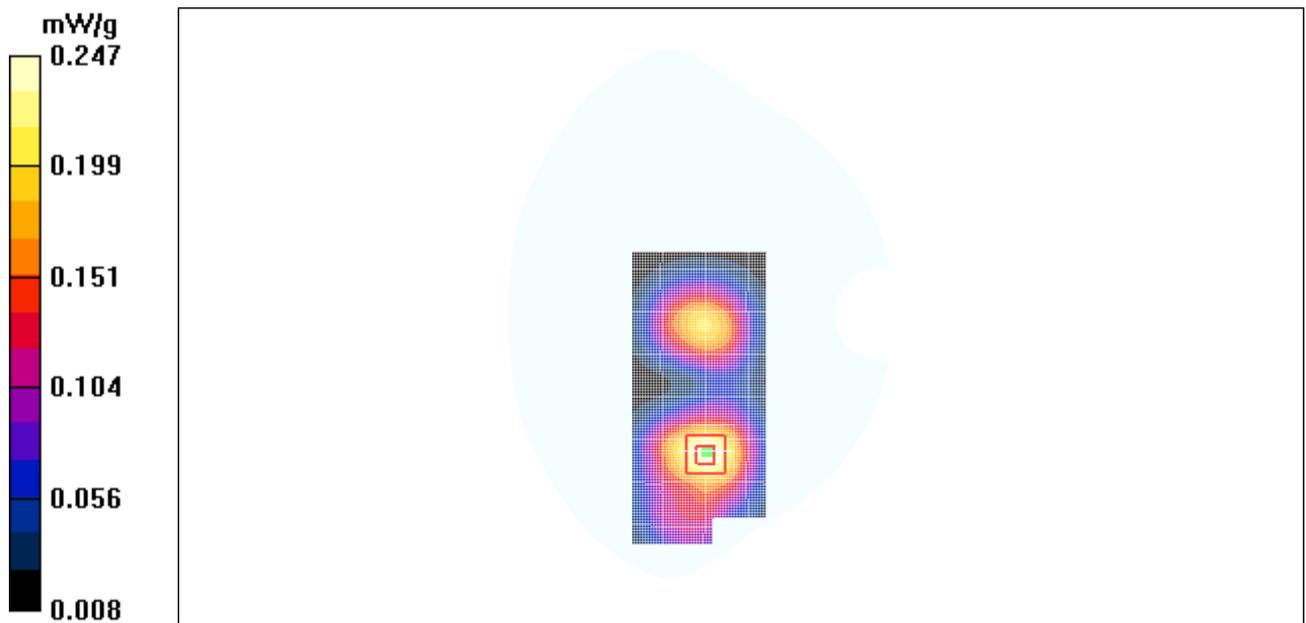


Figure 56 Body, Towards Phantom, Open GSM 1900 GPRS Channel 661

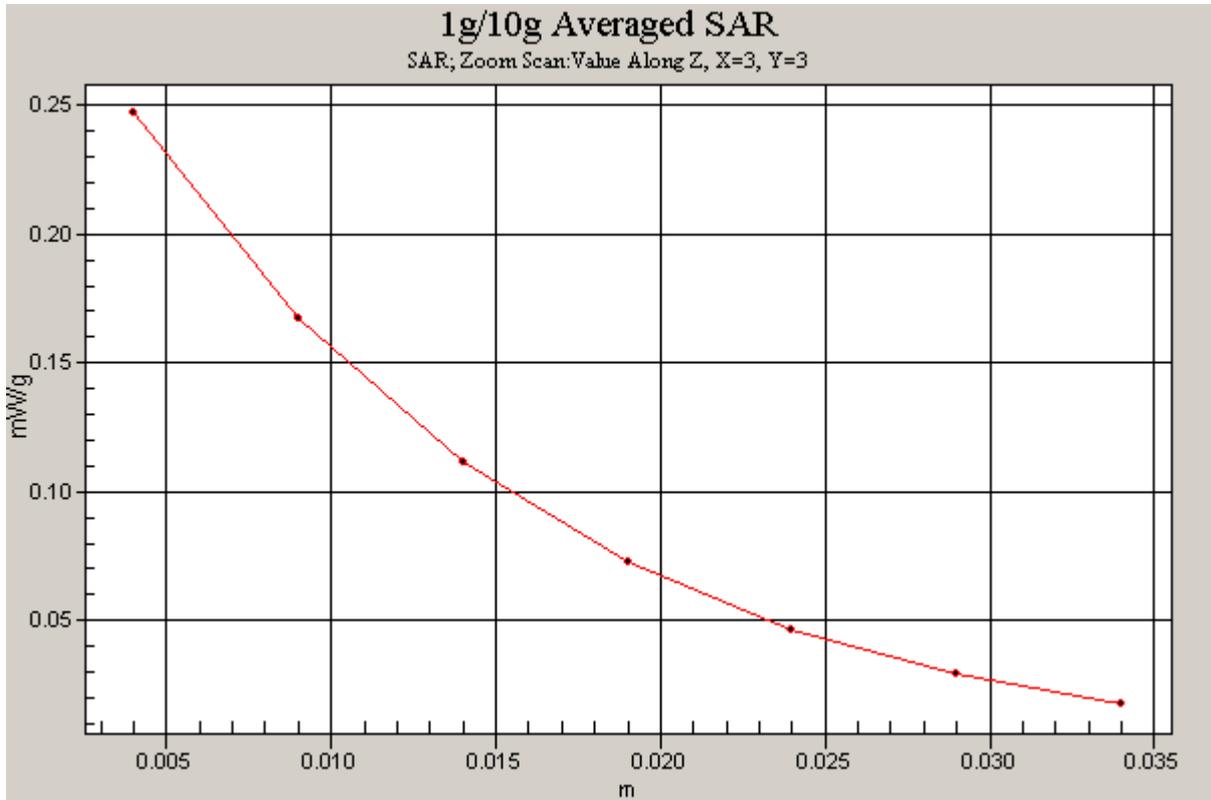


Figure 57 Z-Scan at power reference point (Body, Towards Phantom, Open GSM 1900 GPRS Channel 661)

GSM 1900 GPRS Towards Phantom Low Open

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Low/Area Scan (51x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.257 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

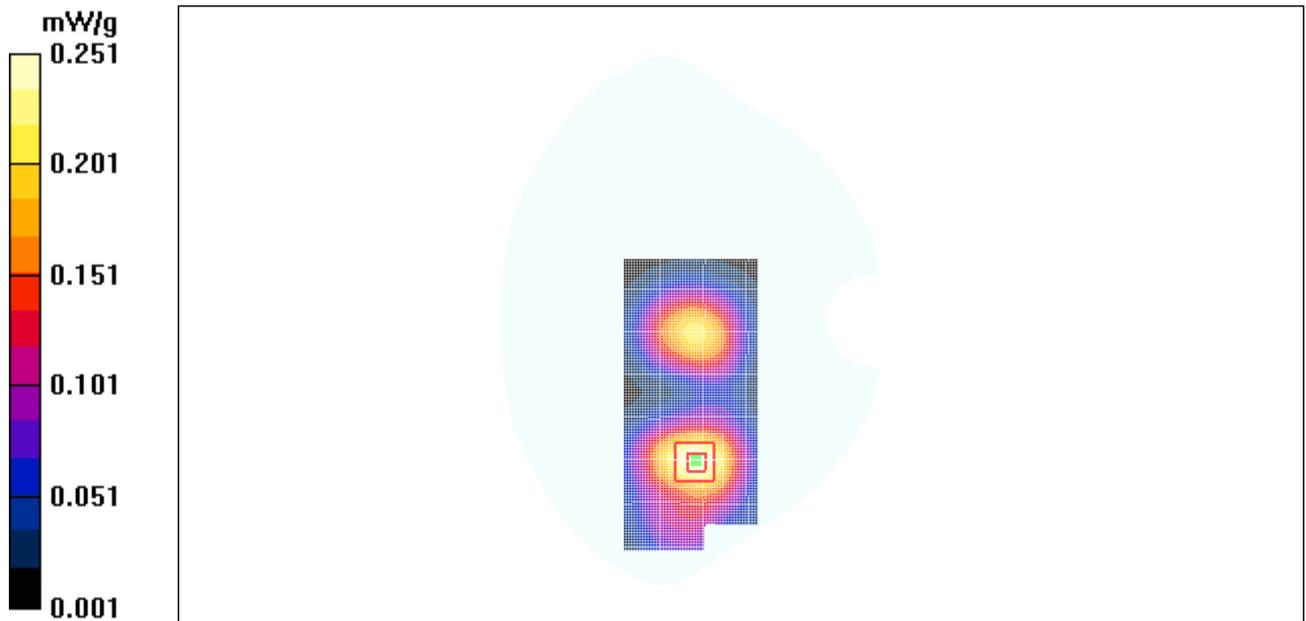


Figure 58 Body, Towards Phantom, Open GSM 1900 GPRS Channel 512

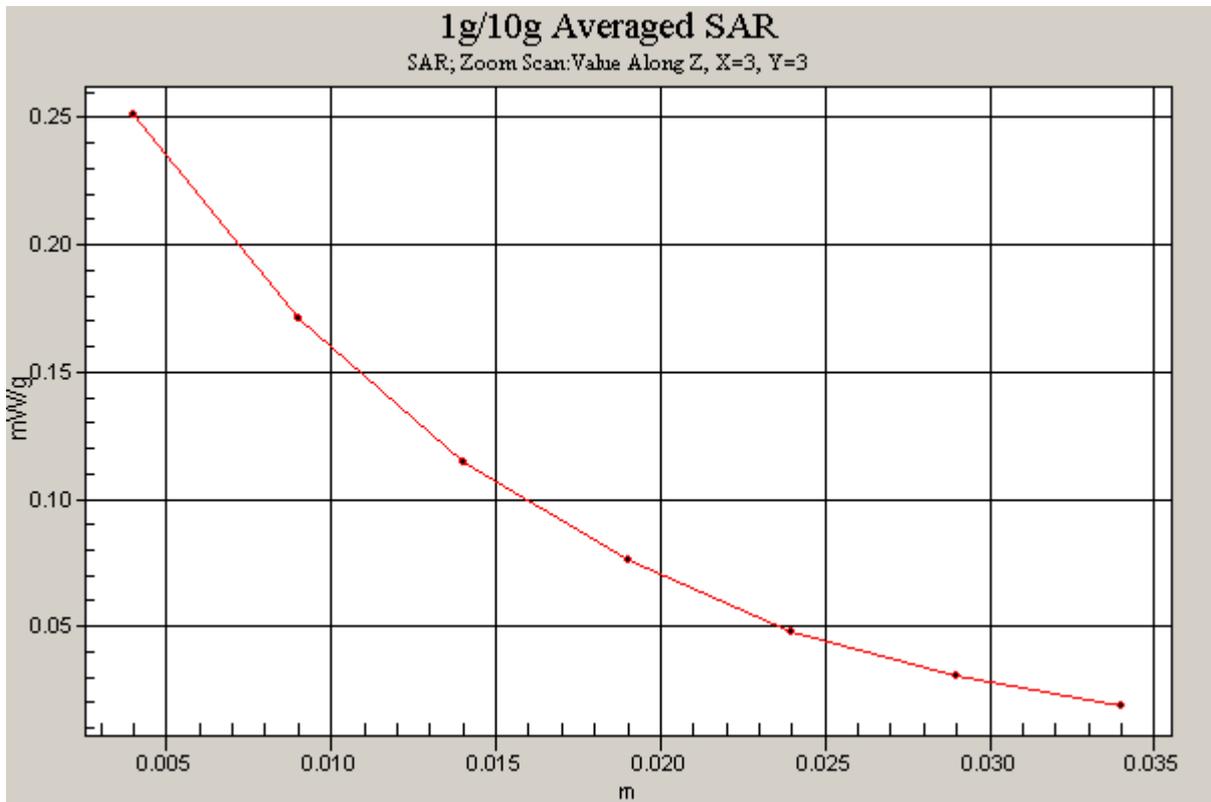


Figure 59 Z-Scan at power reference point (Body, Towards Phantom, Open GSM 1900 GPRS Channel 512)

GSM 1900 Left Cheek High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.482 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.63 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

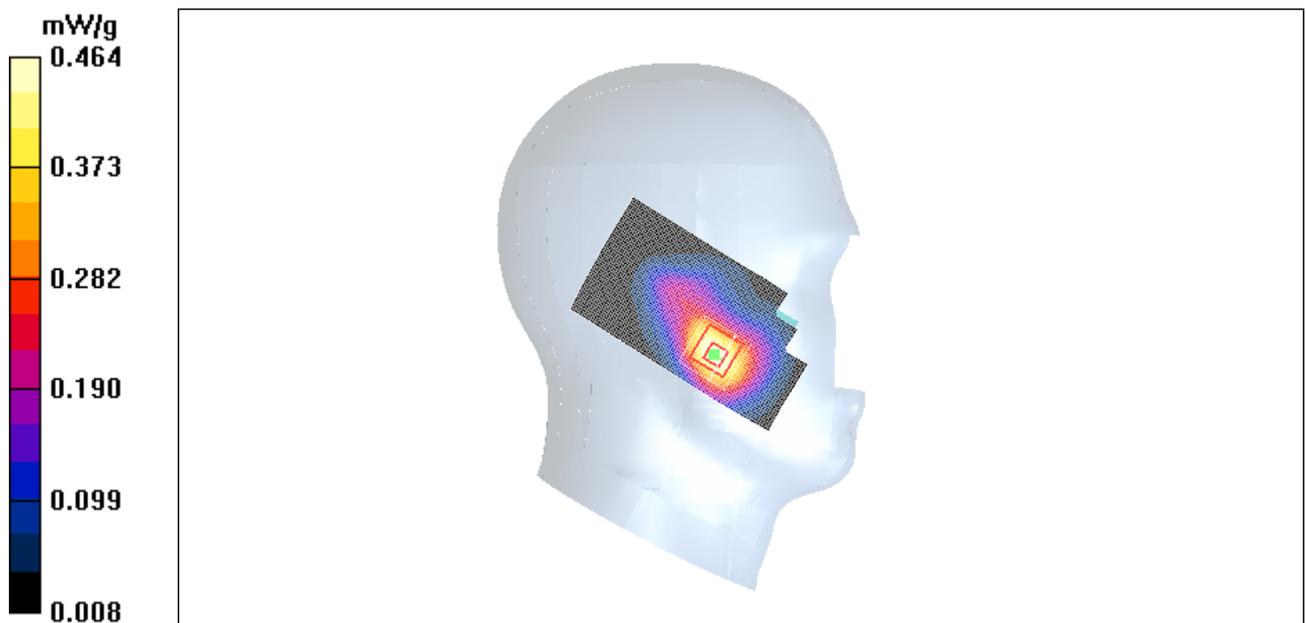


Figure 60 Left Hand Touch Cheek Close GSM 1900 Channel 810

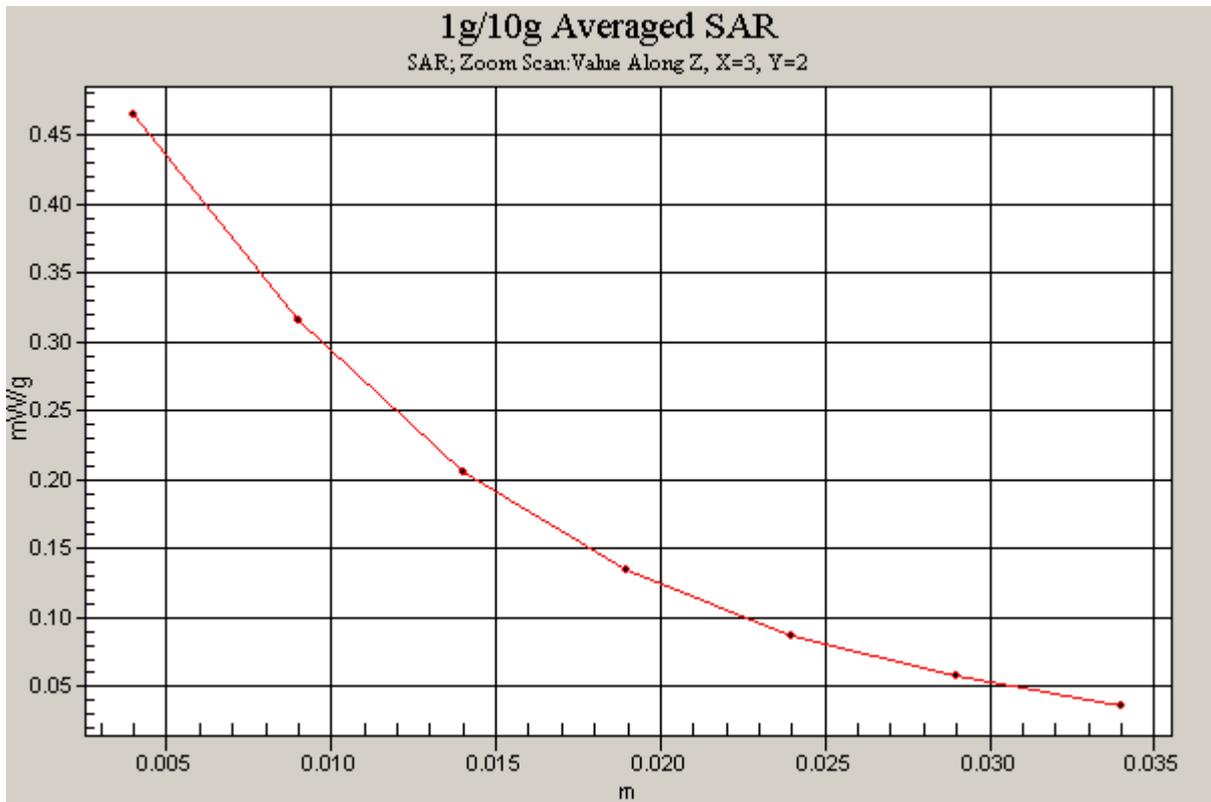


Figure 61 Z-Scan at power reference point (Left Hand Touch Cheek Close GSM 1900 Channel 810)

GSM 1900 Left Cheek Middle Close

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.467 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.60 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.261 mW/g

Maximum value of SAR (measured) = 0.452 mW/g

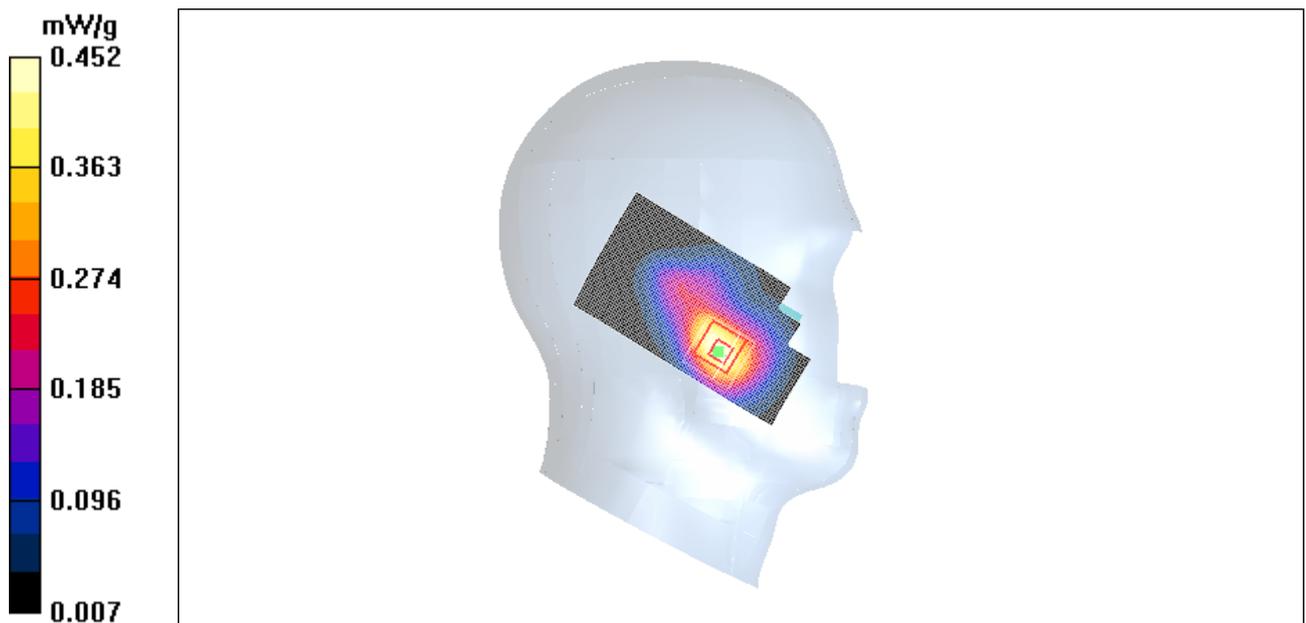


Figure 62 Left Hand Touch Cheek Close GSM 1900 Channel 661

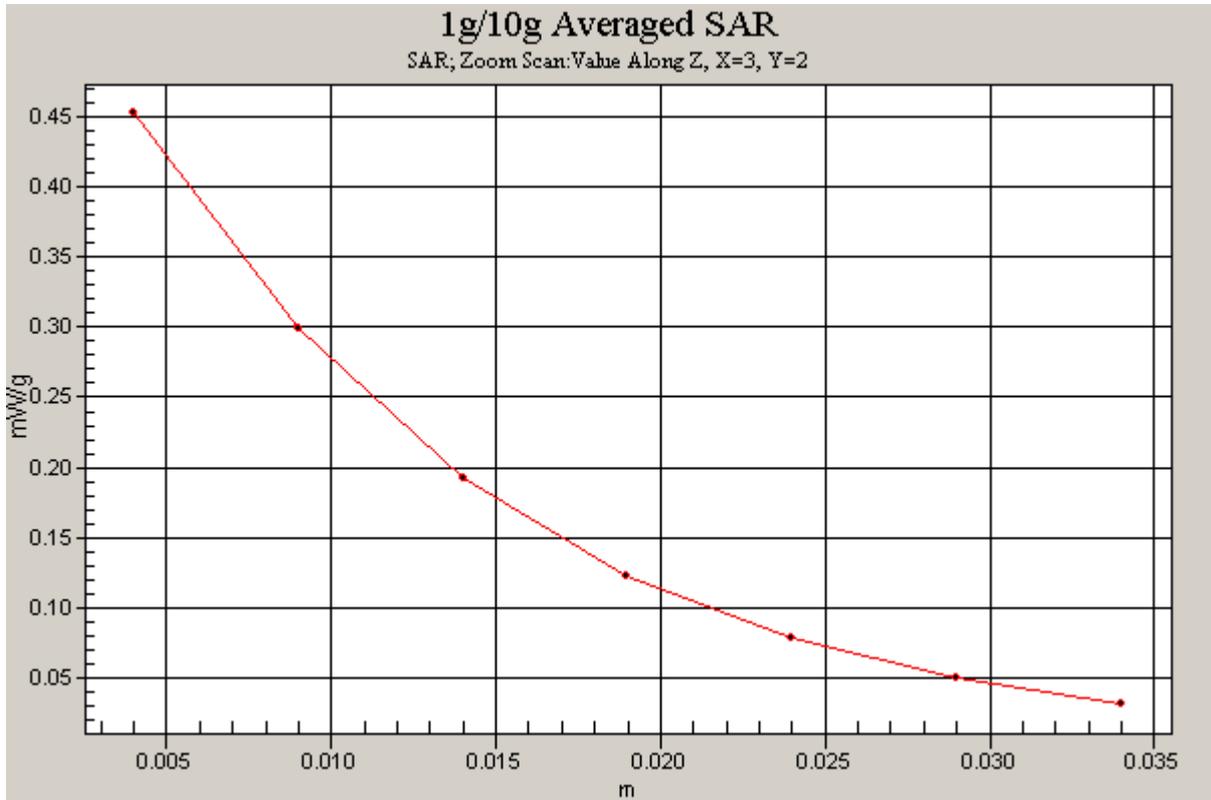


Figure 63 Z-Scan at power reference point (Left Hand Touch Cheek Close GSM 1900 Channel 661)

GSM 1900 Left Cheek Low Close

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.383 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.09 V/m; Power Drift = 0.098 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

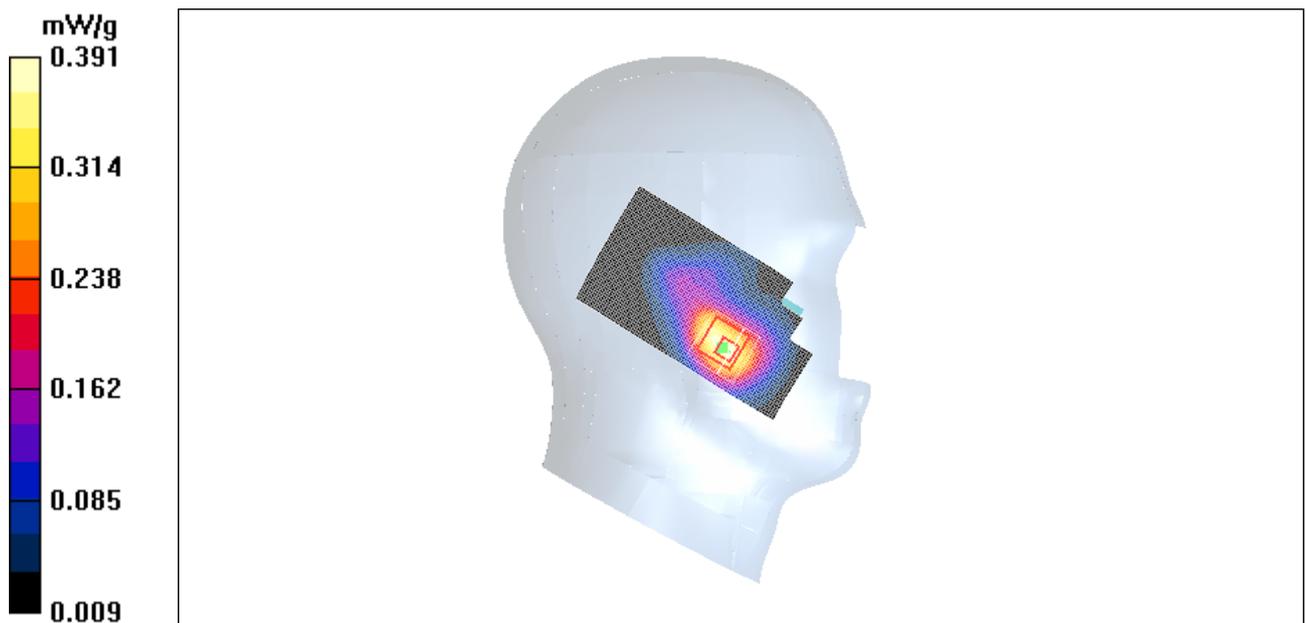


Figure 64 Left Hand Touch Cheek Close GSM 1900 Channel 512

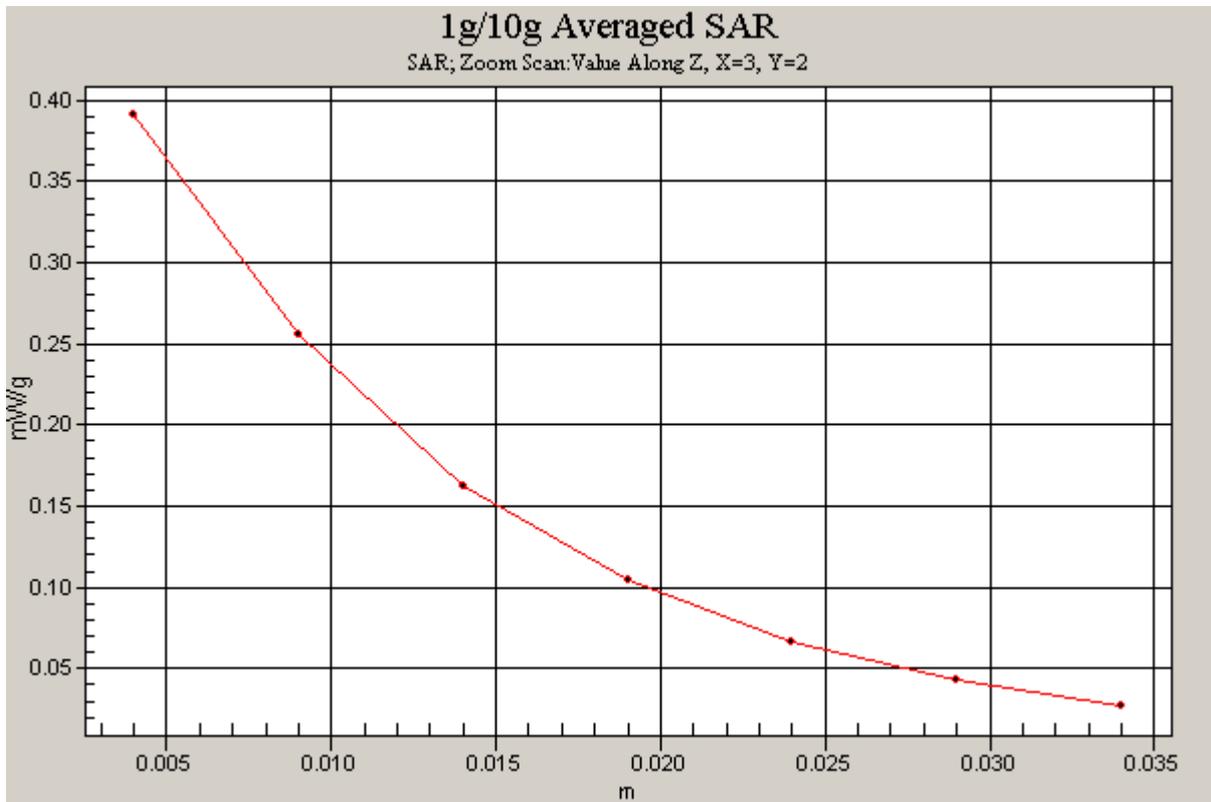


Figure 65 Z-Scan at power reference point (Left Hand Touch Cheek Close GSM 1900 Channel 512)

GSM 1900 Left Tilt High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.165 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.05 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.159 mW/g

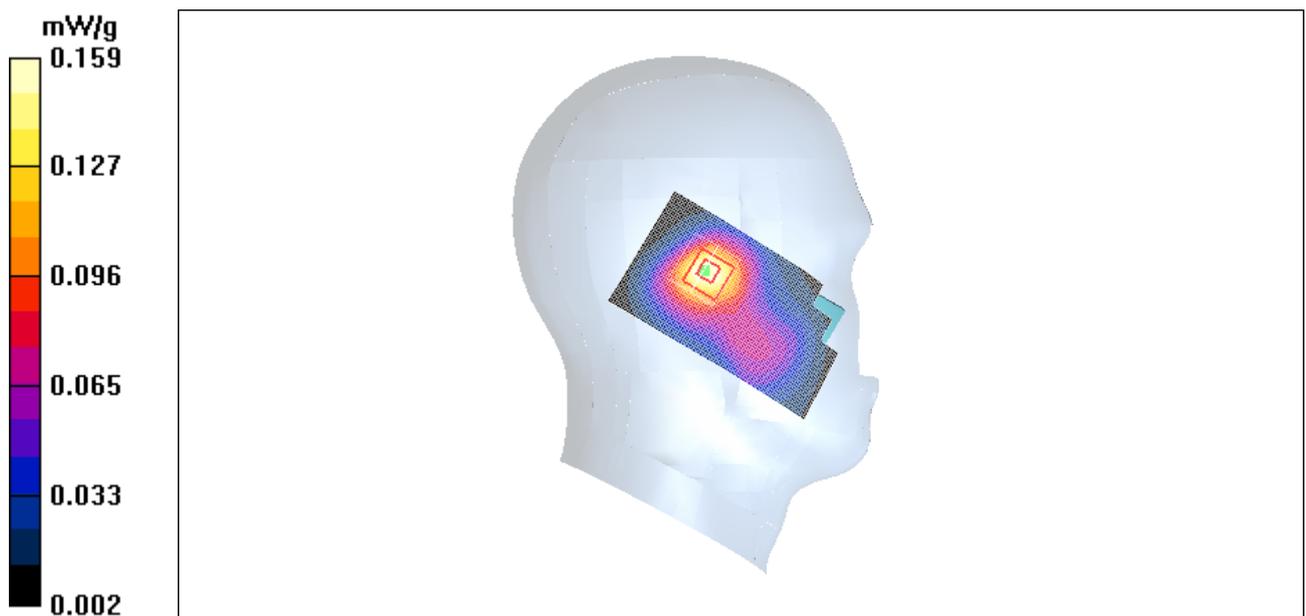


Figure 66 Left Hand Tilt 15°Close GSM 1900 Channel 810

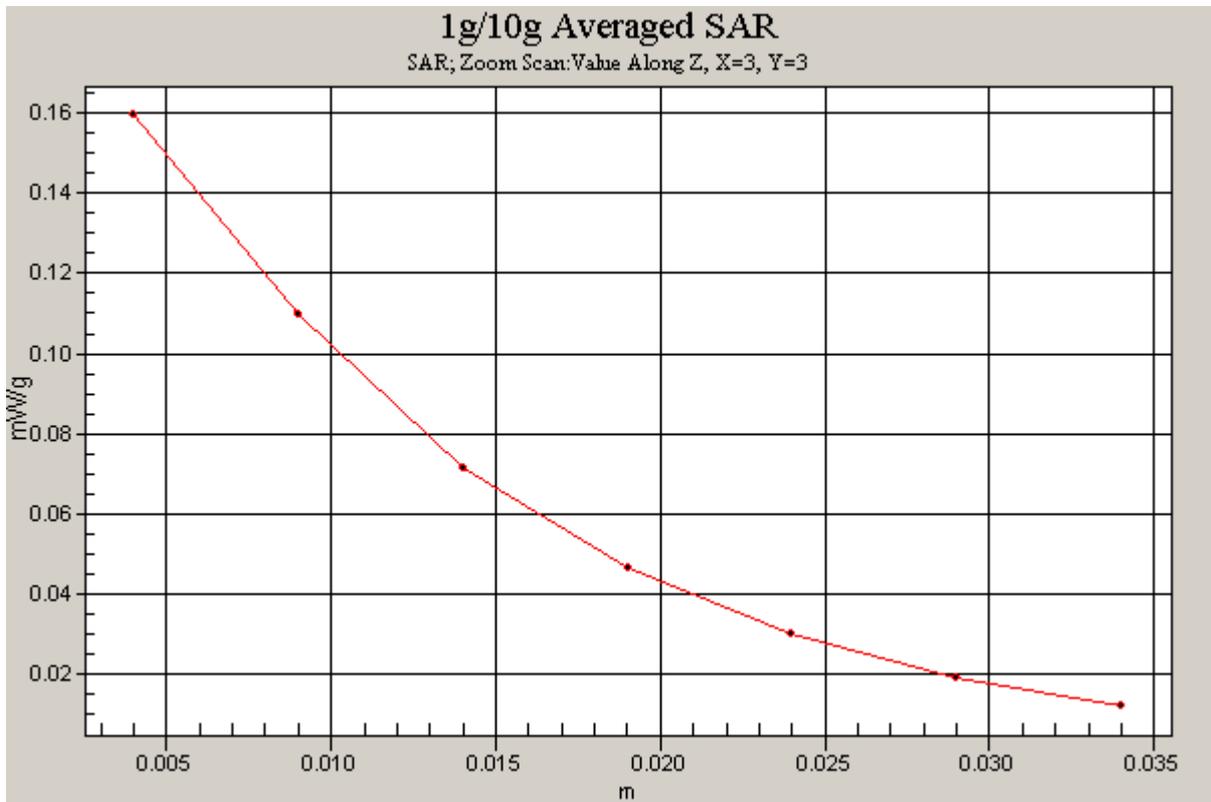


Figure 67 Z-Scan at power reference point (Left Hand Tilt 15° Close GSM 1900 Channel 810)

GSM 1900 Left Tilt Middle Close

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.155 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.74 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.150 mW/g

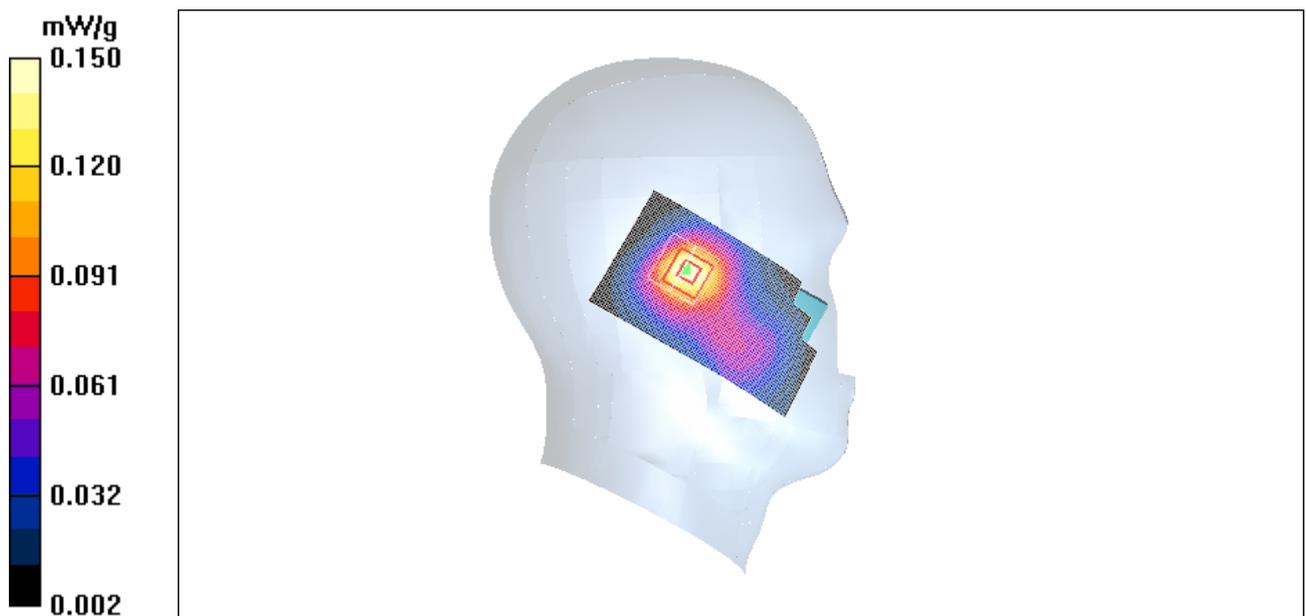


Figure 68 Left Hand Tilt 15 ° Close GSM 1900 Channel 661

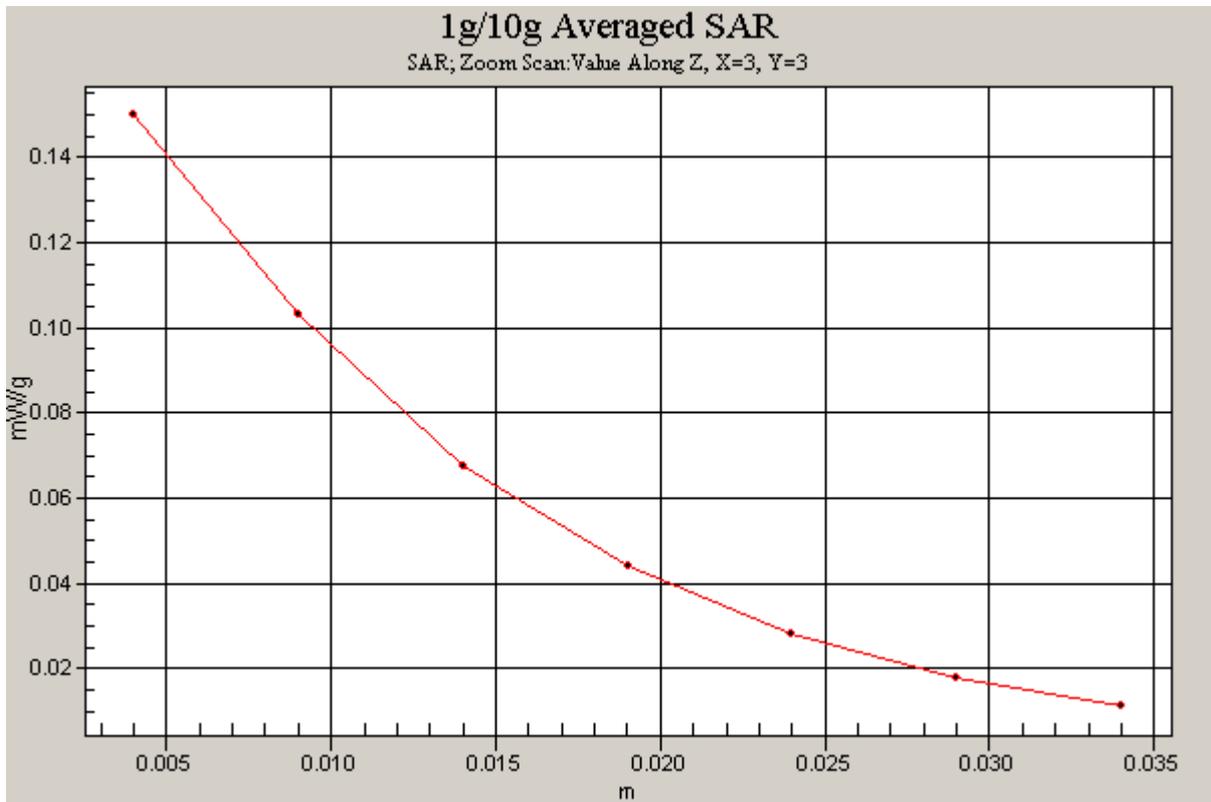


Figure 69 Z-Scan at power reference point (Left Hand Tilt 15 ° Close GSM 1900 Channel 661)

GSM 1900 Left Tilt Low Close

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.121 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.75 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.118 mW/g

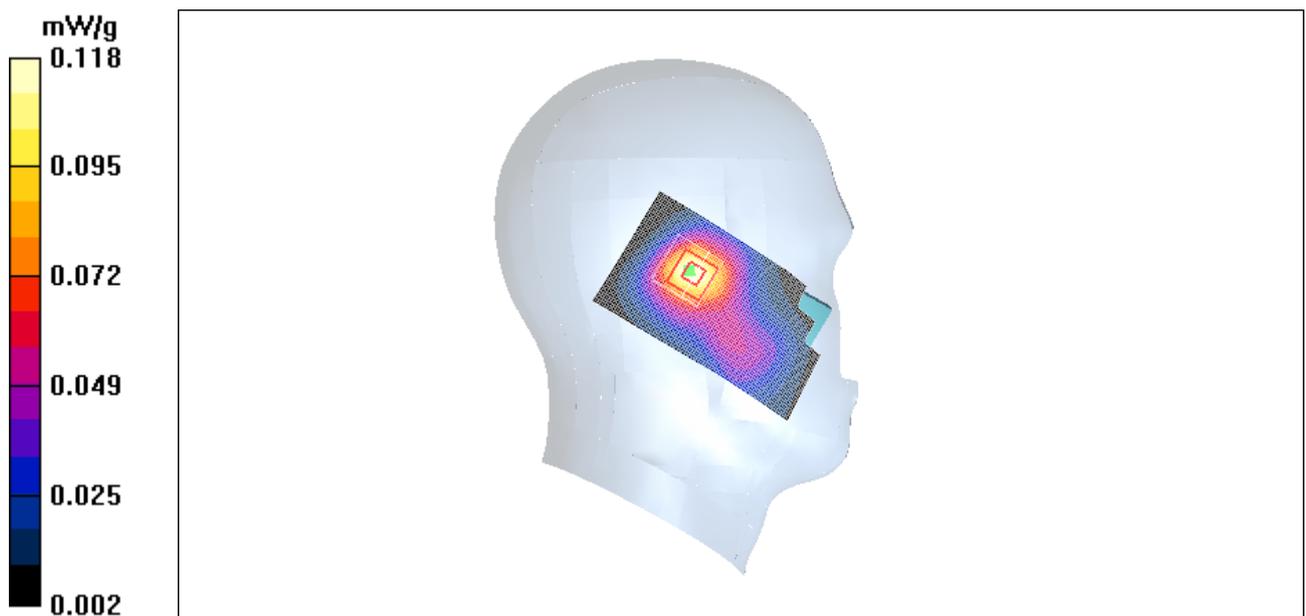


Figure 70 Left Hand Tilt 15 ° Close GSM 1900 Channel 512

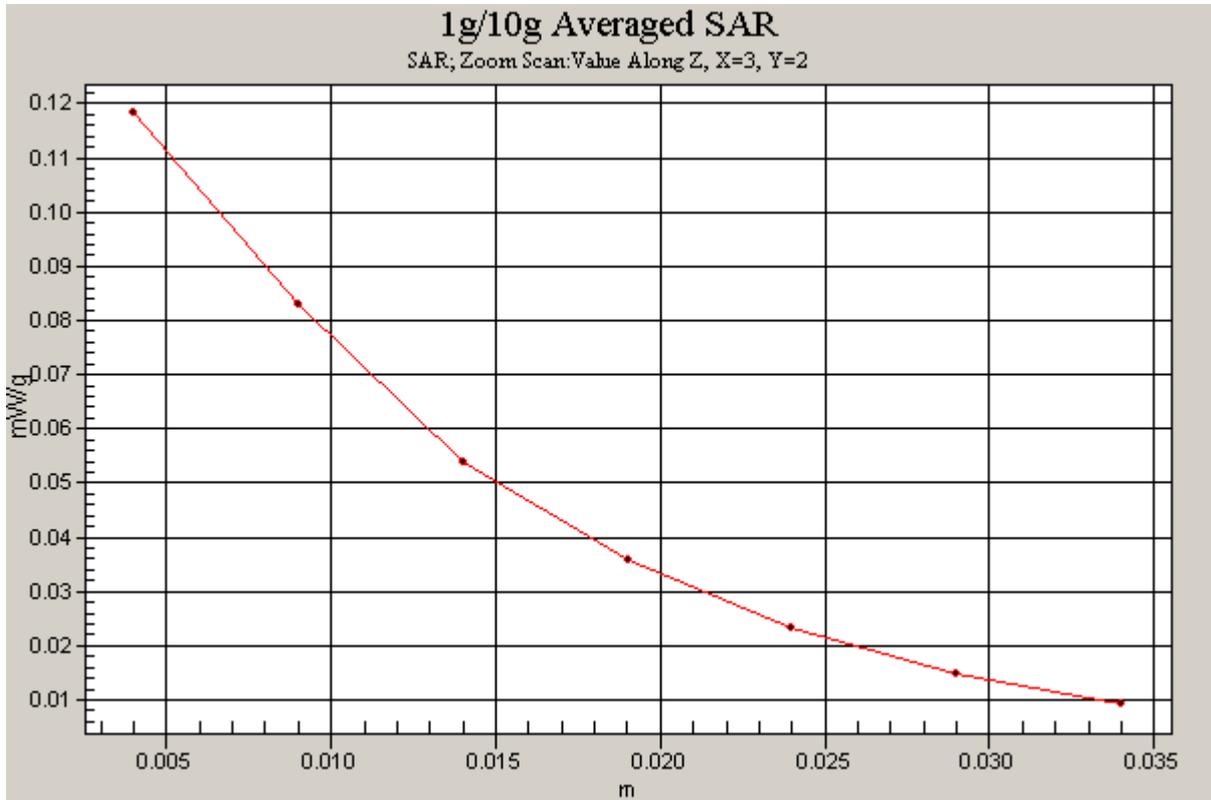


Figure 71 Z-Scan at power reference point (Left Hand Tilt 15 ° Close GSM 1900 Channel 512)

GSM 1900 Right Cheek High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.367 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.351 mW/g

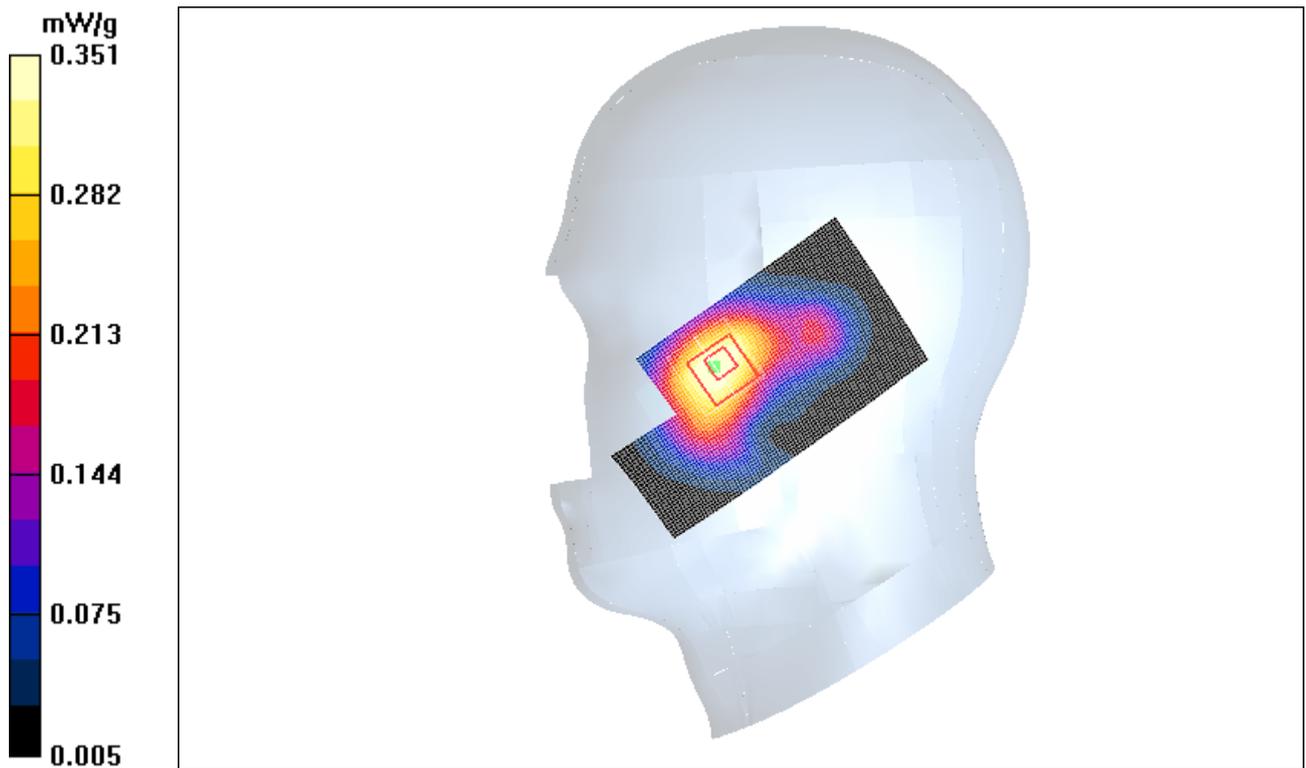


Figure 72 Right Hand Touch Cheek Close GSM 1900 Channel 810

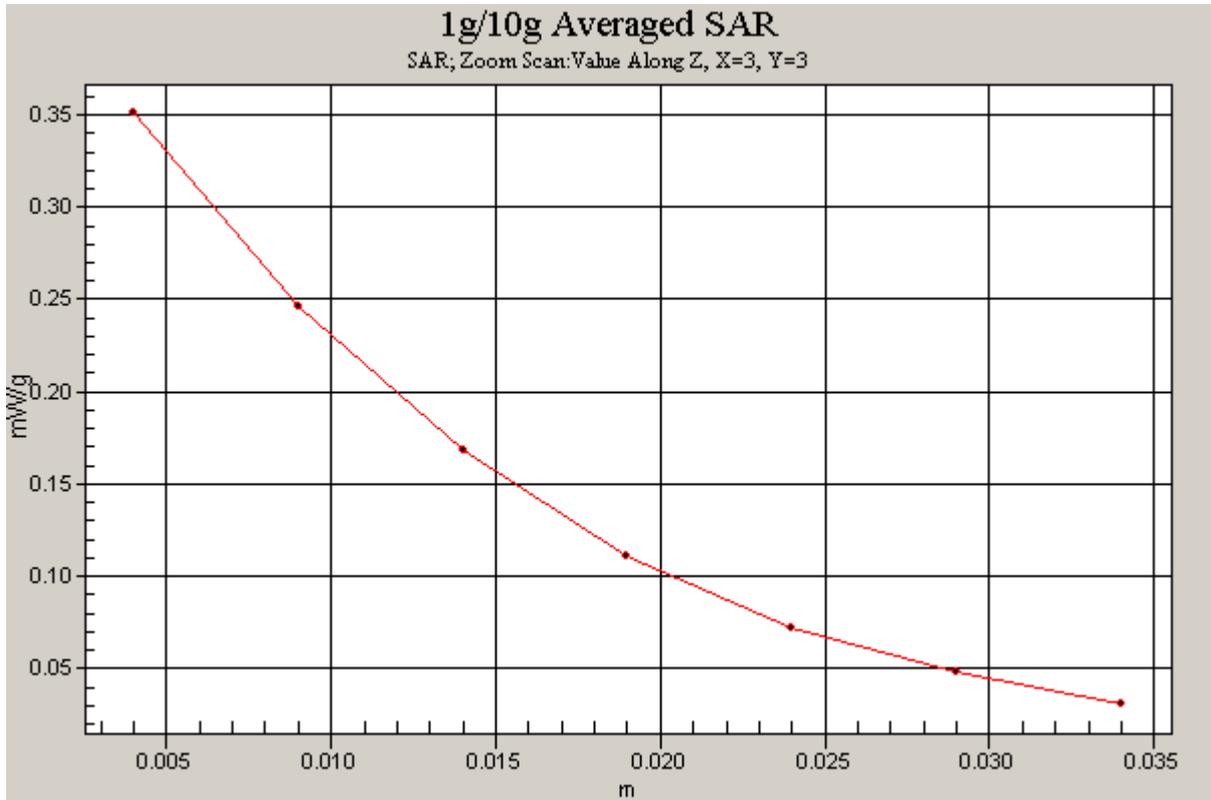


Figure 73 Z-Scan at power reference point (Right Hand Touch Cheek Close GSM 1900 Channel 810)

GSM 1900 Right Cheek Middle Close

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.362 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.42 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.351 mW/g

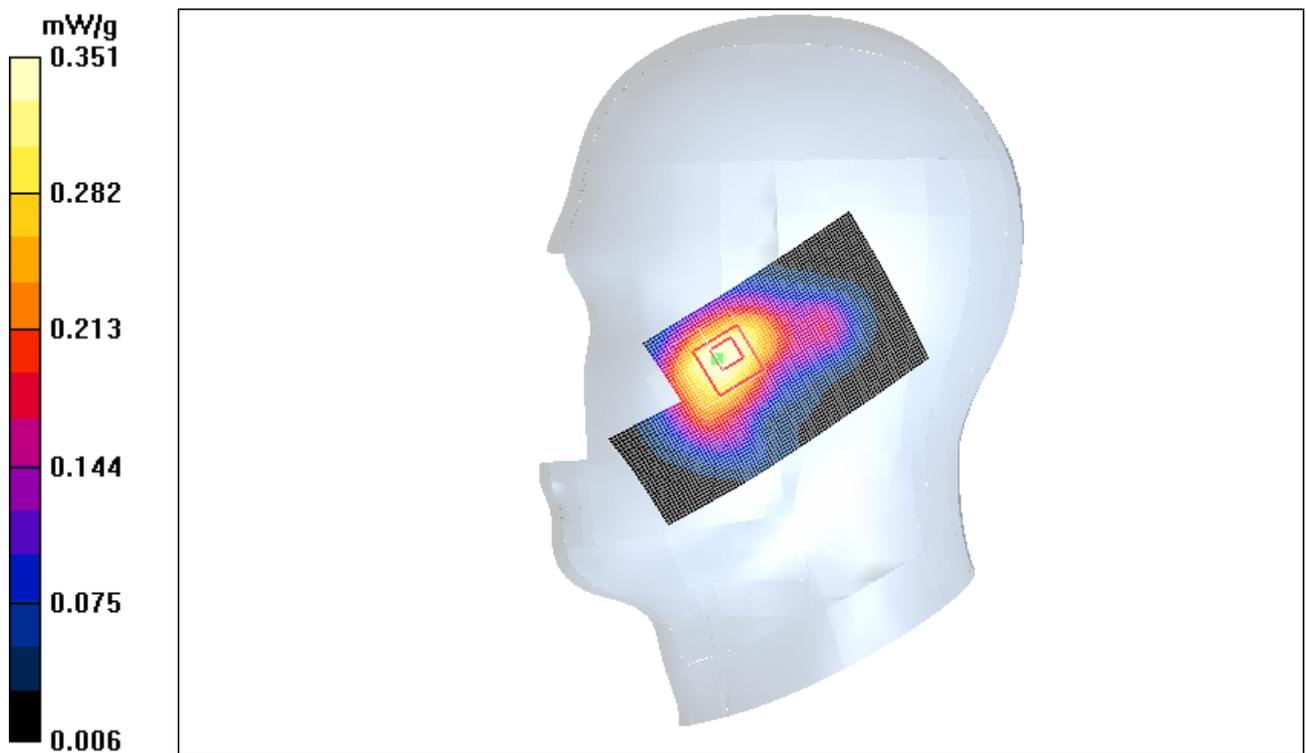


Figure 74 Right Hand Touch Cheek Close GSM 1900 Channel 661

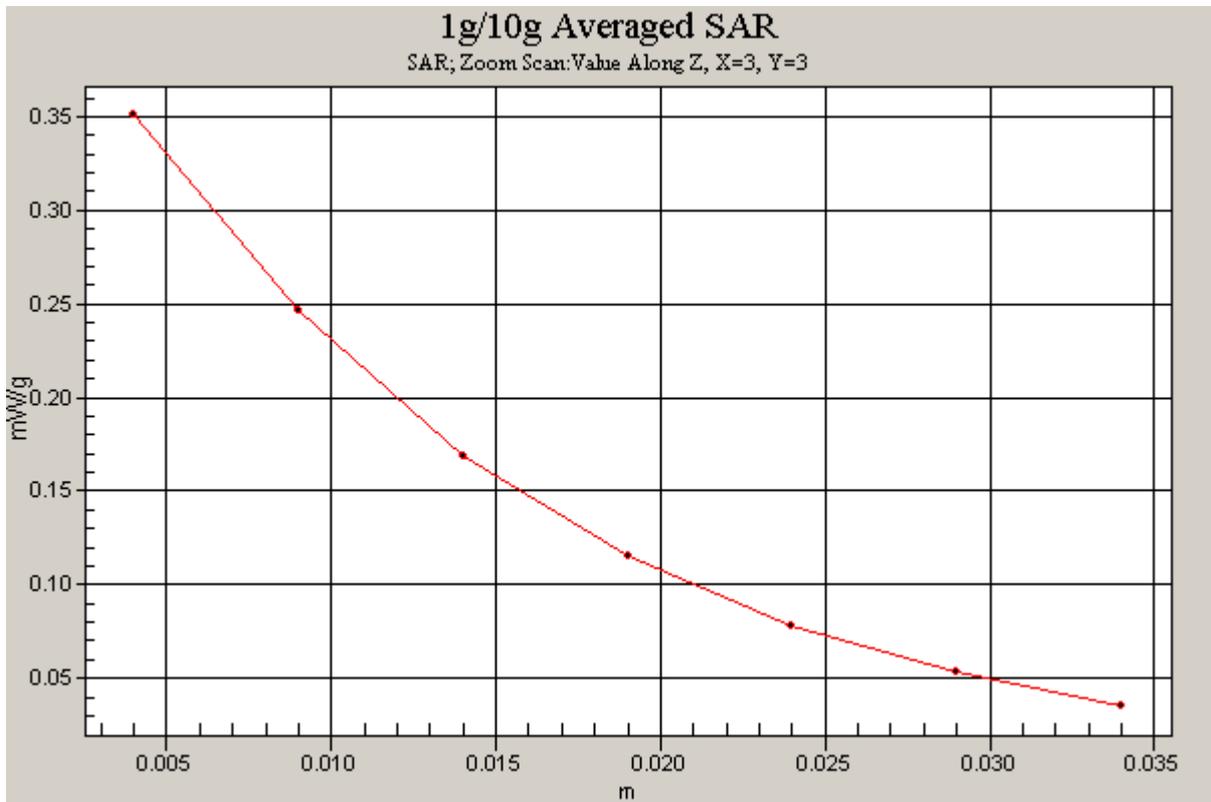


Figure 75 Z-Scan at power reference point (Right Hand Touch Cheek Close GSM 1900 Channel 661)

GSM 1900 Right Cheek Low Close

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.304 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.90 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.294 mW/g

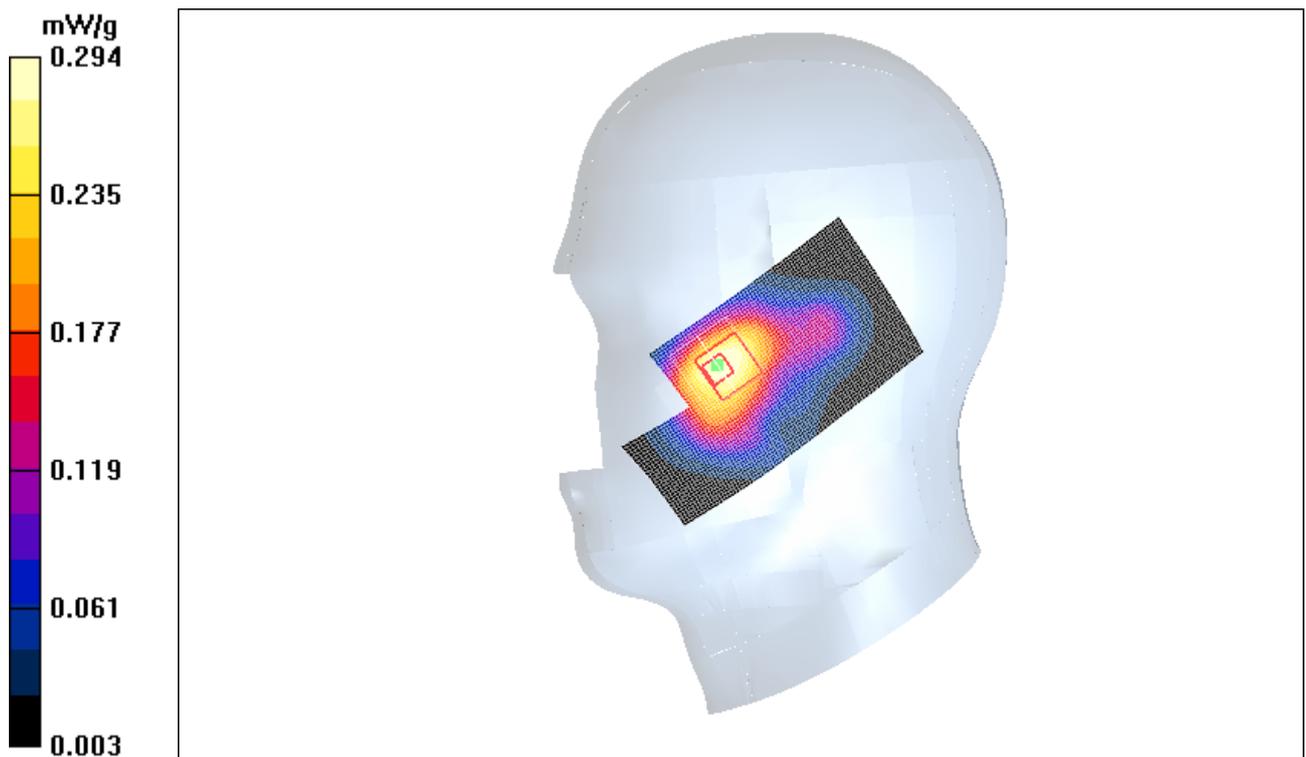


Figure 76 Right Hand Touch Cheek Close GSM 1900 Channel 512

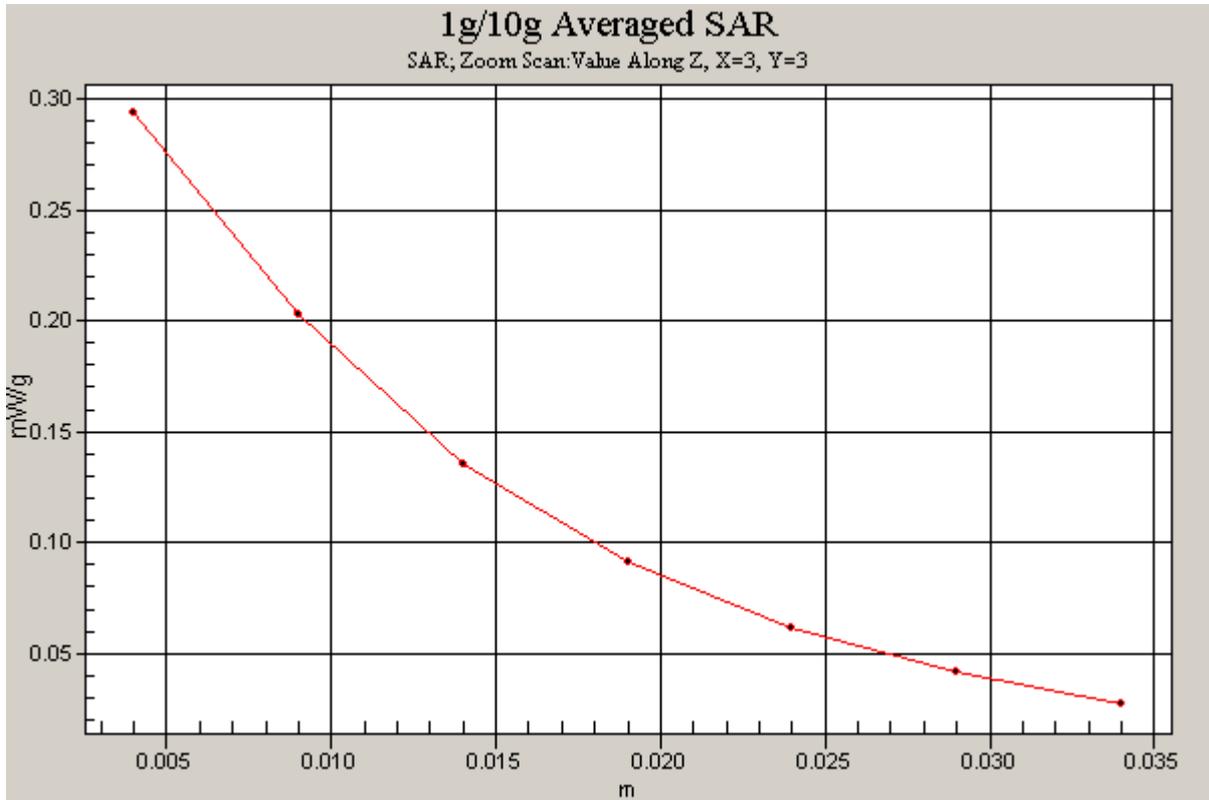


Figure 77 Z-Scan at power reference point (Right Hand Touch Cheek Close GSM 1900 Channel 512)

GSM 1900 Right Tilt High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

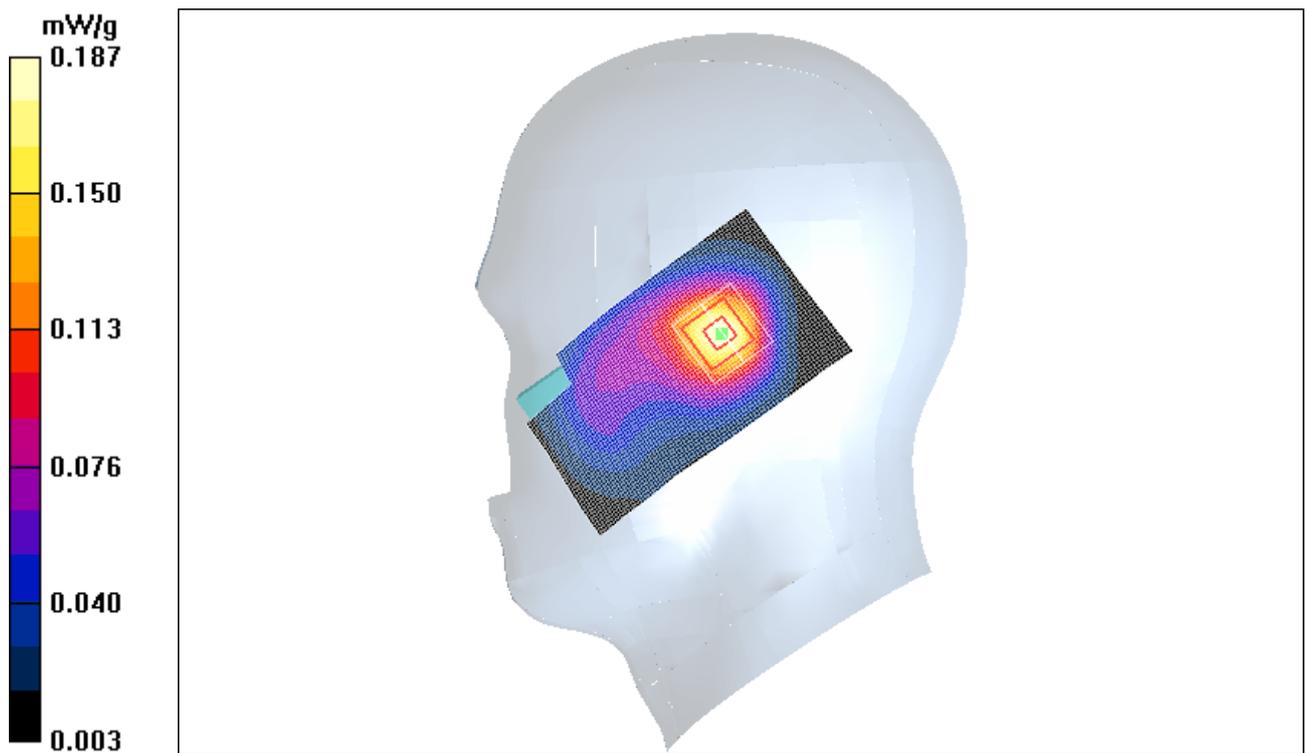


Figure 78 Right Hand Tilt 15 ° Close GSM 1900 Channel 810

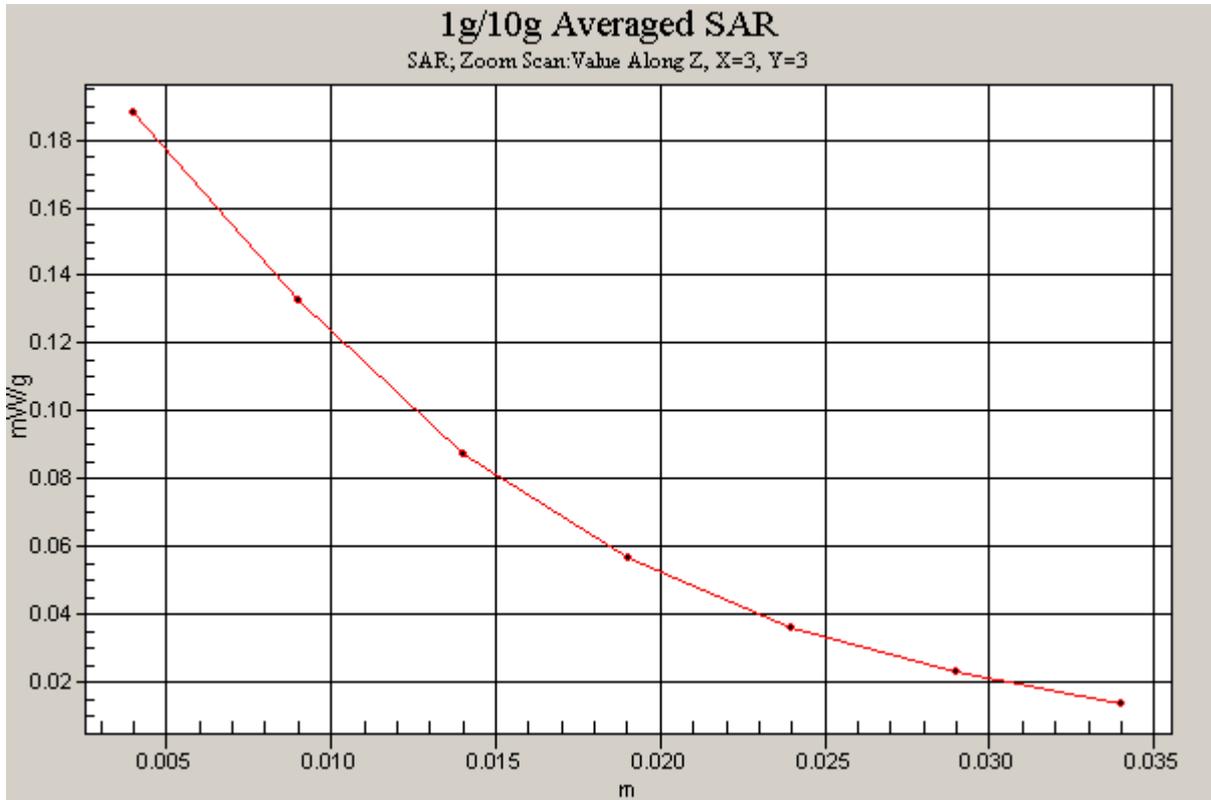


Figure 79 Z-Scan at power reference point (Right Hand Tilt 15 ° Close GSM 1900 Channel 810)

GSM 1900 Right Tilt Middle Close

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.160 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.160 mW/g

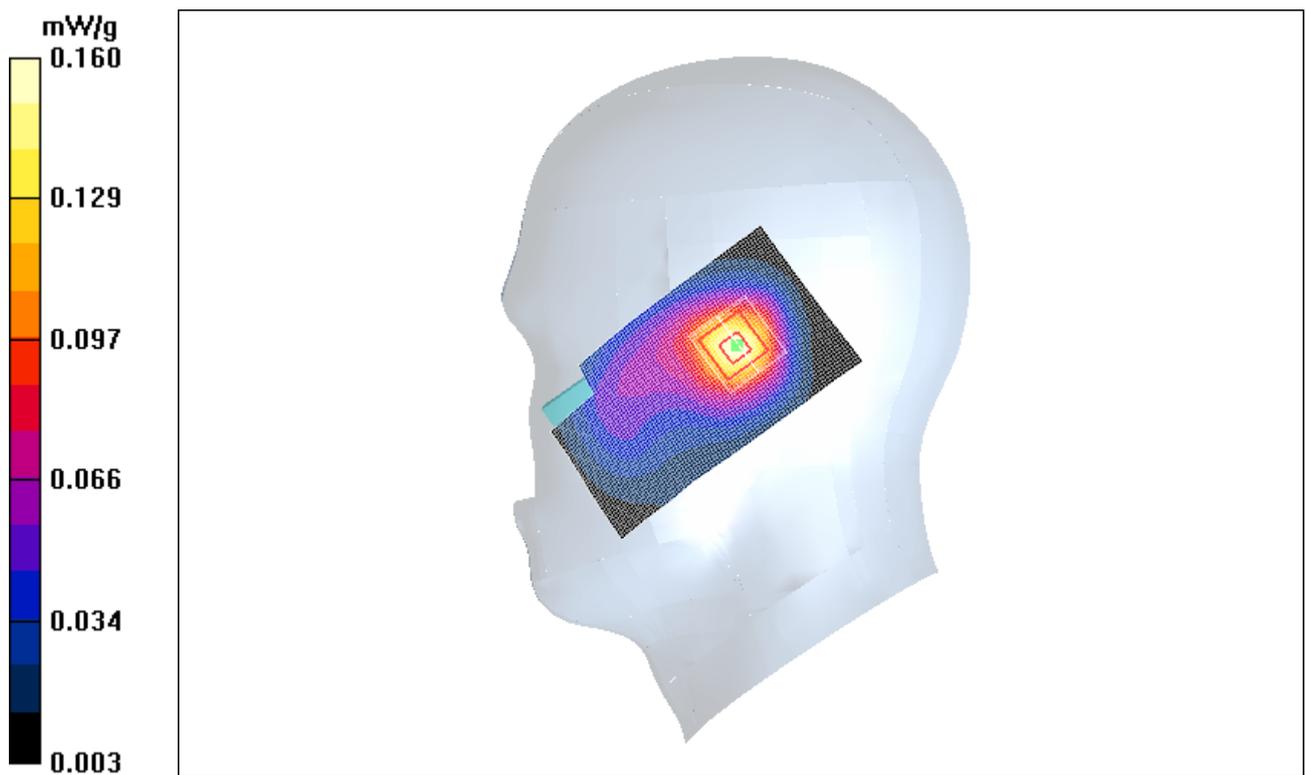


Figure 80 Right Hand Tilt 15 ° Close GSM 1900 Channel 661

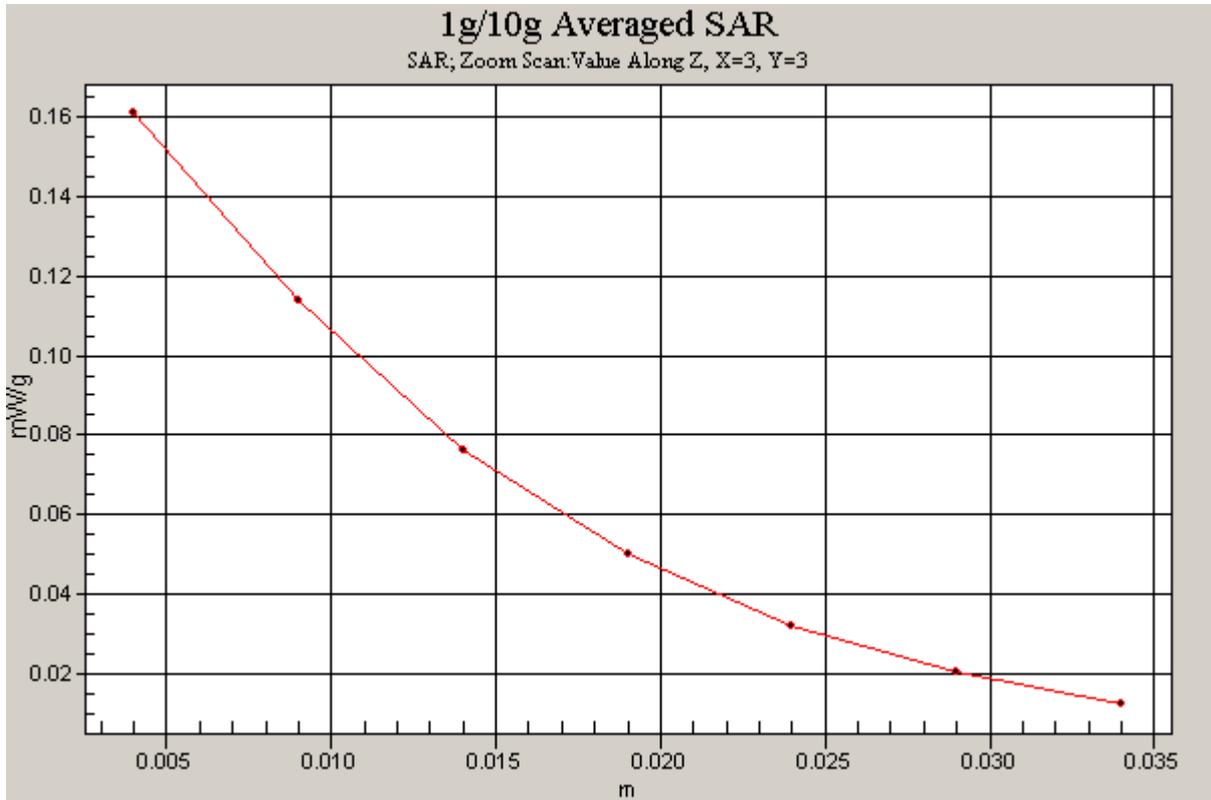


Figure 81 Z-Scan at power reference point (Right Hand Tilt 15 ° Close GSM 1900 Channel 661)

GSM 1900 Right Tilt Low Close

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.117 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.68 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

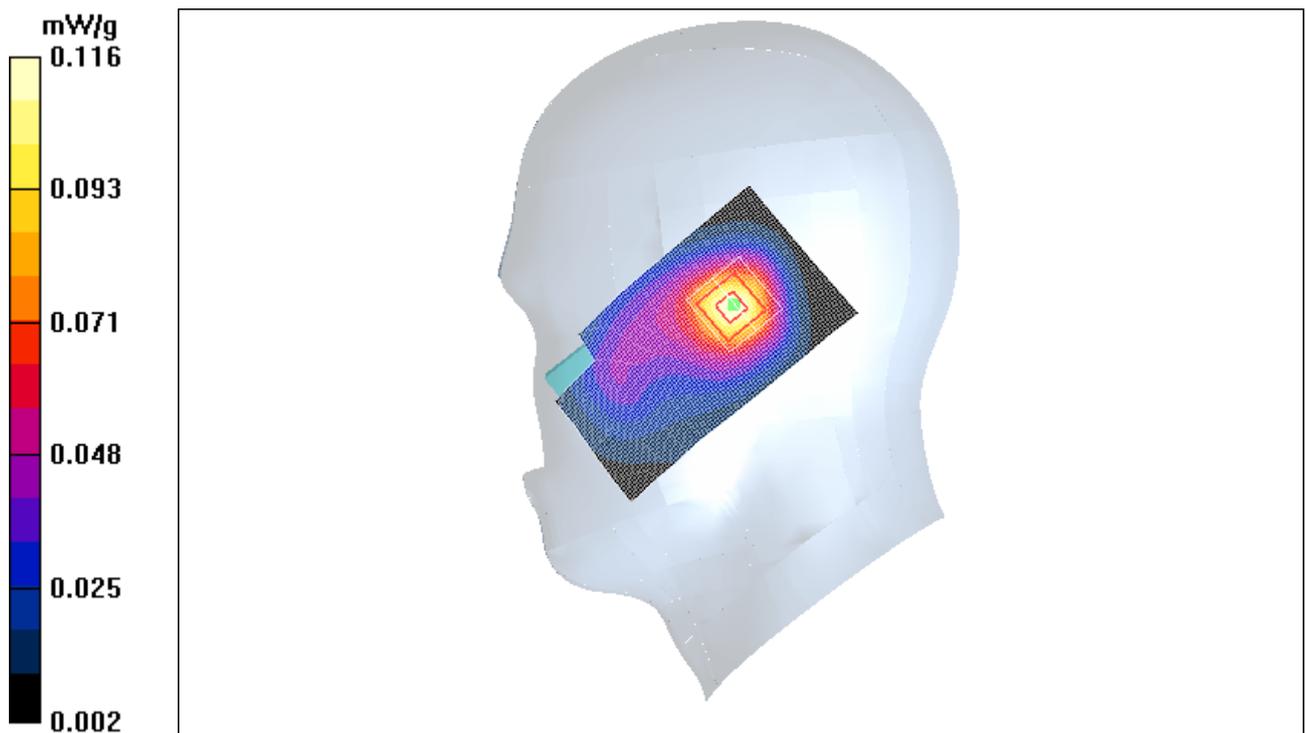


Figure 82 Right Hand Tilt 15 ° Close GSM 1900 Channel 512

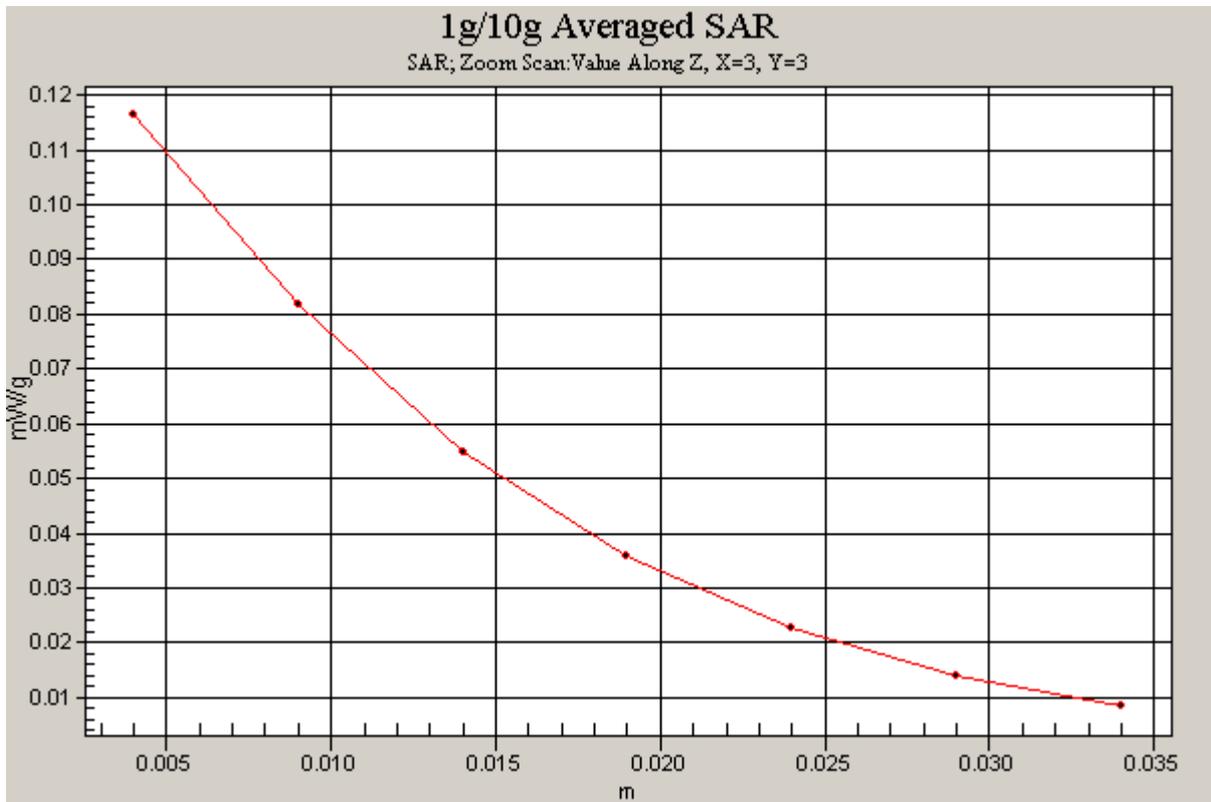


Figure 83 Z-Scan at power reference point (Right Hand Tilt 15 ° Close GSM 1900 Channel 512)

GSM 1900 Towards Ground High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.593 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.50 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.545 mW/g

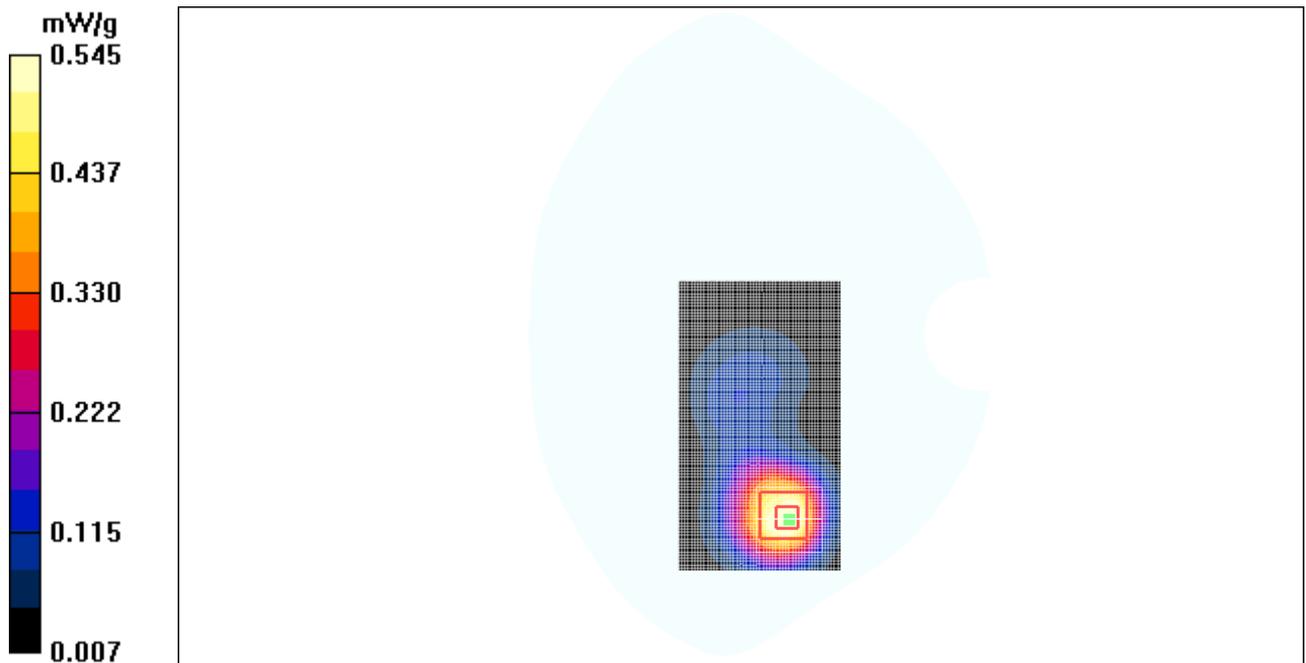


Figure 84 Body, Towards Ground, Close GSM 1900 Channel 810

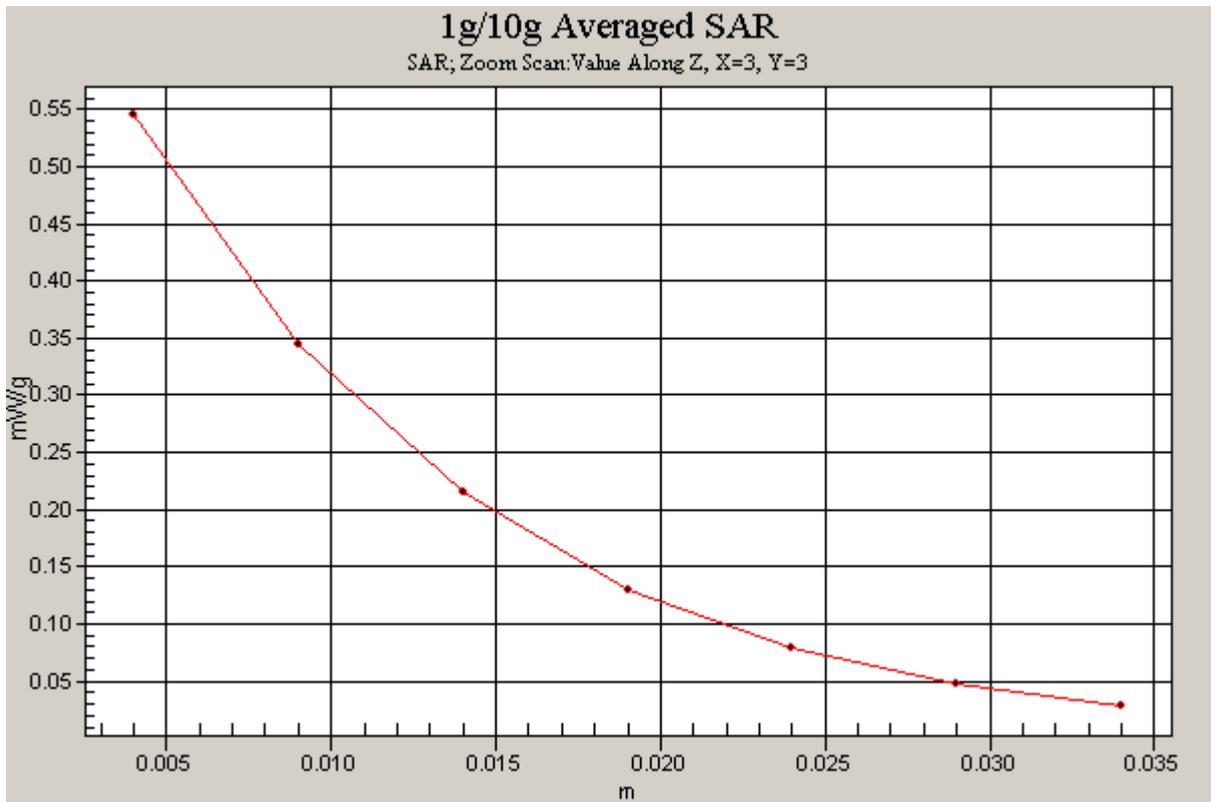


Figure 85 Z-Scan at power reference point (Body, Towards Ground, Close GSM 1900 Channel 810)

GSM 1900 Towards Ground Middle Close

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.579 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.06 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.539 mW/g

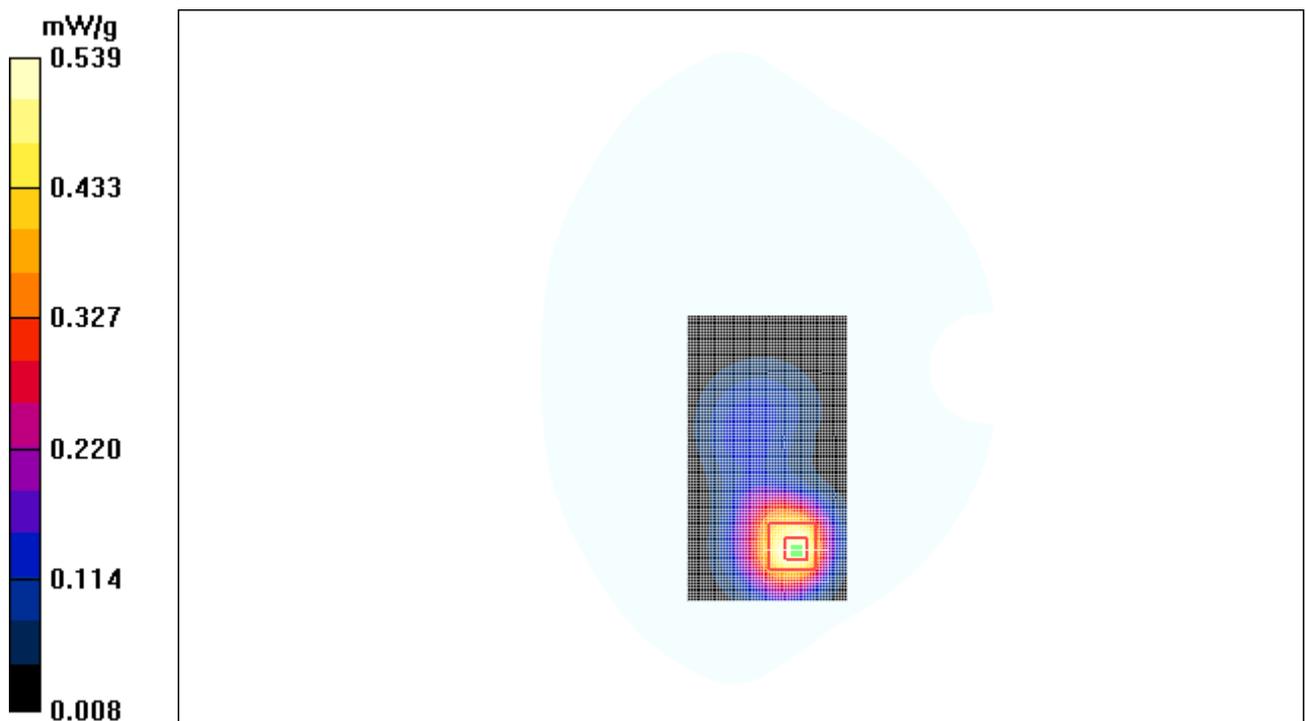


Figure 86 Body, Towards Ground, Close GSM 1900 Channel 661

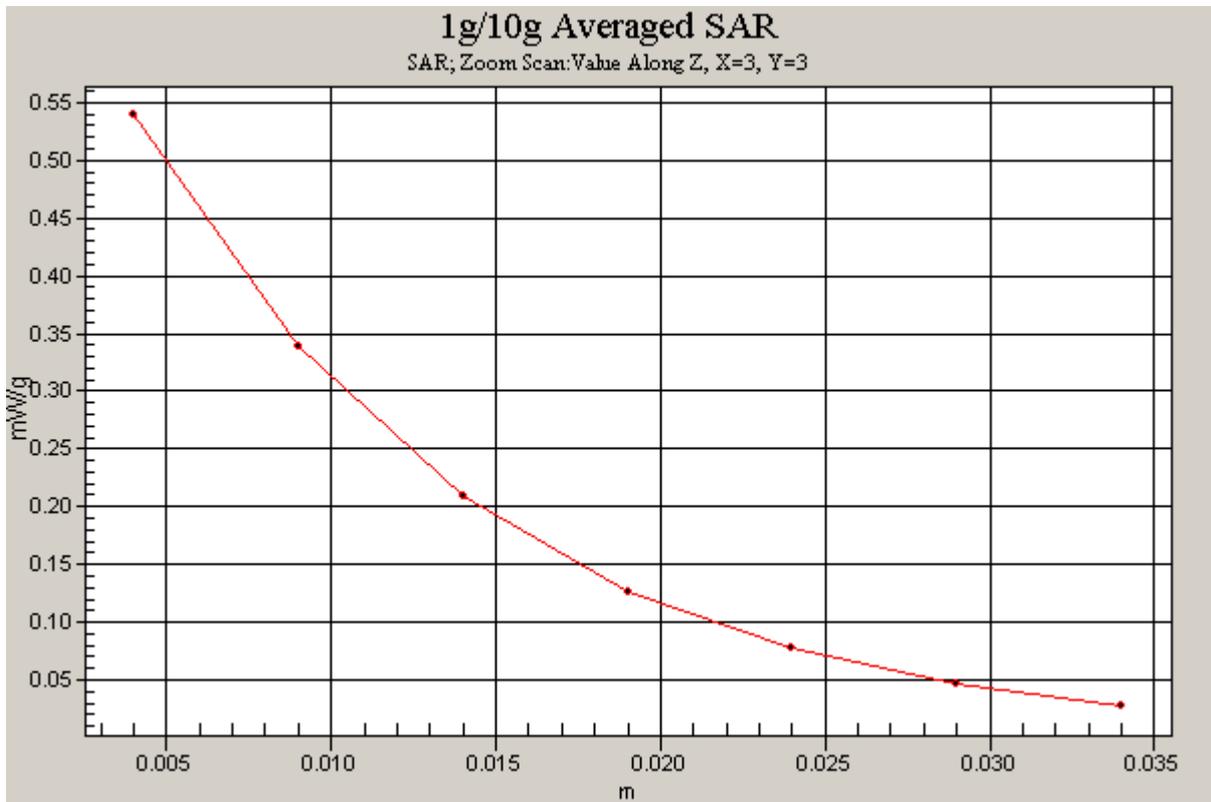


Figure 87 Z-Scan at power reference point (Body, Towards Ground, Close GSM 1900 Channel 661)

GSM 1900 Towards Ground Low Close

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.433 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.44 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

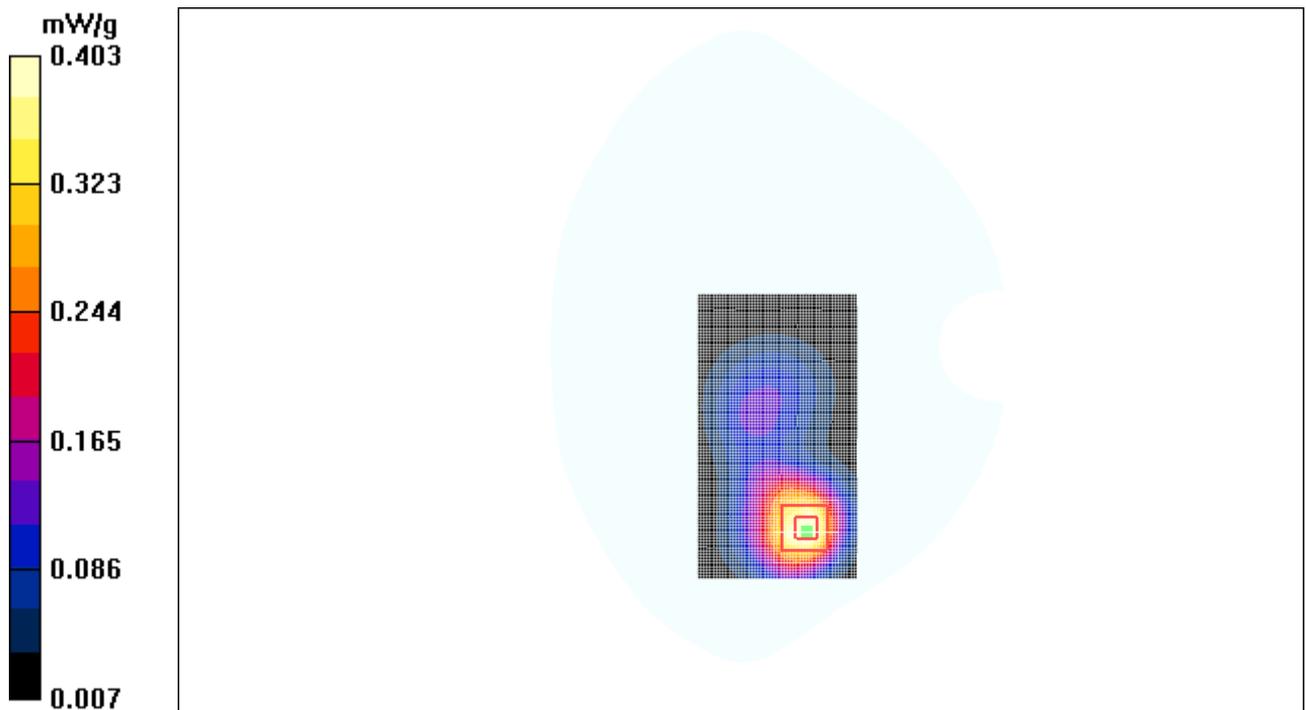


Figure 88 Body, Towards Ground, Close GSM 1900 Channel 512

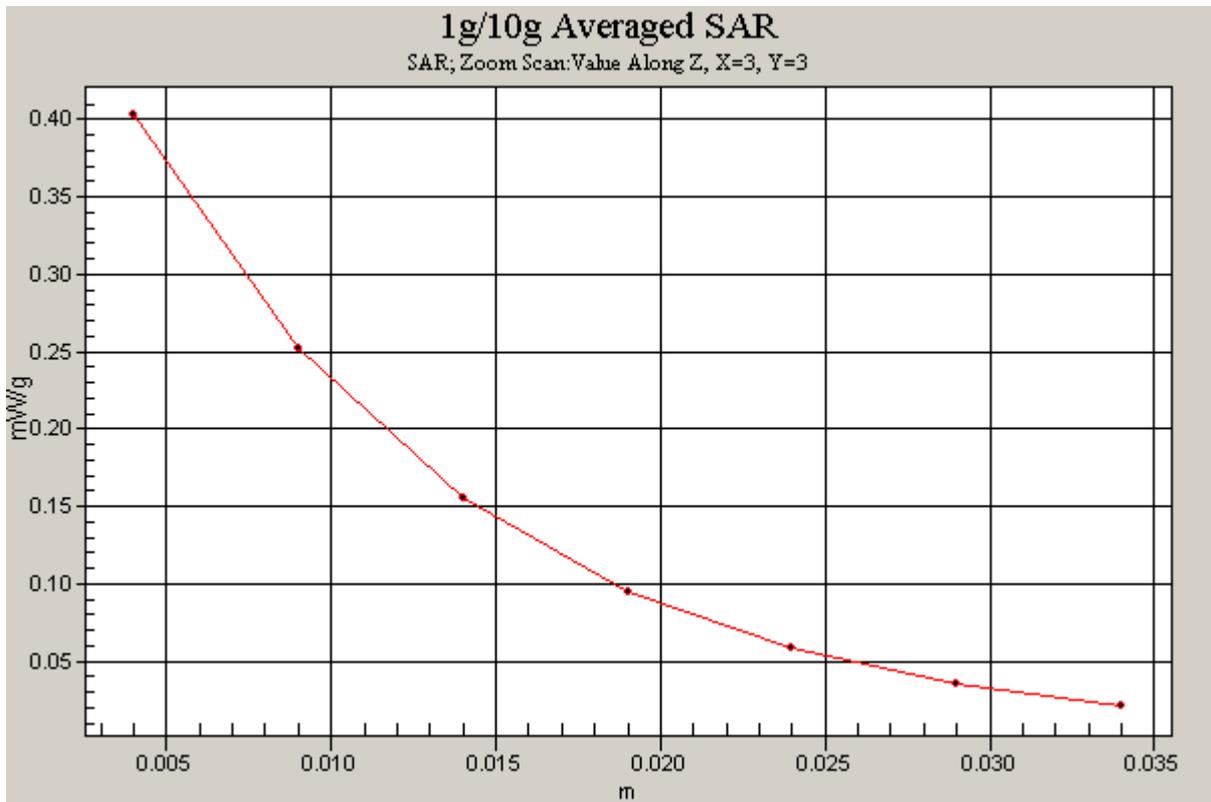


Figure 89 Z-Scan at power reference point (Body, Towards Ground, Close GSM 1900 Channel 512)

GSM 1900 Towards Phantom High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.145 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.63 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.209 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.143 mW/g

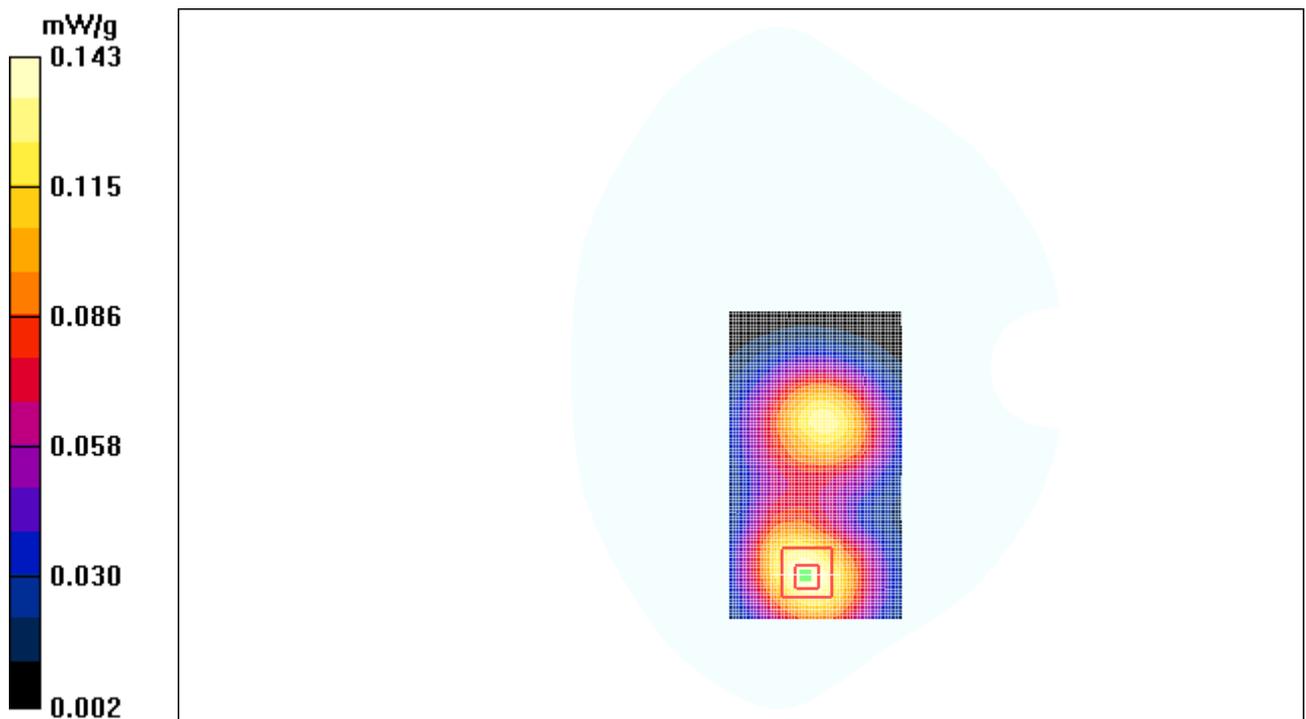


Figure 90 Body, Towards Phantom, Close GSM 1900 Channel 810

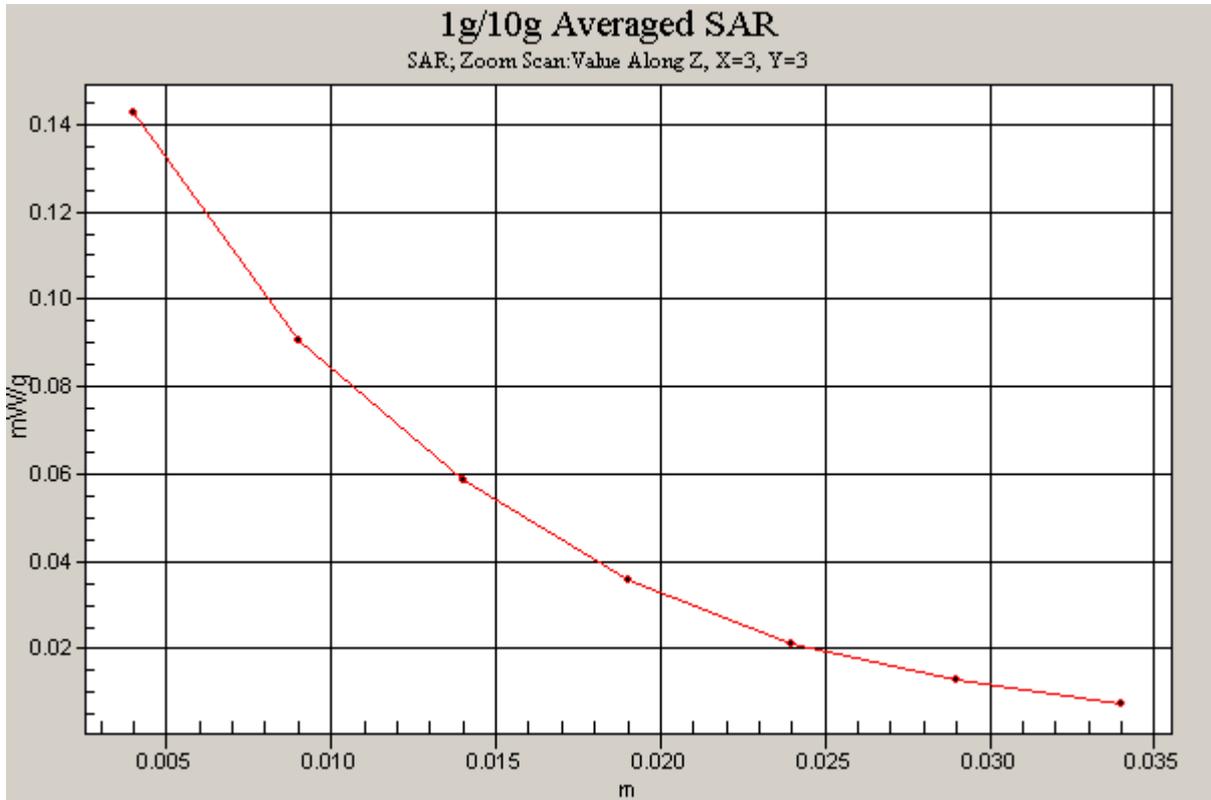


Figure 91 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 1900 Channel 810)

GSM 1900 Towards Phantom Middle Close

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.136 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.41 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.134 mW/g

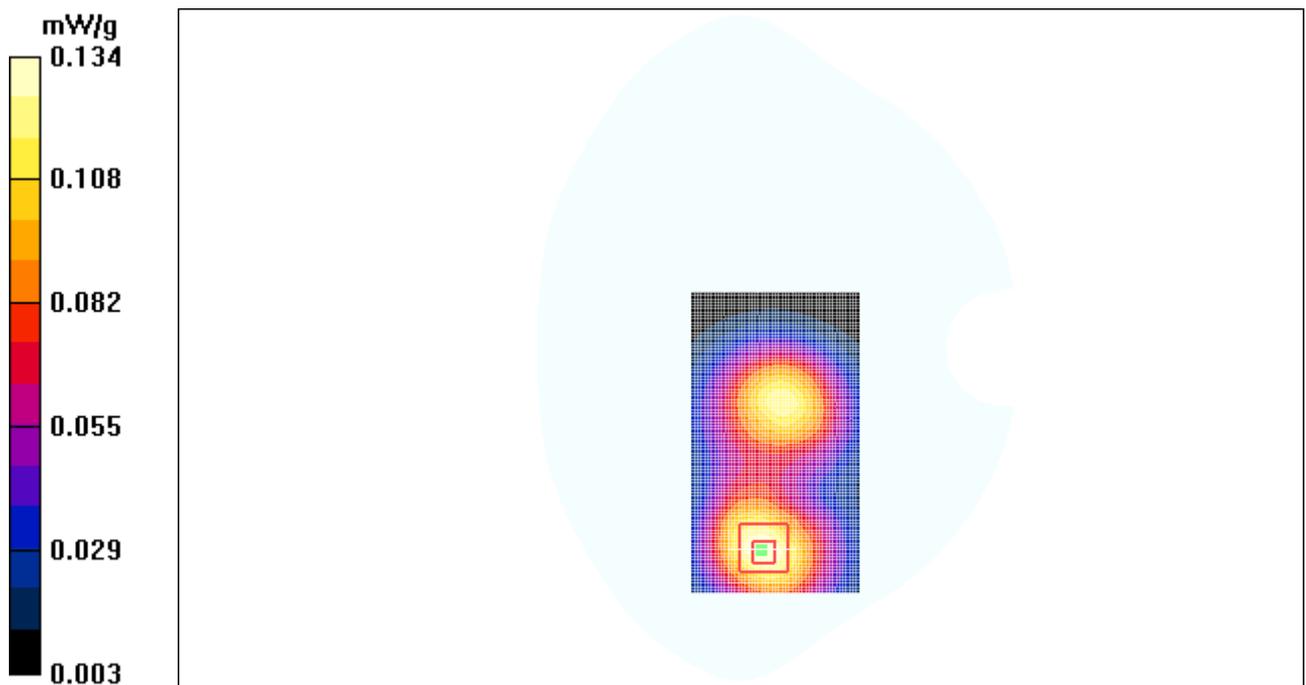


Figure 92 Body, Towards Phantom, Close GSM 1900 Channel 661

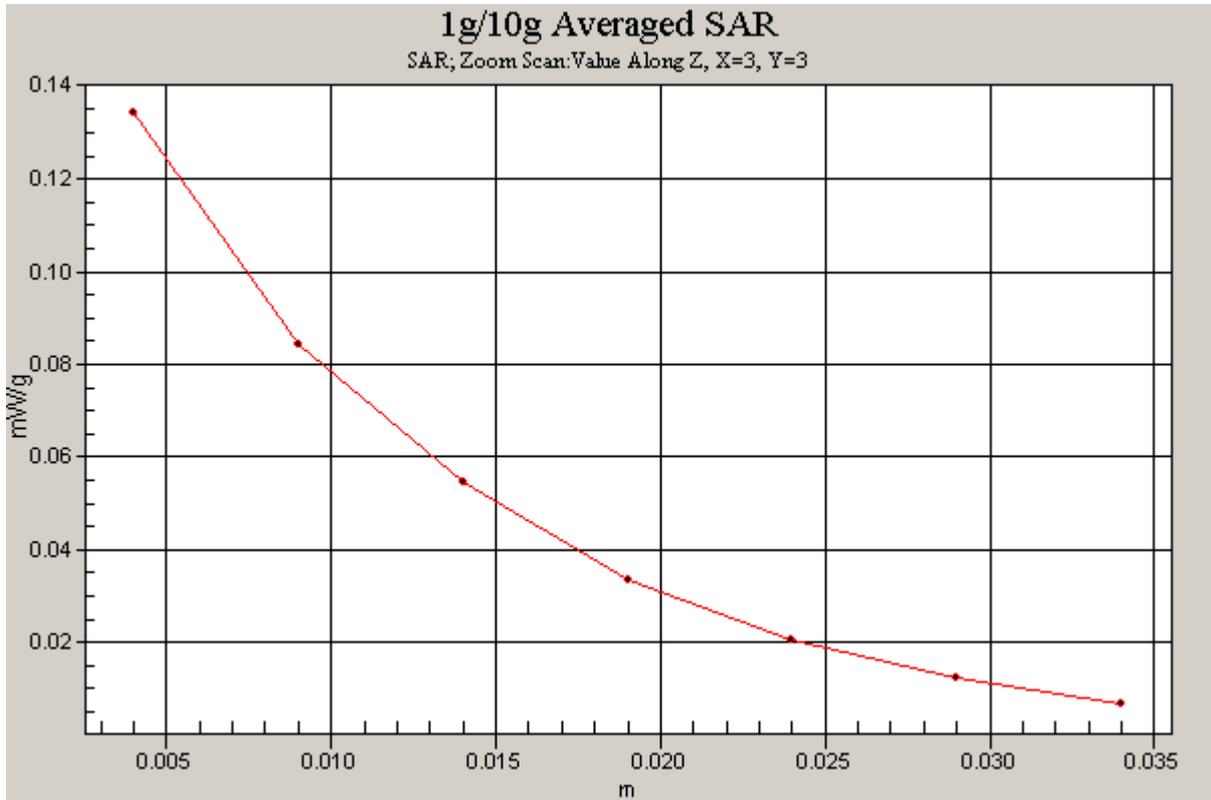


Figure 93 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 1900 Channel 661)

GSM 1900 Towards Phantom Low Close

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.106 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.60 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.102 mW/g

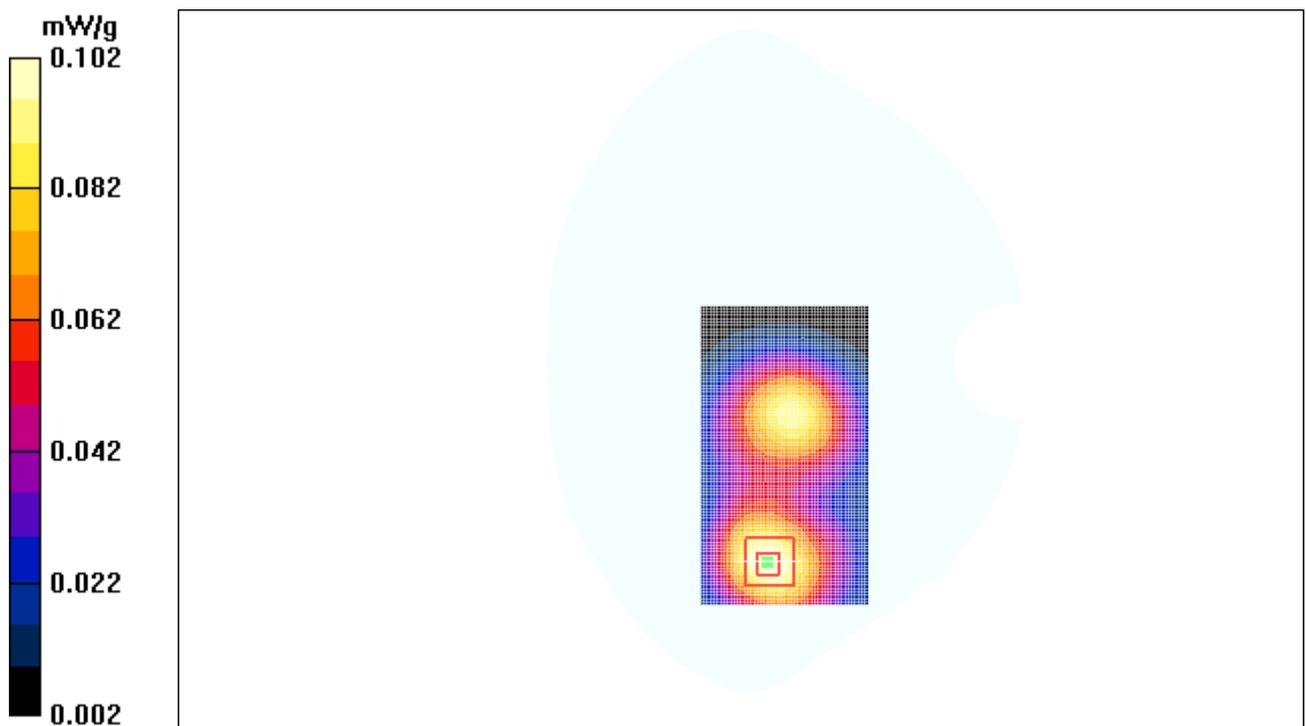


Figure 94 Body, Towards Phantom, Close GSM 1900 Channel 512

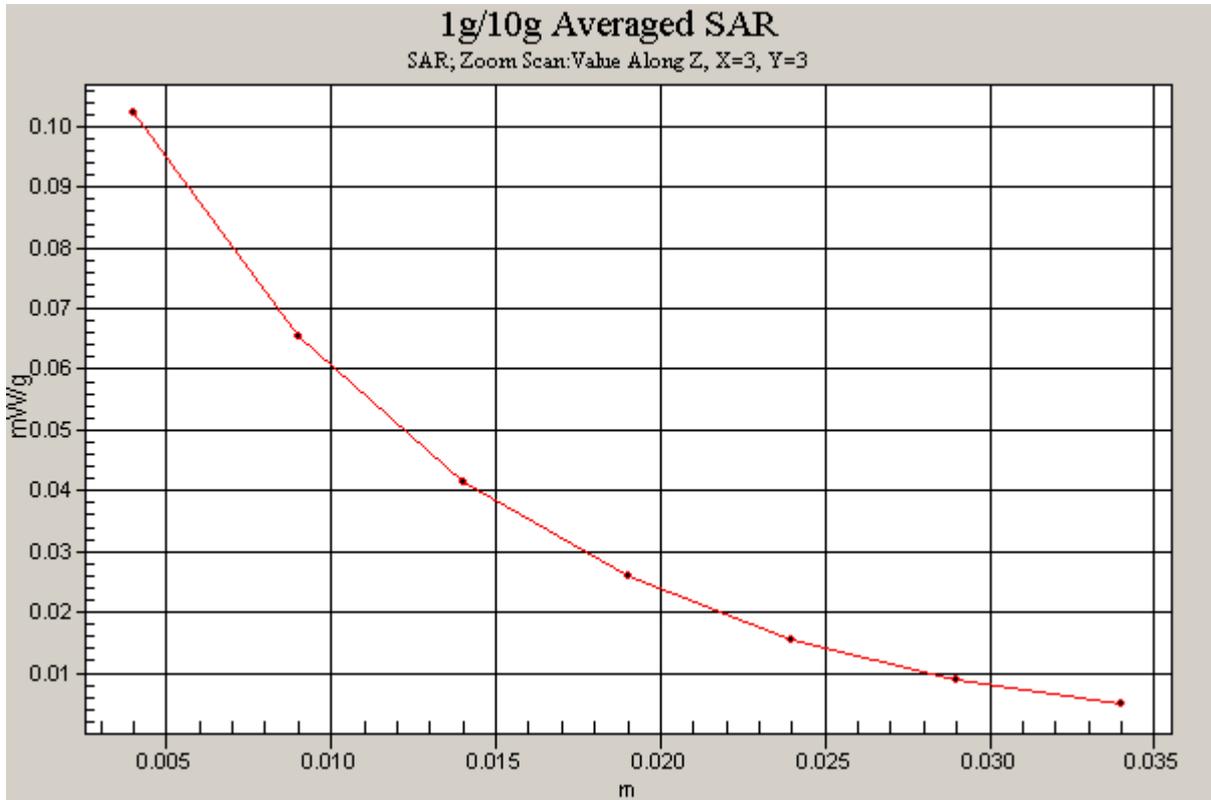


Figure 95 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 1900 Channel 512)

GSM 1900 Earphone Towards Ground High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.526 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.50 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.487 mW/g

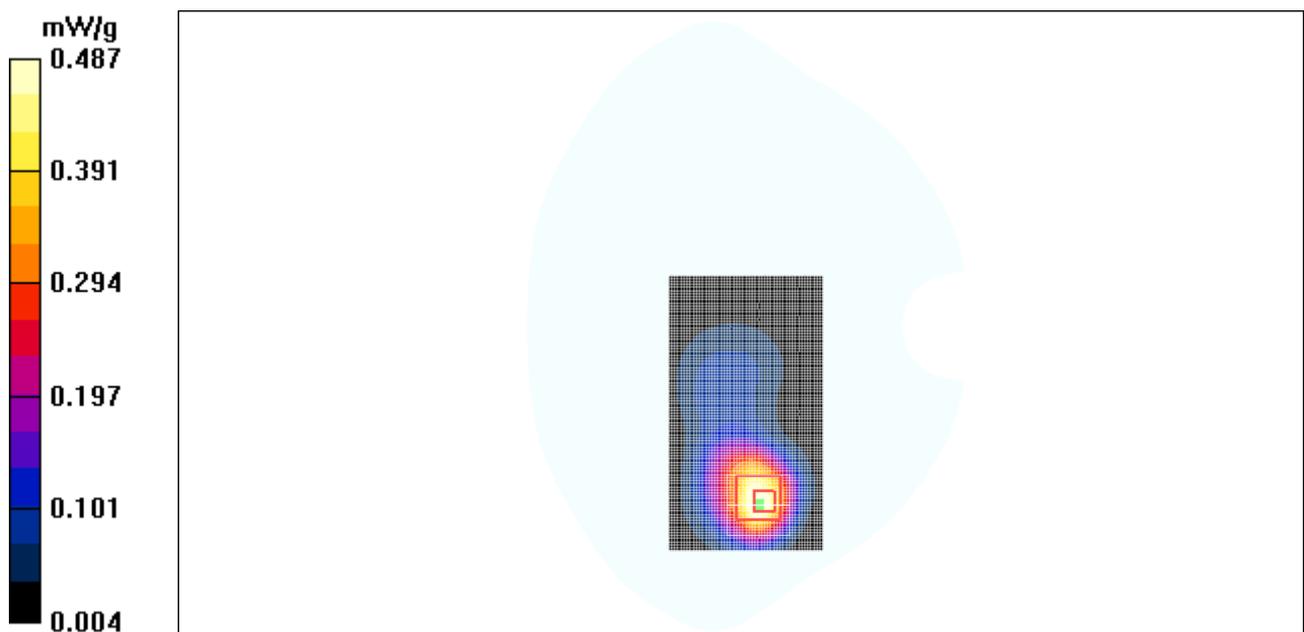


Figure 96 Body with Earphone, Towards Ground, Close GSM 1900, Channel 810

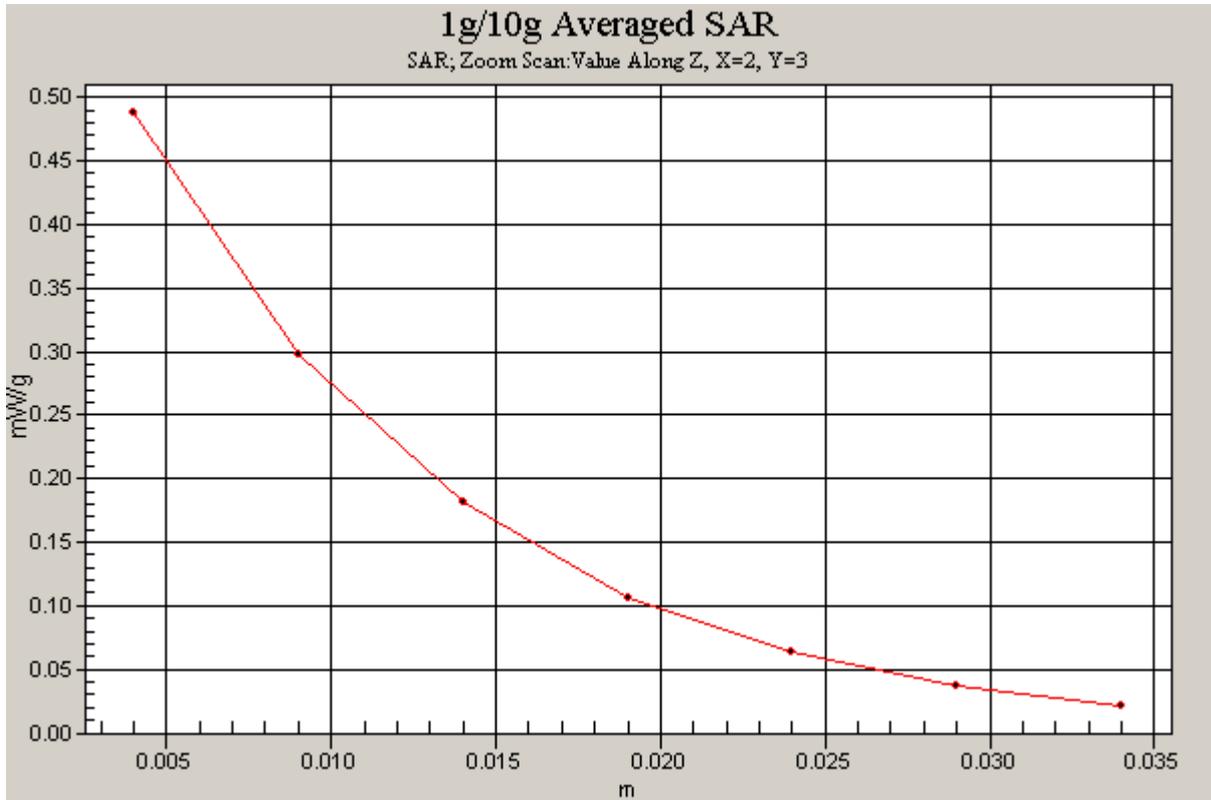


Figure 97 Z-Scan at power reference point (Body with Earphone, Towards Ground, Close GSM 1900, Channel 810)

GSM 1900 Bluetooth Earphone Towards Ground High Close

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.704 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.11 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.623 mW/g

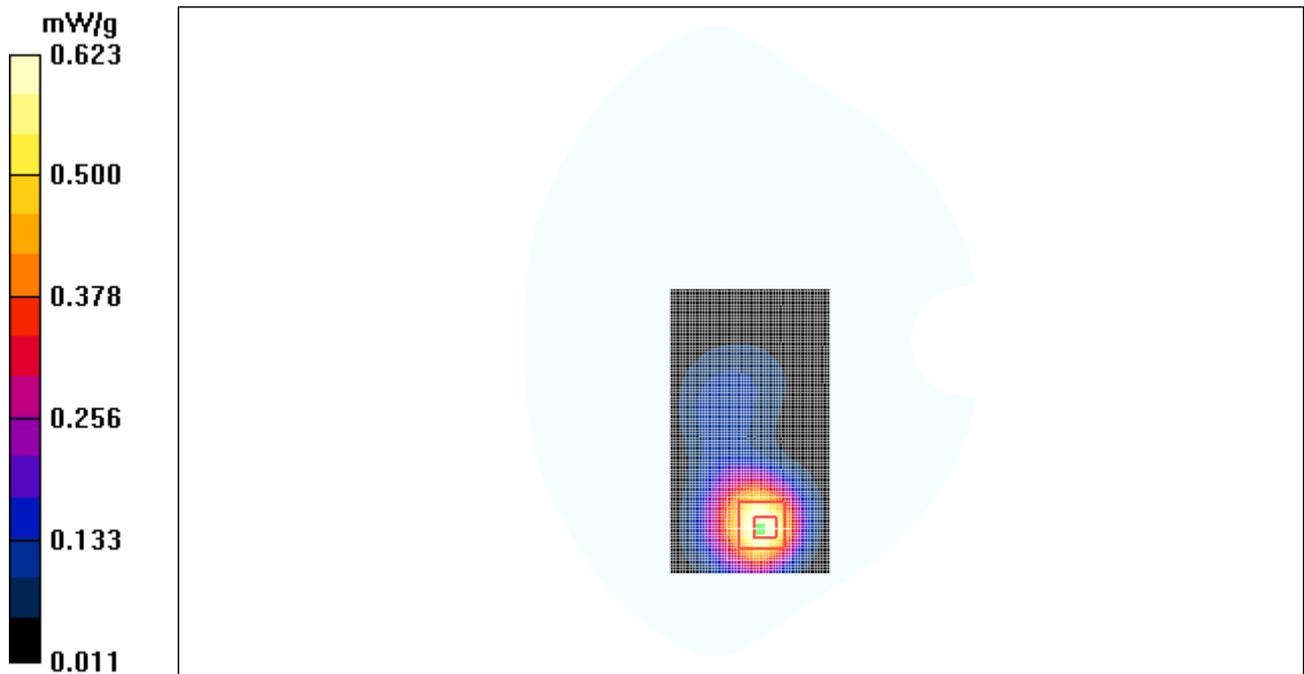


Figure 98 Body with Bluetooth earphone, Towards Ground, Close GSM 1900, Channel 810

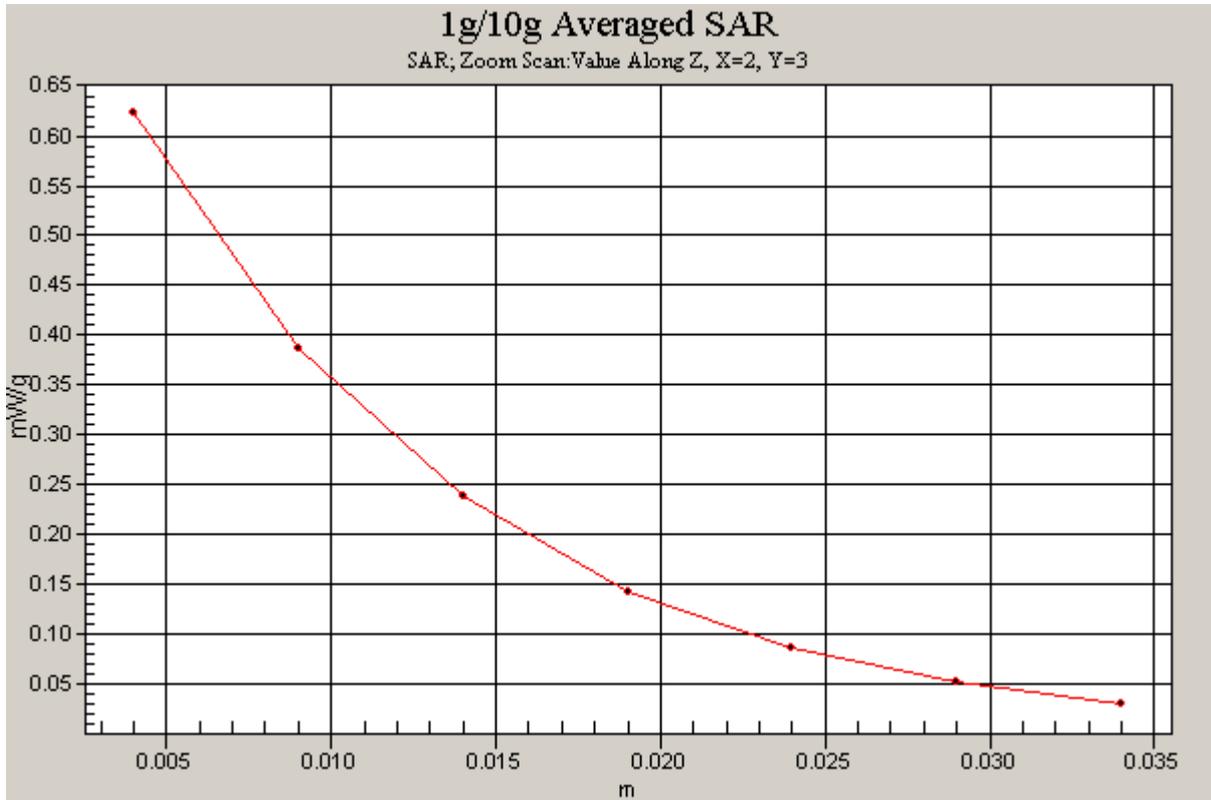


Figure 99 Z-Scan at power reference point (Body with Bluetooth earphone, Towards Ground, Close GSM 1900, Channel 810)

GSM 1900 GPRS Towards Ground High Close

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.984 mW/g

Towards Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.53 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.862 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 0.940 mW/g

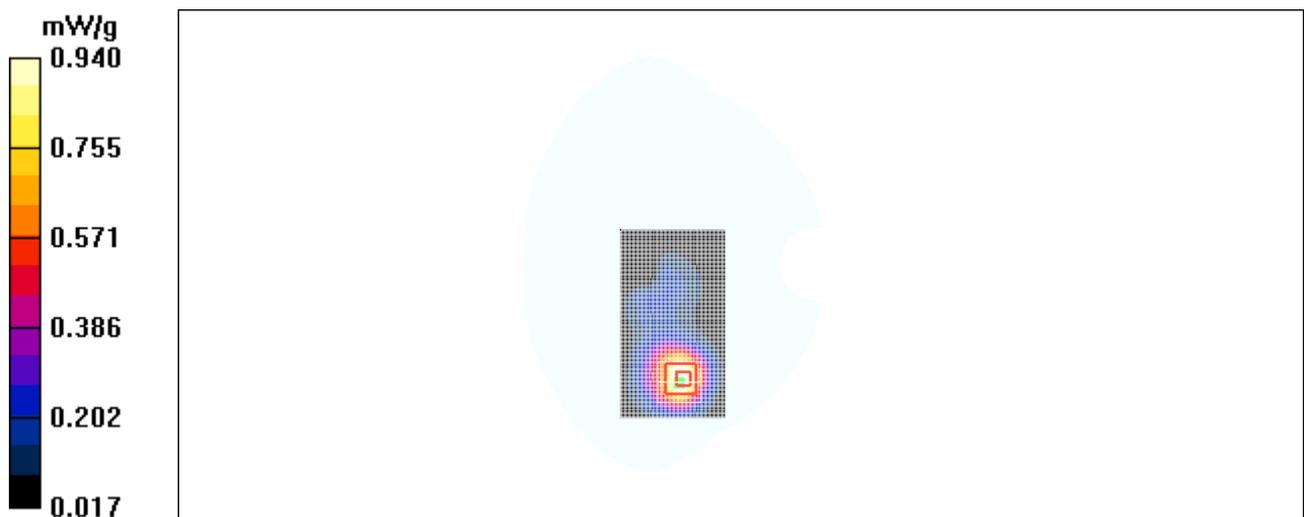


Figure 100 Body, Towards Ground, Close GSM 1900 GPRS, Channel 810

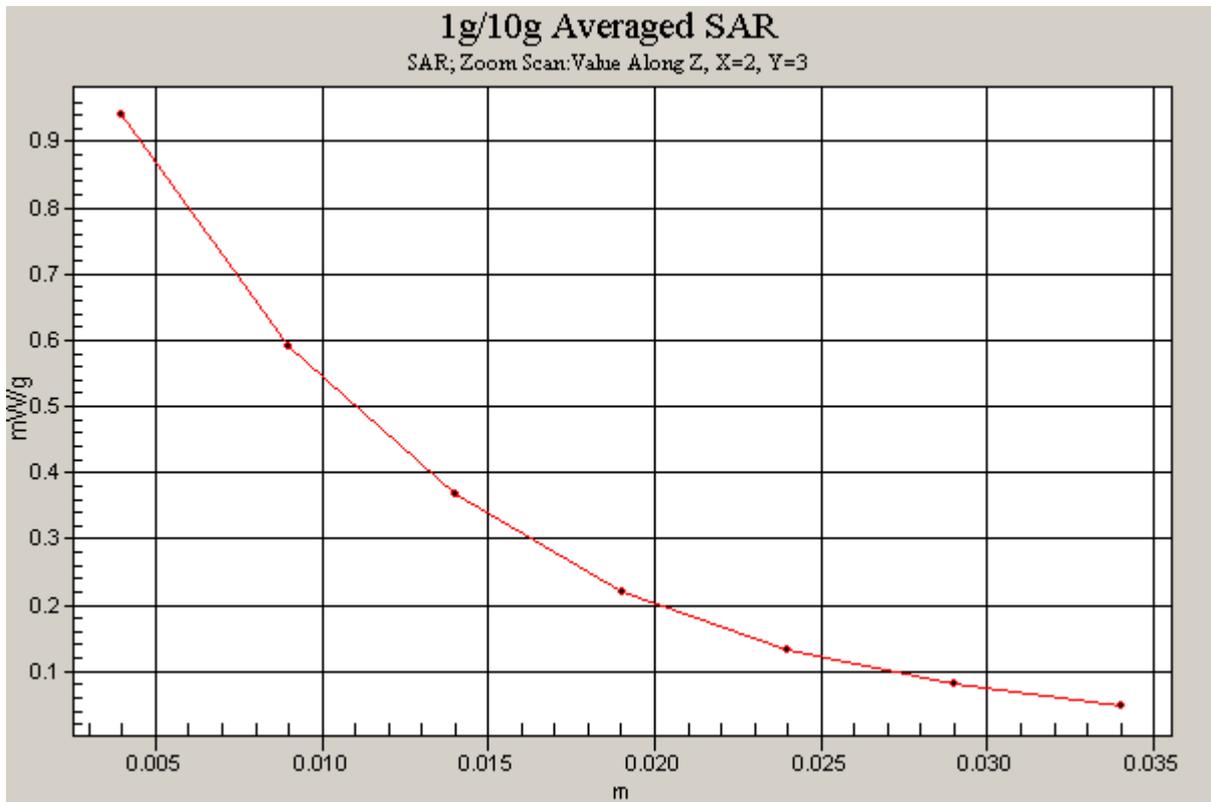


Figure 101 Z-Scan at power reference point (Body, Towards Ground, Close GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Ground Middle Close

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.924 mW/g

Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.817 mW/g; SAR(10 g) = 0.481 mW/g

Maximum value of SAR (measured) = 0.887 mW/g

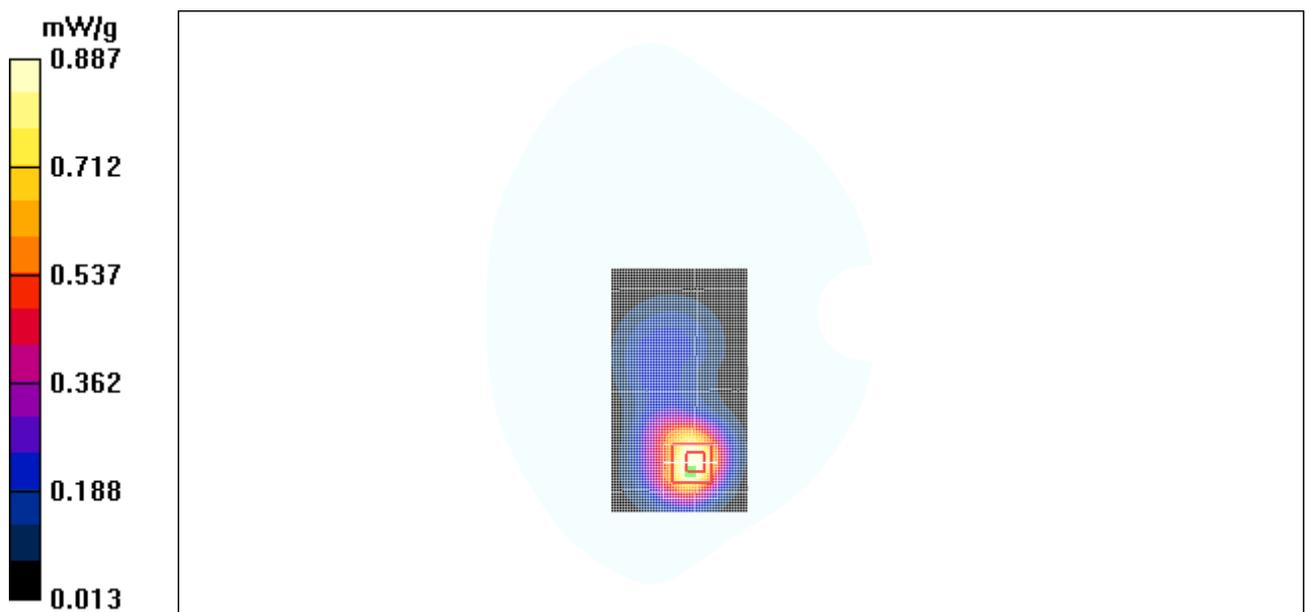


Figure 102 Body, Towards Ground, Close GSM 1900 GPRS Channel 661

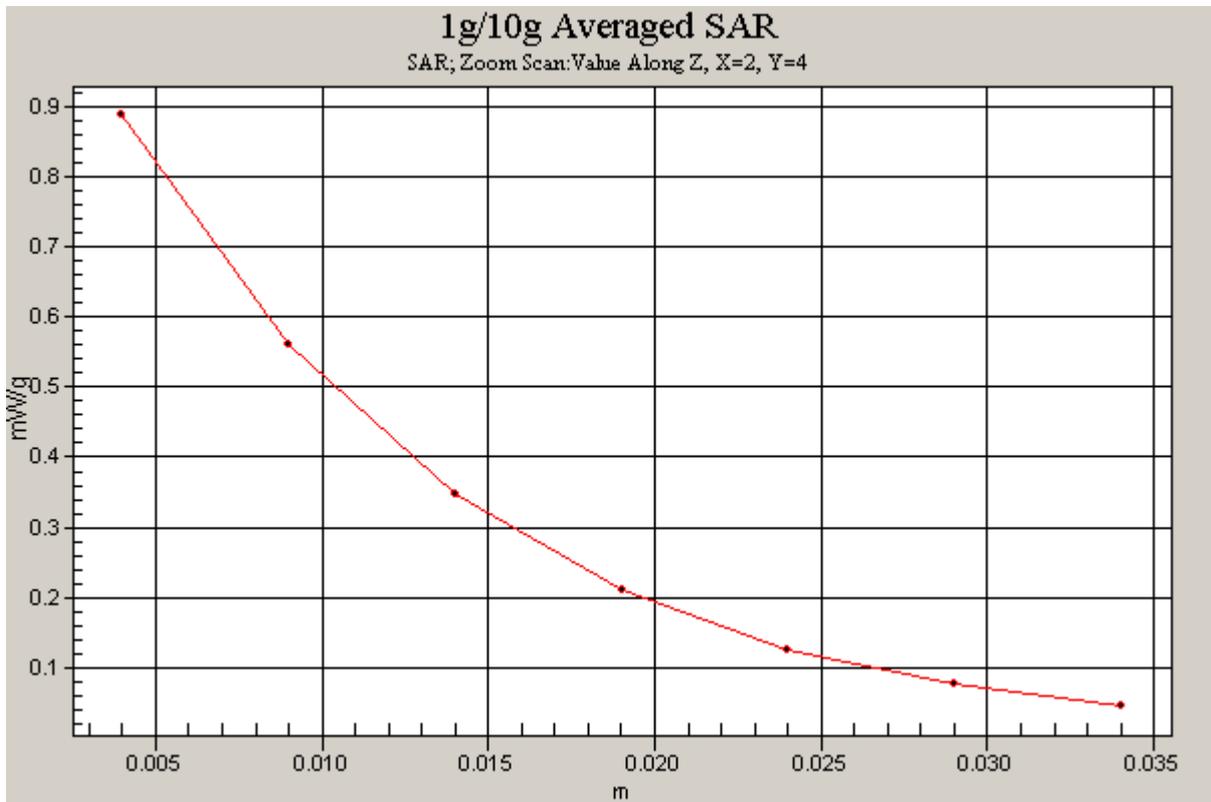


Figure 103 Z-Scan at power reference point (Body, Towards Ground, Close GSM 1900 GPRS Channel 661)

GSM 1900 GPRS Towards Ground Low Close

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Ground Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.730 mW/g

Towards Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.44 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.646 mW/g; SAR(10 g) = 0.382 mW/g

Maximum value of SAR (measured) = 0.704 mW/g

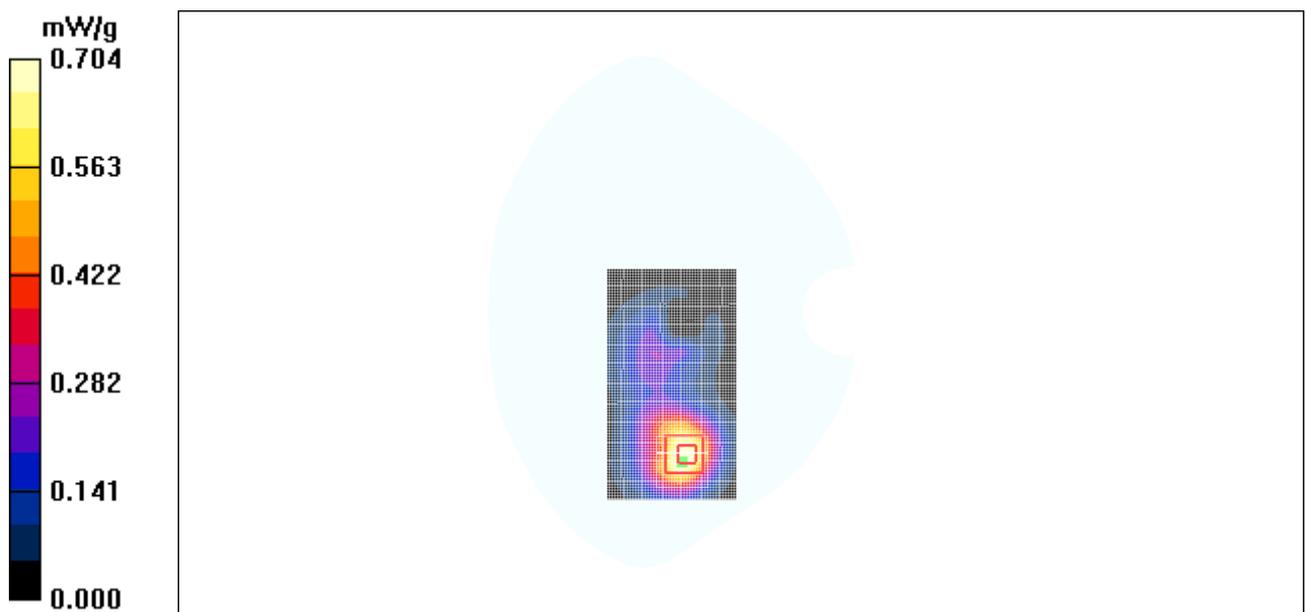


Figure 104 Body, Towards Ground, Close GSM 1900 GPRS Channel 512

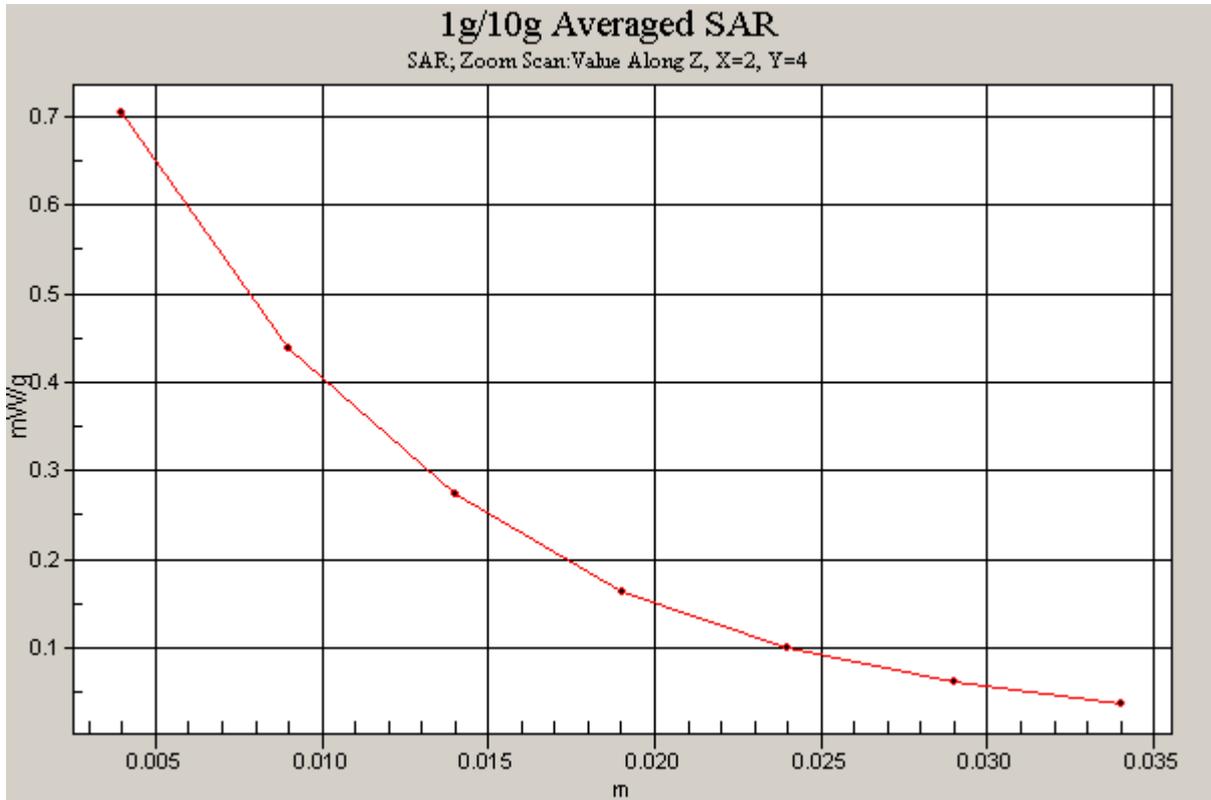


Figure 105 Z-Scan at power reference point (Body, Towards Ground, Close GSM 1900 GPRS Channel 512)

GSM 1900 GPRS Towards Phantom High Close

Communication System: GSM 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.227 mW/g

Towards Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.15 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.221 mW/g

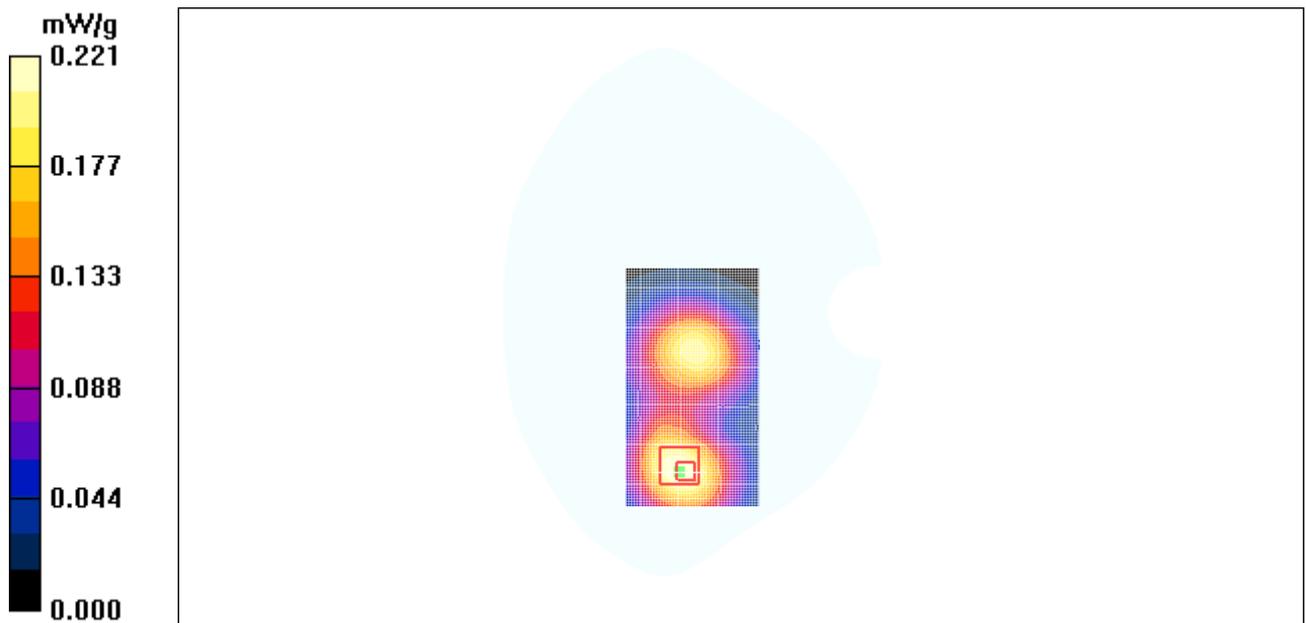


Figure 106 Body, Towards Phantom, Close GSM 1900 GPRS, Channel 810

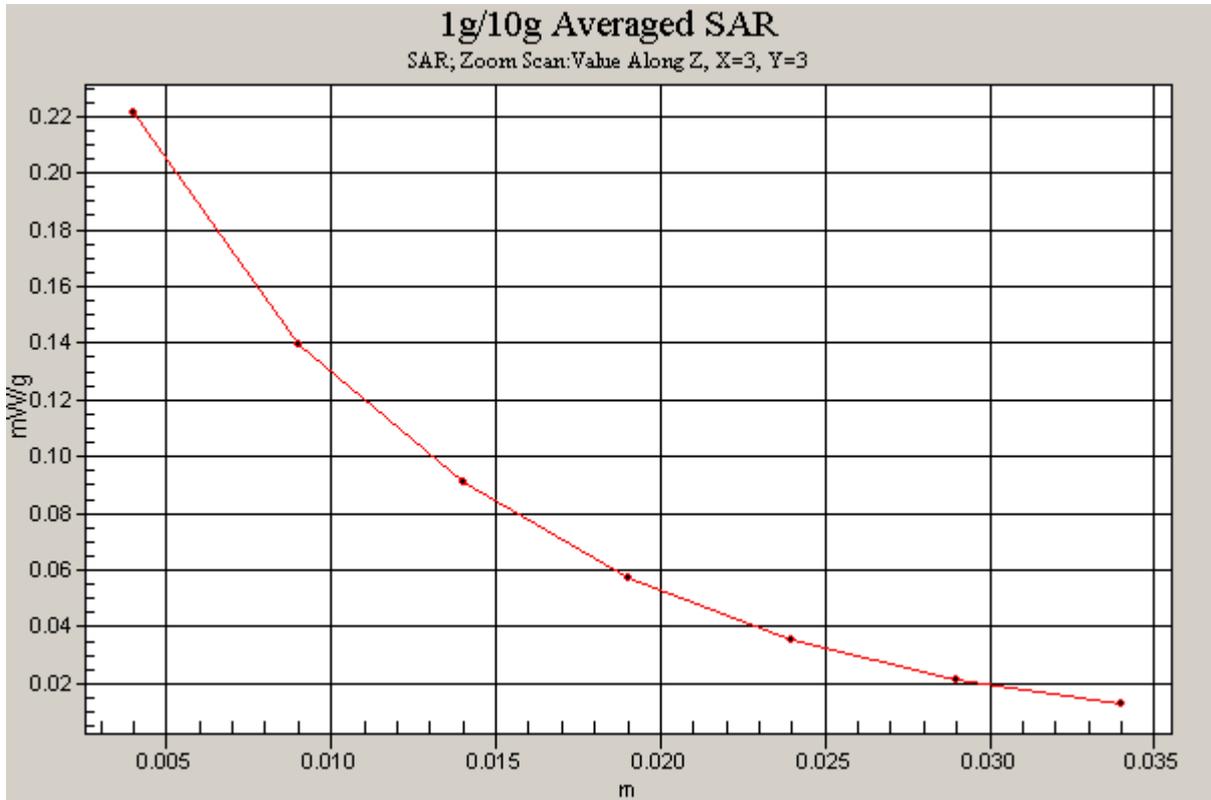


Figure 107 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 1900 GPRS, Channel 810)

GSM 1900 GPRS Towards Phantom Middle Close

Communication System: GSM 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.213 mW/g

Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.313 W/kg

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.209 mW/g

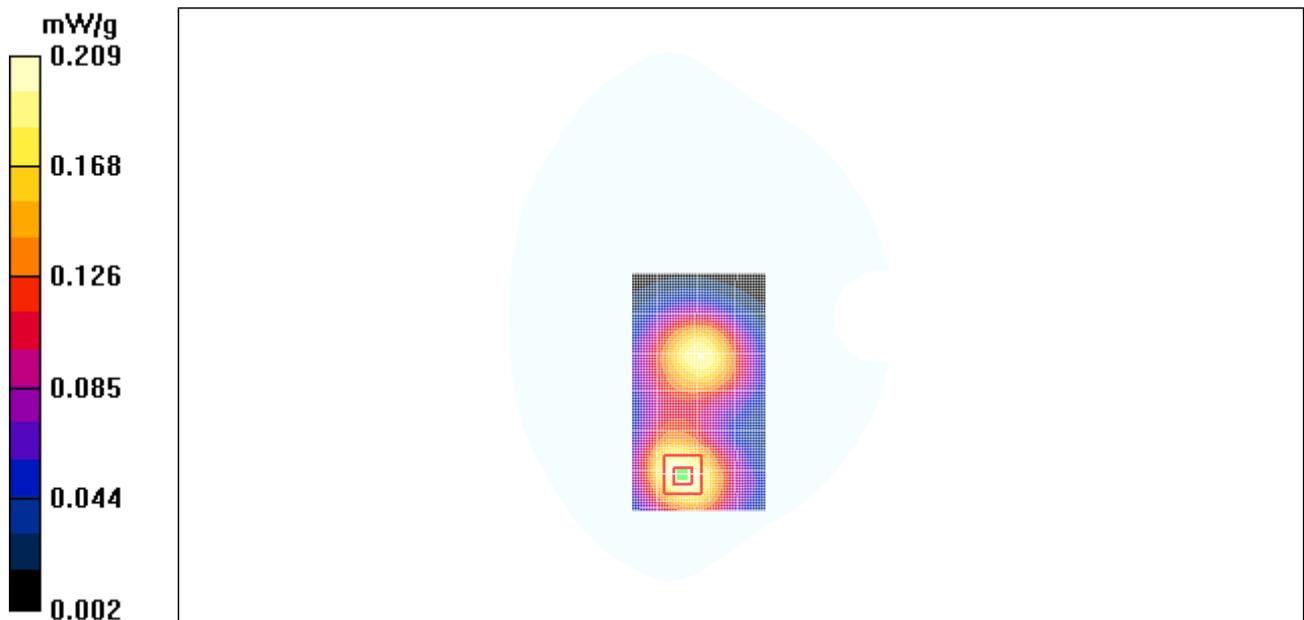


Figure 108 Body, Towards Phantom, Close GSM 1900 GPRS Channel 661

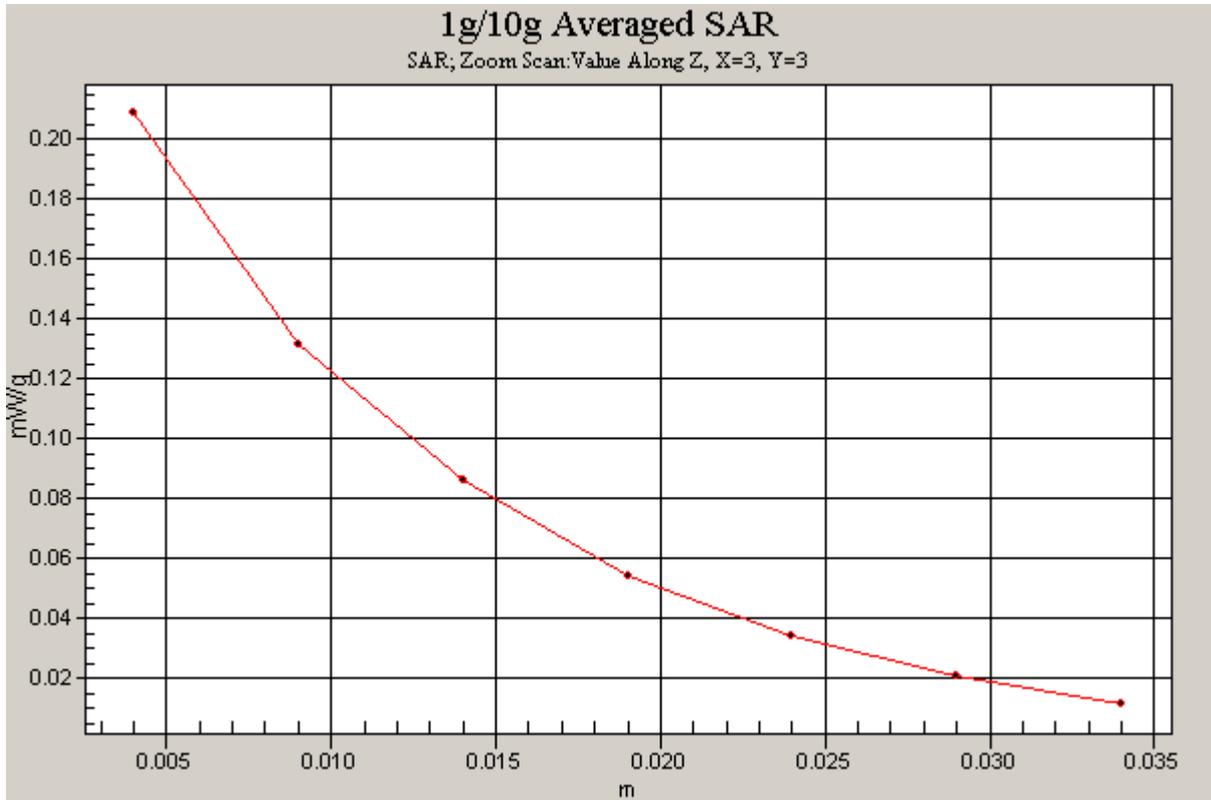


Figure 109 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 1900 GPRS Channel 661)

GSM 1900 GPRS Towards Phantom Low Close

Communication System: GSM 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(4.64, 4.64, 4.64);

Electronics: DAE4 Sn452;

Towards Phantom Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.167 mW/g

Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.71 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

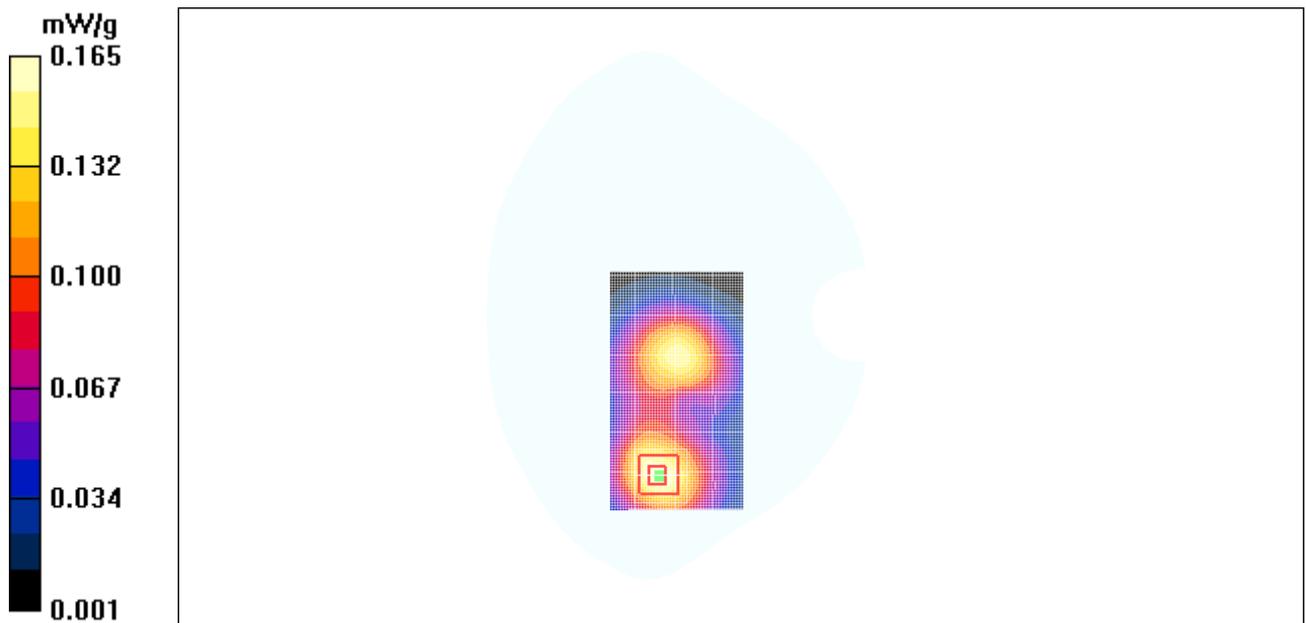


Figure 110 Body, Towards Phantom, Close GSM 1900 GPRS Channel 512

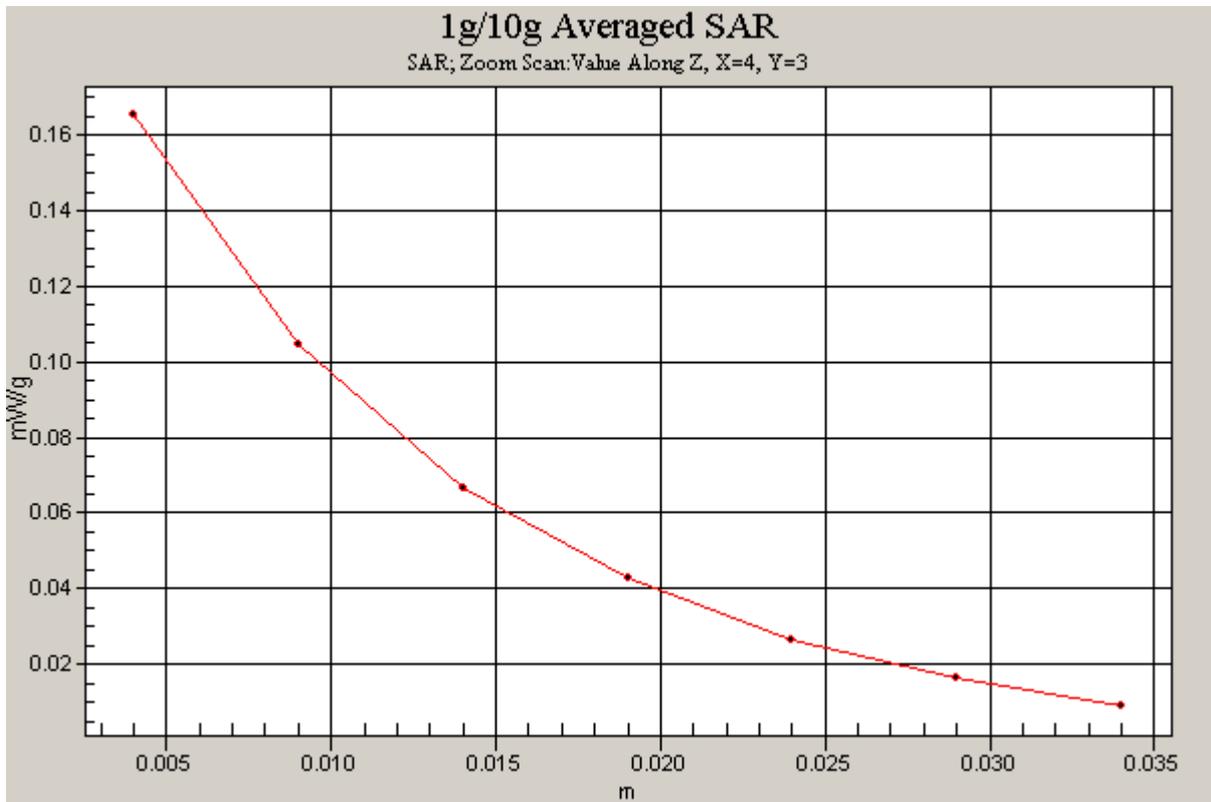


Figure 111 Z-Scan at power reference point (Body, Towards Phantom, Close GSM 1900 GPRS Channel 512)

ANNEX D : SYSTEM VALIDATION RESULTS

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Probe: ET3DV6 - SN1531; ConvF(5.15, 5.15, 5.15);

Electronics: DAE4 Sn452;

d=10mm, Pin=250mW 2/Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.8 mW/g

d=10mm, Pin=250mW 2/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.8 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 9.36 mW/g; SAR(10 g) = 4.93 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

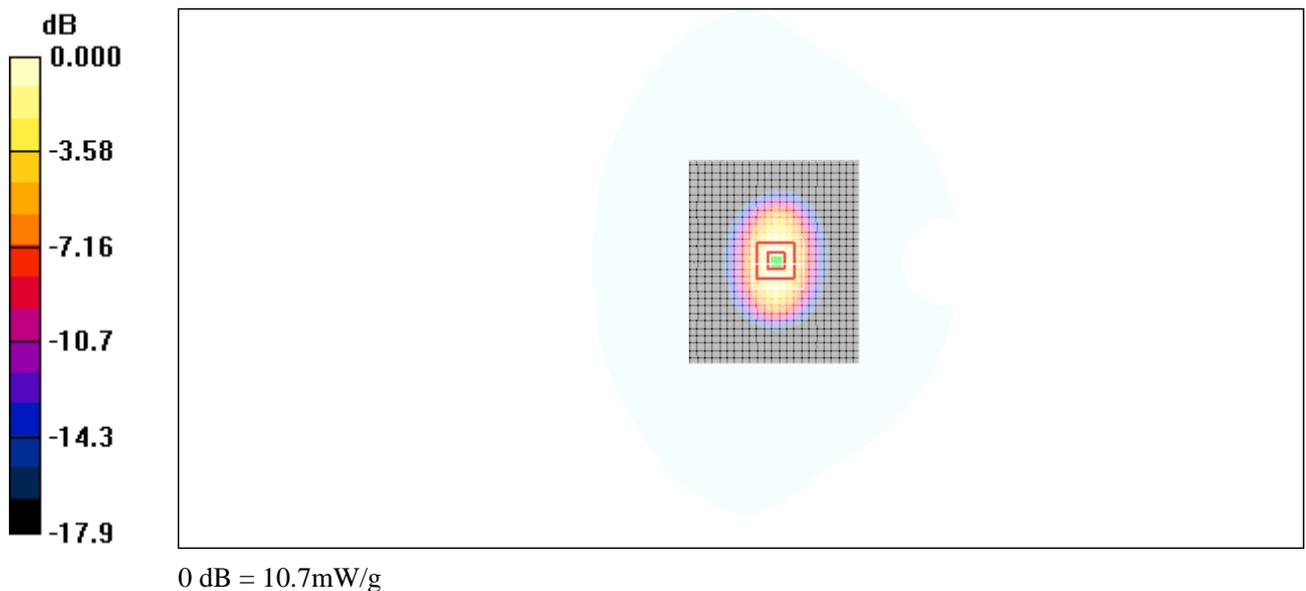


Figure 112 System Performance Check 1900MHz 250mW

ANNEX E : PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **ET3-1531_Jan08**

CALIBRATION CERTIFICATE

Object: **ET3DV6 - SN:1531**

Calibration procedure(s): **QA CAL-01.v6 and QA CAL-12.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 29, 2008**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498067	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5088 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (SPEAG, No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Kolja Pokovic	Technical Manager	
Approved by:	Nils Kuster	Quality Manager	

Issued: January 29, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2008-1100FCC

Page 138of 169

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.