

# FCC Test Report

## FCC ID: QISVIE-L29

**Project No.** : 1602C121  
**Equipment** : Smart Phone  
**Model Name** : VIE-L29  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : Feb. 26, 2016  
**Date of Test** : Feb. 26, 2016 ~ Mar. 14, 2016  
**Issued Date** : Mar. 15, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Pike Lee  
(Pike Lee)

**Technical Manager** : Jeff Yang  
(Jeff Yang)

**Authorized Signatory** : Andy Chiu  
(Andy Chiu)

# **B T L I N C .**

B1, No. 37, Lane 365, Yang-Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Testing Laboratory  
0659

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--|-------------|
| <b>1 . CERTIFICATION</b>                                     | <b>5</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 2.1 TEST FACILITY  | 7           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 3.2 DESCRIPTION OF TEST MODES                                | 9           |
| 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10          |
| 3.4 DESCRIPTION OF SUPPORT UNITS                             | 11          |
| <b>4 . EMC EMISSION TEST</b>                                 | <b>12</b>   |
| 4.1 CONDUCTED EMISSION MEASUREMENT                           | 12          |
| 4.1.1 POWER LINE CONDUCTED EMISSION                          | 12          |
| 4.1.2 TEST PROCEDURE   | 12          |
| 4.1.3 DEVIATION FROM TEST STANDARD                           | 12          |
| 4.1.4 TEST SETUP   | 13          |
| 4.1.5 EUT OPERATING CONDITIONS                               | 13          |
| 4.1.6 TEST RESULTS   | 13          |
| 4.2 RADIATED EMISSION MEASUREMENT                            | 14          |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT                | 14          |
| 4.2.2 TEST PROCEDURE   | 15          |
| 4.2.3 DEVIATION FROM TEST STANDARD                           | 15          |
| 4.2.4 TEST SETUP   | 16          |
| 4.2.5 EUT OPERATING CONDITIONS                               | 16          |
| 4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)                       | 17          |
| 4.2.7 TEST RESULTS (ABOVE 1000 MHZ)                          | 17          |
| <b>5 . MEASUREMENT INSTRUMENTS LIST</b>                      | <b>18</b>   |
| <b>ATTACHMENT A - CONDUCTED EMISSION</b>                     | <b>19</b>   |
| <b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>   | <b>44</b>   |
| <b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>      | <b>69</b>   |

## REPORT ISSUED HISTORY

| Issued No.          | Description     | Issued Date   |
|---------------------|-----------------|---------------|
| BTL-FCCE-1-1602C121 | Original Issue. | Mar. 15, 2016 |

## 1. CERTIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : VIE-L29  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Date of Test : Feb. 26, 2016 ~ Mar. 14, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1602C121) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| EMC Emission                             |                               |         |          |                 |
|--|-------------------------------|---------|----------|-----------------|
| Standard(s)                              | Test Item                     | Limit   | Judgment | Remark          |
| FCC Part15, Subpart B<br>ANSI C63.4-2014 | Conducted Emission            | Class B | PASS     |                 |
|  | Radiated emission Below 1 GHz | Class B | PASS     |                 |
|  | Radiated emission Above 1 GHz | Class B | PASS     | <b>NOTE (2)</b> |

**NOTE:**

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 5850MHz which exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U,(dB) |
|-----------|--------|-----------------------------|--------|
| C05       | CISPR  | 150 kHz ~ 30MHz             | 2.04   |

### B. Radiated Measurement :

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| CB08 (3m) | CISPR  | 30 MHz ~ 200 MHz            | V          | 3.06    |
|           |        | 30 MHz ~ 200 MHz            | H          | 2.58    |
|           |        | 200 MHz ~ 1, 000 MHz        | V          | 3.50    |
|           |        | 200 MHz ~ 1, 000 MHz        | H          | 3.10    |

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| CB08 (3m) | CISPR  | 1GHz ~ 6GHz                 | V          | 4.14    |
|           |        | 1GHz ~ 6GHz                 | H          | 4.14    |
|           |        | 6GHz ~ 18GHz                | V          | 5.34    |
|           |        | 6GHz ~ 18GHz                | H          | 5.34    |

| Test Site | Method | Measurement Frequency Range | U,(dB) |
|-----------|--------|-----------------------------|--------|
| CB08 (3m) | CISPR  | 18 ~ 26.5 GHz               | 4.66   |
|           |        | 26.5 ~ 40 GHz               | 4.74   |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                  |   |
|------------------|---|
| Equipment        | Smart Phone   |
| Brand Name       | HUAWEI  |
| Model Name       | VIE-L29   |
| Model Difference | N/A   |
| Power Source     | #1 DC Voltage supplied from AC/DC adapter.<br>Manufacturer:<br>(1) HUIZHOU BYD ELECTRONIC CO., LTD.<br>(2) Salcomp (Shenzhen)Co.,Ltd<br>Model:<br>(1) HW-059200BHQ (UK)<br>(2) HW-059200EHQ (EU)<br>(3) HW-059200UHQ (US)<br>(4) HW-059200AHQ (AU)<br>#2 Supplied from battery. |
| Power Rating     | #1 I/P: 100V~240V~ 50/60 Hz,0.2A<br>O/P: 5V $\equiv$ 1A<br>#2 DC 3.8V   |
| HW Version       | HL1AVIENNAM   |
| SW Version       | VIE-L29C900B071   |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

| Item      | Mfr/Brand  | Model.              |
|-----------|--|---------------------|
| USB Cable | FOXCONN INTERCONNECT TECHNOLOGY LIMITED.         | CUDU01B-HC212-EH    |
|           | LUXSHARE-ICT Co., Ltd.                           | L99UC001-CS-H       |
|           | Chang Shu Honglin Technology Co.,Ltd.            | 130-26988           |
| Earphone  | JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD | MEMD1632B580C00     |
|           | BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD       | 1311-3291-3.5mm-229 |
| Battery   | Sunwoda Electronic Co., LTD                      | HB376883ECW         |
|           | SCUD (FUJIAN) Electronics Co., Ltd               |                     |
|           | Desay Battery Co., Ltd.                          |                     |

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                      |
|--------------|--|
| Mode 1       | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone |
| Mode 2       | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker  |
| Mode 3       | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on        |
| Mode 4       | Adapter+GSM+BT+2.4GHz WIFI+GPS                   |
| Mode 5       | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                 |
| Mode 6       | Adapter+LTE+BT+2.4GHz WIFI+GPS                   |
| Mode 7       | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS         |
| Mode 8       | USB copy(EUT with PC)+BT+5GHz WIFI+GPS           |


The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

| For Conducted Test |  |
|--------------------|--|
| Final Test Mode    | Description                                      |
| Mode 1             | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone |
| Mode 2             | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker  |
| Mode 3             | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on        |
| Mode 4             | Adapter+GSM+BT+2.4GHz WIFI+GPS                   |
| Mode 5             | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                 |
| Mode 6             | Adapter+LTE+BT+2.4GHz WIFI+GPS                   |
| Mode 7             | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS         |
| Mode 8             | USB copy(EUT with PC)+BT+5GHz WIFI+GPS           |


| For Radiated Test |  |
|-------------------|--|
| Final Test Mode   | Description                                      |
| Mode 1            | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone |
| Mode 2            | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker  |
| Mode 3            | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on        |
| Mode 4            | Adapter+GSM+BT+2.4GHz WIFI+GPS                   |
| Mode 5            | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                 |
| Mode 6            | Adapter+LTE+BT+2.4GHz WIFI+GPS                   |
| Mode 7            | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS         |
| Mode 8            | USB copy(EUT with PC)+BT+5GHz WIFI+GPS           |

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Mode 1-6

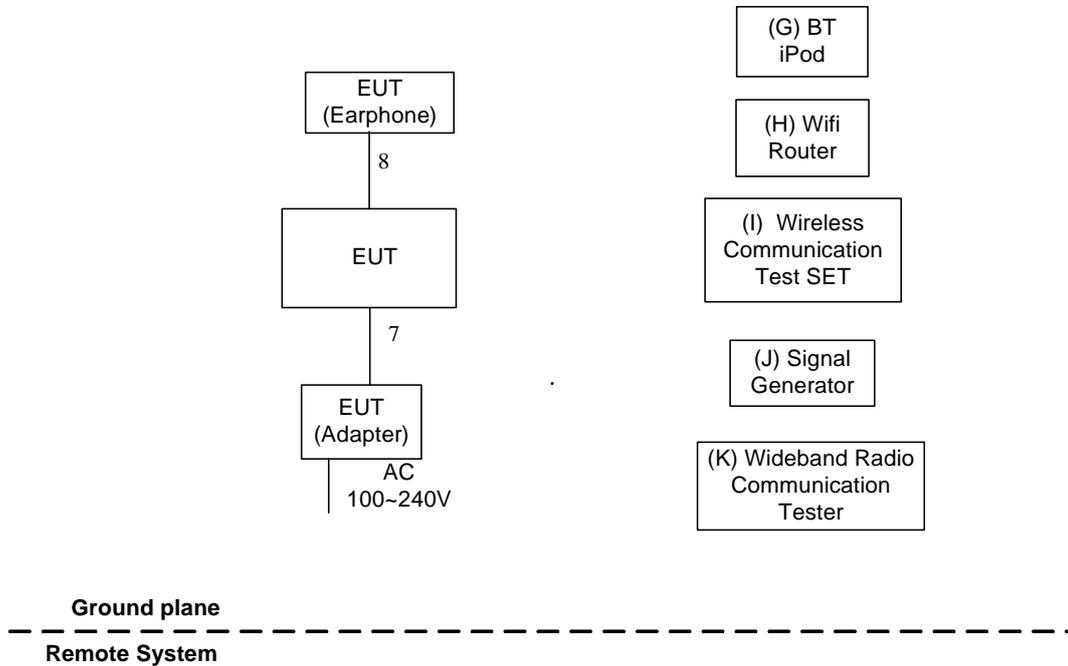

#### Mode 7/8

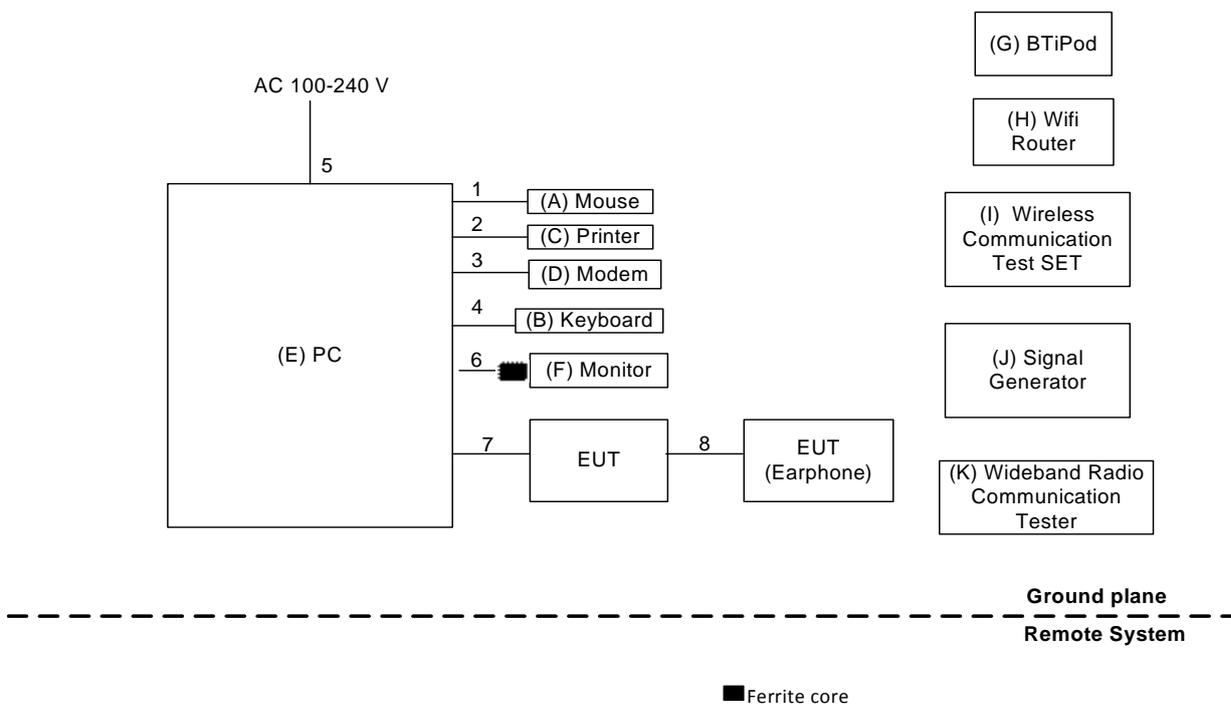

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                           | Mfr/Brand | Model/Type No.          | FCC ID      | Series No.                  |
|------|-------------------------------------|-----------|-------------------------|-------------|-----------------------------|
| A    | USB Mouse                           | DELL      | MS111-P                 | DOC         | CN011D3V71581279<br>OLOT    |
| B    | USB Keyboard                        | DELL      | KB212-B                 | DOC         | CN0HTXH97158125<br>004DXA01 |
| C    | Printer                             | SII       | DPU-414                 | DOC         | 3018507 B                   |
| D    | Modem                               | ACEEX     | DM-1414V                | IFAXDM1414  | 0603002131                  |
| E    | PC                                  | DELL      | DCSM 745                | DOC         | G7K832X                     |
| F    | LCD monitor                         | DELL      | E177FPc                 | DOC         | CNOFJ179-64180-6<br>AG-1WNS |
| G    | iPod                                | Apple     | A1446                   | BCG-A1446A  | DCYJGOPCFOGV                |
| H    | Router                              | ASUS      | RT-AC66U                | MSQ-RTAC66U | E8ICGG000138                |
| I    | Wireless Communication Test SET     | Agilent   | (8960 Series)<br>E5515C | N/A         | MY48364183                  |
| J    | Signal Generator                    | Agilent   | E4438C                  | N/A         | MY49071316                  |
| K    | Wideband Radio Communication Tester | RS        | CMW500                  | N/A         | 122125                      |

| Item | Shielded Type | Ferrite Core | Length | Note           |
|------|---------------|--------------|--------|----------------|
| 1    | YES           | NO           | 1.8m   | USB Cable      |
| 2    | YES           | NO           | 1.8m   | Parallel Cable |
| 3    | YES           | NO           | 1.8m   | RS232 Cable    |
| 4    | YES           | NO           | 1.8m   | USB Cable      |
| 5    | NO            | NO           | 1.8m   | AC power Cable |
| 6    | YES           | YES          | 1.8m   | D-SUB Cable    |
| 7    | YES           | NO           | 1m     | USB Cable      |
| 8    | NO            | NO           | 1.2m   | Earphone Cable |

Note:

(1) For detachable type I/O cable should be specified the length m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           |
|-----------------|----------------|---------|----------------|-----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

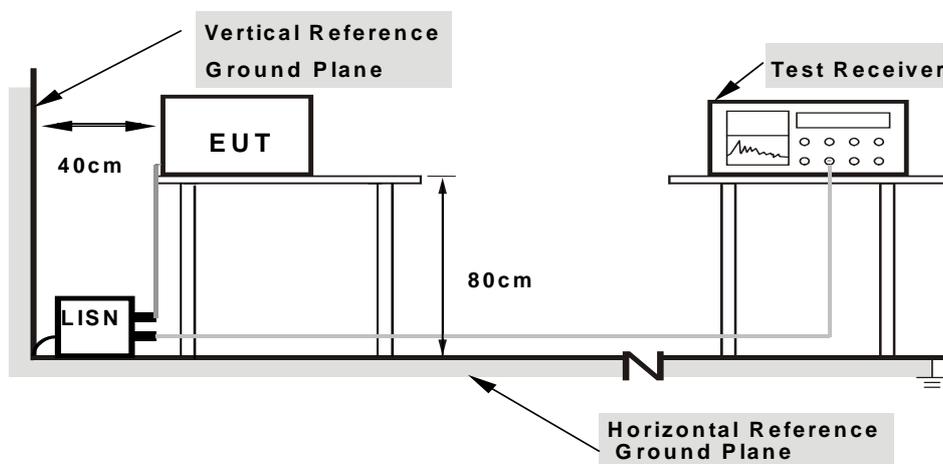

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 24°C Relative Humidity: 60%

#### Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

**Below 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A (at 10m)         |                            | Class B (at 3m)          |                            |
|-----------------|--------------------------|----------------------------|--------------------------|----------------------------|
|                 | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength | (uV/m)<br>Field strength | (dBuV/m)<br>Field strength |
| 30 - 88         | 90                       | 39                         | 100                      | 40                         |
| 88 - 216        | 150                      | 43.5                       | 150                      | 43.5                       |
| 216 - 960       | 210                      | 46.4                       | 200                      | 46                         |
| Above 960       | 300                      | 49.5                       | 500                      | 54                         |

**CISPR 22 or CAN/CSA-CISPR 22-10:**

| Frequency (MHz) | Class A (at 10m) | Class B (at 10m) |
|-----------------|------------------|------------------|
|                 | dBuV/m           |                  |
| 30 - 230        | 40               | 30               |
| 230 - 1000      | 47               | 37               |

**Above 1 GHz**

**Measurement Method and Applied Limits:**

**ANSI C63.4:**

| Frequency (MHz) | Class A          |         |                   |         | Class B          |         |
|-----------------|------------------|---------|-------------------|---------|------------------|---------|
|                 | (dBuV/m) (at 3m) |         | (dBuV/m) (at 10m) |         | (dBuV/m) (at 3m) |         |
|                 | Peak             | Average | Peak              | Average | Peak             | Average |
| Above 1000      | 80               | 60      | 69.5              | 49.5    | 74               | 54      |

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)   |
|---|---|
| Below 1.705   | 30  |
| 1.705 - 108   | 1000  |
| 108 - 500   | 2000  |
| 500 - 1000  | 5000  |
| Above 1000  | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

**NOTE:**

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### **4.2.2 TEST PROCEDURE**


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### **4.2.3 DEVIATION FROM TEST STANDARD**


No deviation

#### 4.2.4 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

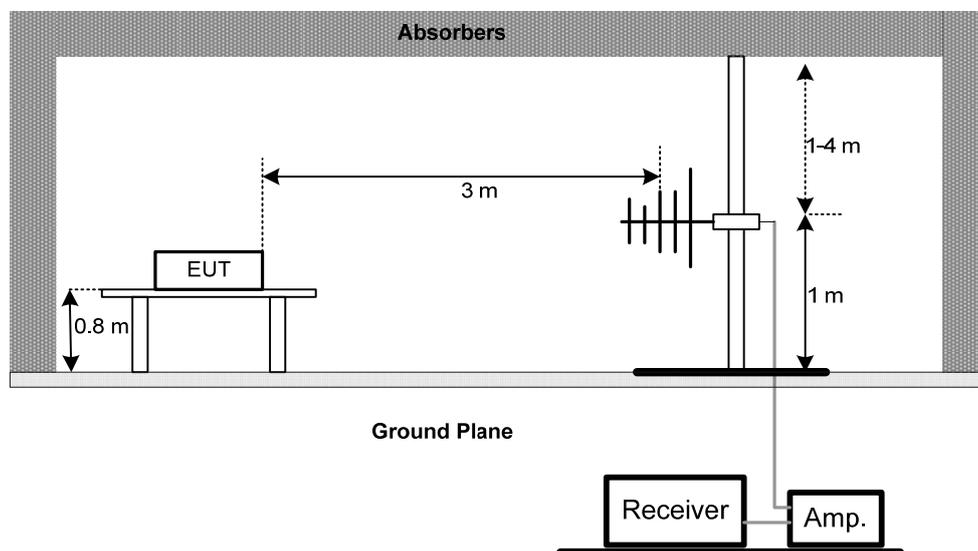

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

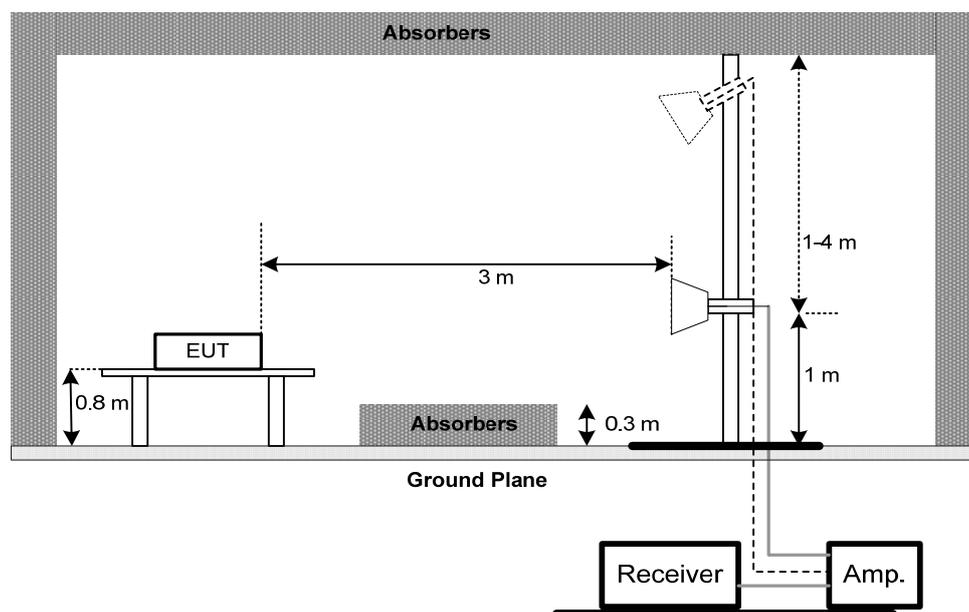

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)**

Please refer to the Attachment B.

Temperature: 25°C    Relative Humidity: 60%

#### **4.2.7 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Attachment C

Temperature: 25°C    Relative Humidity: 60%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

## 5. MEASUREMENT INSTRUMENTS LIST

| Conducted Emission |                      |              |                         |            |                  |
|--------------------|----------------------|--------------|-------------------------|------------|------------------|
| Item               | Kind of Equipment    | Manufacturer | Type No.                | Serial No. | Calibrated until |
| 1                  | TWO-LINE V-NETWORK   | R&S          | ENV216                  | 101050     | Feb. 01, 2017    |
| 2                  | Test Cable           | TIMES        | CFD300-NL               | C05        | Jun. 14, 2016    |
| 3                  | EMI Test Receiver    | R&S          | ESR3                    | 101854     | Dec. 10, 2016    |
| 4                  | Measurement Software | EZ           | EZ EMC (Version NB-03A) | N/A        | N/A              |


| Radiated Emission |                       |                       |                         |            |                  |
|-------------------|-----------------------|-----------------------|-------------------------|------------|------------------|
| Item              | Kind of Equipment     | Manufacturer          | Type No.                | Serial No. | Calibrated until |
| 1                 | Log-Bicon Antenna     | Schwarzbeck           | VULB 9168               | 9168-641   | Sep. 10, 2016    |
| 2                 | Log-Bicon Antenna     | Schwarzbeck           | VULB 9168               | 9168-642   | Sep. 10, 2016    |
| 3                 | Attenuator            | Inmet                 | AT-N0507                | 01         | Sep. 10, 2016    |
| 4                 | Attenuator            | Inmet                 | AT-N0508                | 02         | Sep. 10, 2016    |
| 5                 | Pre-Amplifier         | EMCI                  | EMC9135                 | 980281     | Oct. 05, 2016    |
| 6                 | Pre-Amplifier         | EMCI                  | EMC9135                 | 980282     | Oct. 05, 2016    |
| 7                 | Test Cable            | EMCI                  | EMC8D-NM-NM-800         | 150102     | Jan. 22, 2017    |
| 8                 | Test Cable            | EMCI                  | EMC8D-NM-NM-800         | 150103     | Jan. 22, 2017    |
| 9                 | Test Cable            | EMCI                  | EMC8D-NM-NM-5000        | 150105     | Jan. 22, 2017    |
| 10                | Test Cable            | EMCI                  | EMC8D-NM-NM-5000        | 150106     | Jan. 22, 2017    |
| 11                | Test Cable            | EMCI                  | EMC8D-NM-NM-10000       | 150107     | Jan. 22, 2017    |
| 12                | Test Cable            | EMCI                  | EMC8D-NM-NM-20000       | 150116     | Jan. 22, 2017    |
| 13                | EXA Spectrum Analyzer | Keysight Technologies | N9010A                  | MY54200483 | Sep. 21, 2016    |
| 14                | EMI Receiver          | Keysight Technologies | N9038A                  | MY54130009 | Oct. 02, 2016    |
| 15                | Horn Antenna          | Schwarzbeck           | BBHA-9120D              | 120D-1297  | Aug. 03, 2016    |
| 16                | Pre-Amplifier         | Agilent               | 8449B                   | 3008A02331 | Jan. 22, 2017    |
| 17                | Test Cable            | EMCI                  | EMC104-SM-SM-800        | 150110     | Jan. 22, 2017    |
| 18                | Test Cable            | EMCI                  | EMC104-SM-SM-15000      | 150111     | Jan. 22, 2017    |
| 19                | Test Cable            | EMCI                  | EMC104-SM-SM-5000       | 141210     | Jan. 22, 2017    |
| 20                | Measurement Software  | EZ                    | EZ EMC (Version NB-03A) | N/A        | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

## ATTACHMENT A - CONDUCTED EMISSION

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |


### Line

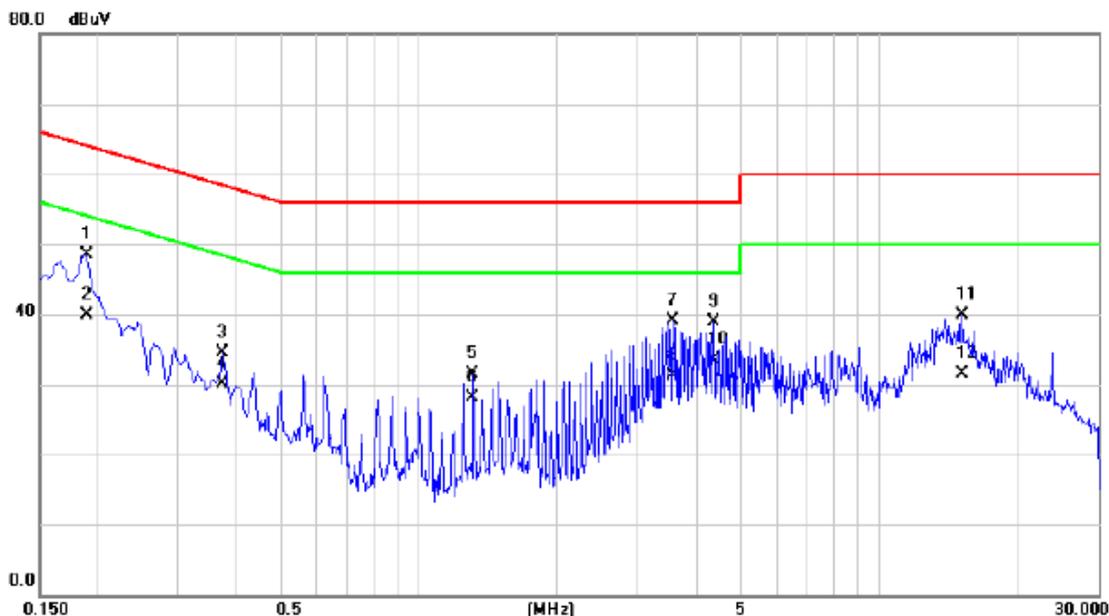

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.1900  | 38.99         | 9.57           | 48.56       | 64.04 | -15.48 | QP       |         |
| 2   |     | 0.1900  | 30.40         | 9.57           | 39.97       | 54.04 | -14.07 | AVG      |         |
| 3   |     | 0.3740  | 24.94         | 9.66           | 34.60       | 58.41 | -23.81 | QP       |         |
| 4   |     | 0.3740  | 20.40         | 9.66           | 30.06       | 48.41 | -18.35 | AVG      |         |
| 5   |     | 1.3140  | 21.74         | 9.83           | 31.57       | 56.00 | -24.43 | QP       |         |
| 6   |     | 1.3140  | 18.20         | 9.83           | 28.03       | 46.00 | -17.97 | AVG      |         |
| 7   |     | 3.5700  | 29.18         | 9.99           | 39.17       | 56.00 | -16.83 | QP       |         |
| 8   |     | 3.5700  | 21.40         | 9.99           | 31.39       | 46.00 | -14.61 | AVG      |         |
| 9   |     | 4.3820  | 28.91         | 9.97           | 38.88       | 56.00 | -17.12 | QP       |         |
| 10  | *   | 4.3820  | 23.60         | 9.97           | 33.57       | 46.00 | -12.43 | AVG      |         |
| 11  |     | 15.2060 | 30.17         | 9.82           | 39.99       | 60.00 | -20.01 | QP       |         |
| 12  |     | 15.2060 | 21.70         | 9.82           | 31.52       | 50.00 | -18.48 | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |


## Neutral

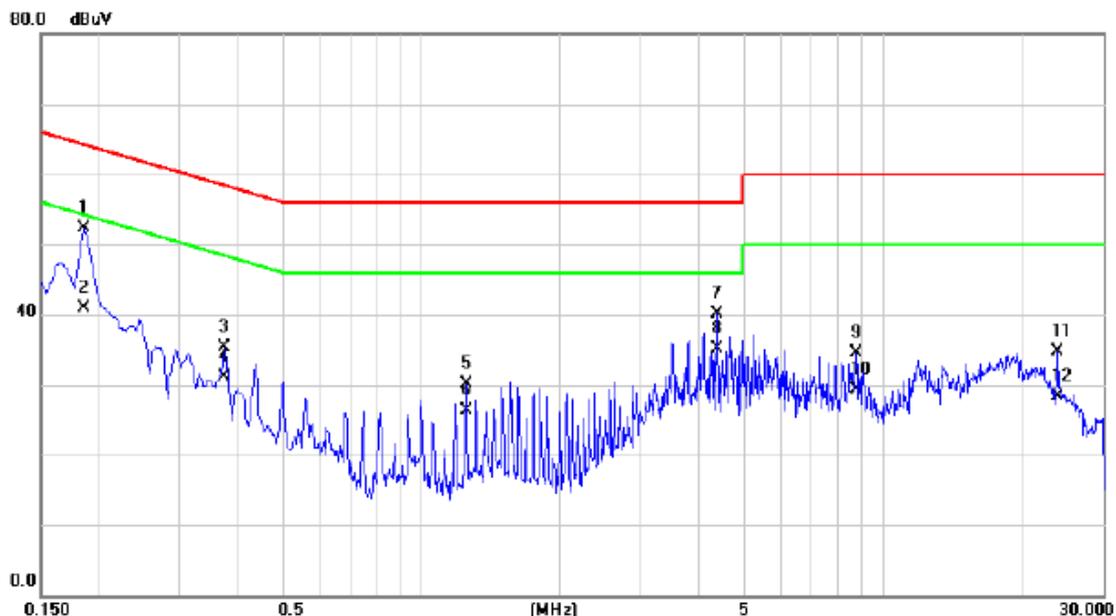

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1860       | 42.79                    | 9.49                    | 52.28                    | 64.21         | -11.93       | QP       |         |
| 2   |     | 0.1860       | 31.40                    | 9.49                    | 40.89                    | 54.21         | -13.32       | AVG      |         |
| 3   |     | 0.3740       | 25.82                    | 9.54                    | 35.36                    | 58.41         | -23.05       | QP       |         |
| 4   |     | 0.3740       | 21.60                    | 9.54                    | 31.14                    | 48.41         | -17.27       | AVG      |         |
| 5   |     | 1.2500       | 20.54                    | 9.64                    | 30.18                    | 56.00         | -25.82       | QP       |         |
| 6   |     | 1.2500       | 16.70                    | 9.64                    | 26.34                    | 46.00         | -19.66       | AVG      |         |
| 7   |     | 4.3820       | 30.29                    | 9.91                    | 40.20                    | 56.00         | -15.80       | QP       |         |
| 8   | *   | 4.3820       | 25.10                    | 9.91                    | 35.01                    | 46.00         | -10.99       | AVG      |         |
| 9   |     | 8.7700       | 24.74                    | 9.85                    | 34.59                    | 60.00         | -25.41       | QP       |         |
| 10  |     | 8.7700       | 19.50                    | 9.85                    | 29.35                    | 50.00         | -20.65       | AVG      |         |
| 11  |     | 23.9700      | 24.79                    | 9.99                    | 34.78                    | 60.00         | -25.22       | QP       |         |
| 12  |     | 23.9700      | 18.30                    | 9.99                    | 28.29                    | 50.00         | -21.71       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |

### Line

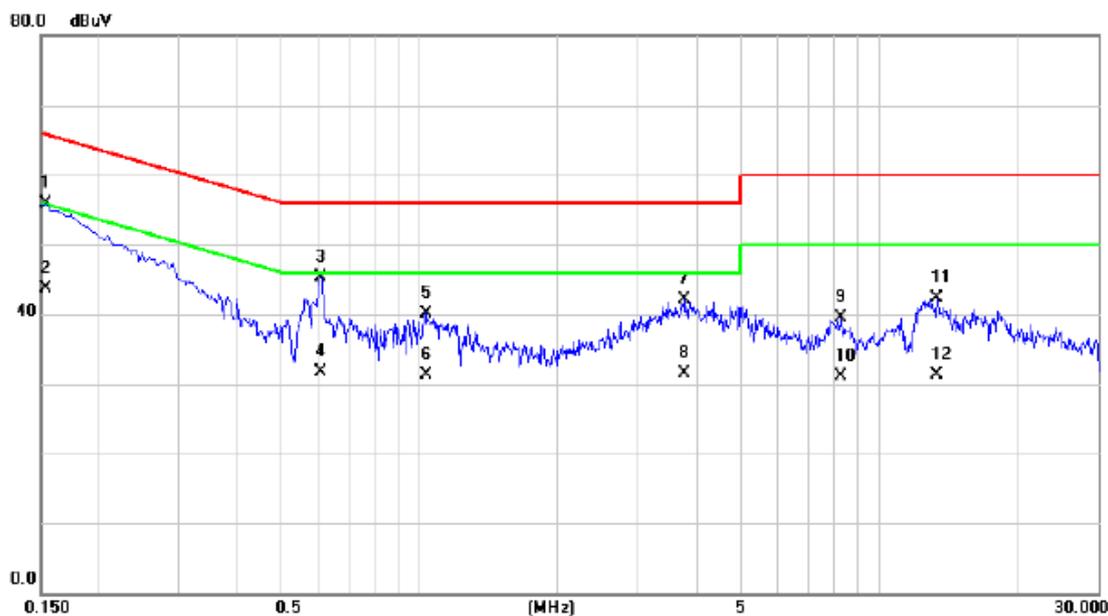

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Margin |          |         |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
|     |     | MHz     | dBuV    | Factor  | ment     | dBuV  | dB     | Detector | Comment |
| 1   | *   | 0.1540  | 46.32   | 9.54    | 55.86    | 65.78 | -9.92  | QP       |         |
| 2   |     | 0.1540  | 34.20   | 9.54    | 43.74    | 55.78 | -12.04 | AVG      |         |
| 3   |     | 0.6100  | 35.50   | 9.72    | 45.22    | 56.00 | -10.78 | QP       |         |
| 4   |     | 0.6100  | 21.90   | 9.72    | 31.62    | 46.00 | -14.38 | AVG      |         |
| 5   |     | 1.0340  | 30.38   | 9.80    | 40.18    | 56.00 | -15.82 | QP       |         |
| 6   |     | 1.0340  | 21.50   | 9.80    | 31.30    | 46.00 | -14.70 | AVG      |         |
| 7   |     | 3.7660  | 32.17   | 9.98    | 42.15    | 56.00 | -13.85 | QP       |         |
| 8   |     | 3.7660  | 21.60   | 9.98    | 31.58    | 46.00 | -14.42 | AVG      |         |
| 9   |     | 8.2940  | 29.53   | 9.90    | 39.43    | 60.00 | -20.57 | QP       |         |
| 10  |     | 8.2940  | 21.30   | 9.90    | 31.20    | 50.00 | -18.80 | AVG      |         |
| 11  |     | 13.3540 | 32.43   | 9.84    | 42.27    | 60.00 | -17.73 | QP       |         |
| 12  |     | 13.3540 | 21.50   | 9.84    | 31.34    | 50.00 | -18.66 | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |


## Neutral



| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.1580 | 41.44         | 9.49           | 50.93       | 65.57 | -14.64 | QP       |         |
| 2   |     | 0.1580 | 26.20         | 9.49           | 35.69       | 55.57 | -19.88 | AVG      |         |
| 3   |     | 0.2220 | 34.41         | 9.50           | 43.91       | 62.74 | -18.83 | QP       |         |
| 4   |     | 0.2220 | 23.50         | 9.50           | 33.00       | 52.74 | -19.74 | AVG      |         |
| 5   |     | 0.4140 | 32.80         | 9.53           | 42.33       | 57.57 | -15.24 | QP       |         |
| 6   |     | 0.4140 | 21.70         | 9.53           | 31.23       | 47.57 | -16.34 | AVG      |         |
| 7   | *   | 0.5580 | 37.04         | 9.56           | 46.60       | 56.00 | -9.40  | QP       |         |
| 8   |     | 0.5580 | 22.60         | 9.56           | 32.16       | 46.00 | -13.84 | AVG      |         |
| 9   |     | 0.6940 | 33.41         | 9.53           | 42.94       | 56.00 | -13.06 | QP       |         |
| 10  |     | 0.6940 | 22.50         | 9.53           | 32.03       | 46.00 | -13.97 | AVG      |         |
| 11  |     | 3.6460 | 34.28         | 9.88           | 44.16       | 56.00 | -11.84 | QP       |         |
| 12  |     | 3.6460 | 21.60         | 9.88           | 31.48       | 46.00 | -14.52 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG |


### Line

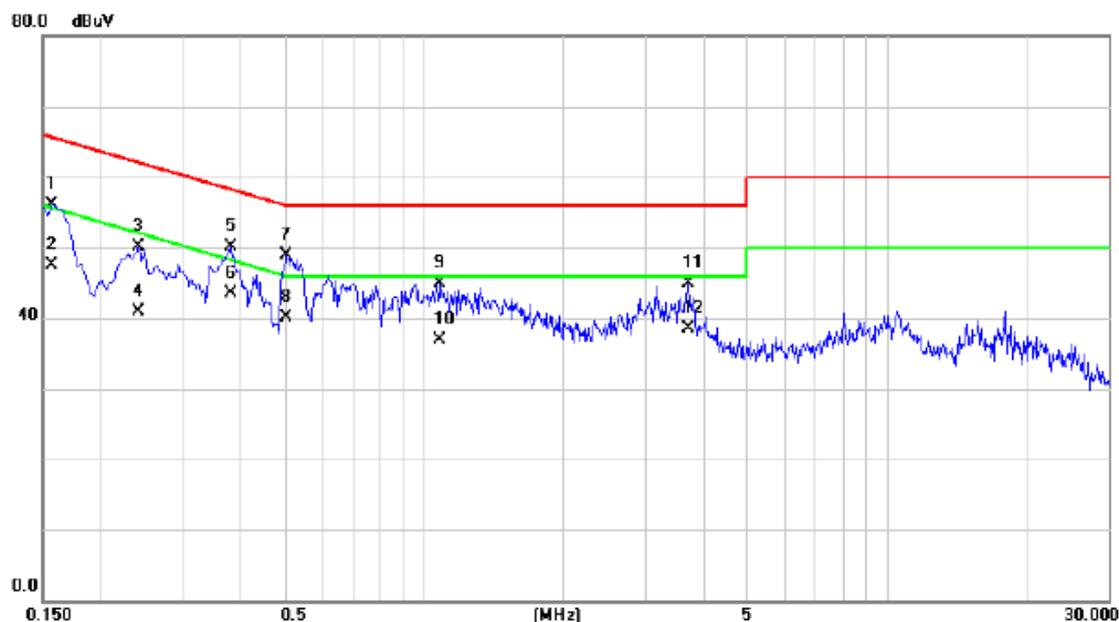

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.1580 | 46.51         | 9.55           | 56.06       | 65.57 | -9.51  | QP       |         |
| 2   |     | 0.1580 | 37.90         | 9.55           | 47.45       | 55.57 | -8.12  | AVG      |         |
| 3   |     | 0.2420 | 40.54         | 9.60           | 50.14       | 62.03 | -11.89 | QP       |         |
| 4   |     | 0.2420 | 31.30         | 9.60           | 40.90       | 52.03 | -11.13 | AVG      |         |
| 5   |     | 0.3820 | 40.41         | 9.67           | 50.08       | 58.24 | -8.16  | QP       |         |
| 6   | *   | 0.3820 | 33.90         | 9.67           | 43.57       | 48.24 | -4.67  | AVG      |         |
| 7   |     | 0.5060 | 39.15         | 9.68           | 48.83       | 56.00 | -7.17  | QP       |         |
| 8   |     | 0.5060 | 30.50         | 9.68           | 40.18       | 46.00 | -5.82  | AVG      |         |
| 9   |     | 1.0860 | 35.06         | 9.80           | 44.86       | 56.00 | -11.14 | QP       |         |
| 10  |     | 1.0860 | 27.10         | 9.80           | 36.90       | 46.00 | -9.10  | AVG      |         |
| 11  |     | 3.7380 | 35.01         | 9.98           | 44.99       | 56.00 | -11.01 | QP       |         |
| 12  |     | 3.7380 | 28.60         | 9.98           | 38.58       | 46.00 | -7.42  | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG |


## Neutral

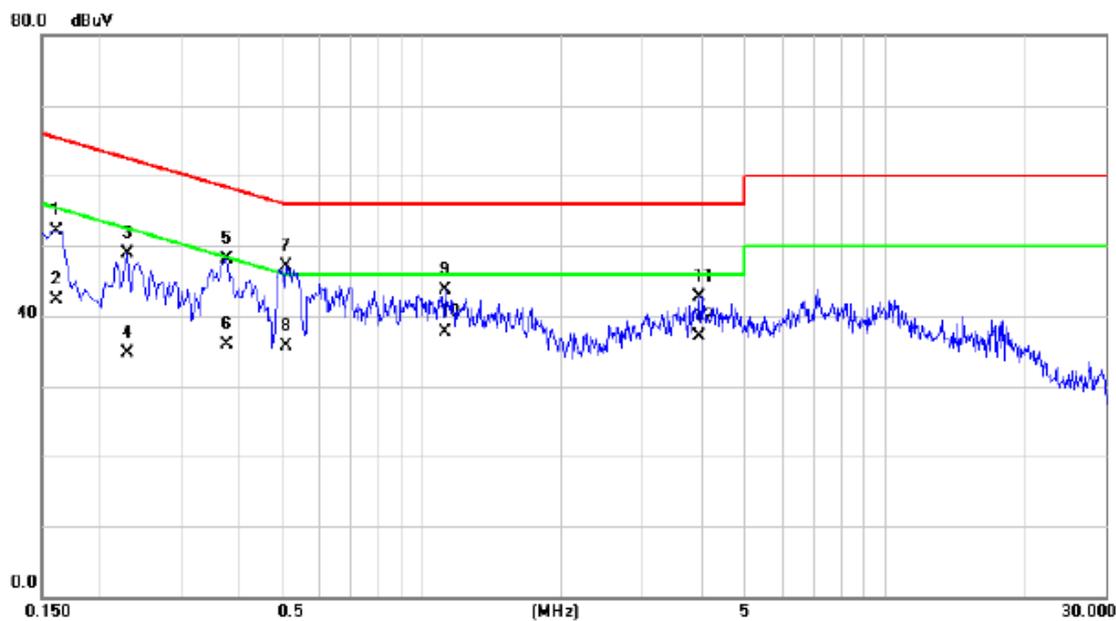

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1620       | 42.71                    | 9.48                    | 52.19                    | 65.36         | -13.17       | QP       |         |
| 2   |     | 0.1620       | 32.90                    | 9.48                    | 42.38                    | 55.36         | -12.98       | AVG      |         |
| 3   |     | 0.2300       | 39.45                    | 9.51                    | 48.96                    | 62.45         | -13.49       | QP       |         |
| 4   |     | 0.2300       | 25.20                    | 9.51                    | 34.71                    | 52.45         | -17.74       | AVG      |         |
| 5   |     | 0.3780       | 38.60                    | 9.53                    | 48.13                    | 58.32         | -10.19       | QP       |         |
| 6   |     | 0.3780       | 26.40                    | 9.53                    | 35.93                    | 48.32         | -12.39       | AVG      |         |
| 7   |     | 0.5100       | 37.45                    | 9.56                    | 47.01                    | 56.00         | -8.99        | QP       |         |
| 8   |     | 0.5100       | 26.10                    | 9.56                    | 35.66                    | 46.00         | -10.34       | AVG      |         |
| 9   |     | 1.1180       | 34.17                    | 9.60                    | 43.77                    | 56.00         | -12.23       | QP       |         |
| 10  | *   | 1.1180       | 28.20                    | 9.60                    | 37.80                    | 46.00         | -8.20        | AVG      |         |
| 11  |     | 3.9740       | 32.80                    | 9.92                    | 42.72                    | 56.00         | -13.28       | QP       |         |
| 12  |     | 3.9740       | 27.20                    | 9.92                    | 37.12                    | 46.00         | -8.88        | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |


## Line

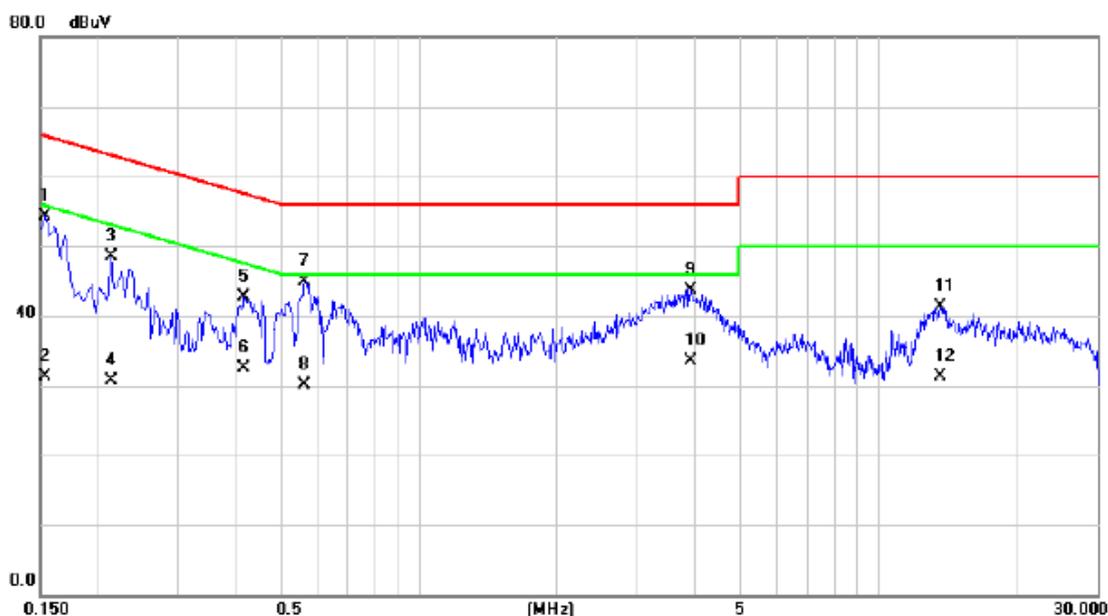

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.1540  | 44.75         | 9.54           | 54.29       | 65.78 | -11.49 | QP       |         |
| 2   |     | 0.1540  | 21.80         | 9.54           | 31.34       | 55.78 | -24.44 | AVG      |         |
| 3   |     | 0.2140  | 38.87         | 9.58           | 48.45       | 63.05 | -14.60 | QP       |         |
| 4   |     | 0.2140  | 21.20         | 9.58           | 30.78       | 53.05 | -22.27 | AVG      |         |
| 5   |     | 0.4180  | 33.02         | 9.68           | 42.70       | 57.49 | -14.79 | QP       |         |
| 6   |     | 0.4180  | 22.80         | 9.68           | 32.48       | 47.49 | -15.01 | AVG      |         |
| 7   | *   | 0.5660  | 35.27         | 9.71           | 44.98       | 56.00 | -11.02 | QP       |         |
| 8   |     | 0.5660  | 20.30         | 9.71           | 30.01       | 46.00 | -15.99 | AVG      |         |
| 9   |     | 3.9020  | 33.80         | 9.98           | 43.78       | 56.00 | -12.22 | QP       |         |
| 10  |     | 3.9020  | 23.60         | 9.98           | 33.58       | 46.00 | -12.42 | AVG      |         |
| 11  |     | 13.6660 | 31.48         | 9.83           | 41.31       | 60.00 | -18.69 | QP       |         |
| 12  |     | 13.6660 | 21.40         | 9.83           | 31.23       | 50.00 | -18.77 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |


## Neutral

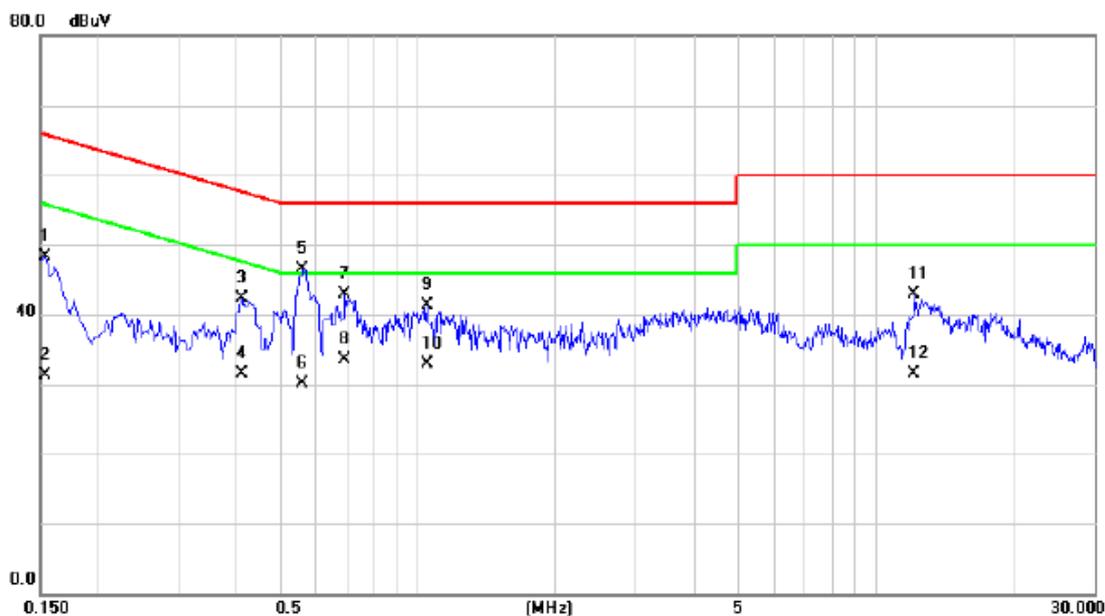

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.1540  | 38.74         | 9.49           | 48.23       | 65.78 | -17.55 | QP       |         |
| 2   |     | 0.1540  | 21.80         | 9.49           | 31.29       | 55.78 | -24.49 | AVG      |         |
| 3   |     | 0.4140  | 32.86         | 9.53           | 42.39       | 57.57 | -15.18 | QP       |         |
| 4   |     | 0.4140  | 21.90         | 9.53           | 31.43       | 47.57 | -16.14 | AVG      |         |
| 5   | *   | 0.5620  | 36.90         | 9.56           | 46.46       | 56.00 | -9.54  | QP       |         |
| 6   |     | 0.5620  | 20.60         | 9.56           | 30.16       | 46.00 | -15.84 | AVG      |         |
| 7   |     | 0.6940  | 33.38         | 9.53           | 42.91       | 56.00 | -13.09 | QP       |         |
| 8   |     | 0.6940  | 23.90         | 9.53           | 33.43       | 46.00 | -12.57 | AVG      |         |
| 9   |     | 1.0540  | 31.66         | 9.59           | 41.25       | 56.00 | -14.75 | QP       |         |
| 10  |     | 1.0540  | 23.40         | 9.59           | 32.99       | 46.00 | -13.01 | AVG      |         |
| 11  |     | 12.1420 | 33.00         | 9.88           | 42.88       | 60.00 | -17.12 | QP       |         |
| 12  |     | 12.1420 | 21.60         | 9.88           | 31.48       | 50.00 | -18.52 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on            |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |


## Line

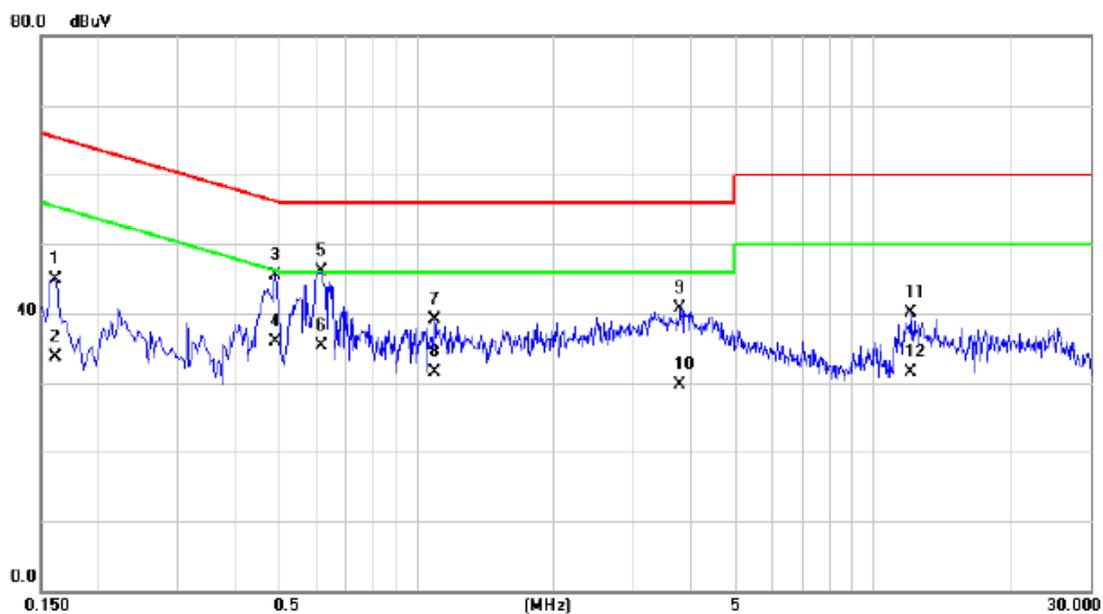

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1620       | 35.30                    | 9.55                    | 44.85                    | 65.36         | -20.51       | QP       |         |
| 2   |     | 0.1620       | 24.10                    | 9.55                    | 33.65                    | 55.36         | -21.71       | AVG      |         |
| 3   |     | 0.4900       | 35.87                    | 9.68                    | 45.55                    | 56.17         | -10.62       | QP       |         |
| 4   |     | 0.4900       | 26.30                    | 9.68                    | 35.98                    | 46.17         | -10.19       | AVG      |         |
| 5   | *   | 0.6180       | 36.33                    | 9.73                    | 46.06                    | 56.00         | -9.94        | QP       |         |
| 6   |     | 0.6180       | 25.50                    | 9.73                    | 35.23                    | 46.00         | -10.77       | AVG      |         |
| 7   |     | 1.0940       | 29.38                    | 9.80                    | 39.18                    | 56.00         | -16.82       | QP       |         |
| 8   |     | 1.0940       | 21.70                    | 9.80                    | 31.50                    | 46.00         | -14.50       | AVG      |         |
| 9   |     | 3.7980       | 30.69                    | 9.98                    | 40.67                    | 56.00         | -15.33       | QP       |         |
| 10  |     | 3.7980       | 19.80                    | 9.98                    | 29.78                    | 46.00         | -16.22       | AVG      |         |
| 11  |     | 12.1380      | 30.15                    | 9.86                    | 40.01                    | 60.00         | -19.99       | QP       |         |
| 12  |     | 12.1380      | 21.70                    | 9.86                    | 31.56                    | 50.00         | -18.44       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on            |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |

## Neutral

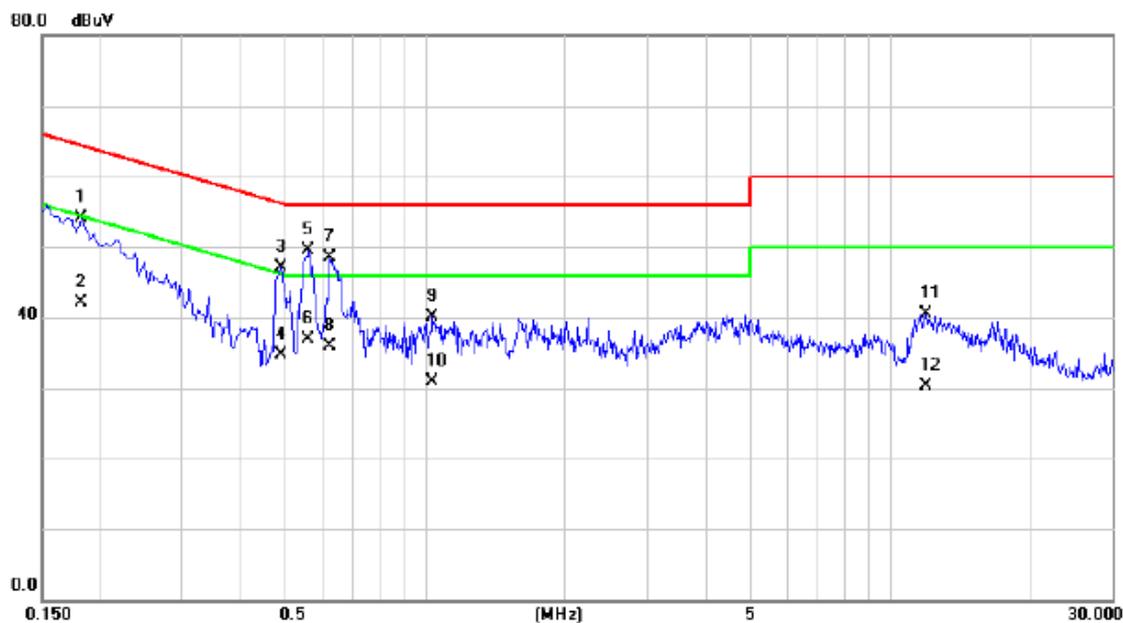

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Margin |          |         |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
|     |     | MHz     | Level   | Factor  | ment     | dBuV  | dB     | Detector | Comment |
|     |     |         | dBuV    | dB      | dBuV     | dBuV  | dB     |          |         |
| 1   |     | 0.1820  | 44.67   | 9.49    | 54.16    | 64.39 | -10.23 | QP       |         |
| 2   |     | 0.1820  | 32.70   | 9.49    | 42.19    | 54.39 | -12.20 | AVG      |         |
| 3   |     | 0.4900  | 37.50   | 9.56    | 47.06    | 56.17 | -9.11  | QP       |         |
| 4   |     | 0.4900  | 25.10   | 9.56    | 34.66    | 46.17 | -11.51 | AVG      |         |
| 5   | *   | 0.5620  | 39.90   | 9.56    | 49.46    | 56.00 | -6.54  | QP       |         |
| 6   |     | 0.5620  | 27.30   | 9.56    | 36.86    | 46.00 | -9.14  | AVG      |         |
| 7   |     | 0.6260  | 38.95   | 9.55    | 48.50    | 56.00 | -7.50  | QP       |         |
| 8   |     | 0.6260  | 26.40   | 9.55    | 35.95    | 46.00 | -10.05 | AVG      |         |
| 9   |     | 1.0420  | 30.53   | 9.59    | 40.12    | 56.00 | -15.88 | QP       |         |
| 10  |     | 1.0420  | 21.40   | 9.59    | 30.99    | 46.00 | -15.01 | AVG      |         |
| 11  |     | 11.9540 | 30.70   | 9.87    | 40.57    | 60.00 | -19.43 | QP       |         |
| 12  |     | 11.9540 | 20.50   | 9.87    | 30.37    | 50.00 | -19.63 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                       |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |

## Line



| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1       | 0.1540       | 46.50                    | 9.54                    | 56.04                    | 65.78         | -9.74        | QP       |         |
| 2       | 0.1540       | 32.50                    | 9.54                    | 42.04                    | 55.78         | -13.74       | AVG      |         |
| 3       | 0.2780       | 41.20                    | 9.63                    | 50.83                    | 60.88         | -10.05       | QP       |         |
| 4       | 0.2780       | 32.60                    | 9.63                    | 42.23                    | 50.88         | -8.65        | AVG      |         |
| 5 *     | 0.5820       | 39.15                    | 9.71                    | 48.86                    | 56.00         | -7.14        | QP       |         |
| 6       | 0.5820       | 27.60                    | 9.71                    | 37.31                    | 46.00         | -8.69        | AVG      |         |
| 7       | 0.6260       | 32.97                    | 9.73                    | 42.70                    | 56.00         | -13.30       | QP       |         |
| 8       | 0.6260       | 23.50                    | 9.73                    | 33.23                    | 46.00         | -12.77       | AVG      |         |
| 9       | 2.6460       | 27.19                    | 10.01                   | 37.20                    | 56.00         | -18.80       | QP       |         |
| 10      | 2.6460       | 21.40                    | 10.01                   | 31.41                    | 46.00         | -14.59       | AVG      |         |
| 11      | 11.5260      | 26.03                    | 9.86                    | 35.89                    | 60.00         | -24.11       | QP       |         |
| 12      | 11.5260      | 18.90                    | 9.86                    | 28.76                    | 50.00         | -21.24       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                       |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |


### Neutral



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1500       | 47.31                    | 9.49                    | 56.80                    | 66.00         | -9.20        | QP       |         |
| 2   |     | 0.1500       | 32.70                    | 9.49                    | 42.19                    | 56.00         | -13.81       | AVG      |         |
| 3   |     | 0.3620       | 39.52                    | 9.54                    | 49.06                    | 58.68         | -9.62        | QP       |         |
| 4   |     | 0.3620       | 27.60                    | 9.54                    | 37.14                    | 48.68         | -11.54       | AVG      |         |
| 5   | *   | 0.5900       | 39.51                    | 9.56                    | 49.07                    | 56.00         | -6.93        | QP       |         |
| 6   |     | 0.5900       | 28.60                    | 9.56                    | 38.16                    | 46.00         | -7.84        | AVG      |         |
| 7   |     | 0.6900       | 33.20                    | 9.53                    | 42.73                    | 56.00         | -13.27       | QP       |         |
| 8   |     | 0.6900       | 24.30                    | 9.53                    | 33.83                    | 46.00         | -12.17       | AVG      |         |
| 9   |     | 1.0820       | 29.39                    | 9.60                    | 38.99                    | 56.00         | -17.01       | QP       |         |
| 10  |     | 1.0820       | 21.40                    | 9.60                    | 31.00                    | 46.00         | -15.00       | AVG      |         |
| 11  |     | 4.7500       | 26.96                    | 9.92                    | 36.88                    | 56.00         | -19.12       | QP       |         |
| 12  |     | 4.7500       | 19.70                    | 9.92                    | 29.62                    | 46.00         | -16.38       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                     |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |

## Line

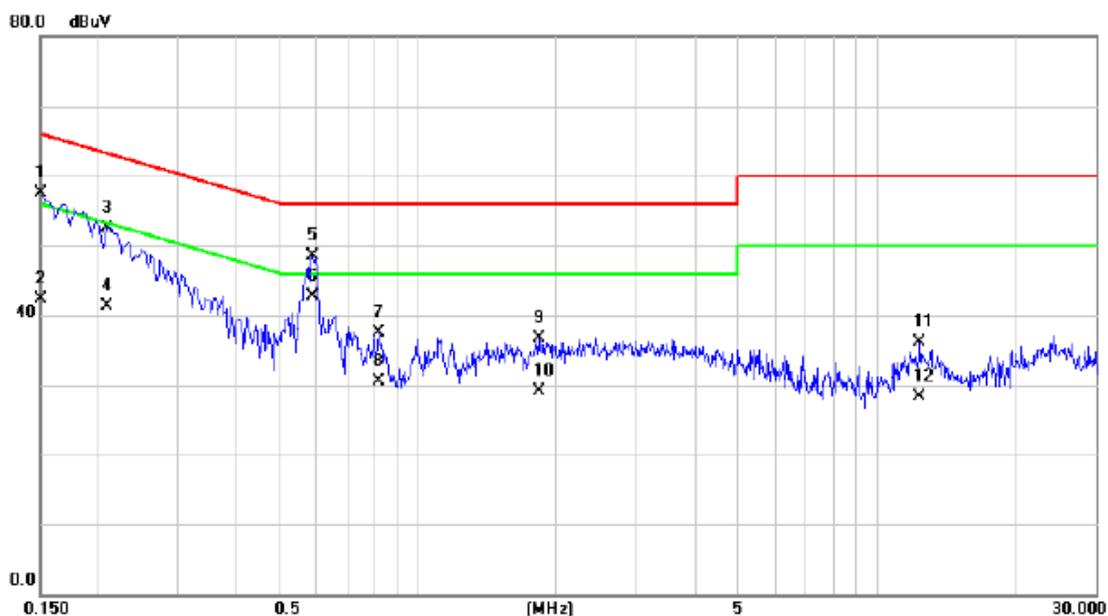

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1500       | 47.92                    | 9.54                    | 57.46                    | 66.00         | -8.54        | QP       |         |
| 2   |     | 0.1500       | 32.70                    | 9.54                    | 42.24                    | 56.00         | -13.76       | AVG      |         |
| 3   |     | 0.2100       | 42.85                    | 9.58                    | 52.43                    | 63.21         | -10.78       | QP       |         |
| 4   |     | 0.2100       | 31.80                    | 9.58                    | 41.38                    | 53.21         | -11.83       | AVG      |         |
| 5   |     | 0.5900       | 38.85                    | 9.72                    | 48.57                    | 56.00         | -7.43        | QP       |         |
| 6   | *   | 0.5900       | 32.90                    | 9.72                    | 42.62                    | 46.00         | -3.38        | AVG      |         |
| 7   |     | 0.8180       | 27.83                    | 9.75                    | 37.58                    | 56.00         | -18.42       | QP       |         |
| 8   |     | 0.8180       | 20.70                    | 9.75                    | 30.45                    | 46.00         | -15.55       | AVG      |         |
| 9   |     | 1.8340       | 26.84                    | 9.90                    | 36.74                    | 56.00         | -19.26       | QP       |         |
| 10  |     | 1.8340       | 19.30                    | 9.90                    | 29.20                    | 46.00         | -16.80       | AVG      |         |
| 11  |     | 12.4340      | 26.23                    | 9.85                    | 36.08                    | 60.00         | -23.92       | QP       |         |
| 12  |     | 12.4340      | 18.50                    | 9.85                    | 28.35                    | 50.00         | -21.65       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                     |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |


## Neutral



| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.1500 | 48.45         | 9.49           | 57.94       | 66.00 | -8.06  | QP       |         |
| 2   |     | 0.1500 | 36.70         | 9.49           | 46.19       | 56.00 | -9.81  | AVG      |         |
| 3   |     | 0.2300 | 41.90         | 9.51           | 51.41       | 62.45 | -11.04 | QP       |         |
| 4   |     | 0.2300 | 32.10         | 9.51           | 41.61       | 52.45 | -10.84 | AVG      |         |
| 5   |     | 0.5940 | 41.28         | 9.56           | 50.84       | 56.00 | -5.16  | QP       |         |
| 6   | *   | 0.5940 | 33.70         | 9.56           | 43.26       | 46.00 | -2.74  | AVG      |         |
| 7   |     | 0.6580 | 32.33         | 9.54           | 41.87       | 56.00 | -14.13 | QP       |         |
| 8   |     | 0.6580 | 24.50         | 9.54           | 34.04       | 46.00 | -11.96 | AVG      |         |
| 9   |     | 1.1980 | 29.51         | 9.62           | 39.13       | 56.00 | -16.87 | QP       |         |
| 10  |     | 1.1980 | 21.60         | 9.62           | 31.22       | 46.00 | -14.78 | AVG      |         |
| 11  |     | 1.8420 | 29.07         | 9.70           | 38.77       | 56.00 | -17.23 | QP       |         |
| 12  |     | 1.8420 | 18.70         | 9.70           | 28.40       | 46.00 | -17.60 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                       |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |


## Line

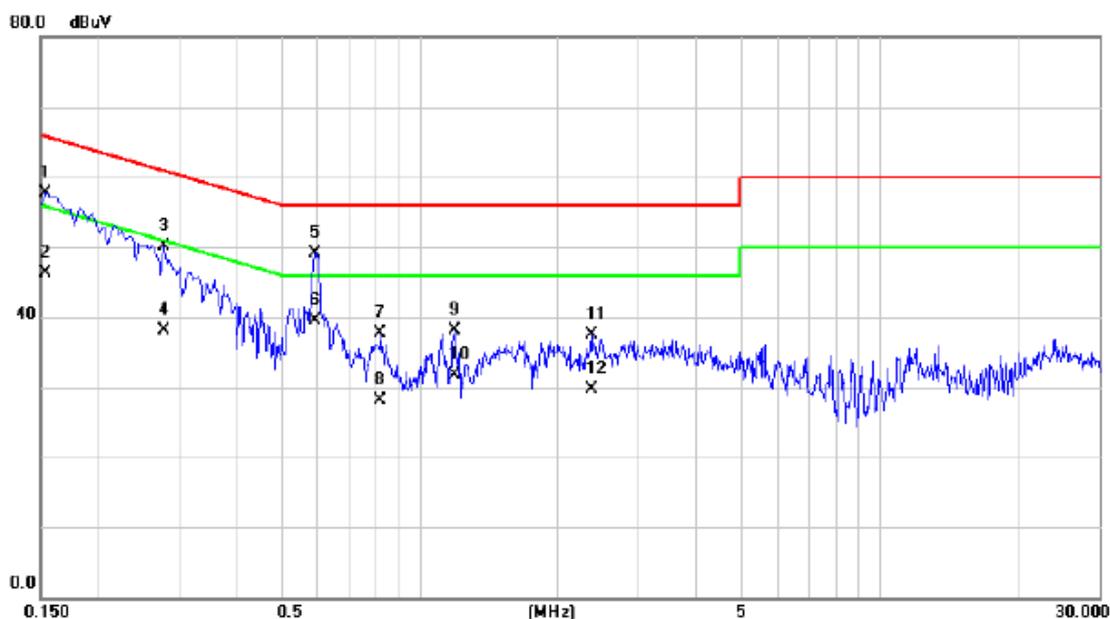

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1       | 0.1540       | 48.21                    | 9.54                    | 57.75                    | 65.78         | -8.03        | QP       |         |
| 2       | 0.1540       | 36.70                    | 9.54                    | 46.24                    | 55.78         | -9.54        | AVG      |         |
| 3       | 0.2780       | 40.45                    | 9.63                    | 50.08                    | 60.88         | -10.80       | QP       |         |
| 4       | 0.2780       | 28.50                    | 9.63                    | 38.13                    | 50.88         | -12.75       | AVG      |         |
| 5       | 0.5940       | 39.30                    | 9.72                    | 49.02                    | 56.00         | -6.98        | QP       |         |
| 6 *     | 0.5940       | 29.80                    | 9.72                    | 39.52                    | 46.00         | -6.48        | AVG      |         |
| 7       | 0.8220       | 27.91                    | 9.75                    | 37.66                    | 56.00         | -18.34       | QP       |         |
| 8       | 0.8220       | 18.40                    | 9.75                    | 28.15                    | 46.00         | -17.85       | AVG      |         |
| 9       | 1.1940       | 28.24                    | 9.81                    | 38.05                    | 56.00         | -17.95       | QP       |         |
| 10      | 1.1940       | 21.90                    | 9.81                    | 31.71                    | 46.00         | -14.29       | AVG      |         |
| 11      | 2.3620       | 27.62                    | 9.97                    | 37.59                    | 56.00         | -18.41       | QP       |         |
| 12      | 2.3620       | 19.80                    | 9.97                    | 29.77                    | 46.00         | -16.23       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                       |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay |


## Neutral

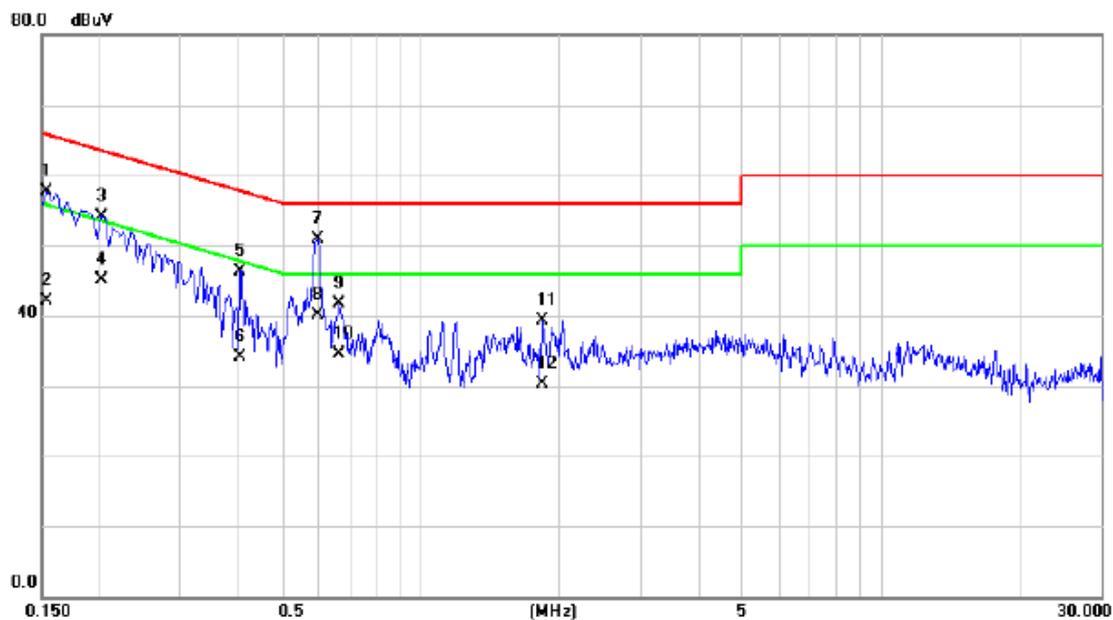

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1       | 0.1540       | 48.27                    | 9.49                    | 57.76                    | 65.78         | -8.02        | QP       |         |
| 2       | 0.1540       | 32.60                    | 9.49                    | 42.09                    | 55.78         | -13.69       | AVG      |         |
| 3       | 0.2030       | 44.67                    | 9.50                    | 54.17                    | 63.49         | -9.32        | QP       |         |
| 4       | 0.2030       | 35.70                    | 9.50                    | 45.20                    | 53.49         | -8.29        | AVG      |         |
| 5       | 0.4060       | 36.77                    | 9.53                    | 46.30                    | 57.73         | -11.43       | QP       |         |
| 6       | 0.4060       | 24.60                    | 9.53                    | 34.13                    | 47.73         | -13.60       | AVG      |         |
| 7 *     | 0.5980       | 41.29                    | 9.56                    | 50.85                    | 56.00         | -5.15        | QP       |         |
| 8       | 0.5980       | 30.50                    | 9.56                    | 40.06                    | 46.00         | -5.94        | AVG      |         |
| 9       | 0.6660       | 32.26                    | 9.54                    | 41.80                    | 56.00         | -14.20       | QP       |         |
| 10      | 0.6660       | 24.90                    | 9.54                    | 34.44                    | 46.00         | -11.56       | AVG      |         |
| 11      | 1.8420       | 29.59                    | 9.70                    | 39.29                    | 56.00         | -16.71       | QP       |         |
| 12      | 1.8420       | 20.60                    | 9.70                    | 30.30                    | 46.00         | -15.70       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


### Line

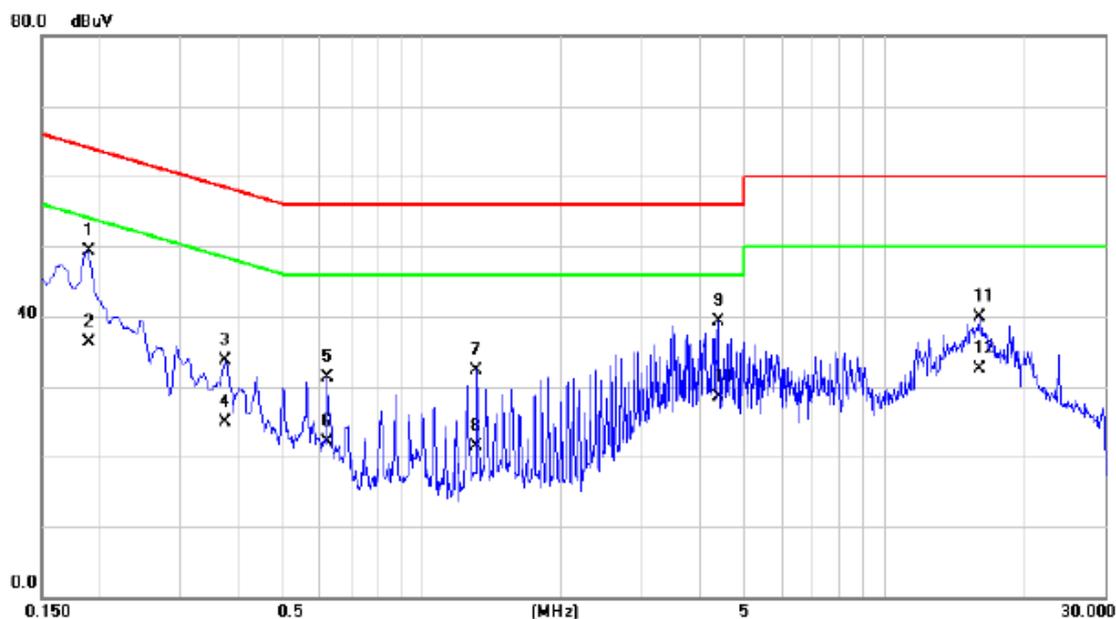

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.1900       | 39.69                    | 9.57                    | 49.26                    | 64.04         | -14.78       | QP       |         |
| 2   |     | 0.1900       | 26.70                    | 9.57                    | 36.27                    | 54.04         | -17.77       | AVG      |         |
| 3   |     | 0.3740       | 24.11                    | 9.66                    | 33.77                    | 58.41         | -24.64       | QP       |         |
| 4   |     | 0.3740       | 15.20                    | 9.66                    | 24.86                    | 48.41         | -23.55       | AVG      |         |
| 5   |     | 0.6260       | 21.66                    | 9.73                    | 31.39                    | 56.00         | -24.61       | QP       |         |
| 6   |     | 0.6260       | 12.40                    | 9.73                    | 22.13                    | 46.00         | -23.87       | AVG      |         |
| 7   |     | 1.3140       | 22.48                    | 9.83                    | 32.31                    | 56.00         | -23.69       | QP       |         |
| 8   |     | 1.3140       | 11.60                    | 9.83                    | 21.43                    | 46.00         | -24.57       | AVG      |         |
| 9   |     | 4.3820       | 29.42                    | 9.97                    | 39.39                    | 56.00         | -16.61       | QP       |         |
| 10  |     | 4.3820       | 18.60                    | 9.97                    | 28.57                    | 46.00         | -17.43       | AVG      |         |
| 11  |     | 16.0780      | 30.06                    | 9.83                    | 39.89                    | 60.00         | -20.11       | QP       |         |
| 12  |     | 16.0780      | 22.60                    | 9.83                    | 32.43                    | 50.00         | -17.57       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


### Neutral

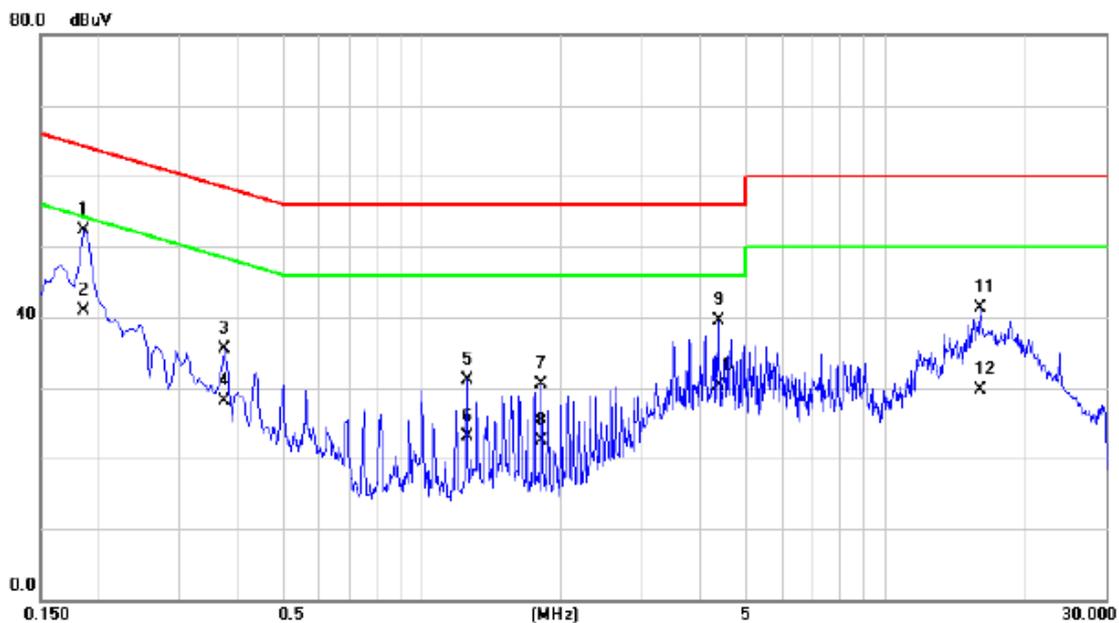

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.1860       | 42.79                    | 9.49                    | 52.28                    | 64.21         | -11.93       | QP       |         |
| 2   |     | 0.1860       | 31.50                    | 9.49                    | 40.99                    | 54.21         | -13.22       | AVG      |         |
| 3   |     | 0.3740       | 26.00                    | 9.54                    | 35.54                    | 58.41         | -22.87       | QP       |         |
| 4   |     | 0.3740       | 18.60                    | 9.54                    | 28.14                    | 48.41         | -20.27       | AVG      |         |
| 5   |     | 1.2500       | 21.41                    | 9.64                    | 31.05                    | 56.00         | -24.95       | QP       |         |
| 6   |     | 1.2500       | 13.40                    | 9.64                    | 23.04                    | 46.00         | -22.96       | AVG      |         |
| 7   |     | 1.8140       | 20.77                    | 9.70                    | 30.47                    | 56.00         | -25.53       | QP       |         |
| 8   |     | 1.8140       | 12.80                    | 9.70                    | 22.50                    | 46.00         | -23.50       | AVG      |         |
| 9   |     | 4.3820       | 29.65                    | 9.91                    | 39.56                    | 56.00         | -16.44       | QP       |         |
| 10  |     | 4.3820       | 20.40                    | 9.91                    | 30.31                    | 46.00         | -15.69       | AVG      |         |
| 11  |     | 16.0820      | 31.31                    | 9.93                    | 41.24                    | 60.00         | -18.76       | QP       |         |
| 12  |     | 16.0820      | 19.80                    | 9.93                    | 29.73                    | 50.00         | -20.27       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


## Line

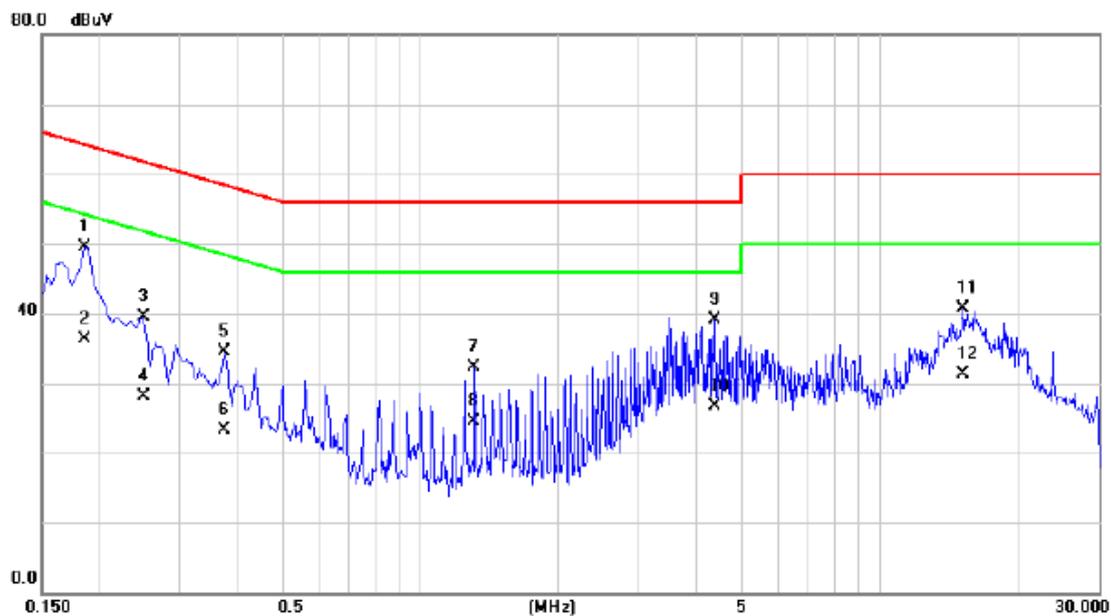

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 *     | 0.1860       | 39.89                    | 9.57                    | 49.46                    | 64.21         | -14.75       | QP       |         |
| 2       | 0.1860       | 26.70                    | 9.57                    | 36.27                    | 54.21         | -17.94       | AVG      |         |
| 3       | 0.2500       | 29.91                    | 9.61                    | 39.52                    | 61.76         | -22.24       | QP       |         |
| 4       | 0.2500       | 18.50                    | 9.61                    | 28.11                    | 51.76         | -23.65       | AVG      |         |
| 5       | 0.3740       | 24.79                    | 9.66                    | 34.45                    | 58.41         | -23.96       | QP       |         |
| 6       | 0.3740       | 13.70                    | 9.66                    | 23.36                    | 48.41         | -25.05       | AVG      |         |
| 7       | 1.3140       | 22.43                    | 9.83                    | 32.26                    | 56.00         | -23.74       | QP       |         |
| 8       | 1.3140       | 14.60                    | 9.83                    | 24.43                    | 46.00         | -21.57       | AVG      |         |
| 9       | 4.3820       | 29.16                    | 9.97                    | 39.13                    | 56.00         | -16.87       | QP       |         |
| 10      | 4.3820       | 16.80                    | 9.97                    | 26.77                    | 46.00         | -19.23       | AVG      |         |
| 11      | 15.2020      | 30.95                    | 9.82                    | 40.77                    | 60.00         | -19.23       | QP       |         |
| 12      | 15.2020      | 21.50                    | 9.82                    | 31.32                    | 50.00         | -18.68       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


### Neutral

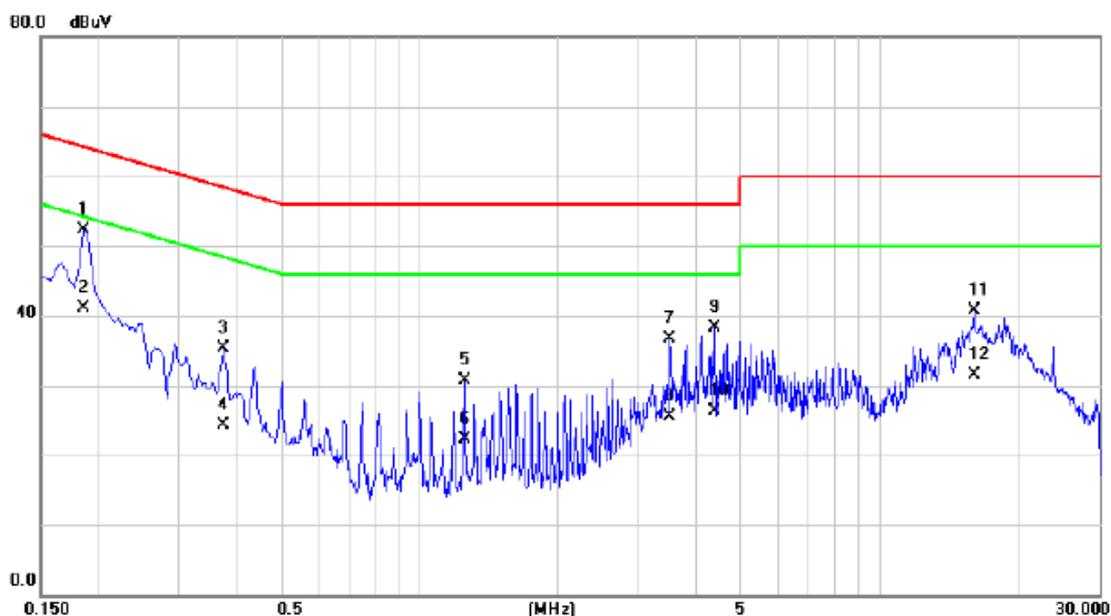

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   | *   | 0.1860  | 42.87         | 9.49           | 52.36       | 64.21 | -11.85 | QP       |         |
| 2   |     | 0.1860  | 31.70         | 9.49           | 41.19       | 54.21 | -13.02 | AVG      |         |
| 3   |     | 0.3740  | 25.80         | 9.54           | 35.34       | 58.41 | -23.07 | QP       |         |
| 4   |     | 0.3740  | 14.80         | 9.54           | 24.34       | 48.41 | -24.07 | AVG      |         |
| 5   |     | 1.2500  | 21.11         | 9.64           | 30.75       | 56.00 | -25.25 | QP       |         |
| 6   |     | 1.2500  | 12.60         | 9.64           | 22.24       | 46.00 | -23.76 | AVG      |         |
| 7   |     | 3.5060  | 26.85         | 9.87           | 36.72       | 56.00 | -19.28 | QP       |         |
| 8   |     | 3.5060  | 15.70         | 9.87           | 25.57       | 46.00 | -20.43 | AVG      |         |
| 9   |     | 4.3820  | 28.31         | 9.91           | 38.22       | 56.00 | -17.78 | QP       |         |
| 10  |     | 4.3820  | 16.40         | 9.91           | 26.31       | 46.00 | -19.69 | AVG      |         |
| 11  |     | 16.0820 | 30.86         | 9.93           | 40.79       | 60.00 | -19.21 | QP       |         |
| 12  |     | 16.0820 | 21.50         | 9.93           | 31.43       | 50.00 | -18.57 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


## Line

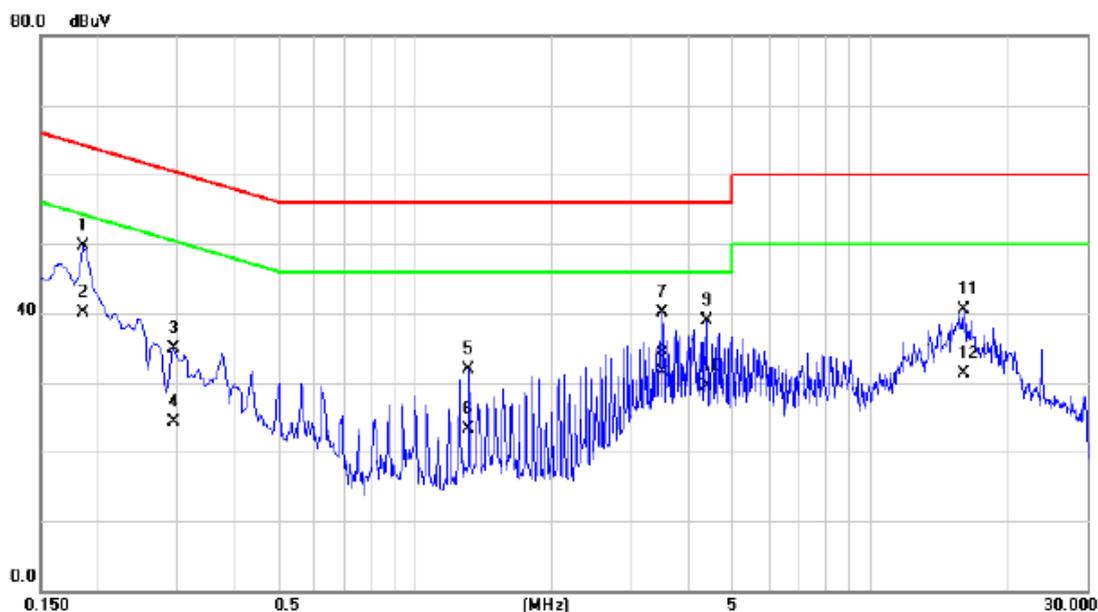

| No. | Mk. | Freq.   | Reading | Correct | Measurement | Limit | Margin |          |         |
|-----|-----|---------|---------|---------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV    | dB      | dBuV        | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.1860  | 40.11   | 9.57    | 49.68       | 64.21 | -14.53 | QP       |         |
| 2   | *   | 0.1860  | 30.60   | 9.57    | 40.17       | 54.21 | -14.04 | AVG      |         |
| 3   |     | 0.2940  | 25.27   | 9.64    | 34.91       | 60.41 | -25.50 | QP       |         |
| 4   |     | 0.2940  | 14.70   | 9.64    | 24.34       | 50.41 | -26.07 | AVG      |         |
| 5   |     | 1.3140  | 22.14   | 9.83    | 31.97       | 56.00 | -24.03 | QP       |         |
| 6   |     | 1.3140  | 13.50   | 9.83    | 23.33       | 46.00 | -22.67 | AVG      |         |
| 7   |     | 3.5060  | 30.05   | 10.00   | 40.05       | 56.00 | -15.95 | QP       |         |
| 8   |     | 3.5060  | 21.60   | 10.00   | 31.60       | 46.00 | -14.40 | AVG      |         |
| 9   |     | 4.3820  | 28.97   | 9.97    | 38.94       | 56.00 | -17.06 | QP       |         |
| 10  |     | 4.3820  | 19.50   | 9.97    | 29.47       | 46.00 | -16.53 | AVG      |         |
| 11  |     | 16.0780 | 30.65   | 9.83    | 40.48       | 60.00 | -19.52 | QP       |         |
| 12  |     | 16.0780 | 21.40   | 9.83    | 31.23       | 50.00 | -18.77 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


### Neutral

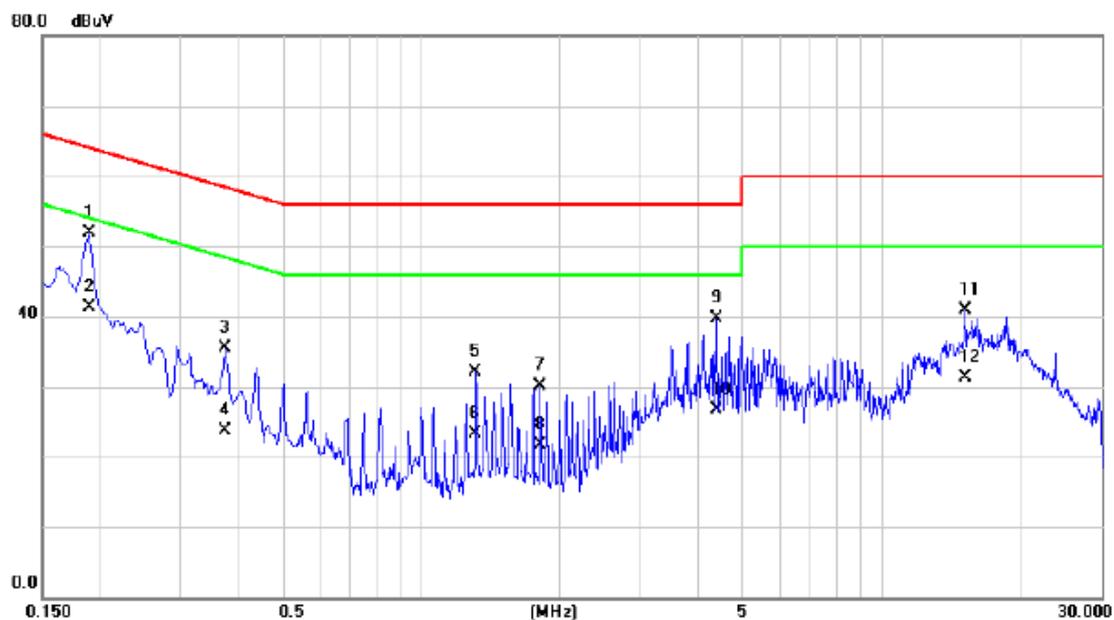

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.1900       | 42.43                    | 9.49                    | 51.92                    | 64.04         | -12.12       | QP       |         |
| 2   |     | 0.1900       | 31.80                    | 9.49                    | 41.29                    | 54.04         | -12.75       | AVG      |         |
| 3   |     | 0.3740       | 25.97                    | 9.54                    | 35.51                    | 58.41         | -22.90       | QP       |         |
| 4   |     | 0.3740       | 14.20                    | 9.54                    | 23.74                    | 48.41         | -24.67       | AVG      |         |
| 5   |     | 1.3140       | 22.42                    | 9.64                    | 32.06                    | 56.00         | -23.94       | QP       |         |
| 6   |     | 1.3140       | 13.60                    | 9.64                    | 23.24                    | 46.00         | -22.76       | AVG      |         |
| 7   |     | 1.8140       | 20.42                    | 9.70                    | 30.12                    | 56.00         | -25.88       | QP       |         |
| 8   |     | 1.8140       | 12.10                    | 9.70                    | 21.80                    | 46.00         | -24.20       | AVG      |         |
| 9   |     | 4.3820       | 29.72                    | 9.91                    | 39.63                    | 56.00         | -16.37       | QP       |         |
| 10  |     | 4.3820       | 16.80                    | 9.91                    | 26.71                    | 46.00         | -19.29       | AVG      |         |
| 11  |     | 15.2060      | 30.94                    | 9.92                    | 40.86                    | 60.00         | -19.14       | QP       |         |
| 12  |     | 15.2060      | 21.40                    | 9.92                    | 31.32                    | 50.00         | -18.68       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Line

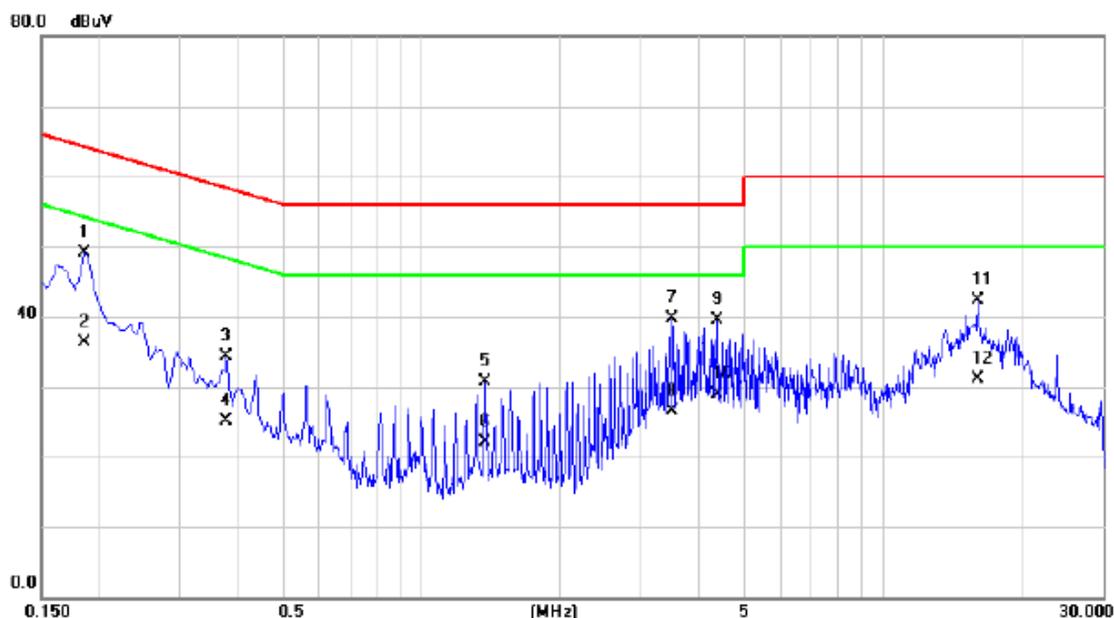

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin |          |         |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector | Comment |
| 1   | *   | 0.1860  | 39.45         | 9.57           | 49.02       | 64.21 | -15.19 | QP       |         |
| 2   |     | 0.1860  | 26.70         | 9.57           | 36.27       | 54.21 | -17.94 | AVG      |         |
| 3   |     | 0.3780  | 24.57         | 9.67           | 34.24       | 58.32 | -24.08 | QP       |         |
| 4   |     | 0.3780  | 15.40         | 9.67           | 25.07       | 48.32 | -23.25 | AVG      |         |
| 5   |     | 1.3780  | 20.78         | 9.83           | 30.61       | 56.00 | -25.39 | QP       |         |
| 6   |     | 1.3780  | 12.30         | 9.83           | 22.13       | 46.00 | -23.87 | AVG      |         |
| 7   |     | 3.5060  | 29.72         | 10.00          | 39.72       | 56.00 | -16.28 | QP       |         |
| 8   |     | 3.5060  | 16.50         | 10.00          | 26.50       | 46.00 | -19.50 | AVG      |         |
| 9   |     | 4.3820  | 29.51         | 9.97           | 39.48       | 56.00 | -16.52 | QP       |         |
| 10  |     | 4.3820  | 18.90         | 9.97           | 28.87       | 46.00 | -17.13 | AVG      |         |
| 11  |     | 16.0820 | 32.44         | 9.83           | 42.27       | 60.00 | -17.73 | QP       |         |
| 12  |     | 16.0820 | 21.30         | 9.83           | 31.13       | 50.00 | -18.87 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |

### Neutral

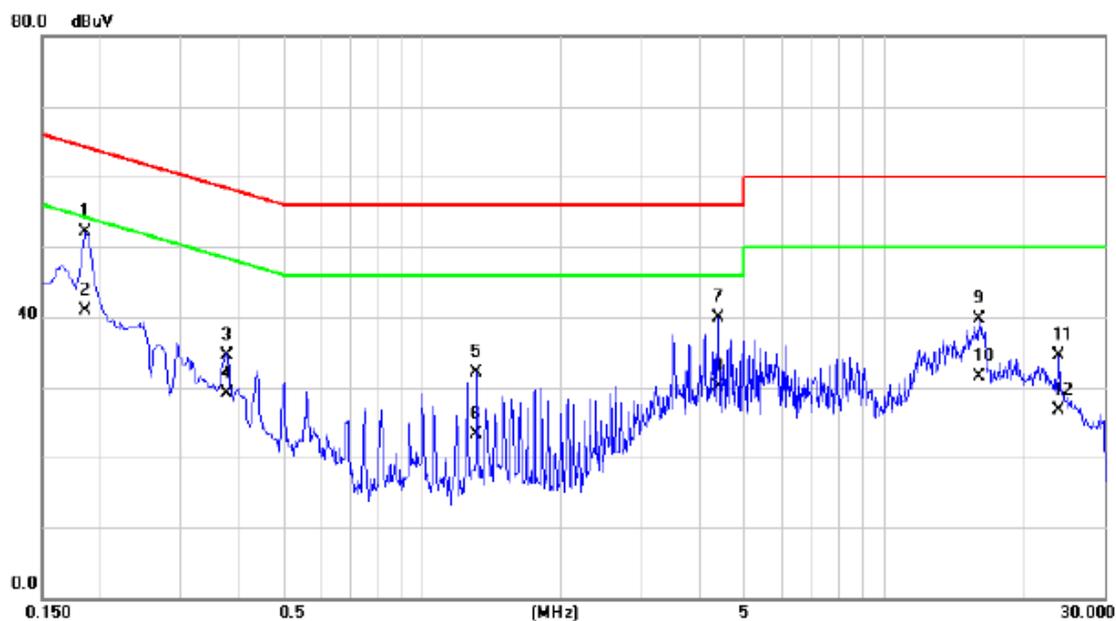


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1 *     | 0.1860       | 42.60                    | 9.49                    | 52.09                    | 64.21         | -12.12       | QP       |         |
| 2       | 0.1860       | 31.40                    | 9.49                    | 40.89                    | 54.21         | -13.32       | AVG      |         |
| 3       | 0.3780       | 25.04                    | 9.53                    | 34.57                    | 58.32         | -23.75       | QP       |         |
| 4       | 0.3780       | 19.50                    | 9.53                    | 29.03                    | 48.32         | -19.29       | AVG      |         |
| 5       | 1.3140       | 22.54                    | 9.64                    | 32.18                    | 56.00         | -23.82       | QP       |         |
| 6       | 1.3140       | 13.70                    | 9.64                    | 23.34                    | 46.00         | -22.66       | AVG      |         |
| 7       | 4.3820       | 29.95                    | 9.91                    | 39.86                    | 56.00         | -16.14       | QP       |         |
| 8       | 4.3820       | 20.10                    | 9.91                    | 30.01                    | 46.00         | -15.99       | AVG      |         |
| 9       | 16.0780      | 29.69                    | 9.93                    | 39.62                    | 60.00         | -20.38       | QP       |         |
| 10      | 16.0780      | 21.50                    | 9.93                    | 31.43                    | 50.00         | -18.57       | AVG      |         |
| 11      | 23.9700      | 24.52                    | 9.99                    | 34.51                    | 60.00         | -25.49       | QP       |         |
| 12      | 23.9700      | 16.80                    | 9.99                    | 26.79                    | 50.00         | -23.21       | AVG      |         |

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |

## Vertical

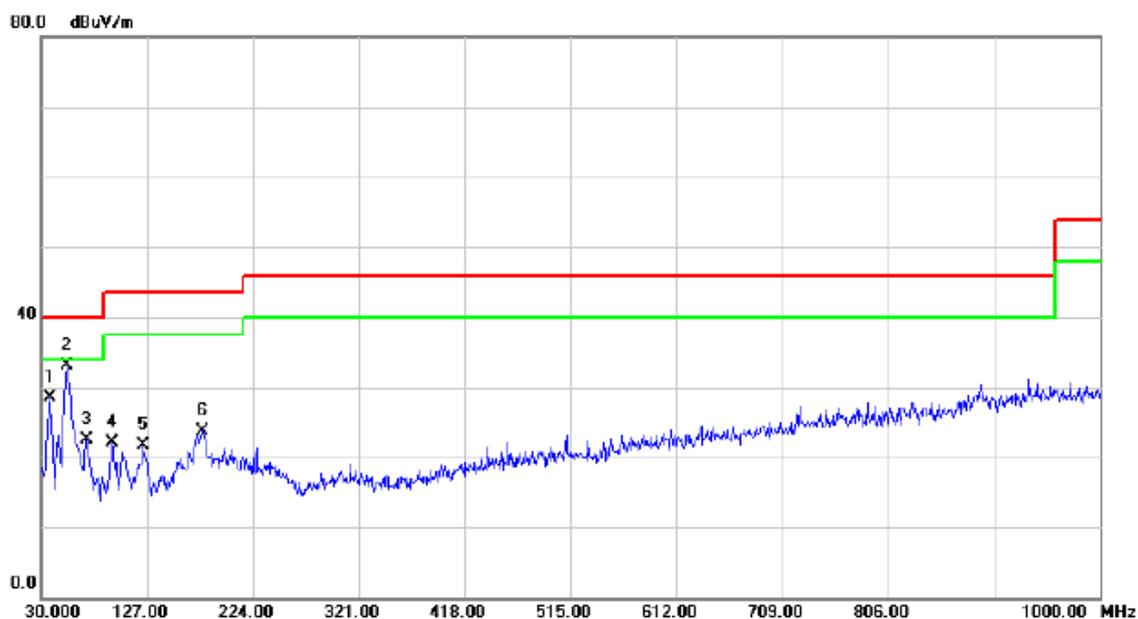

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 37.7600      | 43.08                    | -14.62                  | 28.46                      | 40.00           | -11.54       | QP       |         |
| 2   | *   | 53.2800      | 47.07                    | -14.03                  | 33.04                      | 40.00           | -6.96        | QP       |         |
| 3   |     | 71.7100      | 39.02                    | -16.58                  | 22.44                      | 40.00           | -17.56       | QP       |         |
| 4   |     | 94.9900      | 41.71                    | -19.58                  | 22.13                      | 43.50           | -21.37       | QP       |         |
| 5   |     | 123.1200     | 37.62                    | -15.94                  | 21.68                      | 43.50           | -21.82       | QP       |         |
| 6   |     | 178.4100     | 39.06                    | -15.26                  | 23.80                      | 43.50           | -19.70       | QP       |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |


### Horizontal



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 53.2800      | 38.17                    | -14.03                  | 24.14                      | 40.00           | -15.86       | QP       |         |
| 2   |     | 158.0400     | 40.57                    | -13.94                  | 26.63                      | 43.50           | -16.87       | QP       |         |
| 3   |     | 230.7900     | 40.80                    | -15.78                  | 25.02                      | 46.00           | -20.98       | QP       |         |
| 4   |     | 333.6100     | 37.56                    | -12.62                  | 24.94                      | 46.00           | -21.06       | QP       |         |
| 5   |     | 743.9200     | 32.41                    | -5.06                   | 27.35                      | 46.00           | -18.65       | QP       |         |
| 6   | *   | 935.0100     | 35.07                    | -2.08                   | 32.99                      | 46.00           | -13.01       | QP       |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |


## Vertical

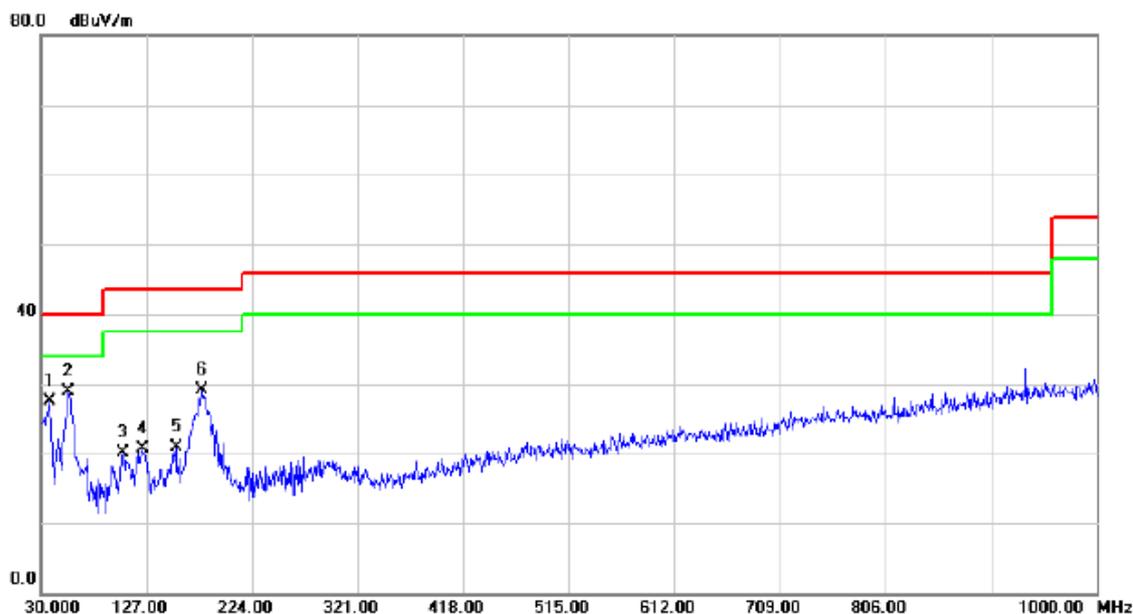

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 37.7600      | 42.13                    | -14.62                  | 27.51                      | 40.00           | -12.49       | QP       |         |
| 2   | *   | 55.2200      | 43.22                    | -14.24                  | 28.98                      | 40.00           | -11.02       | QP       |         |
| 3   |     | 105.6600     | 38.01                    | -17.97                  | 20.04                      | 43.50           | -23.46       | QP       |         |
| 4   |     | 124.0900     | 36.47                    | -15.84                  | 20.63                      | 43.50           | -22.87       | QP       |         |
| 5   |     | 154.1600     | 34.87                    | -14.00                  | 20.87                      | 43.50           | -22.63       | QP       |         |
| 6   |     | 178.4100     | 44.42                    | -15.26                  | 29.16                      | 43.50           | -14.34       | QP       |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |


## Horizontal

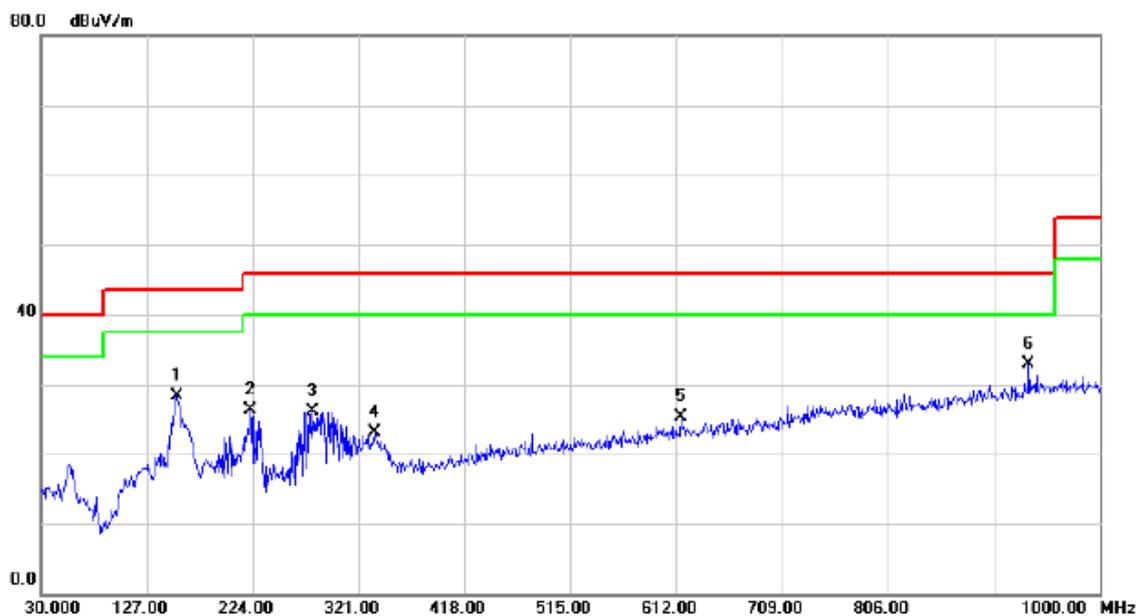

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 154.1600     | 42.33                    | -14.00                  | 28.33                      | 43.50           | -15.17       | QP       |         |
| 2   |     | 222.0600     | 42.81                    | -16.43                  | 26.38                      | 46.00           | -19.62       | QP       |         |
| 3   |     | 279.2900     | 40.18                    | -13.98                  | 26.20                      | 46.00           | -19.80       | QP       |         |
| 4   |     | 335.5500     | 35.59                    | -12.57                  | 23.02                      | 46.00           | -22.98       | QP       |         |
| 5   |     | 615.8800     | 32.57                    | -7.28                   | 25.29                      | 46.00           | -20.71       | QP       |         |
| 6   | *   | 935.0100     | 35.04                    | -2.08                   | 32.96                      | 46.00           | -13.04       | QP       |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                        |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay + Earphone: LIANCHUANG |


## Vertical

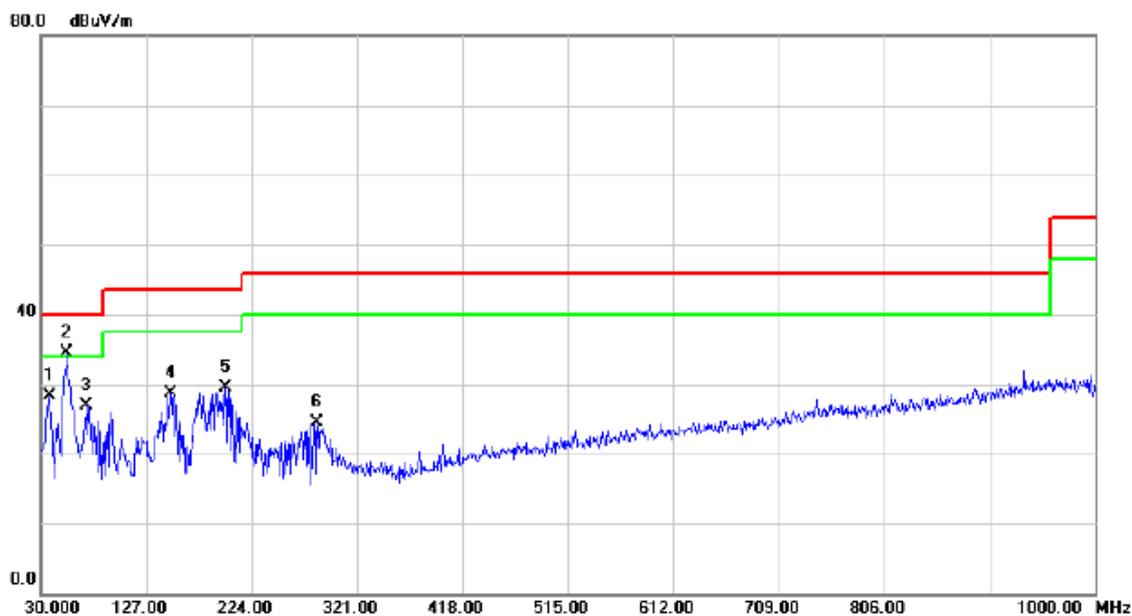

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 37.7600      | 42.86                    | -14.62                  | 28.24                      | 40.00           | -11.76       | QP       |         |
| 2   | *   | 54.2500      | 48.57                    | -14.14                  | 34.43                      | 40.00           | -5.57        | QP       |         |
| 3   |     | 71.7100      | 43.50                    | -16.58                  | 26.92                      | 40.00           | -13.08       | QP       |         |
| 4   |     | 149.3100     | 42.83                    | -14.07                  | 28.76                      | 43.50           | -14.74       | QP       |         |
| 5   |     | 199.7500     | 46.27                    | -16.72                  | 29.55                      | 43.50           | -13.95       | QP       |         |
| 6   |     | 284.1400     | 38.32                    | -13.85                  | 24.47                      | 46.00           | -21.53       | QP       |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                        |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay + Earphone: LIANCHUANG |


## Horizontal

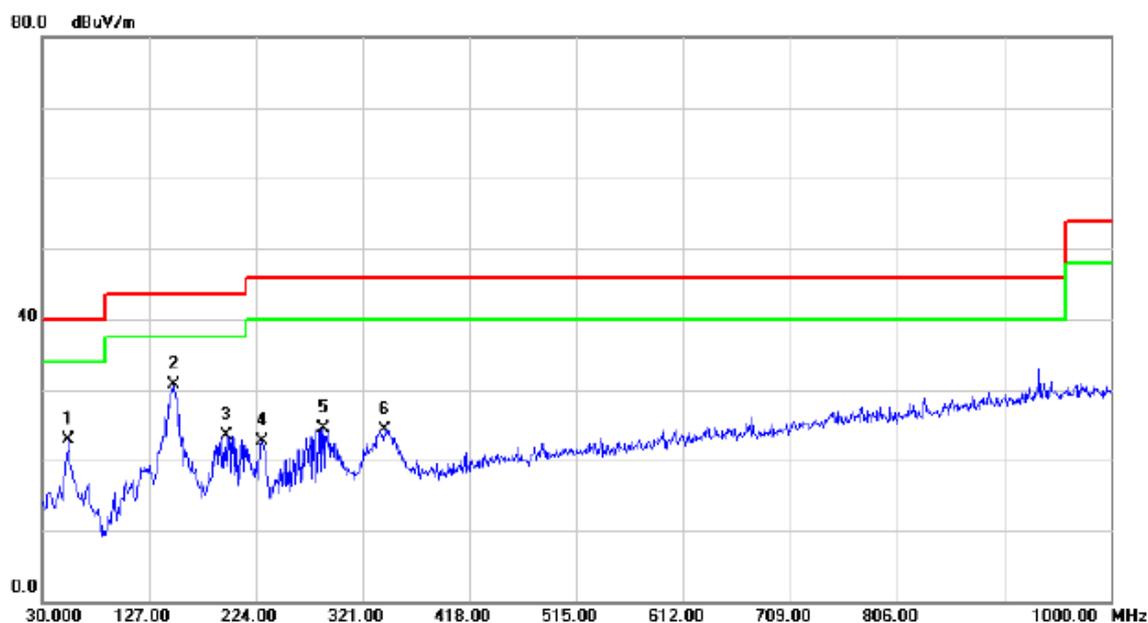

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 54.2500      | 37.11                    | -14.14                  | 22.97                      | 40.00           | -17.03       | QP       |         |
| 2   | *   | 149.3100     | 44.74                    | -14.07                  | 30.67                      | 43.50           | -12.83       | QP       |         |
| 3   |     | 196.8400     | 40.19                    | -16.71                  | 23.48                      | 43.50           | -20.02       | QP       |         |
| 4   |     | 229.8200     | 38.53                    | -15.84                  | 22.69                      | 46.00           | -23.31       | QP       |         |
| 5   |     | 285.1100     | 38.26                    | -13.82                  | 24.44                      | 46.00           | -21.56       | QP       |         |
| 6   |     | 340.4000     | 36.67                    | -12.44                  | 24.23                      | 46.00           | -21.77       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker  |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Vertical

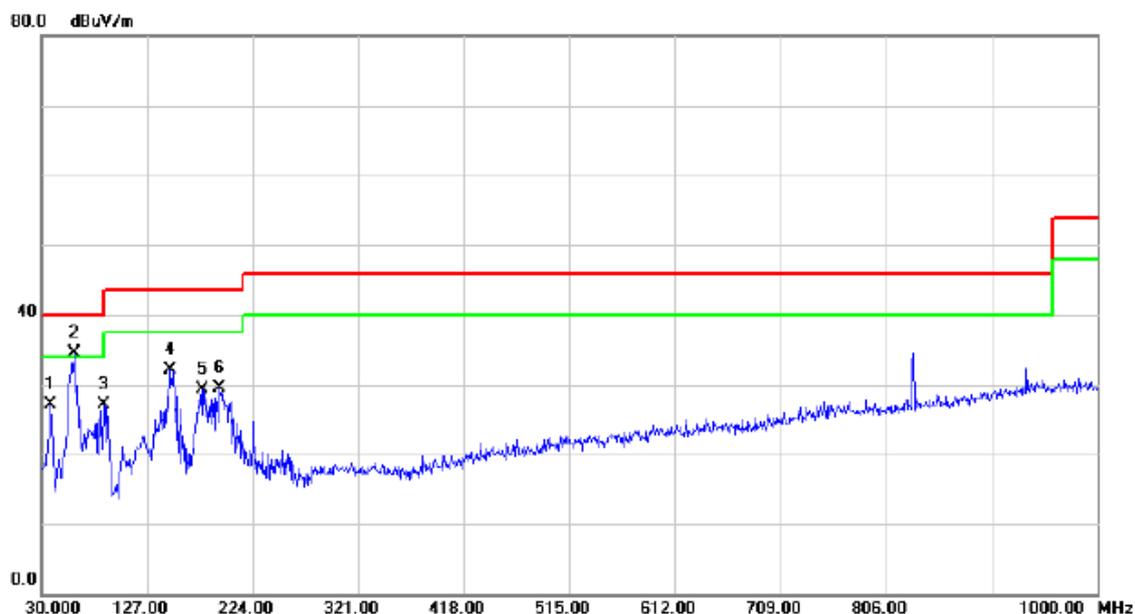

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 37.7600      | 41.64                    | -14.62                  | 27.02                      | 40.00           | -12.98       | QP       |         |
| 2   | *   | 60.0700      | 49.33                    | -14.75                  | 34.58                      | 40.00           | -5.42        | QP       |         |
| 3   |     | 87.2300      | 46.88                    | -19.70                  | 27.18                      | 40.00           | -12.82       | QP       |         |
| 4   |     | 148.3400     | 46.24                    | -14.11                  | 32.13                      | 43.50           | -11.37       | QP       |         |
| 5   |     | 178.4100     | 44.54                    | -15.26                  | 29.28                      | 43.50           | -14.22       | QP       |         |
| 6   |     | 193.9300     | 46.21                    | -16.70                  | 29.51                      | 43.50           | -13.99       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker  |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Horizontal

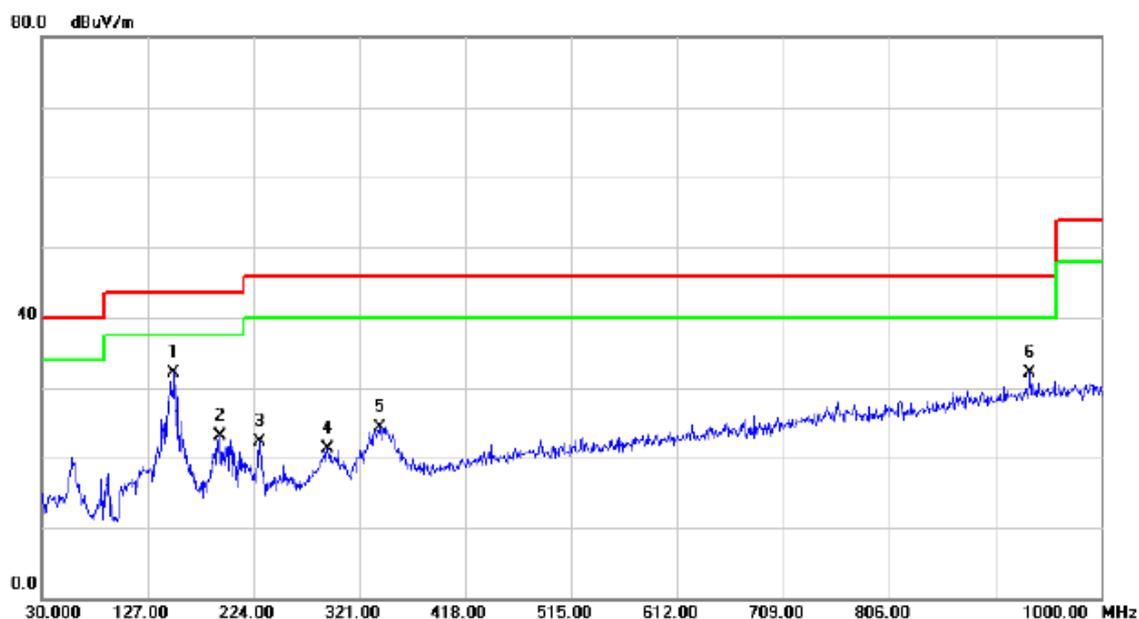

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 151.2500     | 46.17                    | -14.04                  | 32.13                      | 43.50           | -11.37       | QP       |         |
| 2   |     | 193.9300     | 39.77                    | -16.70                  | 23.07                      | 43.50           | -20.43       | QP       |         |
| 3   |     | 229.8200     | 38.05                    | -15.84                  | 22.21                      | 46.00           | -23.79       | QP       |         |
| 4   |     | 291.9000     | 35.01                    | -13.65                  | 21.36                      | 46.00           | -24.64       | QP       |         |
| 5   |     | 339.4300     | 36.85                    | -12.47                  | 24.38                      | 46.00           | -21.62       | QP       |         |
| 6   |     | 935.0100     | 34.15                    | -2.08                   | 32.07                      | 46.00           | -13.93       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on        |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |

## Vertical

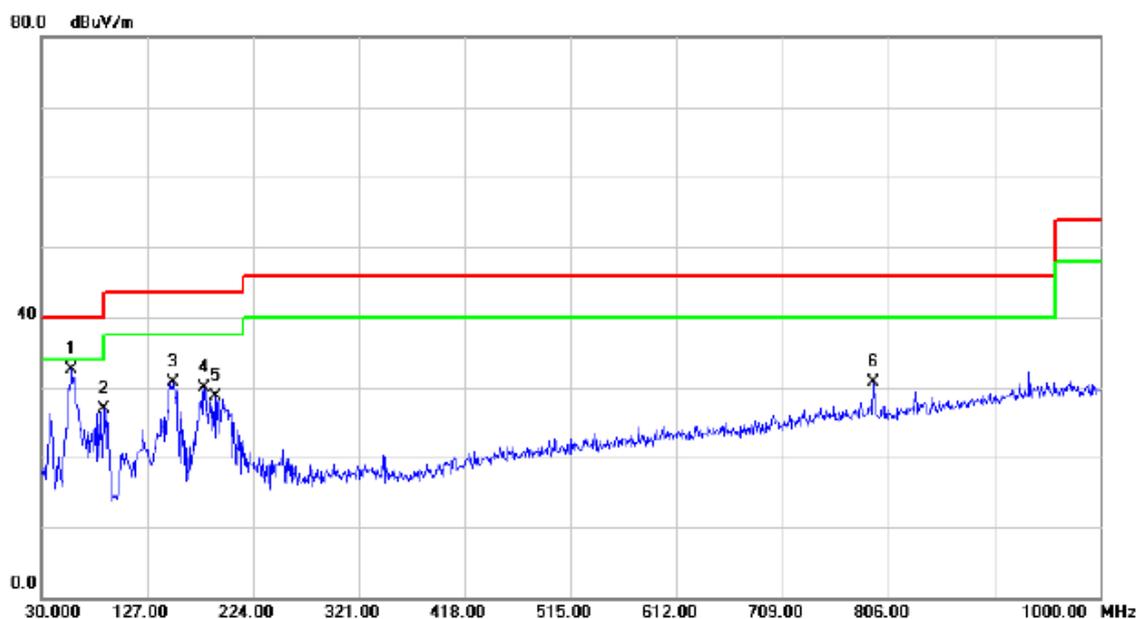

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 58.1300      | 47.15                    | -14.55                  | 32.60                      | 40.00           | -7.40        | QP       |         |
| 2   |     | 87.2300      | 46.69                    | -19.70                  | 26.99                      | 40.00           | -13.01       | QP       |         |
| 3   |     | 151.2500     | 44.69                    | -14.04                  | 30.65                      | 43.50           | -12.85       | QP       |         |
| 4   |     | 179.3800     | 45.20                    | -15.36                  | 29.84                      | 43.50           | -13.66       | QP       |         |
| 5   |     | 190.0500     | 45.43                    | -16.68                  | 28.75                      | 43.50           | -14.75       | QP       |         |
| 6   |     | 792.4200     | 35.57                    | -4.78                   | 30.79                      | 46.00           | -15.21       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on        |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Horizontal



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 58.1300      | 33.90                    | -14.55                  | 19.35                      | 40.00           | -20.65       | QP       |         |
| 2   | *   | 151.2500     | 44.42                    | -14.04                  | 30.38                      | 43.50           | -13.12       | QP       |         |
| 3   |     | 192.9600     | 38.82                    | -16.70                  | 22.12                      | 43.50           | -21.38       | QP       |         |
| 4   |     | 226.9100     | 38.81                    | -16.07                  | 22.74                      | 46.00           | -23.26       | QP       |         |
| 5   |     | 337.4900     | 37.43                    | -12.52                  | 24.91                      | 46.00           | -21.09       | QP       |         |
| 6   |     | 792.4200     | 36.07                    | -4.78                   | 31.29                      | 46.00           | -14.71       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                   |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |

## Vertical

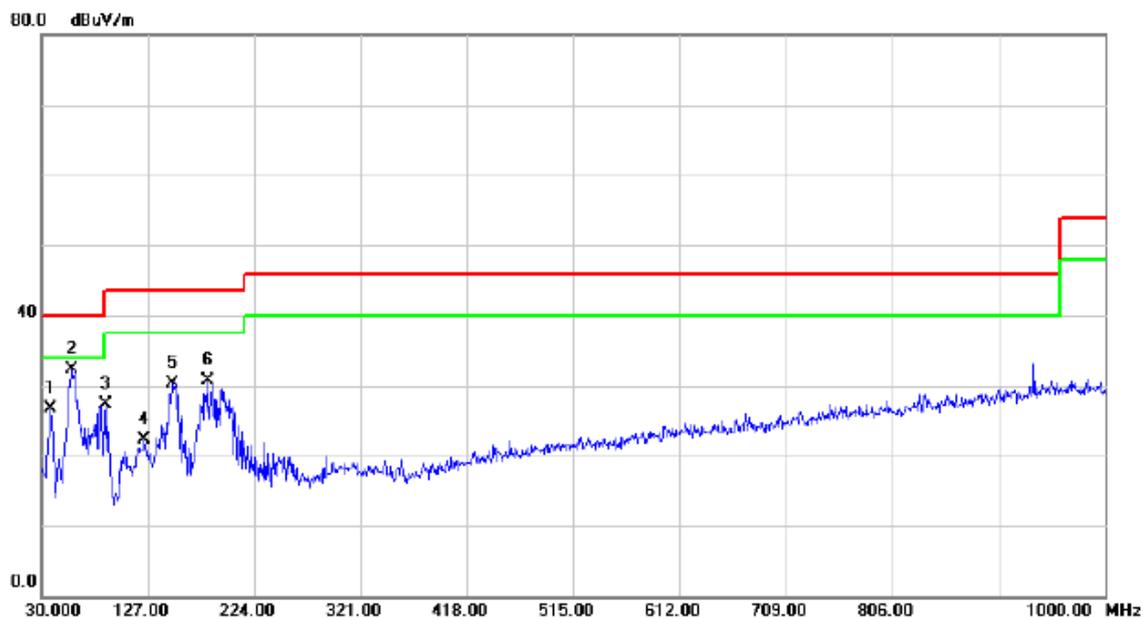

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 37.7600      | 41.38                    | -14.62                  | 26.76                      | 40.00           | -13.24       | QP       |         |
| 2   | *   | 58.1300      | 46.81                    | -14.55                  | 32.26                      | 40.00           | -7.74        | QP       |         |
| 3   |     | 88.2000      | 47.28                    | -19.92                  | 27.36                      | 43.50           | -16.14       | QP       |         |
| 4   |     | 124.0900     | 38.09                    | -15.84                  | 22.25                      | 43.50           | -21.25       | QP       |         |
| 5   |     | 149.3100     | 44.46                    | -14.07                  | 30.39                      | 43.50           | -13.11       | QP       |         |
| 6   |     | 181.3200     | 46.39                    | -15.60                  | 30.79                      | 43.50           | -12.71       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                   |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Horizontal



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 58.1300      | 33.73                    | -14.55                  | 19.18                      | 40.00           | -20.82       | QP       |         |
| 2   | *   | 149.3100     | 45.97                    | -14.07                  | 31.90                      | 43.50           | -11.60       | QP       |         |
| 3   |     | 192.9600     | 40.41                    | -16.70                  | 23.71                      | 43.50           | -19.79       | QP       |         |
| 4   |     | 297.7200     | 35.13                    | -13.54                  | 21.59                      | 46.00           | -24.41       | QP       |         |
| 5   |     | 342.3400     | 37.54                    | -12.41                  | 25.13                      | 46.00           | -20.87       | QP       |         |
| 6   |     | 935.0100     | 35.83                    | -2.08                   | 33.75                      | 46.00           | -12.25       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                 |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Vertical

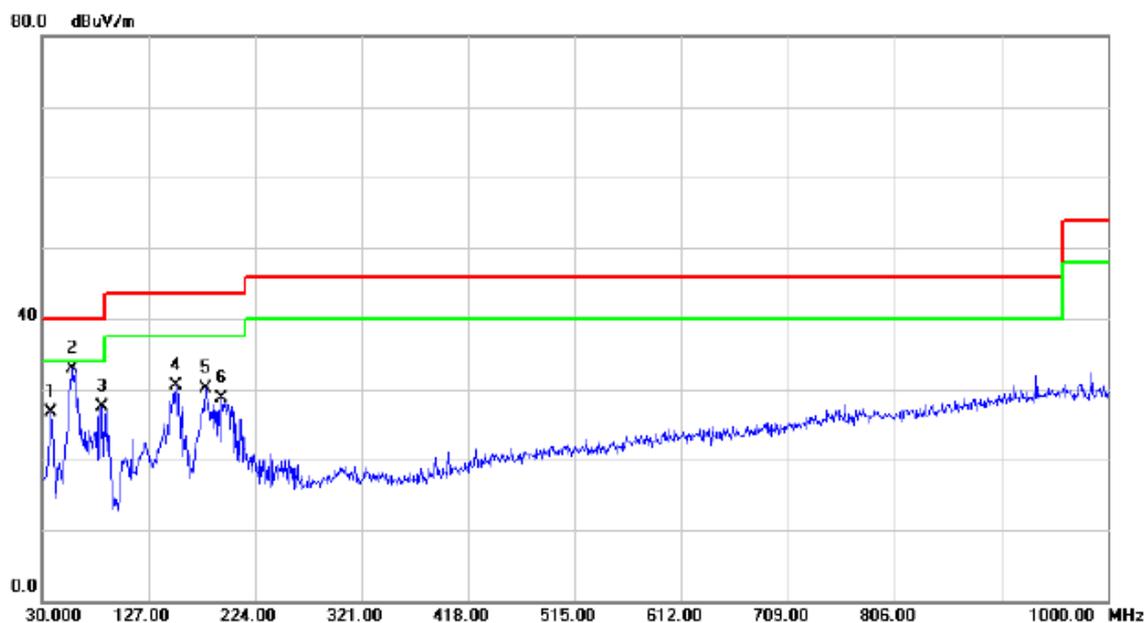

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 38.7300      | 41.08                    | -14.44                  | 26.64                      | 40.00           | -13.36       | QP       |         |
| 2   | *   | 57.1600      | 47.40                    | -14.44                  | 32.96                      | 40.00           | -7.04        | QP       |         |
| 3   |     | 85.2900      | 46.79                    | -19.27                  | 27.52                      | 40.00           | -12.48       | QP       |         |
| 4   |     | 152.2200     | 44.62                    | -14.03                  | 30.59                      | 43.50           | -12.91       | QP       |         |
| 5   |     | 179.3800     | 45.42                    | -15.36                  | 30.06                      | 43.50           | -13.44       | QP       |         |
| 6   |     | 193.9300     | 45.36                    | -16.70                  | 28.66                      | 43.50           | -14.84       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                 |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Horizontal

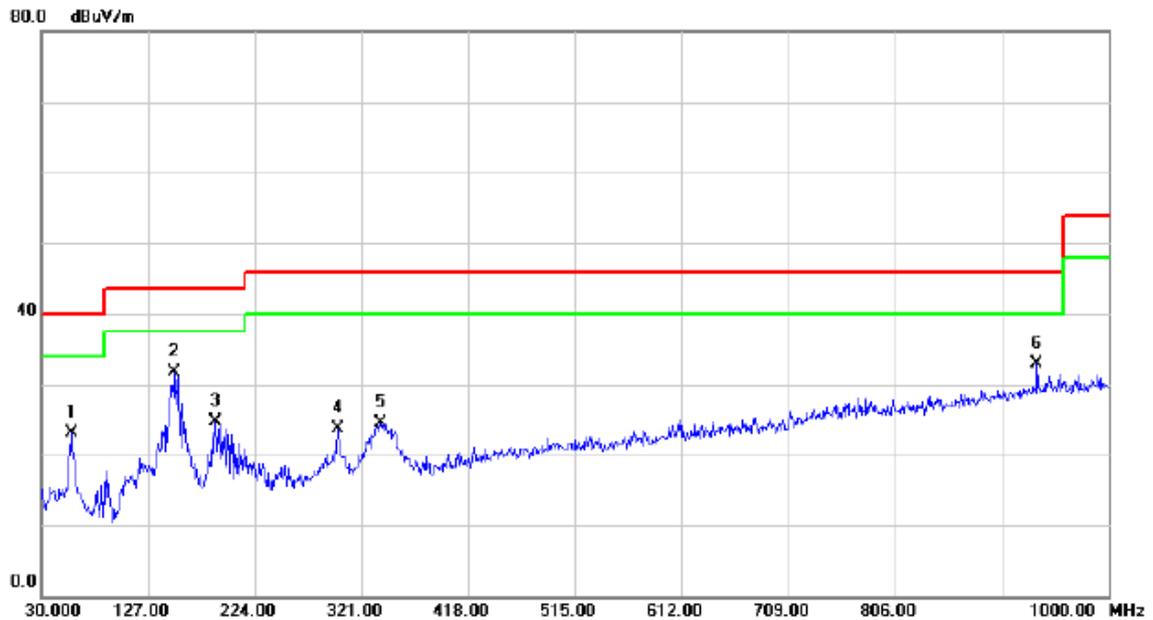

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 57.1600      | 37.49                    | -14.44                  | 23.05                      | 40.00           | -16.95       | QP       |         |
| 2   | *   | 151.2500     | 45.76                    | -14.04                  | 31.72                      | 43.50           | -11.78       | QP       |         |
| 3   |     | 188.1100     | 41.14                    | -16.44                  | 24.70                      | 43.50           | -18.80       | QP       |         |
| 4   |     | 299.6600     | 37.11                    | -13.50                  | 23.61                      | 46.00           | -22.39       | QP       |         |
| 5   |     | 338.4600     | 37.07                    | -12.49                  | 24.58                      | 46.00           | -21.42       | QP       |         |
| 6   |     | 935.0100     | 35.00                    | -2.08                   | 32.92                      | 46.00           | -13.08       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                   |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Vertical

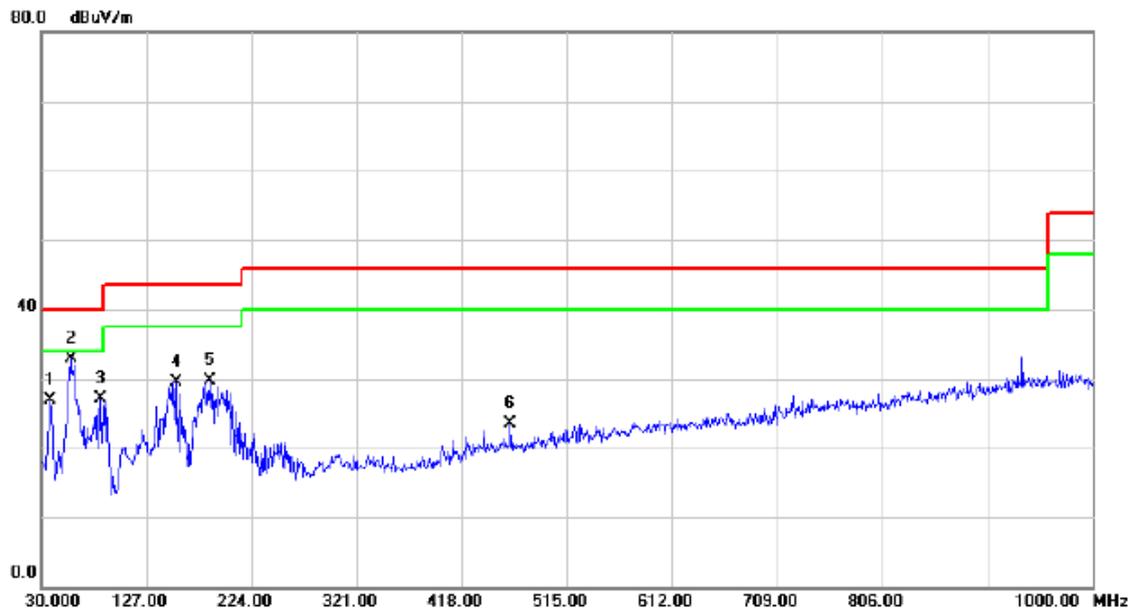

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 38.7300      | 41.44                    | -14.44                  | 27.00                      | 40.00           | -13.00       | QP       |         |
| 2   | *   | 57.1600      | 47.30                    | -14.44                  | 32.86                      | 40.00           | -7.14        | QP       |         |
| 3   |     | 85.2900      | 46.44                    | -19.27                  | 27.17                      | 40.00           | -12.83       | QP       |         |
| 4   |     | 154.1600     | 43.58                    | -14.00                  | 29.58                      | 43.50           | -13.92       | QP       |         |
| 5   |     | 185.2000     | 45.79                    | -16.07                  | 29.72                      | 43.50           | -13.78       | QP       |         |
| 6   |     | 462.6200     | 33.13                    | -9.58                   | 23.55                      | 46.00           | -22.45       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                                     |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                   |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Desay |


## Horizontal

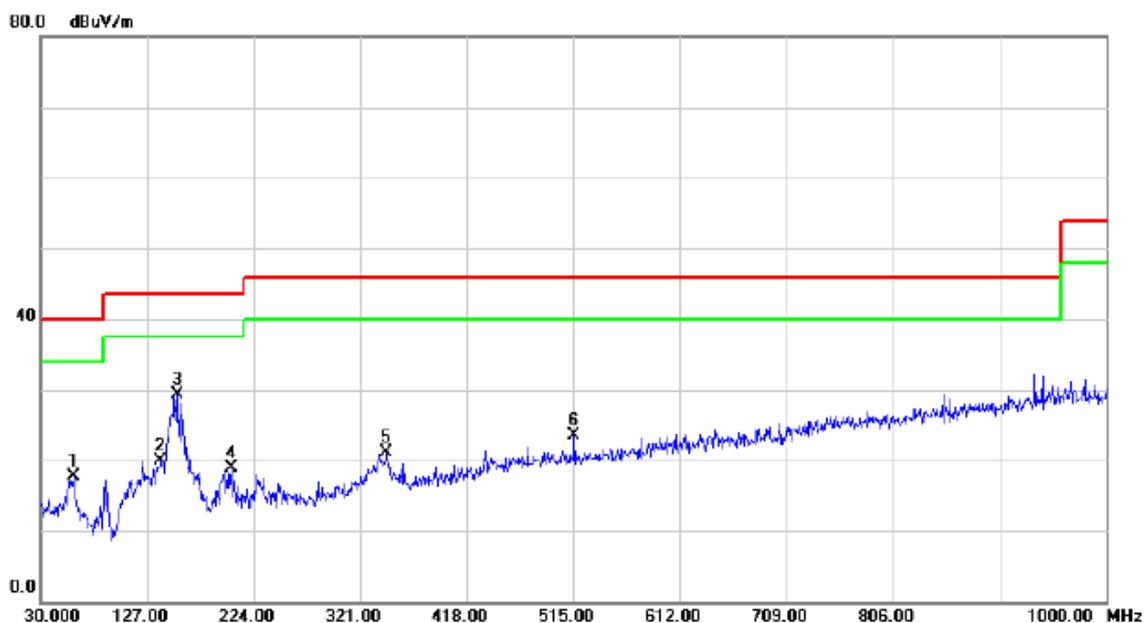

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 60.0700      | 32.39                    | -14.75                  | 17.64                      | 40.00           | -22.36       | peak     |         |
| 2   |     | 139.6100     | 34.43                    | -14.48                  | 19.95                      | 43.50           | -23.55       | peak     |         |
| 3   | *   | 154.1600     | 43.40                    | -14.00                  | 29.40                      | 43.50           | -14.10       | peak     |         |
| 4   |     | 203.6300     | 35.49                    | -16.66                  | 18.83                      | 43.50           | -24.67       | peak     |         |
| 5   |     | 345.2500     | 33.46                    | -12.34                  | 21.12                      | 46.00           | -24.88       | peak     |         |
| 6   |     | 515.9700     | 32.39                    | -8.89                   | 23.50                      | 46.00           | -22.50       | peak     |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


## Vertical

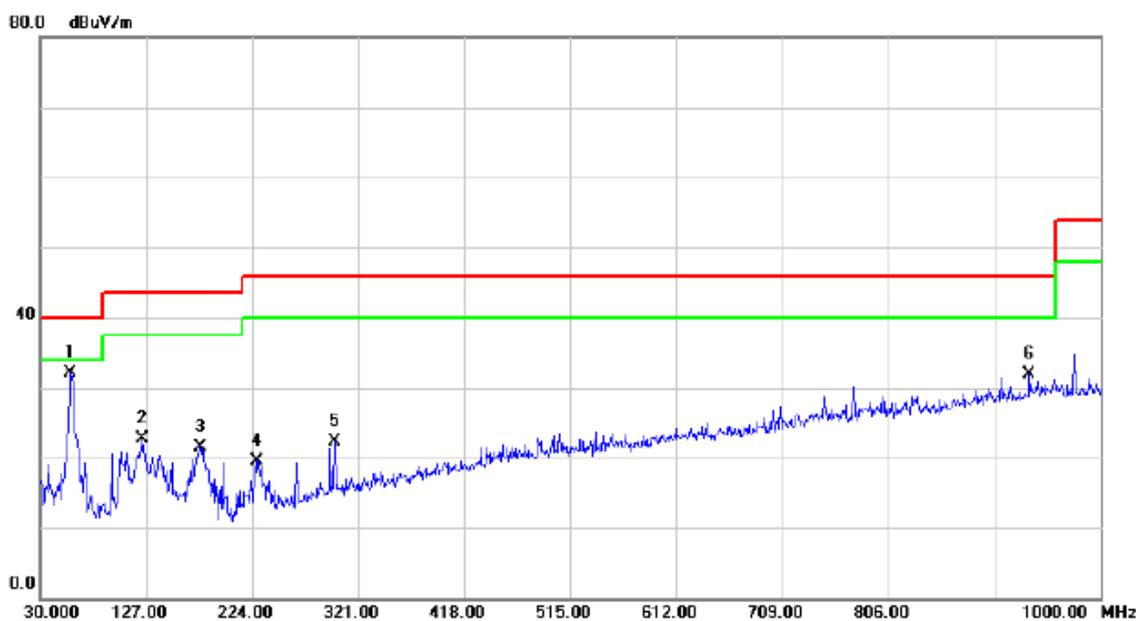

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 58.1300      | 46.66                    | -14.55                  | 32.11                      | 40.00           | -7.89        | QP       |         |
| 2   |     | 124.0900     | 38.56                    | -15.84                  | 22.72                      | 43.50           | -20.78       | QP       |         |
| 3   |     | 176.4700     | 36.64                    | -15.07                  | 21.57                      | 43.50           | -21.93       | QP       |         |
| 4   |     | 228.8500     | 35.52                    | -15.92                  | 19.60                      | 46.00           | -26.40       | QP       |         |
| 5   |     | 299.6600     | 35.78                    | -13.50                  | 22.28                      | 46.00           | -23.72       | QP       |         |
| 6   |     | 935.0100     | 33.93                    | -2.08                   | 31.85                      | 46.00           | -14.15       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


## Horizontal

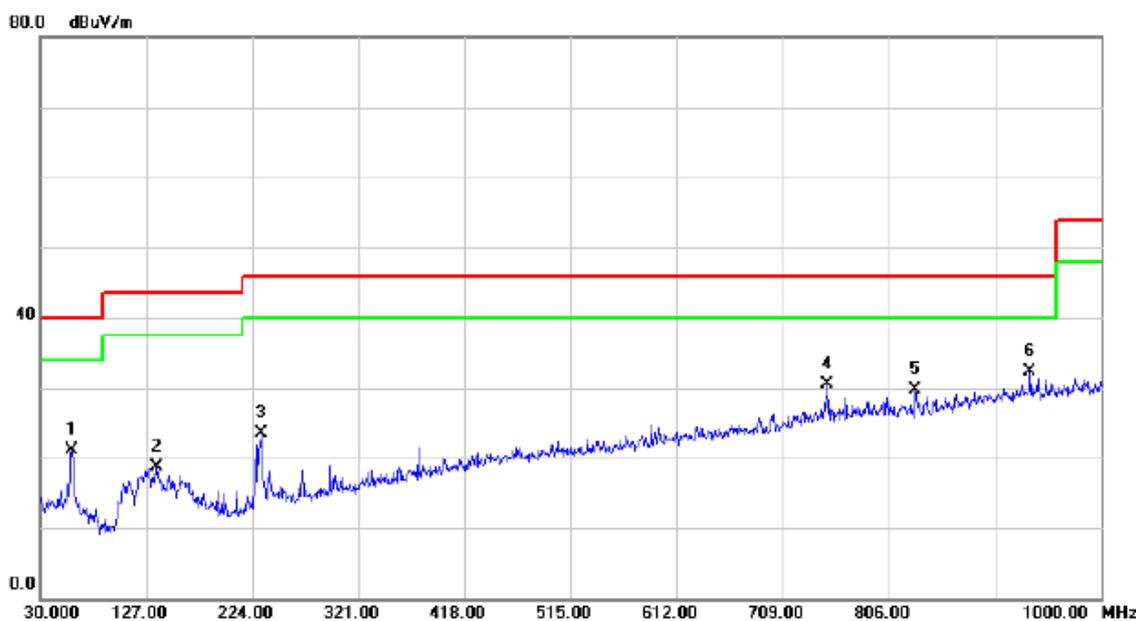

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 59.1000      | 35.71                    | -14.64                  | 21.07                      | 40.00           | -18.93       | QP       |         |
| 2   |     | 136.7000     | 33.42                    | -14.73                  | 18.69                      | 43.50           | -24.81       | QP       |         |
| 3   |     | 231.7600     | 39.22                    | -15.72                  | 23.50                      | 46.00           | -22.50       | QP       |         |
| 4   |     | 749.7400     | 35.47                    | -5.01                   | 30.46                      | 46.00           | -15.54       | QP       |         |
| 5   |     | 830.2500     | 34.00                    | -4.20                   | 29.80                      | 46.00           | -16.20       | QP       |         |
| 6   | *   | 935.0100     | 34.36                    | -2.08                   | 32.28                      | 46.00           | -13.72       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


## Vertical

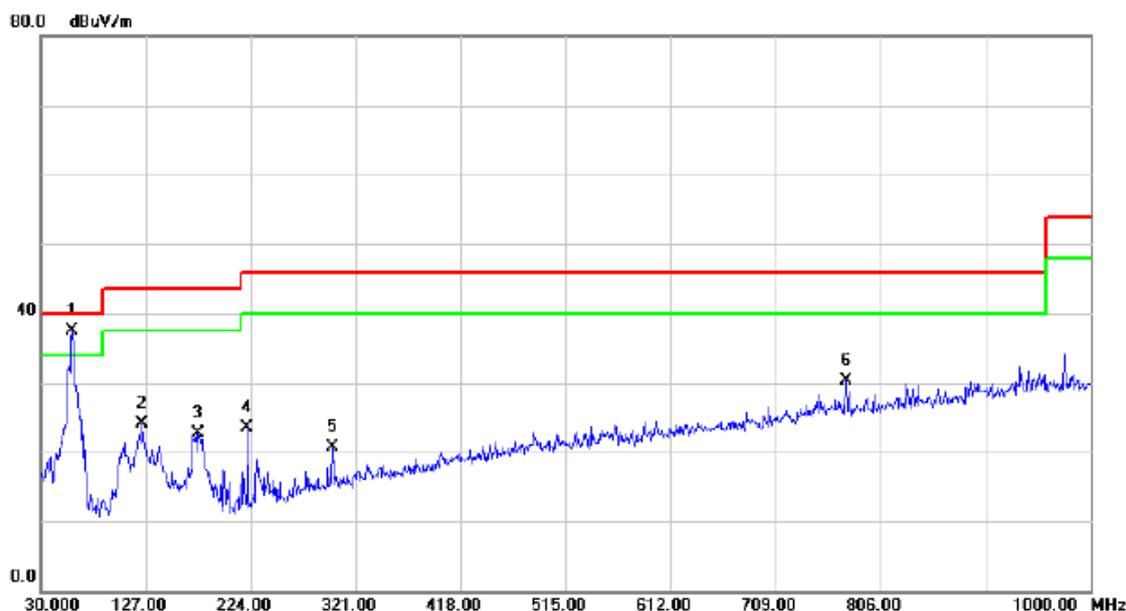

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 59.1000      | 52.07                    | -14.64                  | 37.43                      | 40.00           | -2.57        | QP       |         |
| 2   |     | 124.0900     | 39.86                    | -15.84                  | 24.02                      | 43.50           | -19.48       | QP       |         |
| 3   |     | 175.5000     | 37.76                    | -14.97                  | 22.79                      | 43.50           | -20.71       | QP       |         |
| 4   |     | 221.0900     | 39.96                    | -16.49                  | 23.47                      | 46.00           | -22.53       | QP       |         |
| 5   |     | 299.6600     | 34.12                    | -13.50                  | 20.62                      | 46.00           | -25.38       | QP       |         |
| 6   |     | 773.9900     | 35.26                    | -4.88                   | 30.38                      | 46.00           | -15.62       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


## Horizontal

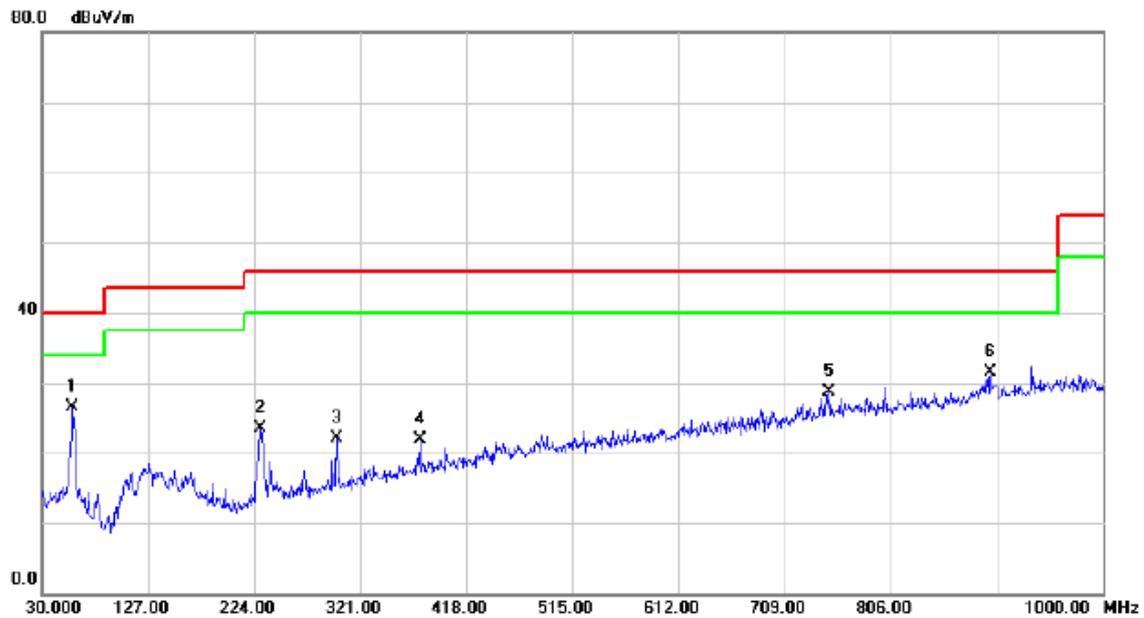

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 58.1300      | 40.99                    | -14.55                  | 26.44                      | 40.00           | -13.56       | QP       |         |
| 2   |     | 229.8200     | 39.36                    | -15.84                  | 23.52                      | 46.00           | -22.48       | QP       |         |
| 3   |     | 299.6600     | 35.51                    | -13.50                  | 22.01                      | 46.00           | -23.99       | QP       |         |
| 4   |     | 375.3200     | 33.69                    | -11.71                  | 21.98                      | 46.00           | -24.02       | QP       |         |
| 5   |     | 749.7400     | 33.70                    | -5.01                   | 28.69                      | 46.00           | -17.31       | QP       |         |
| 6   |     | 897.1800     | 34.40                    | -2.89                   | 31.51                      | 46.00           | -14.49       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


## Vertical

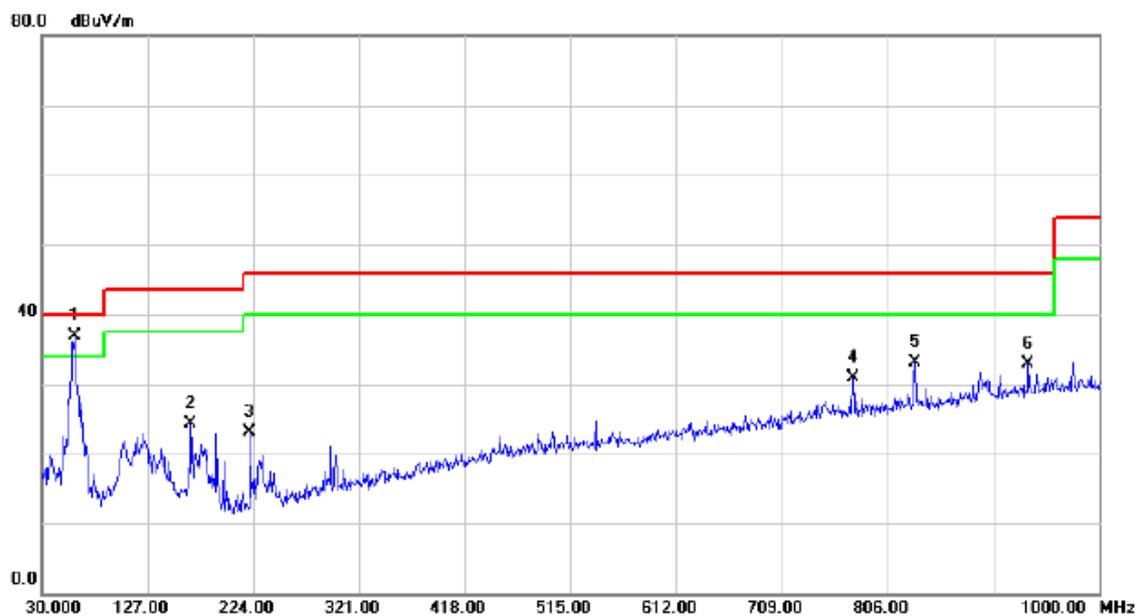

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 60.0700      | 51.66                    | -14.75                  | 36.91                      | 40.00           | -3.09        | QP       |         |
| 2   |     | 166.7700     | 38.51                    | -14.26                  | 24.25                      | 43.50           | -19.25       | QP       |         |
| 3   |     | 221.0900     | 39.56                    | -16.49                  | 23.07                      | 46.00           | -22.93       | QP       |         |
| 4   |     | 773.9900     | 35.69                    | -4.88                   | 30.81                      | 46.00           | -15.19       | QP       |         |
| 5   |     | 831.2200     | 37.34                    | -4.18                   | 33.16                      | 46.00           | -12.84       | QP       |         |
| 6   |     | 935.0100     | 34.94                    | -2.08                   | 32.86                      | 46.00           | -13.14       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


## Horizontal

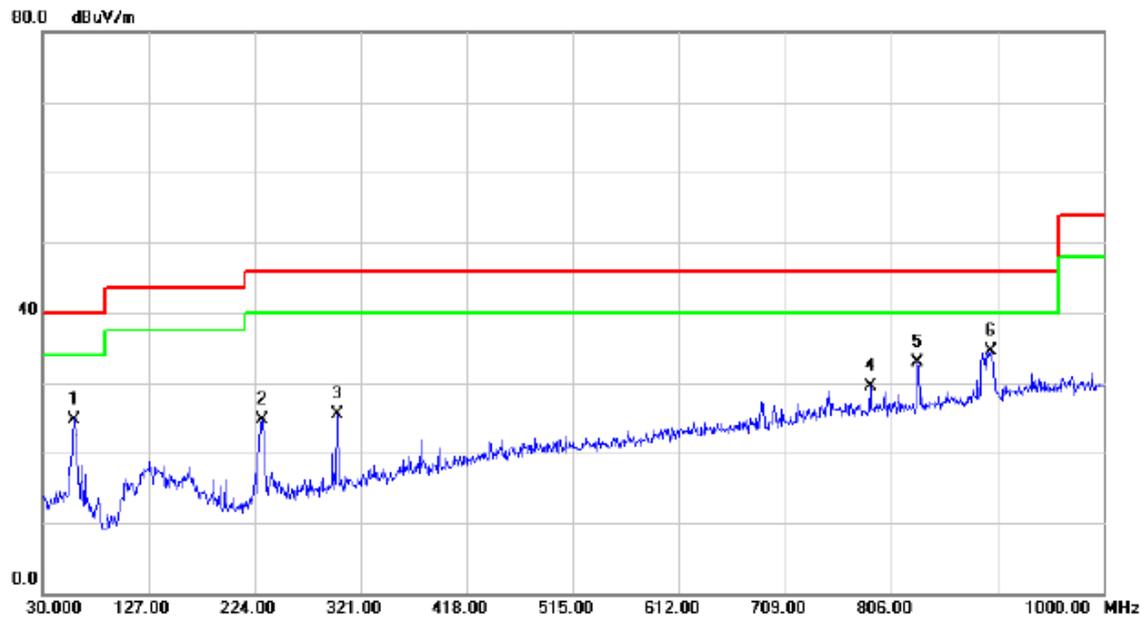

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 59.1000      | 39.44                    | -14.64                  | 24.80                      | 40.00           | -15.20       | QP       |         |
| 2   |     | 230.7900     | 40.52                    | -15.78                  | 24.74                      | 46.00           | -21.26       | QP       |         |
| 3   |     | 299.6600     | 39.03                    | -13.50                  | 25.53                      | 46.00           | -20.47       | QP       |         |
| 4   |     | 786.6000     | 34.29                    | -4.81                   | 29.48                      | 46.00           | -16.52       | QP       |         |
| 5   |     | 830.2500     | 37.04                    | -4.20                   | 32.84                      | 46.00           | -13.16       | QP       |         |
| 6   | *   | 897.1800     | 37.31                    | -2.89                   | 34.42                      | 46.00           | -11.58       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Vertical

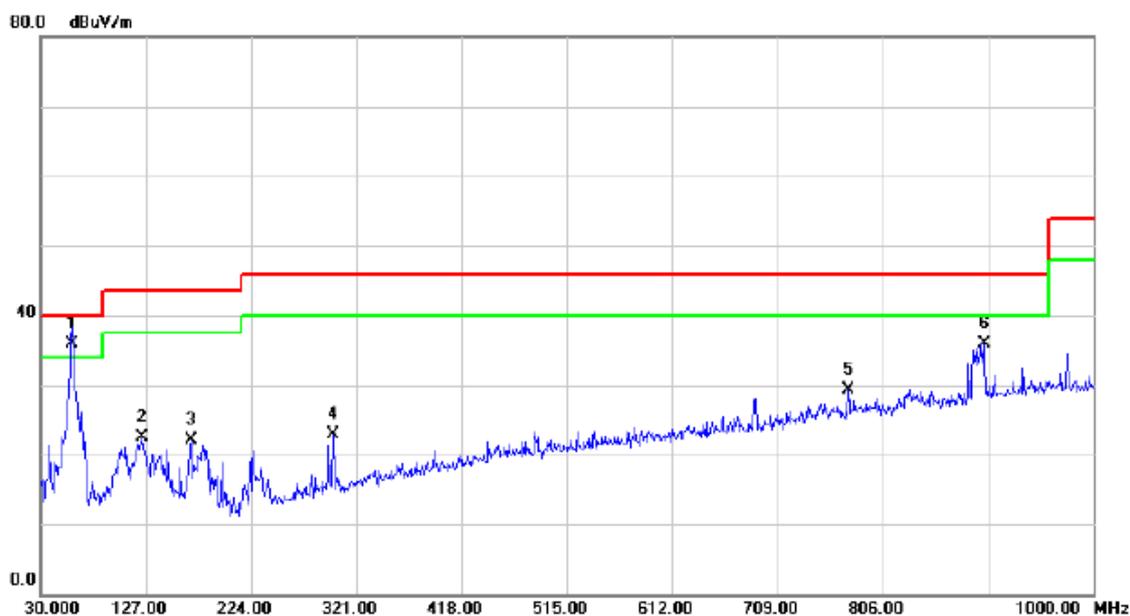

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   | *   | 59.1000      | 50.64                    | -14.64                  | 36.00                      | 40.00           | -4.00        | QP       |         |
| 2   |     | 124.0900     | 38.34                    | -15.84                  | 22.50                      | 43.50           | -21.00       | QP       |         |
| 3   |     | 168.7100     | 36.43                    | -14.36                  | 22.07                      | 43.50           | -21.43       | QP       |         |
| 4   |     | 299.6600     | 36.40                    | -13.50                  | 22.90                      | 46.00           | -23.10       | QP       |         |
| 5   |     | 773.9900     | 34.16                    | -4.88                   | 29.28                      | 46.00           | -16.72       | QP       |         |
| 6   |     | 899.1200     | 38.74                    | -2.85                   | 35.89                      | 46.00           | -10.11       | QP       |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |

## Horizontal

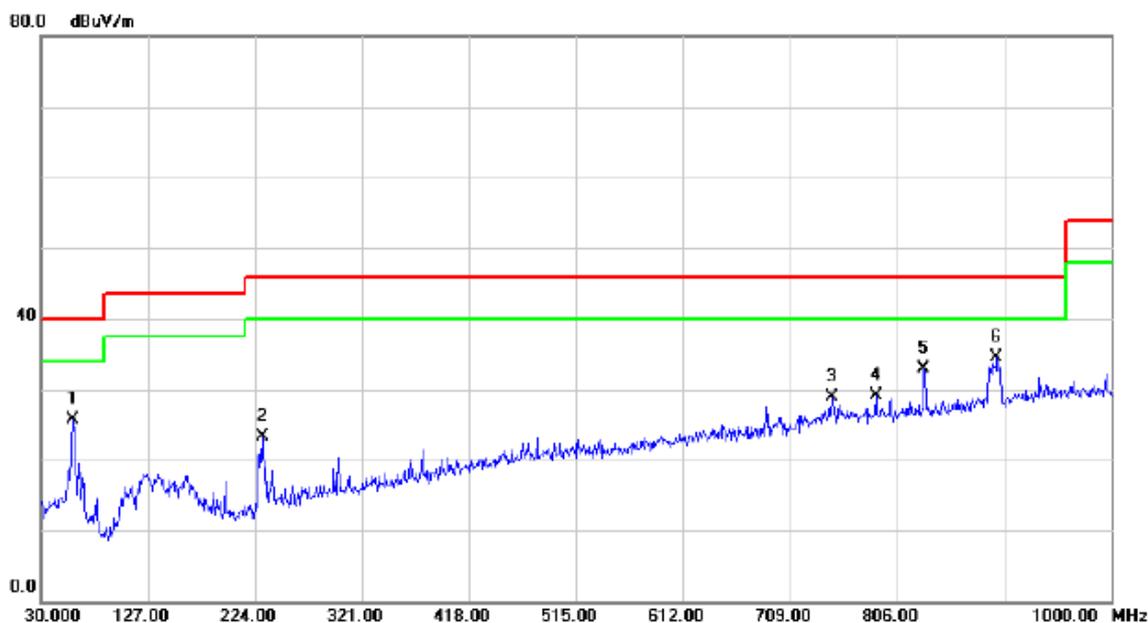


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 59.1000      | 40.39                    | -14.64                  | 25.75                      | 40.00           | -14.25       | QP       |         |
| 2   |     | 230.7900     | 39.10                    | -15.78                  | 23.32                      | 46.00           | -22.68       | QP       |         |
| 3   |     | 746.8300     | 34.04                    | -5.04                   | 29.00                      | 46.00           | -17.00       | QP       |         |
| 4   |     | 786.6000     | 33.84                    | -4.81                   | 29.03                      | 46.00           | -16.97       | QP       |         |
| 5   |     | 830.2500     | 37.05                    | -4.20                   | 32.85                      | 46.00           | -13.15       | QP       |         |
| 6   | *   | 896.2100     | 37.49                    | -2.90                   | 34.59                      | 46.00           | -11.41       | QP       |         |

**ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)**

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |


## Vertical

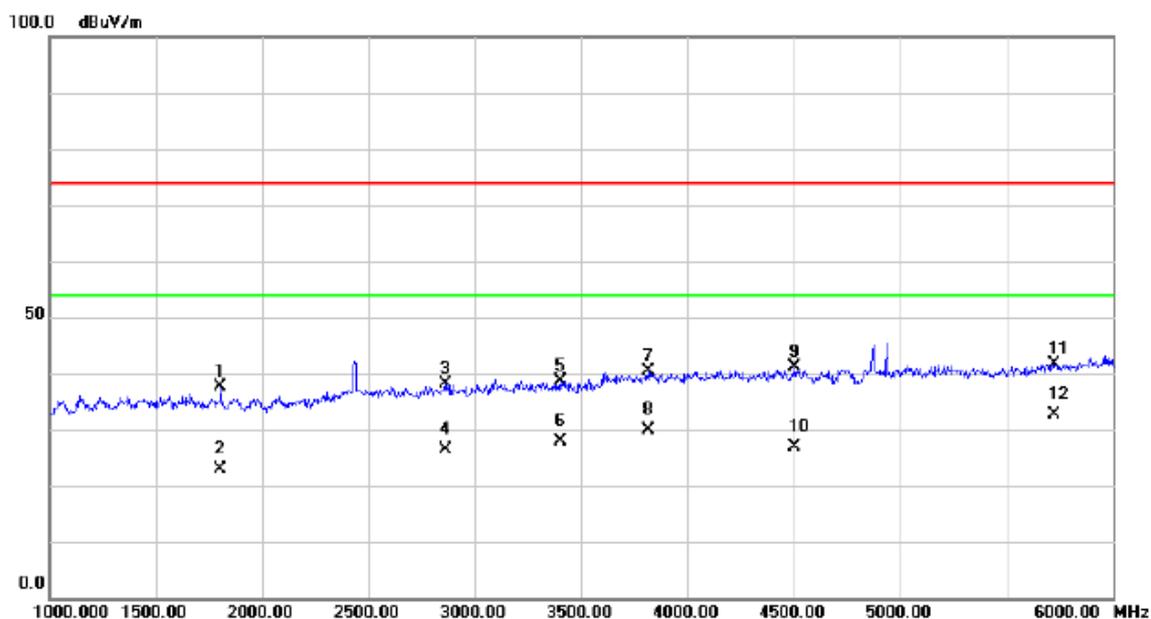

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1805.000     | 41.00                    | -3.33                   | 37.67                      | 74.00           | -36.33       | peak     |         |
| 2   |     | 1805.000     | 26.30                    | -3.33                   | 22.97                      | 54.00           | -31.03       | AVG      |         |
| 3   |     | 2860.000     | 37.16                    | 0.97                    | 38.13                      | 74.00           | -35.87       | peak     |         |
| 4   |     | 2860.000     | 25.40                    | 0.97                    | 26.37                      | 54.00           | -27.63       | AVG      |         |
| 5   |     | 3400.000     | 36.09                    | 2.64                    | 38.73                      | 74.00           | -35.27       | peak     |         |
| 6   |     | 3400.000     | 25.30                    | 2.64                    | 27.94                      | 54.00           | -26.06       | AVG      |         |
| 7   |     | 3815.000     | 36.28                    | 4.19                    | 40.47                      | 74.00           | -33.53       | peak     |         |
| 8   |     | 3815.000     | 25.60                    | 4.19                    | 29.79                      | 54.00           | -24.21       | AVG      |         |
| 9   |     | 4505.000     | 35.35                    | 5.67                    | 41.02                      | 74.00           | -32.98       | peak     |         |
| 10  |     | 4505.000     | 21.30                    | 5.67                    | 26.97                      | 54.00           | -27.03       | AVG      |         |
| 11  |     | 5720.000     | 32.82                    | 8.88                    | 41.70                      | 74.00           | -32.30       | peak     |         |
| 12  | *   | 5720.000     | 23.70                    | 8.88                    | 32.58                      | 54.00           | -21.42       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |


## Horizontal

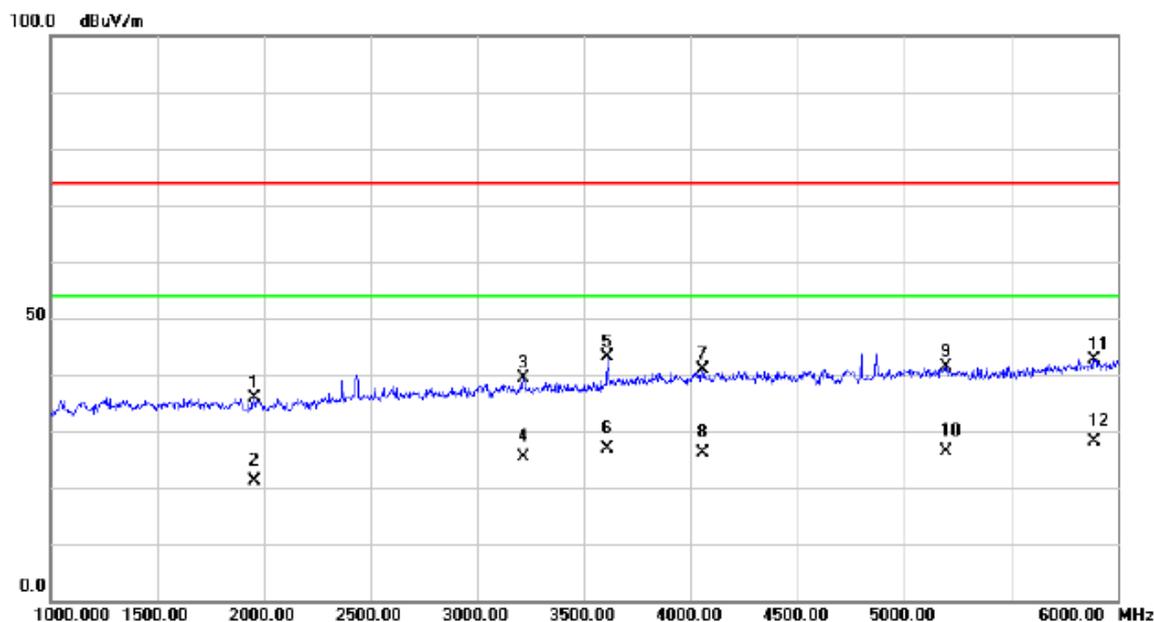

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1957.500     | 39.01                    | -3.12                   | 35.89                      | 74.00           | -38.11       | peak     |         |
| 2   |     | 1957.500     | 24.30                    | -3.12                   | 21.18                      | 54.00           | -32.82       | AVG      |         |
| 3   |     | 3217.500     | 37.24                    | 2.10                    | 39.34                      | 74.00           | -34.66       | peak     |         |
| 4   |     | 3217.500     | 23.20                    | 2.10                    | 25.30                      | 54.00           | -28.70       | AVG      |         |
| 5   |     | 3610.000     | 39.66                    | 3.37                    | 43.03                      | 74.00           | -30.97       | peak     |         |
| 6   |     | 3610.000     | 23.60                    | 3.37                    | 26.97                      | 54.00           | -27.03       | AVG      |         |
| 7   |     | 4057.500     | 35.99                    | 5.00                    | 40.99                      | 74.00           | -33.01       | peak     |         |
| 8   |     | 4057.500     | 21.10                    | 5.00                    | 26.10                      | 54.00           | -27.90       | AVG      |         |
| 9   |     | 5197.500     | 33.91                    | 7.57                    | 41.48                      | 74.00           | -32.52       | peak     |         |
| 10  |     | 5197.500     | 18.90                    | 7.57                    | 26.47                      | 54.00           | -27.53       | AVG      |         |
| 11  |     | 5892.500     | 33.09                    | 9.57                    | 42.66                      | 74.00           | -31.34       | peak     |         |
| 12  | *   | 5892.500     | 18.50                    | 9.57                    | 28.07                      | 54.00           | -25.93       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |


## Vertical

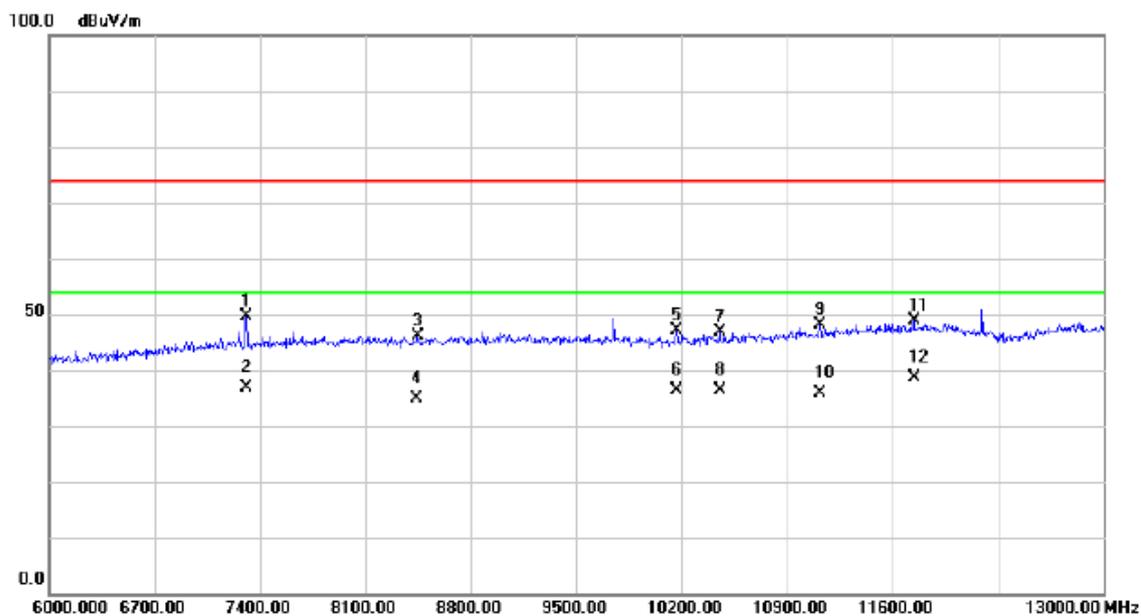

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7312.500     | 36.16                    | 13.55                   | 49.71                      | 74.00           | -24.29       | peak     |         |
| 2   |     | 7312.500     | 23.29                    | 13.55                   | 36.84                      | 54.00           | -17.16       | AVG      |         |
| 3   |     | 8446.500     | 31.64                    | 14.44                   | 46.08                      | 74.00           | -27.92       | peak     |         |
| 4   |     | 8446.500     | 20.40                    | 14.44                   | 34.84                      | 54.00           | -19.16       | AVG      |         |
| 5   |     | 10168.50     | 31.24                    | 15.82                   | 47.06                      | 74.00           | -26.94       | peak     |         |
| 6   |     | 10168.50     | 20.60                    | 15.82                   | 36.42                      | 54.00           | -17.58       | AVG      |         |
| 7   |     | 10455.50     | 30.24                    | 16.56                   | 46.80                      | 74.00           | -27.20       | peak     |         |
| 8   |     | 10455.50     | 19.80                    | 16.56                   | 36.36                      | 54.00           | -17.64       | AVG      |         |
| 9   |     | 11117.00     | 29.76                    | 18.32                   | 48.08                      | 74.00           | -25.92       | peak     |         |
| 10  |     | 11117.00     | 17.60                    | 18.32                   | 35.92                      | 54.00           | -18.08       | AVG      |         |
| 11  |     | 11740.00     | 28.67                    | 20.11                   | 48.78                      | 74.00           | -25.22       | peak     |         |
| 12  | *   | 11740.00     | 18.50                    | 20.11                   | 38.61                      | 54.00           | -15.39       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: BYD +USB Cable: FOXCONN +Battery: Sunwoda + Earphone: LIANCHUANG |


## Horizontal

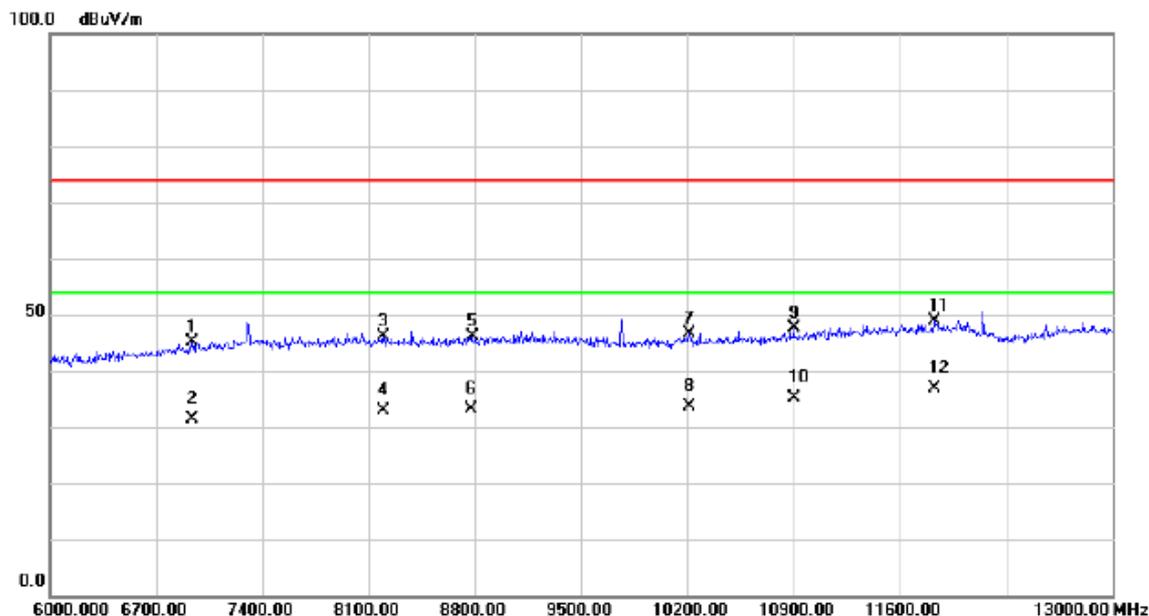

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6938.000     | 32.24                    | 12.89                   | 45.13                      | 74.00           | -28.87       | peak     |         |
| 2   |     | 6938.000     | 18.60                    | 12.89                   | 31.49                      | 54.00           | -22.51       | AVG      |         |
| 3   |     | 8201.500     | 31.72                    | 14.46                   | 46.18                      | 74.00           | -27.82       | peak     |         |
| 4   |     | 8201.500     | 18.30                    | 14.46                   | 32.76                      | 54.00           | -21.24       | AVG      |         |
| 5   |     | 8782.500     | 31.18                    | 14.93                   | 46.11                      | 74.00           | -27.89       | peak     |         |
| 6   |     | 8782.500     | 18.10                    | 14.93                   | 33.03                      | 54.00           | -20.97       | AVG      |         |
| 7   |     | 10214.00     | 30.77                    | 15.93                   | 46.70                      | 74.00           | -27.30       | peak     |         |
| 8   |     | 10214.00     | 17.60                    | 15.93                   | 33.53                      | 54.00           | -20.47       | AVG      |         |
| 9   |     | 10903.50     | 29.90                    | 17.72                   | 47.62                      | 74.00           | -26.38       | peak     |         |
| 10  |     | 10903.50     | 17.40                    | 17.72                   | 35.12                      | 54.00           | -18.88       | AVG      |         |
| 11  |     | 11831.00     | 28.40                    | 20.36                   | 48.76                      | 74.00           | -25.24       | peak     |         |
| 12  | *   | 11831.00     | 16.50                    | 20.36                   | 36.86                      | 54.00           | -17.14       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |


## Vertical

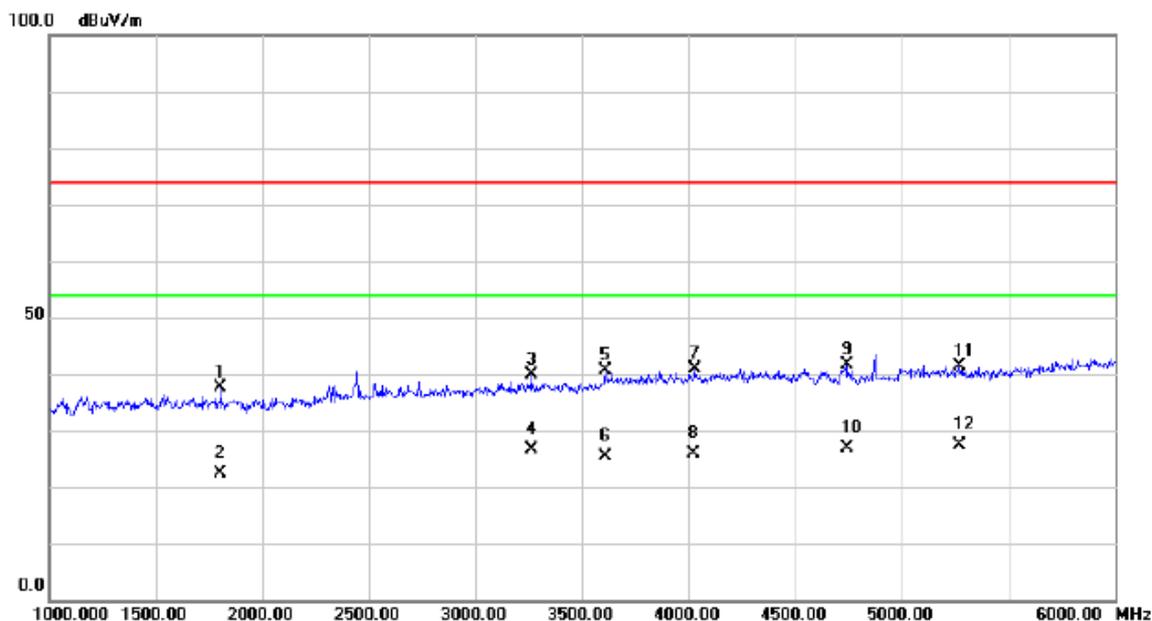

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1805.000     | 40.86                    | -3.33                   | 37.53                      | 74.00           | -36.47       | peak     |         |
| 2   |     | 1805.000     | 25.60                    | -3.33                   | 22.27                      | 54.00           | -31.73       | AVG      |         |
| 3   |     | 3262.500     | 37.60                    | 2.24                    | 39.84                      | 74.00           | -34.16       | peak     |         |
| 4   |     | 3262.500     | 24.30                    | 2.24                    | 26.54                      | 54.00           | -27.46       | AVG      |         |
| 5   |     | 3610.000     | 37.20                    | 3.37                    | 40.57                      | 74.00           | -33.43       | peak     |         |
| 6   |     | 3610.000     | 22.10                    | 3.37                    | 25.47                      | 54.00           | -28.53       | AVG      |         |
| 7   |     | 4027.500     | 35.81                    | 4.96                    | 40.77                      | 74.00           | -33.23       | peak     |         |
| 8   |     | 4027.500     | 20.80                    | 4.96                    | 25.76                      | 54.00           | -28.24       | AVG      |         |
| 9   |     | 4742.500     | 35.08                    | 6.44                    | 41.52                      | 74.00           | -32.48       | peak     |         |
| 10  |     | 4742.500     | 20.50                    | 6.44                    | 26.94                      | 54.00           | -27.06       | AVG      |         |
| 11  |     | 5270.000     | 33.78                    | 7.67                    | 41.45                      | 74.00           | -32.55       | peak     |         |
| 12  | *   | 5270.000     | 19.80                    | 7.67                    | 27.47                      | 54.00           | -26.53       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |


## Horizontal

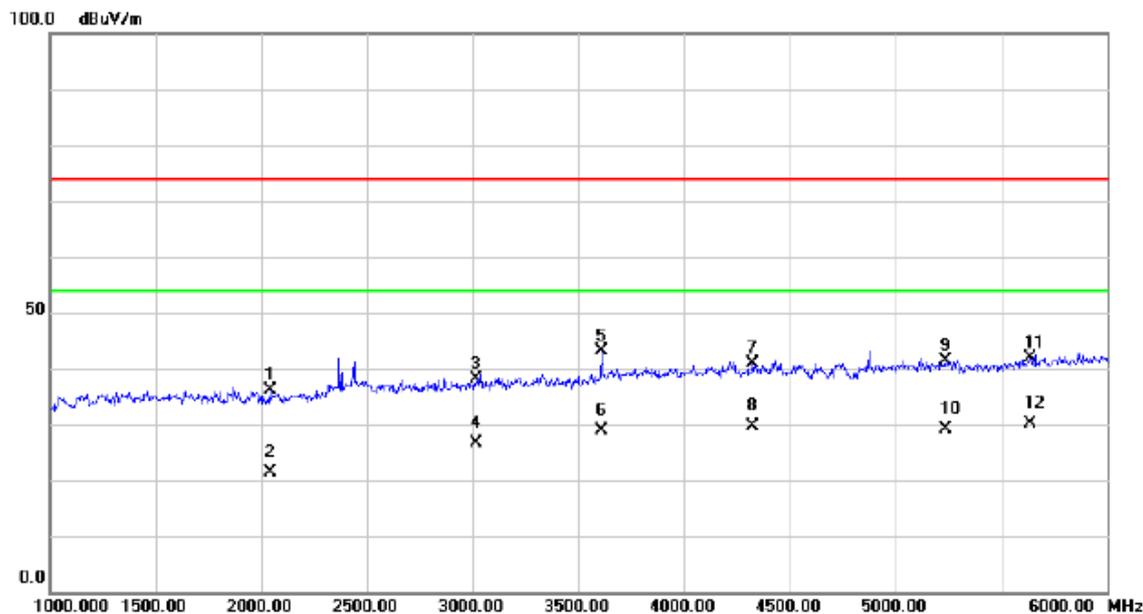

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 2042.500     | 38.84                    | -2.83                   | 36.01                      | 74.00           | -37.99       | peak     |         |
| 2   |     | 2042.500     | 24.30                    | -2.83                   | 21.47                      | 54.00           | -32.53       | AVG      |         |
| 3   |     | 3017.500     | 36.65                    | 1.52                    | 38.17                      | 74.00           | -35.83       | peak     |         |
| 4   |     | 3017.500     | 25.10                    | 1.52                    | 26.62                      | 54.00           | -27.38       | AVG      |         |
| 5   |     | 3610.000     | 39.66                    | 3.37                    | 43.03                      | 74.00           | -30.97       | peak     |         |
| 6   |     | 3610.000     | 25.60                    | 3.37                    | 28.97                      | 54.00           | -25.03       | AVG      |         |
| 7   |     | 4322.500     | 35.57                    | 5.39                    | 40.96                      | 74.00           | -33.04       | peak     |         |
| 8   |     | 4322.500     | 24.20                    | 5.39                    | 29.59                      | 54.00           | -24.41       | AVG      |         |
| 9   |     | 5235.000     | 33.71                    | 7.62                    | 41.33                      | 74.00           | -32.67       | peak     |         |
| 10  |     | 5235.000     | 21.50                    | 7.62                    | 29.12                      | 54.00           | -24.88       | AVG      |         |
| 11  |     | 5635.000     | 33.23                    | 8.54                    | 41.77                      | 74.00           | -32.23       | peak     |         |
| 12  | *   | 5635.000     | 21.60                    | 8.54                    | 30.14                      | 54.00           | -23.86       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |


## Vertical

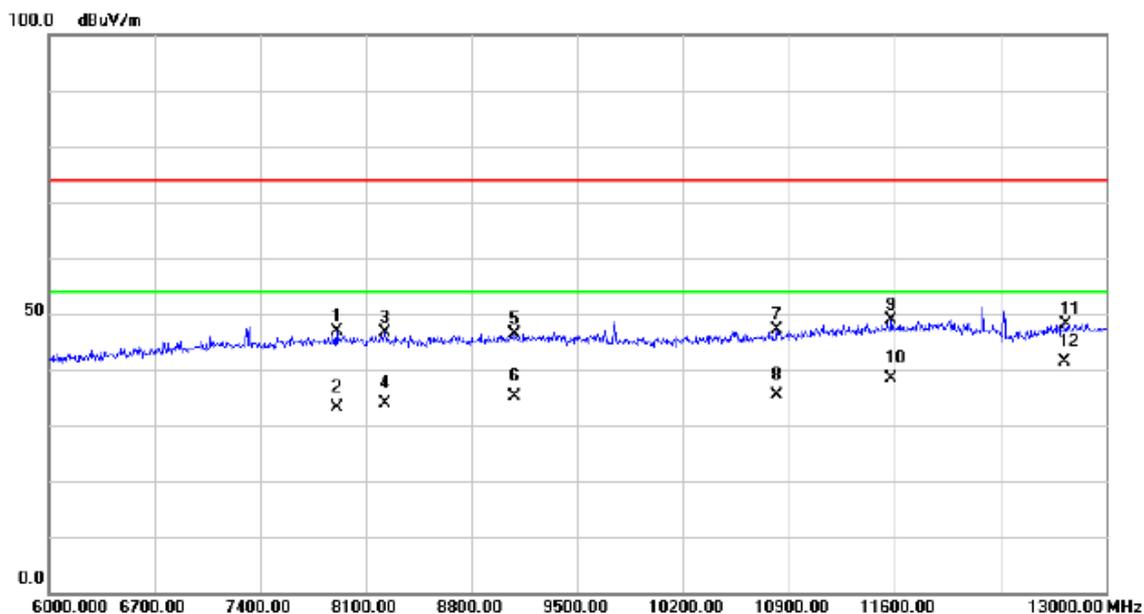

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7907.500     | 32.44                    | 14.35                   | 46.79                      | 74.00           | -27.21       | peak     |         |
| 2   |     | 7907.500     | 18.70                    | 14.35                   | 33.05                      | 54.00           | -20.95       | AVG      |         |
| 3   |     | 8229.500     | 32.27                    | 14.45                   | 46.72                      | 74.00           | -27.28       | peak     |         |
| 4   |     | 8229.500     | 19.40                    | 14.45                   | 33.85                      | 54.00           | -20.15       | AVG      |         |
| 5   |     | 9087.000     | 31.04                    | 15.34                   | 46.38                      | 74.00           | -27.62       | peak     |         |
| 6   |     | 9087.000     | 19.90                    | 15.34                   | 35.24                      | 54.00           | -18.76       | AVG      |         |
| 7   |     | 10819.500    | 29.58                    | 17.49                   | 47.07                      | 74.00           | -26.93       | peak     |         |
| 8   |     | 10819.500    | 17.80                    | 17.49                   | 35.29                      | 54.00           | -18.71       | AVG      |         |
| 9   |     | 11579.000    | 29.18                    | 19.68                   | 48.86                      | 74.00           | -25.14       | peak     |         |
| 10  |     | 11579.000    | 18.60                    | 19.68                   | 38.28                      | 54.00           | -15.72       | AVG      |         |
| 11  |     | 12730.500    | 26.88                    | 21.21                   | 48.09                      | 74.00           | -25.91       | peak     |         |
| 12  | *   | 12730.500    | 20.20                    | 21.21                   | 41.41                      | 54.00           | -12.59       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                          |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD + Earphone: QUANCHENG |


## Horizontal

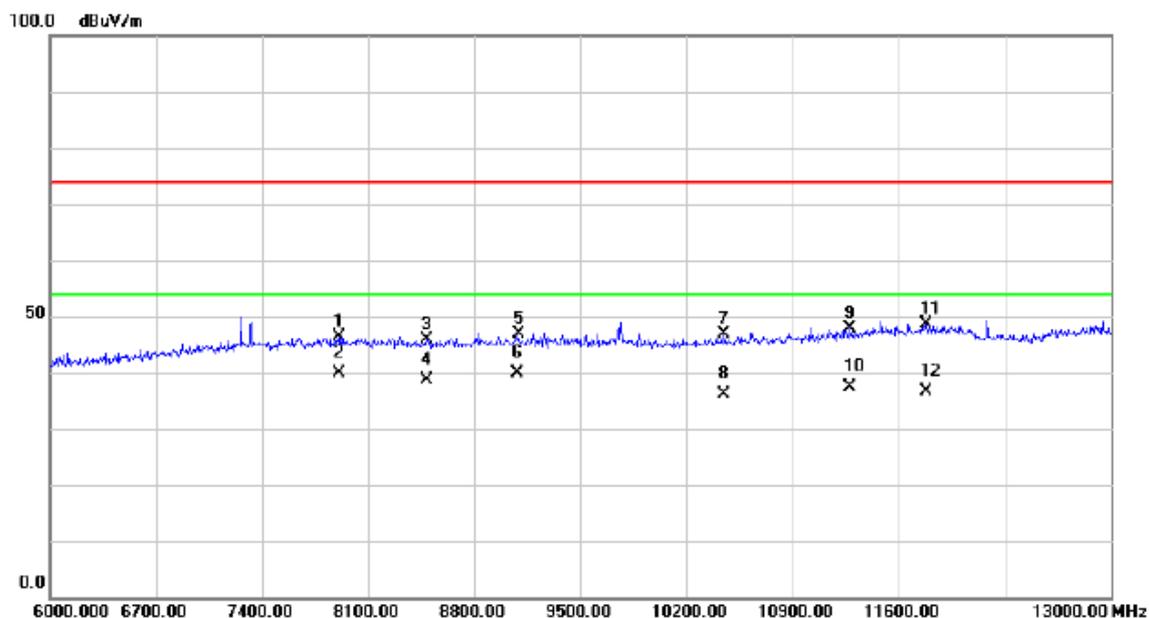

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7904.000     | 31.95                    | 14.35                   | 46.30                      | 74.00           | -27.70       | peak     |         |
| 2   | *   | 7904.000     | 25.60                    | 14.35                   | 39.95                      | 54.00           | -14.05       | AVG      |         |
| 3   |     | 8488.500     | 31.37                    | 14.43                   | 45.80                      | 74.00           | -28.20       | peak     |         |
| 4   |     | 8488.500     | 24.30                    | 14.43                   | 38.73                      | 54.00           | -15.27       | AVG      |         |
| 5   |     | 9090.500     | 31.48                    | 15.35                   | 46.83                      | 74.00           | -27.17       | peak     |         |
| 6   |     | 9090.500     | 24.50                    | 15.35                   | 39.85                      | 54.00           | -14.15       | AVG      |         |
| 7   |     | 10448.50     | 30.34                    | 16.54                   | 46.88                      | 74.00           | -27.12       | peak     |         |
| 8   |     | 10448.50     | 19.70                    | 16.54                   | 36.24                      | 54.00           | -17.76       | AVG      |         |
| 9   |     | 11281.50     | 29.17                    | 18.80                   | 47.97                      | 74.00           | -26.03       | peak     |         |
| 10  |     | 11281.50     | 18.60                    | 18.80                   | 37.40                      | 54.00           | -16.60       | AVG      |         |
| 11  |     | 11782.00     | 28.36                    | 20.22                   | 48.58                      | 74.00           | -25.42       | peak     |         |
| 12  |     | 11782.00     | 16.50                    | 20.22                   | 36.72                      | 54.00           | -17.28       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG |


## Vertical

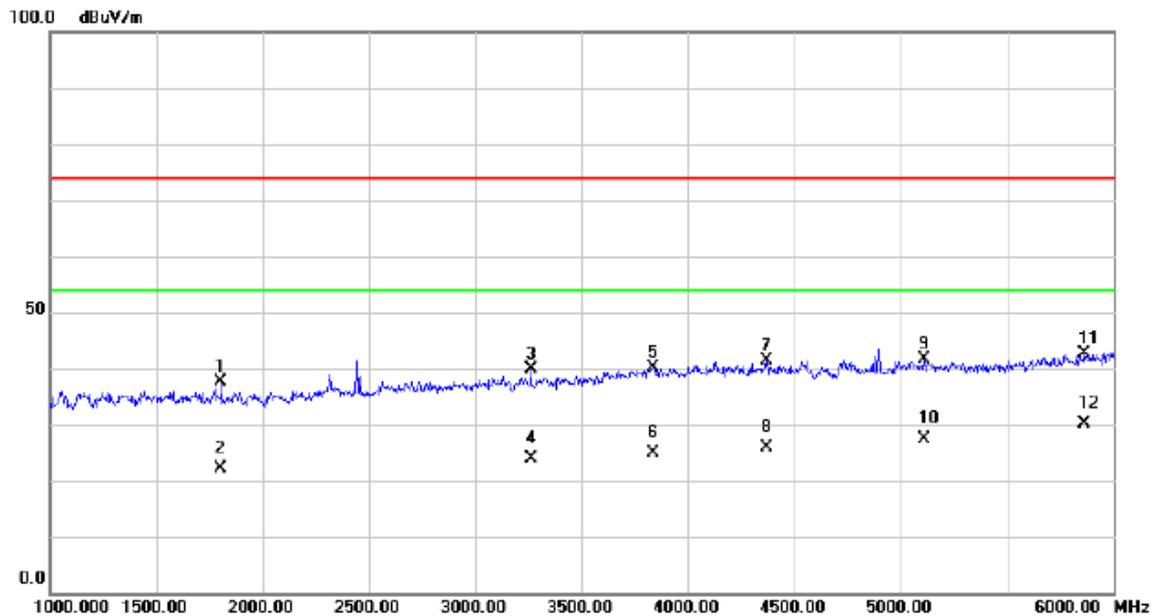

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1805.000     | 41.06                    | -3.33                   | 37.73                      | 74.00           | -36.27       | peak     |         |
| 2   |     | 1805.000     | 25.50                    | -3.33                   | 22.17                      | 54.00           | -31.83       | AVG      |         |
| 3   |     | 3262.500     | 37.66                    | 2.24                    | 39.90                      | 74.00           | -34.10       | peak     |         |
| 4   |     | 3262.500     | 21.60                    | 2.24                    | 23.84                      | 54.00           | -30.16       | AVG      |         |
| 5   |     | 3835.000     | 35.84                    | 4.26                    | 40.10                      | 74.00           | -33.90       | peak     |         |
| 6   |     | 3835.000     | 20.70                    | 4.26                    | 24.96                      | 54.00           | -29.04       | AVG      |         |
| 7   |     | 4370.000     | 35.80                    | 5.46                    | 41.26                      | 74.00           | -32.74       | peak     |         |
| 8   |     | 4370.000     | 20.50                    | 5.46                    | 25.96                      | 54.00           | -28.04       | AVG      |         |
| 9   |     | 5112.500     | 34.16                    | 7.46                    | 41.62                      | 74.00           | -32.38       | peak     |         |
| 10  |     | 5112.500     | 19.80                    | 7.46                    | 27.26                      | 54.00           | -26.74       | AVG      |         |
| 11  |     | 5862.500     | 33.16                    | 9.45                    | 42.61                      | 74.00           | -31.39       | peak     |         |
| 12  | *   | 5862.500     | 20.60                    | 9.45                    | 30.05                      | 54.00           | -23.95       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG |


## Horizontal

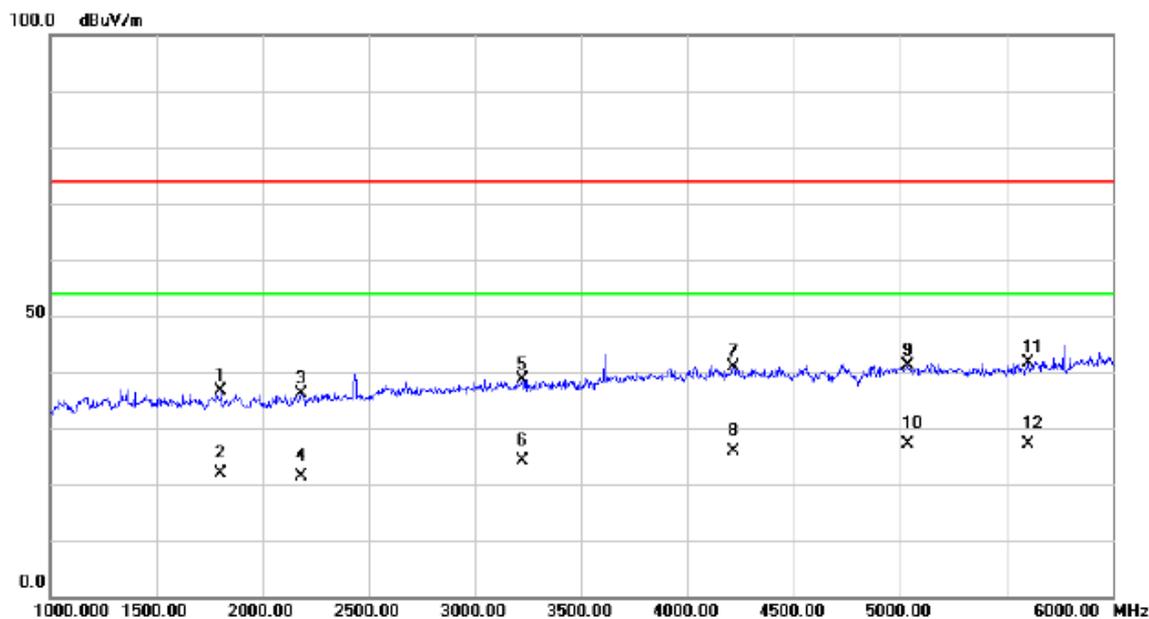

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1805.000     | 39.85                    | -3.33                   | 36.52                      | 74.00           | -37.48       | peak     |         |
| 2   |     | 1805.000     | 25.30                    | -3.33                   | 21.97                      | 54.00           | -32.03       | AVG      |         |
| 3   |     | 2182.500     | 38.28                    | -2.06                   | 36.22                      | 74.00           | -37.78       | peak     |         |
| 4   |     | 2182.500     | 23.40                    | -2.06                   | 21.34                      | 54.00           | -32.66       | AVG      |         |
| 5   |     | 3220.000     | 36.60                    | 2.12                    | 38.72                      | 74.00           | -35.28       | peak     |         |
| 6   |     | 3220.000     | 22.10                    | 2.12                    | 24.22                      | 54.00           | -29.78       | AVG      |         |
| 7   |     | 4217.500     | 35.55                    | 5.23                    | 40.78                      | 74.00           | -33.22       | peak     |         |
| 8   |     | 4217.500     | 20.60                    | 5.23                    | 25.83                      | 54.00           | -28.17       | AVG      |         |
| 9   |     | 5035.000     | 33.85                    | 7.34                    | 41.19                      | 74.00           | -32.81       | peak     |         |
| 10  |     | 5035.000     | 19.70                    | 7.34                    | 27.04                      | 54.00           | -26.96       | AVG      |         |
| 11  |     | 5605.000     | 33.27                    | 8.42                    | 41.69                      | 74.00           | -32.31       | peak     |         |
| 12  | *   | 5605.000     | 18.80                    | 8.42                    | 27.22                      | 54.00           | -26.78       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG |


## Vertical

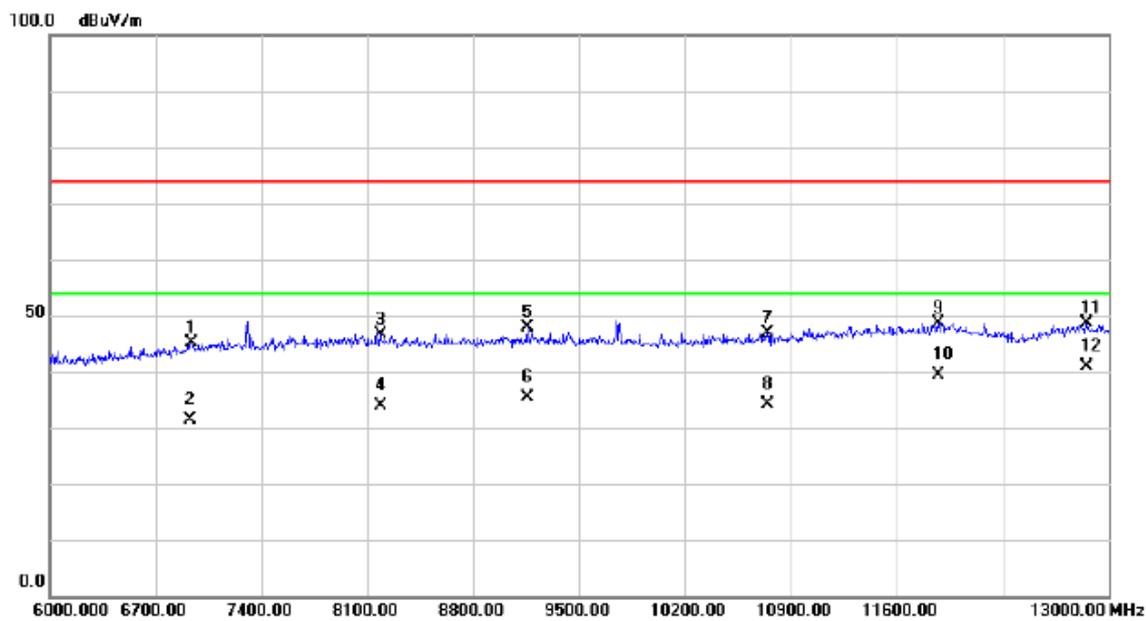

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6934.500     | 32.32                    | 12.88                   | 45.20                      | 74.00           | -28.80       | peak     |         |
| 2   |     | 6934.500     | 18.60                    | 12.88                   | 31.48                      | 54.00           | -22.52       | AVG      |         |
| 3   |     | 8187.500     | 32.08                    | 14.47                   | 46.55                      | 74.00           | -27.45       | peak     |         |
| 4   |     | 8187.500     | 19.30                    | 14.47                   | 33.77                      | 54.00           | -20.23       | AVG      |         |
| 5   |     | 9160.500     | 32.47                    | 15.35                   | 47.82                      | 74.00           | -26.18       | peak     |         |
| 6   |     | 9160.500     | 20.10                    | 15.35                   | 35.45                      | 54.00           | -18.55       | AVG      |         |
| 7   |     | 10749.50     | 29.61                    | 17.32                   | 46.93                      | 74.00           | -27.07       | peak     |         |
| 8   |     | 10749.50     | 16.70                    | 17.32                   | 34.02                      | 54.00           | -19.98       | AVG      |         |
| 9   |     | 11876.50     | 28.25                    | 20.48                   | 48.73                      | 74.00           | -25.27       | peak     |         |
| 10  |     | 11876.50     | 18.90                    | 20.48                   | 39.38                      | 54.00           | -14.62       | AVG      |         |
| 11  |     | 12856.50     | 27.22                    | 21.38                   | 48.60                      | 74.00           | -25.40       | peak     |         |
| 12  | *   | 12856.50     | 19.40                    | 21.38                   | 40.78                      | 54.00           | -13.22       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz   |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Earphone                           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: Desay + Earphone: QUANCHENG |


## Horizontal

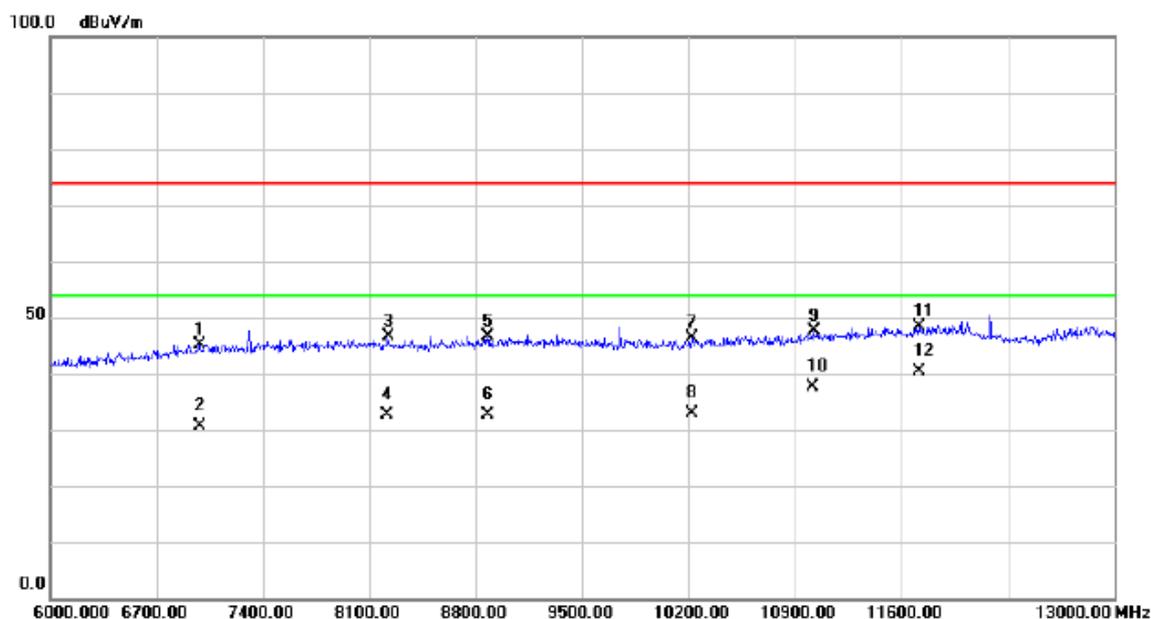

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6980.000     | 32.08                    | 13.07                   | 45.15                      | 74.00           | -28.85       | peak     |         |
| 2   |     | 6980.000     | 17.60                    | 13.07                   | 30.67                      | 54.00           | -23.33       | AVG      |         |
| 3   |     | 8222.500     | 32.18                    | 14.46                   | 46.64                      | 74.00           | -27.36       | peak     |         |
| 4   |     | 8222.500     | 18.20                    | 14.46                   | 32.66                      | 54.00           | -21.34       | AVG      |         |
| 5   |     | 8880.500     | 31.47                    | 15.12                   | 46.59                      | 74.00           | -27.41       | peak     |         |
| 6   |     | 8880.500     | 17.60                    | 15.12                   | 32.72                      | 54.00           | -21.28       | AVG      |         |
| 7   |     | 10221.000    | 30.39                    | 15.95                   | 46.34                      | 74.00           | -27.66       | peak     |         |
| 8   |     | 10221.000    | 16.90                    | 15.95                   | 32.85                      | 54.00           | -21.15       | AVG      |         |
| 9   |     | 11022.500    | 29.57                    | 18.03                   | 47.60                      | 74.00           | -26.40       | peak     |         |
| 10  |     | 11022.500    | 19.70                    | 18.03                   | 37.73                      | 54.00           | -16.27       | AVG      |         |
| 11  |     | 11712.000    | 28.44                    | 20.03                   | 48.47                      | 74.00           | -25.53       | peak     |         |
| 12  | *   | 11712.000    | 20.30                    | 20.03                   | 40.33                      | 54.00           | -13.67       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker     |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

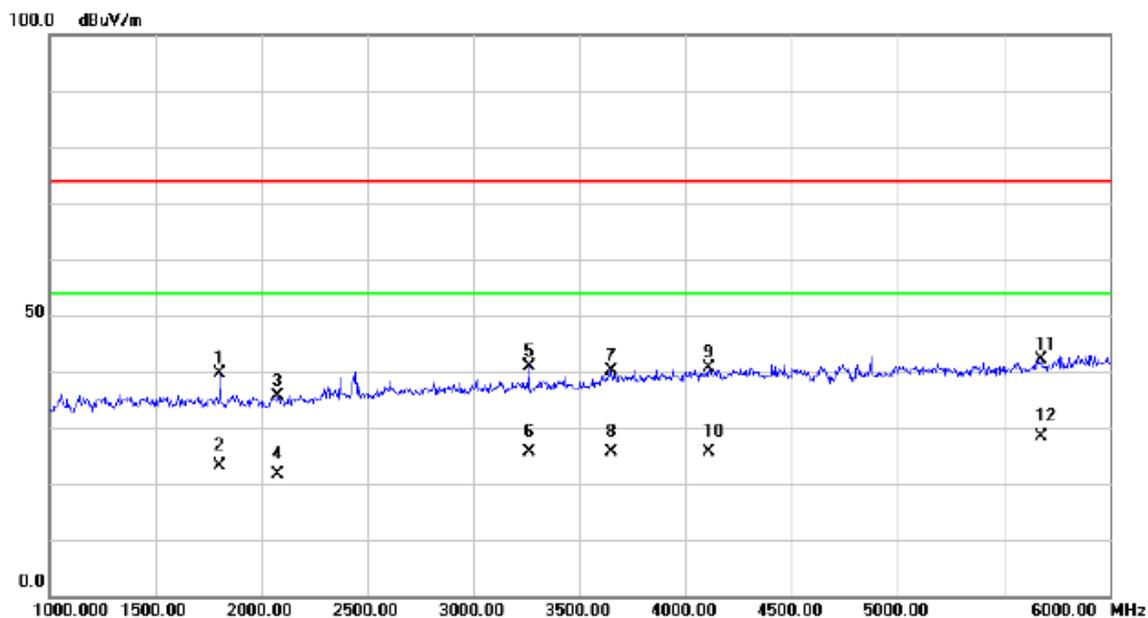

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1805.000     | 42.88                    | -3.33                   | 39.55                      | 74.00           | -34.45       | peak     |         |
| 2   |     | 1805.000     | 26.50                    | -3.33                   | 23.17                      | 54.00           | -30.83       | AVG      |         |
| 3   |     | 2077.500     | 38.35                    | -2.64                   | 35.71                      | 74.00           | -38.29       | peak     |         |
| 4   |     | 2077.500     | 24.30                    | -2.64                   | 21.66                      | 54.00           | -32.34       | AVG      |         |
| 5   |     | 3262.500     | 38.75                    | 2.24                    | 40.99                      | 74.00           | -33.01       | peak     |         |
| 6   |     | 3262.500     | 23.50                    | 2.24                    | 25.74                      | 54.00           | -28.26       | AVG      |         |
| 7   |     | 3652.500     | 36.68                    | 3.54                    | 40.22                      | 74.00           | -33.78       | peak     |         |
| 8   |     | 3652.500     | 22.10                    | 3.54                    | 25.64                      | 54.00           | -28.36       | AVG      |         |
| 9   |     | 4110.000     | 35.48                    | 5.08                    | 40.56                      | 74.00           | -33.44       | peak     |         |
| 10  |     | 4110.000     | 20.60                    | 5.08                    | 25.68                      | 54.00           | -28.32       | AVG      |         |
| 11  |     | 5675.000     | 33.36                    | 8.70                    | 42.06                      | 74.00           | -31.94       | peak     |         |
| 12  | *   | 5675.000     | 19.80                    | 8.70                    | 28.50                      | 54.00           | -25.50       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker     |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

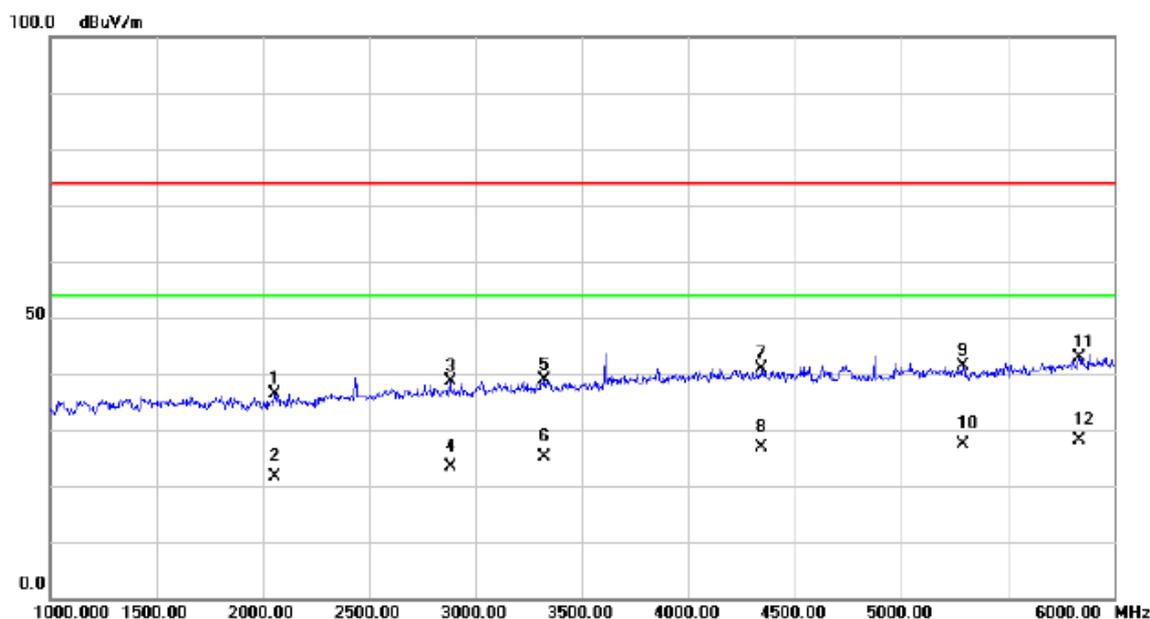

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 2055.000     | 39.05                    | -2.76                   | 36.29                      | 74.00           | -37.71       | peak     |         |
| 2   |     | 2055.000     | 24.30                    | -2.76                   | 21.54                      | 54.00           | -32.46       | AVG      |         |
| 3   |     | 2880.000     | 37.60                    | 1.03                    | 38.63                      | 74.00           | -35.37       | peak     |         |
| 4   |     | 2880.000     | 22.40                    | 1.03                    | 23.43                      | 54.00           | -30.57       | AVG      |         |
| 5   |     | 3325.000     | 36.36                    | 2.42                    | 38.78                      | 74.00           | -35.22       | peak     |         |
| 6   |     | 3325.000     | 22.60                    | 2.42                    | 25.02                      | 54.00           | -28.98       | AVG      |         |
| 7   |     | 4345.000     | 35.34                    | 5.43                    | 40.77                      | 74.00           | -33.23       | peak     |         |
| 8   |     | 4345.000     | 21.50                    | 5.43                    | 26.93                      | 54.00           | -27.07       | AVG      |         |
| 9   |     | 5292.500     | 33.60                    | 7.70                    | 41.30                      | 74.00           | -32.70       | peak     |         |
| 10  |     | 5292.500     | 19.80                    | 7.70                    | 27.50                      | 54.00           | -26.50       | AVG      |         |
| 11  |     | 5835.000     | 33.49                    | 9.34                    | 42.83                      | 74.00           | -31.17       | peak     |         |
| 12  | *   | 5835.000     | 18.70                    | 9.34                    | 28.04                      | 54.00           | -25.96       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker     |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

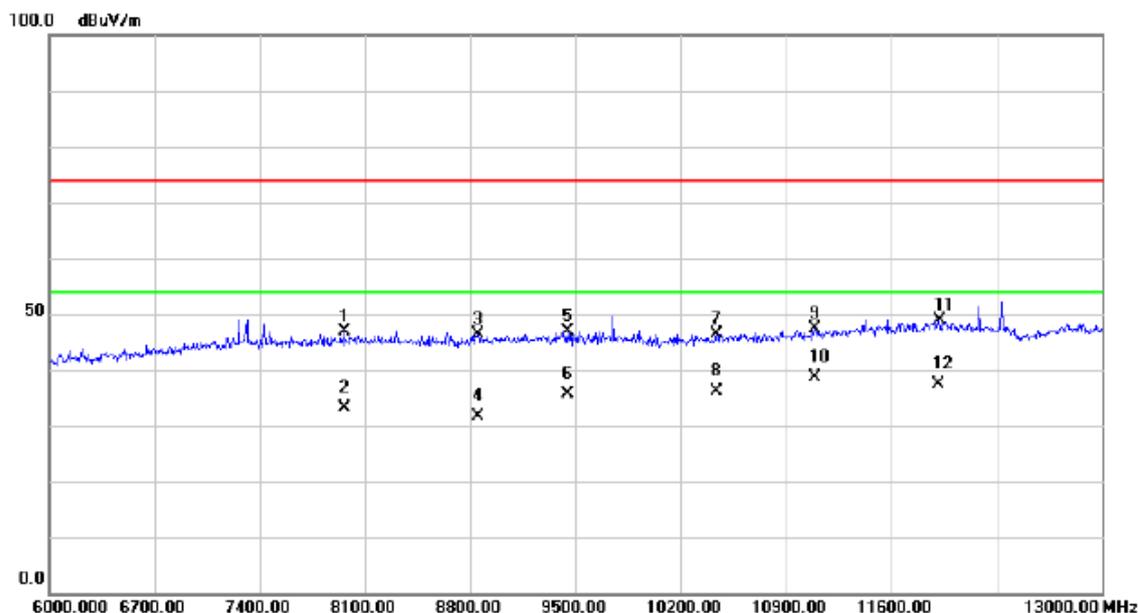

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7960.000     | 32.58                    | 14.42                   | 47.00                      | 74.00           | -27.00       | peak     |         |
| 2   |     | 7960.000     | 18.60                    | 14.42                   | 33.02                      | 54.00           | -20.98       | AVG      |         |
| 3   |     | 8852.500     | 31.22                    | 15.06                   | 46.28                      | 74.00           | -27.72       | peak     |         |
| 4   |     | 8852.500     | 16.50                    | 15.06                   | 31.56                      | 54.00           | -22.44       | AVG      |         |
| 5   |     | 9444.000     | 31.48                    | 15.41                   | 46.89                      | 74.00           | -27.11       | peak     |         |
| 6   |     | 9444.000     | 20.30                    | 15.41                   | 35.71                      | 54.00           | -18.29       | AVG      |         |
| 7   |     | 10441.500    | 29.82                    | 16.52                   | 46.34                      | 74.00           | -27.66       | peak     |         |
| 8   |     | 10441.500    | 19.60                    | 16.52                   | 36.12                      | 54.00           | -17.88       | AVG      |         |
| 9   |     | 11089.000    | 29.06                    | 18.23                   | 47.29                      | 74.00           | -26.71       | peak     |         |
| 10  | *   | 11089.000    | 20.30                    | 18.23                   | 38.53                      | 54.00           | -15.47       | AVG      |         |
| 11  |     | 11918.500    | 28.16                    | 20.60                   | 48.76                      | 74.00           | -25.24       | peak     |         |
| 12  |     | 11918.500    | 16.80                    | 20.60                   | 37.40                      | 54.00           | -16.60       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Playing+Speaker     |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

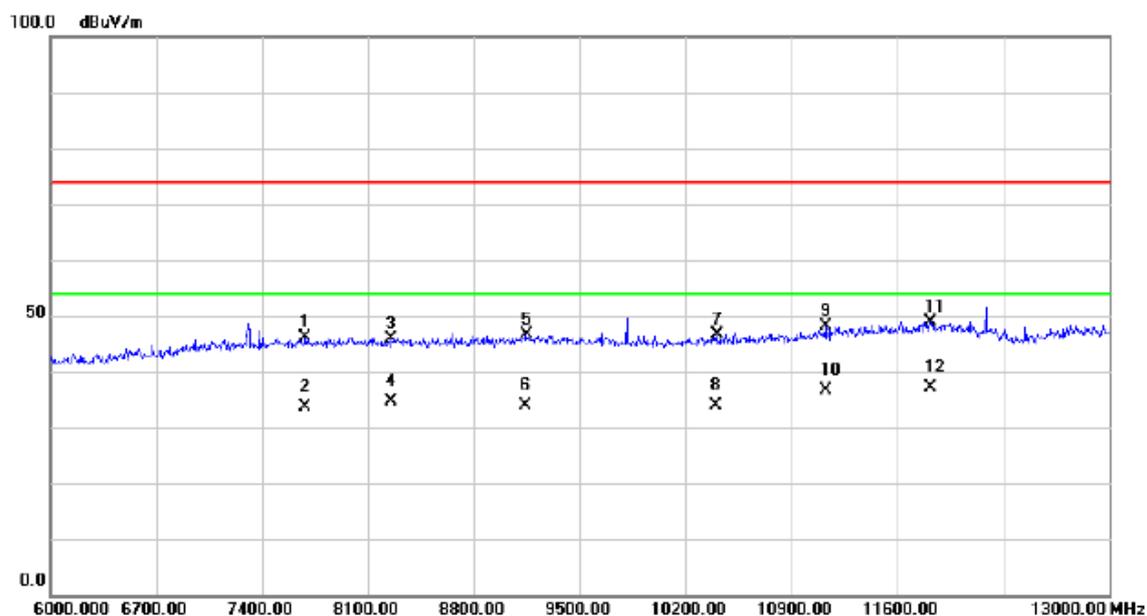

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7687.000     | 31.98                    | 14.04                   | 46.02                      | 74.00           | -27.98       | peak     |         |
| 2   |     | 7687.000     | 19.70                    | 14.04                   | 33.74                      | 54.00           | -20.26       | AVG      |         |
| 3   |     | 8257.500     | 31.48                    | 14.46                   | 45.94                      | 74.00           | -28.06       | peak     |         |
| 4   |     | 8257.500     | 20.10                    | 14.46                   | 34.56                      | 54.00           | -19.44       | AVG      |         |
| 5   |     | 9146.500     | 31.19                    | 15.36                   | 46.55                      | 74.00           | -27.45       | peak     |         |
| 6   |     | 9146.500     | 18.60                    | 15.36                   | 33.96                      | 54.00           | -20.04       | AVG      |         |
| 7   |     | 10406.50     | 30.28                    | 16.43                   | 46.71                      | 74.00           | -27.29       | peak     |         |
| 8   |     | 10406.50     | 17.40                    | 16.43                   | 33.83                      | 54.00           | -20.17       | AVG      |         |
| 9   |     | 11124.00     | 29.73                    | 18.33                   | 48.06                      | 74.00           | -25.94       | peak     |         |
| 10  |     | 11124.00     | 18.20                    | 18.33                   | 36.53                      | 54.00           | -17.47       | AVG      |         |
| 11  |     | 11817.00     | 28.66                    | 20.33                   | 48.99                      | 74.00           | -25.01       | peak     |         |
| 12  | *   | 11817.00     | 16.90                    | 20.33                   | 37.23                      | 54.00           | -16.77       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

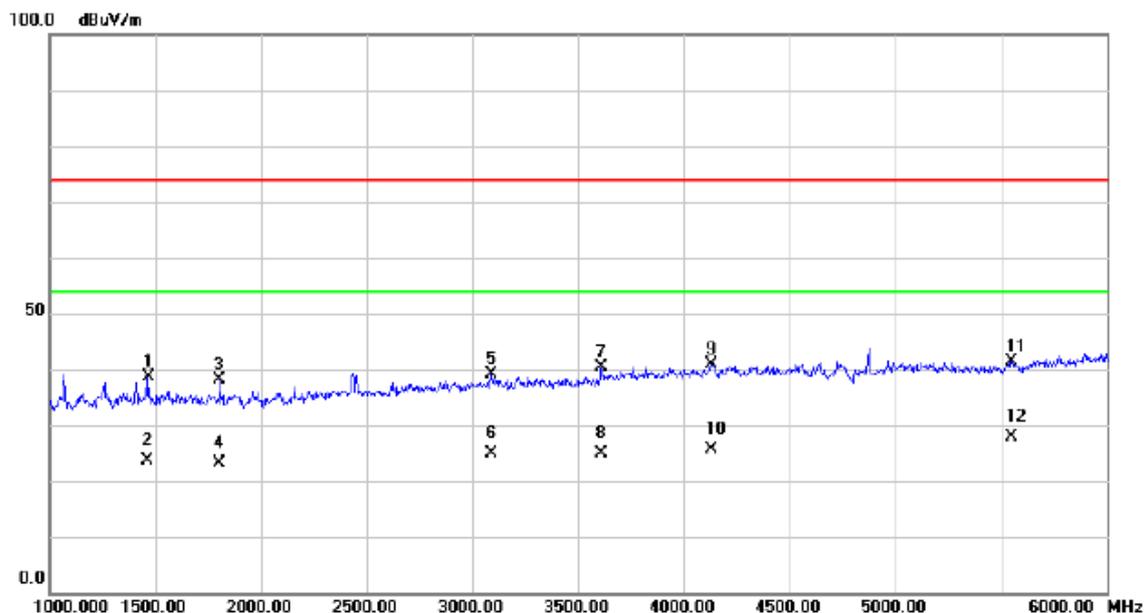

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 1467.500     | 42.46                    | -3.87                   | 38.59                      | 74.00           | -35.41       | peak     |         |
| 2       | 1467.500     | 27.60                    | -3.87                   | 23.73                      | 54.00           | -30.27       | AVG      |         |
| 3       | 1805.000     | 41.47                    | -3.33                   | 38.14                      | 74.00           | -35.86       | peak     |         |
| 4       | 1805.000     | 26.40                    | -3.33                   | 23.07                      | 54.00           | -30.93       | AVG      |         |
| 5       | 3090.000     | 37.47                    | 1.73                    | 39.20                      | 74.00           | -34.80       | peak     |         |
| 6       | 3090.000     | 23.10                    | 1.73                    | 24.83                      | 54.00           | -29.17       | AVG      |         |
| 7       | 3610.000     | 36.92                    | 3.37                    | 40.29                      | 74.00           | -33.71       | peak     |         |
| 8       | 3610.000     | 21.40                    | 3.37                    | 24.77                      | 54.00           | -29.23       | AVG      |         |
| 9       | 4132.500     | 35.77                    | 5.12                    | 40.89                      | 74.00           | -33.11       | peak     |         |
| 10      | 4132.500     | 20.60                    | 5.12                    | 25.72                      | 54.00           | -28.28       | AVG      |         |
| 11      | 5552.500     | 33.24                    | 8.20                    | 41.44                      | 74.00           | -32.56       | peak     |         |
| 12 *    | 5552.500     | 19.70                    | 8.20                    | 27.90                      | 54.00           | -26.10       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

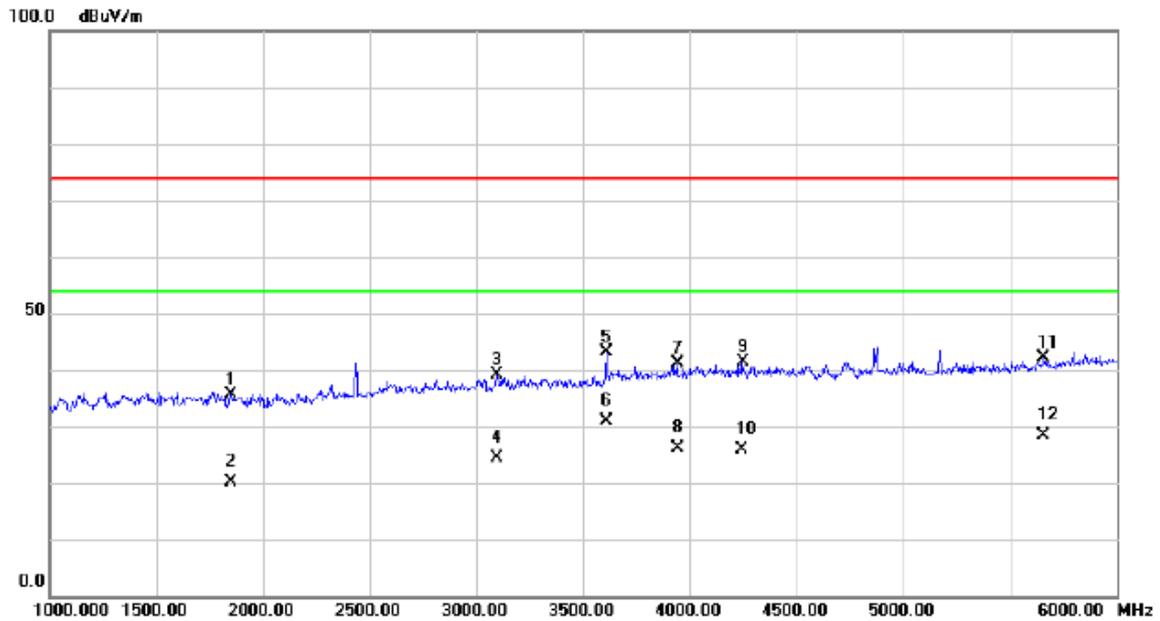

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1852.500     | 39.02                    | -3.27                   | 35.75                      | 74.00           | -38.25       | peak     |         |
| 2   |     | 1852.500     | 23.40                    | -3.27                   | 20.13                      | 54.00           | -33.87       | AVG      |         |
| 3   |     | 3097.500     | 37.30                    | 1.75                    | 39.05                      | 74.00           | -34.95       | peak     |         |
| 4   |     | 3097.500     | 22.60                    | 1.75                    | 24.35                      | 54.00           | -29.65       | AVG      |         |
| 5   |     | 3610.000     | 39.85                    | 3.37                    | 43.22                      | 74.00           | -30.78       | peak     |         |
| 6   | *   | 3610.000     | 27.50                    | 3.37                    | 30.87                      | 54.00           | -23.13       | AVG      |         |
| 7   |     | 3940.000     | 36.36                    | 4.69                    | 41.05                      | 74.00           | -32.95       | peak     |         |
| 8   |     | 3940.000     | 21.40                    | 4.69                    | 26.09                      | 54.00           | -27.91       | AVG      |         |
| 9   |     | 4247.500     | 36.19                    | 5.29                    | 41.48                      | 74.00           | -32.52       | peak     |         |
| 10  |     | 4247.500     | 20.50                    | 5.29                    | 25.79                      | 54.00           | -28.21       | AVG      |         |
| 11  |     | 5655.000     | 33.39                    | 8.62                    | 42.01                      | 74.00           | -31.99       | peak     |         |
| 12  |     | 5655.000     | 19.70                    | 8.62                    | 28.32                      | 54.00           | -25.68       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

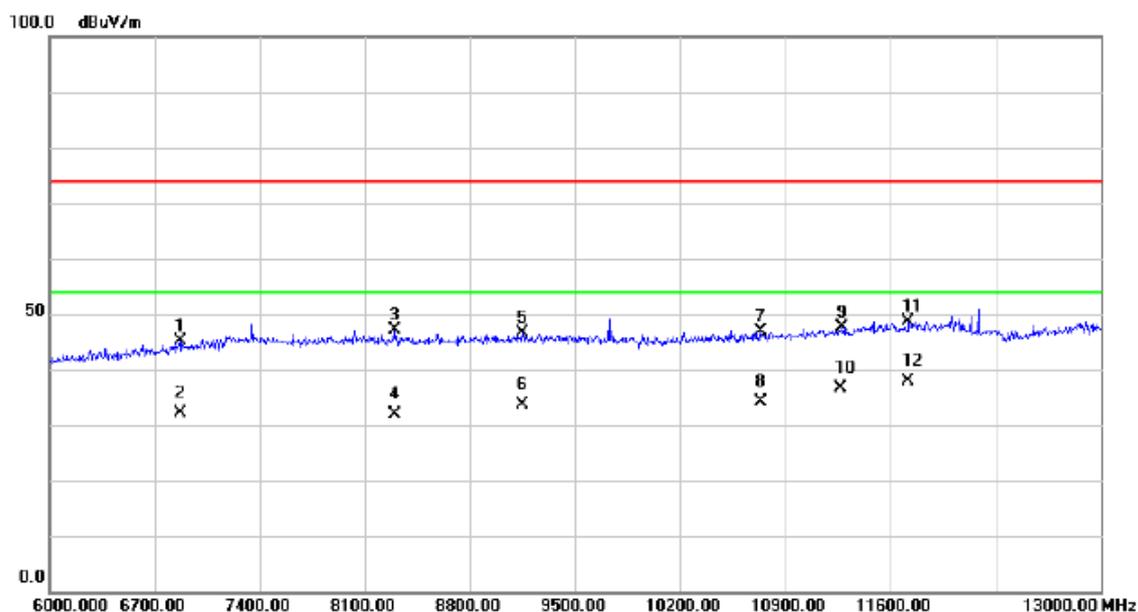

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 6871.500     | 32.45                    | 12.61                   | 45.06                      | 74.00           | -28.94       | peak     |         |
| 2       | 6871.500     | 19.60                    | 12.61                   | 32.21                      | 54.00           | -21.79       | AVG      | X       |
| 3       | 8296.000     | 32.62                    | 14.46                   | 47.08                      | 74.00           | -26.92       | peak     | X       |
| 4       | 8296.000     | 17.50                    | 14.46                   | 31.96                      | 54.00           | -22.04       | AVG      | X       |
| 5       | 9153.500     | 31.31                    | 15.36                   | 46.67                      | 74.00           | -27.33       | peak     | X       |
| 6       | 9153.500     | 18.30                    | 15.36                   | 33.66                      | 54.00           | -20.34       | AVG      | X       |
| 7       | 10735.500    | 29.52                    | 17.28                   | 46.80                      | 74.00           | -27.20       | peak     | X       |
| 8       | 10735.500    | 16.90                    | 17.28                   | 34.18                      | 54.00           | -19.82       | AVG      | X       |
| 9       | 11274.500    | 28.79                    | 18.78                   | 47.57                      | 74.00           | -26.43       | peak     | X       |
| 10      | 11274.500    | 17.80                    | 18.78                   | 36.58                      | 54.00           | -17.42       | AVG      | X       |
| 11      | 11719.000    | 28.50                    | 20.06                   | 48.56                      | 74.00           | -25.44       | peak     | X       |
| 12 *    | 11719.000    | 17.70                    | 20.06                   | 37.76                      | 54.00           | -16.24       | AVG      | X       |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+Idle+BT+2.4GHz WIFI+GPS+Camera on           |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

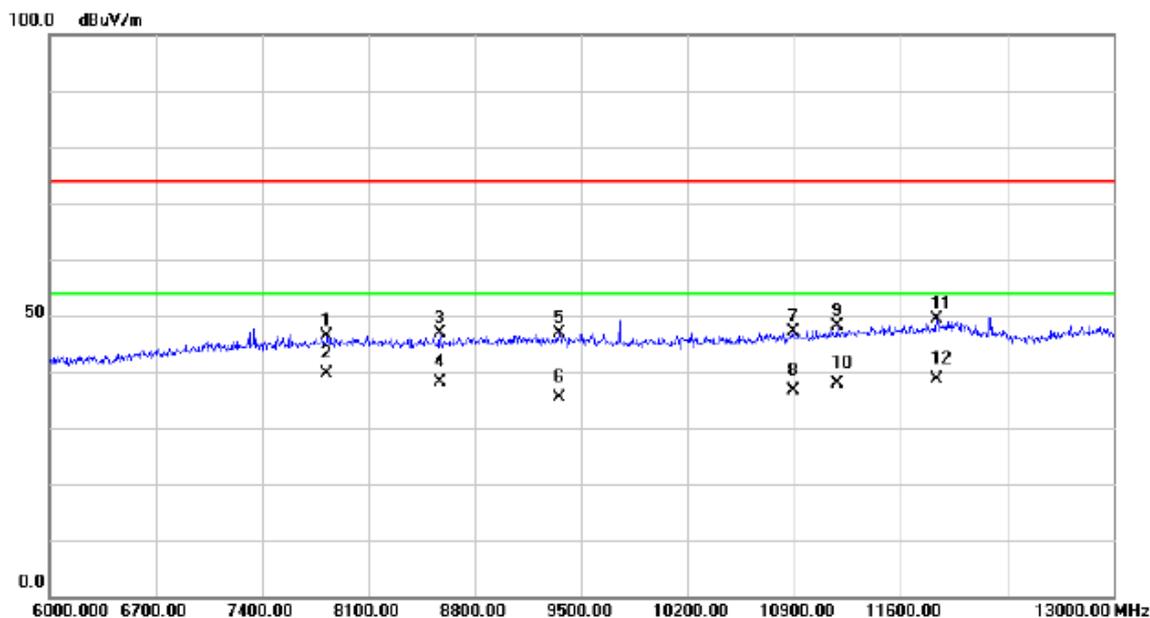

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7827.000     | 32.21                    | 14.24                   | 46.45                      | 74.00           | -27.55       | peak     |         |
| 2   | *   | 7827.000     | 25.40                    | 14.24                   | 39.64                      | 54.00           | -14.36       | AVG      |         |
| 3   |     | 8572.500     | 32.25                    | 14.57                   | 46.82                      | 74.00           | -27.18       | peak     |         |
| 4   |     | 8572.500     | 23.50                    | 14.57                   | 38.07                      | 54.00           | -15.93       | AVG      |         |
| 5   |     | 9353.000     | 31.53                    | 15.39                   | 46.92                      | 74.00           | -27.08       | peak     |         |
| 6   |     | 9353.000     | 20.10                    | 15.39                   | 35.49                      | 54.00           | -18.51       | AVG      |         |
| 7   |     | 10893.000    | 29.45                    | 17.68                   | 47.13                      | 74.00           | -26.87       | peak     |         |
| 8   |     | 10893.000    | 18.90                    | 17.68                   | 36.58                      | 54.00           | -17.42       | AVG      |         |
| 9   |     | 11183.500    | 29.56                    | 18.50                   | 48.06                      | 74.00           | -25.94       | peak     |         |
| 10  |     | 11183.500    | 19.50                    | 18.50                   | 38.00                      | 54.00           | -16.00       | AVG      |         |
| 11  |     | 11838.000    | 28.91                    | 20.38                   | 49.29                      | 74.00           | -24.71       | peak     |         |
| 12  |     | 11838.000    | 18.30                    | 20.38                   | 38.68                      | 54.00           | -15.32       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

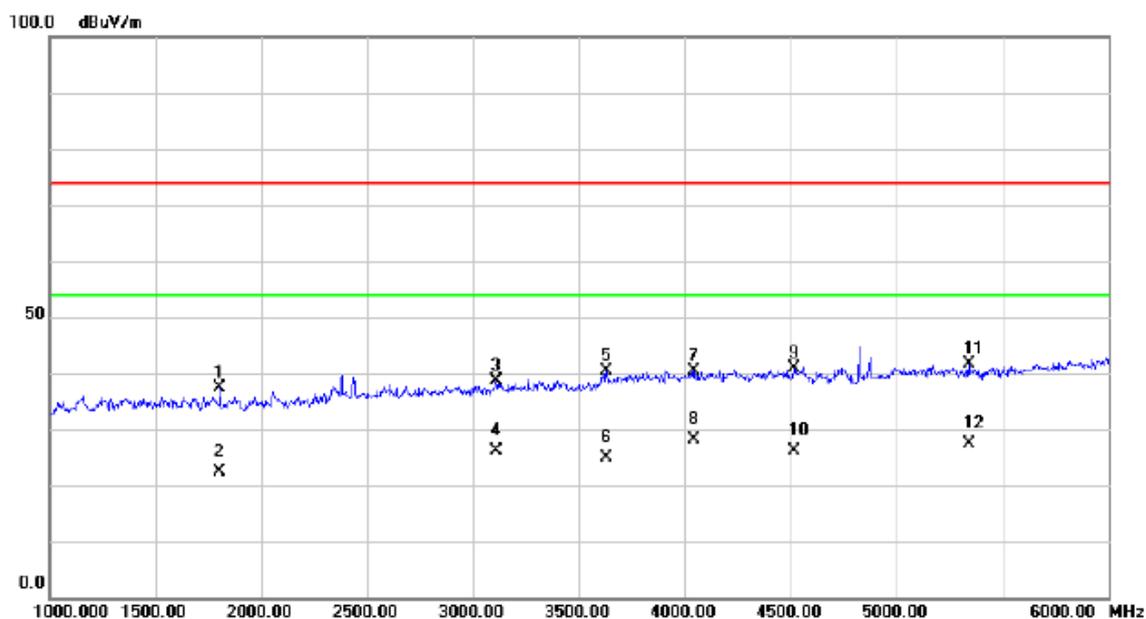

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 1805.000     | 40.83                    | -3.33                   | 37.50                      | 74.00           | -36.50       | peak     |         |
| 2       | 1805.000     | 25.60                    | -3.33                   | 22.27                      | 54.00           | -31.73       | AVG      |         |
| 3       | 3110.000     | 36.77                    | 1.79                    | 38.56                      | 74.00           | -35.44       | peak     |         |
| 4       | 3110.000     | 24.30                    | 1.79                    | 26.09                      | 54.00           | -27.91       | AVG      |         |
| 5       | 3632.500     | 36.86                    | 3.46                    | 40.32                      | 74.00           | -33.68       | peak     |         |
| 6       | 3632.500     | 21.30                    | 3.46                    | 24.76                      | 54.00           | -29.24       | AVG      |         |
| 7       | 4045.000     | 35.43                    | 4.99                    | 40.42                      | 74.00           | -33.58       | peak     |         |
| 8 *     | 4045.000     | 23.10                    | 4.99                    | 28.09                      | 54.00           | -25.91       | AVG      |         |
| 9       | 4515.000     | 35.24                    | 5.71                    | 40.95                      | 74.00           | -33.05       | peak     |         |
| 10      | 4515.000     | 20.50                    | 5.71                    | 26.21                      | 54.00           | -27.79       | AVG      |         |
| 11      | 5340.000     | 33.74                    | 7.77                    | 41.51                      | 74.00           | -32.49       | peak     |         |
| 12      | 5340.000     | 19.70                    | 7.77                    | 27.47                      | 54.00           | -26.53       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

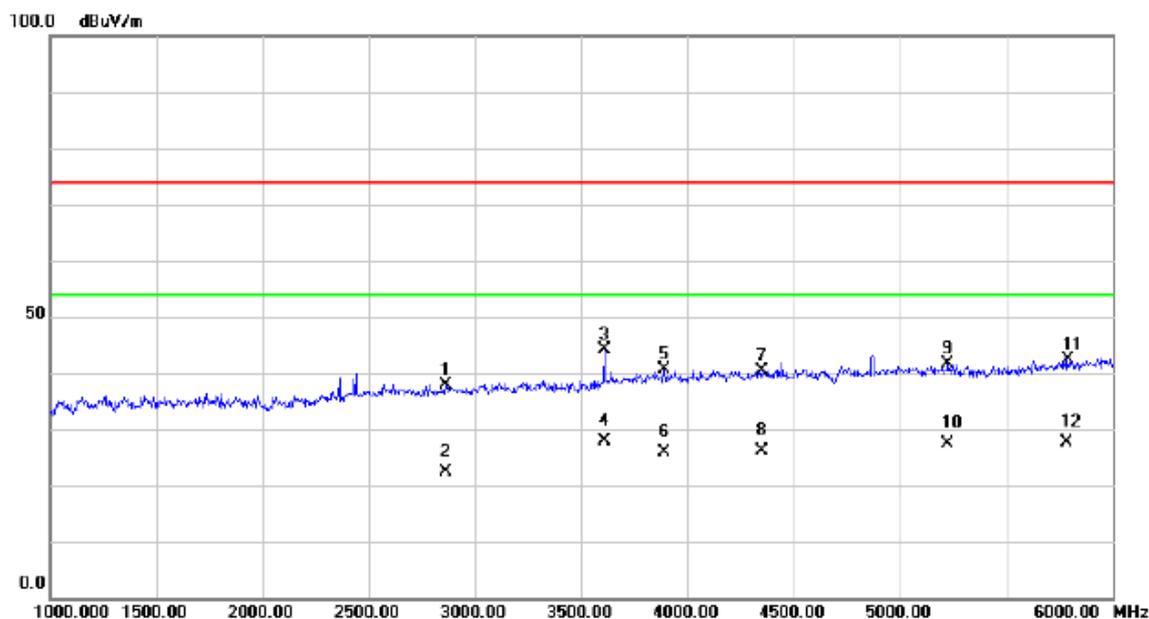

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 2862.500     | 36.95                    | 0.97                    | 37.92                      | 74.00           | -36.08       | peak     |         |
| 2       | 2862.500     | 21.30                    | 0.97                    | 22.27                      | 54.00           | -31.73       | AVG      |         |
| 3       | 3610.000     | 40.69                    | 3.37                    | 44.06                      | 74.00           | -29.94       | peak     |         |
| 4 *     | 3610.000     | 24.60                    | 3.37                    | 27.97                      | 54.00           | -26.03       | AVG      |         |
| 5       | 3892.500     | 36.05                    | 4.49                    | 40.54                      | 74.00           | -33.46       | peak     |         |
| 6       | 3892.500     | 21.50                    | 4.49                    | 25.99                      | 54.00           | -28.01       | AVG      |         |
| 7       | 4352.500     | 35.05                    | 5.43                    | 40.48                      | 74.00           | -33.52       | peak     |         |
| 8       | 4352.500     | 20.60                    | 5.43                    | 26.03                      | 54.00           | -27.97       | AVG      |         |
| 9       | 5225.000     | 34.10                    | 7.60                    | 41.70                      | 74.00           | -32.30       | peak     |         |
| 10      | 5225.000     | 19.80                    | 7.60                    | 27.40                      | 54.00           | -26.60       | AVG      |         |
| 11      | 5787.500     | 33.15                    | 9.15                    | 42.30                      | 74.00           | -31.70       | peak     |         |
| 12      | 5787.500     | 18.50                    | 9.15                    | 27.65                      | 54.00           | -26.35       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

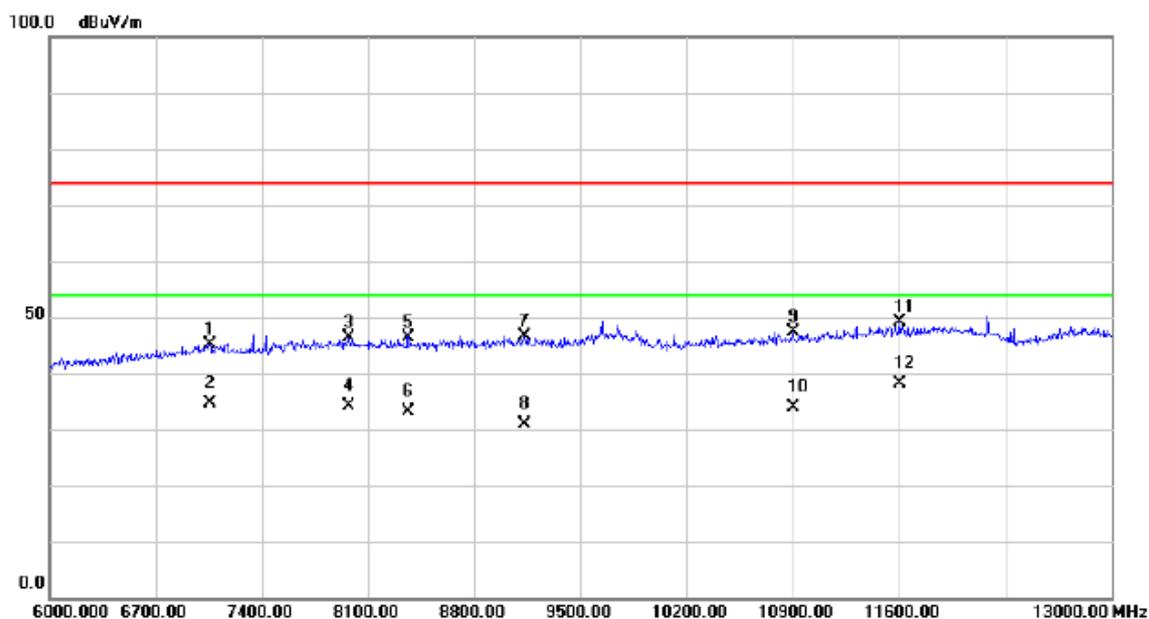

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7057.000     | 31.94                    | 13.22                   | 45.16                      | 74.00           | -28.84       | peak     |         |
| 2   |     | 7057.000     | 21.30                    | 13.22                   | 34.52                      | 54.00           | -19.48       | AVG      |         |
| 3   |     | 7977.500     | 32.00                    | 14.45                   | 46.45                      | 74.00           | -27.55       | peak     |         |
| 4   |     | 7977.500     | 19.80                    | 14.45                   | 34.25                      | 54.00           | -19.75       | AVG      |         |
| 5   |     | 8366.000     | 32.06                    | 14.44                   | 46.50                      | 74.00           | -27.50       | peak     |         |
| 6   |     | 8366.000     | 18.60                    | 14.44                   | 33.04                      | 54.00           | -20.96       | AVG      |         |
| 7   |     | 9129.000     | 31.34                    | 15.35                   | 46.69                      | 74.00           | -27.31       | peak     |         |
| 8   |     | 9129.000     | 15.60                    | 15.35                   | 30.95                      | 54.00           | -23.05       | AVG      |         |
| 9   |     | 10900.00     | 29.62                    | 17.70                   | 47.32                      | 74.00           | -26.68       | peak     |         |
| 10  |     | 10900.00     | 16.20                    | 17.70                   | 33.90                      | 54.00           | -20.10       | AVG      |         |
| 11  |     | 11603.50     | 29.41                    | 19.74                   | 49.15                      | 74.00           | -24.85       | peak     |         |
| 12  | *   | 11603.50     | 18.30                    | 19.74                   | 38.04                      | 54.00           | -15.96       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+GSM+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

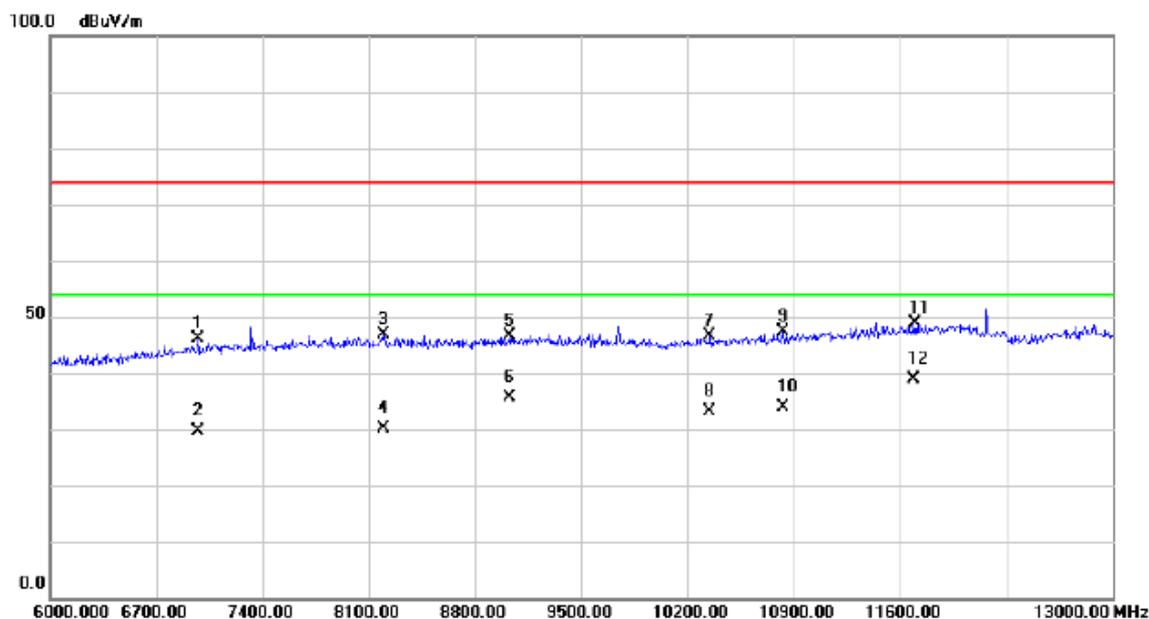

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 6976.500     | 33.06                    | 13.04                   | 46.10                      | 74.00           | -27.90       | peak     |         |
| 2   |     | 6976.500     | 16.50                    | 13.04                   | 29.54                      | 54.00           | -24.46       | AVG      |         |
| 3   |     | 8198.000     | 32.46                    | 14.46                   | 46.92                      | 74.00           | -27.08       | peak     |         |
| 4   |     | 8198.000     | 15.70                    | 14.46                   | 30.16                      | 54.00           | -23.84       | AVG      |         |
| 5   |     | 9031.000     | 31.26                    | 15.33                   | 46.59                      | 74.00           | -27.41       | peak     |         |
| 6   |     | 9031.000     | 20.30                    | 15.33                   | 35.63                      | 54.00           | -18.37       | AVG      |         |
| 7   |     | 10347.00     | 30.46                    | 16.28                   | 46.74                      | 74.00           | -27.26       | peak     |         |
| 8   |     | 10347.00     | 16.80                    | 16.28                   | 33.08                      | 54.00           | -20.92       | AVG      |         |
| 9   |     | 10833.50     | 29.87                    | 17.52                   | 47.39                      | 74.00           | -26.61       | peak     |         |
| 10  |     | 10833.50     | 16.40                    | 17.52                   | 33.92                      | 54.00           | -20.08       | AVG      |         |
| 11  |     | 11694.50     | 29.01                    | 19.99                   | 49.00                      | 74.00           | -25.00       | peak     |         |
| 12  | *   | 11694.50     | 18.90                    | 19.99                   | 38.89                      | 54.00           | -15.11       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                    |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

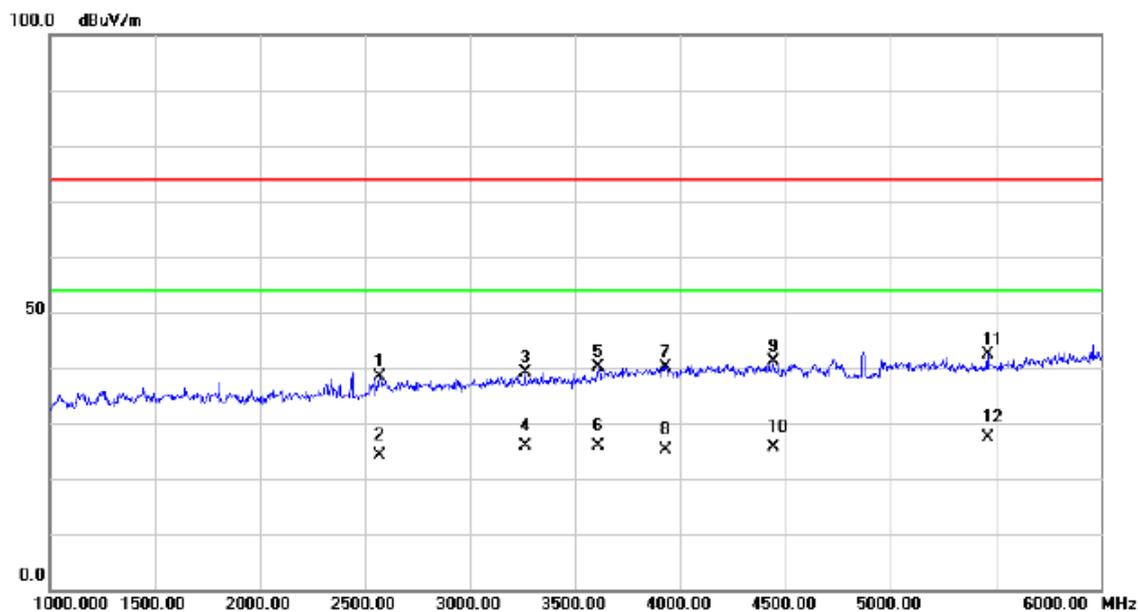

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 2572.500     | 38.46                    | -0.07                   | 38.39                      | 74.00           | -35.61       | peak     |         |
| 2   |     | 2572.500     | 24.30                    | -0.07                   | 24.23                      | 54.00           | -29.77       | AVG      |         |
| 3   |     | 3262.500     | 36.99                    | 2.24                    | 39.23                      | 74.00           | -34.77       | peak     |         |
| 4   |     | 3262.500     | 23.60                    | 2.24                    | 25.84                      | 54.00           | -28.16       | AVG      |         |
| 5   |     | 3610.000     | 36.71                    | 3.37                    | 40.08                      | 74.00           | -33.92       | peak     |         |
| 6   |     | 3610.000     | 22.50                    | 3.37                    | 25.87                      | 54.00           | -28.13       | AVG      |         |
| 7   |     | 3930.000     | 35.59                    | 4.65                    | 40.24                      | 74.00           | -33.76       | peak     |         |
| 8   |     | 3930.000     | 20.60                    | 4.65                    | 25.25                      | 54.00           | -28.75       | AVG      |         |
| 9   |     | 4442.500     | 35.66                    | 5.58                    | 41.24                      | 74.00           | -32.76       | peak     |         |
| 10  |     | 4442.500     | 20.10                    | 5.58                    | 25.68                      | 54.00           | -28.32       | AVG      |         |
| 11  |     | 5462.500     | 34.52                    | 7.94                    | 42.46                      | 74.00           | -31.54       | peak     |         |
| 12  | *   | 5462.500     | 19.40                    | 7.94                    | 27.34                      | 54.00           | -26.66       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                    |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

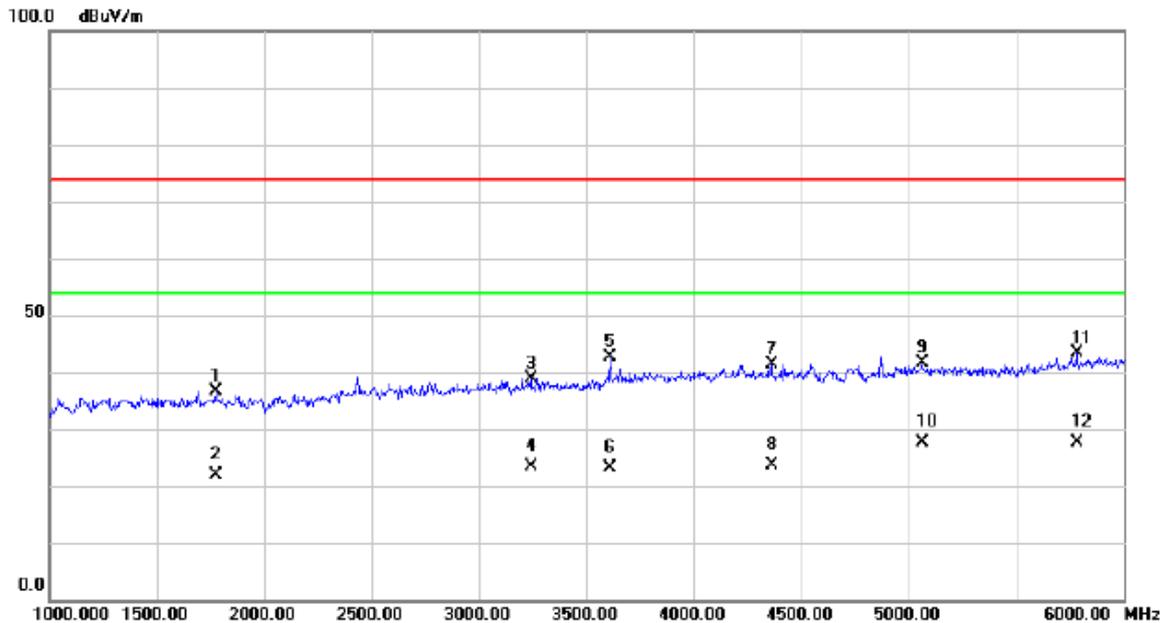

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1777.500     | 40.02                    | -3.38                   | 36.64                      | 74.00           | -37.36       | peak     |         |
| 2   |     | 1777.500     | 25.30                    | -3.38                   | 21.92                      | 54.00           | -32.08       | AVG      |         |
| 3   |     | 3242.500     | 36.74                    | 2.18                    | 38.92                      | 74.00           | -35.08       | peak     |         |
| 4   |     | 3242.500     | 21.20                    | 2.18                    | 23.38                      | 54.00           | -30.62       | AVG      |         |
| 5   |     | 3610.000     | 39.31                    | 3.37                    | 42.68                      | 74.00           | -31.32       | peak     |         |
| 6   |     | 3610.000     | 19.80                    | 3.37                    | 23.17                      | 54.00           | -30.83       | AVG      |         |
| 7   |     | 4362.500     | 36.03                    | 5.45                    | 41.48                      | 74.00           | -32.52       | peak     |         |
| 8   |     | 4362.500     | 18.30                    | 5.45                    | 23.75                      | 54.00           | -30.25       | AVG      |         |
| 9   |     | 5060.000     | 34.18                    | 7.37                    | 41.55                      | 74.00           | -32.45       | peak     |         |
| 10  |     | 5060.000     | 20.30                    | 7.37                    | 27.67                      | 54.00           | -26.33       | AVG      |         |
| 11  |     | 5782.500     | 34.26                    | 9.13                    | 43.39                      | 74.00           | -30.61       | peak     |         |
| 12  | *   | 5782.500     | 18.60                    | 9.13                    | 27.73                      | 54.00           | -26.27       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                    |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

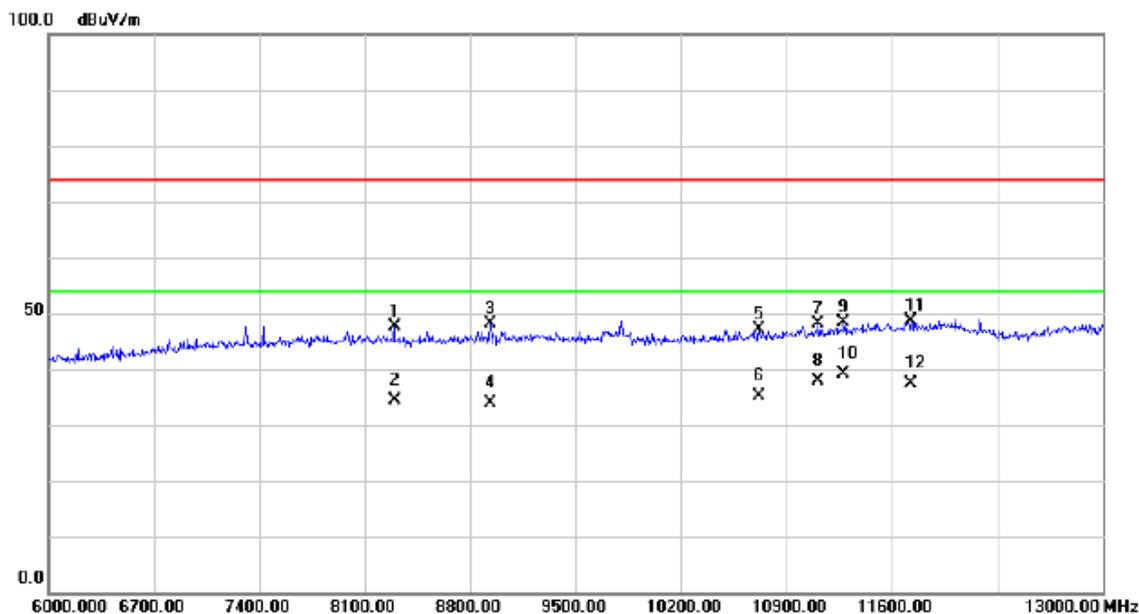

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8296.000     | 33.12                    | 14.46                   | 47.58                      | 74.00           | -26.42       | peak     |         |
| 2   |     | 8296.000     | 19.80                    | 14.46                   | 34.26                      | 54.00           | -19.74       | AVG      |         |
| 3   |     | 8936.500     | 32.88                    | 15.21                   | 48.09                      | 74.00           | -25.91       | peak     |         |
| 4   |     | 8936.500     | 18.60                    | 15.21                   | 33.81                      | 54.00           | -20.19       | AVG      |         |
| 5   |     | 10721.50     | 29.81                    | 17.24                   | 47.05                      | 74.00           | -26.95       | peak     |         |
| 6   |     | 10721.50     | 17.90                    | 17.24                   | 35.14                      | 54.00           | -18.86       | AVG      |         |
| 7   |     | 11110.00     | 29.96                    | 18.29                   | 48.25                      | 74.00           | -25.75       | peak     |         |
| 8   |     | 11110.00     | 19.50                    | 18.29                   | 37.79                      | 54.00           | -16.21       | AVG      |         |
| 9   |     | 11278.00     | 29.69                    | 18.79                   | 48.48                      | 74.00           | -25.52       | peak     |         |
| 10  | *   | 11278.00     | 20.30                    | 18.79                   | 39.09                      | 54.00           | -14.91       | AVG      |         |
| 11  |     | 11729.50     | 28.55                    | 20.09                   | 48.64                      | 74.00           | -25.36       | peak     |         |
| 12  |     | 11729.50     | 17.20                    | 20.09                   | 37.29                      | 54.00           | -16.71       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+WCDMA+BT+2.4GHz WIFI+GPS                    |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

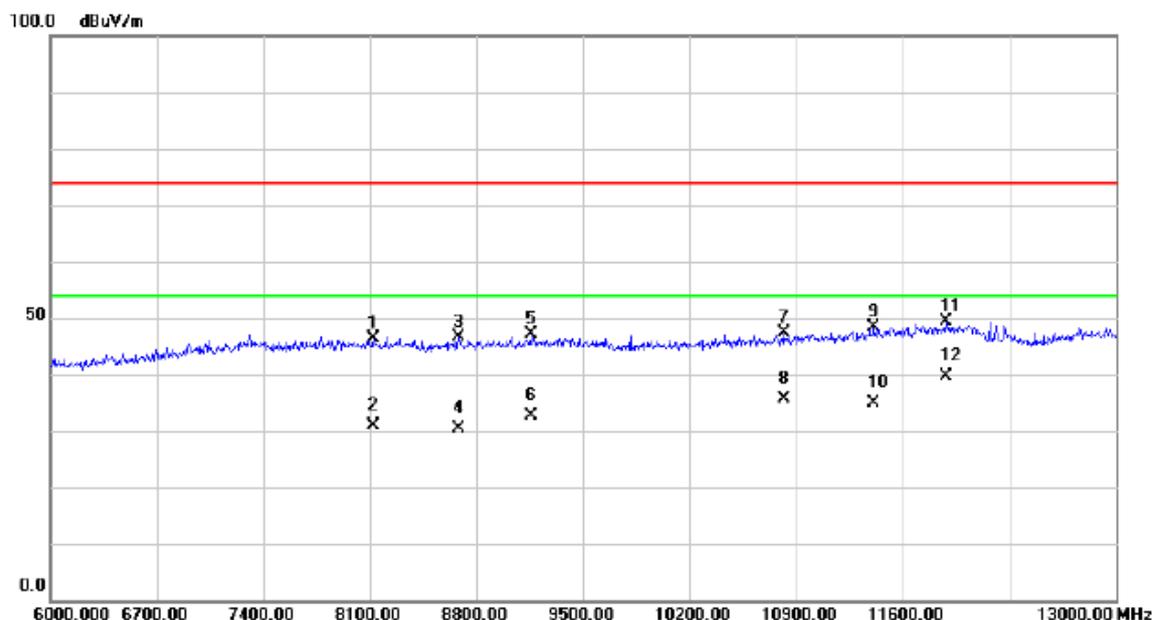

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8124.500     | 31.87                    | 14.47                   | 46.34                      | 74.00           | -27.66       | peak     |         |
| 2   |     | 8124.500     | 16.50                    | 14.47                   | 30.97                      | 54.00           | -23.03       | AVG      |         |
| 3   |     | 8681.000     | 31.85                    | 14.75                   | 46.60                      | 74.00           | -27.40       | peak     |         |
| 4   |     | 8681.000     | 15.60                    | 14.75                   | 30.35                      | 54.00           | -23.65       | AVG      |         |
| 5   |     | 9160.500     | 31.73                    | 15.35                   | 47.08                      | 74.00           | -26.92       | peak     |         |
| 6   |     | 9160.500     | 17.30                    | 15.35                   | 32.65                      | 54.00           | -21.35       | AVG      |         |
| 7   |     | 10816.00     | 29.78                    | 17.48                   | 47.26                      | 74.00           | -26.74       | peak     |         |
| 8   |     | 10816.00     | 18.20                    | 17.48                   | 35.68                      | 54.00           | -18.32       | AVG      |         |
| 9   |     | 11411.00     | 29.22                    | 19.19                   | 48.41                      | 74.00           | -25.59       | peak     |         |
| 10  |     | 11411.00     | 15.60                    | 19.19                   | 34.79                      | 54.00           | -19.21       | AVG      |         |
| 11  |     | 11880.00     | 28.90                    | 20.49                   | 49.39                      | 74.00           | -24.61       | peak     |         |
| 12  | *   | 11880.00     | 19.20                    | 20.49                   | 39.69                      | 54.00           | -14.31       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

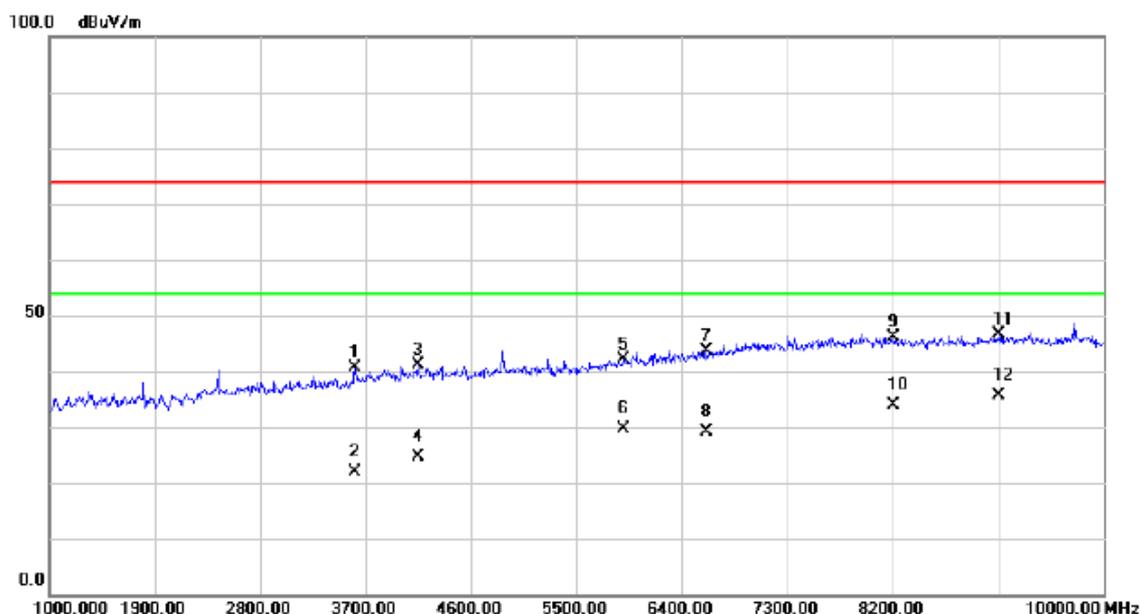

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 3610.000     | 37.22                    | 3.37                    | 40.59                      | 74.00           | -33.41       | peak     |         |
| 2   |     | 3610.000     | 18.60                    | 3.37                    | 21.97                      | 54.00           | -32.03       | AVG      |         |
| 3   |     | 4154.500     | 36.10                    | 5.14                    | 41.24                      | 74.00           | -32.76       | peak     |         |
| 4   |     | 4154.500     | 19.50                    | 5.14                    | 24.64                      | 54.00           | -29.36       | AVG      |         |
| 5   |     | 5905.000     | 32.51                    | 9.63                    | 42.14                      | 74.00           | -31.86       | peak     |         |
| 6   |     | 5905.000     | 20.10                    | 9.63                    | 29.73                      | 54.00           | -24.27       | AVG      |         |
| 7   |     | 6607.000     | 32.07                    | 11.48                   | 43.55                      | 74.00           | -30.45       | peak     |         |
| 8   |     | 6607.000     | 17.60                    | 11.48                   | 29.08                      | 54.00           | -24.92       | AVG      |         |
| 9   |     | 8209.000     | 31.69                    | 14.46                   | 46.15                      | 74.00           | -27.85       | peak     |         |
| 10  |     | 8209.000     | 19.40                    | 14.46                   | 33.86                      | 54.00           | -20.14       | AVG      |         |
| 11  |     | 9109.000     | 31.17                    | 15.35                   | 46.52                      | 74.00           | -27.48       | peak     |         |
| 12  | *   | 9109.000     | 20.40                    | 15.35                   | 35.75                      | 54.00           | -18.25       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

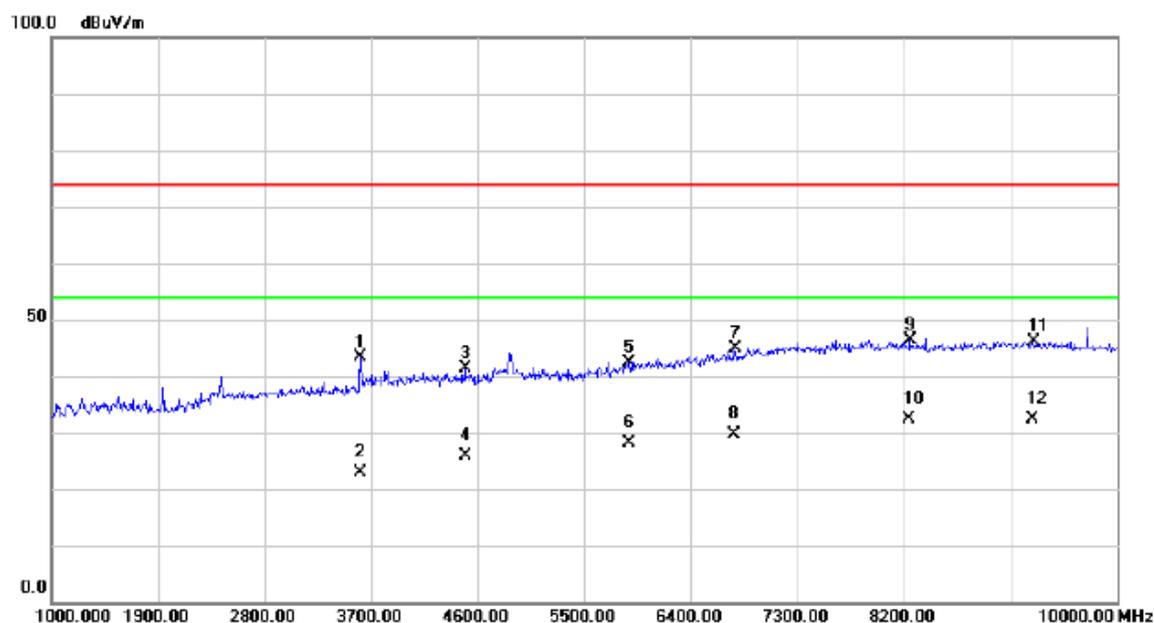

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 3610.000     | 39.97                    | 3.37                    | 43.34                      | 74.00           | -30.66       | peak     |         |
| 2   |     | 3610.000     | 19.60                    | 3.37                    | 22.97                      | 54.00           | -31.03       | AVG      |         |
| 3   |     | 4492.000     | 35.67                    | 5.64                    | 41.31                      | 74.00           | -32.69       | peak     |         |
| 4   |     | 4492.000     | 20.30                    | 5.64                    | 25.94                      | 54.00           | -28.06       | AVG      |         |
| 5   |     | 5878.000     | 32.88                    | 9.51                    | 42.39                      | 74.00           | -31.61       | peak     |         |
| 6   |     | 5878.000     | 18.60                    | 9.51                    | 28.11                      | 54.00           | -25.89       | AVG      |         |
| 7   |     | 6773.500     | 32.59                    | 12.20                   | 44.79                      | 74.00           | -29.21       | peak     |         |
| 8   |     | 6773.500     | 17.50                    | 12.20                   | 29.70                      | 54.00           | -24.30       | AVG      |         |
| 9   |     | 8249.500     | 31.98                    | 14.46                   | 46.44                      | 74.00           | -27.56       | peak     |         |
| 10  | *   | 8249.500     | 17.90                    | 14.46                   | 32.36                      | 54.00           | -21.64       | AVG      |         |
| 11  |     | 9293.500     | 30.75                    | 15.39                   | 46.14                      | 74.00           | -27.86       | peak     |         |
| 12  |     | 9293.500     | 16.90                    | 15.39                   | 32.29                      | 54.00           | -21.71       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Vertical

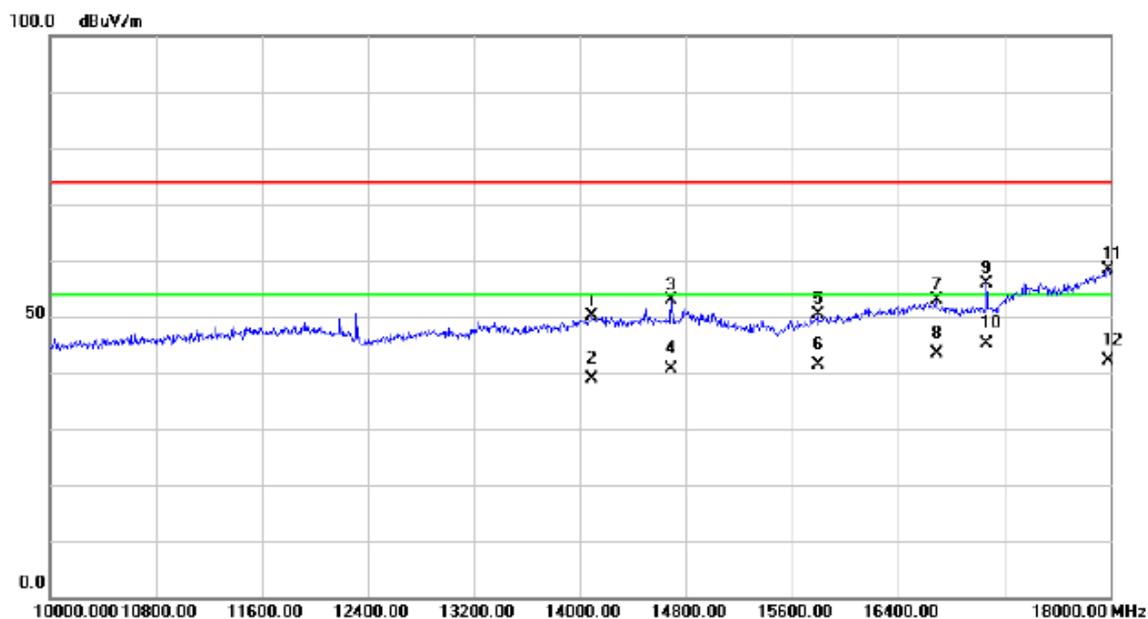

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 14092.00     | 27.34                    | 22.70                   | 50.04                      | 74.00           | -23.96       | peak     |         |
| 2       | 14092.00     | 16.30                    | 22.70                   | 39.00                      | 54.00           | -15.00       | AVG      |         |
| 3       | 14692.00     | 29.65                    | 23.25                   | 52.90                      | 74.00           | -21.10       | peak     |         |
| 4       | 14692.00     | 17.26                    | 23.25                   | 40.51                      | 54.00           | -13.49       | AVG      |         |
| 5       | 15792.00     | 28.19                    | 22.09                   | 50.28                      | 74.00           | -23.72       | peak     |         |
| 6       | 15792.00     | 19.20                    | 22.09                   | 41.29                      | 54.00           | -12.71       | AVG      |         |
| 7       | 16692.00     | 27.95                    | 24.90                   | 52.85                      | 74.00           | -21.15       | peak     |         |
| 8       | 16692.00     | 18.50                    | 24.90                   | 43.40                      | 54.00           | -10.60       | AVG      |         |
| 9       | 17068.00     | 30.04                    | 25.90                   | 55.94                      | 74.00           | -18.06       | peak     |         |
| 10 *    | 17068.00     | 19.24                    | 25.90                   | 45.14                      | 54.00           | -8.86        | AVG      |         |
| 11      | 17984.00     | 26.84                    | 31.49                   | 58.33                      | 74.00           | -15.67       | peak     |         |
| 12      | 17984.00     | 10.75                    | 31.49                   | 42.24                      | 54.00           | -11.76       | AVG      |         |

|               |   |
|---------------|---|
| Test Voltage: | AC 120V/60Hz  |
| Test Mode:    | Adapter+LTE+BT+2.4GHz WIFI+GPS                      |
| Note:         | Adapter: Salcomp +USB Cable: FOXCONN +Battery: SCUD |


## Horizontal

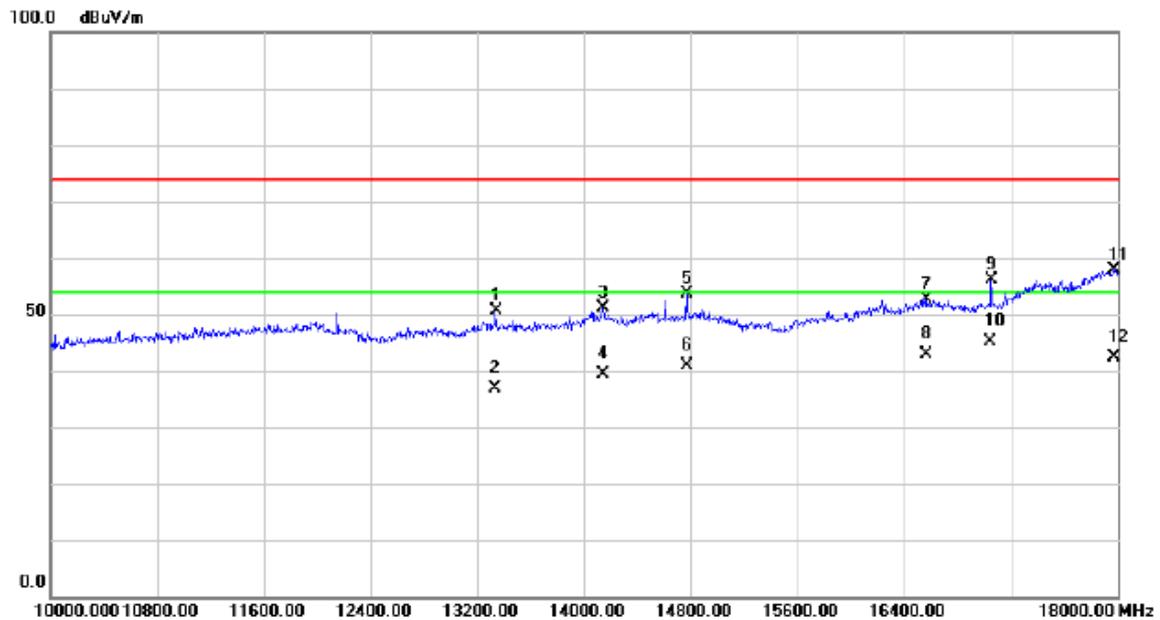

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 13340.00     | 28.88                    | 21.64                   | 50.52                      | 74.00           | -23.48       | peak     |         |
| 2       | 13340.00     | 15.20                    | 21.64                   | 36.84                      | 54.00           | -17.16       | AVG      |         |
| 3       | 14144.00     | 28.26                    | 22.79                   | 51.05                      | 74.00           | -22.95       | peak     |         |
| 4       | 14144.00     | 16.50                    | 22.79                   | 39.29                      | 54.00           | -14.71       | AVG      |         |
| 5       | 14772.00     | 30.50                    | 23.16                   | 53.66                      | 74.00           | -20.34       | peak     |         |
| 6       | 14772.00     | 17.61                    | 23.16                   | 40.77                      | 54.00           | -13.23       | AVG      |         |
| 7       | 16564.00     | 28.02                    | 24.63                   | 52.65                      | 74.00           | -21.35       | peak     |         |
| 8       | 16564.00     | 18.30                    | 24.63                   | 42.93                      | 54.00           | -11.07       | AVG      |         |
| 9       | 17052.00     | 30.40                    | 25.82                   | 56.22                      | 74.00           | -17.78       | peak     |         |
| 10 *    | 17052.00     | 19.43                    | 25.82                   | 45.25                      | 54.00           | -8.75        | AVG      |         |
| 11      | 17972.00     | 26.54                    | 31.41                   | 57.95                      | 74.00           | -16.05       | peak     |         |
| 12      | 17972.00     | 10.93                    | 31.41                   | 42.34                      | 54.00           | -11.66       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


## Vertical

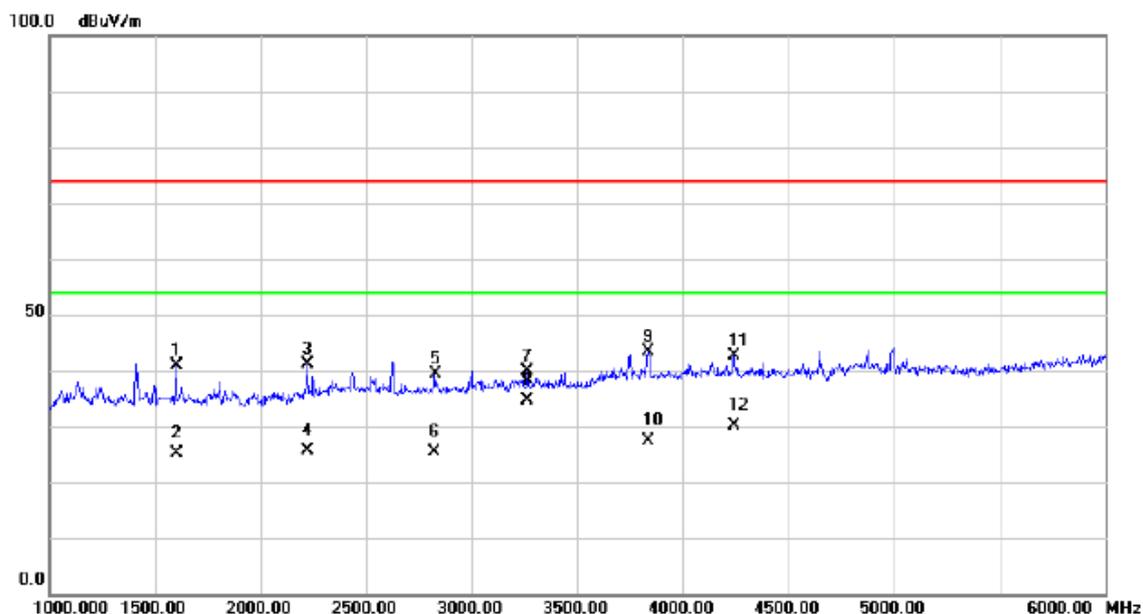

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 1600.000     | 44.44                    | -3.62                   | 40.82                      | 74.00           | -33.18       | peak     |         |
| 2       | 1600.000     | 28.70                    | -3.62                   | 25.08                      | 54.00           | -28.92       | AVG      |         |
| 3       | 2222.500     | 43.07                    | -1.85                   | 41.22                      | 74.00           | -32.78       | peak     |         |
| 4       | 2222.500     | 27.60                    | -1.85                   | 25.75                      | 54.00           | -28.25       | AVG      |         |
| 5       | 2827.500     | 38.44                    | 0.84                    | 39.28                      | 74.00           | -34.72       | peak     |         |
| 6       | 2827.500     | 24.60                    | 0.84                    | 25.44                      | 54.00           | -28.56       | AVG      |         |
| 7       | 3262.500     | 37.55                    | 2.24                    | 39.79                      | 74.00           | -34.21       | peak     |         |
| 8 *     | 3262.500     | 32.40                    | 2.24                    | 34.64                      | 54.00           | -19.36       | AVG      |         |
| 9       | 3837.500     | 39.03                    | 4.27                    | 43.30                      | 74.00           | -30.70       | peak     |         |
| 10      | 3837.500     | 23.10                    | 4.27                    | 27.37                      | 54.00           | -26.63       | AVG      |         |
| 11      | 4240.000     | 37.31                    | 5.28                    | 42.59                      | 74.00           | -31.41       | peak     |         |
| 12      | 4240.000     | 24.80                    | 5.28                    | 30.08                      | 54.00           | -23.92       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


## Horizontal

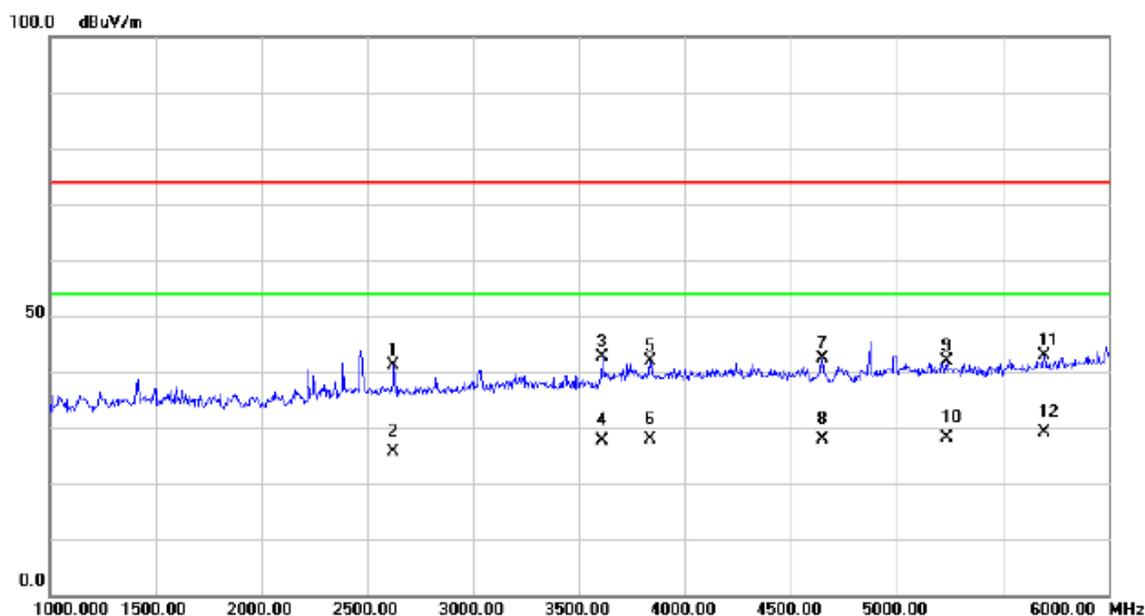

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1   |     | 2625.000 | 40.91         | 0.11           | 41.02       | 74.00  | -32.98 | peak     |         |
| 2   |     | 2625.000 | 25.40         | 0.11           | 25.51       | 54.00  | -28.49 | AVG      |         |
| 3   |     | 3610.000 | 39.20         | 3.37           | 42.57       | 74.00  | -31.43 | peak     |         |
| 4   |     | 3610.000 | 24.30         | 3.37           | 27.67       | 54.00  | -26.33 | AVG      |         |
| 5   |     | 3835.000 | 37.64         | 4.26           | 41.90       | 74.00  | -32.10 | peak     |         |
| 6   |     | 3835.000 | 23.70         | 4.26           | 27.96       | 54.00  | -26.04 | AVG      |         |
| 7   |     | 4652.500 | 36.30         | 6.16           | 42.46       | 74.00  | -31.54 | peak     |         |
| 8   |     | 4652.500 | 21.60         | 6.16           | 27.76       | 54.00  | -26.24 | AVG      |         |
| 9   |     | 5237.500 | 34.28         | 7.63           | 41.91       | 74.00  | -32.09 | peak     |         |
| 10  |     | 5237.500 | 20.40         | 7.63           | 28.03       | 54.00  | -25.97 | AVG      |         |
| 11  |     | 5697.500 | 34.17         | 8.78           | 42.95       | 74.00  | -31.05 | peak     |         |
| 12  | *   | 5697.500 | 20.30         | 8.78           | 29.08       | 54.00  | -24.92 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


## Vertical

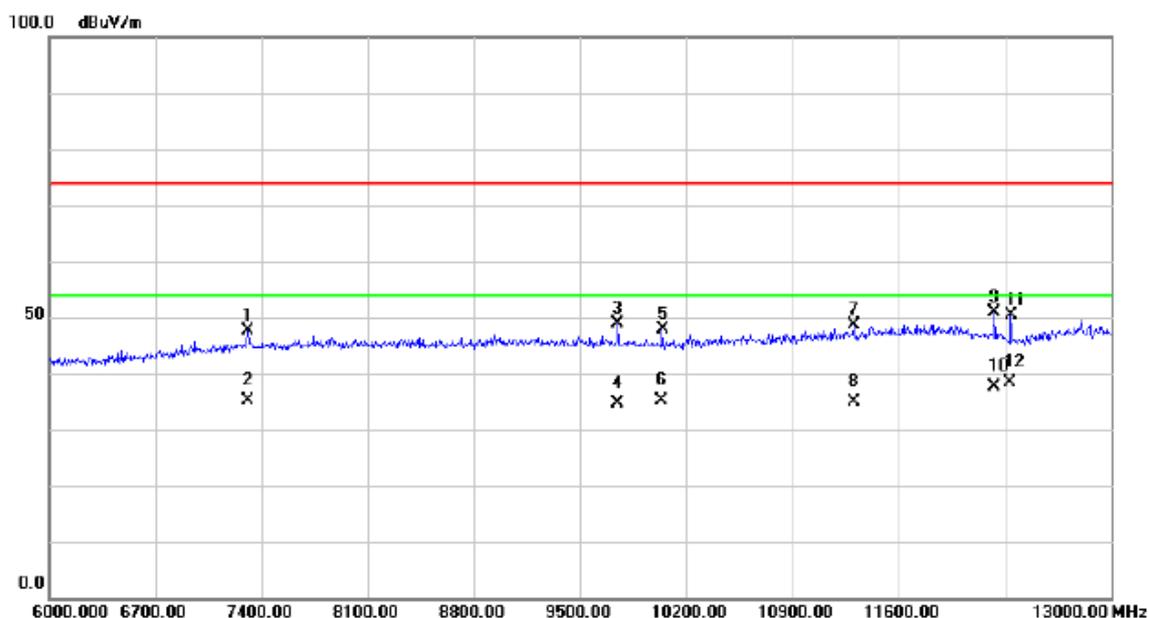

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7312.500     | 34.02                    | 13.55                   | 47.57                      | 74.00           | -26.43       | peak     |         |
| 2   |     | 7312.500     | 21.57                    | 13.55                   | 35.12                      | 54.00           | -18.88       | AVG      |         |
| 3   |     | 9748.500     | 33.44                    | 15.41                   | 48.85                      | 74.00           | -25.15       | peak     |         |
| 4   |     | 9748.500     | 19.34                    | 15.41                   | 34.75                      | 54.00           | -19.25       | AVG      |         |
| 5   |     | 10042.500    | 32.29                    | 15.50                   | 47.79                      | 74.00           | -26.21       | peak     |         |
| 6   |     | 10042.500    | 19.61                    | 15.50                   | 35.11                      | 54.00           | -18.89       | AVG      |         |
| 7   |     | 11306.000    | 29.81                    | 18.88                   | 48.69                      | 74.00           | -25.31       | peak     |         |
| 8   |     | 11306.000    | 15.90                    | 18.88                   | 34.78                      | 54.00           | -19.22       | AVG      |         |
| 9   |     | 12233.500    | 30.02                    | 20.85                   | 50.87                      | 74.00           | -23.13       | peak     |         |
| 10  |     | 12233.500    | 16.68                    | 20.85                   | 37.53                      | 54.00           | -16.47       | AVG      |         |
| 11  |     | 12338.500    | 29.42                    | 20.87                   | 50.29                      | 74.00           | -23.71       | peak     |         |
| 12  | *   | 12338.500    | 17.39                    | 20.87                   | 38.26                      | 54.00           | -15.74       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: HONGLIN                       |


## Horizontal

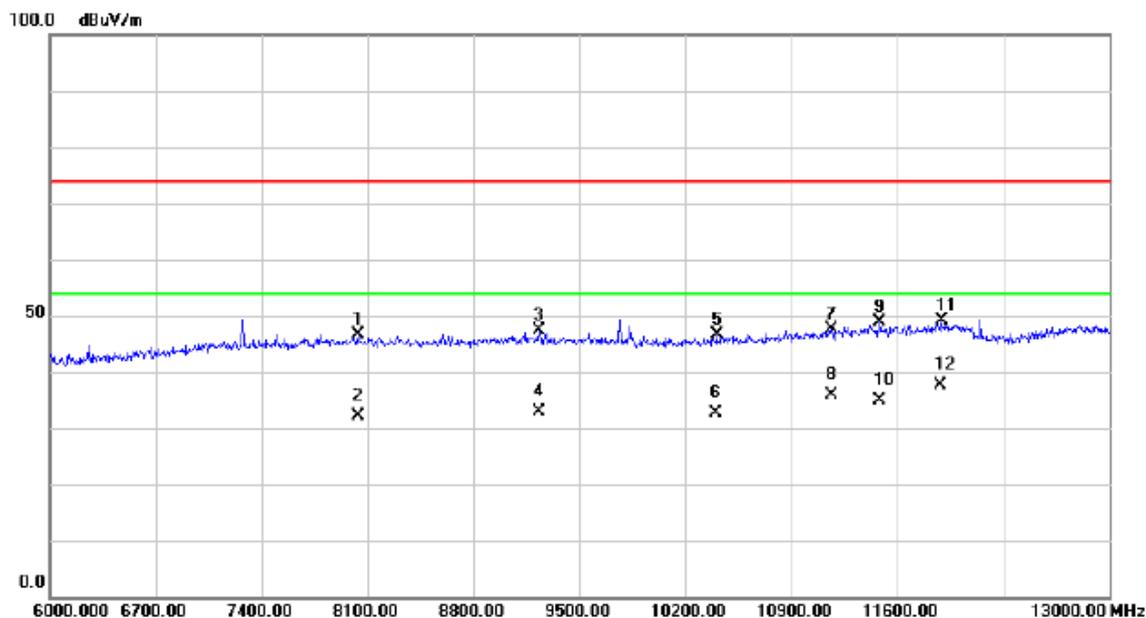

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8037.000     | 32.19                    | 14.47                   | 46.66                      | 74.00           | -27.34       | peak     |         |
| 2   |     | 8037.000     | 17.60                    | 14.47                   | 32.07                      | 54.00           | -21.93       | AVG      |         |
| 3   |     | 9234.000     | 32.04                    | 15.37                   | 47.41                      | 74.00           | -26.59       | peak     |         |
| 4   |     | 9234.000     | 17.60                    | 15.37                   | 32.97                      | 54.00           | -21.03       | AVG      |         |
| 5   |     | 10406.50     | 30.20                    | 16.43                   | 46.63                      | 74.00           | -27.37       | peak     |         |
| 6   |     | 10406.50     | 16.30                    | 16.43                   | 32.73                      | 54.00           | -21.27       | AVG      |         |
| 7   |     | 11169.50     | 29.04                    | 18.47                   | 47.51                      | 74.00           | -26.49       | peak     |         |
| 8   |     | 11169.50     | 17.50                    | 18.47                   | 35.97                      | 54.00           | -18.03       | AVG      |         |
| 9   |     | 11484.50     | 29.50                    | 19.41                   | 48.91                      | 74.00           | -25.09       | peak     |         |
| 10  |     | 11484.50     | 15.40                    | 19.41                   | 34.81                      | 54.00           | -19.19       | AVG      |         |
| 11  |     | 11890.50     | 28.58                    | 20.52                   | 49.10                      | 74.00           | -24.90       | peak     |         |
| 12  | *   | 11890.50     | 17.10                    | 20.52                   | 37.62                      | 54.00           | -16.38       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


## Vertical

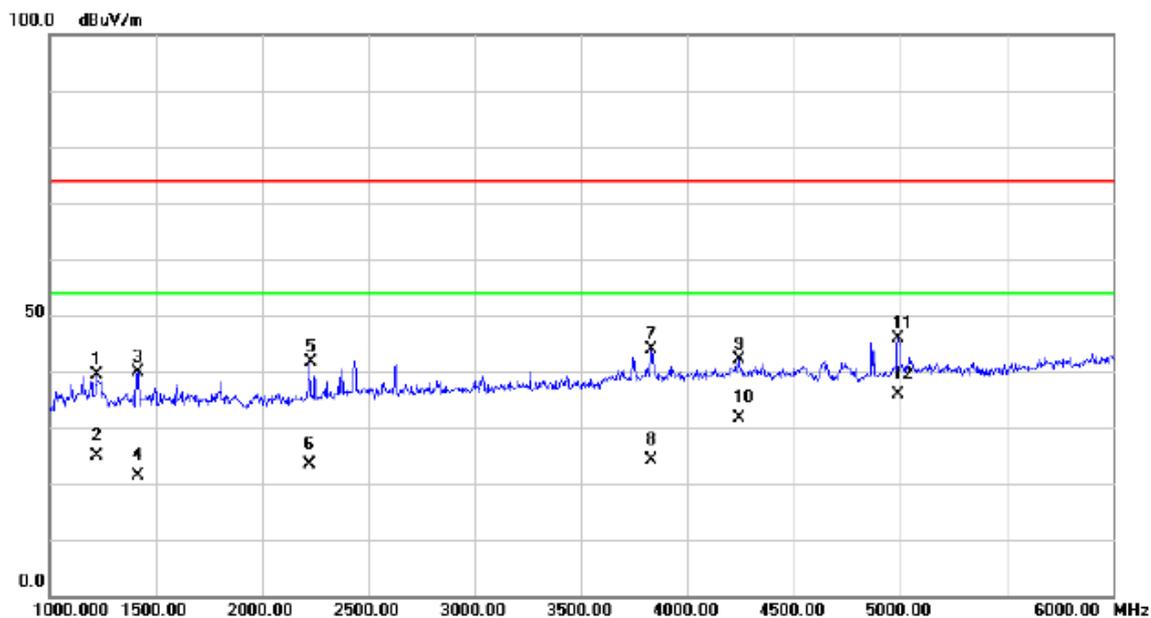

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1220.000     | 44.08                    | -4.65                   | 39.43                      | 74.00           | -34.57       | peak     |         |
| 2   |     | 1220.000     | 29.60                    | -4.65                   | 24.95                      | 54.00           | -29.05       | AVG      |         |
| 3   |     | 1417.500     | 43.85                    | -4.03                   | 39.82                      | 74.00           | -34.18       | peak     |         |
| 4   |     | 1417.500     | 25.40                    | -4.03                   | 21.37                      | 54.00           | -32.63       | AVG      |         |
| 5   |     | 2227.500     | 43.37                    | -1.82                   | 41.55                      | 74.00           | -32.45       | peak     |         |
| 6   |     | 2227.500     | 25.30                    | -1.82                   | 23.48                      | 54.00           | -30.52       | AVG      |         |
| 7   |     | 3832.500     | 39.54                    | 4.25                    | 43.79                      | 74.00           | -30.21       | peak     |         |
| 8   |     | 3832.500     | 20.00                    | 4.25                    | 24.25                      | 54.00           | -29.75       | AVG      |         |
| 9   |     | 4242.500     | 36.89                    | 5.28                    | 42.17                      | 74.00           | -31.83       | peak     |         |
| 10  |     | 4242.500     | 26.40                    | 5.28                    | 31.68                      | 54.00           | -22.32       | AVG      |         |
| 11  |     | 4992.500     | 38.64                    | 7.26                    | 45.90                      | 74.00           | -28.10       | peak     |         |
| 12  | *   | 4992.500     | 28.63                    | 7.26                    | 35.89                      | 54.00           | -18.11       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


## Horizontal

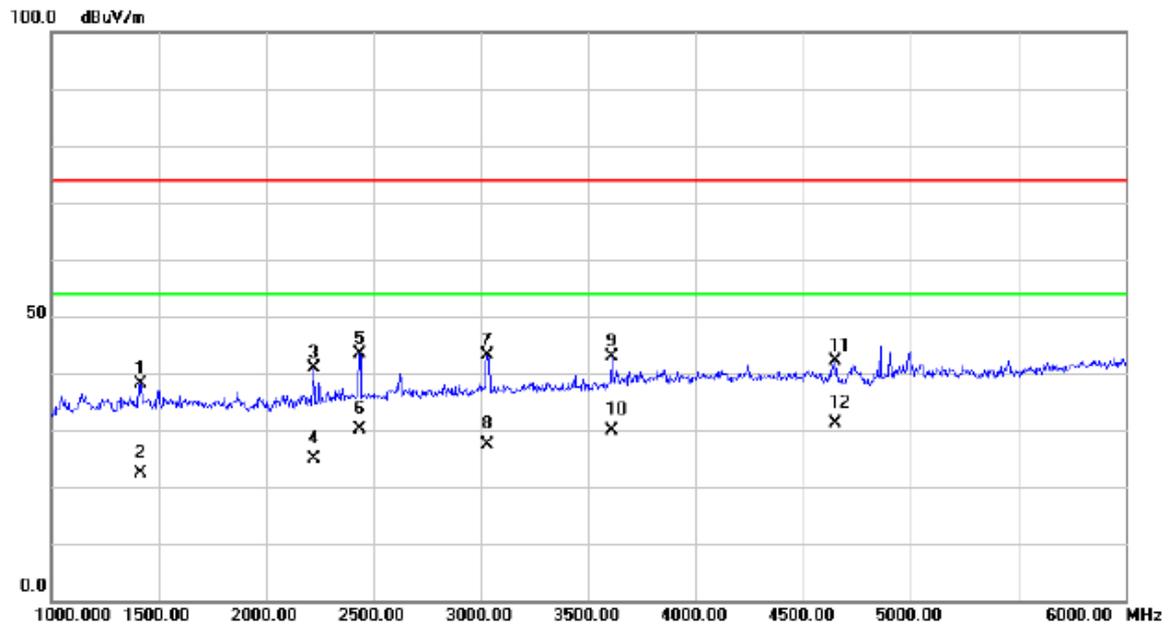

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 1415.000     | 42.04                    | -4.03                   | 38.01                      | 74.00           | -35.99       | peak     |         |
| 2       | 1415.000     | 26.50                    | -4.03                   | 22.47                      | 54.00           | -31.53       | AVG      |         |
| 3       | 2225.000     | 42.70                    | -1.83                   | 40.87                      | 74.00           | -33.13       | peak     |         |
| 4       | 2225.000     | 26.70                    | -1.83                   | 24.87                      | 54.00           | -29.13       | AVG      |         |
| 5       | 2437.500     | 43.98                    | -0.68                   | 43.30                      | 74.00           | -30.70       | peak     |         |
| 6       | 2437.500     | 30.84                    | -0.68                   | 30.16                      | 54.00           | -23.84       | AVG      |         |
| 7       | 3032.500     | 41.58                    | 1.57                    | 43.15                      | 74.00           | -30.85       | peak     |         |
| 8       | 3032.500     | 25.70                    | 1.57                    | 27.27                      | 54.00           | -26.73       | AVG      |         |
| 9       | 3610.000     | 39.47                    | 3.37                    | 42.84                      | 74.00           | -31.16       | peak     |         |
| 10      | 3610.000     | 26.50                    | 3.37                    | 29.87                      | 54.00           | -24.13       | AVG      |         |
| 11      | 4652.500     | 36.00                    | 6.16                    | 42.16                      | 74.00           | -31.84       | peak     |         |
| 12 *    | 4652.500     | 24.90                    | 6.16                    | 31.06                      | 54.00           | -22.94       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


## Vertical

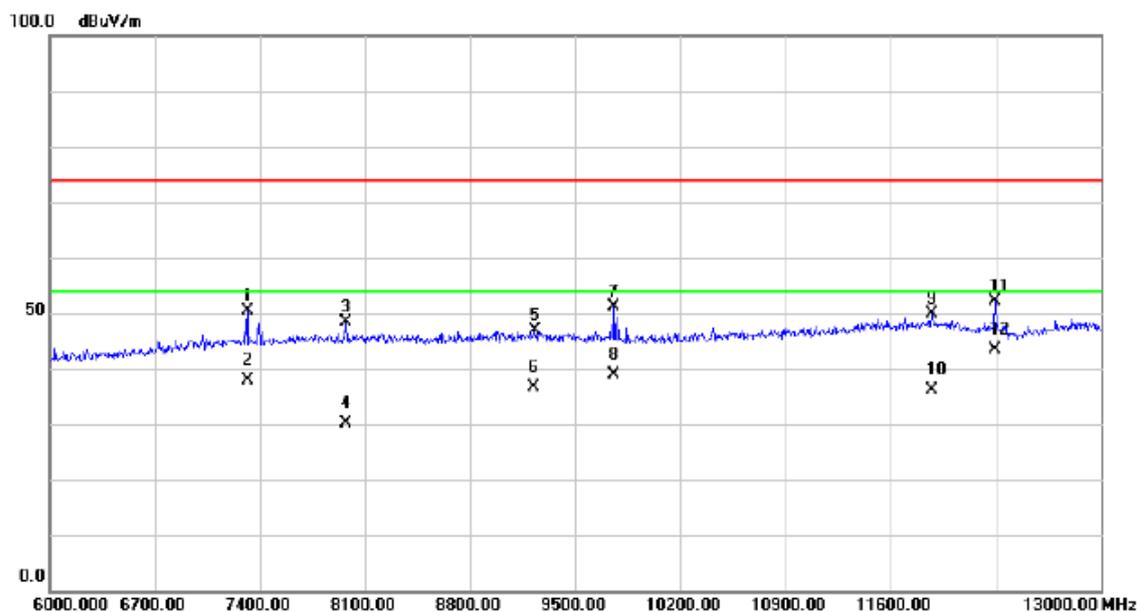

| No. | Mk. | Freq.     | Reading | Correct | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|-----------|---------|---------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV    | dB      | dBuV/m      | dBuV/m | dB     |          |         |
| 1   |     | 7316.000  | 36.80   | 13.55   | 50.35       | 74.00  | -23.65 | peak     |         |
| 2   |     | 7316.000  | 24.23   | 13.55   | 37.78       | 54.00  | -16.22 | AVG      |         |
| 3   |     | 7974.000  | 33.82   | 14.44   | 48.26       | 74.00  | -25.74 | peak     |         |
| 4   |     | 7974.000  | 15.60   | 14.44   | 30.04       | 54.00  | -23.96 | AVG      |         |
| 5   |     | 9230.500  | 31.45   | 15.37   | 46.82       | 74.00  | -27.18 | peak     |         |
| 6   |     | 9230.500  | 21.30   | 15.37   | 36.67       | 54.00  | -17.33 | AVG      |         |
| 7   |     | 9759.000  | 35.61   | 15.40   | 51.01       | 74.00  | -22.99 | peak     |         |
| 8   |     | 9759.000  | 23.57   | 15.40   | 38.97       | 54.00  | -15.03 | AVG      |         |
| 9   |     | 11876.500 | 29.43   | 20.48   | 49.91       | 74.00  | -24.09 | peak     |         |
| 10  |     | 11876.500 | 15.70   | 20.48   | 36.18       | 54.00  | -17.82 | AVG      |         |
| 11  |     | 12296.500 | 31.25   | 20.87   | 52.12       | 74.00  | -21.88 | peak     |         |
| 12  | *   | 12296.500 | 22.46   | 20.87   | 43.33       | 54.00  | -10.67 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                       |


## Horizontal

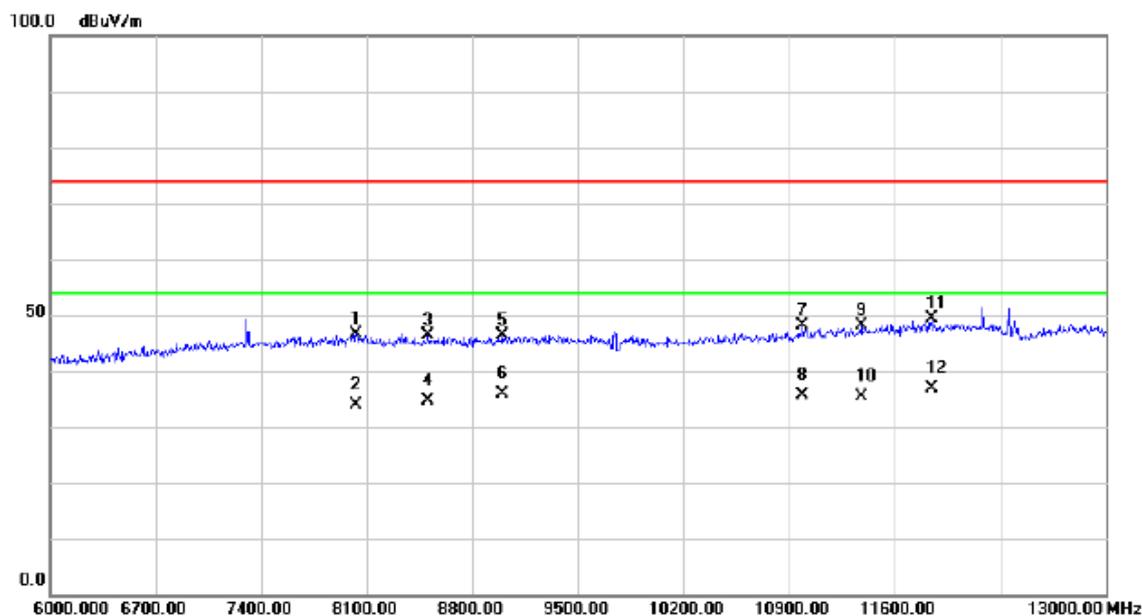

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 8030.000     | 32.14                    | 14.47                   | 46.61                      | 74.00           | -27.39       | peak     |         |
| 2   |     | 8030.000     | 19.50                    | 14.47                   | 33.97                      | 54.00           | -20.03       | AVG      |         |
| 3   |     | 8509.500     | 31.97                    | 14.45                   | 46.42                      | 74.00           | -27.58       | peak     |         |
| 4   |     | 8509.500     | 20.10                    | 14.45                   | 34.55                      | 54.00           | -19.45       | AVG      |         |
| 5   |     | 8996.000     | 31.07                    | 15.32                   | 46.39                      | 74.00           | -27.61       | peak     |         |
| 6   |     | 8996.000     | 20.50                    | 15.32                   | 35.82                      | 54.00           | -18.18       | AVG      |         |
| 7   |     | 10991.00     | 30.16                    | 17.94                   | 48.10                      | 74.00           | -25.90       | peak     |         |
| 8   |     | 10991.00     | 17.60                    | 17.94                   | 35.54                      | 54.00           | -18.46       | AVG      |         |
| 9   |     | 11376.00     | 28.99                    | 19.09                   | 48.08                      | 74.00           | -25.92       | peak     |         |
| 10  |     | 11376.00     | 16.30                    | 19.09                   | 35.39                      | 54.00           | -18.61       | AVG      |         |
| 11  |     | 11848.50     | 28.99                    | 20.41                   | 49.40                      | 74.00           | -24.60       | peak     |         |
| 12  | *   | 11848.50     | 16.40                    | 20.41                   | 36.81                      | 54.00           | -17.19       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


## Vertical

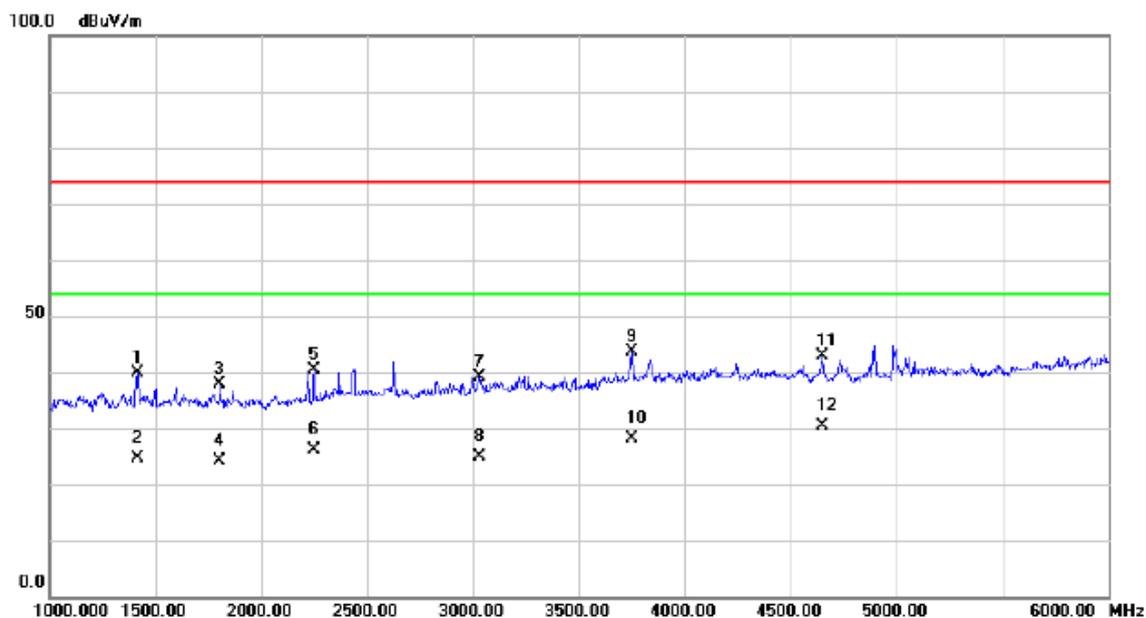

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1415.000     | 43.94                    | -4.03                   | 39.91                      | 74.00           | -34.09       | peak     |         |
| 2   |     | 1415.000     | 28.60                    | -4.03                   | 24.57                      | 54.00           | -29.43       | AVG      |         |
| 3   |     | 1805.000     | 41.31                    | -3.33                   | 37.98                      | 74.00           | -36.02       | peak     |         |
| 4   |     | 1805.000     | 27.50                    | -3.33                   | 24.17                      | 54.00           | -29.83       | AVG      |         |
| 5   |     | 2250.000     | 42.00                    | -1.70                   | 40.30                      | 74.00           | -33.70       | peak     |         |
| 6   |     | 2250.000     | 27.90                    | -1.70                   | 26.20                      | 54.00           | -27.80       | AVG      |         |
| 7   |     | 3030.000     | 37.53                    | 1.55                    | 39.08                      | 74.00           | -34.92       | peak     |         |
| 8   |     | 3030.000     | 23.40                    | 1.55                    | 24.95                      | 54.00           | -29.05       | AVG      |         |
| 9   |     | 3750.000     | 39.61                    | 3.93                    | 43.54                      | 74.00           | -30.46       | peak     |         |
| 10  |     | 3750.000     | 24.10                    | 3.93                    | 28.03                      | 54.00           | -25.97       | AVG      |         |
| 11  |     | 4650.000     | 36.75                    | 6.15                    | 42.90                      | 74.00           | -31.10       | peak     |         |
| 12  | *   | 4650.000     | 24.30                    | 6.15                    | 30.45                      | 54.00           | -23.55       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


## Horizontal

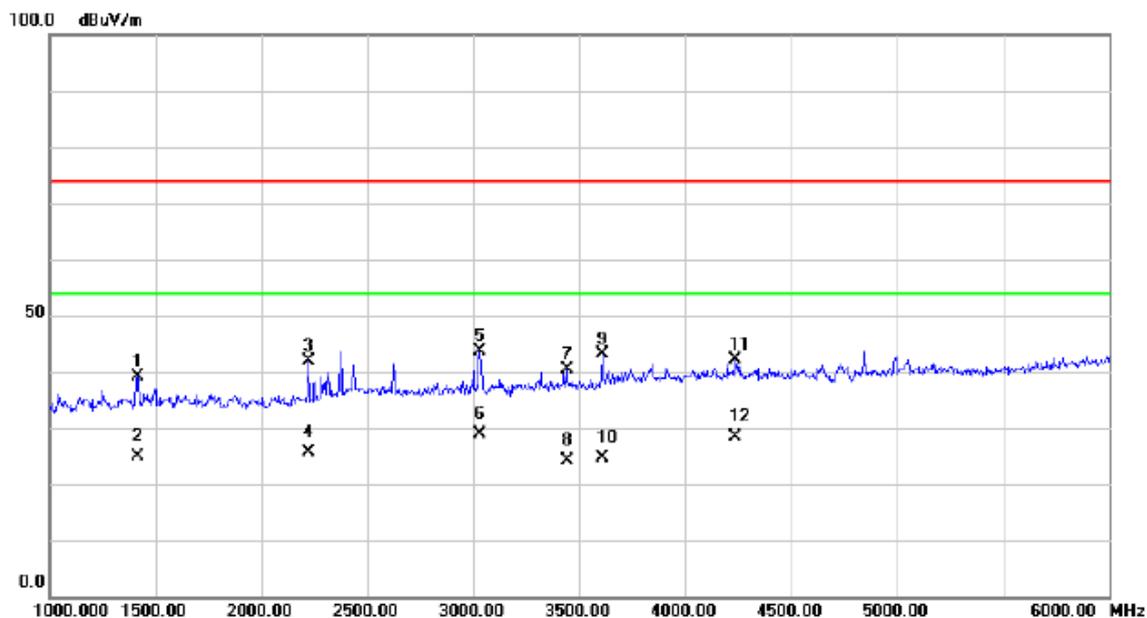

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 1415.000     | 43.27                    | -4.03                   | 39.24                      | 74.00           | -34.76       | peak     |         |
| 2   |     | 1415.000     | 28.90                    | -4.03                   | 24.87                      | 54.00           | -29.13       | AVG      |         |
| 3   |     | 2220.000     | 43.81                    | -1.86                   | 41.95                      | 74.00           | -32.05       | peak     |         |
| 4   |     | 2220.000     | 27.50                    | -1.86                   | 25.64                      | 54.00           | -28.36       | AVG      |         |
| 5   |     | 3032.500     | 42.09                    | 1.57                    | 43.66                      | 74.00           | -30.34       | peak     |         |
| 6   | *   | 3032.500     | 27.30                    | 1.57                    | 28.87                      | 54.00           | -25.13       | AVG      |         |
| 7   |     | 3442.500     | 37.55                    | 2.76                    | 40.31                      | 74.00           | -33.69       | peak     |         |
| 8   |     | 3442.500     | 21.40                    | 2.76                    | 24.16                      | 54.00           | -29.84       | AVG      |         |
| 9   |     | 3610.000     | 39.64                    | 3.37                    | 43.01                      | 74.00           | -30.99       | peak     |         |
| 10  |     | 3610.000     | 21.30                    | 3.37                    | 24.67                      | 54.00           | -29.33       | AVG      |         |
| 11  |     | 4237.500     | 36.91                    | 5.28                    | 42.19                      | 74.00           | -31.81       | peak     |         |
| 12  |     | 4237.500     | 23.20                    | 5.28                    | 28.48                      | 54.00           | -25.52       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


## Vertical

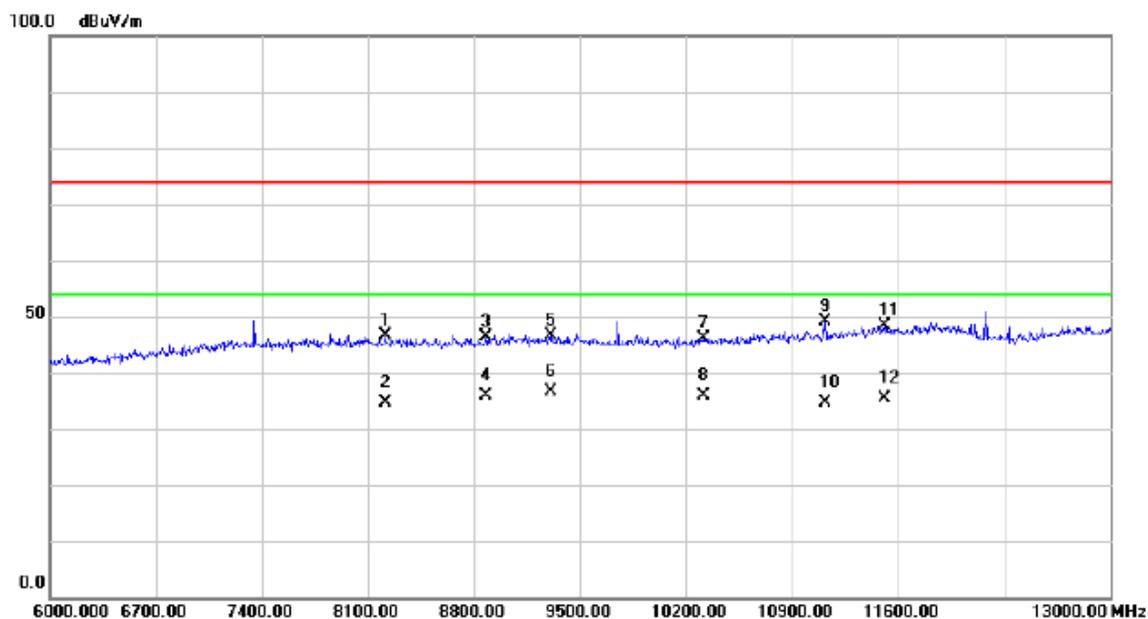

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 8215.500     | 32.21                    | 14.46                   | 46.67                      | 74.00           | -27.33       | peak     |         |
| 2       | 8215.500     | 20.10                    | 14.46                   | 34.56                      | 54.00           | -19.44       | AVG      |         |
| 3       | 8880.500     | 31.19                    | 15.12                   | 46.31                      | 74.00           | -27.69       | peak     |         |
| 4       | 8880.500     | 20.80                    | 15.12                   | 35.92                      | 54.00           | -18.08       | AVG      |         |
| 5       | 9307.500     | 31.28                    | 15.38                   | 46.66                      | 74.00           | -27.34       | peak     |         |
| 6 *     | 9307.500     | 21.30                    | 15.38                   | 36.68                      | 54.00           | -17.32       | AVG      |         |
| 7       | 10315.500    | 29.84                    | 16.19                   | 46.03                      | 74.00           | -27.97       | peak     |         |
| 8       | 10315.500    | 19.80                    | 16.19                   | 35.99                      | 54.00           | -18.01       | AVG      |         |
| 9       | 11117.000    | 30.91                    | 18.32                   | 49.23                      | 74.00           | -24.77       | peak     |         |
| 10      | 11117.000    | 16.40                    | 18.32                   | 34.72                      | 54.00           | -19.28       | AVG      |         |
| 11      | 11512.500    | 28.98                    | 19.50                   | 48.48                      | 74.00           | -25.52       | peak     |         |
| 12      | 11512.500    | 15.90                    | 19.50                   | 35.40                      | 54.00           | -18.60       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                             |
| Test Mode:    | USB copy(EUT with PC)+BT+2.4GHz WIFI+GPS |
| Note:         | USB Cable: LUXSHARE-ICT                  |


## Horizontal

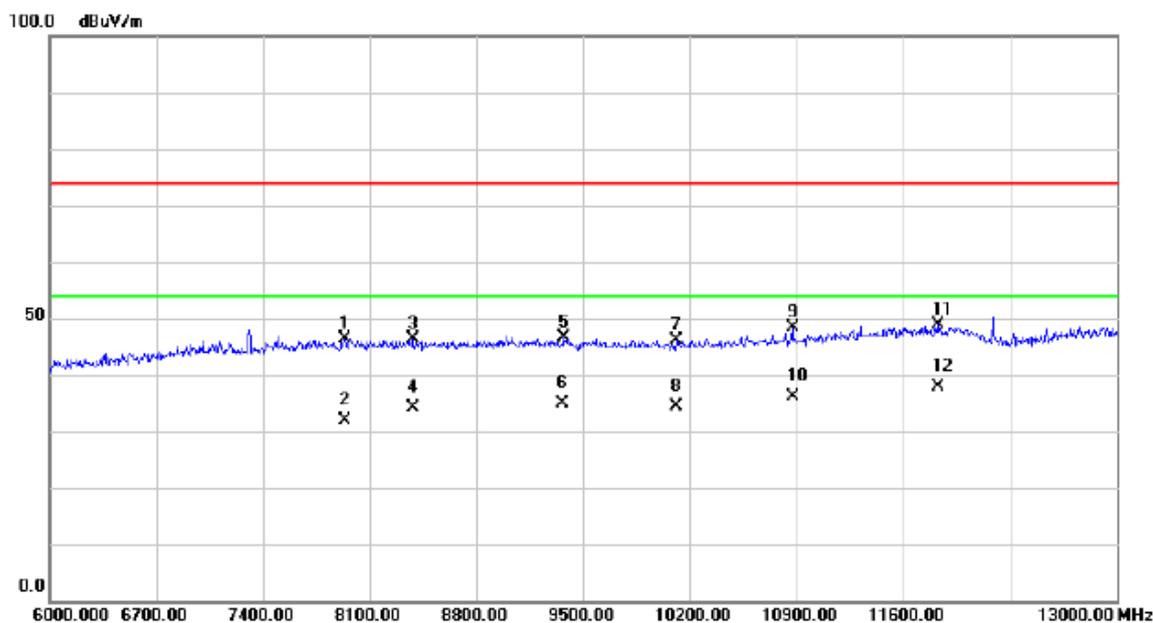

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 7939.000     | 31.88                    | 14.40                   | 46.28                      | 74.00           | -27.72       | peak     |         |
| 2   |     | 7939.000     | 17.60                    | 14.40                   | 32.00                      | 54.00           | -22.00       | AVG      |         |
| 3   |     | 8383.500     | 31.89                    | 14.44                   | 46.33                      | 74.00           | -27.67       | peak     |         |
| 4   |     | 8383.500     | 19.60                    | 14.44                   | 34.04                      | 54.00           | -19.96       | AVG      |         |
| 5   |     | 9370.500     | 31.35                    | 15.40                   | 46.75                      | 74.00           | -27.25       | peak     |         |
| 6   |     | 9370.500     | 19.50                    | 15.40                   | 34.90                      | 54.00           | -19.10       | AVG      |         |
| 7   |     | 10109.000    | 30.46                    | 15.67                   | 46.13                      | 74.00           | -27.87       | peak     |         |
| 8   |     | 10109.000    | 18.70                    | 15.67                   | 34.37                      | 54.00           | -19.63       | AVG      |         |
| 9   |     | 10875.500    | 30.66                    | 17.64                   | 48.30                      | 74.00           | -25.70       | peak     |         |
| 10  |     | 10875.500    | 18.60                    | 17.64                   | 36.24                      | 54.00           | -17.76       | AVG      |         |
| 11  |     | 11827.500    | 28.50                    | 20.35                   | 48.85                      | 74.00           | -25.15       | peak     |         |
| 12  | *   | 11827.500    | 17.60                    | 20.35                   | 37.95                      | 54.00           | -16.05       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Vertical

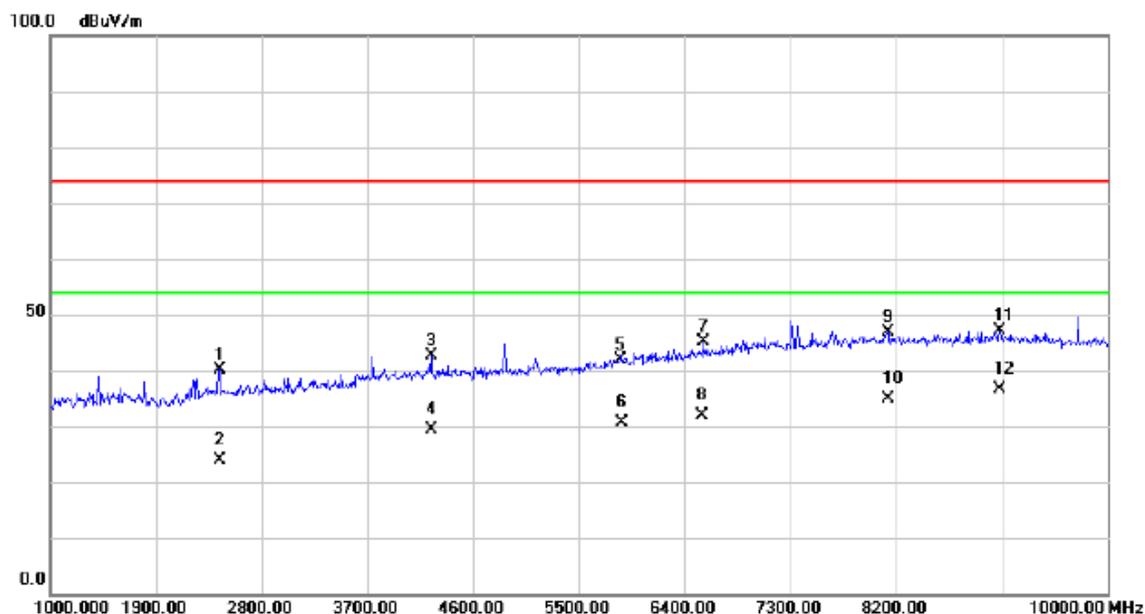

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV/m | Limit dBuV/m | Margin dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|--------------------|--------------|-----------|----------|---------|
| 1       | 2440.000  | 40.89              | -0.66             | 40.23              | 74.00        | -33.77    | peak     |         |
| 2       | 2440.000  | 24.50              | -0.66             | 23.84              | 54.00        | -30.16    | AVG      |         |
| 3       | 4244.500  | 37.27              | 5.28              | 42.55              | 74.00        | -31.45    | peak     |         |
| 4       | 4244.500  | 24.20              | 5.28              | 29.48              | 54.00        | -24.52    | AVG      |         |
| 5       | 5851.000  | 32.59              | 9.40              | 41.99              | 74.00        | -32.01    | peak     |         |
| 6       | 5851.000  | 21.30              | 9.40              | 30.70              | 54.00        | -23.30    | AVG      |         |
| 7       | 6557.500  | 33.75              | 11.28             | 45.03              | 74.00        | -28.97    | peak     |         |
| 8       | 6557.500  | 20.70              | 11.28             | 31.98              | 54.00        | -22.02    | AVG      |         |
| 9       | 8132.500  | 32.51              | 14.47             | 46.98              | 74.00        | -27.02    | peak     |         |
| 10      | 8132.500  | 20.50              | 14.47             | 34.97              | 54.00        | -19.03    | AVG      |         |
| 11      | 9086.500  | 31.87              | 15.34             | 47.21              | 74.00        | -26.79    | peak     |         |
| 12 *    | 9086.500  | 21.30              | 15.34             | 36.64              | 54.00        | -17.36    | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Horizontal

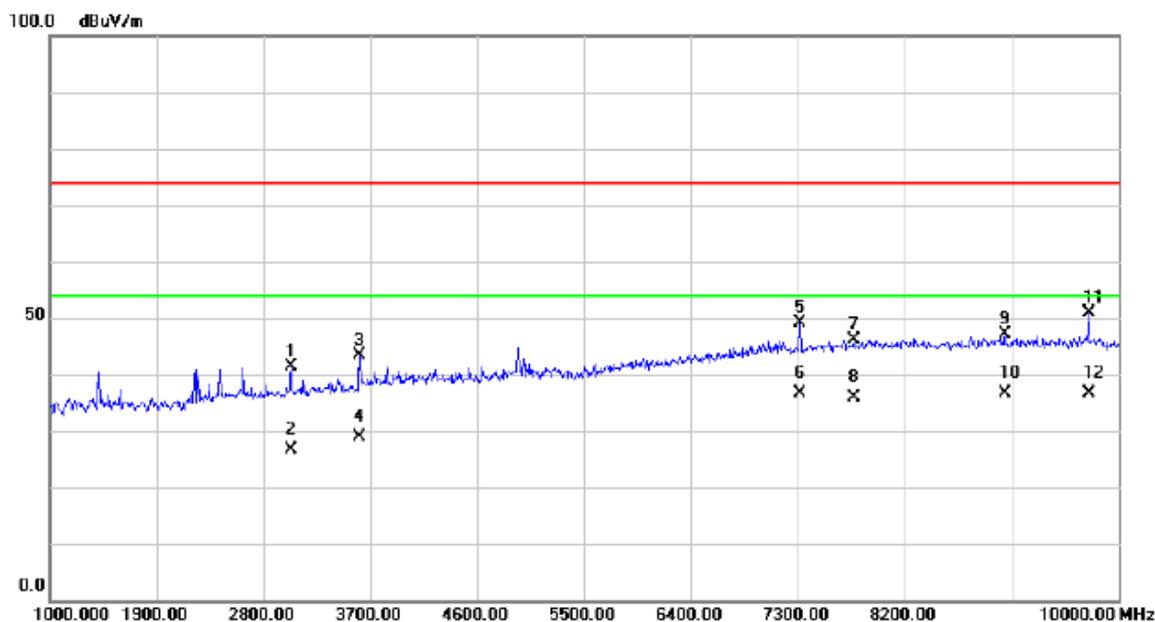

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 3038.500     | 39.91                    | 1.58                    | 41.49                      | 74.00           | -32.51       | peak     |         |
| 2   |     | 3038.500     | 25.10                    | 1.58                    | 26.68                      | 54.00           | -27.32       | AVG      |         |
| 3   |     | 3610.000     | 39.90                    | 3.37                    | 43.27                      | 74.00           | -30.73       | peak     |         |
| 4   |     | 3610.000     | 25.40                    | 3.37                    | 28.77                      | 54.00           | -25.23       | AVG      |         |
| 5   |     | 7318.000     | 35.67                    | 13.55                   | 49.22                      | 74.00           | -24.78       | peak     |         |
| 6   |     | 7318.000     | 23.19                    | 13.55                   | 36.74                      | 54.00           | -17.26       | AVG      |         |
| 7   |     | 7772.500     | 31.99                    | 14.16                   | 46.15                      | 74.00           | -27.85       | peak     |         |
| 8   |     | 7772.500     | 21.60                    | 14.16                   | 35.76                      | 54.00           | -18.24       | AVG      |         |
| 9   |     | 9050.500     | 31.74                    | 15.33                   | 47.07                      | 74.00           | -26.93       | peak     |         |
| 10  |     | 9050.500     | 21.40                    | 15.33                   | 36.73                      | 54.00           | -17.27       | AVG      |         |
| 11  |     | 9748.000     | 35.44                    | 15.41                   | 50.85                      | 74.00           | -23.15       | peak     |         |
| 12  | *   | 9748.000     | 21.34                    | 15.41                   | 36.75                      | 54.00           | -17.25       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


### Vertical

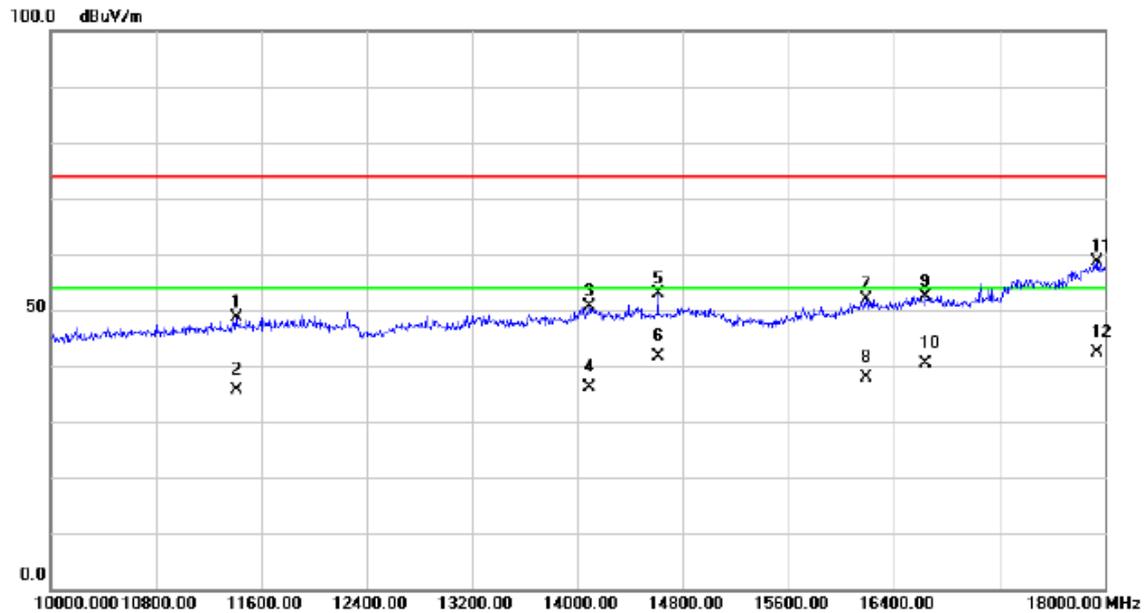

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Margin |          |         |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     | MHz      | Level   | Factor  | ment     |        |        | Detector | Comment |
|     |     |          | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 11408.00 | 29.52   | 19.18   | 48.70    | 74.00  | -25.30 | peak     |         |
| 2   |     | 11408.00 | 16.40   | 19.18   | 35.58    | 54.00  | -18.42 | AVG      |         |
| 3   |     | 14092.00 | 28.00   | 22.70   | 50.70    | 74.00  | -23.30 | peak     |         |
| 4   |     | 14092.00 | 13.50   | 22.70   | 36.20    | 54.00  | -17.80 | AVG      |         |
| 5   |     | 14608.00 | 29.52   | 23.33   | 52.85    | 74.00  | -21.15 | peak     |         |
| 6   |     | 14608.00 | 18.34   | 23.33   | 41.67    | 54.00  | -12.33 | AVG      |         |
| 7   |     | 16192.00 | 28.14   | 23.62   | 51.76    | 74.00  | -22.24 | peak     |         |
| 8   |     | 16192.00 | 14.30   | 23.62   | 37.92    | 54.00  | -16.08 | AVG      |         |
| 9   |     | 16640.00 | 27.62   | 24.79   | 52.41    | 74.00  | -21.59 | peak     |         |
| 10  |     | 16640.00 | 15.70   | 24.79   | 40.49    | 54.00  | -13.51 | AVG      |         |
| 11  |     | 17936.00 | 27.59   | 31.15   | 58.74    | 74.00  | -15.26 | peak     |         |
| 12  | *   | 17936.00 | 11.29   | 31.15   | 42.44    | 54.00  | -11.56 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Horizontal

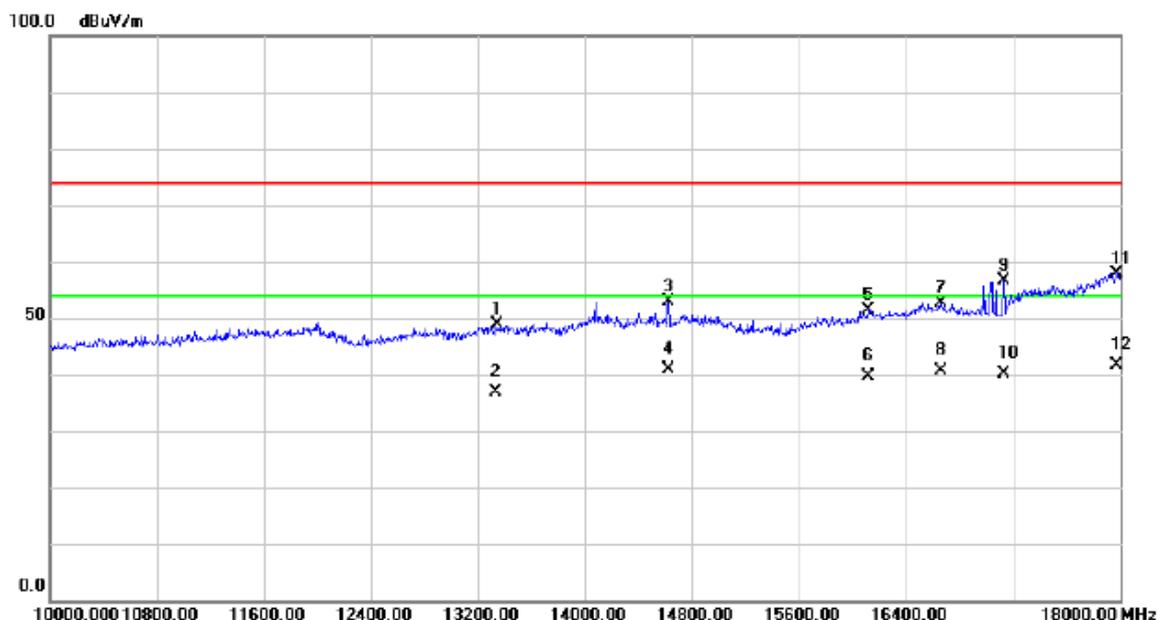

| No. | Mk. | Freq.    | Reading | Correct | Measurement | Limit  | Margin | Detector | Comment |
|-----|-----|----------|---------|---------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV    | dB      | dBuV/m      | dBuV/m | dB     |          |         |
| 1   |     | 13340.00 | 27.32   | 21.64   | 48.96       | 74.00  | -25.04 | peak     |         |
| 2   |     | 13340.00 | 15.20   | 21.64   | 36.84       | 54.00  | -17.16 | AVG      |         |
| 3   |     | 14624.00 | 29.63   | 23.32   | 52.95       | 74.00  | -21.05 | peak     |         |
| 4   |     | 14624.00 | 17.45   | 23.32   | 40.77       | 54.00  | -13.23 | AVG      |         |
| 5   |     | 16116.00 | 28.03   | 23.41   | 51.44       | 74.00  | -22.56 | peak     |         |
| 6   |     | 16116.00 | 16.20   | 23.41   | 39.61       | 54.00  | -14.39 | AVG      |         |
| 7   |     | 16660.00 | 27.75   | 24.84   | 52.59       | 74.00  | -21.41 | peak     |         |
| 8   |     | 16660.00 | 15.80   | 24.84   | 40.64       | 54.00  | -13.36 | AVG      |         |
| 9   |     | 17128.00 | 30.40   | 26.20   | 56.60       | 74.00  | -17.40 | peak     |         |
| 10  |     | 17128.00 | 13.81   | 26.20   | 40.01       | 54.00  | -13.99 | AVG      |         |
| 11  |     | 17972.00 | 26.59   | 31.41   | 58.00       | 74.00  | -16.00 | peak     |         |
| 12  | *   | 17972.00 | 10.15   | 31.41   | 41.56       | 54.00  | -12.44 | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Vertical

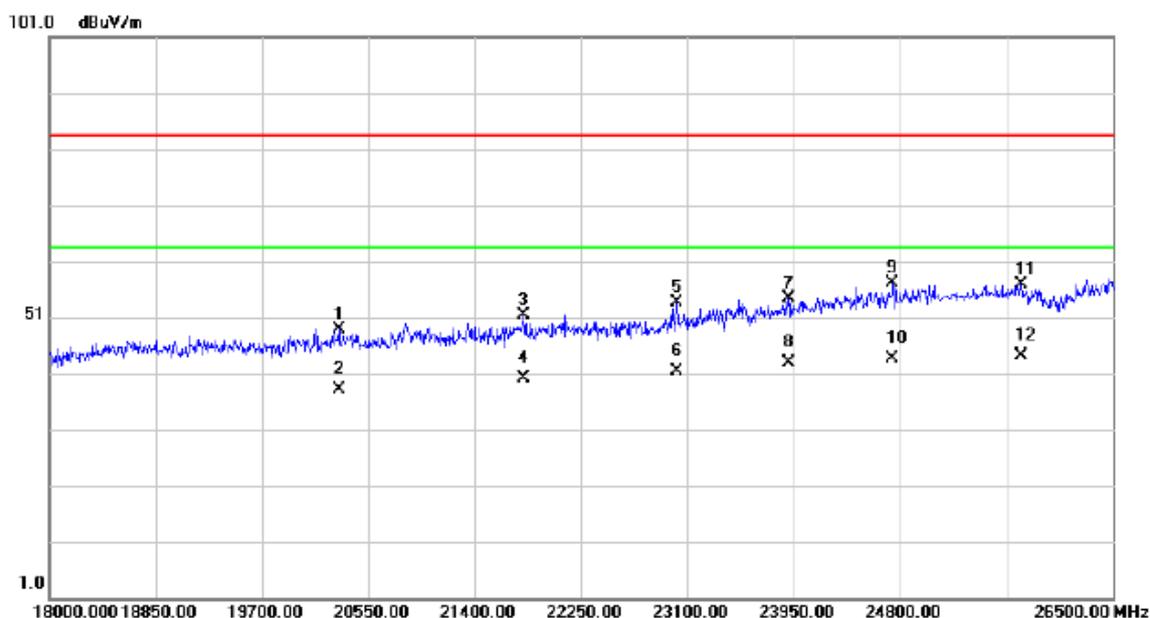

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 20312.00     | 29.46                    | 19.48                   | 48.94                      | 83.50           | -34.56       | peak     |         |
| 2   |     | 20312.00     | 18.59                    | 19.48                   | 38.07                      | 63.50           | -25.43       | AVG      |         |
| 3   |     | 21791.00     | 30.05                    | 21.22                   | 51.27                      | 83.50           | -32.23       | peak     |         |
| 4   |     | 21791.00     | 18.85                    | 21.22                   | 40.07                      | 63.50           | -23.43       | AVG      |         |
| 5   |     | 23015.00     | 29.91                    | 23.65                   | 53.56                      | 83.50           | -29.94       | peak     |         |
| 6   |     | 23015.00     | 17.67                    | 23.65                   | 41.32                      | 63.50           | -22.18       | AVG      |         |
| 7   |     | 23907.50     | 29.64                    | 24.78                   | 54.42                      | 83.50           | -29.08       | peak     |         |
| 8   |     | 23907.50     | 18.05                    | 24.78                   | 42.83                      | 63.50           | -20.67       | AVG      |         |
| 9   |     | 24740.50     | 31.14                    | 25.92                   | 57.06                      | 83.50           | -26.44       | peak     |         |
| 10  |     | 24740.50     | 17.79                    | 25.92                   | 43.71                      | 63.50           | -19.79       | AVG      |         |
| 11  |     | 25769.00     | 30.01                    | 26.97                   | 56.98                      | 83.50           | -26.52       | peak     |         |
| 12  | *   | 25769.00     | 17.10                    | 26.97                   | 44.07                      | 63.50           | -19.43       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Horizontal

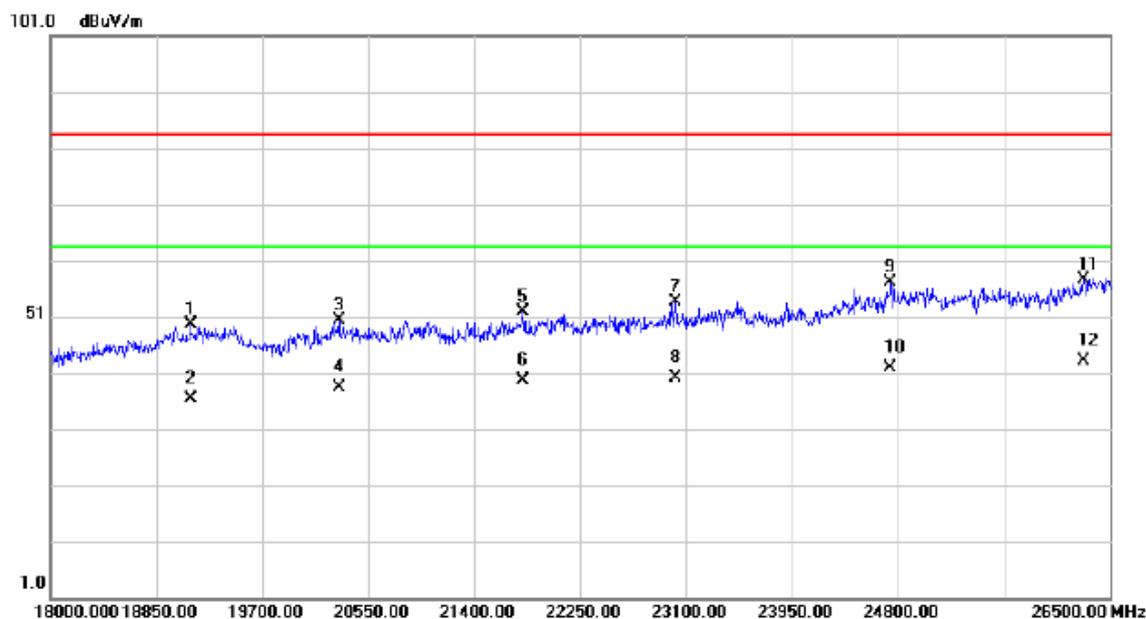

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 19122.00     | 29.60                    | 20.06                   | 49.66                      | 83.50           | -33.84       | peak     |         |
| 2       | 19122.00     | 16.21                    | 20.06                   | 36.27                      | 63.50           | -27.23       | AVG      |         |
| 3       | 20312.00     | 30.96                    | 19.48                   | 50.44                      | 83.50           | -33.06       | peak     |         |
| 4       | 20312.00     | 18.79                    | 19.48                   | 38.27                      | 63.50           | -25.23       | AVG      |         |
| 5       | 21791.00     | 30.55                    | 21.22                   | 51.77                      | 83.50           | -31.73       | peak     |         |
| 6       | 21791.00     | 18.40                    | 21.22                   | 39.62                      | 63.50           | -23.88       | AVG      |         |
| 7       | 23015.00     | 29.91                    | 23.65                   | 53.56                      | 83.50           | -29.94       | peak     |         |
| 8       | 23015.00     | 16.59                    | 23.65                   | 40.24                      | 63.50           | -23.26       | AVG      |         |
| 9       | 24740.50     | 31.14                    | 25.92                   | 57.06                      | 83.50           | -26.44       | peak     |         |
| 10      | 24740.50     | 16.04                    | 25.92                   | 41.96                      | 63.50           | -21.54       | AVG      |         |
| 11      | 26287.50     | 30.25                    | 27.43                   | 57.68                      | 83.50           | -25.82       | peak     |         |
| 12 *    | 26287.50     | 15.64                    | 27.43                   | 43.07                      | 63.50           | -20.43       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |


## Vertical

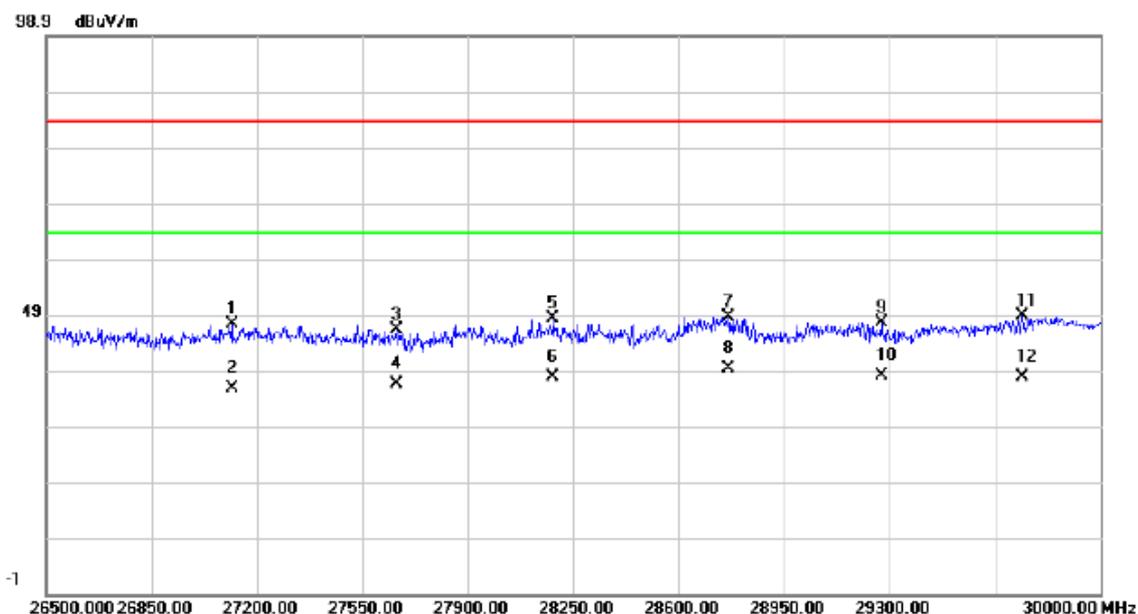

| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 27116.00     | 43.55                    | 3.74                    | 47.29                      | 83.50           | -36.21       | peak     |         |
| 2       | 27116.00     | 32.07                    | 3.74                    | 35.81                      | 63.50           | -27.69       | AVG      |         |
| 3       | 27662.00     | 42.70                    | 3.69                    | 46.39                      | 83.50           | -37.11       | peak     |         |
| 4       | 27662.00     | 32.90                    | 3.69                    | 36.59                      | 63.50           | -26.91       | AVG      |         |
| 5       | 28183.50     | 43.76                    | 4.46                    | 48.22                      | 83.50           | -35.28       | peak     |         |
| 6       | 28183.50     | 33.24                    | 4.46                    | 37.70                      | 63.50           | -25.80       | AVG      |         |
| 7       | 28764.50     | 43.15                    | 5.47                    | 48.62                      | 83.50           | -34.88       | peak     |         |
| 8 *     | 28764.50     | 33.76                    | 5.47                    | 39.23                      | 63.50           | -24.27       | AVG      |         |
| 9       | 29272.00     | 41.23                    | 6.36                    | 47.59                      | 83.50           | -35.91       | peak     |         |
| 10      | 29272.00     | 31.57                    | 6.36                    | 37.93                      | 63.50           | -25.57       | AVG      |         |
| 11      | 29741.00     | 41.46                    | 7.23                    | 48.69                      | 83.50           | -34.81       | peak     |         |
| 12      | 29741.00     | 30.47                    | 7.23                    | 37.70                      | 63.50           | -25.80       | AVG      |         |

|               |  |
|---------------|--|
| Test Voltage: | AC 120V/60Hz                           |
| Test Mode:    | USB copy(EUT with PC)+BT+5GHz WIFI+GPS |
| Note:         | USB Cable: FOXCONN                     |

## Horizontal

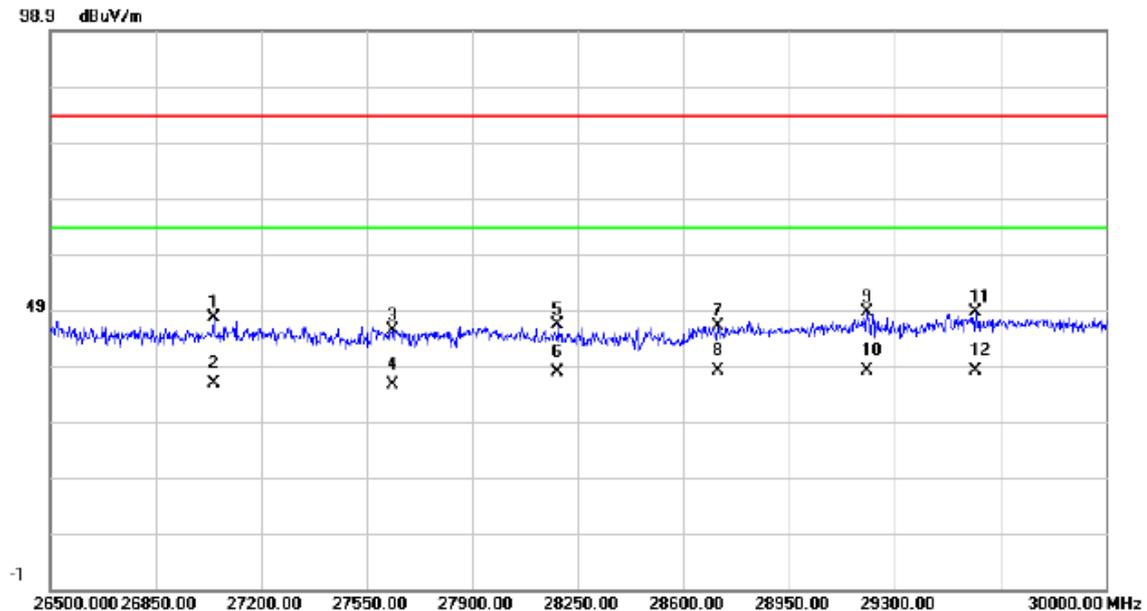

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 27042.50     | 43.70                    | 3.80                    | 47.50                      | 83.50           | -36.00       | peak     |         |
| 2   |     | 27042.50     | 31.98                    | 3.80                    | 35.78                      | 63.50           | -27.72       | AVG      |         |
| 3   |     | 27634.00     | 41.70                    | 3.65                    | 45.35                      | 83.50           | -38.15       | peak     |         |
| 4   |     | 27634.00     | 31.95                    | 3.65                    | 35.60                      | 63.50           | -27.90       | AVG      |         |
| 5   |     | 28183.50     | 41.76                    | 4.46                    | 46.22                      | 83.50           | -37.28       | peak     |         |
| 6   |     | 28183.50     | 33.37                    | 4.46                    | 37.83                      | 63.50           | -25.67       | AVG      |         |
| 7   |     | 28712.00     | 40.71                    | 5.37                    | 46.08                      | 83.50           | -37.42       | peak     |         |
| 8   |     | 28712.00     | 32.55                    | 5.37                    | 37.92                      | 63.50           | -25.58       | AVG      |         |
| 9   |     | 29209.00     | 42.25                    | 6.27                    | 48.52                      | 83.50           | -34.98       | peak     |         |
| 10  | *   | 29209.00     | 31.87                    | 6.27                    | 38.14                      | 63.50           | -25.36       | AVG      |         |
| 11  |     | 29566.00     | 41.71                    | 6.86                    | 48.57                      | 83.50           | -34.93       | peak     |         |
| 12  |     | 29566.00     | 31.06                    | 6.86                    | 37.92                      | 63.50           | -25.58       | AVG      |         |