

Plot 98 LTE Band 2 1RB Right Cheek High (Battery 2, Power Reduce)

Date: 11/27/2016

Communication System: UID 0, LTE (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 39.008$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.09, 5.09, 5.09); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM; Serial:

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.939 W/kg


Right Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.09 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.460 W/kg

Maximum value of SAR (measured) = 0.840 W/kg

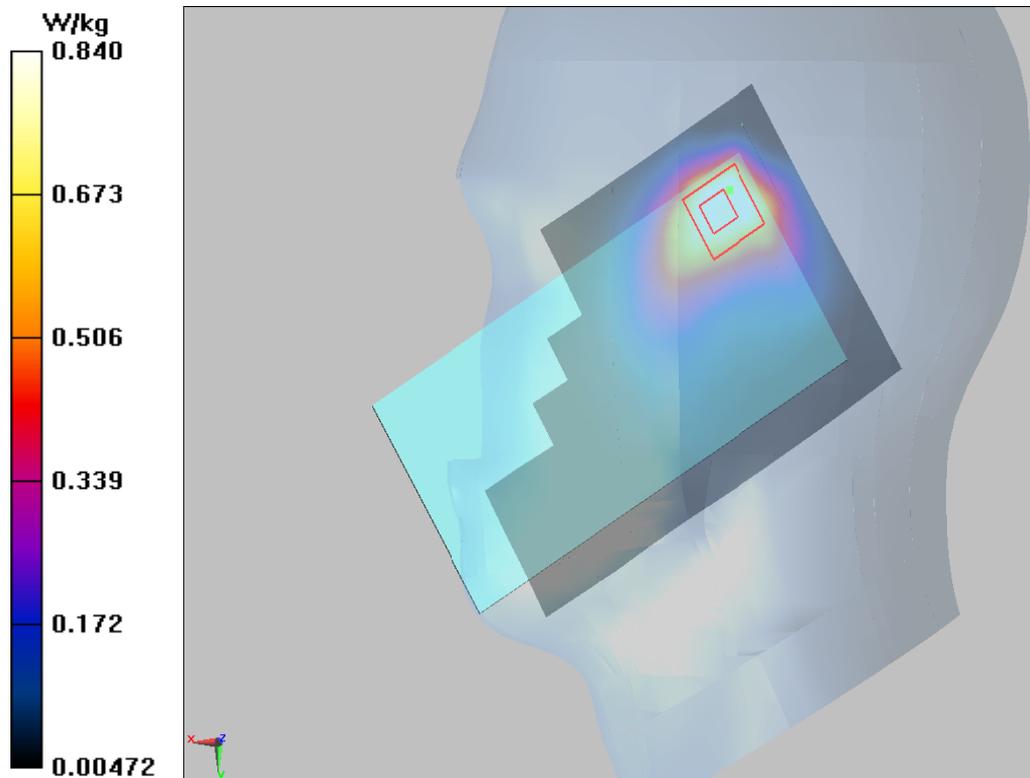

Plot 99 LTE Band 2 1RB Back Side Middle (Distance 15mm)

Date: 2016/12/7

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 51.566$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.78, 4.78, 4.78); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side Middle/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.194W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.223 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.189 W/kg

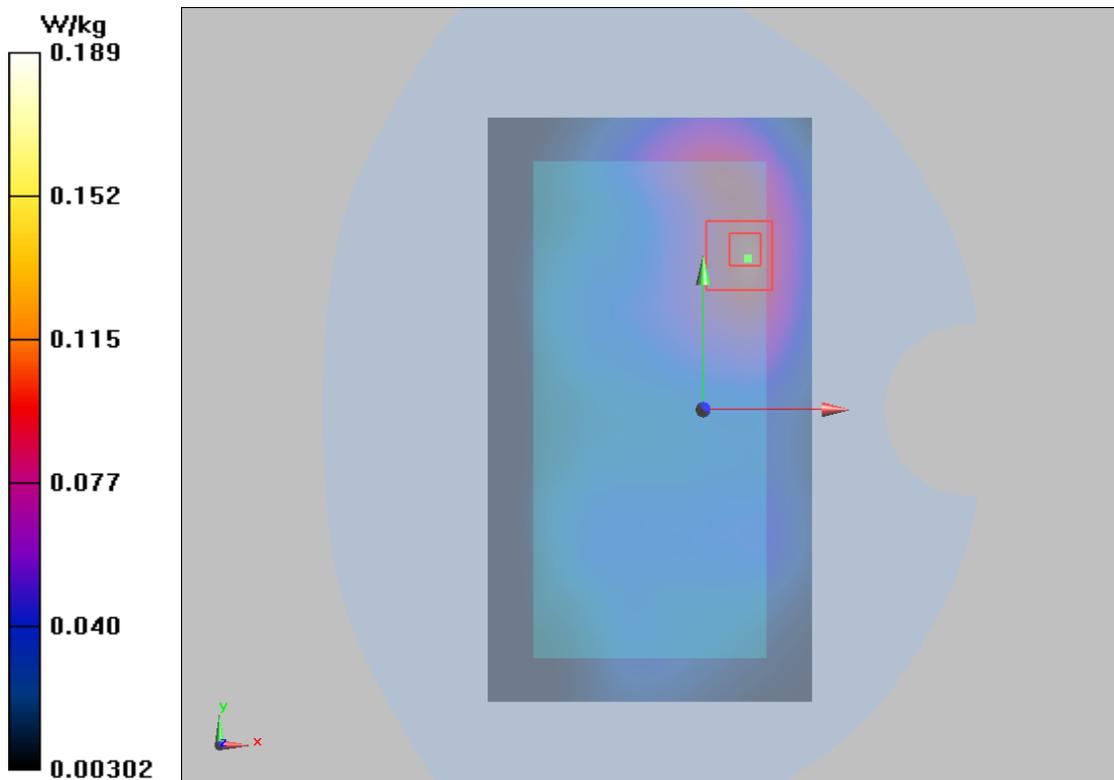

Plot 100 LTE Band 2 1RB Back Side Middle (Distance 10mm)

Date: 2016/12/7

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.477$ S/m; $\epsilon_r = 51.607$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.78, 4.78, 4.78); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side Middle/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.239 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.931 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

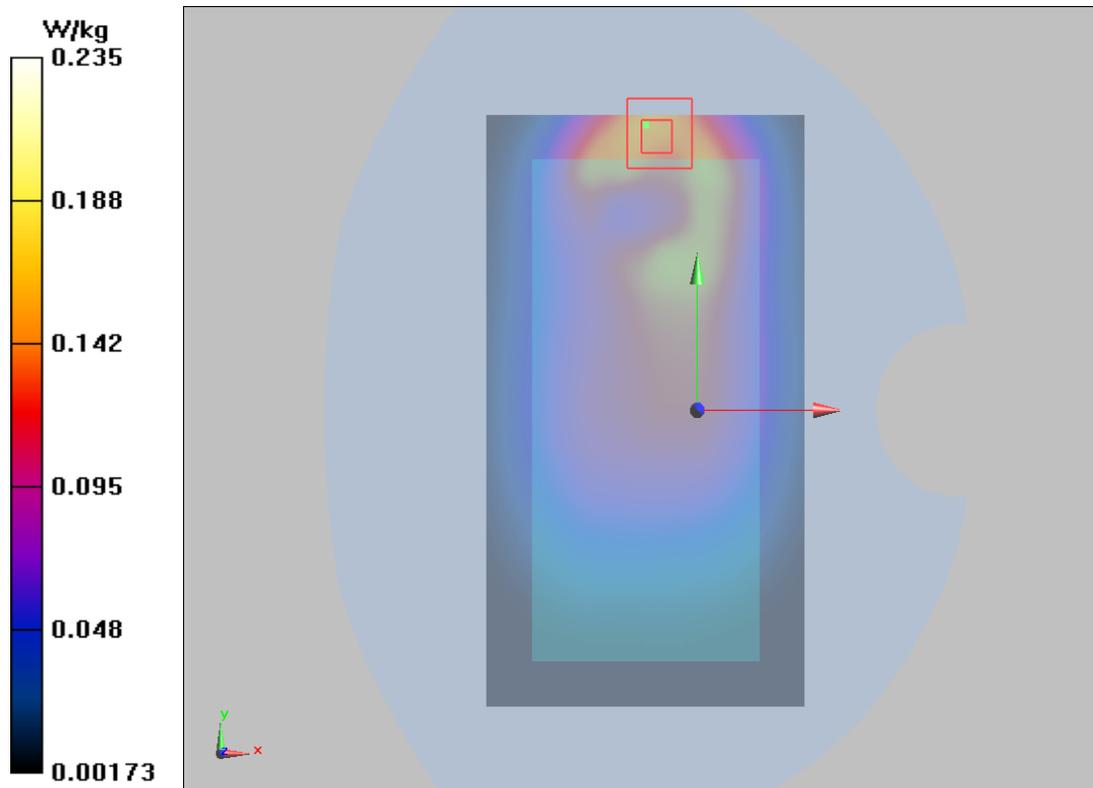

Plot 101 LTE Band 4 1RB Right Cheek High

Date: 11/23/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 38.592$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.32, 5.32, 5.32); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.17 W/kg


Right Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.50 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.524 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

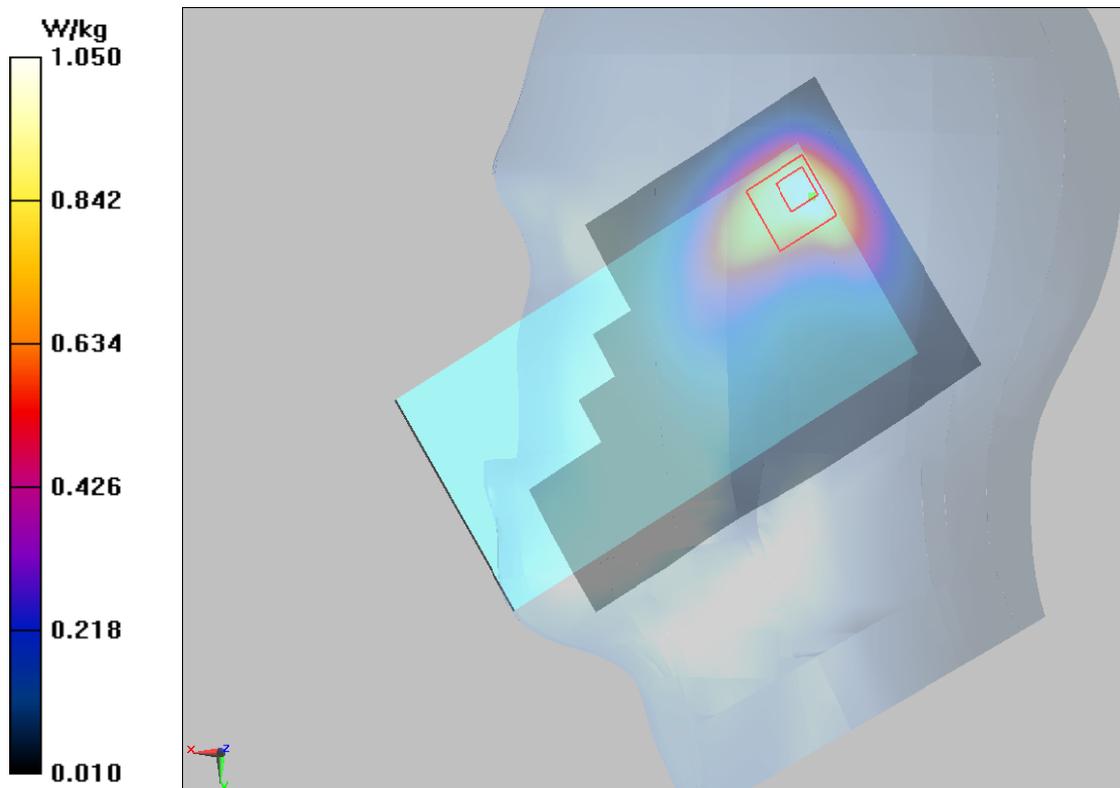

Plot 102 LTE Band 4 1RB Back Side High (Distance 15mm)

Date: 2016/12/9

Communication System: UID 0, LTE_FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 51.692$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.00, 5.00, 5.00); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0827 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.599 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.077 W/kg ; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0825 W/kg

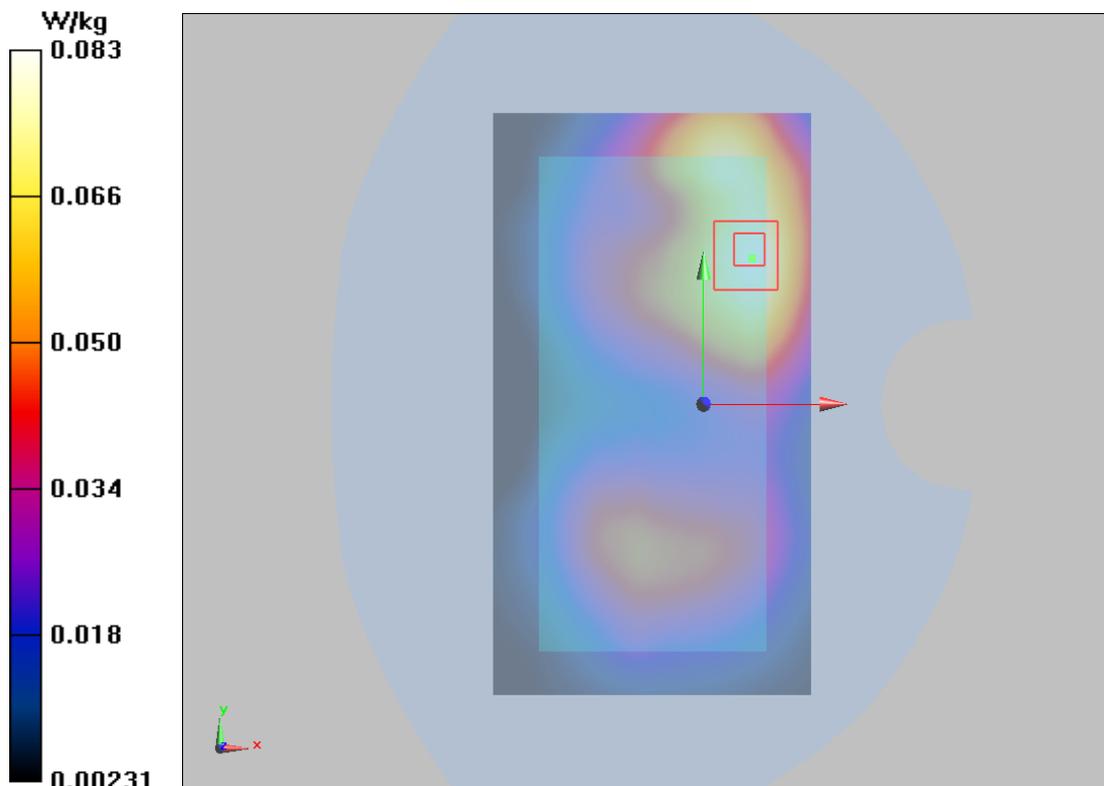

Plot 103 LTE Band 4 1RB Left Edge High (Distance 10mm)

Date: 2016/12/9

Communication System: UID 0, LTE_FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 51.692$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.00, 5.00, 5.00); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Edge High/Area Scan (51x181x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.206 W/kg


Left Edge High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.255 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.181 W/kg ; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

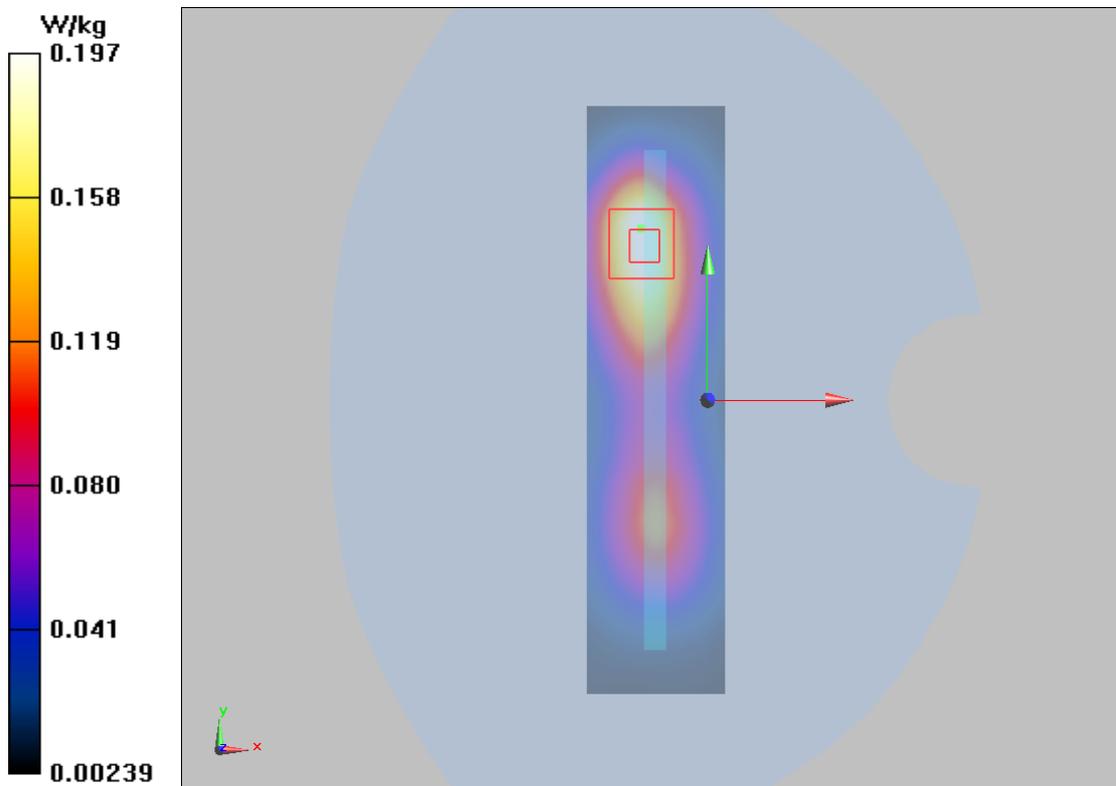

Plot 104 LTE Band 5 1RB Right Cheek Middle (Full Power)

Date: 11/25/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 41.92$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.22, 6.22, 6.22); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek Middle/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.34 W/kg


Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.92 V/m ; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 1.17 W/kg ; SAR(10 g) = 0.691 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

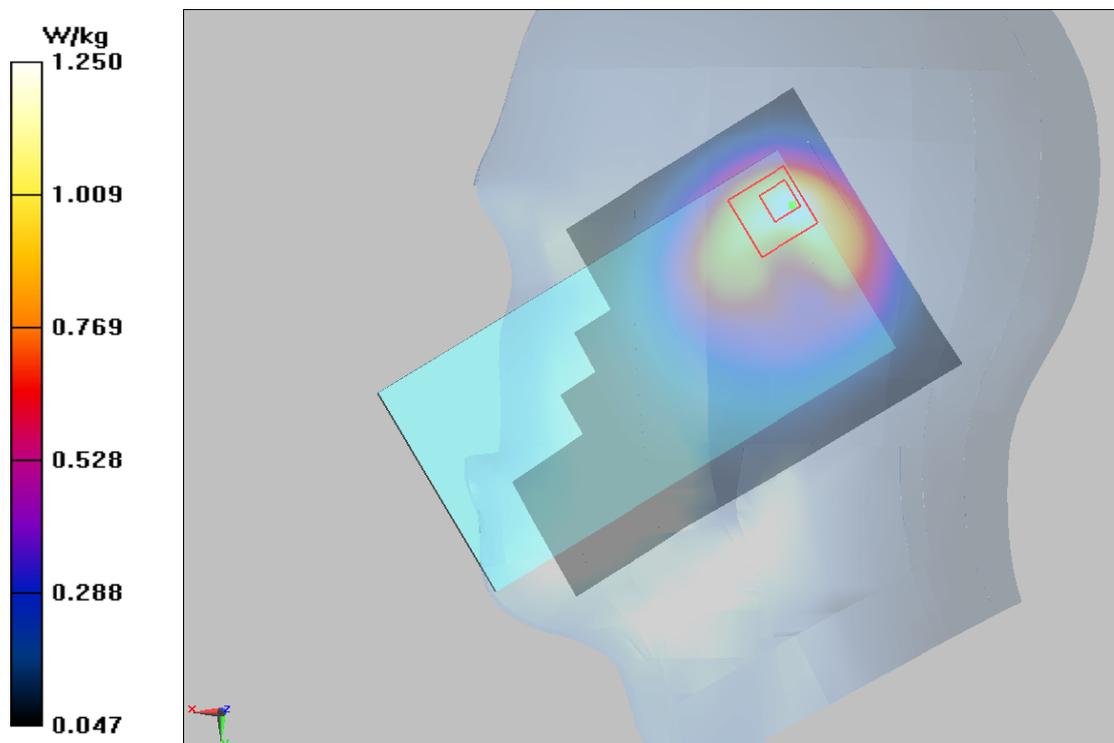

Plot 105 LTE Band 5 1RB Right Cheek Middle (Power Reduce)

Date: 11/25/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.92$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.22, 6.22, 6.22); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek Middle/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.92 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.98 W/kg; SAR(10 g) = 0.491 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

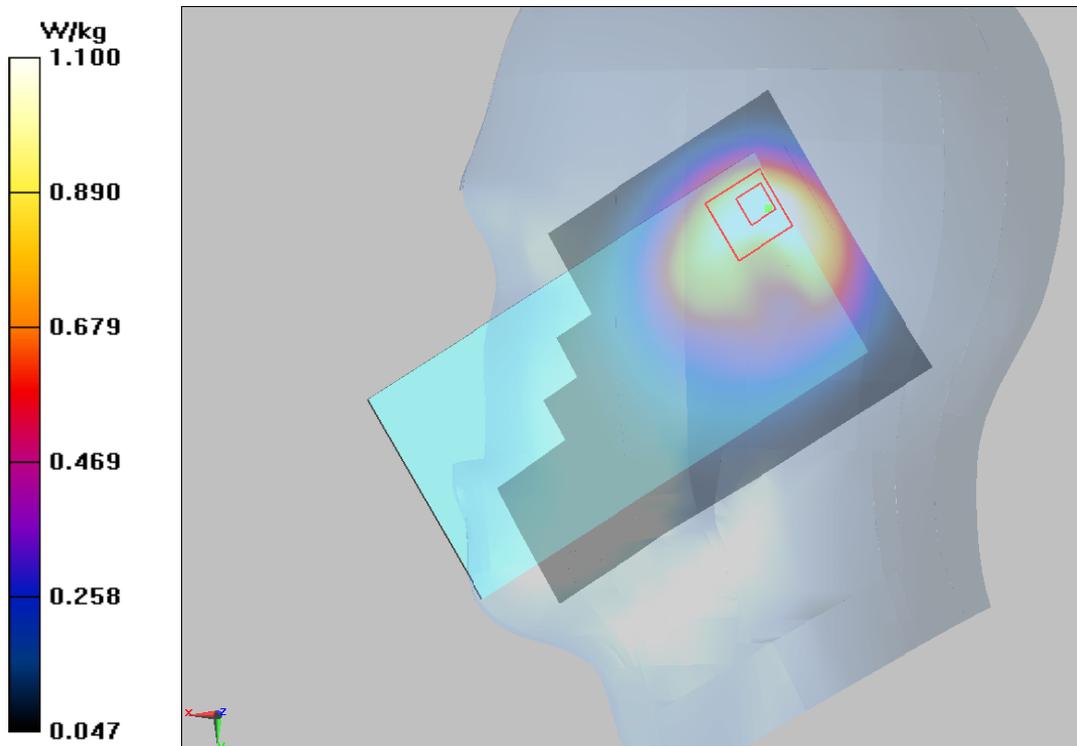

Plot 106 LTE Band 5 1RB Back Side High (Distance 15mm)

Date: 11/22/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 844 \text{ MHz}$; $\sigma = 1.027 \text{ S/m}$; $\epsilon_r = 55.337$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.87, 5.87, 5.87); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High /Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.233 W/kg


Back Side High /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.02 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.205 W/kg ; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

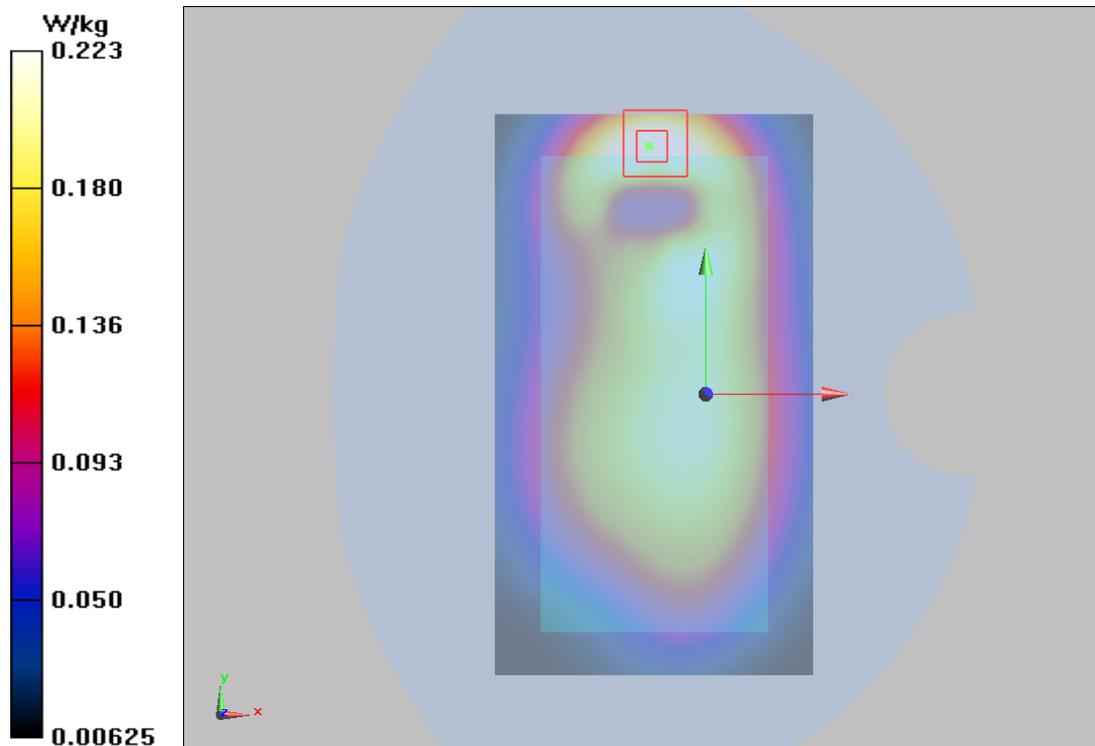

Plot 107 LTE Band 5 50%RB Back Side Low (Distance 10mm)

Date: 11/22/2016

Communication System: UID 0, LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.393$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.87, 5.87, 5.87); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side Low /Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.412 W/kg


Back Side Low /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.17 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.708 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.402 W/kg

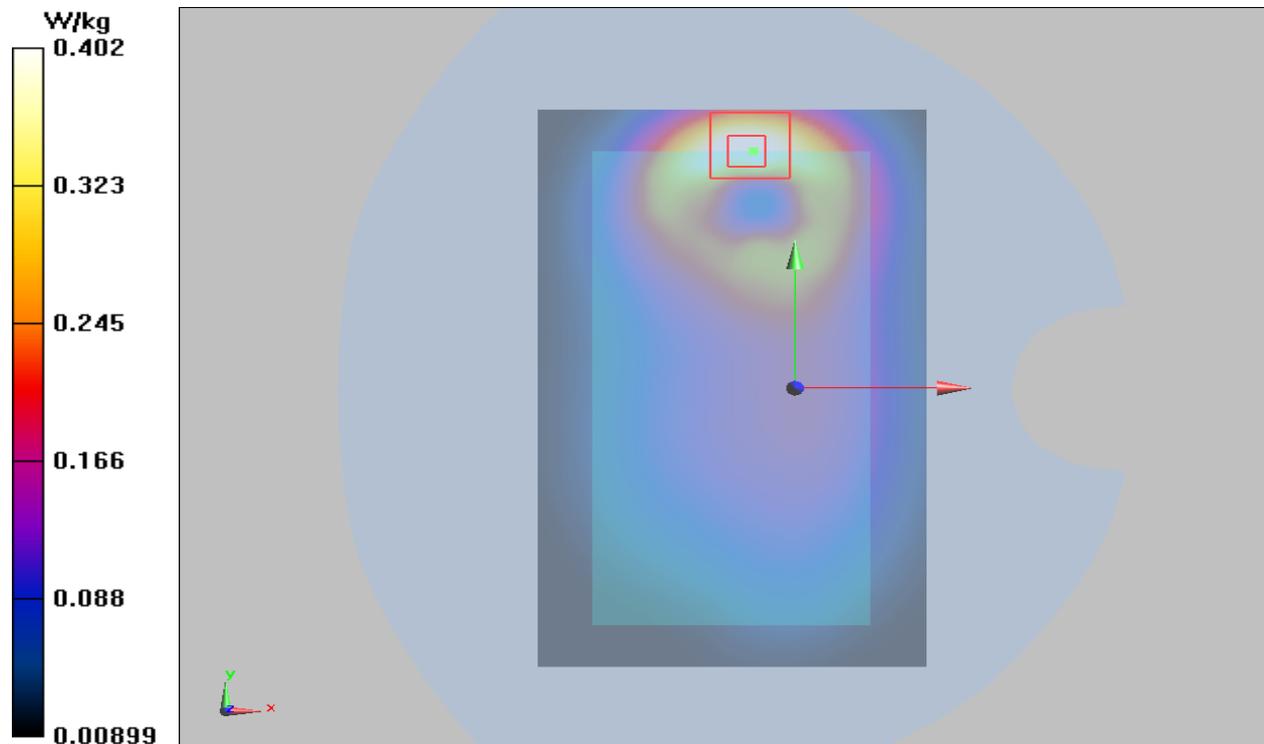

Plot 108 LTE Band 7 1RB Right Cheek Middle

Date: 2016/12/5

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.25, 4.25, 4.25); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.870 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.501 W/kg

Maximum value of SAR (measured) = 0.985 W/kg

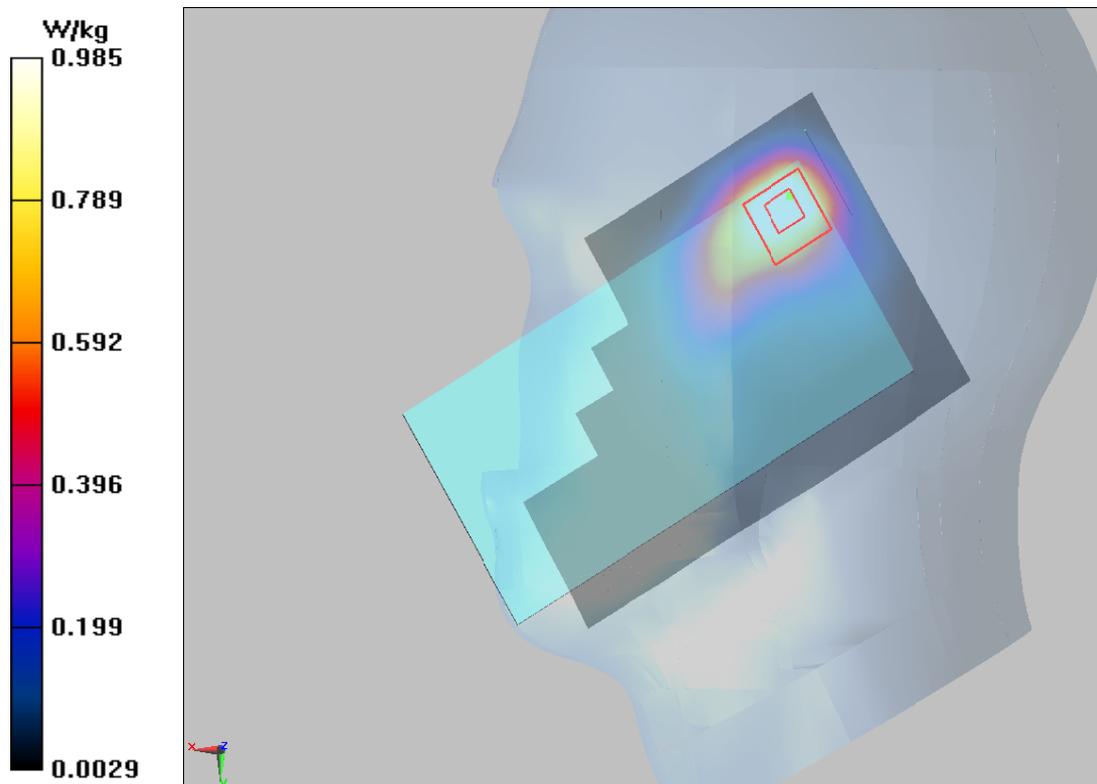

Plot 109 LTE Band 7 1RB Front Side Middle (Distance 15mm)

Date: 12/13/2016

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.099$ S/m; $\epsilon_r = 51.973$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.21, 4.21, 4.21); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Front Side Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.107 W/kg


Front Side Middle /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.587 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0919 W/kg

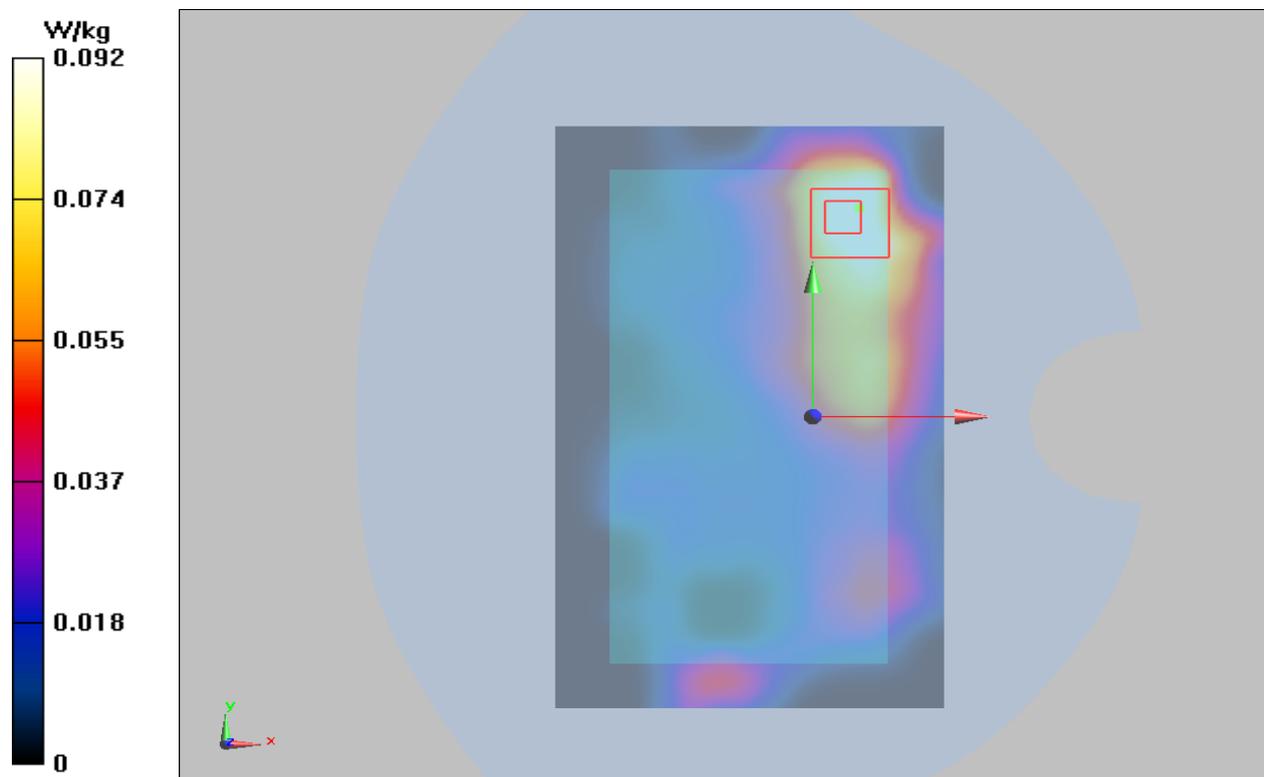

Plot 110 LTE Band 7 1RB Front Side Middle (Distance 10mm)

Date: 12/13/2016

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.099$ S/m; $\epsilon_r = 51.973$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.21, 4.21, 4.21); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Front Side Middle /Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.238 W/kg


Front Side Middle /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.724 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.223 W/kg

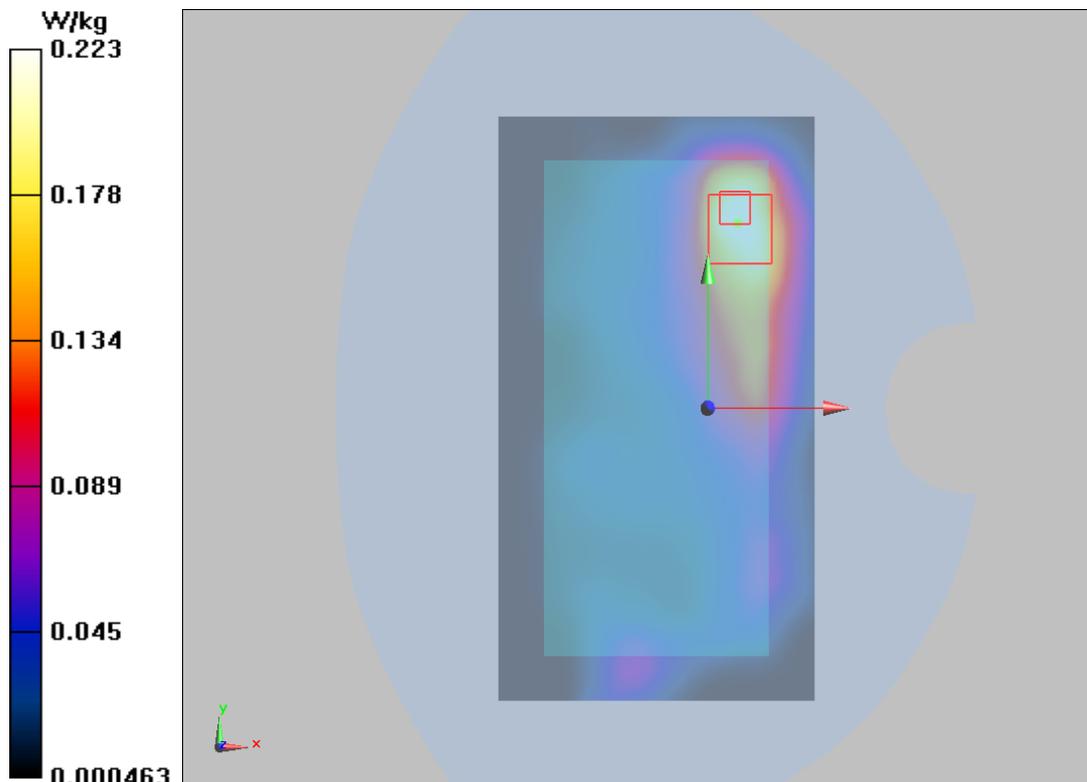

Plot 111 LTE Band 12 1RB Right Cheek High (Full Power)

Date: 2016/12/1

Communication System: UID 0, LTE_FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.328$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.63, 6.63, 6.63); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM; Serial:

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.42 W/kg


Right Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.46 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.695 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

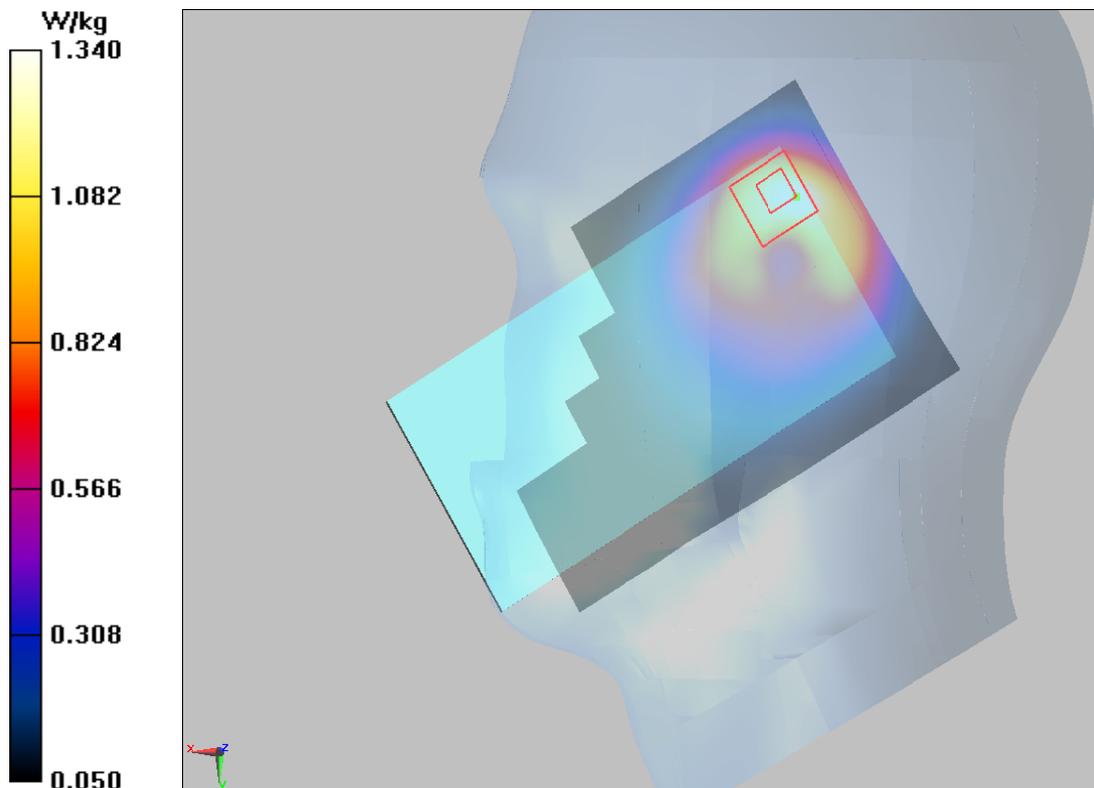

Plot 112 LTE Band 12 1RB Right Cheek High (Power Reduce)

Date: 2016/12/1

Communication System: UID 0, LTE_FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.864 \text{ S/m}$; $\epsilon_r = 41.328$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.63, 6.63, 6.63); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.16 W/kg


Right Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.37 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.581 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

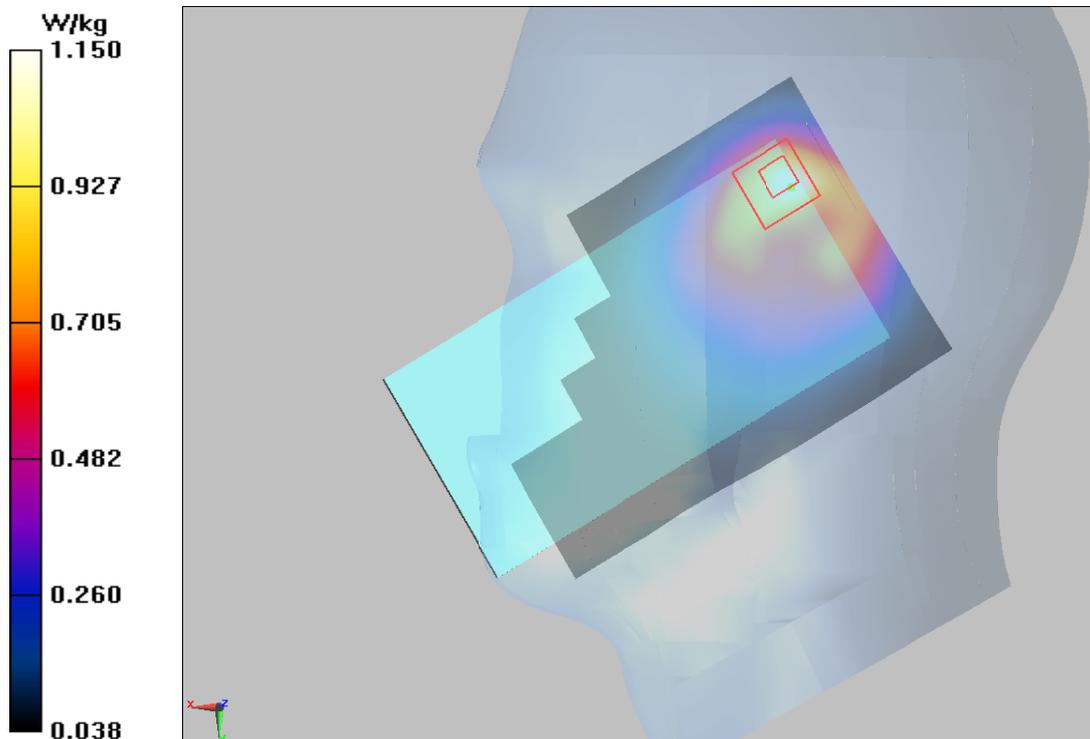

Plot 113 LTE Band 12 1RB Back Side High (Battery2, Distance 15mm)

Date: 11/20/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 57.243$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.83, 5.83, 5.83); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM; Serial:

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.375 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.95 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.354 W/kg ; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.375 W/kg

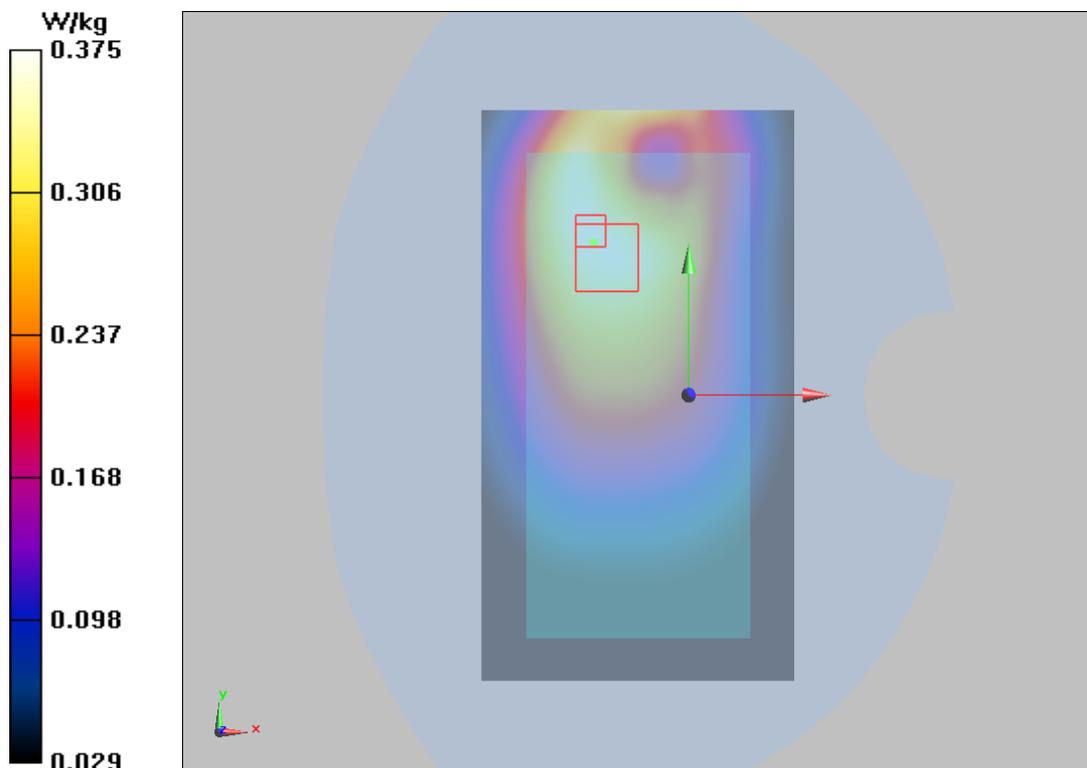

Plot 114 LTE Band 12 1RB Back Side High (Distance 10mm)

Date: 11/20/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 57.243$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.83, 5.83, 5.83); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM; Serial:

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.697 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.87 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

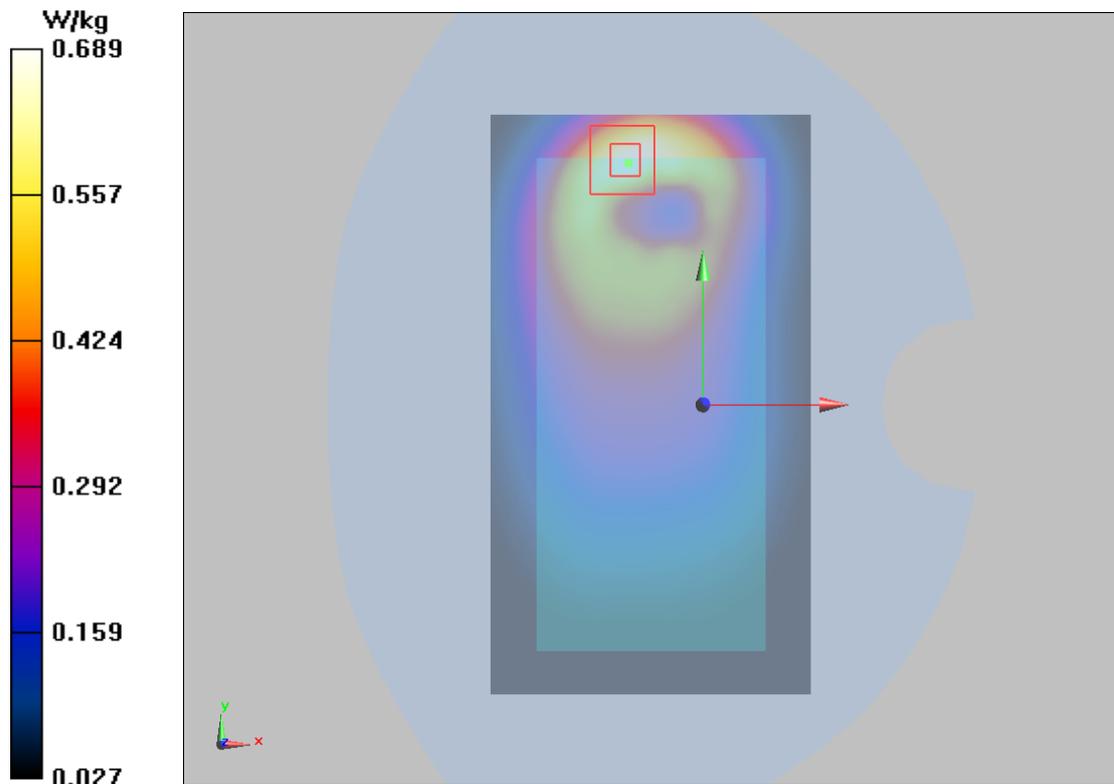

Plot 115 LTE Band 17 1RB Right Cheek High (Full Power)

Date: 2016/12/2

Communication System: UID 0, LTE_FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.864 \text{ S/m}$; $\epsilon_r = 41.328$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.63, 6.63, 6.63); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.44 W/kg


Right Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.77 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.303 W/kg ; SAR(10 g) = 0.724 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

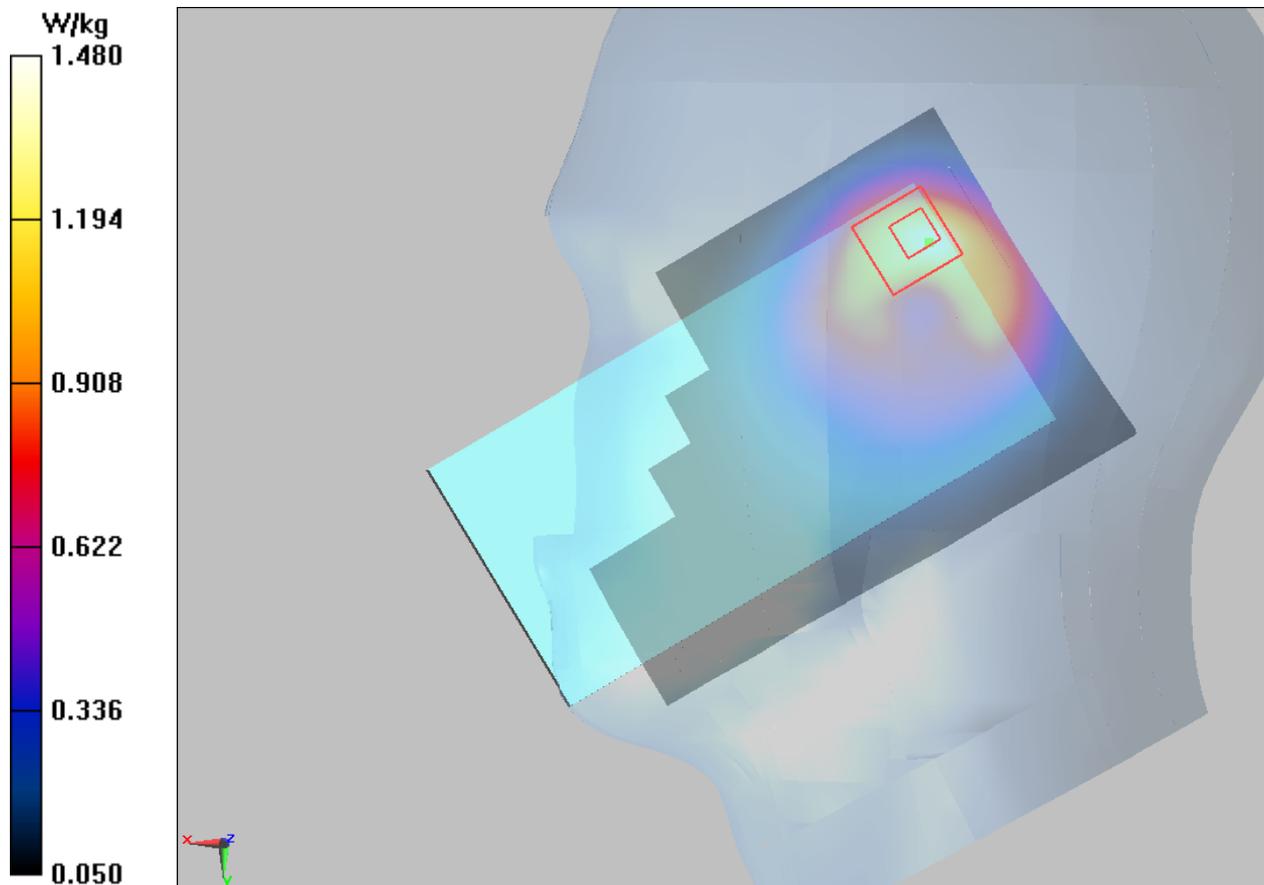

Plot 116 LTE Band 17 1RB Right Cheek High (Power Reduce)

Date: 2016/12/3

Communication System: UID 0, LTE_FDD (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.864 \text{ S/m}$; $\epsilon_r = 41.328$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.63, 6.63, 6.63); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.07 W/kg


Right Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.17 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.973 W/kg ; SAR(10 g) = 0.543 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

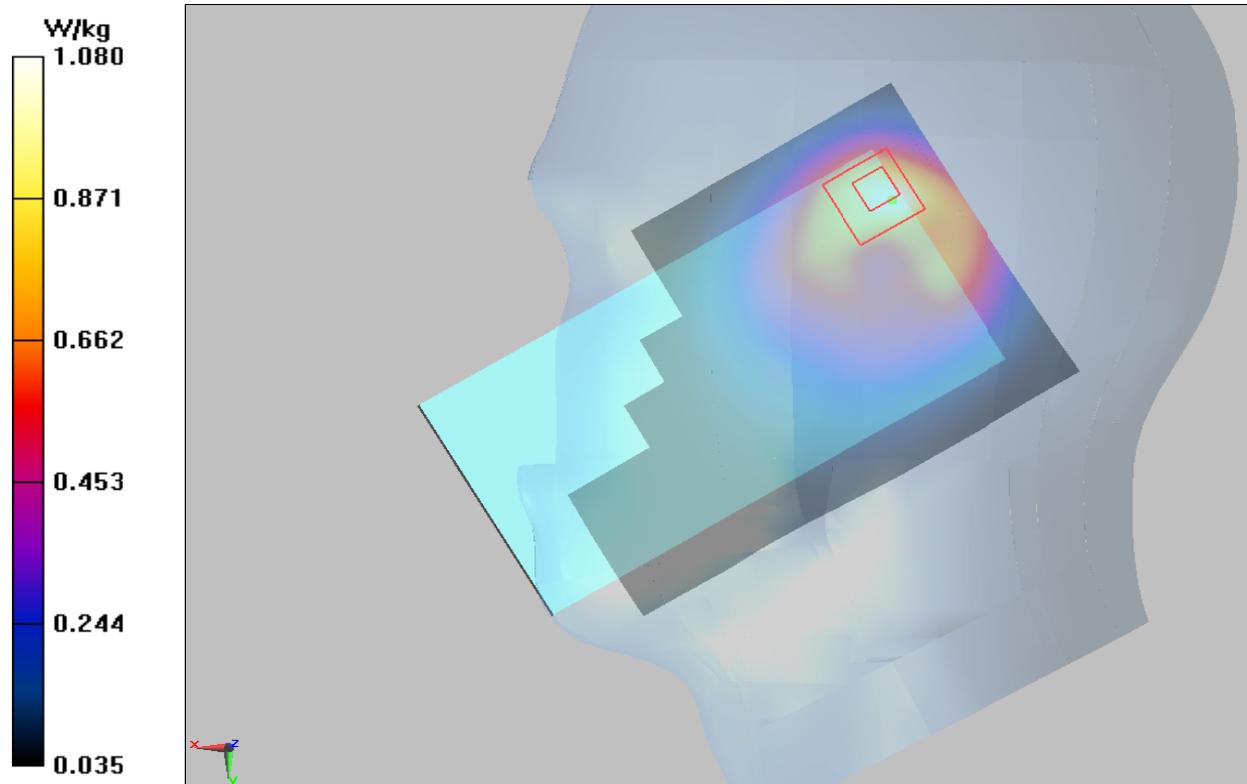

Plot 117 LTE Band 17 1RB Back Side Middle (Distance 15mm)

Date: 11/20/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 57.243$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.83, 5.83, 5.83); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side Middle/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.387 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.38 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.384 W/kg

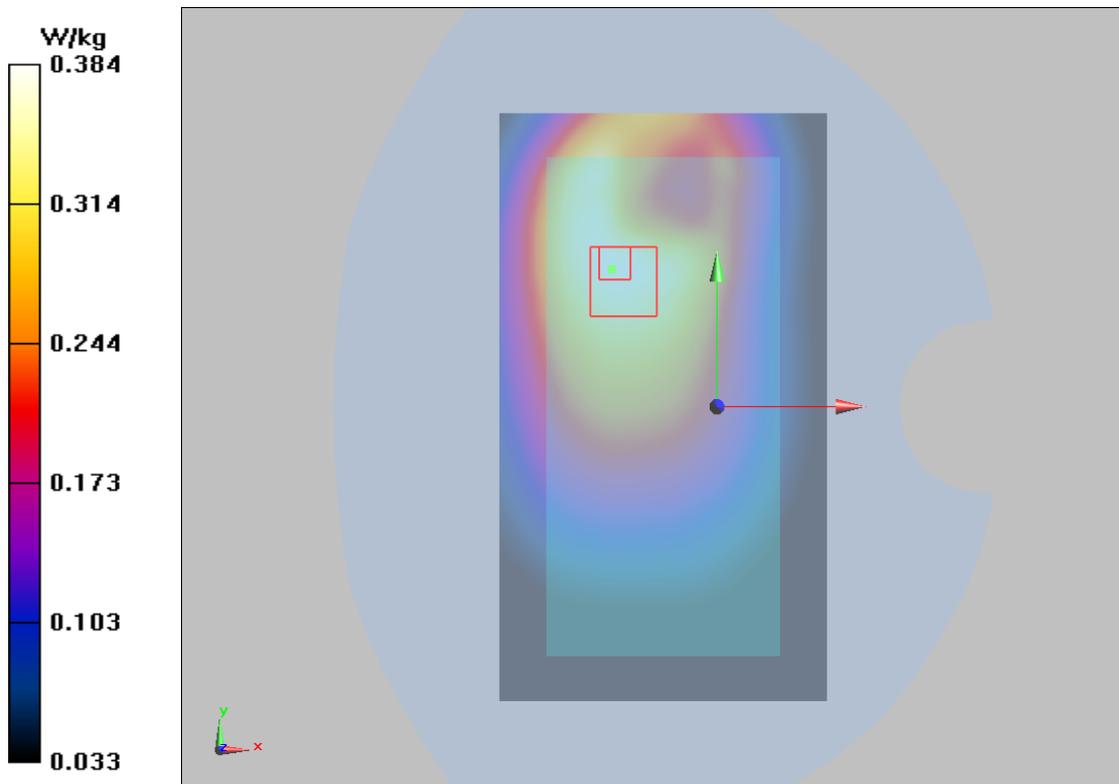

Plot 118 LTE Band 17 1RB Back Side Middle (Distance 10mm)

Date: 11/20/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 57.243$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (5.83, 5.83, 5.83); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side Middle/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.629 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.46 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.599W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

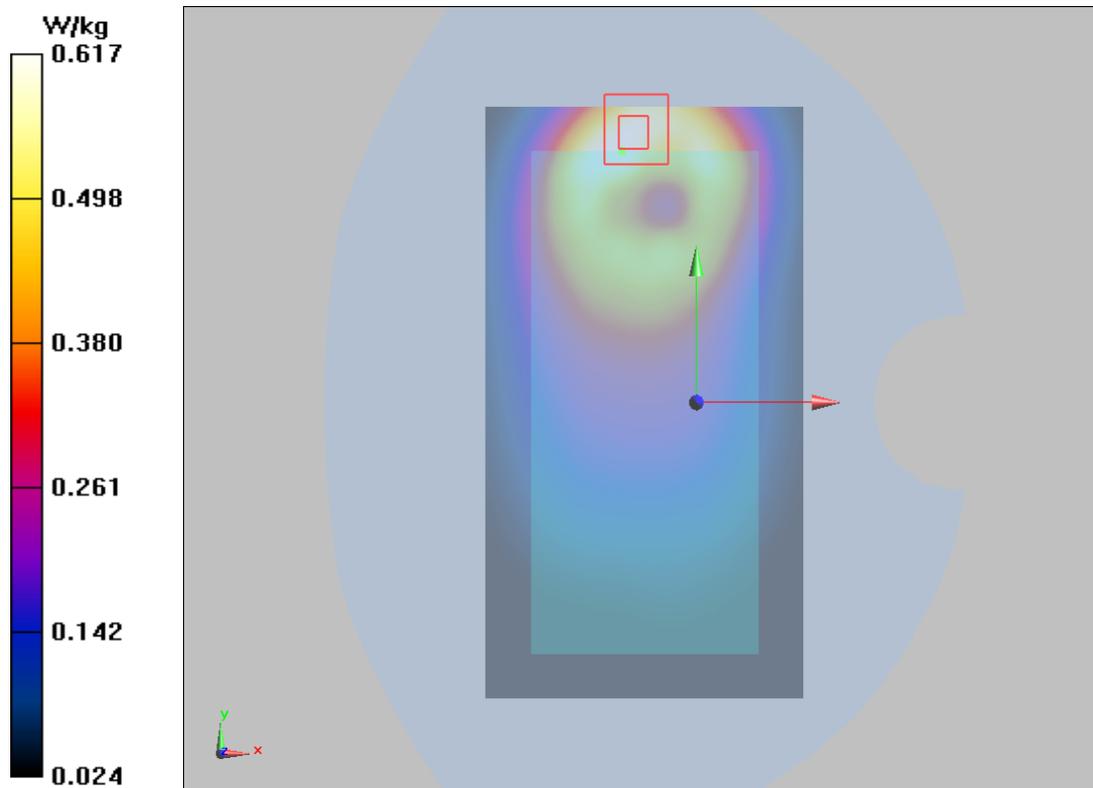

Plot 119 LTE Band 26 1RB Right Cheek Middle (Full Power)

Date: 11/25/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.602$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.22, 6.22, 6.22); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek Middle/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.884 W/kg


Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.58 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.447 W/kg

Maximum value of SAR (measured) = 0.821 W/kg

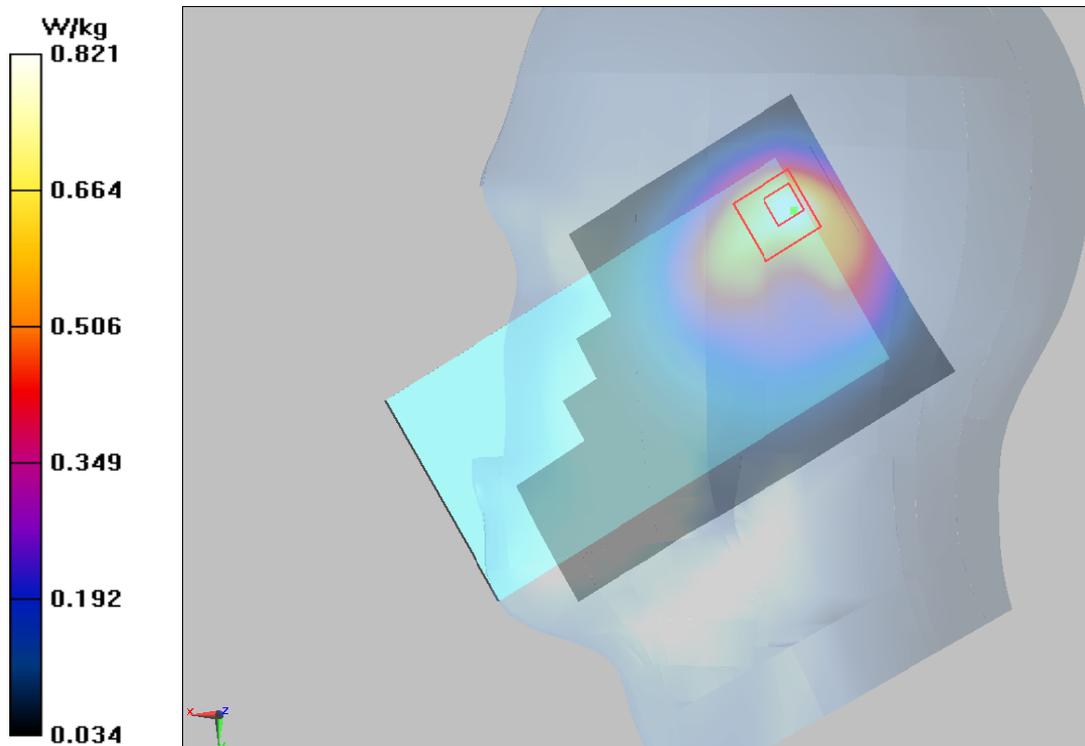

Plot 120 LTE Band 26 1RB Right Cheek High (Power Reduce)

Date: 11/25/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 42.485$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(6.22, 6.22, 6.22); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.719 W/kg


Right Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.06 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.634 W/kg ; SAR(10 g) = 0.377 W/kg

Maximum value of SAR (measured) = 0.667 W/kg

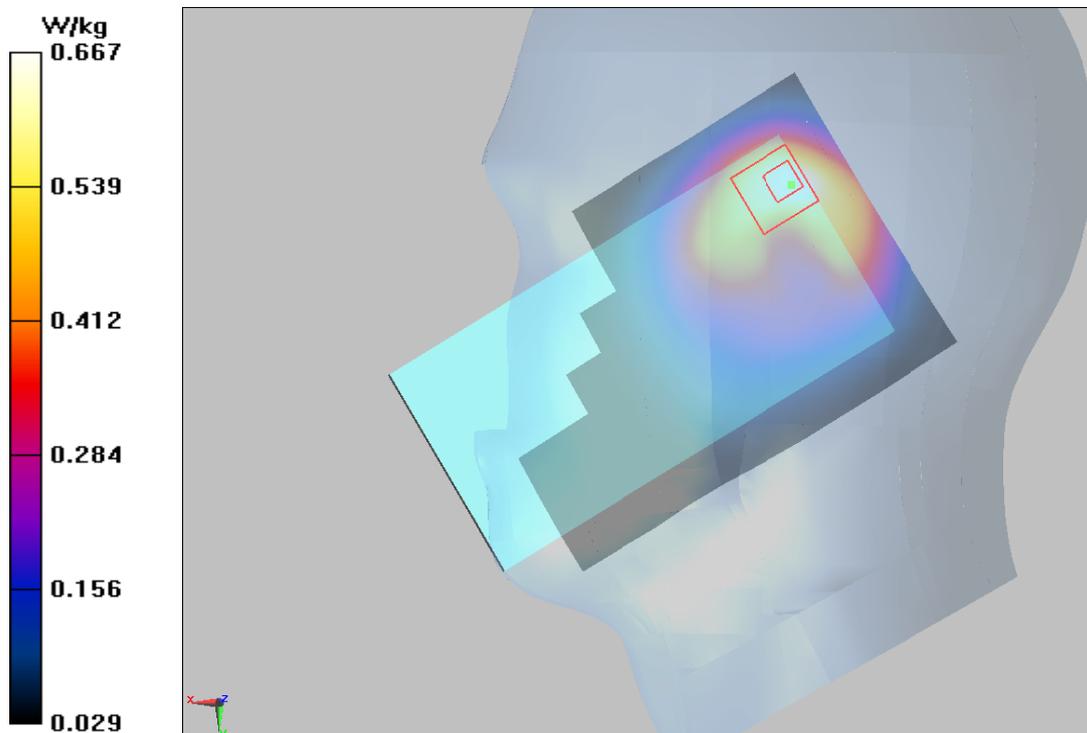

Plot 121 LTE Band 26 1RB Back Side High (Distance 15mm)

Date: 11/29/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 54.378$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.87, 5.87, 5.87); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM; Serial:

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm.

Maximum value of SAR (interpolated) = 0.190 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.02 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

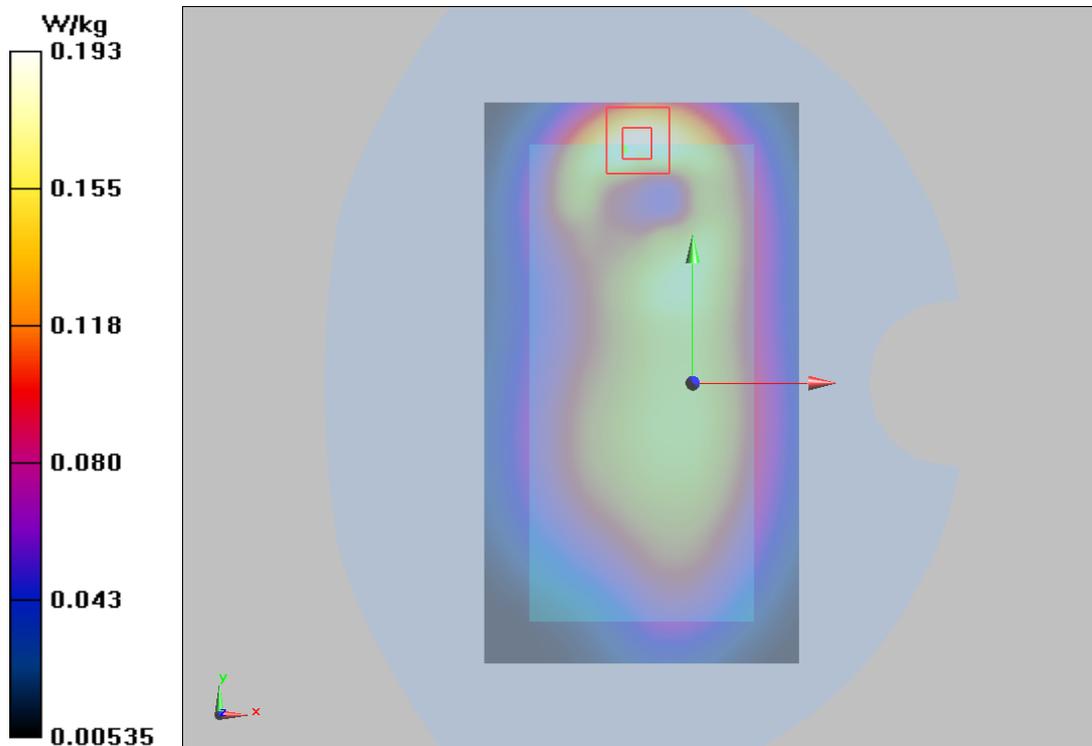

Plot 122 LTE Band 26 1RB Back Side High (Distance 10mm)

Date: 11/29/2016

Communication System: UID 0, LTE_FDD (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 54.378$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(5.87, 5.87, 5.87); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.435 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.41 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.430 W/kg

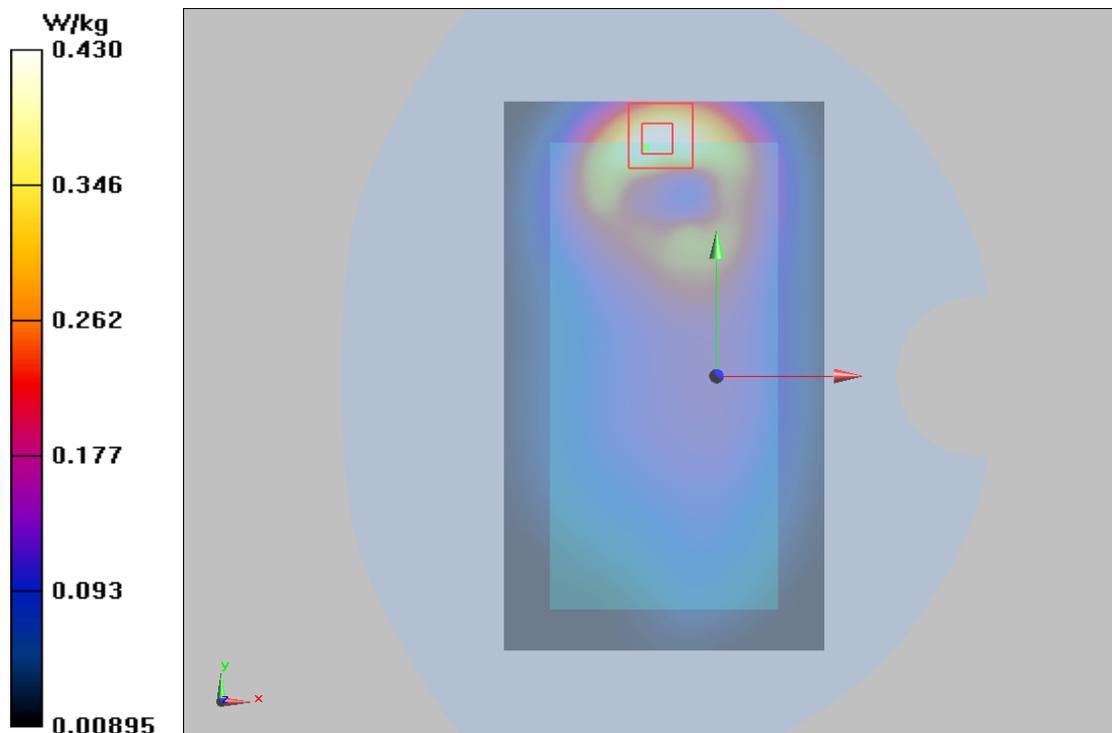

Plot 123 LTE Band 38 1RB Right Cheek Middle (Full Power)

Date: 2016/12/6

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 39.385$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.25, 4.25, 4.25); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.32 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.58 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.643 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

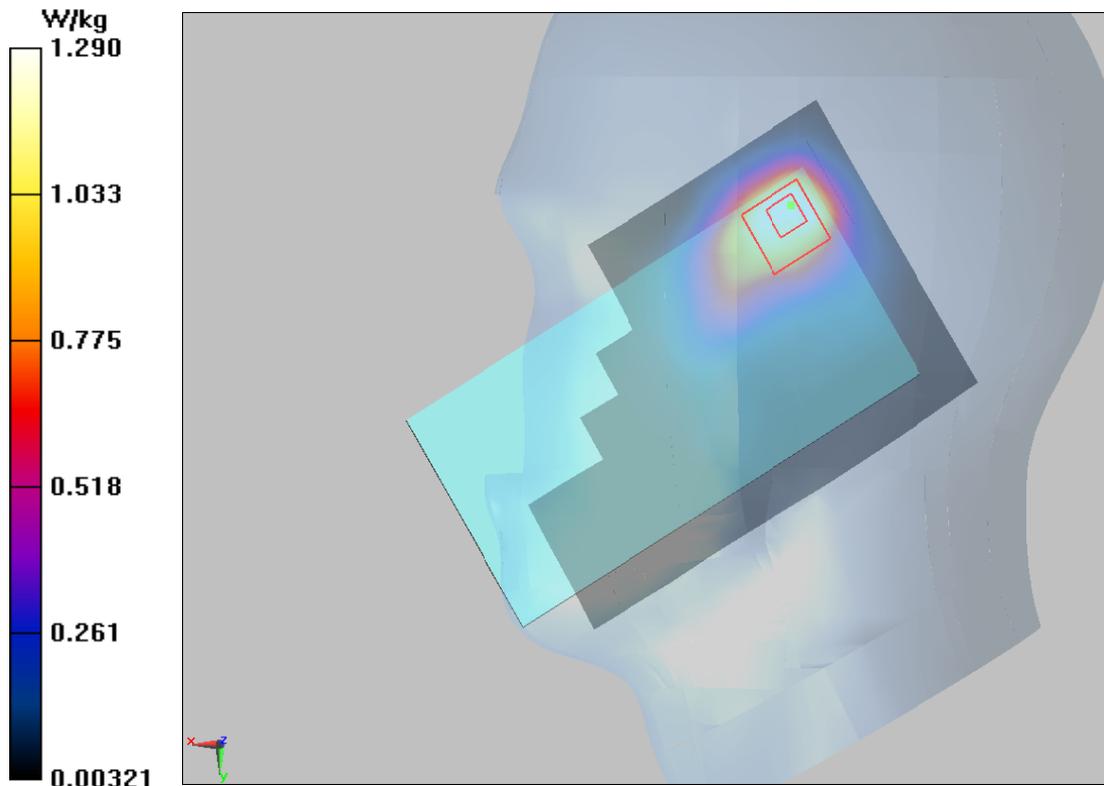

Plot 124 LTE Band 38 1RB Right Cheek Middle (Battery 3, Power Reduce)

Date: 2016/12/6

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 39.385$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.25, 4.25, 4.25); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.872 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.986 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 0.876 W/kg

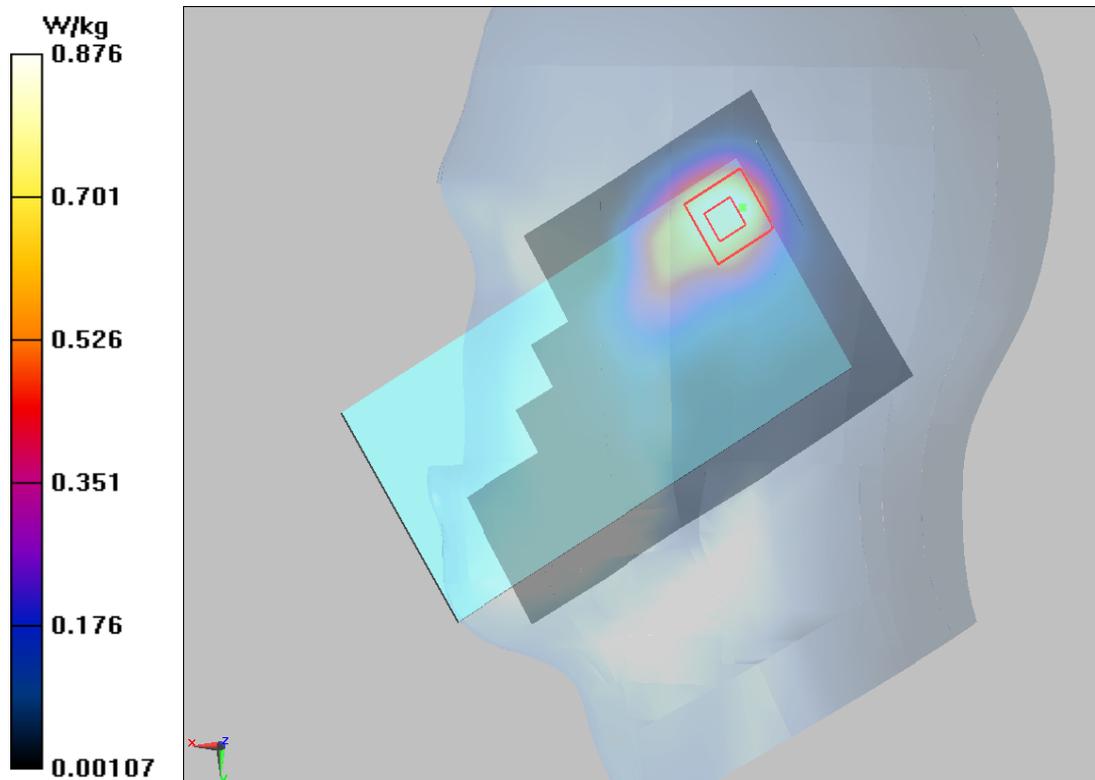

Plot 125 LTE Band 38 1RB Back Side High (Distance 15mm)

Date: 12/13/2016

Communication System: UID 0, LTE TDD (0); Frequency: 2610 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2610$ MHz; $\sigma = 2.161$ S/m; $\epsilon_r = 51.919$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.21, 4.21, 4.21); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM; Serial:

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.174 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.534 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.165 W/kg

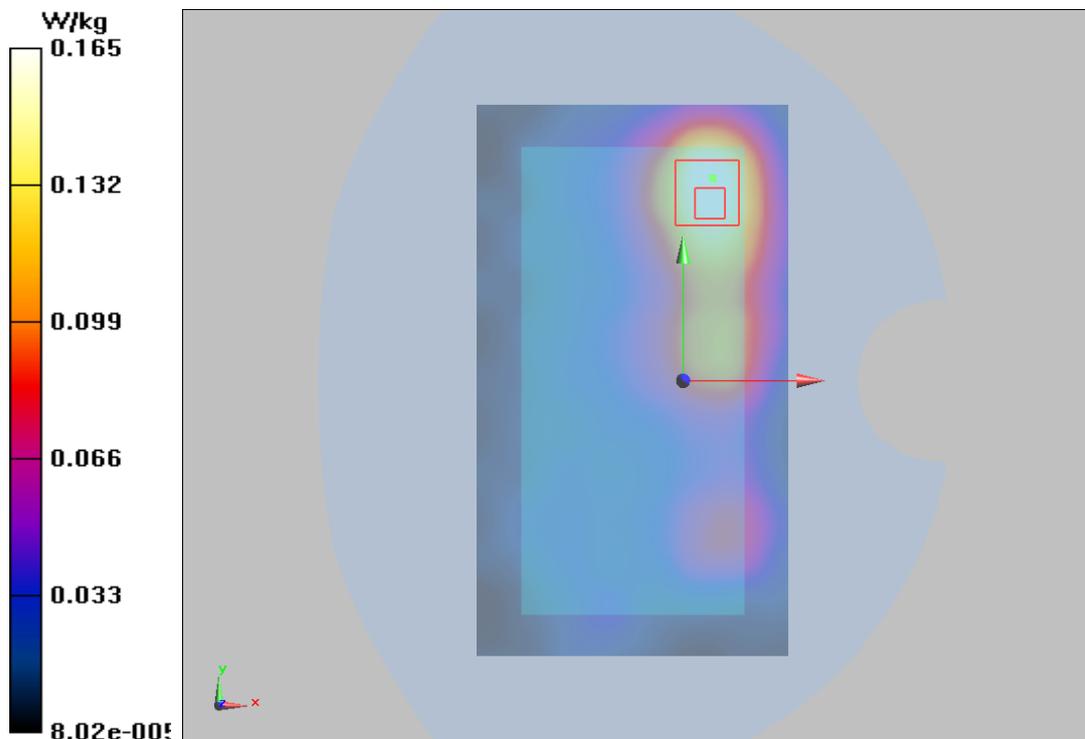

Plot 126 LTE Band 38 1RB Back Side High (Distance 10mm)

Date: 12/13/2016

Communication System: UID 0, LTE TDD (0); Frequency: 2610 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2610$ MHz; $\sigma = 2.161$ S/m; $\epsilon_r = 51.919$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.21, 4.21, 4.21); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM; Serial:

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.358 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.482 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

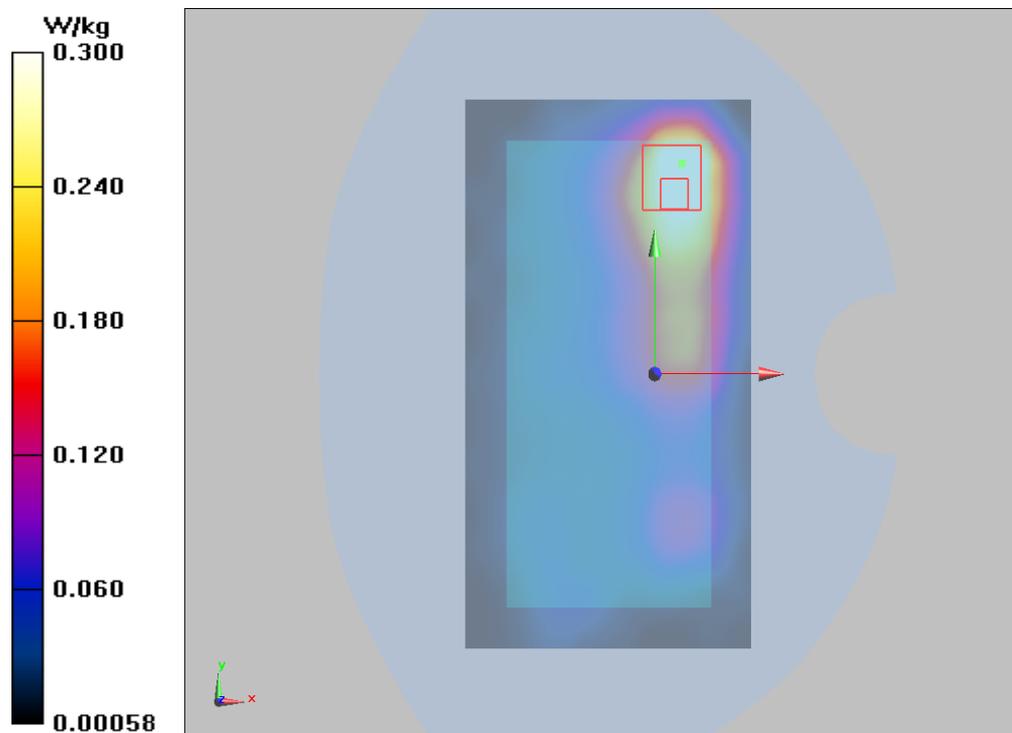

Plot 127 LTE Band 41 1RB Right Cheek High (Full Power)

Date: 2016/12/4

Communication System: UID 0, LTE TDD (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.083$ S/m; $\epsilon_r = 39.16$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.25, 4.25, 4.25); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Right Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.959 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 1.37 W/kg

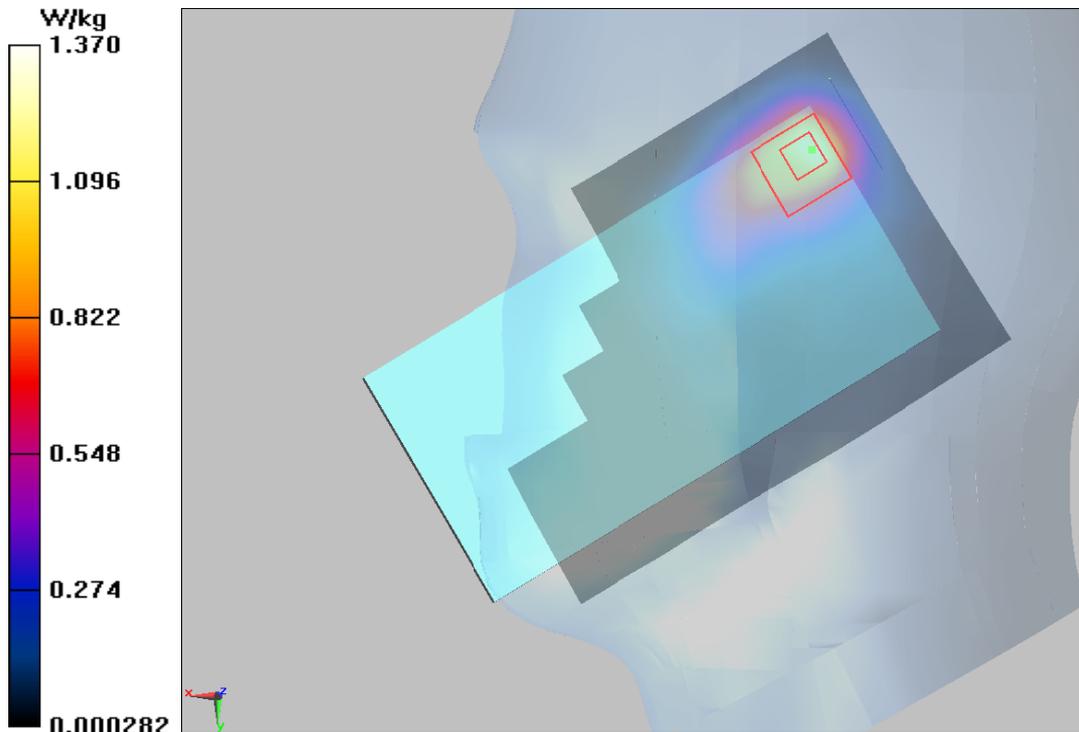

Plot 128 LTE Band 41 1RB Right Cheek High (Power Reduce)

Date: 2016/12/4

Communication System: UID 0, LTE TDD (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.083$ S/m; $\epsilon_r = 39.16$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.25, 4.25, 4.25); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.645 W/kg


Right Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.447 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

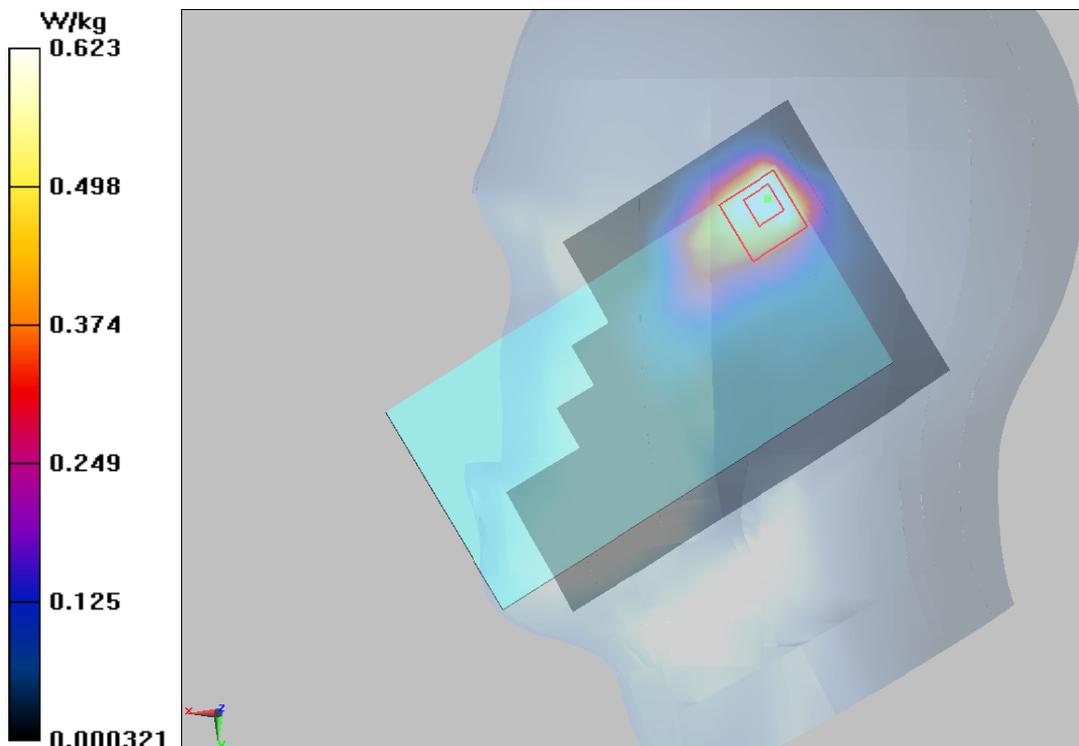

Plot 129 LTE Band 41 1RB Front Side High (Distance 15mm)

Date: 12/13/2016

Communication System: UID 0, LTE_TDD (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.201$ S/m; $\epsilon_r = 51.864$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.21, 4.21, 4.21); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Front Side High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.140 W/kg


Front Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.264 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

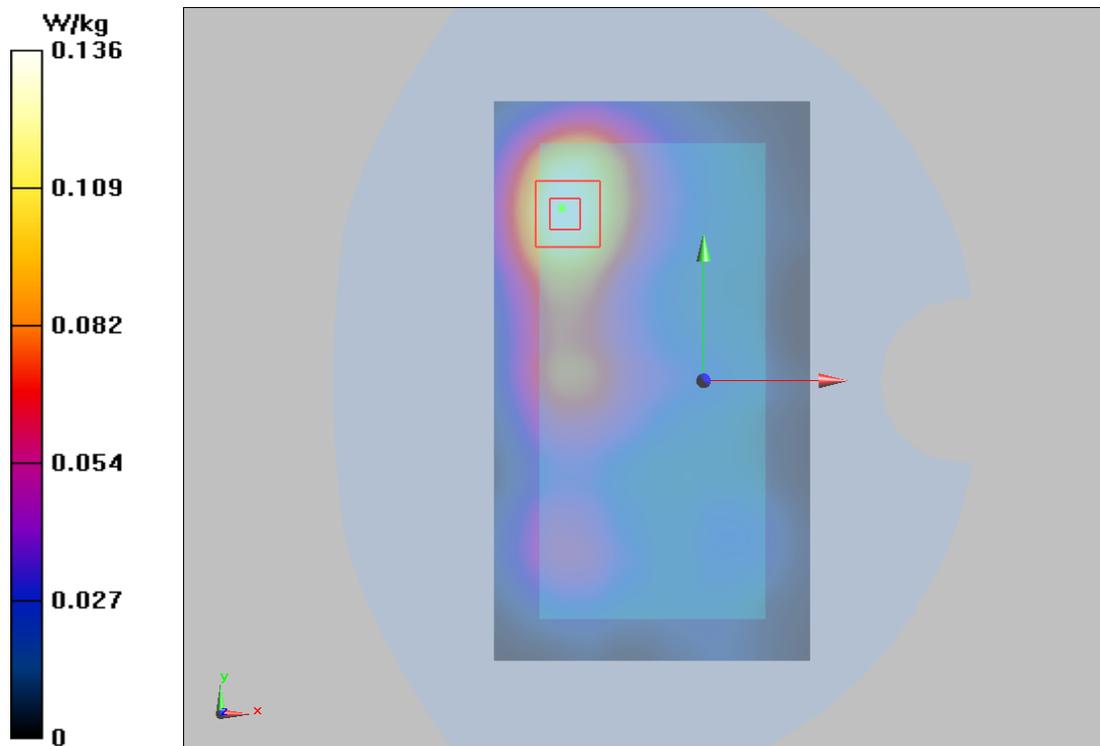

Plot 130 LTE Band 41 1RB Back Side High (Distance 10mm)

Date: 12/13/2016

Communication System: UID 0, LTE TDD (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57979

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.201$ S/m; $\epsilon_r = 51.864$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.21, 4.21, 4.21); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (91x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.273 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.094 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

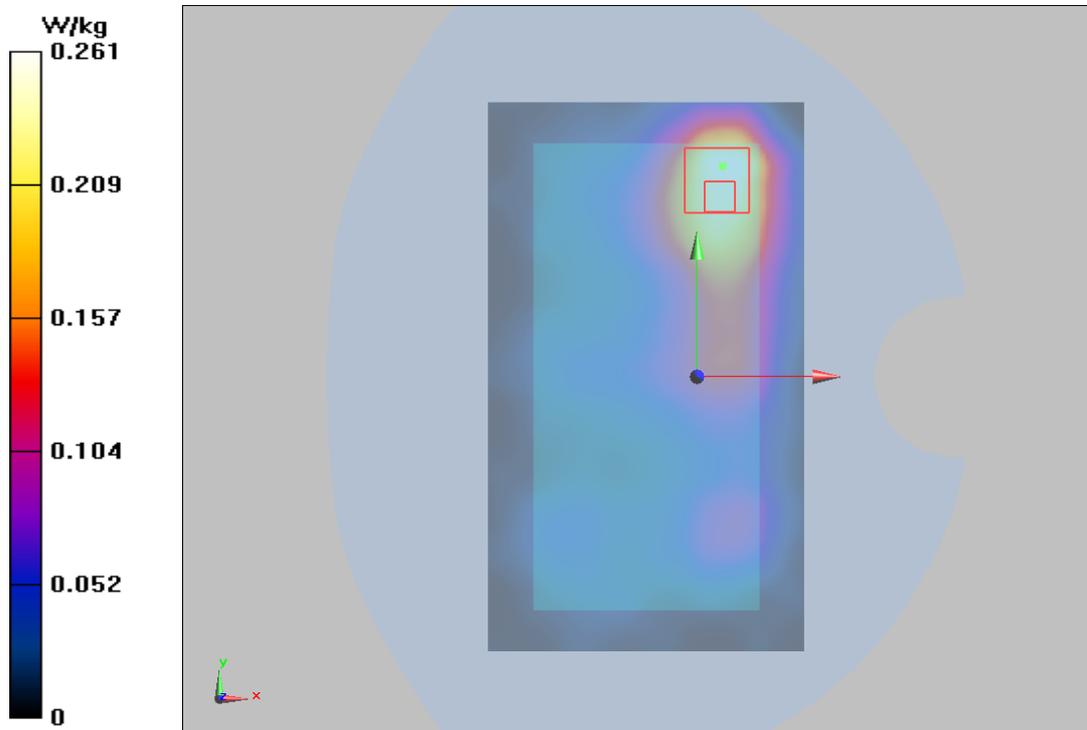

Wi-Fi-2.4G

Antenna 1

Plot 131 802.11b Left Cheek High (Full Power)

Date: 12/17/2016

Communication System: UID 0, 802.11 b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.42, 4.42, 4.42); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Cheek High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.521W/kg


Left Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.083 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.627 W/kg

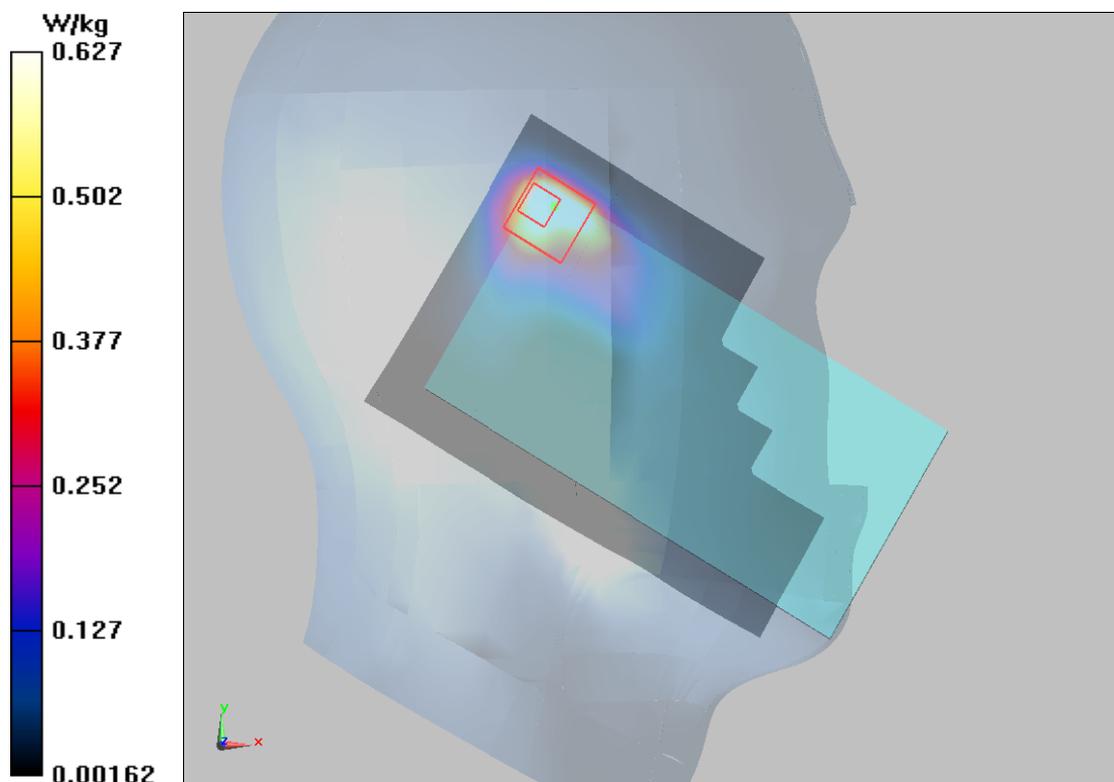

Plot 132 802.11b Left Cheek High (Power Reduce)

Date: 12/17/2016

Communication System: UID 0, 802.11 b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.42, 4.42, 4.42); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Cheek High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.335 W/kg


Left Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.261 V/m; Power Drift = 0.154 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

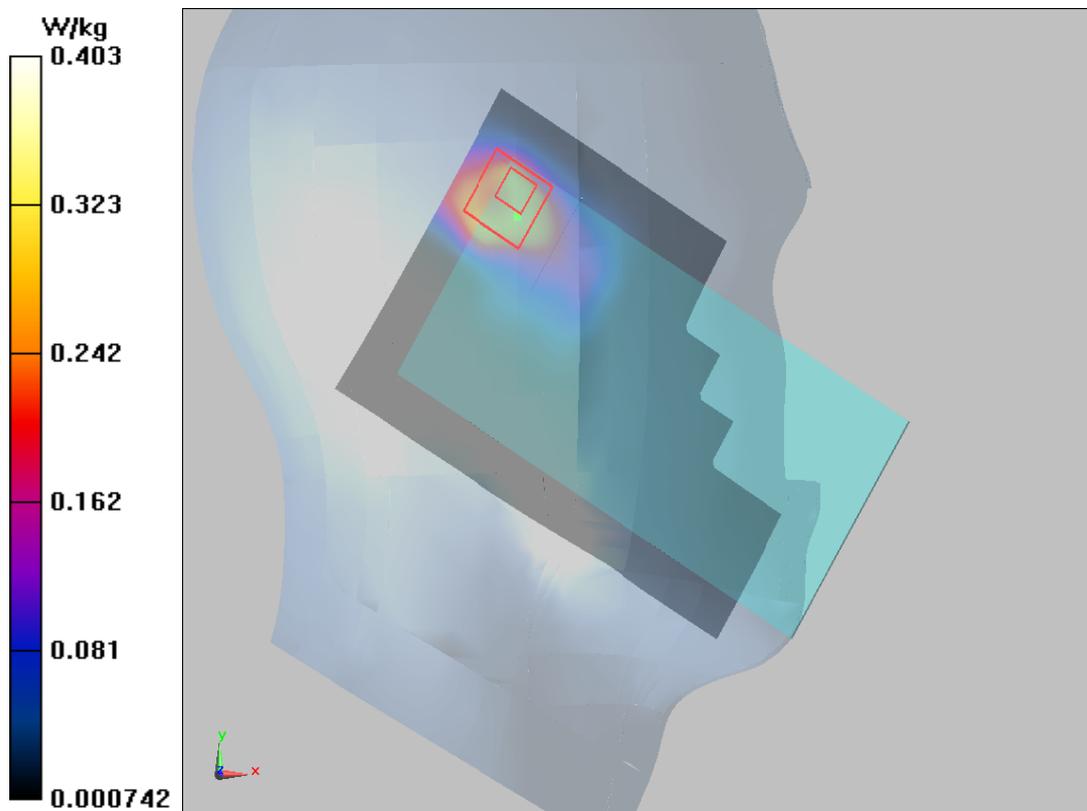

Plot 133 802.11b Back Side High (Distance 15mm)

Date: 12/16/2016

Communication System: UID 0, 802.11 b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 52.343$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.36, 4.36, 4.36); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0480 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.731 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0529 W/kg

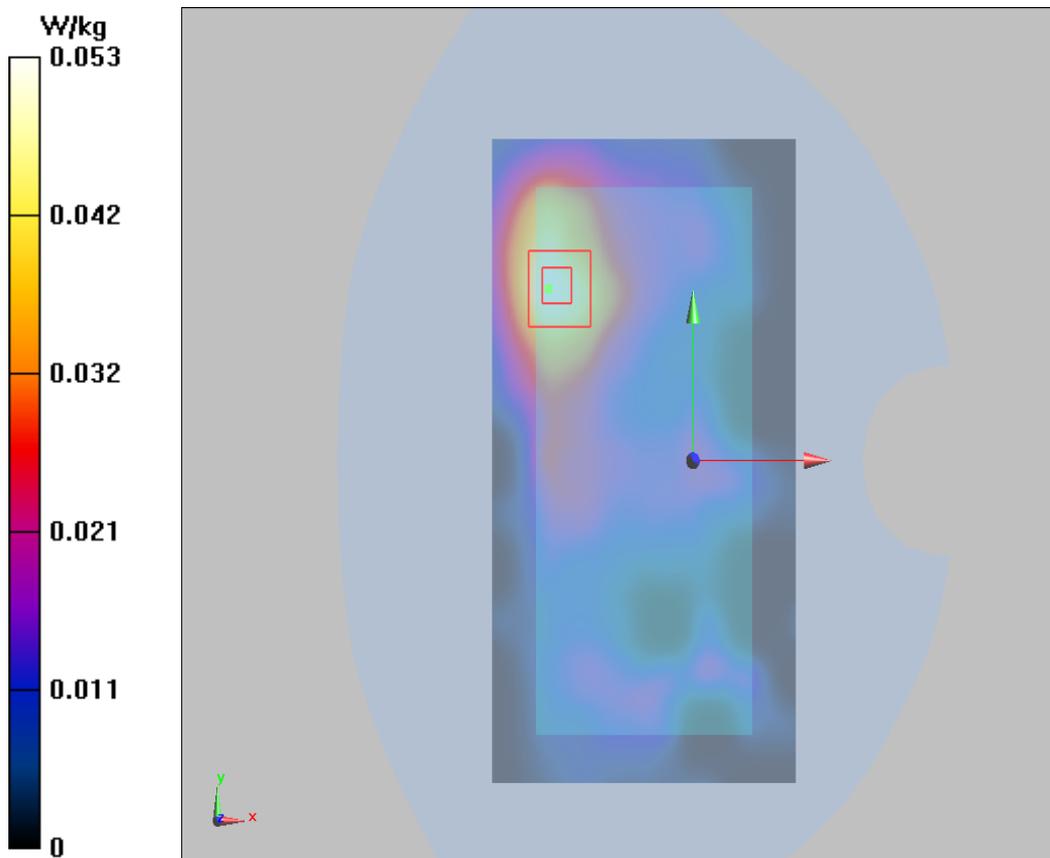

Plot 134 802.11b Back Side High (Distance 10mm)

Date: 12/16/2016

Communication System: UID 0, 802.11 b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 52.343$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.36, 4.36, 4.36); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.111 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.638 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

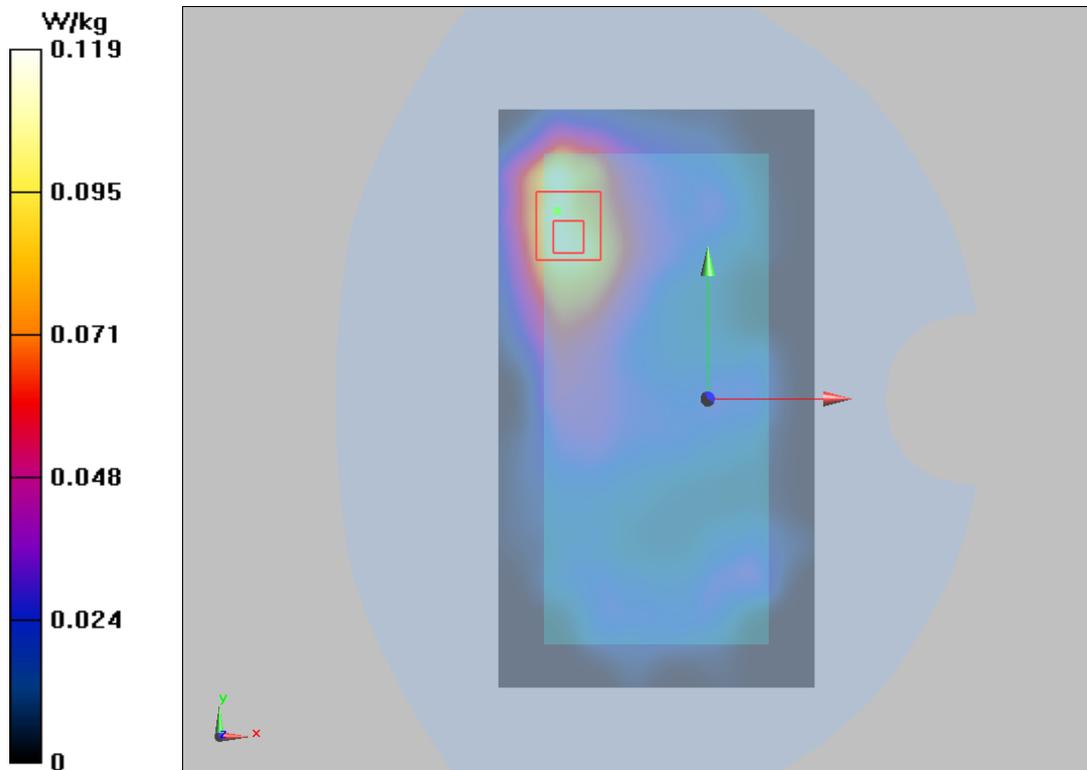

Antenna 2

Plot 135 802.11b Left Cheek Middle (Battery 2, Full Power)

Date: 12/17/2016

Communication System: UID 0, 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 39.945$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.42, 4.42, 4.42); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Cheek Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.394 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.980 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.450 W/kg

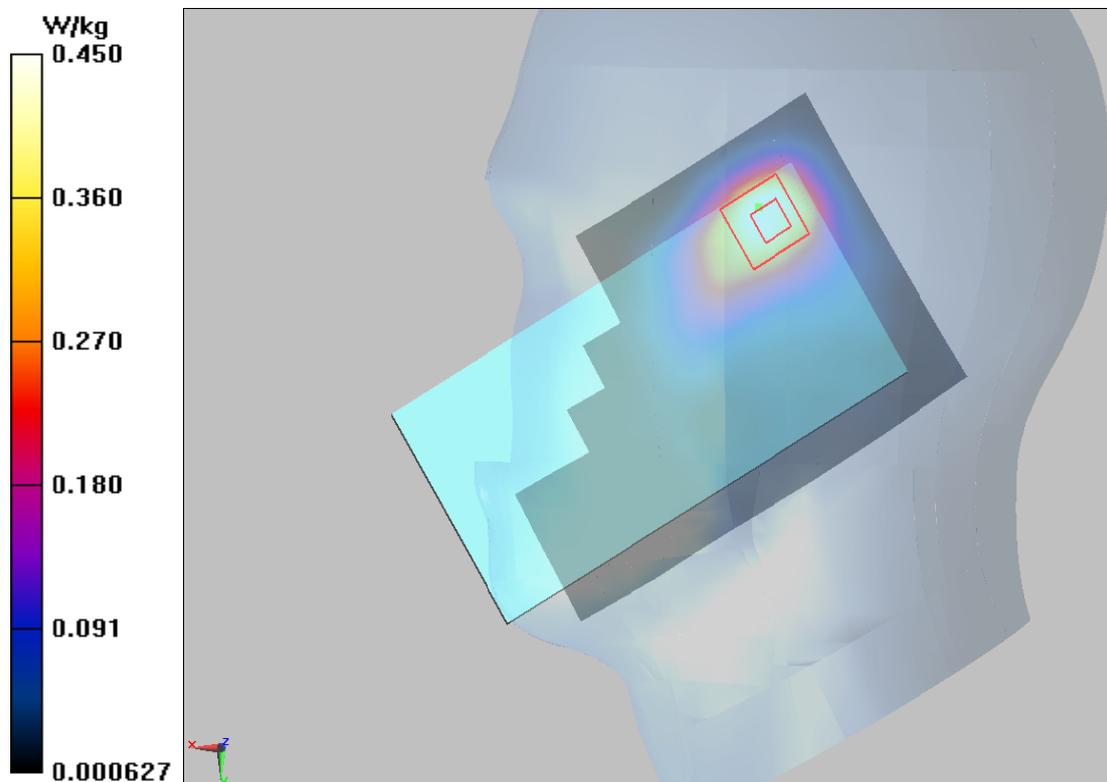

Plot 136 802.11b Back Side Middle (Distance 10mm)

Date: 12/16/2016

Communication System: UID 0, 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 52.435$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF(4.36, 4.36, 4.36); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side Middle/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.117 W/kg


Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.343 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

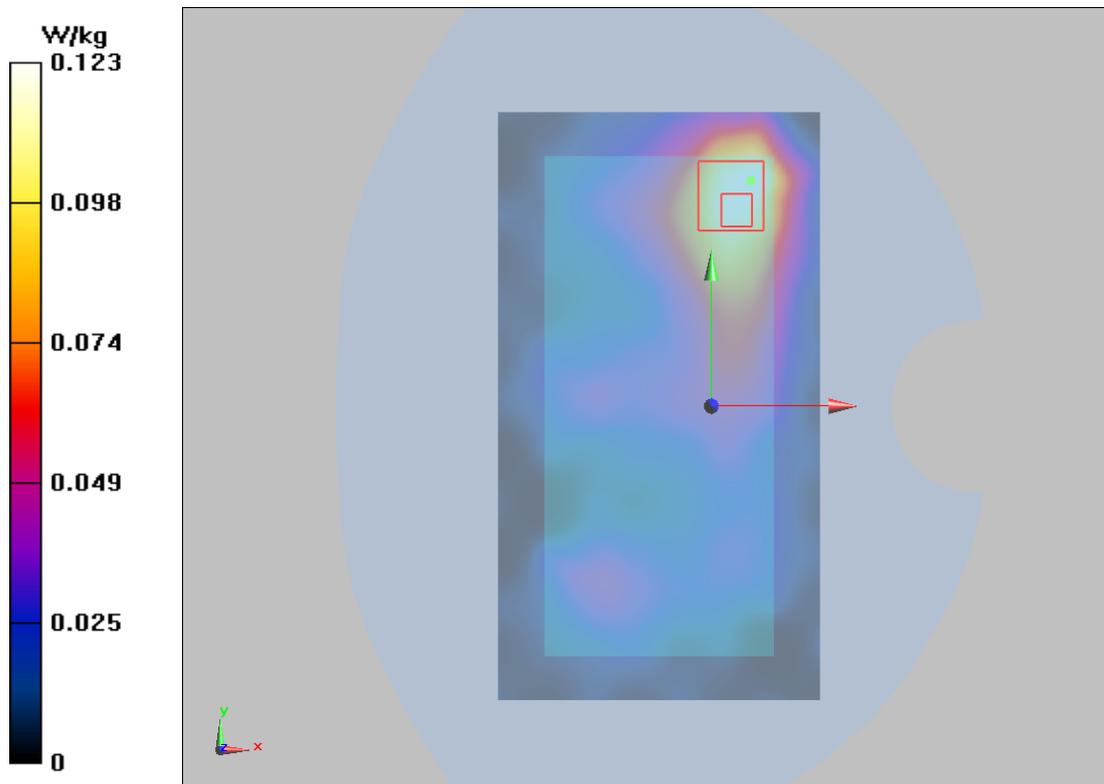

MIMO

Plot 137 802.11g Left Cheek High (Full Power)

Date: 12/17/2016

Communication System: UID 0, WiFi 802.11 g (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.36, 4.36, 4.36); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Cheek High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.362 W/kg


Left Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.924 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.497 W/kg

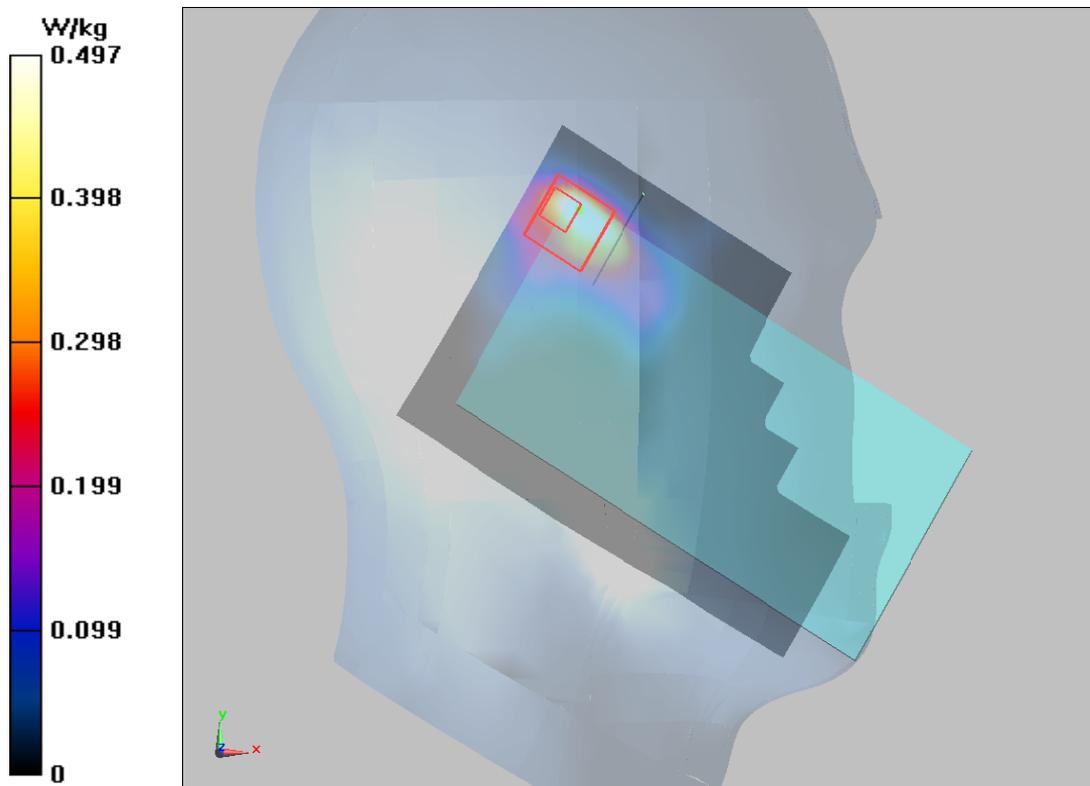

Plot 138 802.11g Back Side High (Distance 15mm)

Date: 12/16/2016

Communication System: UID 0, WiFi 802.11 g (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 52.343$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.36, 4.36, 4.36); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0440 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.666 V/m; Power Drift = 0.34 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0486 W/kg

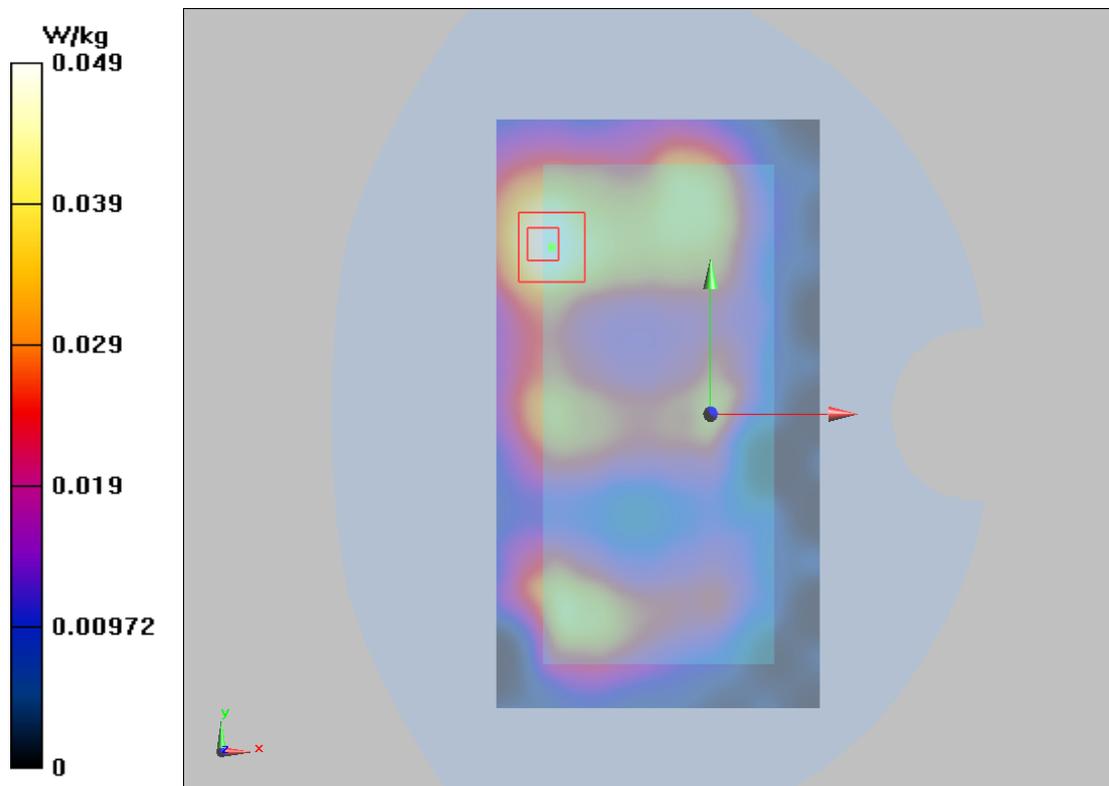

Plot 139 802.11g Back Side High (Distance 10mm)

Date: 12/16/2016

Communication System: UID 0, WiFi (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.969 \text{ S/m}$; $\epsilon_r = 53.574$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: ES3DV3 - SN3189; ConvF (4.36, 4.36, 4.36); Calibrated: 7/27/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side High/Area Scan (91x151x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.077 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.578 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

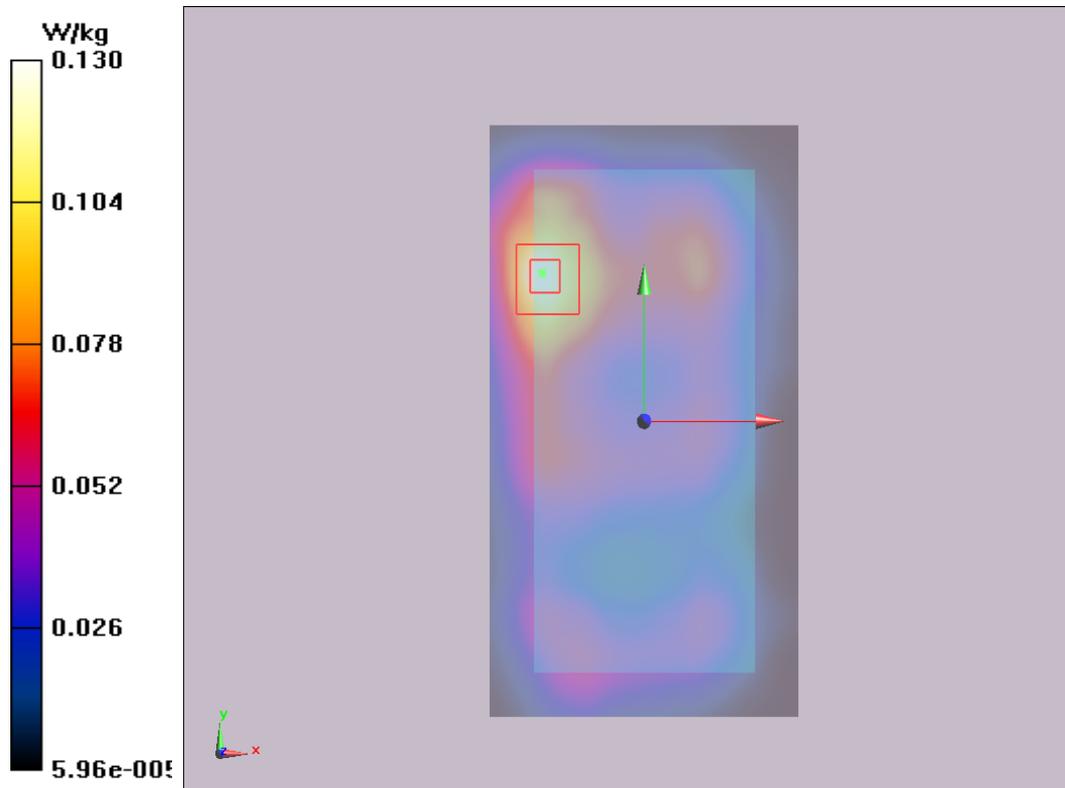

Wi-Fi-5G

Antenna 1

Plot 140 802.11a U-NII-2A Left Cheek CH64 (Full Power)

Date: 12/23/2016

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 35.77$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF (5.32, 5.32, 5.32); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Cheek CH64 /Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.341 W/kg


Left Cheek CH64 /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.992 V/m; Power Drift = 0.158 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

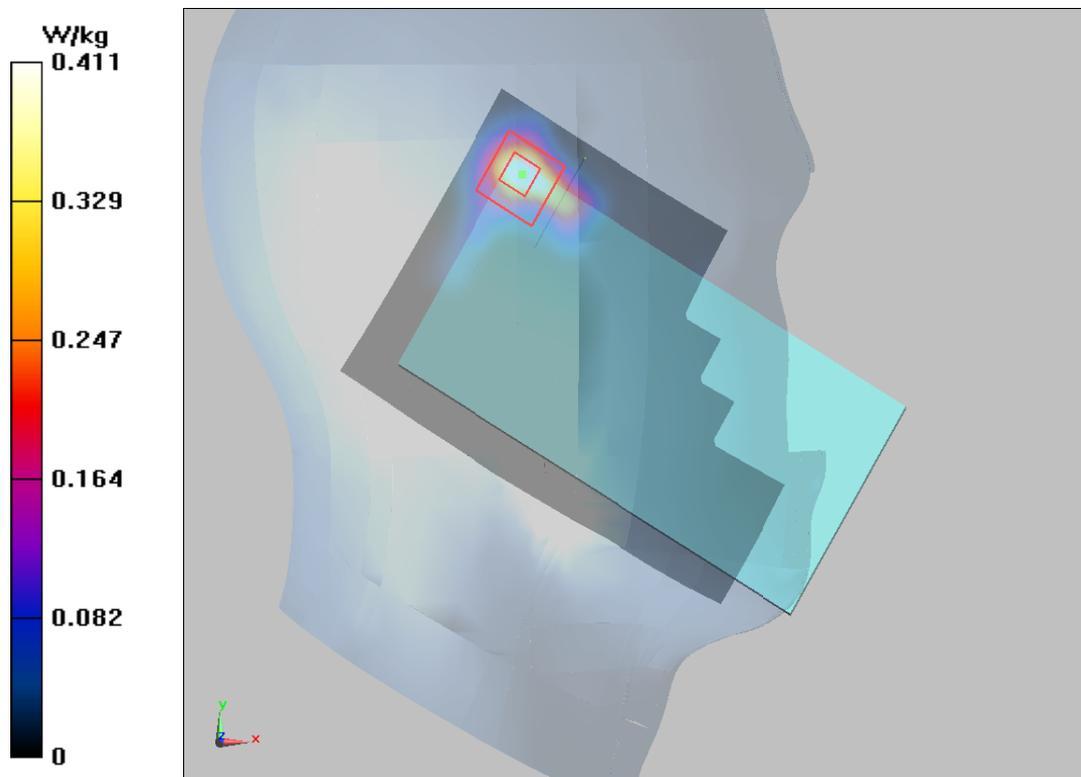

Plot 141 802.11a U-NII-2A Left Cheek CH64 (Power Reduce)

Date: 12/23/2016

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.816$ S/m; $\epsilon_r = 35.827$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF (5.32, 5.32, 5.32); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Cheek CH64 /Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.287 W/kg


Left Cheek CH64 /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.633 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.965W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

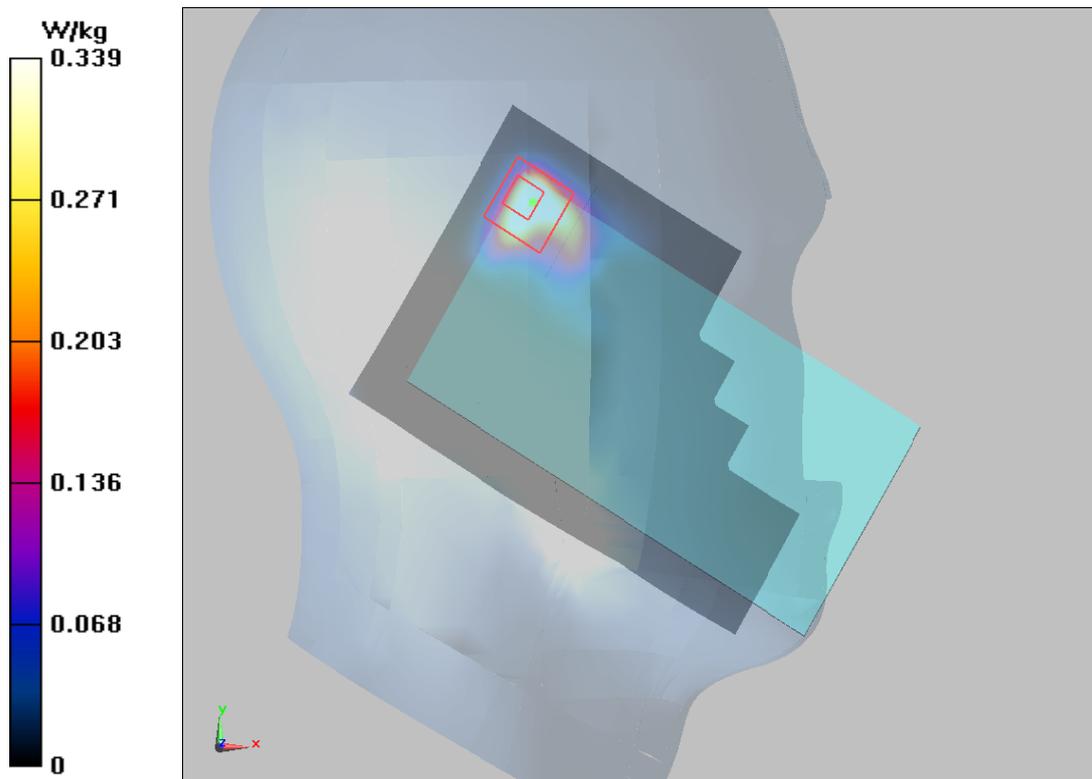

Plot 142 802.11a U-NII-2A Front Side CH64 (Distance 15mm)

Date: 12/22/2016

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 5.435 \text{ S/m}$; $\epsilon_r = 46.681$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF (4.69, 4.69, 4.69); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Front Side CH64 /Area Scan (111x181x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.009 W/kg


Front Side CH64 /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.384 V/m; Power Drift = 0.089dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.01W/kg; SAR(10 g) = 0.004 W/kg

Maximum value of SAR (measured) = 0.015 W/kg

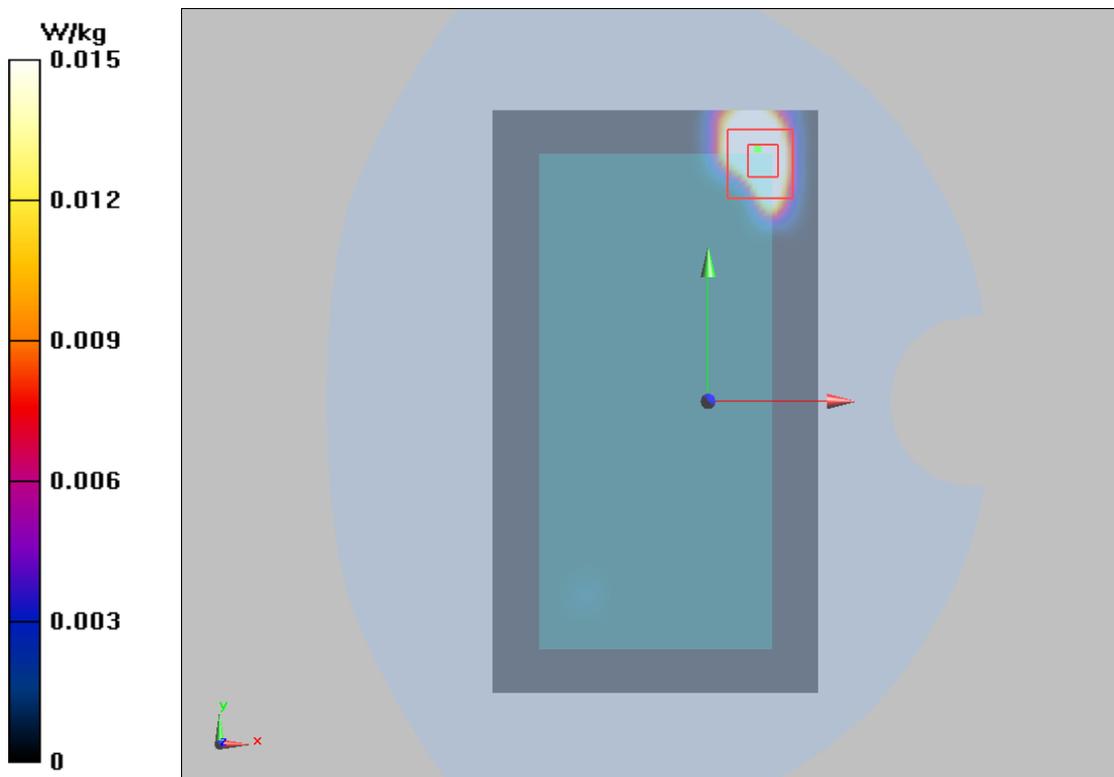

Plot 143 802.11a U-NII-2A Back Edge CH64 (Distance 0mm)

Date: 12/22/2016

Communication System: UID 0, 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.493$ S/m; $\epsilon_r = 46.563$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF (4.69, 4.69, 4.69); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Back Side CH64 /Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.954 W/kg


Back Side CH64 /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.462V/m; Power Drift = 0.11dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.97 W/kg

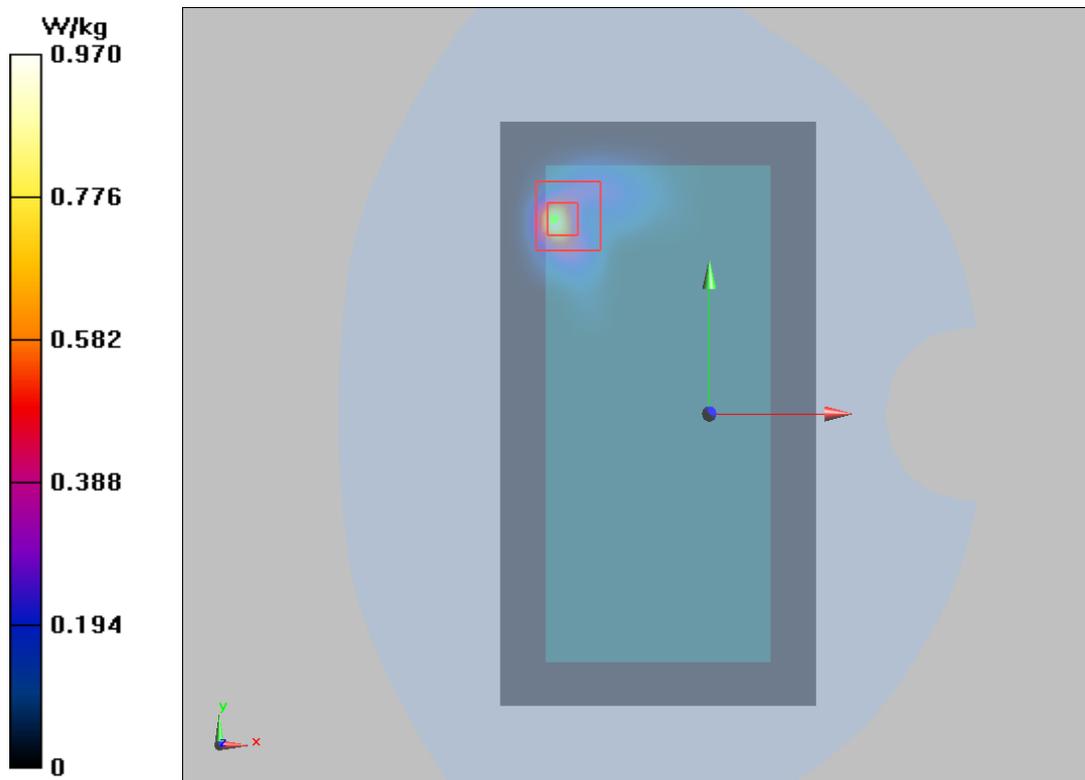

Antenna 2

Plot 144 802.11a U-NII-2A Right Tilt CH52 (Battery2)

Date: 12/23/2016

Communication System: UID 0, 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.765$ S/m; $\epsilon_r = 35.934$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF(5.32, 5.32, 5.32); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Tilt CH52 /Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.223 W/kg


Right Tilt CH52 /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=10mm, dy=10mm, dz=5mm

Reference Value = 2.412 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

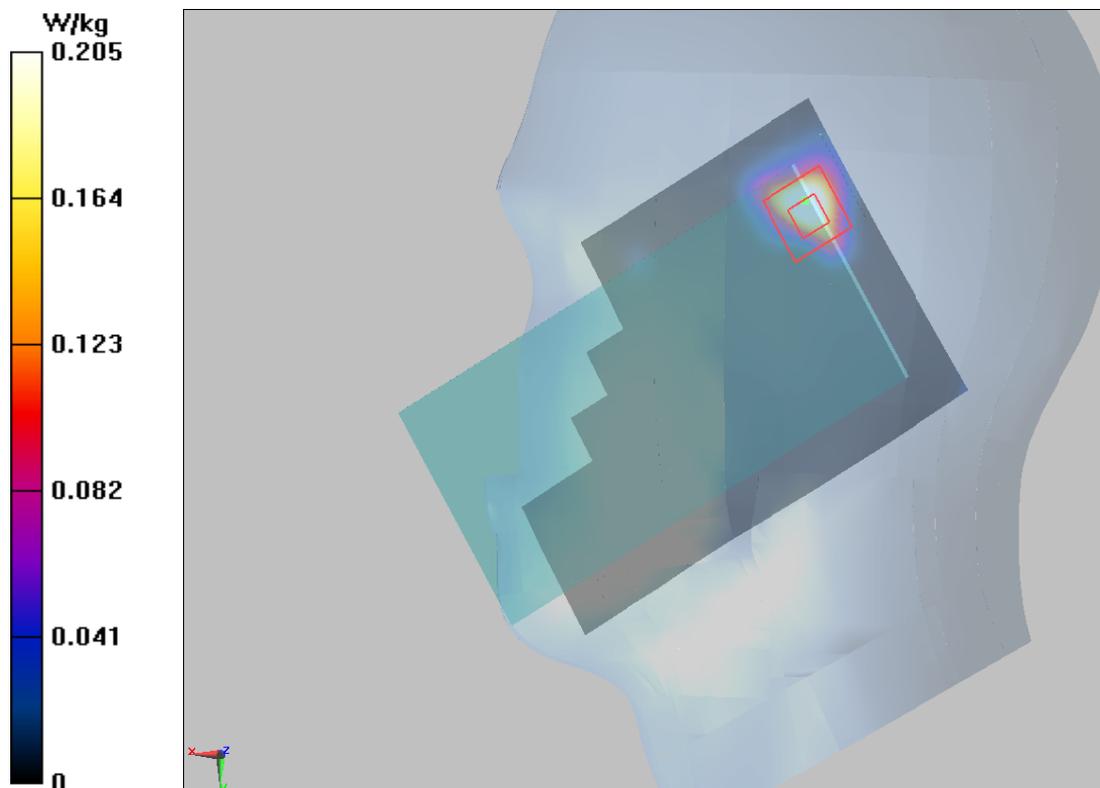

Plot 145 802.11a U-NII-2A Front Edge CH52 (Distance 0mm)

Date: 12/23/2016

Communication System: UID 0, 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.435$ S/m; $\epsilon_r = 46.681$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF (4.69, 4.69, 4.69); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Front Side 0mm/Low/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.681 W/kg


Front Side 0mm/Low/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm Reference Value = 1.674 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.776 W/kg

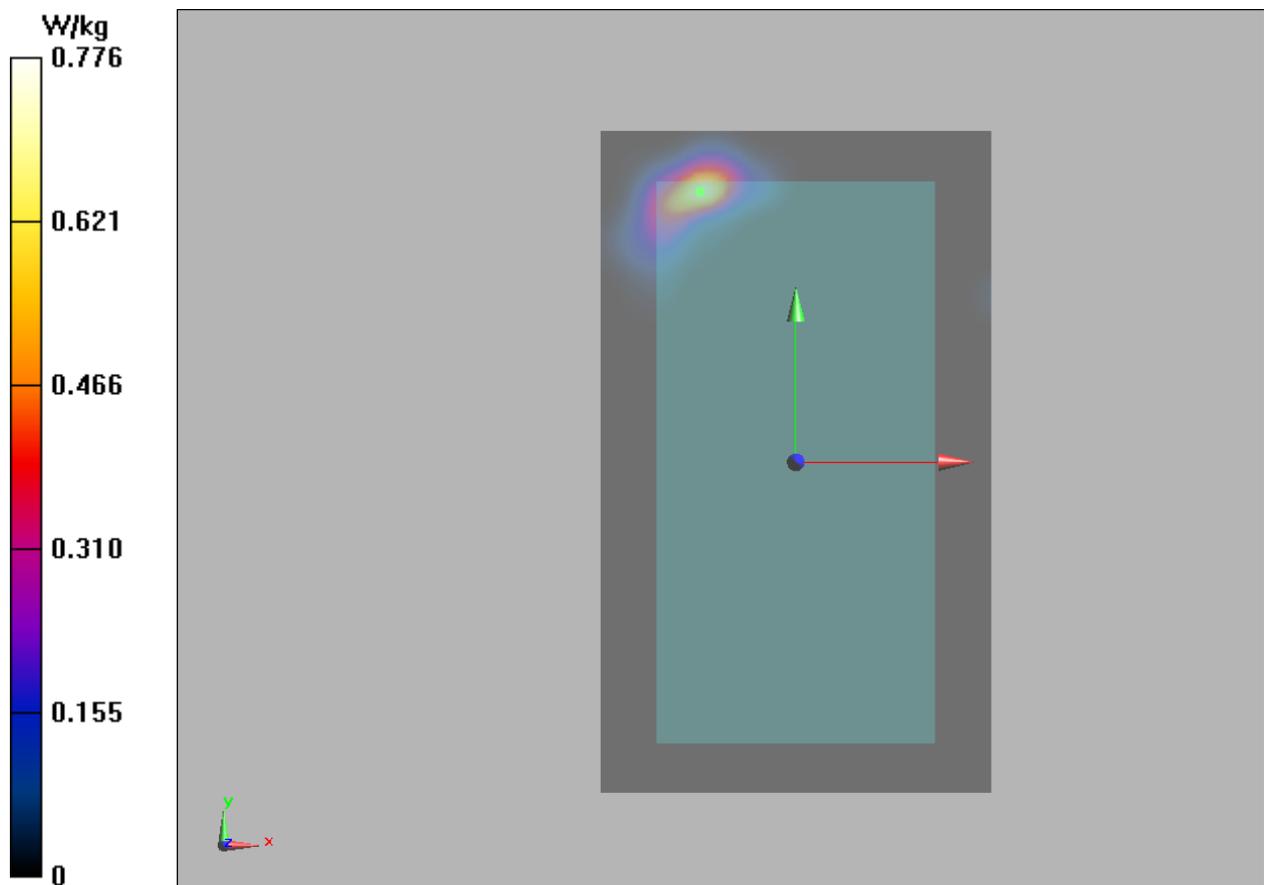

MIMO

Plot 146 802.11a U-NII-2A Left Cheek CH56

Date: 12/23/2016

Communication System: UID 0, 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 35.88$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF (5.32, 5.32, 5.32); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Cheek CH56/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.245 W/kg


Left Cheek CH56/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.753 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.768 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.365 W/kg

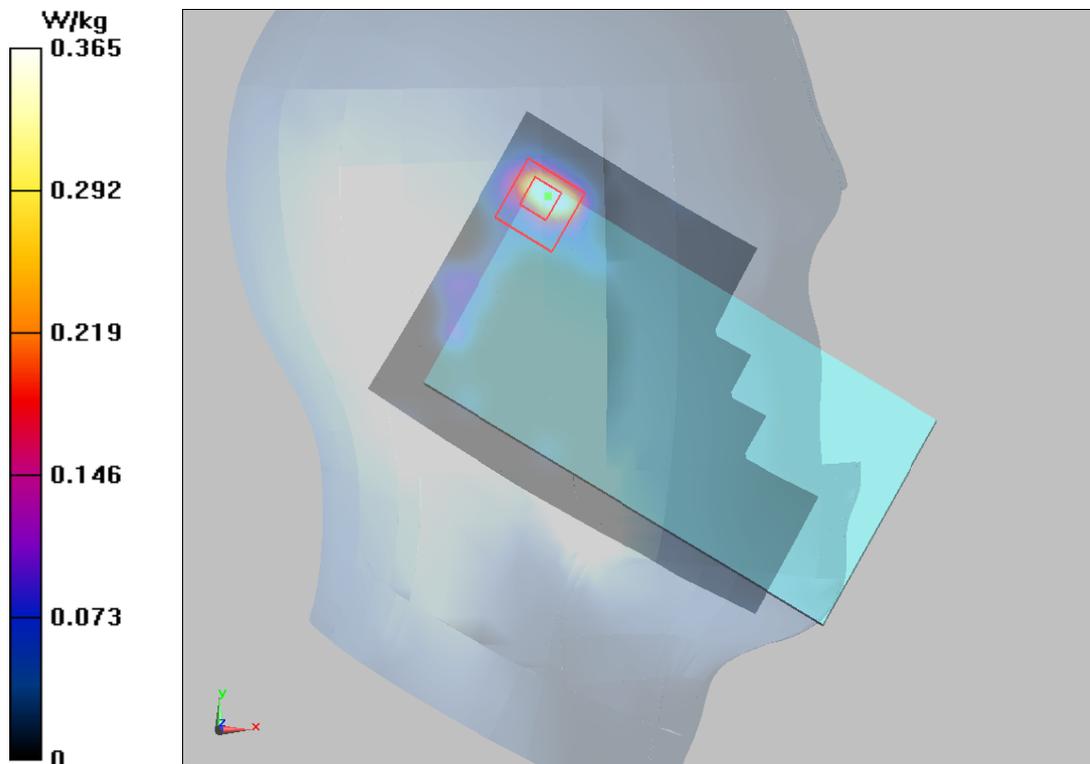

Plot 147 802.11a U-NII-2A Front Side CH56 (Distance 15mm)

Date: 12/22/2016

Communication System: UID 0, 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.464$ S/m; $\epsilon_r = 46.63$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3898; ConvF (4.69, 4.69, 4.69); Calibrated: 7/11/2016;

Electronics: DAE4 Sn1317; Calibrated: 8/2/2016

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Front Side CH56/Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.024 W/kg

Front Side CH56/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.071 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0425 W/kg

