

**Appendix B. SAR Measurement Plots**

<b>Table of contents</b>
<b>GSM850 Head Second Antenna</b>
<b>GSM850 Body Second Antenna</b>
<b>GSM1900 Head Second Antenna</b>
<b>GSM1900 Body Second Antenna</b>
<b>UMTS Band II Head Second Antenna</b>
<b>UMTS Band II Body Second Antenna</b>
<b>UMTS Band IV Head Second Antenna</b>
<b>UMTS Band IV Body Second Antenna</b>
<b>UMTS Band V Head Second Antenna</b>
<b>UMTS Band V Body Second Antenna</b>
<b>LTE Band II Head Second Antenna</b>
<b>LTE Band II Body Second Antenna</b>
<b>LTE Band IV Head Second Antenna</b>
<b>LTE Band IV Body Second Antenna</b>
<b>LTE Band V Head Second Antenna</b>
<b>LTE Band V Body Second Antenna</b>
<b>LTE Band VII Head Second Antenna</b>
<b>LTE Band VII Body Second Antenna</b>
<b>LTE Band XII Head Second Antenna</b>
<b>LTE Band XII Body Second Antenna</b>
<b>GSM850 Head Main Antenna</b>
<b>GSM850 Body Main Antenna</b>
<b>GSM1900 Head Main Antenna</b>
<b>GSM1900 Body Main Antenna</b>
<b>UMTS Band II Head Main Antenna</b>
<b>UMTS Band II Body Main Antenna</b>
<b>UMTS Band IV Head Main Antenna</b>
<b>UMTS Band IV Body Main Antenna</b>
<b>UMTS Band V Head Main Antenna</b>
<b>UMTS Band V Body Main Antenna</b>
<b>LTE Band II Head Main Antenna</b>
<b>LTE Band II Body Main Antenna</b>
<b>LTE Band IV Head Main Antenna</b>

<b>LTE Band IV Body Main Antenna</b>
<b>LTE Band V Head Main Antenna</b>
<b>LTE Band V Body Main Antenna</b>
<b>LTE Band VII Head Main Antenna</b>
<b>LTE Band VII Body Main Antenna</b>
<b>LTE Band XII Head Main Antenna</b>
<b>LTE Band XII Body Main Antenna</b>
<b>WiFi 2.4G Head</b>
<b>WiFi 2.4G Body</b>

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T GSM850 190CH Right touch with Battery 2-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.892$  S/m;  $\epsilon_r = 41.047$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.86, 8.86, 8.86); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.665 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 19.94 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.354 W/kg**

Maximum value of SAR (measured) = 0.900 W/kg

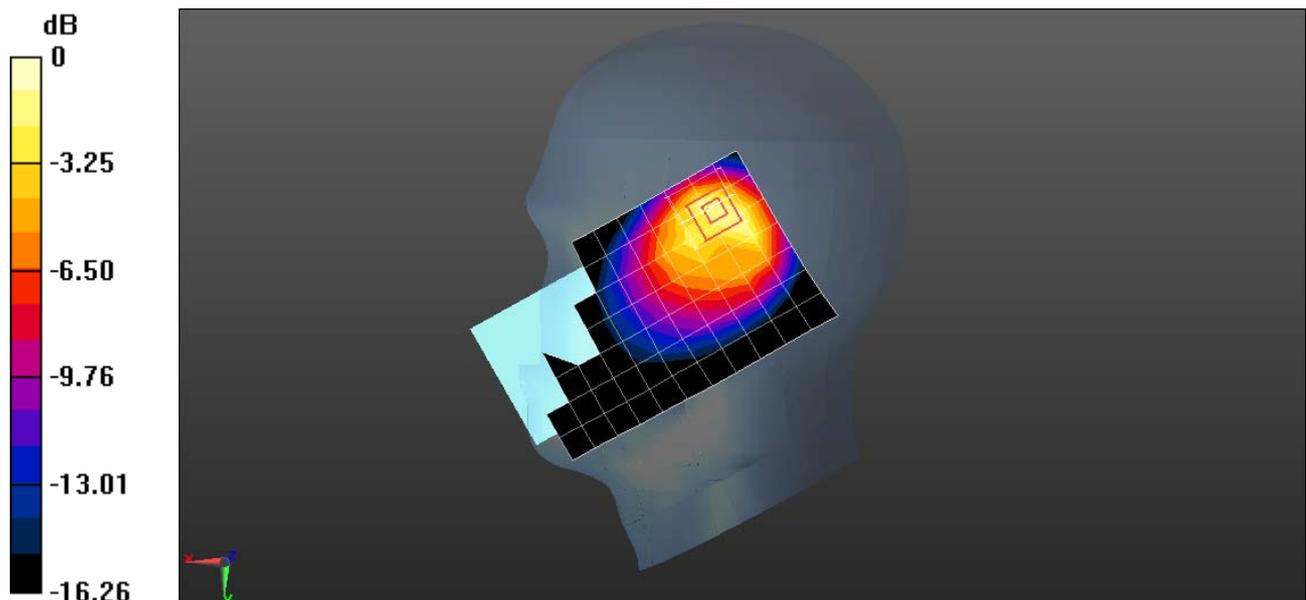

0 dB = 0.900 W/kg = -0.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T GSM850 190CH Front side 15mm with Battery 2-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1.003 \text{ S/m}$ ;  $\epsilon_r = 53.102$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.126 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.302 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.127 W/kg

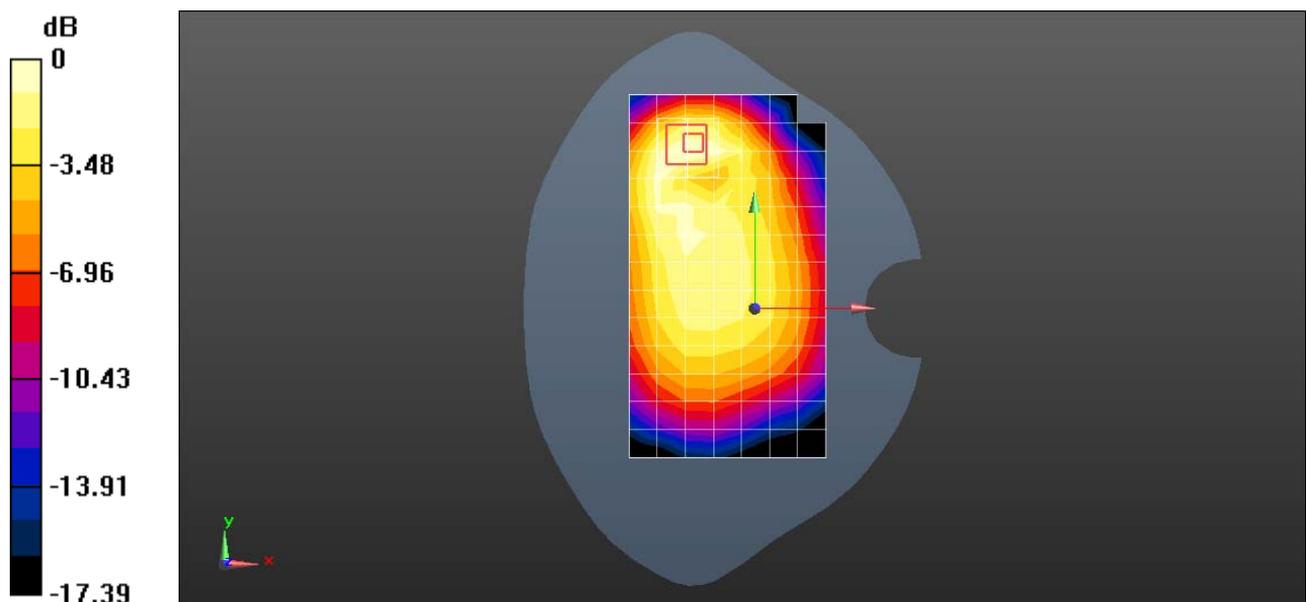

0 dB = 0.127 W/kg = -8.96 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T GSM850 GPRS 2TS 190CH Front side 10mm-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.003$  S/m;  $\epsilon_r = 53.102$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.273 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 9.100 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.427 W/kg

**SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.293 W/kg

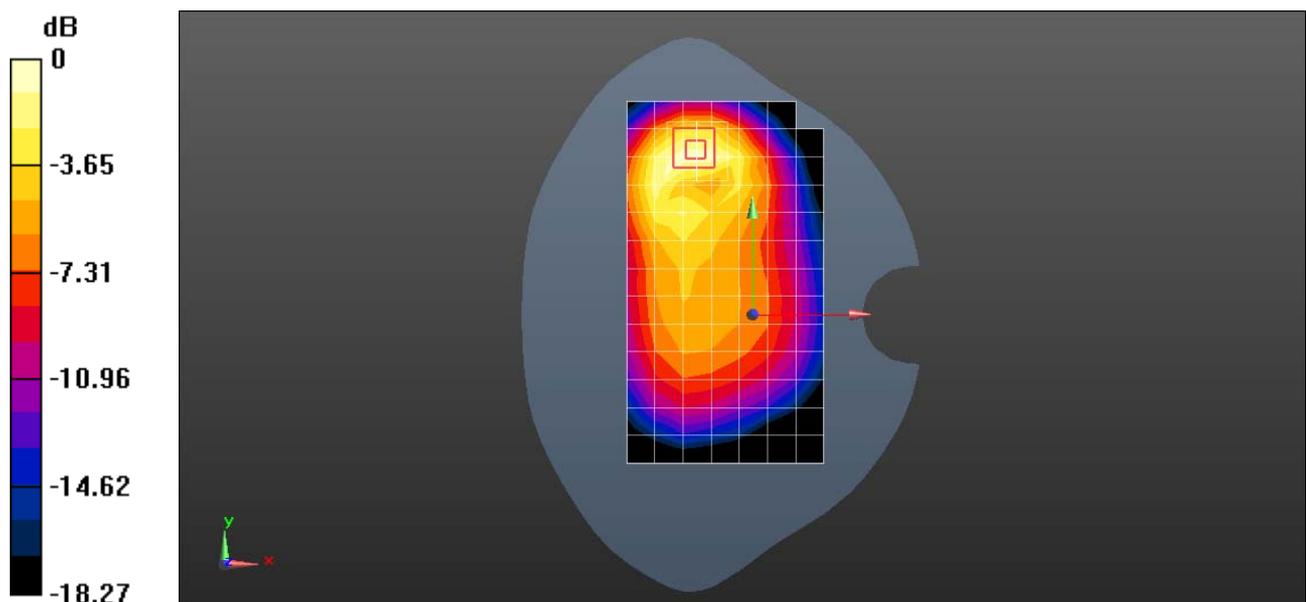

0 dB = 0.293 W/kg = -5.33 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T GSM1900 512CH Right touch-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 40.408$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.33, 5.33, 5.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.562 W/kg

**Configuration/Head/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 12.69 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.307 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.710 W/kg

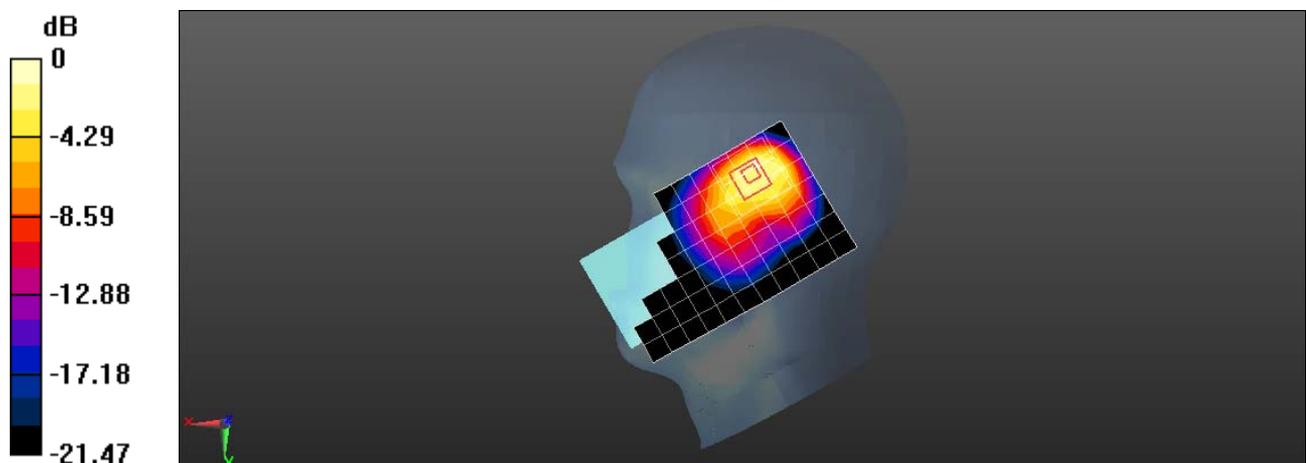

0 dB = 0.710 W/kg = -1.49 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## **WAS-L03T GSM1900 661CH Front side 15mm with Battery 2-Second Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.563$  S/m;  $\epsilon_r = 52.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.0720 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.904 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0850 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0738 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 1:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.904 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0780 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0654 W/kg

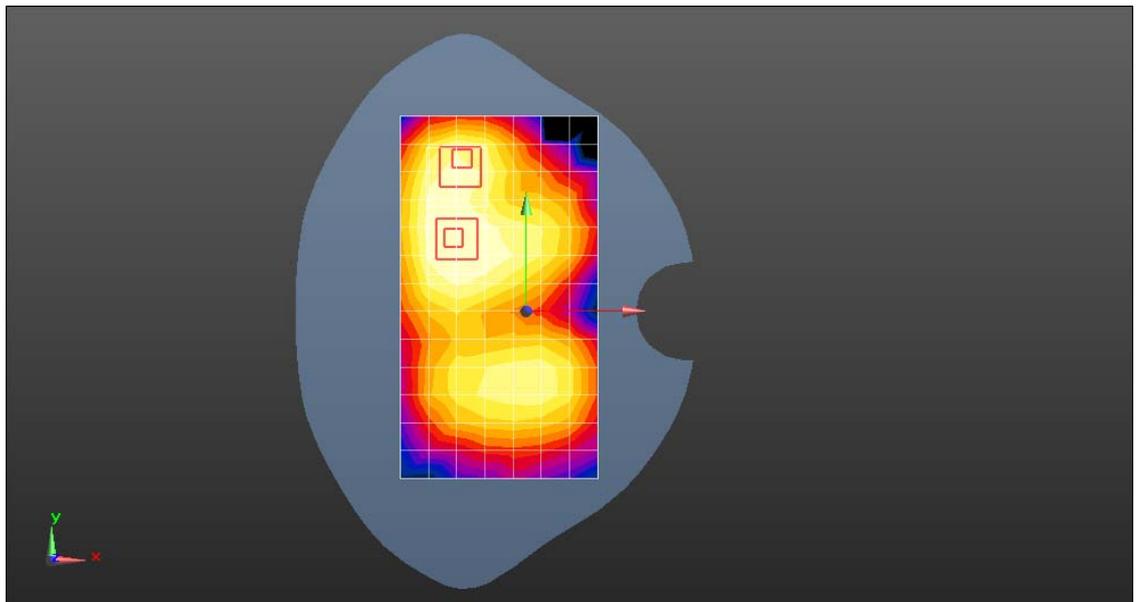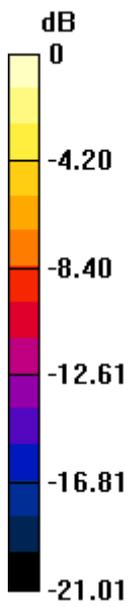

0 dB = 0.0654 W/kg = -11.84 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## **WAS-L03T GSM1900 GPRS 2TS 661CH Left side 10mm-Second Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1880 MHz; Duty Cycle: 1:4.10015

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.563$  S/m;  $\epsilon_r = 52.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.188 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.663 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.233 W/kg

**SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.198 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 1:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.663 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.124 W/kg

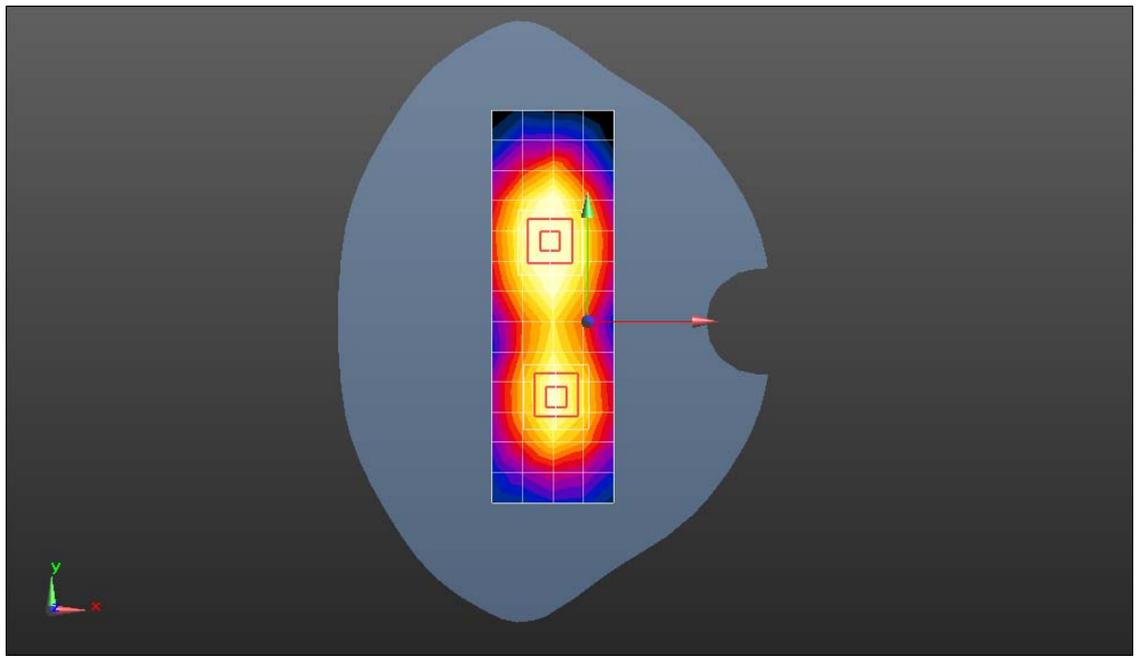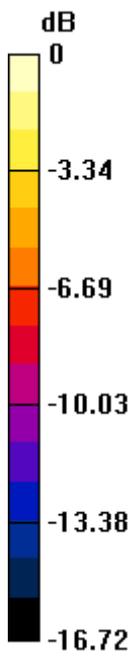

0 dB = 0.124 W/kg = -9.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band II 9262CH Right touch-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.413$  S/m;  $\epsilon_r = 40.408$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.33, 5.33, 5.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.621 W/kg

**Configuration/Head/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 13.81 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.355 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.823 W/kg

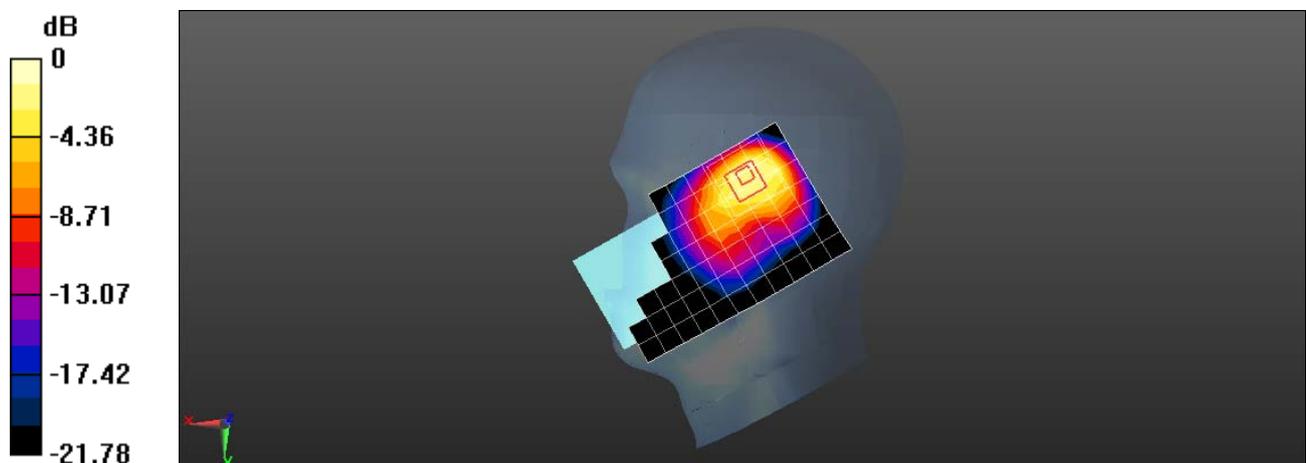

0 dB = 0.823 W/kg = -0.85 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band II 9400CH Front side 15mm with Battery 2-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.563$  S/m;  $\epsilon_r = 52.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.0802 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.705 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0930 W/kg

**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.0796 W/kg

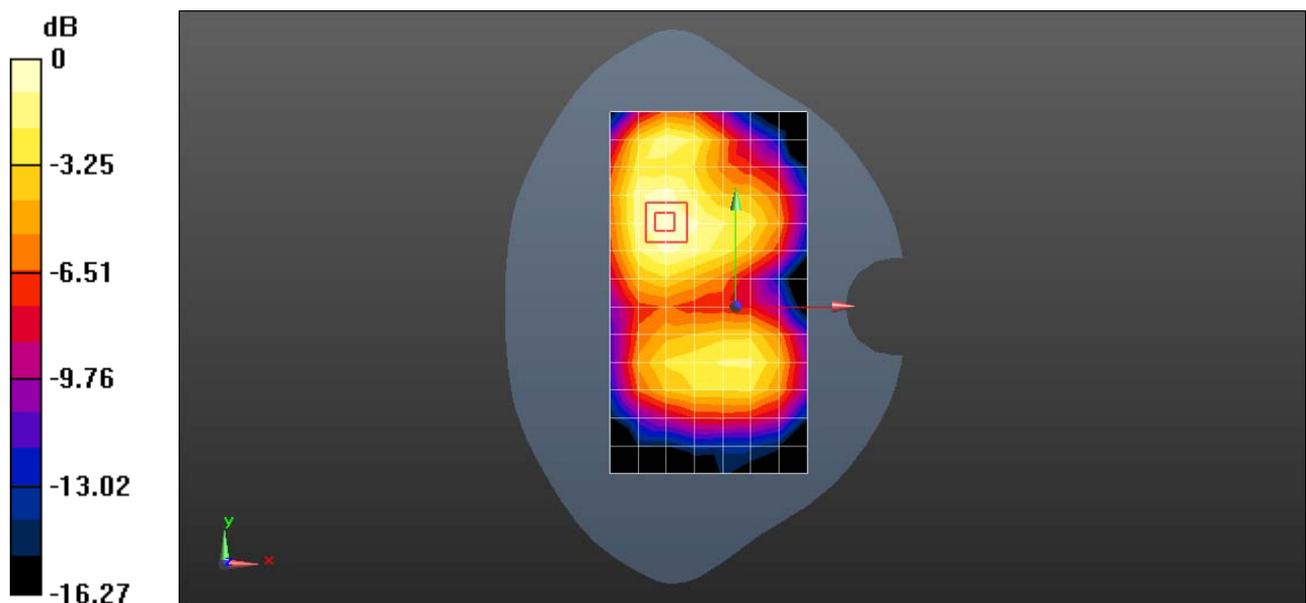

0 dB = 0.0796 W/kg = -10.99 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T UMTS Band II 9400CH Left side 10mm-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.563$  S/m;  $\epsilon_r = 52.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.216 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.139 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.263 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

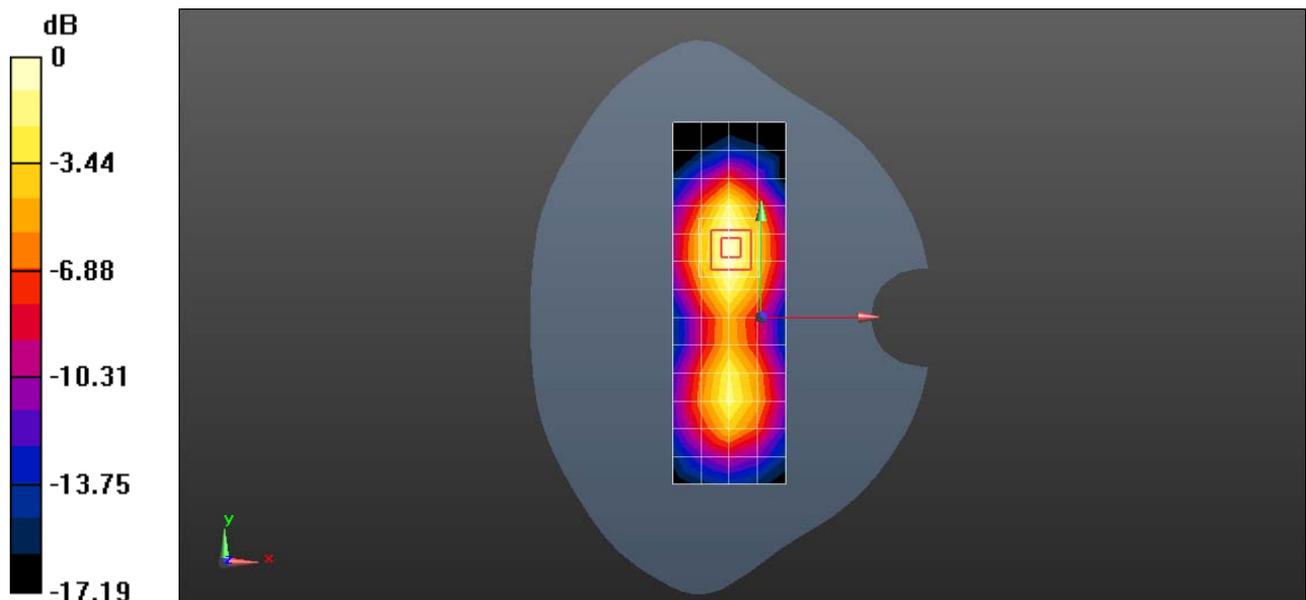

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band IV 1513CH Right touch with Battery 2-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 38.97$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.774 W/kg


**Configuration/Head/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 12.59 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.352 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

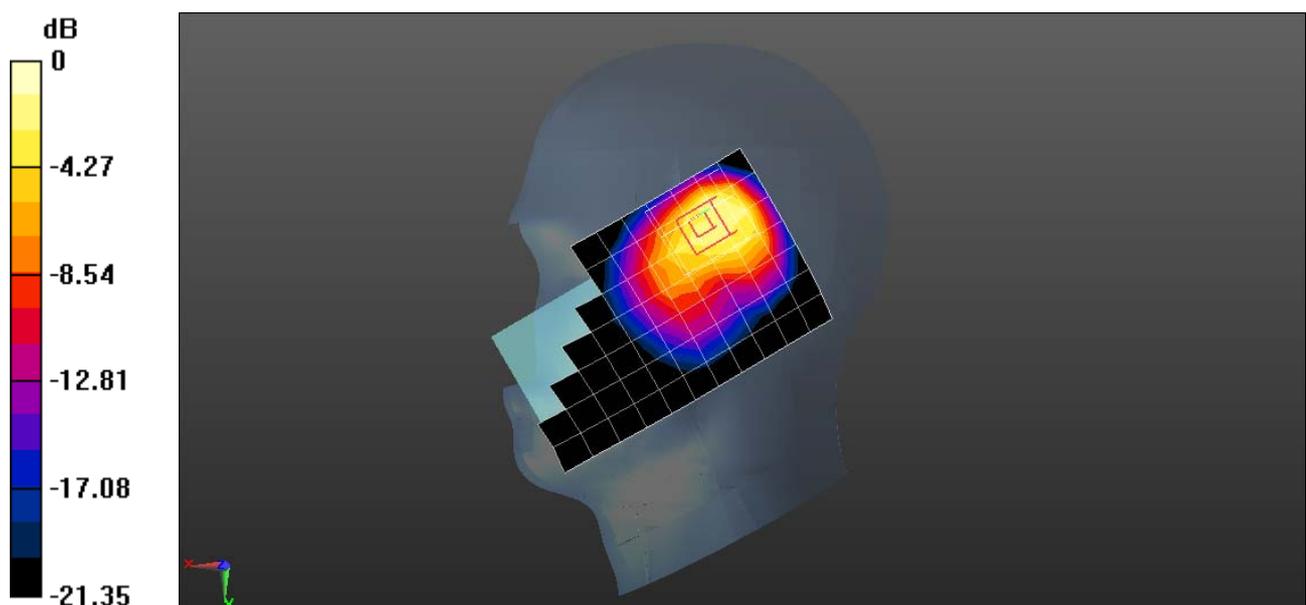

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T UMTS Band IV 1413CH Back side 15mm-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.523$  S/m;  $\epsilon_r = 52.631$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.0843 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.259 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0990 W/kg

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.0858 W/kg

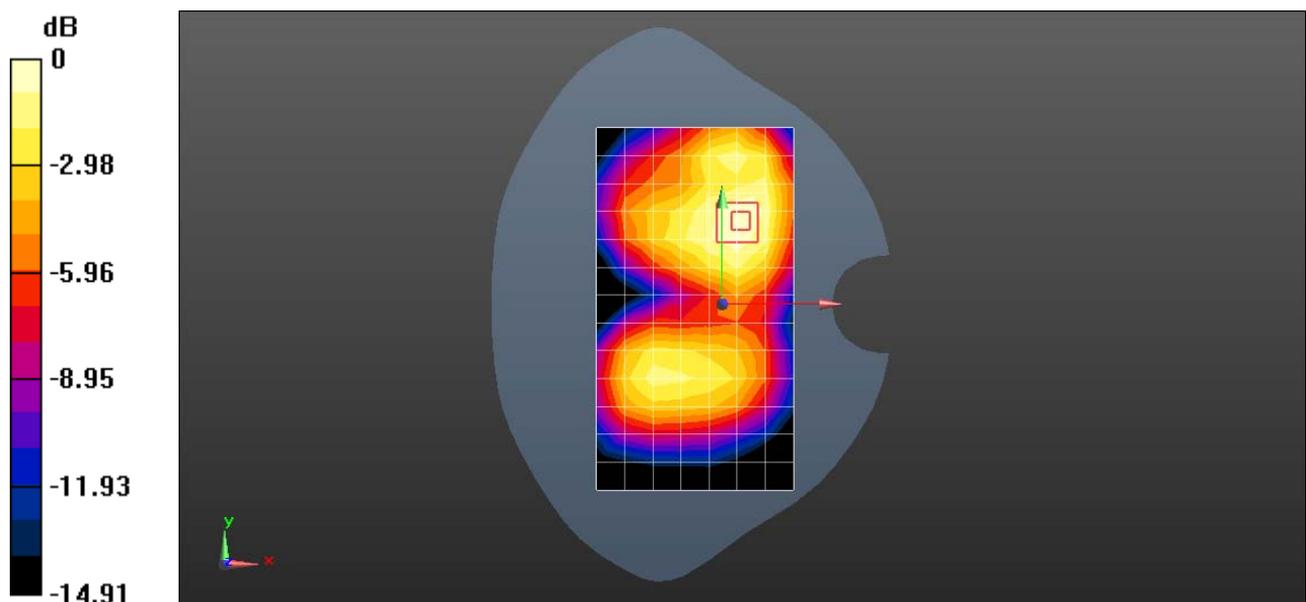

0 dB = 0.0858 W/kg = -10.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## **WAS-L03T UMTS Band IV 1413CH Left side 10mm-Second Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.523$  S/m;  $\epsilon_r = 52.631$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.193 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.793 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.234 W/kg

**SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.201 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 1:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.793 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.184 W/kg

**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

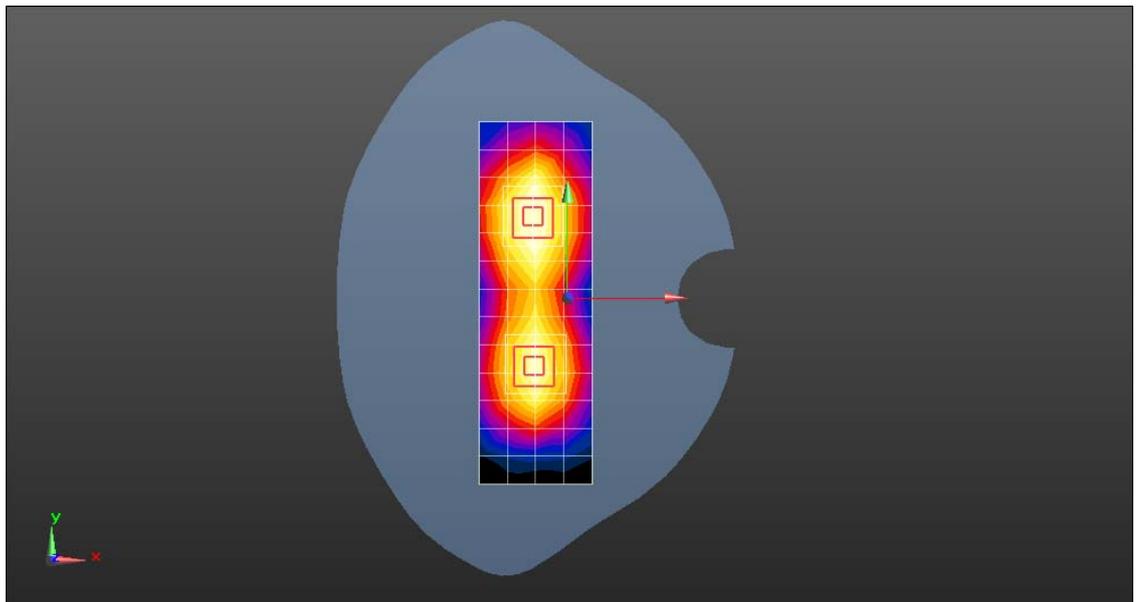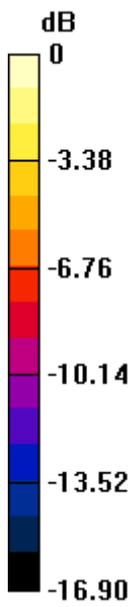

0 dB = 0.158 W/kg = -8.01 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band V 4182CH Right touch-Second Antenna-state1-Repeated

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 43.408$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.86, 8.86, 8.86); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.848 W/kg

**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 19.68 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.82 W/kg

**SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.404 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 W/kg

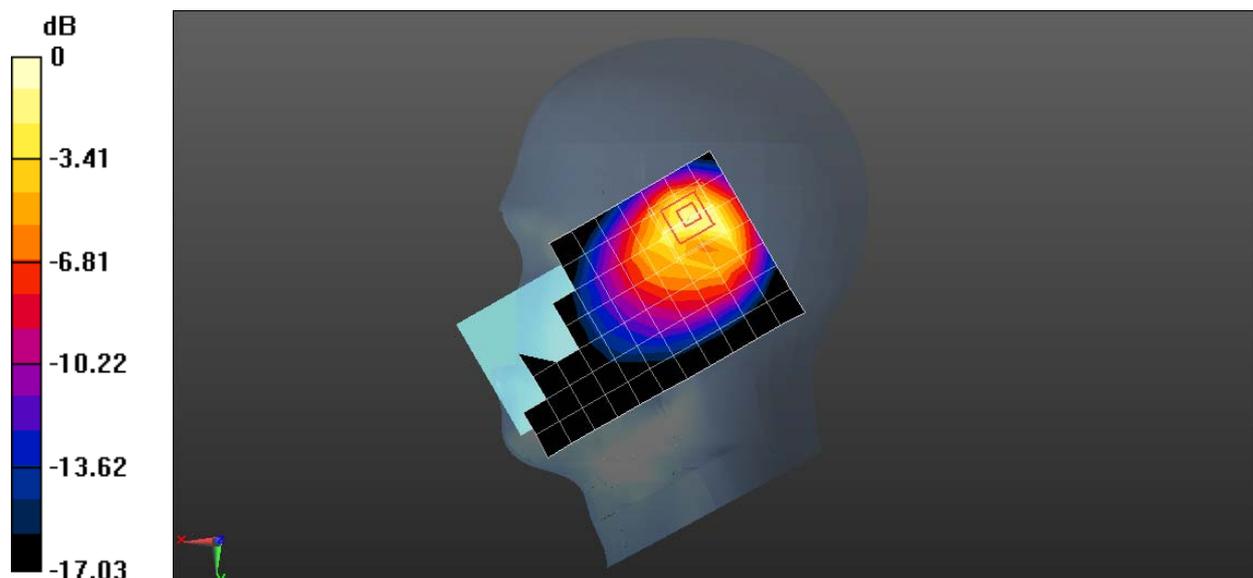

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band V 4182CH Front side 15mm with Battery2-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 1.002$  S/m;  $\epsilon_r = 53.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.119 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 9.814 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.170 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.061 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.124 W/kg

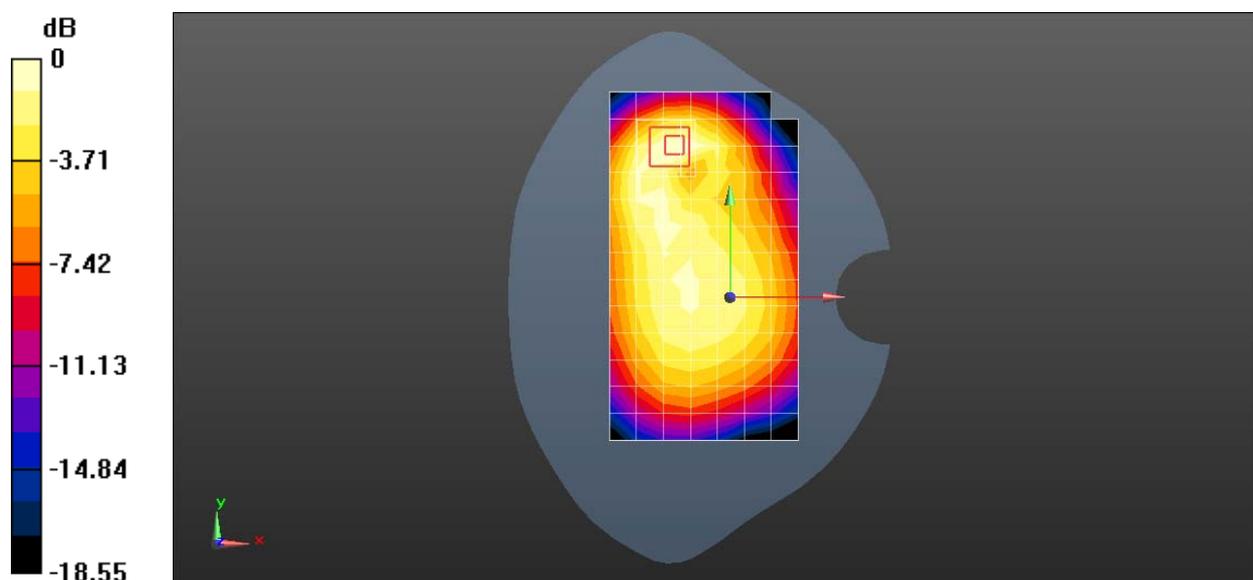

0 dB = 0.124 W/kg = -9.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T UMTS Band V 4182CH Left side 10mm with Battery 2-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 1.002$  S/m;  $\epsilon_r = 53.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.264 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 16.23 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.337 W/kg

**SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.155 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.268 W/kg

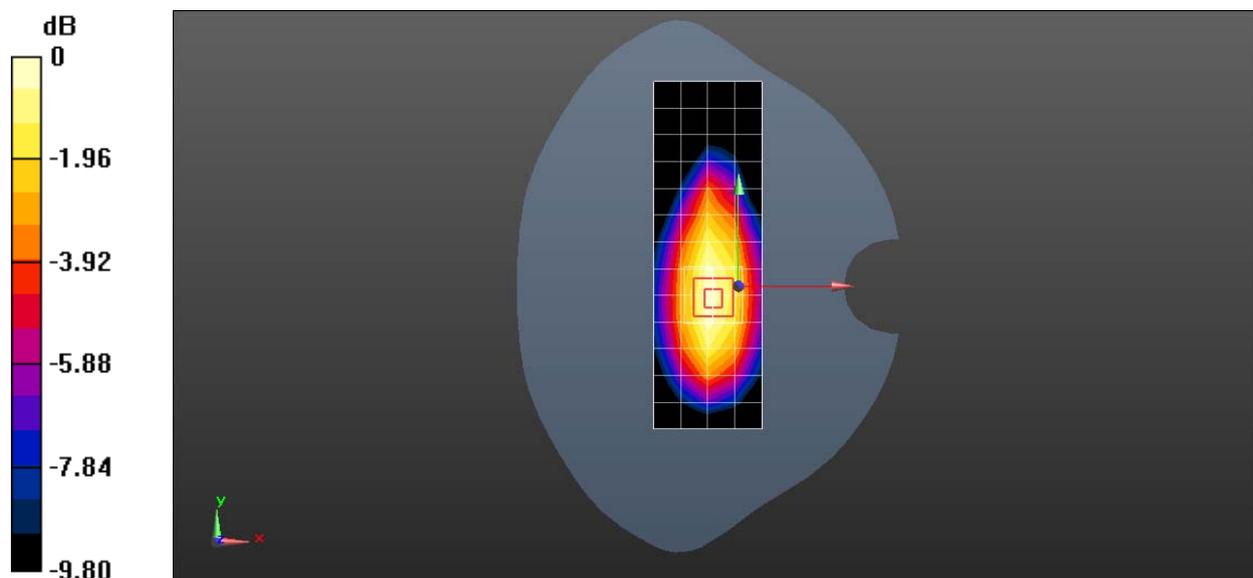

0 dB = 0.268 W/kg = -5.72 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band II 20M QPSK 1RB 50 offset 19100CH Right touch-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.462$  S/m;  $\epsilon_r = 40.179$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.33, 5.33, 5.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.729 W/kg


**Configuration/Head/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 13.60 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.399 W/kg**

Maximum value of SAR (measured) = 0.939 W/kg

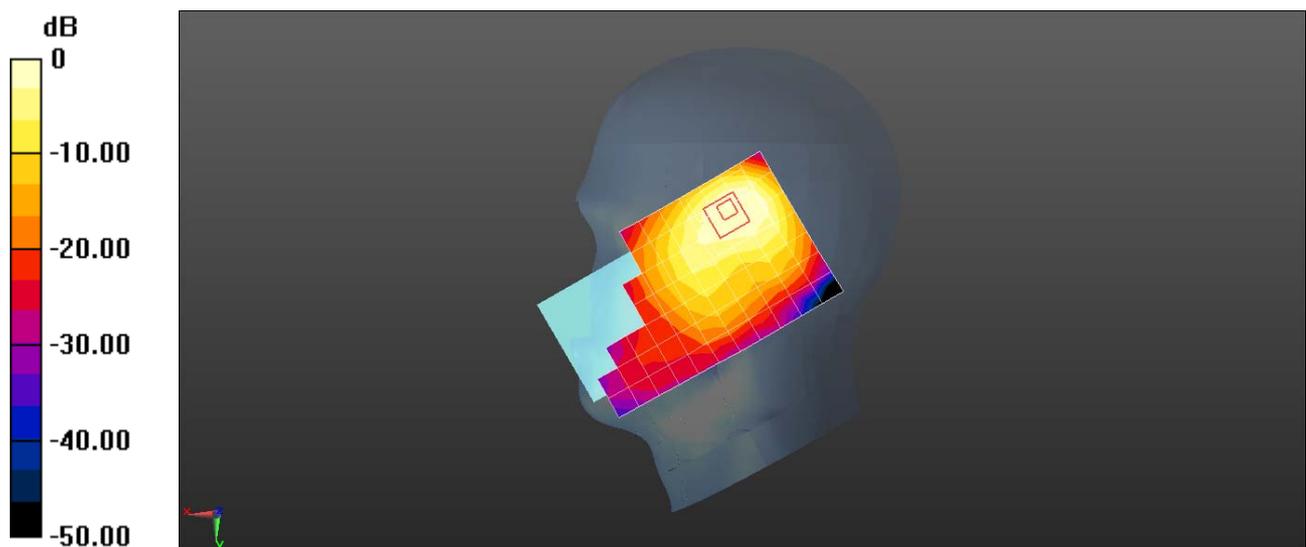

0 dB = 0.729 W/kg = -1.37 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band II 20M QPSK 1RB 50 offset 18700CH Back side 15mm-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.527$  S/m;  $\epsilon_r = 53.058$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.0721 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.055 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0820 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0706 W/kg

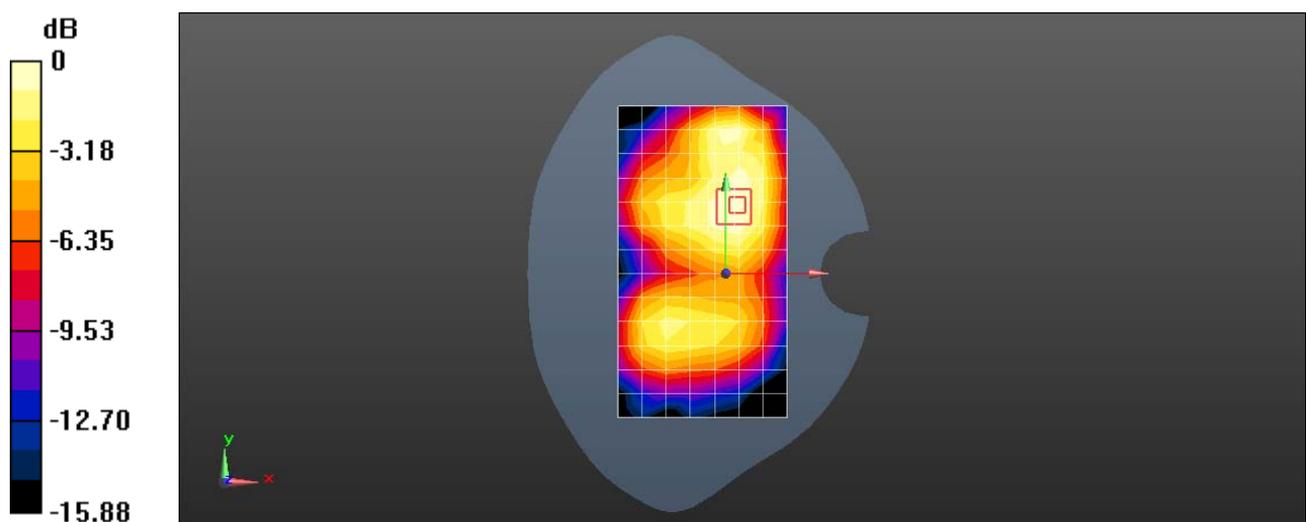

0 dB = 0.0706 W/kg = -11.51 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T LTE Band II 20M QPSK 1RB 50 offset 18700CH Left side 10mm with Battery 2-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.527$  S/m;  $\epsilon_r = 53.058$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.169 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.383 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.214 W/kg

**SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.181 W/kg

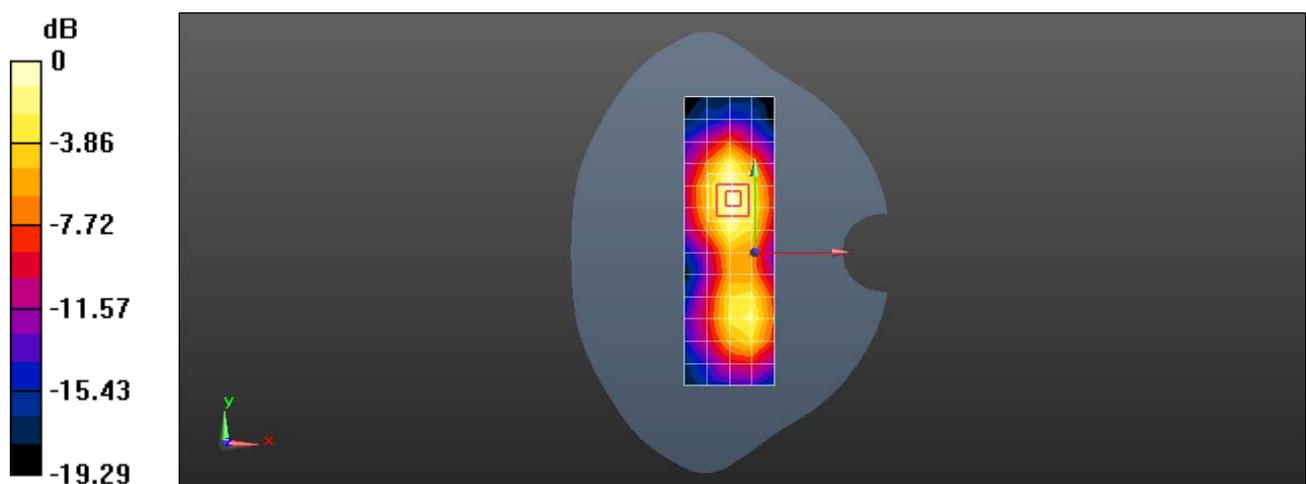

0 dB = 0.181 W/kg = -7.42 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band IV 20M QPSK 1RB 50 Offset 20300CH Right touch with Battery 2-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 39.568$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.859 W/kg


**Configuration/Head/Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 12.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.388 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

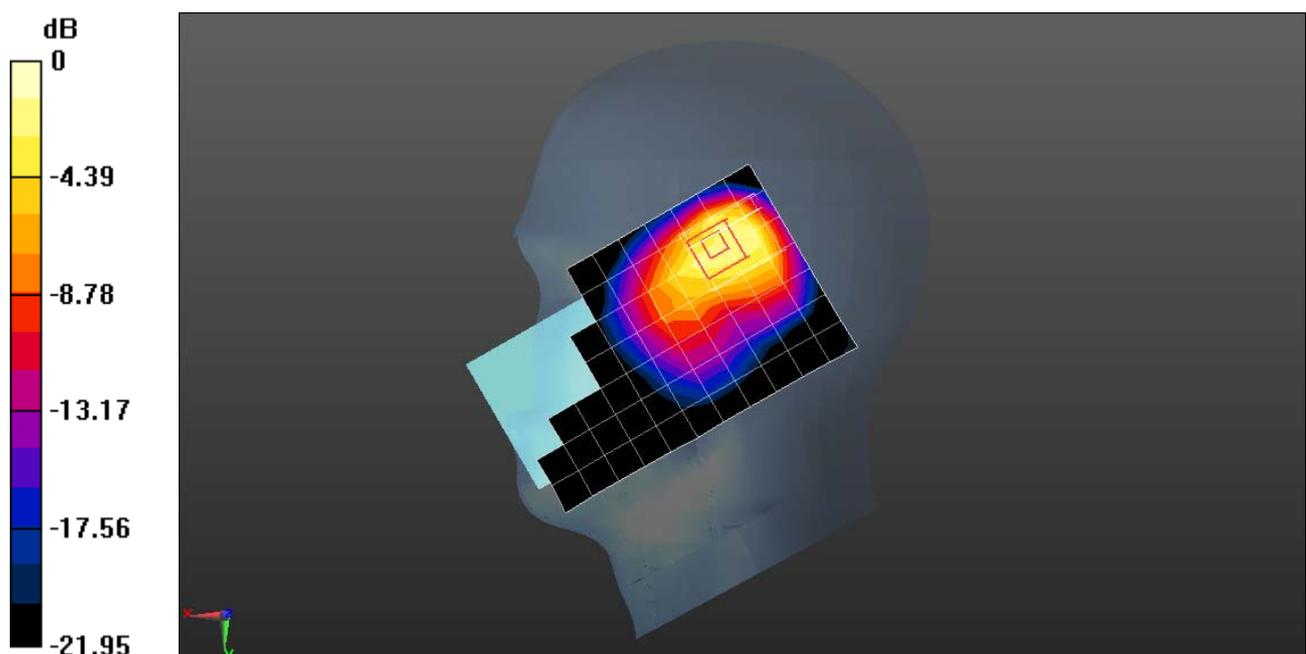

0 dB = 1.20 W/kg = 0.80 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## **WAS-L03T LTE Band IV 20M QPSK 1RB 50 offset 20175CH Front side 15mm-Second Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.523$  S/m;  $\epsilon_r = 52.633$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0890 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 2.705 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.104 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.045 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0910 W/kg

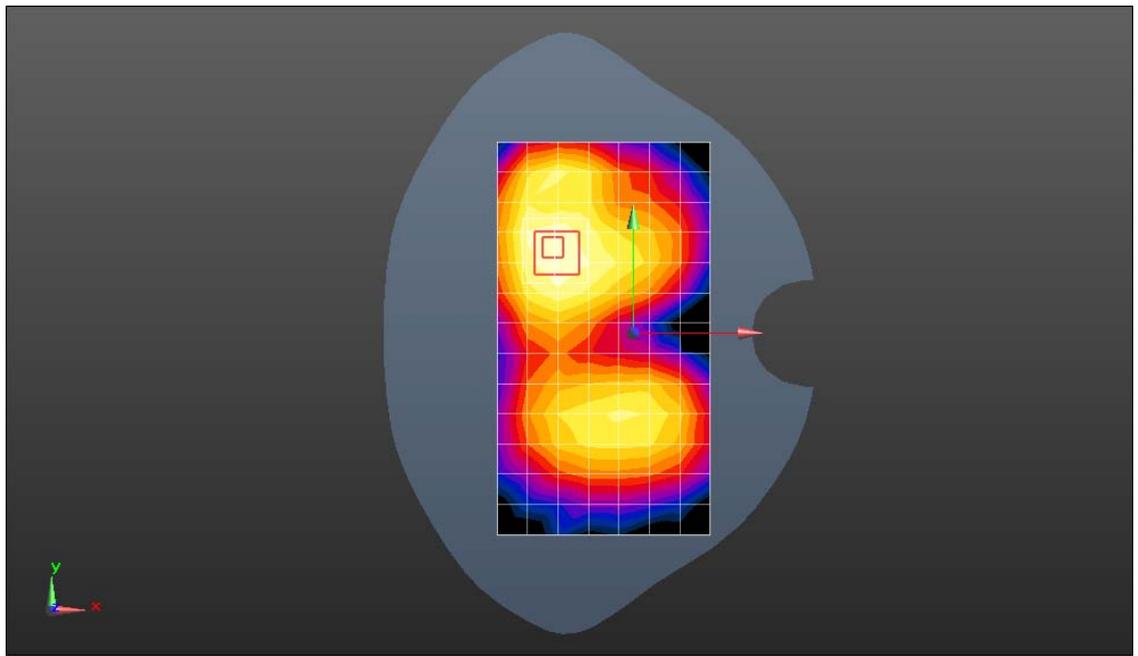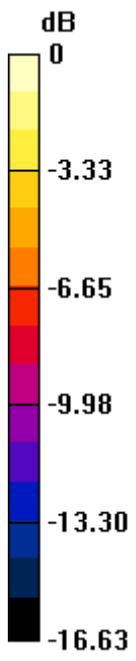

0 dB = 0.0910 W/kg = -10.41 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

**WAS-L03T LTE Band IV 20M QPSK 1RB 50 offset 20175CH Left side 10mm with Battery 2-Second Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.523$  S/m;  $\epsilon_r = 52.633$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.170 W/kg

**Configuration/Body/Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 5.431 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.203 W/kg



**SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.071 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.173 W/kg

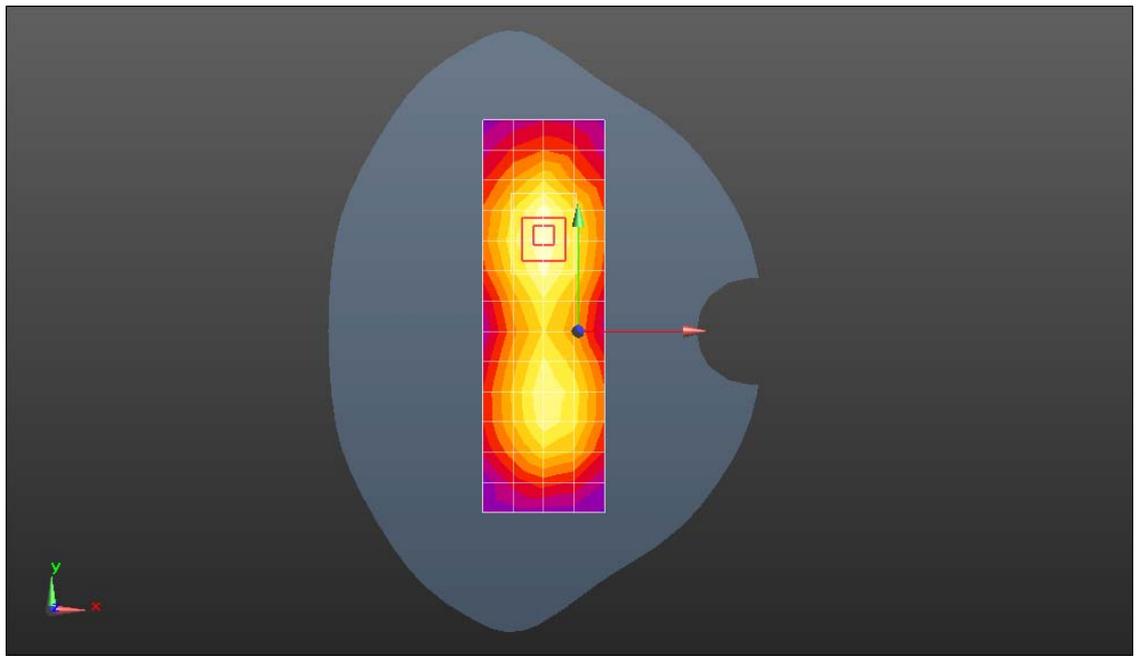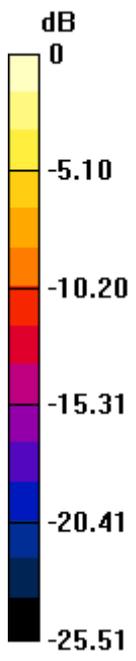

0 dB = 0.173 W/kg = -7.62 dBW/kg

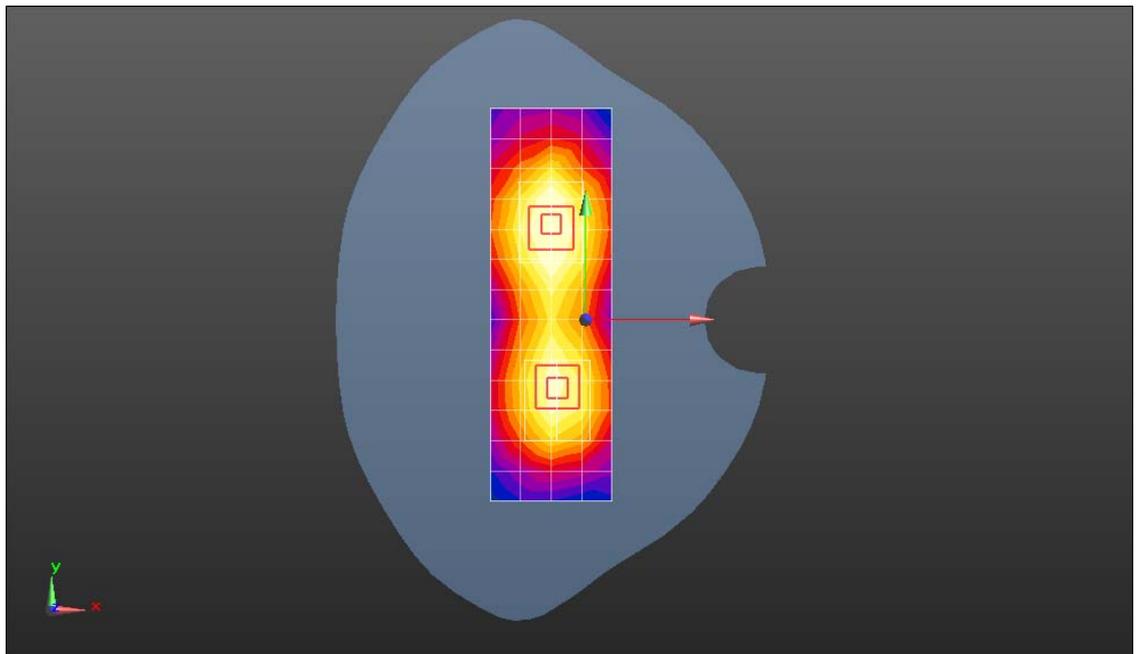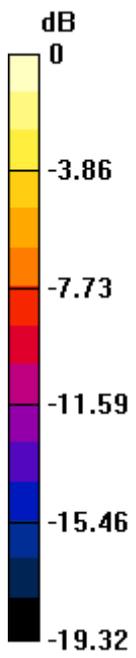

0 dB = 0.125 W/kg = -9.03 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band V 10M QPSK 1RB 25 Offset 20450CH Right touch with Battery 2-Second Antenna-State1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.93$  S/m;  $\epsilon_r = 43.468$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.86, 8.86, 8.86); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.788 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 21.21 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.401 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

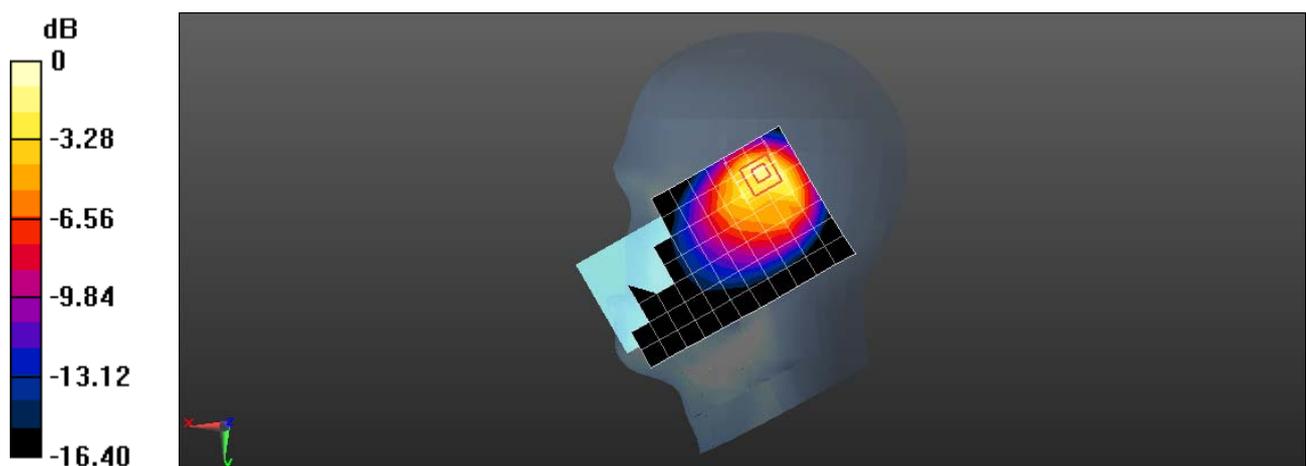

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## **WAS-L03T LTE Band V 10M 1RB 25 offset 20600CH Front side 15mm-Second Antenna-state1**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 1.01 \text{ S/m}$ ;  $\epsilon_r = 53.016$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.135 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.968 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.200 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.168 W/kg



**Configuration/Body/Zoom Scan (5x5x7)/Cube 1:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.968 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.177 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.150 W/kg

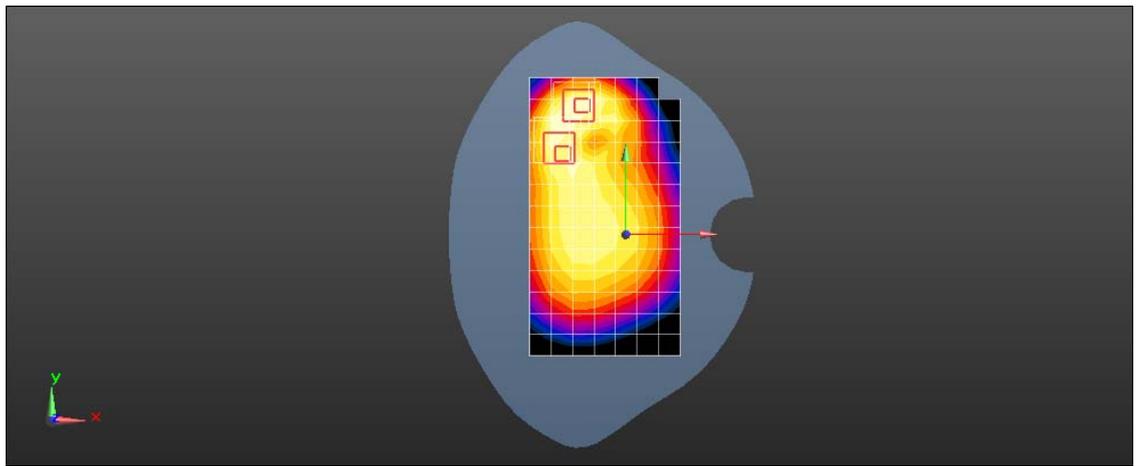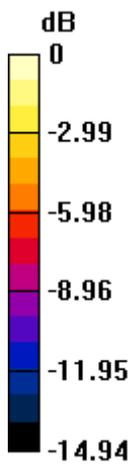

0 dB = 0.150 W/kg = -8.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band V 10M 1RB 25 offset 20600CH Front side 10mm-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 1.01 \text{ S/m}$ ;  $\epsilon_r = 53.016$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.342 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.922 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.484 W/kg

**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.140 W/kg**

Maximum value of SAR (measured) = 0.402 W/kg

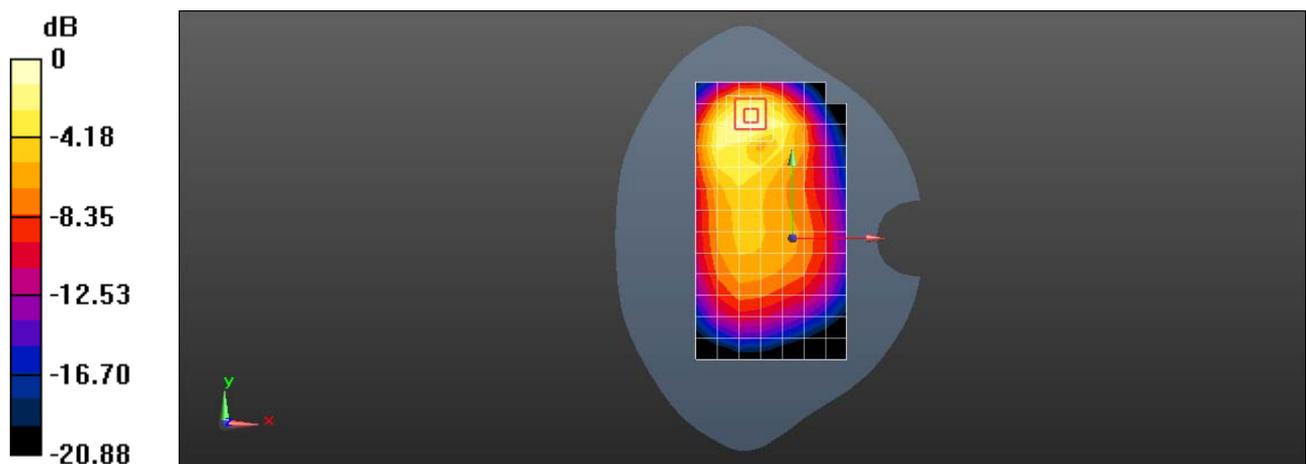

0 dB = 0.402 W/kg = -3.96 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band VII 20M QPSK 1RB 50 Offset 21100CH Right touch with Battery 2-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 40.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.9, 6.9, 6.9); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (9x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.616 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.313 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 0.613 W/kg

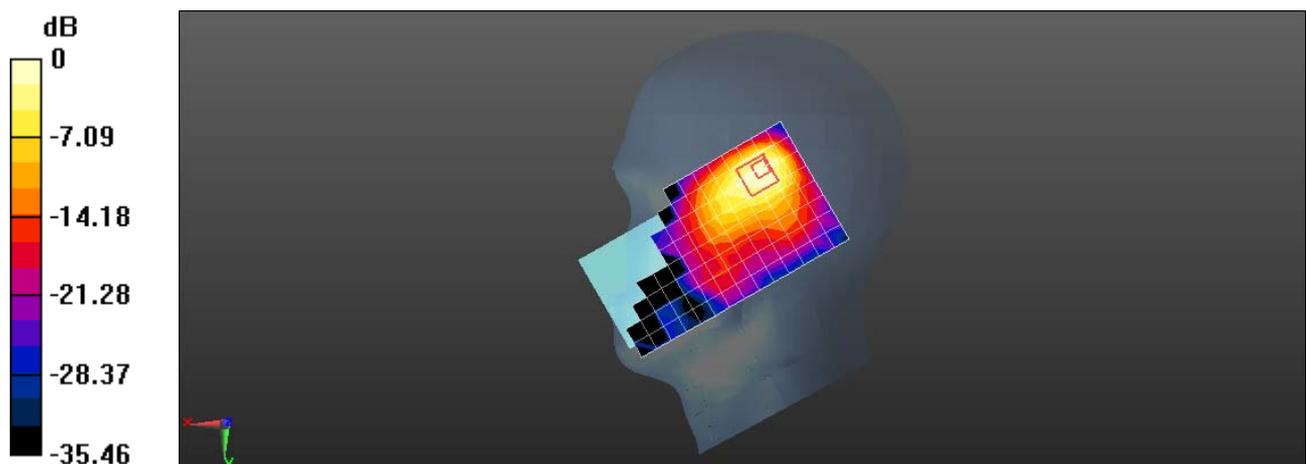

0 dB = 0.613 W/kg = -2.13 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band VII 20M QPSK 1RB 50 offset 20850CH Front side 15mm-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 2.097$  S/m;  $\epsilon_r = 55.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.92, 6.92, 6.92); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.0615 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 2.731 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0850 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0686 W/kg

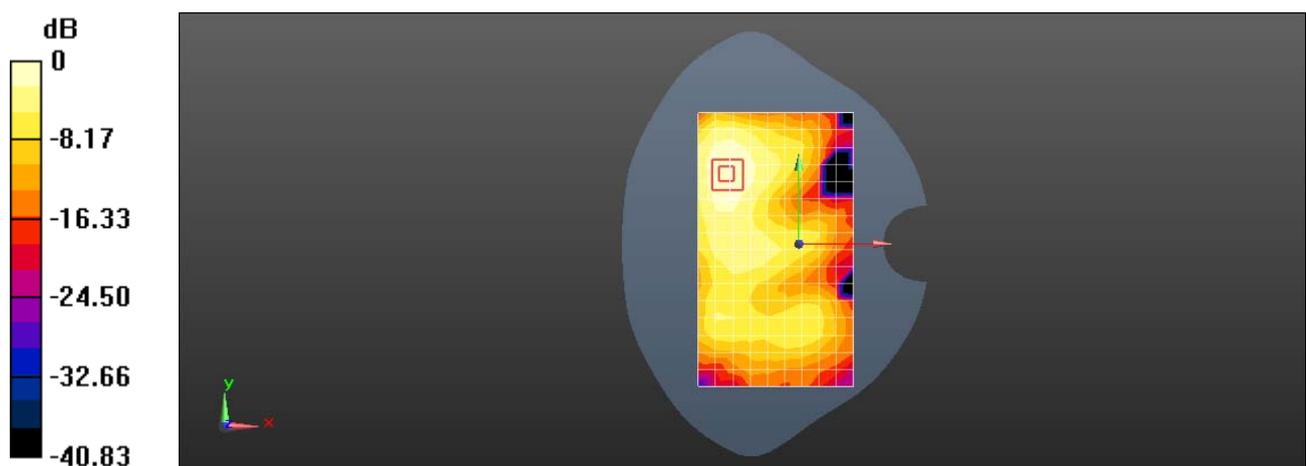

0 dB = 0.0686 W/kg = -11.64 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T LTE Band VII 20M QPSK 1RB 50 offset 20850CH Left side 10mm-Second Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 2.097$  S/m;  $\epsilon_r = 55.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.92, 6.92, 6.92); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = -9.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.113 W/kg

**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.625 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.181 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.142 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 1:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.625 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.173 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.136 W/kg

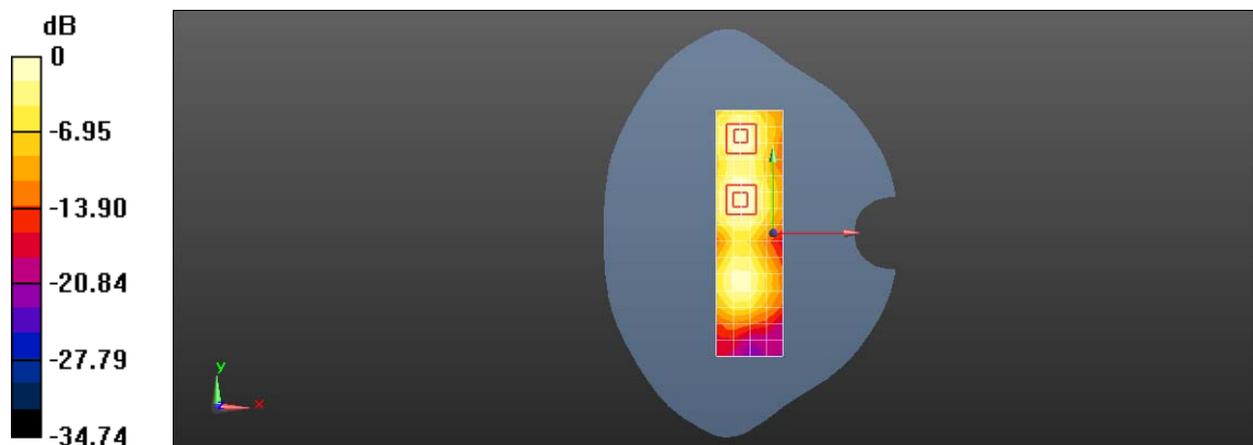

0 dB = 0.136 W/kg = -8.66 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band XII 10M QPSK 1RB 25 offset 23130CH Right touch with Battery 2-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.869$  S/m;  $\epsilon_r = 41.016$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.7, 9.7, 9.7); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.831 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 23.12 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.00 W/kg

**SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.460 W/kg**

Maximum value of SAR (measured) = 1.10 W/kg

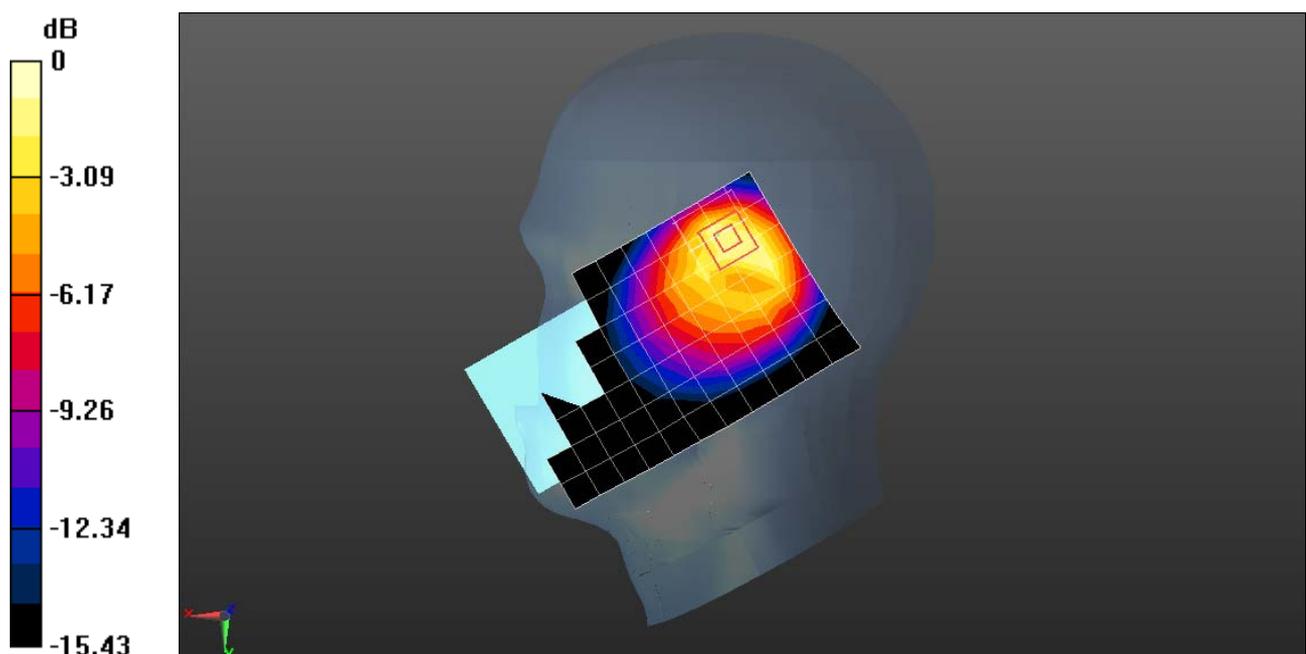

0 dB = 1.10 W/kg = 0.41 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T LTE Band XII 10M QPSK 1RB 25 offset 23060CH Back side 15mm-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704 \text{ MHz}$ ;  $\sigma = 0.966 \text{ S/m}$ ;  $\epsilon_r = 55.423$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.0930 \text{ W/kg}$


**Configuration/Head/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.178 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.123 \text{ W/kg}$

**SAR(1 g) =  $0.070 \text{ W/kg}$ ; SAR(10 g) =  $0.041 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.100 \text{ W/kg}$

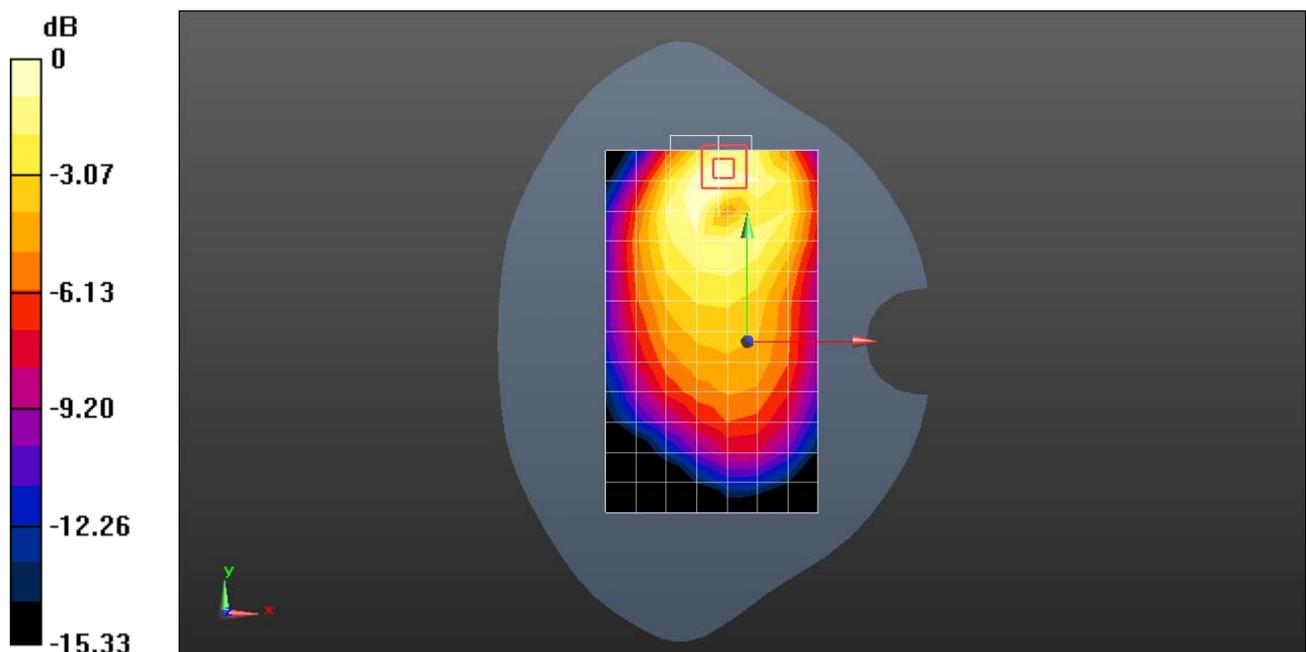

0 dB =  $0.100 \text{ W/kg}$  =  $-10.00 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T LTE Band XII 10M QPSK 1RB 25 offset 23060CH Back side 10mm with Battery 2-Second Antenna-state1

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704$  MHz;  $\sigma = 0.966$  S/m;  $\epsilon_r = 55.423$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.218 W/kg


**Configuration/Body/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 6.779 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.296 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.239 W/kg

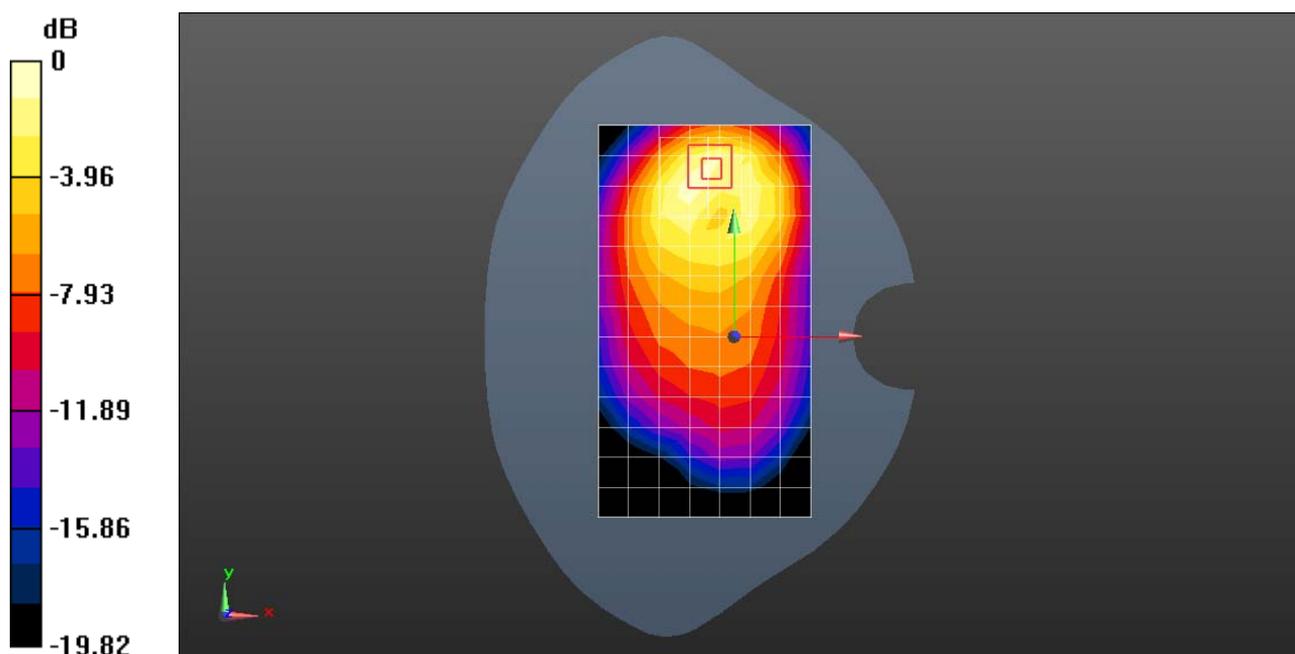

0 dB = 0.239 W/kg = -6.22 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T GSM850 251CH Right touch-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 40.941$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.86, 8.86, 8.86); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.434 W/kg


**Configuration/Head/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.759 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.500 W/kg

**SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.310 W/kg**

Maximum value of SAR (measured) = 0.437 W/kg

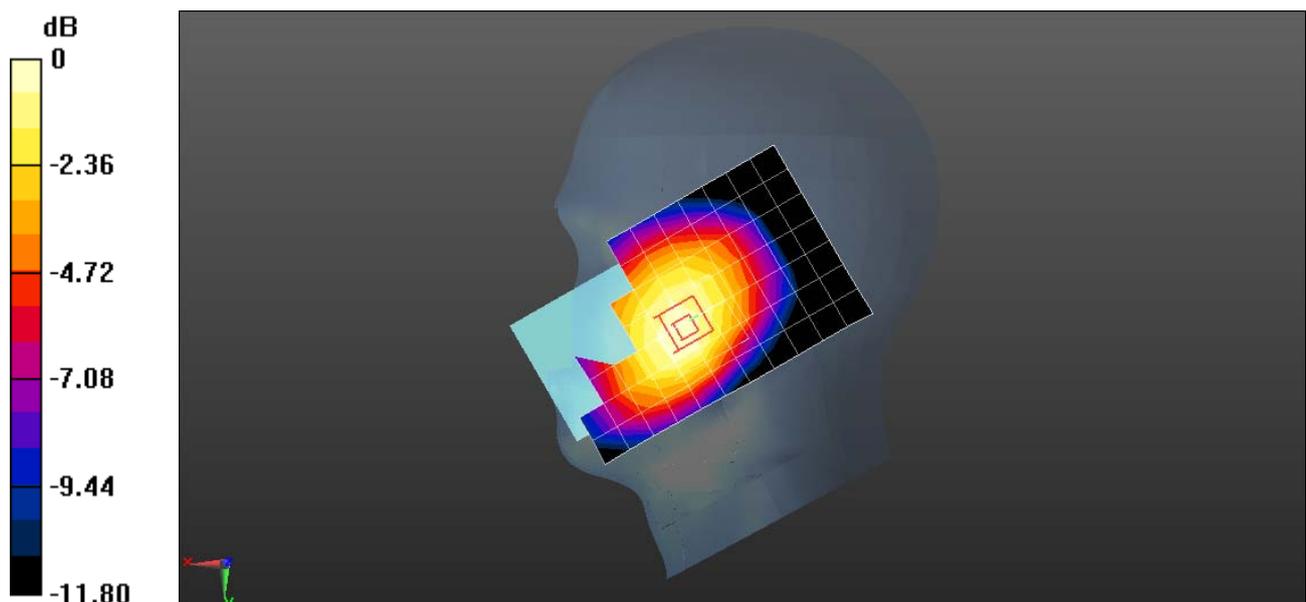

0 dB = 0.437 W/kg = -3.60 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T GSM850 190CH Back side 15mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.003$  S/m;  $\epsilon_r = 53.102$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.461 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 21.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.525 W/kg

**SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.323 W/kg**

Maximum value of SAR (measured) = 0.458 W/kg

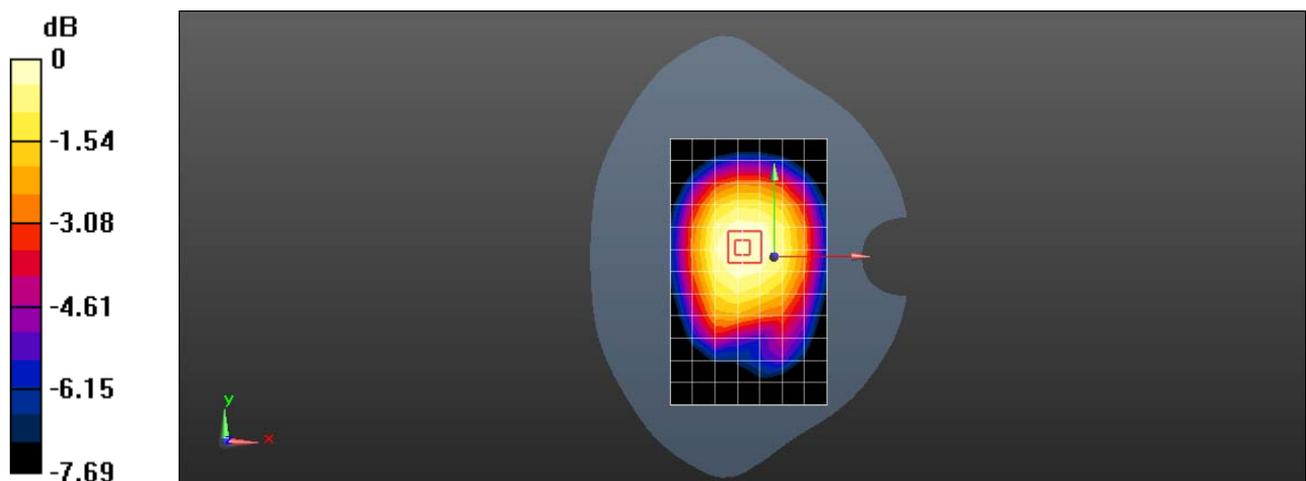

0 dB = 0.458 W/kg = -3.39 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T GSM850 GPRS 2TS 190CH Right side 10mm with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.003$  S/m;  $\epsilon_r = 53.102$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.578 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 24.38 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.753 W/kg

**SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 0.605 W/kg

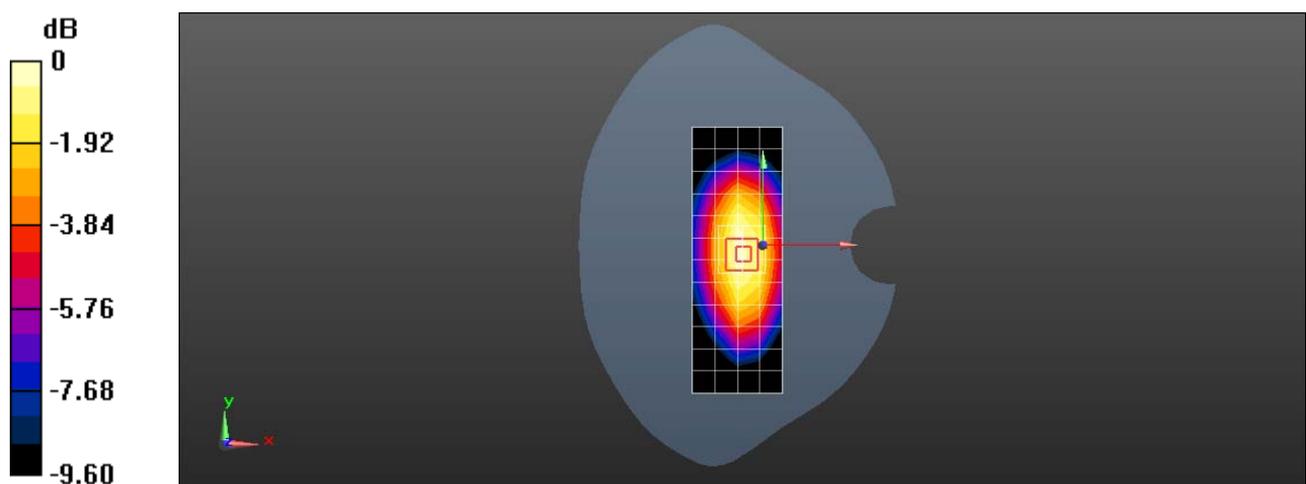

0 dB = 0.605 W/kg = -2.18 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T GSM1900 512CH Left touch-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1850.2 MHz;Dut8y  
Cycle: 1:8.30042

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.412$  S/m;  $\epsilon_r = 40.408$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.33, 5.33, 5.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.196 W/kg

**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 4.068 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.282 W/kg

**SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.119 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.222 W/kg

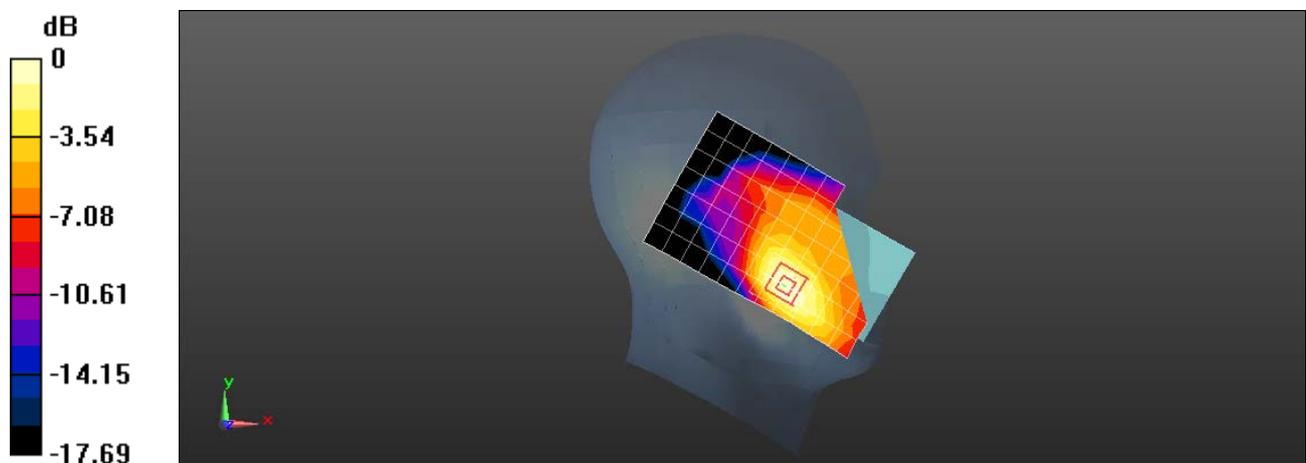

0 dB = 0.222 W/kg = -6.54 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T GSM1900 661CH Back side 15mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.563$  S/m;  $\epsilon_r = 52.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (9x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.589 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.574 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.856 W/kg

**SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.302 W/kg**

Maximum value of SAR (measured) = 0.735 W/kg

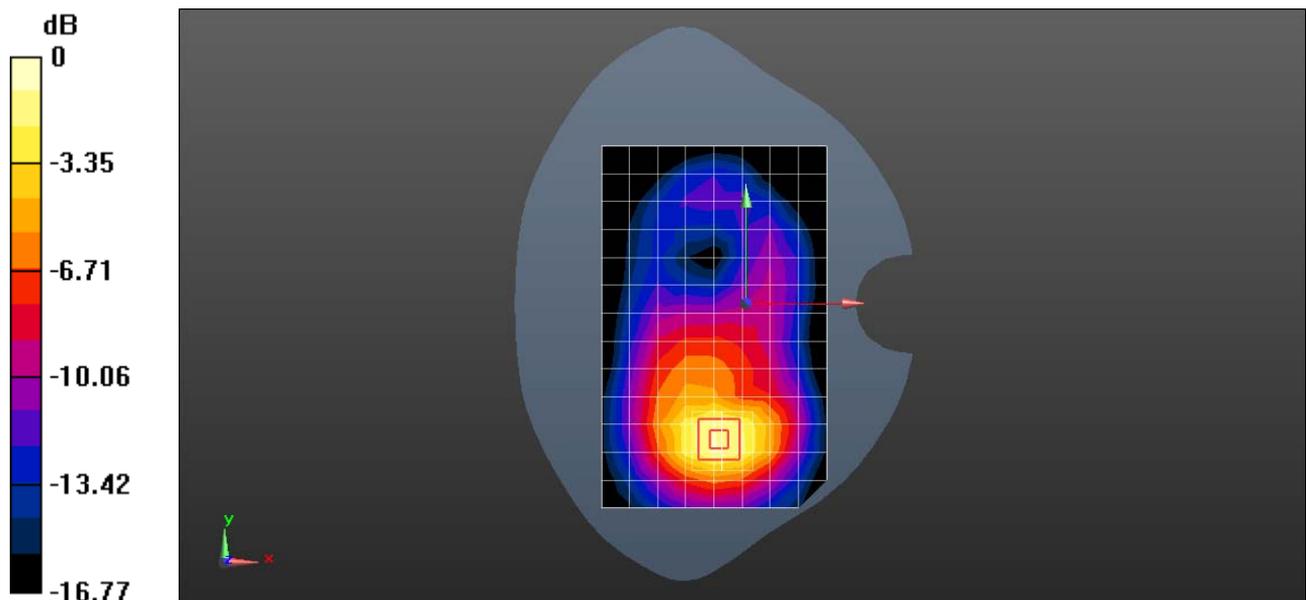

0 dB = 0.735 W/kg = -1.34 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T GSM1900 GPRS 2TS 512CH Bottom side 10mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.768$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x9x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.03 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 22.85 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.386 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 W/kg

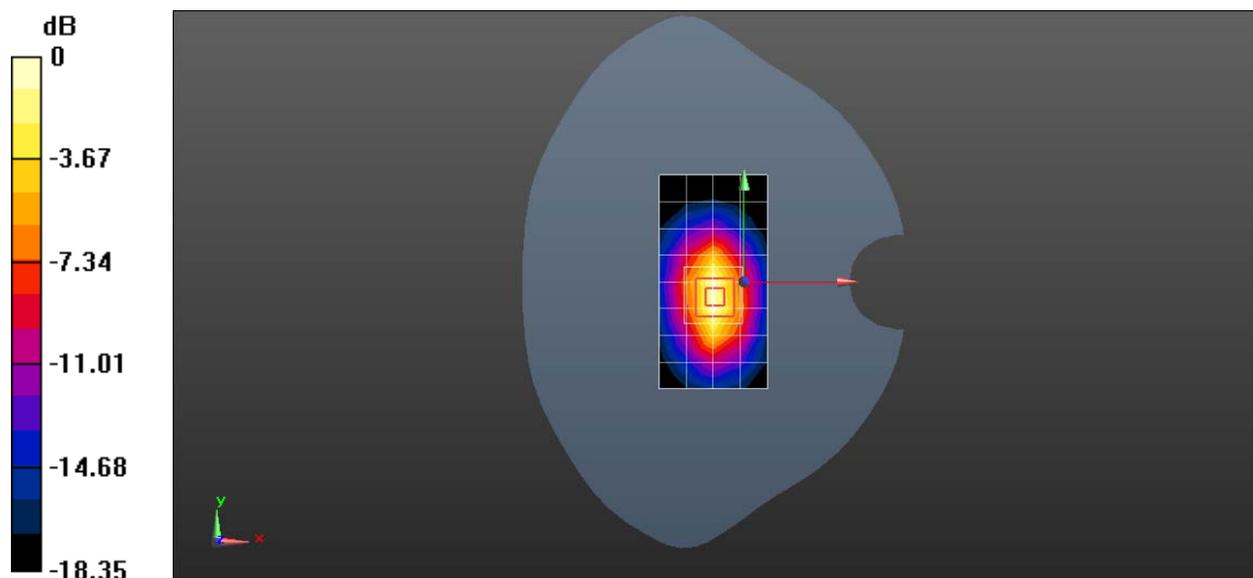

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band II 9262CH Left touch-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.413$  S/m;  $\epsilon_r = 40.408$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.33, 5.33, 5.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.235 W/kg

**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 4.879 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.351 W/kg

**SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.147 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.274 W/kg

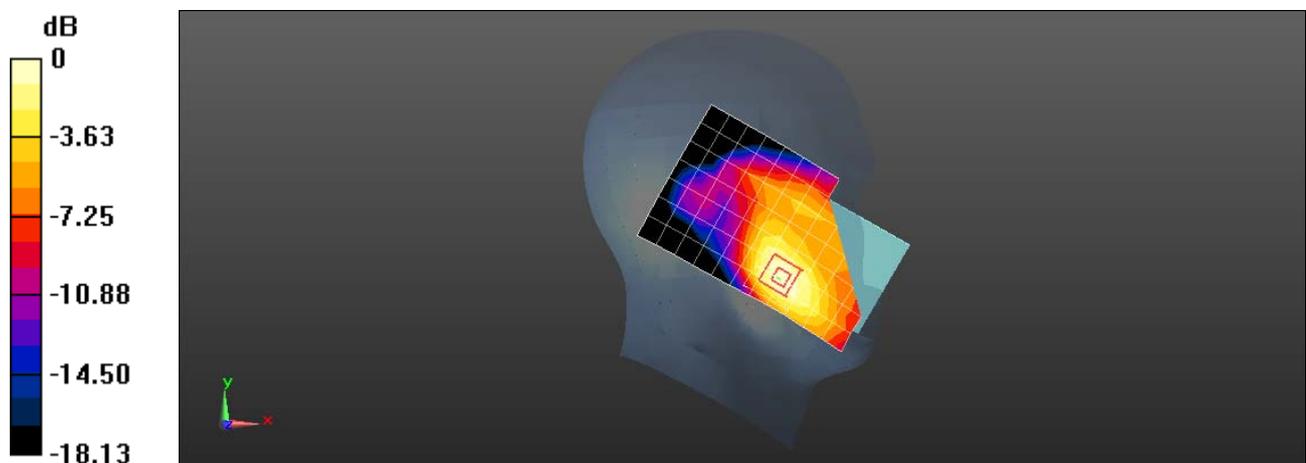

0 dB = 0.274 W/kg = -5.62 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T UMTS Band II 9538CH Back side 15mm with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.578 \text{ S/m}$ ;  $\epsilon_r = 52.653$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.05 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.246 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.436 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

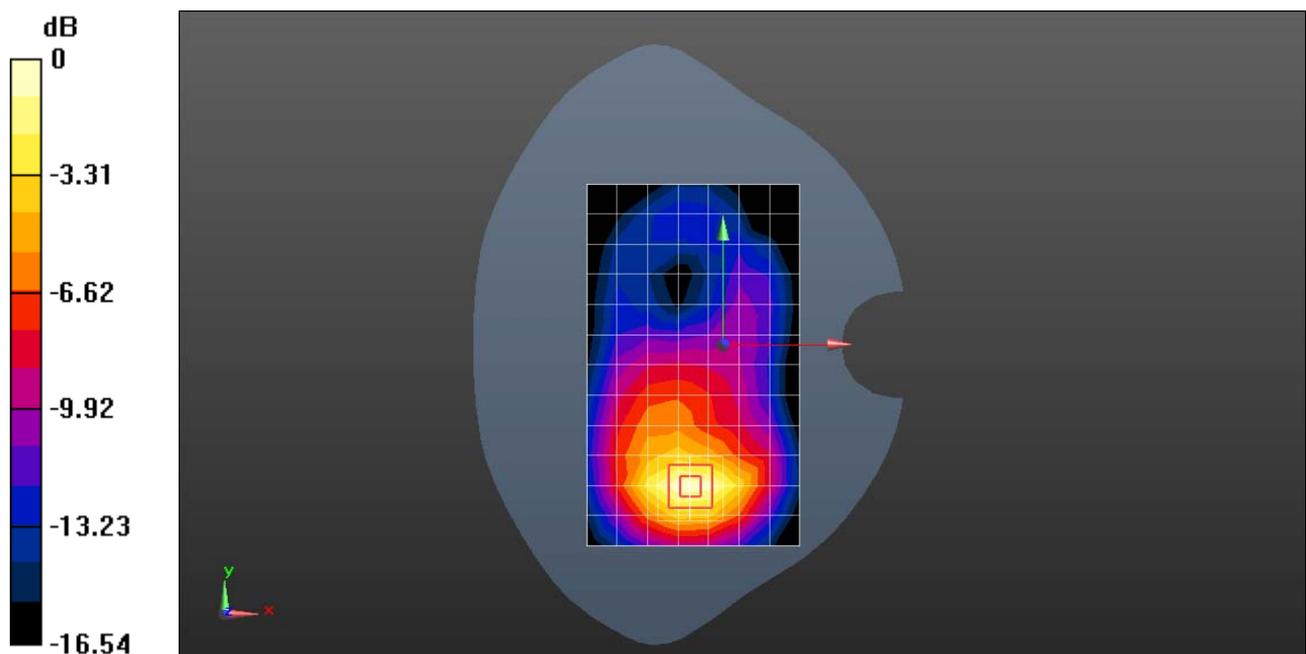

0 dB = 1.09 W/kg = 0.38 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T UMTS Band II 9538CH Bottom side 10mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.578 \text{ S/m}$ ;  $\epsilon_r = 52.653$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x11x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.855 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.13 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.300 W/kg**

Maximum value of SAR (measured) = 0.869 W/kg

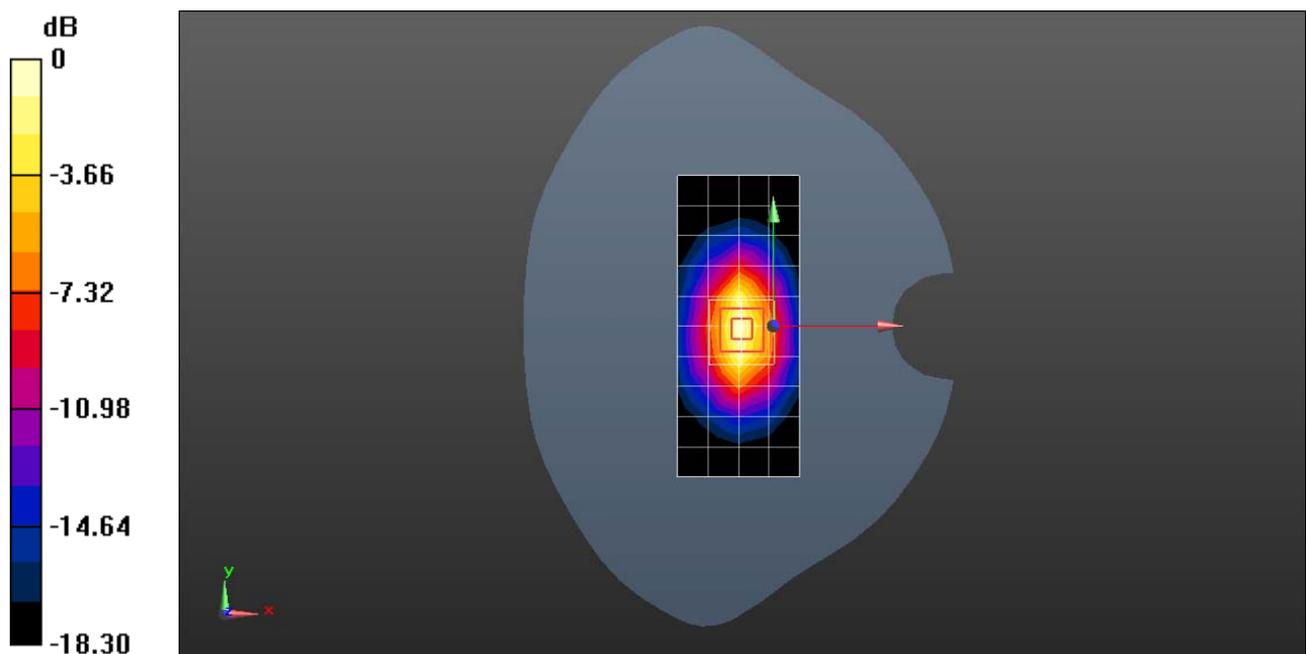

0 dB = 0.869 W/kg = -0.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band IV 1513CH Left touch with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 38.97$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.252 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 4.923 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.316 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.275 W/kg

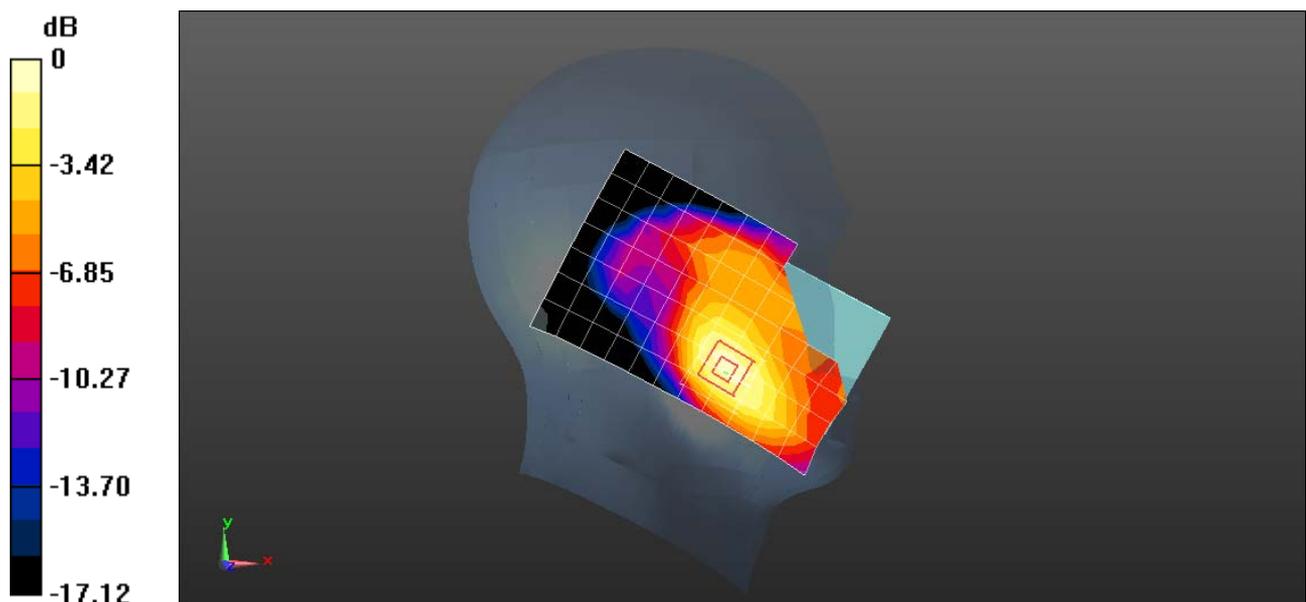

0 dB = 0.275 W/kg = -5.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T UMTS Band IV 1413CH Back side 15mm with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.523$  S/m;  $\epsilon_r = 52.631$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.697 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.960 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.804 W/kg

**SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.295 W/kg**

Maximum value of SAR (measured) = 0.701 W/kg

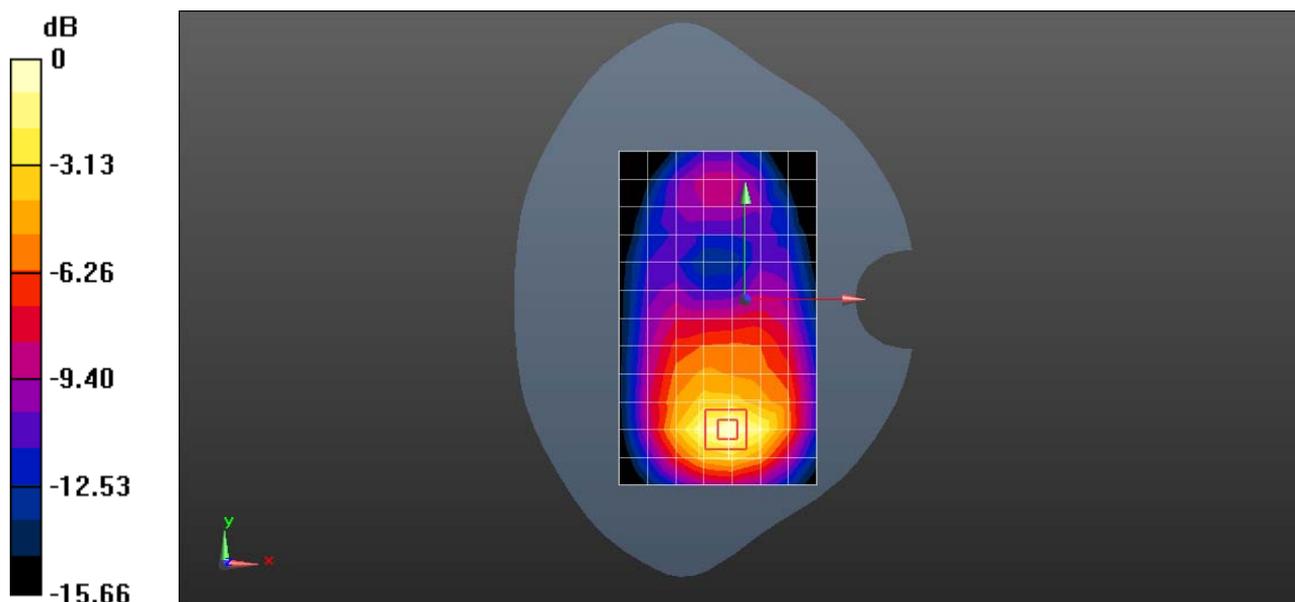

0 dB = 0.701 W/kg = -1.54 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T UMTS Band IV 1513CH Bottom side 10mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.601$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x11x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 1.41 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 27.53 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.994 W/kg; SAR(10 g) = 0.526 W/kg**

Maximum value of SAR (measured) = 1.49 W/kg

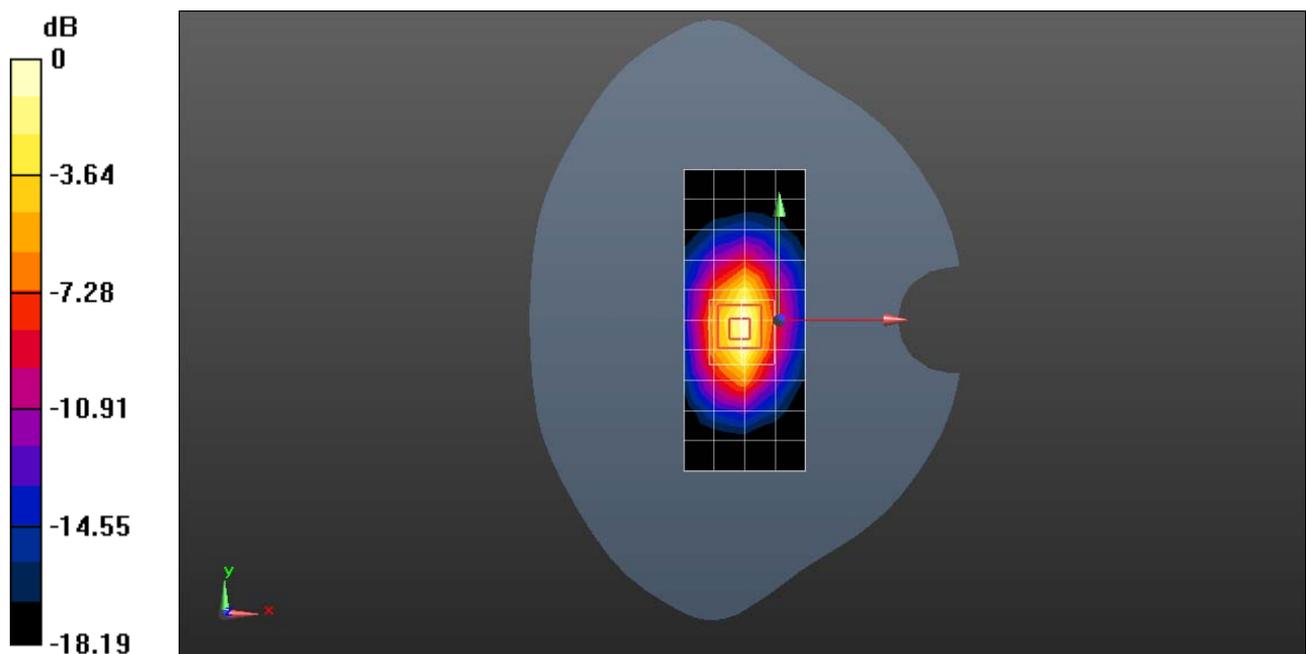

0 dB = 1.49 W/kg = 1.73 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band V 4182CH Right touch-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 43.408$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.86, 8.86, 8.86); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.334 W/kg

**Configuration/Head/Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 10.55 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.400 W/kg

**SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.242 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.345 W/kg

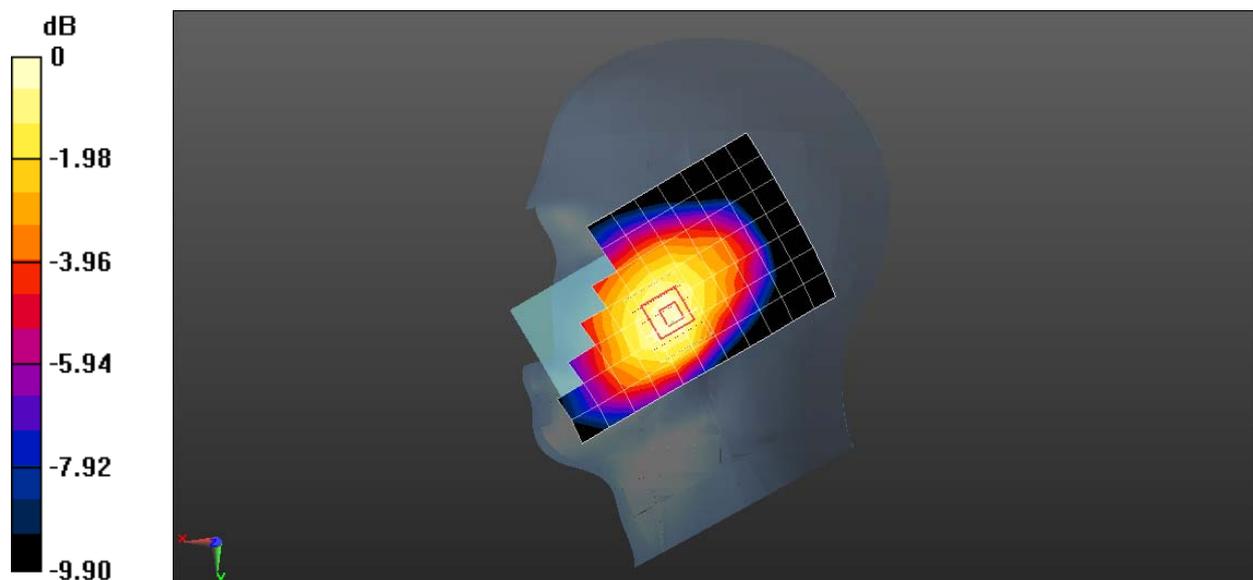

0 dB = 0.345 W/kg = -4.62 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band V 4182CH Front side 15mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 1.002$  S/m;  $\epsilon_r = 53.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.391 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 11.64 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.407 W/kg

**SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.231 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.371 W/kg

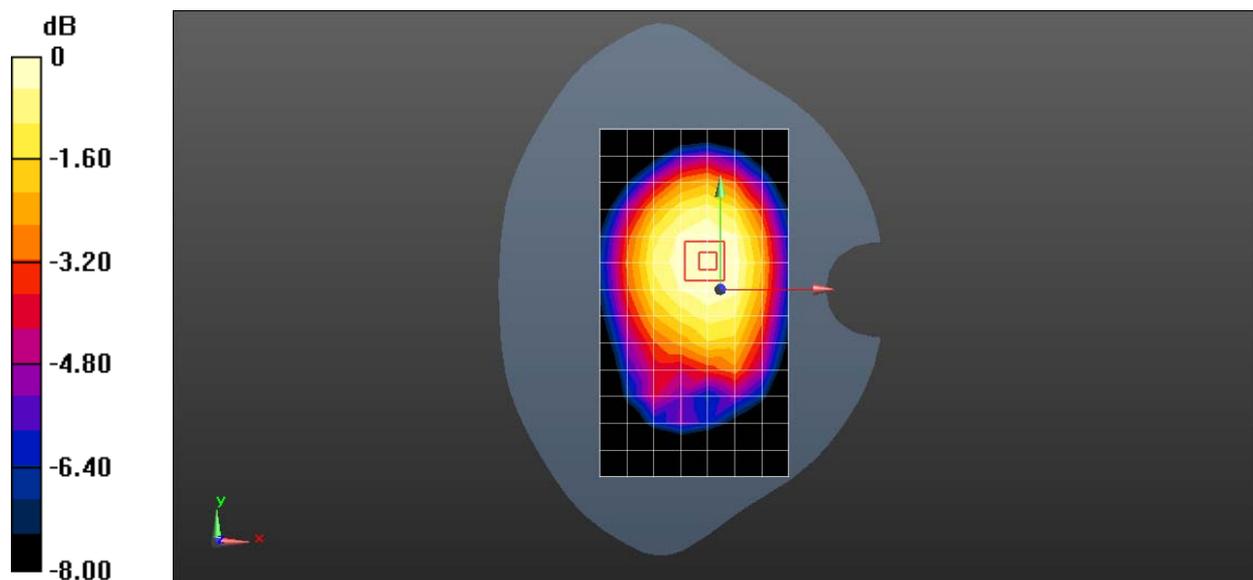

0 dB = 0.371 W/kg = -4.31 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T UMTS Band V 4182CH Right side 10mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 1.002$  S/m;  $\epsilon_r = 53.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.662 W/kg

**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm


Reference Value = 23.65 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.765 W/kg

**SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.334 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.670 W/kg

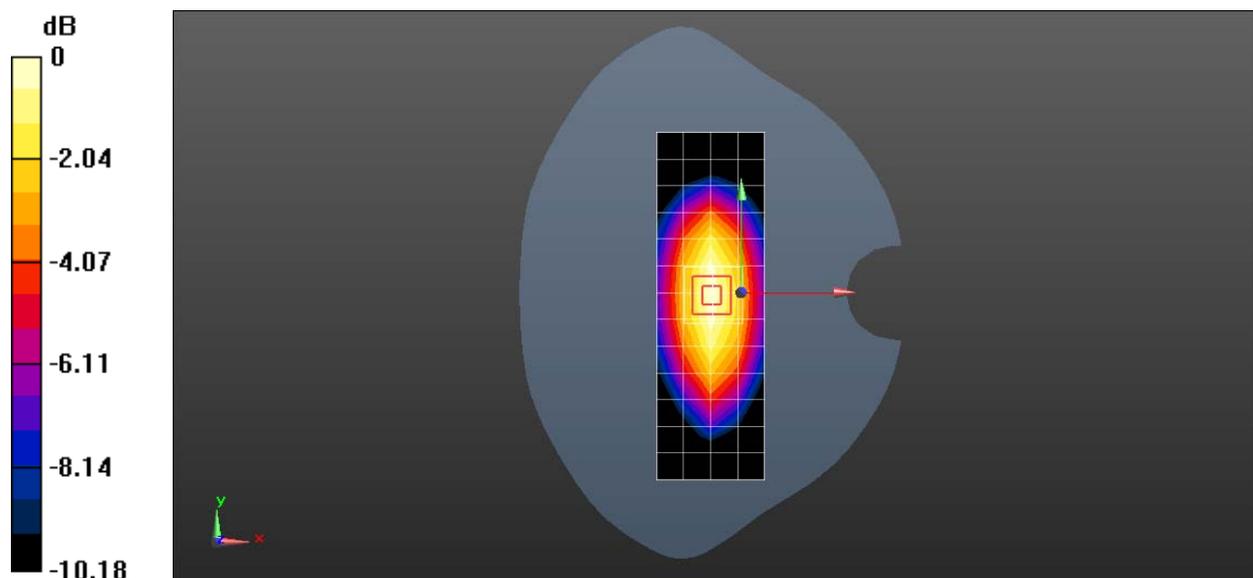

0 dB = 0.670 W/kg = -1.74 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band II 20M QPSK 1RB 50 offset 18700CH Left touch-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.387$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.33, 5.33, 5.33); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.319 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.381 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.474 W/kg

**SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.198 W/kg**

Maximum value of SAR (measured) = 0.371 W/kg

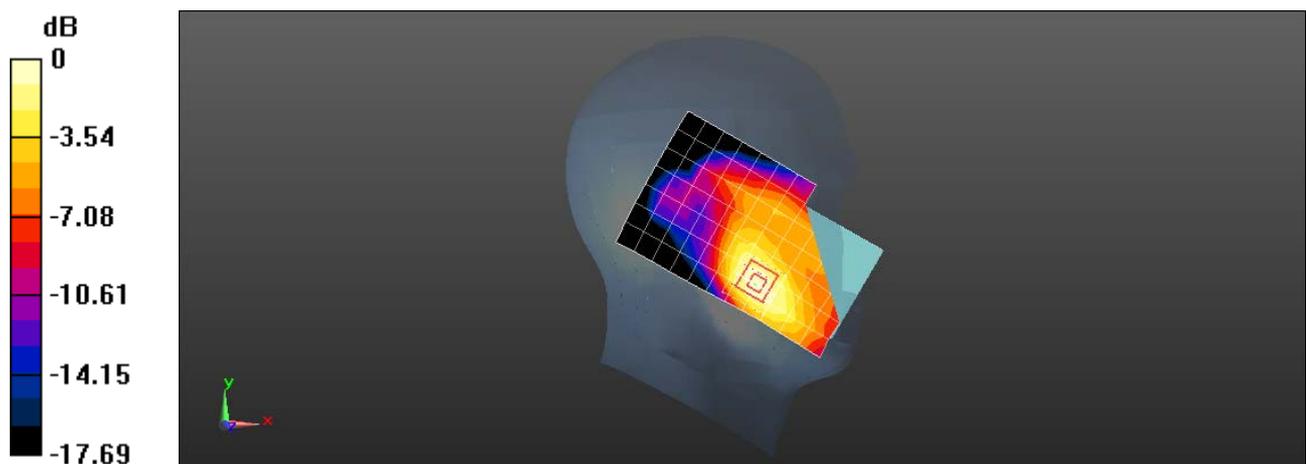

0 dB = 0.371 W/kg = -4.31 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band II 20M QPSK 1RB 50 offset 18700CH Back side 15mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.527$  S/m;  $\epsilon_r = 53.058$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.946 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.951 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.443 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

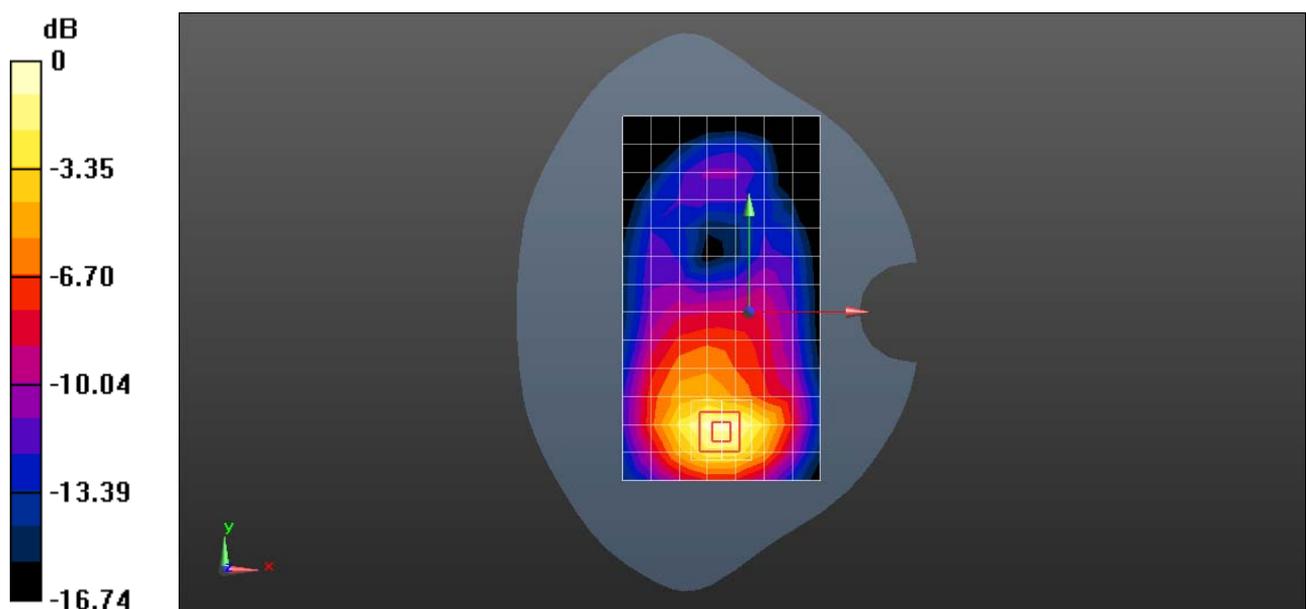

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T LTE Band II 20M QPSK 1RB 50 offset 19100CH Bottom side 10mm- Main Antenna-Repeated

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.564$  S/m;  $\epsilon_r = 52.908$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.48, 7.48, 7.48); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x9x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 1.28 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 25.85 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.447 W/kg**

Maximum value of SAR (measured) = 1.30 W/kg

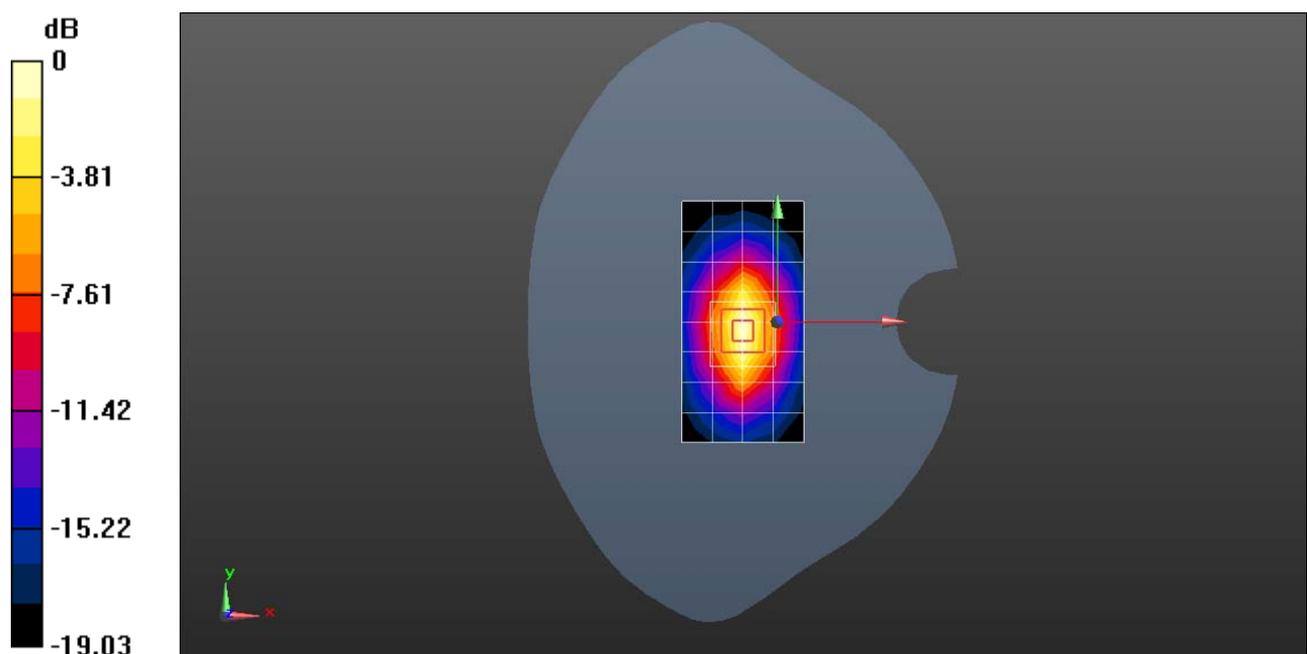

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## **WAS-L03T LTE Band IV 20M QPSK 1RB 50 Offset 20175CH Left touch-Main Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 39.589$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.09, 8.09, 8.09); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.279 W/kg

**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 5.358 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.333 W/kg

**SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.131 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.284 W/kg

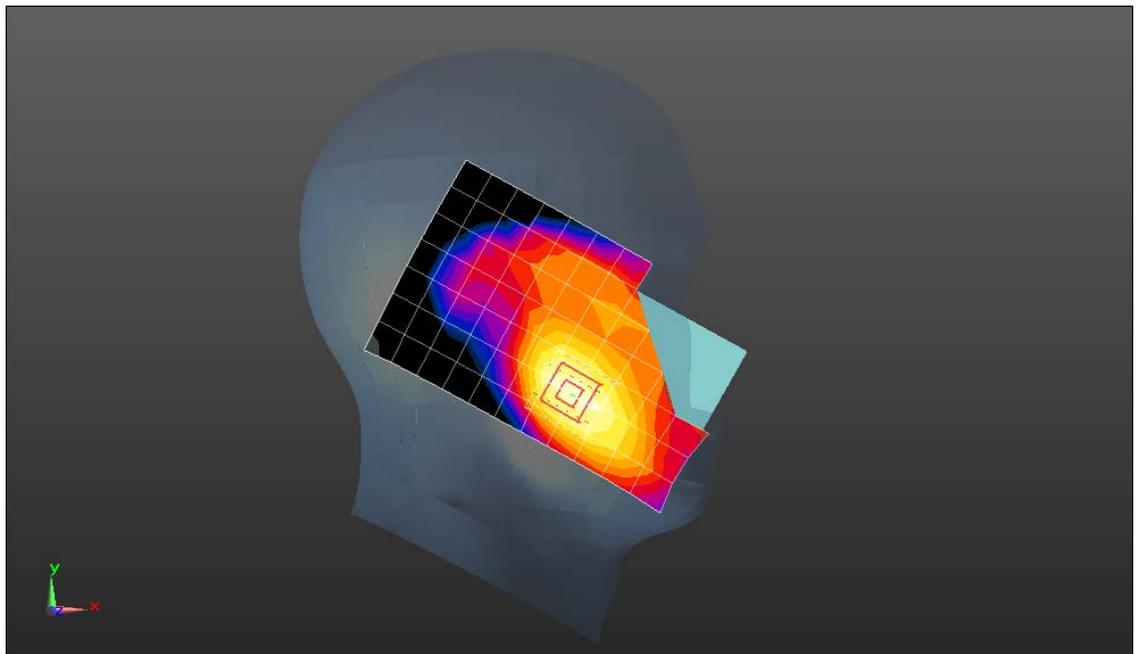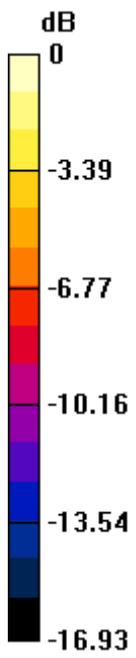

0 dB = 0.284 W/kg = -5.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T LTE Band IV 20M QPSK 1RB 50 offset 20300CH Back side 15mm- Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.532$  S/m;  $\epsilon_r = 52.615$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.545 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.601 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.655 W/kg

**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.245 W/kg**

Maximum value of SAR (measured) = 0.571 W/kg

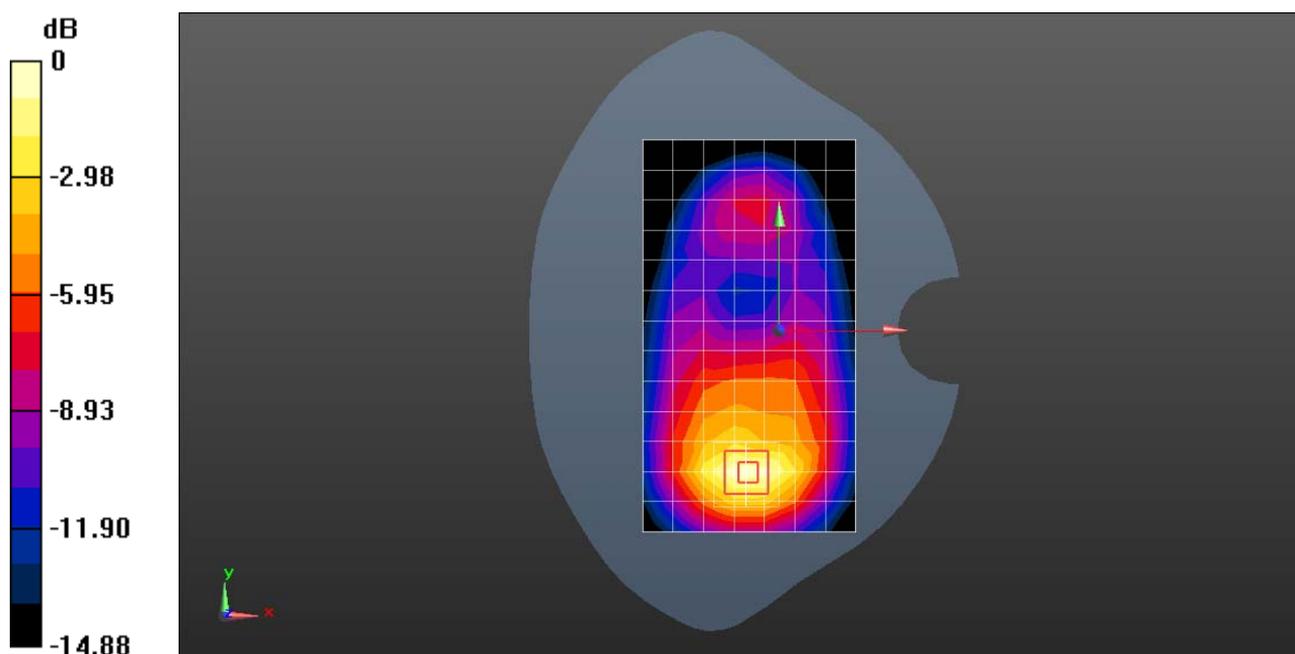

0 dB = 0.571 W/kg = -2.43 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

**WAS-L03T LTE Band IV 20M QPSK 1RB 50 offset 20050CH Bottom side 10mm with Battery 2-Main Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 52.643$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.61, 7.61, 7.61); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x11x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.721 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 19.65 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.863 W/kg

**SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.266 W/kg**

Maximum value of SAR (measured) = 0.741 W/kg

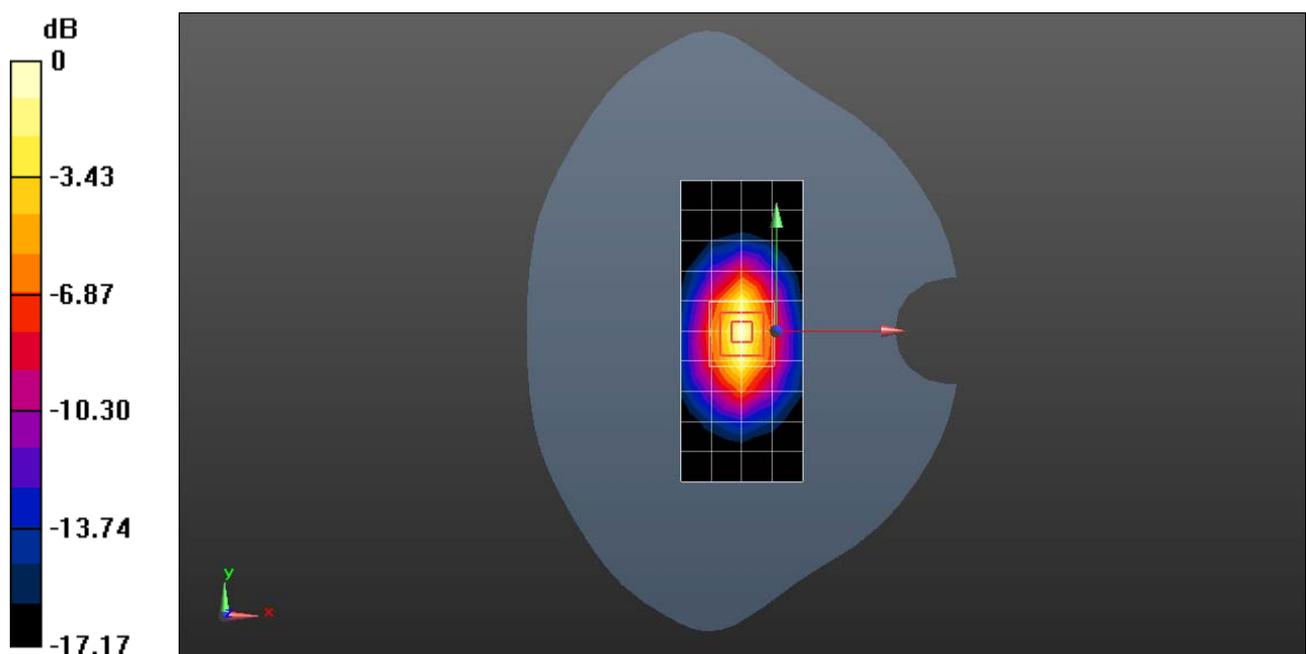

0 dB = 0.741 W/kg = -1.30 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band V 10M 1RB 25 offset 20600CH Right touch with Battery 2- Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 844$  MHz;  $\sigma = 0.935$  S/m;  $\epsilon_r = 43.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.86, 8.86, 8.86); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.367 W/kg


**Configuration/Head/Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 11.52 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.431 W/kg

**SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.262 W/kg**

Maximum value of SAR (measured) = 0.373 W/kg

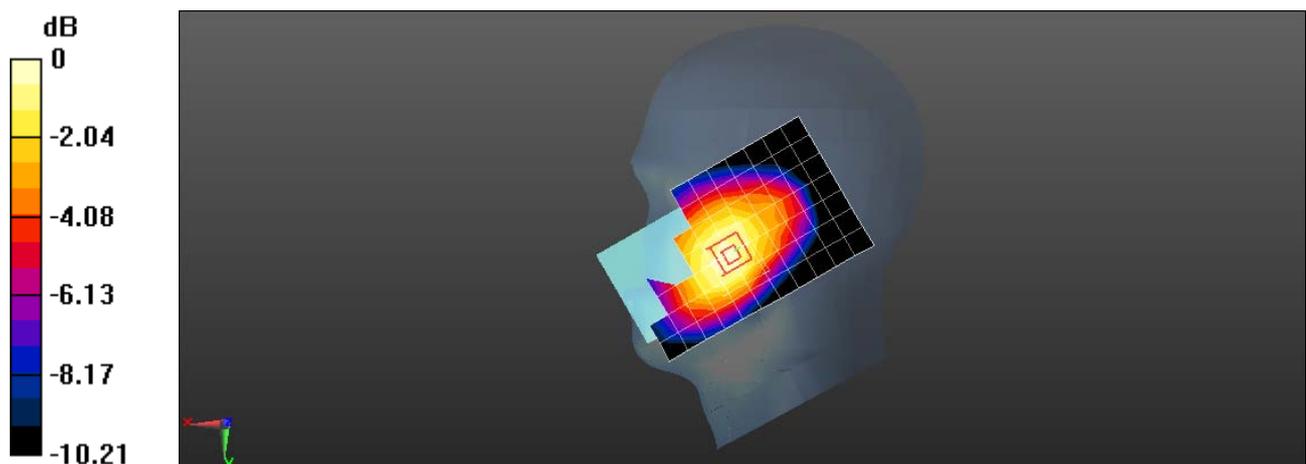

0 dB = 0.373 W/kg = -4.28 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band V 10M 1RB 25 offset 20600CH Back side 15mm with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 844$  MHz;  $\sigma = 1.01$  S/m;  $\epsilon_r = 53.016$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.368 W/kg


**Configuration/Body/Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 18.49 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.440 W/kg

**SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.260 W/kg**

Maximum value of SAR (measured) = 0.377 W/kg

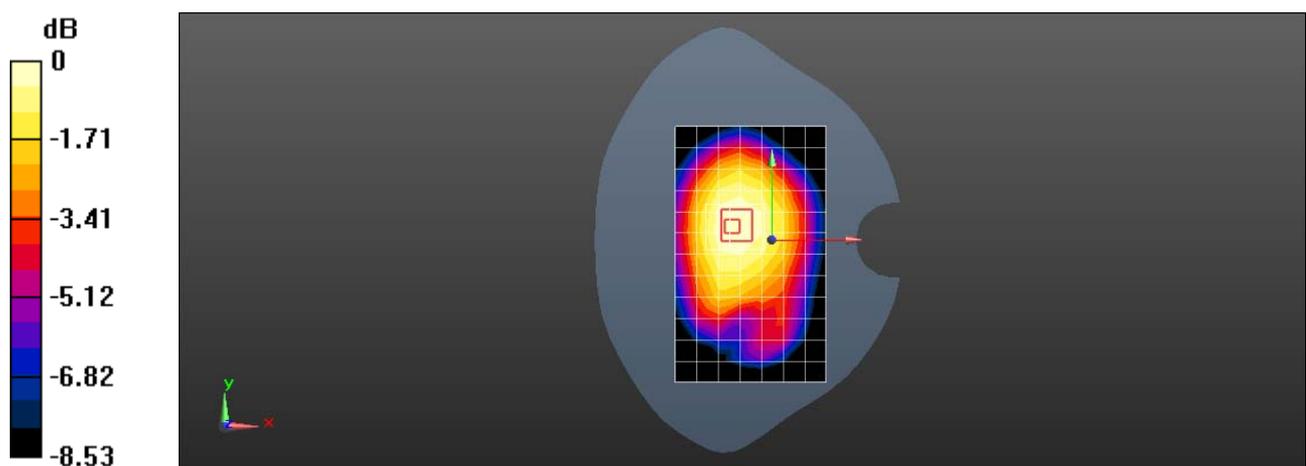

0 dB = 0.377 W/kg = -4.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band V 10M 1RB 25 offset 20600CH Right side 10mm with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 1.01 \text{ S/m}$ ;  $\epsilon_r = 53.016$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(8.94, 8.94, 8.94); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (5x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.561 \text{ W/kg}$


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $23.35 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.727 \text{ W/kg}$

**SAR(1 g) =  $0.504 \text{ W/kg}$ ; SAR(10 g) =  $0.341 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.583 \text{ W/kg}$

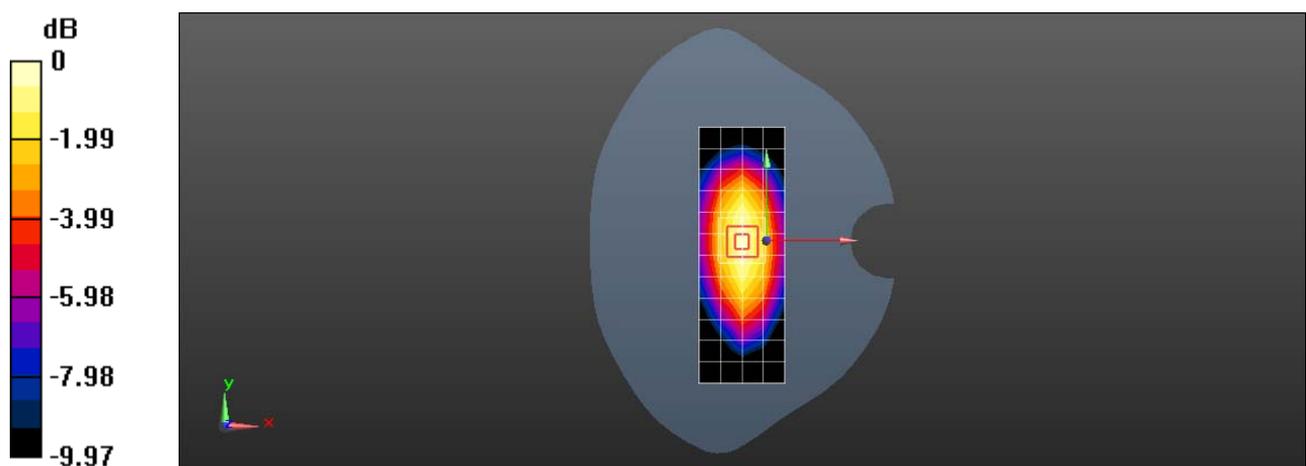

0 dB =  $0.583 \text{ W/kg} = -2.34 \text{ dBW/kg}$

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band VII 20M QPSK 1RB 50 offset 20850CH Right touch-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.923$  S/m;  $\epsilon_r = 40.069$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.9, 6.9, 6.9); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (10x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.221 W/kg


**Configuration/Head/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 2.313 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.272 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.228 W/kg

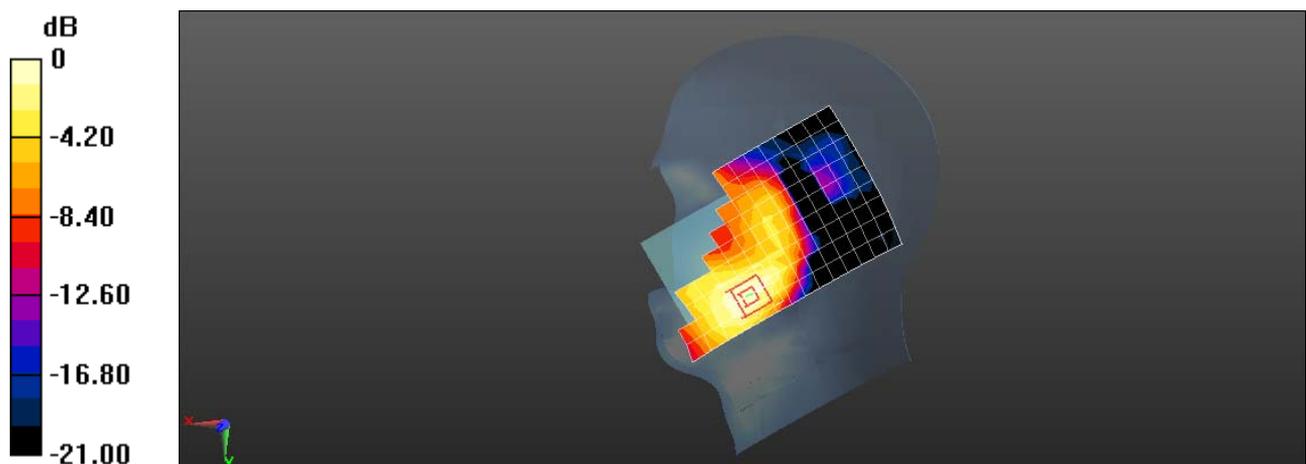

0 dB = 0.228 W/kg = -6.42 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band VII 20M QPSK 1RB 50 offset 21350CH Front side 15mm-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.162$  S/m;  $\epsilon_r = 54.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.92, 6.92, 6.92); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (10x17x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.765 W/kg

**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 2.885 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.934 W/kg

**SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.268 W/kg**

Maximum value of SAR (measured) = 0.754 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 1:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 2.885 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.679 W/kg

**SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.169 W/kg**

Maximum value of SAR (measured) = 0.541 W/kg

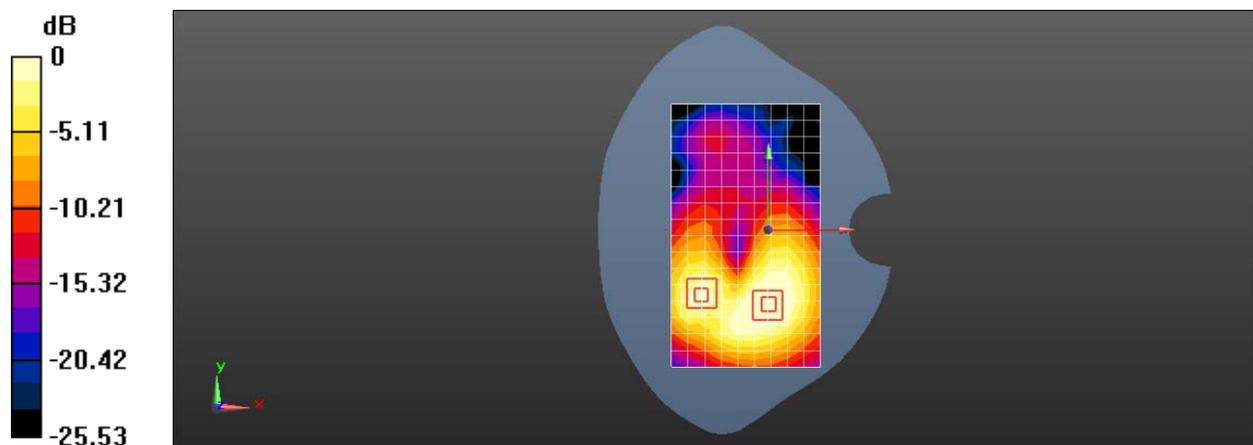

0 dB = 0.541 W/kg = -2.67 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

**WAS-L03T LTE Band VII 20M QPSK 1RB 50 offset 21350CH Bottom side 10mm with Battery 2-Main Antenna**

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.162$  S/m;  $\epsilon_r = 54.968$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(6.92, 6.92, 6.92); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (6x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.960 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.698 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.334 W/kg**

Maximum value of SAR (measured) = 1.14 W/kg

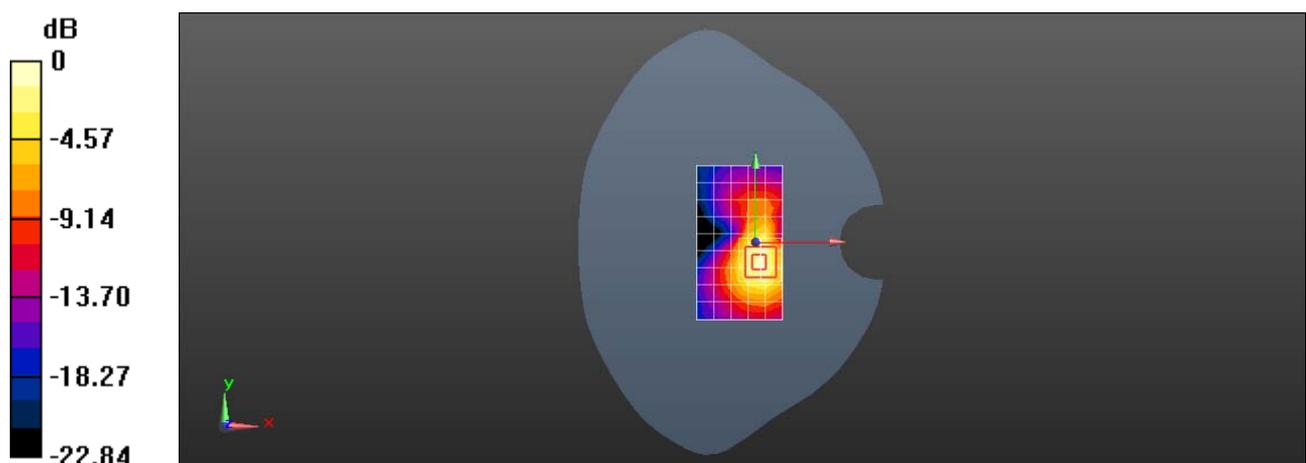

0 dB = 1.14 W/kg = 0.57 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band XII 10M QPSK 1RB 25 offset 23130CH Right touch with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.869$  S/m;  $\epsilon_r = 41.016$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.7, 9.7, 9.7); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (8x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.207 W/kg


**Configuration/Head/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.827 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.151 W/kg**

Maximum value of SAR (measured) = 0.210 W/kg

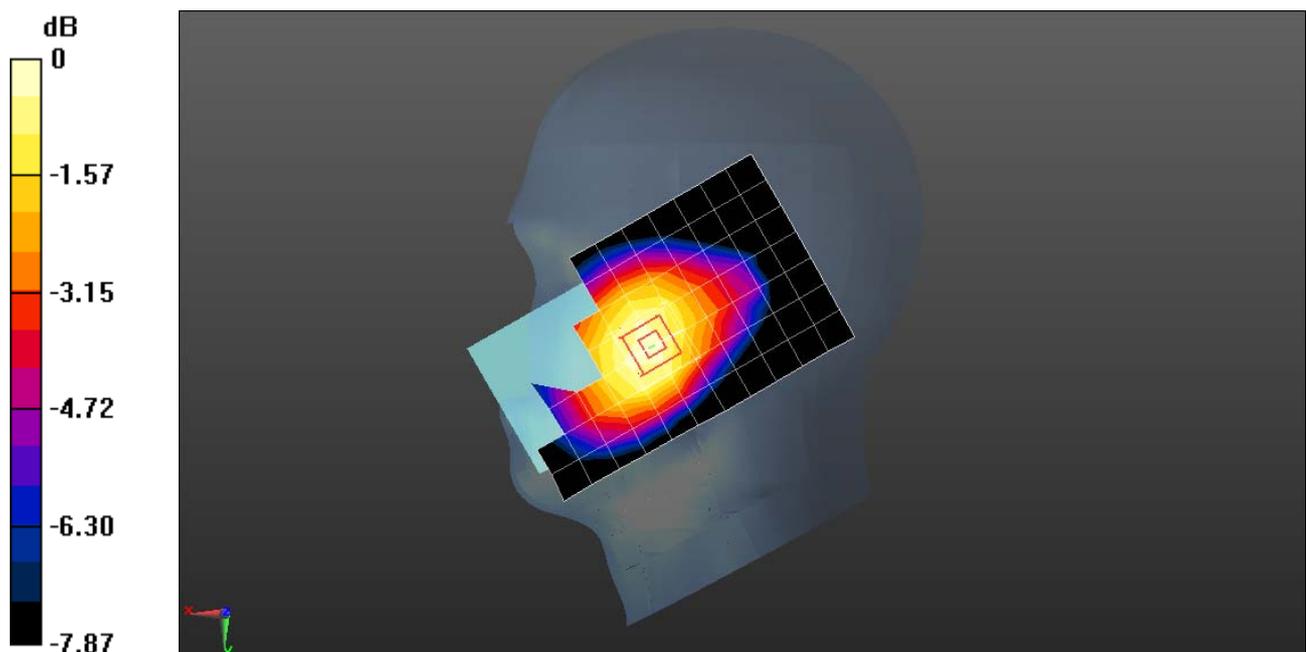

0 dB = 0.210 W/kg = -6.78 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T LTE Band XII 10M QPSK 1RB 25 offset 23060CH Back side 15mm with Battery 2-Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704 \text{ MHz}$ ;  $\sigma = 0.966 \text{ S/m}$ ;  $\epsilon_r = 55.423$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 0.343 W/kg


**Configuration/Body/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.59 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.382 W/kg

**SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.222 W/kg**

Maximum value of SAR (measured) = 0.348 W/kg

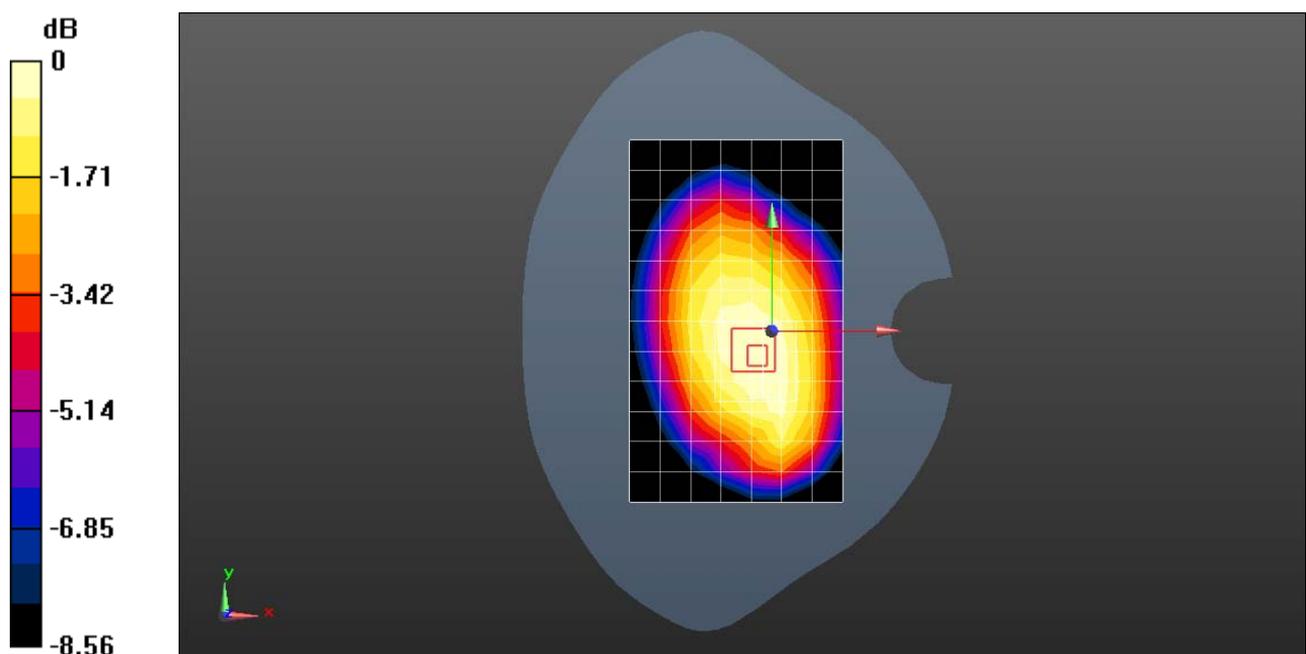

0 dB = 0.348 W/kg = -4.58 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T LTE Band XII 10M QPSK 1RB 25 offset 23060CH Back side 10mm- Main Antenna

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR2**

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704$  MHz;  $\sigma = 0.966$  S/m;  $\epsilon_r = 55.423$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(9.03, 9.03, 9.03); Calibrated: 2016-7-26;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2016-11-22
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (8x14x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.453 W/kg


**Configuration/Body/Zoom Scan (7x9x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 19.11 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.544 W/kg

**SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.269 W/kg**

Maximum value of SAR (measured) = 0.467 W/kg

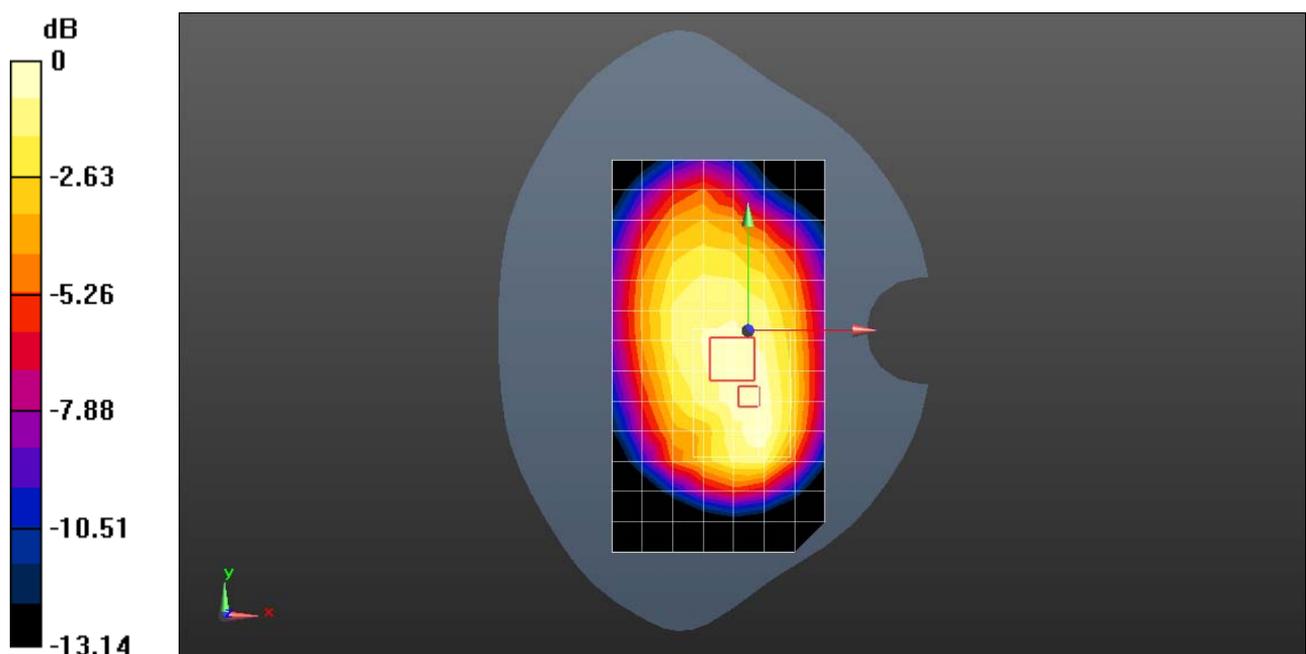

0 dB = 0.467 W/kg = -3.31 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T WIFI 2.4GH 11b 6CH Left Touch with Battery2

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.783$  S/m;  $\epsilon_r = 38.171$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.73, 4.73, 4.73); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Head/Area Scan (10x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 1.08 W/kg


**Configuration/Head/Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 8.743 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

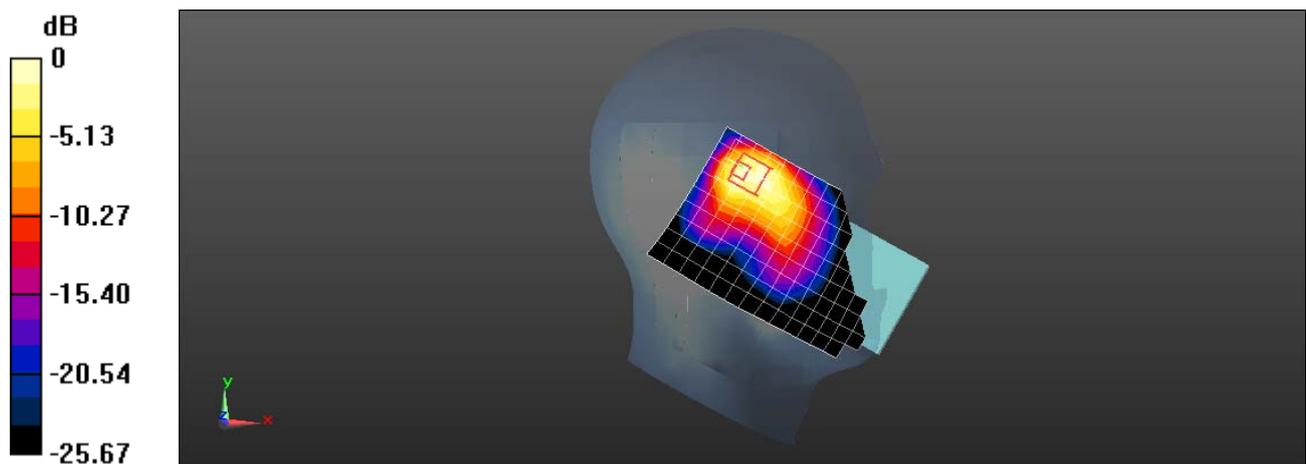

0 dB = 1.11 W/kg = 0.45 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

## WAS-L03T wifi2.4G 802.11b 6CH Back Side 15mm with Battery2

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.994$  S/m;  $\epsilon_r = 52.655$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.57, 4.57, 4.57); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (10x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.0817 W/kg

**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 4.826 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.131 W/kg  
**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.041 W/kg**  
Maximum value of SAR (measured) = 0.0902 W/kg

**Configuration/Body/Zoom Scan (7x7x7)/Cube 1:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 4.826 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.0940 W/kg  
**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.030 W/kg**  
Maximum value of SAR (measured) = 0.0639 W/kg

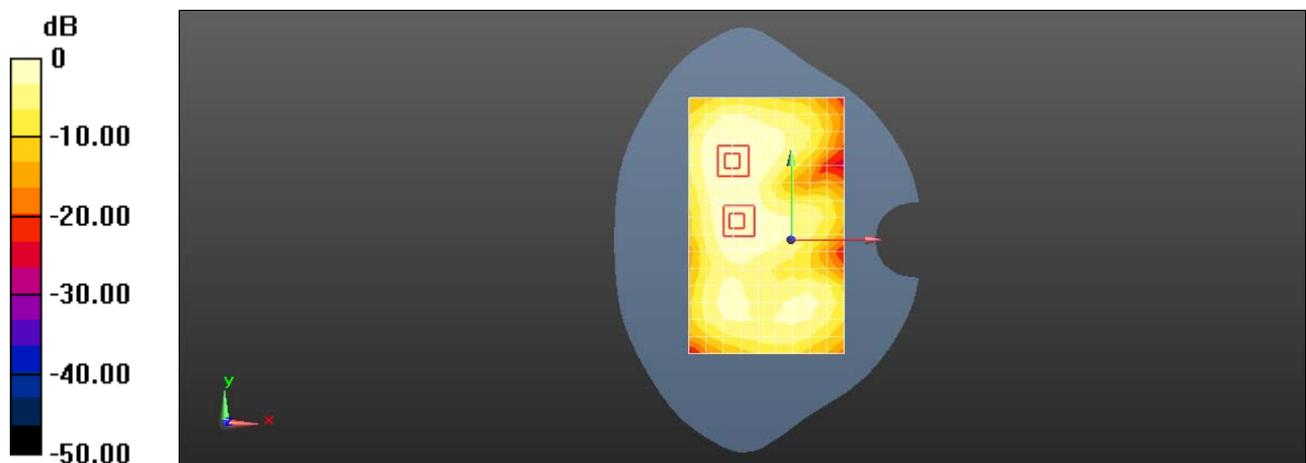

0 dB = 0.0639 W/kg = -11.94 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### WAS-L03T wifi2.4G 802.11b 6CH Right Side 10mm

**DUT: WAS-L03T; Type: Smart Phone; Serial: SAR1**

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.994$  S/m;  $\epsilon_r = 52.655$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section


DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.57, 4.57, 4.57); Calibrated: 2016-9-27;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2016-4-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1258); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (7x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm  
Maximum value of SAR (measured) = 0.159 W/kg

**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 7.525 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 0.283 W/kg  
**SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.077 W/kg**  
Maximum value of SAR (measured) = 0.185 W/kg

**Configuration/Body/Zoom Scan (7x7x7)/Cube 1:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 7.525 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 0.246 W/kg  
**SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.061 W/kg**

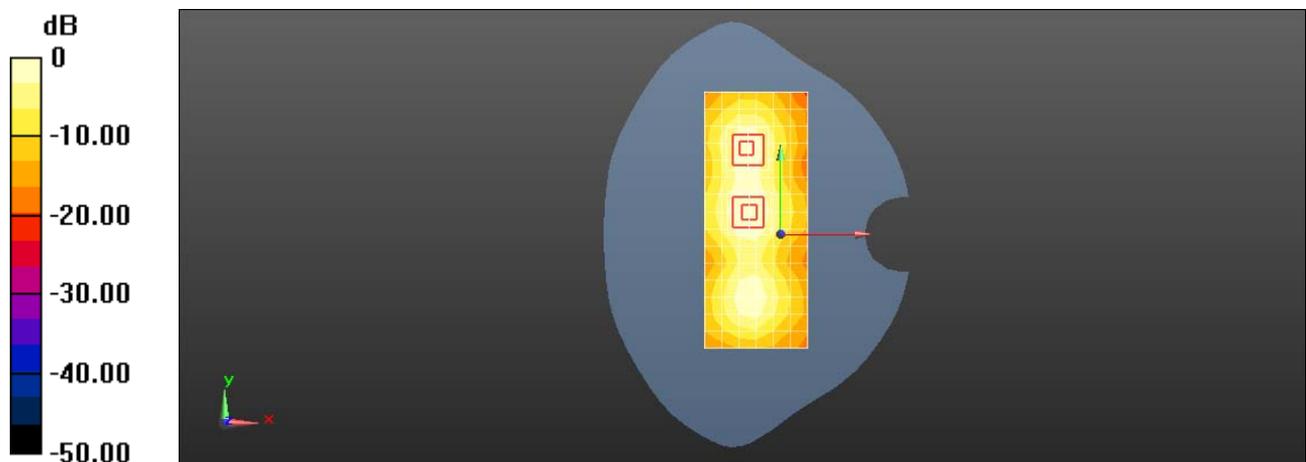

0 dB = 0.159 W/kg = -7.99 dBW/kg