

FCC Test Report

FCC ID: QISWAS-L03T

Project No. : 1612C199B
Equipment : Smart Phone
Model Name : WAS-L03T
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Dec. 16, 2016
Date of Test : Dec. 16, 2016 ~ Dec. 30, 2016
Issued Date : Mar. 14, 2017
Tested by : BTL Inc.

Testing Engineer : Treey Chen
(Treey Chen)

Technical Manager : Bill Zhang
(Bill Zhang)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents**Page**

REPORT ISSUED HISTORY	4
1 .CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 EUT OPERATING CONDITIONS	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATIONFROMTESTSTANDARD	14
4.1.5 TESTSETUP	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	63
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	63
4.2.2 MEASUREMENT INSTRUMENTS LIST	64
4.2.3 TEST PROCEDURE	64
4.2.4 DEVIATION FROM TEST STANDARD	65
4.2.5 TEST SETUP	65
4.2.6 TEST RESULTS-BELOW 1GHZ	65
4.2.7 TEST RESULTS-ABOVE 1GHZ	98

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1612C199	Original report.	Jan. 03, 2017
BTL-FCCE-1-1612C199B	Compared with the previous report (BTL-FCCE-1-1612C199), added the third source of battery and the related test results, the rest are kept the same.	Mar. 14, 2017

1.CERIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : WAS-L03T
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Dec. 16, 2016 ~ Dec. 30, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1612C199B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB COPY+IDLE
Mode 2	Adapter+Idle+WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)


For Conducted Test	
Final Test Mode	Description
Mode 1	USB COPY+IDLE
Mode 2	Adapter+Idle+WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB COPY+IDLE
Mode 2	Adapter+Idle+WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)


3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

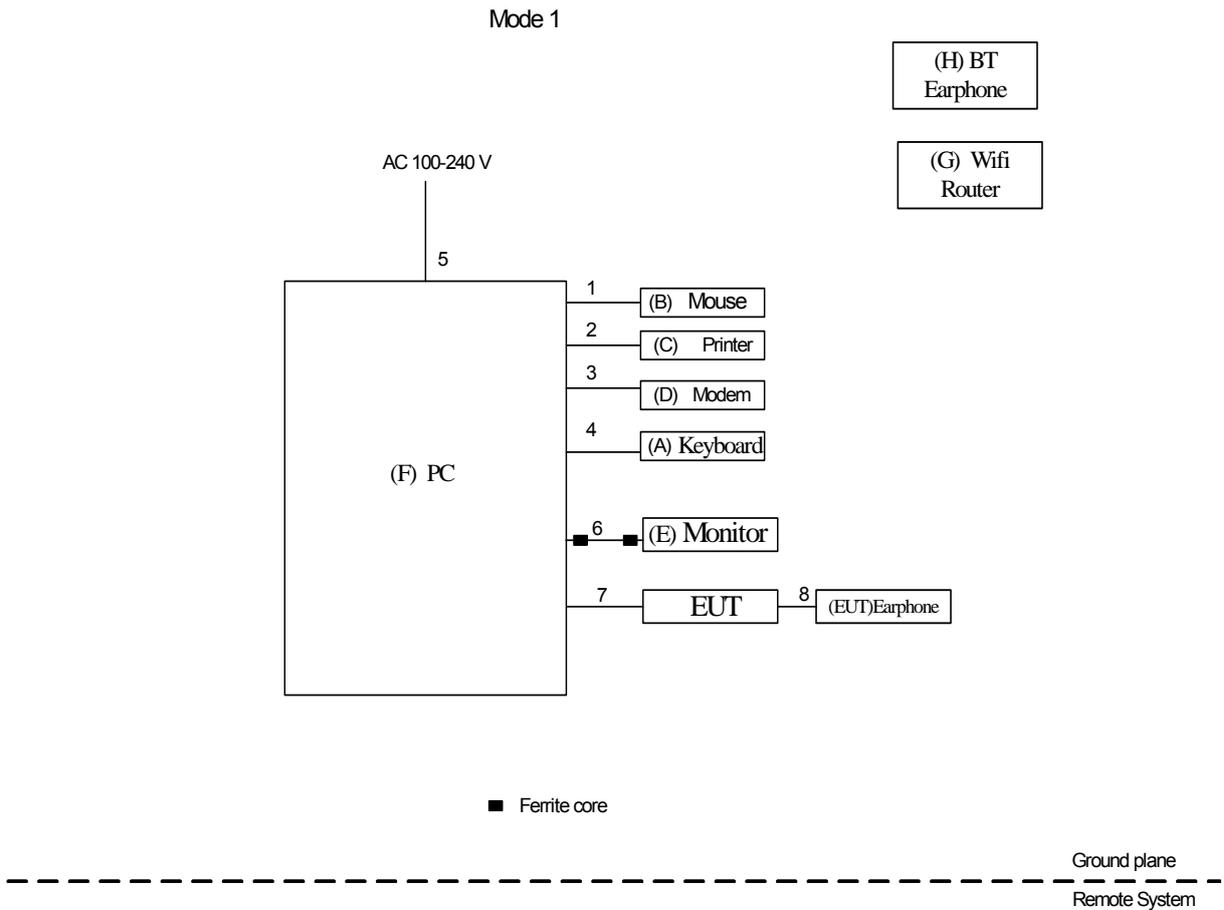

Mode 2-7

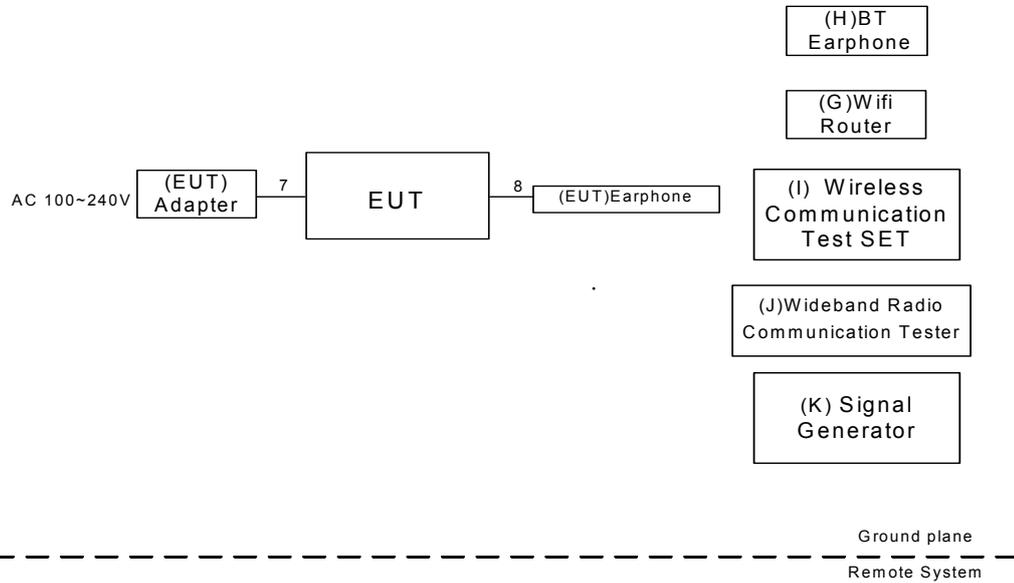

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
F	PC	Dell 745	DCSM	DOC	G7K832X
G	wireless router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series)	N/A	MY48364183
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	PARALLEL Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCYRANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 27, 2017
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 27, 2017
5	Cable	emci	RG223(9K Hz-30MHz) (5m)	N/A	Mar. 10, 2017
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

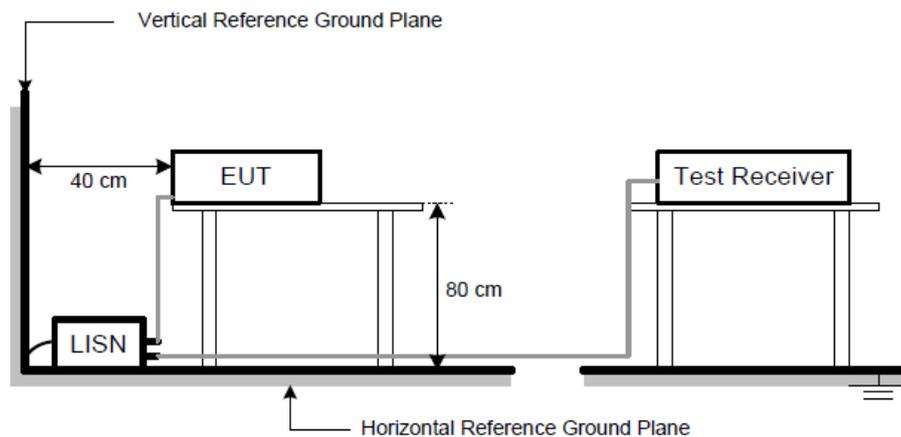


4.1.6 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY+IDLE		
Note	USB Cable:FF		
Test Engineer	Trey Chen		

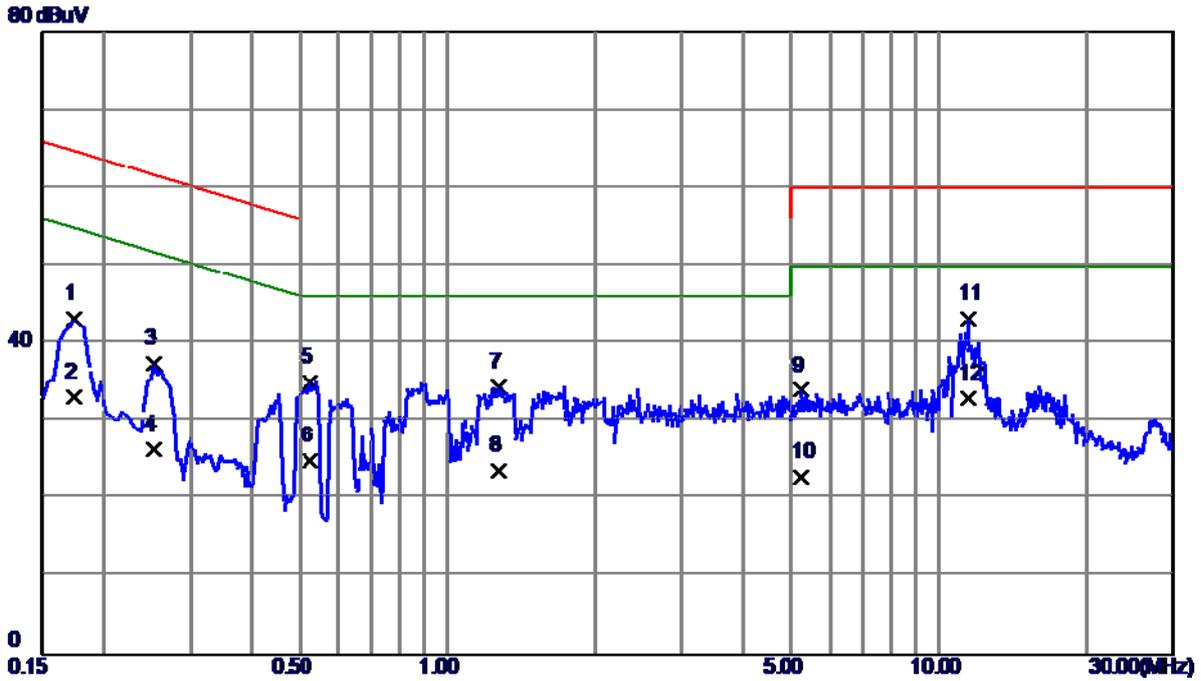


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1740	33.68	9.57	43.25	64.77	-21.52	QP		
2	0.1740	23.50	9.57	33.07	54.77	-21.70	AVG		
3	0.2540	27.86	9.57	37.43	61.63	-24.20	QP		
4	0.2540	16.90	9.57	26.47	51.63	-25.16	AVG		
5	0.5260	25.42	9.69	35.11	56.00	-20.89	QP		
6	0.5260	15.20	9.69	24.89	46.00	-21.11	AVG		
7	1.2700	24.51	9.88	34.39	56.00	-21.61	QP		
8	1.2700	13.80	9.88	23.68	46.00	-22.32	AVG		
9	5.2619	23.74	10.26	34.00	60.00	-26.00	QP		
10	5.2619	12.70	10.26	22.96	50.00	-27.04	AVG		
11 *	11.4580	32.63	10.55	43.18	60.00	-16.82	QP		
12	11.4580	22.40	10.55	32.95	50.00	-17.05	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY+IDLE		
Note	USB Cable:FF		
Test Engineer	Treey Chen		

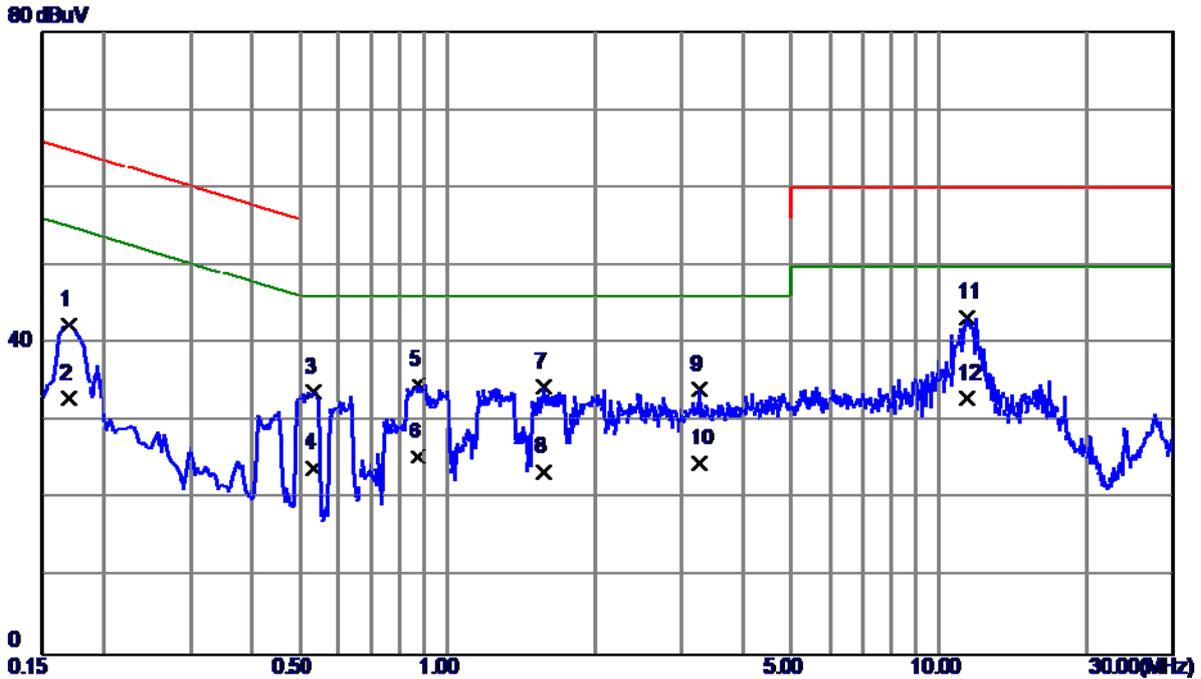


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1700	32.94	9.47	42.41	64.96	-22.55	QP		
2	0.1700	23.50	9.47	32.97	54.96	-21.99	AVG		
3	0.5340	24.34	9.49	33.83	56.00	-22.17	QP		
4	0.5340	14.50	9.49	23.99	46.00	-22.01	AVG		
5	0.8740	25.04	9.70	34.74	56.00	-21.26	QP		
6	0.8740	15.70	9.70	25.40	46.00	-20.60	AVG		
7	1.5700	24.66	9.78	34.44	56.00	-21.56	QP		
8	1.5700	13.80	9.78	23.58	46.00	-22.42	AVG		
9	3.2659	24.04	9.99	34.03	56.00	-21.97	QP		
10	3.2659	14.71	9.99	24.70	46.00	-21.30	AVG		
11 *	11.3979	32.72	10.62	43.34	60.00	-16.66	QP		
12	11.3979	22.40	10.62	33.02	50.00	-16.98	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY+IDLE		
Note	USB Cable:LX		
Test Engineer	Treey Chen		

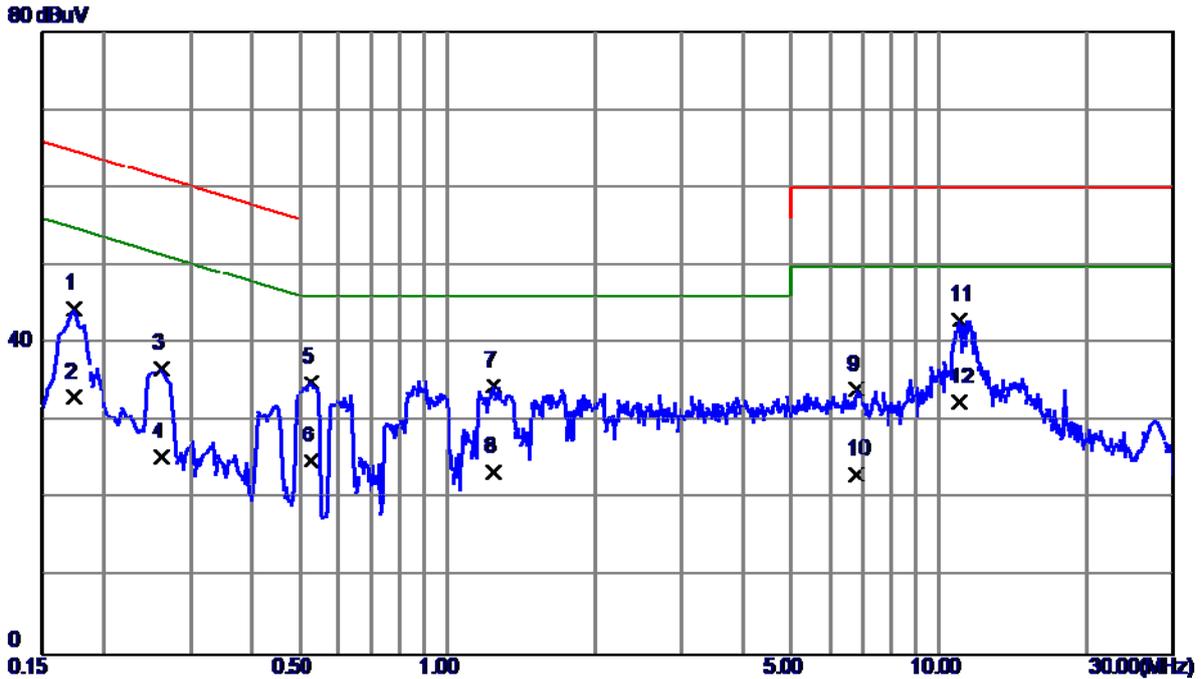


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1740	34.95	9.57	44.52	64.77	-20.25	QP		
2	0.1740	23.50	9.57	33.07	54.77	-21.70	AVG		
3	0.2620	27.21	9.57	36.78	61.37	-24.59	QP		
4	0.2620	15.90	9.57	25.47	51.37	-25.90	AVG		
5	0.5299	25.42	9.69	35.11	56.00	-20.89	QP		
6	0.5299	15.20	9.69	24.89	46.00	-21.11	AVG		
7	1.2420	24.63	9.87	34.50	56.00	-21.50	QP		
8	1.2420	13.60	9.87	23.47	46.00	-22.53	AVG		
9	6.8060	23.64	10.39	34.03	60.00	-25.97	QP		
10	6.8060	12.80	10.39	23.19	50.00	-26.81	AVG		
11 *	11.0140	32.45	10.53	42.98	60.00	-17.02	QP		
12	11.0140	21.90	10.53	32.43	50.00	-17.57	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY+IDLE		
Note	USB Cable:LX		
Test Engineer	Treyy Chen		

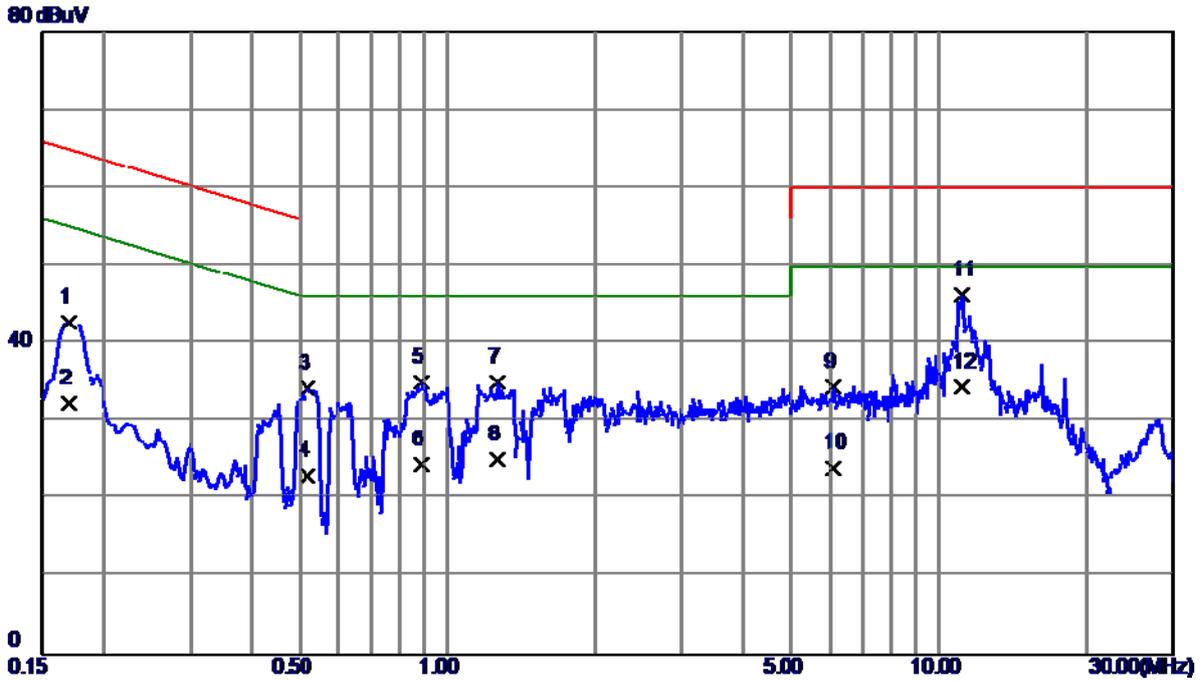


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1700	33.18	9.47	42.65	64.96	-22.31	QP		
2	0.1700	22.80	9.47	32.27	54.96	-22.69	AVG		
3	0.5180	24.73	9.49	34.22	56.00	-21.78	QP		
4	0.5180	13.50	9.49	22.99	46.00	-23.01	AVG		
5	0.8900	25.26	9.72	34.98	56.00	-21.02	QP		
6	0.8900	14.80	9.72	24.52	46.00	-21.48	AVG		
7	1.2620	25.26	9.76	35.02	56.00	-20.98	QP		
8	1.2620	15.40	9.76	25.16	46.00	-20.84	AVG		
9	6.0780	24.23	10.23	34.46	60.00	-25.54	QP		
10	6.0780	13.70	10.23	23.93	50.00	-26.07	AVG		
11 *	11.1420	35.60	10.61	46.21	60.00	-13.79	QP		
12	11.1420	23.81	10.61	34.42	50.00	-15.58	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY+IDLE		
Note	USB Cable:PY		
Test Engineer	Treey Chen		

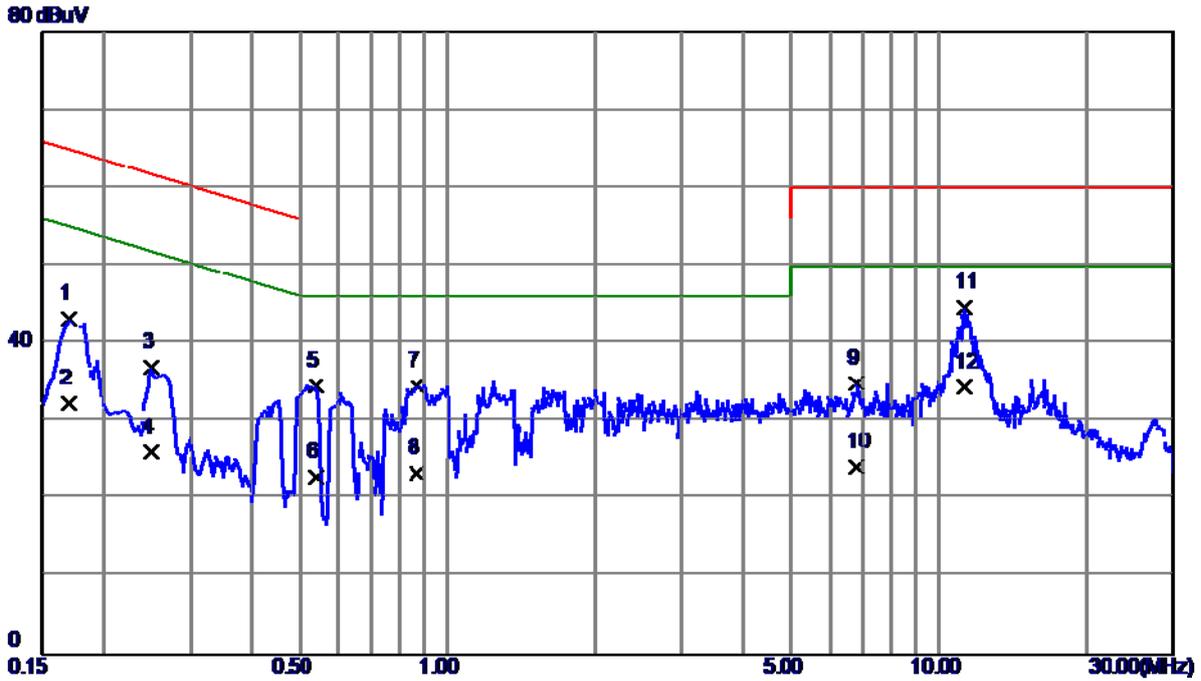


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1700	33.59	9.57	43.16	64.96	-21.80	QP		
2	0.1700	22.80	9.57	32.37	54.96	-22.59	AVG		
3	0.2500	27.40	9.57	36.97	61.76	-24.79	QP		
4	0.2500	16.50	9.57	26.07	51.76	-25.69	AVG		
5	0.5420	24.85	9.69	34.54	56.00	-21.46	QP		
6	0.5420	13.20	9.69	22.89	46.00	-23.11	AVG		
7	0.8660	24.77	9.83	34.60	56.00	-21.40	QP		
8	0.8660	13.60	9.83	23.43	46.00	-22.57	AVG		
9	6.8060	24.42	10.39	34.81	60.00	-25.19	QP		
10	6.8060	13.80	10.39	24.19	50.00	-25.81	AVG		
11 *	11.2739	34.15	10.54	44.69	60.00	-15.31	QP		
12	11.2739	23.91	10.54	34.45	50.00	-15.55	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY+IDLE		
Note	USB Cable:PY		
Test Engineer	Treey Chen		

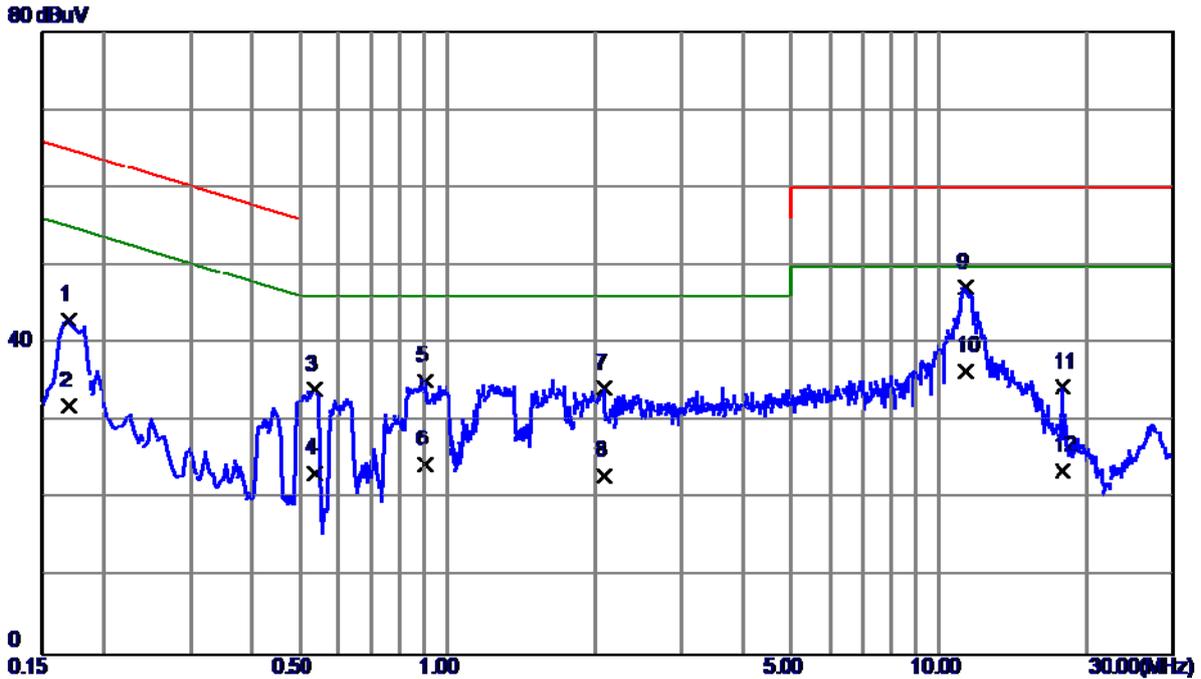


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1700	33.59	9.47	43.06	64.96	-21.90	QP		
2	0.1700	22.60	9.47	32.07	54.96	-22.89	AVG		
3	0.5380	24.61	9.49	34.10	56.00	-21.90	QP		
4	0.5380	13.80	9.49	23.29	46.00	-22.71	AVG		
5	0.9020	25.44	9.73	35.17	56.00	-20.83	QP		
6	0.9020	14.70	9.73	24.43	46.00	-21.57	AVG		
7	2.0860	24.44	9.83	34.27	56.00	-21.73	QP		
8	2.0860	13.20	9.83	23.03	46.00	-22.97	AVG		
9 *	11.3420	36.58	10.62	47.20	60.00	-12.80	QP		
10	11.3420	25.80	10.62	36.42	50.00	-13.58	AVG		
11	17.9180	23.60	10.82	34.42	60.00	-25.58	QP		
12	17.9180	12.90	10.82	23.72	50.00	-26.28	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY+IDLE		
Note	USB Cable:CR		
Test Engineer	Treey Chen		

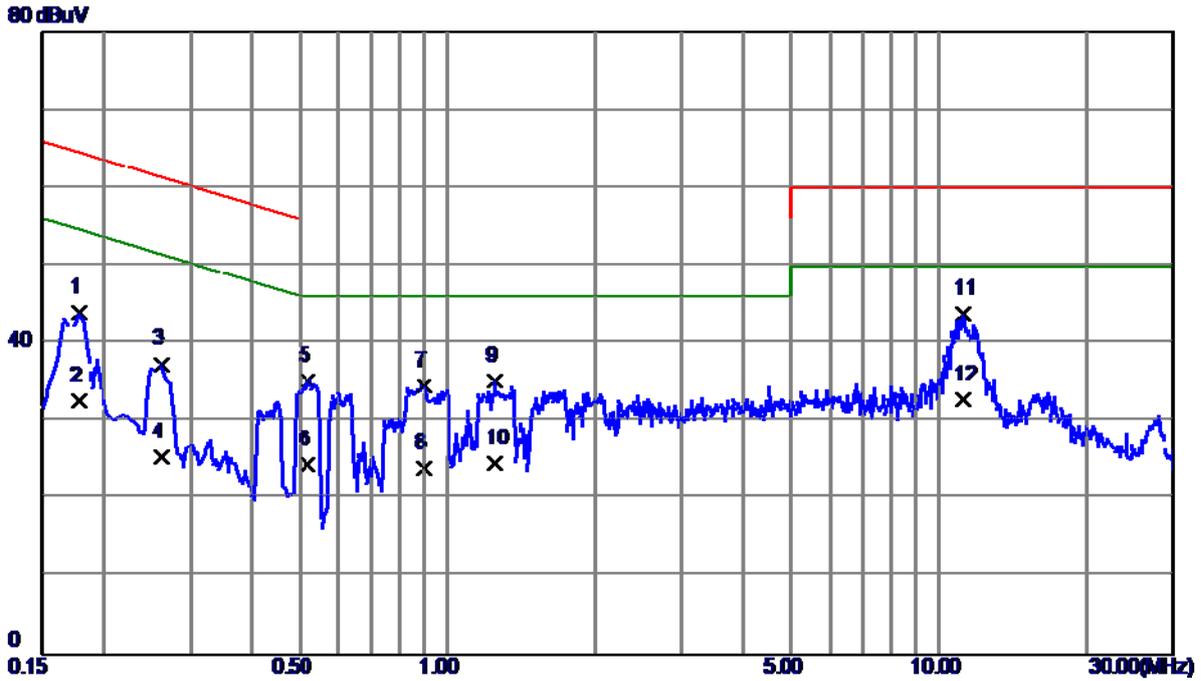


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1780	34.44	9.57	44.01	64.58	-20.57	QP		
2	0.1780	23.10	9.57	32.67	54.58	-21.91	AVG		
3	0.2620	27.79	9.57	37.36	61.37	-24.01	QP		
4	0.2620	15.90	9.57	25.47	51.37	-25.90	AVG		
5	0.5180	25.58	9.69	35.27	56.00	-20.73	QP		
6	0.5180	14.80	9.69	24.49	46.00	-21.51	AVG		
7	0.8980	24.72	9.83	34.55	56.00	-21.45	QP		
8	0.8980	14.20	9.83	24.03	46.00	-21.97	AVG		
9	1.2460	25.38	9.87	35.25	56.00	-20.75	QP		
10	1.2460	14.71	9.87	24.58	46.00	-21.42	AVG		
11 *	11.2140	33.37	10.54	43.91	60.00	-16.09	QP		
12	11.2140	22.30	10.54	32.84	50.00	-17.16	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY+IDLE		
Note	USB Cable:CR		
Test Engineer	Treey Chen		

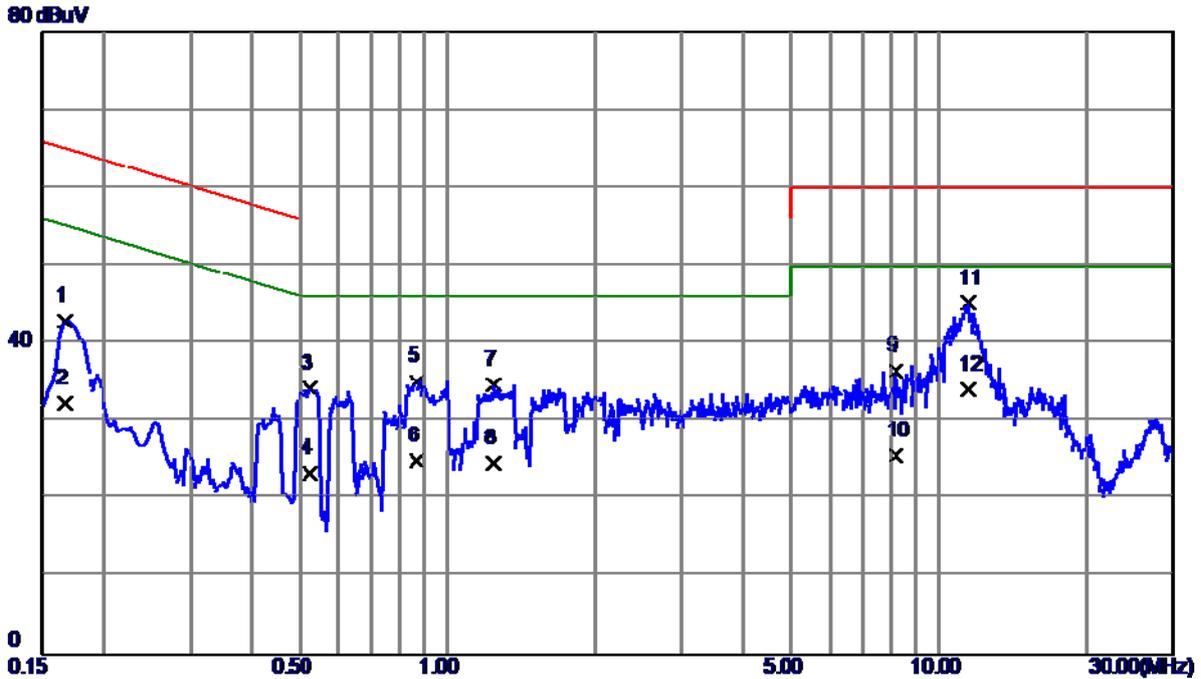


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1668	33.33	9.49	42.82	65.12	-22.30	QP		
2	0.1668	22.90	9.49	32.39	55.12	-22.73	AVG		
3	0.5260	24.79	9.49	34.28	56.00	-21.72	QP		
4	0.5260	13.80	9.49	23.29	46.00	-22.71	AVG		
5	0.8660	25.43	9.69	35.12	56.00	-20.88	QP		
6	0.8660	15.21	9.69	24.90	46.00	-21.10	AVG		
7	1.2380	24.97	9.76	34.73	56.00	-21.27	QP		
8	1.2380	14.90	9.76	24.66	46.00	-21.34	AVG		
9	8.1660	26.17	10.35	36.52	60.00	-23.48	QP		
10	8.1660	15.20	10.35	25.55	50.00	-24.45	AVG		
11 *	11.4740	34.58	10.62	45.20	60.00	-14.80	QP		
12	11.4740	23.50	10.62	34.12	50.00	-15.88	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

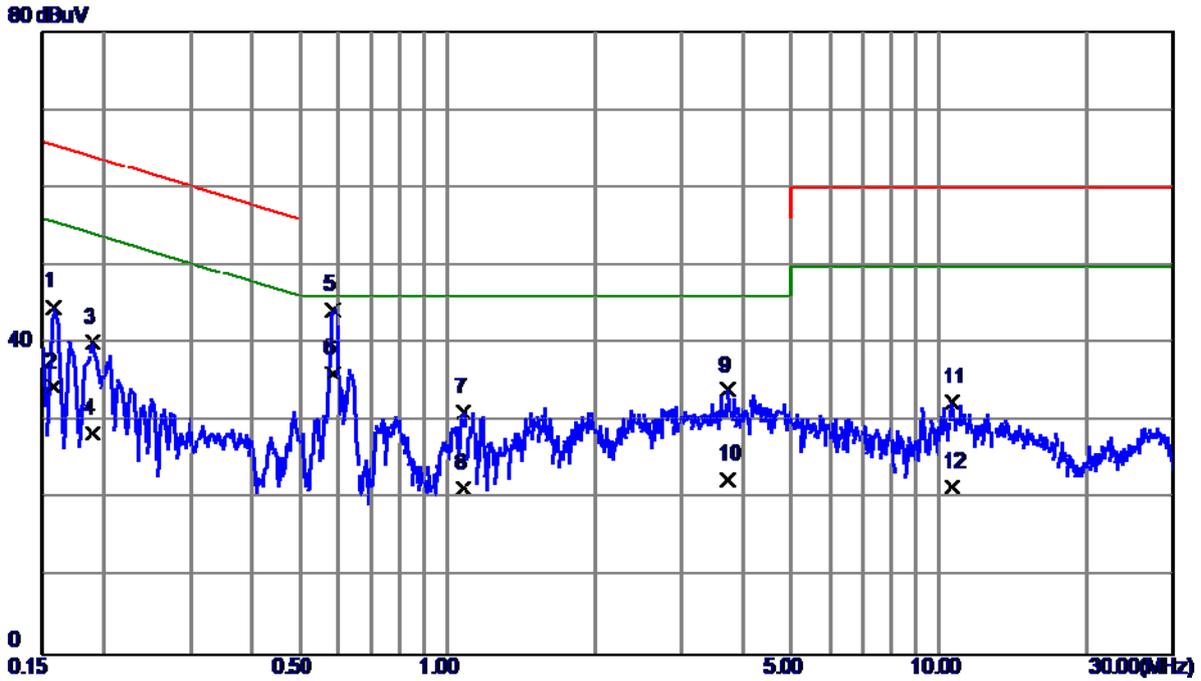


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1580	35.15	9.57	44.72	65.57	-20.85	QP		
2	0.1580	24.90	9.57	34.47	55.57	-21.10	AVG		
3	0.1900	30.54	9.57	40.11	64.04	-23.93	QP		
4	0.1900	18.90	9.57	28.47	54.04	-25.57	AVG		
5	0.5860	34.66	9.70	44.36	56.00	-11.64	QP		
6 *	0.5860	26.40	9.70	36.10	46.00	-9.90	AVG		
7	1.0780	21.33	9.85	31.18	56.00	-24.82	QP		
8	1.0780	11.60	9.85	21.45	46.00	-24.55	AVG		
9	3.7100	23.65	10.35	34.00	56.00	-22.00	QP		
10	3.7100	12.20	10.35	22.55	46.00	-23.45	AVG		
11	10.6300	21.93	10.52	32.45	60.00	-27.55	QP		
12	10.6300	11.09	10.52	21.61	50.00	-28.39	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

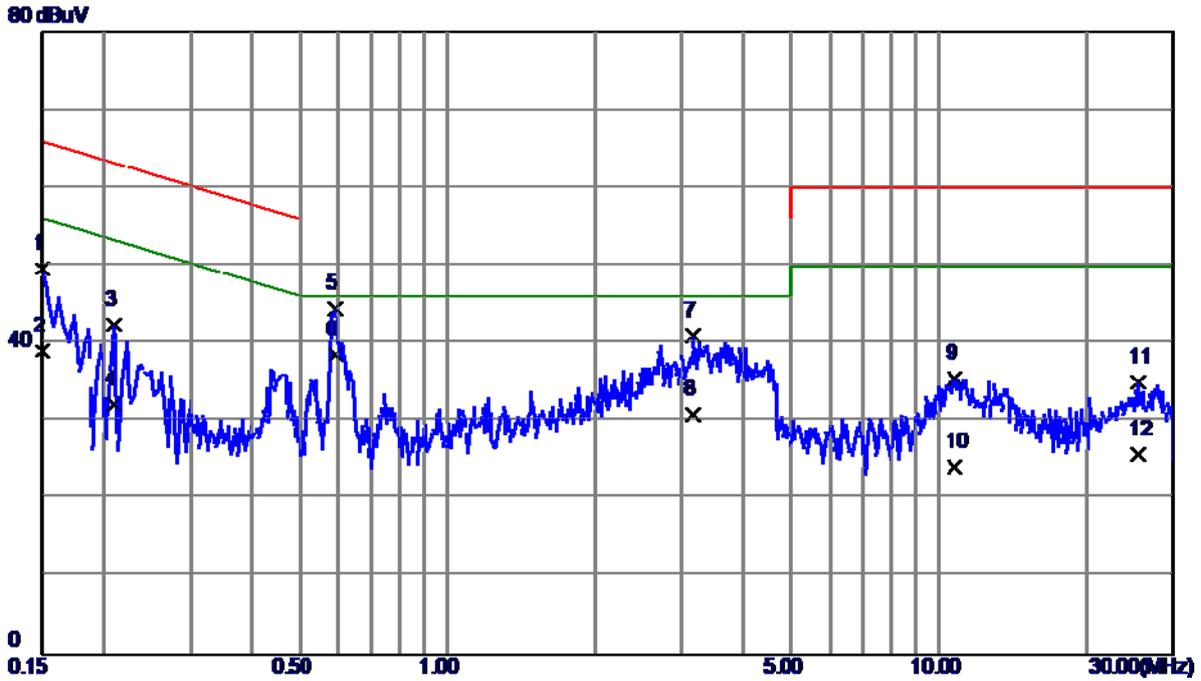


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	40.01	9.57	49.58	66.00	-16.42	QP		
2	0.1500	29.50	9.57	39.07	56.00	-16.93	AVG		
3	0.2100	32.83	9.57	42.40	63.21	-20.81	QP		
4	0.2100	22.60	9.57	32.17	53.21	-21.04	AVG		
5	0.5899	34.96	9.50	44.46	56.00	-11.54	QP		
6 *	0.5899	29.00	9.50	38.50	46.00	-7.50	AVG		
7	3.1740	31.03	9.98	41.01	56.00	-14.99	QP		
8	3.1740	20.91	9.98	30.89	46.00	-15.11	AVG		
9	10.7739	24.98	10.61	35.59	60.00	-24.41	QP		
10	10.7739	13.50	10.61	24.11	50.00	-25.89	AVG		
11	25.4940	24.05	11.00	35.05	60.00	-24.95	QP		
12	25.4940	14.70	11.00	25.70	50.00	-24.30	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:LX+Battery:DESAY(LG)		
Test Engineer	Trey Chen		

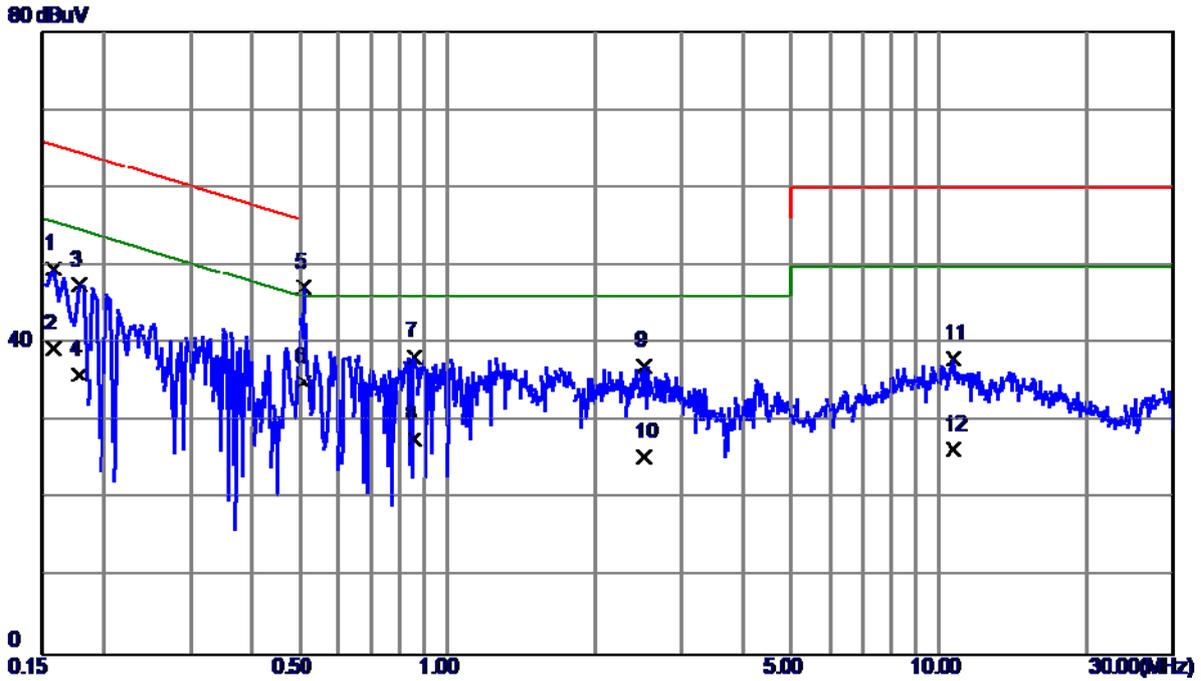


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1580	40.03	9.57	49.60	65.57	-15.97	QP		
2	0.1580	29.80	9.57	39.37	55.57	-16.20	AVG		
3	0.1780	37.96	9.57	47.53	64.58	-17.05	QP		
4	0.1780	26.50	9.57	36.07	54.58	-18.51	AVG		
5 *	0.5100	37.53	9.69	47.22	56.00	-8.78	QP		
6	0.5100	25.30	9.69	34.99	46.00	-11.01	AVG		
7	0.8580	28.49	9.83	38.32	56.00	-17.68	QP		
8	0.8580	17.90	9.83	27.73	46.00	-18.27	AVG		
9	2.5180	26.83	10.24	37.07	56.00	-18.93	QP		
10	2.5180	15.20	10.24	25.44	46.00	-20.56	AVG		
11	10.7020	27.53	10.52	38.05	60.00	-21.95	QP		
12	10.7020	15.90	10.52	26.42	50.00	-23.58	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:LX+Battery:DESAY(LG)		
Test Engineer	Treey Chen		

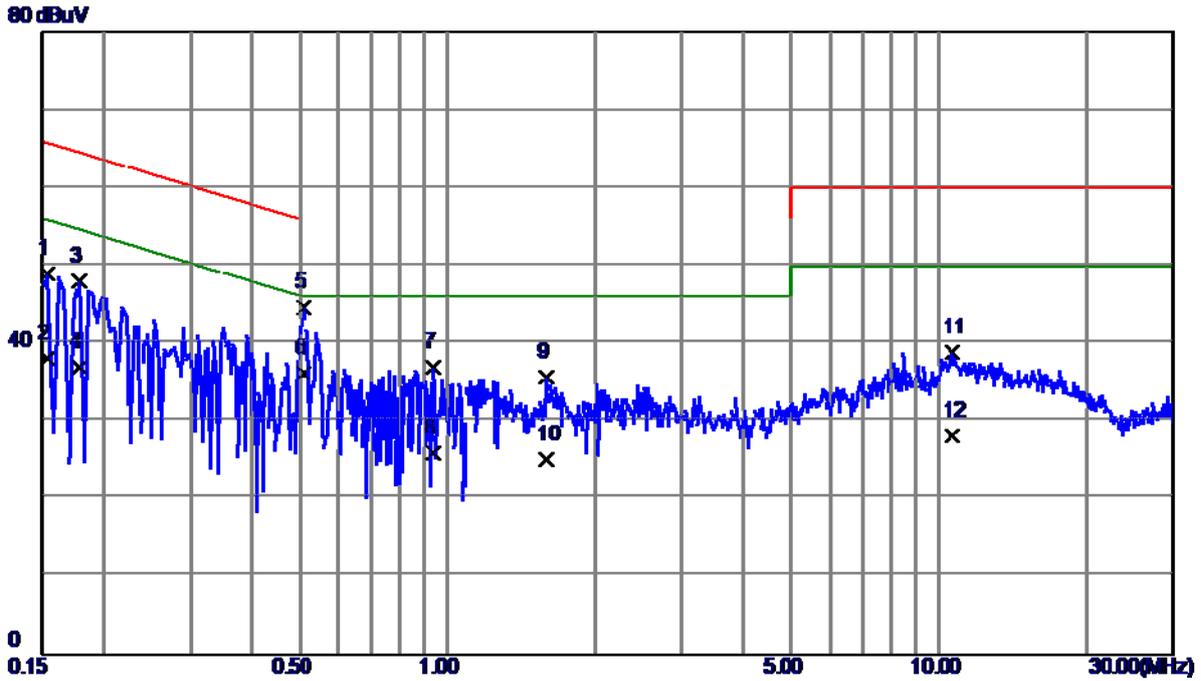


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	39.44	9.55	48.99	65.79	-16.80	QP		
2	0.1539	28.60	9.55	38.15	55.79	-17.64	AVG		
3	0.1780	38.54	9.50	48.04	64.58	-16.54	QP		
4	0.1780	27.50	9.50	37.00	54.58	-17.58	AVG		
5	0.5100	35.21	9.49	44.70	56.00	-11.30	QP		
6 *	0.5100	26.60	9.49	36.09	46.00	-9.91	AVG		
7	0.9380	27.20	9.73	36.93	56.00	-19.07	QP		
8	0.9380	16.20	9.73	25.93	46.00	-20.07	AVG		
9	1.5900	25.90	9.78	35.68	56.00	-20.32	QP		
10	1.5900	15.30	9.78	25.08	46.00	-20.92	AVG		
11	10.6620	28.25	10.60	38.85	60.00	-21.15	QP		
12	10.6620	17.50	10.60	28.10	50.00	-21.90	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

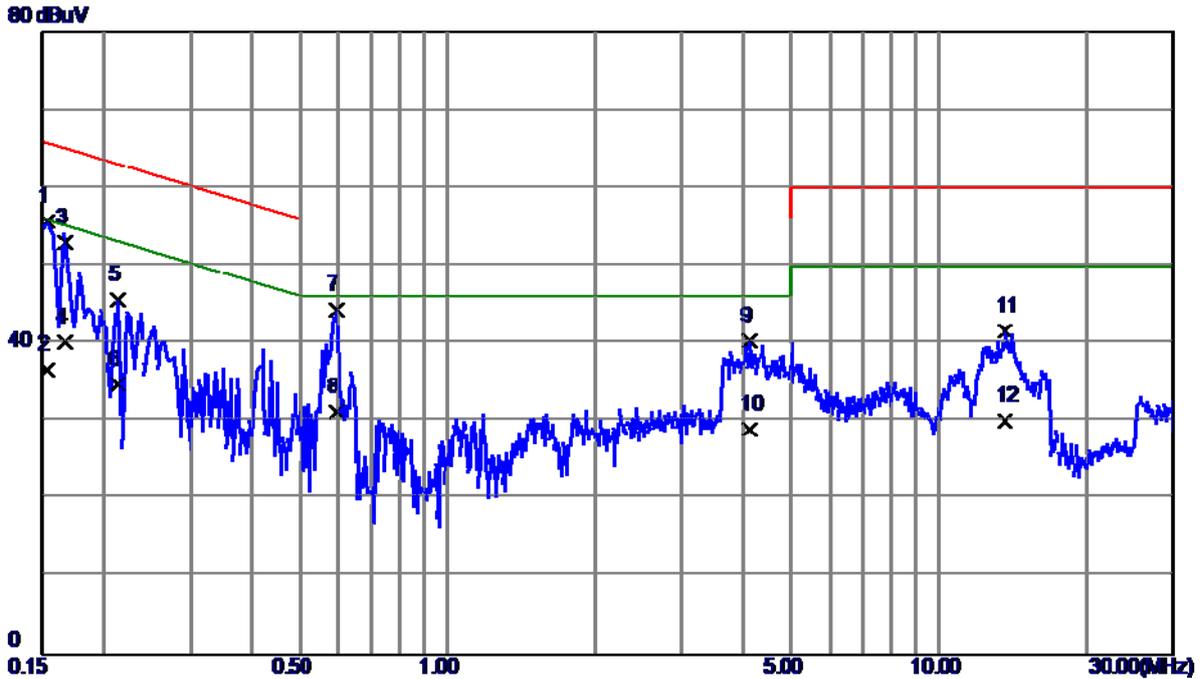


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1 *	0.1539	46.08	9.57	55.65	65.79	-10.14	QP		
2	0.1539	27.00	9.57	36.57	55.79	-19.22	AVG		
3	0.1668	43.35	9.57	52.92	65.12	-12.20	QP		
4	0.1668	30.60	9.57	40.17	55.12	-14.95	AVG		
5	0.2140	36.00	9.57	45.57	63.05	-17.48	QP		
6	0.2140	25.10	9.57	34.67	53.05	-18.38	AVG		
7	0.5940	34.66	9.70	44.36	56.00	-11.64	QP		
8	0.5940	21.50	9.70	31.20	46.00	-14.80	AVG		
9	4.1180	30.00	10.37	40.37	56.00	-15.63	QP		
10	4.1180	18.61	10.37	28.98	46.00	-17.02	AVG		
11	13.6540	30.93	10.64	41.57	60.00	-18.43	QP		
12	13.6540	19.50	10.64	30.14	50.00	-19.86	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

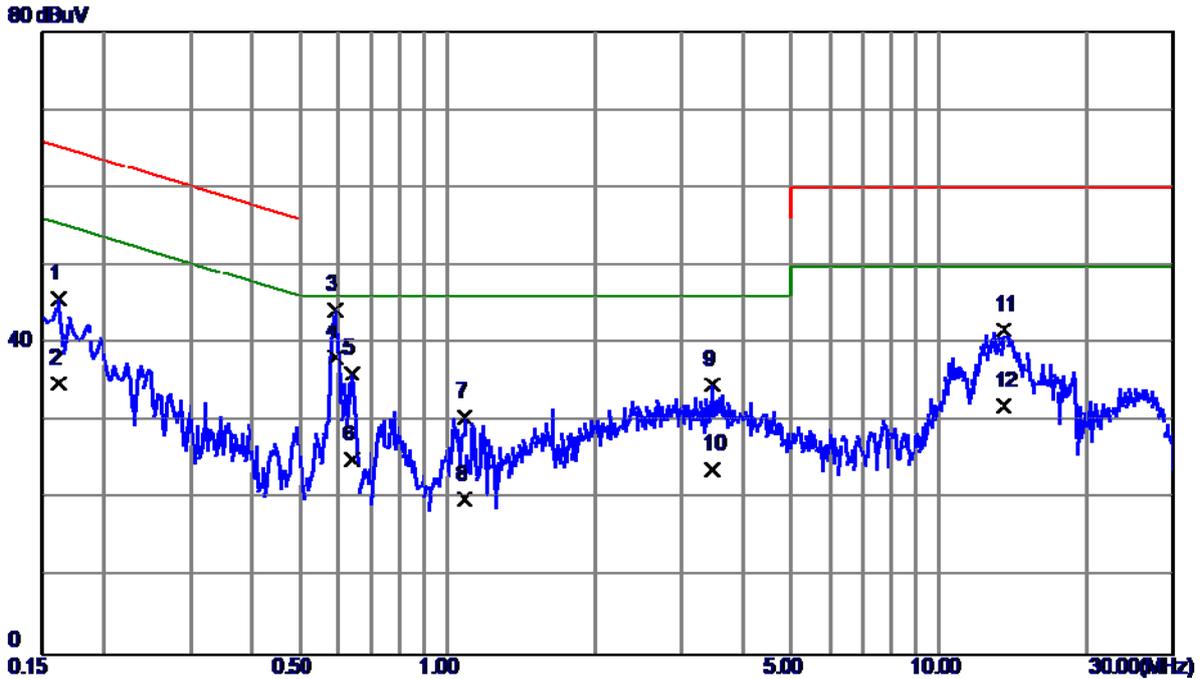


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1620	36.19	9.51	45.70	65.36	-19.66	QP		
2	0.1620	25.40	9.51	34.91	55.36	-20.45	AVG		
3	0.5899	34.77	9.50	44.27	56.00	-11.73	QP		
4 *	0.5899	28.70	9.50	38.20	46.00	-7.80	AVG		
5	0.6380	26.66	9.50	36.16	56.00	-19.84	QP		
6	0.6380	15.60	9.50	25.10	46.00	-20.90	AVG		
7	1.0859	20.75	9.75	30.50	56.00	-25.50	QP		
8	1.0859	10.30	9.75	20.05	46.00	-25.95	AVG		
9	3.4580	24.66	10.02	34.68	56.00	-21.32	QP		
10	3.4580	13.80	10.02	23.82	46.00	-22.18	AVG		
11	13.5420	31.08	10.67	41.75	60.00	-18.25	QP		
12	13.5420	21.40	10.67	32.07	50.00	-17.93	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:Lianchuang		
Test Engineer	Trey Chen		

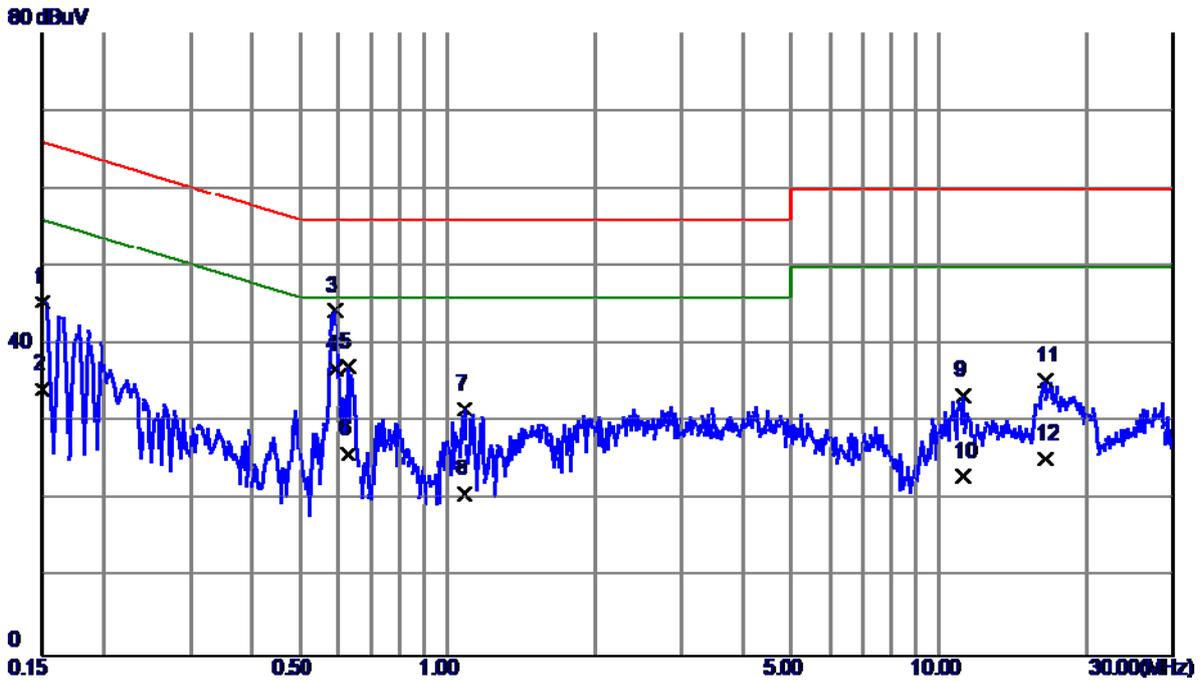


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	35.85	9.57	45.42	66.00	-20.58	QP		
2	0.1500	24.60	9.57	34.17	56.00	-21.83	AVG		
3	0.5899	34.66	9.70	44.36	56.00	-11.64	QP		
4 *	0.5899	27.10	9.70	36.80	46.00	-9.20	AVG		
5	0.6260	27.44	9.70	37.14	56.00	-18.86	QP		
6	0.6260	16.20	9.70	25.90	46.00	-20.10	AVG		
7	1.0820	21.77	9.85	31.62	56.00	-24.38	QP		
8	1.0820	10.90	9.85	20.75	46.00	-25.25	AVG		
9	11.2060	22.92	10.54	33.46	60.00	-26.54	QP		
10	11.2060	12.50	10.54	23.04	50.00	-26.96	AVG		
11	16.4180	24.69	10.73	35.42	60.00	-24.58	QP		
12	16.4180	14.60	10.73	25.33	50.00	-24.67	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:Lianchuang		
Test Engineer	Treyy Chen		

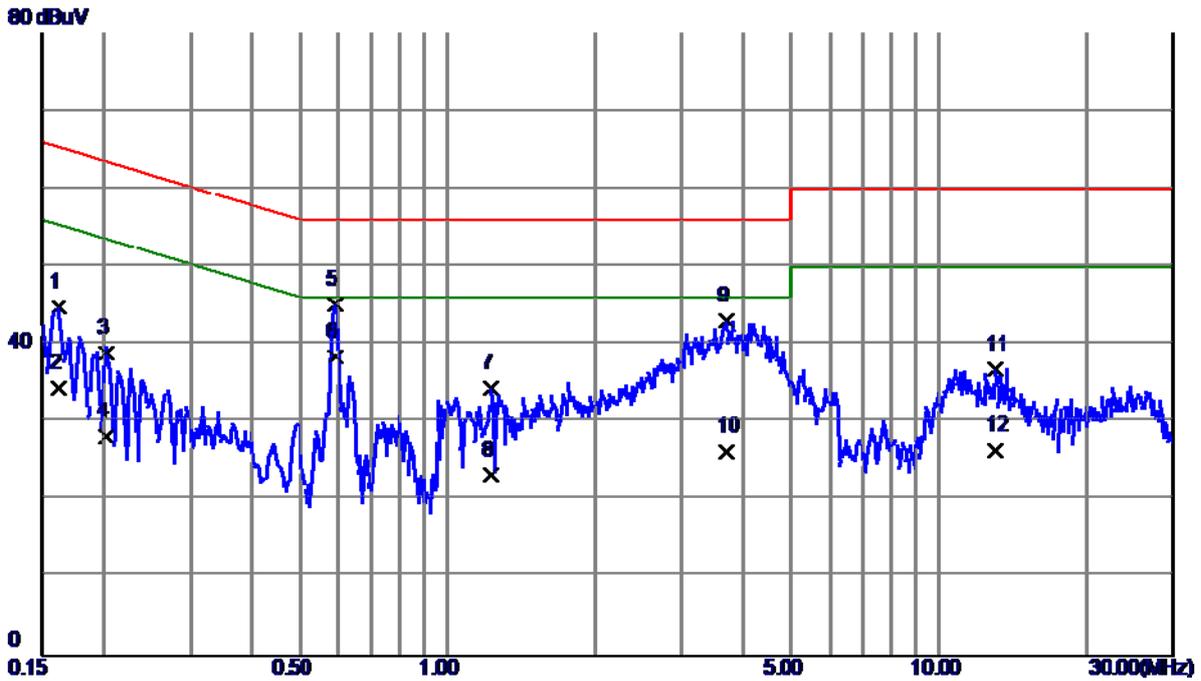


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1620	35.30	9.51	44.81	65.36	-20.55	QP		
2	0.1620	24.90	9.51	34.41	55.36	-20.95	AVG		
3	0.2030	29.37	9.57	38.94	63.49	-24.55	QP		
4	0.2030	18.60	9.57	28.17	53.49	-25.32	AVG		
5	0.5899	35.61	9.50	45.11	56.00	-10.89	QP		
6 *	0.5899	28.90	9.50	38.40	46.00	-7.60	AVG		
7	1.2300	24.67	9.76	34.43	56.00	-21.57	QP		
8	1.2300	13.50	9.76	23.26	46.00	-22.74	AVG		
9	3.6940	33.04	10.05	43.09	56.00	-12.91	QP		
10	3.6940	16.20	10.05	26.25	46.00	-19.75	AVG		
11	12.9660	26.15	10.66	36.81	60.00	-23.19	QP		
12	12.9660	15.80	10.66	26.46	50.00	-23.54	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:Quancheng		
Test Engineer	Treyy Chen		

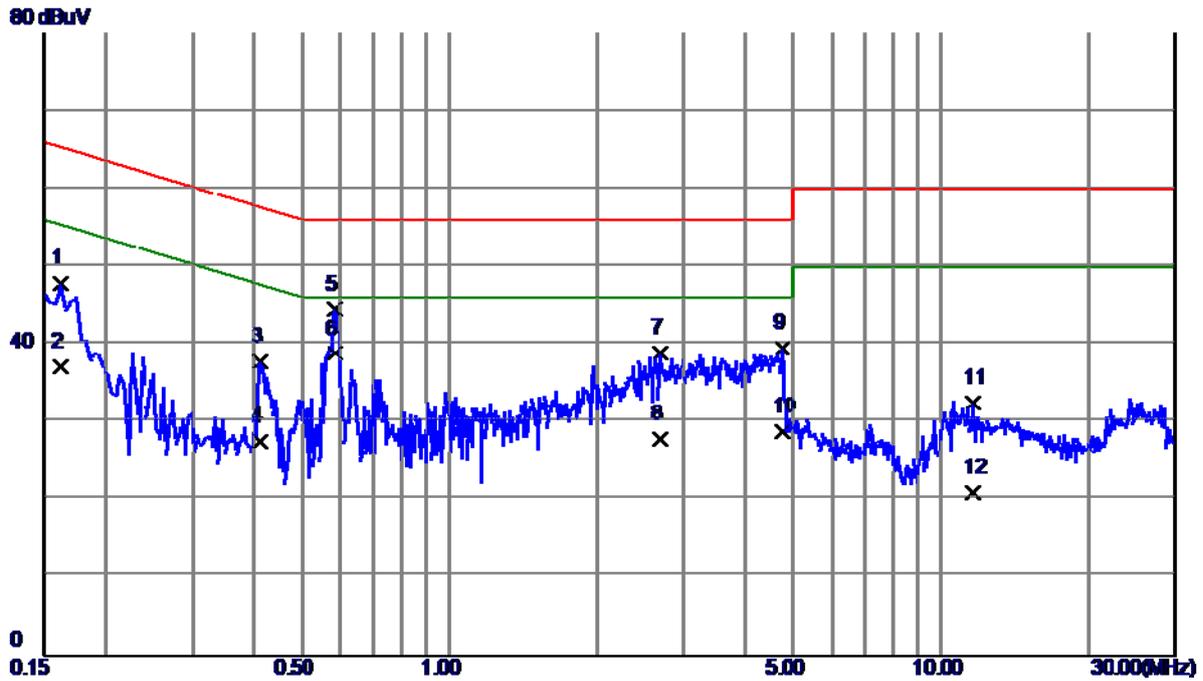


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1620	38.23	9.57	47.80	65.36	-17.56	QP		
2	0.1620	27.60	9.57	37.17	55.36	-18.19	AVG		
3	0.4140	28.15	9.60	37.75	57.57	-19.82	QP		
4	0.4140	17.89	9.60	27.49	47.57	-20.08	AVG		
5	0.5860	34.79	9.70	44.49	56.00	-11.51	QP		
6 *	0.5860	29.10	9.70	38.80	46.00	-7.20	AVG		
7	2.6820	28.64	10.24	38.88	56.00	-17.12	QP		
8	2.6820	17.60	10.24	27.84	46.00	-18.16	AVG		
9	4.7619	29.21	10.28	39.49	56.00	-16.51	QP		
10	4.7619	18.50	10.28	28.78	46.00	-17.22	AVG		
11	11.6100	21.98	10.56	32.54	60.00	-27.46	QP		
12	11.6100	10.40	10.56	20.96	50.00	-29.04	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:Quancheng		
Test Engineer	Treyy Chen		

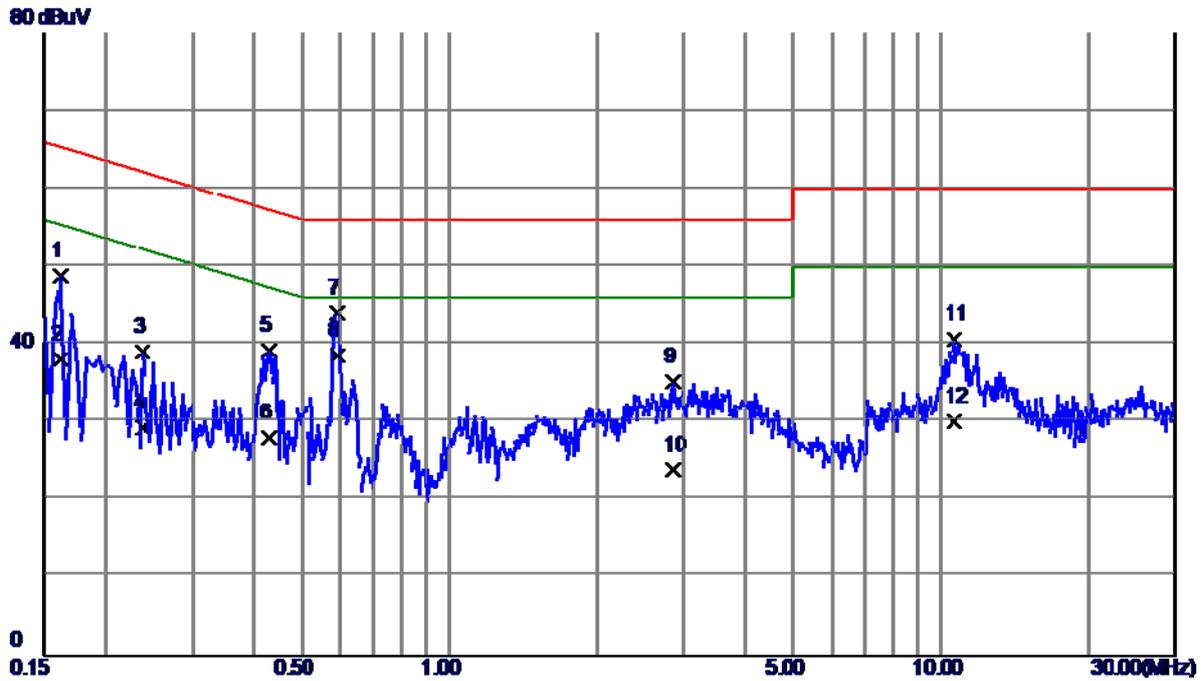


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1620	39.33	9.51	48.84	65.36	-16.52	QP		
2	0.1620	28.60	9.51	38.11	55.36	-17.25	AVG		
3	0.2380	29.52	9.57	39.09	62.17	-23.08	QP		
4	0.2380	19.70	9.57	29.27	52.17	-22.90	AVG		
5	0.4300	29.70	9.49	39.19	57.25	-18.06	QP		
6	0.4300	18.50	9.49	27.99	47.25	-19.26	AVG		
7	0.5899	34.57	9.50	44.07	56.00	-11.93	QP		
8 *	0.5899	29.00	9.50	38.50	46.00	-7.50	AVG		
9	2.8540	25.18	9.95	35.13	56.00	-20.87	QP		
10	2.8540	13.90	9.95	23.85	46.00	-22.15	AVG		
11	10.6260	30.06	10.60	40.66	60.00	-19.34	QP		
12	10.6260	19.50	10.60	30.10	50.00	-19.90	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:MERRY		
Test Engineer	Treyy Chen		

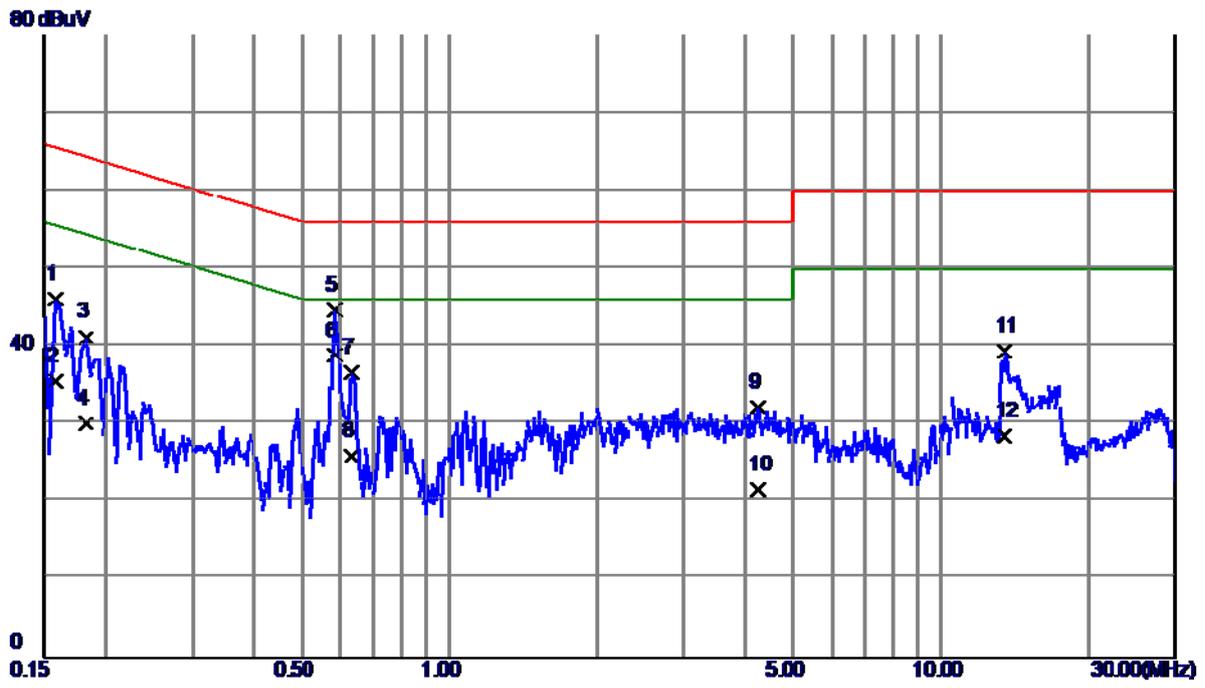


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1580	36.56	9.57	46.13	65.57	-19.44	QP		
2	0.1580	25.90	9.57	35.47	55.57	-20.10	AVG		
3	0.1819	31.63	9.57	41.20	64.40	-23.20	QP		
4	0.1819	20.50	9.57	30.07	54.40	-24.33	AVG		
5	0.5860	34.88	9.70	44.58	56.00	-11.42	QP		
6 *	0.5860	29.10	9.70	38.80	46.00	-7.20	AVG		
7	0.6300	27.00	9.70	36.70	56.00	-19.30	QP		
8	0.6300	16.20	9.70	25.90	46.00	-20.10	AVG		
9	4.2580	21.77	10.35	32.12	56.00	-23.88	QP		
10	4.2580	11.30	10.35	21.65	46.00	-24.35	AVG		
11	13.4540	28.70	10.63	39.33	60.00	-20.67	QP		
12	13.4540	17.81	10.63	28.44	50.00	-21.56	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:MERRY		
Test Engineer	Treyy Chen		

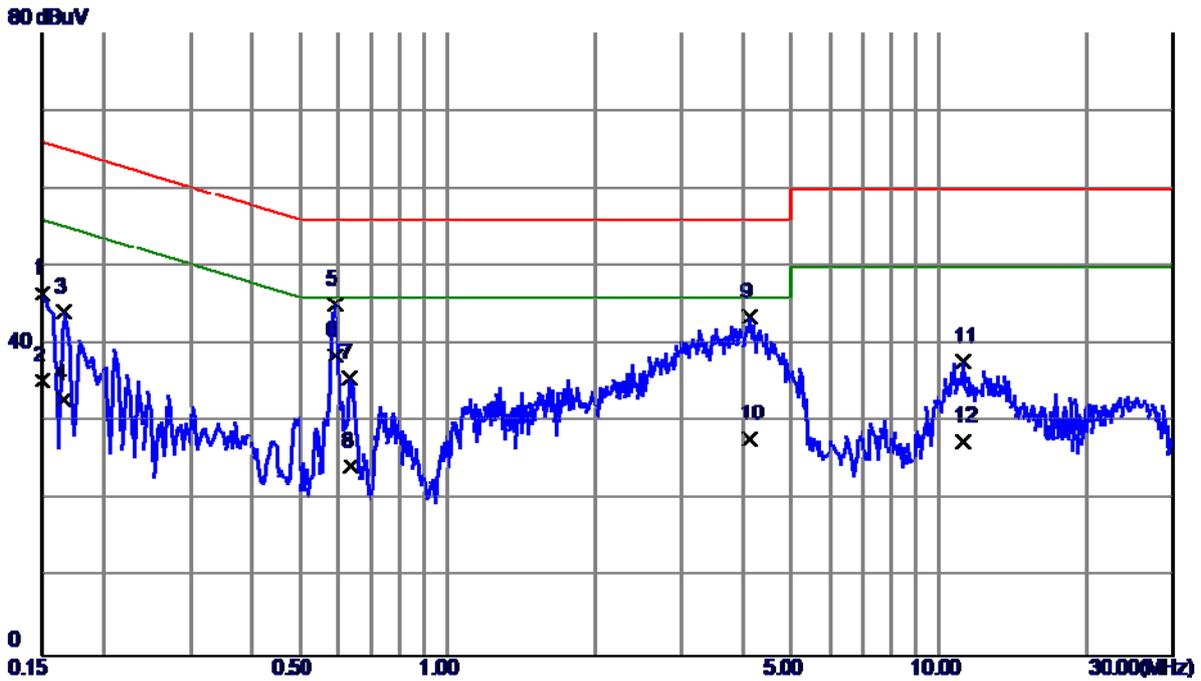


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	36.99	9.57	46.56	66.00	-19.44	QP		
2	0.1500	25.80	9.57	35.37	56.00	-20.63	AVG		
3	0.1660	34.63	9.49	44.12	65.16	-21.04	QP		
4	0.1660	23.40	9.49	32.89	55.16	-22.27	AVG		
5	0.5899	35.62	9.50	45.12	56.00	-10.88	QP		
6 *	0.5899	29.00	9.50	38.50	46.00	-7.50	AVG		
7	0.6300	26.11	9.50	35.61	56.00	-20.39	QP		
8	0.6340	14.80	9.50	24.30	46.00	-21.70	AVG		
9	4.1140	33.41	10.11	43.52	56.00	-12.48	QP		
10	4.1140	17.80	10.11	27.91	46.00	-18.09	AVG		
11	11.2460	27.09	10.62	37.71	60.00	-22.29	QP		
12	11.2460	16.90	10.62	27.52	50.00	-22.48	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:Goertek		
Test Engineer	Treyy Chen		

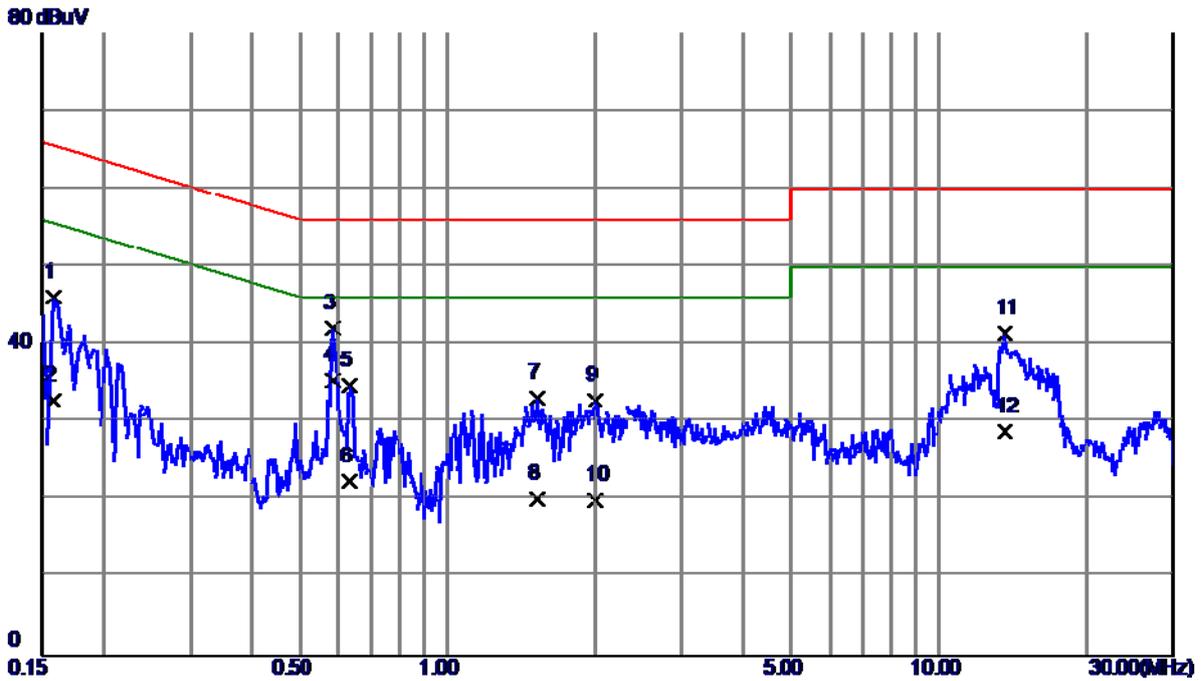


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1580	36.56	9.57	46.13	65.57	-19.44	QP		
2	0.1580	23.20	9.57	32.77	55.57	-22.80	AVG		
3	0.5860	32.39	9.70	42.09	56.00	-13.91	QP		
4 *	0.5860	25.60	9.70	35.30	46.00	-10.70	AVG		
5	0.6300	25.00	9.70	34.70	56.00	-21.30	QP		
6	0.6300	12.70	9.70	22.40	46.00	-23.60	AVG		
7	1.5220	23.07	9.98	33.05	56.00	-22.95	QP		
8	1.5220	10.20	9.98	20.18	46.00	-25.82	AVG		
9	2.0020	22.83	10.01	32.84	56.00	-23.16	QP		
10	2.0020	10.00	10.01	20.01	46.00	-25.99	AVG		
11	13.6140	30.84	10.64	41.48	60.00	-18.52	QP		
12	13.6140	18.20	10.64	28.84	50.00	-21.16	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)Earphone:Goertek		
Test Engineer	Treyy Chen		

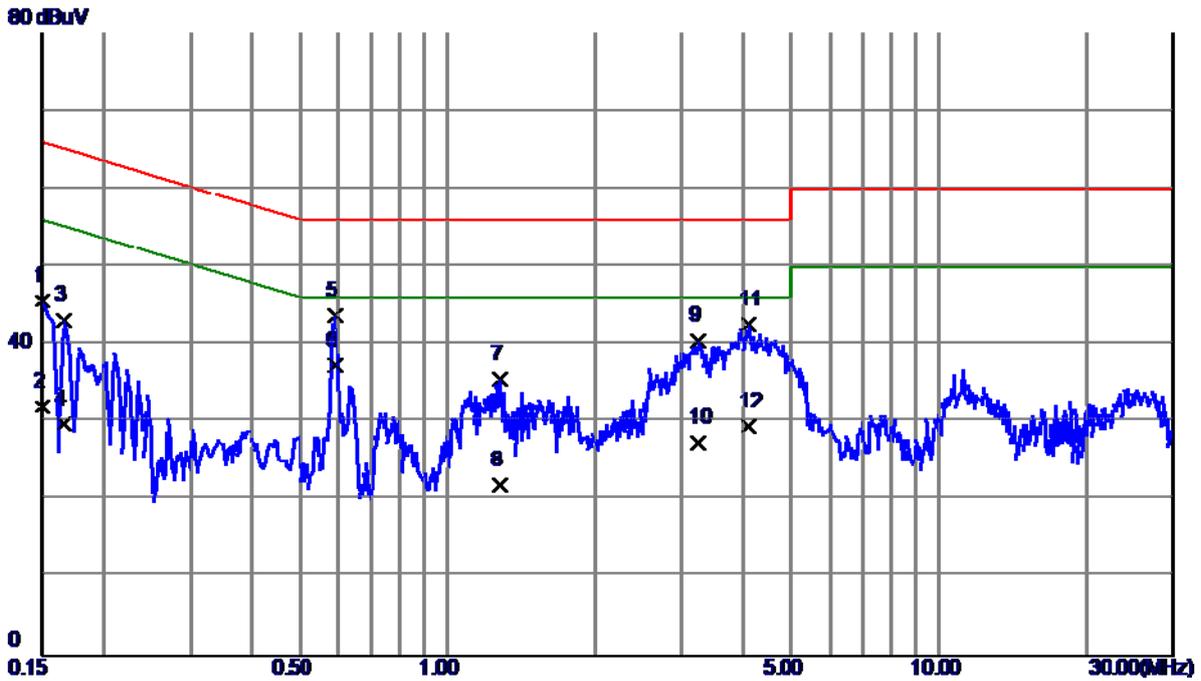


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	35.99	9.57	45.56	66.00	-20.44	QP		
2	0.1500	22.40	9.57	31.97	56.00	-24.03	AVG		
3	0.1660	33.63	9.49	43.12	65.16	-22.04	QP		
4	0.1660	20.20	9.49	29.69	55.16	-25.47	AVG		
5	0.5899	34.12	9.50	43.62	56.00	-12.38	QP		
6 *	0.5899	27.80	9.50	37.30	46.00	-8.70	AVG		
7	1.2820	25.71	9.76	35.47	56.00	-20.53	QP		
8	1.2820	12.20	9.76	21.96	46.00	-24.04	AVG		
9	3.2340	30.50	9.99	40.49	56.00	-15.51	QP		
10	3.2340	17.30	9.99	27.29	46.00	-18.71	AVG		
11	4.1020	32.41	10.11	42.52	56.00	-13.48	QP		
12	4.1020	19.30	10.11	29.41	46.00	-16.59	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

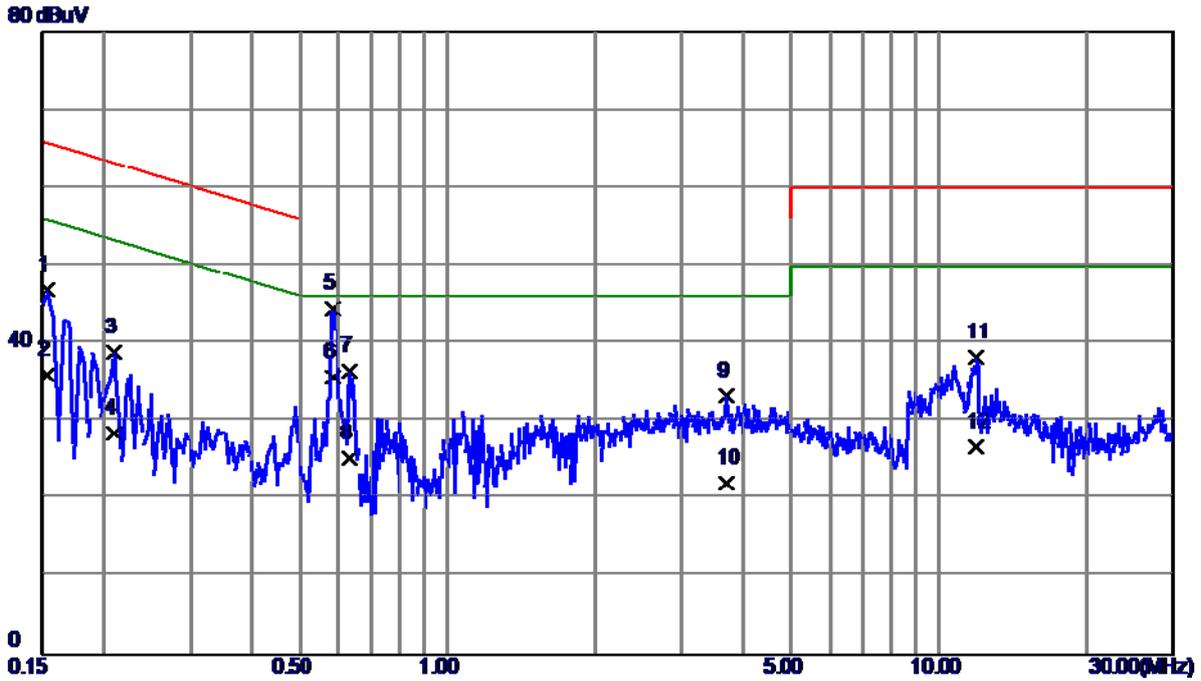


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1539	37.29	9.57	46.86	65.79	-18.93	QP		
2	0.1539	26.50	9.57	36.07	55.79	-19.72	AVG		
3	0.2100	29.37	9.57	38.94	63.21	-24.27	QP		
4	0.2100	18.90	9.57	28.47	53.21	-24.74	AVG		
5	0.5860	34.72	9.70	44.42	56.00	-11.58	QP		
6 *	0.5860	26.00	9.70	35.70	46.00	-10.30	AVG		
7	0.6300	26.84	9.70	36.54	56.00	-19.46	QP		
8	0.6300	15.60	9.70	25.30	46.00	-20.70	AVG		
9	3.6820	22.88	10.35	33.23	56.00	-22.77	QP		
10	3.6820	11.70	10.35	22.05	46.00	-23.95	AVG		
11	11.8940	27.61	10.57	38.18	60.00	-21.82	QP		
12	11.8940	16.20	10.57	26.77	50.00	-23.23	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

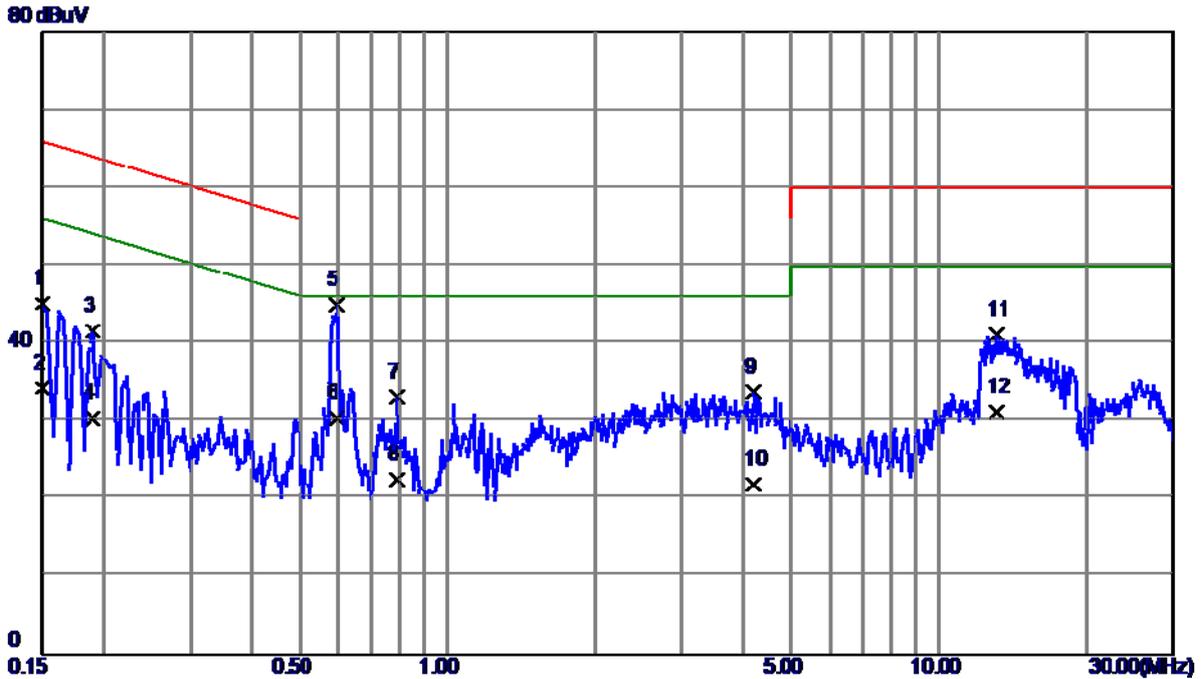


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	35.50	9.57	45.07	66.00	-20.93	QP		
2	0.1500	24.60	9.57	34.17	56.00	-21.83	AVG		
3	0.1900	31.99	9.54	41.53	64.04	-22.51	QP		
4	0.1900	20.80	9.54	30.34	54.04	-23.70	AVG		
5 *	0.5940	35.51	9.50	45.01	56.00	-10.99	QP		
6	0.5940	20.90	9.50	30.40	46.00	-15.60	AVG		
7	0.7900	23.47	9.61	33.08	56.00	-22.92	QP		
8	0.7900	12.90	9.61	22.51	46.00	-23.49	AVG		
9	4.2020	23.66	10.12	33.78	56.00	-22.22	QP		
10	4.2020	11.80	10.12	21.92	46.00	-24.08	AVG		
11	13.0940	30.39	10.66	41.05	60.00	-18.95	QP		
12	13.0940	20.60	10.66	31.26	50.00	-18.74	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

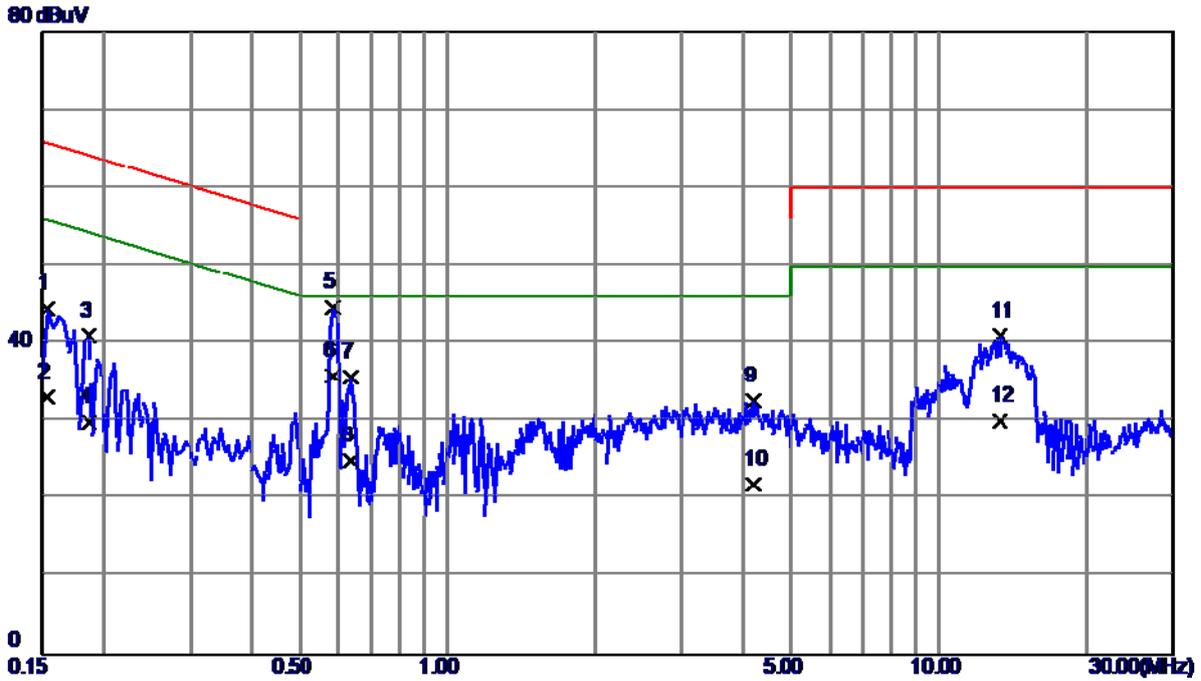


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1539	34.88	9.57	44.45	65.79	-21.34	QP		
2	0.1539	23.50	9.57	33.07	55.79	-22.72	AVG		
3	0.1860	31.39	9.57	40.96	64.21	-23.25	QP		
4	0.1860	20.40	9.57	29.97	54.21	-24.24	AVG		
5	0.5860	34.91	9.70	44.61	56.00	-11.39	QP		
6 *	0.5860	26.10	9.70	35.80	46.00	-10.20	AVG		
7	0.6340	25.99	9.70	35.69	56.00	-20.31	QP		
8	0.6340	15.20	9.70	24.90	46.00	-21.10	AVG		
9	4.2020	22.35	10.36	32.71	56.00	-23.29	QP		
10	4.2020	11.60	10.36	21.96	46.00	-24.04	AVG		
11	13.3380	30.34	10.63	40.97	60.00	-19.03	QP		
12	13.3380	19.50	10.63	30.13	50.00	-19.87	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

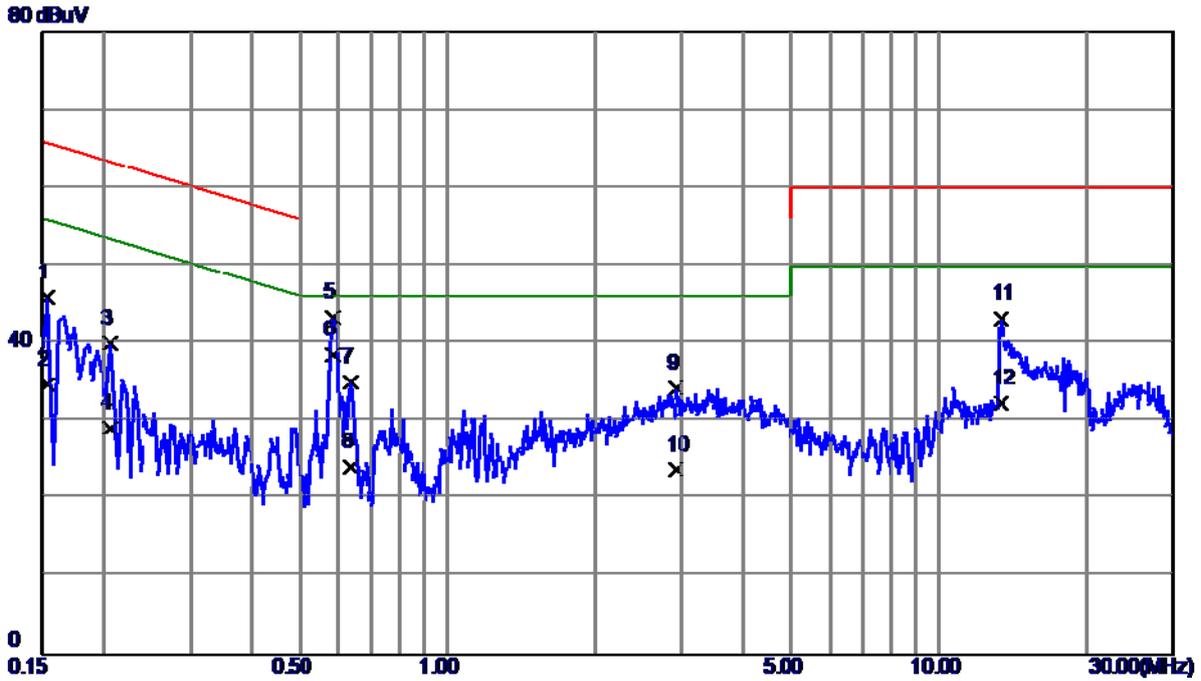


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1539	36.34	9.55	45.89	65.79	-19.90	QP		
2	0.1539	25.10	9.55	34.65	55.79	-21.14	AVG		
3	0.2060	30.40	9.57	39.97	63.37	-23.40	QP		
4	0.2060	19.50	9.57	29.07	53.37	-24.30	AVG		
5	0.5860	33.80	9.50	43.30	56.00	-12.70	QP		
6 *	0.5860	29.10	9.50	38.60	46.00	-7.40	AVG		
7	0.6340	25.48	9.50	34.98	56.00	-21.02	QP		
8	0.6340	14.60	9.50	24.10	46.00	-21.90	AVG		
9	2.9100	24.26	9.96	34.22	56.00	-21.78	QP		
10	2.9100	13.80	9.96	23.76	46.00	-22.24	AVG		
11	13.4060	32.58	10.66	43.24	60.00	-16.76	QP		
12	13.4060	21.60	10.66	32.26	50.00	-17.74	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

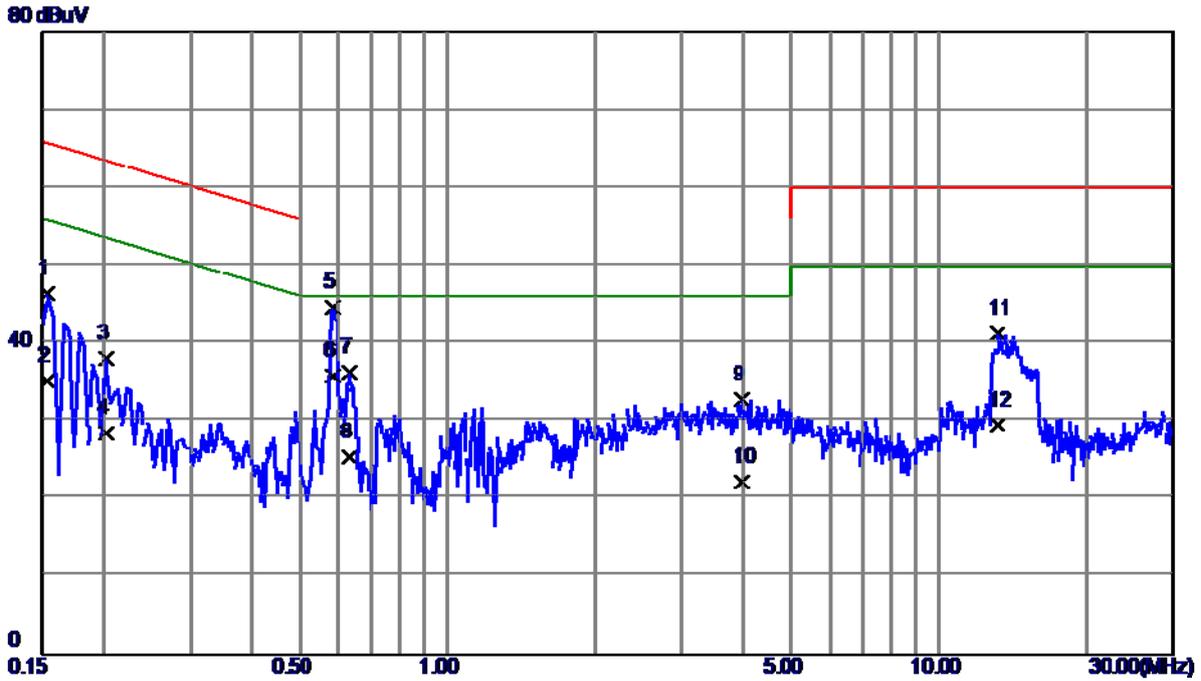


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	36.81	9.57	46.38	65.79	-19.41	QP		
2	0.1539	25.60	9.57	35.17	55.79	-20.62	AVG		
3	0.2020	28.46	9.57	38.03	63.53	-25.50	QP		
4	0.2020	18.90	9.57	28.47	53.53	-25.06	AVG		
5	0.5860	34.88	9.70	44.58	56.00	-11.42	QP		
6 *	0.5860	26.10	9.70	35.80	46.00	-10.20	AVG		
7	0.6300	26.68	9.70	36.38	56.00	-19.62	QP		
8	0.6300	15.70	9.70	25.40	46.00	-20.60	AVG		
9	3.9740	22.47	10.39	32.86	56.00	-23.14	QP		
10	3.9740	11.90	10.39	22.29	46.00	-23.71	AVG		
11	13.1700	30.72	10.62	41.34	60.00	-18.66	QP		
12	13.1700	18.90	10.62	29.52	50.00	-20.48	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:LX+Battery:SUNWODA (ALT)		
Test Engineer	Trey Chen		

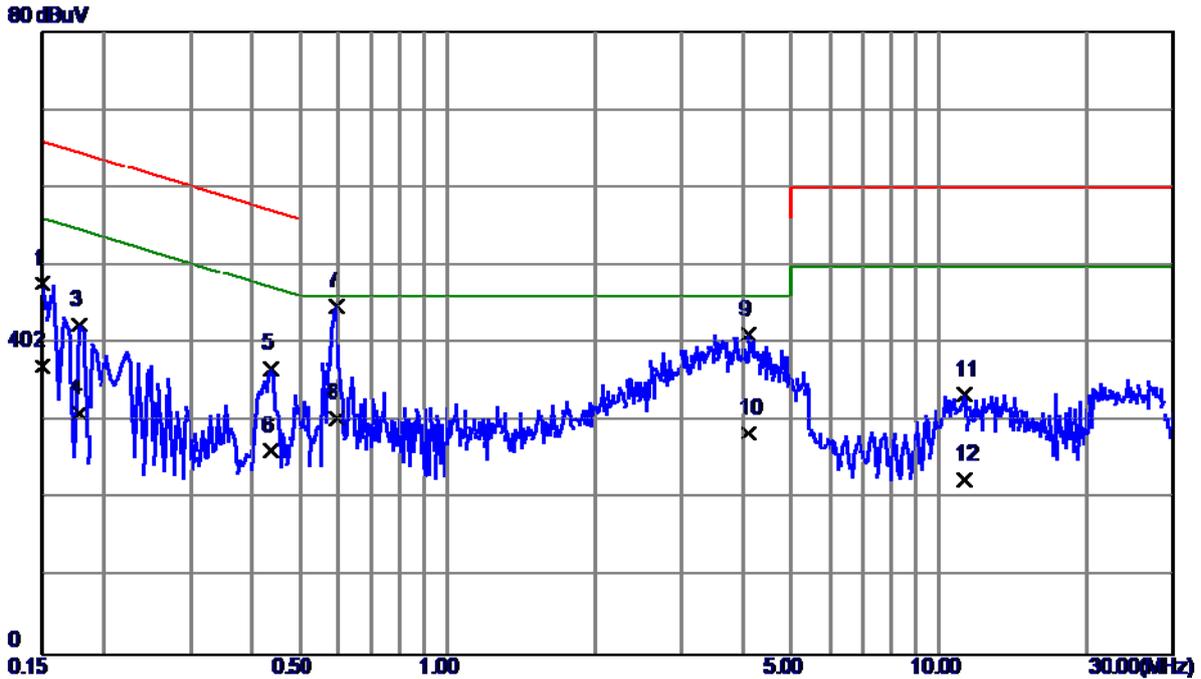


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree
1	0.1500	38.13	9.57	47.70	66.00	-18.30	QP		
2	0.1500	27.50	9.57	37.07	56.00	-18.93	AVG		
3	0.1780	32.86	9.50	42.36	64.58	-22.22	QP		
4	0.1780	21.60	9.50	31.10	54.58	-23.48	AVG		
5	0.4380	27.26	9.49	36.75	57.10	-20.35	QP		
6	0.4380	16.80	9.49	26.29	47.10	-20.81	AVG		
7 *	0.5940	35.33	9.50	44.83	56.00	-11.17	QP		
8	0.5940	20.90	9.50	30.40	46.00	-15.60	AVG		
9	4.1060	31.01	10.11	41.12	56.00	-14.88	QP		
10	4.1060	18.30	10.11	28.41	46.00	-17.59	AVG		
11	11.2900	22.85	10.62	33.47	60.00	-26.53	QP		
12	11.2900	11.90	10.62	22.52	50.00	-27.48	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Treey Chen		

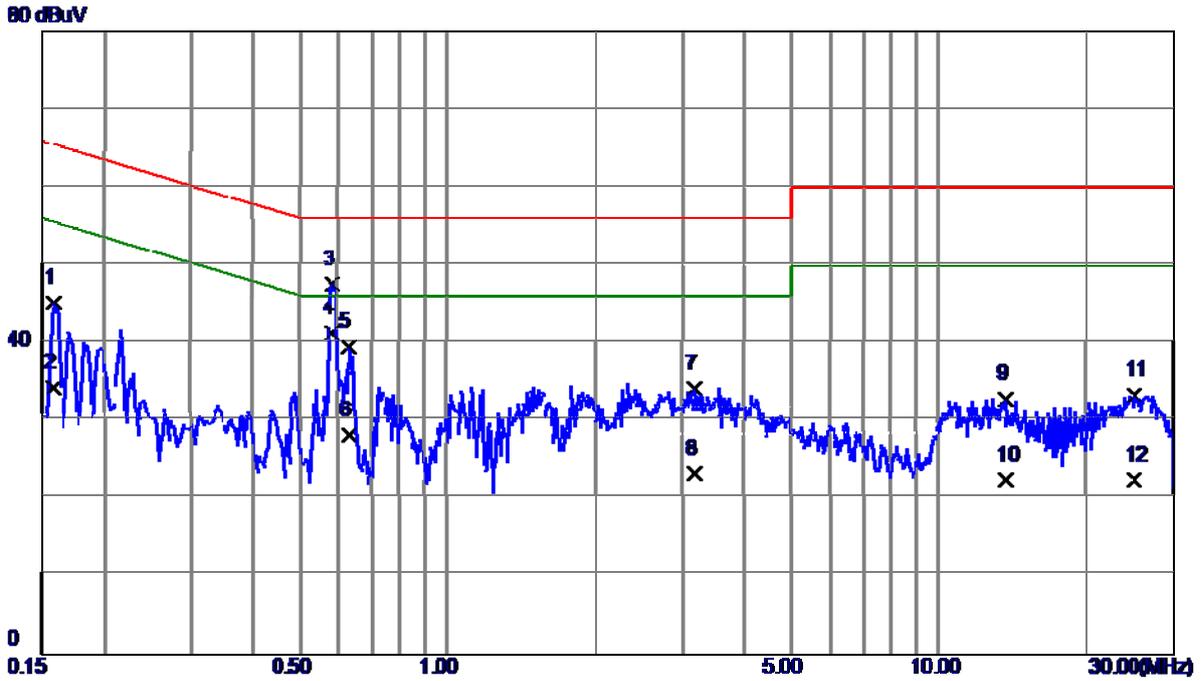


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1580	35.53	9.57	45.10	65.57	-20.47	QP		
2	0.1580	24.60	9.57	34.17	55.57	-21.40	AVG		
3	0.5860	37.83	9.70	47.53	56.00	-8.47	QP		
4 *	0.5860	31.59	9.70	41.29	46.00	-4.71	AVG		
5	0.6300	29.87	9.70	39.57	56.00	-16.43	QP		
6	0.6300	18.40	9.70	28.10	46.00	-17.90	AVG		
7	3.1860	23.87	10.28	34.15	56.00	-21.85	QP		
8	3.1860	12.91	10.28	23.19	46.00	-22.81	AVG		
9	13.6740	22.22	10.64	32.86	60.00	-27.14	QP		
10	13.6740	11.70	10.64	22.34	50.00	-27.66	AVG		
11	25.0660	22.40	10.84	33.24	60.00	-26.76	QP		
12	25.0660	11.60	10.84	22.44	50.00	-27.56	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

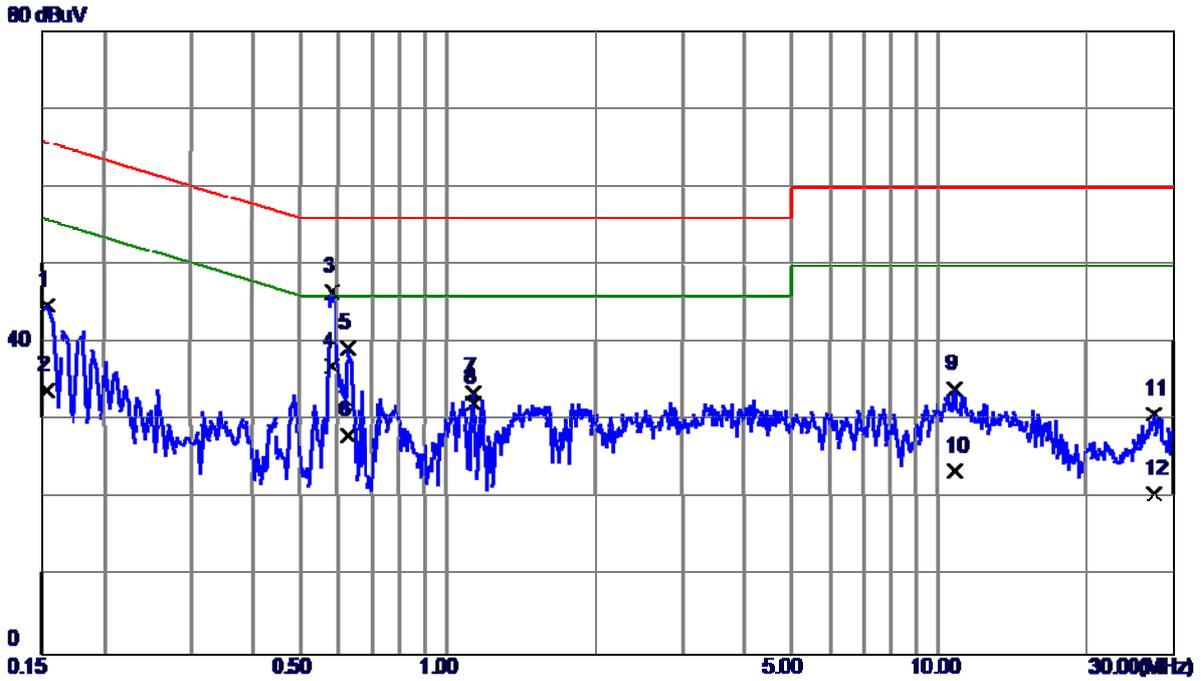


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	35.19	9.55	44.74	65.79	-21.05	QP		
2	0.1539	24.30	9.55	33.85	55.79	-21.94	AVG		
3	0.5860	37.12	9.50	46.62	56.00	-9.38	QP		
4 *	0.5860	27.40	9.50	36.90	46.00	-9.10	AVG		
5	0.6300	29.79	9.50	39.29	56.00	-16.71	QP		
6	0.6300	18.60	9.50	28.10	46.00	-17.90	AVG		
7	1.1300	23.86	9.75	33.61	56.00	-22.39	QP		
8	1.1300	22.50	9.75	32.25	46.00	-13.75	AVG		
9	10.7620	23.43	10.61	34.04	60.00	-25.96	QP		
10	10.7620	12.90	10.61	23.51	50.00	-26.49	AVG		
11	27.5380	19.79	11.03	30.82	60.00	-29.18	QP		
12	27.5380	9.60	11.03	20.63	50.00	-29.37	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:LX+Battery:SCUD(ATL)		
Test Engineer	Treey Chen		

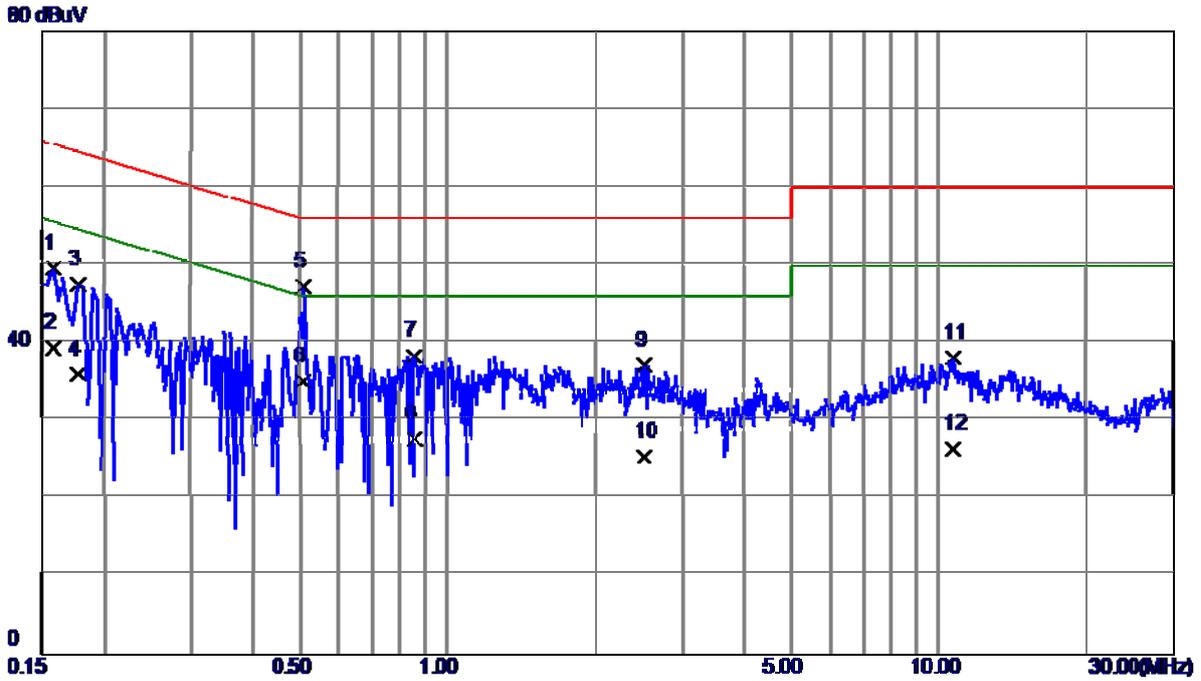


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1580	40.03	9.57	49.60	65.57	-15.97	QP		
2	0.1580	29.80	9.57	39.37	55.57	-16.20	AVG		
3	0.1780	37.96	9.57	47.53	64.58	-17.05	QP		
4	0.1780	26.50	9.57	36.07	54.58	-18.51	AVG		
5 *	0.5100	37.53	9.69	47.22	56.00	-8.78	QP		
6	0.5100	25.30	9.69	34.99	46.00	-11.01	AVG		
7	0.8580	28.49	9.83	38.32	56.00	-17.68	QP		
8	0.8580	17.90	9.83	27.73	46.00	-18.27	AVG		
9	2.5180	26.83	10.24	37.07	56.00	-18.93	QP		
10	2.5180	15.20	10.24	25.44	46.00	-20.56	AVG		
11	10.7020	27.53	10.52	38.05	60.00	-21.95	QP		
12	10.7020	15.90	10.52	26.42	50.00	-23.58	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:LX+Battery:SCUD(ATL)		
Test Engineer	Trey Chen		

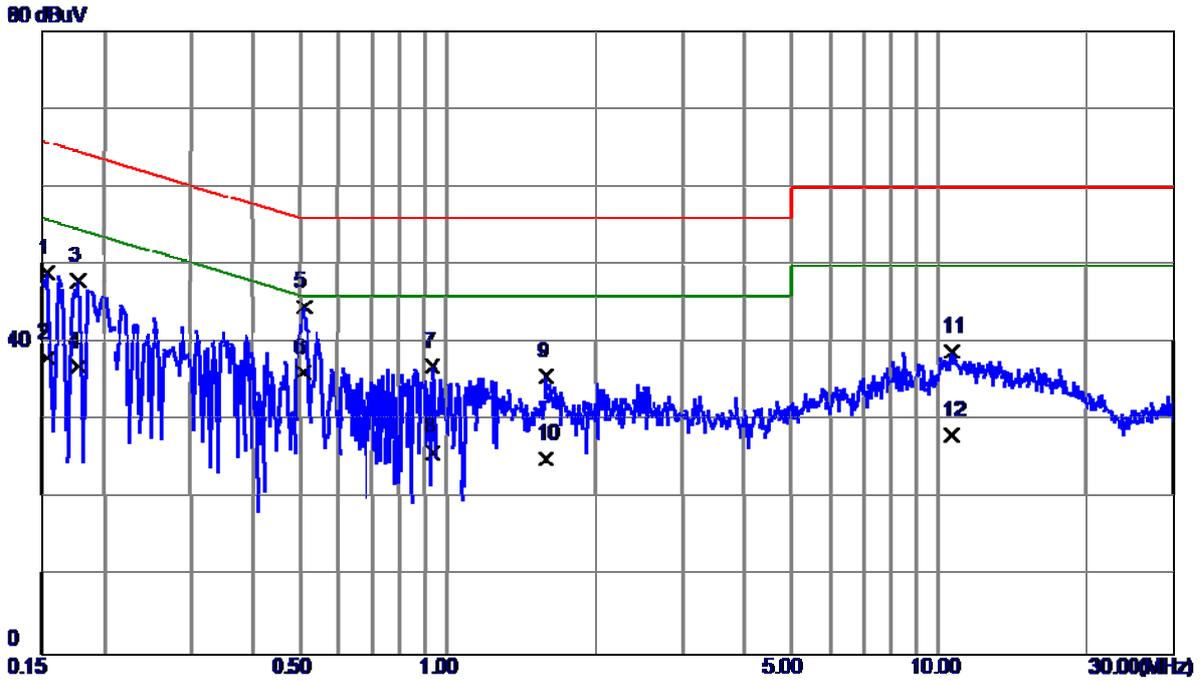


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	39.44	9.55	48.99	65.79	-16.80	QP		
2	0.1539	28.60	9.55	38.15	55.79	-17.64	AVG		
3	0.1780	38.54	9.50	48.04	64.58	-16.54	QP		
4	0.1780	27.50	9.50	37.00	54.58	-17.58	AVG		
5	0.5100	35.21	9.49	44.70	56.00	-11.30	QP		
6 *	0.5100	26.60	9.49	36.09	46.00	-9.91	AVG		
7	0.9380	27.20	9.73	36.93	56.00	-19.07	QP		
8	0.9380	16.20	9.73	25.93	46.00	-20.07	AVG		
9	1.5900	25.90	9.78	35.68	56.00	-20.32	QP		
10	1.5900	15.30	9.78	25.08	46.00	-20.92	AVG		
11	10.6620	28.25	10.60	38.85	60.00	-21.15	QP		
12	10.6620	17.50	10.60	28.10	50.00	-21.90	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Treyy Chen		

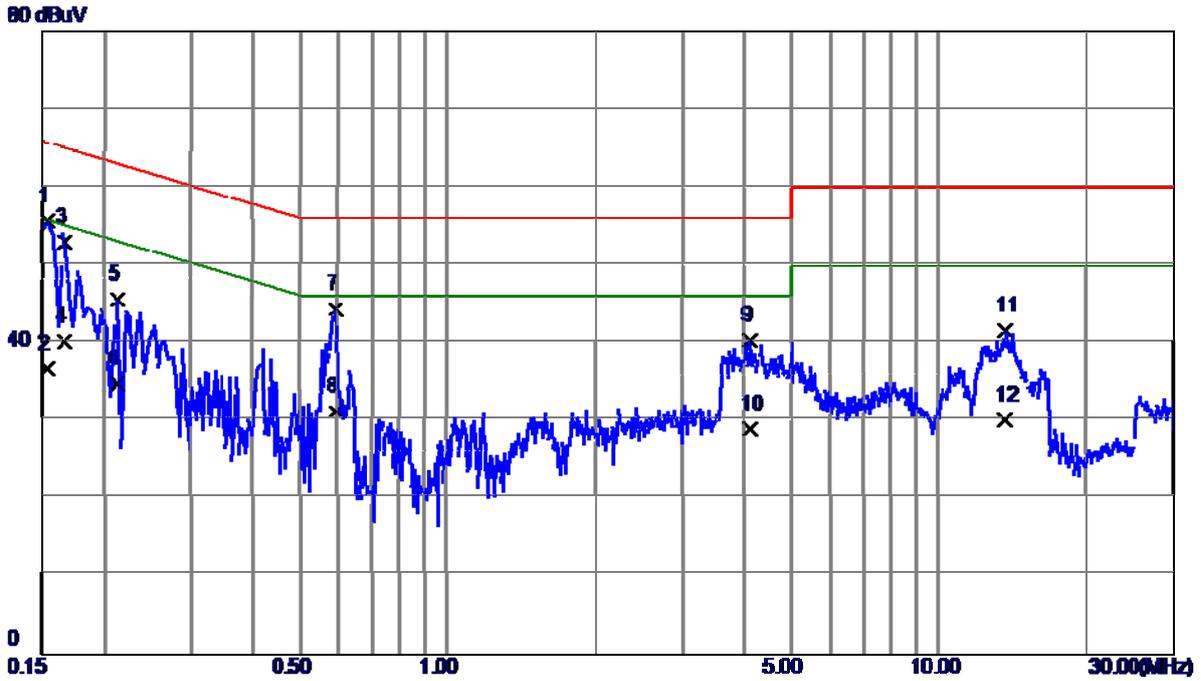


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1 *	0.1539	46.08	9.57	55.65	65.79	-10.14	QP		
2	0.1539	27.00	9.57	36.57	55.79	-19.22	AVG		
3	0.1668	43.35	9.57	52.92	65.12	-12.20	QP		
4	0.1668	30.60	9.57	40.17	55.12	-14.95	AVG		
5	0.2140	36.00	9.57	45.57	63.05	-17.48	QP		
6	0.2140	25.10	9.57	34.67	53.05	-18.38	AVG		
7	0.5940	34.66	9.70	44.36	56.00	-11.64	QP		
8	0.5940	21.50	9.70	31.20	46.00	-14.80	AVG		
9	4.1180	30.00	10.37	40.37	56.00	-15.63	QP		
10	4.1180	18.61	10.37	28.98	46.00	-17.02	AVG		
11	13.6540	30.93	10.64	41.57	60.00	-18.43	QP		
12	13.6540	19.50	10.64	30.14	50.00	-19.86	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

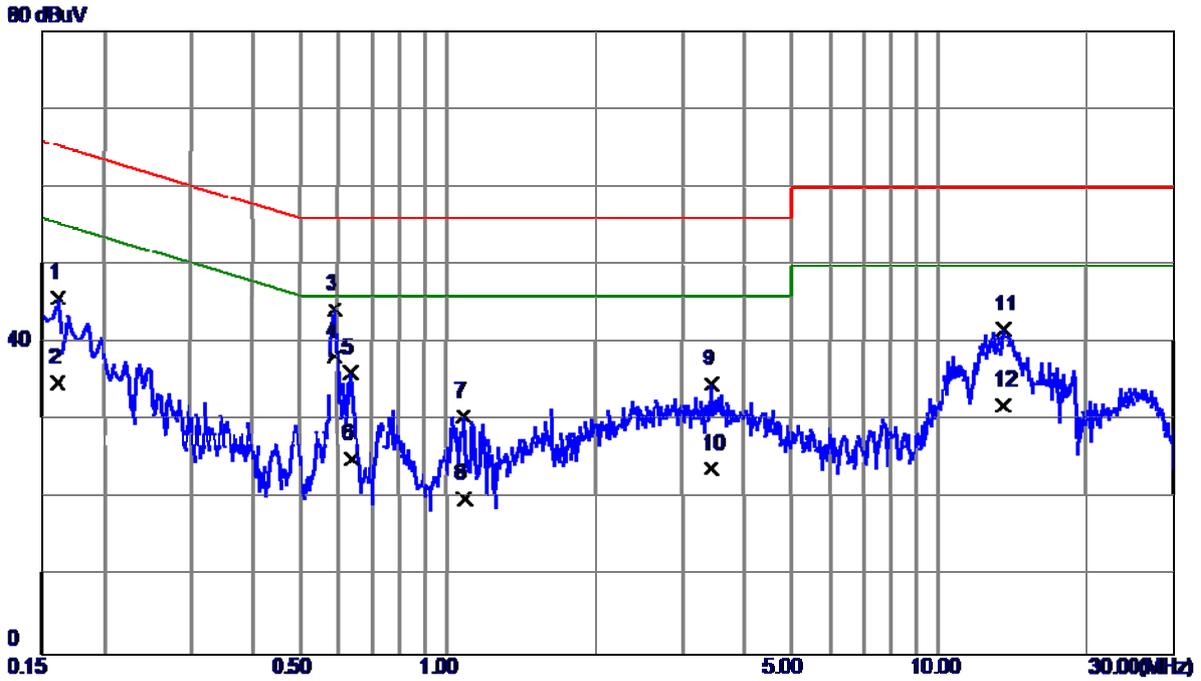


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1620	36.19	9.51	45.70	65.36	-19.66	QP		
2	0.1620	25.40	9.51	34.91	55.36	-20.45	AVG		
3	0.5899	34.77	9.50	44.27	56.00	-11.73	QP		
4 *	0.5899	28.70	9.50	38.20	46.00	-7.80	AVG		
5	0.6380	26.66	9.50	36.16	56.00	-19.84	QP		
6	0.6380	15.60	9.50	25.10	46.00	-20.90	AVG		
7	1.0859	20.75	9.75	30.50	56.00	-25.50	QP		
8	1.0859	10.30	9.75	20.05	46.00	-25.95	AVG		
9	3.4580	24.66	10.02	34.68	56.00	-21.32	QP		
10	3.4580	13.80	10.02	23.82	46.00	-22.18	AVG		
11	13.5420	31.08	10.67	41.75	60.00	-18.25	QP		
12	13.5420	21.40	10.67	32.07	50.00	-17.93	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:Lianchuang		
Test Engineer	Treyy Chen		

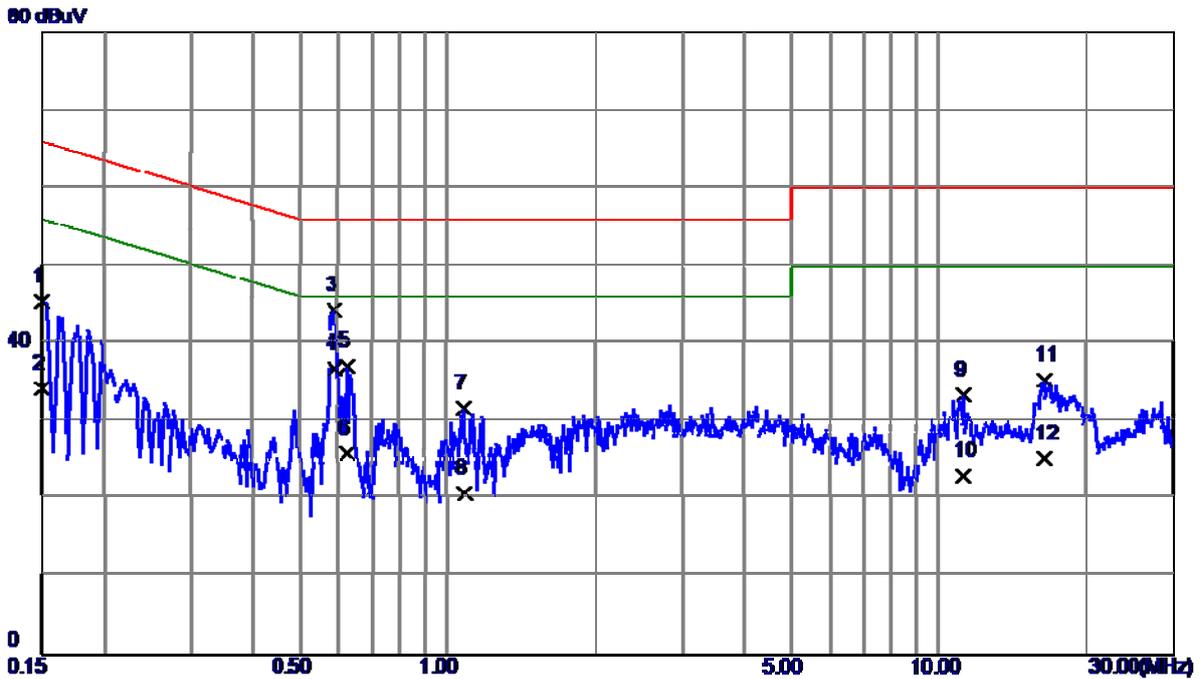


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	35.85	9.57	45.42	66.00	-20.58	QP		
2	0.1500	24.60	9.57	34.17	56.00	-21.83	AVG		
3	0.5899	34.66	9.70	44.36	56.00	-11.64	QP		
4 *	0.5899	27.10	9.70	36.80	46.00	-9.20	AVG		
5	0.6260	27.44	9.70	37.14	56.00	-18.86	QP		
6	0.6260	16.20	9.70	25.90	46.00	-20.10	AVG		
7	1.0820	21.77	9.85	31.62	56.00	-24.38	QP		
8	1.0820	10.90	9.85	20.75	46.00	-25.25	AVG		
9	11.2060	22.92	10.54	33.46	60.00	-26.54	QP		
10	11.2060	12.50	10.54	23.04	50.00	-26.96	AVG		
11	16.4180	24.69	10.73	35.42	60.00	-24.58	QP		
12	16.4180	14.60	10.73	25.33	50.00	-24.67	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:Lianchuang		
Test Engineer	Trey Chen		

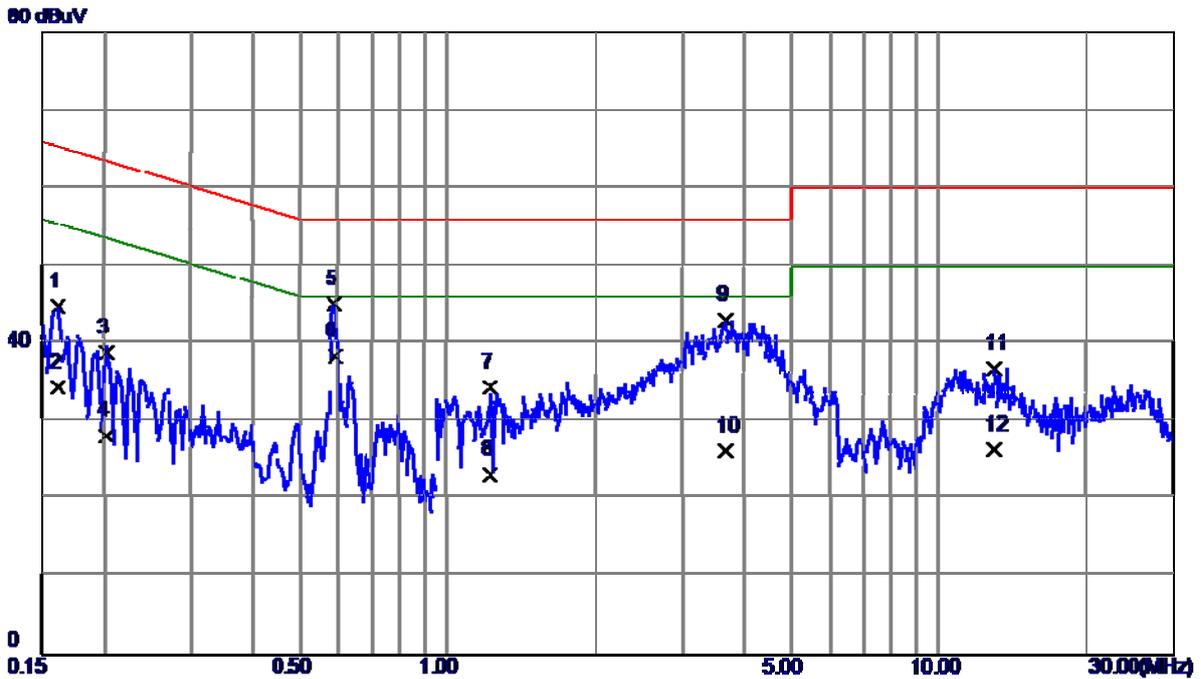


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1620	35.30	9.51	44.81	65.36	-20.55	QP		
2	0.1620	24.90	9.51	34.41	55.36	-20.95	AVG		
3	0.2030	29.37	9.57	38.94	63.49	-24.55	QP		
4	0.2030	18.60	9.57	28.17	53.49	-25.32	AVG		
5	0.5899	35.61	9.50	45.11	56.00	-10.89	QP		
6 *	0.5899	28.90	9.50	38.40	46.00	-7.60	AVG		
7	1.2300	24.67	9.76	34.43	56.00	-21.57	QP		
8	1.2300	13.50	9.76	23.26	46.00	-22.74	AVG		
9	3.6940	33.04	10.05	43.09	56.00	-12.91	QP		
10	3.6940	16.20	10.05	26.25	46.00	-19.75	AVG		
11	12.9660	26.15	10.66	36.81	60.00	-23.19	QP		
12	12.9660	15.80	10.66	26.46	50.00	-23.54	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:Quancheng		
Test Engineer	Trey Chen		

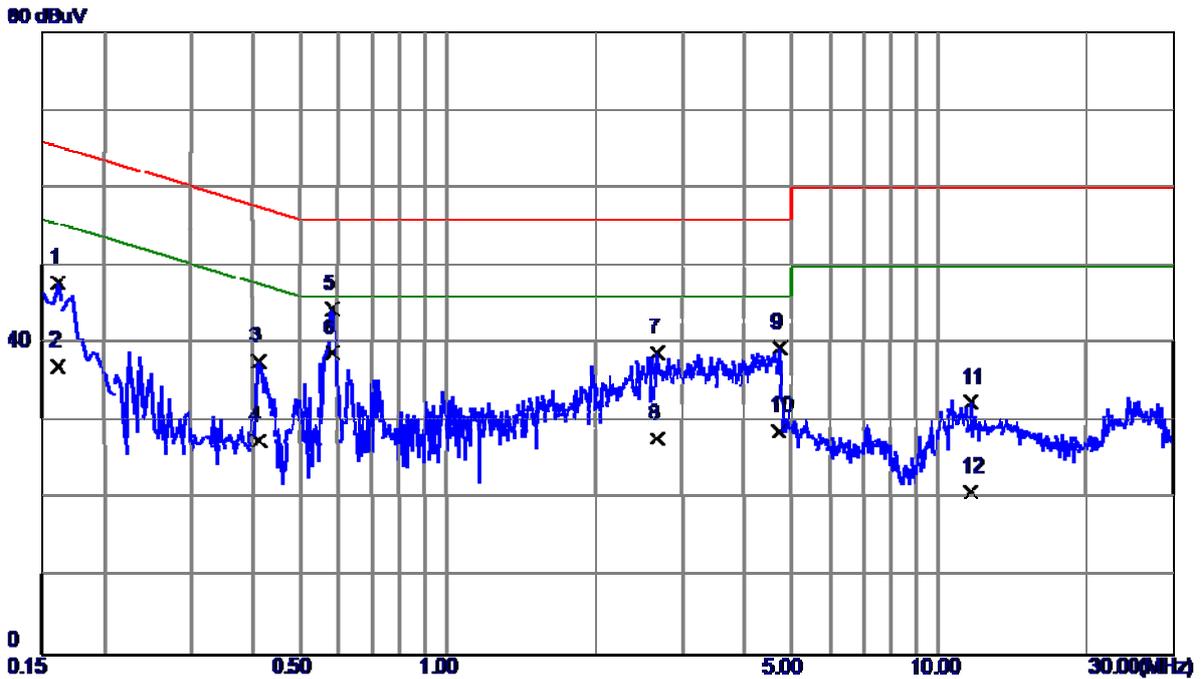


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1620	38.23	9.57	47.80	65.36	-17.56	QP		
2	0.1620	27.60	9.57	37.17	55.36	-18.19	AVG		
3	0.4140	28.15	9.60	37.75	57.57	-19.82	QP		
4	0.4140	17.89	9.60	27.49	47.57	-20.08	AVG		
5	0.5860	34.79	9.70	44.49	56.00	-11.51	QP		
6 *	0.5860	29.10	9.70	38.80	46.00	-7.20	AVG		
7	2.6820	28.64	10.24	38.88	56.00	-17.12	QP		
8	2.6820	17.60	10.24	27.84	46.00	-18.16	AVG		
9	4.7619	29.21	10.28	39.49	56.00	-16.51	QP		
10	4.7619	18.50	10.28	28.78	46.00	-17.22	AVG		
11	11.6100	21.98	10.56	32.54	60.00	-27.46	QP		
12	11.6100	10.40	10.56	20.96	50.00	-29.04	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:Quancheng		
Test Engineer	Trey Chen		

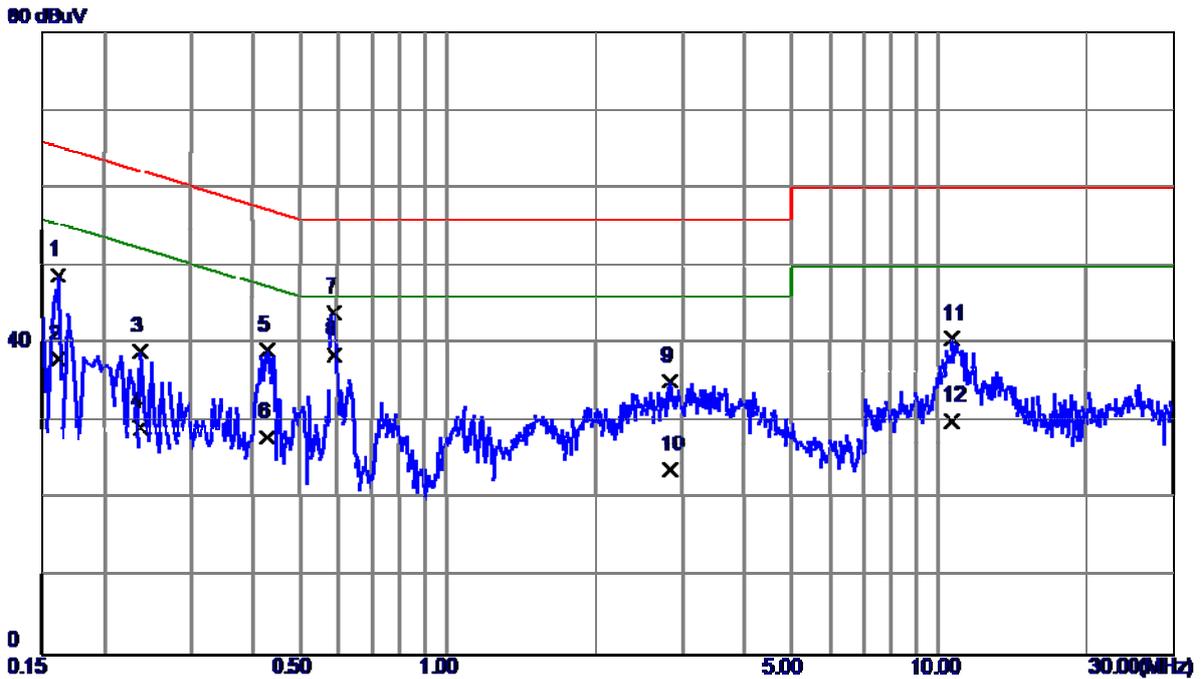


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1620	39.33	9.51	48.84	65.36	-16.52	QP		
2	0.1620	28.60	9.51	38.11	55.36	-17.25	AVG		
3	0.2380	29.52	9.57	39.09	62.17	-23.08	QP		
4	0.2380	19.70	9.57	29.27	52.17	-22.90	AVG		
5	0.4300	29.70	9.49	39.19	57.25	-18.06	QP		
6	0.4300	18.50	9.49	27.99	47.25	-19.26	AVG		
7	0.5899	34.57	9.50	44.07	56.00	-11.93	QP		
8 *	0.5899	29.00	9.50	38.50	46.00	-7.50	AVG		
9	2.8540	25.18	9.95	35.13	56.00	-20.87	QP		
10	2.8540	13.90	9.95	23.85	46.00	-22.15	AVG		
11	10.6260	30.06	10.60	40.66	60.00	-19.34	QP		
12	10.6260	19.50	10.60	30.10	50.00	-19.90	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:MERRY		
Test Engineer	Trey Chen		

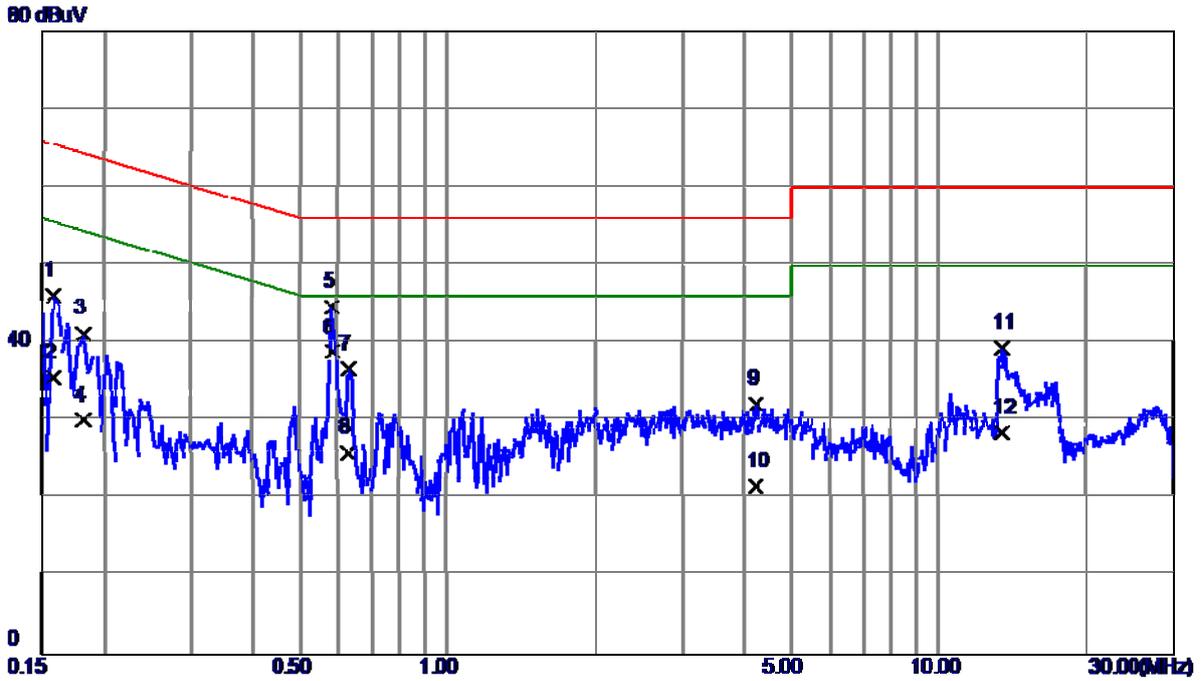


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1580	36.56	9.57	46.13	65.57	-19.44	QP		
2	0.1580	25.90	9.57	35.47	55.57	-20.10	AVG		
3	0.1819	31.63	9.57	41.20	64.40	-23.20	QP		
4	0.1819	20.50	9.57	30.07	54.40	-24.33	AVG		
5	0.5860	34.88	9.70	44.58	56.00	-11.42	QP		
6 *	0.5860	29.10	9.70	38.80	46.00	-7.20	AVG		
7	0.6300	27.00	9.70	36.70	56.00	-19.30	QP		
8	0.6300	16.20	9.70	25.90	46.00	-20.10	AVG		
9	4.2580	21.77	10.35	32.12	56.00	-23.88	QP		
10	4.2580	11.30	10.35	21.65	46.00	-24.35	AVG		
11	13.4540	28.70	10.63	39.33	60.00	-20.67	QP		
12	13.4540	17.81	10.63	28.44	50.00	-21.56	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:MERRY		
Test Engineer	Trey Chen		

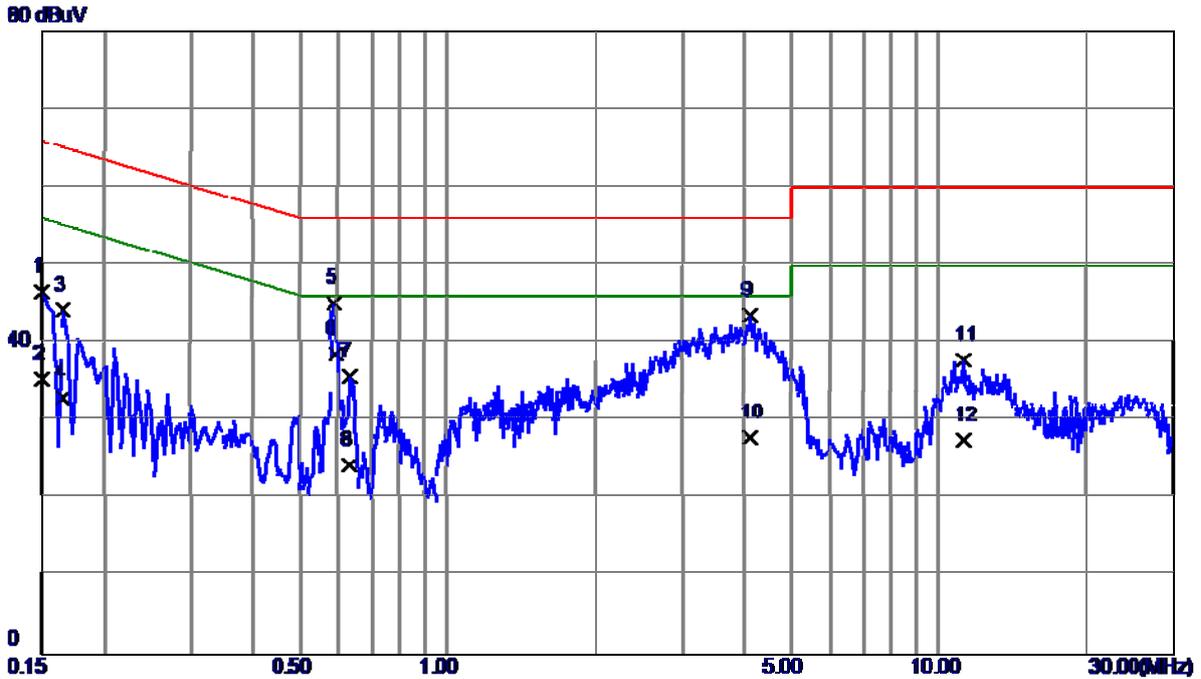


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	36.99	9.57	46.56	66.00	-19.44	QP		
2	0.1500	25.80	9.57	35.37	56.00	-20.63	AVG		
3	0.1660	34.63	9.49	44.12	65.16	-21.04	QP		
4	0.1660	23.40	9.49	32.89	55.16	-22.27	AVG		
5	0.5899	35.62	9.50	45.12	56.00	-10.88	QP		
6 *	0.5899	29.00	9.50	38.50	46.00	-7.50	AVG		
7	0.6300	26.11	9.50	35.61	56.00	-20.39	QP		
8	0.6340	14.80	9.50	24.30	46.00	-21.70	AVG		
9	4.1140	33.41	10.11	43.52	56.00	-12.48	QP		
10	4.1140	17.80	10.11	27.91	46.00	-18.09	AVG		
11	11.2460	27.09	10.62	37.71	60.00	-22.29	QP		
12	11.2460	16.90	10.62	27.52	50.00	-22.48	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:Goertek		
Test Engineer	Trey Chen		

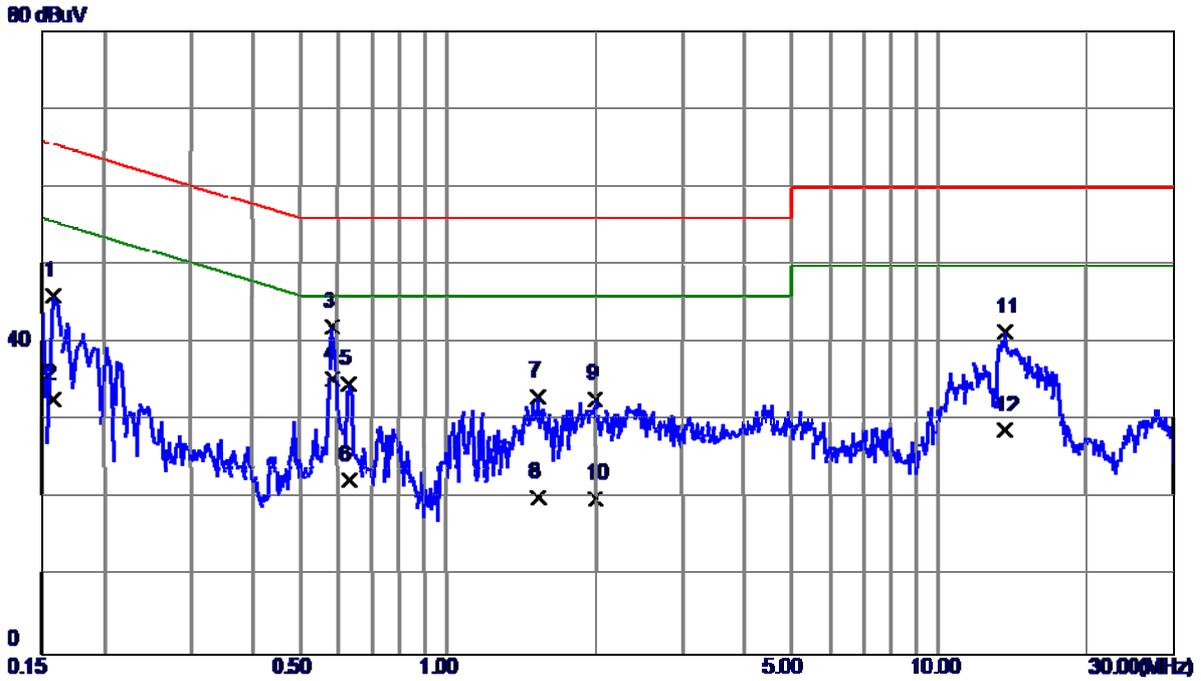


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1580	36.56	9.57	46.13	65.57	-19.44	QP		
2	0.1580	23.20	9.57	32.77	55.57	-22.80	AVG		
3	0.5860	32.39	9.70	42.09	56.00	-13.91	QP		
4 *	0.5860	25.60	9.70	35.30	46.00	-10.70	AVG		
5	0.6300	25.00	9.70	34.70	56.00	-21.30	QP		
6	0.6300	12.70	9.70	22.40	46.00	-23.60	AVG		
7	1.5220	23.07	9.98	33.05	56.00	-22.95	QP		
8	1.5220	10.20	9.98	20.18	46.00	-25.82	AVG		
9	2.0020	22.83	10.01	32.84	56.00	-23.16	QP		
10	2.0020	10.00	10.01	20.01	46.00	-25.99	AVG		
11	13.6140	30.84	10.64	41.48	60.00	-18.52	QP		
12	13.6140	18.20	10.64	28.84	50.00	-21.16	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)Earphone:Goertek		
Test Engineer	Trey Chen		

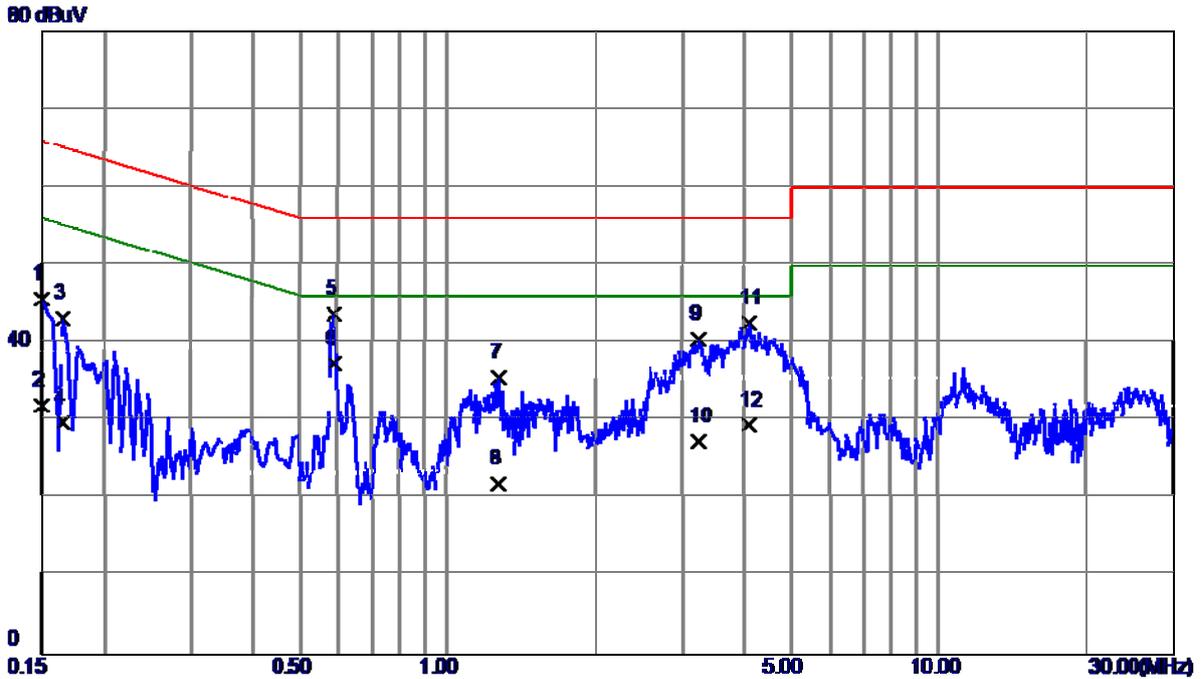


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	35.99	9.57	45.56	66.00	-20.44	QP		
2	0.1500	22.40	9.57	31.97	56.00	-24.03	AVG		
3	0.1660	33.63	9.49	43.12	65.16	-22.04	QP		
4	0.1660	20.20	9.49	29.69	55.16	-25.47	AVG		
5	0.5899	34.12	9.50	43.62	56.00	-12.38	QP		
6 *	0.5899	27.80	9.50	37.30	46.00	-8.70	AVG		
7	1.2820	25.71	9.76	35.47	56.00	-20.53	QP		
8	1.2820	12.20	9.76	21.96	46.00	-24.04	AVG		
9	3.2340	30.50	9.99	40.49	56.00	-15.51	QP		
10	3.2340	17.30	9.99	27.29	46.00	-18.71	AVG		
11	4.1020	32.41	10.11	42.52	56.00	-13.48	QP		
12	4.1020	19.30	10.11	29.41	46.00	-16.59	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

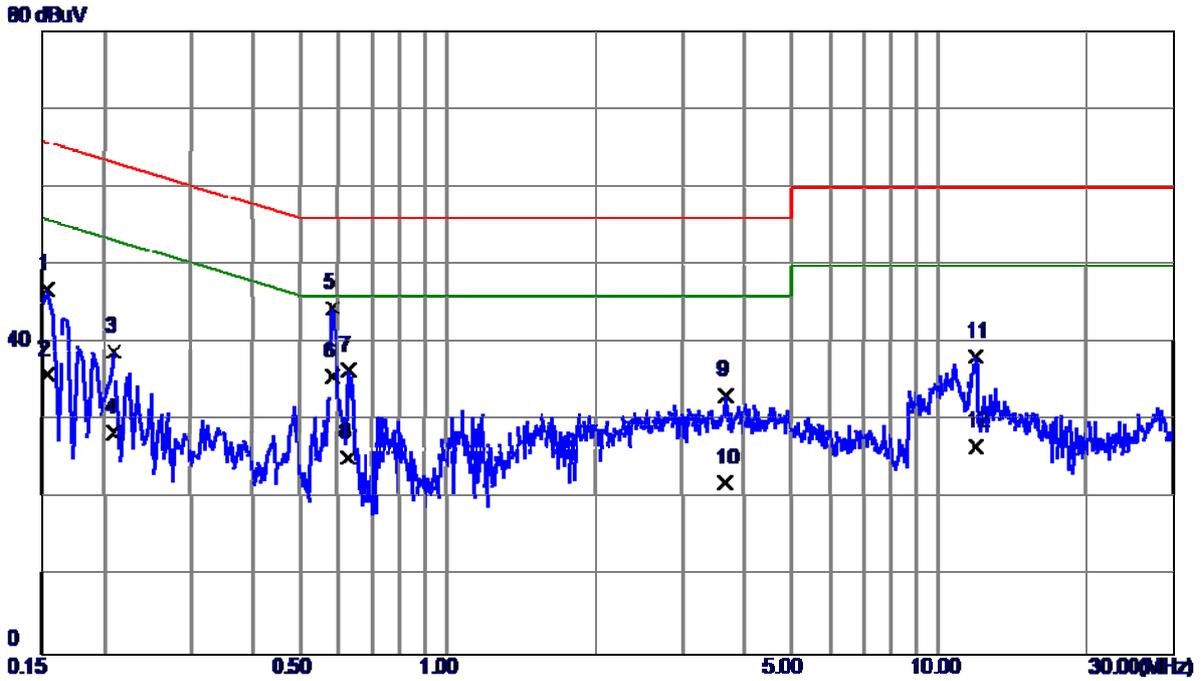


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	37.29	9.57	46.86	65.79	-18.93	QP		
2	0.1539	26.50	9.57	36.07	55.79	-19.72	AVG		
3	0.2100	29.37	9.57	38.94	63.21	-24.27	QP		
4	0.2100	18.90	9.57	28.47	53.21	-24.74	AVG		
5	0.5860	34.72	9.70	44.42	56.00	-11.58	QP		
6 *	0.5860	26.00	9.70	35.70	46.00	-10.30	AVG		
7	0.6300	26.84	9.70	36.54	56.00	-19.46	QP		
8	0.6300	15.60	9.70	25.30	46.00	-20.70	AVG		
9	3.6820	22.88	10.35	33.23	56.00	-22.77	QP		
10	3.6820	11.70	10.35	22.05	46.00	-23.95	AVG		
11	11.8940	27.61	10.57	38.18	60.00	-21.82	QP		
12	11.8940	16.20	10.57	26.77	50.00	-23.23	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

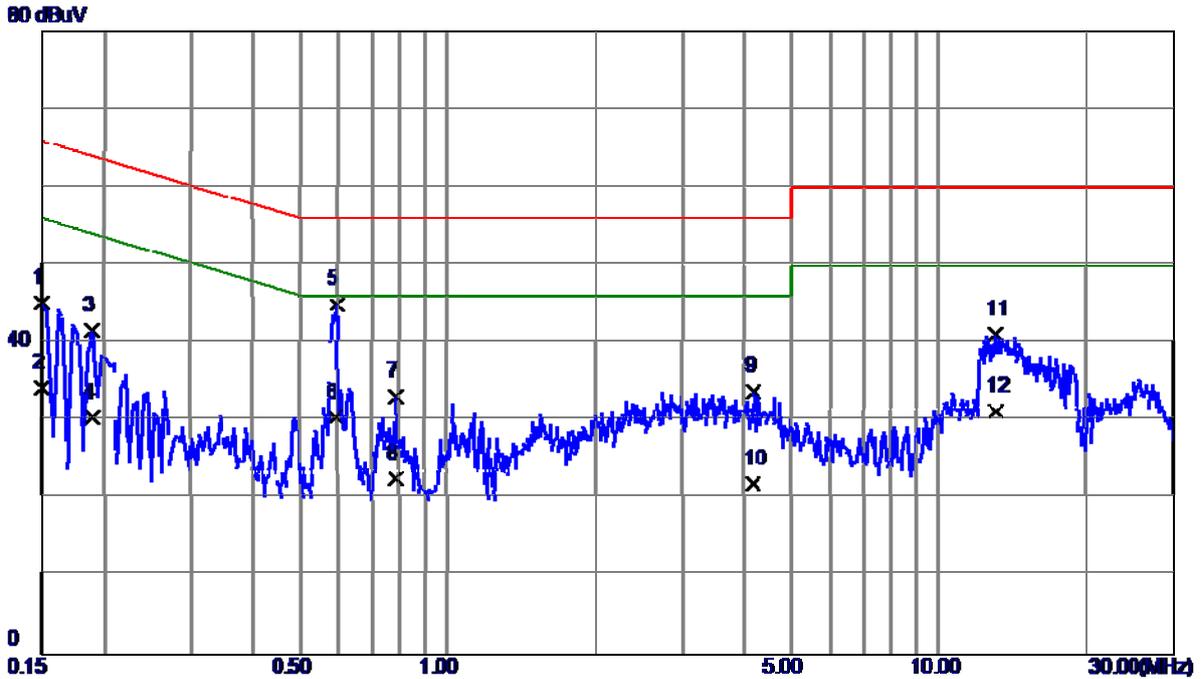


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	35.50	9.57	45.07	66.00	-20.93	QP		
2	0.1500	24.60	9.57	34.17	56.00	-21.83	AVG		
3	0.1900	31.99	9.54	41.53	64.04	-22.51	QP		
4	0.1900	20.80	9.54	30.34	54.04	-23.70	AVG		
5 *	0.5940	35.51	9.50	45.01	56.00	-10.99	QP		
6	0.5940	20.90	9.50	30.40	46.00	-15.60	AVG		
7	0.7900	23.47	9.61	33.08	56.00	-22.92	QP		
8	0.7900	12.90	9.61	22.51	46.00	-23.49	AVG		
9	4.2020	23.66	10.12	33.78	56.00	-22.22	QP		
10	4.2020	11.80	10.12	21.92	46.00	-24.08	AVG		
11	13.0940	30.39	10.66	41.05	60.00	-18.95	QP		
12	13.0940	20.60	10.66	31.26	50.00	-18.74	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

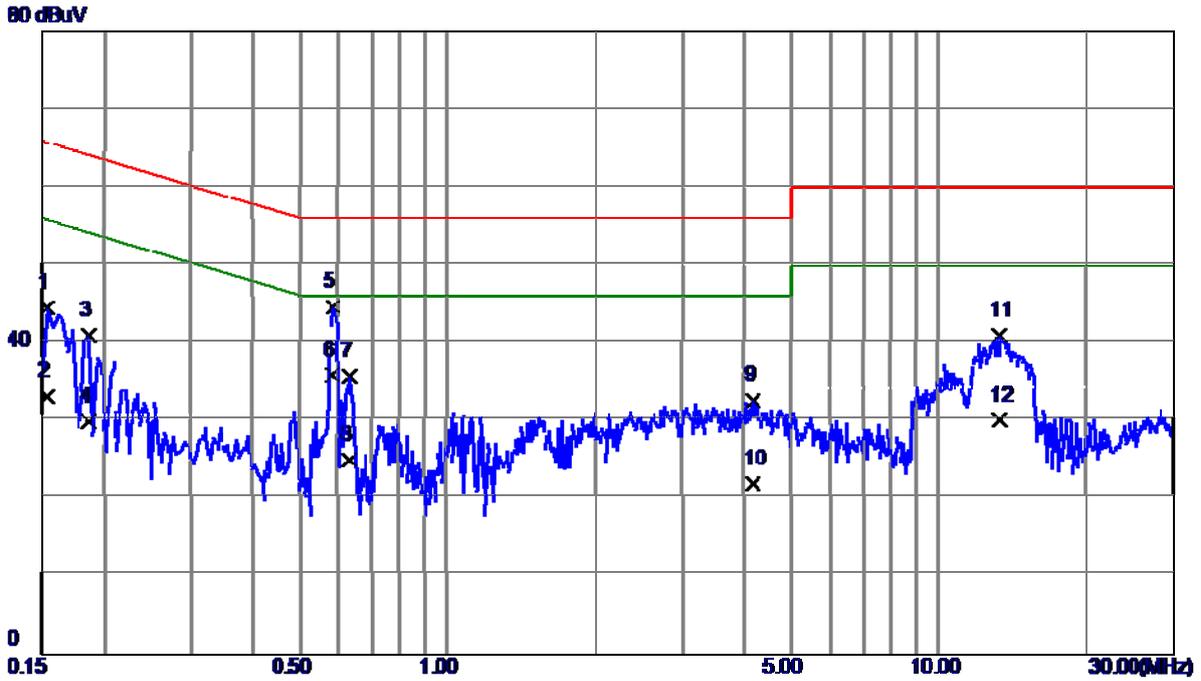


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	34.88	9.57	44.45	65.79	-21.34	QP		
2	0.1539	23.50	9.57	33.07	55.79	-22.72	AVG		
3	0.1860	31.39	9.57	40.96	64.21	-23.25	QP		
4	0.1860	20.40	9.57	29.97	54.21	-24.24	AVG		
5	0.5860	34.91	9.70	44.61	56.00	-11.39	QP		
6 *	0.5860	26.10	9.70	35.80	46.00	-10.20	AVG		
7	0.6340	25.99	9.70	35.69	56.00	-20.31	QP		
8	0.6340	15.20	9.70	24.90	46.00	-21.10	AVG		
9	4.2020	22.35	10.36	32.71	56.00	-23.29	QP		
10	4.2020	11.60	10.36	21.96	46.00	-24.04	AVG		
11	13.3380	30.34	10.63	40.97	60.00	-19.03	QP		
12	13.3380	19.50	10.63	30.13	50.00	-19.87	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

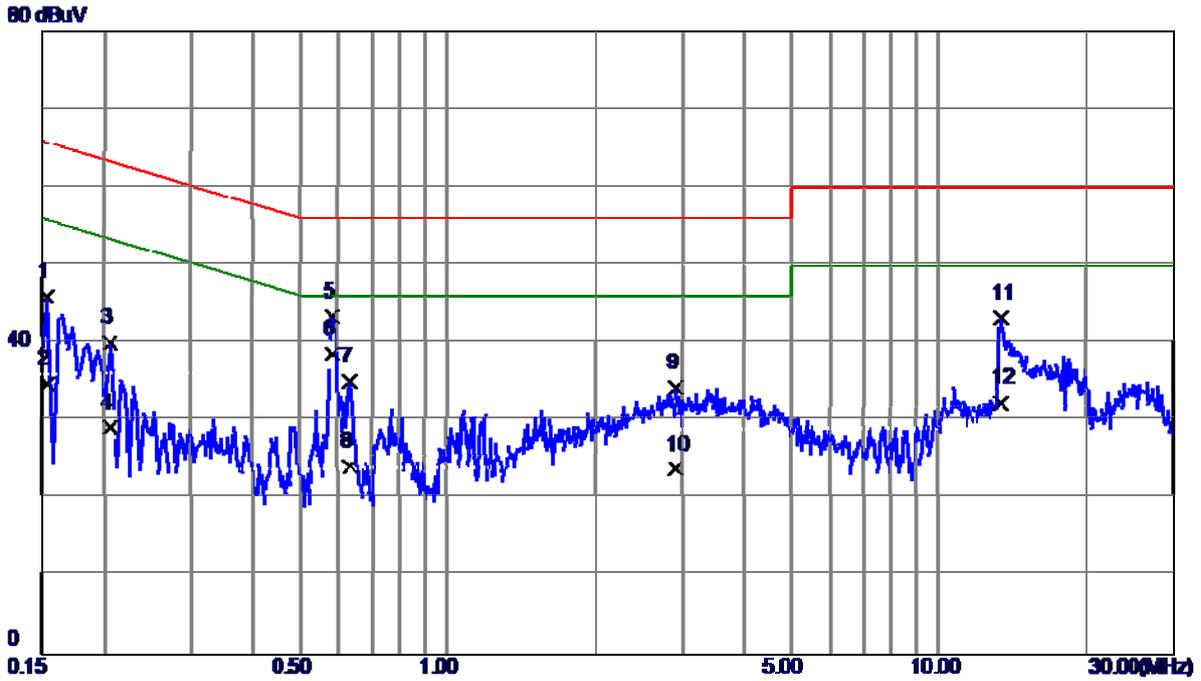


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	36.34	9.55	45.89	65.79	-19.90	QP		
2	0.1539	25.10	9.55	34.65	55.79	-21.14	AVG		
3	0.2060	30.40	9.57	39.97	63.37	-23.40	QP		
4	0.2060	19.50	9.57	29.07	53.37	-24.30	AVG		
5	0.5860	33.80	9.50	43.30	56.00	-12.70	QP		
6 *	0.5860	29.10	9.50	38.60	46.00	-7.40	AVG		
7	0.6340	25.48	9.50	34.98	56.00	-21.02	QP		
8	0.6340	14.60	9.50	24.10	46.00	-21.90	AVG		
9	2.9100	24.26	9.96	34.22	56.00	-21.78	QP		
10	2.9100	13.80	9.96	23.76	46.00	-22.24	AVG		
11	13.4060	32.58	10.66	43.24	60.00	-16.76	QP		
12	13.4060	21.60	10.66	32.26	50.00	-17.74	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

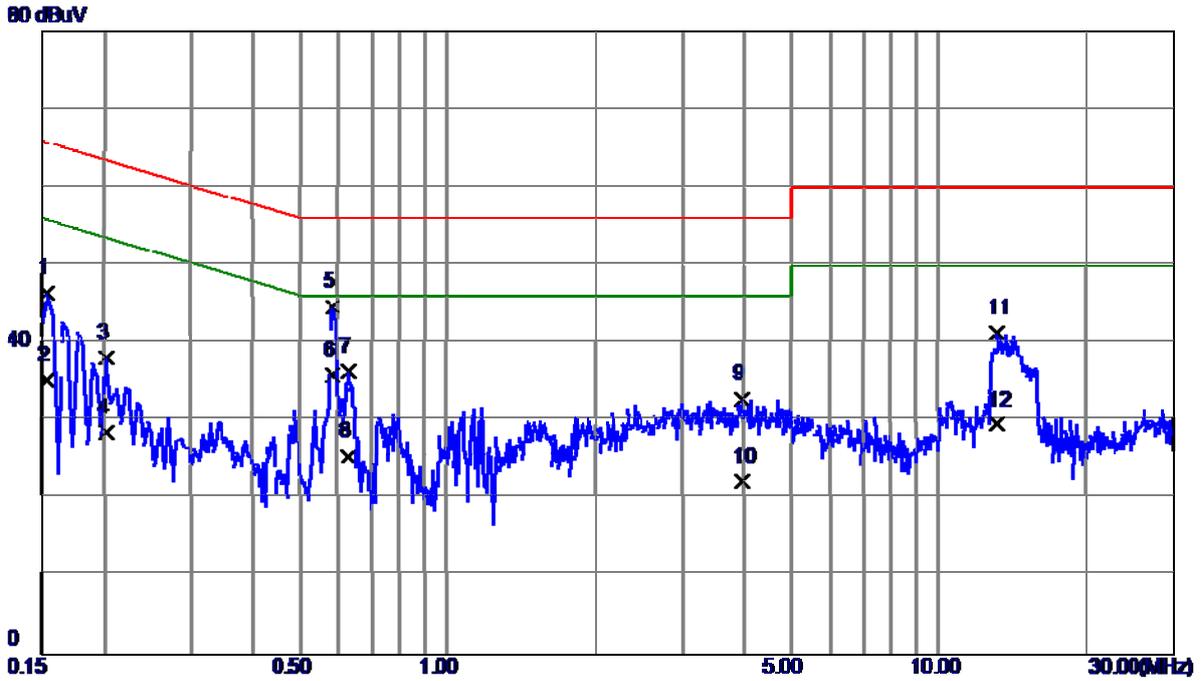

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1539	36.81	9.57	46.38	65.79	-19.41	QP		
2	0.1539	25.60	9.57	35.17	55.79	-20.62	AVG		
3	0.2020	28.46	9.57	38.03	63.53	-25.50	QP		
4	0.2020	18.90	9.57	28.47	53.53	-25.06	AVG		
5	0.5860	34.88	9.70	44.58	56.00	-11.42	QP		
6 *	0.5860	26.10	9.70	35.80	46.00	-10.20	AVG		
7	0.6300	26.68	9.70	36.38	56.00	-19.62	QP		
8	0.6300	15.70	9.70	25.40	46.00	-20.60	AVG		
9	3.9740	22.47	10.39	32.86	56.00	-23.14	QP		
10	3.9740	11.90	10.39	22.29	46.00	-23.71	AVG		
11	13.1700	30.72	10.62	41.34	60.00	-18.66	QP		
12	13.1700	18.90	10.62	29.52	50.00	-20.48	AVG		

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	23°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:LX+Battery:SCUD(SONY)		
Test Engineer	Trey Chen		

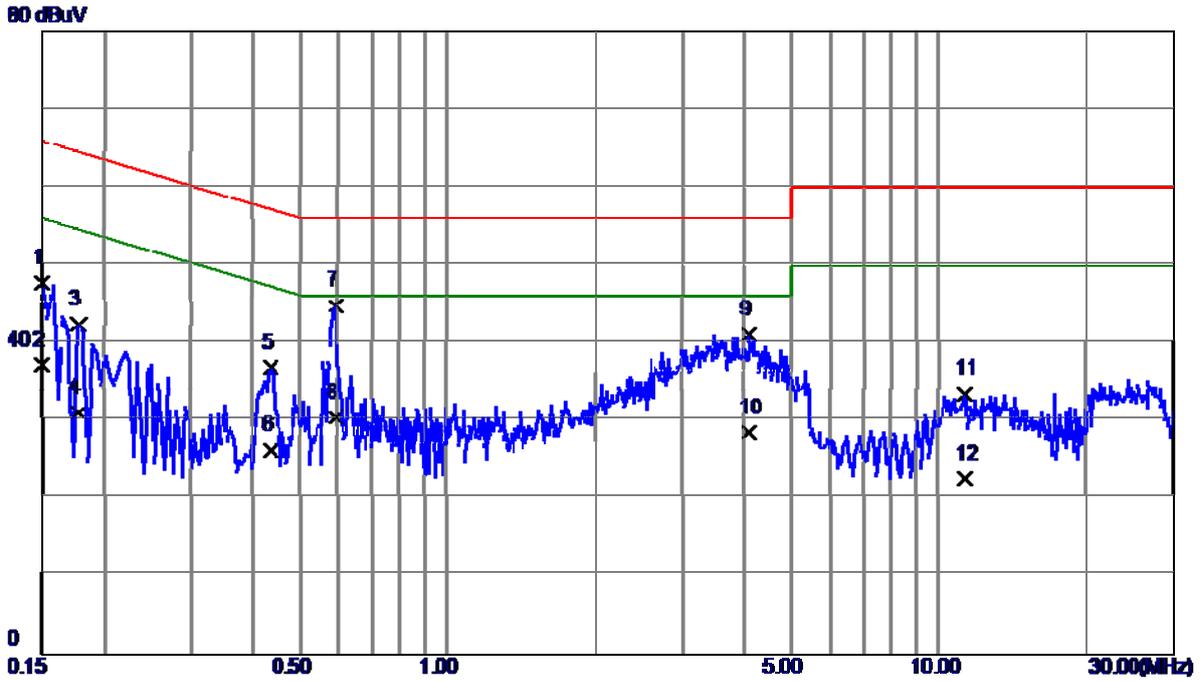

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Antenna Height cm	Table Degree degree
1	0.1500	38.13	9.57	47.70	66.00	-18.30	QP		
2	0.1500	27.50	9.57	37.07	56.00	-18.93	AVG		
3	0.1780	32.86	9.50	42.36	64.58	-22.22	QP		
4	0.1780	21.60	9.50	31.10	54.58	-23.48	AVG		
5	0.4380	27.26	9.49	36.75	57.10	-20.35	QP		
6	0.4380	16.80	9.49	26.29	47.10	-20.81	AVG		
7 *	0.5940	35.33	9.50	44.83	56.00	-11.17	QP		
8	0.5940	20.90	9.50	30.40	46.00	-15.60	AVG		
9	4.1060	31.01	10.11	41.12	56.00	-14.88	QP		
10	4.1060	18.30	10.11	28.41	46.00	-17.59	AVG		
11	11.2900	22.85	10.62	33.47	60.00	-26.53	QP		
12	11.2900	11.90	10.62	22.52	50.00	-27.48	AVG		

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2017
3	Receiver	Agilent	N9038A	MY52130039	Sep. 04, 2017
4	Antenna	EM	EM-6876-1	230	Jul. 08, 2017
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Cable	emci	EMC104-S M-SM-1200 0(12m)	N/A	Jul. 06, 2017
8	Double Ridged Guide Antenna	ETS	3115	00075789	Mar. 27, 2017
9	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 23, 2017
10	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC26540 45	980039 & HA01	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

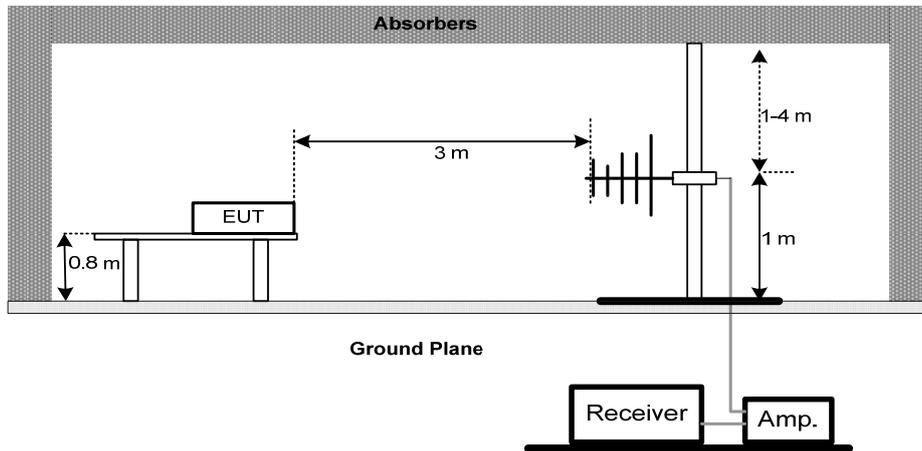

(B) Radiated Emission Test Set-Up Frequency 1 GHz

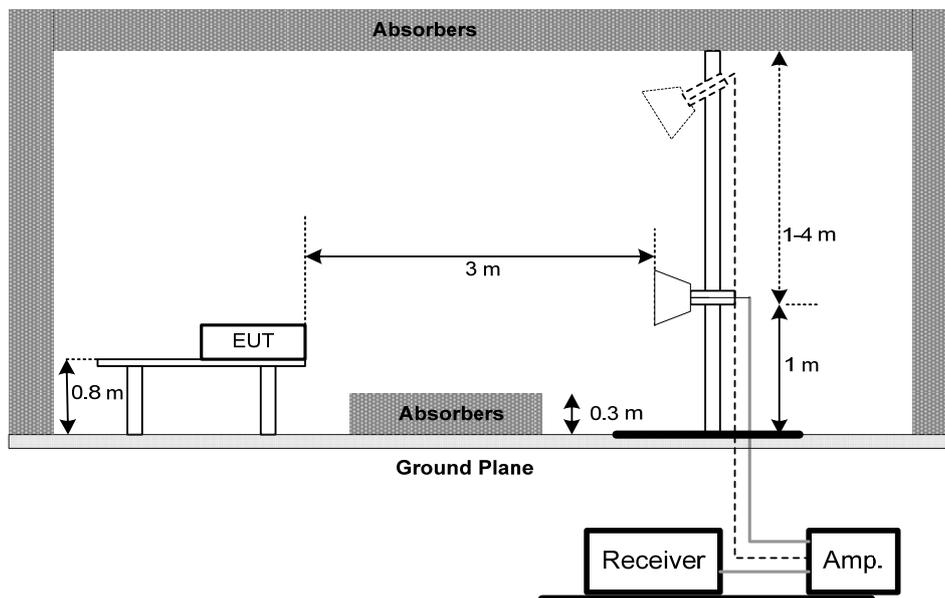


4.2.6 TEST RESULTS-BELOW 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:FF		
Test Engineer	Treey Chen		

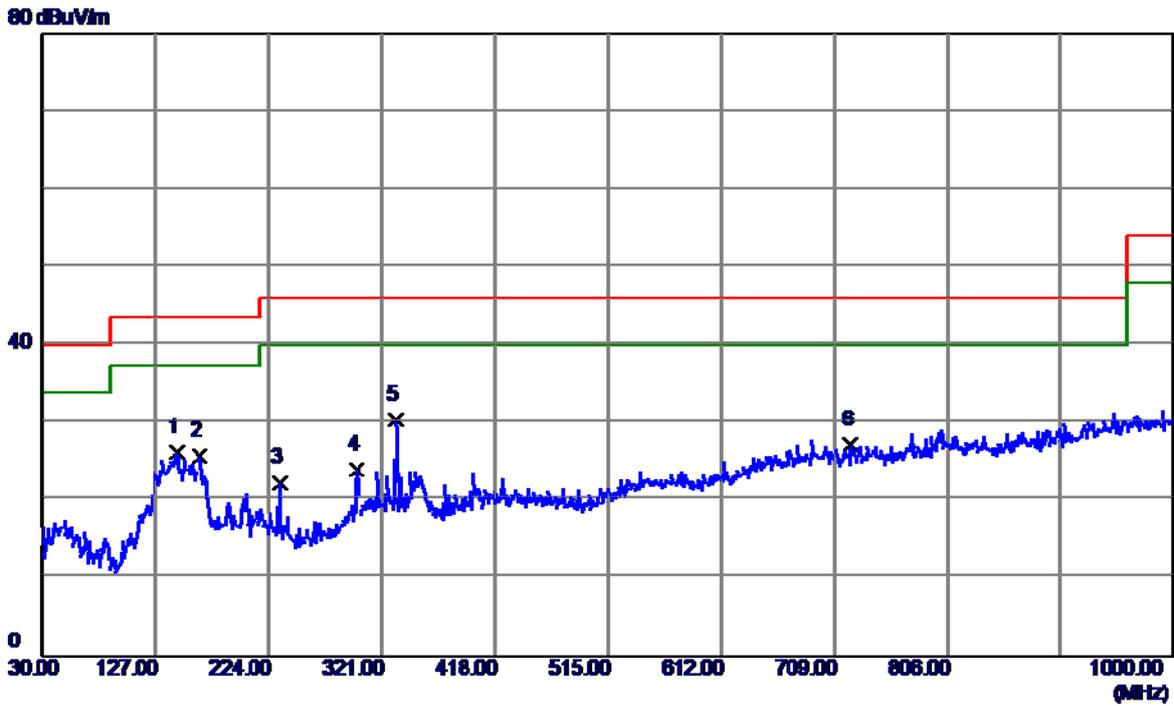


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	144.9450	38.16	-11.90	26.26	43.50	-17.24	QP
2	164.8300	37.41	-11.66	25.75	43.50	-17.75	QP
3	233.2150	35.39	-13.07	22.32	46.00	-23.68	QP
4	299.6600	34.00	-9.94	24.06	46.00	-21.94	QP
5 *	333.1250	40.93	-10.49	30.44	46.00	-15.56	QP
6	723.5500	27.88	-0.75	27.13	46.00	-18.87	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:FF		
Test Engineer	Treyy Chen		

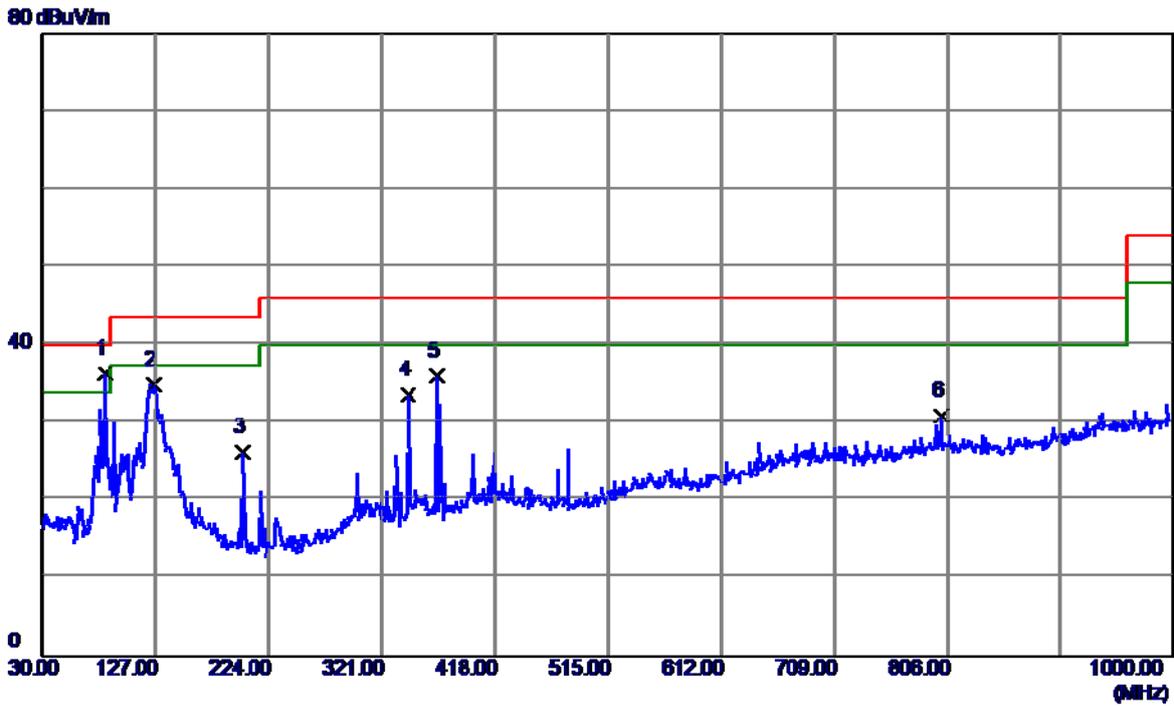


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	84.3200	52.69	-16.31	36.38	40.00	-3.62	QP
2	125.5450	46.74	-11.79	34.95	43.50	-8.55	QP
3	201.6900	39.96	-13.72	26.24	43.50	-17.26	QP
4	343.3100	44.30	-10.66	33.64	46.00	-12.36	QP
5	368.5300	45.50	-9.45	36.05	46.00	-9.95	QP
6	800.1800	30.32	0.61	30.93	46.00	-15.07	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:LX		
Test Engineer	Treyy Chen		

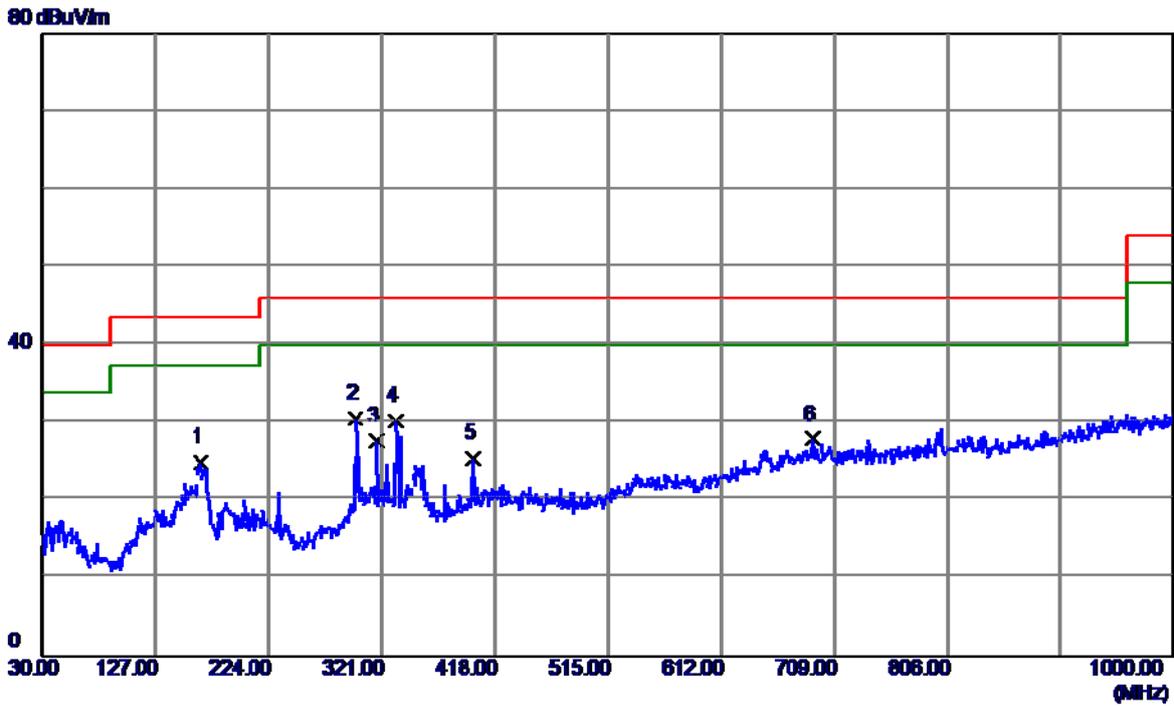


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	165.3150	36.59	-11.57	25.02	43.50	-18.48	QP
2 *	298.6900	40.51	-9.95	30.56	46.00	-15.44	QP
3	317.1200	37.90	-10.22	27.68	46.00	-18.32	QP
4	333.1250	40.69	-10.49	30.20	46.00	-15.80	QP
5	400.0550	32.58	-7.20	25.38	46.00	-20.62	QP
6	690.5700	28.77	-0.85	27.92	46.00	-18.08	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:LX		
Test Engineer	Treyy Chen		

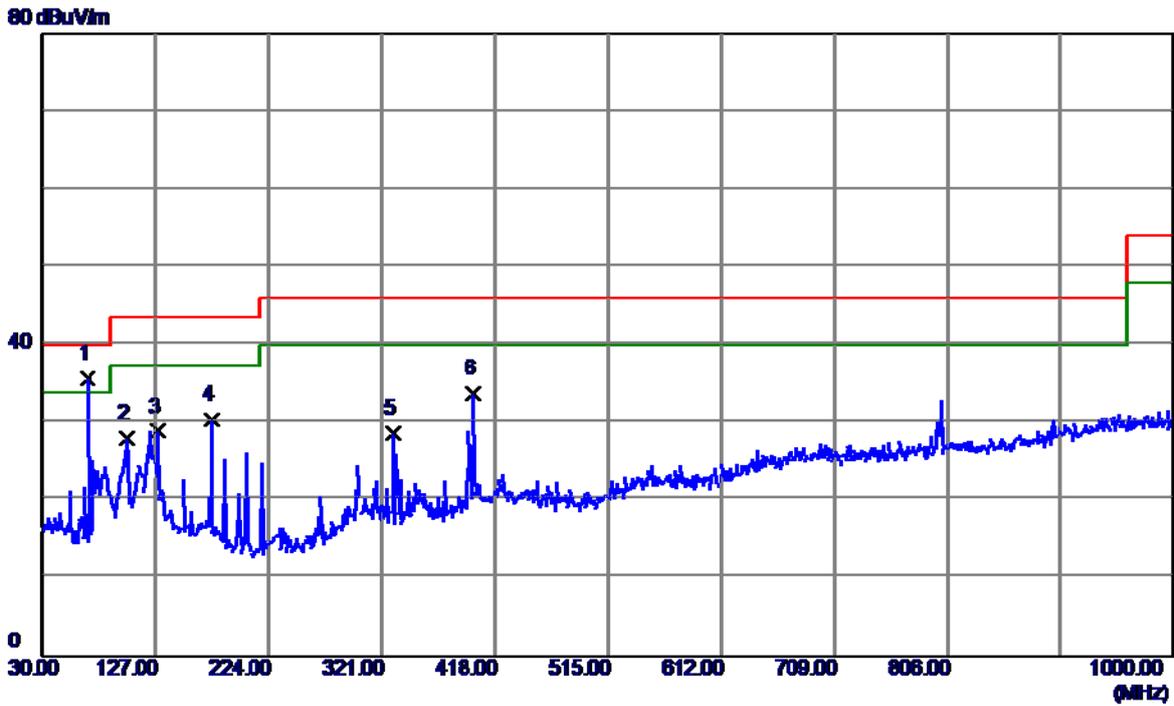


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	69.2850	50.70	-15.01	35.69	40.00	-4.31	QP
2	102.2650	42.34	-14.38	27.96	43.50	-15.54	QP
3	129.4250	40.11	-11.23	28.88	43.50	-14.62	QP
4	175.0150	41.87	-11.43	30.44	43.50	-13.06	QP
5	330.2150	39.06	-10.44	28.62	46.00	-17.38	QP
6	400.0550	40.91	-7.20	33.71	46.00	-12.29	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:PY		
Test Engineer	Treyy Chen		

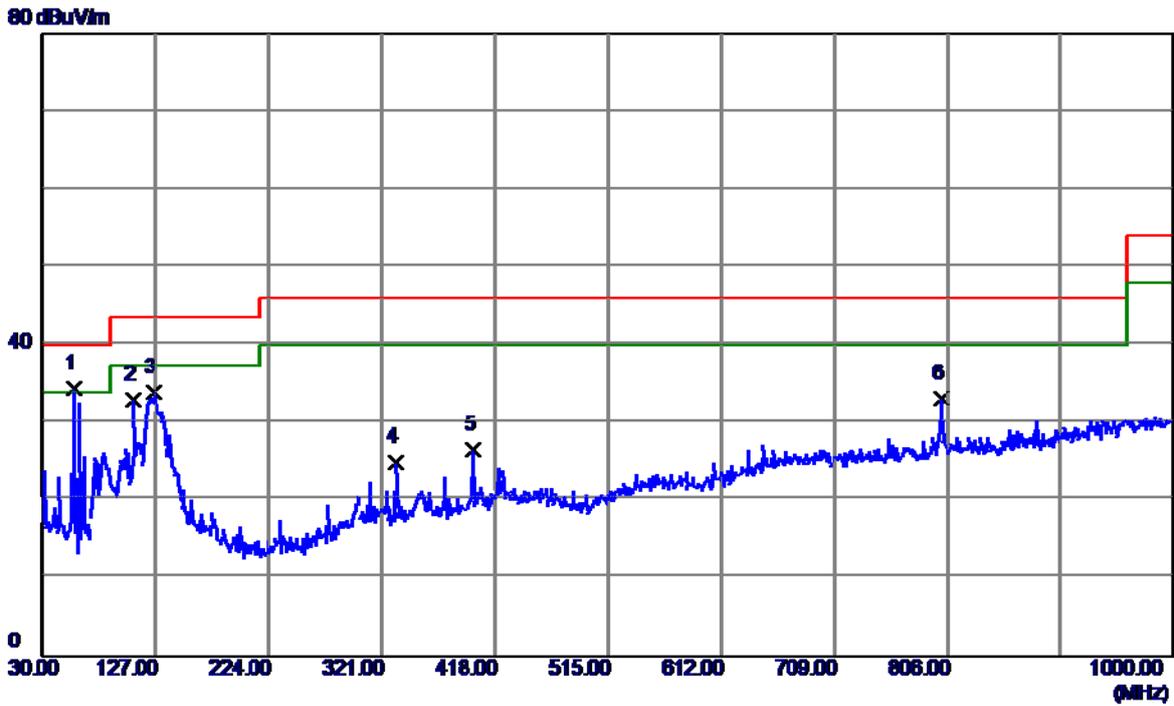


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.6750	47.07	-12.62	34.45	40.00	-5.55	QP
2	107.6000	47.01	-14.03	32.98	43.50	-10.52	QP
3	125.5450	45.64	-11.79	33.85	43.50	-9.65	QP
4	333.1250	35.38	-10.49	24.89	46.00	-21.11	QP
5	400.0550	33.78	-7.20	26.58	46.00	-19.42	QP
6	800.1800	32.58	0.61	33.19	46.00	-12.81	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:PY		
Test Engineer	Trey Chen		

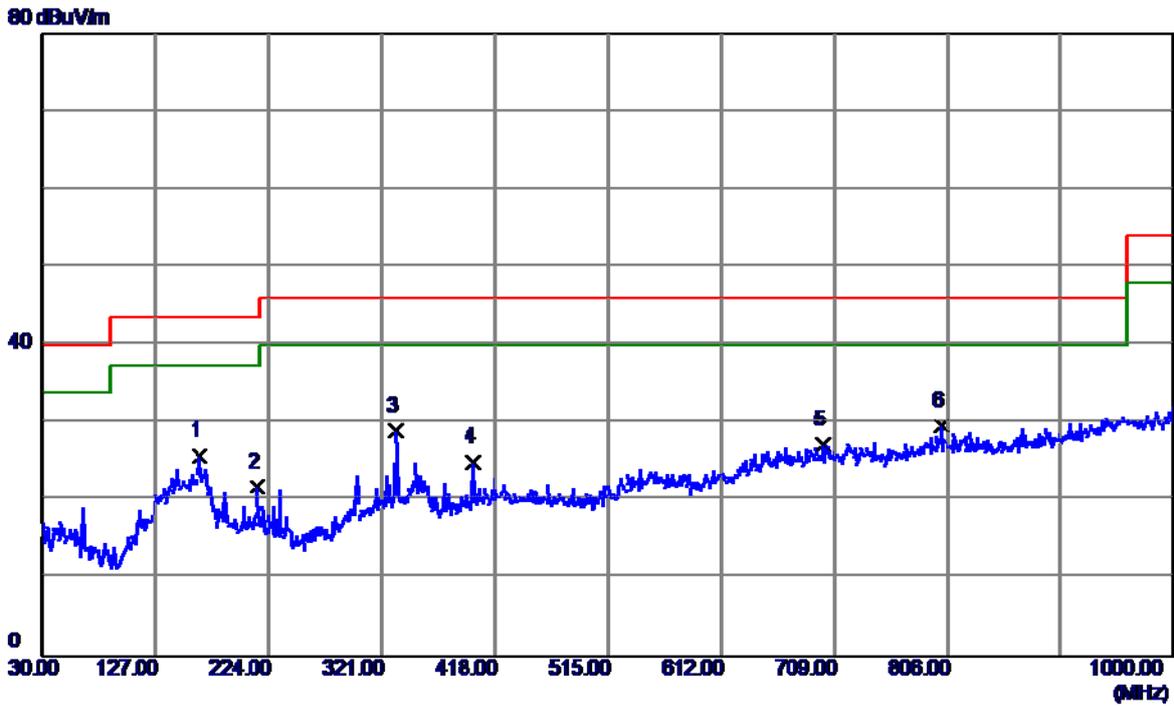


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	164.3450	37.49	-11.75	25.74	43.50	-17.76	QP
2	214.7850	35.84	-14.03	21.81	43.50	-21.69	QP
3	333.1250	39.47	-10.49	28.98	46.00	-17.02	QP
4	400.0550	32.11	-7.20	24.91	46.00	-21.09	QP
5	698.8150	27.82	-0.67	27.15	46.00	-18.85	QP
6 *	800.1800	28.97	0.61	29.58	46.00	-16.42	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:CR		
Test Engineer	Treyy Chen		

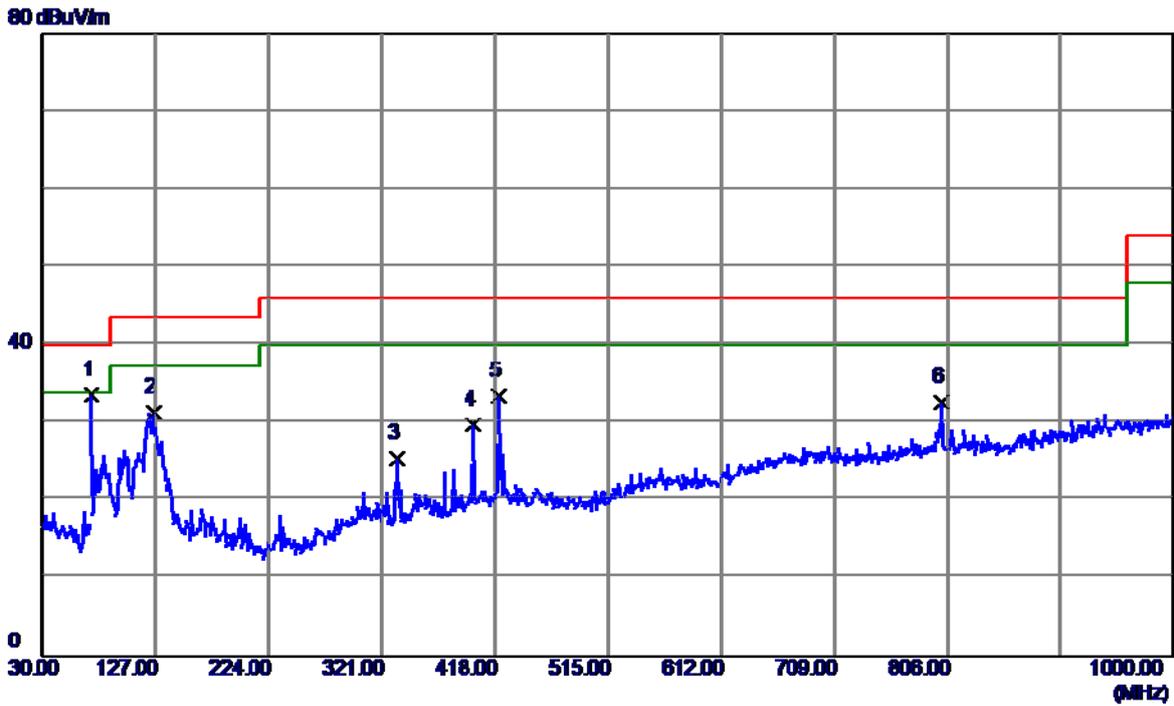


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	72.1950	49.28	-15.64	33.64	40.00	-6.36	QP
2	125.5450	43.18	-11.79	31.39	43.50	-12.11	QP
3	333.6099	35.87	-10.50	25.37	46.00	-20.63	QP
4	400.0550	36.99	-7.20	29.79	46.00	-16.21	QP
5	421.3950	40.53	-7.15	33.38	46.00	-12.62	QP
6	800.1800	32.09	0.61	32.70	46.00	-13.30	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:CR		
Test Engineer	Treyy Chen		

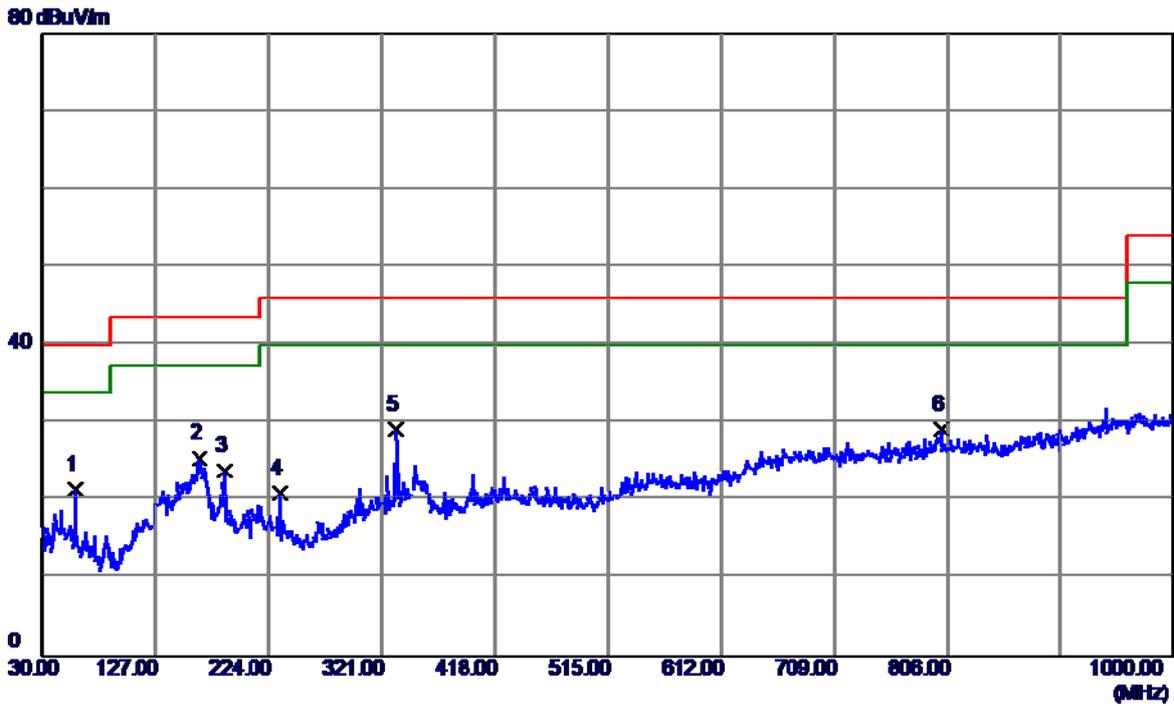


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	57.6450	34.15	-12.66	21.49	40.00	-18.51	QP
2	164.8300	37.10	-11.66	25.44	43.50	-18.06	QP
3	186.1700	36.63	-12.79	23.84	43.50	-19.66	QP
4	233.2150	33.99	-13.07	20.92	46.00	-25.08	QP
5	333.1250	39.54	-10.49	29.05	46.00	-16.95	QP
6 *	800.1800	28.54	0.61	29.15	46.00	-16.85	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FF+BATTERY:SCUD(SONY)		
Test Engineer	Treyy Chen		

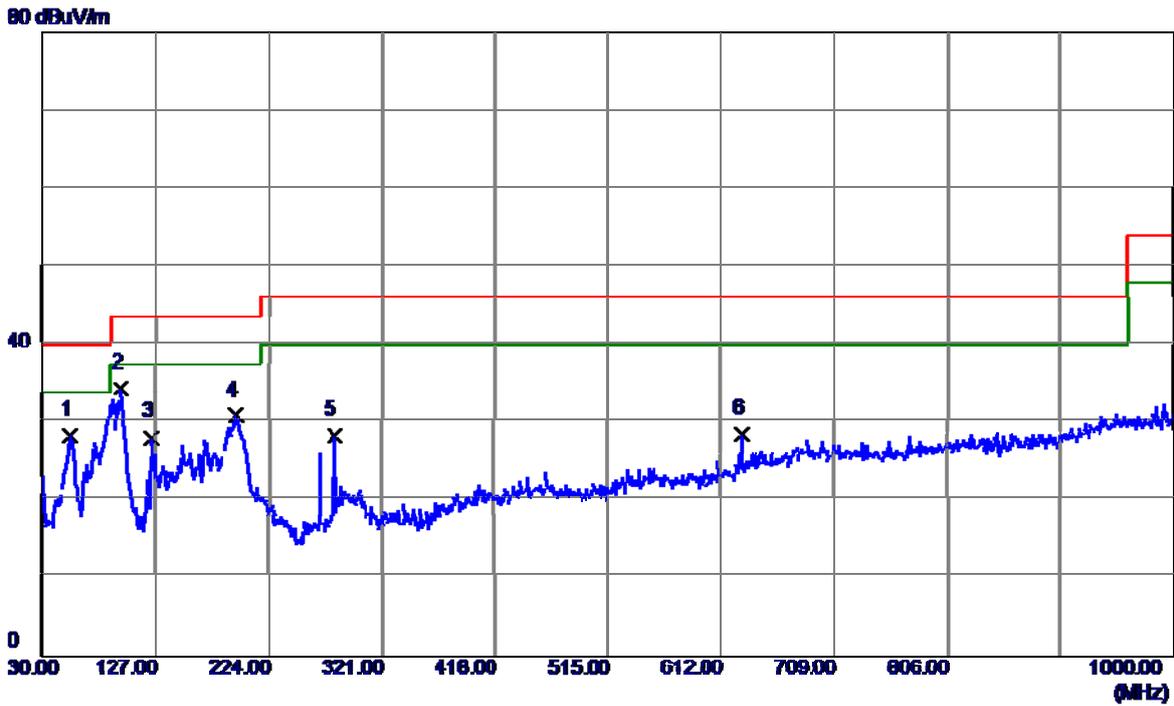


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	54.7350	40.71	-12.35	28.36	40.00	-11.64	QP
2 *	97.9000	49.63	-15.26	34.37	43.50	-9.13	QP
3	124.0900	40.09	-12.01	28.08	43.50	-15.42	QP
4	196.3550	44.40	-13.48	30.92	43.50	-12.58	QP
5	280.2600	40.00	-11.67	28.33	46.00	-17.67	QP
6	629.9450	31.40	-2.95	28.45	46.00	-17.55	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FF+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

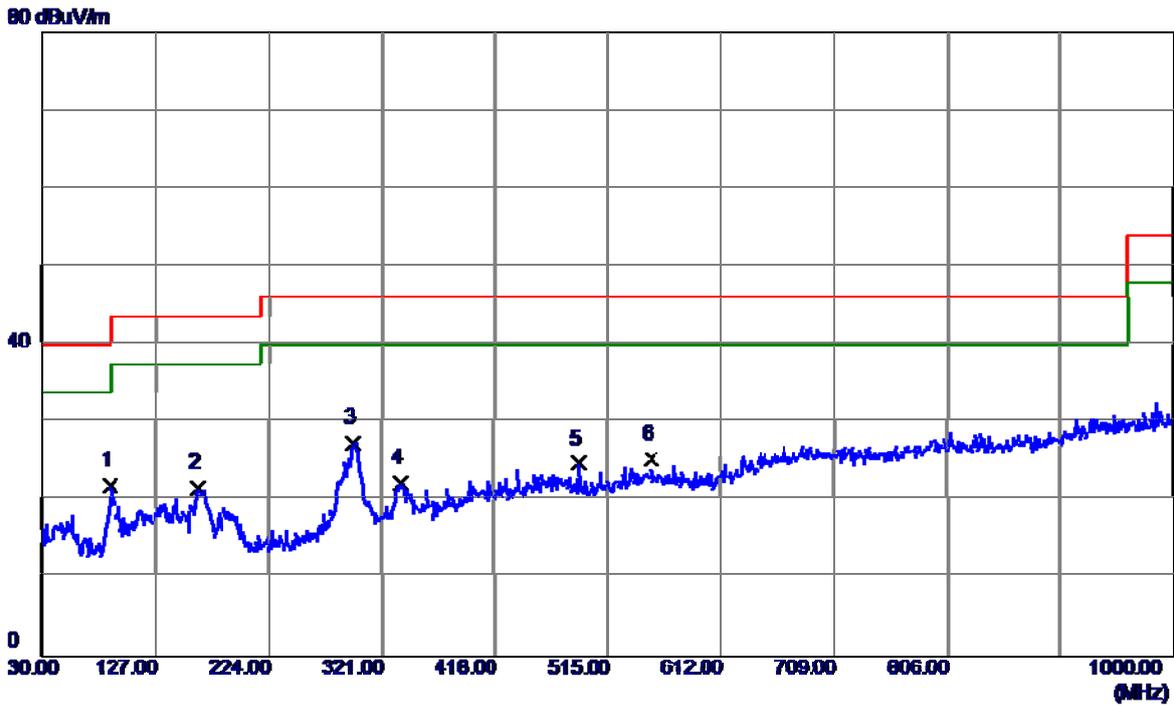


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	88.6850	38.21	-16.36	21.85	43.50	-21.65	QP
2	163.3750	33.47	-11.93	21.54	43.50	-21.96	QP
3 *	297.2349	37.36	-9.95	27.41	46.00	-18.59	QP
4	338.4600	32.87	-10.58	22.29	46.00	-23.71	QP
5	489.7800	32.25	-7.53	24.72	46.00	-21.28	QP
6	552.8300	29.81	-4.46	25.35	46.00	-20.65	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:FF+BATTERY:SCUD(ATL)		
Test Engineer	Treyy Chen		

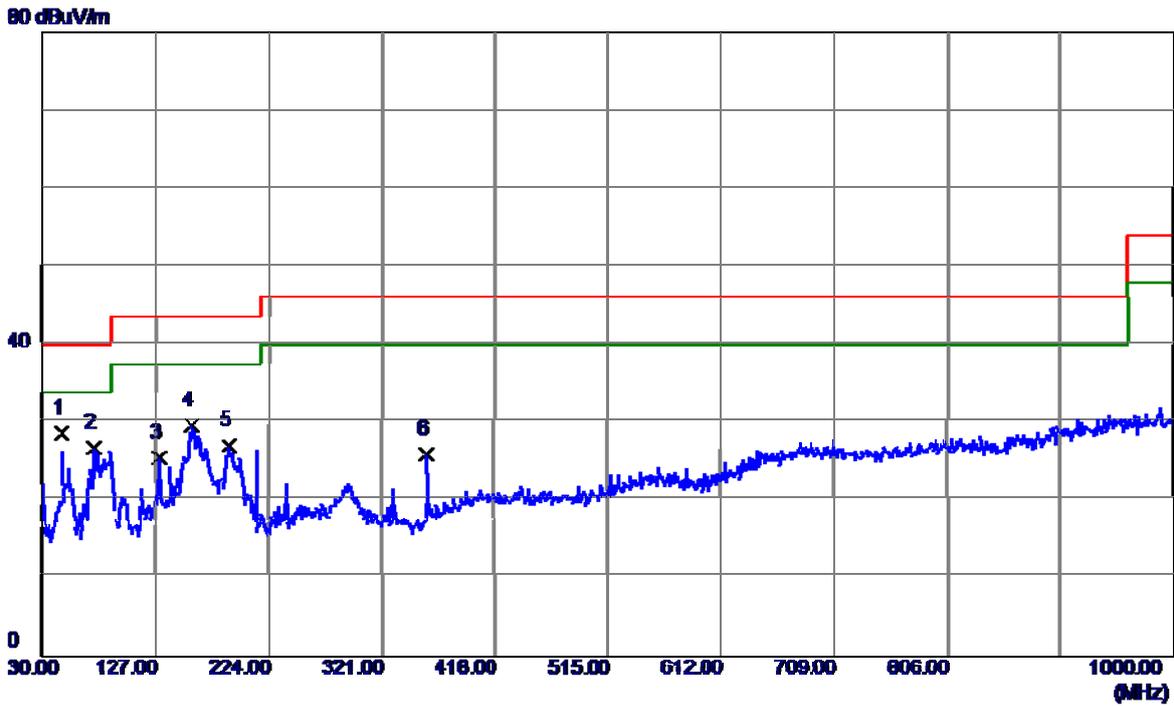


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	47.4600	40.91	-12.35	28.56	40.00	-11.44	QP
2	74.6200	42.86	-16.12	26.74	40.00	-13.26	QP
3	129.9100	36.52	-11.15	25.37	43.50	-18.13	QP
4	158.0399	42.05	-12.43	29.62	43.50	-13.88	QP
5	190.0500	40.28	-13.20	27.08	43.50	-16.42	QP
6	359.8000	35.99	-10.07	25.92	46.00	-20.08	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:FF+BATTERY:SCUD(ATL)		
Test Engineer	Trey Chen		

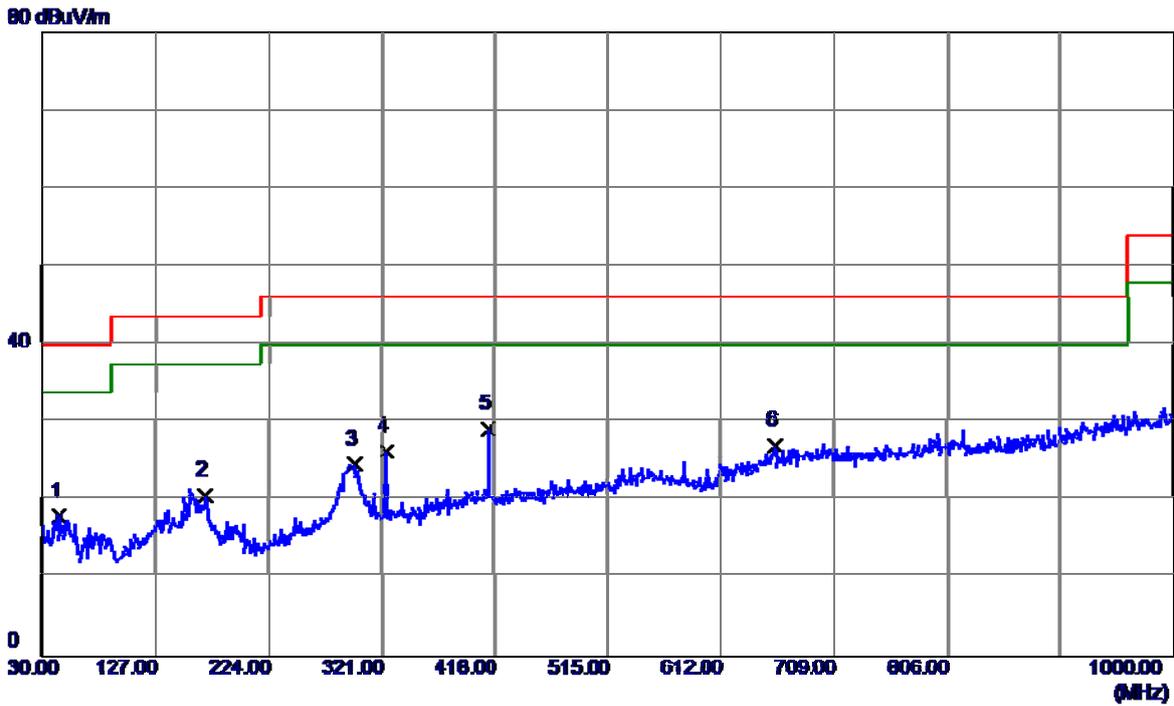


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	45.5200	29.88	-11.98	17.90	40.00	-22.10	QP
2	169.6799	31.47	-10.76	20.71	43.50	-22.79	QP
3	298.2049	34.61	-9.95	24.66	46.00	-21.34	QP
4	324.8800	36.61	-10.35	26.26	46.00	-19.74	QP
5 *	412.6650	36.30	-7.17	29.13	46.00	-16.87	QP
6	659.0450	28.60	-1.50	27.10	46.00	-18.90	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:FF+BATTERY:SUNWODA(ALT)		
Test Engineer	Trey Chen		

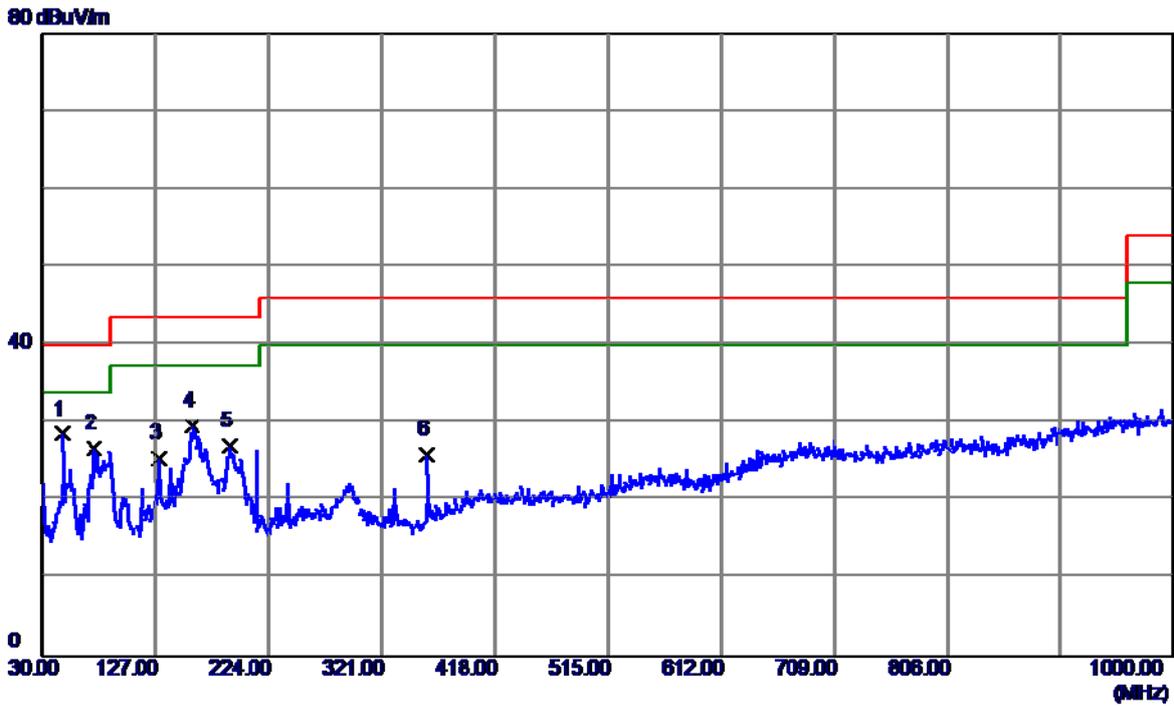


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	47.4600	40.91	-12.35	28.56	40.00	-11.44	QP
2	74.6200	42.86	-16.12	26.74	40.00	-13.26	QP
3	129.9100	36.52	-11.15	25.37	43.50	-18.13	QP
4	158.0399	42.05	-12.43	29.62	43.50	-13.88	QP
5	190.0500	40.28	-13.20	27.08	43.50	-16.42	QP
6	359.8000	35.99	-10.07	25.92	46.00	-20.08	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:FF+BATTERY:SUNWODA(ALT)		
Test Engineer	Treyy Chen		

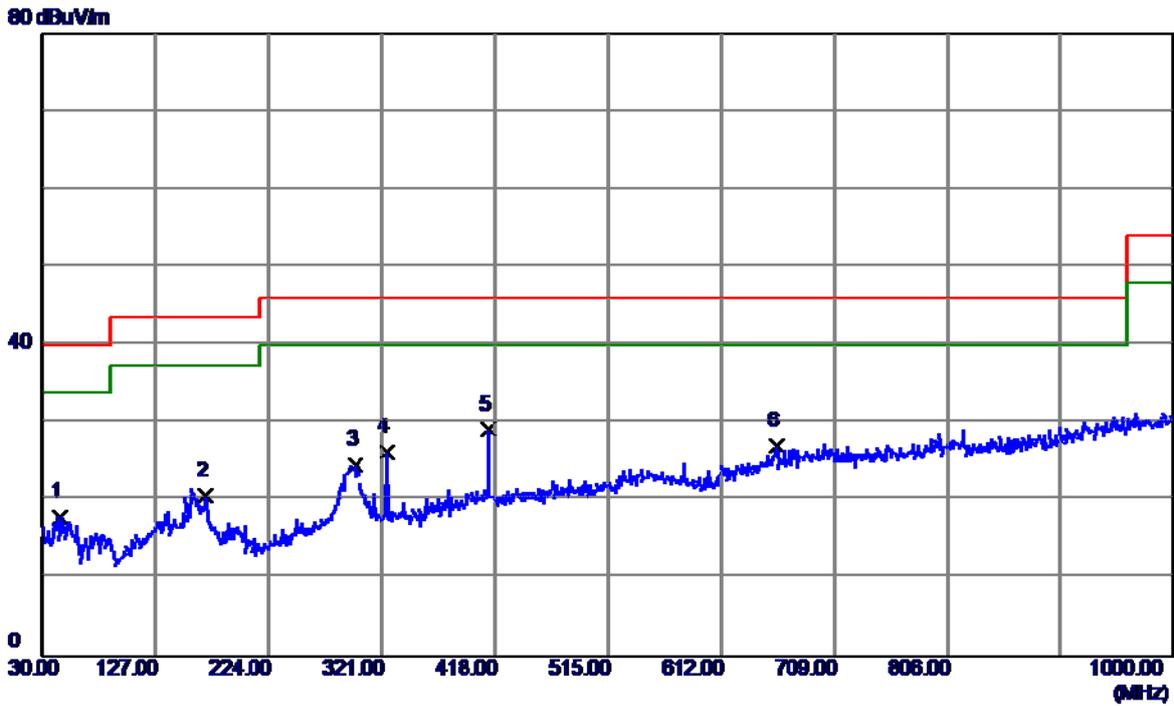


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	45.5200	29.88	-11.98	17.90	40.00	-22.10	QP
2	169.6799	31.47	-10.76	20.71	43.50	-22.79	QP
3	298.2049	34.61	-9.95	24.66	46.00	-21.34	QP
4	324.8800	36.61	-10.35	26.26	46.00	-19.74	QP
5 *	412.6650	36.30	-7.17	29.13	46.00	-16.87	QP
6	659.0450	28.60	-1.50	27.10	46.00	-18.90	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

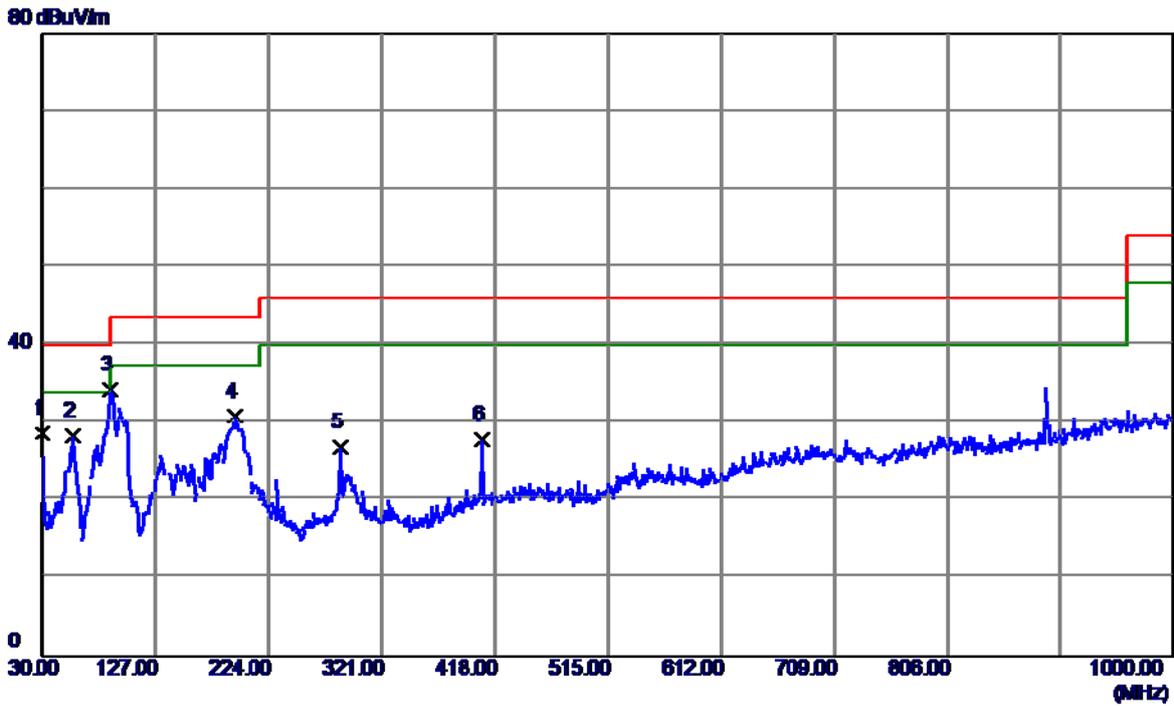


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	41.41	-12.80	28.61	40.00	-11.39	QP
2	56.1900	40.85	-12.60	28.25	40.00	-11.75	QP
3 *	88.6850	50.64	-16.36	34.28	43.50	-9.22	QP
4	194.9000	44.21	-13.41	30.80	43.50	-12.70	QP
5	285.5950	37.66	-10.75	26.91	46.00	-19.09	QP
6	406.8450	35.08	-7.18	27.90	46.00	-18.10	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Treyy Chen		

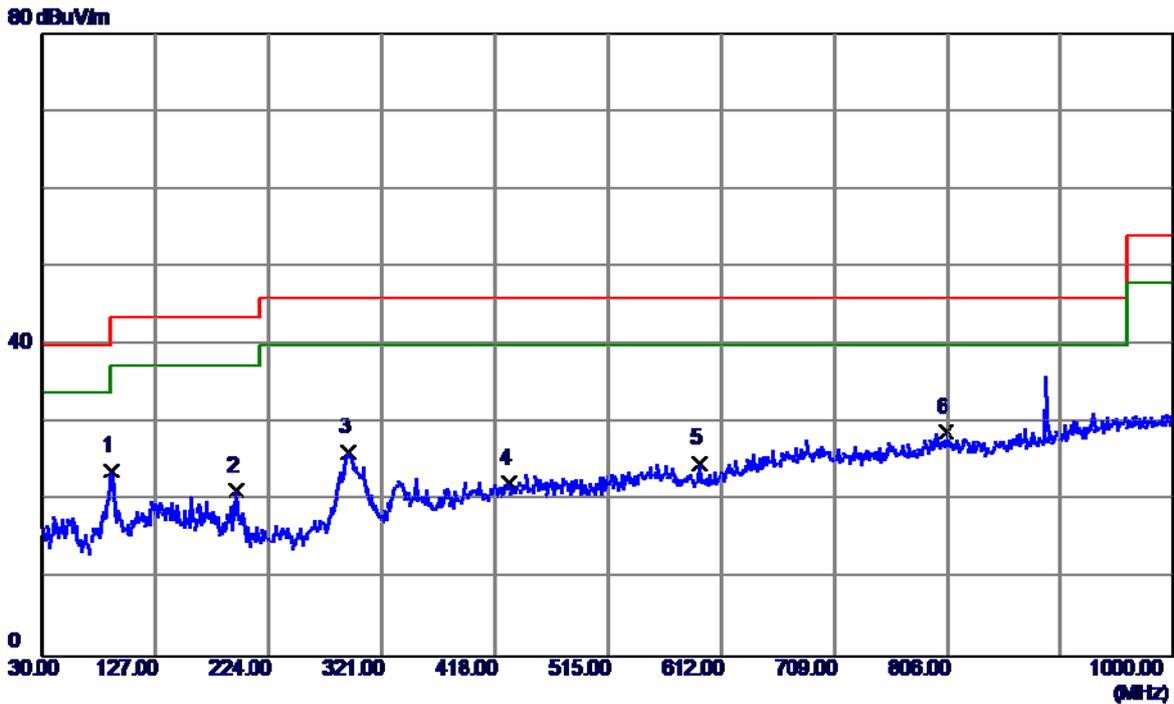


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	89.6550	40.25	-16.39	23.86	43.50	-19.64	QP
2	195.8700	34.67	-13.46	21.21	43.50	-22.29	QP
3	292.3850	36.15	-9.97	26.18	46.00	-19.82	QP
4	429.6400	29.42	-7.13	22.29	46.00	-23.71	QP
5	594.0550	29.52	-4.78	24.74	46.00	-21.26	QP
6 *	805.0300	28.15	0.61	28.76	46.00	-17.24	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

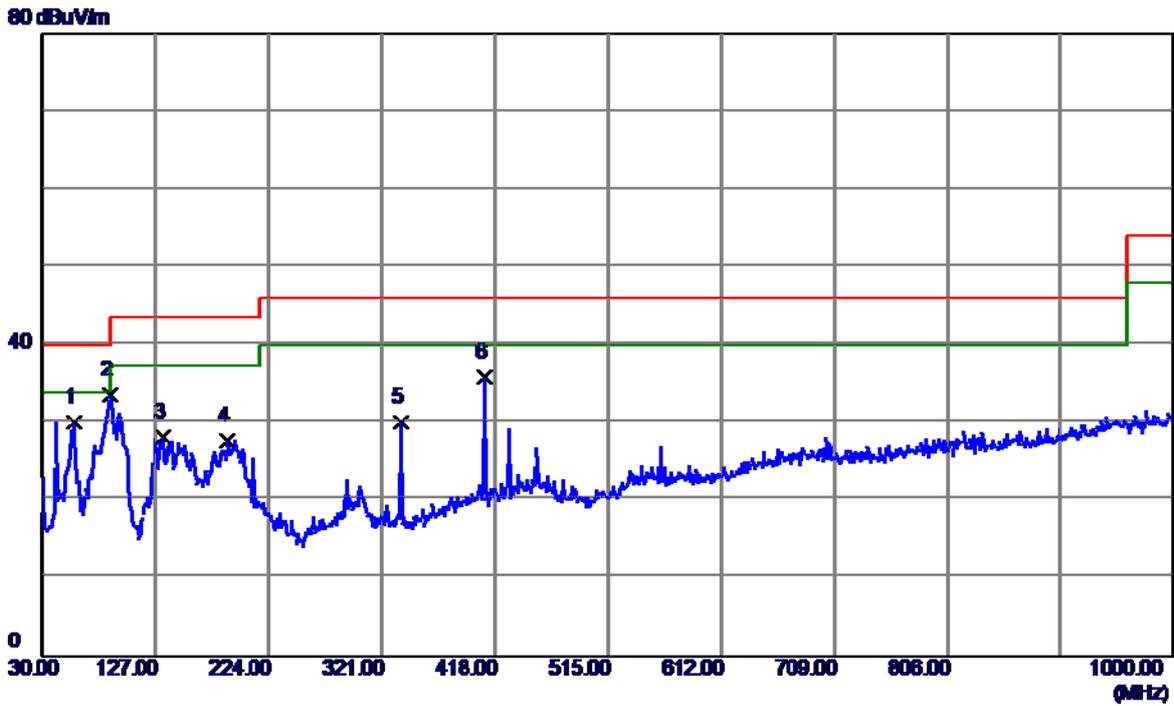


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.6750	42.73	-12.62	30.11	40.00	-9.89	QP
2 *	87.7149	49.96	-16.32	33.64	40.00	-6.36	QP
3	133.3049	39.56	-11.38	28.18	43.50	-15.32	QP
4	188.5950	40.78	-13.05	27.73	43.50	-15.77	QP
5	337.0050	40.63	-10.55	30.08	46.00	-15.92	QP
6	409.2700	43.04	-7.18	35.86	46.00	-10.14	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

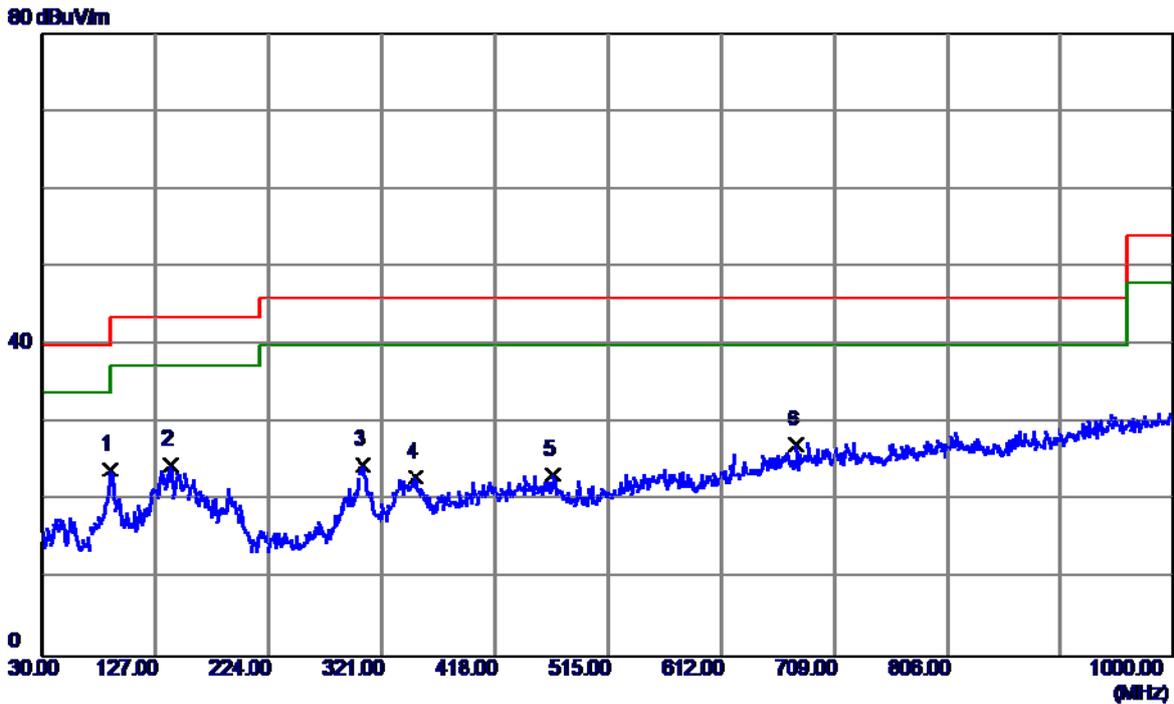


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	88.2000	40.36	-16.34	24.02	43.50	-19.48	QP
2	140.0950	36.51	-11.88	24.63	43.50	-18.87	QP
3	304.9950	34.64	-10.02	24.62	46.00	-21.38	QP
4	350.1000	33.84	-10.76	23.08	46.00	-22.92	QP
5	467.9550	30.62	-7.28	23.34	46.00	-22.66	QP
6 *	676.9900	28.33	-1.13	27.20	46.00	-18.80	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:QuanCheng		
Test Engineer	Trey Chen		

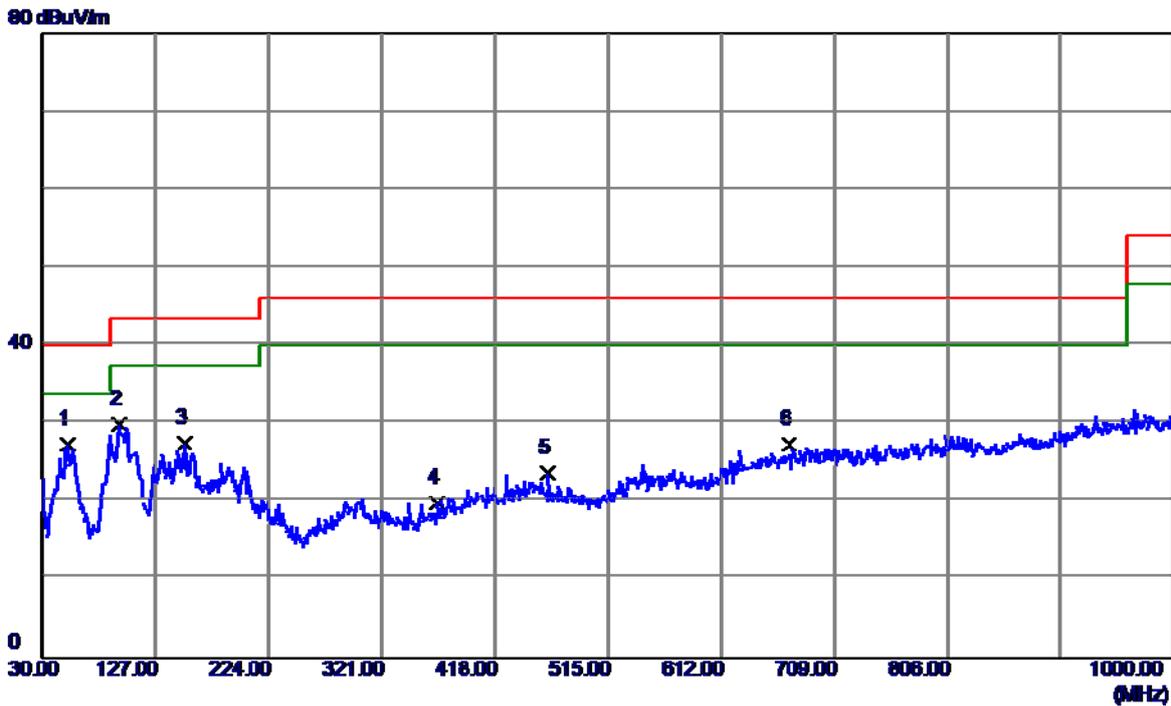


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	51.3400	39.74	-12.36	27.38	40.00	-12.62	QP
2	95.4750	46.06	-16.10	29.96	43.50	-13.54	QP
3	152.2200	39.63	-12.06	27.57	43.50	-15.93	QP
4	368.5300	29.26	-9.45	19.81	46.00	-26.19	QP
5	463.5900	30.90	-7.23	23.67	46.00	-22.33	QP
6	670.2000	28.69	-1.27	27.42	46.00	-18.58	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:QuanCheng		
Test Engineer	Trey Chen		

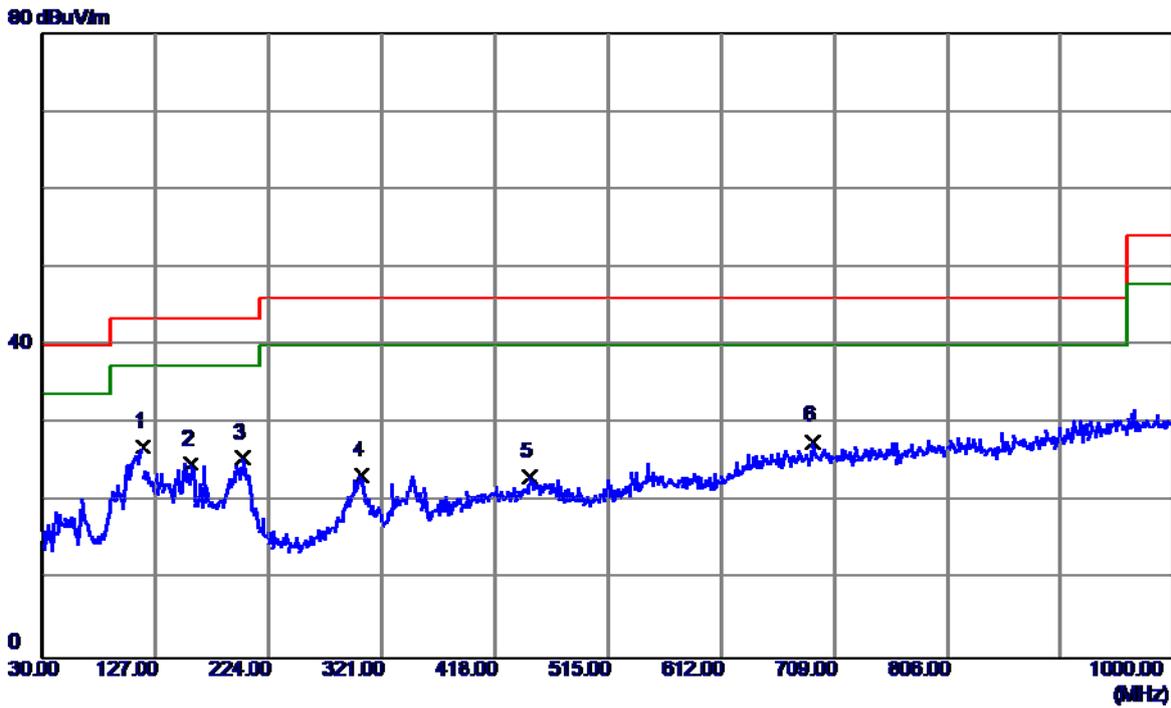


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	115.8450	40.13	-13.13	27.00	43.50	-16.50	QP
2	157.0700	37.25	-12.37	24.88	43.50	-18.62	QP
3	201.6900	39.28	-13.72	25.56	43.50	-17.94	QP
4	304.0250	33.41	-10.01	23.40	46.00	-22.60	QP
5	448.0700	30.22	-7.08	23.14	46.00	-22.86	QP
6	690.5700	28.61	-0.85	27.76	46.00	-18.24	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:LianChuang		
Test Engineer	Trey Chen		

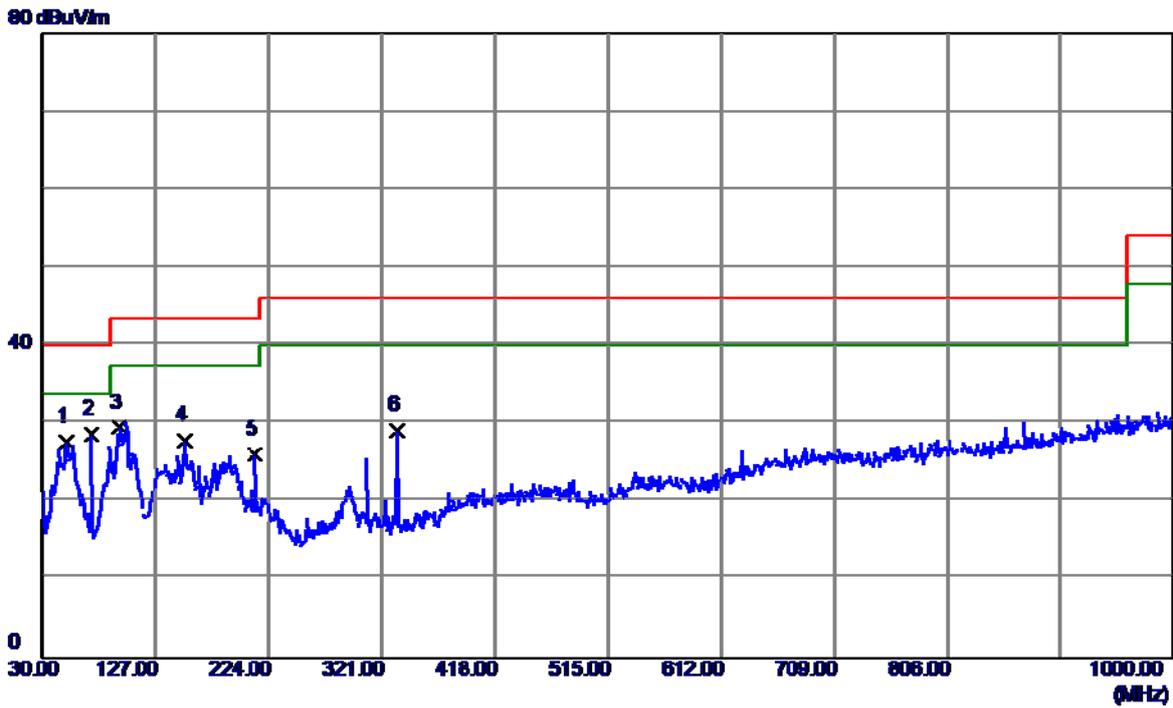


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.3700	39.76	-12.12	27.64	40.00	-12.36	QP
2 *	72.1950	44.32	-15.64	28.68	40.00	-11.32	QP
3	95.9600	45.45	-15.93	29.52	43.50	-13.98	QP
4	151.7350	39.88	-12.03	27.85	43.50	-15.65	QP
5	212.3600	40.19	-14.07	26.12	43.50	-17.38	QP
6	334.0950	39.62	-10.51	29.11	46.00	-16.89	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:LianChuang		
Test Engineer	Trey Chen		

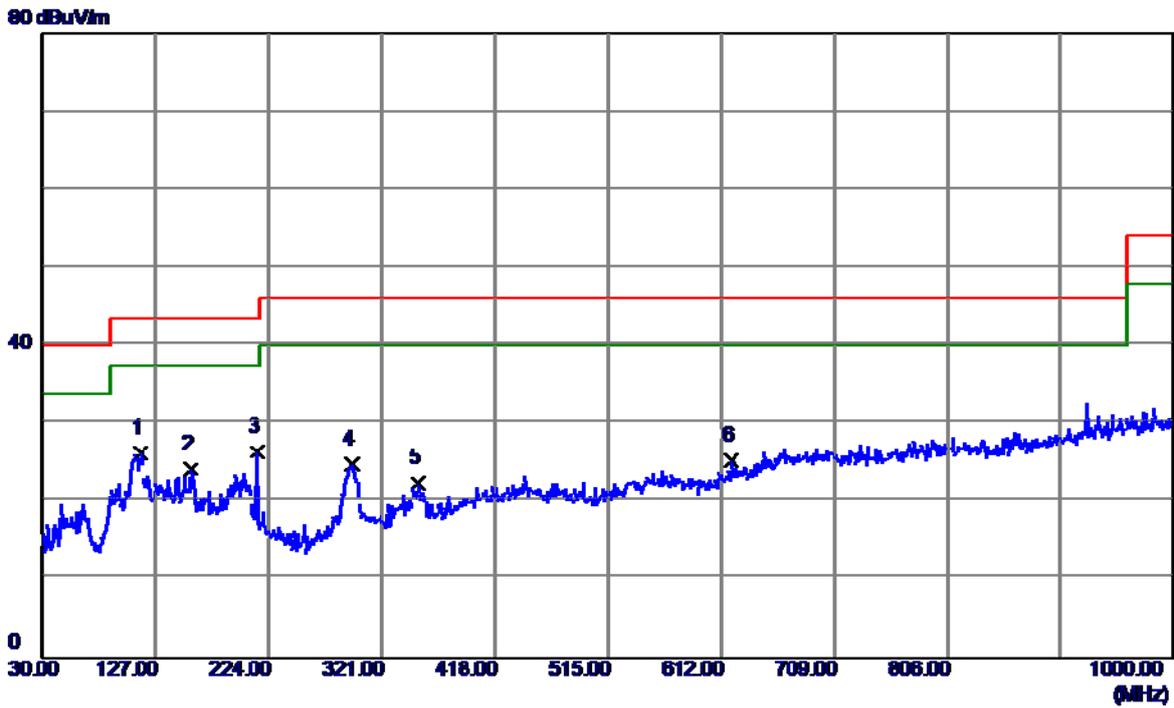


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	114.3900	39.51	-13.31	26.20	43.50	-17.30	QP
2	157.5549	36.58	-12.40	24.18	43.50	-19.32	QP
3 *	214.3000	40.40	-14.04	26.36	43.50	-17.14	QP
4	294.8100	34.75	-9.96	24.79	46.00	-21.21	QP
5	352.0400	32.98	-10.62	22.36	46.00	-23.64	QP
6	620.7300	28.81	-3.53	25.28	46.00	-20.72	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:MERRY		
Test Engineer	Trey Chen		

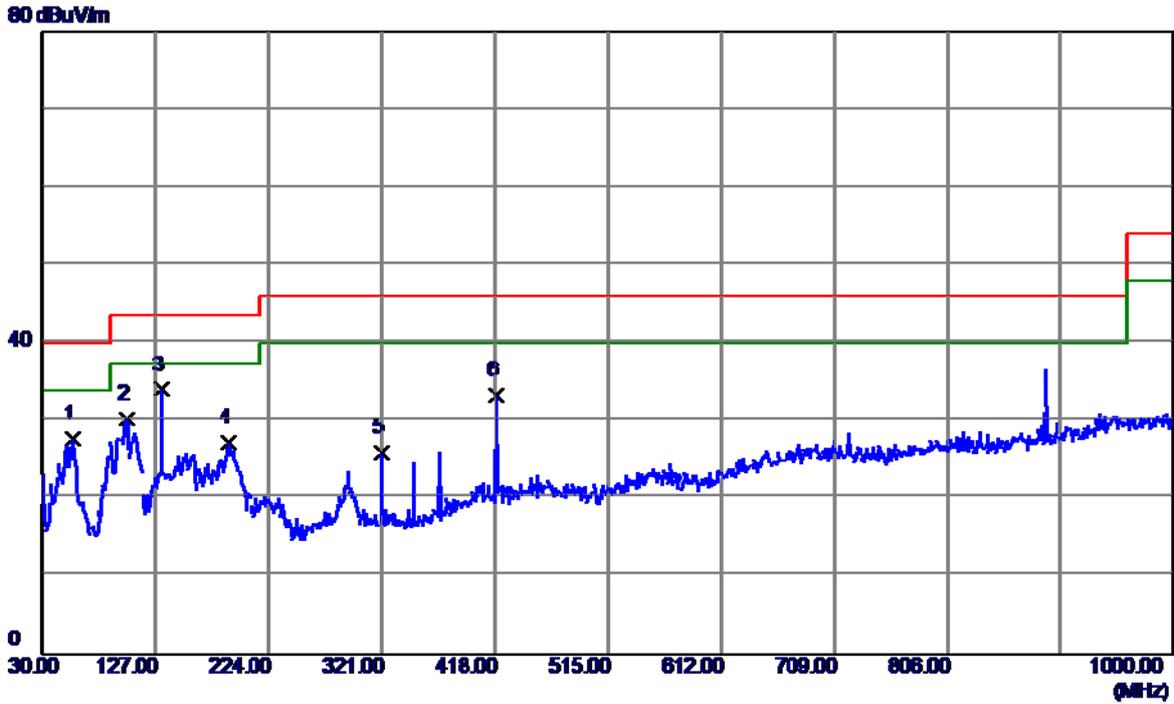


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.1900	40.31	-12.60	27.71	40.00	-12.29	QP
2	101.7800	44.58	-14.41	30.17	43.50	-13.33	QP
3 *	132.3350	45.31	-11.31	34.00	43.50	-9.50	QP
4	189.0800	40.30	-13.10	27.20	43.50	-16.30	QP
5	320.5150	36.16	-10.28	25.88	46.00	-20.12	QP
6	418.9700	40.36	-7.15	33.21	46.00	-12.79	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:MERRY		
Test Engineer	Treyy Chen		

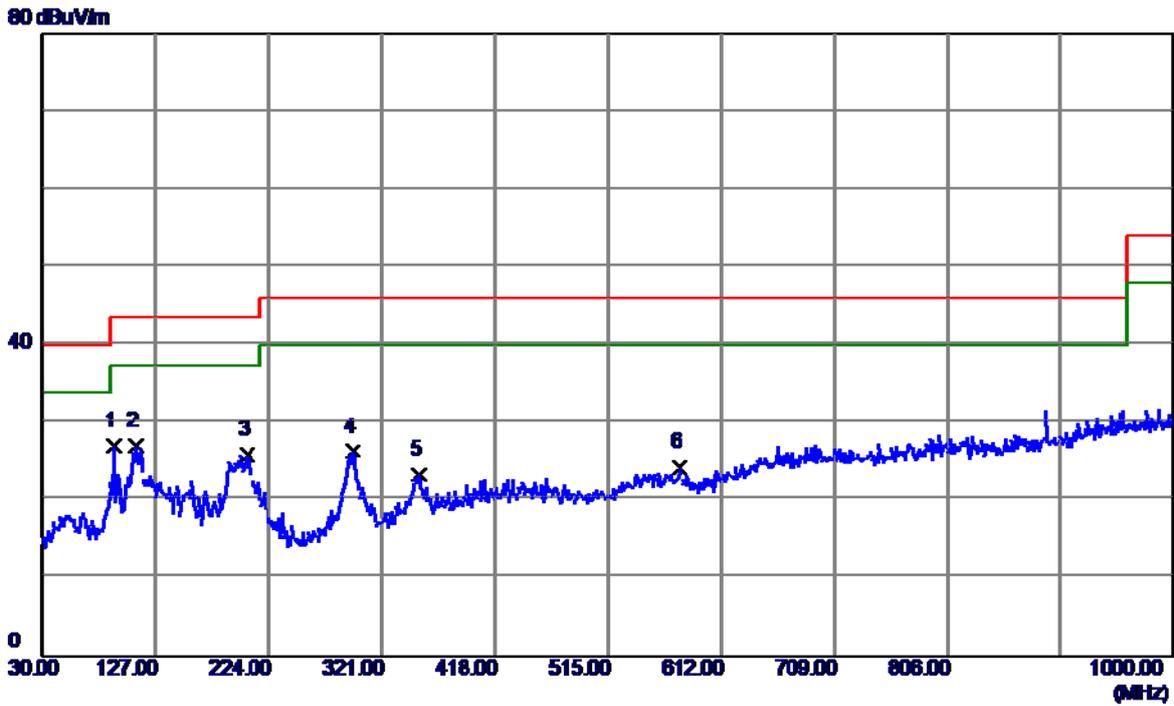


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	91.1100	43.43	-16.37	27.06	43.50	-16.44	QP
2 *	109.5400	41.01	-13.90	27.11	43.50	-16.39	QP
3	206.0549	39.79	-13.92	25.87	43.50	-17.63	QP
4	295.7800	36.28	-9.96	26.32	46.00	-19.68	QP
5	353.0100	33.87	-10.56	23.31	46.00	-22.69	QP
6	576.1100	28.95	-4.64	24.31	46.00	-21.69	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:Goertek		
Test Engineer	Treyy Chen		

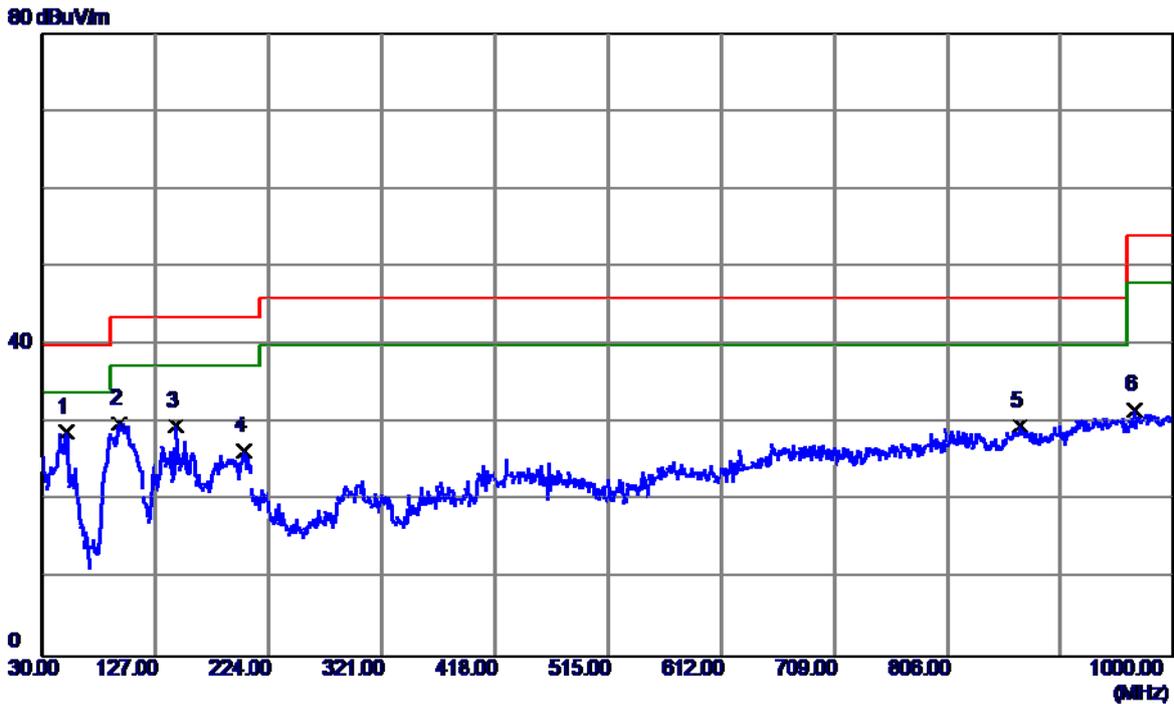


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	50.3700	40.96	-12.12	28.84	40.00	-11.16	QP
2	95.4750	46.06	-16.10	29.96	43.50	-13.54	QP
3	143.9750	41.56	-11.89	29.67	43.50	-13.83	QP
4	202.1750	40.09	-13.74	26.35	43.50	-17.15	QP
5	868.5650	28.61	1.00	29.61	46.00	-16.39	QP
6	966.5350	28.30	3.44	31.74	54.00	-22.26	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)Earphone:Goertek		
Test Engineer	Trey Chen		

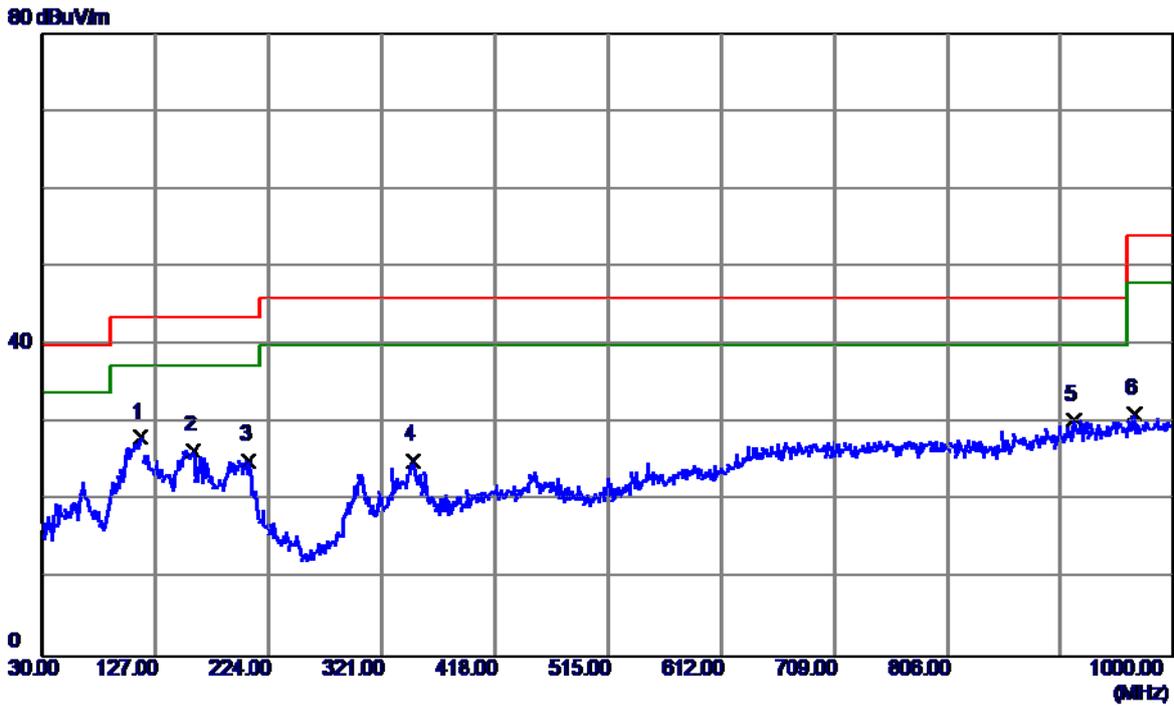


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	113.9050	41.51	-13.37	28.14	43.50	-15.36	QP
2	159.4950	39.01	-12.53	26.48	43.50	-17.02	QP
3	206.5399	39.14	-13.94	25.20	43.50	-18.30	QP
4	347.6750	35.93	-10.73	25.20	46.00	-20.80	QP
5	914.6400	28.22	2.13	30.35	46.00	-15.65	QP
6	966.5350	27.74	3.44	31.18	54.00	-22.82	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

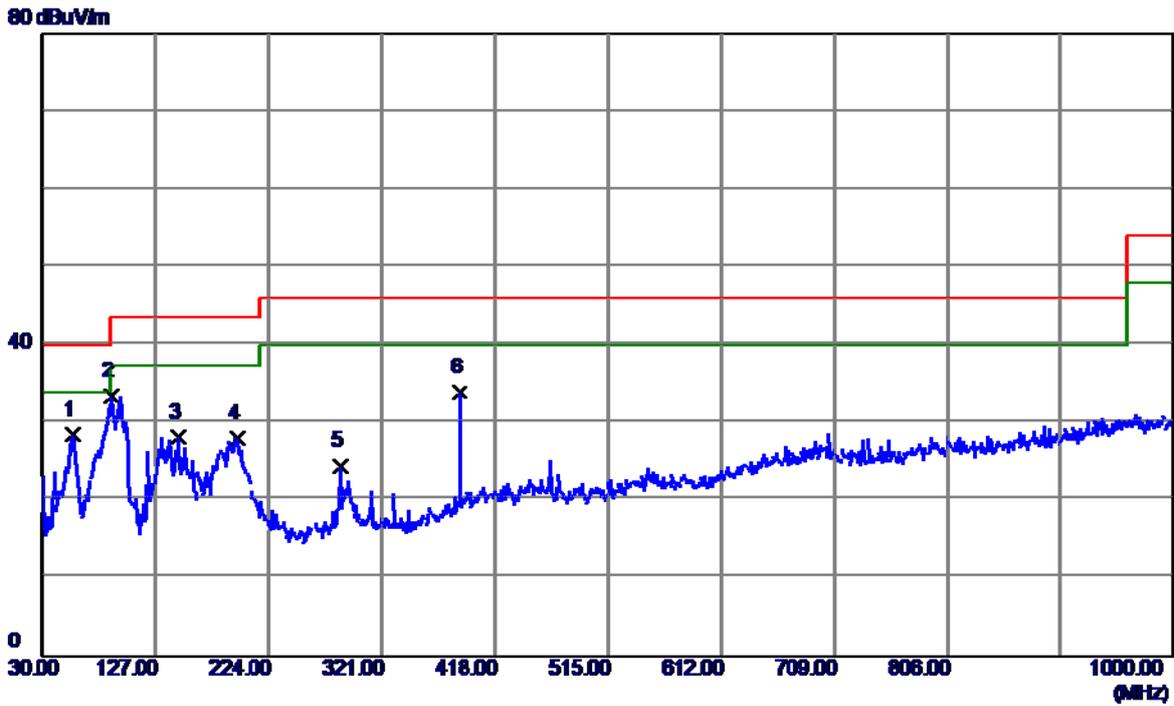


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.1900	41.06	-12.60	28.46	40.00	-11.54	QP
2 *	89.1700	49.87	-16.37	33.50	43.50	-10.00	QP
3	145.9149	40.06	-11.90	28.16	43.50	-15.34	QP
4	196.8400	41.47	-13.50	27.97	43.50	-15.53	QP
5	285.1099	35.37	-10.83	24.54	46.00	-21.46	QP
6	387.4450	42.08	-8.10	33.98	46.00	-12.02	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Treyy Chen		

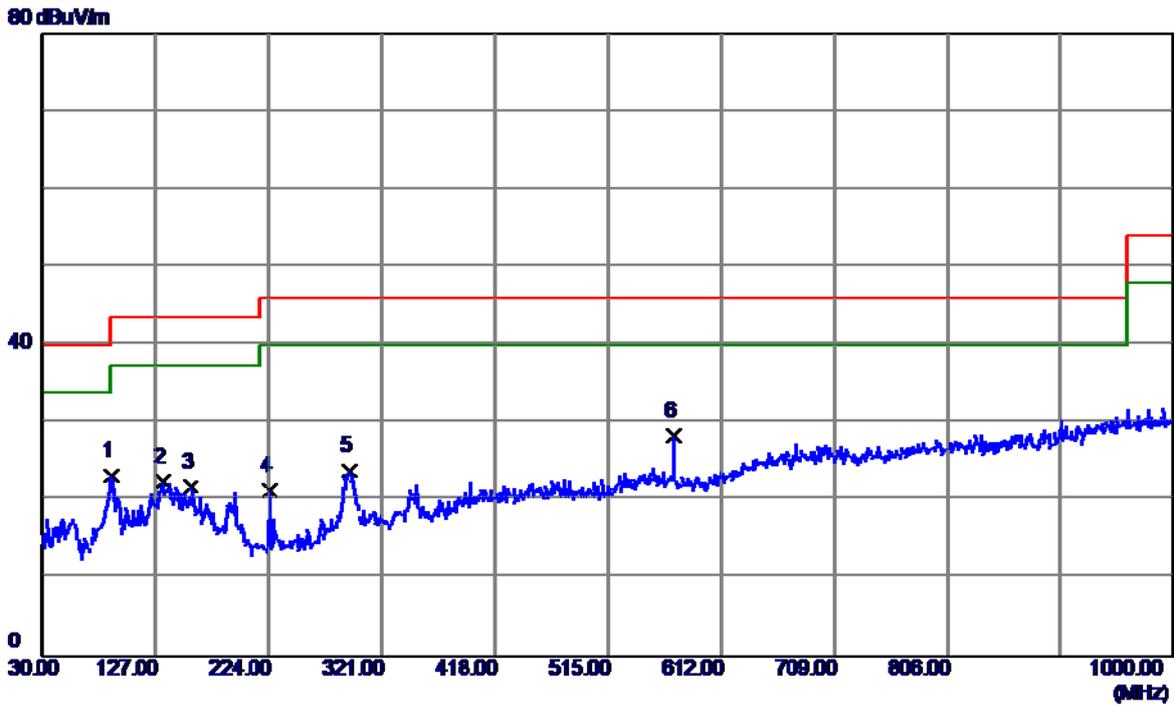


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	89.1700	39.51	-16.37	23.14	43.50	-20.36	QP
2	133.3049	33.75	-11.38	22.37	43.50	-21.13	QP
3	157.5549	34.15	-12.40	21.75	43.50	-21.75	QP
4	225.4550	34.66	-13.39	21.27	46.00	-24.73	QP
5	292.8700	33.82	-9.97	23.85	46.00	-22.15	QP
6 *	570.7750	32.96	-4.60	28.36	46.00	-17.64	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

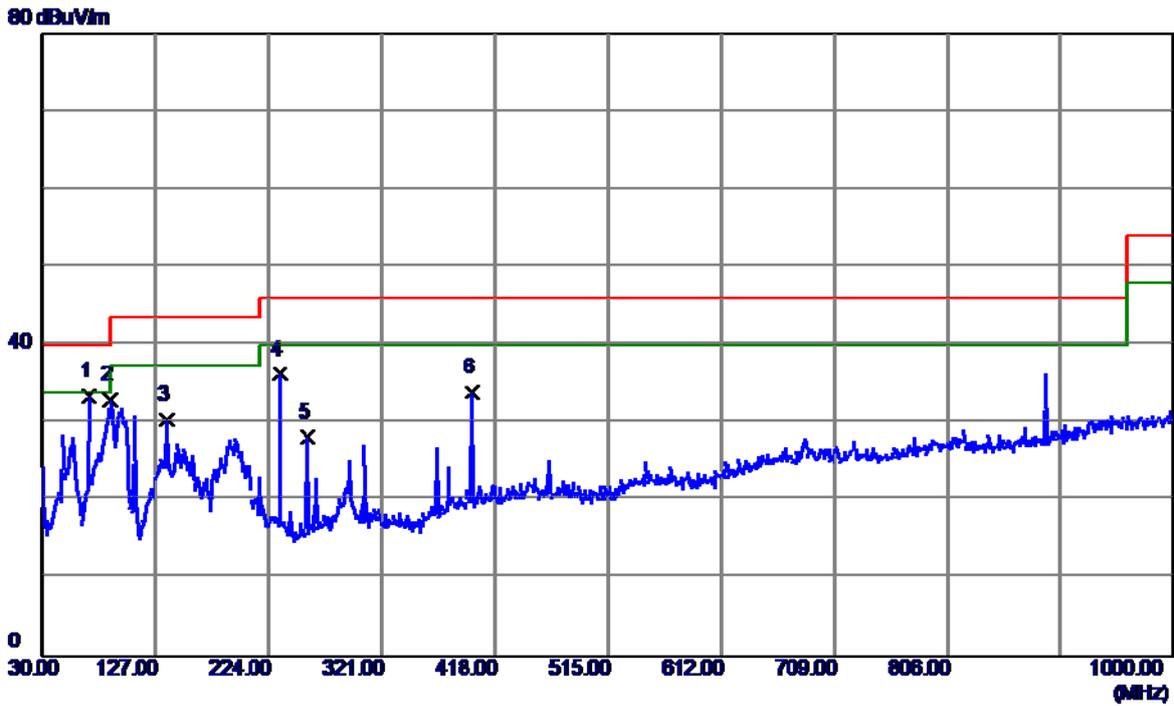


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	70.2550	48.67	-15.27	33.40	40.00	-6.60	QP
2	88.6850	49.33	-16.36	32.97	43.50	-10.53	QP
3	136.7000	42.04	-11.63	30.41	43.50	-13.09	QP
4	233.2150	49.31	-13.07	36.24	46.00	-9.76	QP
5	256.9800	41.19	-13.03	28.16	46.00	-17.84	QP
6	398.6000	41.21	-7.30	33.91	46.00	-12.09	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Treey Chen		

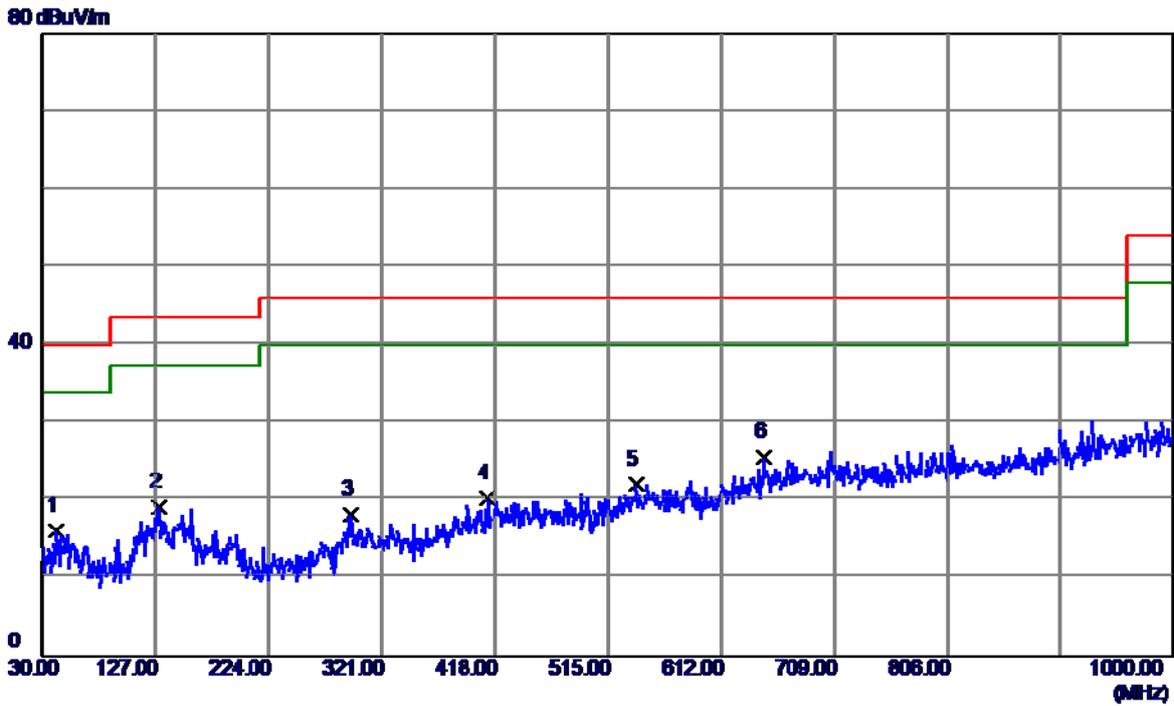


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.6400	28.26	-12.17	16.09	40.00	-23.91	QP
2	130.3950	30.40	-11.17	19.23	43.50	-24.27	QP
3	293.8400	28.14	-9.96	18.18	46.00	-27.82	QP
4	411.2100	27.43	-7.17	20.26	46.00	-25.74	QP
5	539.2500	27.17	-5.13	22.04	46.00	-23.96	QP
6 *	648.3750	27.35	-1.79	25.56	46.00	-20.44	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

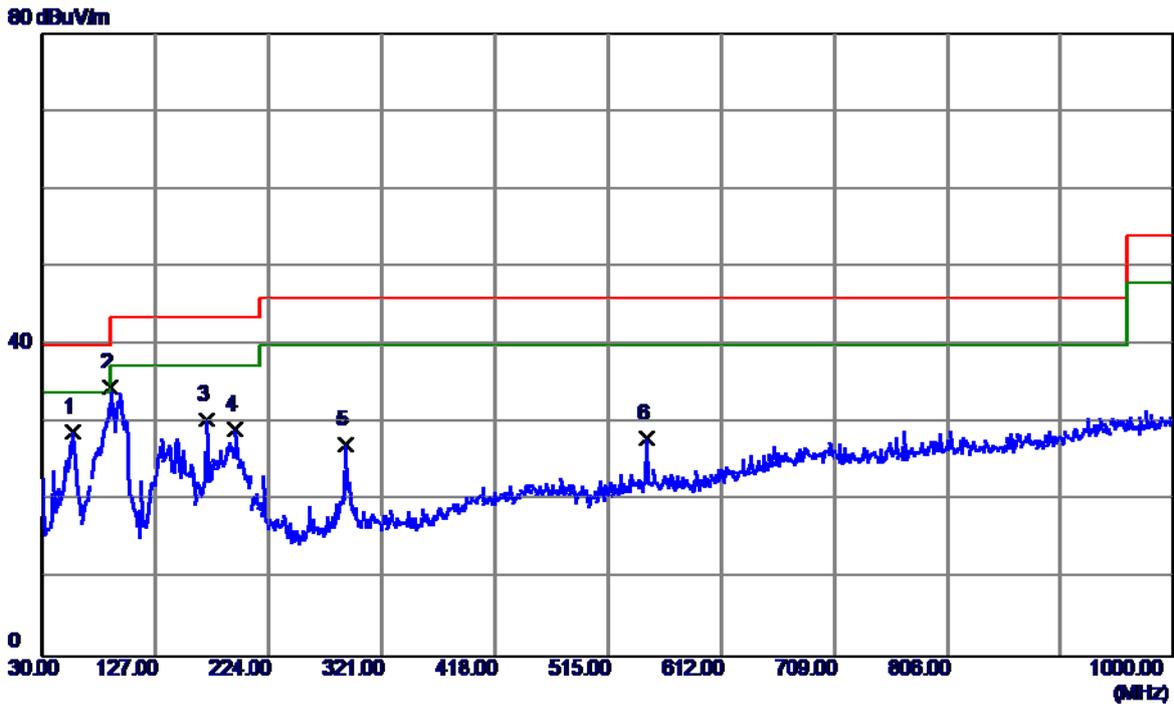

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.1900	41.45	-12.60	28.85	40.00	-11.15	QP
2 *	88.6850	50.93	-16.36	34.57	43.50	-8.93	QP
3	171.6200	41.35	-10.94	30.41	43.50	-13.09	QP
4	195.3850	42.52	-13.43	29.09	43.50	-14.41	QP
5	289.9600	37.17	-9.99	27.18	46.00	-18.82	QP
6	547.9800	32.58	-4.57	28.01	46.00	-17.99	QP

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:FF+BATTERY:DESAY(LG)		
Test Engineer	Treyy Chen		

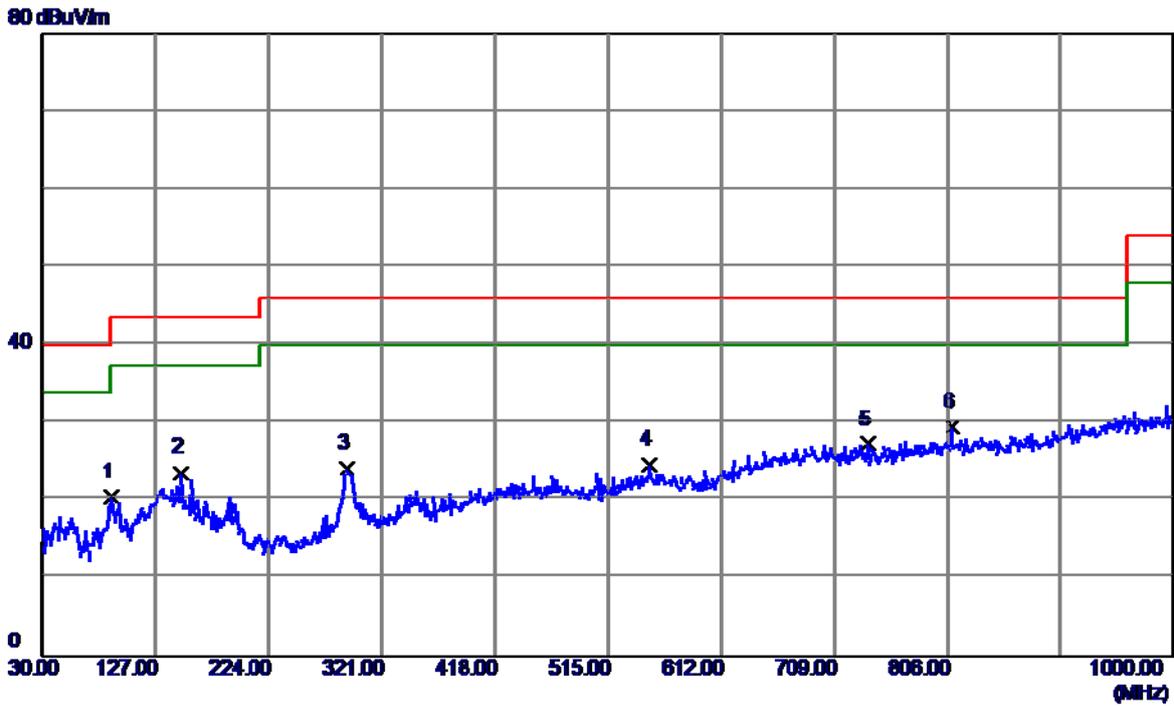


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	89.1700	36.78	-16.37	20.41	43.50	-23.09	QP
2	148.8250	35.51	-11.91	23.60	43.50	-19.90	QP
3	290.9300	34.17	-9.98	24.19	46.00	-21.81	QP
4	550.8900	29.06	-4.45	24.61	46.00	-21.39	QP
5	738.1000	28.10	-0.82	27.28	46.00	-18.72	QP
6 *	809.8800	28.82	0.61	29.43	46.00	-16.57	QP

4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:FF		
Test Engineer	Trey Chen		

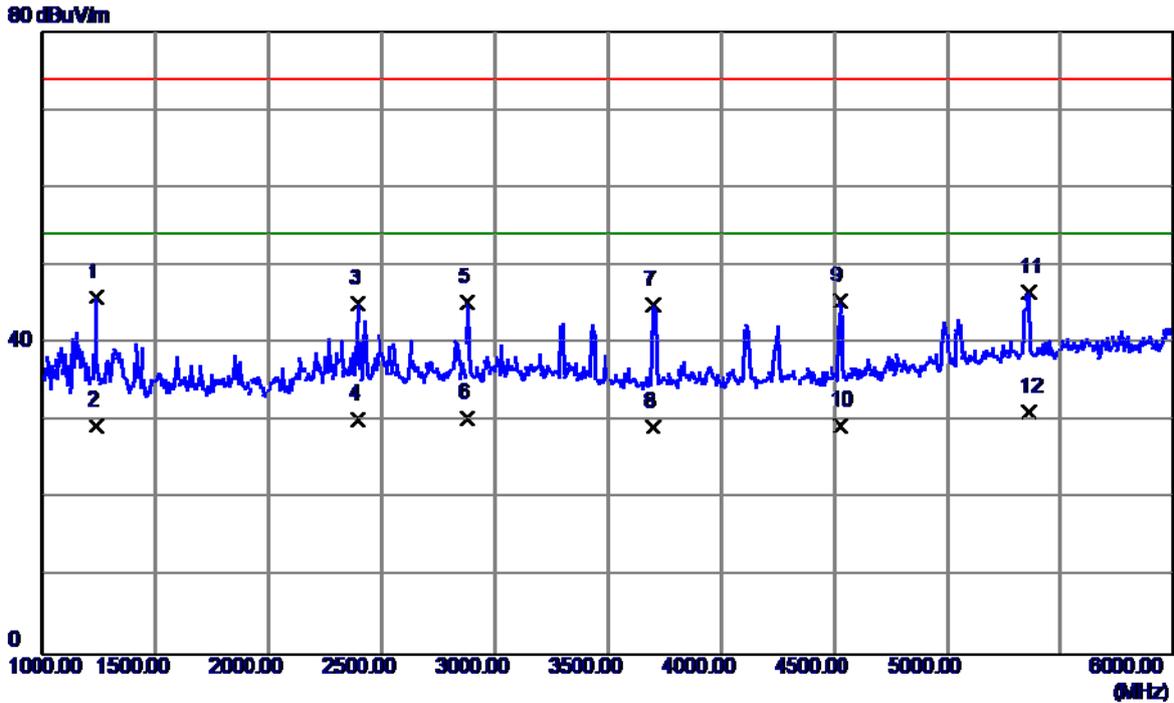


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1237.5000	51.75	-5.88	45.87	74.00	-28.13	Peak
2	1237.5000	35.27	-5.88	29.39	54.00	-24.61	AVG
3	2392.5000	45.53	-0.42	45.11	74.00	-28.89	Peak
4	2392.5000	30.66	-0.42	30.24	54.00	-23.76	AVG
5	2880.0000	43.43	1.86	45.29	74.00	-28.71	Peak
6	2880.0000	28.47	1.86	30.33	54.00	-23.67	AVG
7	3700.0000	42.53	2.44	44.97	74.00	-29.03	Peak
8	3700.0000	26.81	2.44	29.25	54.00	-24.75	AVG
9	4525.0000	41.51	4.00	45.51	74.00	-28.49	Peak
10	4525.0000	25.48	4.00	29.48	54.00	-24.52	AVG
11	5360.0000	38.99	7.53	46.52	74.00	-27.48	Peak
12 *	5360.0000	23.74	7.53	31.27	54.00	-22.73	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:FF		
Test Engineer	Trey Chen		

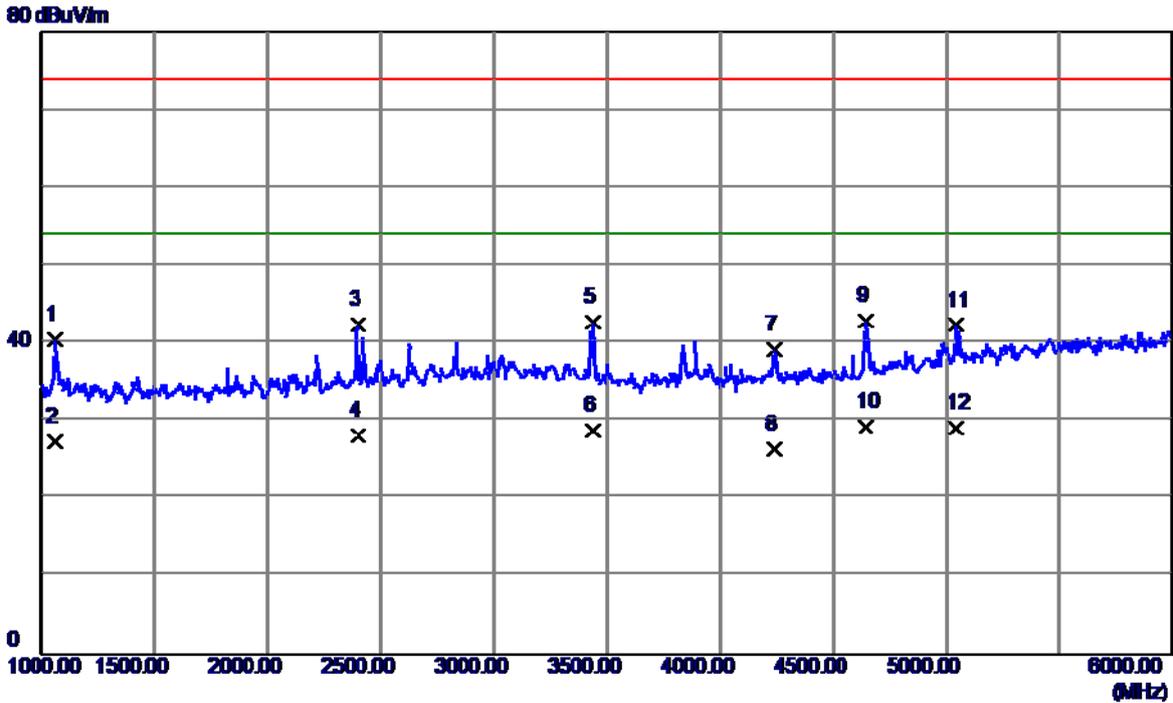


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1062.5000	47.00	-6.51	40.49	74.00	-33.51	Peak
2	1062.5000	33.91	-6.51	27.40	54.00	-26.60	AVG
3	2397.5000	42.80	-0.39	42.41	74.00	-31.59	Peak
4	2397.5000	28.61	-0.39	28.22	54.00	-25.78	AVG
5	3437.5000	40.51	2.27	42.78	74.00	-31.22	Peak
6	3437.5000	26.48	2.27	28.75	54.00	-25.25	AVG
7	4237.5000	35.94	3.27	39.21	74.00	-34.79	Peak
8	4237.5000	23.15	3.27	26.42	54.00	-27.58	AVG
9	4645.0000	38.33	4.58	42.91	74.00	-31.09	Peak
10 *	4645.0000	24.76	4.58	29.34	54.00	-24.66	AVG
11	5045.0000	35.86	6.46	42.32	74.00	-31.68	Peak
12	5045.0000	22.72	6.46	29.18	54.00	-24.82	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:LX		
Test Engineer	Treey Chen		

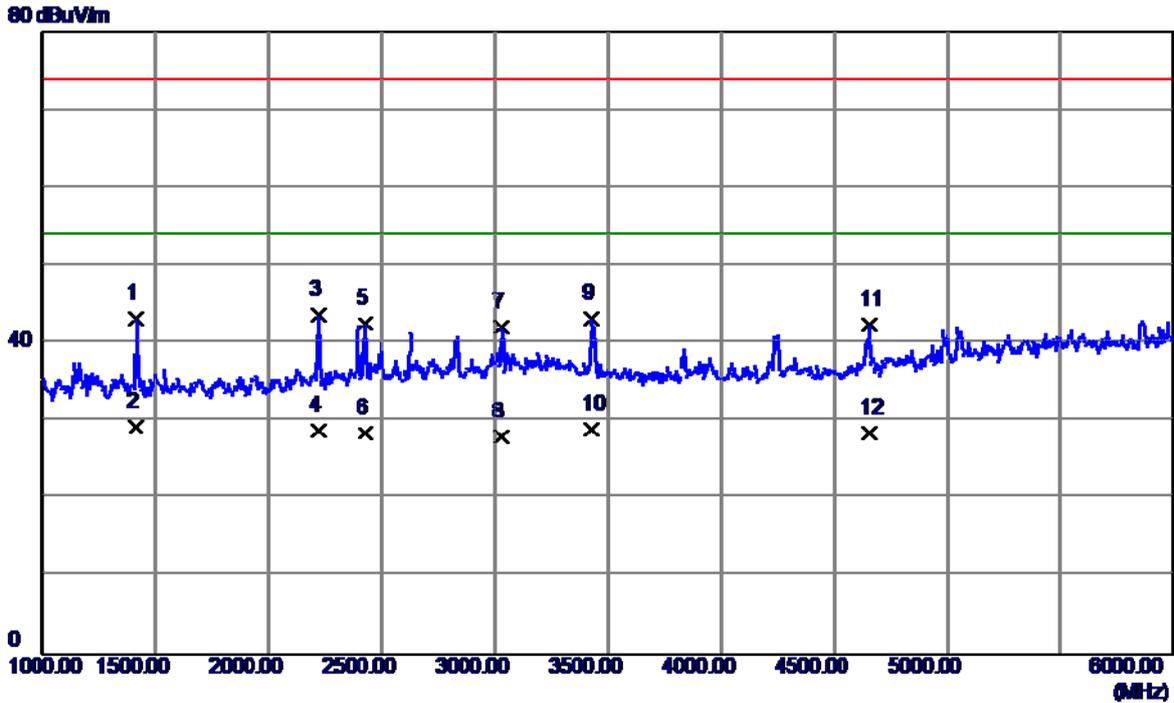


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1412.5000	48.40	-5.26	43.14	74.00	-30.86	Peak
2 *	1412.5000	34.53	-5.26	29.27	54.00	-24.73	AVG
3	2220.0000	44.99	-1.36	43.63	74.00	-30.37	Peak
4	2220.0000	30.17	-1.36	28.81	54.00	-25.19	AVG
5	2427.5000	42.75	-0.23	42.52	74.00	-31.48	Peak
6	2427.5000	28.77	-0.23	28.54	54.00	-25.46	AVG
7	3030.0000	39.75	2.39	42.14	74.00	-31.86	Peak
8	3030.0000	25.61	2.39	28.00	54.00	-26.00	AVG
9	3430.0000	40.98	2.28	43.26	74.00	-30.74	Peak
10	3430.0000	26.74	2.28	29.02	54.00	-24.98	AVG
11	4657.5000	37.76	4.65	42.41	74.00	-31.59	Peak
12	4657.5000	23.84	4.65	28.49	54.00	-25.51	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:LX		
Test Engineer	Trey Chen		

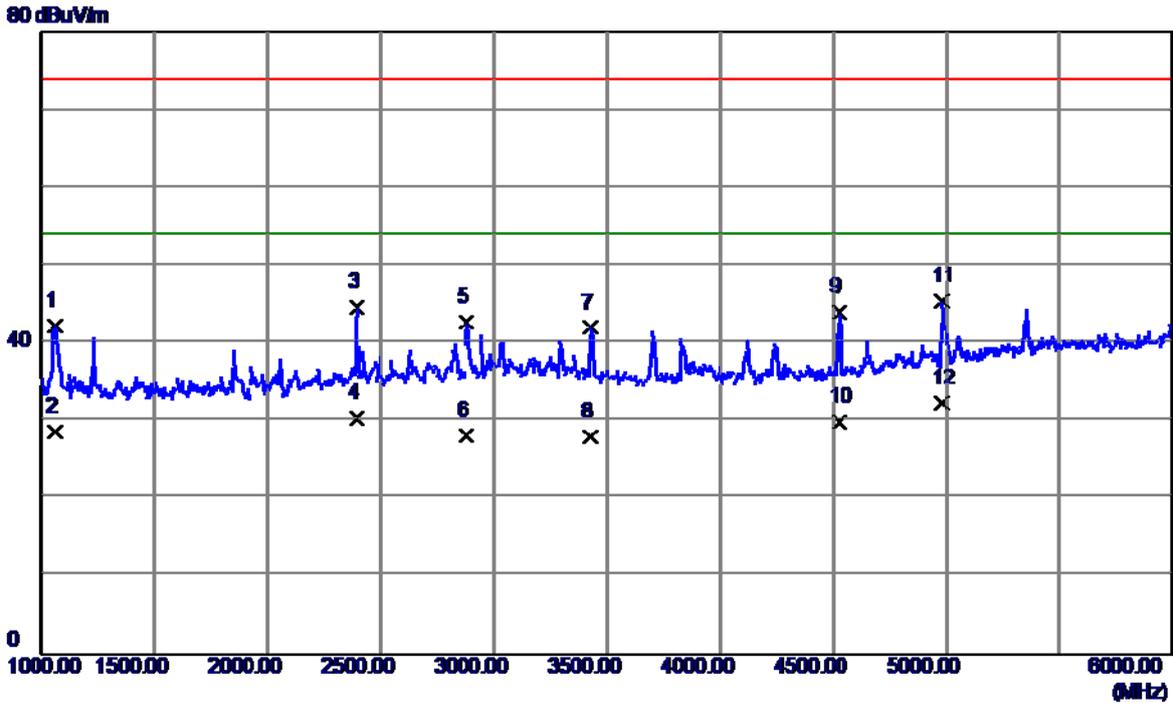


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1060.0000	48.71	-6.52	42.19	74.00	-31.81	Peak
2	1060.0000	35.16	-6.52	28.64	54.00	-25.36	AVG
3	2395.0000	44.98	-0.41	44.57	74.00	-29.43	Peak
4	2395.0000	30.76	-0.41	30.35	54.00	-23.65	AVG
5	2880.0000	40.93	1.86	42.79	74.00	-31.21	Peak
6	2880.0000	26.37	1.86	28.23	54.00	-25.77	AVG
7	3430.0000	39.72	2.28	42.00	74.00	-32.00	Peak
8	3430.0000	25.73	2.28	28.01	54.00	-25.99	AVG
9	4525.0000	39.95	4.00	43.95	74.00	-30.05	Peak
10	4525.0000	25.94	4.00	29.94	54.00	-24.06	AVG
11	4980.0000	39.16	6.21	45.37	74.00	-28.63	Peak
12 *	4980.0000	26.14	6.21	32.35	54.00	-21.65	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:PY		
Test Engineer	Treyy Chen		

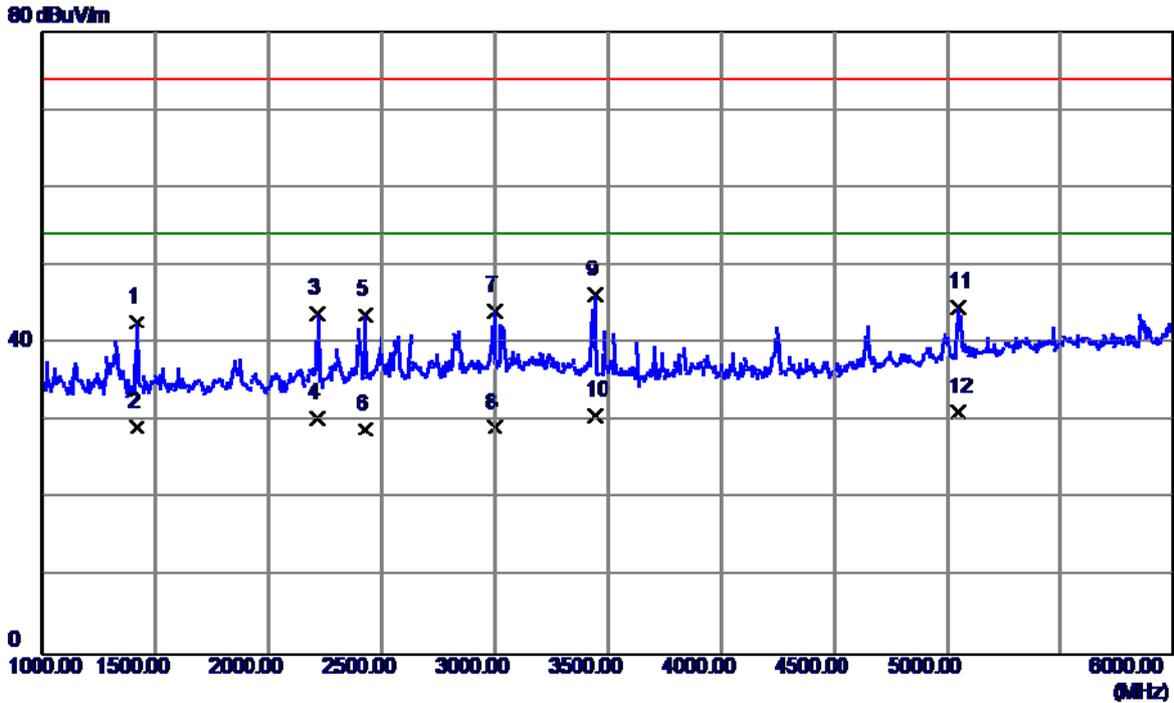


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1415.0000	47.98	-5.25	42.73	74.00	-31.27	Peak
2	1415.0000	34.57	-5.25	29.32	54.00	-24.68	AVG
3	2217.5000	45.22	-1.38	43.84	74.00	-30.16	Peak
4	2217.5000	31.74	-1.38	30.36	54.00	-23.64	AVG
5	2427.5000	43.87	-0.23	43.64	74.00	-30.36	Peak
6	2427.5000	29.22	-0.23	28.99	54.00	-25.01	AVG
7	2997.5000	41.83	2.39	44.22	74.00	-29.78	Peak
8	2997.5000	26.81	2.39	29.20	54.00	-24.80	AVG
9	3442.5000	43.96	2.27	46.23	74.00	-27.77	Peak
10	3442.5000	28.48	2.27	30.75	54.00	-23.25	AVG
11	5047.5000	38.22	6.47	44.69	74.00	-29.31	Peak
12 *	5047.5000	24.75	6.47	31.22	54.00	-22.78	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:PY		
Test Engineer	Trey Chen		

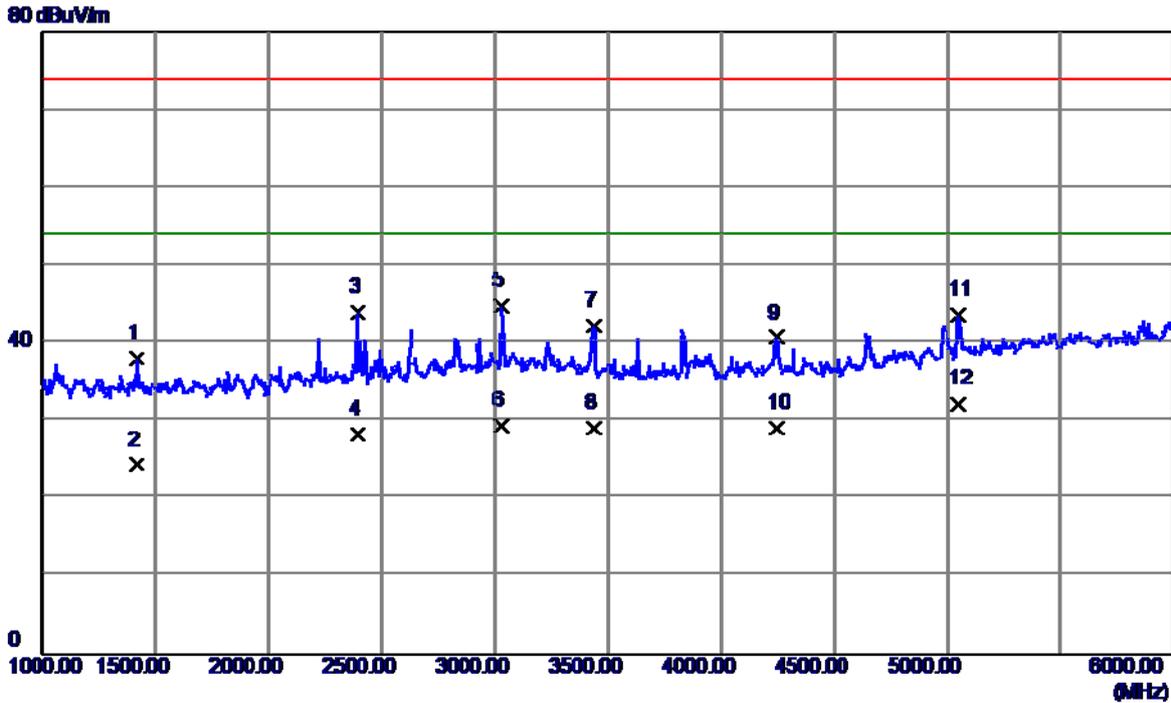


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1417.5000	43.38	-5.24	38.14	74.00	-35.86	Peak
2	1417.5000	29.64	-5.24	24.40	54.00	-29.60	AVG
3	2395.0000	44.38	-0.41	43.97	74.00	-30.03	Peak
4	2395.0000	28.66	-0.41	28.25	54.00	-25.75	AVG
5	3030.0000	42.41	2.39	44.80	74.00	-29.20	Peak
6	3030.0000	26.98	2.39	29.37	54.00	-24.63	AVG
7	3437.5000	39.91	2.27	42.18	74.00	-31.82	Peak
8	3437.5000	26.81	2.27	29.08	54.00	-24.92	AVG
9	4242.5000	37.44	3.28	40.72	74.00	-33.28	Peak
10	4242.5000	25.82	3.28	29.10	54.00	-24.90	AVG
11	5052.5000	37.15	6.49	43.64	74.00	-30.36	Peak
12 *	5052.5000	25.75	6.49	32.24	54.00	-21.76	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY+IDLE		
Note	USB Cable:CR		
Test Engineer	Treey Chen		

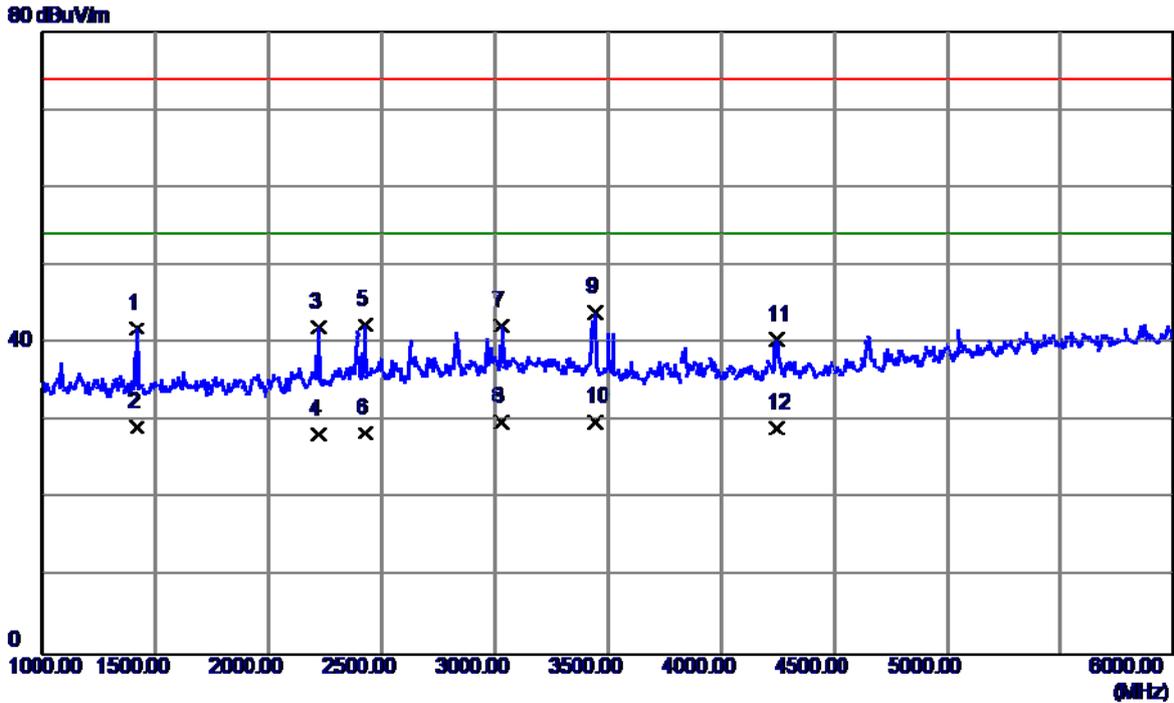


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1415.0000	47.24	-5.25	41.99	74.00	-32.01	Peak
2	1415.0000	34.48	-5.25	29.23	54.00	-24.77	AVG
3	2222.5000	43.40	-1.35	42.05	74.00	-31.95	Peak
4	2222.5000	29.68	-1.35	28.33	54.00	-25.67	AVG
5	2427.5000	42.58	-0.23	42.35	74.00	-31.65	Peak
6	2427.5000	28.68	-0.23	28.45	54.00	-25.55	AVG
7	3030.0000	39.80	2.39	42.19	74.00	-31.81	Peak
8	3030.0000	27.46	2.39	29.85	54.00	-24.15	AVG
9	3442.5000	41.72	2.27	43.99	74.00	-30.01	Peak
10 *	3442.5000	27.64	2.27	29.91	54.00	-24.09	AVG
11	4242.5000	37.22	3.28	40.50	74.00	-33.50	Peak
12	4242.5000	25.86	3.28	29.14	54.00	-24.86	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY+IDLE		
Note	USB Cable:CR		
Test Engineer	Trey Chen		

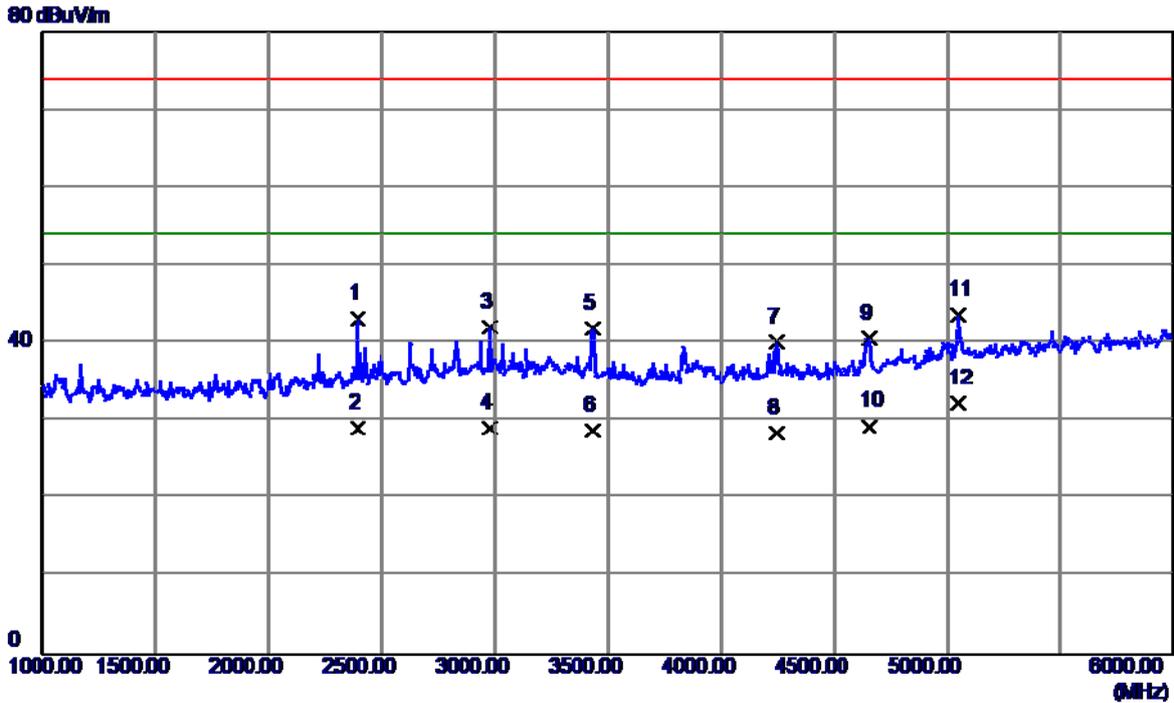


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2395.0000	43.61	-0.41	43.20	74.00	-30.80	Peak
2	2395.0000	29.56	-0.41	29.15	54.00	-24.85	AVG
3	2977.5000	39.84	2.30	42.14	74.00	-31.86	Peak
4	2977.5000	26.75	2.30	29.05	54.00	-24.95	AVG
5	3435.0000	39.67	2.27	41.94	74.00	-32.06	Peak
6	3435.0000	26.55	2.27	28.82	54.00	-25.18	AVG
7	4245.0000	36.86	3.29	40.15	74.00	-33.85	Peak
8	4245.0000	25.12	3.29	28.41	54.00	-25.59	AVG
9	4657.5000	35.98	4.65	40.63	74.00	-33.37	Peak
10	4657.5000	24.71	4.65	29.36	54.00	-24.64	AVG
11	5050.0000	37.21	6.48	43.69	74.00	-30.31	Peak
12 *	5050.0000	25.87	6.48	32.35	54.00	-21.65	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

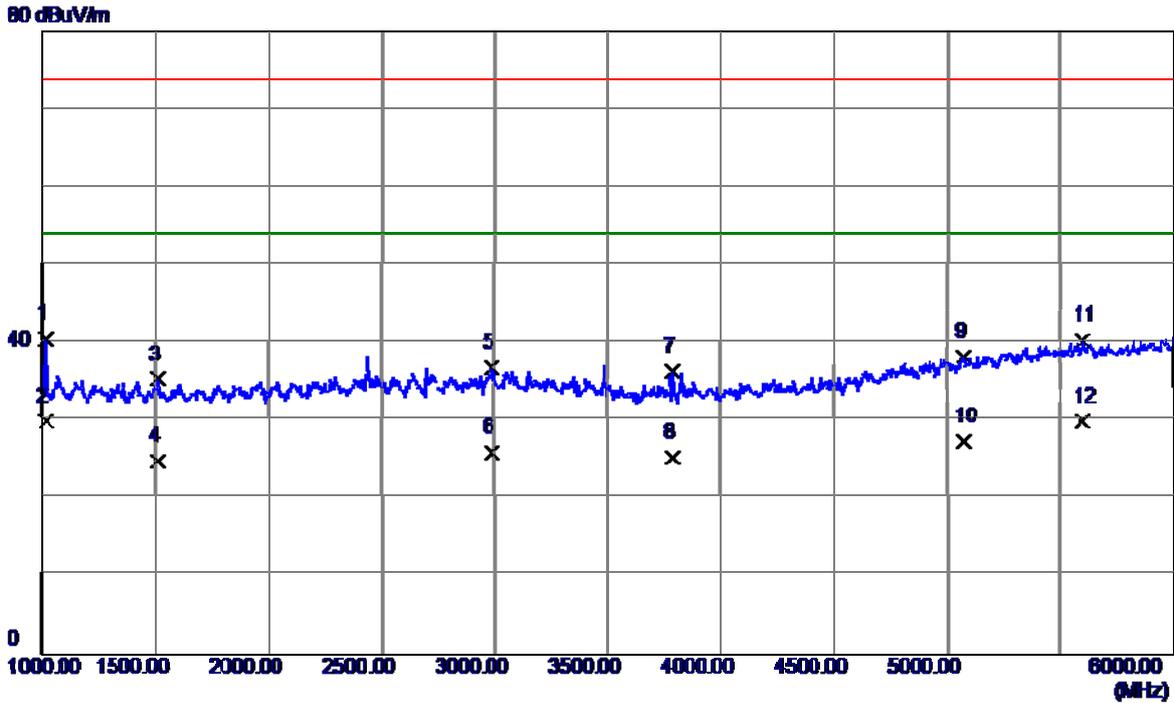


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1015.0000	47.16	-6.68	40.48	74.00	-33.52	Peak
2	1015.0000	36.66	-6.68	29.98	54.00	-24.02	AVG
3	1512.5000	40.17	-4.89	35.28	74.00	-38.72	Peak
4	1512.5000	29.68	-4.89	24.79	54.00	-29.21	AVG
5	2987.5000	34.45	2.34	36.79	74.00	-37.21	Peak
6	2987.5000	23.64	2.34	25.98	54.00	-28.02	AVG
7	3790.0000	33.74	2.52	36.26	74.00	-37.74	Peak
8	3790.0000	22.82	2.52	25.34	54.00	-28.66	AVG
9	5070.0000	31.76	6.55	38.31	74.00	-35.69	Peak
10	5070.0000	20.84	6.55	27.39	54.00	-26.61	AVG
11	5602.5000	32.26	8.10	40.36	74.00	-33.64	Peak
12 *	5602.5000	21.89	8.10	29.99	54.00	-24.01	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

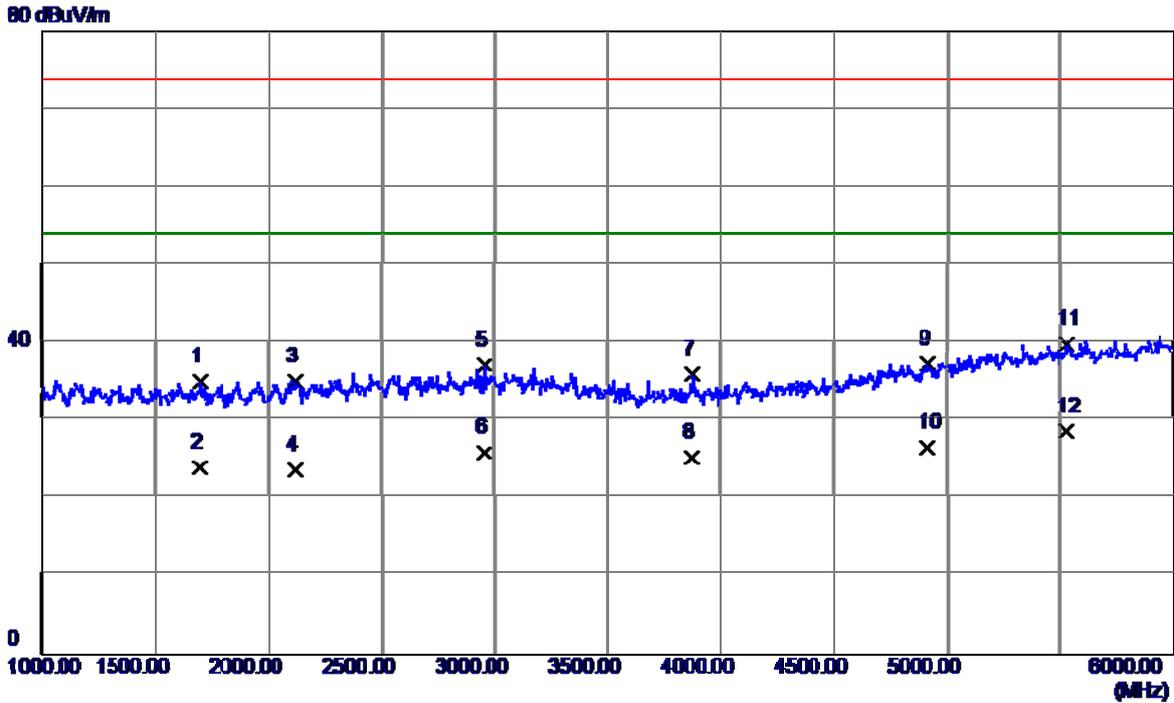


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1697.5000	39.00	-4.01	34.99	74.00	-39.01	Peak
2	1697.5000	27.94	-4.01	23.93	54.00	-30.07	AVG
3	2122.5000	36.94	-1.90	35.04	74.00	-38.96	Peak
4	2122.5000	25.63	-1.90	23.73	54.00	-30.27	AVG
5	2957.5000	34.95	2.21	37.16	74.00	-36.84	Peak
6	2957.5000	23.68	2.21	25.89	54.00	-28.11	AVG
7	3870.0000	33.39	2.60	35.99	74.00	-38.01	Peak
8	3870.0000	22.68	2.60	25.28	54.00	-28.72	AVG
9	4917.5000	31.39	5.91	37.30	74.00	-36.70	Peak
10	4917.5000	20.64	5.91	26.55	54.00	-27.45	AVG
11	5527.5000	31.74	8.03	39.77	74.00	-34.23	Peak
12 *	5527.5000	20.63	8.03	28.66	54.00	-25.34	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

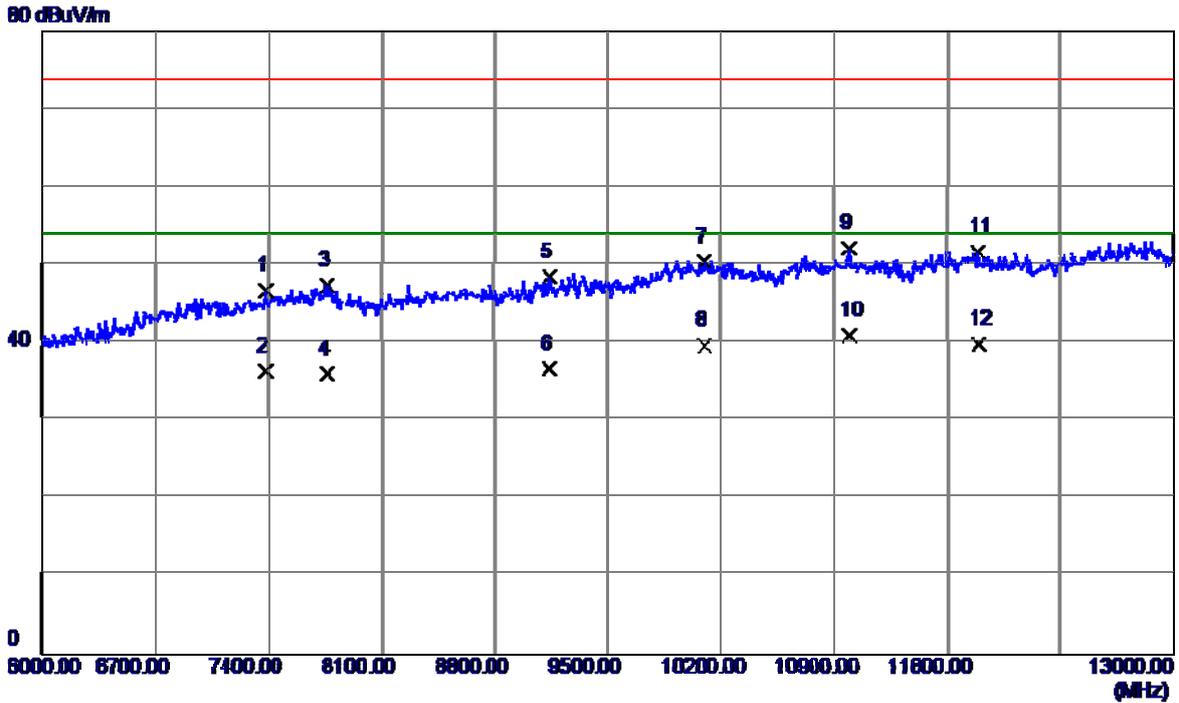


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7382.5000	34.29	12.36	46.65	74.00	-27.35	Peak
2	7382.5000	23.97	12.36	36.33	54.00	-17.67	AVG
3	7764.0000	34.85	12.57	47.42	74.00	-26.58	Peak
4	7764.0000	23.48	12.57	36.05	54.00	-17.95	AVG
5	9143.0000	33.99	14.53	48.52	74.00	-25.48	Peak
6	9143.0000	22.18	14.53	36.71	54.00	-17.29	AVG
7	10098.5000	34.69	15.78	50.47	74.00	-23.53	Peak
8	10098.5000	23.83	15.78	39.61	54.00	-14.39	AVG
9	10994.5000	34.95	17.17	52.12	74.00	-21.88	Peak
10 *	10994.5000	23.84	17.17	41.01	54.00	-12.99	AVG
11	11796.0000	33.96	17.67	51.63	74.00	-22.37	Peak
12	11796.0000	22.16	17.67	39.83	54.00	-14.17	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

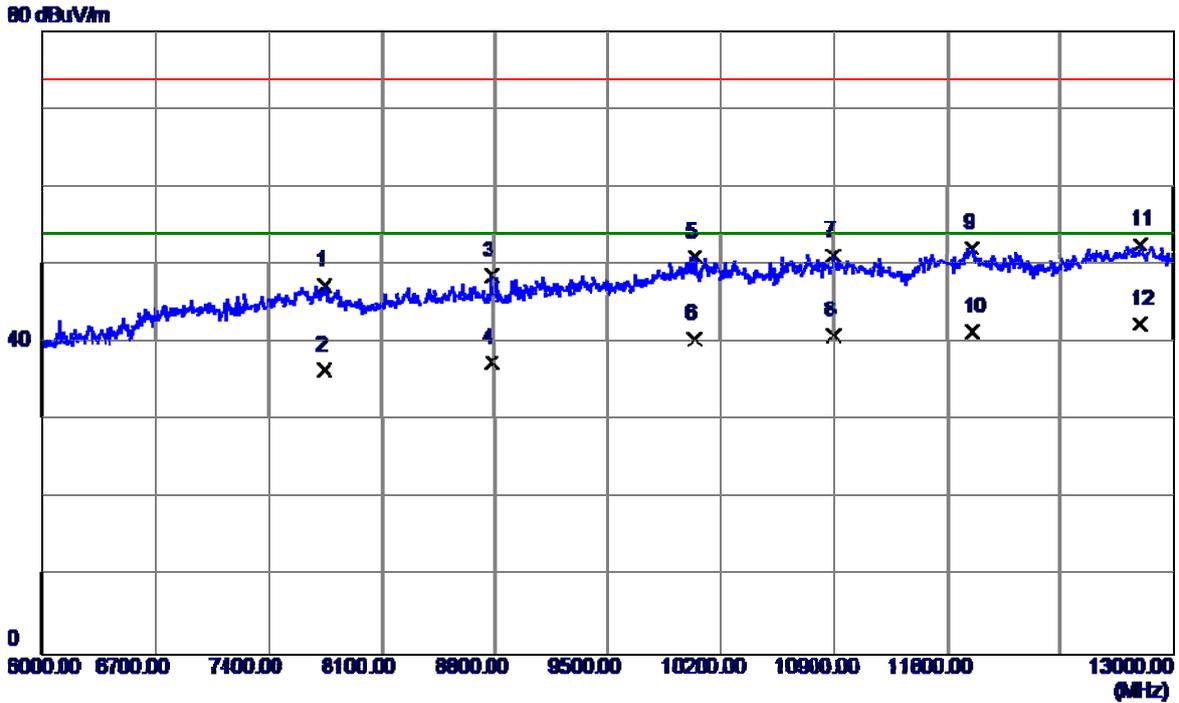


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7746.5000	34.73	12.58	47.31	74.00	-26.69	Peak
2	7746.5000	23.84	12.58	36.42	54.00	-17.58	AVG
3	8786.0000	34.61	14.04	48.65	74.00	-25.35	Peak
4	8786.0000	23.46	14.04	37.50	54.00	-16.50	AVG
5	10035.5000	35.46	15.64	51.10	74.00	-22.90	Peak
6	10035.5000	24.81	15.64	40.45	54.00	-13.55	AVG
7	10903.5000	34.14	17.08	51.22	74.00	-22.78	Peak
8	10903.5000	23.82	17.08	40.90	54.00	-13.10	AVG
9	11754.0000	34.46	17.70	52.16	74.00	-21.84	Peak
10	11754.0000	23.76	17.70	41.46	54.00	-12.54	AVG
11	12797.0000	34.06	18.52	52.58	74.00	-21.42	Peak
12 *	12797.0000	23.88	18.52	42.40	54.00	-11.60	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:CR+BATTERY:SCUD(ATL)		
Test Engineer	Trey Chen		

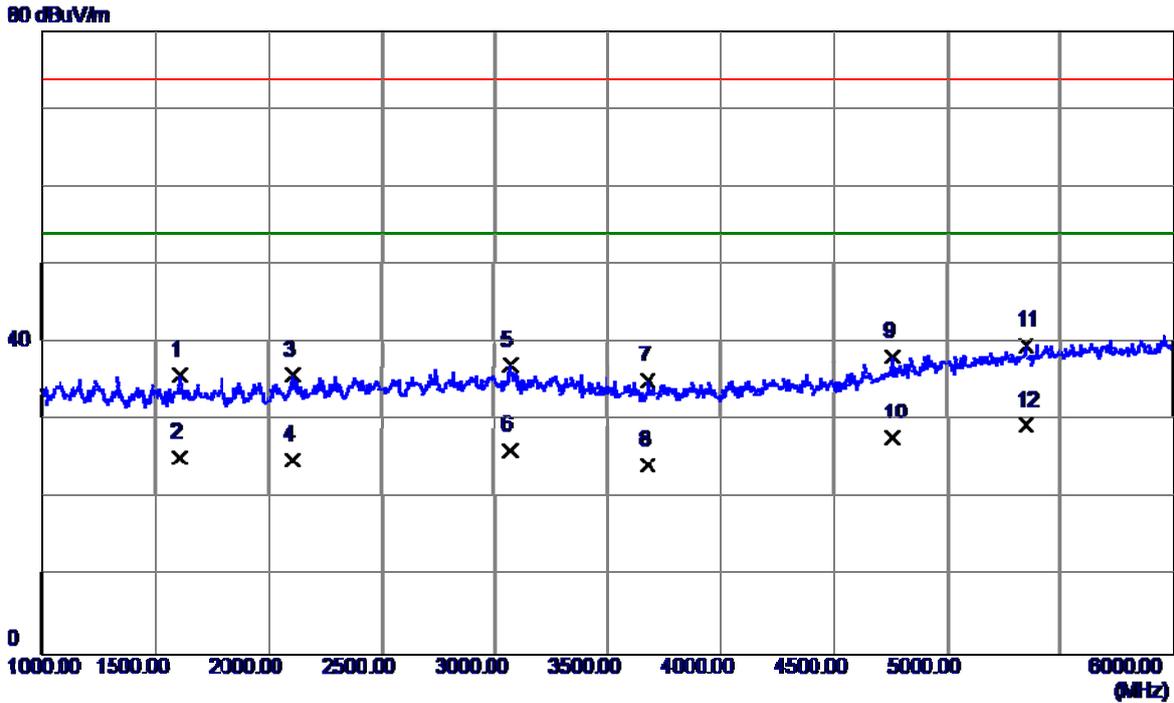


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1610.0000	40.25	-4.43	35.82	74.00	-38.18	Peak
2	1610.0000	29.64	-4.43	25.21	54.00	-28.79	AVG
3	2112.5000	37.76	-1.95	35.81	74.00	-38.19	Peak
4	2112.5000	26.89	-1.95	24.94	54.00	-29.06	AVG
5	3072.5000	34.74	2.38	37.12	74.00	-36.88	Peak
6	3072.5000	23.85	2.38	26.23	54.00	-27.77	AVG
7	3677.5000	32.73	2.42	35.15	74.00	-38.85	Peak
8	3677.5000	21.95	2.42	24.37	54.00	-29.63	AVG
9	4760.0000	33.07	5.14	38.21	74.00	-35.79	Peak
10	4760.0000	22.65	5.14	27.79	54.00	-26.21	AVG
11	5350.0000	32.18	7.50	39.68	74.00	-34.32	Peak
12 *	5350.0000	21.89	7.50	29.39	54.00	-24.61	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:CR+BATTERY:SCUD(ATL)		
Test Engineer	Trey Chen		

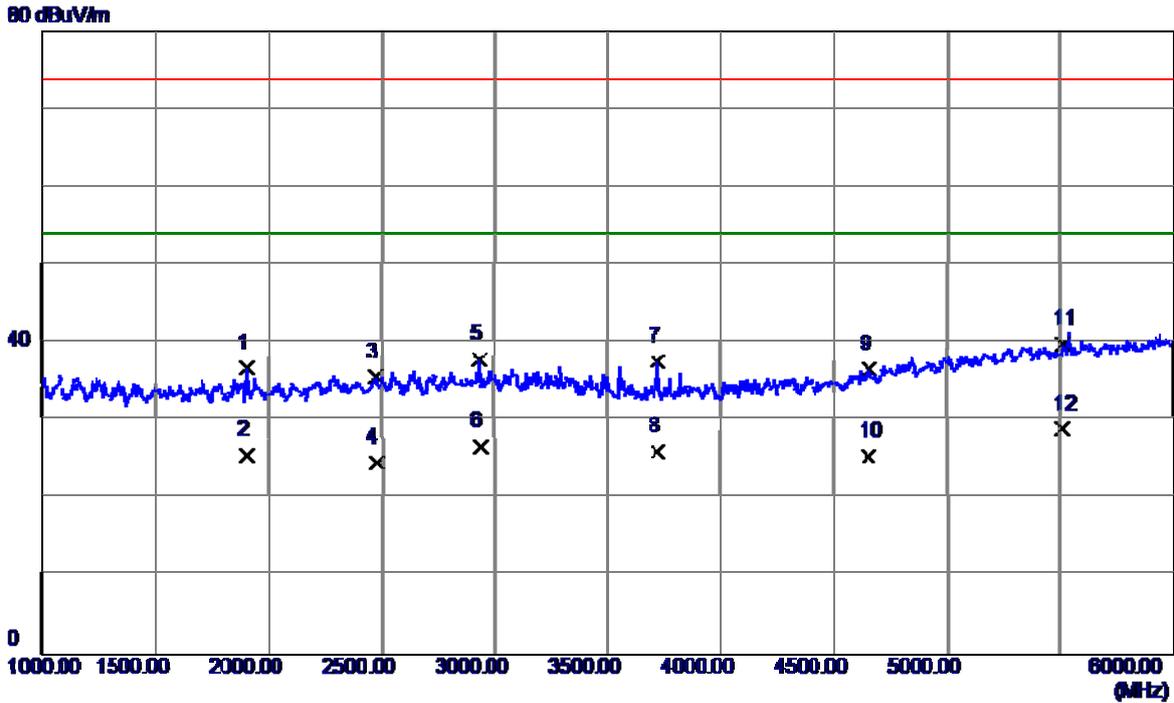


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1905.0000	39.81	-3.02	36.79	74.00	-37.21	Peak
2	1905.0000	28.67	-3.02	25.65	54.00	-28.35	AVG
3	2470.0000	35.69	0.01	35.70	74.00	-38.30	Peak
4	2470.0000	24.56	0.01	24.57	54.00	-29.43	AVG
5	2932.5000	35.81	2.10	37.91	74.00	-36.09	Peak
6	2932.5000	24.68	2.10	26.78	54.00	-27.22	AVG
7	3720.0000	35.08	2.46	37.54	74.00	-36.46	Peak
8	3720.0000	23.68	2.46	26.14	54.00	-27.86	AVG
9	4655.0000	32.05	4.63	36.68	74.00	-37.32	Peak
10	4655.0000	20.86	4.63	25.49	54.00	-28.51	AVG
11	5512.5000	31.76	8.02	39.78	74.00	-34.22	Peak
12 *	5512.5000	20.90	8.02	28.92	54.00	-25.08	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:CR+BATTERY:SUNWODA(ALT)		
Test Engineer	Trey Chen		

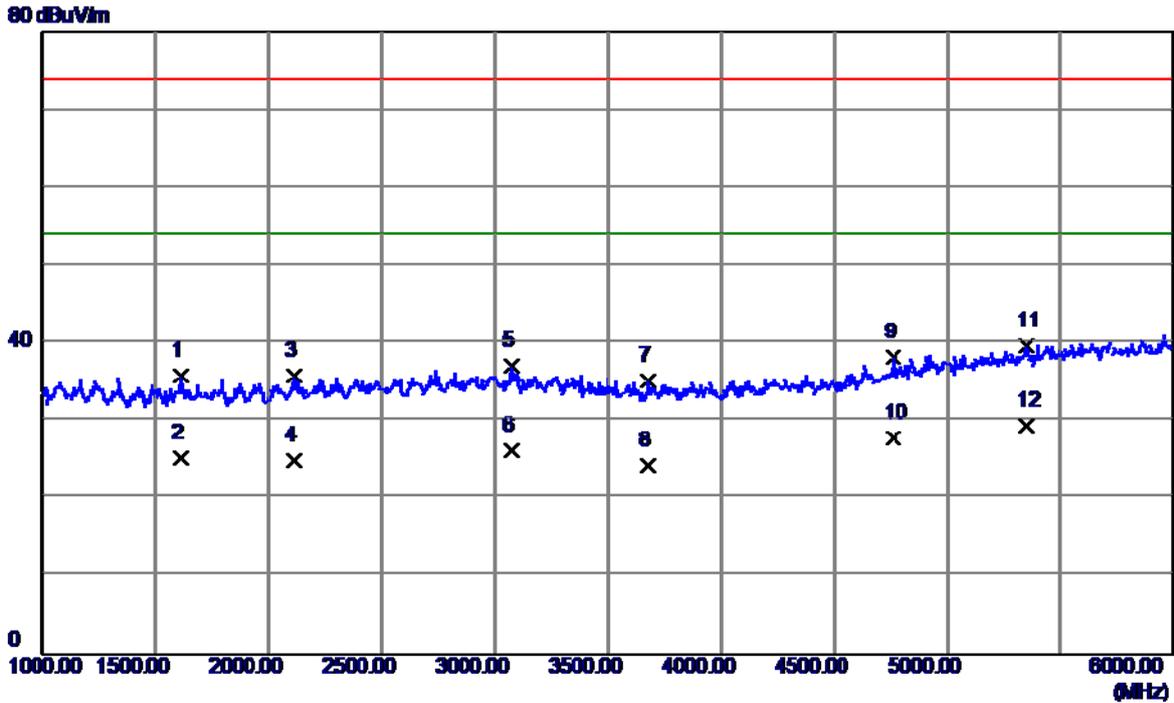


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1610.0000	40.25	-4.43	35.82	74.00	-38.18	Peak
2	1610.0000	29.64	-4.43	25.21	54.00	-28.79	AVG
3	2112.5000	37.76	-1.95	35.81	74.00	-38.19	Peak
4	2112.5000	26.89	-1.95	24.94	54.00	-29.06	AVG
5	3072.5000	34.74	2.38	37.12	74.00	-36.88	Peak
6	3072.5000	23.85	2.38	26.23	54.00	-27.77	AVG
7	3677.5000	32.73	2.42	35.15	74.00	-38.85	Peak
8	3677.5000	21.95	2.42	24.37	54.00	-29.63	AVG
9	4760.0000	33.07	5.14	38.21	74.00	-35.79	Peak
10	4760.0000	22.65	5.14	27.79	54.00	-26.21	AVG
11	5350.0000	32.18	7.50	39.68	74.00	-34.32	Peak
12 *	5350.0000	21.89	7.50	29.39	54.00	-24.61	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:Salcomp+USB Cable:CR+BATTERY:SUNWODA(ALT)		
Test Engineer	Trey Chen		

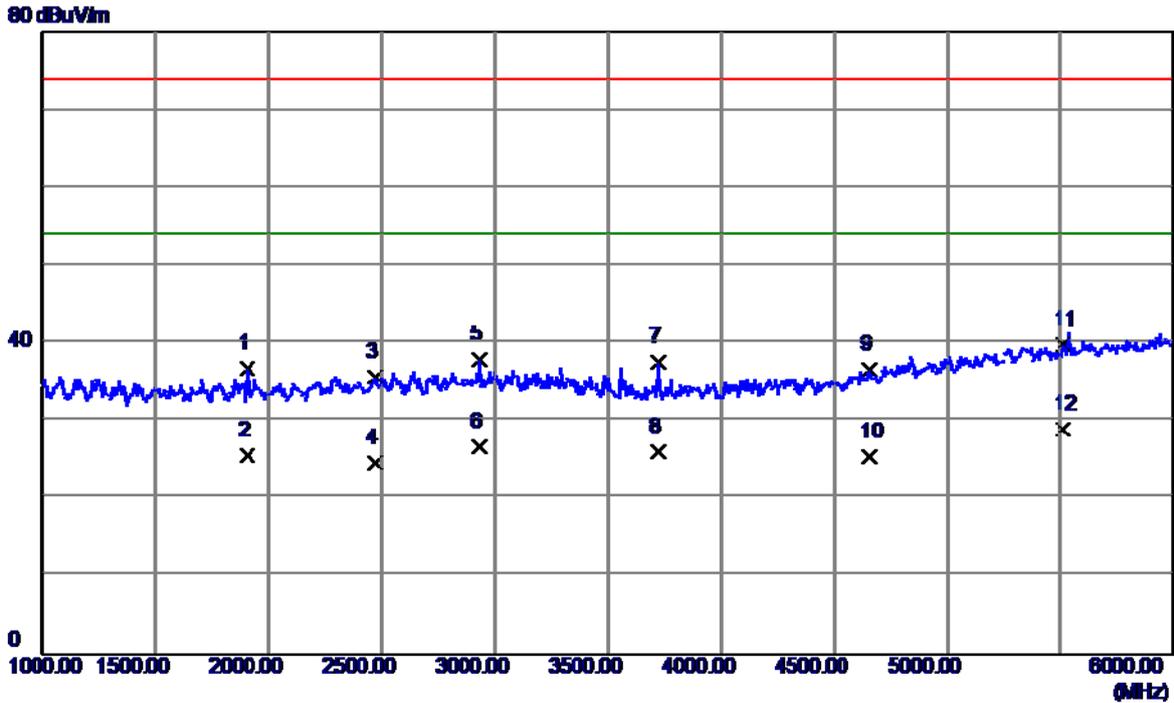


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1905.0000	39.81	-3.02	36.79	74.00	-37.21	Peak
2	1905.0000	28.67	-3.02	25.65	54.00	-28.35	AVG
3	2470.0000	35.69	0.01	35.70	74.00	-38.30	Peak
4	2470.0000	24.56	0.01	24.57	54.00	-29.43	AVG
5	2932.5000	35.81	2.10	37.91	74.00	-36.09	Peak
6	2932.5000	24.68	2.10	26.78	54.00	-27.22	AVG
7	3720.0000	35.08	2.46	37.54	74.00	-36.46	Peak
8	3720.0000	23.68	2.46	26.14	54.00	-27.86	AVG
9	4655.0000	32.05	4.63	36.68	74.00	-37.32	Peak
10	4655.0000	20.86	4.63	25.49	54.00	-28.51	AVG
11	5512.5000	31.76	8.02	39.78	74.00	-34.22	Peak
12 *	5512.5000	20.90	8.02	28.92	54.00	-25.08	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

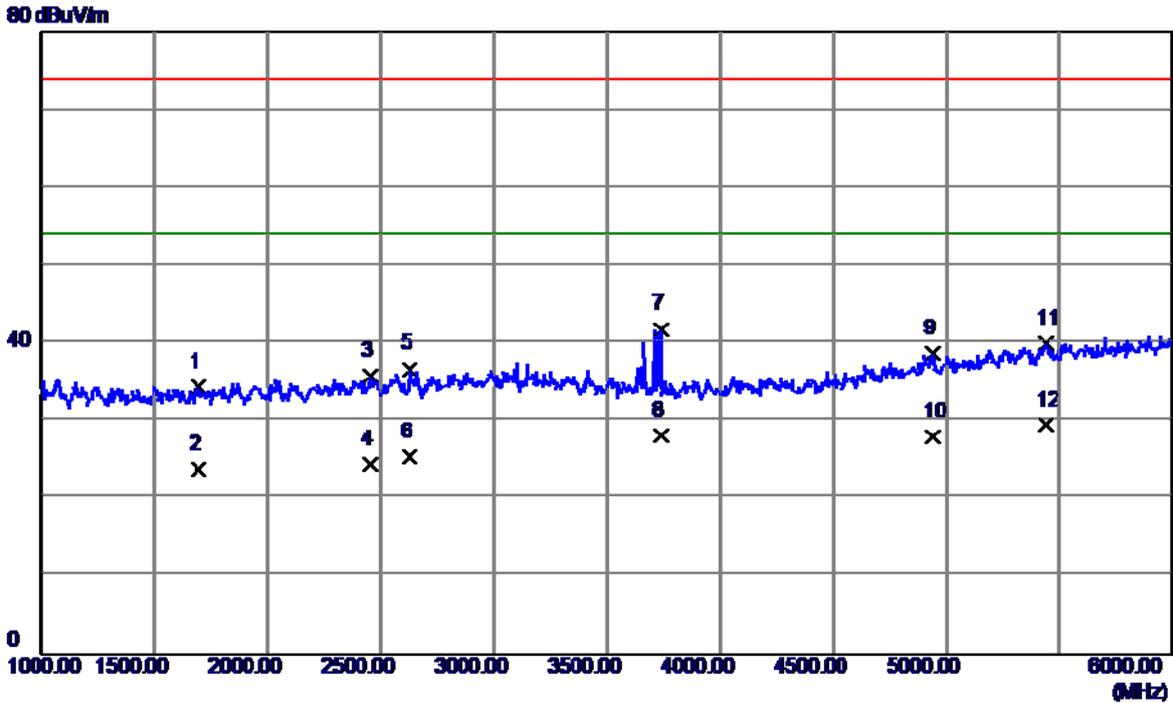


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1695.0000	38.46	-4.02	34.44	74.00	-39.56	Peak
2	1695.0000	27.88	-4.02	23.86	54.00	-30.14	AVG
3	2455.0000	35.86	-0.08	35.78	74.00	-38.22	Peak
4	2455.0000	24.56	-0.08	24.48	54.00	-29.52	AVG
5	2627.5000	35.98	0.74	36.72	74.00	-37.28	Peak
6	2627.5000	24.64	0.74	25.38	54.00	-28.62	AVG
7	3737.5000	39.36	2.48	41.84	74.00	-32.16	Peak
8	3737.5000	25.64	2.48	28.12	54.00	-25.88	AVG
9	4937.5000	32.71	6.01	38.72	74.00	-35.28	Peak
10	4937.5000	21.96	6.01	27.97	54.00	-26.03	AVG
11	5440.0000	32.26	7.81	40.07	74.00	-33.93	Peak
12 *	5440.0000	21.71	7.81	29.52	54.00	-24.48	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

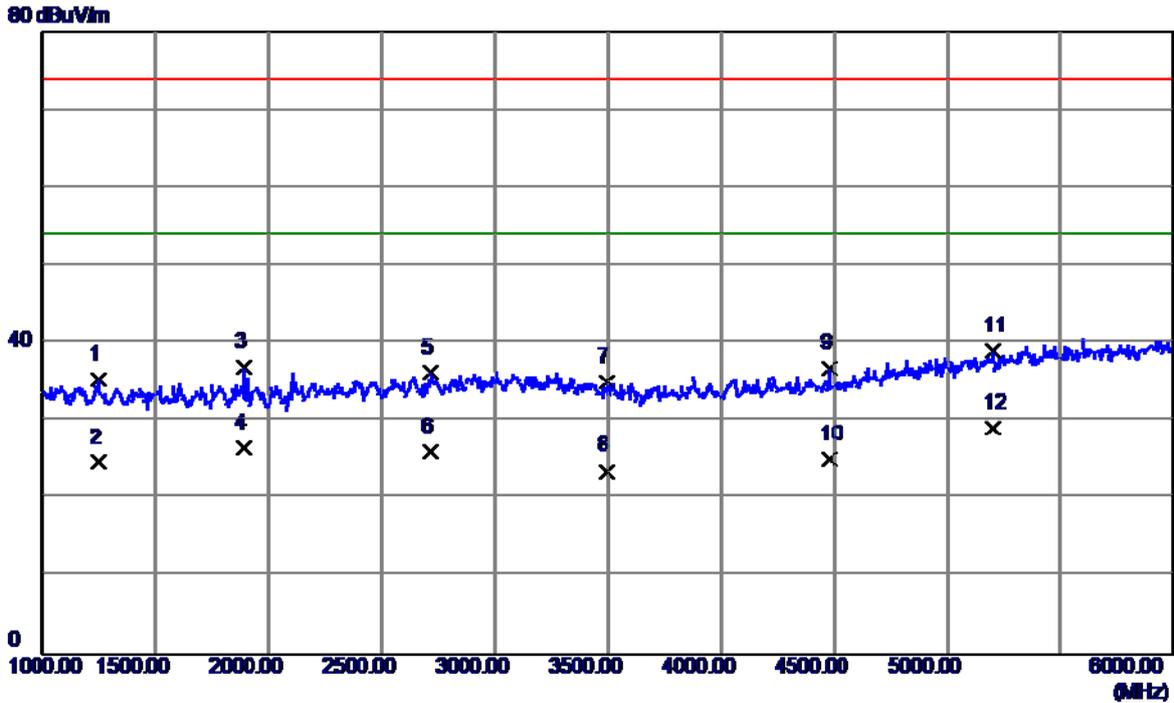


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1247.5000	41.23	-5.85	35.38	74.00	-38.62	Peak
2	1247.5000	30.57	-5.85	24.72	54.00	-29.28	AVG
3	1887.5000	40.09	-3.11	36.98	74.00	-37.02	Peak
4	1887.5000	29.65	-3.11	26.54	54.00	-27.46	AVG
5	2717.5000	35.10	1.14	36.24	74.00	-37.76	Peak
6	2717.5000	24.94	1.14	26.08	54.00	-27.92	AVG
7	3495.0000	32.76	2.26	35.02	74.00	-38.98	Peak
8	3495.0000	21.34	2.26	23.60	54.00	-30.40	AVG
9	4477.5000	32.92	3.83	36.75	74.00	-37.25	Peak
10	4477.5000	21.35	3.83	25.18	54.00	-28.82	AVG
11	5200.0000	32.04	6.99	39.03	74.00	-34.97	Peak
12 *	5200.0000	22.08	6.99	29.07	54.00	-24.93	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

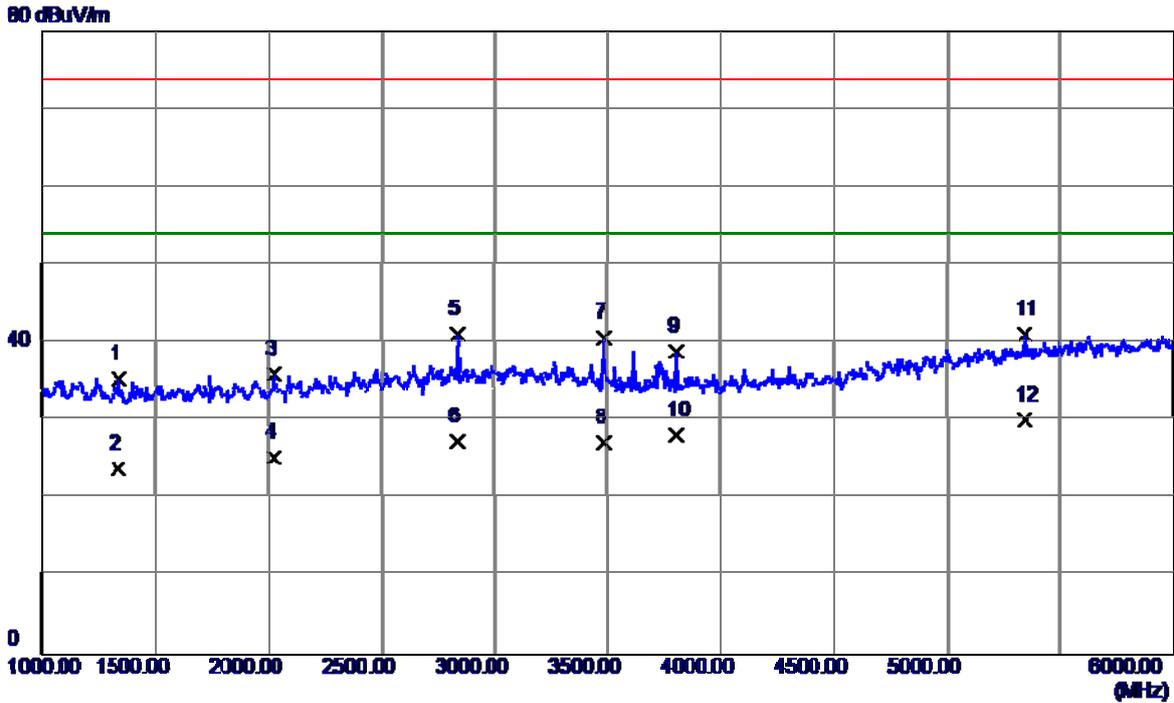


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1337.5000	40.85	-5.53	35.32	74.00	-38.68	Peak
2	1337.5000	29.37	-5.53	23.84	54.00	-30.16	AVG
3	2030.0000	38.48	-2.41	36.07	74.00	-37.93	Peak
4	2030.0000	27.64	-2.41	25.23	54.00	-28.77	AVG
5	2837.5000	39.37	1.68	41.05	74.00	-32.95	Peak
6	2837.5000	25.64	1.68	27.32	54.00	-26.68	AVG
7	3487.5000	38.37	2.26	40.63	74.00	-33.37	Peak
8	3487.5000	24.97	2.26	27.23	54.00	-26.77	AVG
9	3805.0000	36.41	2.54	38.95	74.00	-35.05	Peak
10	3805.0000	25.65	2.54	28.19	54.00	-25.81	AVG
11	5345.0000	33.57	7.48	41.05	74.00	-32.95	Peak
12 *	5345.0000	22.66	7.48	30.14	54.00	-23.86	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

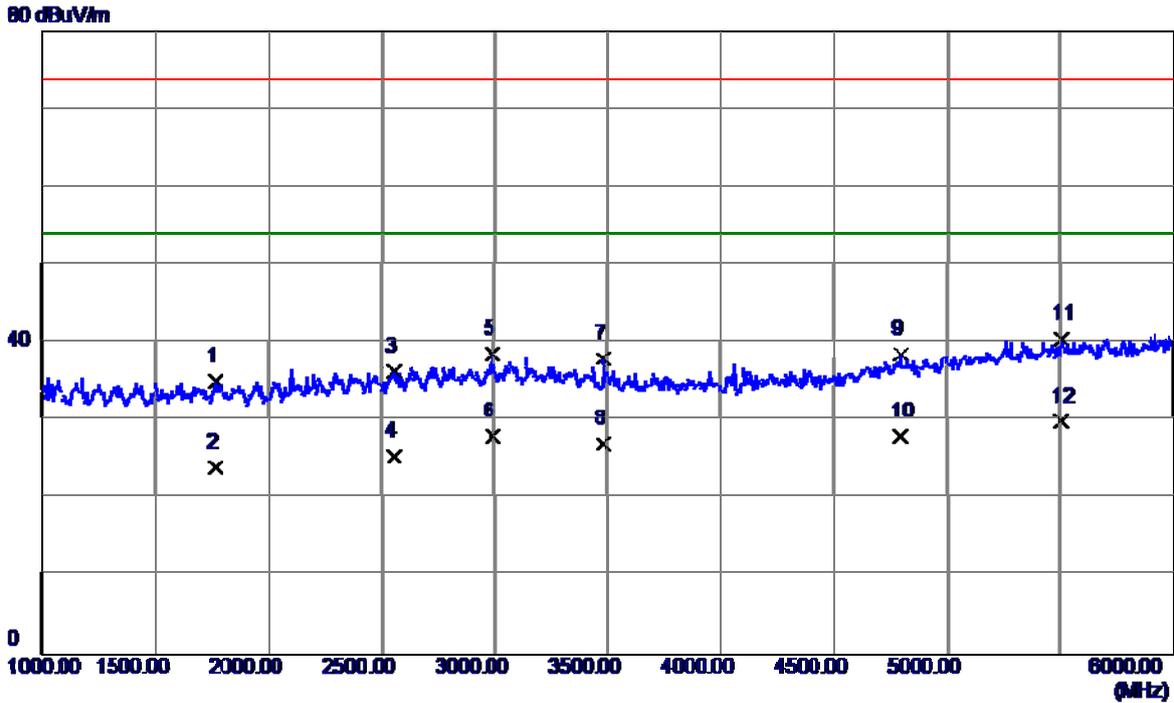


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1765.0000	38.77	-3.69	35.08	74.00	-38.92	Peak
2	1765.0000	27.66	-3.69	23.97	54.00	-30.03	AVG
3	2562.5000	35.92	0.45	36.37	74.00	-37.63	Peak
4	2562.5000	24.94	0.45	25.39	54.00	-28.61	AVG
5	2995.0000	36.17	2.38	38.55	74.00	-35.45	Peak
6	2995.0000	25.67	2.38	28.05	54.00	-25.95	AVG
7	3485.0000	35.60	2.26	37.86	74.00	-36.14	Peak
8	3485.0000	24.84	2.26	27.10	54.00	-26.90	AVG
9	4792.5000	33.23	5.30	38.53	74.00	-35.47	Peak
10	4792.5000	22.68	5.30	27.98	54.00	-26.02	AVG
11	5505.0000	32.41	8.01	40.42	74.00	-33.58	Peak
12 *	5505.0000	21.89	8.01	29.90	54.00	-24.10	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:QuanCheng		
Test Engineer	Trey Chen		

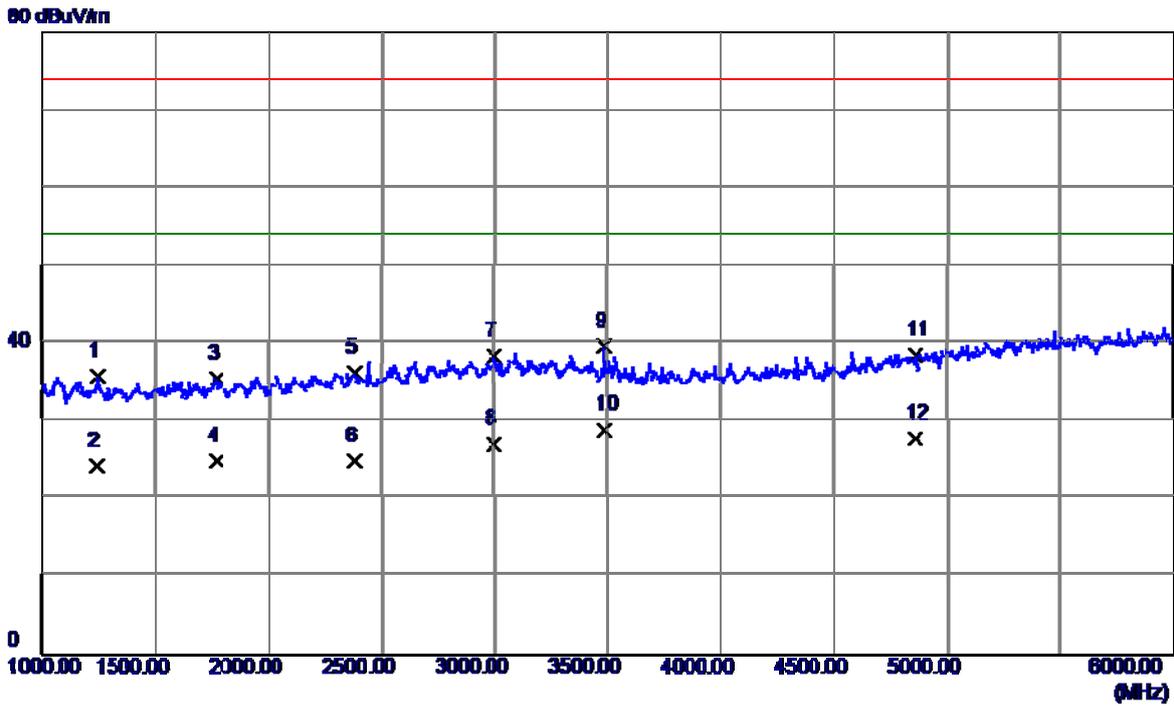


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1242.5000	41.67	-5.87	35.80	74.00	-38.20	Peak
2	1242.5000	30.18	-5.87	24.31	54.00	-29.69	AVG
3	1772.5000	39.15	-3.65	35.50	74.00	-38.50	Peak
4	1772.5000	28.65	-3.65	25.00	54.00	-29.00	AVG
5	2385.0000	36.80	-0.46	36.34	74.00	-37.66	Peak
6	2385.0000	25.35	-0.46	24.89	54.00	-29.11	AVG
7	3000.0000	35.96	2.40	38.36	74.00	-35.64	Peak
8	3000.0000	24.72	2.40	27.12	54.00	-26.88	AVG
9	3487.5000	37.48	2.26	39.74	74.00	-34.26	Peak
10 *	3487.5000	26.64	2.26	28.90	54.00	-25.10	AVG
11	4860.0000	32.99	5.63	38.62	74.00	-35.38	Peak
12	4860.0000	22.15	5.63	27.78	54.00	-26.22	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:QuanCheng		
Test Engineer	Trey Chen		

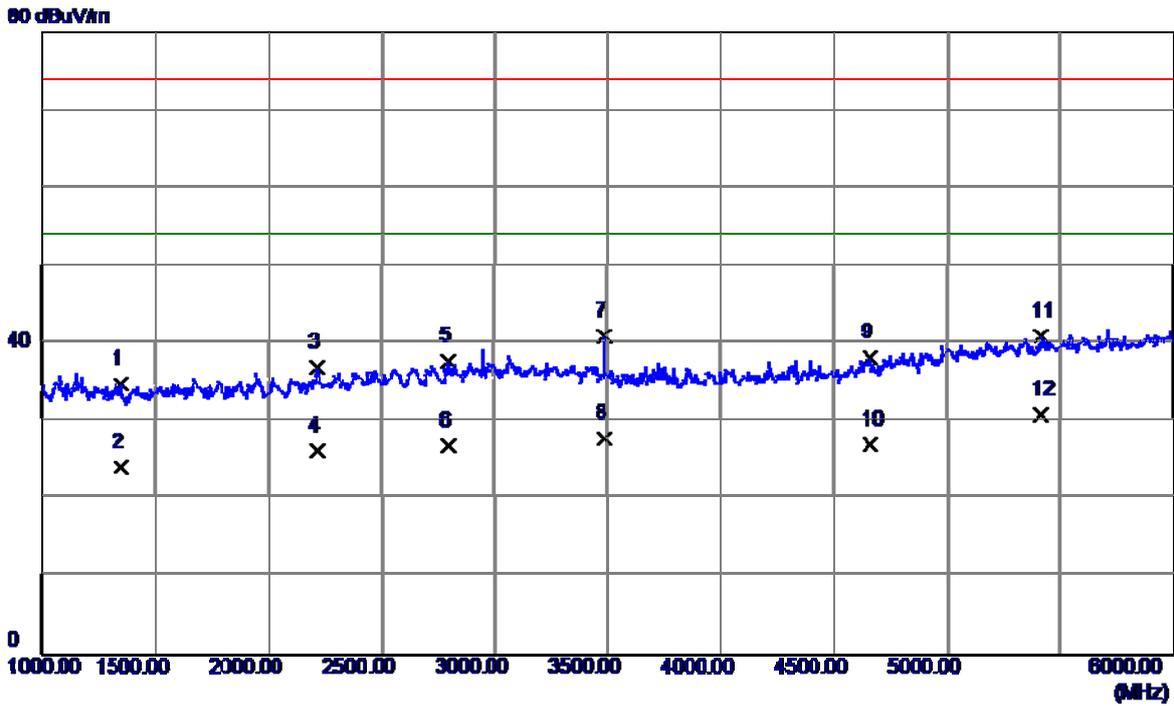


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1347.5000	40.32	-5.49	34.83	74.00	-39.17	Peak
2	1347.5000	29.63	-5.49	24.14	54.00	-29.86	AVG
3	2217.5000	38.27	-1.38	36.89	74.00	-37.11	Peak
4	2217.5000	27.65	-1.38	26.27	54.00	-27.73	AVG
5	2800.0000	36.31	1.51	37.82	74.00	-36.18	Peak
6	2800.0000	25.37	1.51	26.88	54.00	-27.12	AVG
7	3487.5000	38.71	2.26	40.97	74.00	-33.03	Peak
8	3487.5000	25.64	2.26	27.90	54.00	-26.10	AVG
9	4660.0000	33.58	4.66	38.24	74.00	-35.76	Peak
10	4660.0000	22.35	4.66	27.01	54.00	-26.99	AVG
11	5415.0000	33.20	7.72	40.92	74.00	-33.08	Peak
12 *	5415.0000	23.09	7.72	30.81	54.00	-23.19	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:LianChuang		
Test Engineer	Treyy Chen		

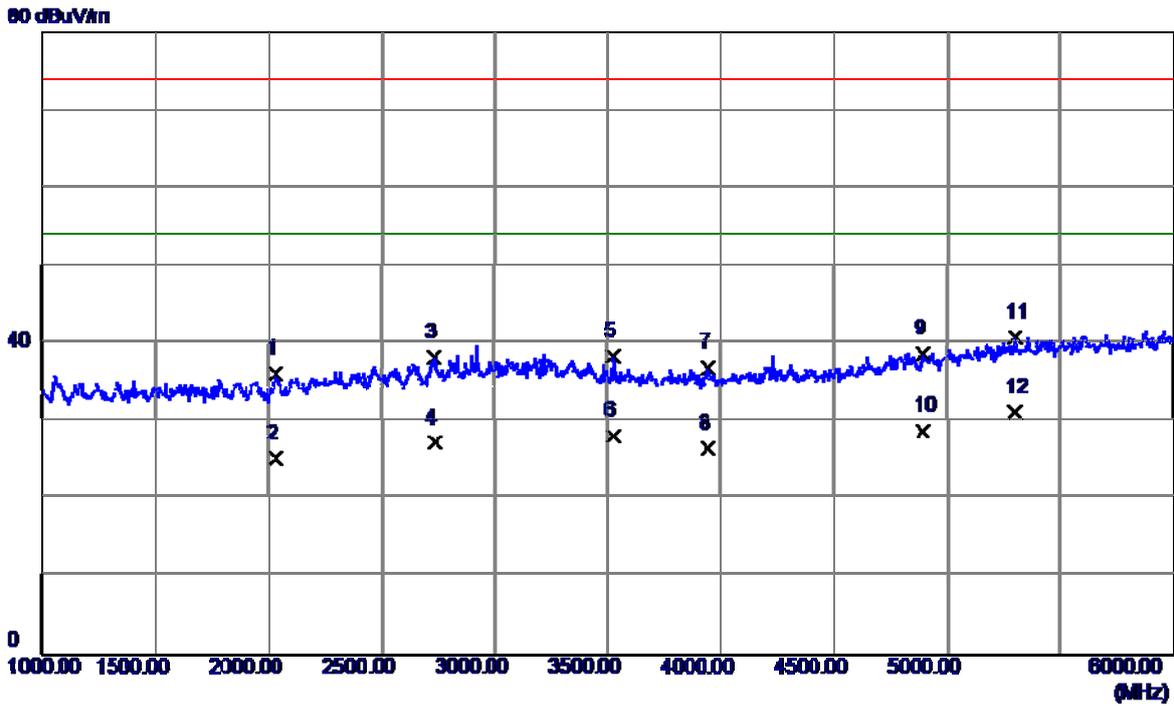


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2032.5000	38.61	-2.39	36.22	74.00	-37.78	Peak
2	2032.5000	27.68	-2.39	25.29	54.00	-28.71	AVG
3	2732.5000	37.00	1.21	38.21	74.00	-35.79	Peak
4	2732.5000	26.07	1.21	27.28	54.00	-26.72	AVG
5	3530.0000	36.14	2.28	38.42	74.00	-35.58	Peak
6	3530.0000	25.84	2.28	28.12	54.00	-25.88	AVG
7	3942.5000	34.25	2.67	36.92	74.00	-37.08	Peak
8	3942.5000	23.94	2.67	26.61	54.00	-27.39	AVG
9	4895.0000	32.94	5.80	38.74	74.00	-35.26	Peak
10	4895.0000	22.98	5.80	28.78	54.00	-25.22	AVG
11	5302.5000	33.50	7.34	40.84	74.00	-33.16	Peak
12 *	5302.5000	23.90	7.34	31.24	54.00	-22.76	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:LianChuang		
Test Engineer	Treyy Chen		

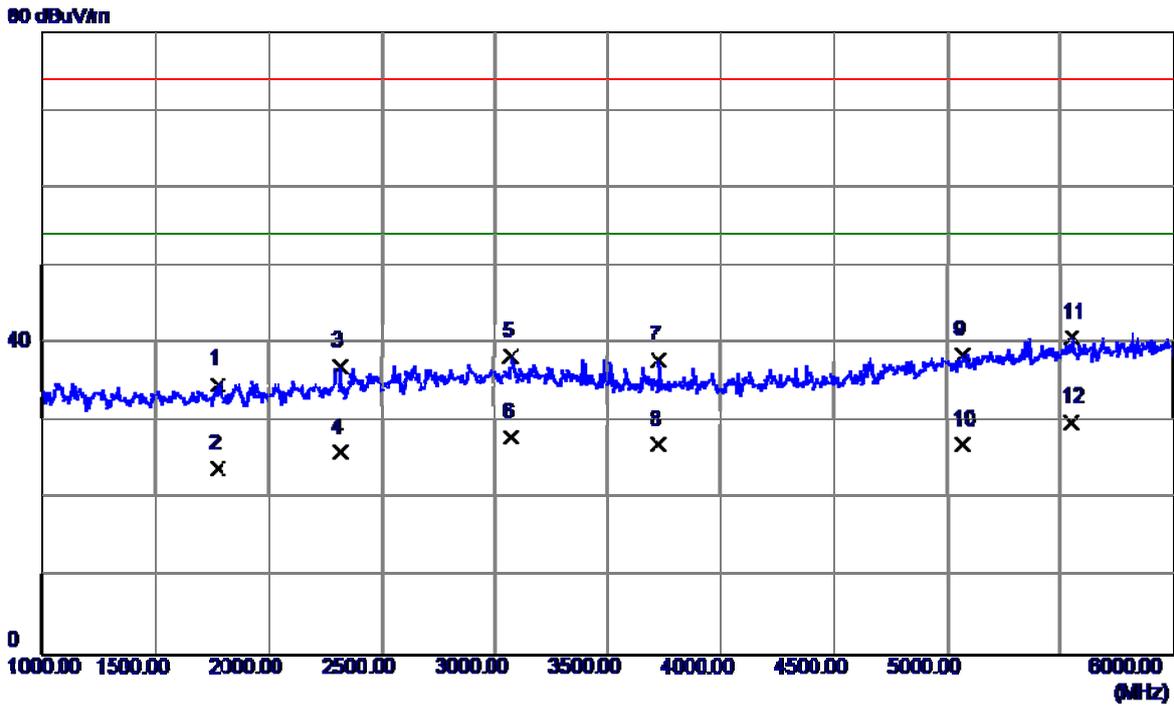


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1780.0000	38.42	-3.62	34.80	74.00	-39.20	Peak
2	1780.0000	27.65	-3.62	24.03	54.00	-29.97	AVG
3	2322.5000	37.87	-0.80	37.07	74.00	-36.93	Peak
4	2322.5000	26.94	-0.80	26.14	54.00	-27.86	AVG
5	3075.0000	36.06	2.38	38.44	74.00	-35.56	Peak
6	3075.0000	25.64	2.38	28.02	54.00	-25.98	AVG
7	3730.0000	35.47	2.47	37.94	74.00	-36.06	Peak
8	3730.0000	24.50	2.47	26.97	54.00	-27.03	AVG
9	5067.5000	31.95	6.54	38.49	74.00	-35.51	Peak
10	5067.5000	20.51	6.54	27.05	54.00	-26.95	AVG
11	5552.5000	32.78	8.06	40.84	74.00	-33.16	Peak
12 *	5552.5000	21.85	8.06	29.91	54.00	-24.09	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:MERRY		
Test Engineer	Treyy Chen		

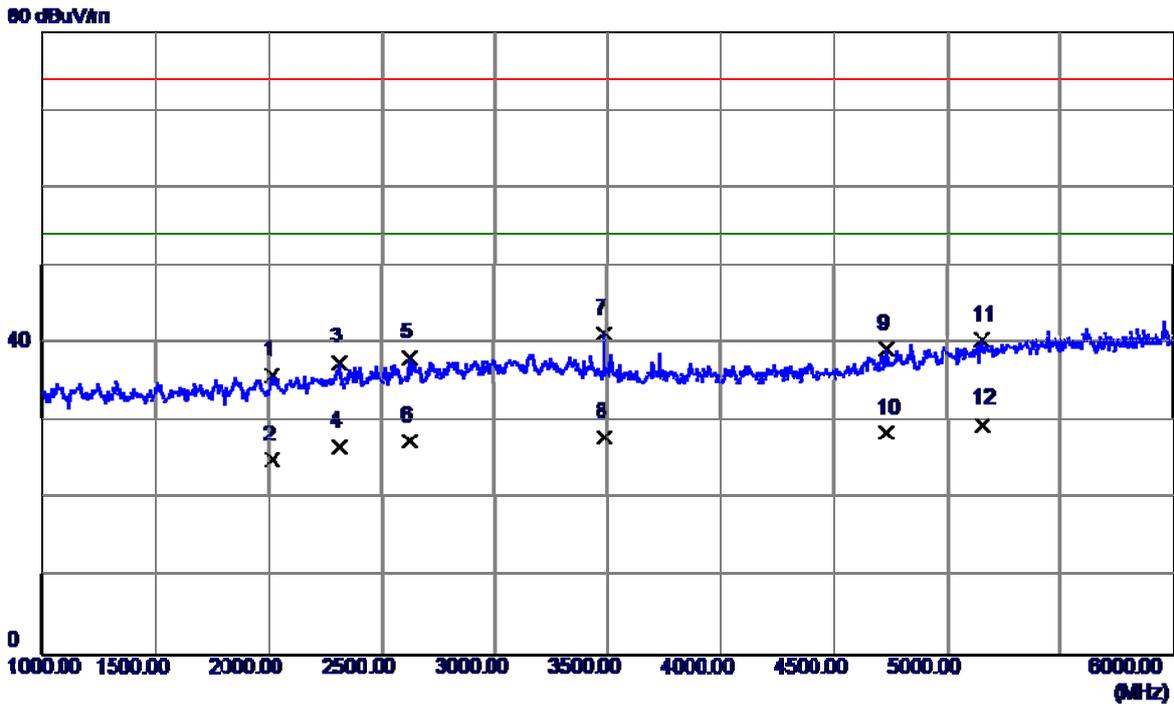


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2015.0000	38.51	-2.49	36.02	74.00	-37.98	Peak
2	2015.0000	27.65	-2.49	25.16	54.00	-28.84	AVG
3	2315.0000	38.52	-0.84	37.68	74.00	-36.32	Peak
4	2315.0000	27.64	-0.84	26.80	54.00	-27.20	AVG
5	2627.5000	37.43	0.74	38.17	74.00	-35.83	Peak
6	2627.5000	26.77	0.74	27.51	54.00	-26.49	AVG
7	3487.5000	38.95	2.26	41.21	74.00	-32.79	Peak
8	3487.5000	25.75	2.26	28.01	54.00	-25.99	AVG
9	4735.0000	34.27	5.02	39.29	74.00	-34.71	Peak
10	4735.0000	23.54	5.02	28.56	54.00	-25.44	AVG
11	5157.5000	33.64	6.85	40.49	74.00	-33.51	Peak
12 *	5157.5000	22.83	6.85	29.68	54.00	-24.32	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:MERRY		
Test Engineer	Treyy Chen		

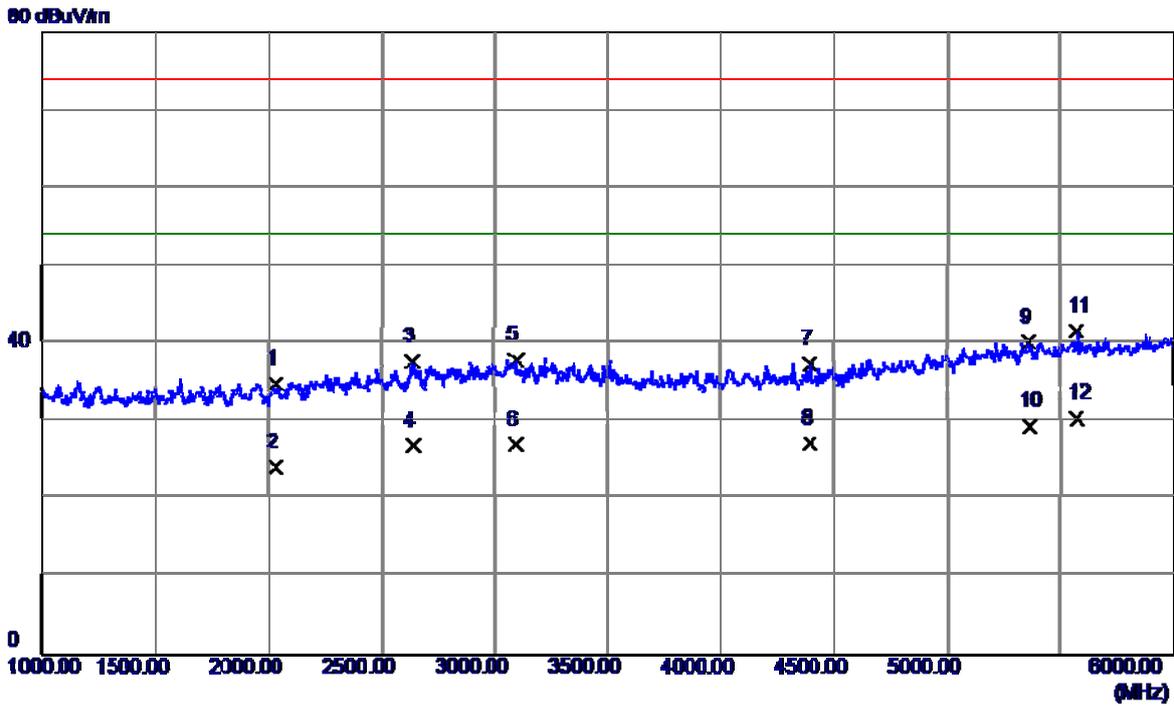


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2035.0000	37.20	-2.38	34.82	74.00	-39.18	Peak
2	2035.0000	26.60	-2.38	24.22	54.00	-29.78	AVG
3	2640.0000	36.96	0.79	37.75	74.00	-36.25	Peak
4	2640.0000	26.05	0.79	26.84	54.00	-27.16	AVG
5	3092.5000	35.61	2.37	37.98	74.00	-36.02	Peak
6	3092.5000	24.65	2.37	27.02	54.00	-26.98	AVG
7	4392.5000	33.83	3.63	37.46	74.00	-36.54	Peak
8	4392.5000	23.64	3.63	27.27	54.00	-26.73	AVG
9	5362.5000	32.65	7.54	40.19	74.00	-33.81	Peak
10	5362.5000	21.94	7.54	29.48	54.00	-24.52	AVG
11	5575.0000	33.51	8.08	41.59	74.00	-32.41	Peak
12 *	5575.0000	22.38	8.08	30.46	54.00	-23.54	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:Goertek		
Test Engineer	Trey Chen		

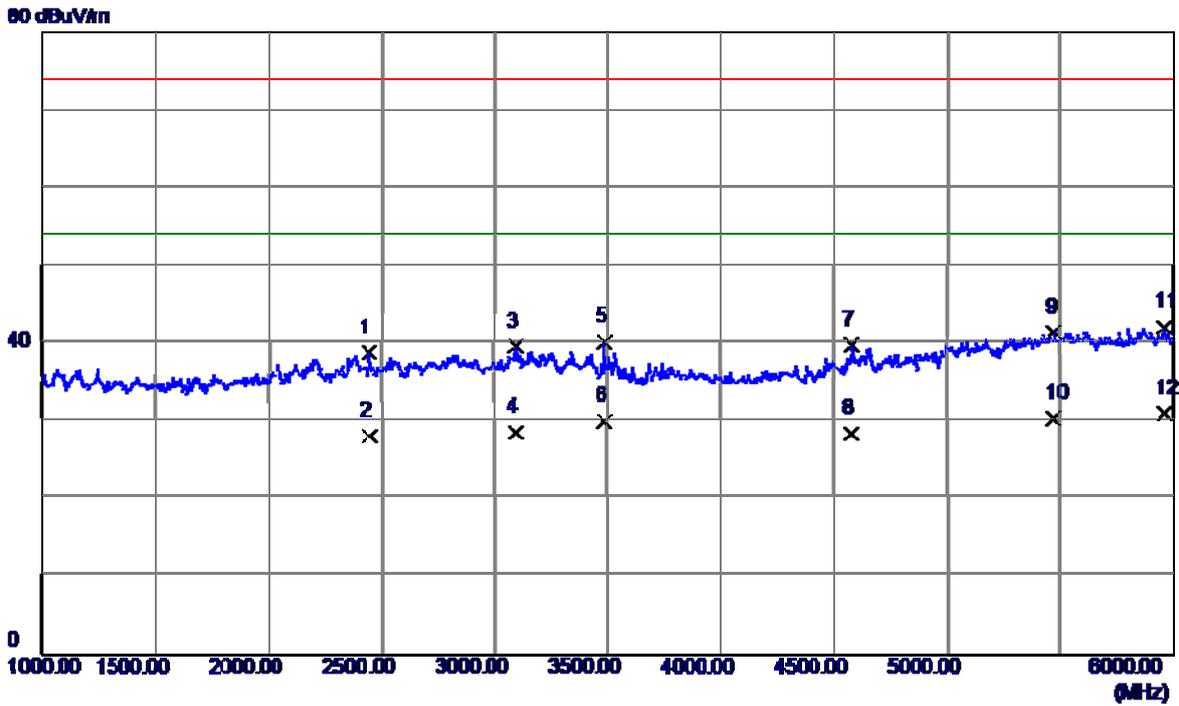


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2445.0000	38.99	-0.13	38.86	74.00	-35.14	Peak
2	2445.0000	28.24	-0.13	28.11	54.00	-25.89	AVG
3	3092.5000	37.30	2.37	39.67	74.00	-34.33	Peak
4	3092.5000	26.28	2.37	28.65	54.00	-25.35	AVG
5	3487.5000	37.98	2.26	40.24	74.00	-33.76	Peak
6	3487.5000	27.76	2.26	30.02	54.00	-23.98	AVG
7	4577.5000	35.56	4.26	39.82	74.00	-34.18	Peak
8	4577.5000	24.16	4.26	28.42	54.00	-25.58	AVG
9	5475.0000	33.48	7.92	41.40	74.00	-32.60	Peak
10	5475.0000	22.44	7.92	30.36	54.00	-23.64	AVG
11	5960.0000	33.74	8.42	42.16	74.00	-31.84	Peak
12 *	5960.0000	22.56	8.42	30.98	54.00	-23.02	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)Earphone:Goertek		
Test Engineer	Trey Chen		

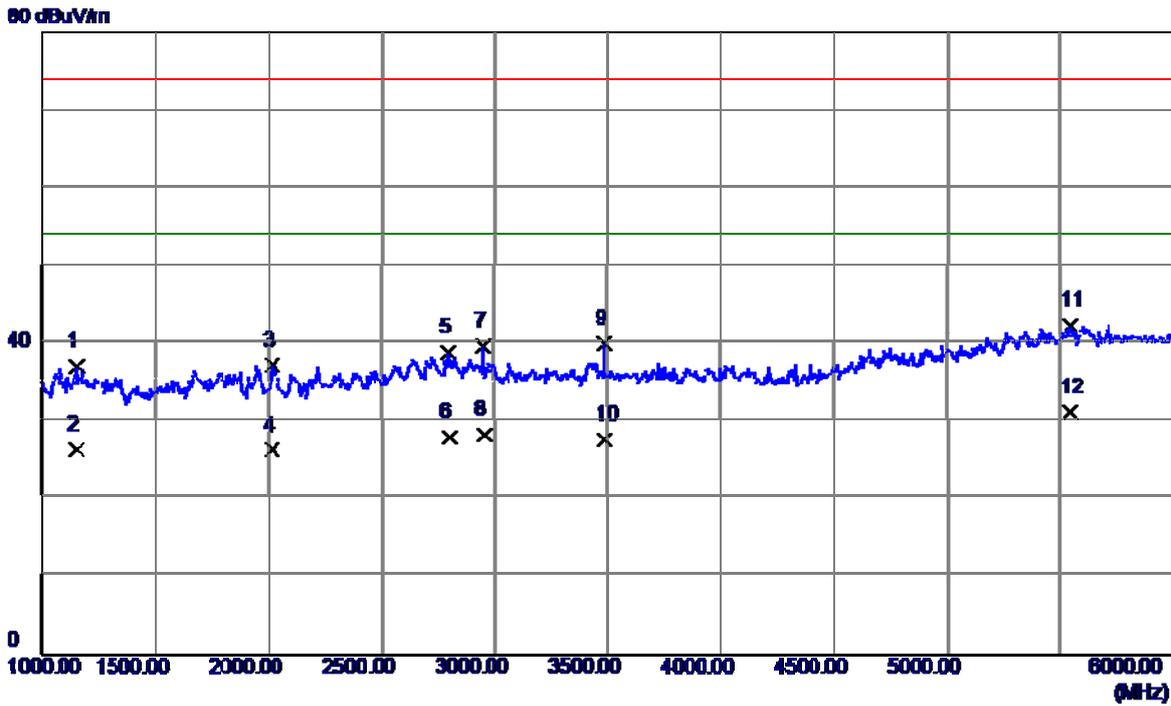


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1155.0000	43.37	-6.18	37.19	74.00	-36.81	Peak
2	1155.0000	32.60	-6.18	26.42	54.00	-27.58	AVG
3	2015.0000	39.69	-2.49	37.20	74.00	-36.80	Peak
4	2015.0000	28.81	-2.49	26.32	54.00	-27.68	AVG
5	2800.0000	37.31	1.51	38.82	74.00	-35.18	Peak
6	2800.0000	26.50	1.51	28.01	54.00	-25.99	AVG
7	2947.5000	37.53	2.17	39.70	74.00	-34.30	Peak
8	2947.5000	26.15	2.17	28.32	54.00	-25.68	AVG
9	3487.5000	37.71	2.26	39.97	74.00	-34.03	Peak
10	3487.5000	25.42	2.26	27.68	54.00	-26.32	AVG
11	5542.5000	34.34	8.05	42.39	74.00	-31.61	Peak
12 *	5542.5000	23.10	8.05	31.15	54.00	-22.85	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

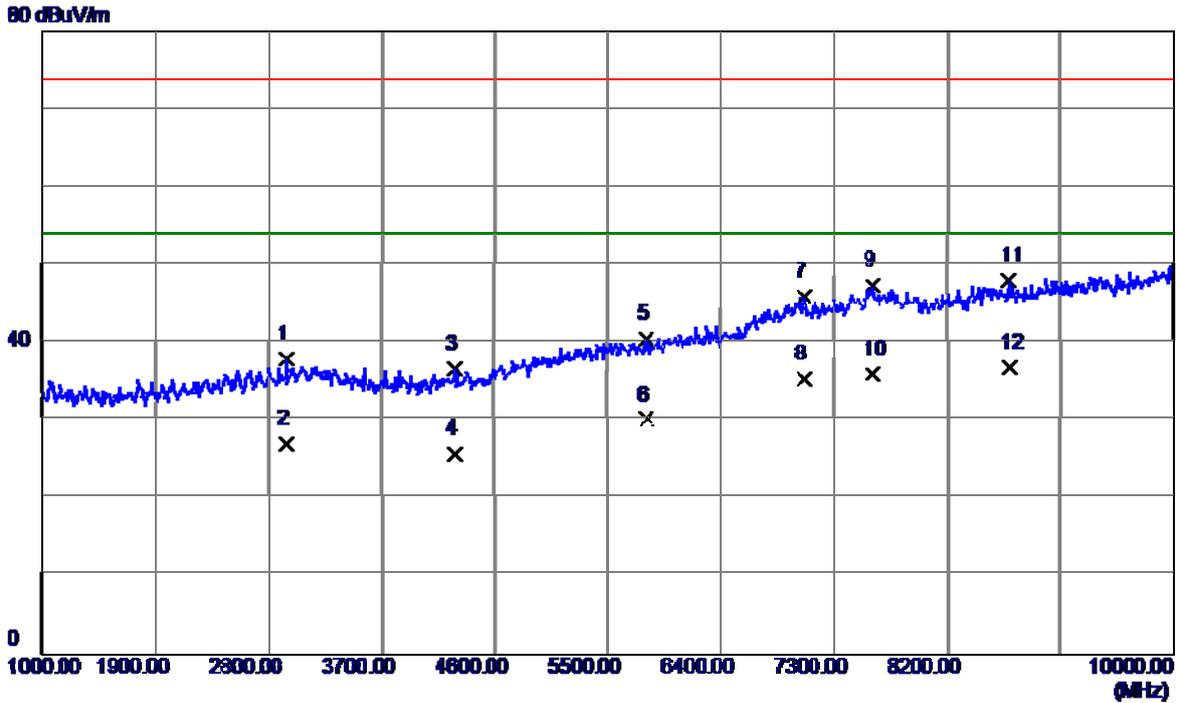


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2948.5000	35.69	2.17	37.86	74.00	-36.14	Peak
2	2948.5000	24.89	2.17	27.06	54.00	-26.94	AVG
3	4289.5000	33.19	3.39	36.58	74.00	-37.42	Peak
4	4289.5000	22.35	3.39	25.74	54.00	-28.26	AVG
5	5810.5000	32.22	8.29	40.51	74.00	-33.49	Peak
6	5810.5000	21.87	8.29	30.16	54.00	-23.84	AVG
7	7061.5000	34.38	11.57	45.95	74.00	-28.05	Peak
8	7061.5000	23.84	11.57	35.41	54.00	-18.59	AVG
9	7610.5000	34.68	12.62	47.30	74.00	-26.70	Peak
10	7610.5000	23.34	12.62	35.96	54.00	-18.04	AVG
11	8695.0000	34.10	13.83	47.93	74.00	-26.07	Peak
12 *	8695.0000	22.95	13.83	36.78	54.00	-17.22	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

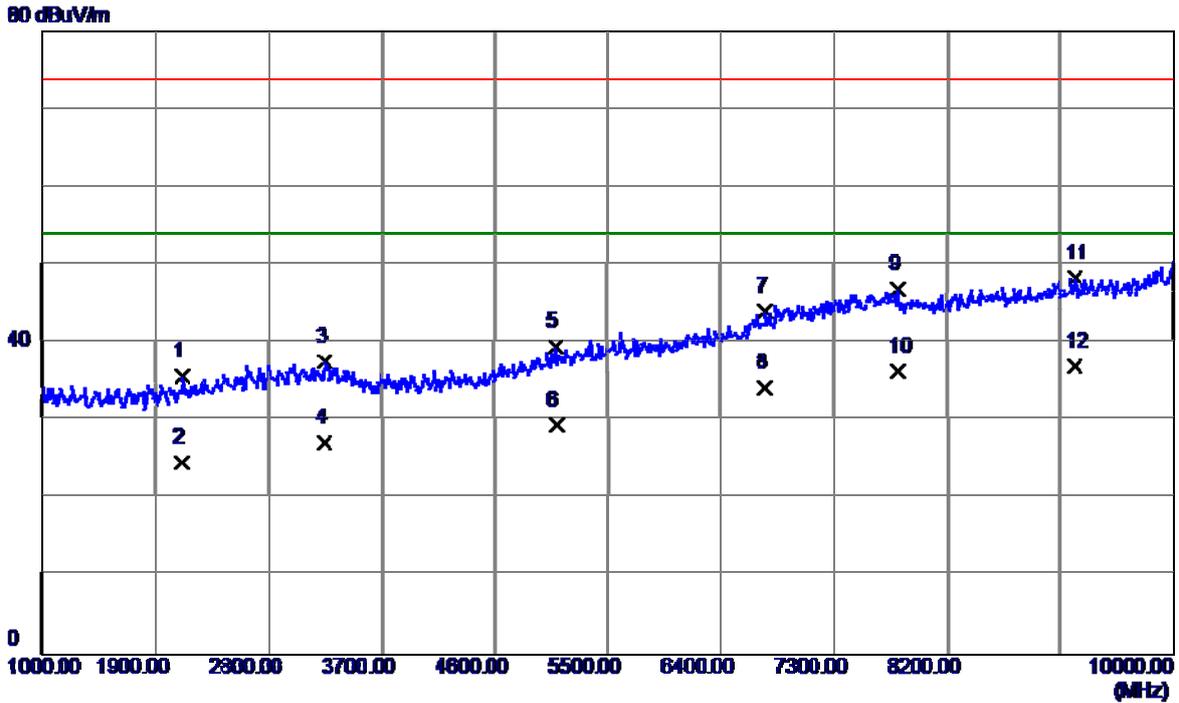


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2116.0000	37.62	-1.93	35.69	74.00	-38.31	Peak
2	2116.0000	26.63	-1.93	24.70	54.00	-29.30	AVG
3	3250.0000	35.22	2.33	37.55	74.00	-36.45	Peak
4	3250.0000	24.86	2.33	27.19	54.00	-26.81	AVG
5	5090.5000	32.90	6.62	39.52	74.00	-34.48	Peak
6	5090.5000	22.84	6.62	29.46	54.00	-24.54	AVG
7	6764.5000	33.47	10.59	44.06	74.00	-29.94	Peak
8	6764.5000	23.61	10.59	34.20	54.00	-19.80	AVG
9	7808.5000	34.28	12.56	46.84	74.00	-27.16	Peak
10	7808.5000	23.81	12.56	36.37	54.00	-17.63	AVG
11	9221.5000	33.80	14.53	48.33	74.00	-25.67	Peak
12 *	9221.5000	22.45	14.53	36.98	54.00	-17.02	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

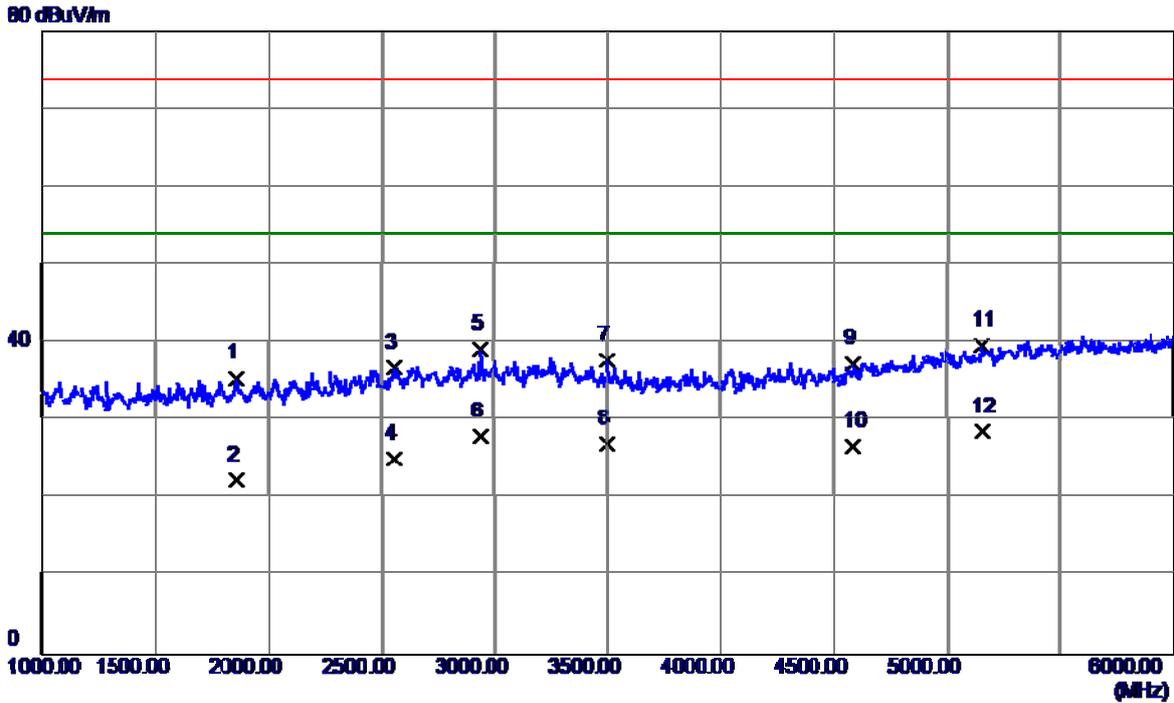


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1860.0000	38.68	-3.24	35.44	74.00	-38.56	Peak
2	1860.0000	25.64	-3.24	22.40	54.00	-31.60	AVG
3	2560.0000	36.30	0.44	36.74	74.00	-37.26	Peak
4	2560.0000	24.64	0.44	25.08	54.00	-28.92	AVG
5	2940.0000	37.00	2.13	39.13	74.00	-34.87	Peak
6	2940.0000	25.85	2.13	27.98	54.00	-26.02	AVG
7	3500.0000	35.57	2.25	37.82	74.00	-36.18	Peak
8	3500.0000	24.86	2.25	27.11	54.00	-26.89	AVG
9	4585.0000	33.07	4.29	37.36	74.00	-36.64	Peak
10	4585.0000	22.38	4.29	26.67	54.00	-27.33	AVG
11	5155.0000	32.90	6.84	39.74	74.00	-34.26	Peak
12 *	5155.0000	21.80	6.84	28.64	54.00	-25.36	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

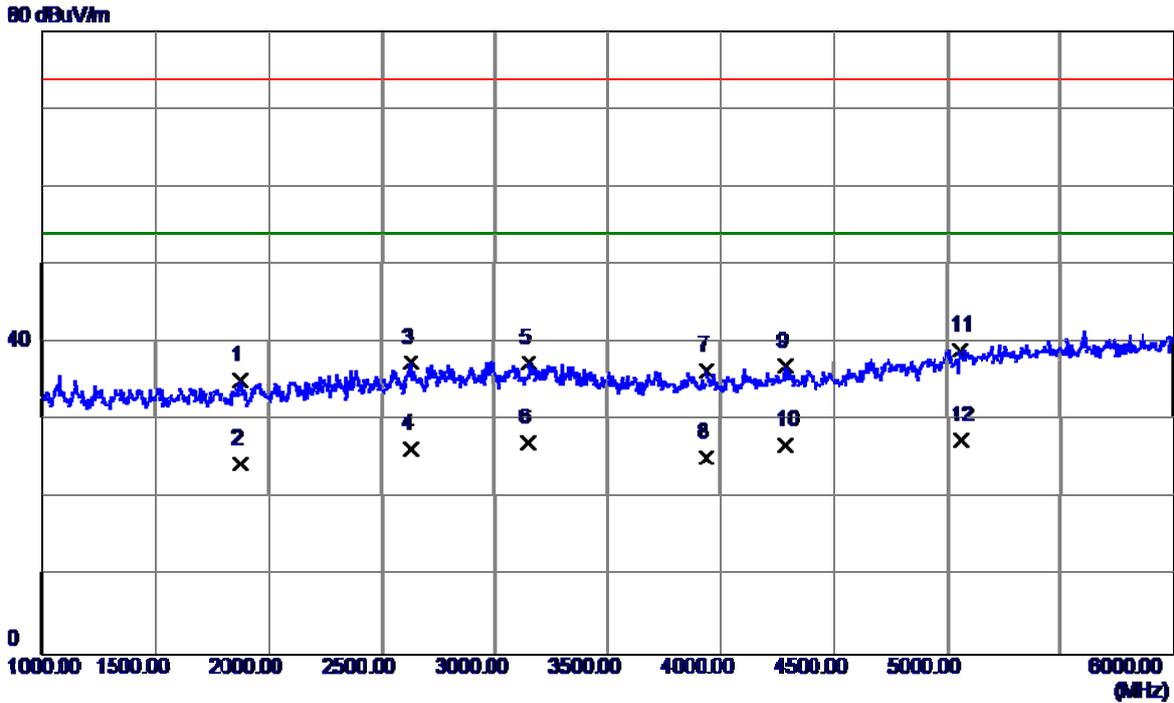


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1877.5000	38.32	-3.15	35.17	74.00	-38.83	Peak
2	1877.5000	27.64	-3.15	24.49	54.00	-29.51	AVG
3	2632.5000	36.68	0.76	37.44	74.00	-36.56	Peak
4	2632.5000	25.65	0.76	26.41	54.00	-27.59	AVG
5	3150.0000	35.09	2.36	37.45	74.00	-36.55	Peak
6	3150.0000	24.84	2.36	27.20	54.00	-26.80	AVG
7	3940.0000	33.74	2.66	36.40	74.00	-37.60	Peak
8	3940.0000	22.64	2.66	25.30	54.00	-28.70	AVG
9	4290.0000	33.62	3.39	37.01	74.00	-36.99	Peak
10	4290.0000	23.49	3.39	26.88	54.00	-27.12	AVG
11	5057.5000	32.59	6.51	39.10	74.00	-34.90	Peak
12 *	5057.5000	21.08	6.51	27.59	54.00	-26.41	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

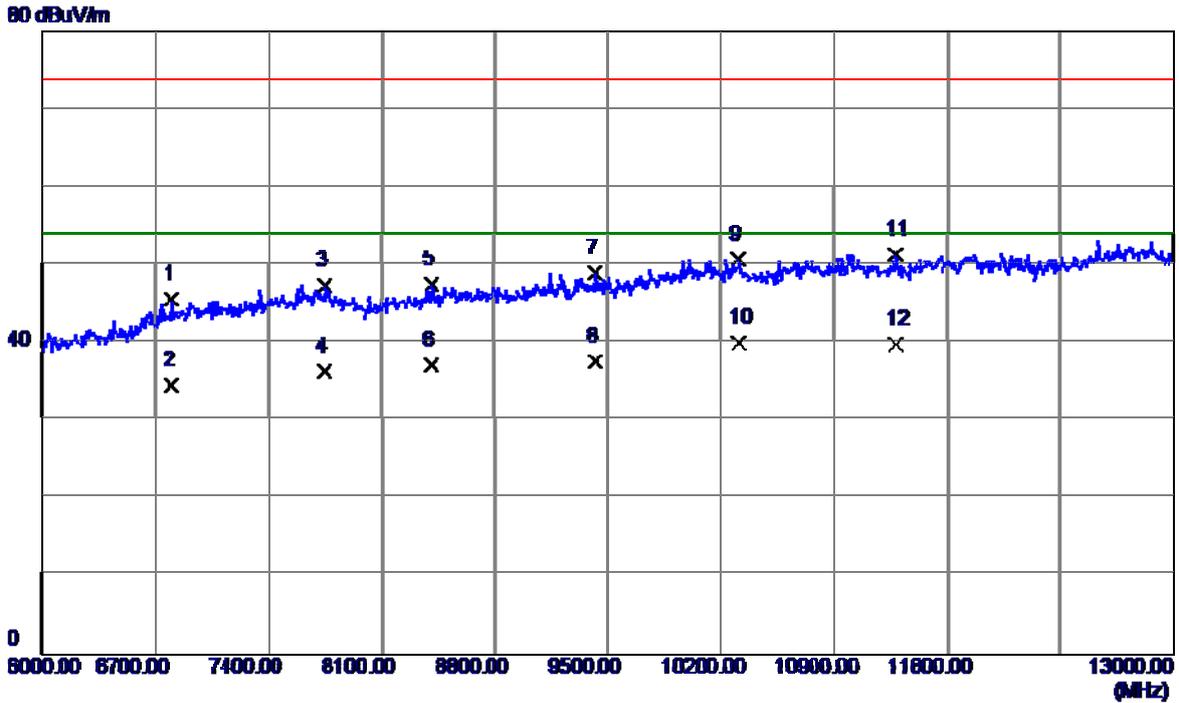


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6805.0000	34.78	10.74	45.52	74.00	-28.48	Peak
2	6805.0000	23.84	10.74	34.58	54.00	-19.42	AVG
3	7753.5000	34.78	12.58	47.36	74.00	-26.64	Peak
4	7753.5000	23.81	12.58	36.39	54.00	-17.61	AVG
5	8415.0000	34.25	13.23	47.48	74.00	-26.52	Peak
6	8415.0000	23.96	13.23	37.19	54.00	-16.81	AVG
7	9419.5000	34.45	14.53	48.98	74.00	-25.02	Peak
8	9419.5000	23.14	14.53	37.67	54.00	-16.33	AVG
9	10312.0000	34.50	16.25	50.75	74.00	-23.25	Peak
10 *	10312.0000	23.81	16.25	40.06	54.00	-13.94	AVG
11	11285.0000	33.81	17.59	51.40	74.00	-22.60	Peak
12	11285.0000	22.23	17.59	39.82	54.00	-14.18	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

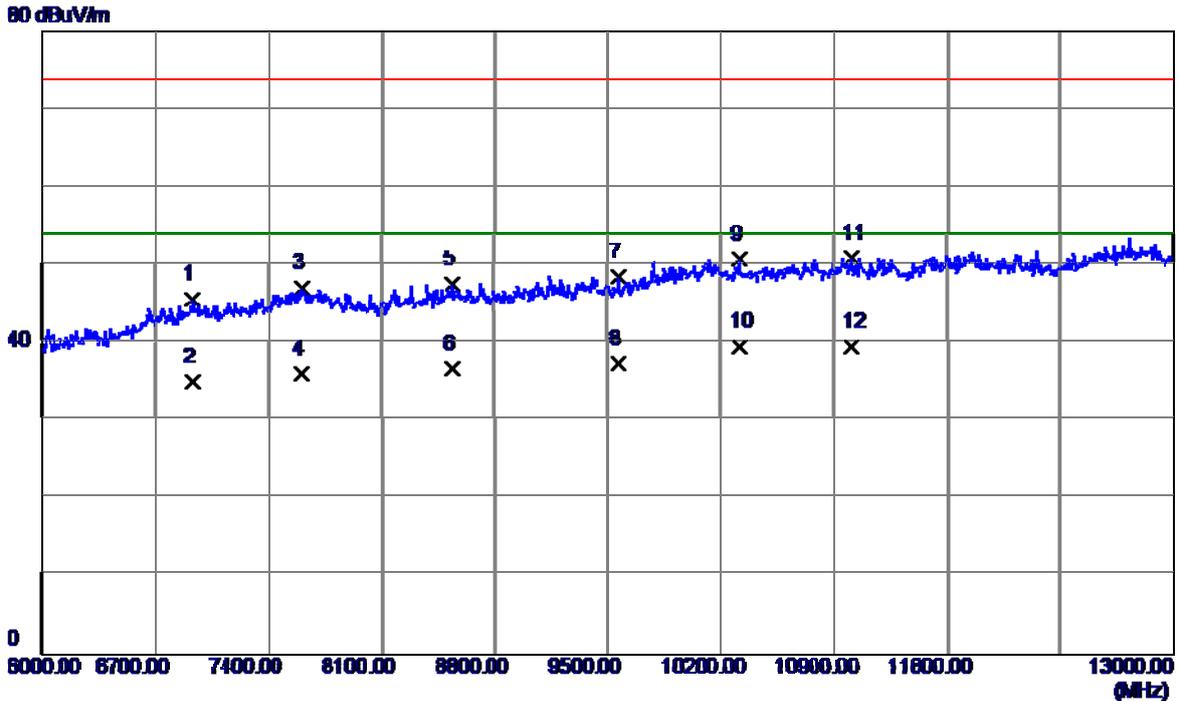


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6934.5000	34.36	11.19	45.55	74.00	-28.45	Peak
2	6934.5000	23.84	11.19	35.03	54.00	-18.97	AVG
3	7613.5000	34.39	12.61	47.00	74.00	-27.00	Peak
4	7613.5000	23.36	12.61	35.97	54.00	-18.03	AVG
5	8544.5000	34.03	13.48	47.51	74.00	-26.49	Peak
6	8544.5000	23.14	13.48	36.62	54.00	-17.38	AVG
7	9566.5000	33.80	14.67	48.47	74.00	-25.53	Peak
8	9566.5000	22.67	14.67	37.34	54.00	-16.66	AVG
9	10315.5000	34.39	16.26	50.65	74.00	-23.35	Peak
10 *	10315.5000	23.28	16.26	39.54	54.00	-14.46	AVG
11	11012.0000	33.63	17.20	50.83	74.00	-23.17	Peak
12	11012.0000	22.28	17.20	39.48	54.00	-14.52	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

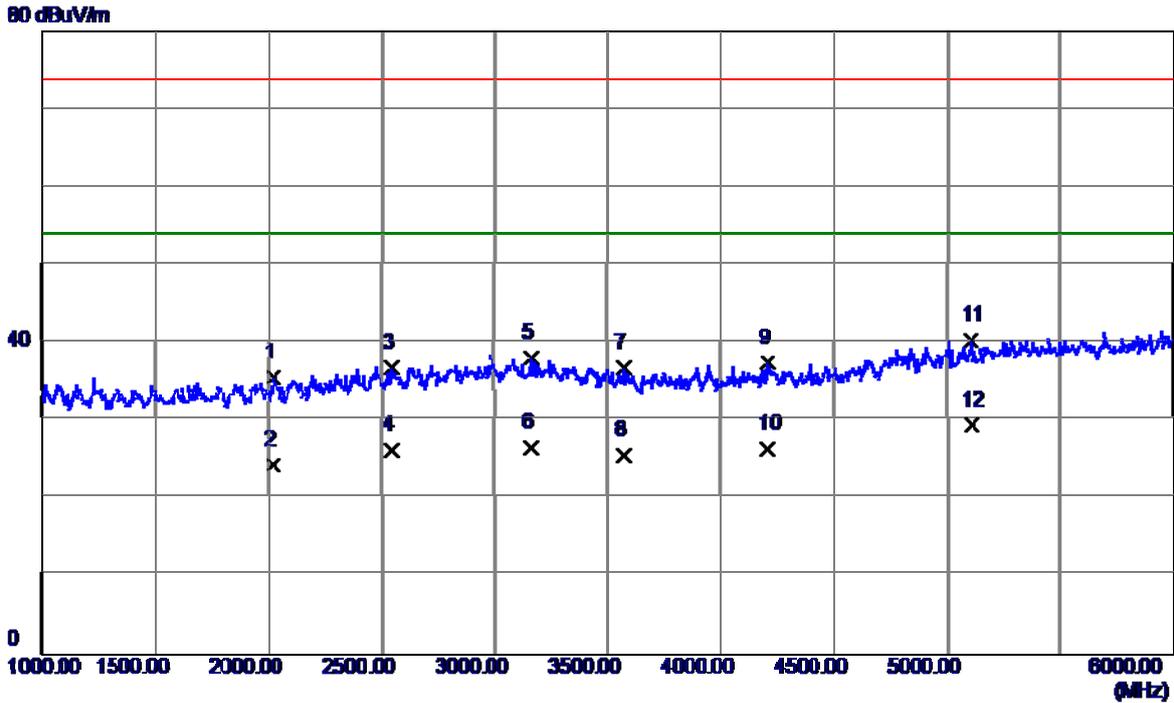


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2020.0000	37.91	-2.46	35.45	74.00	-38.55	Peak
2	2020.0000	26.83	-2.46	24.37	54.00	-29.63	AVG
3	2552.5000	36.43	0.40	36.83	74.00	-37.17	Peak
4	2552.5000	25.90	0.40	26.30	54.00	-27.70	AVG
5	3160.0000	35.80	2.35	38.15	74.00	-35.85	Peak
6	3160.0000	24.18	2.35	26.53	54.00	-27.47	AVG
7	3572.5000	34.47	2.32	36.79	74.00	-37.21	Peak
8	3572.5000	23.28	2.32	25.60	54.00	-28.40	AVG
9	4212.5000	34.17	3.21	37.38	74.00	-36.62	Peak
10	4212.5000	23.18	3.21	26.39	54.00	-27.61	AVG
11	5107.5000	33.69	6.68	40.37	74.00	-33.63	Peak
12 *	5107.5000	22.74	6.68	29.42	54.00	-24.58	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

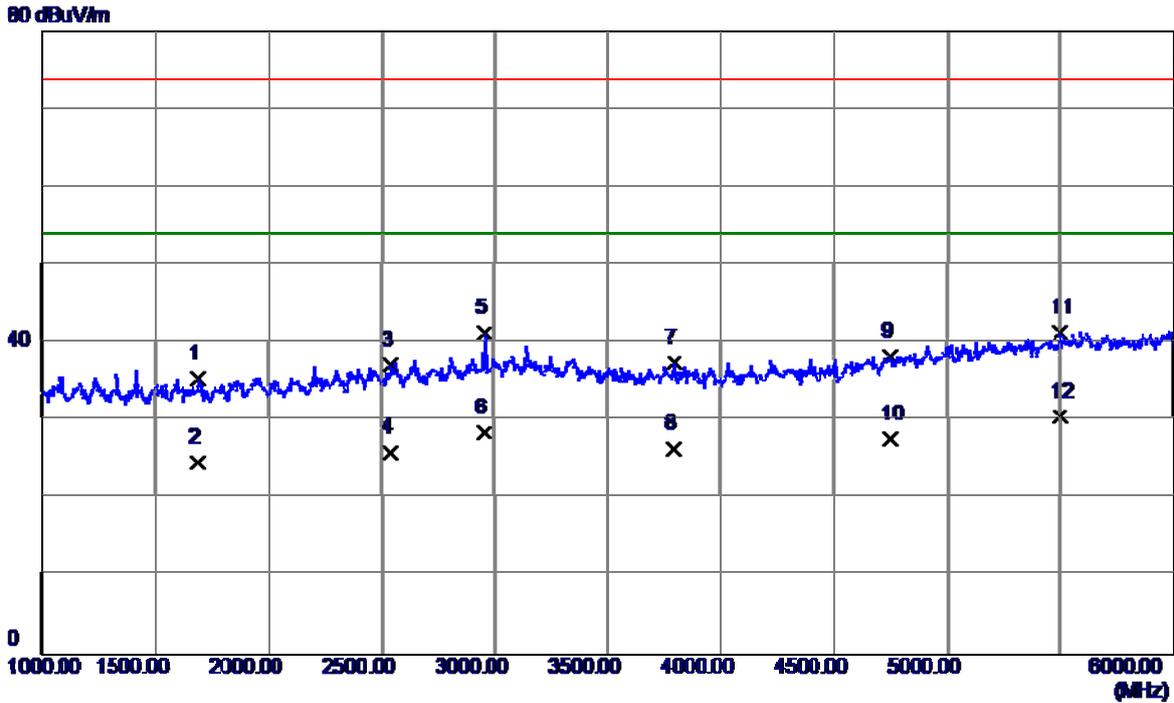


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1690.0000	39.45	-4.05	35.40	74.00	-38.60	Peak
2	1690.0000	28.65	-4.05	24.60	54.00	-29.40	AVG
3	2545.0000	36.68	0.37	37.05	74.00	-36.95	Peak
4	2545.0000	25.50	0.37	25.87	54.00	-28.13	AVG
5	2955.0000	39.12	2.20	41.32	74.00	-32.68	Peak
6	2955.0000	26.24	2.20	28.44	54.00	-25.56	AVG
7	3792.5000	34.90	2.53	37.43	74.00	-36.57	Peak
8	3792.5000	23.84	2.53	26.37	54.00	-27.63	AVG
9	4752.5000	33.12	5.11	38.23	74.00	-35.77	Peak
10	4752.5000	22.64	5.11	27.75	54.00	-26.25	AVG
11	5497.5000	33.30	8.00	41.30	74.00	-32.70	Peak
12 *	5497.5000	22.57	8.00	30.57	54.00	-23.43	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

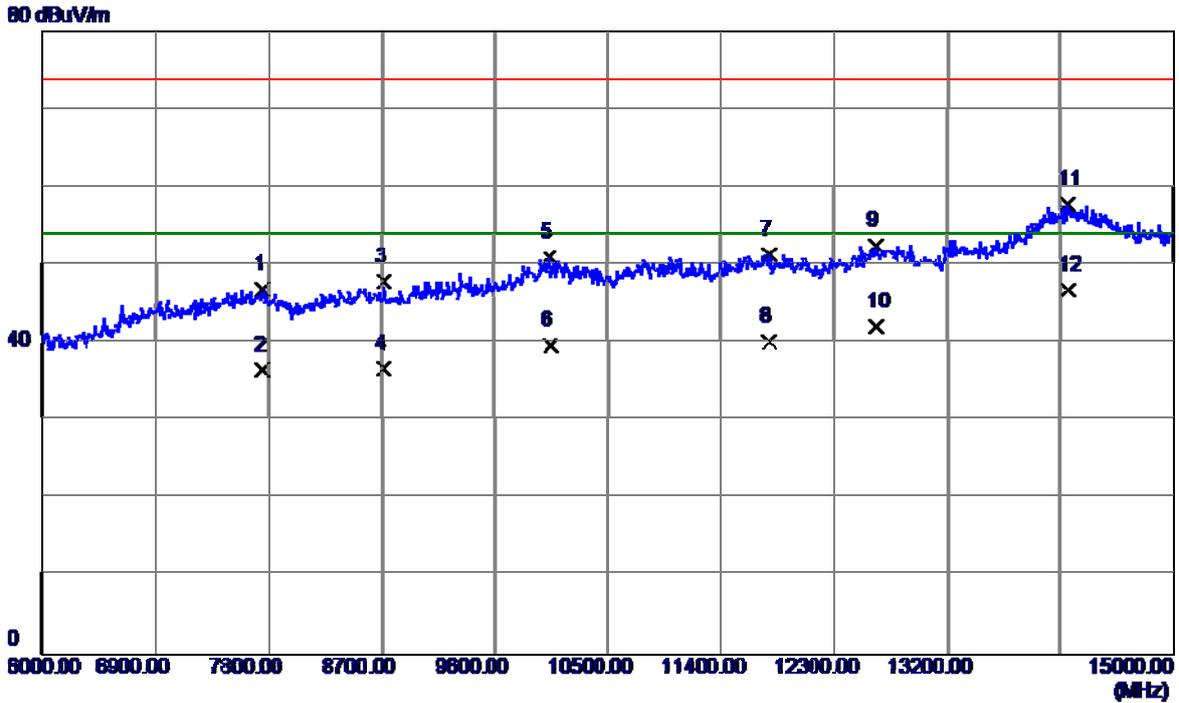


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7755.0000	34.23	12.58	46.81	74.00	-27.19	Peak
2	7755.0000	23.84	12.58	36.42	54.00	-17.58	AVG
3	8722.5000	33.92	13.89	47.81	74.00	-26.19	Peak
4	8722.5000	22.71	13.89	36.60	54.00	-17.40	AVG
5	10036.5000	35.42	15.64	51.06	74.00	-22.94	Peak
6	10036.5000	24.08	15.64	39.72	54.00	-14.28	AVG
7	11787.0000	33.63	17.68	51.31	74.00	-22.69	Peak
8	11787.0000	22.51	17.68	40.19	54.00	-13.81	AVG
9	12642.0000	34.17	18.29	52.46	74.00	-21.54	Peak
10	12642.0000	23.82	18.29	42.11	54.00	-11.89	AVG
11	14163.0000	35.16	22.62	57.78	74.00	-16.22	Peak
12 *	14163.0000	24.18	22.62	46.80	54.00	-7.20	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:SCUD(SONY)		
Test Engineer	Trey Chen		

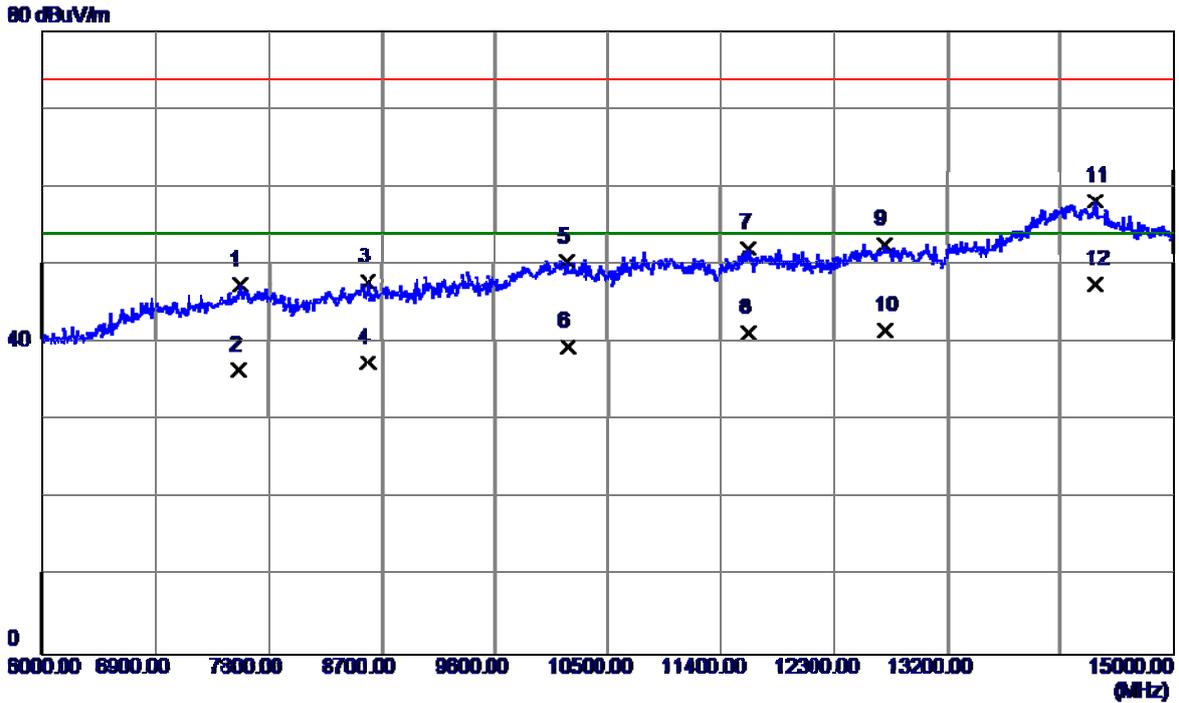


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7570.5000	34.81	12.63	47.44	74.00	-26.56	Peak
2	7570.5000	23.83	12.63	36.46	54.00	-17.54	AVG
3	8592.0000	34.23	13.59	47.82	74.00	-26.18	Peak
4	8592.0000	23.84	13.59	37.43	54.00	-16.57	AVG
5	10176.0000	34.53	15.95	50.48	74.00	-23.52	Peak
6	10176.0000	23.56	15.95	39.51	54.00	-14.49	AVG
7	11620.5000	34.34	17.81	52.15	74.00	-21.85	Peak
8	11620.5000	23.47	17.81	41.28	54.00	-12.72	AVG
9	12705.0000	34.30	18.39	52.69	74.00	-21.31	Peak
10	12705.0000	23.17	18.39	41.56	54.00	-12.44	AVG
11	14379.0000	35.52	22.79	58.31	74.00	-15.69	Peak
12 *	14379.0000	24.67	22.79	47.46	54.00	-6.54	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

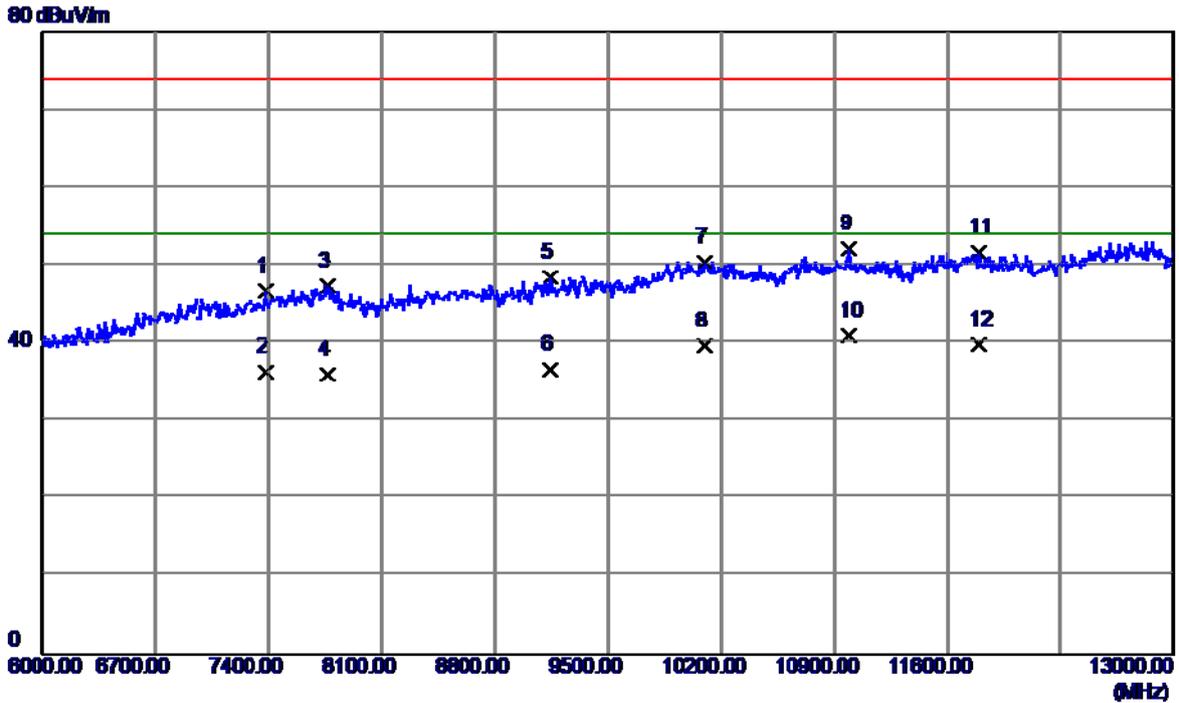


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7382.5000	34.29	12.36	46.65	74.00	-27.35	Peak
2	7382.5000	23.97	12.36	36.33	54.00	-17.67	AVG
3	7764.0000	34.85	12.57	47.42	74.00	-26.58	Peak
4	7764.0000	23.48	12.57	36.05	54.00	-17.95	AVG
5	9143.0000	33.99	14.53	48.52	74.00	-25.48	Peak
6	9143.0000	22.18	14.53	36.71	54.00	-17.29	AVG
7	10098.5000	34.69	15.78	50.47	74.00	-23.53	Peak
8	10098.5000	23.83	15.78	39.61	54.00	-14.39	AVG
9	10994.5000	34.95	17.17	52.12	74.00	-21.88	Peak
10 *	10994.5000	23.84	17.17	41.01	54.00	-12.99	AVG
11	11796.0000	33.96	17.67	51.63	74.00	-22.37	Peak
12	11796.0000	22.16	17.67	39.83	54.00	-14.17	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

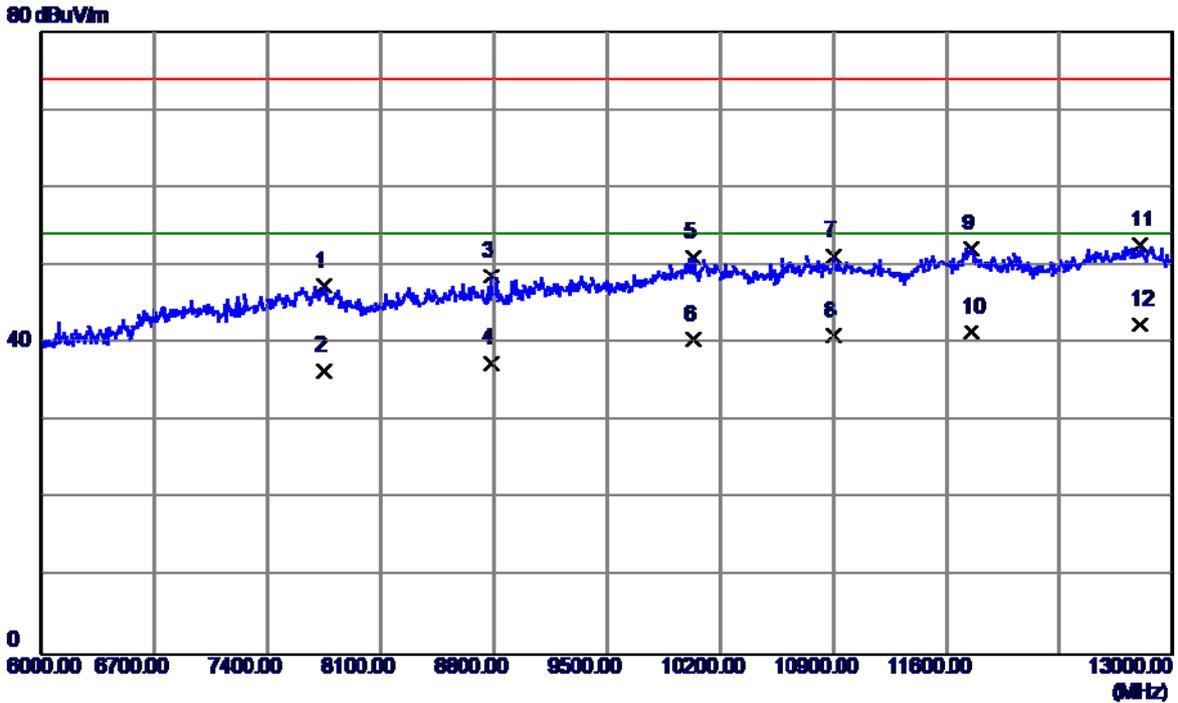


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7746.5000	34.73	12.58	47.31	74.00	-26.69	Peak
2	7746.5000	23.84	12.58	36.42	54.00	-17.58	AVG
3	8786.0000	34.61	14.04	48.65	74.00	-25.35	Peak
4	8786.0000	23.46	14.04	37.50	54.00	-16.50	AVG
5	10035.5000	35.46	15.64	51.10	74.00	-22.90	Peak
6	10035.5000	24.81	15.64	40.45	54.00	-13.55	AVG
7	10903.5000	34.14	17.08	51.22	74.00	-22.78	Peak
8	10903.5000	23.82	17.08	40.90	54.00	-13.10	AVG
9	11754.0000	34.46	17.70	52.16	74.00	-21.84	Peak
10	11754.0000	23.76	17.70	41.46	54.00	-12.54	AVG
11	12797.0000	34.06	18.52	52.58	74.00	-21.42	Peak
12 *	12797.0000	23.88	18.52	42.40	54.00	-11.60	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

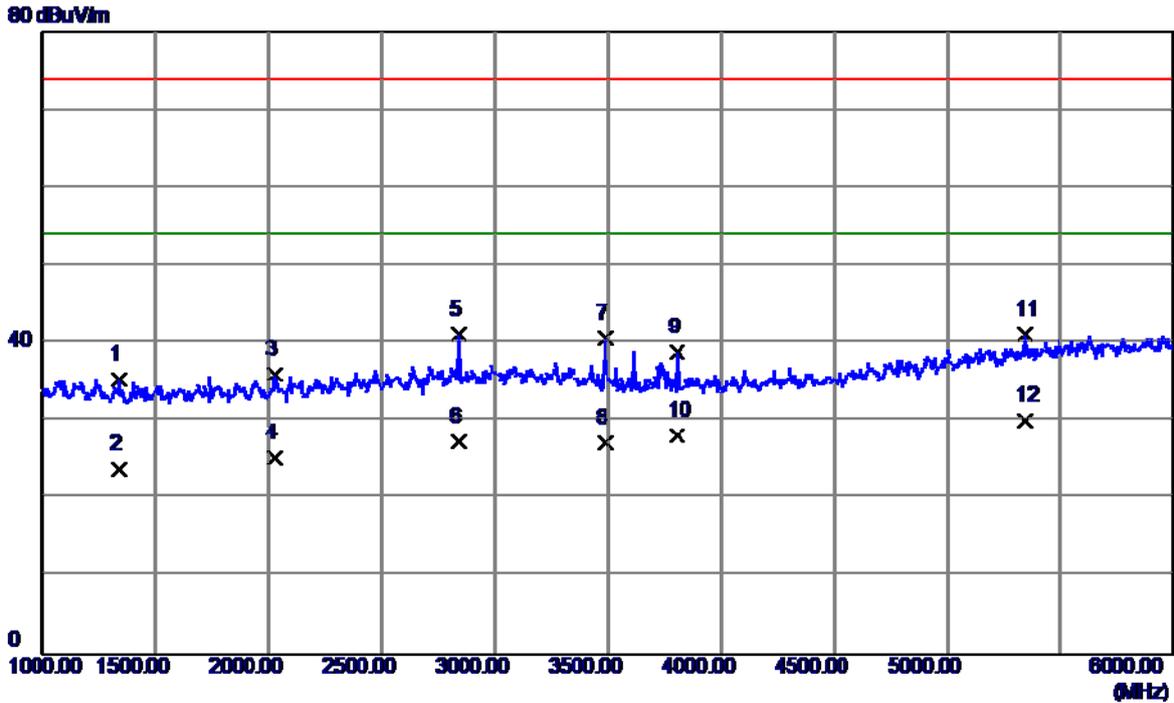


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1337.5000	40.85	-5.53	35.32	74.00	-38.68	Peak
2	1337.5000	29.37	-5.53	23.84	54.00	-30.16	AVG
3	2030.0000	38.48	-2.41	36.07	74.00	-37.93	Peak
4	2030.0000	27.64	-2.41	25.23	54.00	-28.77	AVG
5	2837.5000	39.37	1.68	41.05	74.00	-32.95	Peak
6	2837.5000	25.64	1.68	27.32	54.00	-26.68	AVG
7	3487.5000	38.37	2.26	40.63	74.00	-33.37	Peak
8	3487.5000	24.97	2.26	27.23	54.00	-26.77	AVG
9	3805.0000	36.41	2.54	38.95	74.00	-35.05	Peak
10	3805.0000	25.65	2.54	28.19	54.00	-25.81	AVG
11	5345.0000	33.57	7.48	41.05	74.00	-32.95	Peak
12 *	5345.0000	22.66	7.48	30.14	54.00	-23.86	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

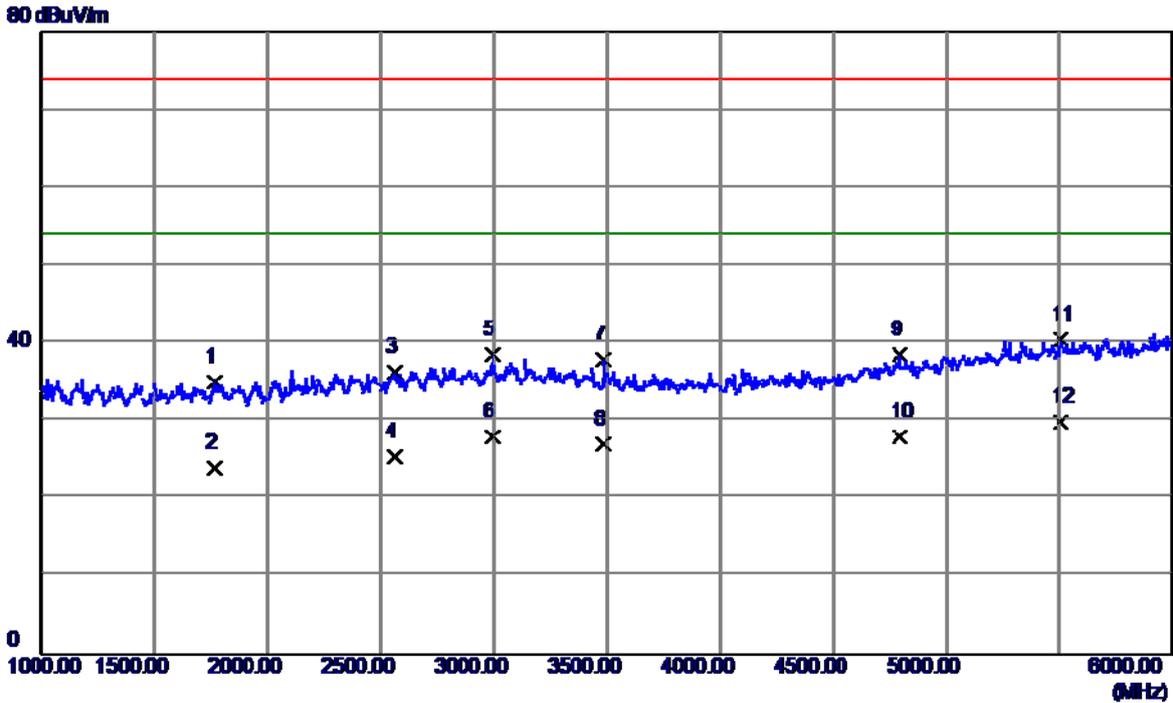


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1765.0000	38.77	-3.69	35.08	74.00	-38.92	Peak
2	1765.0000	27.66	-3.69	23.97	54.00	-30.03	AVG
3	2562.5000	35.92	0.45	36.37	74.00	-37.63	Peak
4	2562.5000	24.94	0.45	25.39	54.00	-28.61	AVG
5	2995.0000	36.17	2.38	38.55	74.00	-35.45	Peak
6	2995.0000	25.67	2.38	28.05	54.00	-25.95	AVG
7	3485.0000	35.60	2.26	37.86	74.00	-36.14	Peak
8	3485.0000	24.84	2.26	27.10	54.00	-26.90	AVG
9	4792.5000	33.23	5.30	38.53	74.00	-35.47	Peak
10	4792.5000	22.68	5.30	27.98	54.00	-26.02	AVG
11	5505.0000	32.41	8.01	40.42	74.00	-33.58	Peak
12 *	5505.0000	21.89	8.01	29.90	54.00	-24.10	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)Earphone:QuanCheng		
Test Engineer	Treyy Chen		

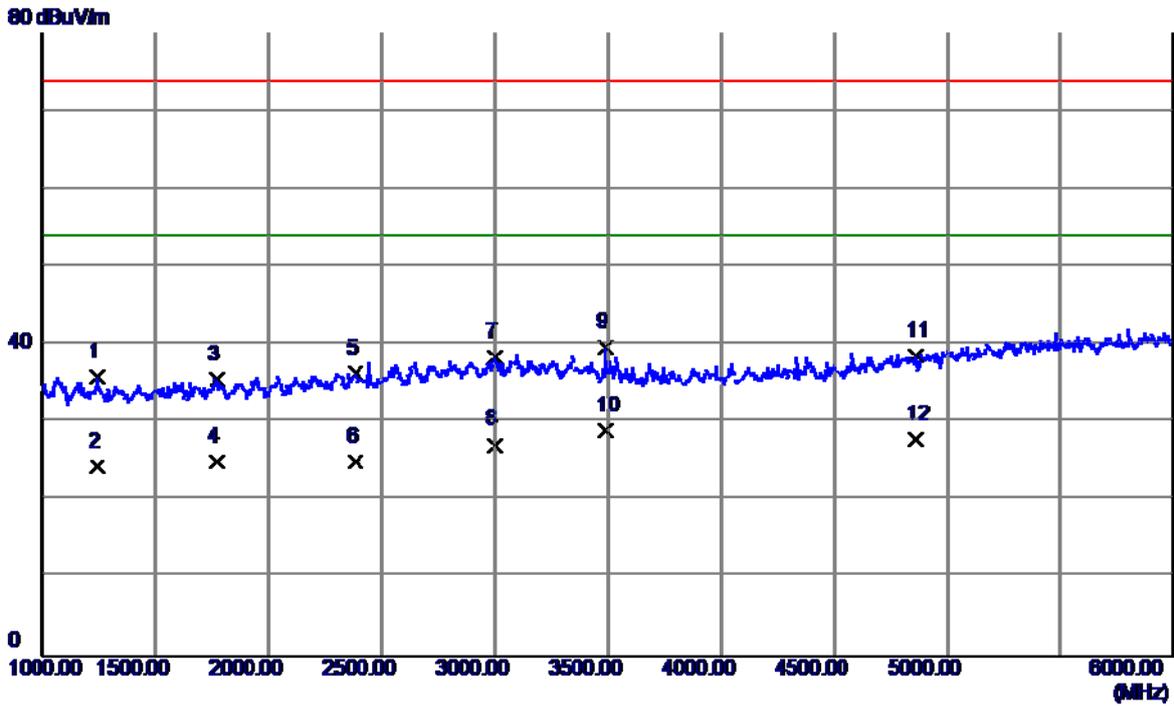


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1242.5000	41.67	-5.87	35.80	74.00	-38.20	Peak
2	1242.5000	30.18	-5.87	24.31	54.00	-29.69	AVG
3	1772.5000	39.15	-3.65	35.50	74.00	-38.50	Peak
4	1772.5000	28.65	-3.65	25.00	54.00	-29.00	AVG
5	2385.0000	36.80	-0.46	36.34	74.00	-37.66	Peak
6	2385.0000	25.35	-0.46	24.89	54.00	-29.11	AVG
7	3000.0000	35.96	2.40	38.36	74.00	-35.64	Peak
8	3000.0000	24.72	2.40	27.12	54.00	-26.88	AVG
9	3487.5000	37.48	2.26	39.74	74.00	-34.26	Peak
10 *	3487.5000	26.64	2.26	28.90	54.00	-25.10	AVG
11	4860.0000	32.99	5.63	38.62	74.00	-35.38	Peak
12	4860.0000	22.15	5.63	27.78	54.00	-26.22	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)Earphone:QuanCheng		
Test Engineer	Trey Chen		

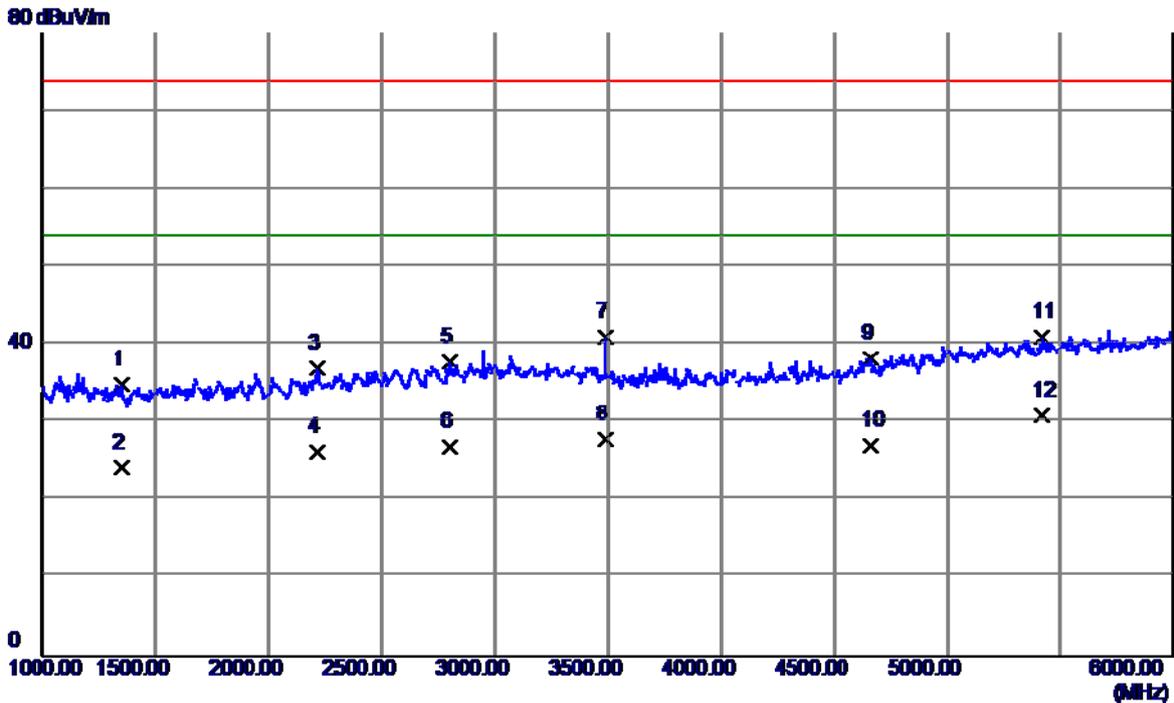


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1347.5000	40.32	-5.49	34.83	74.00	-39.17	Peak
2	1347.5000	29.63	-5.49	24.14	54.00	-29.86	AVG
3	2217.5000	38.27	-1.38	36.89	74.00	-37.11	Peak
4	2217.5000	27.65	-1.38	26.27	54.00	-27.73	AVG
5	2800.0000	36.31	1.51	37.82	74.00	-36.18	Peak
6	2800.0000	25.37	1.51	26.88	54.00	-27.12	AVG
7	3487.5000	38.71	2.26	40.97	74.00	-33.03	Peak
8	3487.5000	25.64	2.26	27.90	54.00	-26.10	AVG
9	4660.0000	33.58	4.66	38.24	74.00	-35.76	Peak
10	4660.0000	22.35	4.66	27.01	54.00	-26.99	AVG
11	5415.0000	33.20	7.72	40.92	74.00	-33.08	Peak
12 *	5415.0000	23.09	7.72	30.81	54.00	-23.19	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)Earphone:LianChuang		
Test Engineer	Trey Chen		

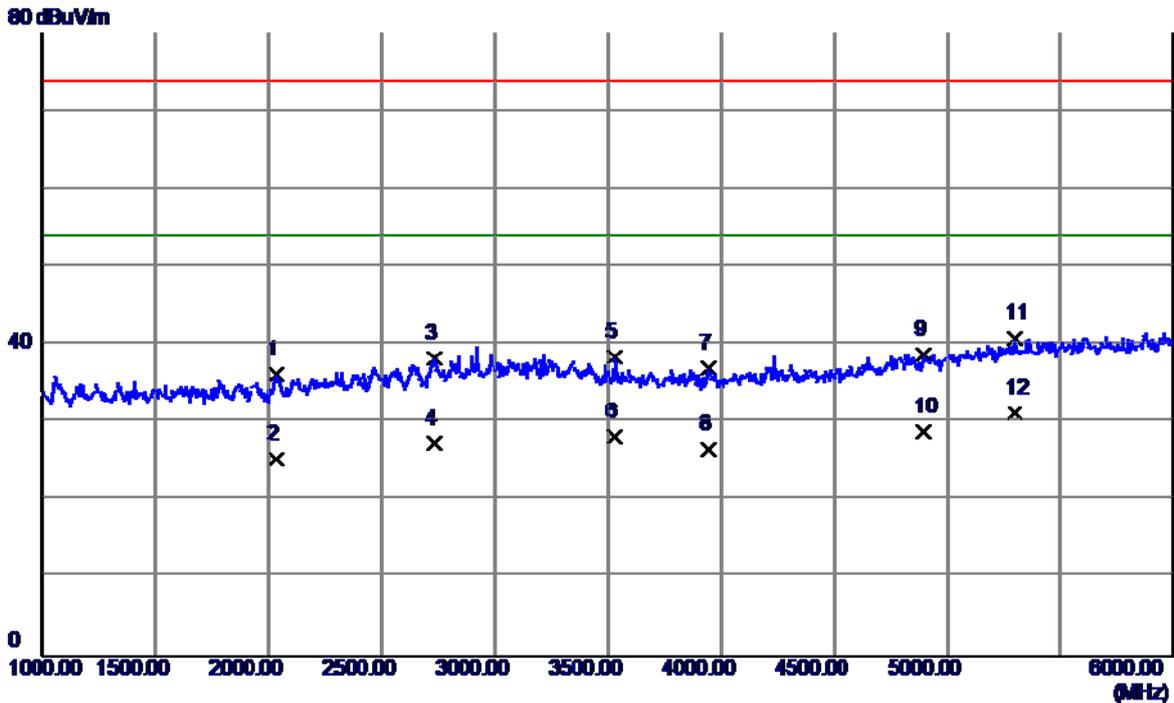


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2032.5000	38.61	-2.39	36.22	74.00	-37.78	Peak
2	2032.5000	27.68	-2.39	25.29	54.00	-28.71	AVG
3	2732.5000	37.00	1.21	38.21	74.00	-35.79	Peak
4	2732.5000	26.07	1.21	27.28	54.00	-26.72	AVG
5	3530.0000	36.14	2.28	38.42	74.00	-35.58	Peak
6	3530.0000	25.84	2.28	28.12	54.00	-25.88	AVG
7	3942.5000	34.25	2.67	36.92	74.00	-37.08	Peak
8	3942.5000	23.94	2.67	26.61	54.00	-27.39	AVG
9	4895.0000	32.94	5.80	38.74	74.00	-35.26	Peak
10	4895.0000	22.98	5.80	28.78	54.00	-25.22	AVG
11	5302.5000	33.50	7.34	40.84	74.00	-33.16	Peak
12 *	5302.5000	23.90	7.34	31.24	54.00	-22.76	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)Earphone:LianChuang		
Test Engineer	Trey Chen		

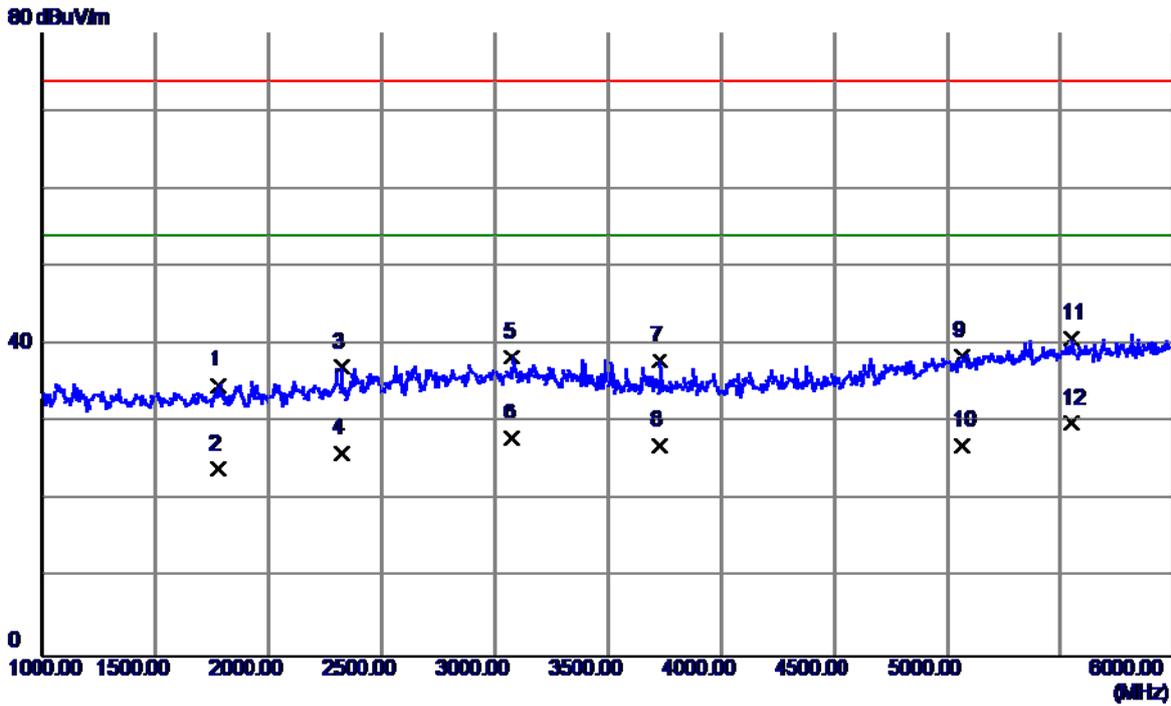


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1780.0000	38.42	-3.62	34.80	74.00	-39.20	Peak
2	1780.0000	27.65	-3.62	24.03	54.00	-29.97	AVG
3	2322.5000	37.87	-0.80	37.07	74.00	-36.93	Peak
4	2322.5000	26.94	-0.80	26.14	54.00	-27.86	AVG
5	3075.0000	36.06	2.38	38.44	74.00	-35.56	Peak
6	3075.0000	25.64	2.38	28.02	54.00	-25.98	AVG
7	3730.0000	35.47	2.47	37.94	74.00	-36.06	Peak
8	3730.0000	24.50	2.47	26.97	54.00	-27.03	AVG
9	5067.5000	31.95	6.54	38.49	74.00	-35.51	Peak
10	5067.5000	20.51	6.54	27.05	54.00	-26.95	AVG
11	5552.5000	32.78	8.06	40.84	74.00	-33.16	Peak
12 *	5552.5000	21.85	8.06	29.91	54.00	-24.09	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)Earphone:MERRY		
Test Engineer	Trey Chen		

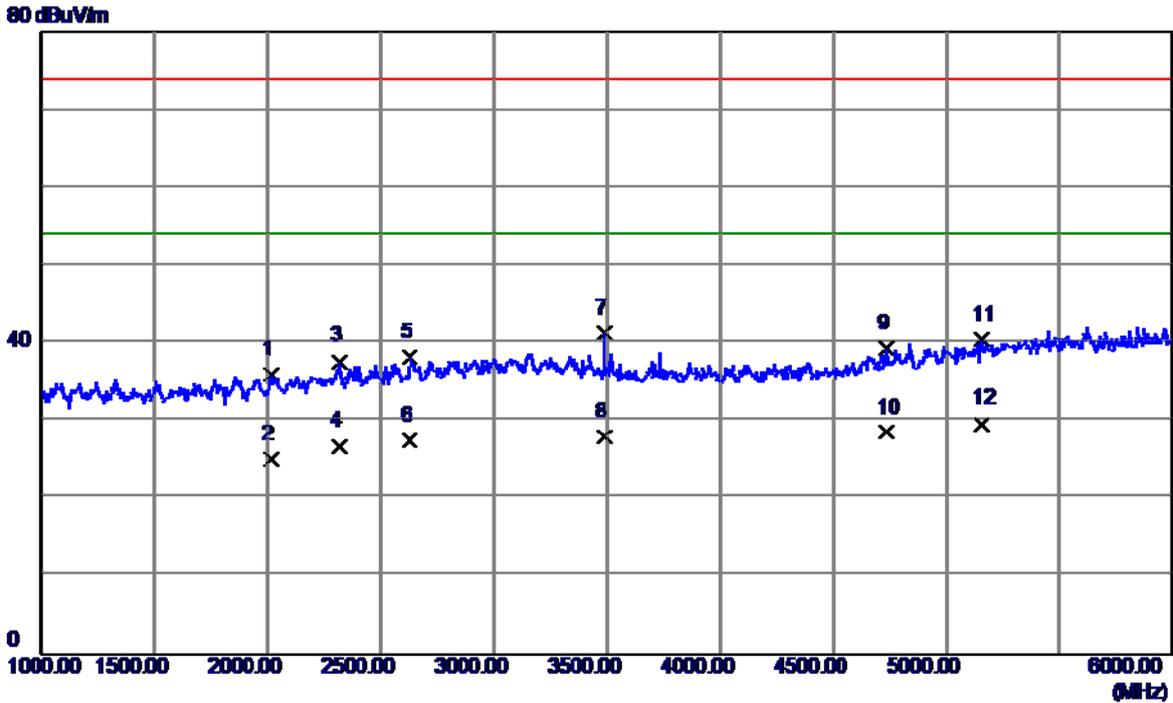


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2015.0000	38.51	-2.49	36.02	74.00	-37.98	Peak
2	2015.0000	27.65	-2.49	25.16	54.00	-28.84	AVG
3	2315.0000	38.52	-0.84	37.68	74.00	-36.32	Peak
4	2315.0000	27.64	-0.84	26.80	54.00	-27.20	AVG
5	2627.5000	37.43	0.74	38.17	74.00	-35.83	Peak
6	2627.5000	26.77	0.74	27.51	54.00	-26.49	AVG
7	3487.5000	38.95	2.26	41.21	74.00	-32.79	Peak
8	3487.5000	25.75	2.26	28.01	54.00	-25.99	AVG
9	4735.0000	34.27	5.02	39.29	74.00	-34.71	Peak
10	4735.0000	23.54	5.02	28.56	54.00	-25.44	AVG
11	5157.5000	33.64	6.85	40.49	74.00	-33.51	Peak
12 *	5157.5000	22.83	6.85	29.68	54.00	-24.32	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)Earphone:MERRY		
Test Engineer	Trey Chen		

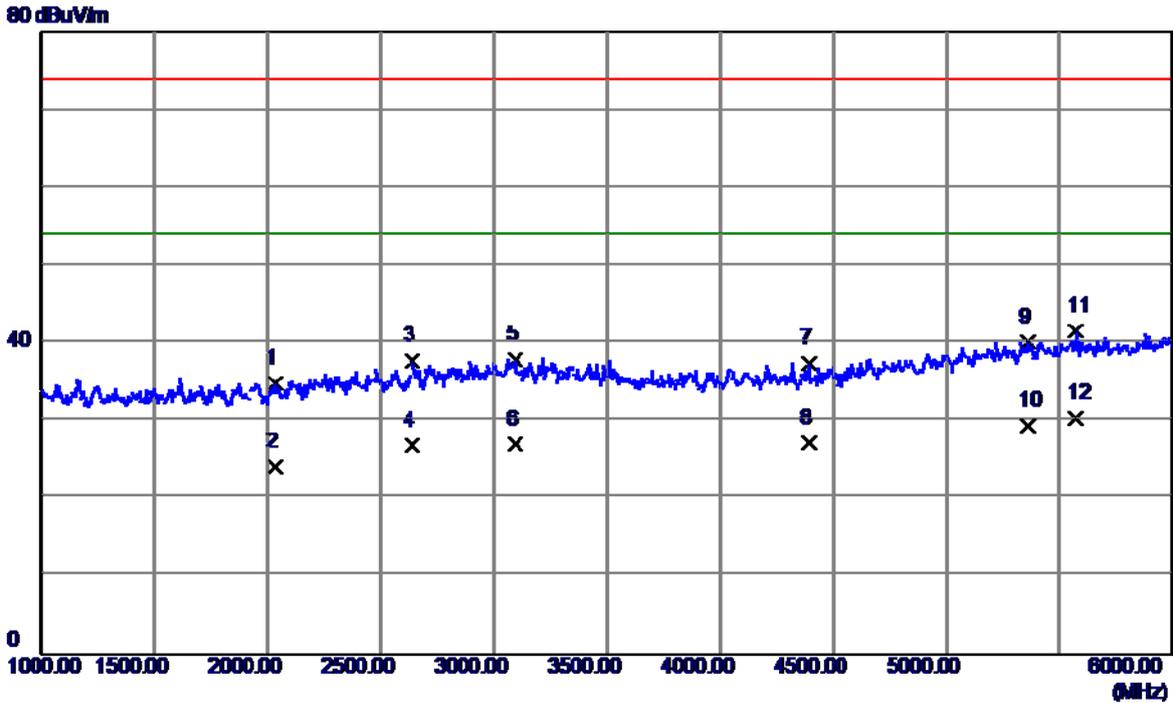


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2035.0000	37.20	-2.38	34.82	74.00	-39.18	Peak
2	2035.0000	26.60	-2.38	24.22	54.00	-29.78	AVG
3	2640.0000	36.96	0.79	37.75	74.00	-36.25	Peak
4	2640.0000	26.05	0.79	26.84	54.00	-27.16	AVG
5	3092.5000	35.61	2.37	37.98	74.00	-36.02	Peak
6	3092.5000	24.65	2.37	27.02	54.00	-26.98	AVG
7	4392.5000	33.83	3.63	37.46	74.00	-36.54	Peak
8	4392.5000	23.64	3.63	27.27	54.00	-26.73	AVG
9	5362.5000	32.65	7.54	40.19	74.00	-33.81	Peak
10	5362.5000	21.94	7.54	29.48	54.00	-24.52	AVG
11	5575.0000	33.51	8.08	41.59	74.00	-32.41	Peak
12 *	5575.0000	22.38	8.08	30.46	54.00	-23.54	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)Earphone:Goertek		
Test Engineer	Trey Chen		

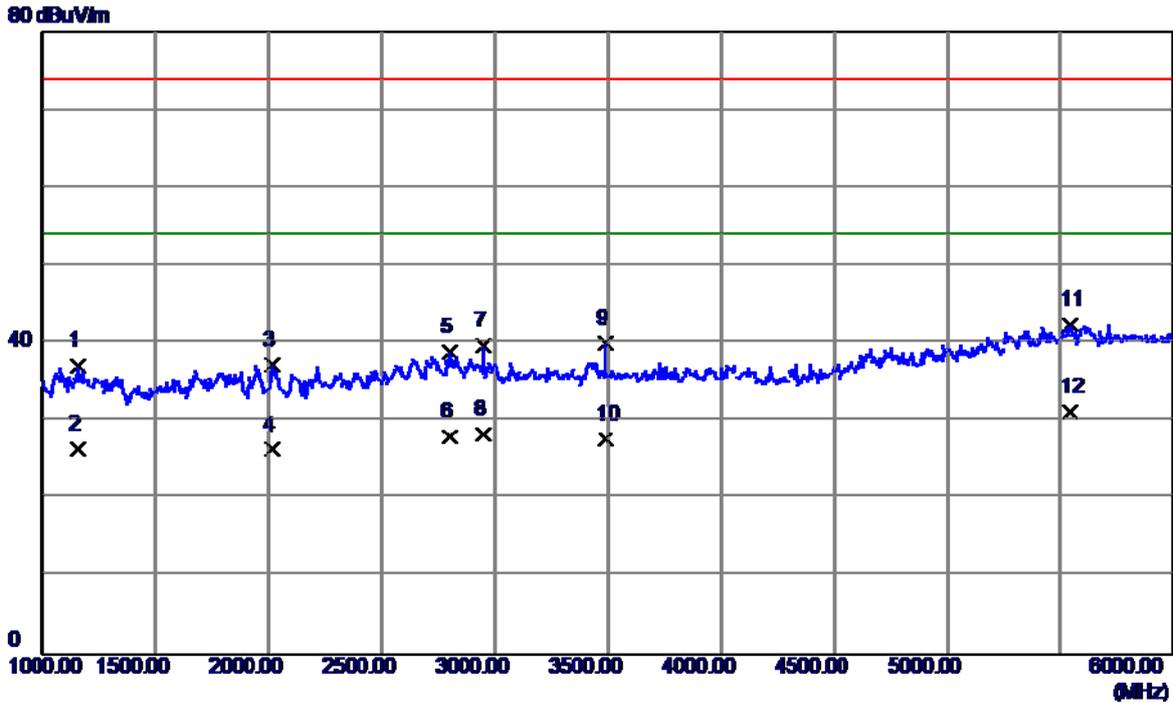


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1155.0000	43.37	-6.18	37.19	74.00	-36.81	Peak
2	1155.0000	32.60	-6.18	26.42	54.00	-27.58	AVG
3	2015.0000	39.69	-2.49	37.20	74.00	-36.80	Peak
4	2015.0000	28.81	-2.49	26.32	54.00	-27.68	AVG
5	2800.0000	37.31	1.51	38.82	74.00	-35.18	Peak
6	2800.0000	26.50	1.51	28.01	54.00	-25.99	AVG
7	2947.5000	37.53	2.17	39.70	74.00	-34.30	Peak
8	2947.5000	26.15	2.17	28.32	54.00	-25.68	AVG
9	3487.5000	37.71	2.26	39.97	74.00	-34.03	Peak
10	3487.5000	25.42	2.26	27.68	54.00	-26.32	AVG
11	5542.5000	34.34	8.05	42.39	74.00	-31.61	Peak
12 *	5542.5000	23.10	8.05	31.15	54.00	-22.85	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG))Earphone:Goertek		
Test Engineer	Trey Chen		

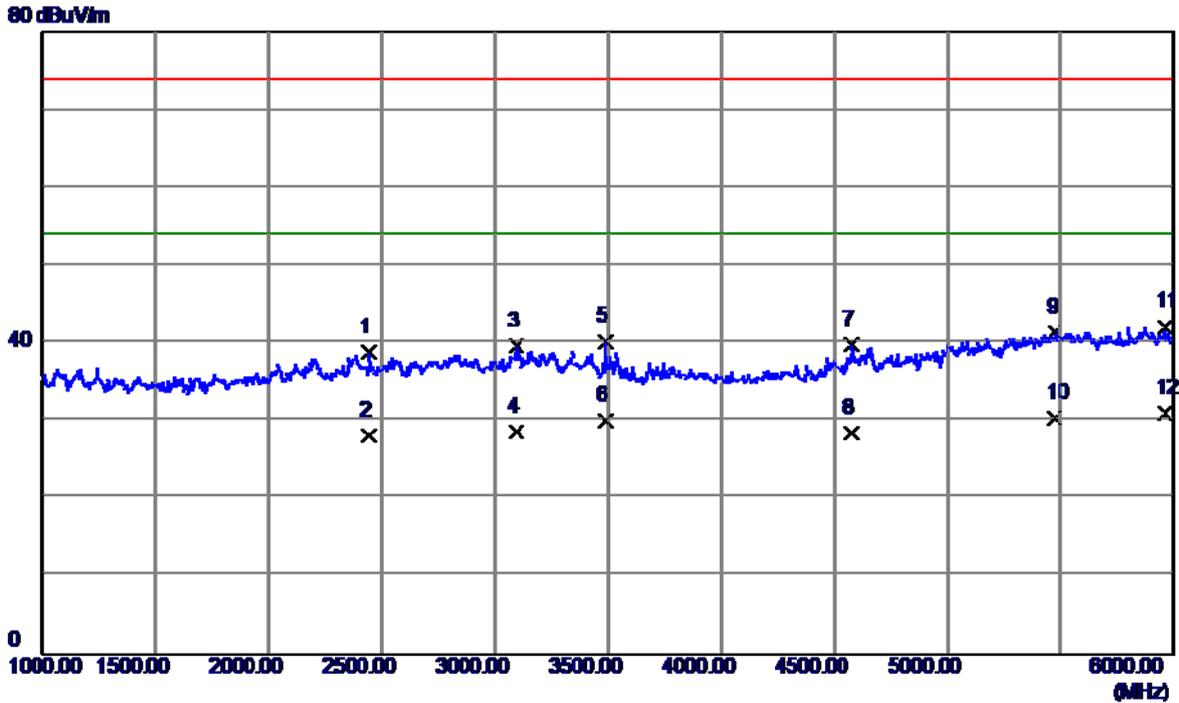


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2445.0000	38.99	-0.13	38.86	74.00	-35.14	Peak
2	2445.0000	28.24	-0.13	28.11	54.00	-25.89	AVG
3	3092.5000	37.30	2.37	39.67	74.00	-34.33	Peak
4	3092.5000	26.28	2.37	28.65	54.00	-25.35	AVG
5	3487.5000	37.98	2.26	40.24	74.00	-33.76	Peak
6	3487.5000	27.76	2.26	30.02	54.00	-23.98	AVG
7	4577.5000	35.56	4.26	39.82	74.00	-34.18	Peak
8	4577.5000	24.16	4.26	28.42	54.00	-25.58	AVG
9	5475.0000	33.48	7.92	41.40	74.00	-32.60	Peak
10	5475.0000	22.44	7.92	30.36	54.00	-23.64	AVG
11	5960.0000	33.74	8.42	42.16	74.00	-31.84	Peak
12 *	5960.0000	22.56	8.42	30.98	54.00	-23.02	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

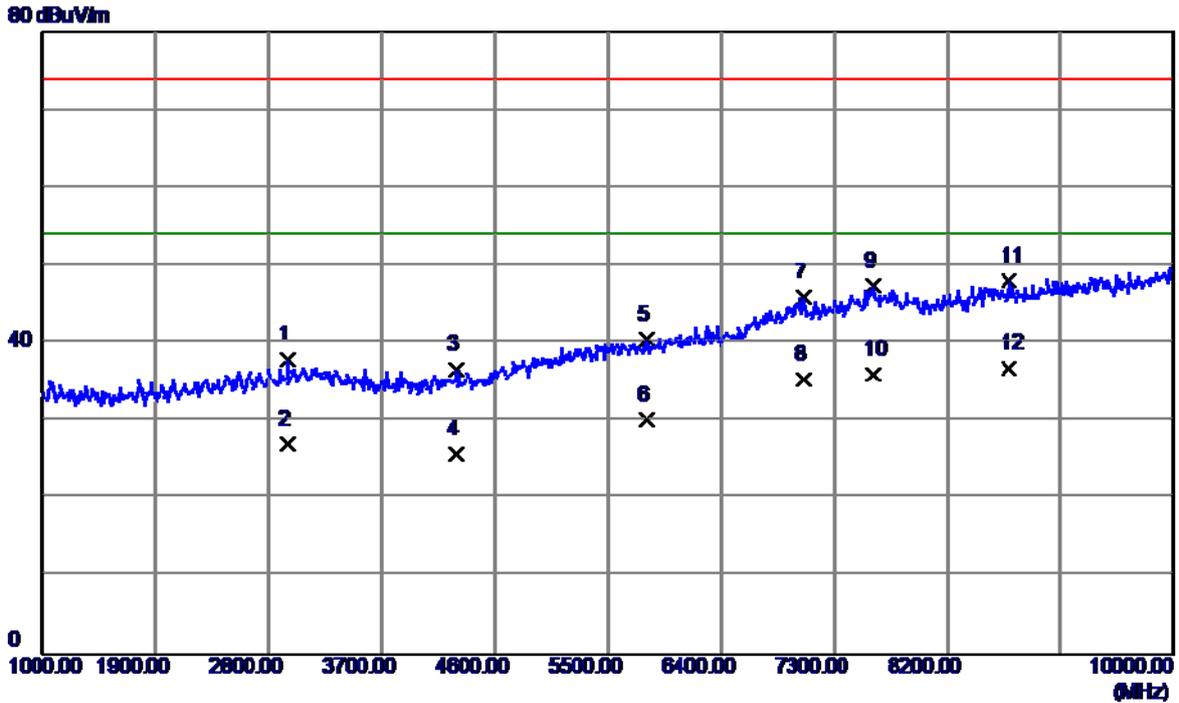


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2948.5000	35.69	2.17	37.86	74.00	-36.14	Peak
2	2948.5000	24.89	2.17	27.06	54.00	-26.94	AVG
3	4289.5000	33.19	3.39	36.58	74.00	-37.42	Peak
4	4289.5000	22.35	3.39	25.74	54.00	-28.26	AVG
5	5810.5000	32.22	8.29	40.51	74.00	-33.49	Peak
6	5810.5000	21.87	8.29	30.16	54.00	-23.84	AVG
7	7061.5000	34.38	11.57	45.95	74.00	-28.05	Peak
8	7061.5000	23.84	11.57	35.41	54.00	-18.59	AVG
9	7610.5000	34.68	12.62	47.30	74.00	-26.70	Peak
10	7610.5000	23.34	12.62	35.96	54.00	-18.04	AVG
11	8695.0000	34.10	13.83	47.93	74.00	-26.07	Peak
12 *	8695.0000	22.95	13.83	36.78	54.00	-17.22	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

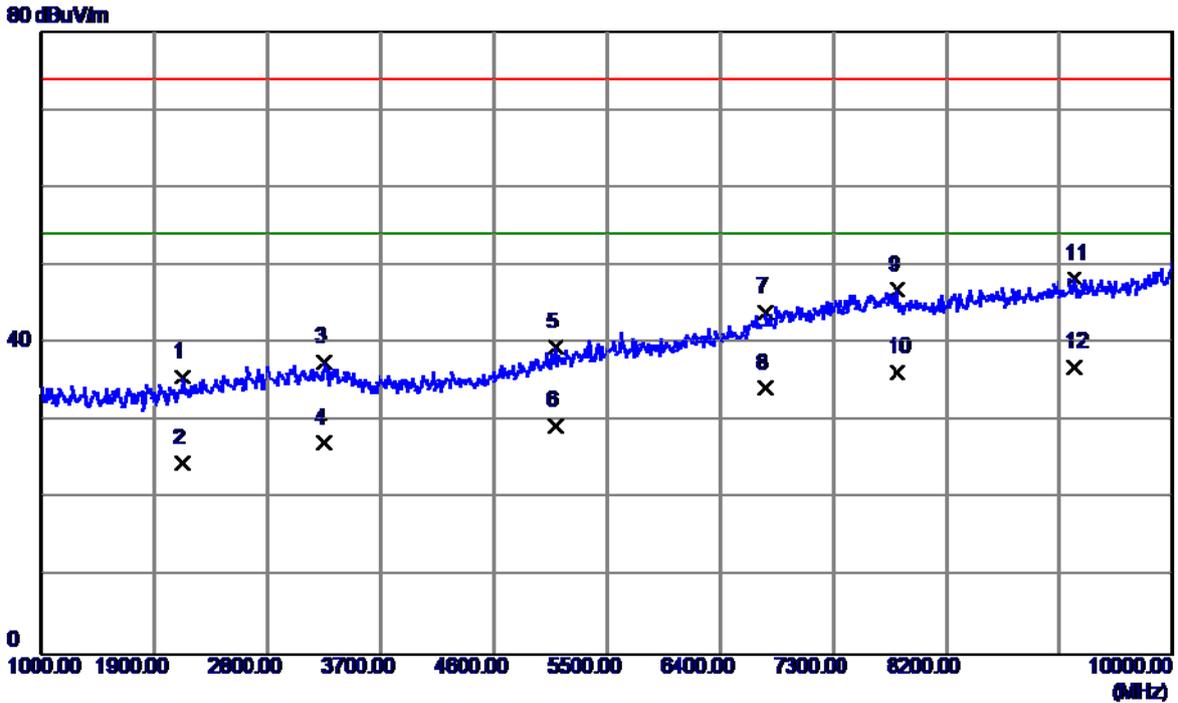


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2116.0000	37.62	-1.93	35.69	74.00	-38.31	Peak
2	2116.0000	26.63	-1.93	24.70	54.00	-29.30	AVG
3	3250.0000	35.22	2.33	37.55	74.00	-36.45	Peak
4	3250.0000	24.86	2.33	27.19	54.00	-26.81	AVG
5	5090.5000	32.90	6.62	39.52	74.00	-34.48	Peak
6	5090.5000	22.84	6.62	29.46	54.00	-24.54	AVG
7	6764.5000	33.47	10.59	44.06	74.00	-29.94	Peak
8	6764.5000	23.61	10.59	34.20	54.00	-19.80	AVG
9	7808.5000	34.28	12.56	46.84	74.00	-27.16	Peak
10	7808.5000	23.81	12.56	36.37	54.00	-17.63	AVG
11	9221.5000	33.80	14.53	48.33	74.00	-25.67	Peak
12 *	9221.5000	22.45	14.53	36.98	54.00	-17.02	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

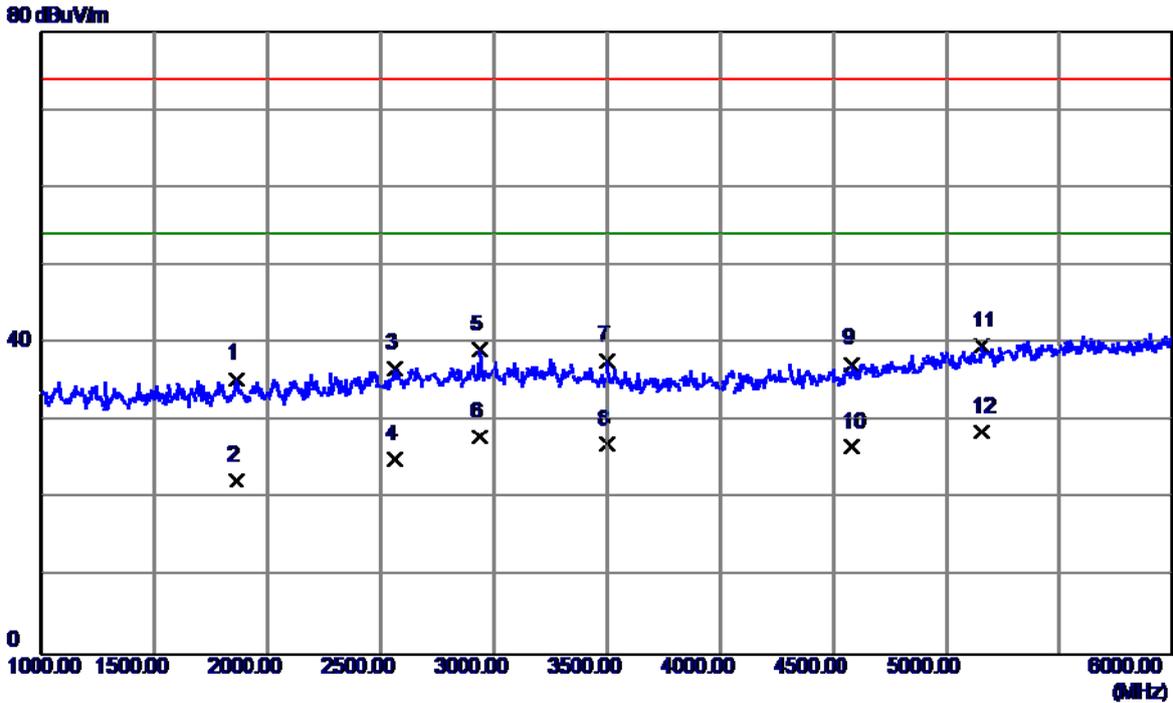


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1860.0000	38.68	-3.24	35.44	74.00	-38.56	Peak
2	1860.0000	25.64	-3.24	22.40	54.00	-31.60	AVG
3	2560.0000	36.30	0.44	36.74	74.00	-37.26	Peak
4	2560.0000	24.64	0.44	25.08	54.00	-28.92	AVG
5	2940.0000	37.00	2.13	39.13	74.00	-34.87	Peak
6	2940.0000	25.85	2.13	27.98	54.00	-26.02	AVG
7	3500.0000	35.57	2.25	37.82	74.00	-36.18	Peak
8	3500.0000	24.86	2.25	27.11	54.00	-26.89	AVG
9	4585.0000	33.07	4.29	37.36	74.00	-36.64	Peak
10	4585.0000	22.38	4.29	26.67	54.00	-27.33	AVG
11	5155.0000	32.90	6.84	39.74	74.00	-34.26	Peak
12 *	5155.0000	21.80	6.84	28.64	54.00	-25.36	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

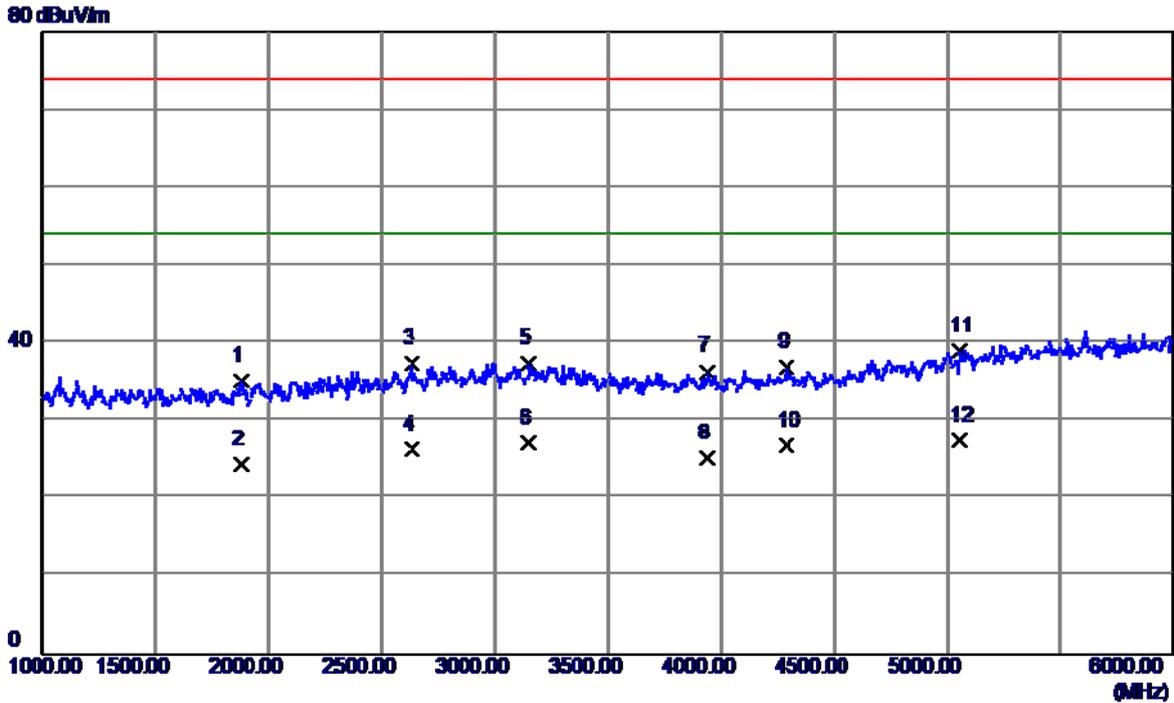


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1877.5000	38.32	-3.15	35.17	74.00	-38.83	Peak
2	1877.5000	27.64	-3.15	24.49	54.00	-29.51	AVG
3	2632.5000	36.68	0.76	37.44	74.00	-36.56	Peak
4	2632.5000	25.65	0.76	26.41	54.00	-27.59	AVG
5	3150.0000	35.09	2.36	37.45	74.00	-36.55	Peak
6	3150.0000	24.84	2.36	27.20	54.00	-26.80	AVG
7	3940.0000	33.74	2.66	36.40	74.00	-37.60	Peak
8	3940.0000	22.64	2.66	25.30	54.00	-28.70	AVG
9	4290.0000	33.62	3.39	37.01	74.00	-36.99	Peak
10	4290.0000	23.49	3.39	26.88	54.00	-27.12	AVG
11	5057.5000	32.59	6.51	39.10	74.00	-34.90	Peak
12 *	5057.5000	21.08	6.51	27.59	54.00	-26.41	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

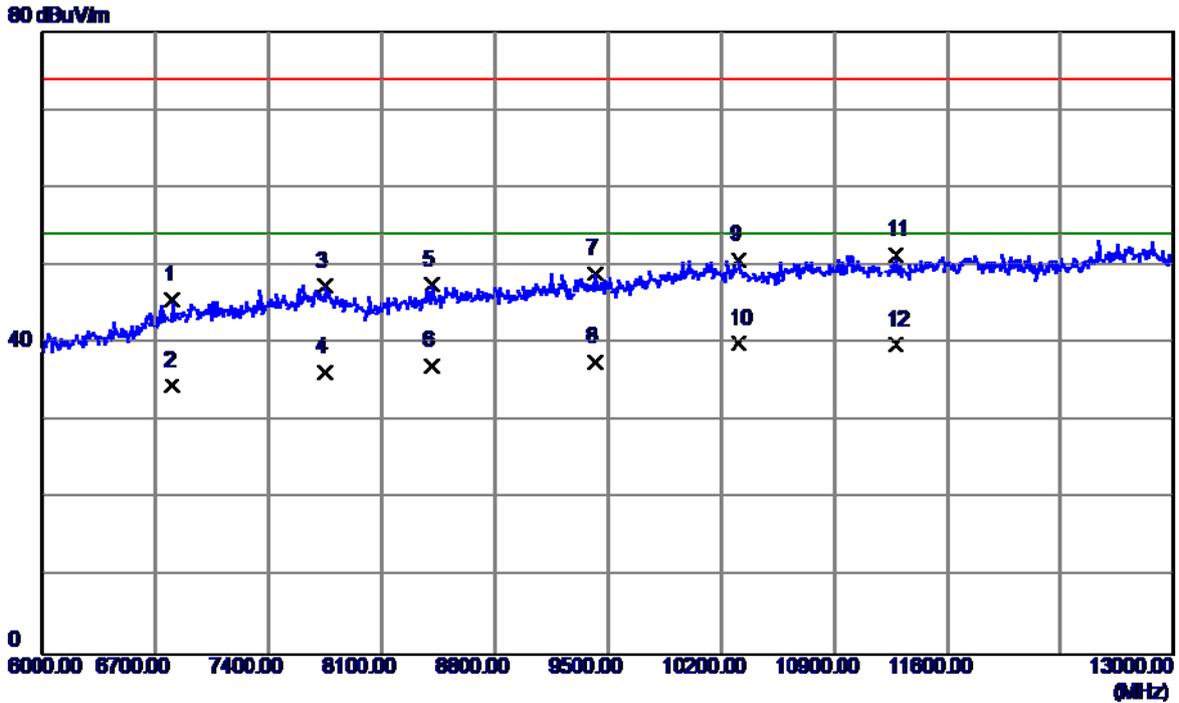


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6805.0000	34.78	10.74	45.52	74.00	-28.48	Peak
2	6805.0000	23.84	10.74	34.58	54.00	-19.42	AVG
3	7753.5000	34.78	12.58	47.36	74.00	-26.64	Peak
4	7753.5000	23.81	12.58	36.39	54.00	-17.61	AVG
5	8415.0000	34.25	13.23	47.48	74.00	-26.52	Peak
6	8415.0000	23.96	13.23	37.19	54.00	-16.81	AVG
7	9419.5000	34.45	14.53	48.98	74.00	-25.02	Peak
8	9419.5000	23.14	14.53	37.67	54.00	-16.33	AVG
9	10312.0000	34.50	16.25	50.75	74.00	-23.25	Peak
10 *	10312.0000	23.81	16.25	40.06	54.00	-13.94	AVG
11	11285.0000	33.81	17.59	51.40	74.00	-22.60	Peak
12	11285.0000	22.23	17.59	39.82	54.00	-14.18	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

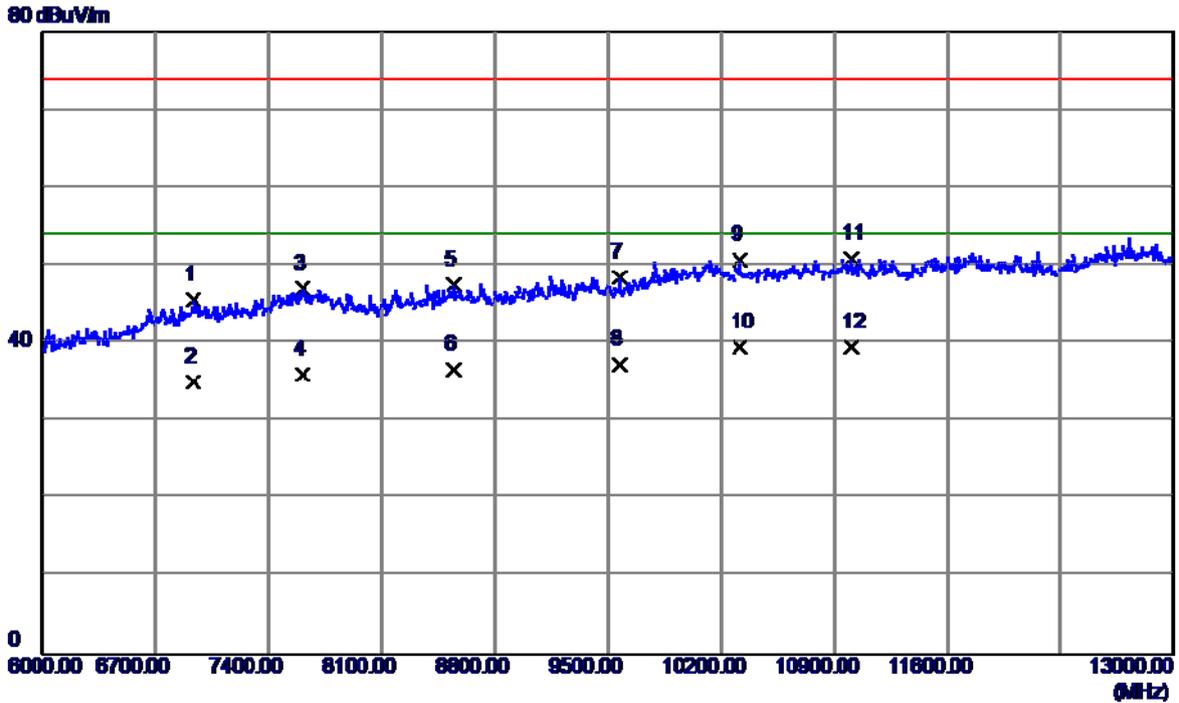


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6934.5000	34.36	11.19	45.55	74.00	-28.45	Peak
2	6934.5000	23.84	11.19	35.03	54.00	-18.97	AVG
3	7613.5000	34.39	12.61	47.00	74.00	-27.00	Peak
4	7613.5000	23.36	12.61	35.97	54.00	-18.03	AVG
5	8544.5000	34.03	13.48	47.51	74.00	-26.49	Peak
6	8544.5000	23.14	13.48	36.62	54.00	-17.38	AVG
7	9566.5000	33.80	14.67	48.47	74.00	-25.53	Peak
8	9566.5000	22.67	14.67	37.34	54.00	-16.66	AVG
9	10315.5000	34.39	16.26	50.65	74.00	-23.35	Peak
10 *	10315.5000	23.28	16.26	39.54	54.00	-14.46	AVG
11	11012.0000	33.63	17.20	50.83	74.00	-23.17	Peak
12	11012.0000	22.28	17.20	39.48	54.00	-14.52	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

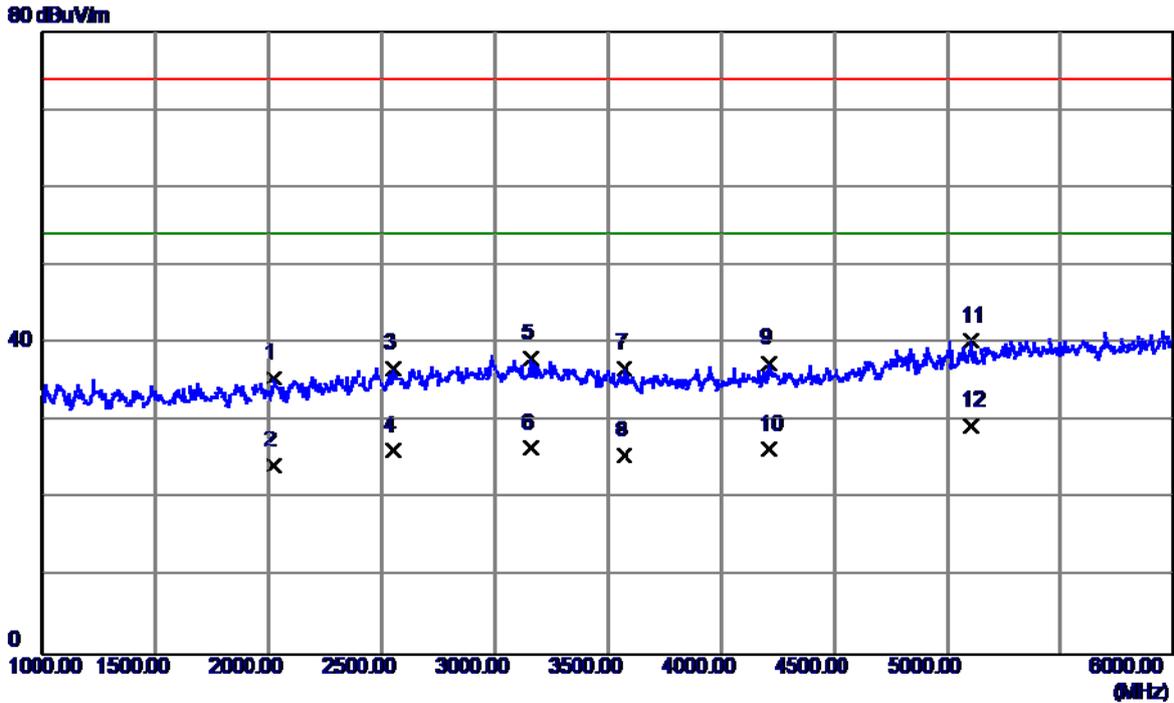


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2020.0000	37.91	-2.46	35.45	74.00	-38.55	Peak
2	2020.0000	26.83	-2.46	24.37	54.00	-29.63	AVG
3	2552.5000	36.43	0.40	36.83	74.00	-37.17	Peak
4	2552.5000	25.90	0.40	26.30	54.00	-27.70	AVG
5	3160.0000	35.80	2.35	38.15	74.00	-35.85	Peak
6	3160.0000	24.18	2.35	26.53	54.00	-27.47	AVG
7	3572.5000	34.47	2.32	36.79	74.00	-37.21	Peak
8	3572.5000	23.28	2.32	25.60	54.00	-28.40	AVG
9	4212.5000	34.17	3.21	37.38	74.00	-36.62	Peak
10	4212.5000	23.18	3.21	26.39	54.00	-27.61	AVG
11	5107.5000	33.69	6.68	40.37	74.00	-33.63	Peak
12 *	5107.5000	22.74	6.68	29.42	54.00	-24.58	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

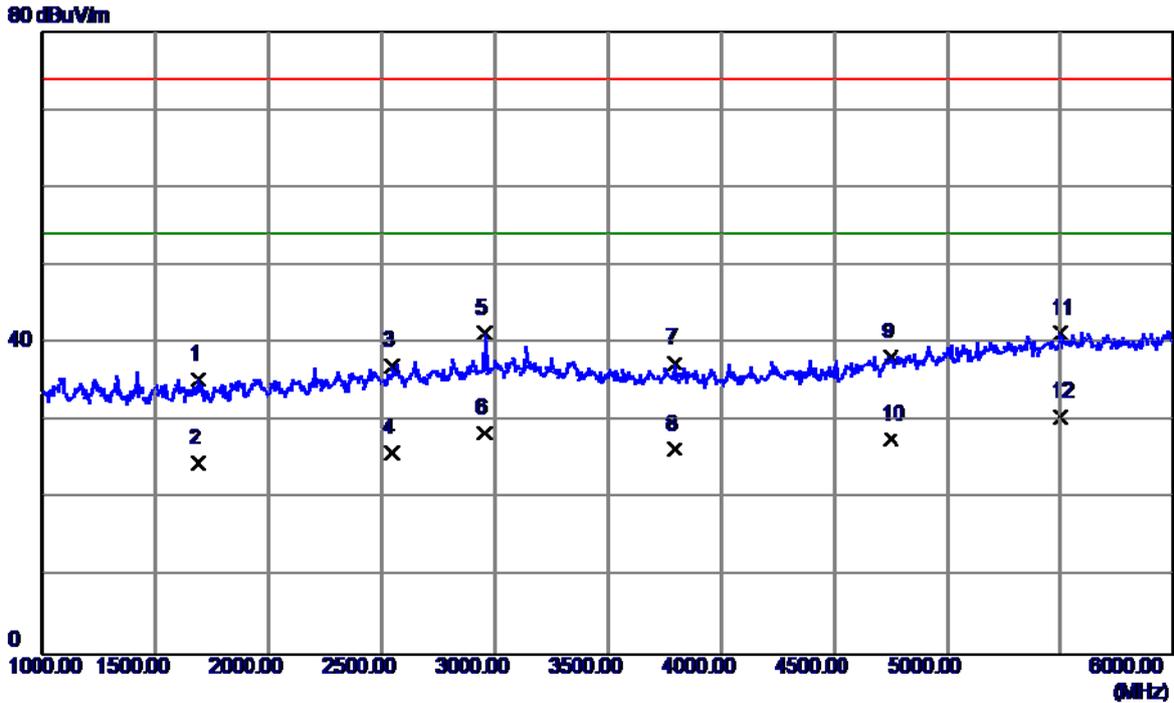


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1690.0000	39.45	-4.05	35.40	74.00	-38.60	Peak
2	1690.0000	28.65	-4.05	24.60	54.00	-29.40	AVG
3	2545.0000	36.68	0.37	37.05	74.00	-36.95	Peak
4	2545.0000	25.50	0.37	25.87	54.00	-28.13	AVG
5	2955.0000	39.12	2.20	41.32	74.00	-32.68	Peak
6	2955.0000	26.24	2.20	28.44	54.00	-25.56	AVG
7	3792.5000	34.90	2.53	37.43	74.00	-36.57	Peak
8	3792.5000	23.84	2.53	26.37	54.00	-27.63	AVG
9	4752.5000	33.12	5.11	38.23	74.00	-35.77	Peak
10	4752.5000	22.64	5.11	27.75	54.00	-26.25	AVG
11	5497.5000	33.30	8.00	41.30	74.00	-32.70	Peak
12 *	5497.5000	22.57	8.00	30.57	54.00	-23.43	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

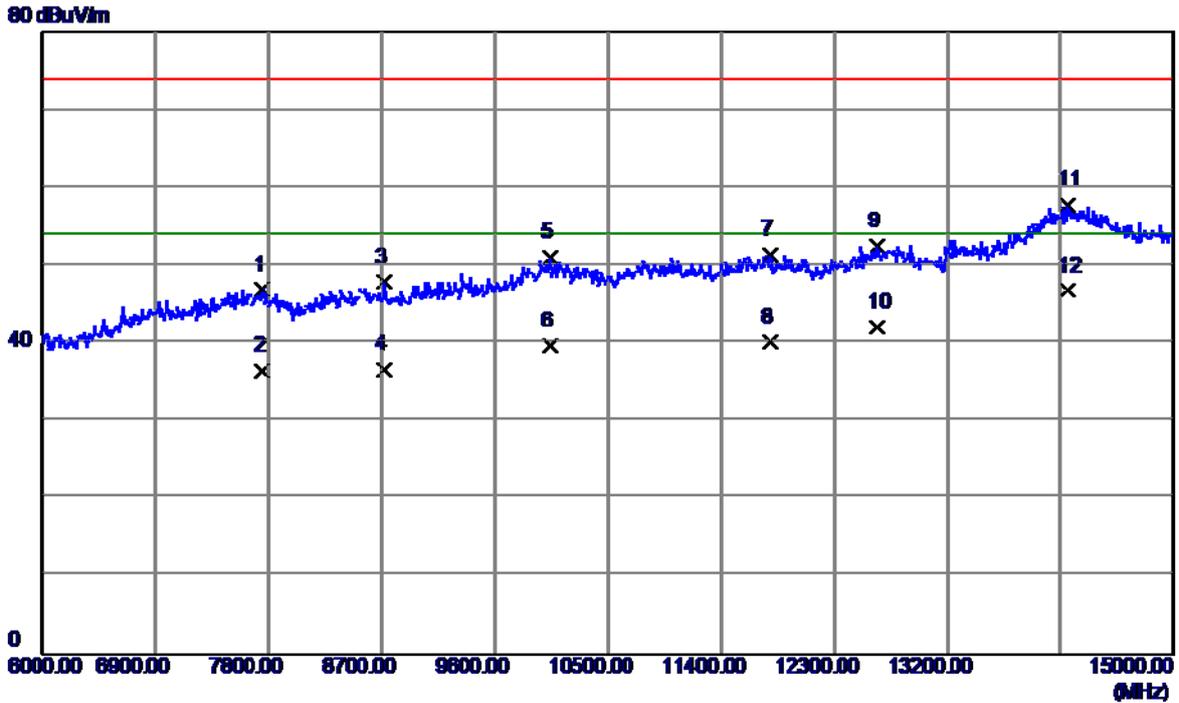

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7755.0000	34.23	12.58	46.81	74.00	-27.19	Peak
2	7755.0000	23.84	12.58	36.42	54.00	-17.58	AVG
3	8722.5000	33.92	13.89	47.81	74.00	-26.19	Peak
4	8722.5000	22.71	13.89	36.60	54.00	-17.40	AVG
5	10036.5000	35.42	15.64	51.06	74.00	-22.94	Peak
6	10036.5000	24.08	15.64	39.72	54.00	-14.28	AVG
7	11787.0000	33.63	17.68	51.31	74.00	-22.69	Peak
8	11787.0000	22.51	17.68	40.19	54.00	-13.81	AVG
9	12642.0000	34.17	18.29	52.46	74.00	-21.54	Peak
10	12642.0000	23.82	18.29	42.11	54.00	-11.89	AVG
11	14163.0000	35.16	22.62	57.78	74.00	-16.22	Peak
12 *	14163.0000	24.18	22.62	46.80	54.00	-7.20	AVG

EUT	Smart Phone	Model Name	WAS-L03T
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:BYD+USB Cable:CR+BATTERY:DESAY(LG)		
Test Engineer	Trey Chen		

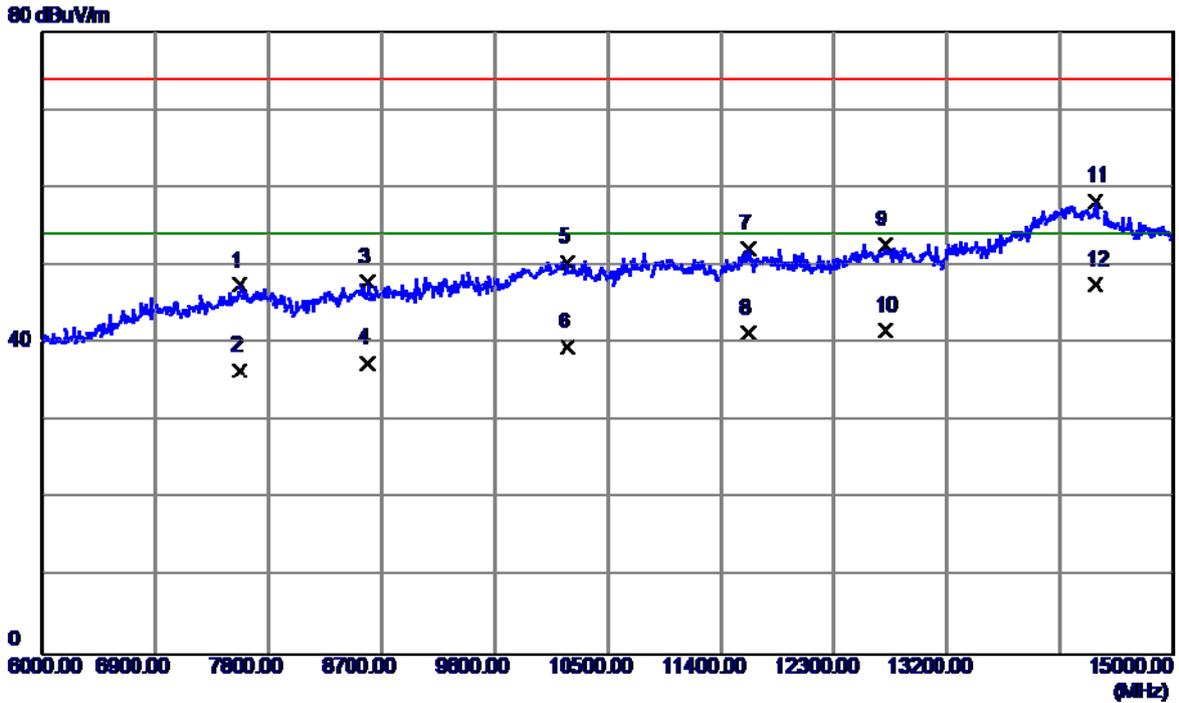

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7570.5000	34.81	12.63	47.44	74.00	-26.56	Peak
2	7570.5000	23.83	12.63	36.46	54.00	-17.54	AVG
3	8592.0000	34.23	13.59	47.82	74.00	-26.18	Peak
4	8592.0000	23.84	13.59	37.43	54.00	-16.57	AVG
5	10176.0000	34.53	15.95	50.48	74.00	-23.52	Peak
6	10176.0000	23.56	15.95	39.51	54.00	-14.49	AVG
7	11620.5000	34.34	17.81	52.15	74.00	-21.85	Peak
8	11620.5000	23.47	17.81	41.28	54.00	-12.72	AVG
9	12705.0000	34.30	18.39	52.69	74.00	-21.31	Peak
10	12705.0000	23.17	18.39	41.56	54.00	-12.44	AVG
11	14379.0000	35.52	22.79	58.31	74.00	-15.69	Peak
12 *	14379.0000	24.67	22.79	47.46	54.00	-6.54	AVG