



# SAR TEST REPORT

<b>Product Name</b>	WCDMA Mobile Phone
<b>Model Name</b>	HUAWEI Y360-U23
<b>Brand Name</b>	HUAWEI
<b>FCC ID</b>	QISY360-U23
<b>Applicant</b>	Huawei Technologies Co., Ltd.
<b>Manufacturer</b>	Huawei Technologies Co., Ltd.
<b>Date of issue</b>	March 20, 2015

**TA Technology (Shanghai) Co., Ltd.**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 2 of 208

**GENERAL SUMMARY**

<b>Reference Standard(s)</b>	<p><b>FCC 47CFR §2.1093</b> Radiofrequency Radiation Exposure Evaluation: Portable Devices</p> <p><b>ANSI C95.1, 1992:</b> Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.(IEEE Std C95.1-1991)</p> <p><b>IEEE Std 1528™-2003:</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.</p> <p><b>KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03:</b> SAR Measurement Requirements for 100 MHz to 6 GHz</p> <p><b>KDB 447498 D01 Mobile Portable RF Exposure v05r02:</b> Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies</p> <p><b>KDB 648474 D04 Handset SAR v01r02:</b> SAR Evaluation Considerations for Wireless Handsets.</p> <p><b>KDB 941225 D01 SAR test for 3G devices v03:</b> SAR Measurement Procedures CDMA 20001x RTT, 1x Ev-Do, WCDMA, HSDPA/HSPA</p> <p><b>KDB 941225 D06 Hotspot Mode SAR v02:</b> SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities</p> <p><b>KDB 248227 D01 SAR meas for 802 11 a b g v01r02:</b> SAR Measurement Procedures for 802.11a/b/g Transmitters.</p>
<b>Conclusion</b>	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards for the tested bands only.</p> <p>General Judgment: <b>Pass</b></p>
<b>Comment</b>	<p>The test result only responds to the measured sample.</p>

Approved by Kai Xu  
Kai Xu  
Director

Revised by Jiang peng Lan  
Jiangpeng Lan  
SAR Manager

Performed by Jie Li  
Jie Li  
SAR Engineer

## TABLE OF CONTENT

1.	General Information .....	5
1.1.	Notes of the Test Report.....	5
1.2.	Testing Laboratory .....	5
1.3.	Applicant Information .....	6
1.4.	Manufacturer Information.....	6
1.5.	Information of EUT.....	7
1.6.	EUT Antenna Locations .....	9
1.7.	The Maximum Reported SAR <sub>1g</sub> .....	10
1.8.	Test Date .....	10
2.	SAR Measurements System Configuration.....	11
2.1.	SAR Measurement Set-up .....	11
2.2.	DASY5 E-field Probe System .....	12
2.2.1.	EX3DV4 Probe Specification .....	12
2.2.2.	E-field Probe Calibration.....	13
2.3.	Other Test Equipment .....	13
2.3.1.	Device Holder for Transmitters .....	13
2.3.2.	Phantom .....	14
2.4.	Scanning Procedure .....	14
2.5.	Data Storage and Evaluation .....	16
2.5.1.	Data Storage.....	16
2.5.2.	Data Evaluation by SEMCAD .....	16
3.	Laboratory Environment.....	18
4.	Tissue-equivalent Liquid .....	19
4.1.	Tissue-equivalent Liquid Ingredients.....	19
4.2.	Tissue-equivalent Liquid Properties .....	21
5.	System Check.....	22
5.1.	Description of System Check.....	22
5.2.	System Check Results.....	23
6.	Operational Conditions during Test .....	24
6.1.	General Description of Test Procedures .....	24
6.2.	Test Positions.....	24
6.2.1.	Against Phantom Head.....	24
6.2.2.	Body Worn Configuration.....	24
6.3.	Measurement Variability.....	26
6.4.	Test Configuration .....	27
6.4.1.	GSM Test Configuration.....	27
6.4.2.	UMTS Test Configuration .....	28
6.4.3.	HSUPA Test Configuration .....	29
6.4.4.	WiFi Test Configuration.....	33
7.	Test Results .....	34

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 4 of 208

---

7.1.	Conducted Power Results .....	34
7.2.	Standalone SAR Test Exclusion Considerations .....	39
7.3.	SAR Test Results .....	40
7.3.1.	GSM 850.....	40
7.3.2.	GSM 1900.....	42
7.3.3.	UMTS Band II .....	43
7.3.4.	UMTS Band V.....	45
7.3.5.	WiFi .....	47
7.4.	Simultaneous Transmission Conditions .....	48
8.	Measurement Uncertainty .....	53
9.	Main Test Instruments .....	54
ANNEX A:	Test Layout .....	55
ANNEX B:	System Check Results .....	59
ANNEX C:	Plots Results .....	67
ANNEX D:	Probe Calibration Certificate (SN:3977) .....	148
ANNEX E:	Probe Calibration Certificate (SN:3677) .....	159
ANNEX F:	D835V2 Dipole Calibration Certificate .....	170
ANNEX G:	D1900V2 Dipole Calibration Certificate .....	178
ANNEX H:	D2450V2 Dipole Calibration Certificate .....	186
ANNEX I:	DAE4 Calibration Certificate .....	194
ANNEX J:	The EUT Appearances and Test Configuration .....	199
ANNEX K:	System Validation .....	208

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 5 of 208

---

## 1. General Information

### 1.1. Notes of the Test Report

**TA Technology (Shanghai) Co., Ltd.** has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L2264.

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. The sample under test was selected by the Client. This report only refers to the item that has undergone the test.

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of **TA Technology (Shanghai) Co., Ltd.**

If the electronic report is inconsistent with the printed one, it should be subject to the latter.

### 1.2. Testing Laboratory

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 6 of 208

---

### 1.3. Applicant Information

Company: Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District  
Shenzhen  
518129  
P.R.China

### 1.4. Manufacturer Information

Company: Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District  
Shenzhen  
518129  
P.R.China

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 7 of 208

### 1.5. Information of EUT

#### General Information

Device Type:	Portable Device	
Exposure Category:	Uncontrolled Environment / General Population	
State of Sample:	Prototype Unit	
Product IMEI:	004401722210644	
Hardware Version:	VER.A	
Software Version:	Y360-U23V100R001C01B112	
Antenna Type:	Internal Antenna	
Device Operating Configurations :		
Test Mode(s):	GSM 850/GSM 1900; UMTS Band II/UMTS Band V; 802.11b/g/n HT20/n HT40; Bluetooth 4.0;	
Test Modulation:	(GSM)GMSK; (UMTS)QPSK; (WiFi)CCK;	
Device Class:	B	
HSUPA UE Category:	6	
HSDPA UE Category:	14	
HSPA+ Category:	14	
GPRS Multislot Class(12):	Max Number of Timeslots in Uplink	4
	Max Number of Timeslots in Downlink	4
	Max Total Timeslot	5
EGPRS:	Downlink Only	
Test Frequency Range(s):	Mode	Tx (MHz)
	GSM 850	824.2 ~ 848.8
	GSM 1900	1850.2 ~ 1909.8
	UMTS Band II	1852.4 ~ 1907.6
	UMTS Band V	826.4 ~ 846.6
	WiFi	2412 ~2462
Power Class:	GSM 850: 4	
	GSM 1900: 1	
	UMTS Band II/V: 3	
Power Level:	GSM 850: level 5	
	GSM 1900: level 0	
	UMTS Band II/V: all up bits	

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4


Page 8 of 208

**Auxiliary Equipment Details**

<b>Name</b>	<b>Model</b>	<b>Manufacturer</b>	<b>Capacity</b>	<b>S/N</b>
Battery 1	HB5V1	BYD	1730mAh	BAAEA10F20013701
Battery 2	HB5V1	Lishen	1730mAh	CABEA20E20022598

<b>Name</b>	<b>Model</b>	<b>Manufacturer</b>
Earphone 1	HA1-3	GoerTek Inc.
Earphone 2	1293#+3283# 3.5MM-150	QUANCHENG
Earphone 3	MEMD1532B528000	Jiangxi lianchuang hongsheng ELECTRONIC CO.,LTD

**1.6. EUT Antenna Locations**

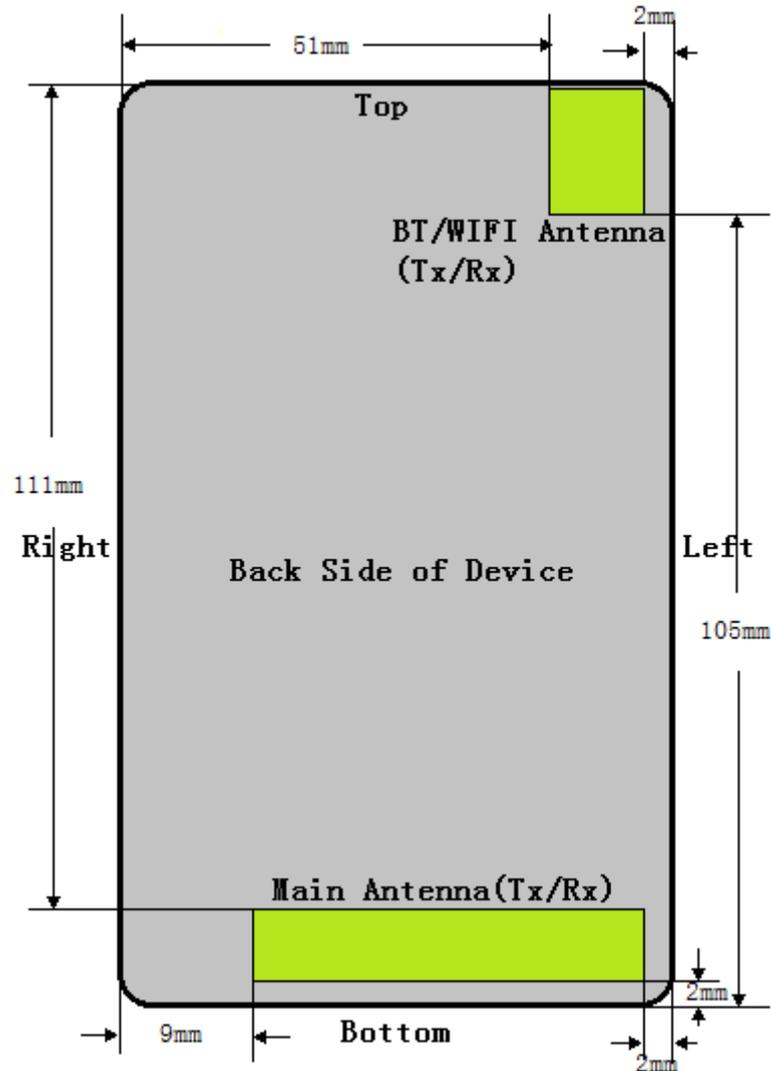

**Mobile Hotspot Sides for SAR Testing**

Mode	Back Side	Front Side	Left Edge	Right Edge	Top Edge	Bottom Edge
GSM 850	Yes	Yes	Yes	Yes	N/A	Yes
GSM 1900	Yes	Yes	Yes	Yes	N/A	Yes
UMTS Band II	Yes	Yes	Yes	Yes	N/A	Yes
UMTS Band V	Yes	Yes	Yes	Yes	N/A	Yes
2.4GHz WLAN	Yes	Yes	Yes	N/A	Yes	N/A

Note: When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 10 of 208

**1.7. The Maximum Reported SAR<sub>1g</sub>**

**Head SAR Configuration**

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR <sub>1g</sub> 1.6 W/kg	
			Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
GSM 850	Left Cheek	190/836.6	0.675	0.750
GSM 1900	Right Cheek	661/1880	0.639	0.774
UMTS Band II	Right Cheek	9400/1880	0.864	1.034
UMTS Band V	Right Cheek	4132/826.4	0.862	1.198
WiFi(802.11b)	Right Cheek	11/2462	0.491	0.501

**Body Worn Configuration**

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR <sub>1g</sub> 1.6 W/kg	
			Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
GSM 850	Back Side	190/836.6	0.616	0.685
GSM 1900	Front Side	661/1880	0.376	0.455
UMTS Band II	Front Side	9400/1880	0.679	0.813
UMTS Band V	Back Side	4183/836.6	0.783	1.109
WiFi(802.11b)	Back Side	11/2462	0.255	0.260

**Hotspot SAR Configuration**

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR <sub>1g</sub> 1.6 W/kg	
			Measured SAR <sub>1g</sub> (W/kg)	Reported SAR <sub>1g</sub> (W/kg)
GPRS 850, 4Txslots	Back Side	190/836.6	1.320	1.351
GPRS 1900,4Txslots	Bottom Edge	810/1909.8	0.695	0.863
UMTS Band II	Bottom Edge	9400/1880	0.788	0.943
UMTS Band V	Back Side	4183/836.6	0.783	1.109
WiFi(802.11b)	Back Side	11/2462	0.255	0.260

**1.8. Test Date**

The test performed January 3, 2015 to March 17, 2015.

## 2. SAR Measurements System Configuration

### 2.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

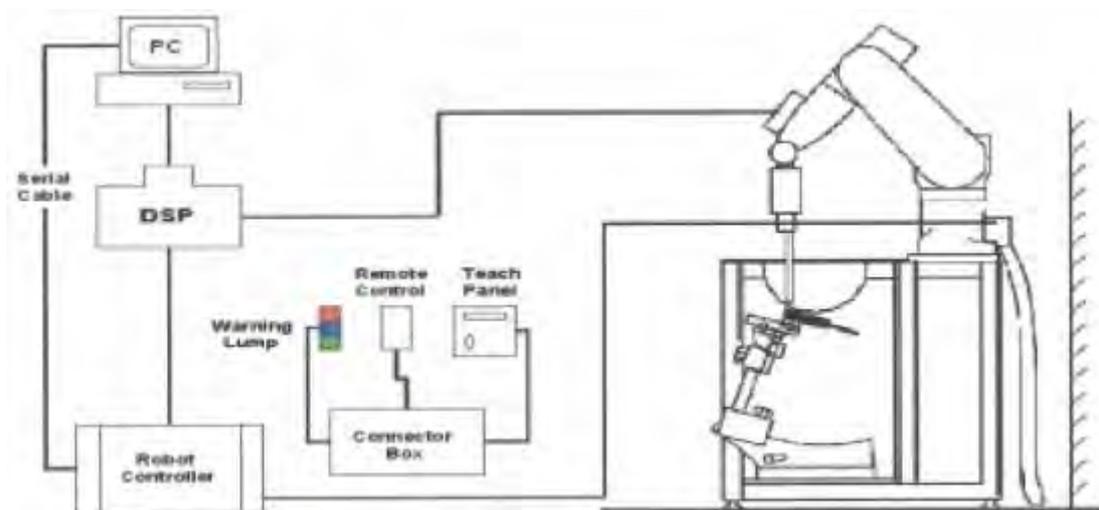


Figure 1 SAR Lab Test Measurement Set-up

## 2.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 2.2.1. EX3DV4 Probe Specification

**Construction**                      Symmetrical design with triangular core  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

**Calibration**                      ISO/IEC 17025 calibration service available

**Frequency**                        10 MHz to > 6 GHz  
Linearity:  $\pm 0.2$  dB  
(30 MHz to 6 GHz)

**Directivity**                         $\pm 0.3$  dB in HSL (rotation around probe axis)  
 $\pm 0.5$  dB in tissue material (rotation normal to probe axis)

**Dynamic Range**                    10  $\mu$ W/g to > 100 mW/g Linearity:  
  
 $\pm 0.2$ dB (noise: typically < 1  $\mu$ W/g)

**Dimensions**                        Overall length: 330 mm (Tip: 20 mm)  
Tip diameter: 2.5 mm (Body: 12 mm)  
Typical distance from probe tip to dipole centers: 1 mm

**Application**                        High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields).  
  
Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



**Figure 2. EX3DV4 E-field Probe**



**Figure 3. EX3DV4 E-field probe**

### 2.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.  
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  
 $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density ( $\text{kg}/\text{m}^3$ ).

## 2.3. Other Test Equipment

### 2.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard.

It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



**Figure 4 Device Holder**

### 2.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W) Available Special



**Figure 5 Generic Twin Phantom**

### 2.4. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. ± 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan  
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

# TA Technology (Shanghai) Co., Ltd.

## Test Report

spacing is set according to FCC KDB Publication 865664. During scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

**Table 1: Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01**

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{area}, \Delta y_{area}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{zoom}, \Delta y_{zoom}$ )	Maximum Zoom Scan Spatial Resolution (mm) $\Delta z_{zoom}(n)$	Minimum Zoom Scan Volume (mm) (x,y,z)
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≥ 22

## **2.5. Data Storage and Evaluation**

### **2.5.1. Data Storage**

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### **2.5.2. Data Evaluation by SEMCAD**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcp <sub>i</sub>
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 17 of 208

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$cf$  = crest factor of exciting field (DASY parameter)

$dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 18 of 208

with **SAR** = local specific absorption rate in mW/g

**$E_{tot}$**  = total field strength in V/m

**$\sigma$**  = conductivity in [mho/m] or [Siemens/m]

**$\rho$**  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  **$P_{pwe}$**  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**$E_{tot}$**  = total electric field strength in V/m

**$H_{tot}$**  = total magnetic field strength in A/m

### 3. Laboratory Environment

Table 2: The Requirements of the Ambient Conditions

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 4. Tissue-equivalent Liquid

### 4.1. Tissue-equivalent Liquid Ingredients

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The table 3 and table 4 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB 865664 D01.

**Table 3: Composition of the Head Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	62.7
Glycol	36.8
Salt	0.5
Dielectric Parameters Target Value	f=2450MHz $\epsilon=39.2$ $\sigma=1.80$

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 20 of 208

**Table 4: Composition of the Body Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Body) 835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

MIXTURE%	FREQUENCY(Body) 2450MHz
Water	73.2
Glycol	26.7
Salt	0.1
Dielectric Parameters Target Value	f=2450MHz $\epsilon=52.7$ $\sigma=1.95$

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 21 of 208

**4.2. Tissue-equivalent Liquid Properties**

**Table 5: Dielectric Performance of Tissue Simulating Liquid**

Frequency	Test Date	Temp °C	Measured Dielectric Parameters		Target Dielectric Parameters		Limit (Within ±5%)	
			$\epsilon_r$	$\sigma$ (s/m)	$\epsilon_r$	$\sigma$ (s/m)	Dev $\epsilon_r$ (%)	Dev $\sigma$ (%)
<b>835MHz (head)</b>	3/6/2015	21.5	41.4	0.93	41.5	0.90	-0.24	3.33
<b>1900MHz (head)</b>	2/4/2015	21.5	39.6	1.43	40.0	1.40	-1.00	2.14
<b>2450MHz (head)</b>	1/3/2015	21.5	38.6	1.81	39.2	1.80	-1.53	0.56
<b>835MHz (body)</b>	3/6/2015	21.5	55.9	0.99	55.2	0.97	1.27	2.06
	3/17/2015	21.5	55.9	0.98	55.2	0.97	1.27	1.03
<b>1900MHz (body)</b>	2/4/2015	21.5	53.1	1.52	53.3	1.52	-0.38	0.00
	3/17/2015	21.5	52.9	1.53	53.3	1.52	-0.75	0.66
<b>2450MHz (body)</b>	1/4/2015	21.5	52.1	1.99	52.7	1.95	-1.14	2.05

## 5. System Check

### 5.1. Description of System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 6 and table 7.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

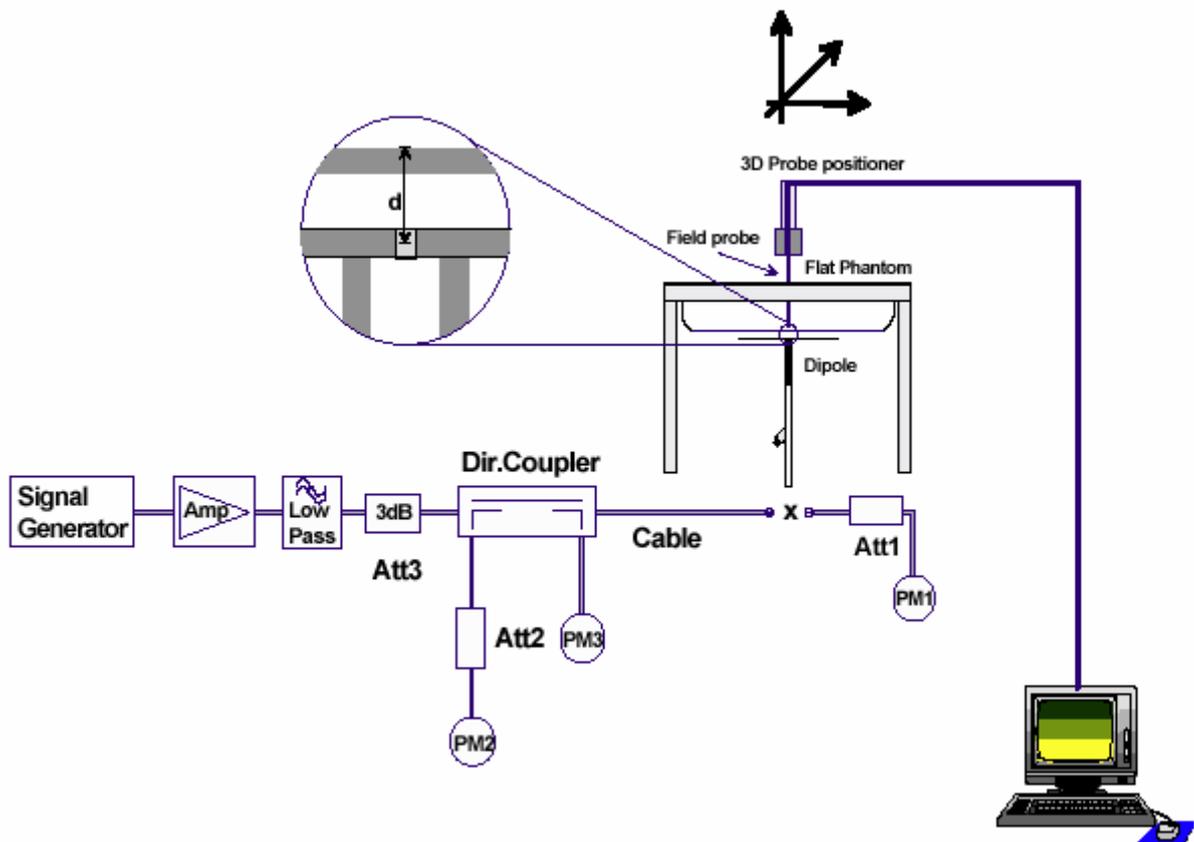


Figure 6 System Check Set-up

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**5.2. System Check Results**

**Table 6: System Check in Head Tissue Simulating Liquid**

Frequency	Test Date	Dielectric Parameters		250mW Measured SAR <sub>1g</sub>	1W Normalized SAR <sub>1g</sub>	1W Target SAR <sub>1g</sub>	Limit (±10% Deviation)
		ε <sub>r</sub>	σ(s/m)	(W/kg)			
<b>835MHz</b>	3/6/2015	41.4	0.93	2.44	9.76	9.54	2.31%
<b>1900MHz</b>	2/4/2015	39.6	1.43	9.48	37.92	39.20	-3.27%
<b>2450MHz</b>	1/3/2015	38.6	1.81	13.70	54.80	52.50	4.38%

Note: 1. The graph results see ANNEX B.  
2. Target Values used derive from the calibration certificate

**Table 7: System Check in Body Tissue Simulating Liquid**

Frequency	Test Date	Dielectric Parameters		250mW Measured SAR <sub>1g</sub>	1W Normalized SAR <sub>1g</sub>	1W Target SAR <sub>1g</sub>	Limit (±10% Deviation)
		ε <sub>r</sub>	σ(s/m)	(W/kg)			
<b>835MHz</b>	3/6/2015	55.9	0.99	2.41	9.64	9.54	1.05%
	3/17/2015	55.9	0.98	2.46	9.84	9.54	3.14%
<b>1900MHz</b>	2/4/2015	53.1	1.52	9.93	39.72	40.00	-0.70%
	3/17/2015	52.9	1.53	9.83	39.32	40.00	-1.70%
<b>2450MHz</b>	1/4/2015	52.1	1.99	12.50	50.00	52.40	-4.58%

Note: 1. The graph results see ANNEX B.  
2. Target Values used derive from the calibration certificate

## **6. Operational Conditions during Test**

### **6.1. General Description of Test Procedures**

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

### **6.2. Test Positions**

#### **6.2.1. Against Phantom Head**

Measurements were made in "cheek" and "tilt" positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2003 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

#### **6.2.2. Body Worn Configuration**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 25 of 208

---

different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

Body-worn accessory SAR compliance must be based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations.

### **6.3. Measurement Variability**

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

## **6.4. Test Configuration**

### **6.4.1. GSM Test Configuration**

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to “5” for GSM 850, set to “0” for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

**Table 8: The allowed power reduction in the multi-slot configuration**

<b>Number of timeslots in uplink assignment</b>	<b>Permissible nominal reduction of maximum output power,(dB)</b>
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

## **6.4.2. UMTS Test Configuration**

### **6.4.2.1. 3G SAR Test Reduction Procedure**

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.<sup>3</sup> This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

### **6.4.2.2. Output power Verification**

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

### **6.4.2.3. Head SAR**

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

### **6.4.2.4. Body-Worn Accessory SAR**

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

#### 6.4.2.5. Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

**Table 9: Subtests for UMTS Release 5 HSDPA**

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI}=8$      $\beta_{hs} = \beta_{hs}/\beta_c = 30/15$      $\beta_{hs} = 30/15 * \beta_c$   
 Note2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ .  
 Note3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

#### 6.4.3. HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in Table 2 and other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Devices’ sections of this document

# TA Technology (Shanghai) Co., Ltd.

## Test Report

**Table 10: Sub-Test 5 Setup for Release 6 HSUPA**

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

**Table 11: HSUPA UE category**

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.  
 UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM.  
 (TS25.306-7.3.0)

#### **6.4.3.1. HSPA, HSPA+ and DC-HSDPA Test Configuration**

measurement is required for HSPA, HSPA+ or DC-HSDPA, a KDB inquiry is required to confirm that the wireless mode configurations in the test setup have remained stable throughout the SAR measurements.<sup>35</sup> Without prior KDB confirmation to determine the SAR results are acceptable, a PBA is required for TCB approval.

SAR test exclusion for HSPA, HSPA+ and DC-HSDPA is determined according to the following:

1) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required sub-test mode(s) to determine SAR test exclusion.

2) SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode.<sup>36</sup> Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

3) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

4) Regardless of whether a PBA is required, the following information must be verified and included in the SAR report for devices supporting HSPA, HSPA+ or DC-HSDPA: a) The output power measurement results and applicable release version(s) of 3GPP TS 34.121.

i) Power measurement difficulties due to test equipment setup or availability must be resolved between the grantee and its test lab.

b) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.

c) The UE category, operating parameters, such as the  $\beta$  and  $\Delta$  values used to configure the device for testing, power setback procedures described in 3GPP TS 34.121 for the power measurements, and HSPA/HSPA+ channel conditions (active and stable) for the entire duration of the measurement according to the required E-TFCI and AG index values.

5) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including E-TFCI and AG index stability and output power conditions.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

**Table 12: HS-DSCH UE category**

Table 5.1a: FDD HS-DSCH physical layer categories

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation	
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)	
Category 2	5	3	7298	28800				
Category 3	5	2	7298	28800				
Category 4	5	2	7298	38400				
Category 5	5	1	7298	57600				
Category 6	5	1	7298	67200				
Category 7	10	1	14411	115200				
Category 8	10	1	14411	134400				
Category 9	15	1	20251	172800				
Category 10	15	1	27952	172800				
Category 11	5	2	3630	14400				QPSK
Category 12	5	1	3630	28800				QPSK, 16QAM, 64QAM
Category 13	15	1	35280	259200				QPSK, 16QAM
Category 14	15	1	42192	259200				QPSK, 16QAM
Category 15	15	1	23370	345600	QPSK, 16QAM			
Category 16	15	1	27952	345600	QPSK, 16QAM			
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM	-		
			23370	345600	-	QPSK, 16QAM		
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM	-		
			27952	345600	-	QPSK, 16QAM		
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM			
Category 20	15	1	42192	518400	QPSK, 16QAM, 64QAM			
Category 21	15	1	23370	345600	-	-	QPSK, 16QAM	
Category 22	15	1	27952	345600	-	-	QPSK, 16QAM	
Category 23	15	1	35280	518400	-	-	QPSK, 16QAM, 64QAM	
Category 24	15	1	42192	518400	-	-	QPSK, 16QAM, 64QAM	

#### **6.4.4. WiFi Test Configuration**

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. The Tx power is set to 16 for 802.11 b mode by software. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. Testing at higher data rates is not required when the maximum average output power is less than 0.25dB higher than those measured at the lowest data rate.

802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 34 of 208

## 7. Test Results

### 7.1. Conducted Power Results

**Table 13: Conducted Power Measurement Results**

GSM 850		Burst Conducted Power(dBm)			/	Average power(dBm)		
		Channel/Frequency(MHz)				Channel/Frequency(MHz)		
		128/824.2	190/836.6	251/848.8		128/824.2	190/836.6	251/848.8
GSM		32.55	32.54	32.49	-9.03dB	23.52	23.51	23.46
GPRS (GMSK)	1Txslot	32.56	32.49	32.44	-9.03dB	23.53	23.46	23.41
	2Txslots	31.72	31.72	31.69	-6.02dB	25.70	25.70	25.67
	3Txslots	30.00	29.98	29.93	-4.26dB	25.74	25.72	25.67
	4Txslots	28.89	28.90	28.86	-3.01dB	<b>25.88</b>	<b>25.89</b>	<b>25.85</b>
GSM 1900		Burst Conducted Power(dBm)			/	Average power(dBm)		
		Channel/Frequency(MHz)				Channel/Frequency(MHz)		
		512/1850.2	661/1880	810/1909.8		512/1850.2	661/1880	810/1909.8
GSM		29.73	29.67	29.54	-9.03dB	20.70	20.64	20.51
GPRS (GMSK)	1Txslot	29.69	29.62	29.48	-9.03dB	20.66	20.59	20.45
	2Txslots	28.94	28.89	28.77	-6.02dB	22.92	22.87	22.75
	3Txslots	27.22	27.18	27.13	-4.26dB	22.96	22.92	22.87
	4Txslots	26.09	26.09	26.06	-3.01dB	<b>23.08</b>	<b>23.08</b>	<b>23.05</b>

Note:

1) Division Factors

To average the power, the division factor is as follows:

1Txslot = 1 transmit time slot out of 8 time slots

=> conducted power divided by (8/1) => -9.03 dB

2Txslots = 2 transmit time slots out of 8 time slots

=> conducted power divided by (8/2) => -6.02 dB

3Txslots = 3 transmit time slots out of 8 time slots

=> conducted power divided by (8/3) => -4.26 dB

4Txslots = 4 transmit time slots out of 8 time slots

=> conducted power divided by (8/4) => -3.01 dB

2) Average power numbers

The maximum power numbers are marks in bold.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 35 of 208

UMTS Band II		Conducted Power (dBm)		
		Channel/Frequency(MHz)		
		9262/1852.4	9400/1880	9538/1907.6
RMC	12.2kbps RMC	23.07	23.22	23.16
	64kbps RMC	23.09	23.25	23.17
	144kbps RMC	23.07	23.24	23.17
	384kbps RMC	23.09	23.24	23.17
HSDPA	Sub - Test 1	22.03	22.22	22.20
	Sub - Test 2	22.01	22.17	22.18
	Sub - Test 3	21.62	21.74	21.72
	Sub - Test 4	21.56	21.72	21.69
HSUPA	Sub - Test 1	19.84	19.98	20.10
	Sub - Test 2	22.09	22.18	22.15
	Sub - Test 3	21.09	21.25	21.27
	Sub - Test 4	20.06	22.22	22.18
	Sub - Test 5	20.27	19.62	19.13
UMTS Band V		Conducted Power (dBm)		
		Channel/Frequency(MHz)		
		4132/826.4	4183/836.6	4233/846.6
RMC	12.2kbps RMC	22.57	22.49	22.57
	64kbps RMC	22.59	22.49	22.58
	144kbps RMC	22.58	22.51	22.59
	384kbps RMC	22.56	22.52	22.60
HSDPA	Sub - Test 1	21.57	21.52	21.58
	Sub - Test 2	21.61	21.52	21.69
	Sub - Test 3	21.09	21.02	21.12
	Sub - Test 4	21.07	21.01	21.10
HSUPA	Sub - Test 1	19.56	19.23	19.37
	Sub - Test 2	21.60	21.55	21.63
	Sub - Test 3	20.47	20.58	21.50
	Sub - Test 4	21.60	21.54	21.63
	Sub - Test 5	18.87	18.41	18.39

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 36 of 208

BT	AV Conducted Power (dBm)		
	Channel/Frequency(MHz)		
	Ch 0/2402 MHz	Ch 39/2441 MHz	Ch 78/2480 MHz
GFSK	6.80	7.30	7.50
$\pi/4$ DQPSK	4.50	5.00	5.20
8DPSK	4.30	4.80	5.00
<b>BT 4.0</b>	Ch 0/2402 MHz	Ch 19/2440 MHz	Ch 39/2480 MHz
GFSK	-0.736	-0.519	-0.382

Mode	Channel/ Frequency(MHz)	Data rate (Mbps)	AV Power (dBm)
802.11b	1/2412	1	15.30
		2	15.21
		5.5	15.08
		11	14.71
	6/2437	1	15.76
		2	15.56
		5.5	15.38
		11	15.08
	11/2462	1	15.91
		2	15.85
		5.5	15.73
		11	15.36
802.11g	1/2412	6	14.07
		9	14.18
		12	14.11
		18	14.02
		24	13.56
		36	13.85
		48	12.21
		54	12.41
	6/2437	6	14.52
		9	14.23
		12	14.26
		18	14.60
		24	13.42
		36	13.54
		48	12.54
		54	12.58

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 37 of 208

	11/2462	6	14.67
		9	14.01
		12	14.50
		18	14.50
		24	13.24
		36	13.14
		48	12.24
		54	12.25
802.11n HT20	1/2412	MCS0	12.03
		MCS1	12.75
		MCS2	12.70
		MCS3	11.54
		MCS4	11.21
		MCS5	10.89
		MCS6	10.65
		MCS7	9.66
	6/2437	MCS0	12.46
		MCS1	12.54
		MCS2	12.45
		MCS3	11.51
		MCS4	11.87
		MCS5	10.55
		MCS6	10.75
		MCS7	9.44
	11/2462	MCS0	12.67
		MCS1	12.87
		MCS2	12.34
		MCS3	11.45
		MCS4	11.23
		MCS5	10.54
		MCS6	10.23
		MCS7	9.70
802.11n HT40	3/2422	MCS0	10.52
		MCS1	10.54
		MCS2	10.77
		MCS3	9.89
		MCS4	9.32
		MCS5	9.77
		MCS6	8.47
		MCS7	8.12
	6/2437	MCS0	10.7
		MCS1	10.21
		MCS2	10.78

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 38 of 208

		MCS3	9.56
		MCS4	9.63
		MCS5	9.15
		MCS6	8.27
		MCS7	8.66
	9/2452	MCS0	10.81
		MCS1	10.89
		MCS2	10.78
		MCS3	9.12
		MCS4	9.78
		MCS5	9.34
		MCS6	8.23
		MCS7	8.75

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 39 of 208

**7.2. Standalone SAR Test Exclusion Considerations**

Per FCC KDB 447498 D01, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Band	Configuration	Frequency (MHz)	Maximum Power (dBm)	Separation Distance (mm)	Calculation Result	SAR Exclusion Thresholds	Standalone SAR
Bluetooth	Head	2480	8	5	1.99	3.0	No
	Body	2480	8	10	0.99	3.0	No
Wifi 2.4GHz	Head	2462	16	5	12.49	3.0	Yes
	Body	2462	16	10	6.25	3.0	Yes

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 40 of 208

### 7.3. SAR Test Results

#### 7.3.1. GSM 850

**Table 14: SAR Values [GSM 850 (GSM/GPRS)]**

Test Position	Channel/Frequency (MHz)	Time slot	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift $\pm 0.21$ dB	Limit SAR <sub>1g</sub> 1.6 W/kg			
						Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)	Graph Results
<b>Test Position of Head</b>										
Left Cheek	190/836.6	GSM	1:8.3	33	32.54	-0.136	0.675	1.11	0.750	Figure.15
Left Tilt	190/836.6	GSM	1:8.3	33	32.54	0.040	0.228	1.11	0.253	Figure.16
Right Cheek	190/836.6	GSM	1:8.3	33	32.54	0.025	0.623	1.11	0.693	Figure.17
Right Tilt	190/836.6	GSM	1:8.3	33	32.54	-0.033	0.456	1.11	0.507	Figure.18
<b>Worst Case Position of Head With Battery 2</b>										
Left Cheek	190/836.6	GSM	1:8.3	33	32.54	0.026	0.658	1.11	0.732	Figure.19
<b>Test position of Body (Distance 10mm)</b>										
Back Side	190/836.6	GSM	1:8.3	33	32.54	-0.170	0.616	1.11	0.685	Figure.20
Front Side	190/836.6	GSM	1:8.3	33	32.54	-0.070	0.573	1.11	0.637	Figure.21
<b>Test position of Body (Distance 10mm)</b>										
Back Side	251/848.8	4Txslots	1:2.77	29	28.86	-0.011	1.170	1.03	1.208	Figure.22
	190/836.6	4Txslots	1:2.77	29	28.9	-0.002	1.290	1.02	1.320	Figure.23
	128/824.2	4Txslots	1:2.77	29	28.89	0.111	1.190	1.03	1.221	Figure.24
Front Side	251/848.8	4Txslots	1:2.77	29	28.86	-0.085	0.932	1.03	0.963	Figure.25
	190/836.6	4Txslots	1:2.77	29	28.9	-0.127	0.965	1.02	0.987	Figure.26
	128/824.2	4Txslots	1:2.77	29	28.89	0.016	0.998	1.03	1.024	Figure.27
Left Edge	190/836.6	4Txslots	1:2.77	29	28.90	0.017	0.531	1.02	0.543	Figure.28
Right Edge	190/836.6	4Txslots	1:2.77	29	28.90	-0.088	0.666	1.02	0.682	Figure.29
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	190/836.6	4Txslots	1:2.77	29	28.90	0.020	0.165	1.02	0.169	Figure.30
<b>Worst case test Position With Battery 2 (Distance 10mm)</b>										
Back Side	190/836.6	4Txslots	1:2.77	29	28.90	0.035	1.320	1.02	1.351	Figure.31
<b>Worst Case Position of Body (1<sup>st</sup> Repeated SAR, Distance 10mm)</b>										
Back Side	190/836.6	4Txslots	1:2.77	29	28.90	-0.100	1.300	1.02	1.326	Figure.32

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is optional for such test configuration(s).

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 41 of 208

3. When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.
4. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset cable were required.

**Table 15: SAR Measurement Variability Results [GSM 850 (GSM/GPRS)]**

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated SAR (1g)	Ratio	2 <sup>nd</sup> Repeated SAR (1g)	3 <sup>rd</sup> Repeated SAR (1g)
Back Side	190/836.6	1.320	1.300	1.02	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 42 of 208

### 7.3.2. GSM 1900

**Table 16: SAR Values [GSM 1900(GSM/GPRS)]**

Test Position	Channel/ Frequency (MHz)	Time slot	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR <sub>1g</sub> 1.6 W/kg			
						Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)	Graph Results
<b>Test Position of Head</b>										
Left Cheek	661/1880	GSM	1:8.3	30.5	29.67	0.050	0.441	1.21	0.534	Figure.33
Left Tilt	661/1880	GSM	1:8.3	30.5	29.67	0.155	0.358	1.21	0.433	Figure.34
Right Cheek	661/1880	GSM	1:8.3	30.5	29.67	-0.054	0.639	1.21	0.774	Figure.35
Right Tilt	661/1880	GSM	1:8.3	30.5	29.67	-0.057	0.119	1.21	0.144	Figure.36
<b>Worst Case Position of Head With Battery 2</b>										
Right Cheek	661/1880	GSM	1:8.3	30.5	29.67	0.040	0.557	1.21	0.674	Figure.37
<b>Test position of Body (Distance 10mm)</b>										
Back Side	661/1880	GSM	1:8.3	30.5	29.67	-0.18	0.342	1.21	0.414	Figure.38
Front Side	661/1880	GSM	1:8.3	30.5	29.67	0.02	0.376	1.21	0.455	Figure.39
<b>Test position of Body (Distance 10mm)</b>										
Back Side	661/1880	4Txslots	1:2.07	27	26.09	-0.042	0.634	1.23	0.782	Figure.40
Front Side	661/1880	4Txslots	1:2.07	27	26.09	-0.070	0.624	1.23	0.769	Figure.41
Left Edge	661/1880	4Txslots	1:2.07	27	26.09	-0.100	0.159	1.23	0.196	Figure.42
Right Edge	661/1880	4Txslots	1:2.07	27	26.09	-0.061	0.074	1.23	0.091	Figure.43
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	810/1909.8	4Txslots	1:2.07	27	26.06	-0.010	0.695	1.24	0.863	Figure.44
	661/1880	4Txslots	1:2.07	27	26.09	0.020	0.684	1.23	0.843	Figure.45
	512/1850.2	4Txslots	1:2.07	27	26.09	-0.070	0.653	1.23	0.805	Figure.46
<b>Worst Case Position of Body With Battery 2 (Distance 10mm)</b>										
Bottom Edge	810/1909.8	4Txslots	1:2.07	27	26.06	-0.042	0.649	1.24	0.806	Figure.47

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).
3. When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.
4. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 43 of 208

### 7.3.3. UMTS Band II

**Table 17: SAR Values [UMTS Band II (WCDMA/HSDPA/HSUPA)]**

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR <sub>1g</sub> 1.6 W/kg			
						Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)	Graph Results
<b>Test Position of Head</b>										
Left Cheek	9400/1880	RMC 12.2K	1:1	24	23.22	0.037	0.575	1.20	0.688	Figure.48
Left Tilt	9400/1880	RMC 12.2K	1:1	24	23.22	-0.036	0.238	1.20	0.285	Figure.49
Right Cheek	9538/1907.6	RMC 12.2K	1:1	24	23.16	-0.016	0.672	1.21	0.815	Figure.50
	9400/1880	RMC 12.2K	1:1	24	23.22	0.020	0.864	1.20	1.034	Figure.51
	9262/1852.4	RMC 12.2K	1:1	24	23.07	-0.035	0.681	1.24	0.844	Figure.52
Right Tilt	9400/1880	RMC 12.2K	1:1	24	23.22	0.044	0.193	1.20	0.231	Figure.53
<b>Worst Case Position of Head With Battery 2</b>										
Right/Cheek	9400/1880	RMC 12.2K	1:1	24	23.22	-0.031	0.818	1.20	0.979	Figure.54
<b>Worst Case Position of SAR (1<sup>st</sup> Repeated SAR)</b>										
Right Cheek	9400/1880	RMC 12.2K	1:1	24	23.22	0.039	0.742	1.20	0.888	Figure.55
<b>Test position of Body (Distance 10mm)</b>										
Back Side	9400/1880	RMC 12.2K	1:1	24	23.22	0.168	0.604	1.20	0.723	Figure.56
Front Side	9538/1907.6	RMC 12.2K	1:1	24	23.16	0.020	0.667	1.21	0.809	Figure.57
	9400/1880	RMC 12.2K	1:1	24	23.22	0.010	0.679	1.20	0.813	Figure.58
	9262/1852.4	RMC 12.2K	1:1	24	23.07	-0.070	0.590	1.24	0.731	Figure.59
Left Edge	9400/1880	RMC 12.2K	1:1	24	23.22	0.170	0.176	1.20	0.211	Figure.60
Right Edge	9400/1880	RMC 12.2K	1:1	24	23.22	0.025	0.186	1.20	0.223	Figure.61
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	9538/1907.6	RMC 12.2K	1:1	24	23.16	-0.090	0.745	1.21	0.904	Figure.62
	9400/1880	RMC 12.2K	1:1	24	23.22	-0.180	0.788	1.20	0.943	Figure.63
	9262/1852.4	RMC 12.2K	1:1	24	23.07	-0.110	0.721	1.24	0.893	Figure.64
<b>Worst Case Position of Body With Battery 2 (Distance 10mm)</b>										
Bottom Edge	9400/1880	RMC 12.2K	1:1	24	23.22	-0.080	0.787	1.20	0.942	Figure.65

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

3. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 44 of 208

**Table 18: 3G SAR Test Reduction Procedure [UMTS Band II (WCDMA/HSDPA/HSUPA)]**

Test Position	Channel/ Frequency (MHz)	The highest reported SAR of primary mode	The maximum Allowed Power of primary mode (dBm)	The maximum Allowed Power of secondary mode (dBm)	Scaling Factor	The adjusted SAR
<b>HSDPA</b>						
Bottom Edge	9400/1880	0.943	24	24	1	0.943
<b>HSUPA</b>						
Bottom Edge	9400/1880	0.943	24	23	0.79	0.745
<p>When the maximum output power and tune-up tolerance specified for production units in a secondary mode is <math>\leq \frac{1}{4}</math> dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is <math>\leq 1.2</math> W/kg, SAR measurement is not required for the secondary mode</p>						

**Table 19: SAR Measurement Variability Results [UMTS Band II (WCDMA/HSDPA/HSUPA)]**

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated SAR (1g)	Ratio	2 <sup>nd</sup> Repeated SAR (1g)	3 <sup>rd</sup> Repeated SAR (1g)
Right Cheek	9400/1880	0.864	0.742	1.16	N/A	N/A
<p>Note: 1) When the original highest measured SAR is <math>\geq 0.80</math> W/kg, the measurement was repeated once.            2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was <math>&gt; 1.20</math> or when the original or repeated measurement was <math>\geq 1.45</math> W/kg (<math>\sim 10\%</math> from the 1-g SAR limit).            3) A third repeated measurement was performed only if the original, first or second repeated measurement was <math>\geq 1.5</math> W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is <math>&gt; 1.20</math>.            4) Repeated measurements are not required when the original highest measured SAR is <math>&lt; 0.80</math> W/kg</p>						

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 45 of 208

### 7.3.4. UMTS Band V

**Table 20: SAR Values [UMTS Band V (WCDMA/HSDPA/HSUPA)]**

Test Position	Channel/ Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR <sub>1g</sub> 1.6 W/kg			
						Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)	Graph Results
<b>Test Position of Head</b>										
Left Cheek	4233/846.6	RMC 12.2K	1:1	24	22.57	0.045	0.695	1.39	0.966	Figure.66
	4183/836.6	RMC 12.2K	1:1	24	22.49	-0.079	0.667	1.42	0.944	Figure.67
	4132/826.4	RMC 12.2K	1:1	24	22.57	-0.038	0.778	1.39	1.081	Figure.68
Left Tilt	4183/836.6	RMC 12.2K	1:1	24	22.49	0.080	0.376	1.42	0.532	Figure.69
Right Cheek	4233/846.6	RMC 12.2K	1:1	24	22.57	0.031	0.691	1.39	0.960	Figure.70
	4183/836.6	RMC 12.2K	1:1	24	22.49	-0.001	0.610	1.42	0.864	Figure.71
	4132/826.4	RMC 12.2K	1:1	24	22.57	-0.031	0.827	1.39	1.149	Figure.72
Right Tilt	4183/836.6	RMC 12.2K	1:1	24	22.49	0.025	0.291	1.42	0.412	Figure.73
<b>Worst Case Position of Head With Battery 2</b>										
Right Cheek	4132/826.4	RMC 12.2K	1:1	24	22.57	0.043	0.597	1.39	0.830	Figure.74
<b>Worst Case Position of SAR (1<sup>st</sup> Repeated SAR)</b>										
Right Cheek	4132/826.4	RMC 12.2K	1:1	24	22.57	-0.050	0.862	1.39	1.198	Figure.75
<b>Test position of Body (Distance 10mm)</b>										
Back Side	4233/846.6	RMC 12.2K	1:1	24	22.57	-0.001	0.767	1.39	1.066	Figure.76
	4183/836.6	RMC 12.2K	1:1	24	22.49	-0.129	0.783	1.42	1.109	Figure.77
	4132/826.4	RMC 12.2K	1:1	24	22.57	-0.119	0.755	1.39	1.049	Figure.78
Front Side	4233/846.6	RMC 12.2K	1:1	24	22.57	-0.034	0.571	1.39	0.794	Figure.79
	4183/836.6	RMC 12.2K	1:1	24	22.49	0.050	0.604	1.42	0.855	Figure.80
	4132/826.4	RMC 12.2K	1:1	24	22.57	0.008	0.734	1.39	1.020	Figure.81
Left Edge	4183/836.6	RMC 12.2K	1:1	24	22.49	-0.035	0.323	1.42	0.457	Figure.82
Right Edge	4183/836.6	RMC 12.2K	1:1	24	22.49	0.034	0.359	1.42	0.508	Figure.83
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	4183/836.6	RMC 12.2K	1:1	24	22.49	0.045	0.113	1.42	0.160	Figure.84
<b>Worst Case Position of Body With Battery 2 (Distance 10mm)</b>										
Back Side	4183/836.6	RMC 12.2K	1:1	24	22.49	-0.119	0.764	1.42	1.082	Figure.85

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 46 of 208

3. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset cable were required.

**Table 21: 3G SAR Test Reduction Procedure [UMTS Band V (WCDMA/HSDPA/HSUPA)]**

Test Position	Channel/ Frequency (MHz)	The highest reported SAR of primary mode	The maximum Allowed Power of primary mode (dBm)	The maximum Allowed Power of secondary mode (dBm)	Scaling Factor	The adjusted SAR
<b>HSDPA</b>						
Back Side	4183/836.6	1.109	24	24	1	1.109
<b>HSUPA</b>						
Back Side	4183/836.6	1.109	24	23	0.79	0.876

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode

**Table 22: SAR Measurement Variability Results [UMTS Band V (WCDMA/HSDPA/HSUPA)]**

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated SAR (1g)	Ratio	2 <sup>nd</sup> Repeated SAR (1g)	3 <sup>rd</sup> Repeated SAR (1g)
Right Cheek	4132/826.4	0.827	0.862	1.04	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).  
 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 7.3.5. WiFi

**Table 23: SAR Values (802.11b/g/n)**

Test Position	Channel/Frequency (MHz)	Service	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit of SAR 1.6 W/kg			
						Drift (dB)	Measured SAR <sub>1g</sub> (W/kg)	Scaling Factor	Reported SAR <sub>1g</sub> (W/kg)	Graph Results
<b>Test Position of Head</b>										
Left Cheek	11/2462	DSSS	1:1	16	15.91	-0.022	0.413	1.02	0.422	Figure.86
Left Tilt	11/2462	DSSS	1:1	16	15.91	0.026	0.384	1.02	0.392	Figure.87
Right Cheek	11/2462	DSSS	1:1	16	15.91	-0.072	0.491	1.02	0.501	Figure.88
Right Tilt	11/2462	DSSS	1:1	16	15.91	0.021	0.483	1.02	0.493	Figure.89
<b>Worst Case Position of Head With Battery 2</b>										
Right Cheek	11/2462	DSSS	1:1	16	15.91	-0.13	0.468	1.02	0.478	Figure.90
<b>Test position of Body (Distance 10mm)</b>										
Back Side	11/2462	DSSS	1:1	16	15.91	-0.129	0.255	1.02	0.260	Figure.91
Front Side	11/2462	DSSS	1:1	16	15.91	0.052	0.140	1.02	0.143	Figure.92
Left Edge	11/2462	DSSS	1:1	16	15.91	0.028	0.168	1.02	0.172	Figure.93
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	11/2462	DSSS	1:1	16	15.91	0.001	0.253	1.02	0.258	Figure.94
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Worst Case Position of Body With Battery 2 (Distance 10mm)</b>										
Back Side	11/2462	DSSS	1:1	16	15.91	0.078	0.177	1.02	0.181	Figure.95

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is optional for such test configuration(s).

3. KDB 248227-SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than measured on the corresponding 802.11b channels.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 48 of 208

**7.4. Simultaneous Transmission Conditions**

Air-Interface	Band (MHz)	Type	Simultaneous Transmissions Note: Not to be tested	Voice Over Digital Transport (Data)
GSM	850	Voice	Yes WiFi or BT	NA
	1900	Voice		NA
	GPRS	Data	Yes WiFi or BT	NA
WCDMA	Band II	Voice	Yes WiFi or BT	NA
	Band V	Voice	Yes WiFi or BT	NA
	HSDPA/HSUPA/ RMC/HSPA+	Data	Yes WiFi or BT	NA
WiFi	2450	Data	Yes GSM,GPRS, HSDPA/HSUPA/RMC/ HSPA+	Yes
Bluetooth (BT)	2450	Data	Yes GSM,GPRS, HSDPA/HSUPA/RMC/ HSPA+	NA

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 49 of 208

When standalone SAR is not required to be measured per FCC KDB 447498 D01, the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \frac{\sqrt{f \text{ (GHz)}}}{7.5}$$

Band	Configuration	Frequency (MHz)	Maximum Power (dBm)	Separation Distance (mm)	Estimated SAR (W/kg)
Bluetooth	Head	2480	8	5	0.265
	Body	2480	8	10	0.132

Per FCC KDB 447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

### Simultaneous transimition SAR For Bluetooth and GSM/UMTS

SAR <sub>1g</sub> (W/kg) \ Test Position	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	Bluetooth	MAX. $\Sigma$ SAR <sub>1g</sub>	Peak location separation ratio
Left, Touch	0.750	0.534	0.688	<b>1.081</b>	<b>0.265</b>	1.346	No
Left, Tilt	0.253	0.433	0.285	<b>0.532</b>	<b>0.265</b>	0.797	No
Right, Touch	0.693	0.774	1.034	<b>1.198</b>	<b>0.265</b>	1.463	No
Right, Tilt	<b>0.507</b>	0.144	0.231	0.412	<b>0.265</b>	0.772	No
Back Side	<b>1.351</b>	0.782	0.723	1.109	<b>0.132</b>	<b>1.483</b>	No
Front Side	<b>1.024</b>	0.769	0.813	1.020	<b>0.132</b>	1.156	No
Left Edge	<b>0.543</b>	0.196	0.211	0.457	<b>0.132</b>	0.675	No
Right Edge	<b>0.682</b>	0.091	0.223	0.508	<b>0.132</b>	0.814	No
Top Edge	NA	NA	NA	NA	<b>0.132</b>	0.132	No
Bottom Edge	0.169	0.863	<b>0.943</b>	0.160	<b>0.132</b>	1.075	No

Note: 1. The value with blue color is the maximum  $\Sigma$ SAR<sub>1g</sub> Value.

2. MAX.  $\Sigma$ SAR<sub>1g</sub> = Unlicensed SAR<sub>MAX</sub> + Licensed SAR<sub>MAX</sub>

MAX.  $\Sigma$ SAR<sub>1g</sub> = 1.483 W/kg < 1.6 W/kg, So the Simultaneous transimition SAR with volum scan are not required for BT and GSM/UMTS antenna.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 50 of 208

**Simultaneous transimition SAR For WiFi and GSM/UMTS**

SAR <sub>1g</sub> (W/kg) Test Position	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	WiFi	MAX. ΣSAR <sub>1g</sub>	Peak location separation ratio
Left, Touch	0.750	0.534	0.688	<b>1.081</b>	<b>0.422</b>	1.503	No
Left, Tilt	0.253	0.433	0.285	<b>0.532</b>	<b>0.392</b>	0.924	No
Right, Touch	0.693	0.774	1.034	<b>1.198</b>	<b>0.501</b>	<b>1.699</b>	Yes
Right, Tilt	<b>0.507</b>	0.144	0.231	0.412	<b>0.493</b>	1.000	No
Back Side	<b>1.351</b>	0.782	0.723	1.109	<b>0.260</b>	<b>1.611</b>	Yes
Front Side	<b>1.024</b>	0.769	0.813	1.020	<b>0.143</b>	1.167	No
Left Edge	<b>0.543</b>	0.196	0.211	0.457	<b>0.172</b>	0.715	No
Right Edge	<b>0.682</b>	0.091	0.223	0.508	N/A	0.682	No
Top Edge	NA	NA	NA	NA	<b>0.258</b>	0.258	No
Bottom Edge	0.169	0.863	<b>0.943</b>	0.160	N/A	0.943	No

Note: 1. The value with blue color is the maximum ΣSAR<sub>1g</sub> Value.  
2. MAX. ΣSAR<sub>1g</sub> = Unlicensed SAR<sub>MAX</sub> + Licensed SAR<sub>MAX</sub>

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 51 of 208

### Simultaneous Transmission for test position of Back Side


SAR <sub>1g</sub> (W/kg) Test Position	SAR <sub>1g</sub> (W/kg)		UMTS		WiFi	MAX. ΣSAR <sub>1g</sub>	Peak location separation ratio
	GSM 850	GSM 1900	Band II	Band V			
Right, Touch	0.693	/	/	/	<b>0.501</b>	1.194	NA
	/	0.774	/	/	0.501	1.275	NA
	/	/	1.034	/	<b>0.501</b>	1.535	NA
	/	/	/	<b>1.198</b>	<b>0.501</b>	1.699	Yes
Back Side	<b>1.351</b>	/	/	/	<b>0.260</b>	1.611	Yes
	/	0.782	/	/	<b>0.260</b>	1.042	NA
	/	/	0.723	/	<b>0.260</b>	0.983	NA
	/	/	/	1.109	<b>0.260</b>	1.369	NA

● **Pair Simultaneous Transmission for GSM 850 and WiFi**

The position SAR<sub>GSM 850</sub> is (x<sub>1</sub>= 76.43, y<sub>1</sub>=-257.9, z<sub>1</sub>=-171.4),

The position SAR<sub>WiFi</sub> is (x<sub>2</sub>=39.3 y<sub>2</sub>=-323.9, z<sub>2</sub>= -172.3)

so the distance between the SAR<sub>Max.GSM 850</sub> and SAR<sub>Max.WiFi</sub> is 75.72 mm.

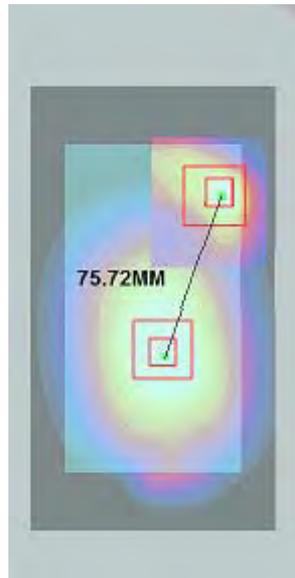

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})}$$


The peak location separation ratio is 0.029<0.04, so the Simultaneous transmission SAR with volum scan are not required for WiFi and GSM 850 antenna.

● **Pair Simultaneous Transmission for UMTS Band V and WiFi**

The position SAR<sub>WCDMA V</sub> is (x<sub>1</sub>=68.18, y<sub>1</sub>=-266.4, z<sub>1</sub>= -174.6),

The position SAR<sub>WiFi</sub> is (x<sub>2</sub>= 39.3, y<sub>2</sub>=-323.9, z<sub>2</sub>= -172.3)

so the distance between the SAR<sub>Max.WCDMA V</sub> and SAR<sub>Max.WiFi</sub> is 64.39 mm.

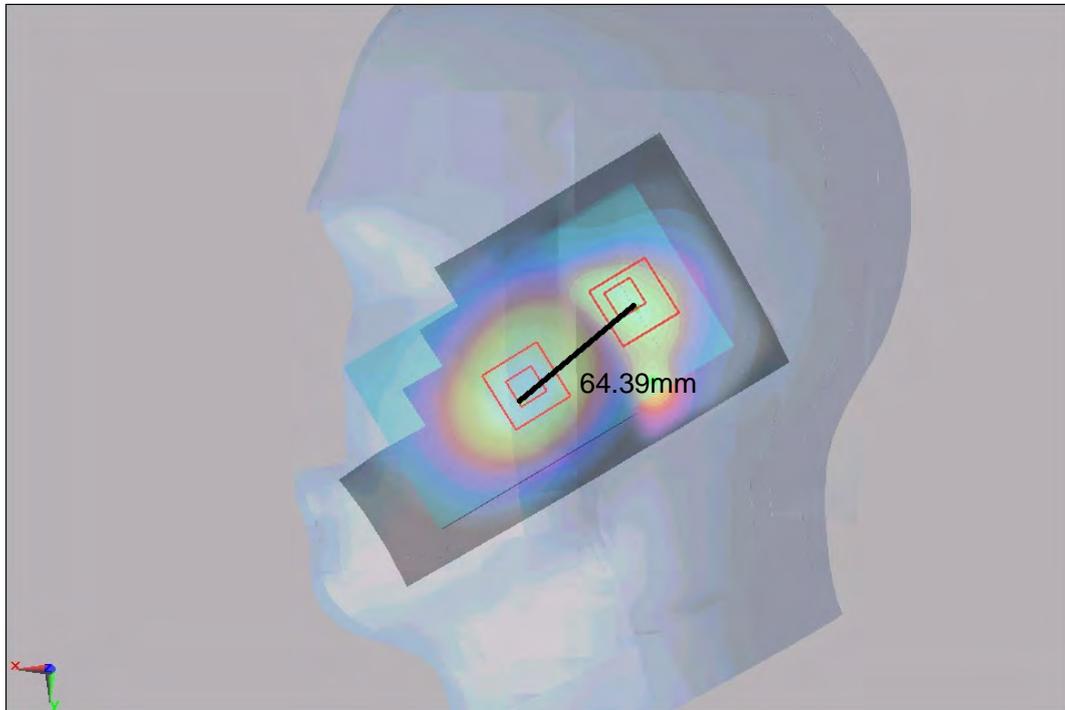

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})}$$

The peak location separation ratio is 0.032<0.04, so the Simultaneous transmission SAR with volum scan are not required for WiFi and UMTS Band V antenna.

## **8. Measurement Uncertainty**

The measured SAR were  $<1.5$  W/kg for all frequency bands, therefore per KDB Publication 865664 D01v01r03, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RXA1501-0016SAR01R4

Page 54 of 208

**9. Main Test Instruments**

**Table 24: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Expiration Time	Valid Period
01	Network analyzer	E5071B	MY42404014	2014-05-26	2015-05-25	1 year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested		
03	Power meter	Agilent E4417A	GB41291714	2014-03-09	2015-03-08	1 year
04	Power meter	Agilent E4417A	GB41291714	2015-03-08	2016-03-07	1 year
05	Power sensor	Agilent N8481H	MY50350004	2014-09-24	2015-09-23	1 year
06	Power sensor	E9327A	US40441622	2014-01-20	2015-01-19	1 year
07	Power sensor	E9327A	US40441622	2015-01-15	2016-01-14	1 year
08	Signal Generator	HP 8341B	2730A00804	2014-09-02	2015-09-01	1 year
09	Dual directional coupler	778D-012	50519	2014-03-24	2015-03-23	1 year
10	Dual directional coupler	777D	50146	2014-03-24	2015-03-23	1 year
11	Amplifier	IXA-020	0401	No Calibration Requested		
12	BTS	E5515C	MY48360988	2014-12-18	2015-12-17	1 year
13	E-field Probe	EX3DV4	3977	2014-02-17	2015-02-16	1 year
14	E-field Probe	EX3DV4	3677	2015-01-30	2016-01-29	1 year
15	DAE	DAE4	1291	2014-11-14	2015-11-13	1 year
16	Validation Kit 835MHz	D835V2	4d020	2014-08-28	2017-08-27	3 years
17	Validation Kit 1900MHz	D1900V2	5d060	2014-09-01	2017-08-31	3 years
18	Validation Kit 2450MHz	D2450V2	786	2014-09-01	2017-08-31	3 years
19	Temperature Probe	JM222	AA1009129	2014-03-13	2015-03-12	1 year
20	Temperature Probe	JM222	AA1009129	2015-03-08	2016-03-07	1 year
21	Hygrothermograph	WS-1	64591	2014-09-25	2015-09-24	1 year

\*\*\*\*\*END OF REPORT \*\*\*\*\*


## ANNEX A: Test Layout



Picture 1: Specific Absorption Rate Test Layout



Picture 2: Liquid depth in the flat Phantom (835MHz, 15.4cm depth)

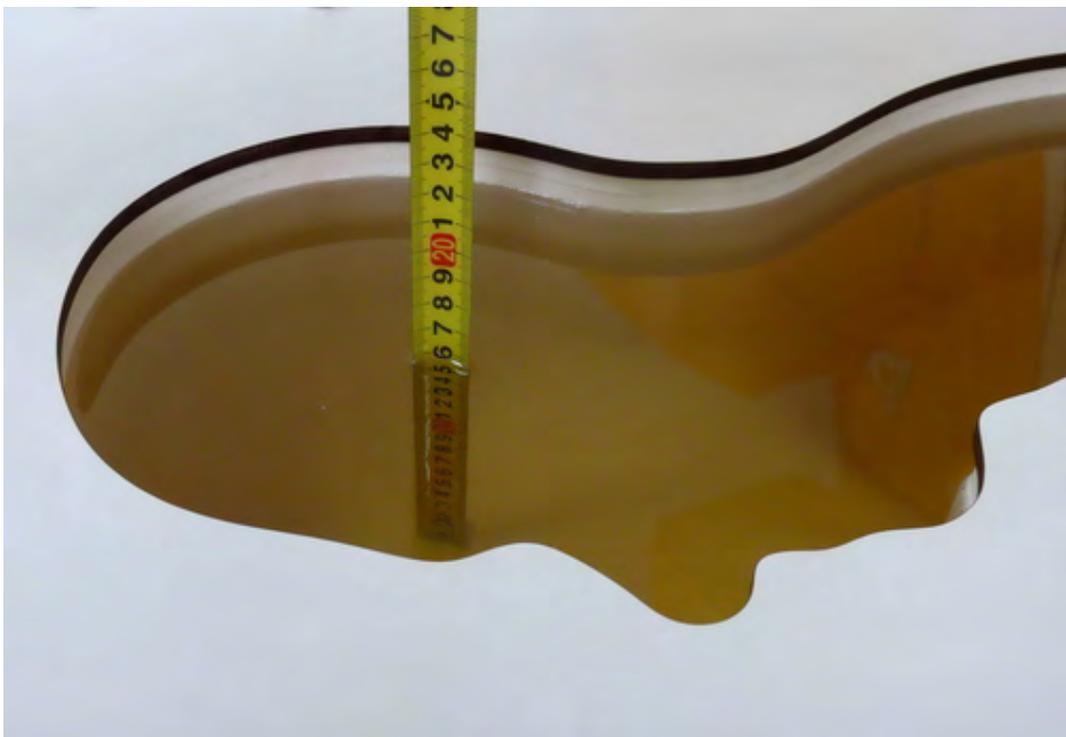


Picture 3: Liquid depth in the head Phantom (835MHz, 15.3cm depth)



Picture 4: Liquid depth in the flat Phantom (1900 MHz, 15.2cm depth)



Picture 5: liquid depth in the head Phantom (1900 MHz, 15.3cm depth)

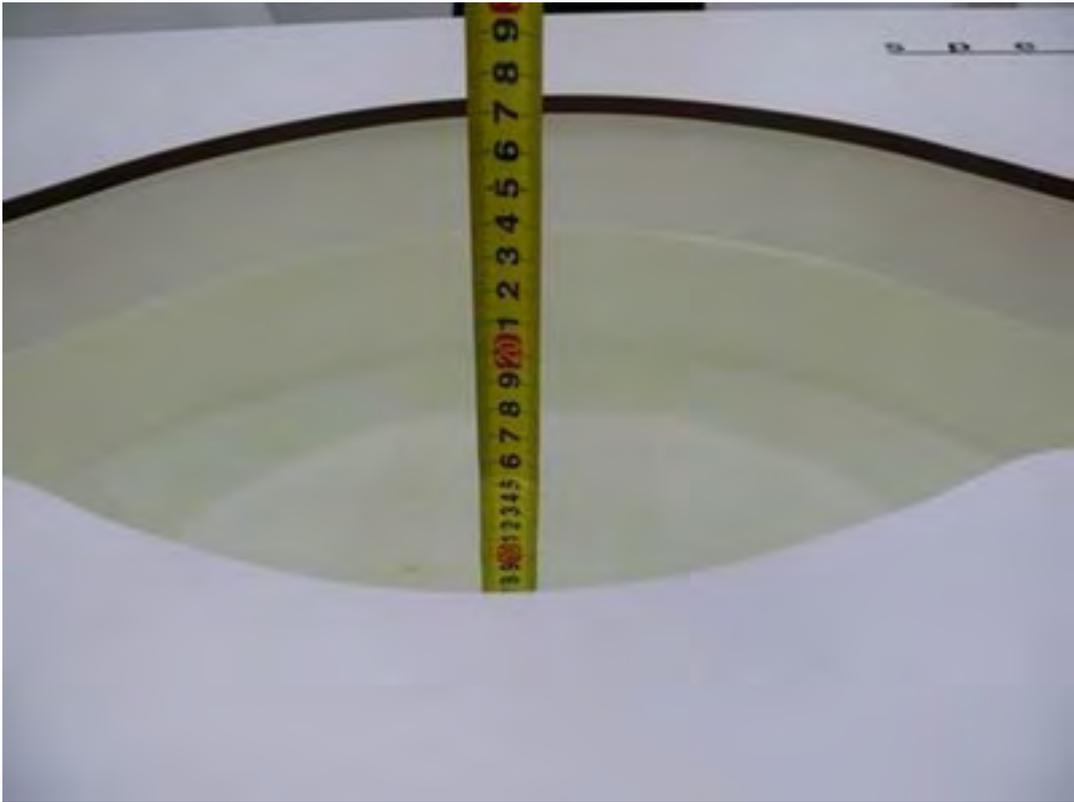

Picture 6: Liquid depth in the flat Phantom (2450 MHz, 15.3cm depth)



Picture 7: Liquid depth in the head Phantom (2450 MHz, 15.4cm depth)

## ANNEX B: System Check Results

### System Performance Check at 835 MHz Head TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020

Date: 3/6/2015

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 41.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.64 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.6 mW/g**

Maximum value of SAR (measured) = 2.64 mW/g

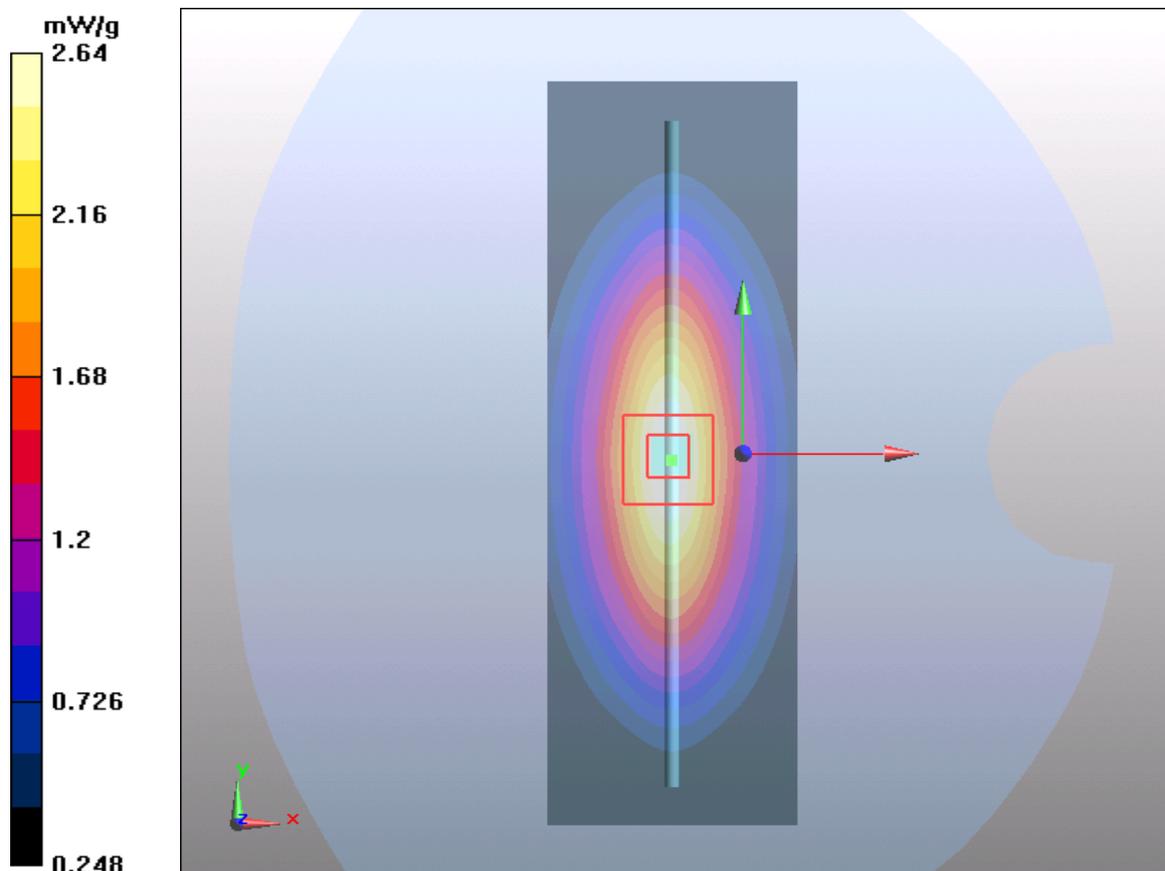


Figure 7 System Performance Check 835MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 60 of 208

## System Performance Check at 835 MHz Body TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020**

Date: 3/6/2015

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1666

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.58 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.9 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 3.5 W/kg

**SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.6 mW/g**

Maximum value of SAR (measured) = 2.6 mW/g

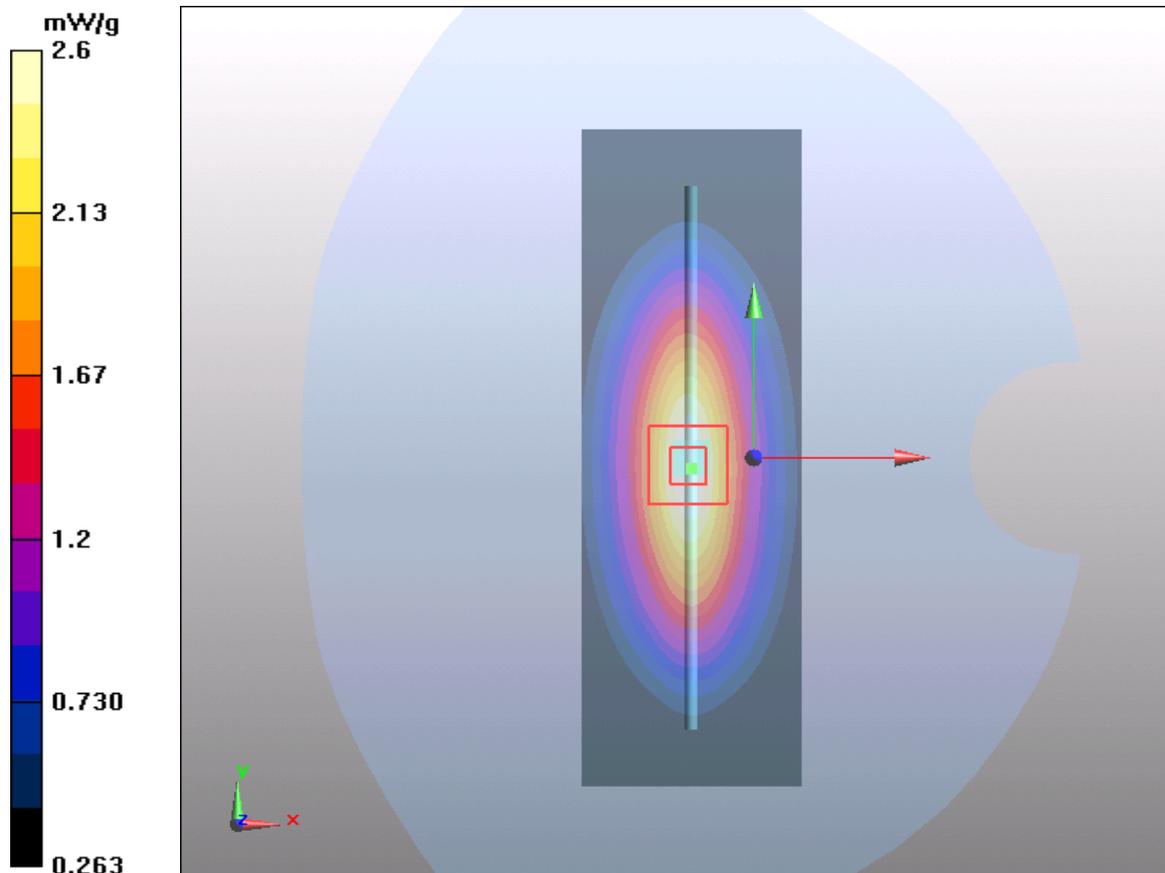


Figure 8 System Performance Check 835MHz 250Mw

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 61 of 208

## System Performance Check at 835 MHz Body TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020**

Date: 3/17/2015

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.61 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.09 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.48 W/kg

**SAR(1 g) = 2.46 mW/g; SAR(10 g) = 1.67 mW/g**

Maximum value of SAR (measured) = 2.73 mW/g

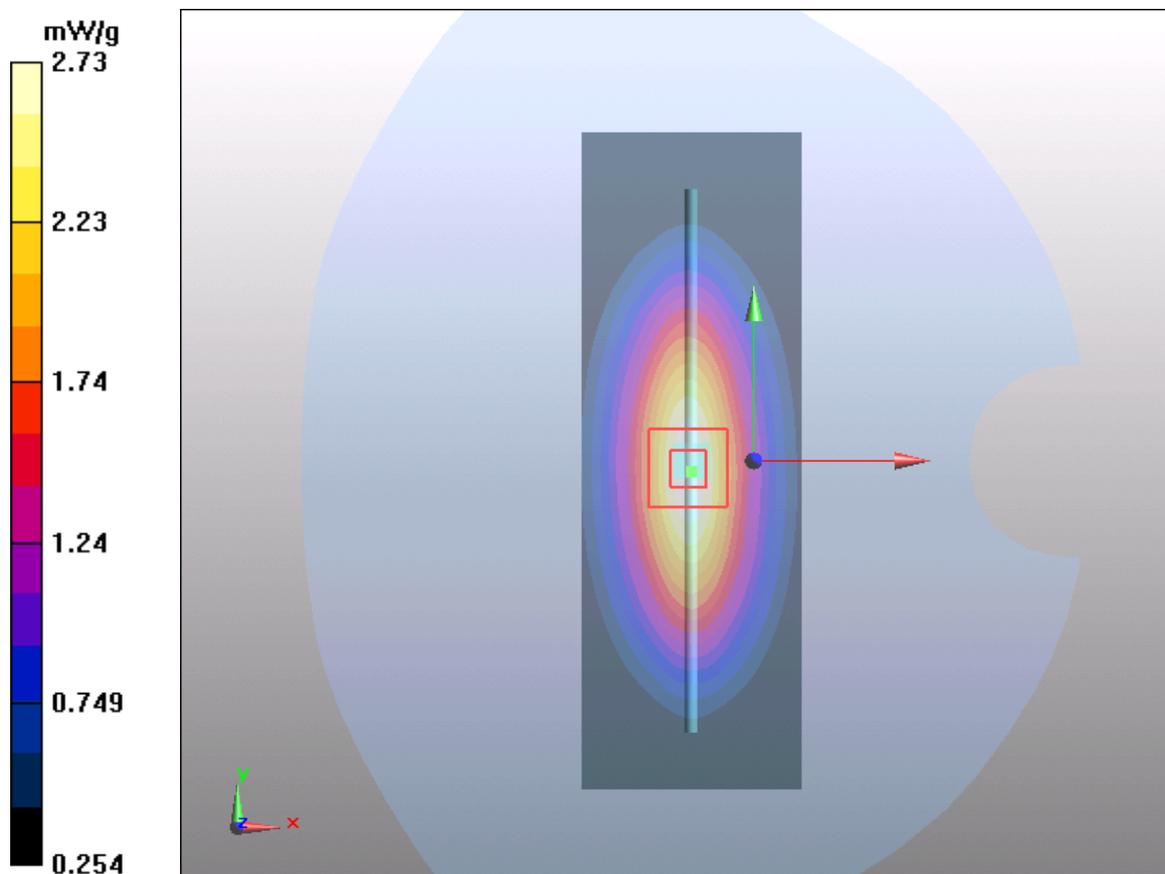


Figure 9 System Performance Check 835MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 62 of 208

## System Performance Check at 1900 MHz Head TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060**

Date: 2/4/2015

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 11.3 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.48 mW/g; SAR(10 g) = 4.9 mW/g**

Maximum value of SAR (measured) = 10.7 mW/g

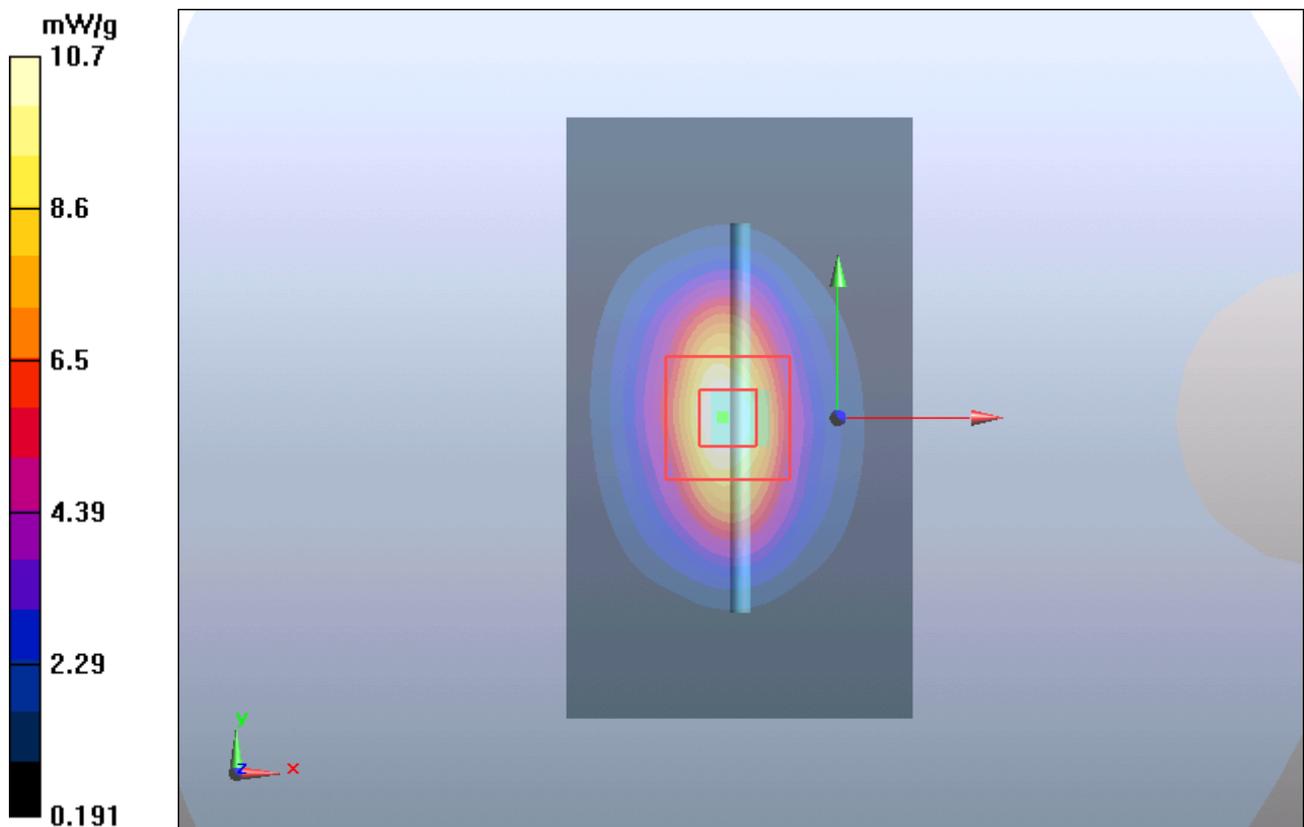


Figure 10 System Performance Check 1900MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 63 of 208

## System Performance Check at 1900 MHz Body TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060**

Date: 2/4/2015

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.2 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 82.3 V/m; Power Drift = 0.068 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 9.93 mW/g; SAR(10 g) = 5.25 mW/g**

Maximum value of SAR (measured) = 11.3 mW/g

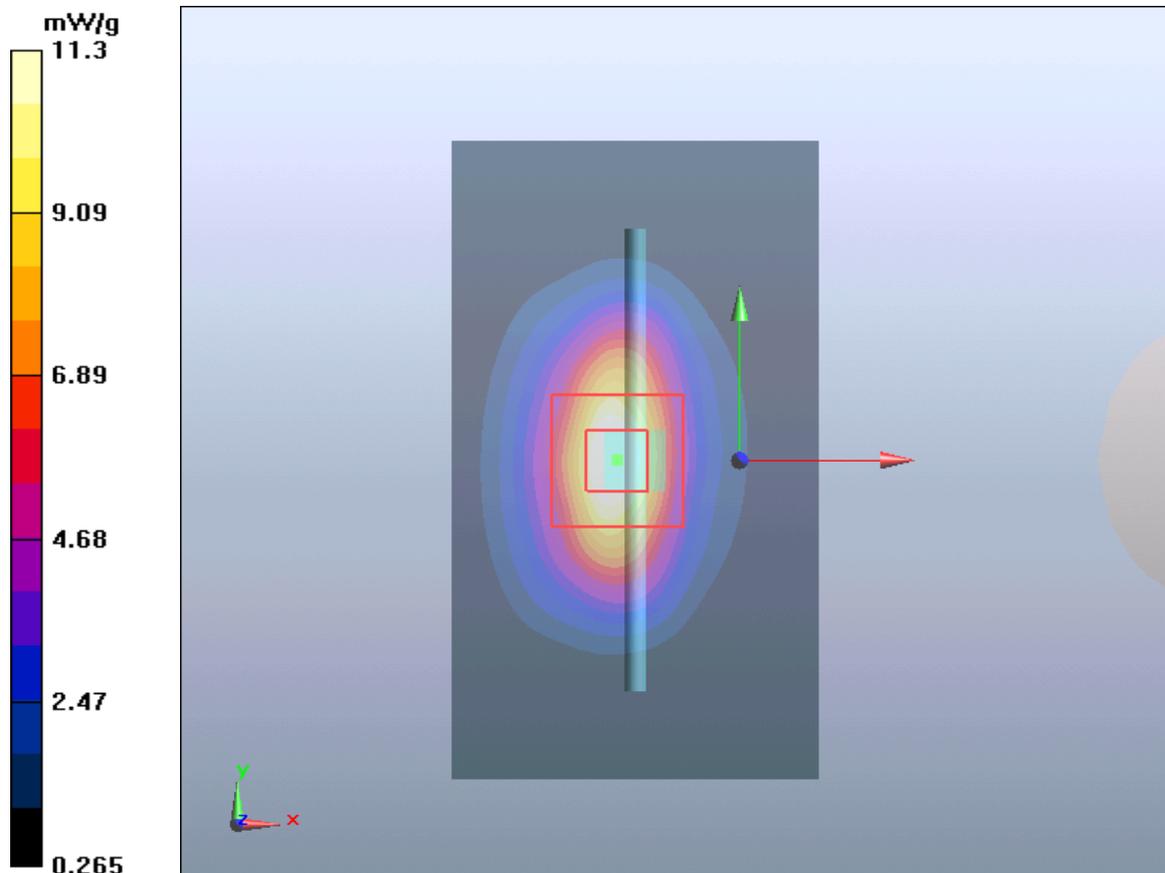


Figure 11 System Performance Check 1900MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 64 of 208

## System Performance Check at 1900 MHz Body TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d060**

Date: 3/17/2015

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM2; Type: SAM; Serial: TP-1524

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 80.8 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 17.6 W/kg

**SAR(1 g) = 9.83 mW/g; SAR(10 g) = 5.2 mW/g**

Maximum value of SAR (measured) = 11.52 mW/g

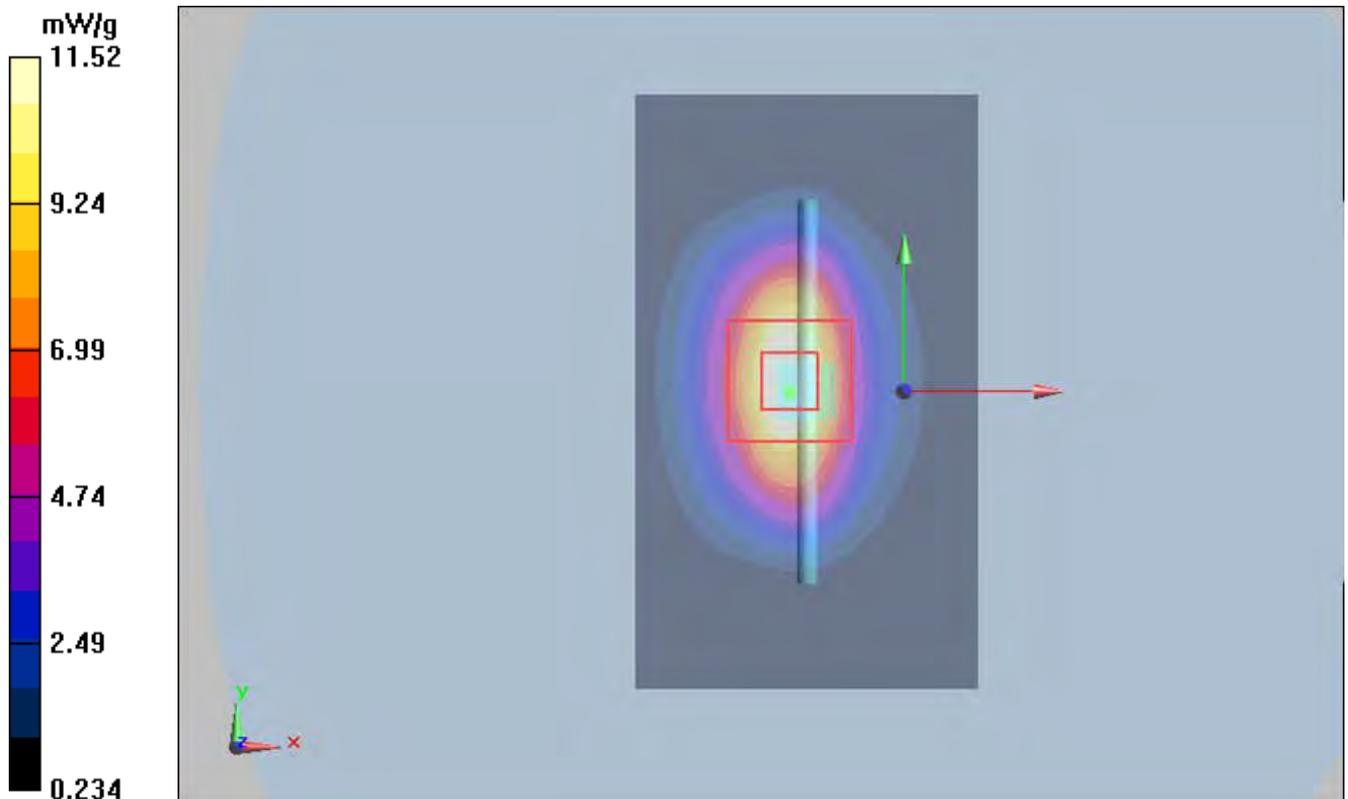


Figure 12 System Performance Check 1900MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 65 of 208

## System Performance Check at 2450 MHz Head TSL

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786**

Date: 1/3/2015

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.81$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3977; ConvF(7.24, 7.24, 7.24); Calibrated: 2/17/2014;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 18.2 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.8 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 30 W/kg

**SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.22 mW/g**

Maximum value of SAR (measured) = 15.9 mW/g

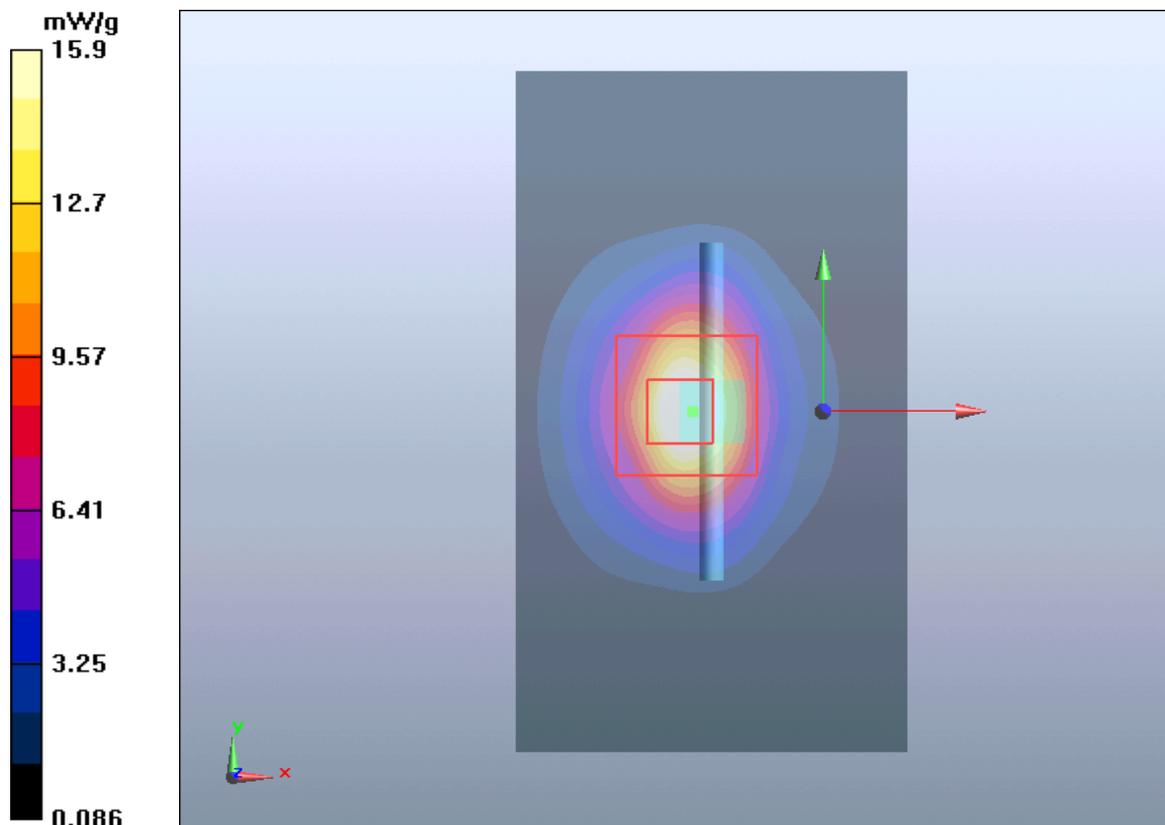


Figure 13 System Performance Check 2450MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 66 of 208

## System Performance Check at 2450 MHz Body TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 786

Date: 1/4/2015

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3977; ConvF(6.97, 6.97, 6.97); Calibrated: 2/17/2014;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: QD000P40CD; Serial: TP1667

Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 16 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.2 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 25.4 W/kg

**SAR(1 g) = 12.5 mW/g; SAR(10 g) = 6.20 mW/g**

Maximum value of SAR (measured) = 14.4 mW/g

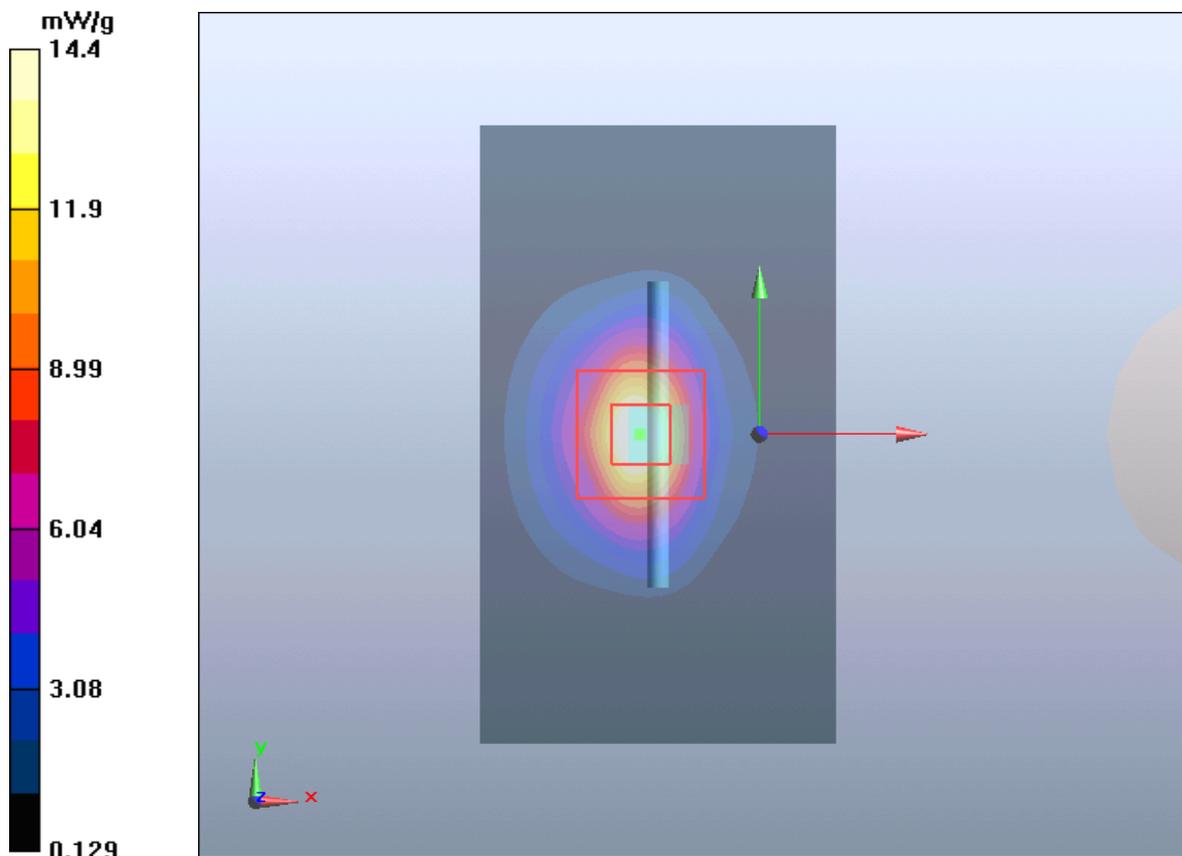


Figure 14 System Performance Check 2450MHz 250mW

## ANNEX C: Plots Results

### GSM 850 Left Cheek Middle (Battery 1)

Date: 3/6/2015

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Left Cheek Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.720 W/kg

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.803 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.456 W/kg**

Maximum value of SAR (measured) = 0.713 W/kg

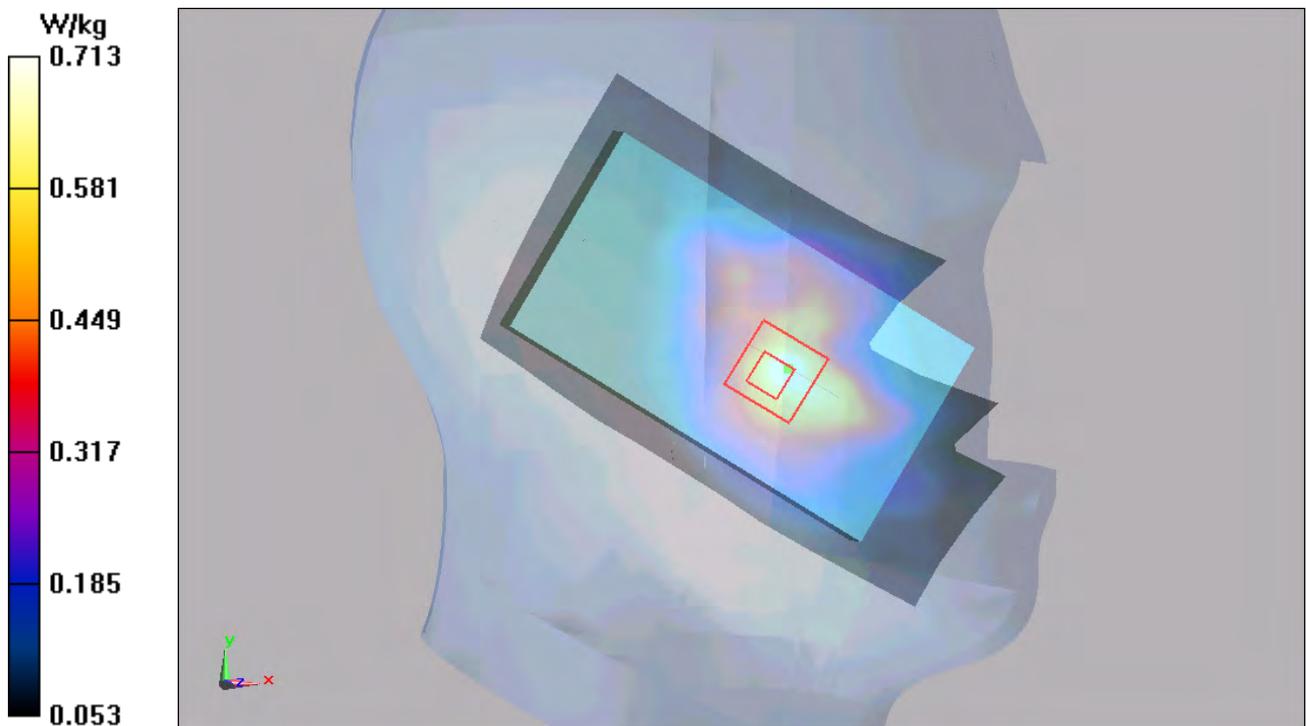


Figure 15 Left Hand Touch Cheek GSM 850 Channel 190

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 68 of 208

### GSM 850 Left Tilt Middle (Battery 1)

Date: 3/6/2015

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Left Tilt Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.424 W/kg

**Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.225 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.448 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.164 W/kg**

Maximum value of SAR (measured) = 0.395 W/kg

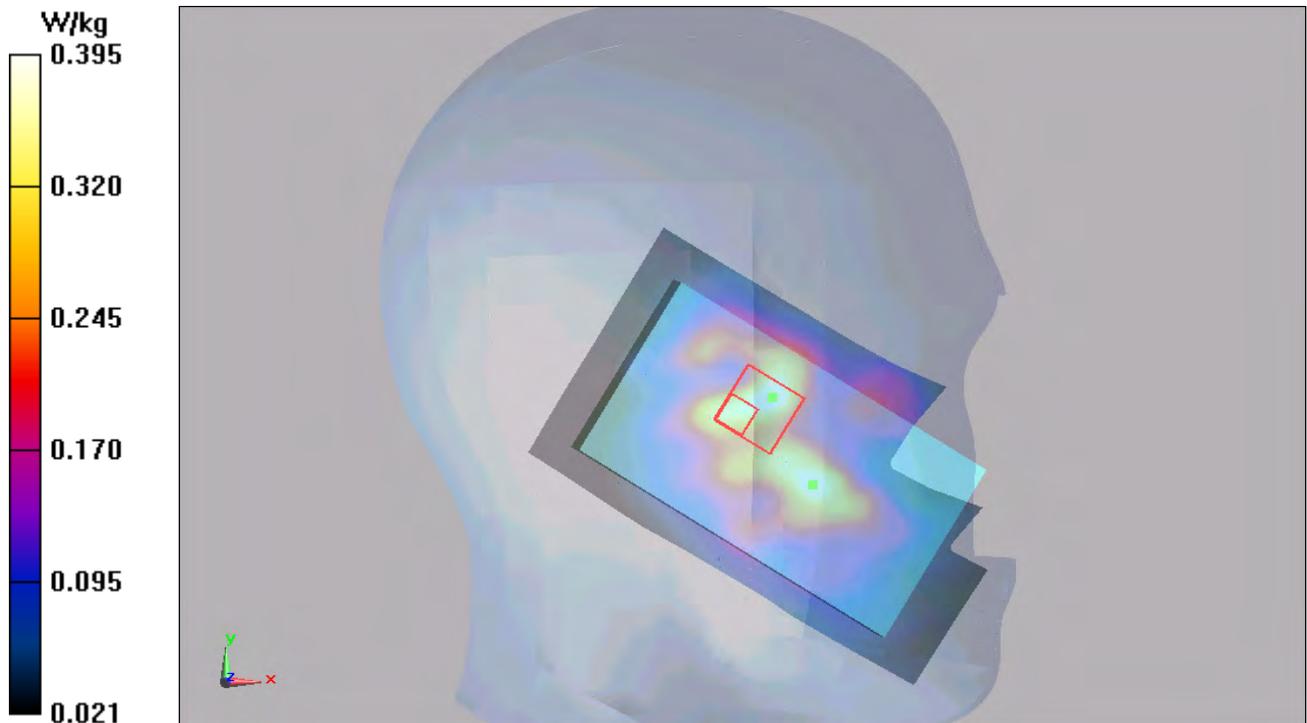


Figure 16 Left Hand Tilt 15° GSM 850 Channel 190

**GSM 850 Right Cheek Middle (Battery 1)**

Date: 3/6/2015

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Right Cheek Middle/Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.755 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.558 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.894 W/kg

**SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.499 W/kg**

Maximum value of SAR (measured) = 0.673 W/kg

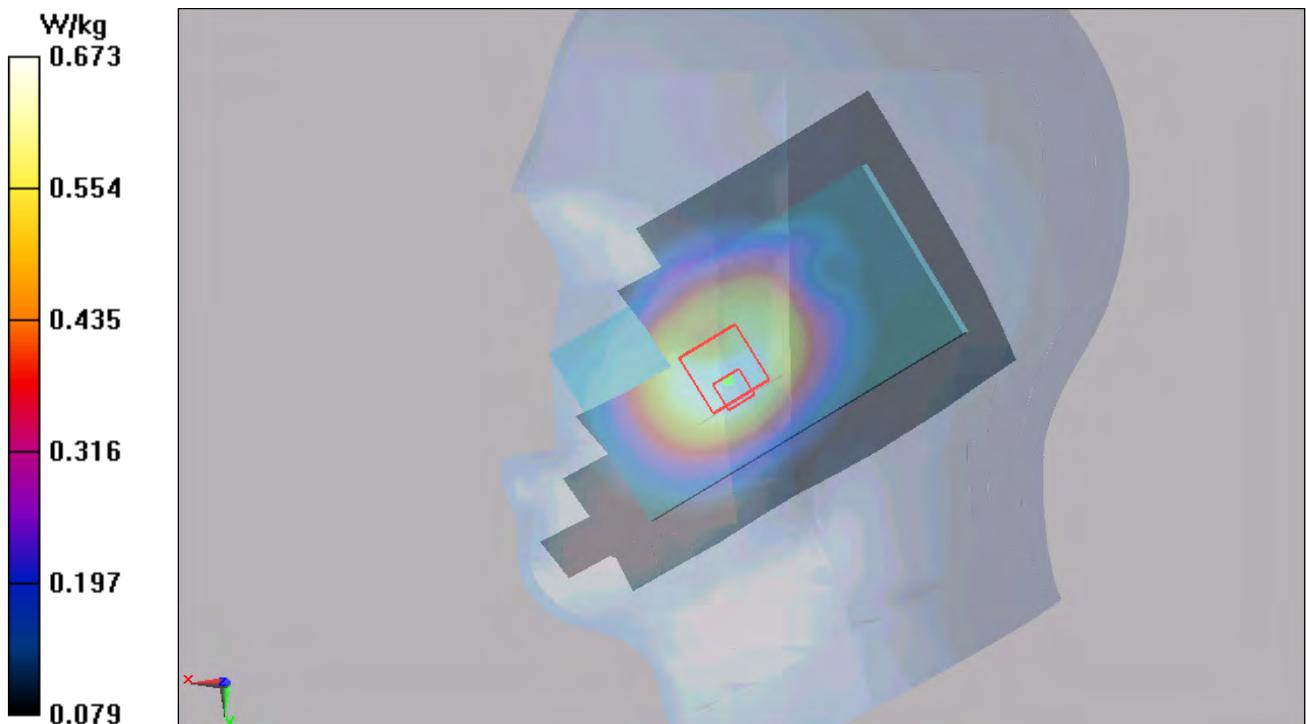


Figure 17 Right Hand Touch Cheek GSM 850 Channel 190

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 70 of 208

## GSM 850 Right Tilt Middle (Battery 1)

Date: 3/6/2015

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Right Tilt Middle/Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.492 W/kg

**Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.686 W/kg

**SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.335 W/kg**

Maximum value of SAR (measured) = 0.500 W/kg

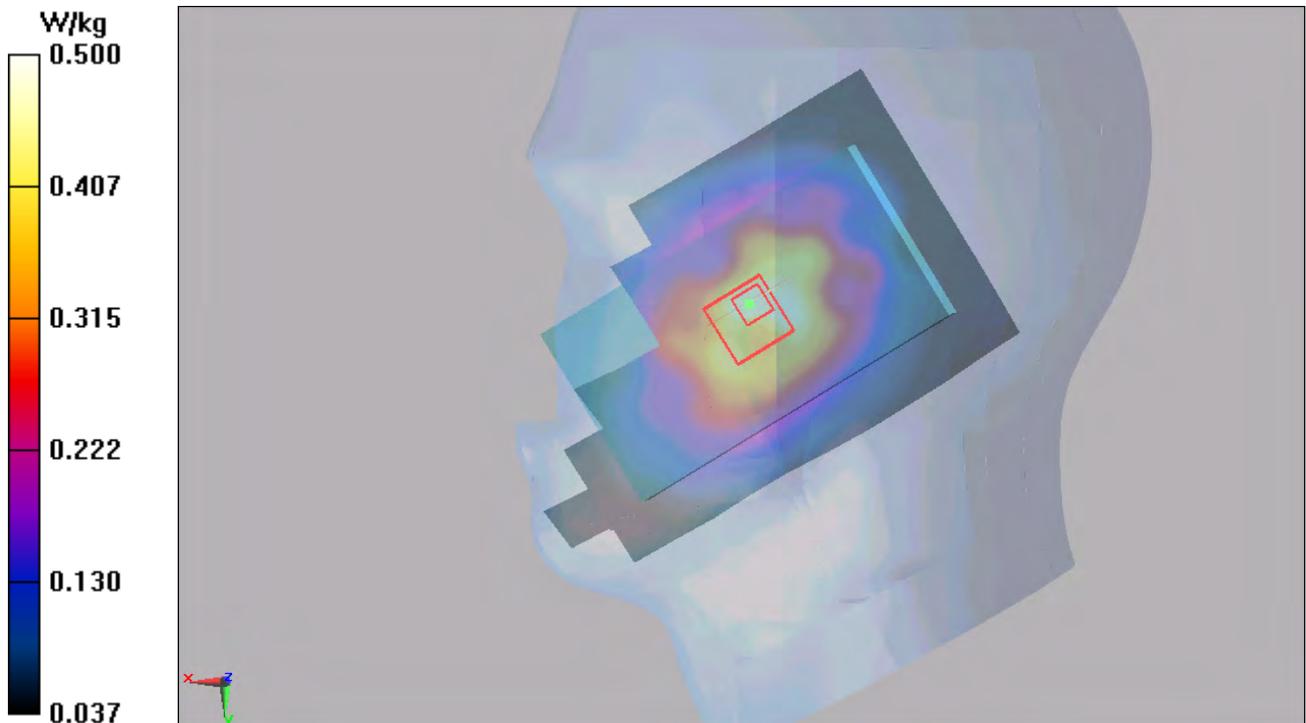


Figure 18 Right Hand Tilt 15° GSM 850 Channel 190

### GSM 850 Left Cheek Middle (Battery 2)

Date: 3/6/2015

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Left Cheek Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.735 W/kg

**Left Cheek Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.565 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.490 W/kg**

Maximum value of SAR (measured) = 0.703 W/kg

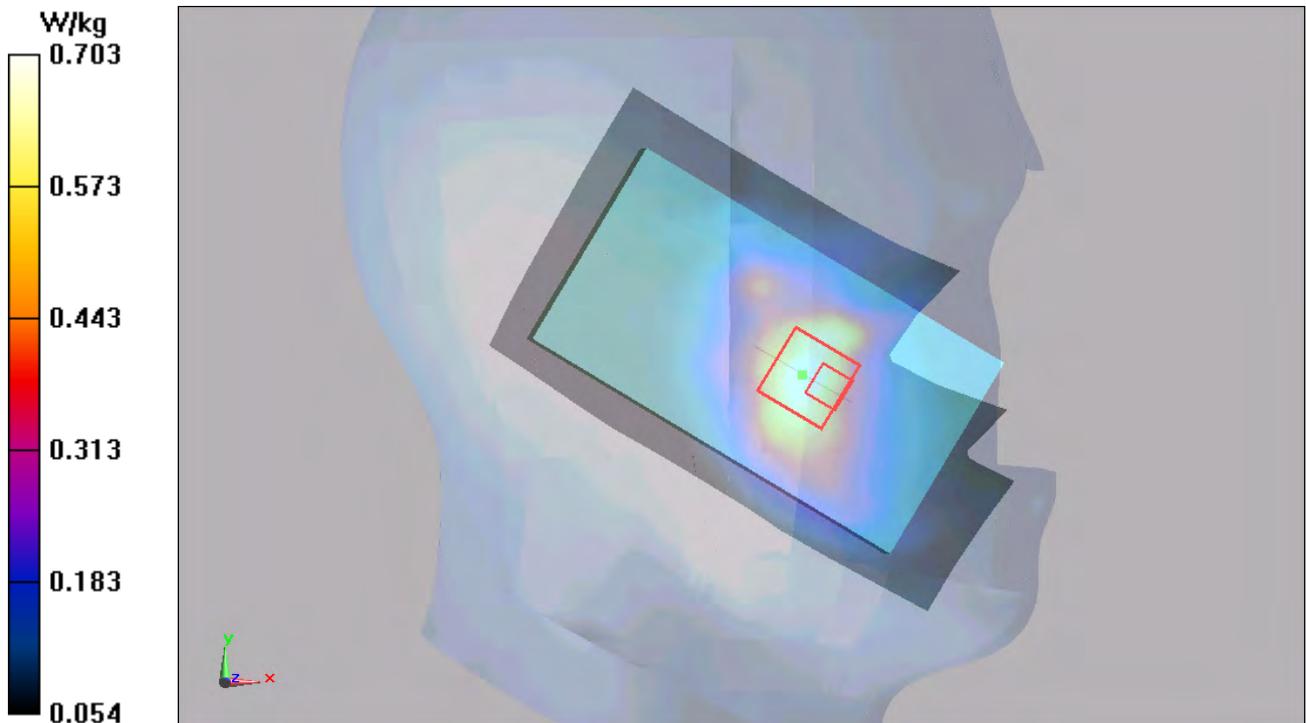


Figure 19 Left Hand Touch Cheek GSM 850 Channel 190

**GSM 850 Back Side Middle (Battery 1)**

Date: 3/17/2015

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Back Side Middle/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.657 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.86 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.772 W/kg

**SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.462 W/kg**

Maximum value of SAR (measured) = 0.640 W/kg

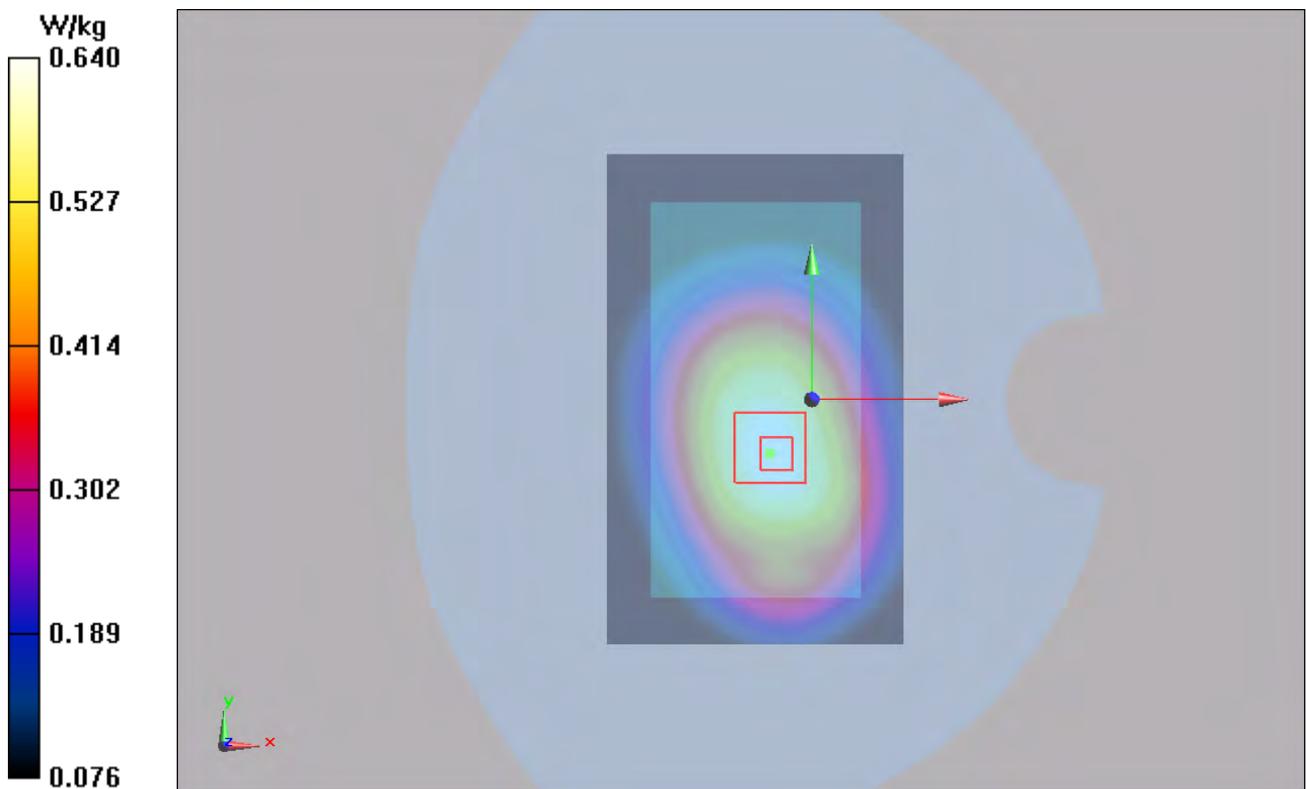


Figure 20 Body, Back Side, GSM 850 Channel 190

**GSM 850 Front Side Middle (Battery 1)**

Date: 3/17/2015

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Front Side Middle/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.601 W/kg

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.34 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.705 W/kg

**SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.435 W/kg**

Maximum value of SAR (measured) = 0.591 W/kg

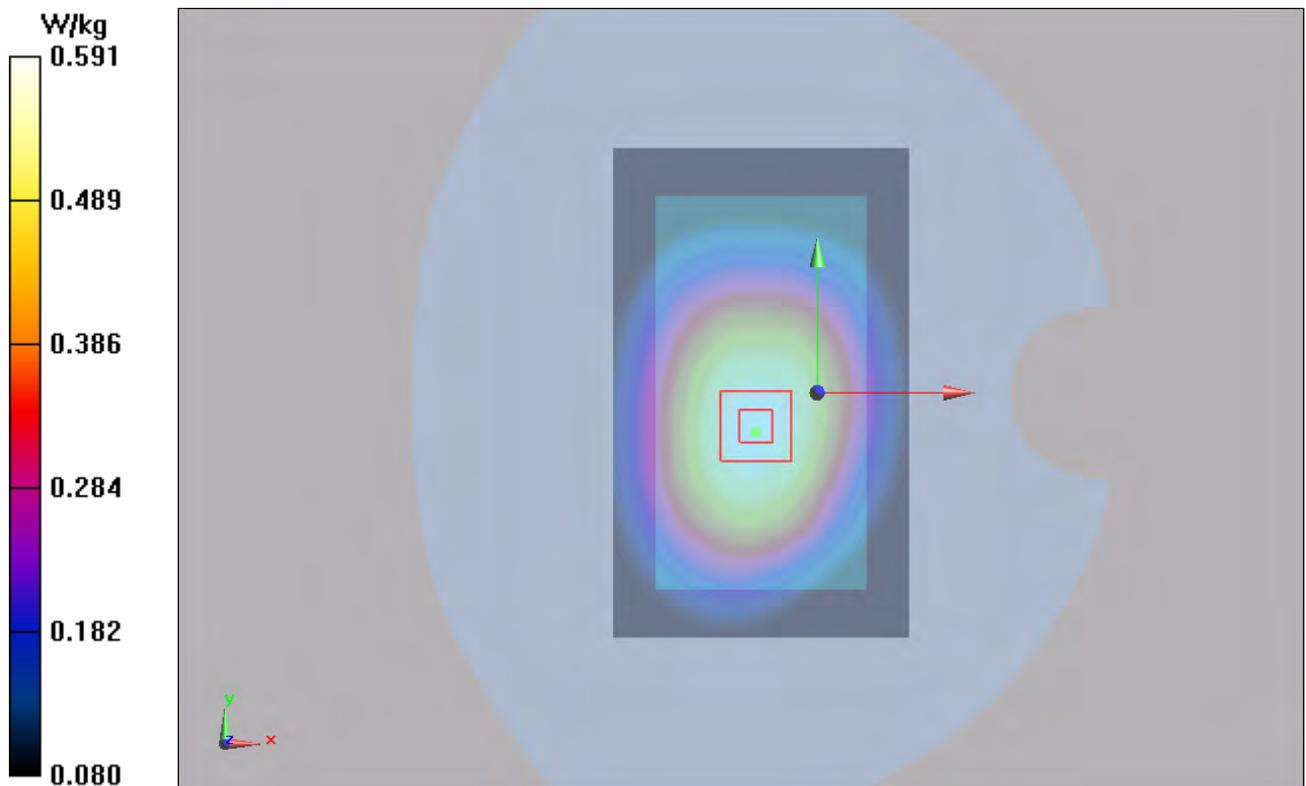


Figure 21 Body, Front Side, GSM 850 Channel 190

### GSM 850 GPRS (4Txslots) Back Side High (Battery 1)

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 848.8 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side High/Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.20 mW/g

**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.2 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 1.170 mW/g; SAR(10 g) = 0.878 mW/g**

Maximum value of SAR (measured) = 1.26 mW/g

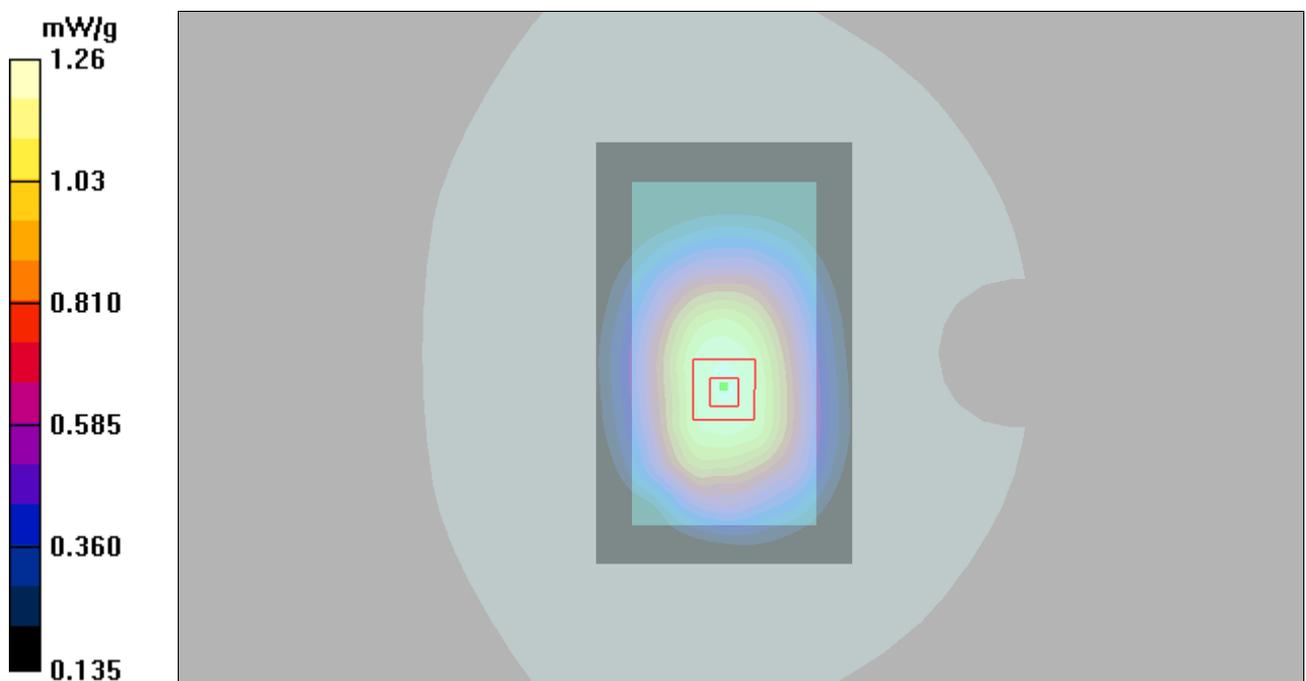


Figure 22 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 251

### GSM 850 GPRS (4Txslots) Back Side Middle (Battery 1)

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle /Area Scan (61x111x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.45 mW/g

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.8 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 1.290 mW/g; SAR(10 g) = 0.973 mW/g**

Maximum value of SAR (measured) = 1.35 mW/g

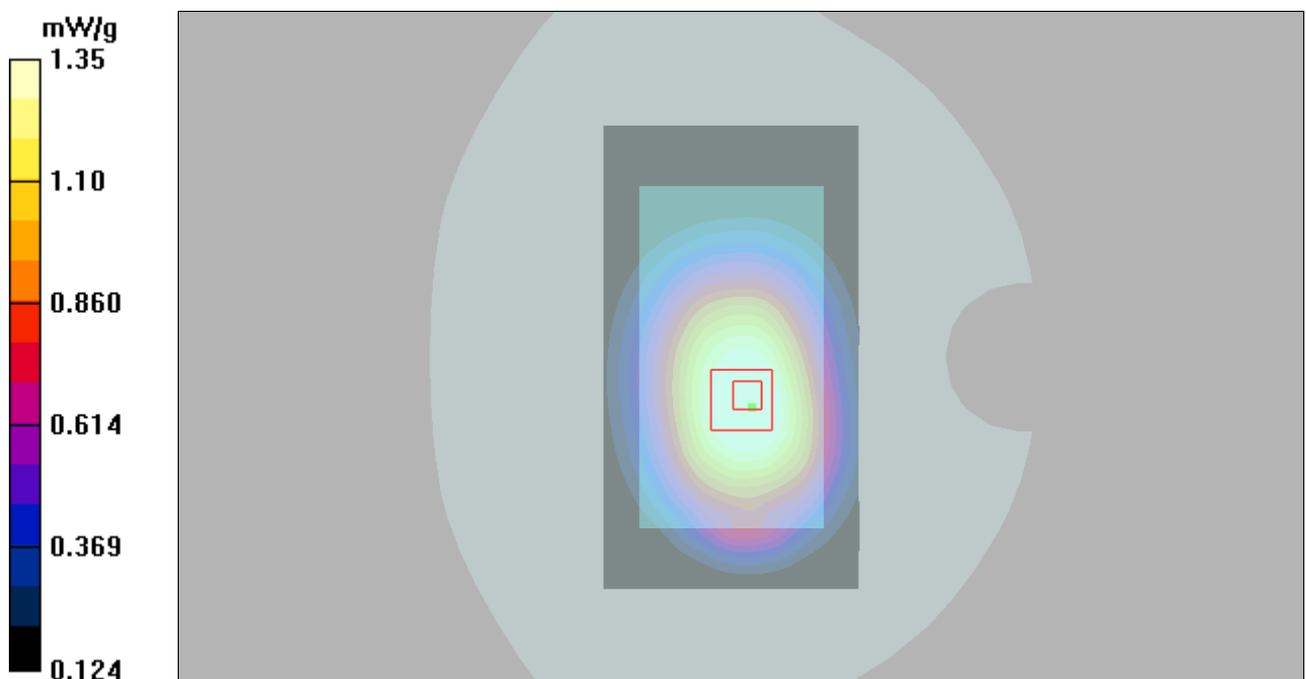


Figure 23 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 190

### GSM 850 GPRS (4Txslots) Back Side Low (Battery 1)

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 824.2 MHz; Duty Cycle: 1:2.075

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Low /Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.25 mW/g

**Back Side Low /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.1 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 1.190 mW/g; SAR(10 g) = 0.907 mW/g**

Maximum value of SAR (measured) = 1.26 mW/g

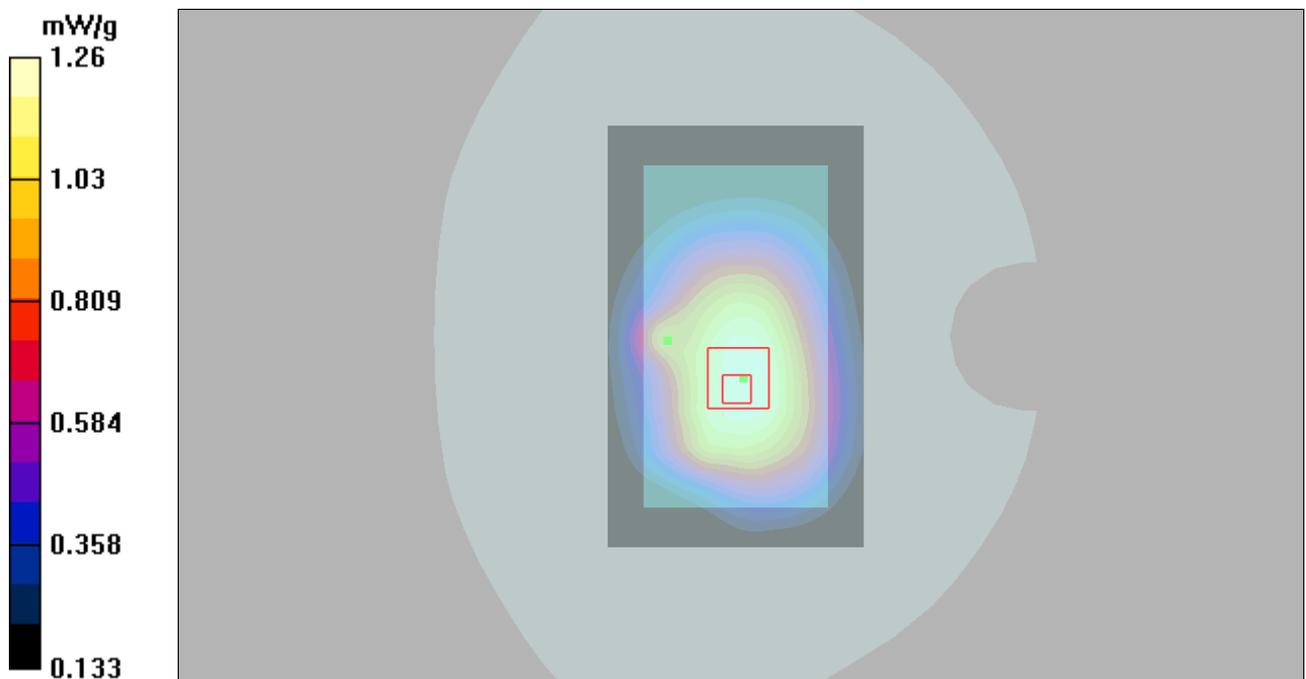


Figure 24 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 128

**GSM 850 GPRS (4Txslots)Front Side High (Battery 1)**

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 848.8 MHz;Duty Cycle: 1:2.075

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side High/Area Scan (61x111x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.978 mW/g

**Front Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.3 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.932 mW/g; SAR(10 g) = 0.705 mW/g**

Maximum value of SAR (measured) = 0.975 mW/g

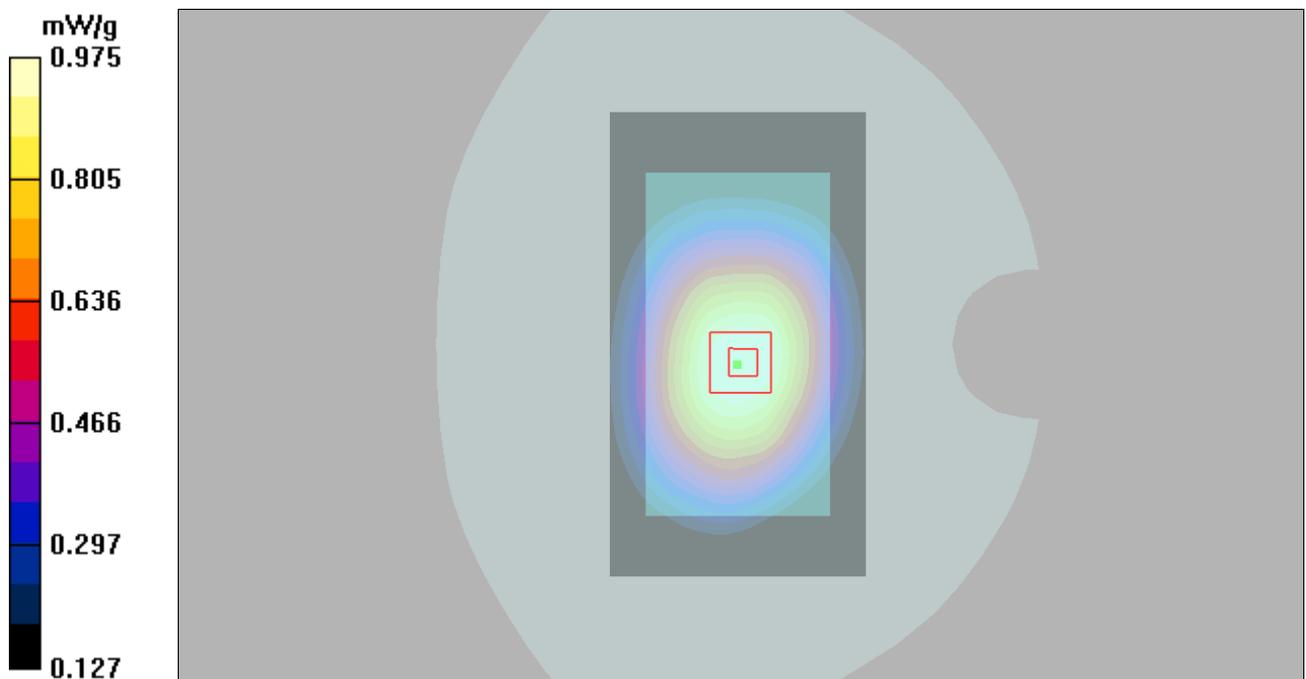


Figure 25 Body, Front Side, GSM 850 GPRS (4Txslots)Channel 251

**GSM 850 GPRS (4Txslots)Front Side Middle (Battery 1)**

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 836.6 MHz;Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side Middle/Area Scan (61x111x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.04 mW/g

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.1 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.965 mW/g; SAR(10 g) = 0.734 mW/g**

Maximum value of SAR (measured) = 1.01 mW/g

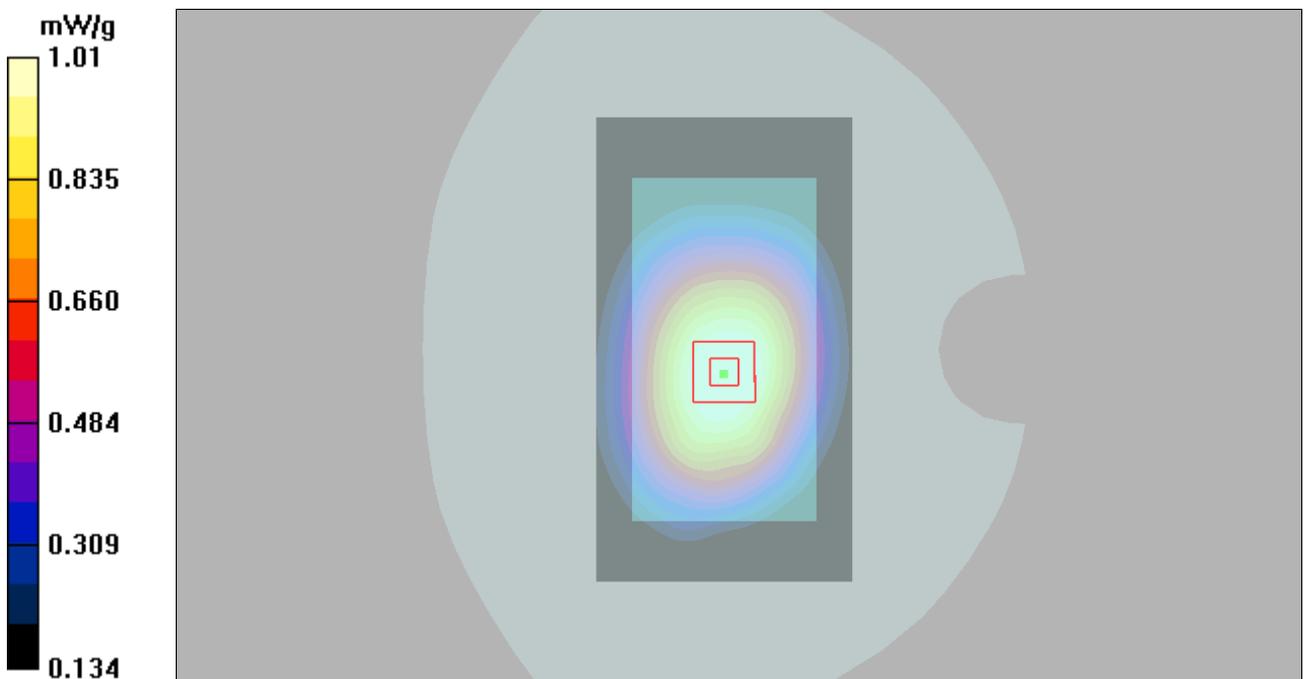


Figure 26 Body, Front Side, GSM 850 GPRS (4Txslots)Channel 190

**GSM 850 GPRS (4Txslots)Front Side Low (Battery 1)**

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 824.2 MHz;Duty Cycle: 1:2.075

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side Low/Area Scan (61x111x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.05 mW/g

**Front Side Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.3 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.760 mW/g**

Maximum value of SAR (measured) = 1.04 mW/g

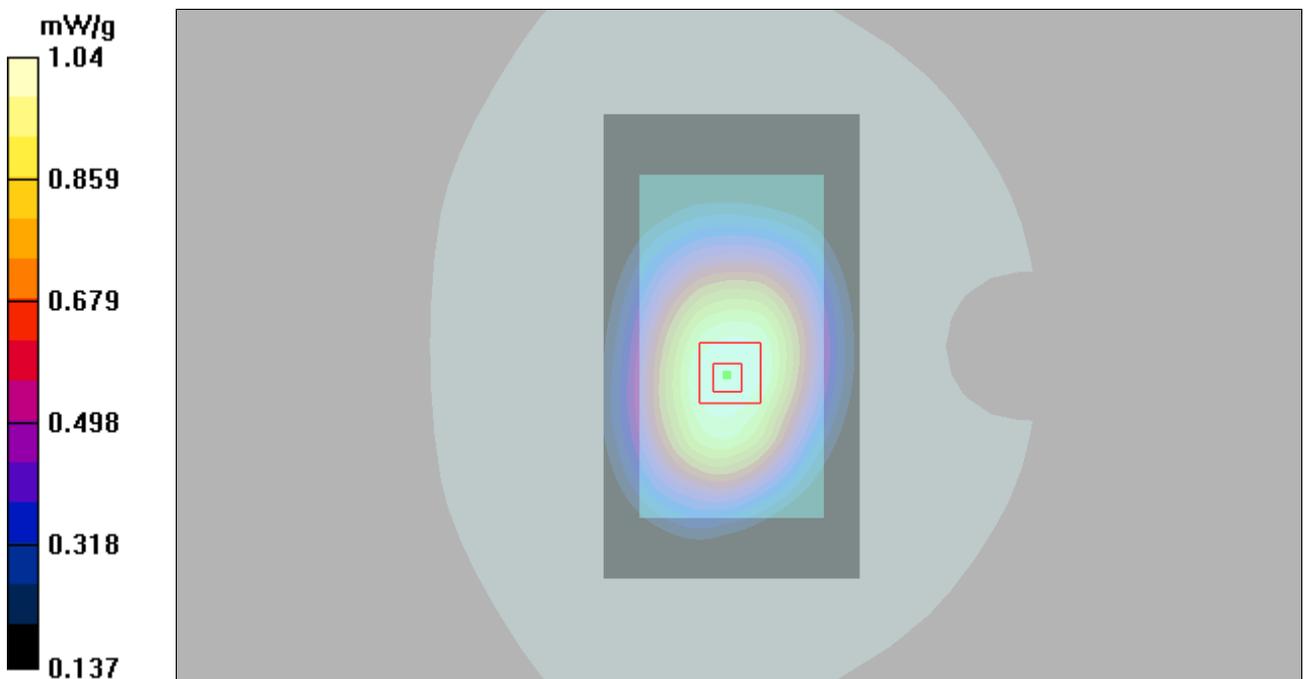


Figure 27 Body, Front Side, GSM 850 GPRS (4Txslots)Channel 128

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 80 of 208

## GSM 850 GPRS (4Txslots)Left Edge Middle (Battery 1)

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 836.6 MHz;Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Edge Middle/Area Scan (51x151x1):** Measurement grid: dx=1.000mm, dy=1.000mm

Maximum value of SAR (interpolated) = 0.573 mW/g

**Left Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.0 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.729 W/kg

**SAR(1 g) = 0.531 mW/g; SAR(10 g) = 0.368 mW/g**

Maximum value of SAR (measured) = 0.568 mW/g

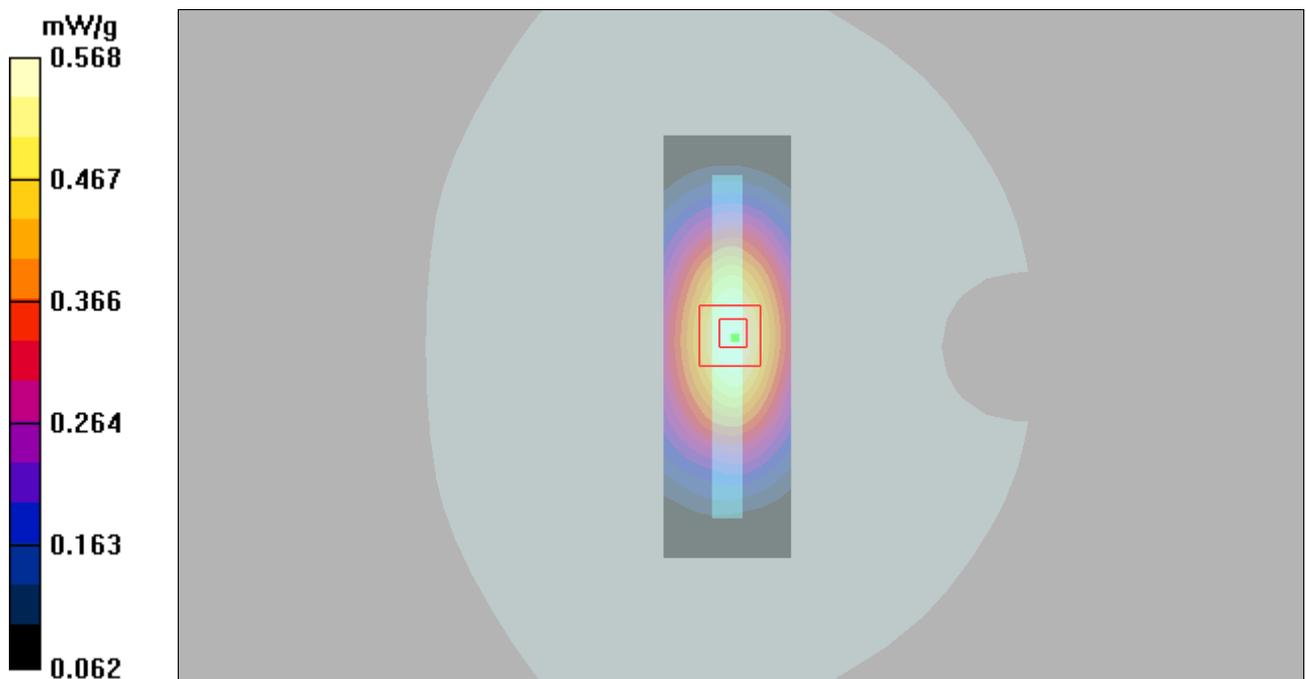


Figure 28 Body, Left Edge, GSM 850 GPRS (4Txslots)Channel 190

**GSM 850 GPRS (4Txslots)Right Edge Middle (Battery 1)**

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 836.6 MHz;Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Edge Middle/Area Scan (51x151x1):** Measurement grid: dx=1.000mm, dy=1.000mm

Maximum value of SAR (interpolated) = 0.717 mW/g

**Right Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 0.929 W/kg

**SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.465 mW/g**

Maximum value of SAR (measured) = 0.711 mW/g

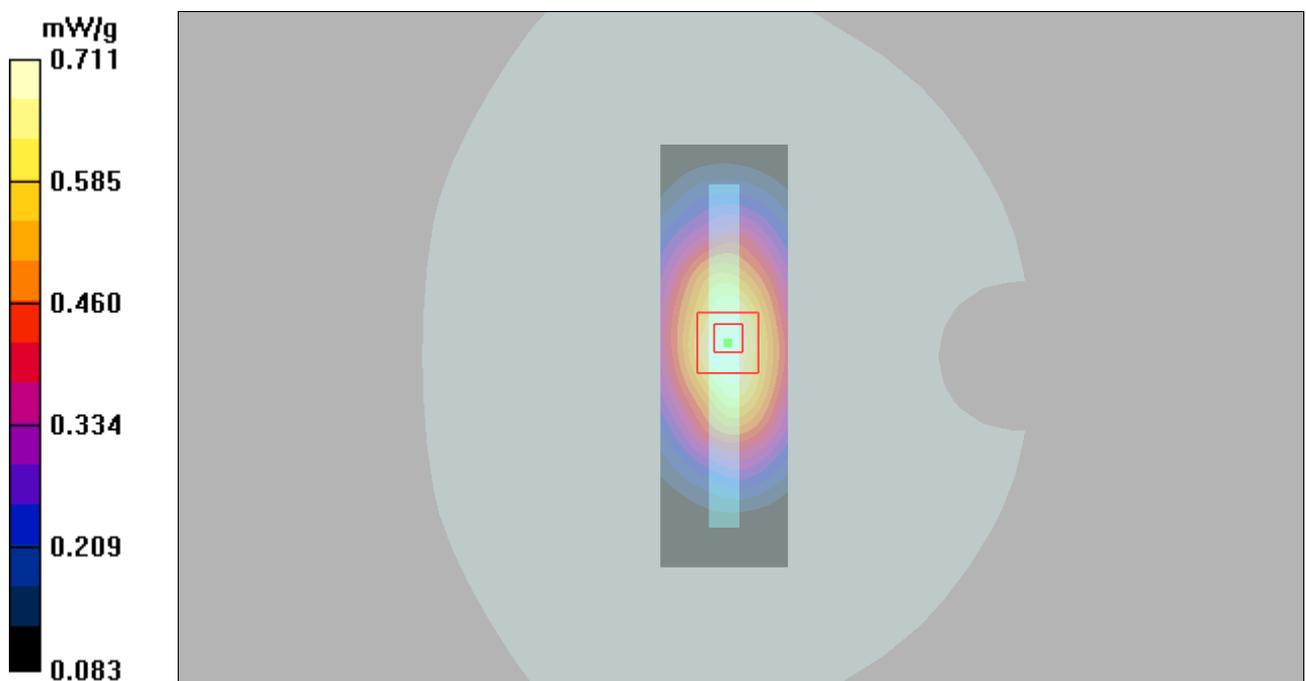


Figure 29 Body, Right Edge, GSM 850 GPRS (4Txslots)Channel 190

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 82 of 208

## GSM 850 GPRS (4Txslots)Bottom Edge Middle (Battery 1)

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 836.6 MHz;Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Bottom Edge Middle/Area Scan (91x51x1):** Measurement grid: dx=1.000mm, dy=1.000mm

Maximum value of SAR (interpolated) = 0.204 mW/g

**Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.299 W/kg

**SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.092 mW/g**

Maximum value of SAR (measured) = 0.189 mW/g

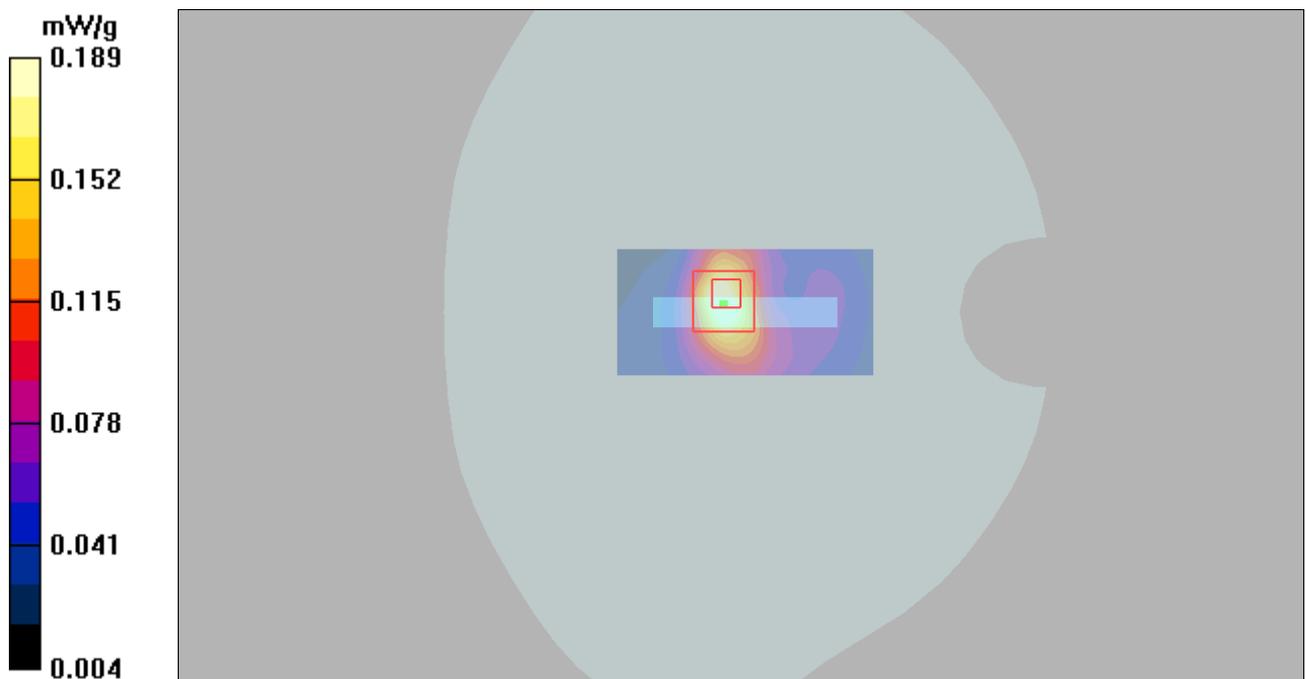


Figure 30 Body, Bottom Edge, GSM 850 GPRS (4Txslots)annel 190

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 83 of 208

### GSM 850 GPRS (4Txslots) Back Side Middle (Battery 2)

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (61x111x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 1.47 mW/g

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.6 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 1.320 mW/g; SAR(10 g) = 0.994 mW/g**

Maximum value of SAR (measured) = 1.40 mW/g

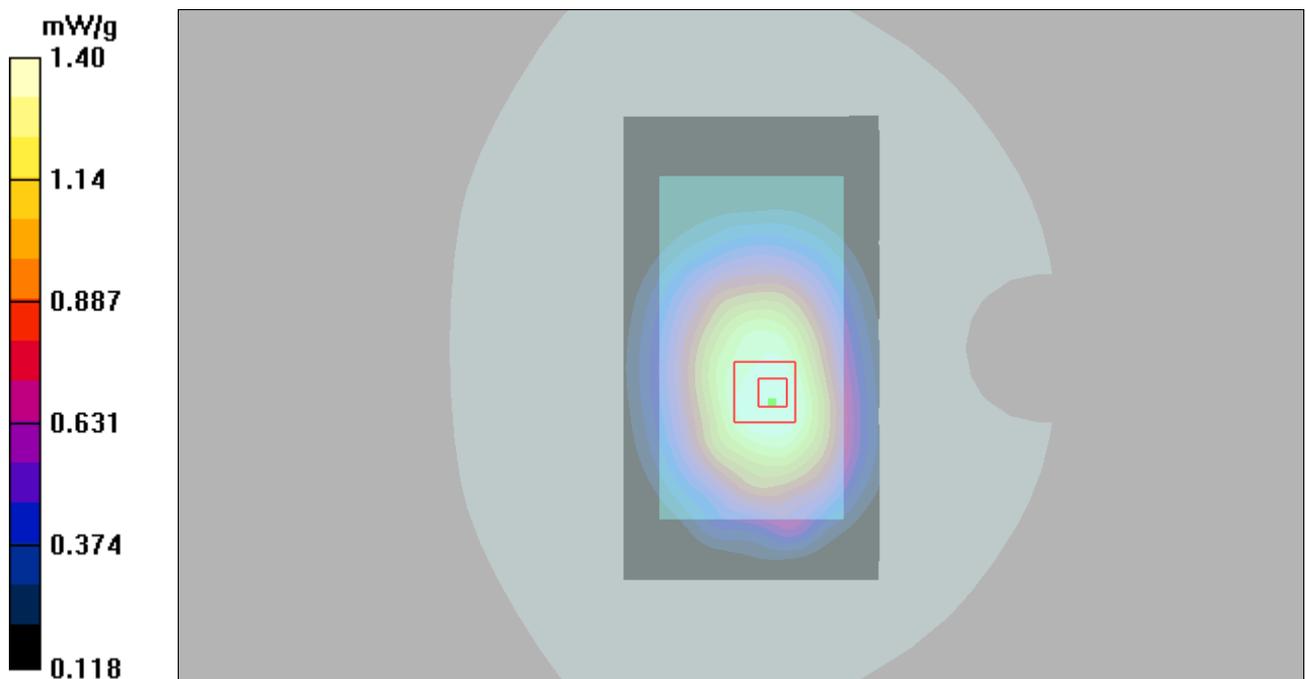


Figure 31 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 190

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 84 of 208

## GSM 850 GPRS (4Txslots) Back Side Middle (1<sup>st</sup> repeated SAR)

Date: 3/6/2015

Communication System: GSM850 + GPRS(4Up); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.992$  S/m;  $\epsilon_r = 55.882$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8);

**Back Side Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.39 W/kg

**Back Side Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.92 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 1.3 W/kg; SAR(10 g) = 0.962 W/kg**

Maximum value of SAR (measured) = 1.34 W/kg

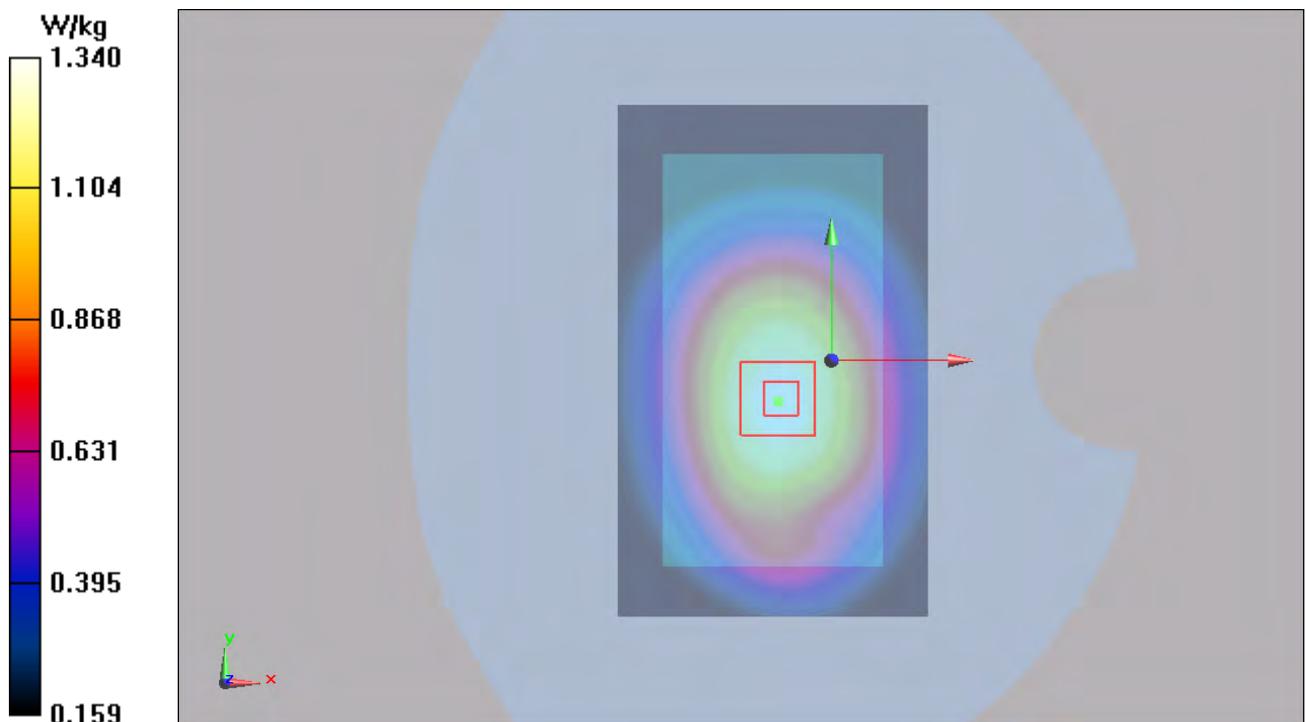


Figure 32 Body, Back Side, GSM 850 GPRS (4Txslots) Channel 190

**GSM 1900 Left Cheek Middle (Battery 1)**

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Left Cheek Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.483 W/kg

**Left Cheek Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.609 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.663 W/kg

**SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.279 W/kg**

Maximum value of SAR (measured) = 0.486 W/kg

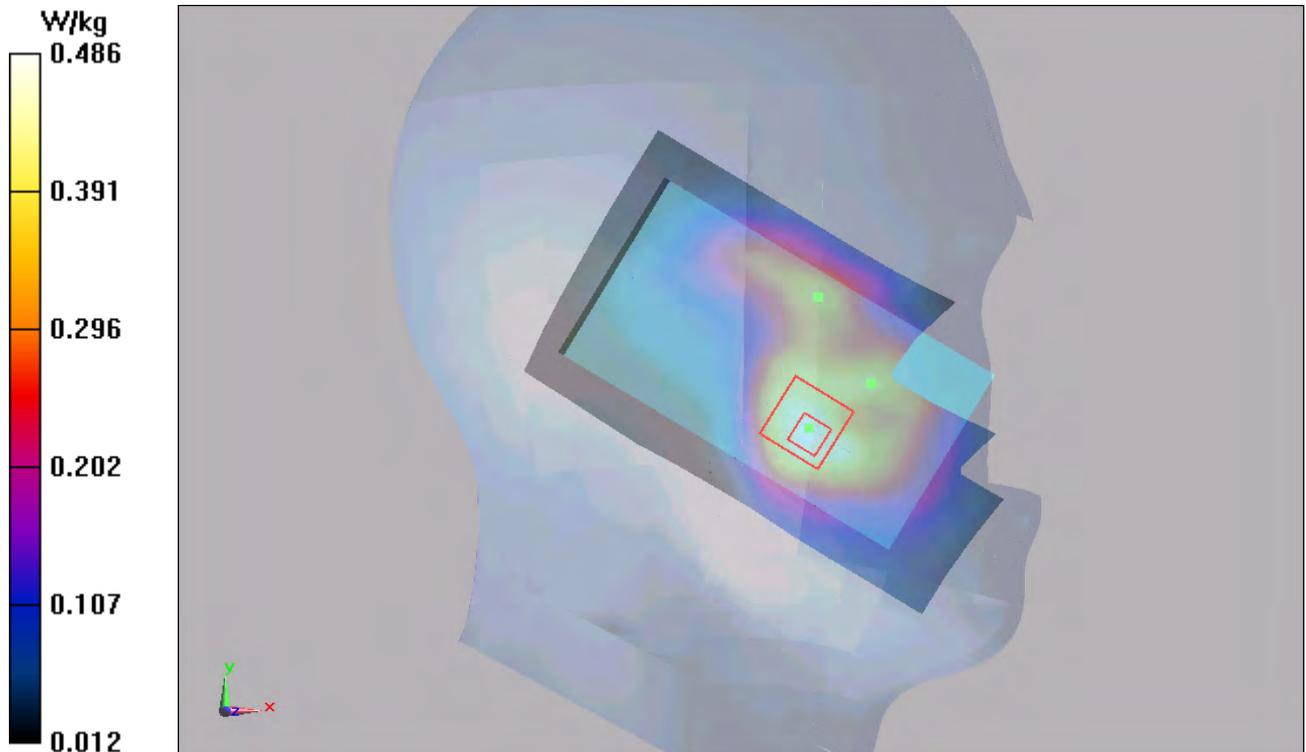


Figure 33 Left Hand Touch Cheek GSM 1900 Channel 661

### GSM 1900 Left Tilt Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Left Tilt Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.285 W/kg

**Left Tilt Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.570 V/m; Power Drift = 0.155 dB

Peak SAR (extrapolated) = 0.559 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.215 W/kg**

Maximum value of SAR (measured) = 0.381 W/kg

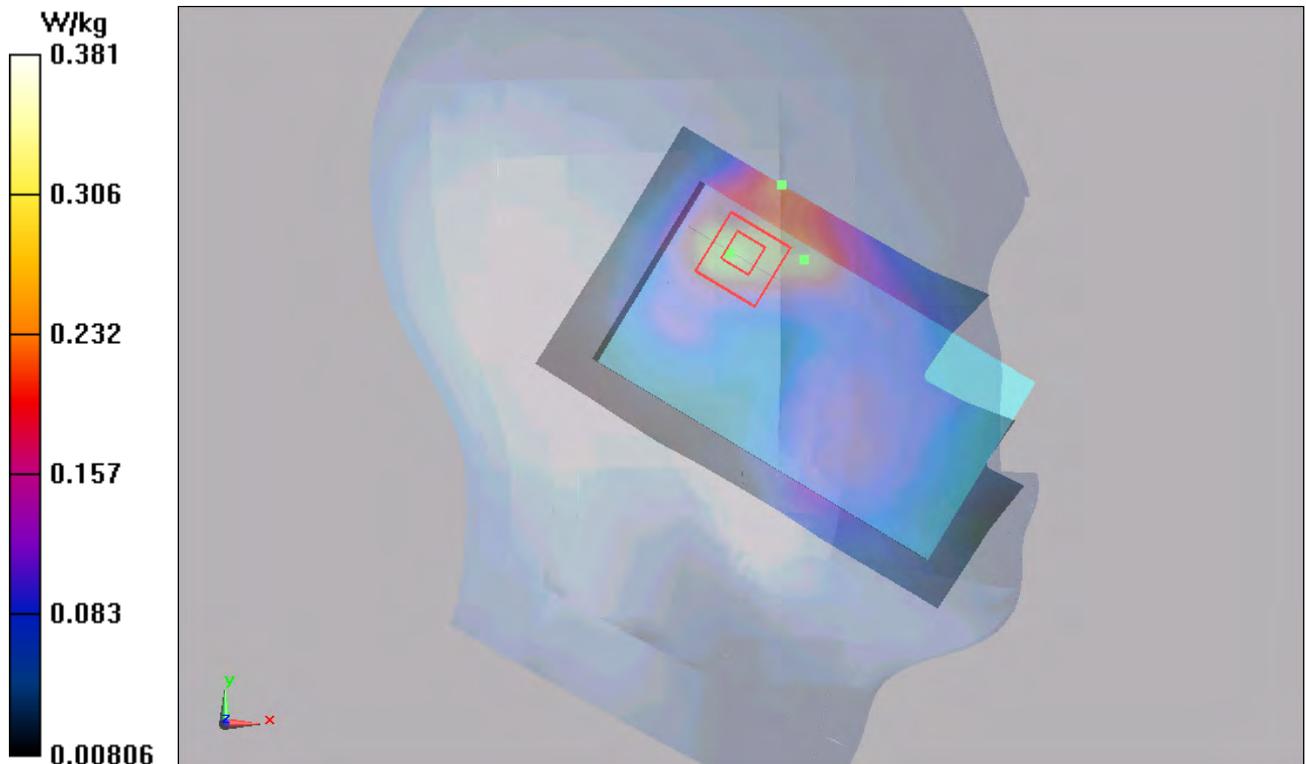


Figure 34 Left Hand Tilt 15° GSM 1900 Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 87 of 208

## GSM 1900 Right Cheek Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94);    Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Right Cheek Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.496 W/kg

**Right Cheek Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.686 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.929 W/kg

**SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.380 W/kg**

Maximum value of SAR (measured) = 0.693 W/kg

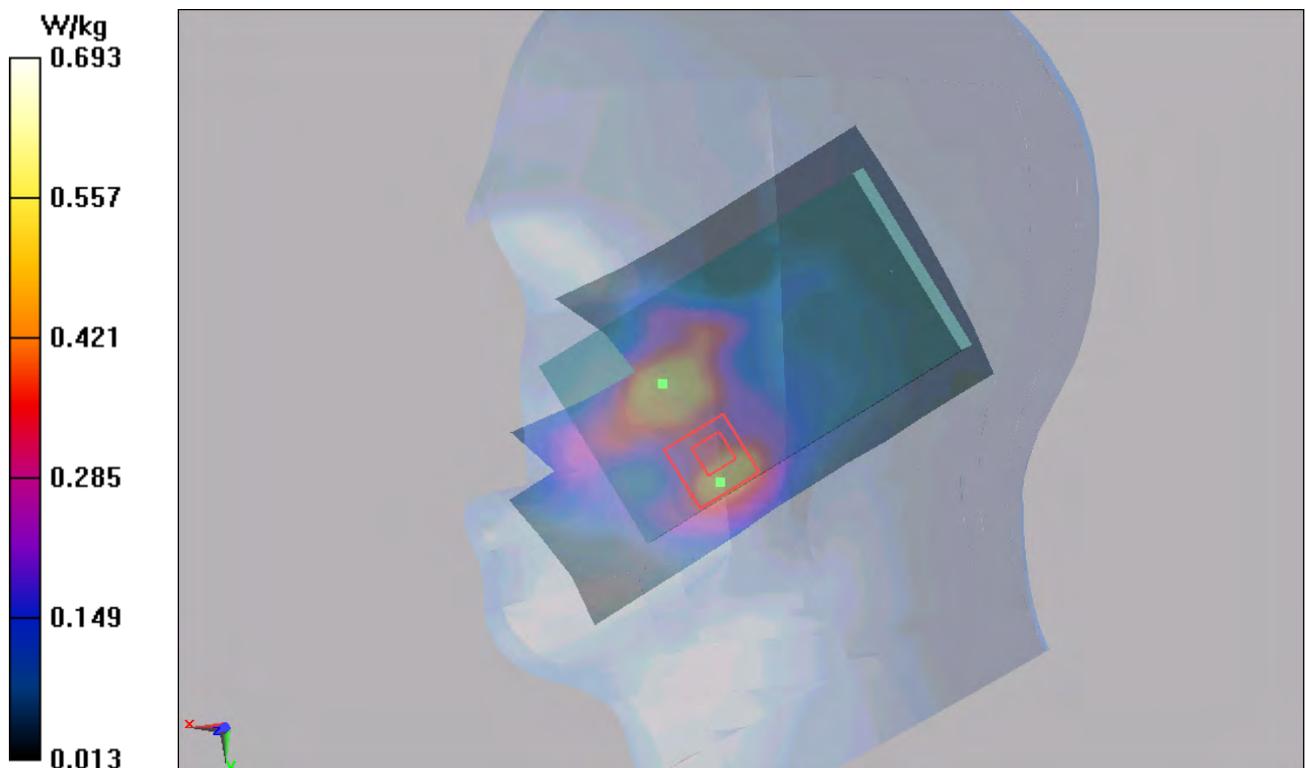


Figure 35 Right Hand Touch Cheek GSM 1900 Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 88 of 208

## GSM 1900 Right Tilt Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Right Tilt Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.154 W/kg

**Right Tilt Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.77 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.193 W/kg

**SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.127 W/kg

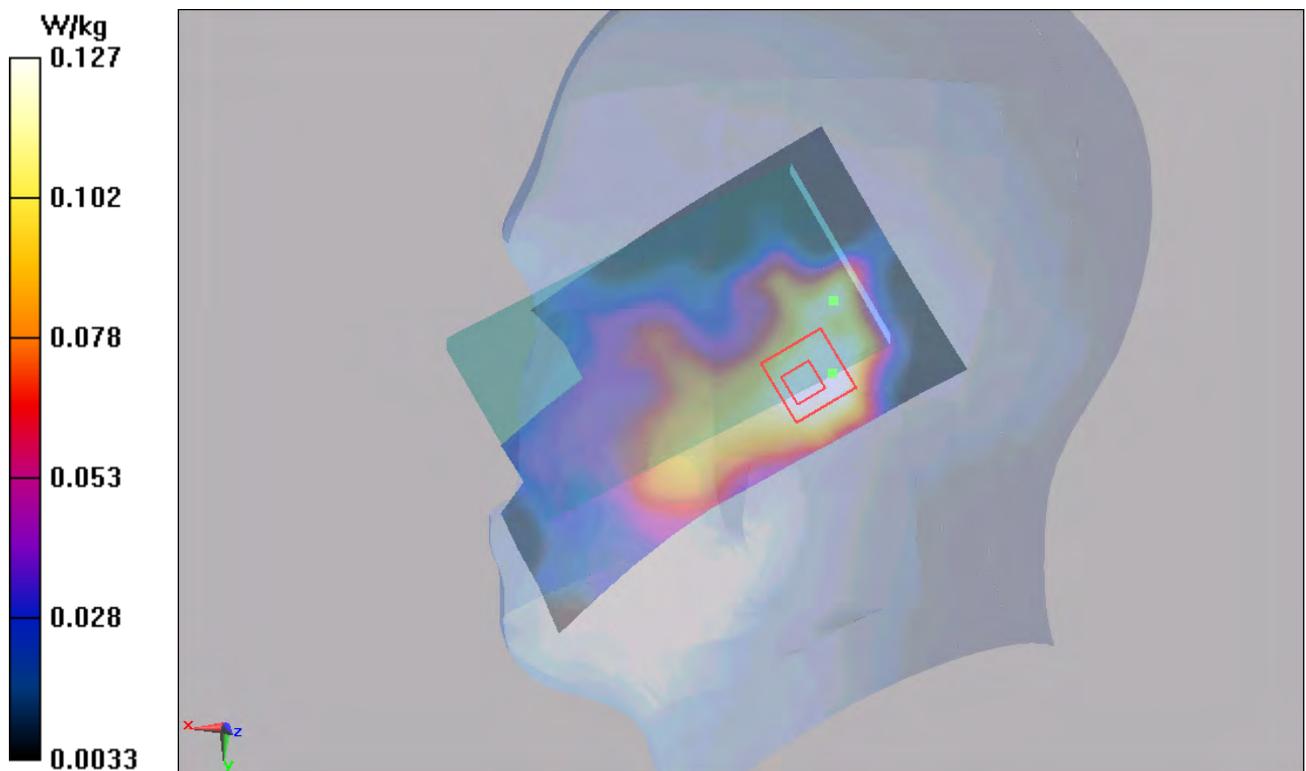


Figure 36 Right Hand Tilt 15° GSM 1900 Channel 661

### GSM 1900 Right Cheek Middle (Battery 2)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Right Cheek Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.755 W/kg

**Right Cheek Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.734 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.947 W/kg

**SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.330 W/kg**

Maximum value of SAR (measured) = 0.599 W/kg

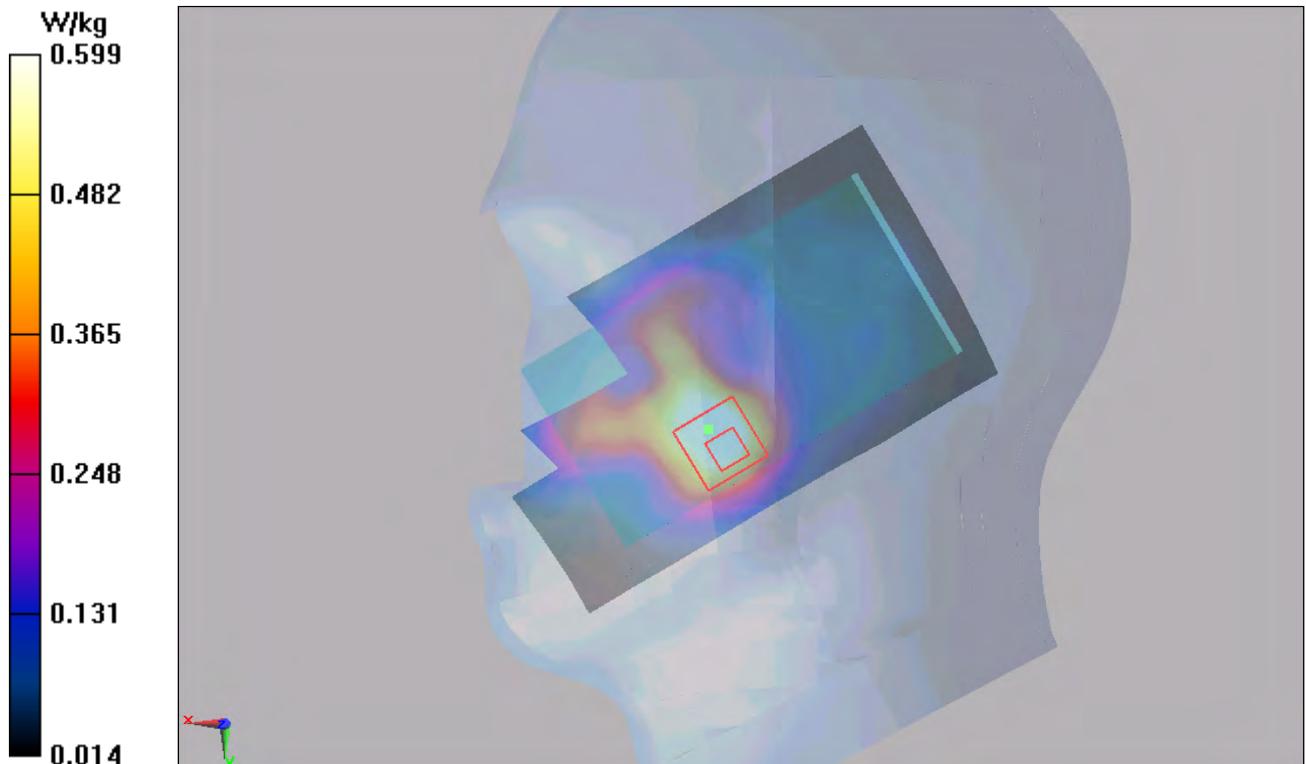


Figure 37 Right Hand Touch Cheek GSM 1900 Channel 661

**GSM 1900 Back Side Middle (Battery 1)**

Date: 3/17/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Back side Middle/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.391 W/kg

**Back side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.747 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.546 W/kg

**SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.214 W/kg**

Maximum value of SAR (measured) = 0.364 W/kg

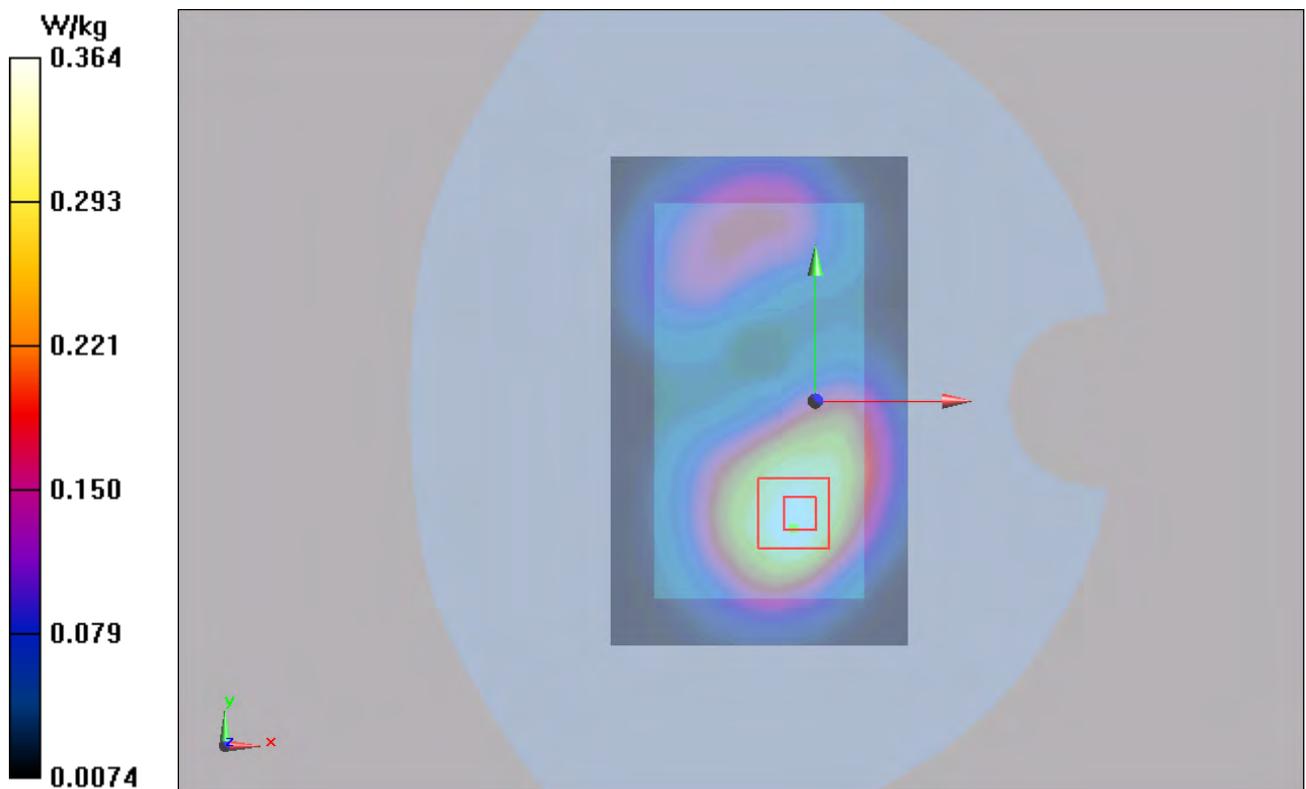


Figure 38 Body, Back Side, GSM 1900 Channel 661

### GSM 1900 Front Side Middle (Battery 1)

Date: 3/17/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Front side Middle/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.409 W/kg

**Front side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.001 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.577 W/kg

**SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 0.399 W/kg

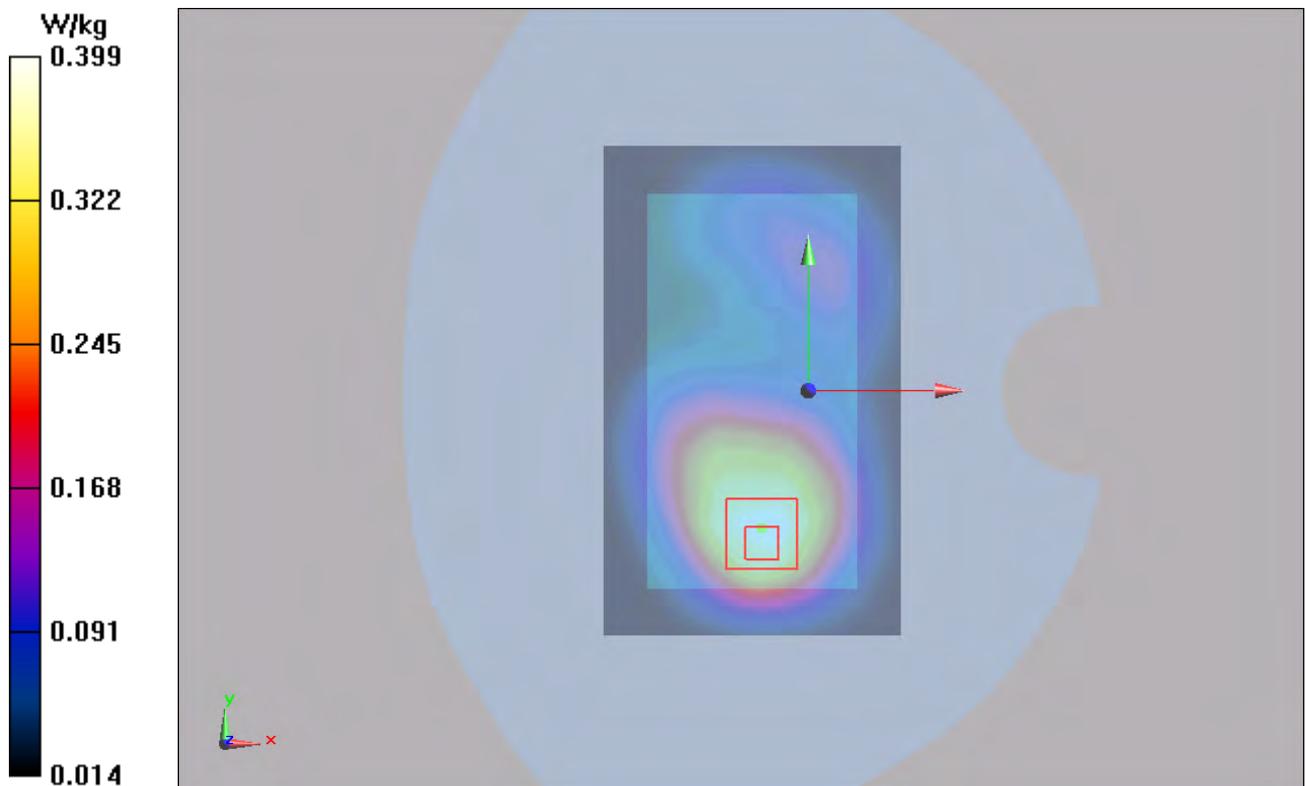


Figure 39 Body, Front Side, GSM 1900 Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 92 of 208

## GSM 1900 GPRS (4Txslots) Back Side Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Back Side Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.708 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.83 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.987 W/kg

**SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.399 W/kg**

Maximum value of SAR (measured) = 0.666 W/kg

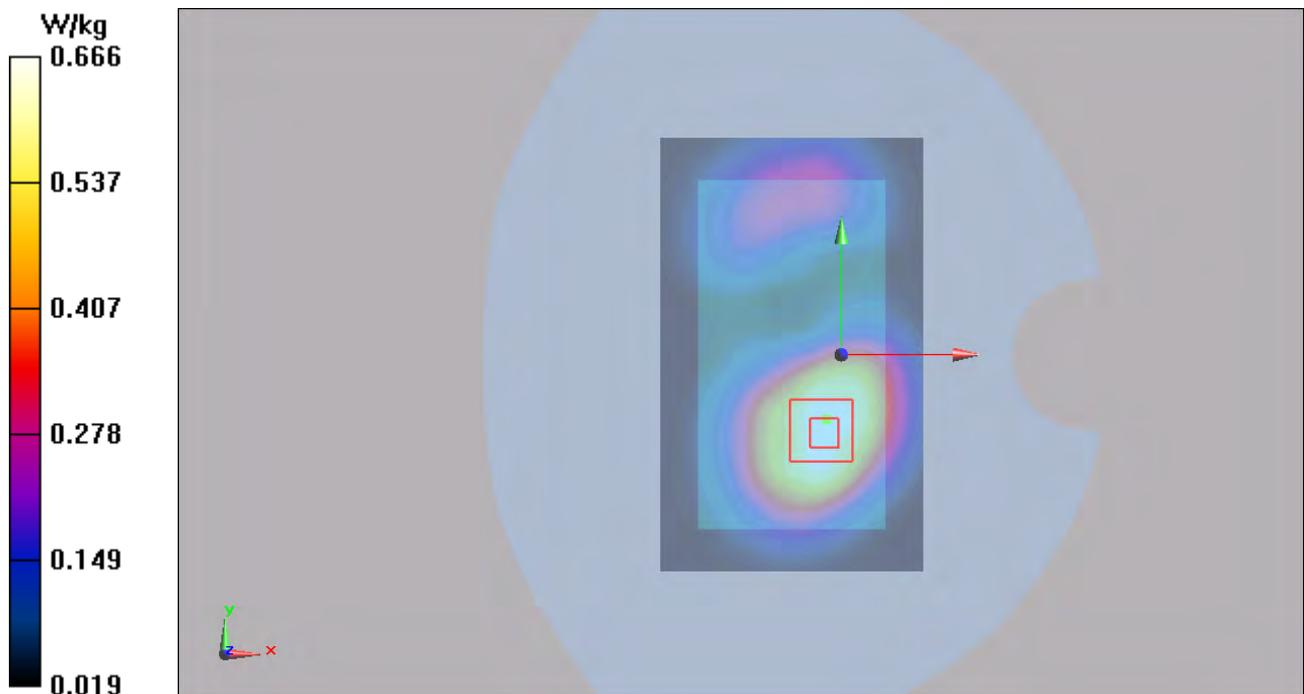


Figure 40 Body, Back Side, GSM 1900 GPRS (4Txslots) Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 93 of 208

## GSM 1900 GPRS (4Txslots) Front Side Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Front Side Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.753 W/kg

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.18 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.971 W/kg

**SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.382 W/kg**

Maximum value of SAR (measured) = 0.654 W/kg

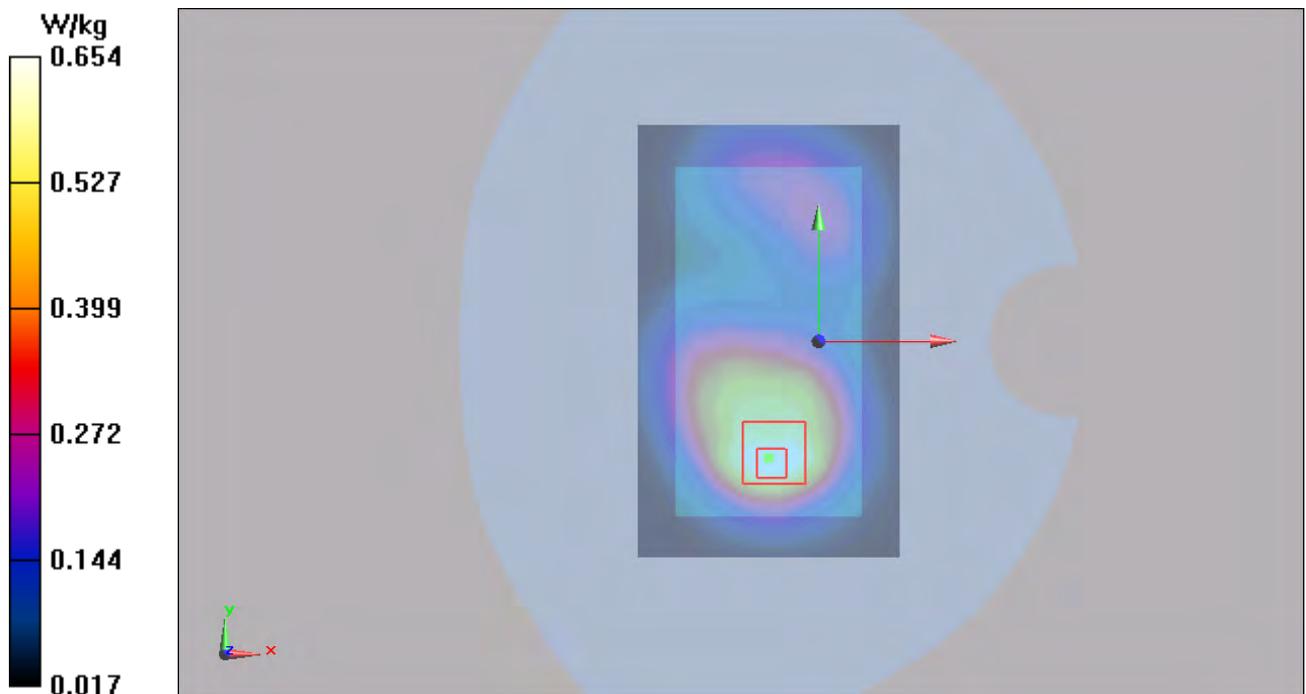


Figure 41 Body, Front Side, GSM 1900 GPRS (4Txslots) Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 94 of 208

## GSM 1900 GPRS (4Txslots) Left Edge Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Left Edge Middle/Area Scan (51x151x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.178 W/kg

**Left Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.965 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.255 W/kg

**SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.163 W/kg

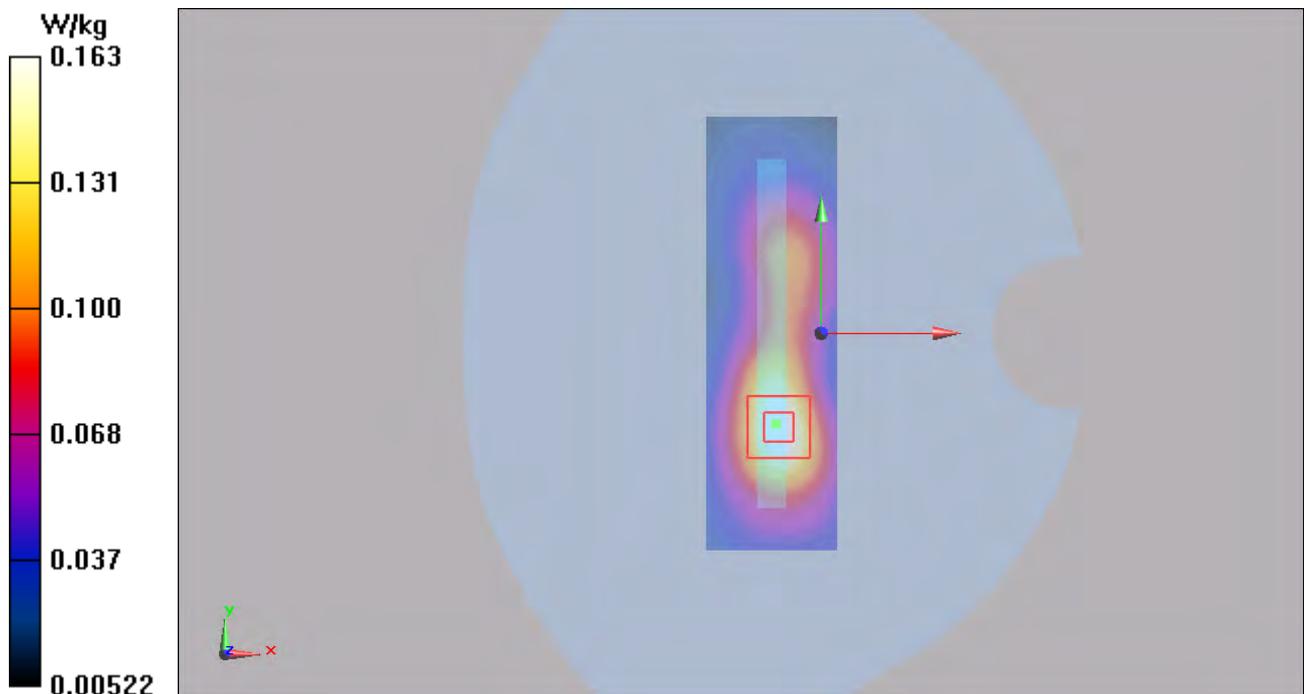


Figure 42 Body, Left Edge, GSM 1900 GPRS (4Txslots) Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 95 of 208

## GSM 1900 GPRS (4Txslots) Right Edge Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Right Edge Middle/Area Scan (51x151x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0865 W/kg

**Right Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.740 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.118 W/kg

**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.0756 W/kg

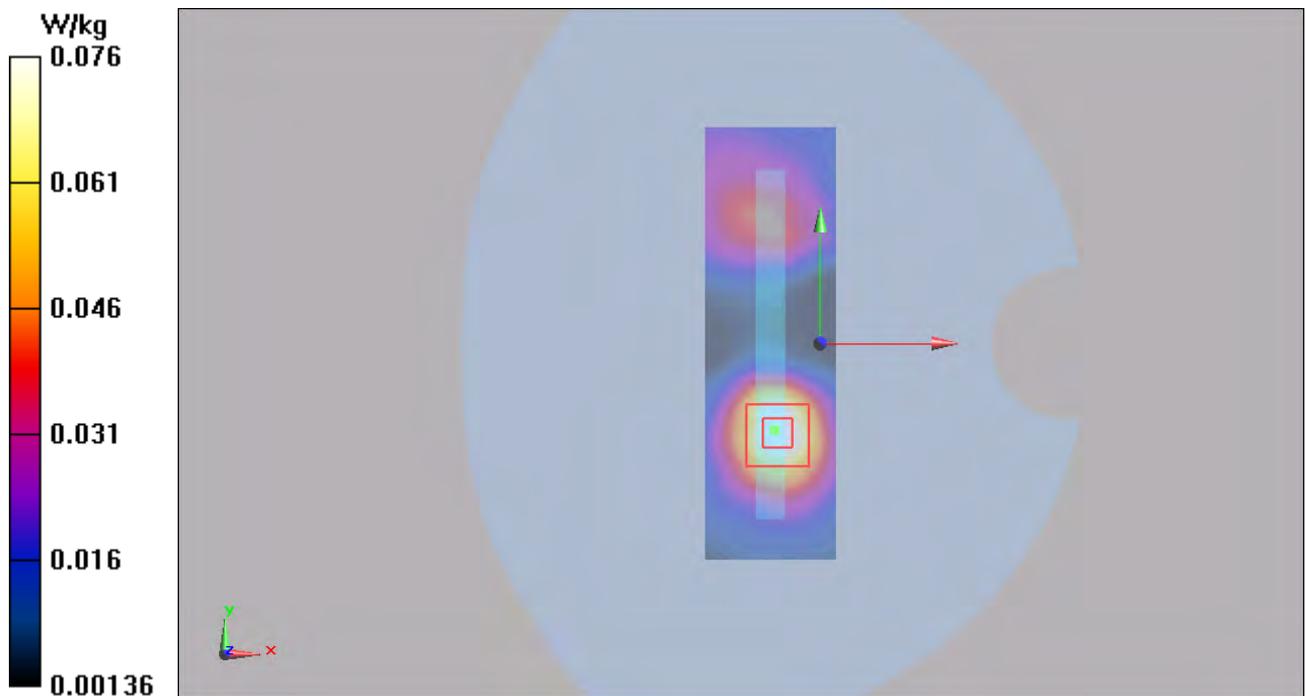


Figure 43 Body, Right Edge, GSM 1900 GPRS (4Txslots) Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 96 of 208

## GSM 1900 GPRS (4Txslots) Bottom Edge High (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.535$  S/m;  $\epsilon_r = 52.981$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Edge High/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.759 W/kg

**Bottom Edge High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.57 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.366 W/kg**

Maximum value of SAR (measured) = 0.662 W/kg

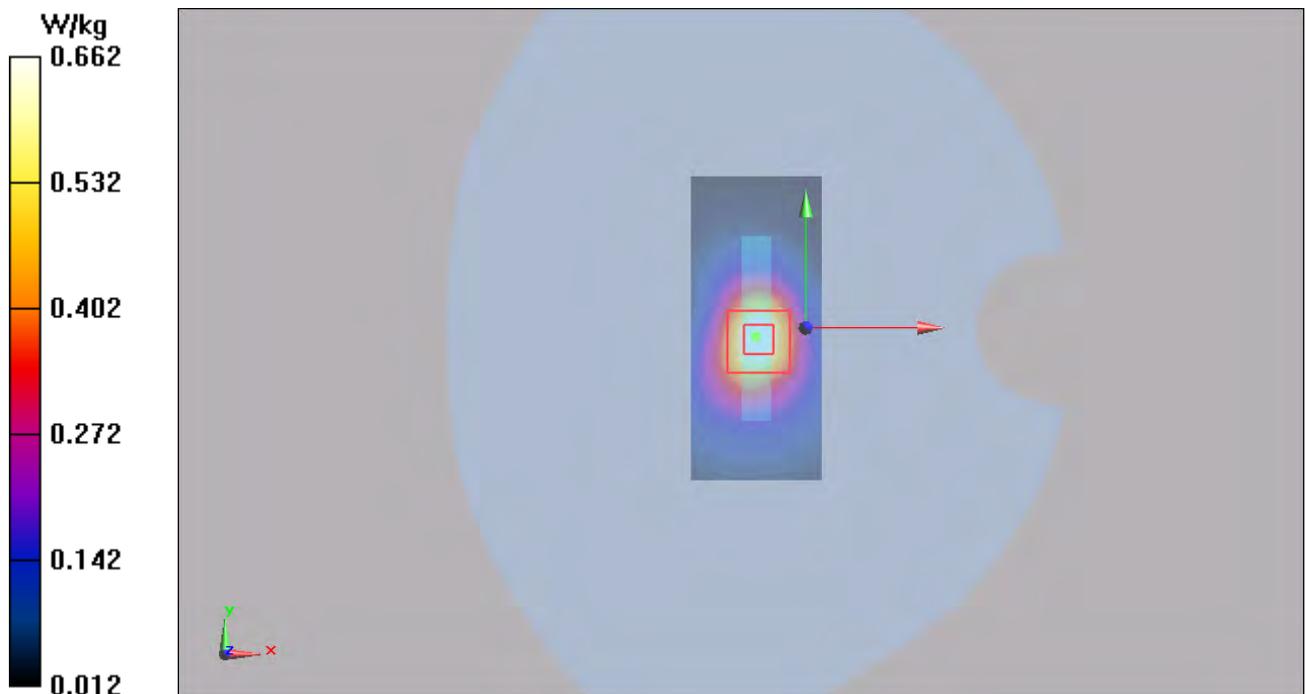


Figure 44 Body, Bottom Edge, GSM 1900 GPRS (4Txslots) Channel 810

**GSM 1900 GPRS (4Txslots) Bottom Edge Middle (Battery 1)**

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Edge Middle/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.744 W/kg

**Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.53 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.363 W/kg**

Maximum value of SAR (measured) = 0.670 W/kg

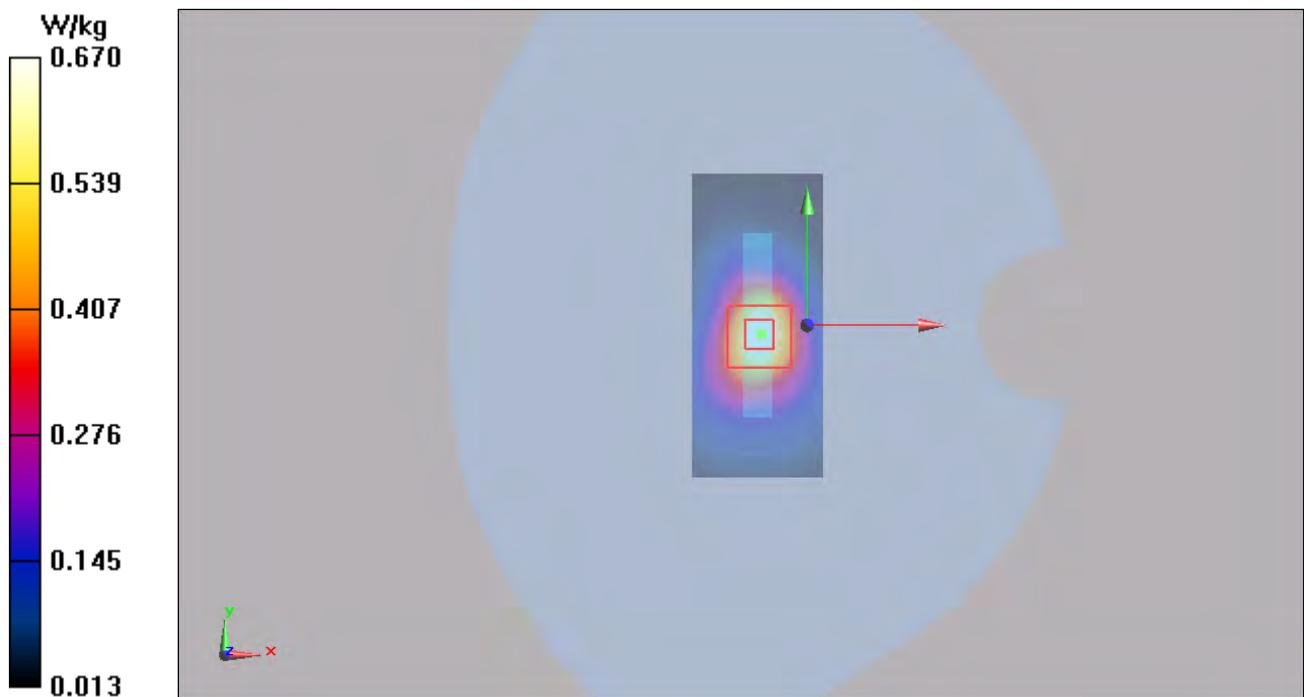


Figure 45 Body, Bottom Edge, GSM 1900 GPRS (4Txslots) Channel 661

### GSM 1900 GPRS (4Txslots) Bottom Edge Low (Battery 1)

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.476$  S/m;  $\epsilon_r = 53.266$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Edge Low/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.696 W/kg

**Bottom Edge Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.41 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.350 W/kg**

Maximum value of SAR (measured) = 0.628 W/kg

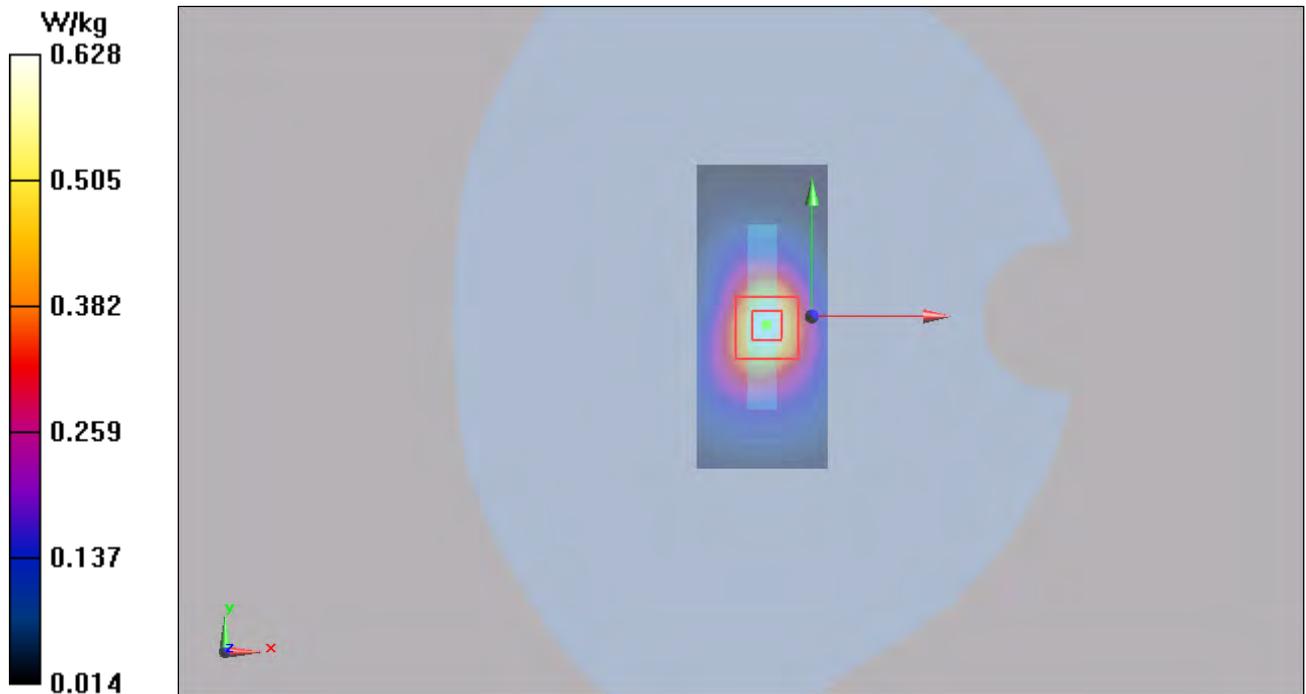


Figure 46 Body, Bottom Edge, GSM 1900 GPRS (4Txslots) Channel 512

**GSM 1900 GPRS (4Txslots) Bottom Edge High (Battery 2)**

Date: 2/4/2015

Communication System: UID 0, GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.535$  S/m;  $\epsilon_r = 52.981$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Side High/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.722 W/kg

**Bottom Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.96 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.337 W/kg**

Maximum value of SAR (measured) = 0.608 W/kg

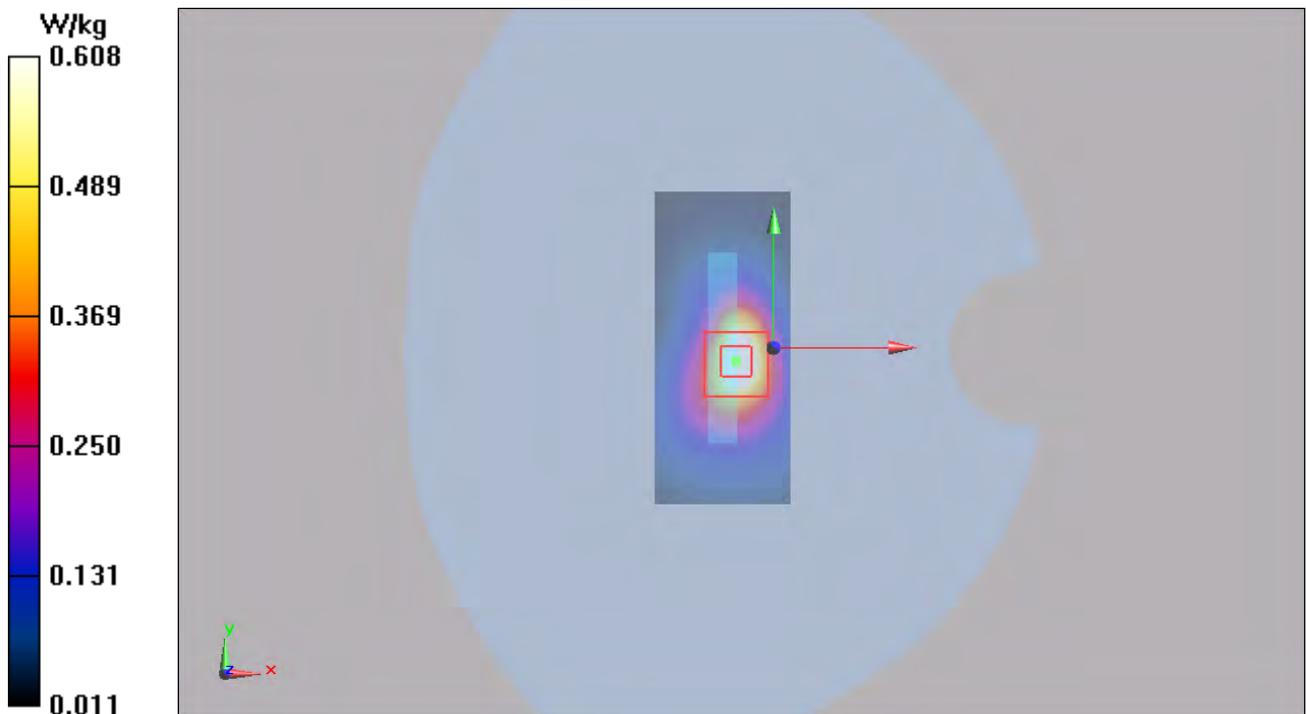


Figure 47 Body, Bottom Edge, GSM 1900 GPRS (4Txslots) Channel 810

**UMTS Band II Left Cheek Middle (Battery 1)**

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Cheek Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.622 W/kg

**Left Cheek Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.503 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.940 W/kg

**SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.356 W/kg**

Maximum value of SAR (measured) = 0.621 W/kg

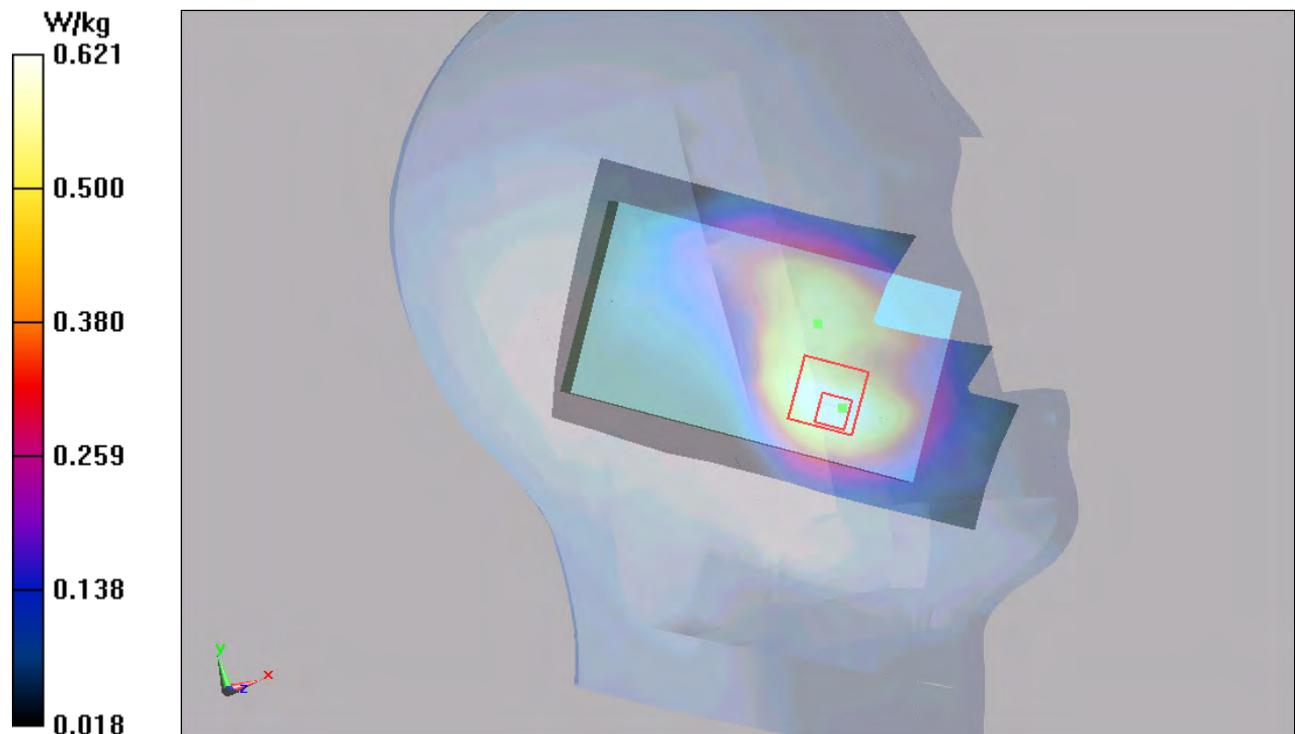


Figure 48 Left Hand Touch Cheek UMTS Band II Channel 9400

### UMTS Band II Left Tilt Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Tilt Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.383 W/kg

**Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.75 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.425 W/kg

**SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.329 W/kg

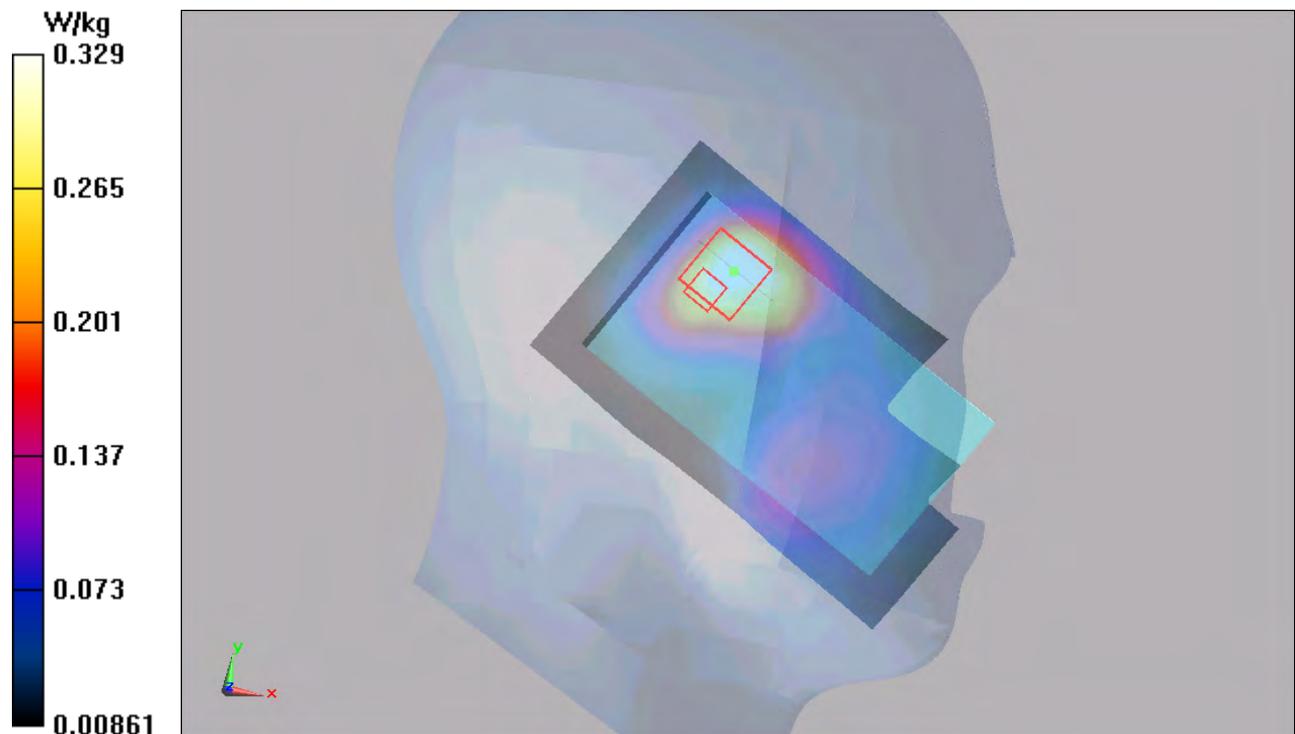


Figure 49 Left Hand Tilt 15° UMTS Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 102 of 208

## UMTS Band II Right Cheek High (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 39.849$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek High/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.729 W/kg

**Right Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.977 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 0.708 W/kg

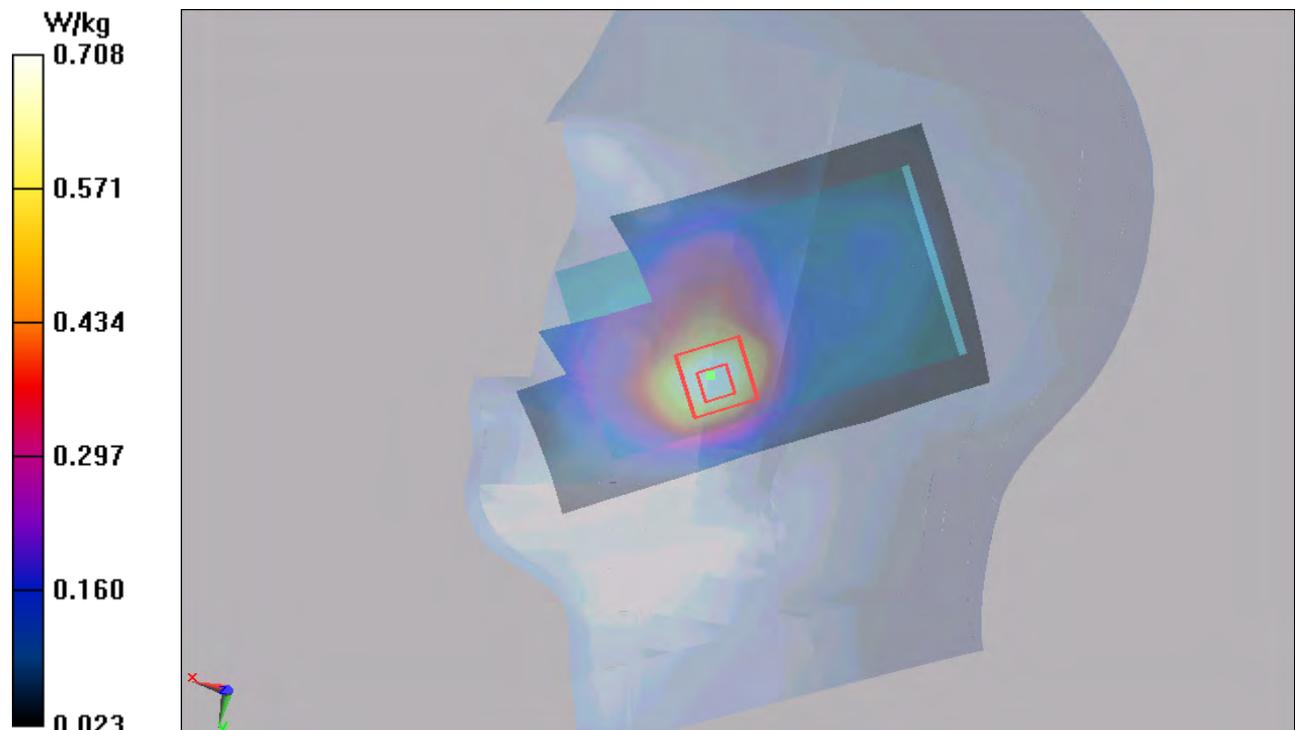


Figure 50 Right Hand Touch Cheek UMTS Band II Channel 9538

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 103 of 208

## UMTS Band II Right Cheek Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.955 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.717 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.864 W/kg; SAR(10 g) = 0.524 W/kg**

Maximum value of SAR (measured) = 0.930 W/kg

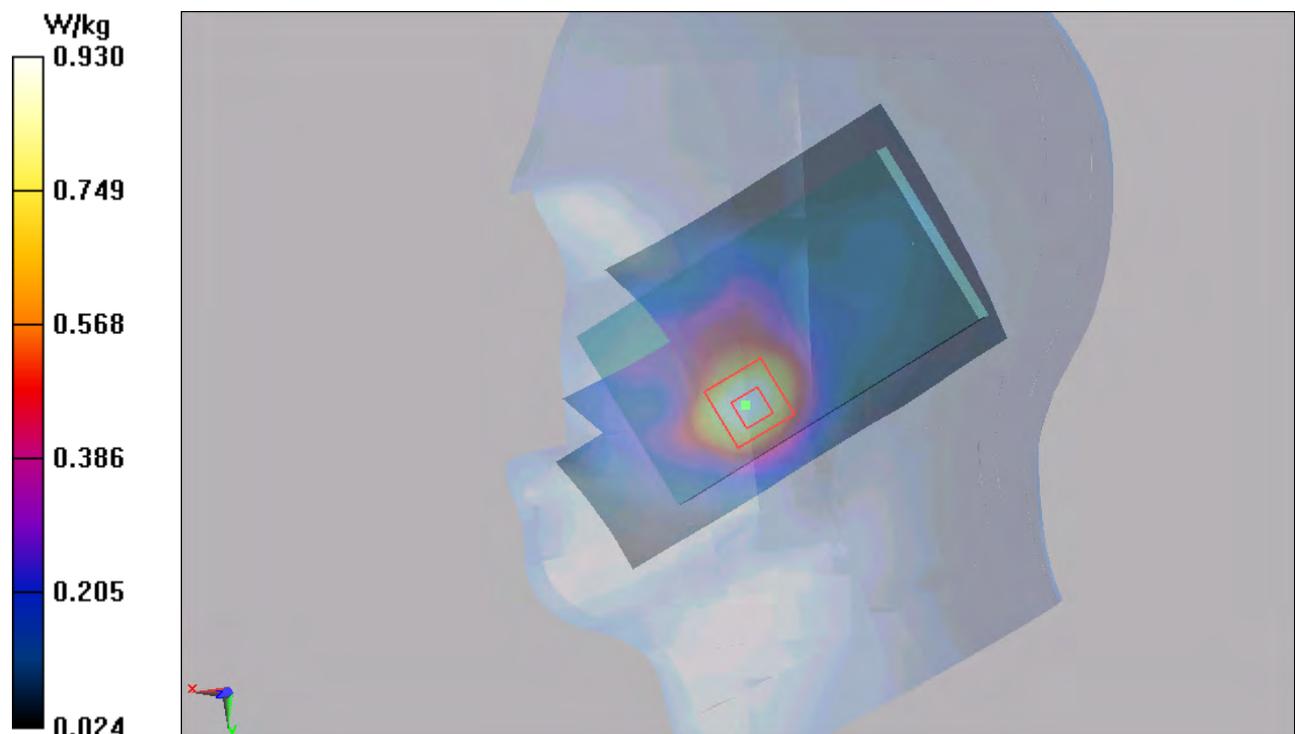


Figure 51 Right Hand Touch Cheek UMTS Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 104 of 208

## UMTS Band II Right Cheek Low (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 40.038$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Low/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.716 W/kg

**Right Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.594 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.992 W/kg

**SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.420 W/kg**

Maximum value of SAR (measured) = 0.727 W/kg

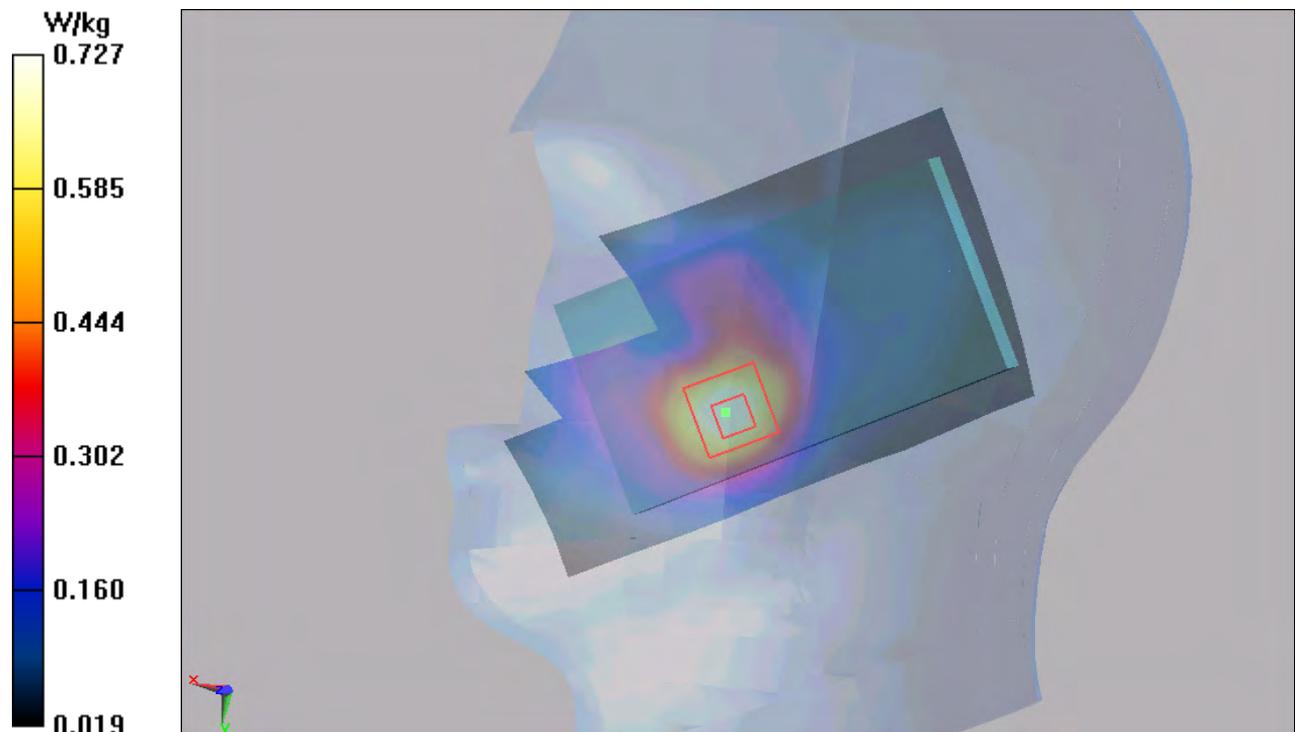


Figure 52 Right Hand Touch Cheek UMTS Band II Channel 9262

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 105 of 208

## UMTS Band II Right Tilt Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Tilt Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg

**Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.39 V/m; Power Drift = 0.044dB

Peak SAR (extrapolated) = 0.438 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.092 W/kg**

Maximum value of SAR (measured) = 0.235 W/kg

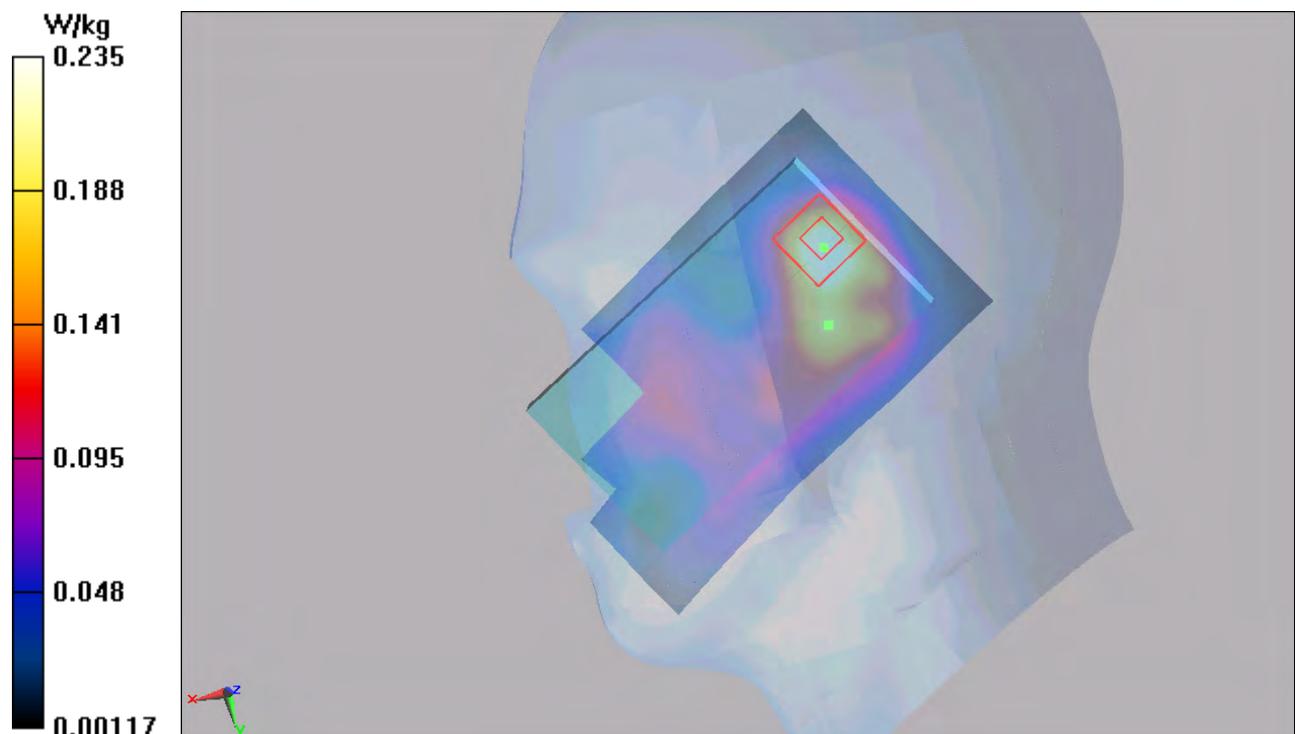


Figure 53 Right Hand Tilt 15° UMTS Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 106 of 208

### UMTS Band II Right Cheek Middle (Battery 2)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Middle /Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.842 W/kg

**Right Cheek Middle /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.779 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.499 W/kg**

Maximum value of SAR (measured) = 0.866 W/kg

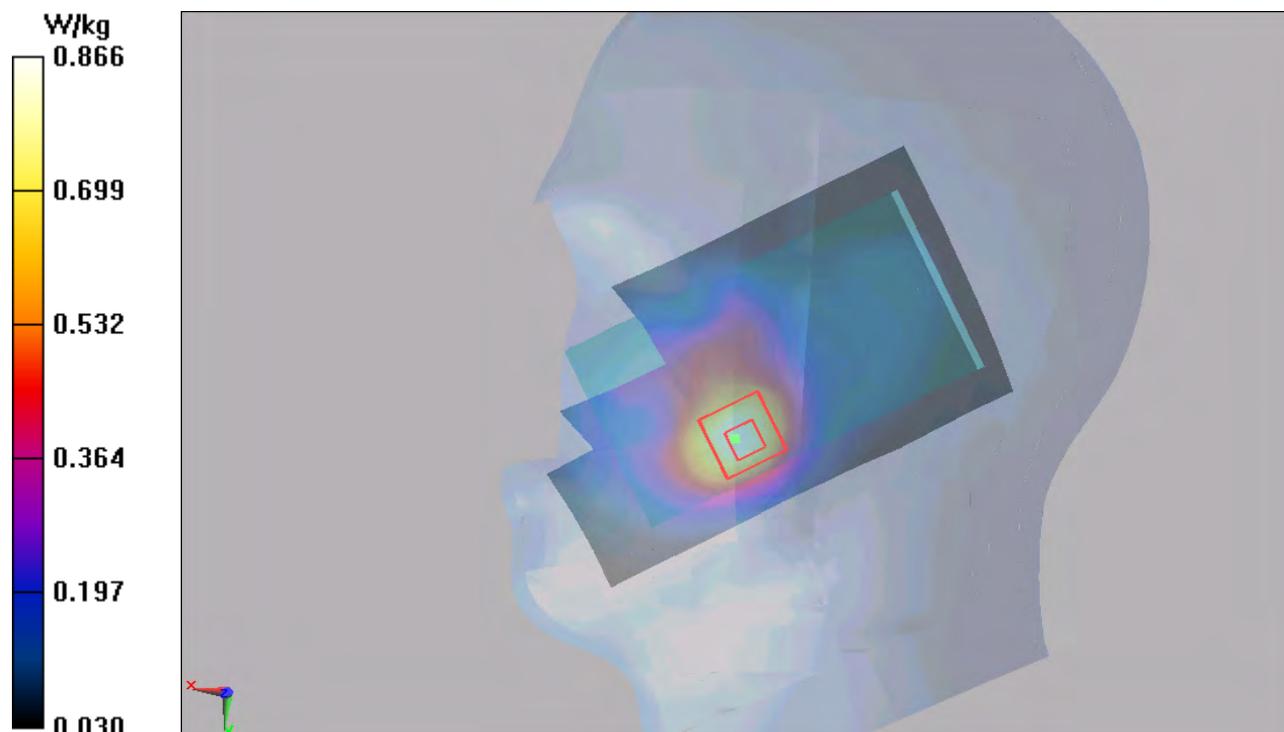


Figure 54 Right Hand Touch Cheek UMTS Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 107 of 208

## UMTS Band II Right Cheek Middle (1<sup>st</sup> repeated SAR)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 39.897$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8);

**Right Cheek Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.774 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.097 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.451 W/kg**

Maximum value of SAR (measured) = 0.793 W/kg

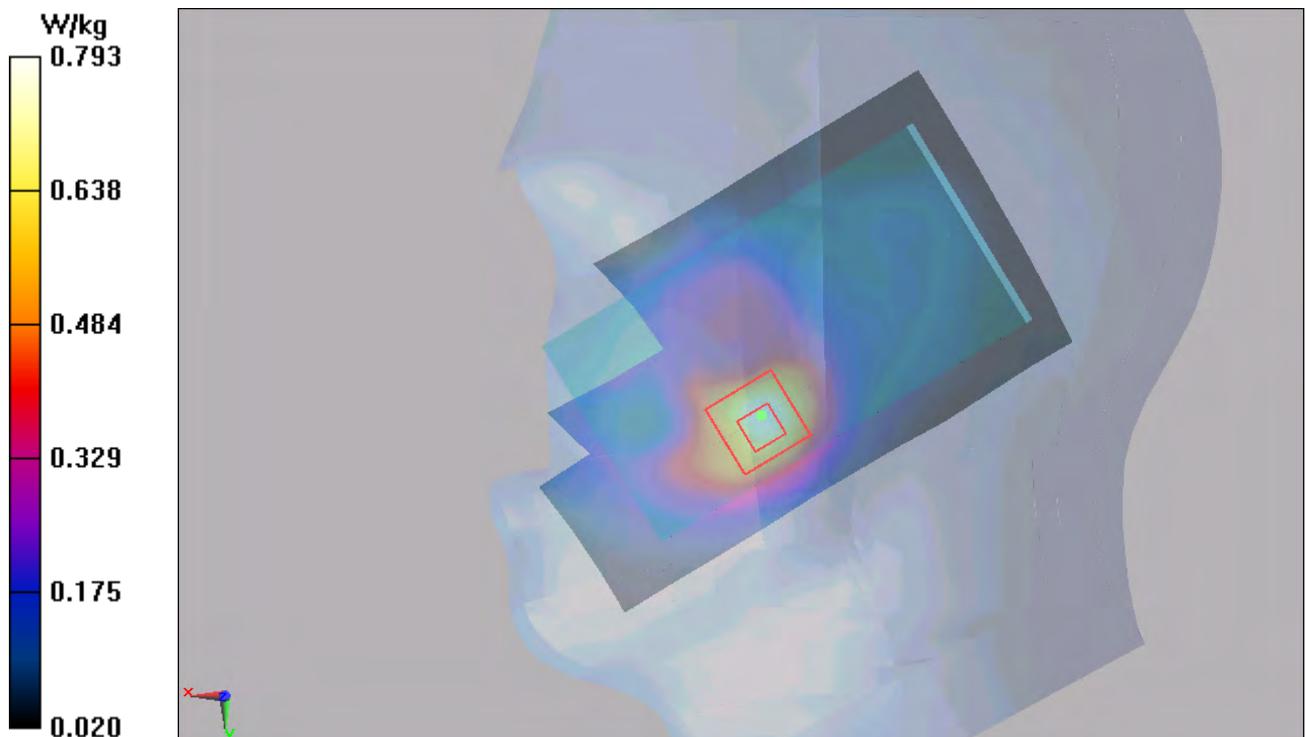


Figure 55 Body, Right Cheek, UMTS Band II Channel 9400

### UMTS Band II Back Side Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Back Side Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.652 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.323 V/m; Power Drift = 0.168 dB

Peak SAR (extrapolated) = 0.947 W/kg

**SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.377 W/kg**

Maximum value of SAR (measured) = 0.637 W/kg

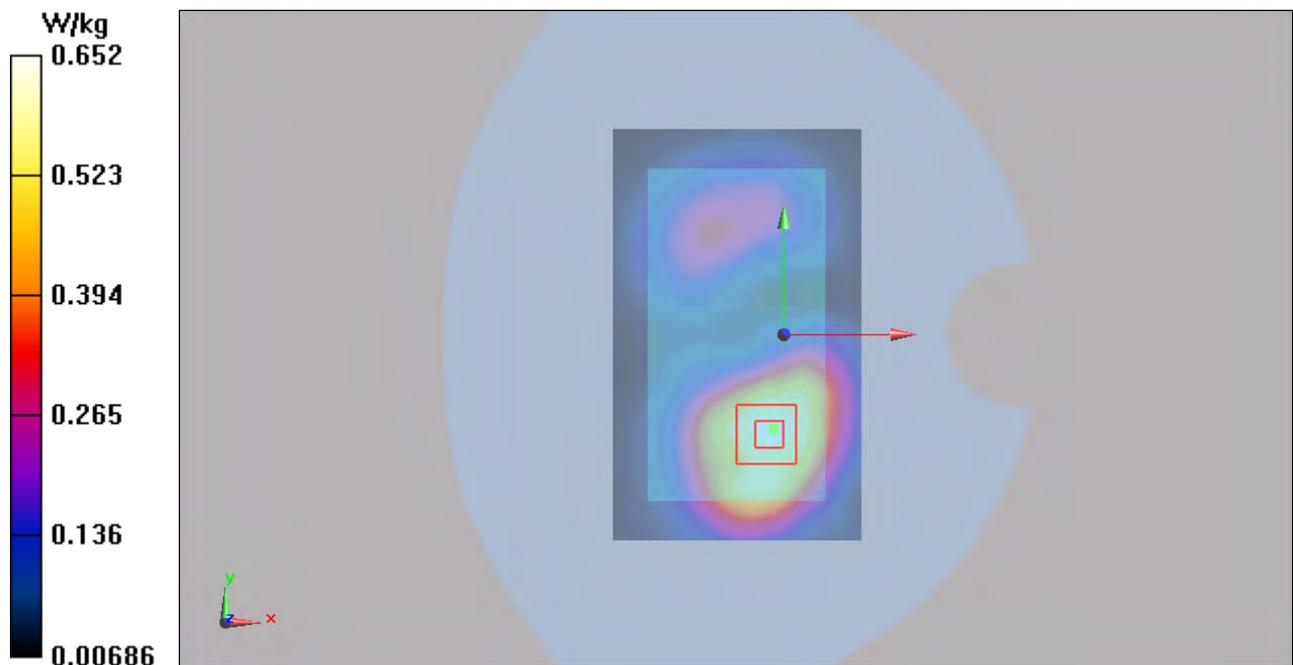


Figure 56 Body, Back Side, UMTS Band II Channel 9400

### UMTS Band II Front Side High (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.532$  S/m;  $\epsilon_r = 53.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Front Side High/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.782 W/kg

**Front Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.453 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.397 W/kg**

Maximum value of SAR (measured) = 0.734 W/kg

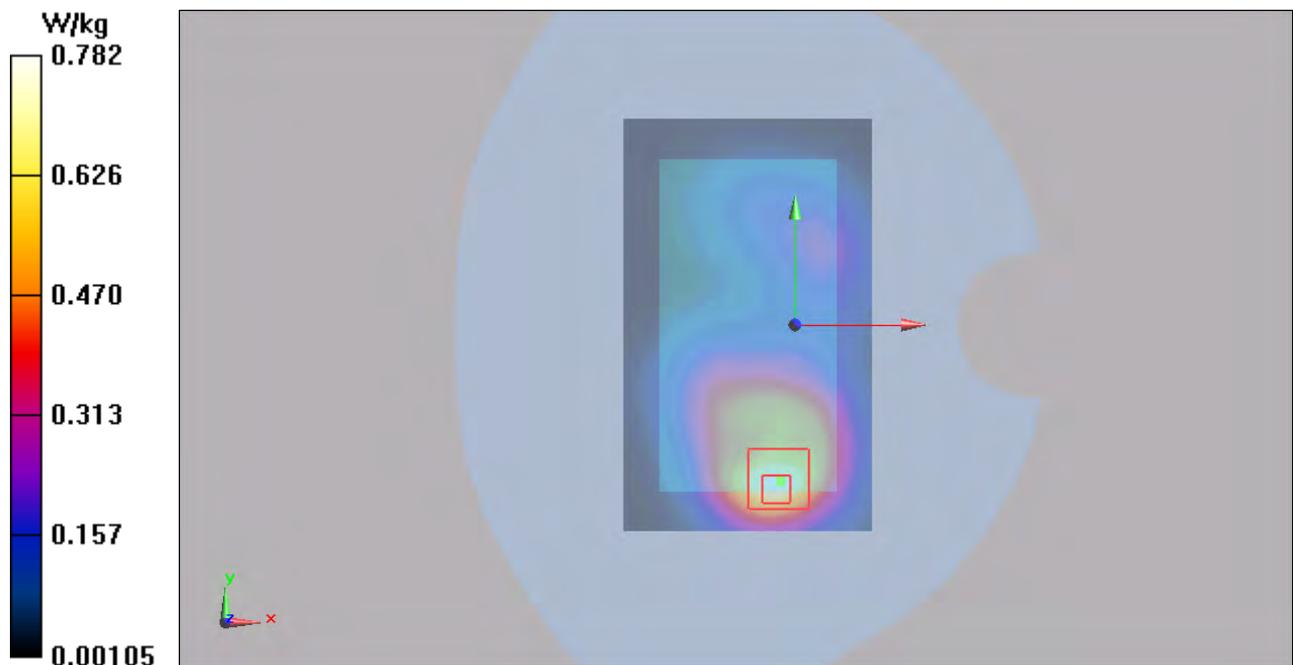


Figure 57 Body, Front Side, UMTS Band II Channel 9538

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 110 of 208

## UMTS Band II Front Side Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Front Side Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.799 W/kg

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.684 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.417 W/kg**

Maximum value of SAR (measured) = 0.736 W/kg

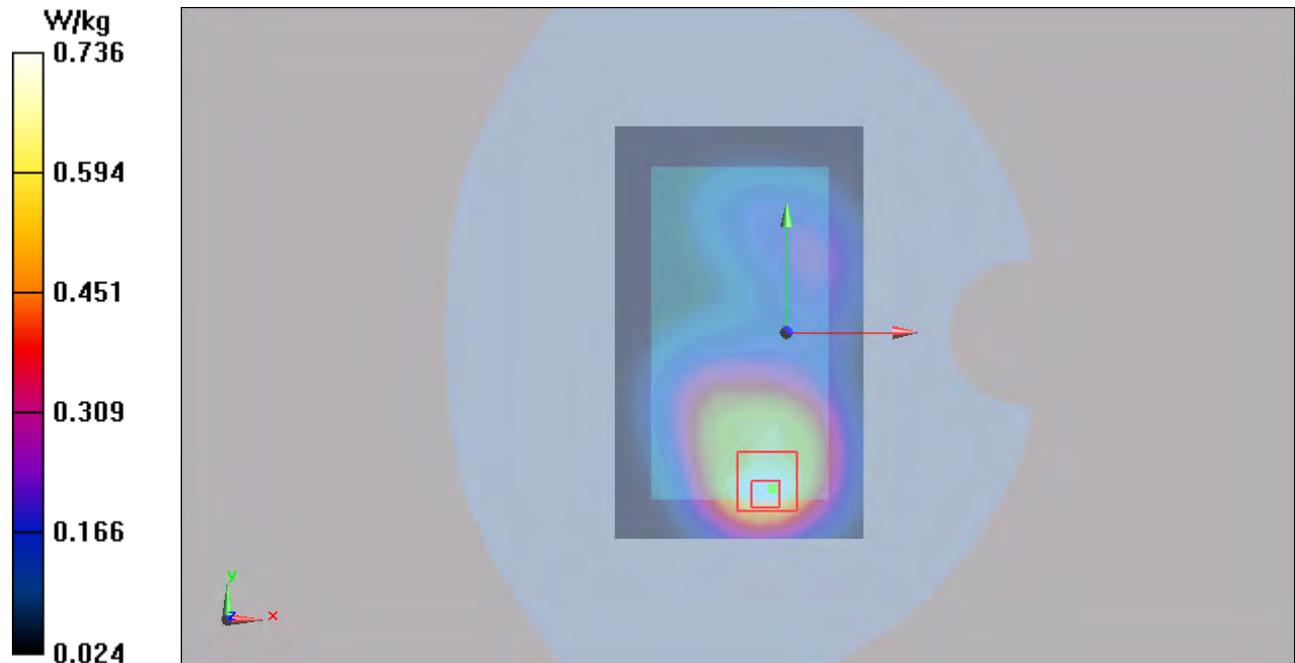


Figure 58 Body, Front Side, UMTS Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 111 of 208

## UMTS Band II Front Side Low (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.477$  S/m;  $\epsilon_r = 53.168$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Front Side Low/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.703 W/kg

**Front Side Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.811 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.906 W/kg

**SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.369 W/kg**

Maximum value of SAR (measured) = 0.641 W/kg

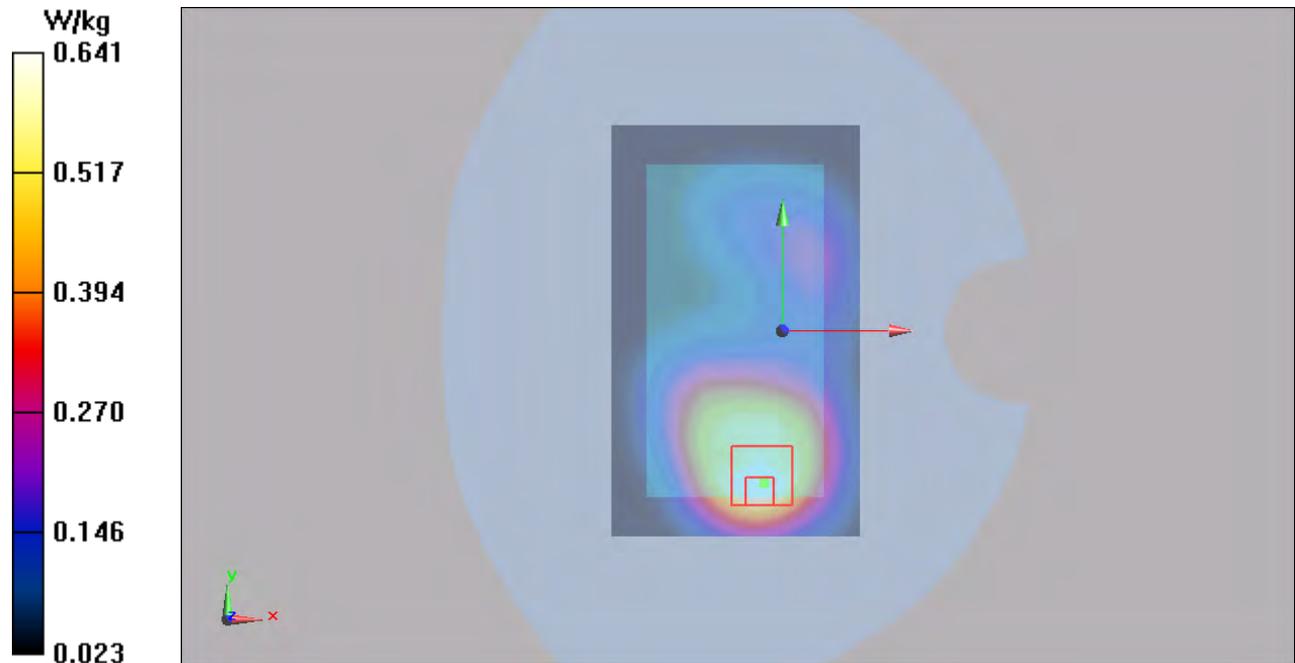


Figure 59 Body, Front Side, UMTS Band II Channel 9262

**UMTS Band II Left Edge Middle (Battery 1)**

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Left Edge Middle/Area Scan (51x151x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.195 W/kg

**Left Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.974 V/m; Power Drift = 0.170 dB

Peak SAR (extrapolated) = 0.284 W/kg

**SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.180 W/kg

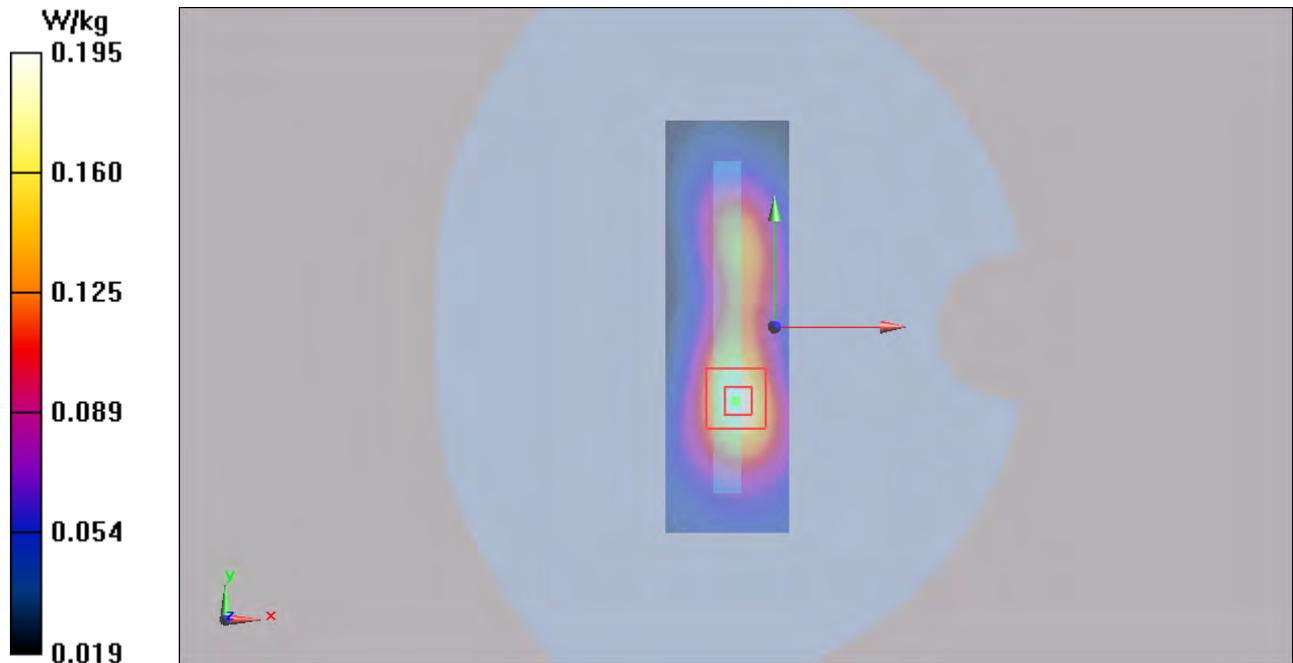


Figure 60 Body, Left Edge, UMTS Band II Channel 9400

**UMTS Band II Right Edge Middle (Battery 1)**

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Right Edge Middle/Area Scan (51x151x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.204 W/kg

**Right Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.759 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.181 W/kg

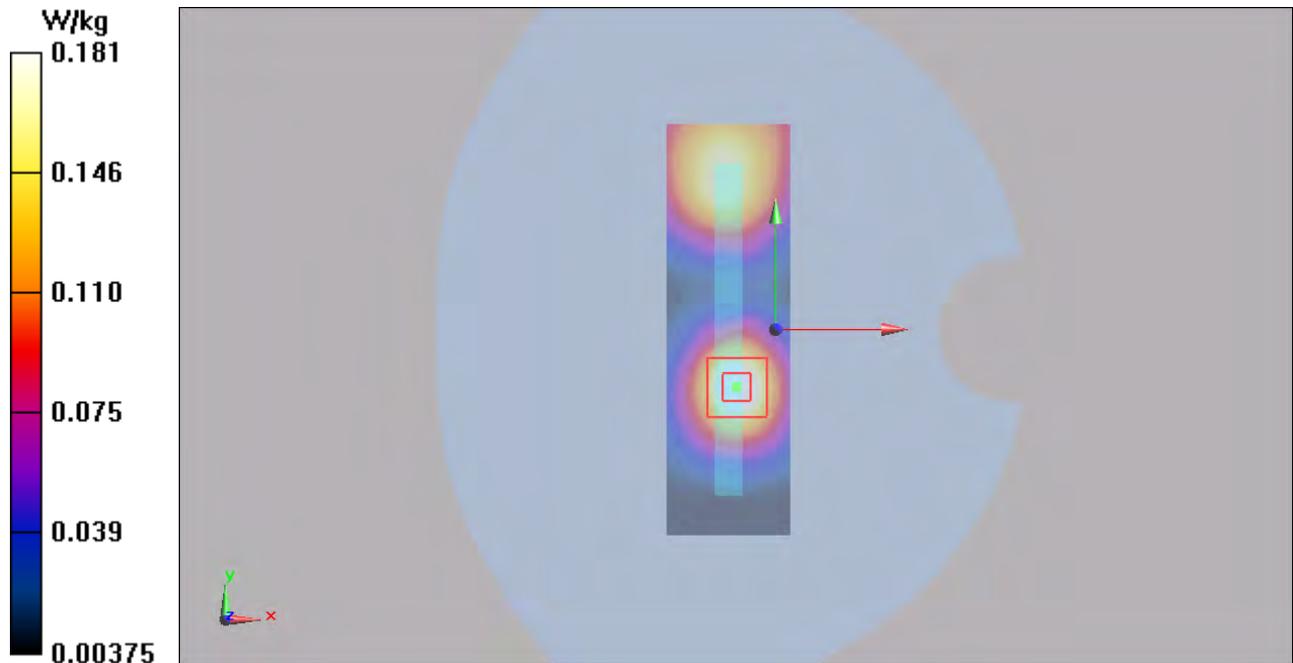


Figure 61 Body, Right Edge, UMTS Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 114 of 208

## UMTS Band II Bottom Edge High (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.532$  S/m;  $\epsilon_r = 53.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Edge High/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.831 W/kg

**Bottom Edge High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.67 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.745 W/kg; SAR(10 g) = 0.394 W/kg**

Maximum value of SAR (measured) = 0.701 W/kg

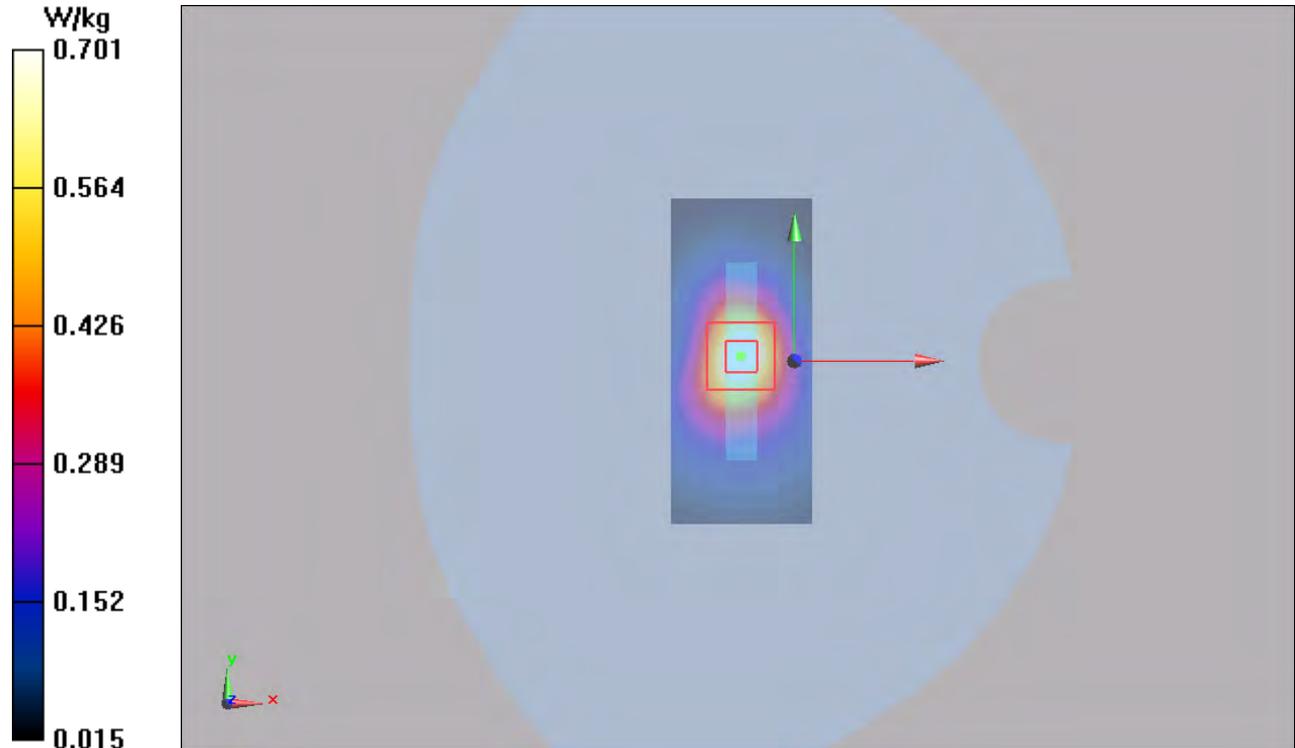


Figure 62 Body, Bottom Edge, UMTS Band II Channel 9538

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 115 of 208

## UMTS Band II Bottom Edge Middle (Battery 1)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Edge Middle/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.886 W/kg

**Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.72 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.788 W/kg; SAR(10 g) = 0.422 W/kg**

Maximum value of SAR (measured) = 0.807 W/kg

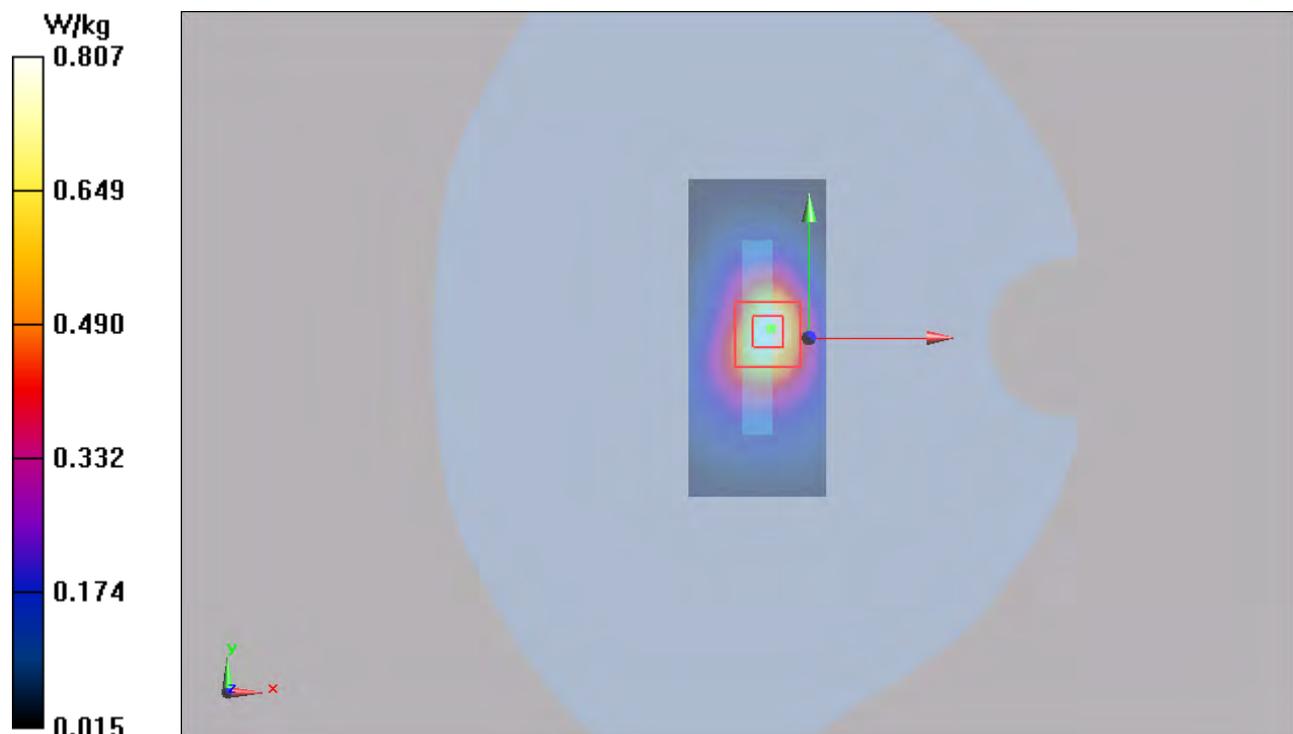


Figure 63 Body, Bottom Edge, UMTS Band II Channel 9400

**UMTS Band II Bottom Edge Low (Battery 1)**

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.477$  S/m;  $\epsilon_r = 53.168$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Edge Low/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.788 W/kg

**Bottom Edge Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.06 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 0.696 W/kg

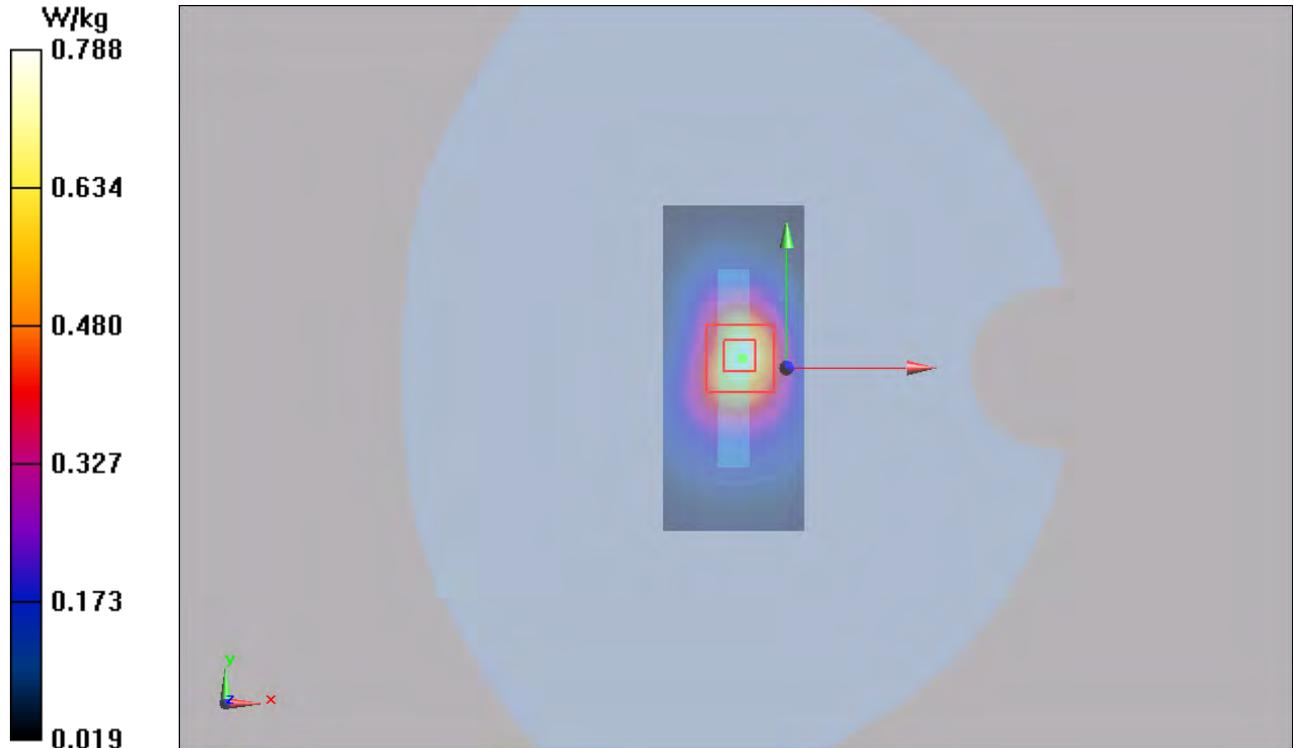


Figure 64 Body, Bottom Edge, UMTS Band II Channel 9262

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 117 of 208

### UMTS Band II Bottom Edge Middle (Battery 2)

Date: 2/4/2015

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.137$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.57, 7.57, 7.57); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (8);

**Bottom Edge Middle/Area Scan (51x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.863 W/kg

**Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.98 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.420 W/kg**

Maximum value of SAR (measured) = 0.775 W/kg

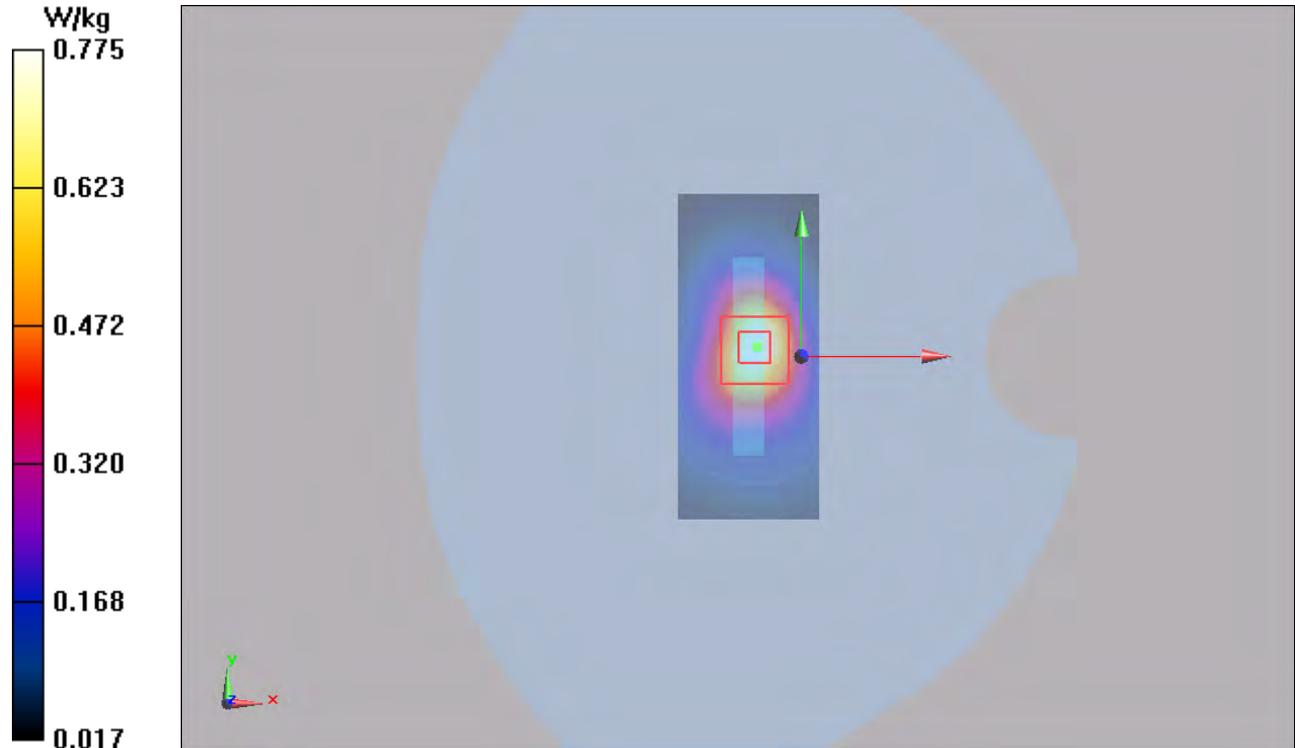


Figure 65 Body, Bottom Edge, UMTS Band II Channel 9400

### UMTS Band V Left Cheek High(Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 40.004$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Cheek High/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.535 W/kg

**Left Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.163 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.474 W/kg**

Maximum value of SAR (measured) = 0.698 W/kg

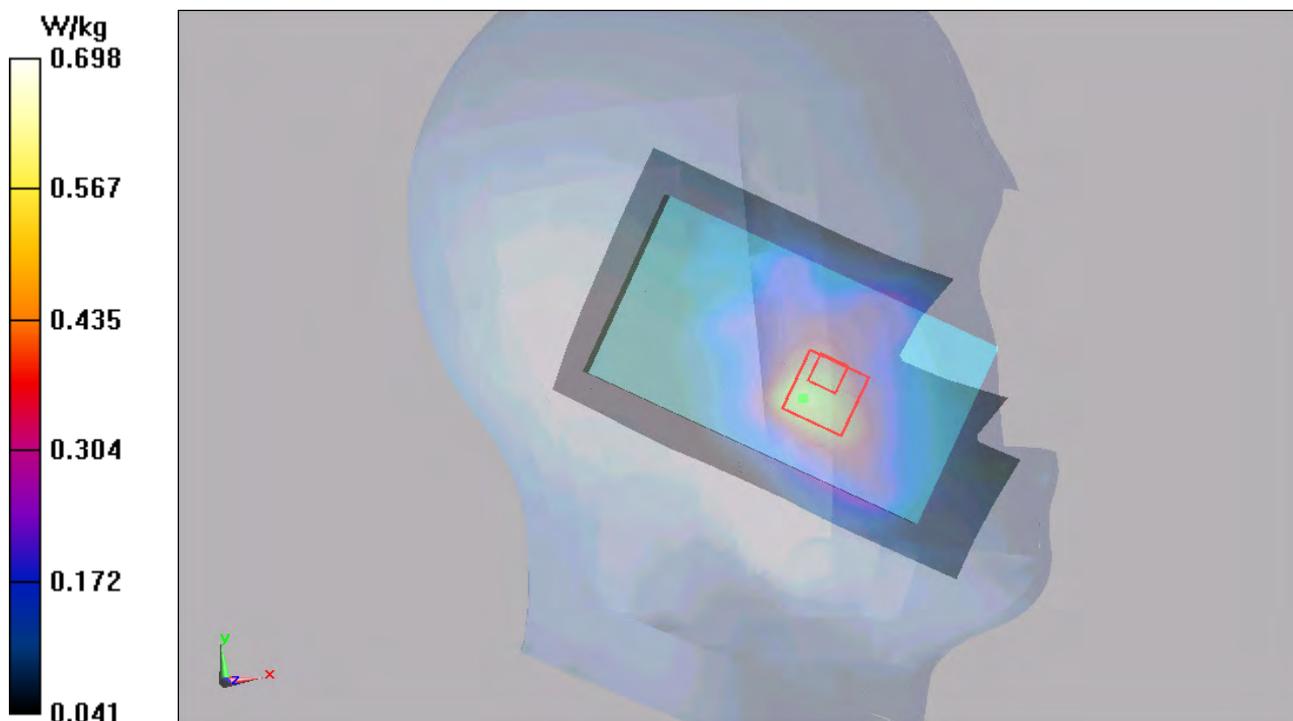


Figure 66 Left Hand Touch Cheek UMTS Band V Channel 4233

### UMTS Band V Left Cheek Middle (Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Cheek Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.593 W/kg

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.290 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.469 W/kg**

Maximum value of SAR (measured) = 0.706 W/kg

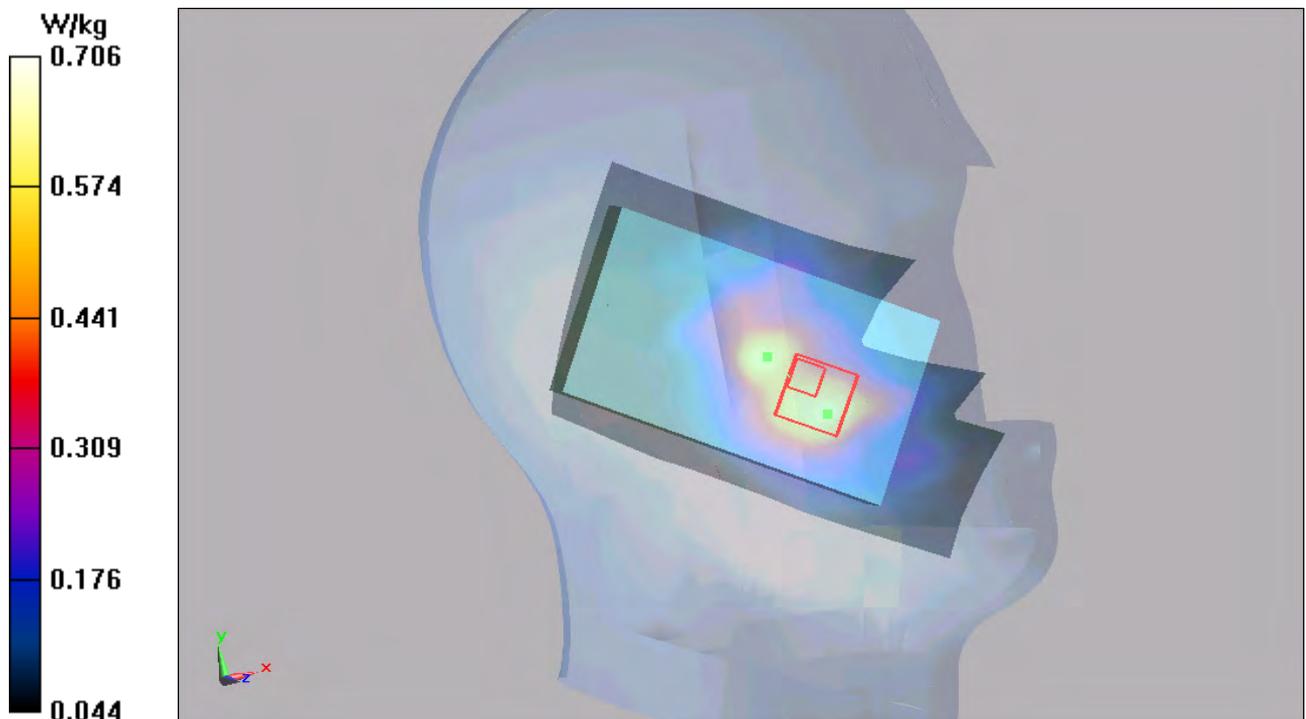


Figure 67 Left Hand Touch Cheek UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 120 of 208

## UMTS Band V Left Cheek Low (Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 40.249$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Cheek Low/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.604 W/kg

**Left Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.596 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.986 W/kg

**SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.531 W/kg**

Maximum value of SAR (measured) = 0.816 W/kg

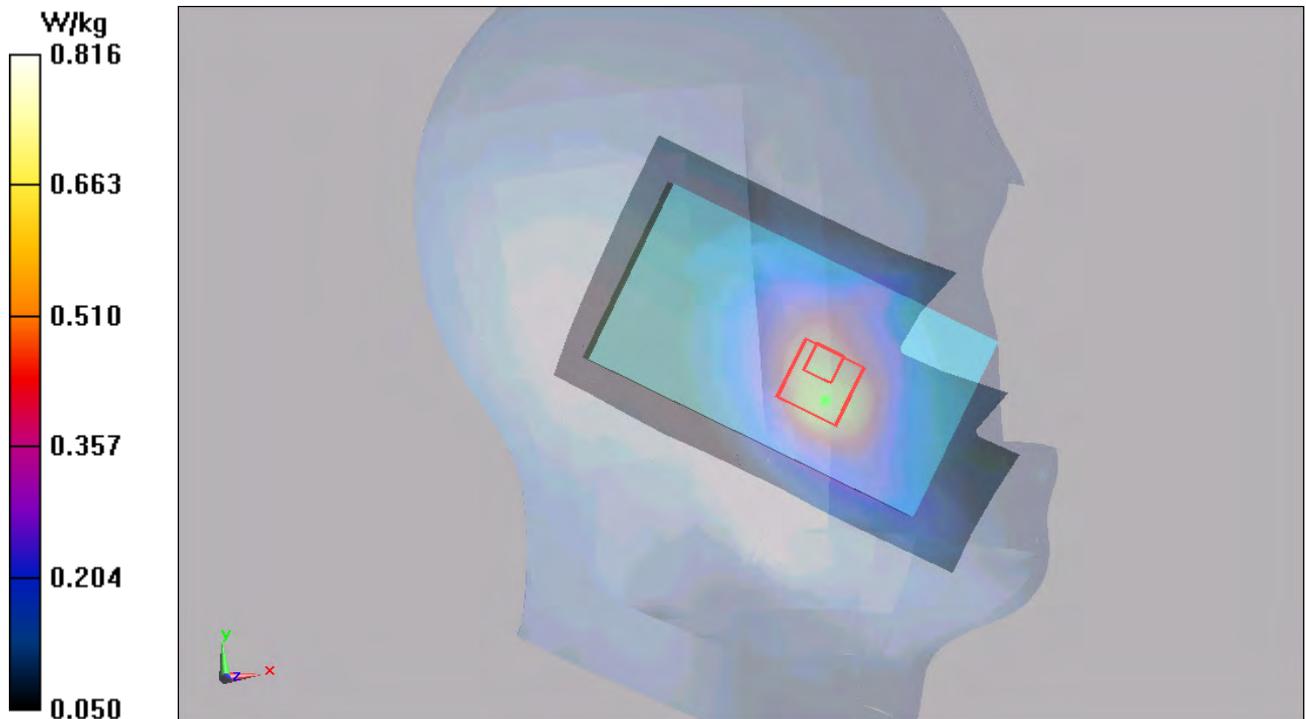


Figure 68 Left Hand Touch Cheek UMTS Band V Channel 4132

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 121 of 208

## UMTS Band V Left Tilt Middle (Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Tilt Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.325 W/kg

**Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.741 V/m; Power Drift = 0.080 dB

Peak SAR (extrapolated) = 0.637 W/kg

**SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.258 W/kg**

Maximum value of SAR (measured) = 0.434 W/kg

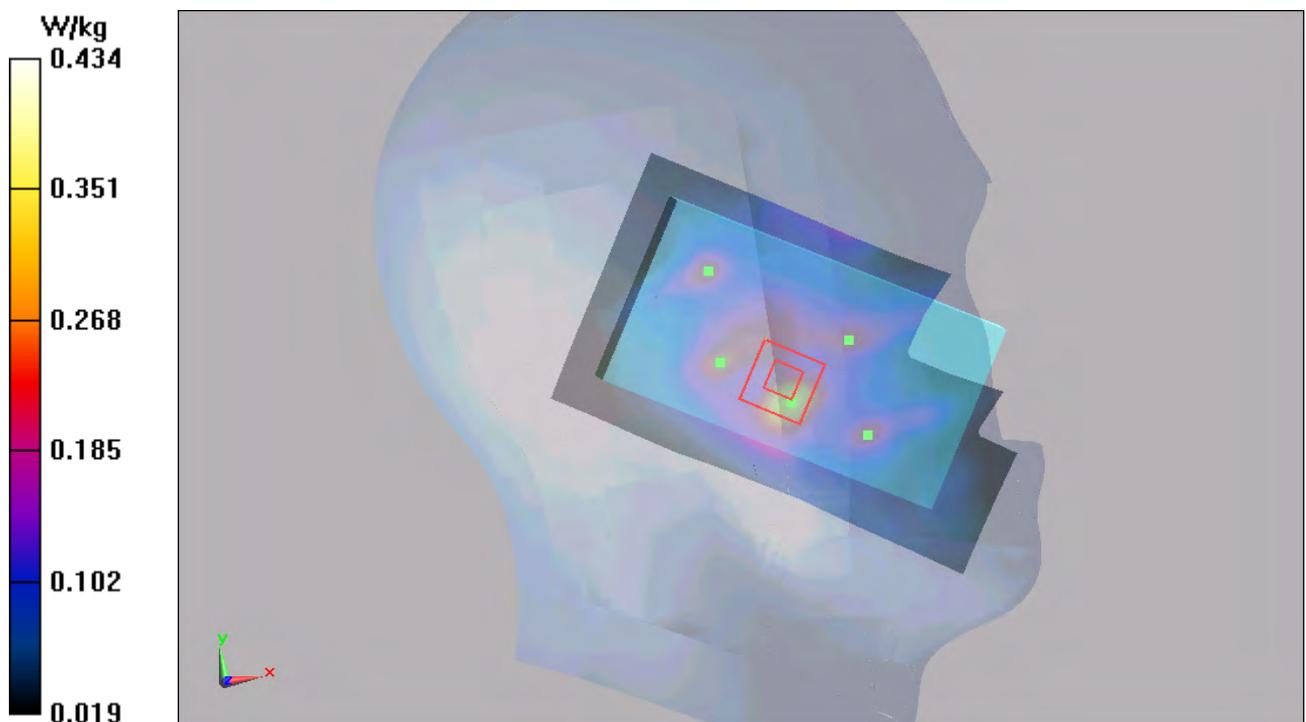


Figure 69 Left Hand Tilt 15° UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 122 of 208

## UMTS Band V Right Cheek High(Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.933$  S/m;  $\epsilon_r = 40.004$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek High/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.640 W/kg

**Right Cheek High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.757 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.500 W/kg**

Maximum value of SAR (measured) = 0.738 W/kg

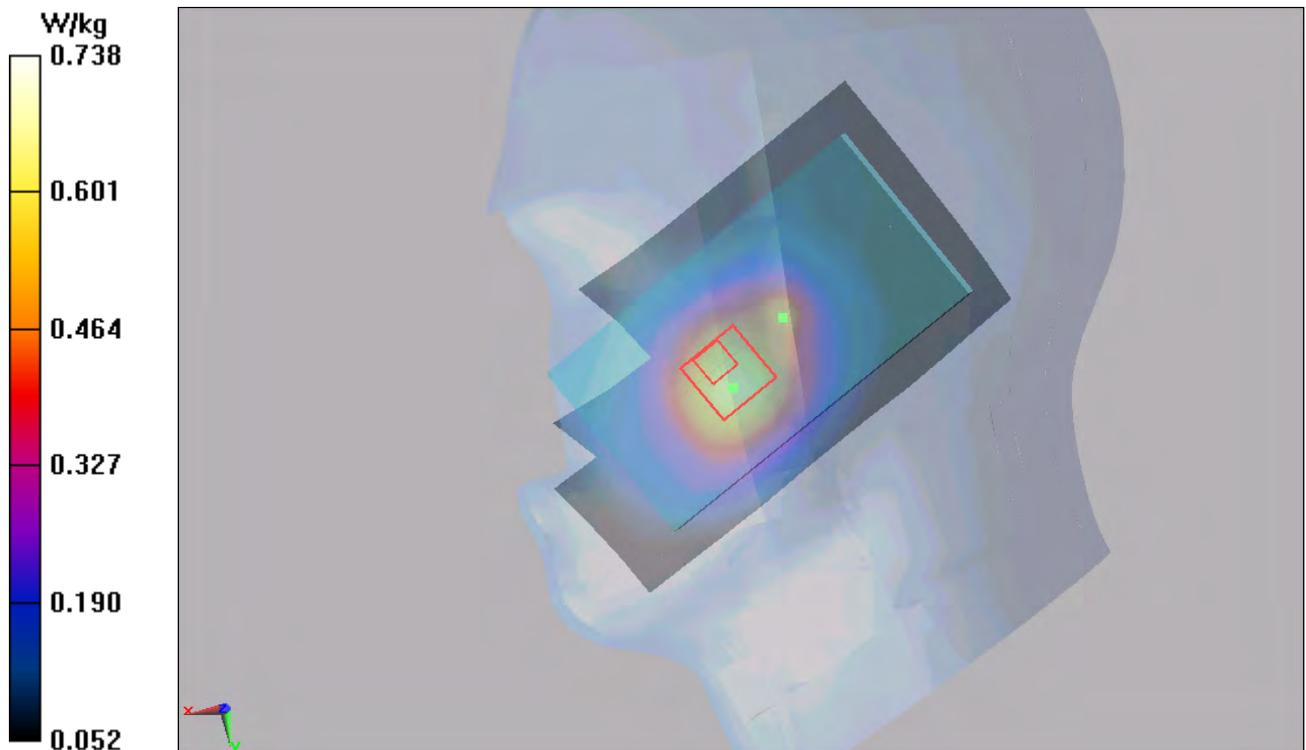


Figure 70 Right Hand Touch Cheek UMTS Band V Channel 4233

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 123 of 208

### UMTS Band V Right Cheek Middle (Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.699 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.085 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.854 W/kg

**SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.454 W/kg**

Maximum value of SAR (measured) = 0.720 W/kg

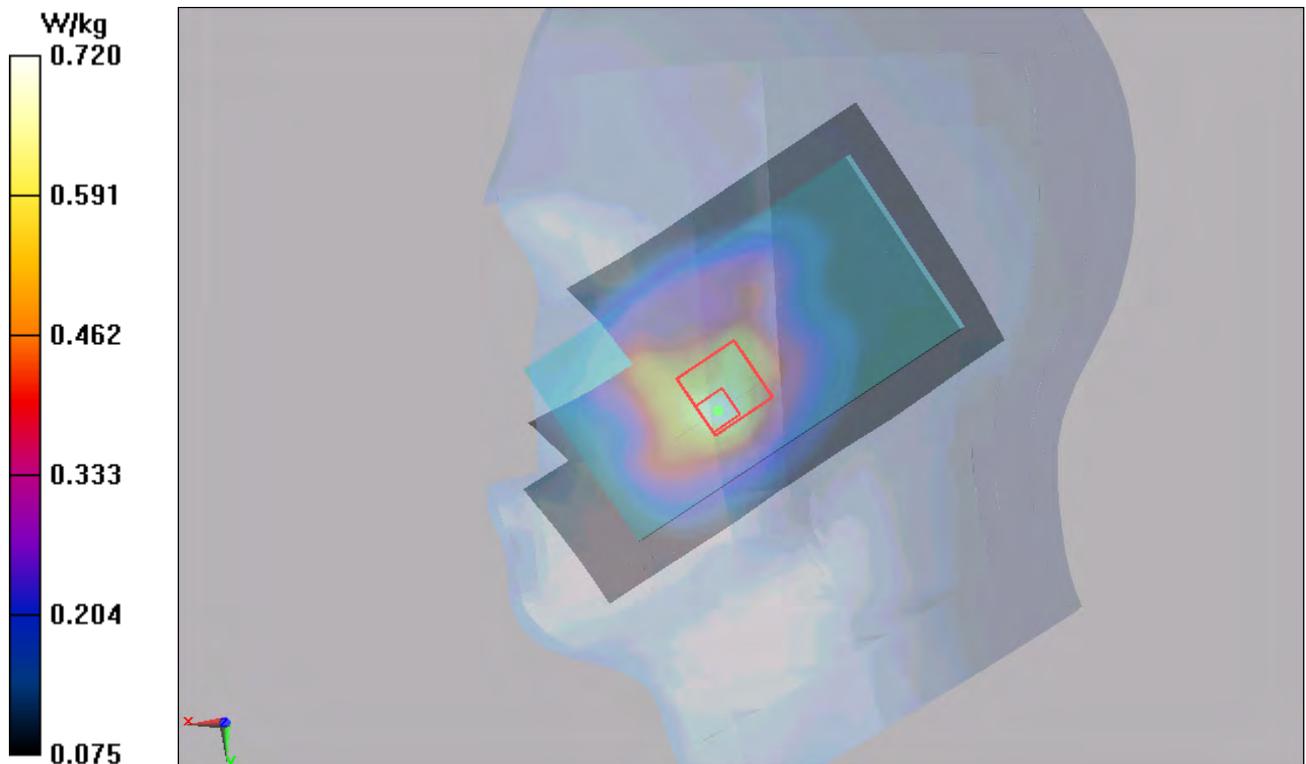


Figure 71 Right Hand Touch Cheek UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 124 of 208

### UMTS Band V Right Cheek Low (Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 40.249$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Low/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.745 W/kg

**Right Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.688 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.827 W/kg; SAR(10 g) = 0.542 W/kg**

Maximum value of SAR (measured) = 0.900 W/kg

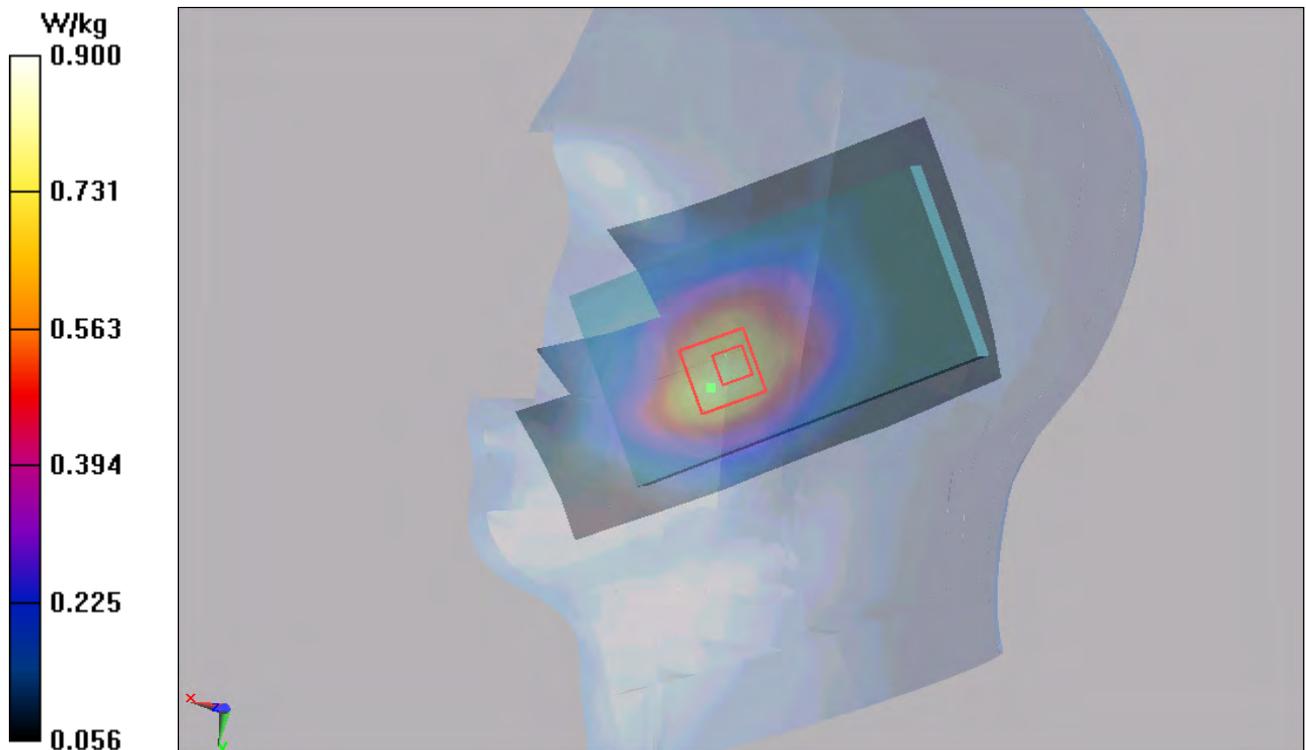


Figure 72 Left Hand Touch Cheek UMTS Band V Channel 4132

### UMTS Band V Right Tilt Middle (Battery 1)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 40.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Tilt Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.410 W/kg

**Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.22 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.469 W/kg

**SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.214 W/kg**

Maximum value of SAR (measured) = 0.431 W/kg

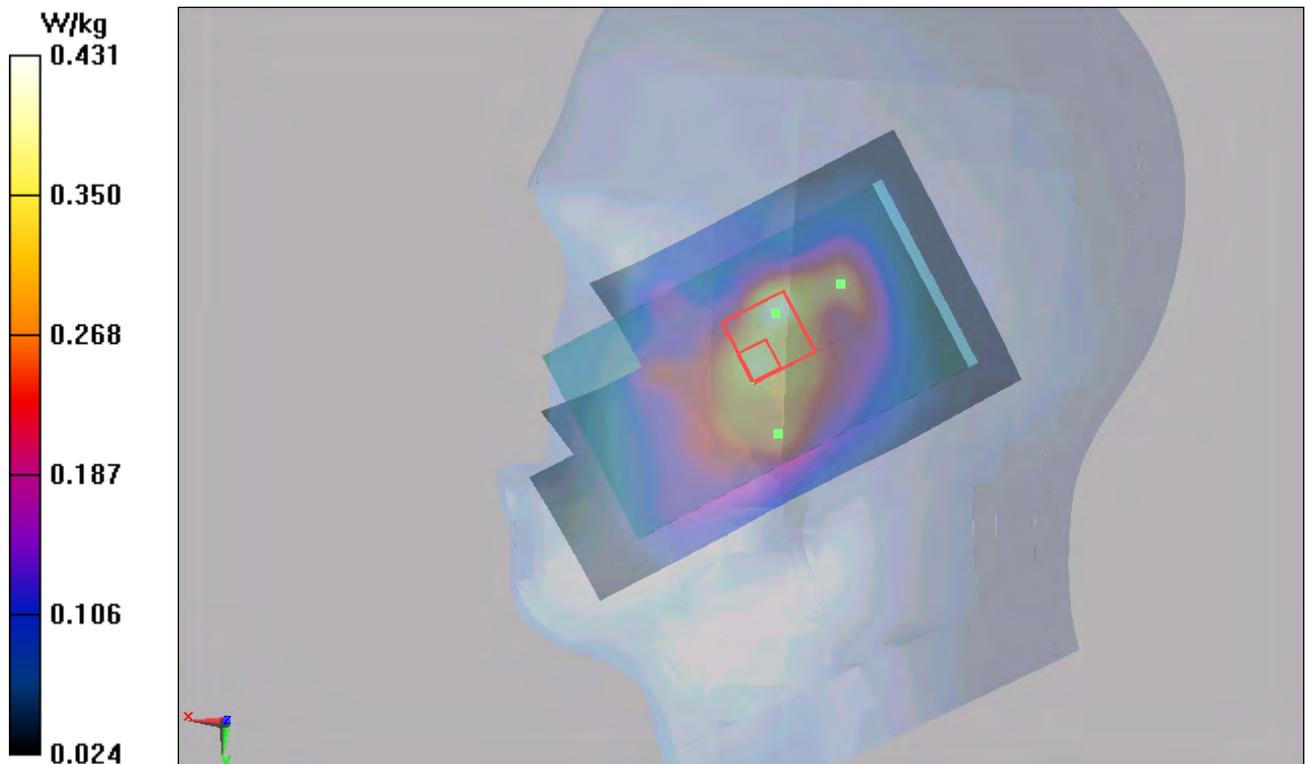


Figure 73 Right Hand Tilt 15° UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 126 of 208

## UMTS Band V Right Cheek Low (Battery 2)

Date: 3/6/2015

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 40.249$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Cheek Low/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.744 W/kg

**Right Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.381 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.435 W/kg**

Maximum value of SAR (measured) = 0.646 W/kg

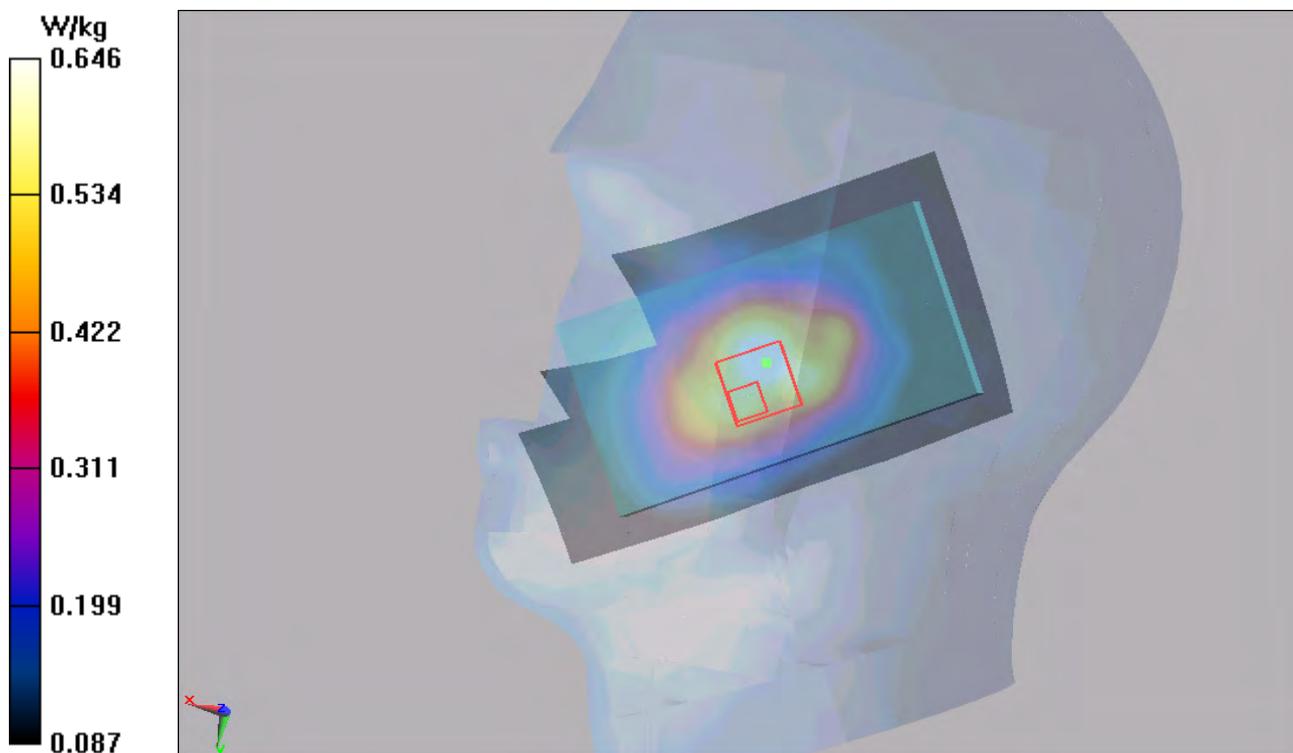


Figure 74 Left Touch Cheek UMTS Band V Channel 4132

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 127 of 208

### UMTS Band V Right Cheek Low (1<sup>st</sup> Repeated SAR)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.437$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.30, 9.30, 9.30); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (8);

**Right Cheek Low/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.935 W/kg

**Right Cheek Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.88 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.654 W/kg**

Maximum value of SAR (measured) = 0.904 W/kg

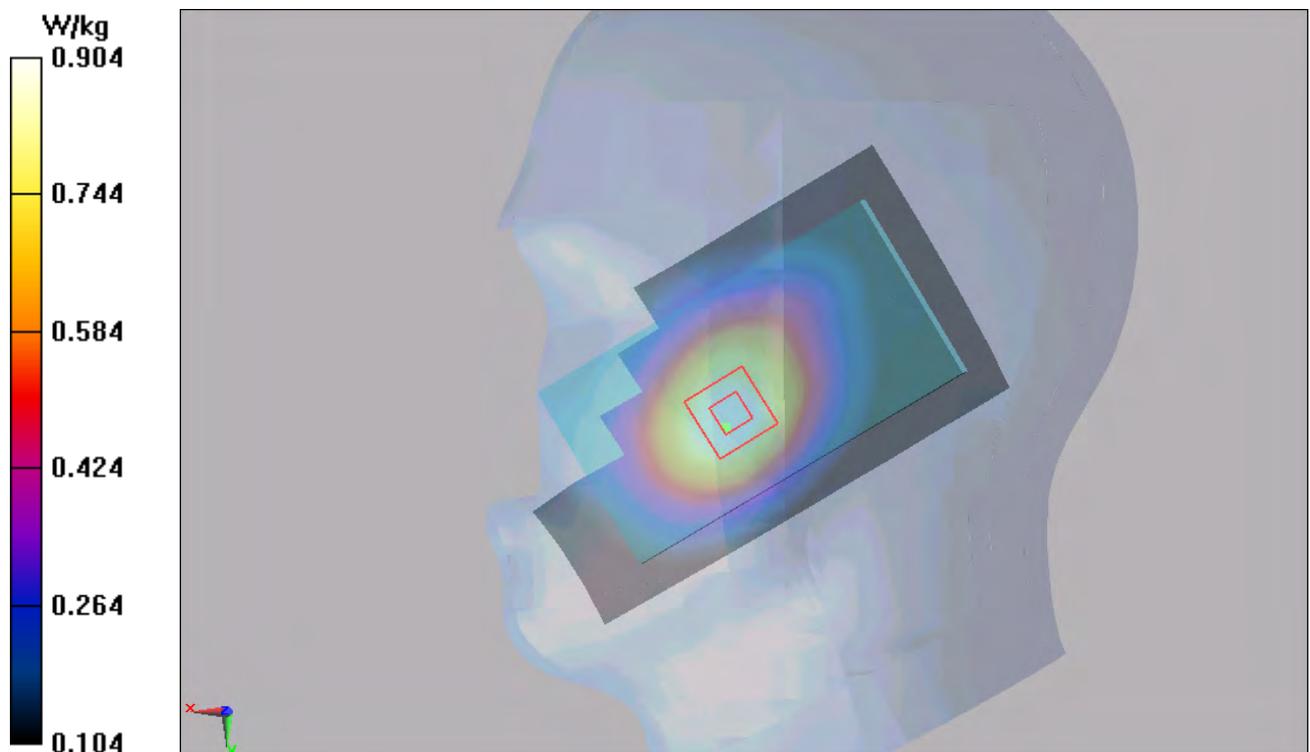


Figure 75 Body, Right Cheek, UMTS Band V Channel 4132

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 128 of 208

### UMTS Band V Back Side High (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side High/Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.829 mW/g

**Back Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.993 W/kg

**SAR(1 g) = 0.767 mW/g; SAR(10 g) = 0.575 mW/g**

Maximum value of SAR (measured) = 0.799 mW/g

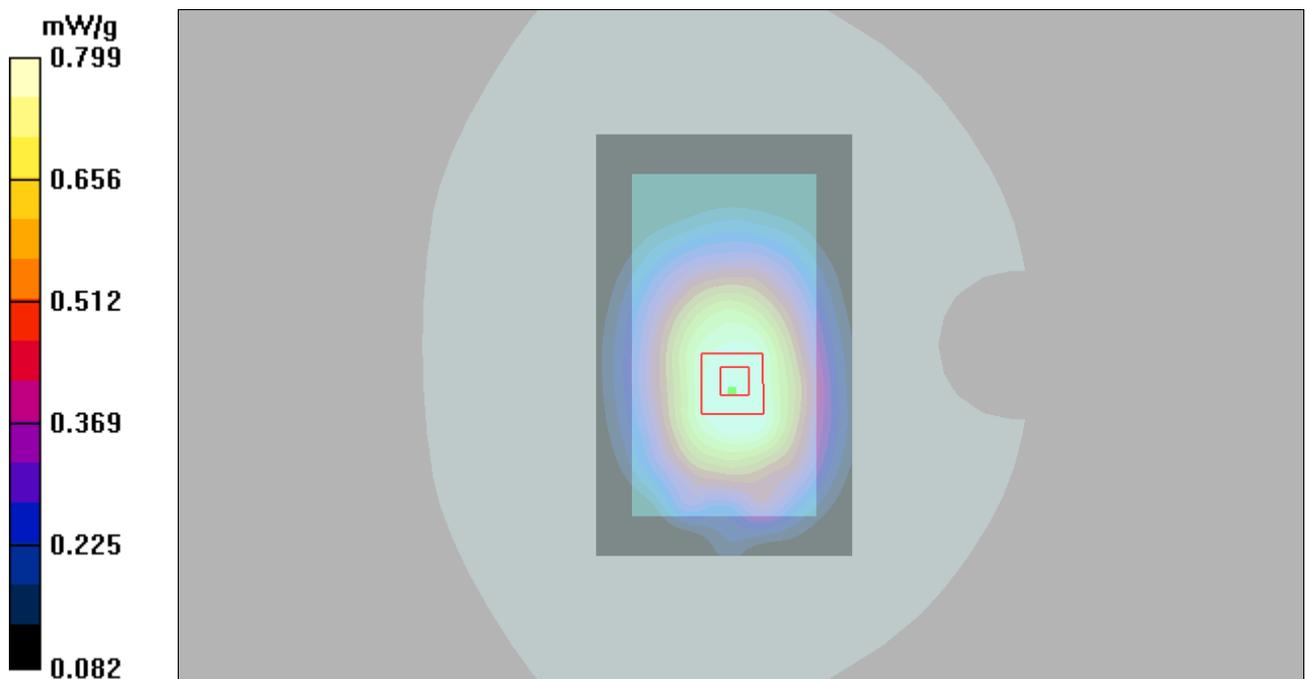


Figure 76 Body, Back Side, UMTS Band V Channel 4233

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 129 of 208

### UMTS Band V Back Side Middle (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.820 mW/g

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.987 W/kg

**SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.580 mW/g**

Maximum value of SAR (measured) = 0.827 mW/g

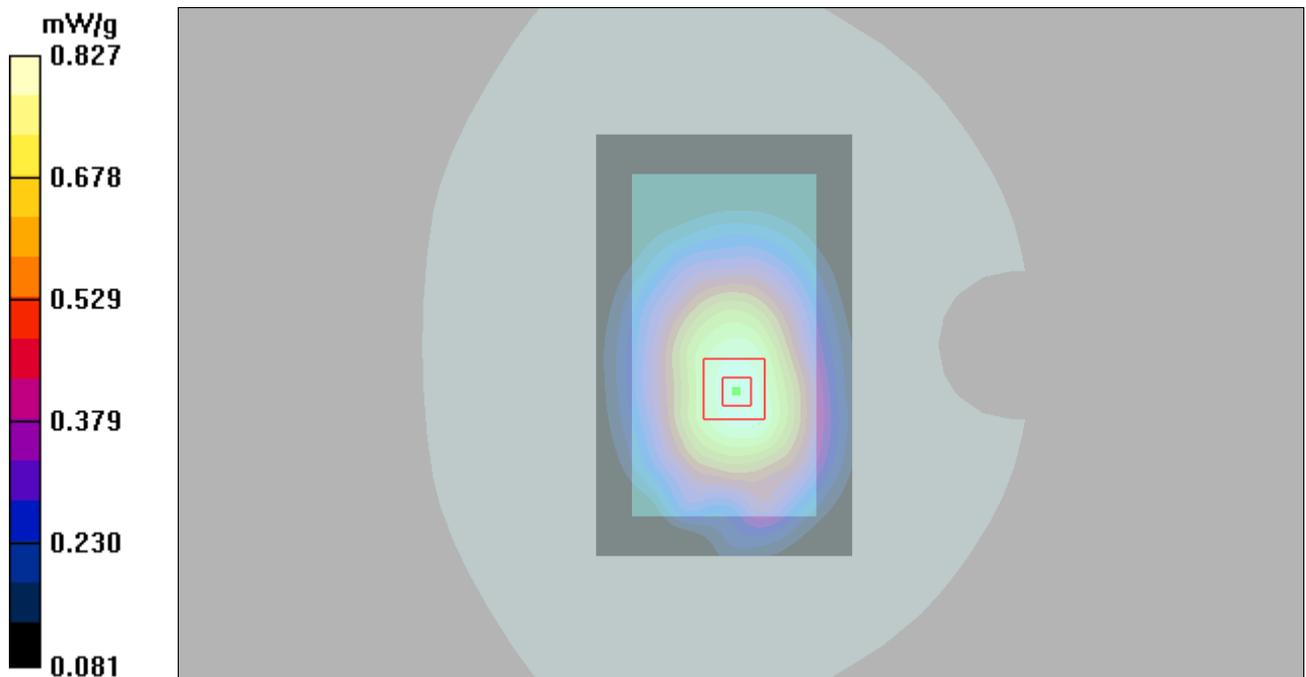


Figure 77 Body, Back Side, UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 130 of 208

### UMTS Band V Back Side Low (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Low/Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.843 mW/g

**Back Side Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.564 mW/g**

Maximum value of SAR (measured) = 0.785 mW/g

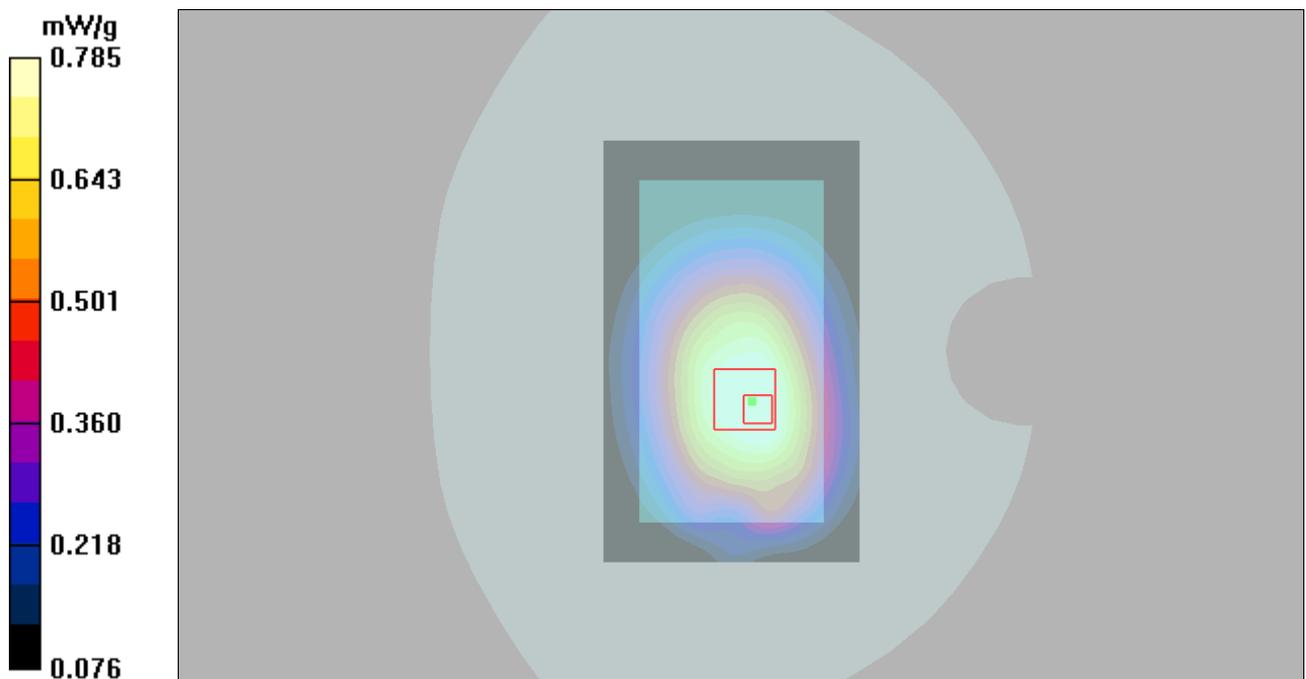


Figure 78 Body, Back Side, UMTS Band V Channel 4132

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 131 of 208

## UMTS Band V Front Side High (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side High/Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.602 mW/g

**Front Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.703 W/kg

**SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.434 mW/g**

Maximum value of SAR (measured) = 0.595 mW/g

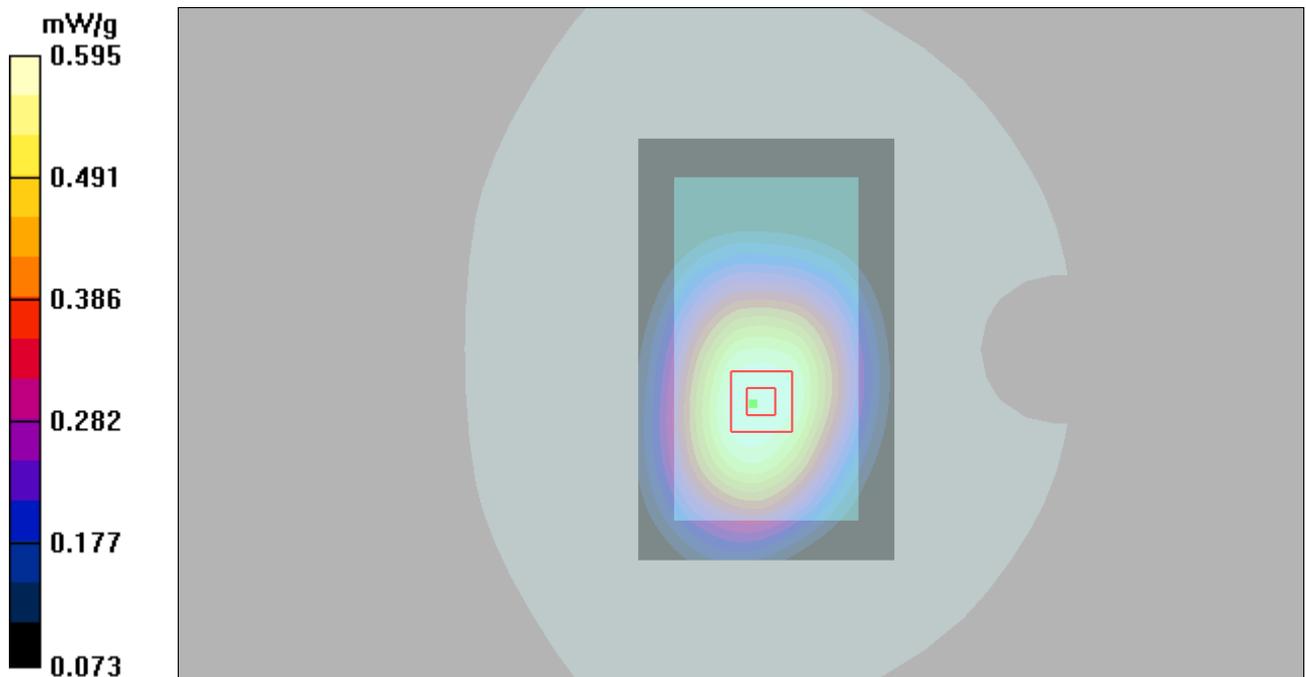


Figure 79 Body, Front Side, UMTS Band V Channel 4233

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 132 of 208

### UMTS Band V Front Side Middle (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side Middle/Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.636 mW/g

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.7 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.748 W/kg

**SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.458 mW/g**

Maximum value of SAR (measured) = 0.632 mW/g

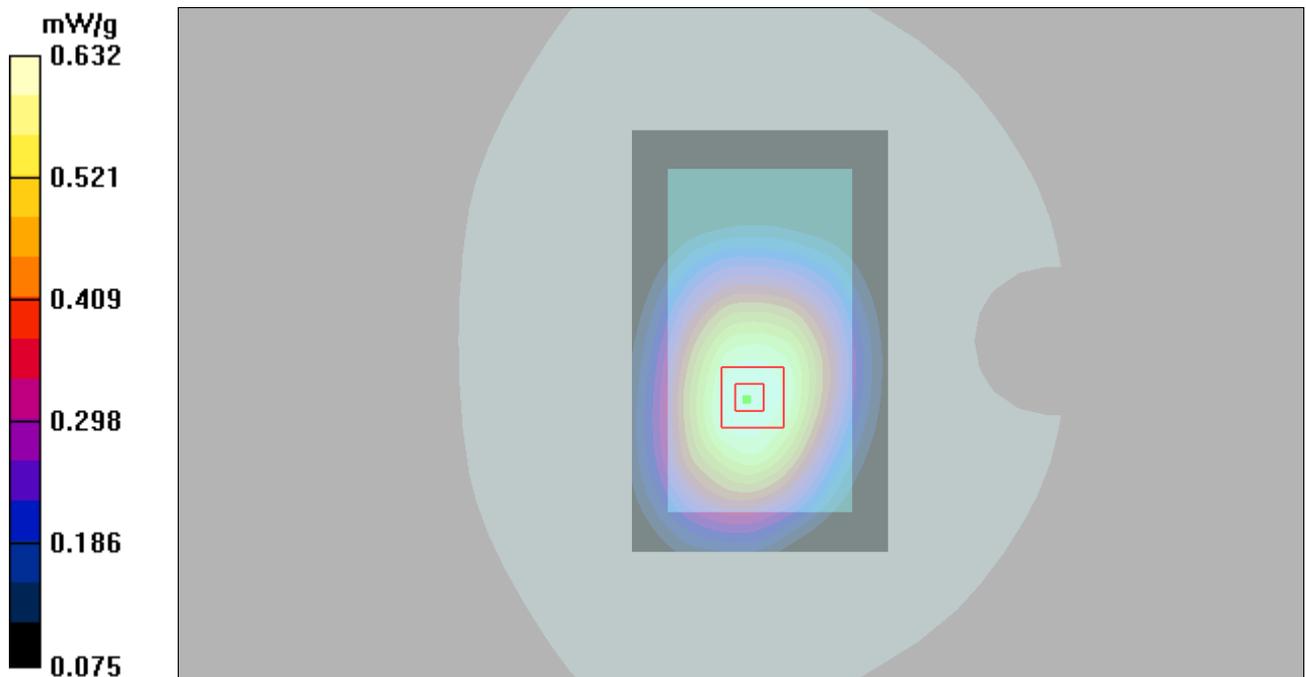


Figure 80 Body, Front Side, UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 133 of 208

## UMTS Band V Front Side Low (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Front Side Low/Area Scan (61x101x1):** Measurement grid: dx=1.500mm, dy=1.500mm

Maximum value of SAR (interpolated) = 0.766 mW/g

**Front Side Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.914 W/kg

**SAR(1 g) = 0.734 mW/g; SAR(10 g) = 0.554 mW/g**

Maximum value of SAR (measured) = 0.770 mW/g

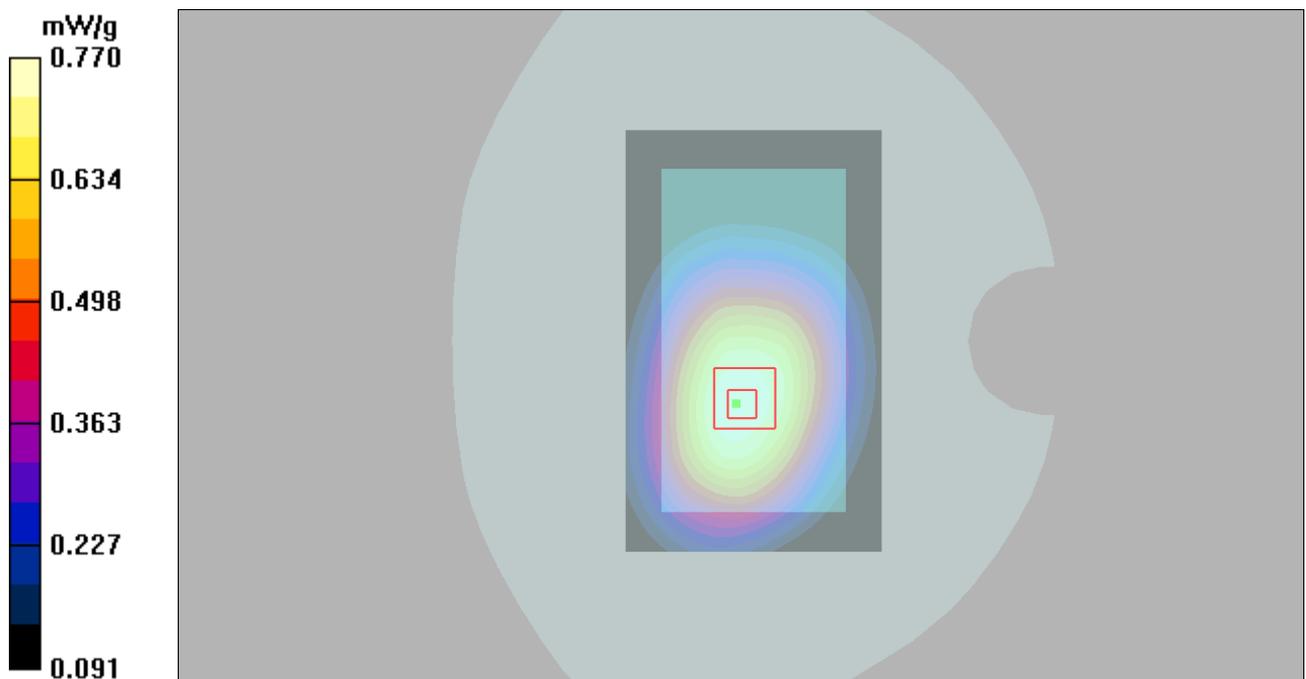


Figure 81 Body, Front Side, UMTS Band V Channel 4132

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 134 of 208

## UMTS Band V Left Edge Middle (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Left Edge Middle/Area Scan (51x151x1):** Measurement grid: dx=1.000mm, dy=1.000mm

Maximum value of SAR (interpolated) = 0.349 mW/g

**Left Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.450 W/kg

**SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.221 mW/g**

Maximum value of SAR (measured) = 0.347 mW/g

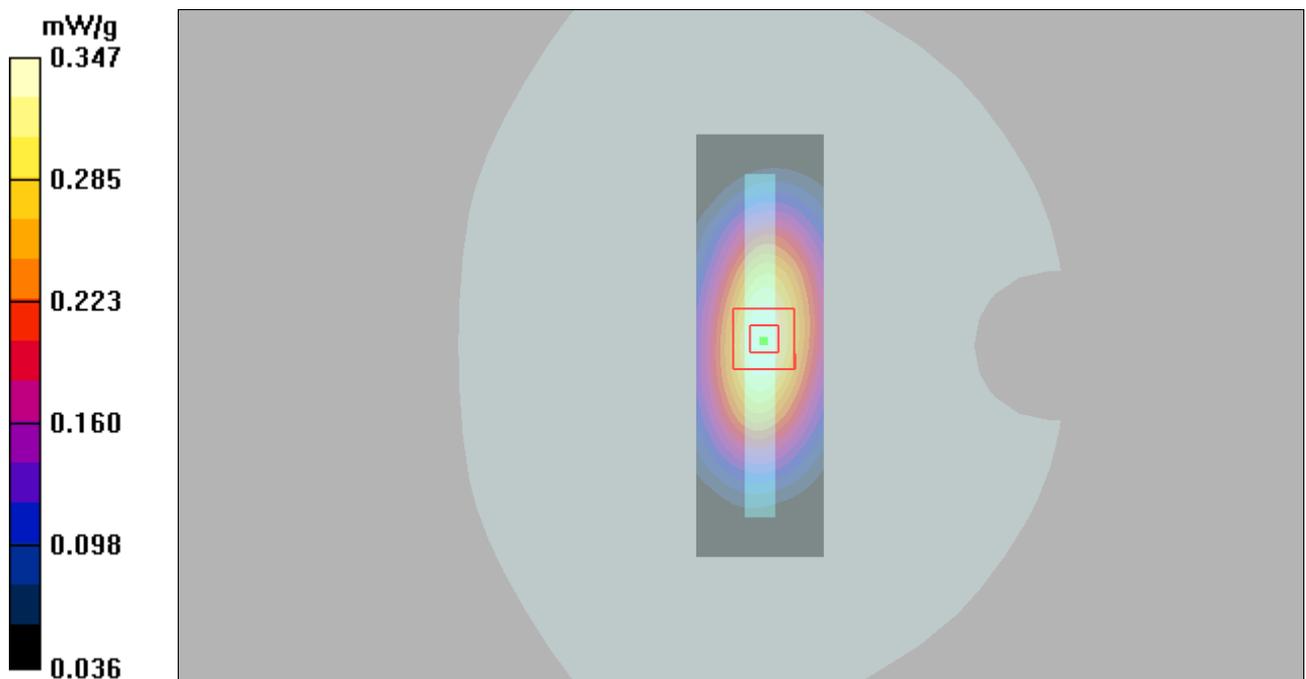


Figure 82 Body, Left Edge, UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 135 of 208

### UMTS Band V Right Edge Middle (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Right Edge Middle/Area Scan (51x151x1):** Measurement grid: dx=1.000mm, dy=1.000mm

Maximum value of SAR (interpolated) = 0.385 mW/g

**Right Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.500 W/kg

**SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.252 mW/g**

Maximum value of SAR (measured) = 0.380 mW/g

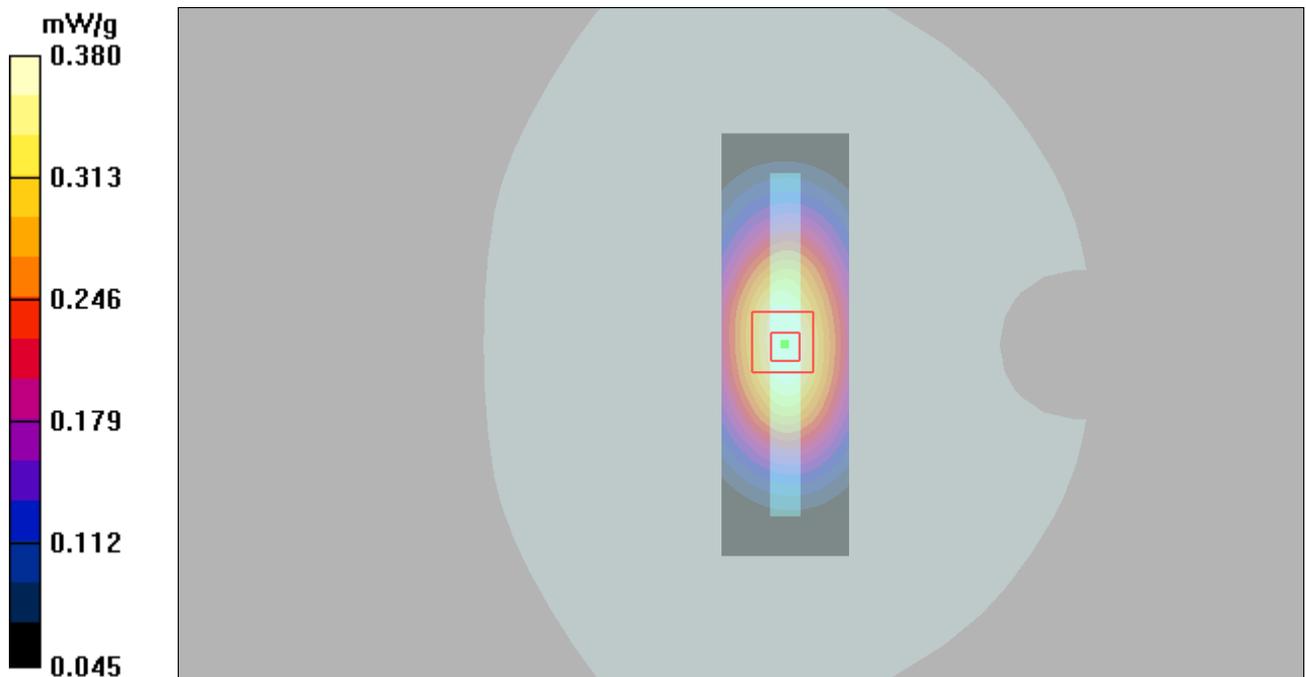


Figure 83 Body, Right Edge, UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 136 of 208

### UMTS Band V Bottom Edge Middle (Battery 1)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Bottom Edge Middle/Area Scan (51x91x1):** Measurement grid: dx=1.000mm, dy=1.000mm

Maximum value of SAR (interpolated) = 0.131 mW/g

**Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.065 mW/g**

Maximum value of SAR (measured) = 0.130 mW/g

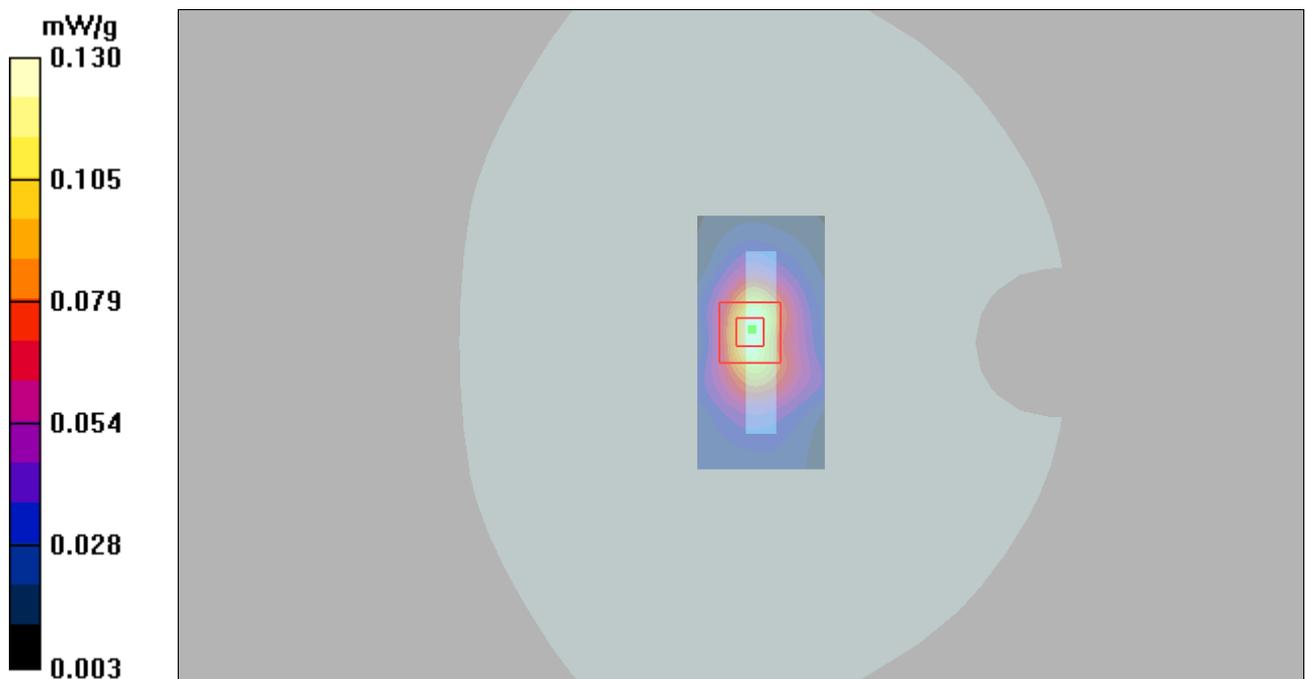


Figure 84 Body, Bottom Edge, UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RXA1501-0016SAR01R4

Page 137 of 208

### UMTS Band V Back Side Middle (Battery 2)

Date: 3/6/2015

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 54.891$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.45, 9.45, 9.45); Calibrated: 1/30/2015;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 11; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Back Side Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.853 W/kg

**Back Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.63 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.571 W/kg**

Maximum value of SAR (measured) = 0.794 W/kg

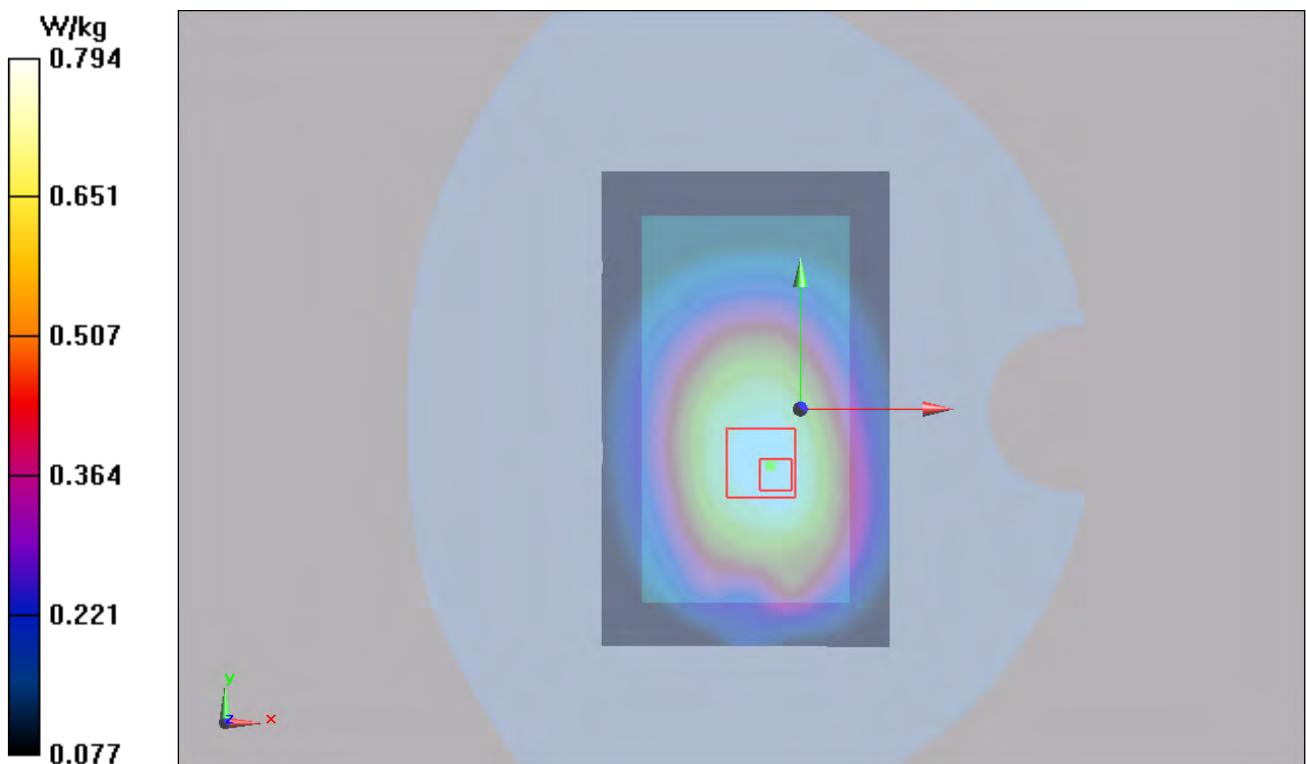


Figure 85 Body, Back Side, UMTS Band V Channel 4183

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RXA1501-0016SAR01R4

Page 138 of 208

## 802.11b Left Cheek High (Battery 1)

Date: 1/3/2015

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 38.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3977; ConvF(7.24, 7.24, 7.24); Calibrated: 2/17/2014;

Electronics: DAE4 Sn1291; Calibrated: 11/14/2014

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Left Cheek High/Area Scan (81x131x1):** Measurement grid: dx=1.200mm, dy=1.200mm

Maximum value of SAR (interpolated) = 0.454 mW/g

**Left Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.776 W/kg

**SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.222 mW/g**

Maximum value of SAR (measured) = 0.446 mW/g

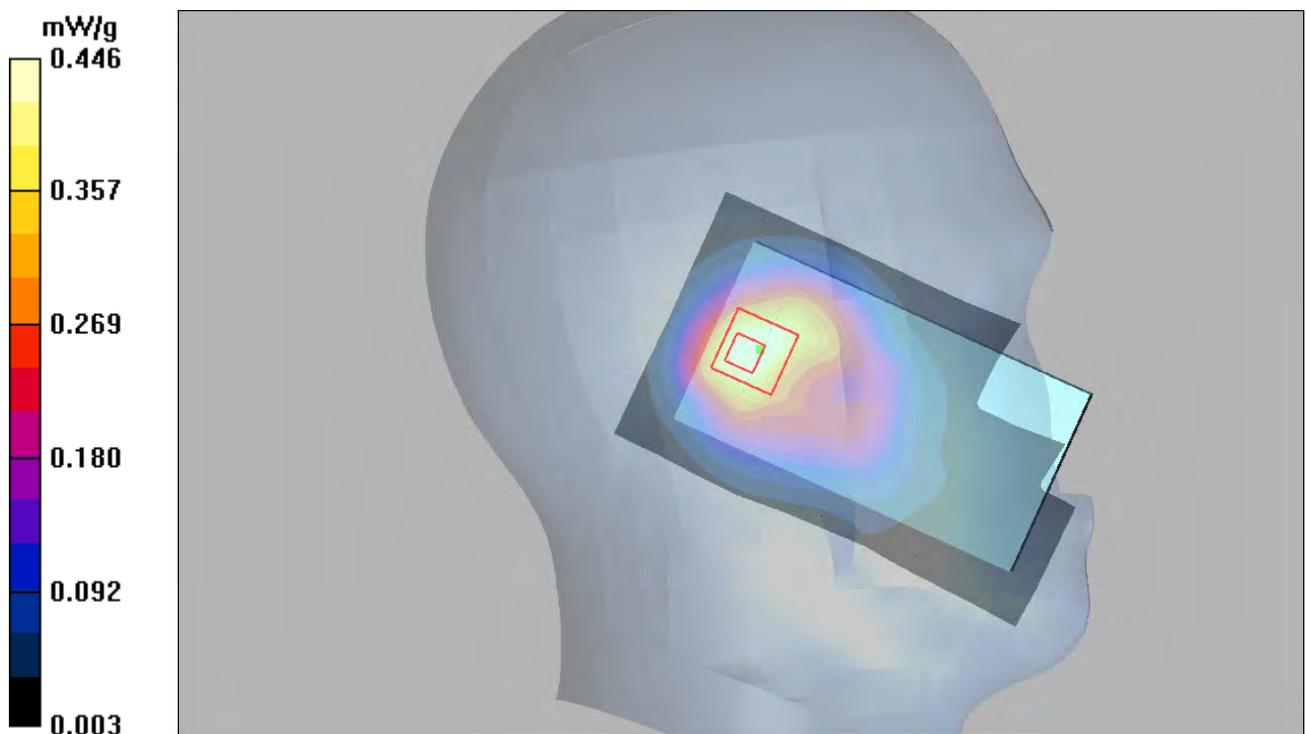


Figure 86 Left Hand Touch Cheek 802.11b Channel 11