



Appendix B. SAR Measurement Plots

| Table of contents |
|---------------------------|
| GSM850 Head |
| GSM850 Body |
| GSM1900 Head |
| GSM1900 Body |
| UMTS Band V Head |
| UMTS Band V Body |
| UMTS Band IV Head |
| UMTS Band IV Body |
| UMTS Band II Head |
| UMTS Band II Body |
| LTE Band II Head |
| LTE Band II Body |
| LTE Band IV Head |
| LTE Band IV Body |
| LTE Band VII Head |
| LTE Band VII Body |
| WiFi 2450 MHz Head |
| WiFi 2450 MHz Body |

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 GSM850 190CH Left hand touch cheek

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 39.879$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.26, 6.26, 6.26); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.404 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.638 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.429 W/kg

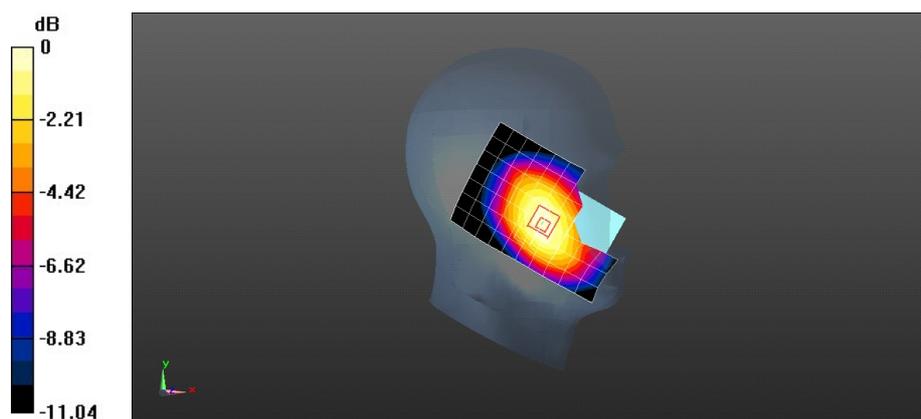

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 GSM850 190CH Back side 15mm

DUT: HUAWEI Y536-A1; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.684 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.40 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.481 W/kg

Maximum value of SAR (measured) = 0.686 W/kg

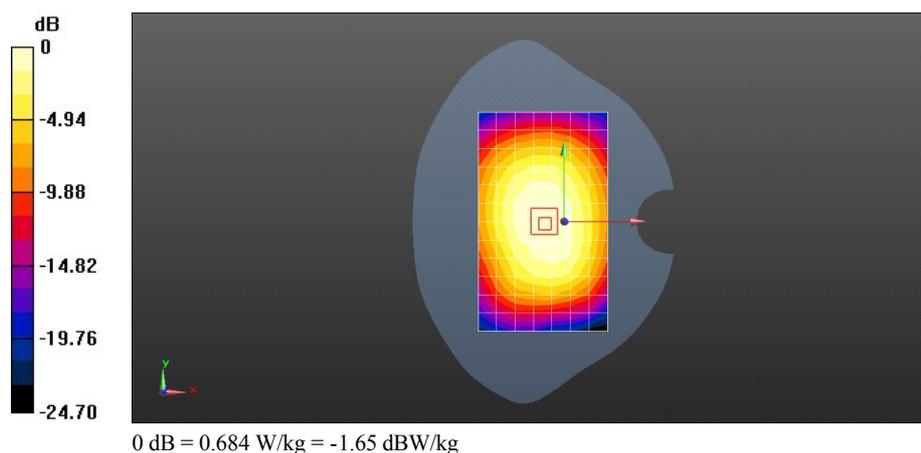

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 GSM850 GPRS 2TS 190CH Back side 10mm

DUT: HUAWEI Y536-A1; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.017$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.777 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 28.76 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.549 W/kg

Maximum value of SAR (measured) = 0.775 W/kg

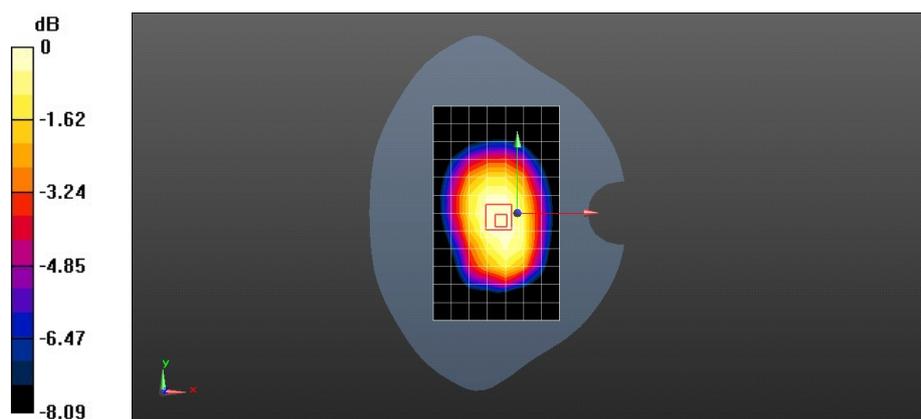

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 GSM1900 512CH Right hand touch cheek

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.76$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.15, 5.15, 5.15); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.275 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 4.007 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.148 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.279 W/kg

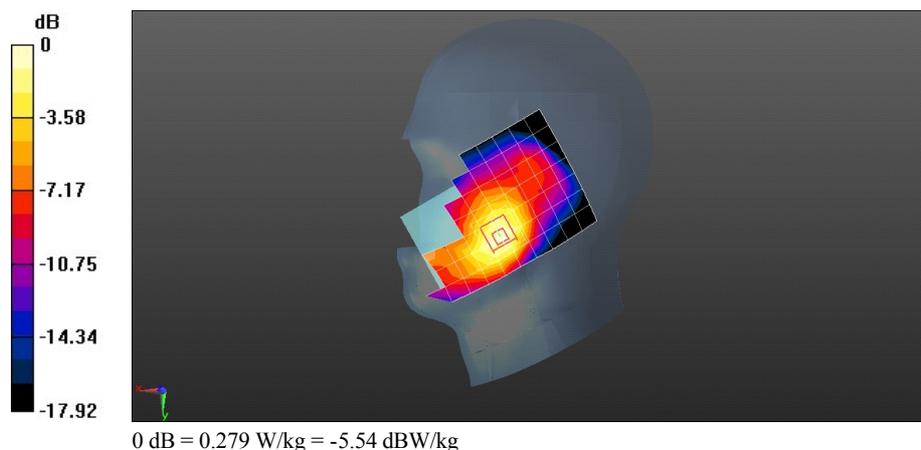

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 GSM1900 661CH Back side 15mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-GSM/GPRS/EGPRS-1TS (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.538$ S/m; $\epsilon_r = 50.853$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.565 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.34 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.591 W/kg

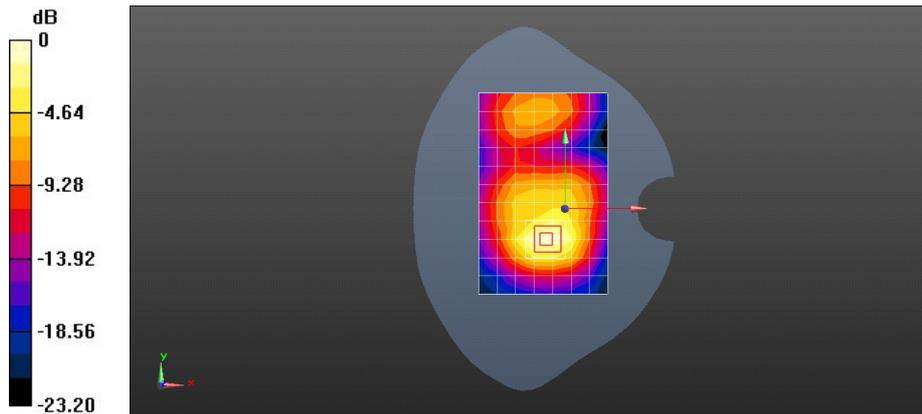

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 GSM1900 GPRS 2TS 512CH Back side 10mm-repeated

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-GSM/GPRS/EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.496$ S/m; $\epsilon_r = 50.931$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.486 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.554 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 W/kg

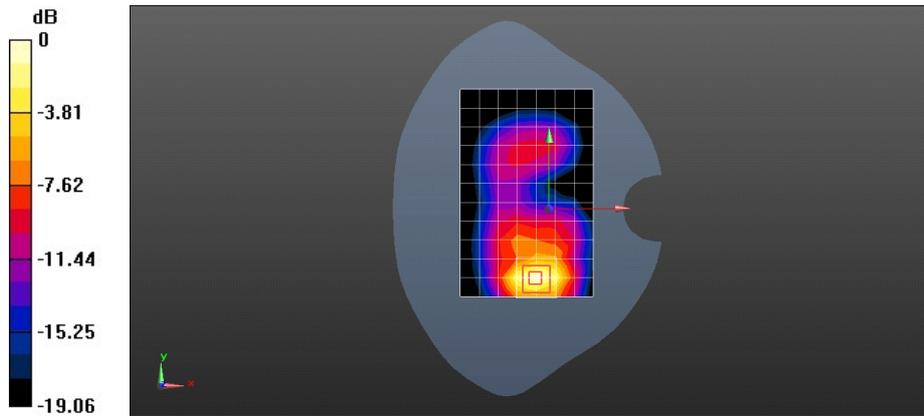

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band V 4182CH Left hand touch cheek

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 39.885$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.26, 6.26, 6.26); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.368 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 5.686 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.261 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.378 W/kg

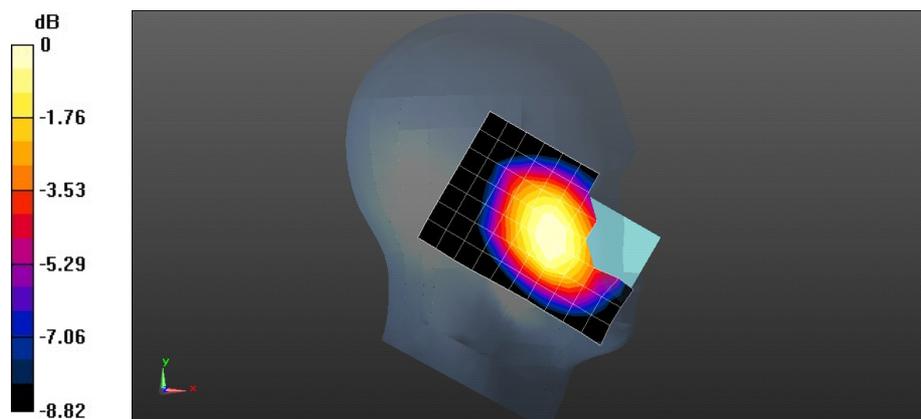

0 dB = 0.368 W/kg = -4.34 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band V 4182CH Back side 15mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.021$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.588 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.03 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.417 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.599 W/kg

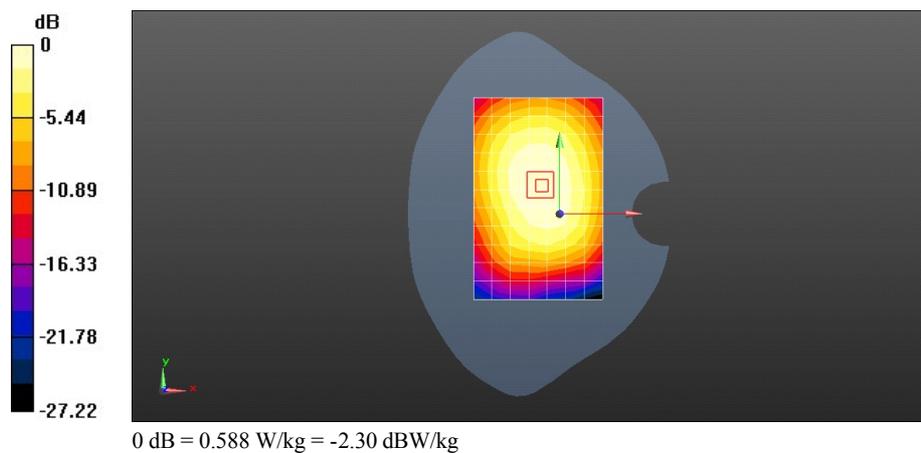

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band V 4182CH Back side 10mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.021$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.449 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.67 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.319 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.452 W/kg

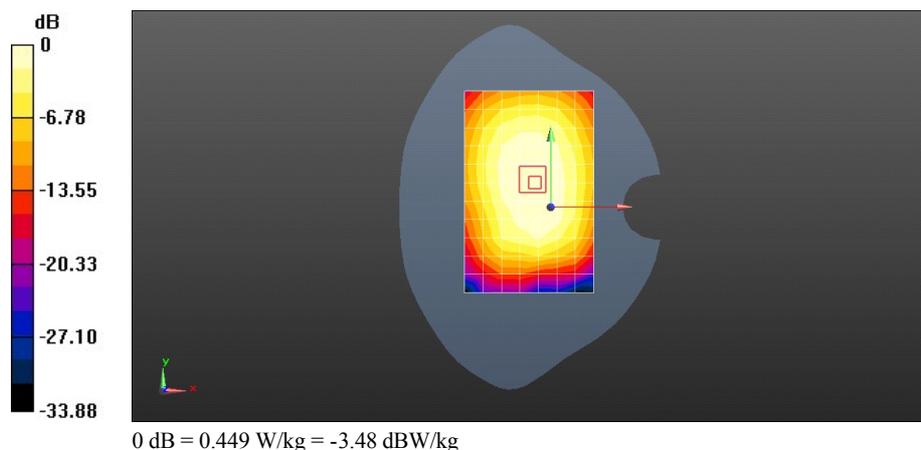

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band IV 1513CH Right hand touch cheek

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.289$ S/m; $\epsilon_r = 41.215$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.3, 5.3, 5.3); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.860 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.475 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.385 W/kg

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.388 W/kg

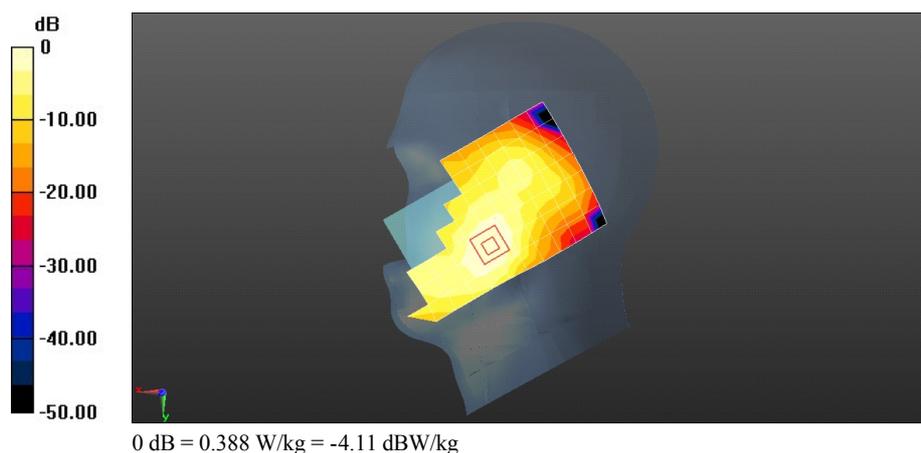

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band IV 1312CH Back Side 15mm-repeated

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.481$ S/m; $\epsilon_r = 51.818$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 3.482 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.646 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.38 W/kg

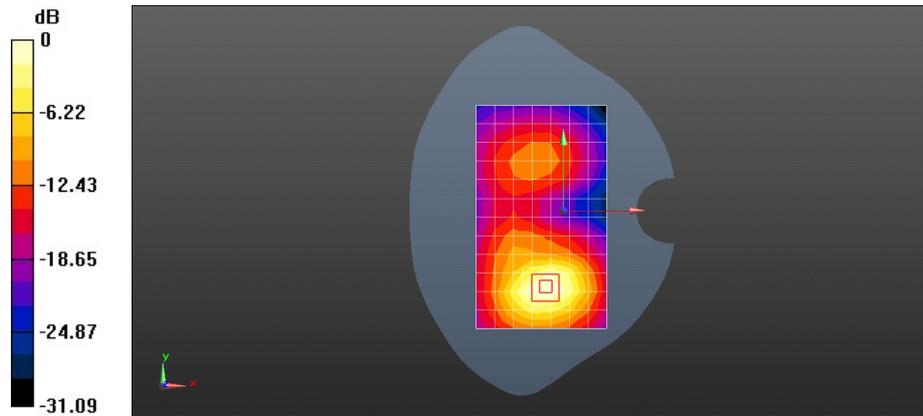

0 dB = 1.21 W/kg = 0.82 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band IV 1513CH Back side 10mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.518$ S/m; $\epsilon_r = 51.625$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.804 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.706 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

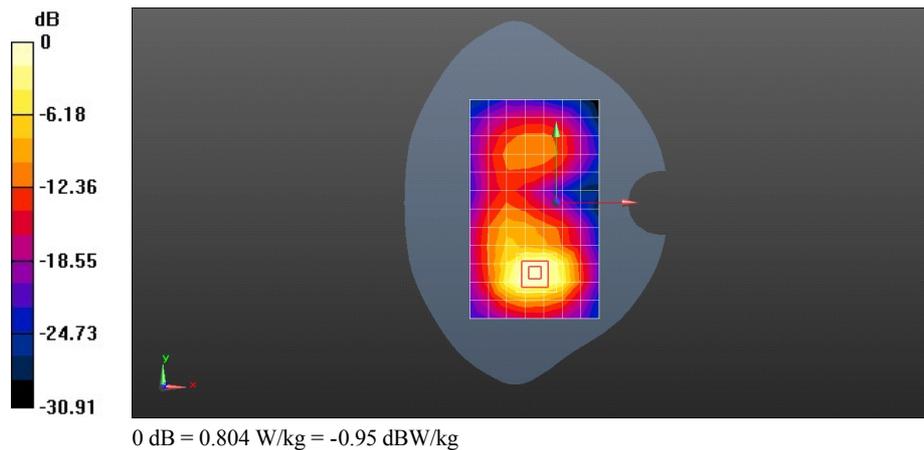

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band II 9538CH Right hand touch check

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 39.455$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.15, 5.15, 5.15); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.649 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.906 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 0.702 W/kg

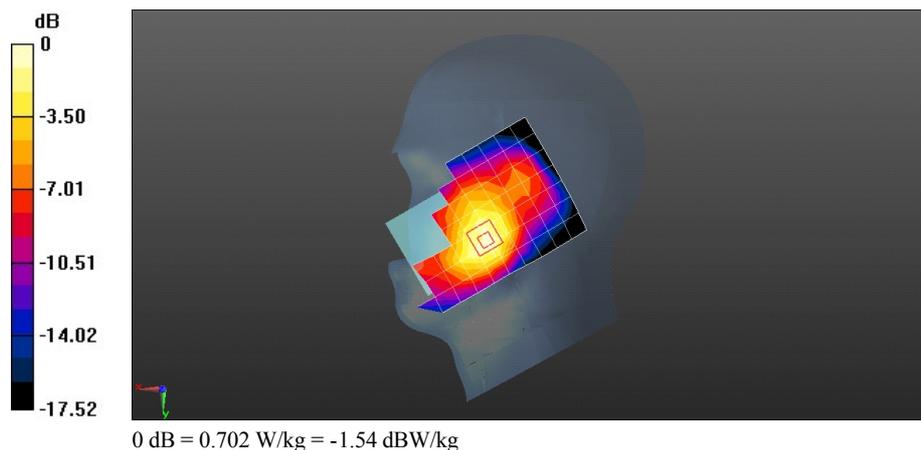

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band II 9262CH Back Side 15mm-repeated

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 50.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.21 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.629 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 W/kg

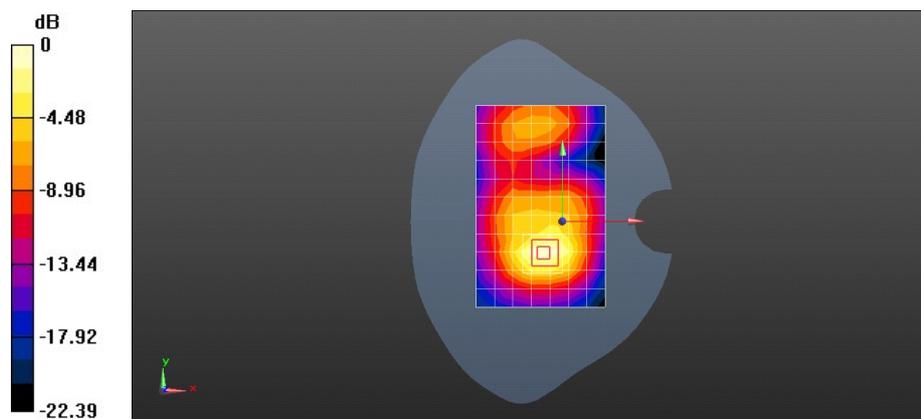

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 UMTS Band II 9262CH Back Side 10mm-repeated

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 50.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.989 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 10.98 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.449 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.08 W/kg

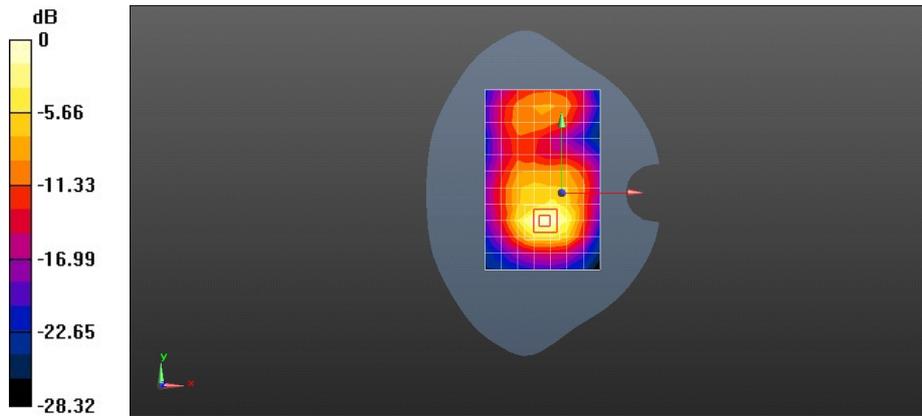

0 dB = 0.989 W/kg = -0.05 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band II 20M QPSK 1RB#99 18700CH Right hand touch cheek

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SARI

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 39.699$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.15, 5.15, 5.15); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.520 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.592 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.283 W/kg

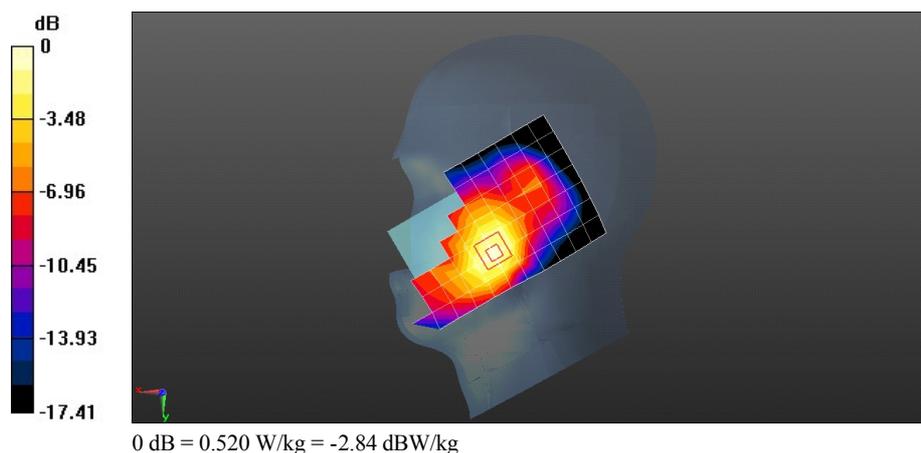

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band II 20M QPSK 1RB#99 18700CH Back side 15mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 50.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.795 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.824 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.466 W/kg

Maximum value of SAR (measured) = 0.983 W/kg

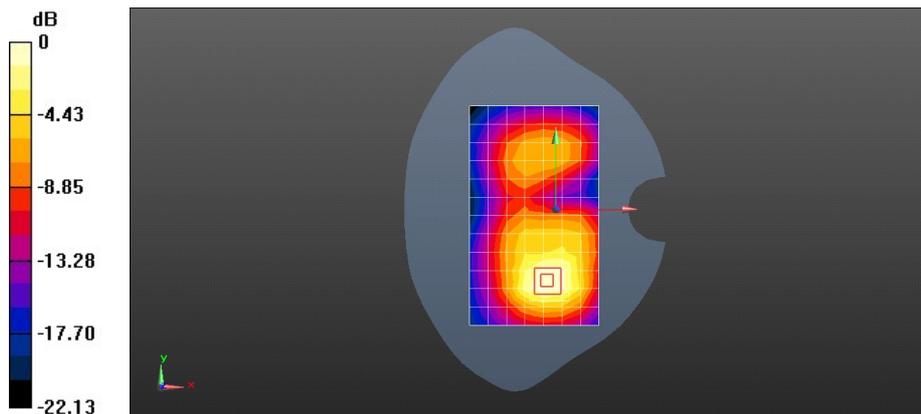

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band II 20M QPSK 1RB#50 18700CH Back side 10mm-repeated

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 50.946$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.839 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.350 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.444 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

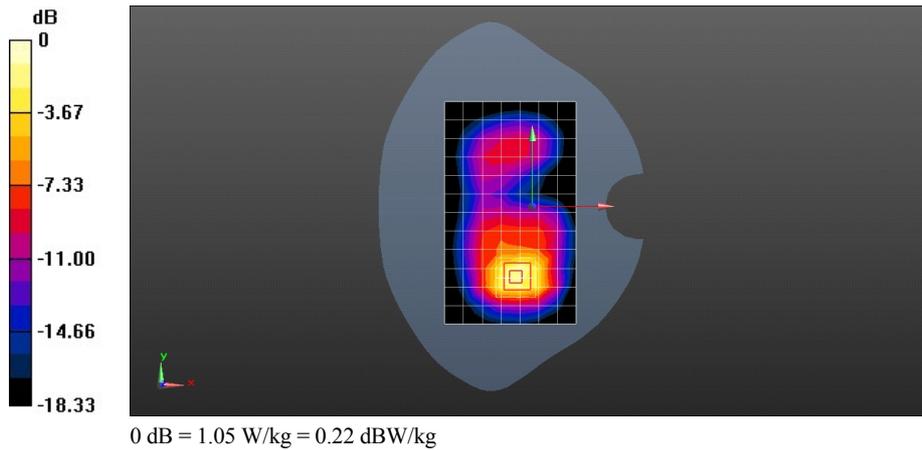

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band IV 20M QPSK 1RB#50 20300CH Right hand touch cheek

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.28$ S/m; $\epsilon_r = 41.247$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(5.3, 5.3, 5.3); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.385 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.172 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.475 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

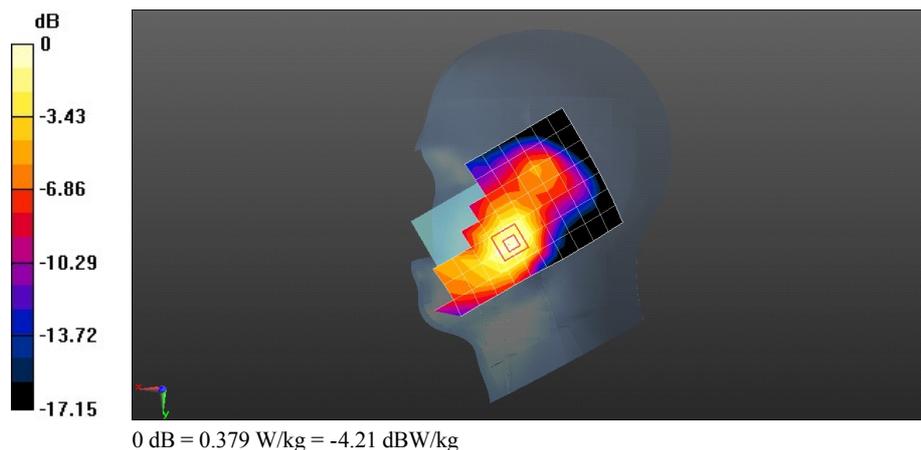

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band IV 20M QPSK 1RB#99 20175CH Back Side 15mm-repeated

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 51.723$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = -8.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 5.411 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.691 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.51 W/kg

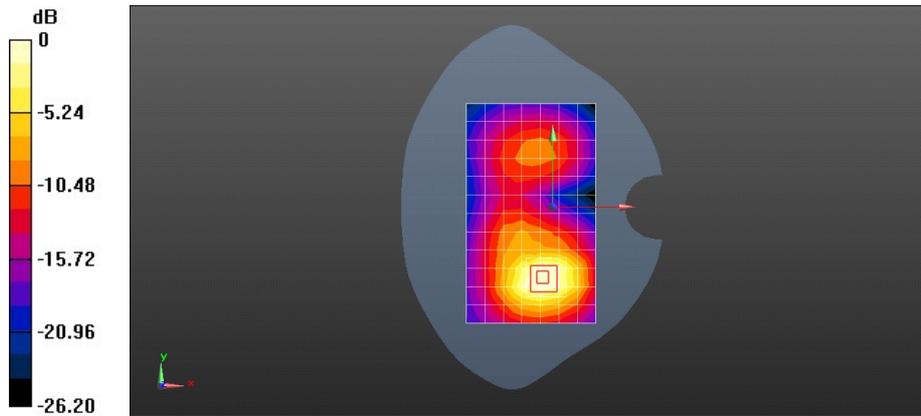

0 dB = 1.16 W/kg = 0.66 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band IV 20M QPSK 50%RB#0 20300CH Back side 10mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1


Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 51.658$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.94, 4.94, 4.94); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
 Maximum value of SAR (measured) = 0.915 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 4.939 V/m; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 0.961 W/kg; SAR(10 g) = 0.492 W/kg
 Maximum value of SAR (measured) = 1.20 W/kg

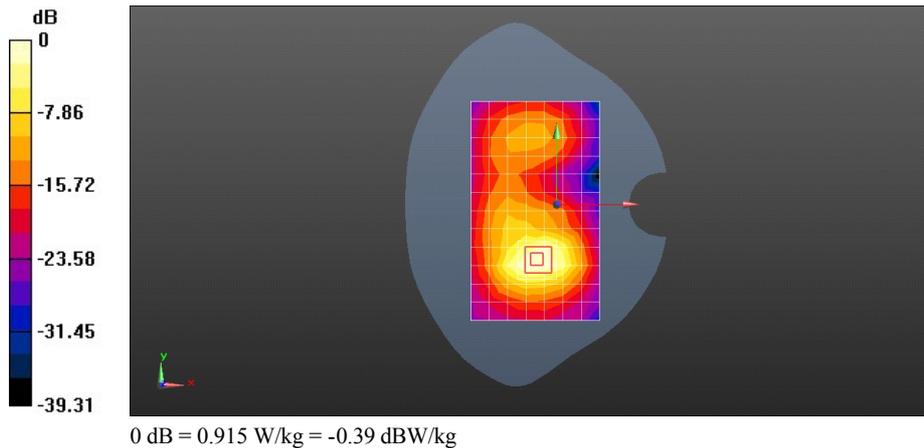

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band VII 20M QPSK 1RB#0 20850CH Right hand touch check

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.842$ S/m; $\epsilon_r = 38.453$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.39, 4.39, 4.39); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.752 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.996 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 0.776 W/kg

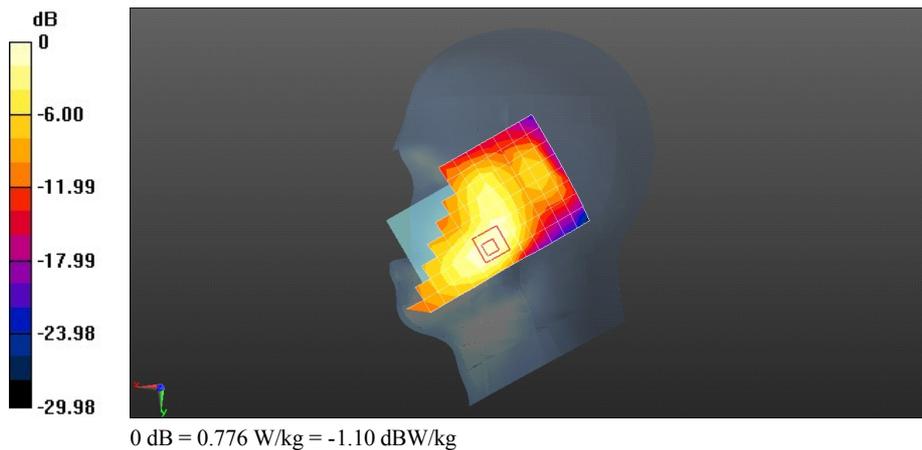

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band VII 20M QPSK 1RB#0 20850CH Back Side 15mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1


Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 2.069$ S/m; $\epsilon_r = 51.518$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.1, 4.1, 4.1); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.491 W/kg

Configuration/Body/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 7.605 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.826 W/kg
SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.245 W/kg
Maximum value of SAR (measured) = 0.531 W/kg

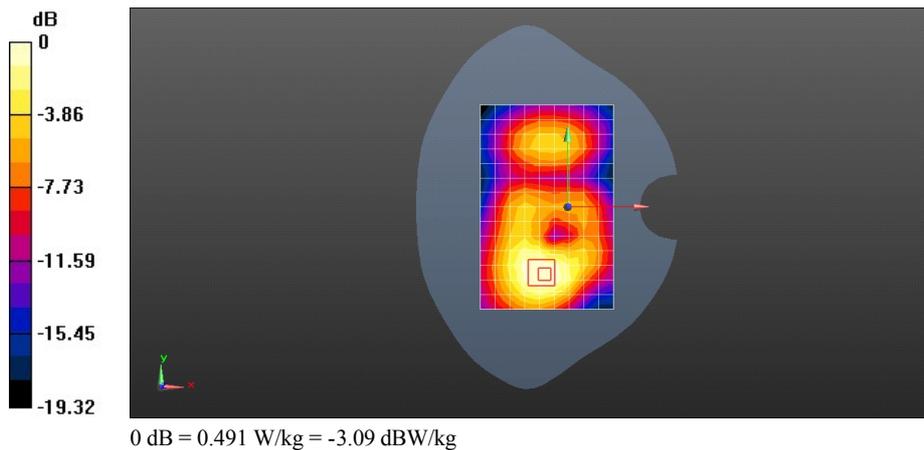

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 LTE Band VII 20M QPSK 50%RB#25 21350CH Back Side 10mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 2.125$ S/m; $\epsilon_r = 51.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.1, 4.1, 4.1); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.751 W/kg


Configuration/Body/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.743 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.795 W/kg

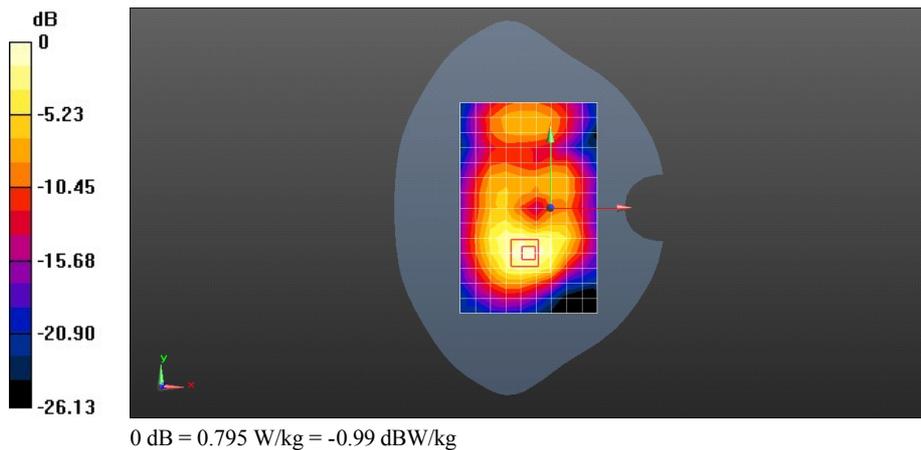

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 WiFi 802.11b 6CH Left hand touch cheek

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 39.915$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.52, 4.52, 4.52); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.198 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.639 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

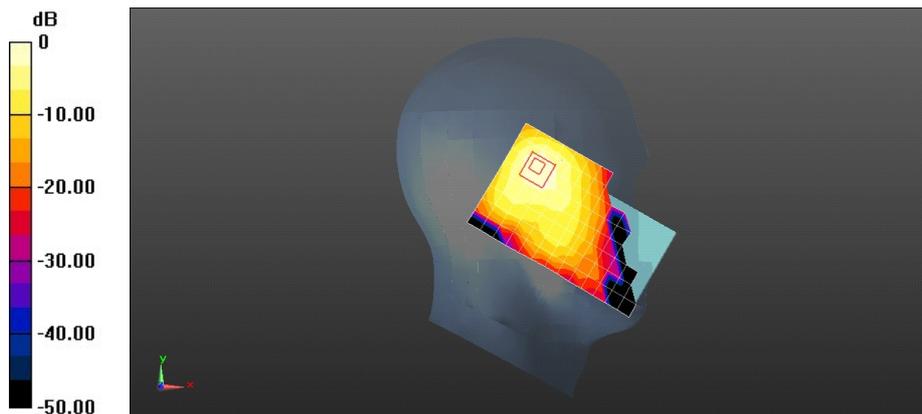

0 dB = 0.198 W/kg = -7.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

Y550-L03 Wifi 802.11b 6CH Back Side 15mm

DUT: HUAWEI Y550-L03; Type: Smart Phone; Serial: SAR1


Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 2.024 \text{ S/m}$; $\epsilon_r = 51.63$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.25, 4.25, 4.25); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.0744 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.473 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.146 W/kg
SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.032 W/kg
 Maximum value of SAR (measured) = 0.0837 W/kg

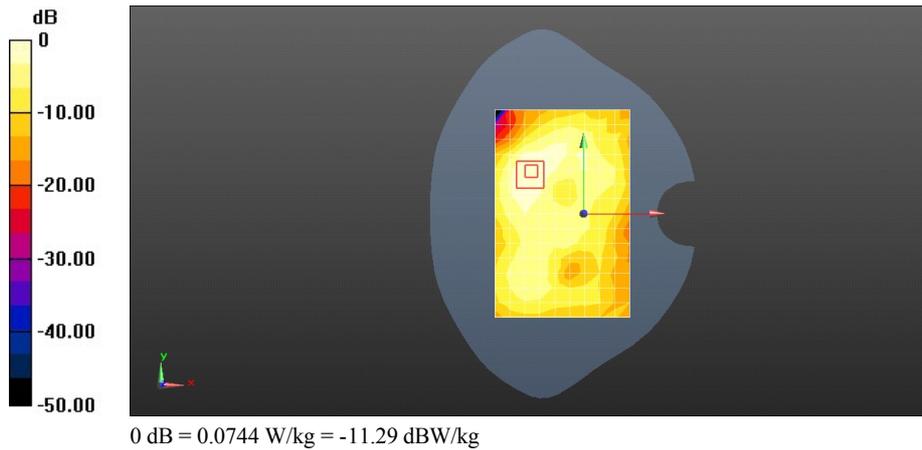

Test Laboratory: HUAWEI SAR/HAC Lab

[772/N25'Y RR! 2403d'8EJ 'DcemUf g'32o o "

FWW<J WCY GK! 772/N25=V{rg<Uo ctvRj qpg=UgtkκUCT3"

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2437 MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 51.63$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.25, 4.25, 4.25); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), z = 2.0, 32.0
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Eqphi wt cvqp IDqf { ICTgc 'Uecp '*32z37z3+<Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.173 W/kg


Eqphi wt cvqp IDqf { 1 qgo 'Uecp '*9z9z9+Ewdg'2<Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.977 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.360 W/kg

UCT*3'1 +? '2078'Y ni =UCT*32'1 +? '2092'Y ni

Maximum value of SAR (measured) = 0.204 W/kg

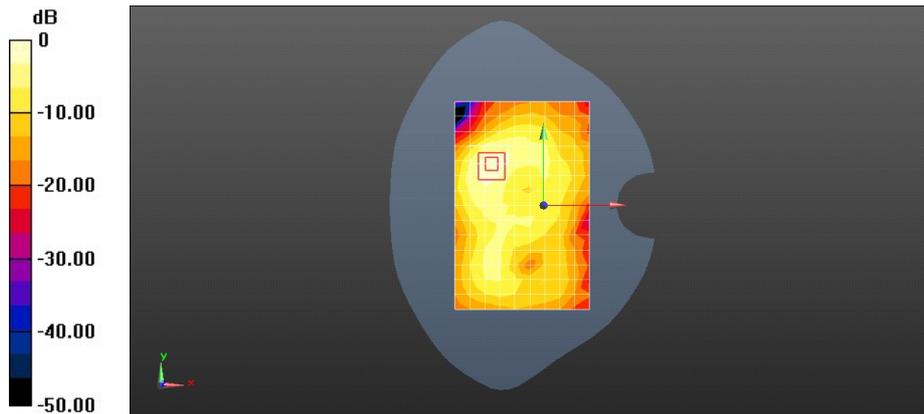

0 dB = 0.204 W/kg = -6.90 dBW/kg