

# FCC Radio Test Report

## FCC ID: QISY560-L02

This report concerns (check one):  Original Grant  Class II Change

**Project No.** : 1505C284  
**Equipment** : Smart Phone  
**Model Name** : HUAWEI Y560-L02, Y560-L02  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt** : May. 27, 2015  
**Date of Test** : May 27, 2015 ~ Jun. 17, 2015  
**Issued Date** : Jun. 18, 2015  
**Tested by** : BTL Inc.

**Testing Engineer** : David Mao  
(David Mao)

**Technical Manager** : Leo Hung  
(Leo Hung)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

# **B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . CERTIFICATION</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>8</b>
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
<b>3 . GENERAL INFORMATION</b>	<b>10</b>
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.4 DESCRIPTION OF SUPPORT UNITS	12
<b>4 . TEST RESULT</b>	<b>13</b>
4.1 RADIATED RF OUTPUT POWER MEASUREMENT	13
4.1.1 LIMIT	13
4.1.2 MEASURING INSTRUMENTS AND SETTING	13
4.1.3 TEST PROCEDURE	13
4.1.4 TEST SETUP LAYOUT	14
4.1.5 TEST DEVIATION	14
4.1.6 EUT OPERATION DURING TEST	14
4.1.7 EUT TEST CONDITIONS	14
4.1.8 TEST RESULTS	14
4.2 99% OCCUPIED BANDWIDTH MEASUREMENT	15
4.2.1 LIMIT	15
4.2.2 MEASURING INSTRUMENTS AND SETTING	15
4.2.3 TEST PROCEDURE	15
4.2.4 TEST SETUP LAYOUT	15
4.2.5 TEST DEVIATION	15
4.2.6 EUT OPERATION DURING TEST	15
4.2.7 EUT TEST CONDITIONS	15
4.2.8 TEST RESULTS	16
4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT	17
4.3.1 LIMIT	17
4.3.2 MEASURING INSTRUMENTS AND SETTING	17
4.3.3 TEST PROCEDURES	17
4.3.4 TEST SETUP LAYOUT	17
4.3.5 TEST DEVIATION	17
4.3.6 EUT OPERATION DURING TEST	17
4.3.7 EUT TEST CONDITIONS	18

<b>Table of Contents</b>	<b>Page</b>
4.3.8 TEST RESULTS	18
4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT	19
4.4.1 LIMIT	19
4.4.2 MEASURING INSTRUMENTS AND SETTING	19
4.4.3 TEST PROCEDURES	19
4.4.4 TESTSETUP LAYOUT	20
4.4.5 TESTDEVIATION	20
4.4.6 EUT OPERATIONDURING TEST	20
4.4.7 EUT TEST CONDITIONS	20
4.4.8 TEST RESULTS	20
4.5 BAND EDGE MEASUREMENT	21
4.5.1 LIMIT	21
4.5.2 MEASURING INSTRUMENTS AND SETTING	21
4.5.3 TEST PROCEDURES	21
4.5.4 TESTSETUP LAYOUT	21
4.5.5 TESTDEVIATION	21
4.5.6 EUT OPERATIONDURING TEST	21
4.5.7 EUT TEST CONDITIONS	21
4.5.8 TEST RESULTS	22
4.6 FREQUENCY STABILITY MEASUREMENT	23
4.6.1 LIMIT	23
4.6.2 MEASURING INSTRUMENTS AND SETTING	23
4.6.3 TEST PROCEDURES	23
4.6.4 TESTSETUP LAYOUT	23
4.6.5 TESTDEVIATION	23
4.6.6 EUT OPERATIONDURING TEST	23
4.6.7 EUT TEST CONDITIONS	24
4.6.8 TEST RESULTS	24
4.7 PEAK TO AVERAGE RATIO	25
4.7.1 LIMIT	25
4.7.2 TEST PROCEDURES	25
4.7.3 TESTSETUP LAYOUT	25
4.7.4 TESTDEVIATION	25
4.7.5 EUT OPERATIONDURING TEST	25
4.7.6 EUT TEST CONDITIONS	25
4.7.7 TEST RESULTS	25
5. LIST OF MEASUREMENT EQUIPMENTS	26
ATTACHMENT A -RADIATED RF OUTPUT POWER	28
ATTACHMENT B - 99% OCCUPIED BANDWIDTH	30
ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	37
ATTACHMENTD - SPURIOUS RADIATED EMISSION	40

<b>Table of Contents</b>	<b>Page</b>
<b>ATTACHMENTE - BAND EDGE</b>	<b>57</b>
<b>ATTACHMENTF - FREQUENCY STABILITY</b>	<b>61</b>
<b>ATTACHMENTG - PEAK TO AVERAGE RATIO</b>	<b>63</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-5-1505C284	Original Issue.	Jun. 18, 2015

## 1. CERTIFICATION

Equipment : Smart Phone  
Brand Name : HUAWEI  
Model Name : HUAWEI Y560-L02, Y560-L02  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C  
Date of Test : May 27, 2015 ~ Jun. 17, 2015  
Test Sample : ENGINEERING SAMPLE  
Standard(s) : 47 CFR FCC Part 24 Subpart E &ANSI C63.4 : 2009  
47 CFR FCC Part 2 &ANSI/TIA-603-C-2004

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-5-1505C284) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**Test result included in this report is only for theGSM 1900MHz approvalpart of the product.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 24 Subpart E & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
2.1047(d)	Modulation Characteristics	PASS	
2.1046 24.232(c)	Radiated RF Output	PASS	
2.1049 24.238(a)	99% Occupied Bandwidth	PASS	
2.1051 24.238(a)	Spurious Emissions at Antenna Terminal	PASS	
2.1053 24.238(a)	Spurious Radiated Emissions	PASS	
24.238(a)	Band Edge Emissions	PASS	
2.1055 24.235	Frequency Stability	PASS	
24.232(d)	Peak to Average Ratio	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this test report

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%** ◦

### A. Radiated Measurement :

Test Site	Parameter	Uncertainty
DG-CB12	All emissions, radiated	±6 dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone		
Brand Name	HUAWEI		
Model Name	HUAWEI Y560-L02, Y560-L02		
Model Difference	Only differ in model name.		
Product Description	Operation Frequency:	TX:1850.2MHz~1909.8MHz RX:1930.2MHz~1989.8MHz	
	Modulation Type:	GMSK;8-PSK	
	EIRP Output Power	26.49dBm	
PowerSource	#1 DC Voltage supplied from AC/DC adapter. Brand/Model: HUAWEI / HW-050100U01(US) Brand/Model: HUAWEI / HW-050100E01(EU) #2 Supplied from battery. Brand/Model: HUAWEI / HB474284RBC		
Power Rating	#1 I/P: 100-240V~ 50/60H 0.2A O/P: DC 5V 1A #2 DC 3.8V 2000mAh		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

Band	Channel	Frequency	
		(MHz)	
1850.2MHz~1909.8MHz	512	Low	1850.20
	661	Mid	1880.00
	810	High	1909.80

3. Table for Filed Antenna @GSM1900:

Ant.	Manufacture	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	-4

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Test Items	Worst TX Mode	Channel
Radiated RF Output	GSM/EDGE	512/661/810
Spurious Radiated Emissions	GSM/EDGE	512/661/810
Band Edge Emissions	GSM/GPRS/EDGE	512/810
Frequency Stability	GSM/EDGE	661
99% Occupied Bandwidth	GSM/GPRS/EDGE	512/661/810
Spurious Emissions at Antenna Terminal	GSM	512/661/810
Peak to Average Ratio	GSM/EDGE	661

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

**Note:**

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT is considered a portable unit; it was pre-tested on the positioning of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.
- (3) Both adapter and battery are evaluated, operated the battery is the worst and recorded as below test data

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

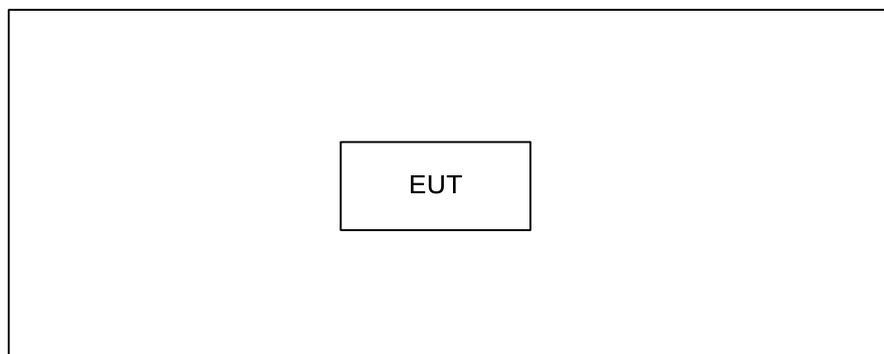

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

## 4. TEST RESULT

### 4.1 RADIATEDRF OUTPUT POWER MEASUREMENT

#### 4.1.1LIMIT

The Radiated Peak Output Power shall be according to the specific rule Part 24.232(b) that “Mobile/Portable station are limited to 2 watts e.i.r.p.” and 24.232(c) specified that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.

#### 4.1.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Center Frequency	Low / middle / high channels
Span Frequency	10MHz
RB / VB	3MHz / 3MHz for Peak

#### 4.1.3 TEST PROCEDURE

1. The EUT was set up for the maximum peak power with GSM link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (low, middle and high operational frequency range).
2. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data)
3. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
4. The substitution horn antenna is substituted for EUT at the same position, and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. “Raw” is the spectrum reading value, “SG” is signal generator export power, “TX Gain” is calibration antenna isotropic gain value, “TX cable” is the transmitted cable loss between the calibration antenna and signal generator. The “Factor” means that the transmission path loss is equal to “SG” - “TX cable” + “TX Gain” - “Raw”.
5. Actually the real E.I.R.P peak power is equal to “Read Value” + “Factor”

#### 4.1.4 TEST SETUP LAYOUT EIRP Power Measurement

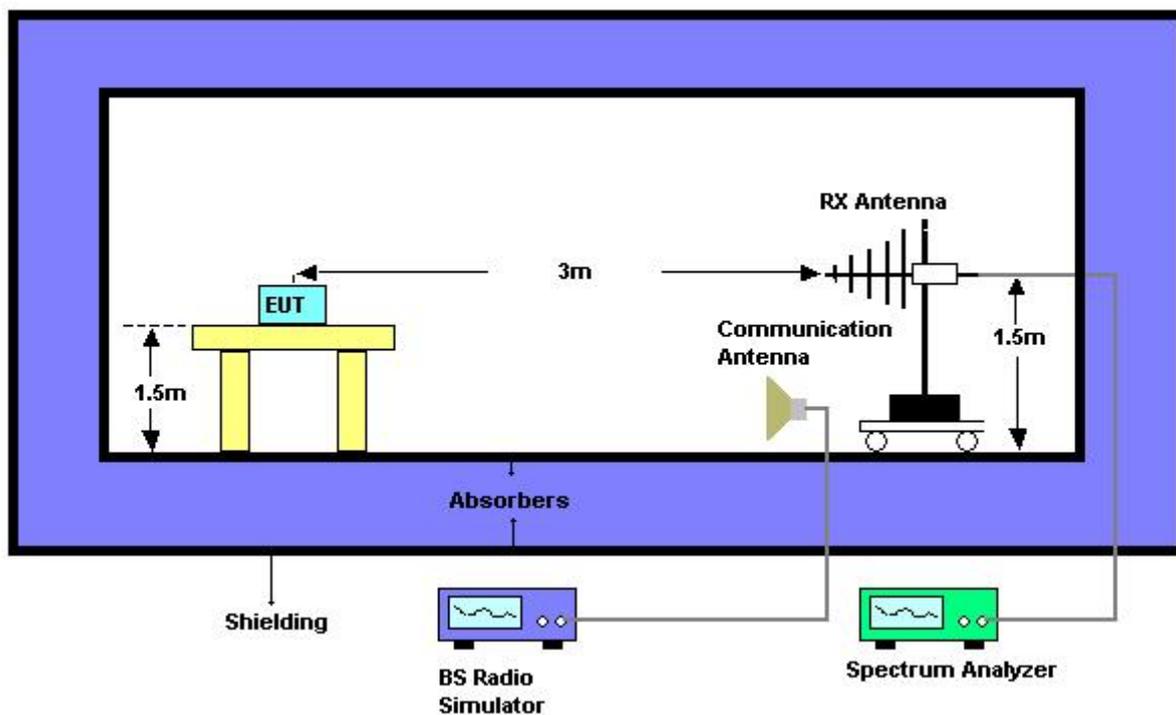

#### 4.1.5 TEST DEVIATION

There is no deviation with the original standard.

#### 4.1.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

#### 4.1.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 4.1.8 TEST RESULTS

Please refer to the Attachment A.

## 4.299% OCCUPIED BANDWIDTH MEASUREMENT

### 4.2.1 LIMIT

According to FCC 2.1049(h) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 4.2.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	30 kHz
VB	100 kHz
Trace	Max Hold

### 4.2.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Used measurement function of spectrum to measure the 99% occupied bandwidth..

### 4.2.4 TEST SETUP LAYOUT

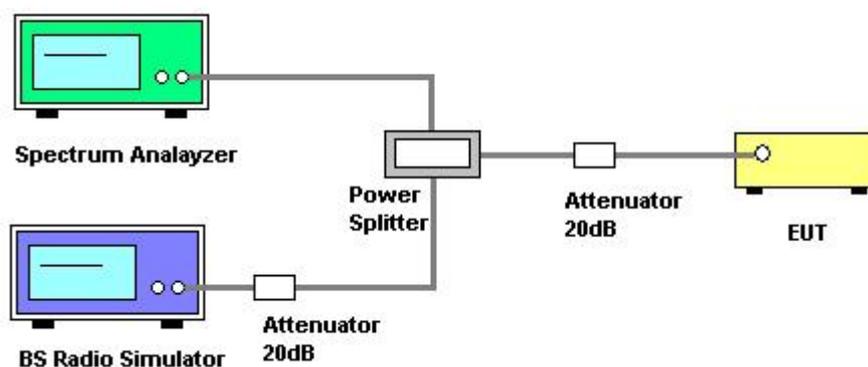

### 4.2.5 TEST DEVIATION

There is no deviation with the original standard.

### 4.2.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

### 4.2.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

**4.2.8 TEST RESULTS**

Please refer to the Attachment B.

#### 4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT

##### 4.3.1 LIMIT

In the FCC 22.917(a)&RSS-132 section 5.5, on any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. The limit translates in the relevant power range (2 to 0.003W). At 2W (Power Control Level 5) the specified minimum attenuation becomes 43dB and the limit of emission equal to  $-13\text{dBm}$

##### 4.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30MHz
Stop Frequency	10th carrier harmonic
RB / VB	1 MHz / 1MHz for Peak

##### 4.3.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with **GSM/EDGE** link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (low, middle and high operational frequency range.)
2. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. When the spectrum scanned from 30MHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
4. When the spectrum scanned from 3GHz to 10GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

##### 4.3.4 TEST SETUP LAYOUT

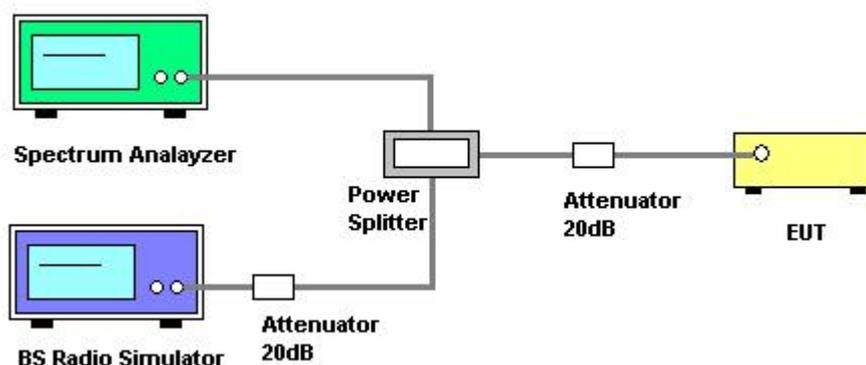

##### 4.3.5 TEST DEVIATION

There is no deviation with the original standard.

##### 4.3.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

**4.3.7EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage:AC 120V/60Hz

**4.3.8TEST RESULTS**

Please refer to the Attachment C.

## 4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT

### 4.4.1 LIMIT

Out of band emissions, The power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside the frequency block. The spurious emissions of limit equal to  $-13\text{dBm}$ .

### 4.4.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	10th carrier harmonic
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1 MHz / 1MHz
Attenuation	Positive Peak

### 4.4.3 TEST PROCEDURES

1. The EUT was placed on the top of the turntable in fully anechoic chamber.
2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. This measurement shall be repeated with the transmitter in standby mode where applicable.
4. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For 1~10th carrier harmonic measurement, the receiving Horn antenna was placed 1.5 meters far away from the turntable.
5. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
6. Replace the EUT by standard antenna and feed the RF port by signal generator.
7. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
8. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
9. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.

**4.4.4 TEST SETUP LAYOUT**

This test setup layout is the same as that shown in section 4.2.4.

**4.4.5 TEST DEVIATION**

There is no deviation with the original standard.

**4.4.6 EUT OPERATION DURING TEST**

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

**4.4.7 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

**4.4.8 TEST RESULTS**

Please refer to the Attachment D.

## 4.5 BAND EDGE MEASUREMENT

### 4.5.1 LIMIT

According to FCC 22.917(a) specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300 kHz and the resolution bandwidth is 3 kHz.

### 4.5.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	5 MHz
RB / VB	10 kHz / 30 kHz
Trace	Sample
Sweep Time	Auto

### 4.5.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with **GSM/EDGE** link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810 (low and high operational frequency range.)
2. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The splitter loss and cable loss are the worst loss 4 dB in the transmitted path track.
3. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 10 kHz and VB of the spectrum is 30 kHz.
4. Record the Sample trace plot into the test report.

### 4.5.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

### 4.5.5 TEST DEVIATION

There is no deviation with the original standard.

### 4.5.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

### 4.5.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

**4.5.8 TEST RESULTS**

Please refer to the Attachment E.

## 4.6 FREQUENCY STABILITY MEASUREMENT

### 4.6.1 LIMIT

According to the FCC part 22.355 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1)  $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$ .

### 4.6.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the BS Simulator.

Spectrum Parameters	Setting
Frequency Error	The maximum of transmit frequency error

### 4.6.3 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the BS Simulator.
2. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.
3. BS simulator used the frequency error function and measured the peak frequency error. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.1 Volts to 4.3 Volts. Each step shall be record the frequency error rate.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
6. Extreme temperature rule is  $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$ .

### 4.6.4 TEST SETUP LAYOUT

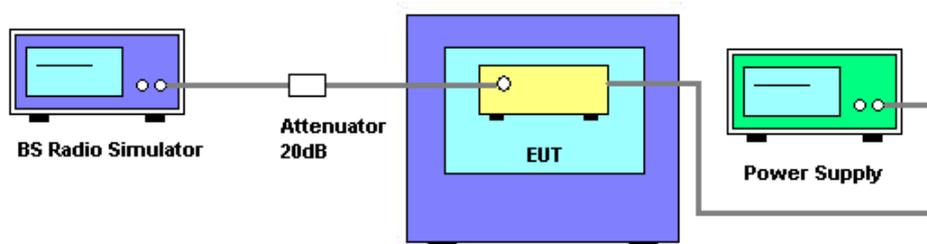

### 4.6.5 TEST DEVIATION

There is no deviation with the original standard.

### 4.6.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

**4.6.7EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

**4.6.8TEST RESULTS**

Please refer to the Attachment F.

## **4.7 PEAK TO AVERAGE RATIO**

### **4.7.1 LIMIT**

In the FCC 47.232 (d) and RSS-133 section 6.4

Peak transmit power shall be measured over any interval of continuous transmission using instrumentation calibrated in terms of rms-equivalent voltage.

The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

To measure transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission shall not exceed 13 dB.

### **4.7.2 TEST PROCEDURES**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;

### **4.7.3 TEST SETUP LAYOUT**

Please refer to section 3.4 in this report.

### **4.7.4 TEST DEVIATION**

There is no deviation with the original standard.

### **4.7.5 EUT OPERATION DURING TEST**

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

### **4.7.6 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

### **4.7.7 TEST RESULTS**

Please refer to the Attachment G.

## 5. LIST OF MEASUREMENT EQUIPMENTS

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	N/A	C_17	N/A	Mar.13, 2016
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	Wireless Communication Test SET	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC012645B	980221	Oct. 22, 2015
3	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015
4	Double Ridged Guide Antenna	ETS·LINDGREN	3115	00075846	Mar. 28, 2016
5	Antenna	SCHWARZBECK	VULB 9160	9160-3231	Mar. 28, 2016
6	Test Cable	N/A	CL-CB12-001	N/A	Oct. 22, 2015
7	Test Cable	N/A	CL-CB12-004	N/A	Oct. 22, 2015
8	Test Cable	N/A	CL-CB12-006	N/A	Oct. 22, 2015
9	Controller	CT	SC100	N/A	N/A
10	Wireless Communication Test SET	(8960 Series ) Agilent	E5515C	MY48364183	Mar. 15, 2016
11	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1710/1785-1690 /1805-60/12SS	38	Mar. 04, 2016
12	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/86 3-60/9SS	7	Mar. 04, 2016
13	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 880/915-860/93 5-60/9SS	14	Mar. 04, 2016
14	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1850/1910-1830 /1930-60/10SS	17	Mar. 04, 2016

**Antenna Conducted Spurious Emission Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Wireless Communication Test SET	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016

**Band Edge Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Wireless Communication Test SET	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016

**99% Occupied Bandwidth Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Wireless Communication Test SET	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016

**Frequency Stability Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Wireless Communication Test SET	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
 All calibration period of equipment list is one year.

## **ATTACHMENT A - RADIATED RF OUTPUT POWER**

Test Mode: TX CH 512/661/810-GSM

GSM 1900		EIRP Power(dBm)			Max. Limit(dBm)	Result
		Channel 512	Channel 661	Channel 810		
GSM	V	15.38	10.51	26.33	33	Complies
	H	24.78	26.49	13.48	33	Complies
EDGE	V	8.13	9.00	6.98	33	Complies
	H	23.22	22.76	22.34	33	Complies

GSM 850		Conducted Power(dBm)		
		Channel 512	Channel 661	Channel 810
GSM (CS)		30.55	30.24	31.30
GPRS (GMSK)	1 Tx Slot	30.26	30.11	31.26
	2 Tx Slot	27.02	27.51	28.16
	3 Tx Slot	25.47	25.32	26.70
	4 Tx Slot	23.31	23.26	24.49
EDGE (GMSK)	1 Tx Slot	30.21	30.16	31.58
	2 Tx Slot	27.42	27.62	28.12
	3 Tx Slot	25.37	25.48	26.60
	4 Tx Slot	23.33	23.26	24.38
EDGE (8PSK)	1 Tx Slot	26.01	26.14	26.89
	2 Tx Slot	23.06	23.01	23.92
	3 Tx Slot	22.01	22.05	22.80
	4 Tx Slot	20.01	20.05	20.91


**REMARKS:**

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) +Ant Gain(dBi)
2. Correction Factor(dB) = Power SplitterLoss(dB) + Cable Loss(dB)
3. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
4. The antenna gain is-4dBi


## **ATTACHMENT B - 99% OCCUPIED BANDWIDTH**

Test Mode : TX Mode ConfigurationGSM				
Channel	Frequency	99% OBW (MHz)	-26dBc Bandwidth(MHz)	Result
512	1850.20MHz	0.246	0.314	Complies
661	1880.00 MHz	0.147	0.317	Complies
810	1909.80 MHz	0.248	0.320	Complies


### 99% Occupied Bandwidth channel 512

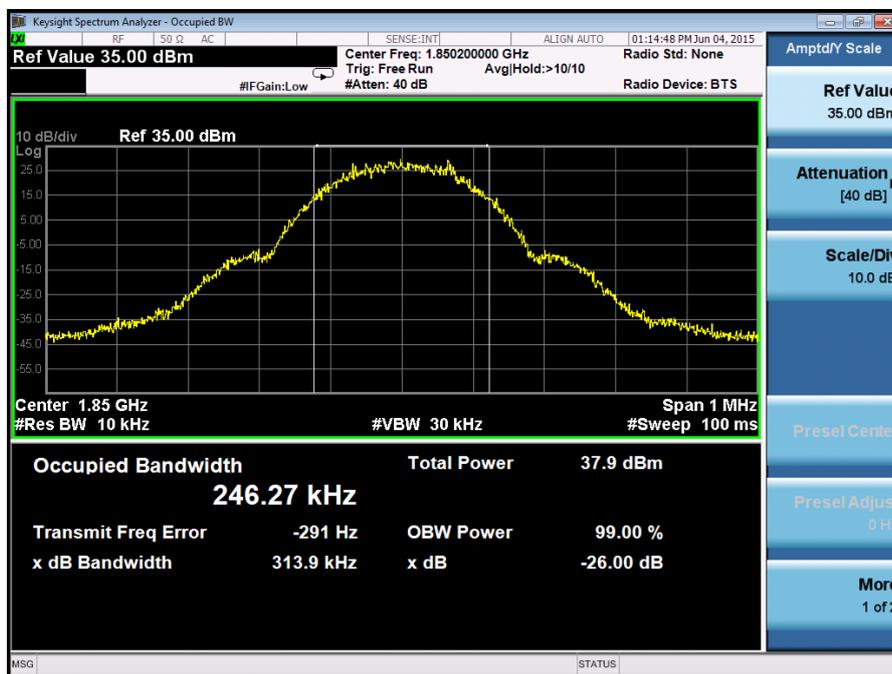

### 99% Occupied Bandwidth channel 661

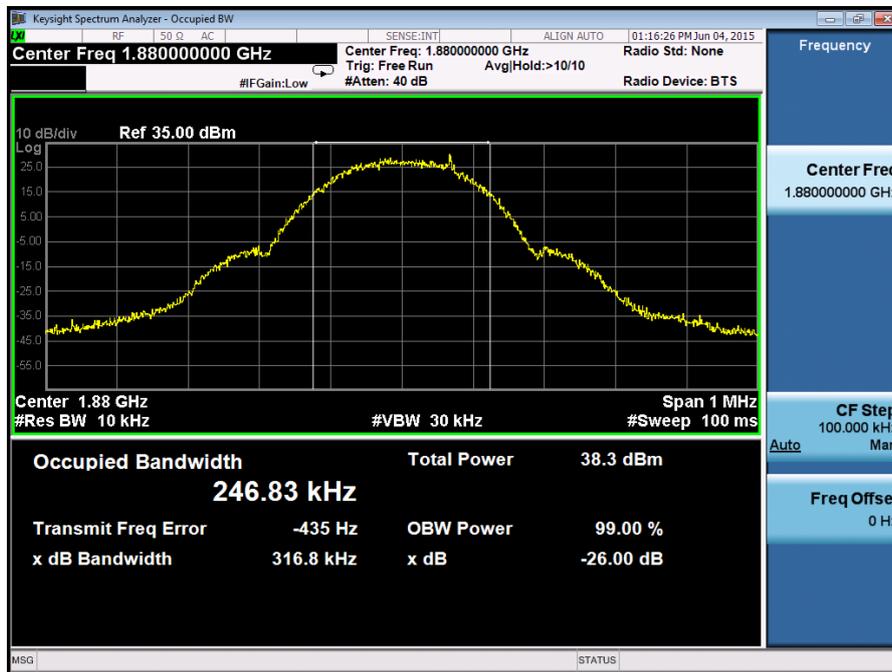


### 99% Occupied Bandwidth channel 810

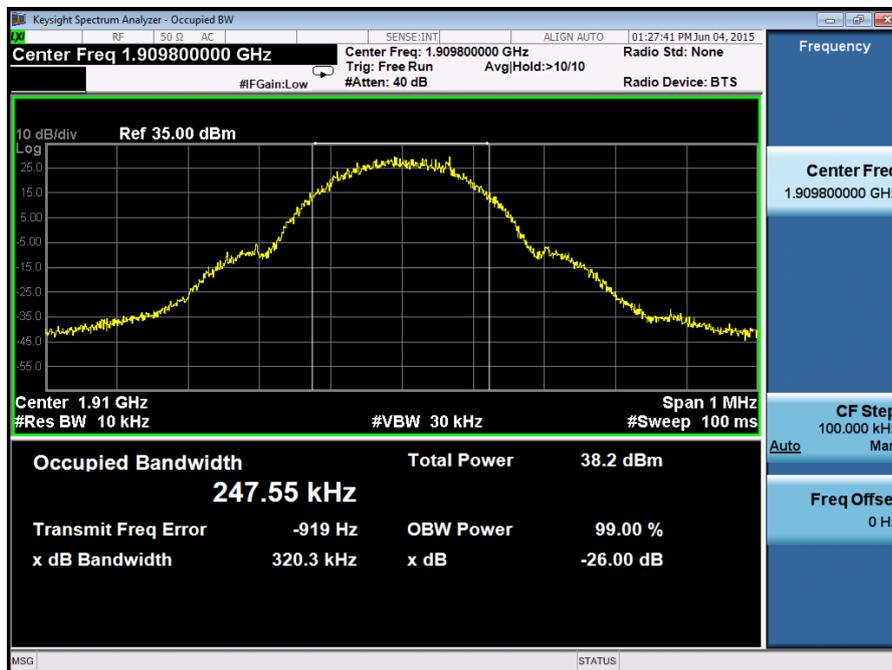


Test Mode : TX Mode Configuration GPRS				
Channel	Frequency	99% OBW (MHz)	-26dBc Bandwidth(MHz)	Result
512	1850.20MHz	0.246	0.314	Complies
661	1880.00 MHz	0.245	0.313	Complies
810	1909.80 MHz	0.246	0.312	Complies

### 99% Occupied Bandwidth channel 512

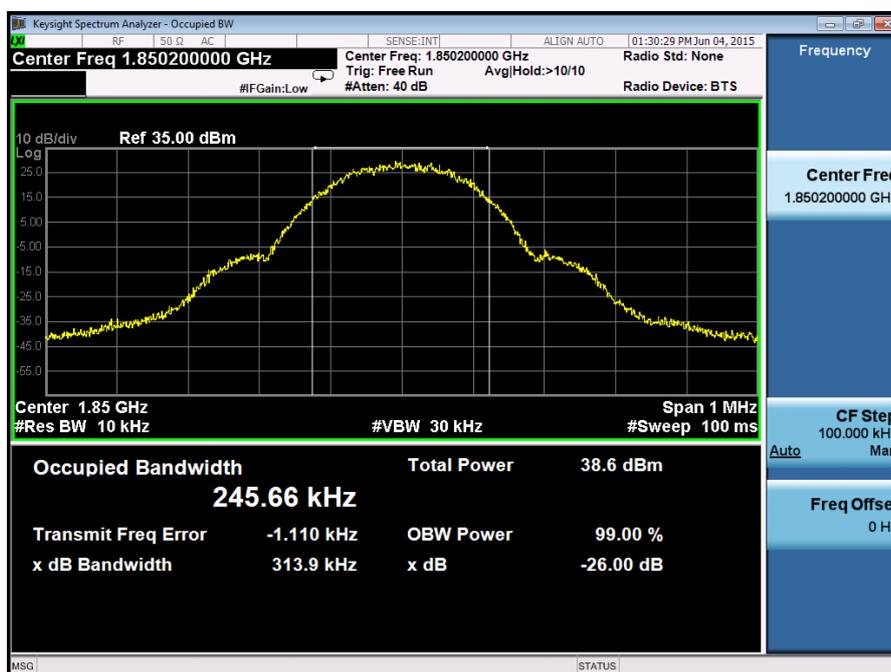

### 99% Occupied Bandwidth channel 661

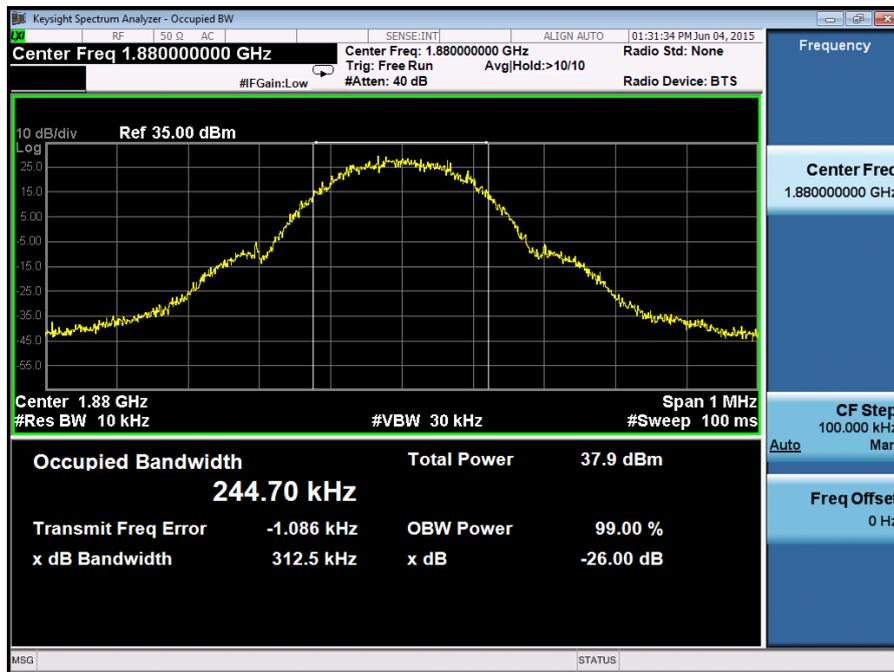


### 99% Occupied Bandwidth channel 810




Test Mode : TX Mode ConfigurationEDGE				
Channel	Frequency	99% OBW (MHz)	-26dBc Bandwidth(MHz)	Result
512	1850.20MHz	0.247	0.310	Complies
661	1880.00 MHz	0.244	0.311	Complies
810	1909.80 MHz	0.245	0.312	Complies


### 99% Occupied Bandwidth channel 512

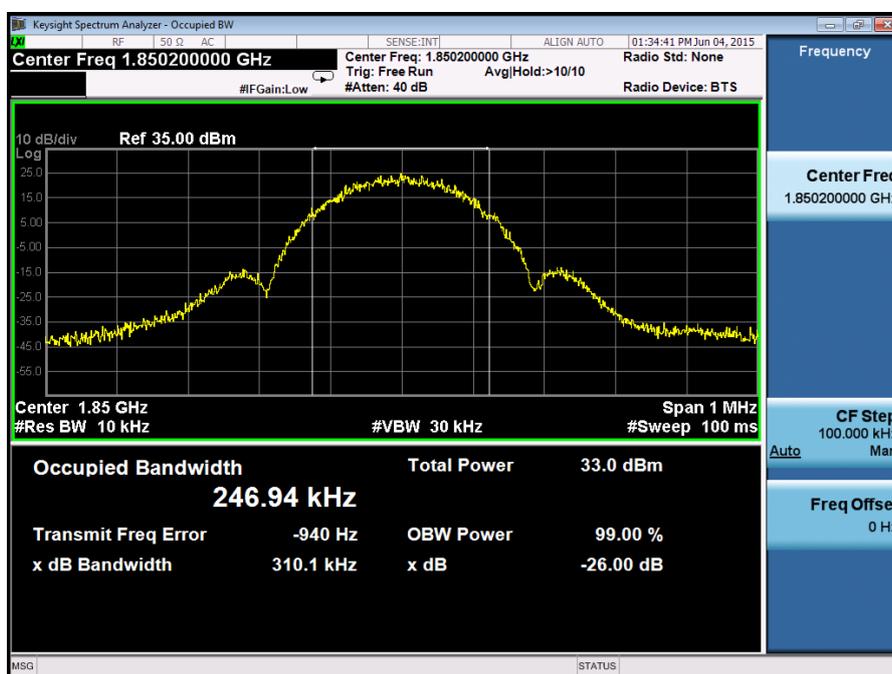

### 99% Occupied Bandwidth channel 661

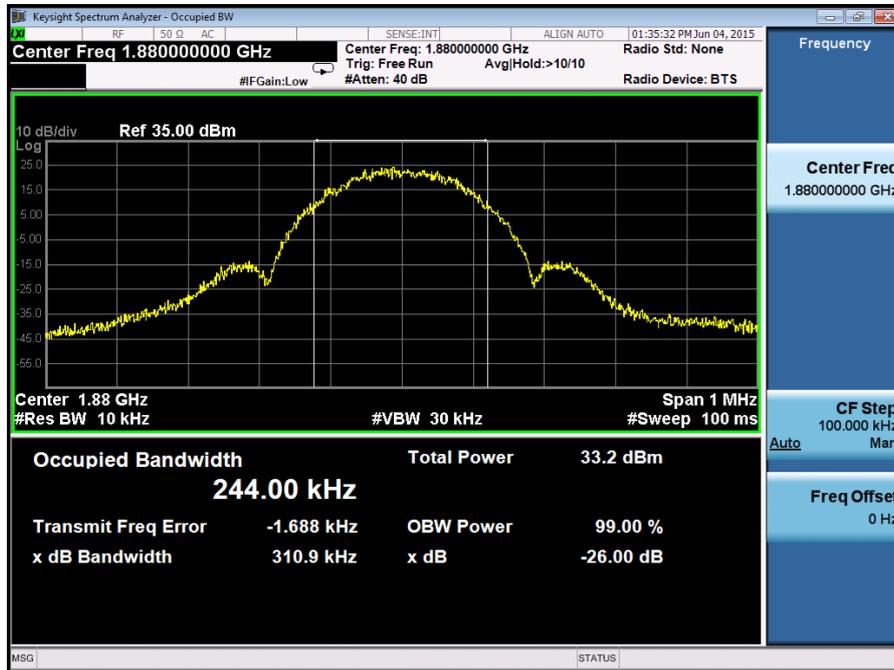

### 99% Occupied Bandwidth channel 810

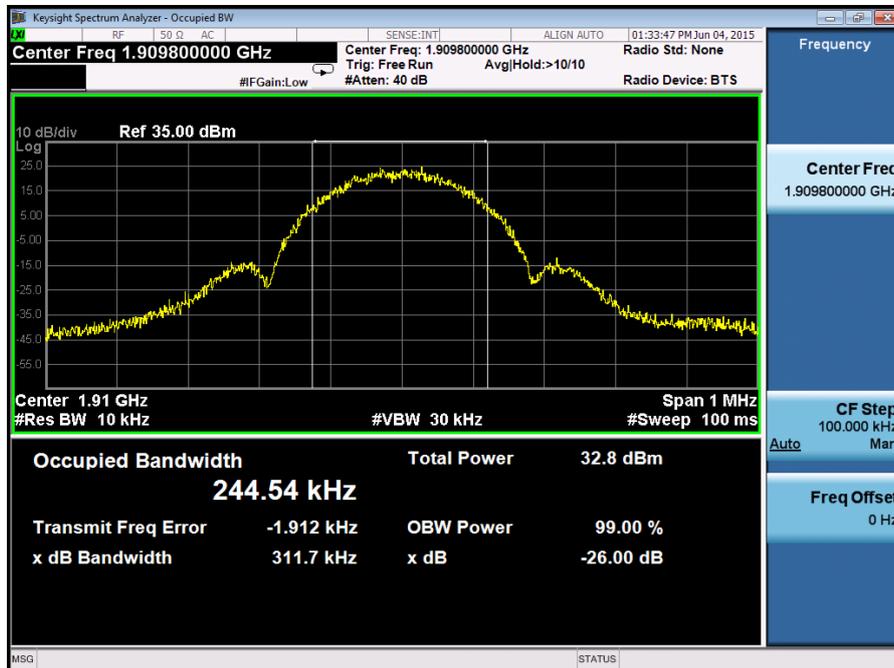

## **ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS**



### Conducted Spurious of Configuration-GSMchannel 810



## **ATTACHMENTD - SPURIOUS RADIATED EMISSION**

Test Mode: TX CH661 GSM


Vertical



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	34.3650	-60.46	-1.32	-61.78	-13.00	-48.78	peak	
2		96.4450	-63.88	-2.93	-66.81	-13.00	-53.81	peak	
3		176.4700	-73.85	0.46	-73.39	-13.00	-60.39	peak	
4		275.4100	-79.49	2.44	-77.05	-13.00	-64.05	peak	
5		421.3950	-80.18	4.63	-75.55	-13.00	-62.55	peak	
6		657.1050	-81.45	10.17	-71.28	-13.00	-58.28	peak	


Test Mode: TX CH661 GSM

### Horizontal

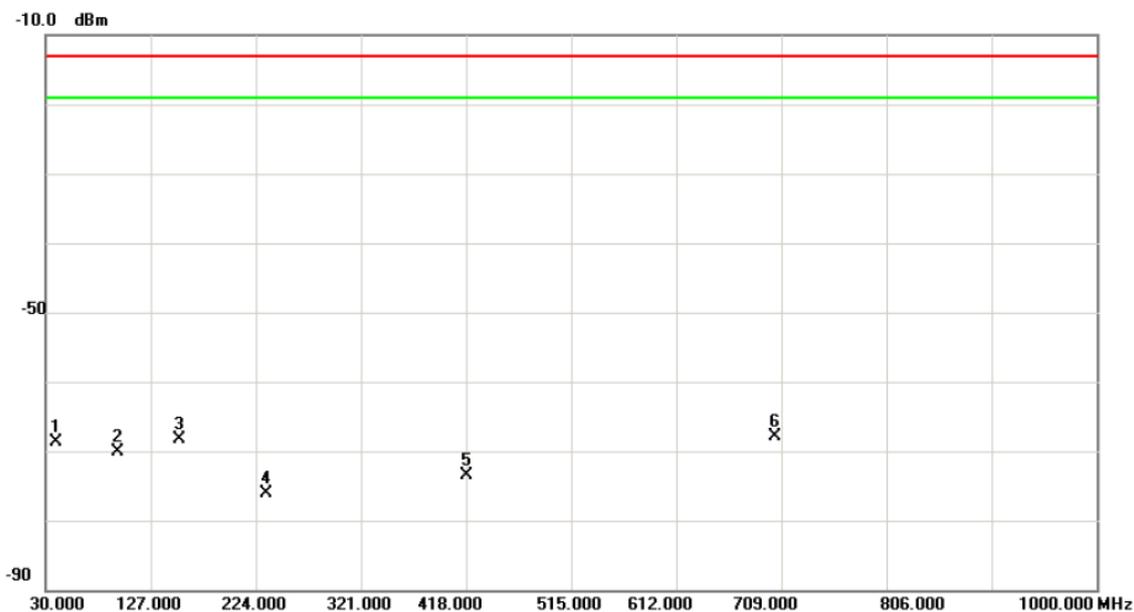

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		40.1850	-70.76	2.12	-68.64	-13.00	-55.64	peak	
2		96.4450	-64.45	-5.56	-70.01	-13.00	-57.01	peak	
3		153.1900	-72.08	3.76	-68.32	-13.00	-55.32	peak	
4		233.7000	-79.06	2.94	-76.12	-13.00	-63.12	peak	
5		418.0000	-80.36	6.78	-73.58	-13.00	-60.58	peak	
6	*	702.6950	-81.74	13.91	-67.83	-13.00	-54.83	peak	


Test Mode: TX CH661EDGE

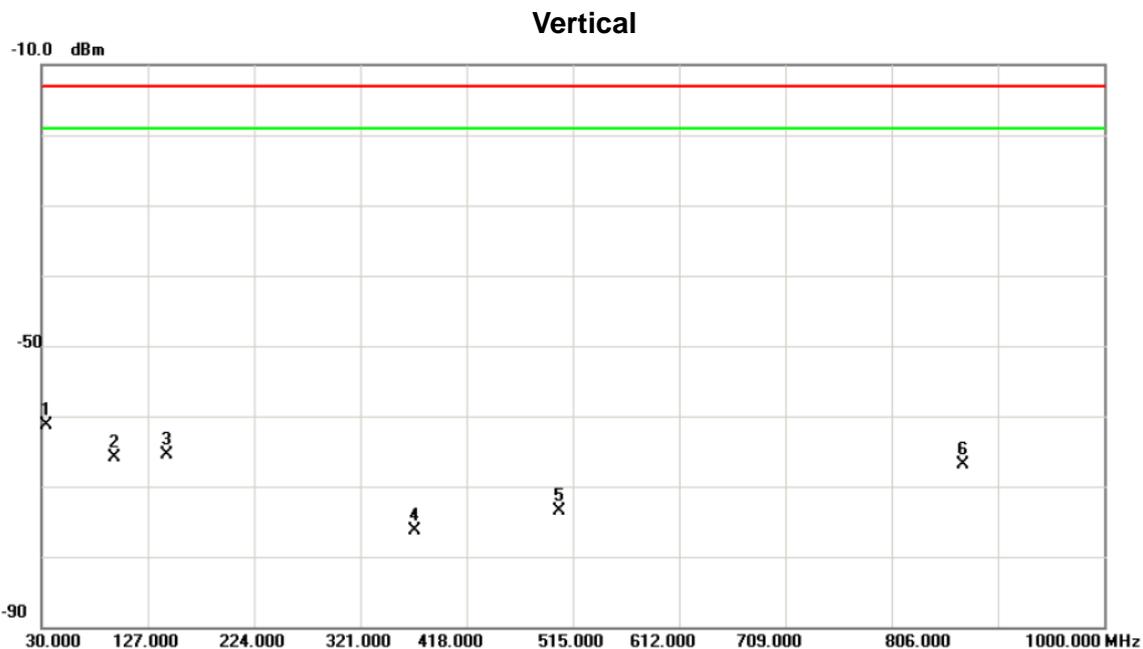

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	33.8800	-60.07	-1.20	-61.27	-13.00	-48.27	peak	
2		96.4450	-62.90	-2.93	-65.83	-13.00	-52.83	peak	
3		143.9750	-68.03	2.55	-65.48	-13.00	-52.48	peak	
4		370.4700	-79.74	3.35	-76.39	-13.00	-63.39	peak	
5		502.8750	-80.96	7.54	-73.42	-13.00	-60.42	peak	
6		870.9900	-80.65	13.72	-66.93	-13.00	-53.93	peak	

Test Mode: TX CH661EDGE


### Horizontal

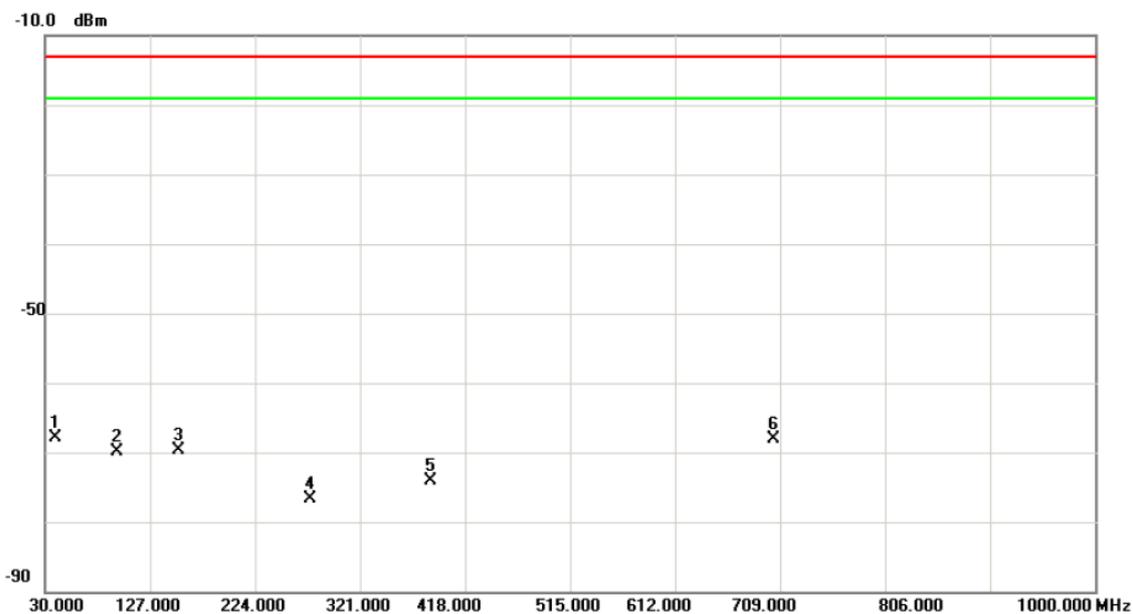

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	40.1850	-70.04	2.12	-67.92	-13.00	-54.92	peak	
2		96.4450	-64.26	-5.56	-69.82	-13.00	-56.82	peak	
3		153.1900	-73.47	3.76	-69.71	-13.00	-56.71	peak	
4		274.4400	-79.48	2.79	-76.69	-13.00	-63.69	peak	
5		385.9900	-80.09	6.03	-74.06	-13.00	-61.06	peak	
6		703.1800	-81.90	13.90	-68.00	-13.00	-55.00	peak	

Test Mode: TXCH512 GSM


Vertical

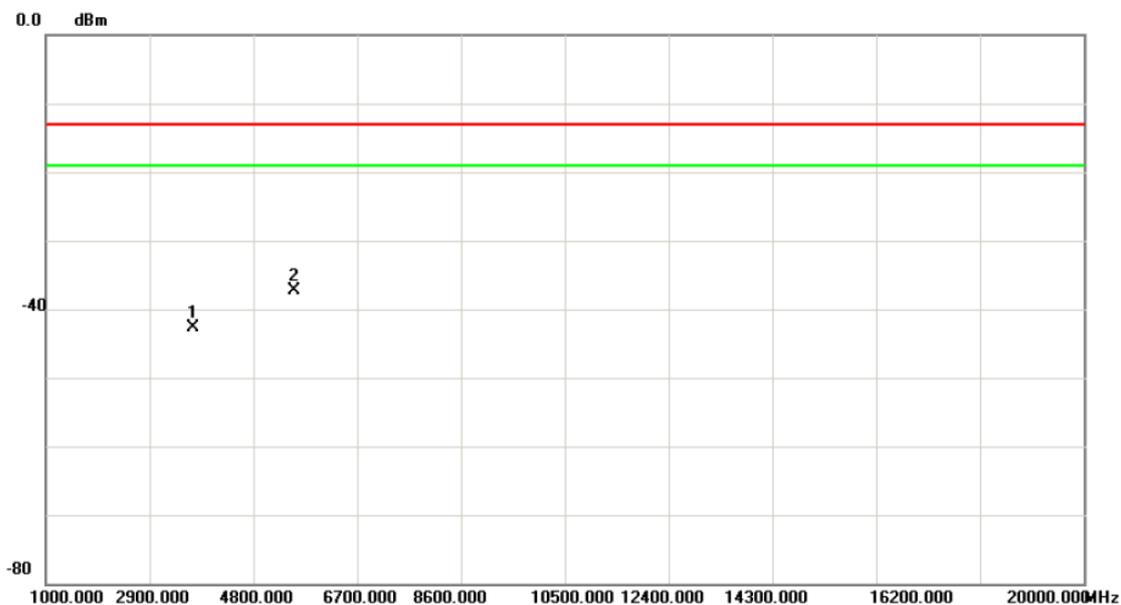

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		3698.000	-48.59	5.93	-42.66	-13.00	-29.66	peak	
2	*	5550.500	-50.25	13.00	-37.25	-13.00	-24.25	peak	

Test Mode: TXCH512 GSM


Horizontal

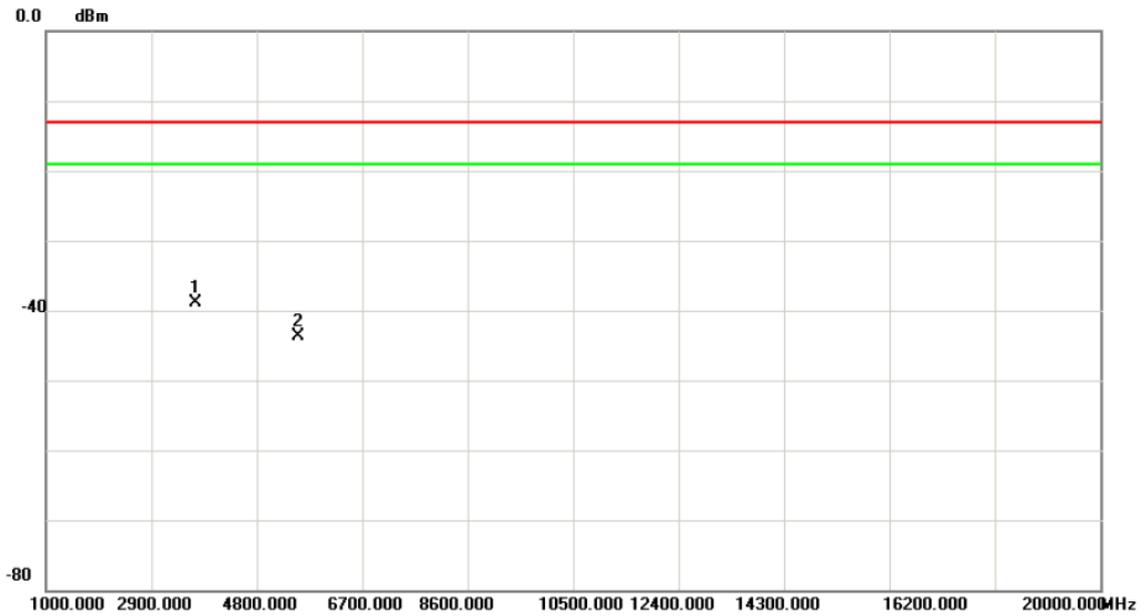

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3698.000	-46.44	7.49	-38.95	-13.00	-25.95	peak	
2		5550.500	-52.25	8.59	-43.66	-13.00	-30.66	peak	

Test Mode: TX CH661 GSM


Vertical

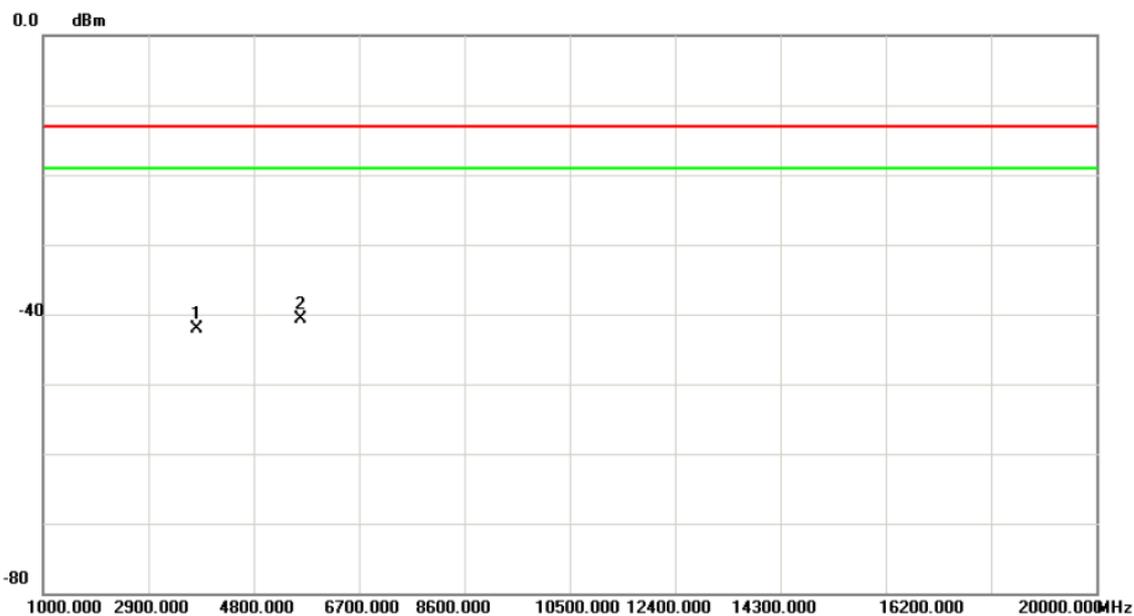

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		3764.500	-48.38	6.26	-42.12	-13.00	-29.12	peak	
2	*	5636.000	-53.96	13.21	-40.75	-13.00	-27.75	peak	


Test Mode: TX CH661 GSM

### Horizontal

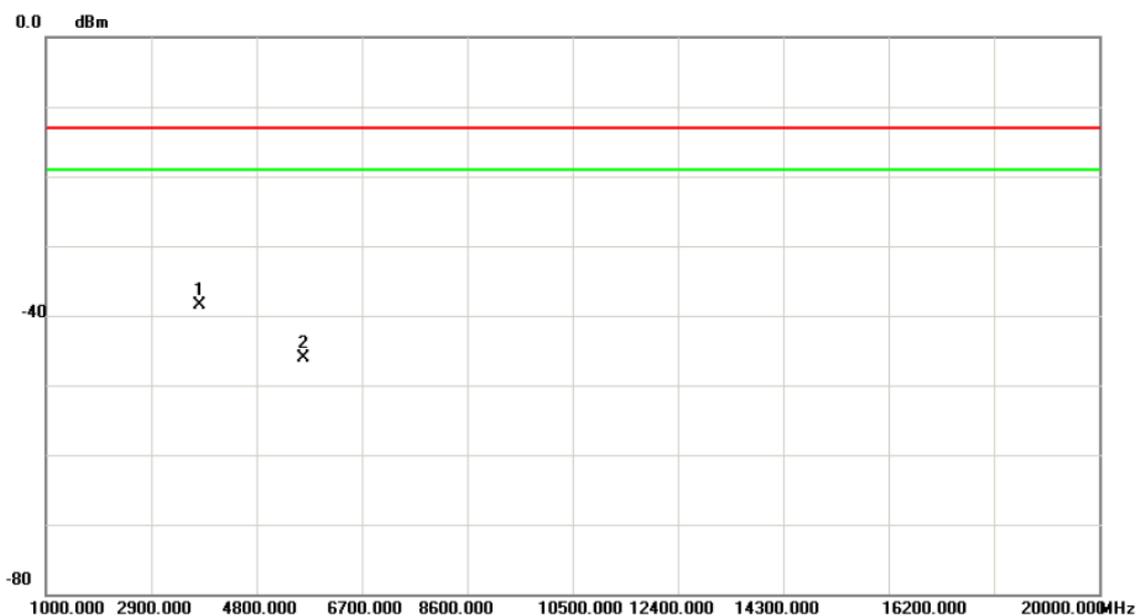


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3764.500	-46.04	7.50	-38.54	-13.00	-25.54	peak	
2		5636.000	-54.84	8.72	-46.12	-13.00	-33.12	peak	

Test Mode: TX CH810 GSM

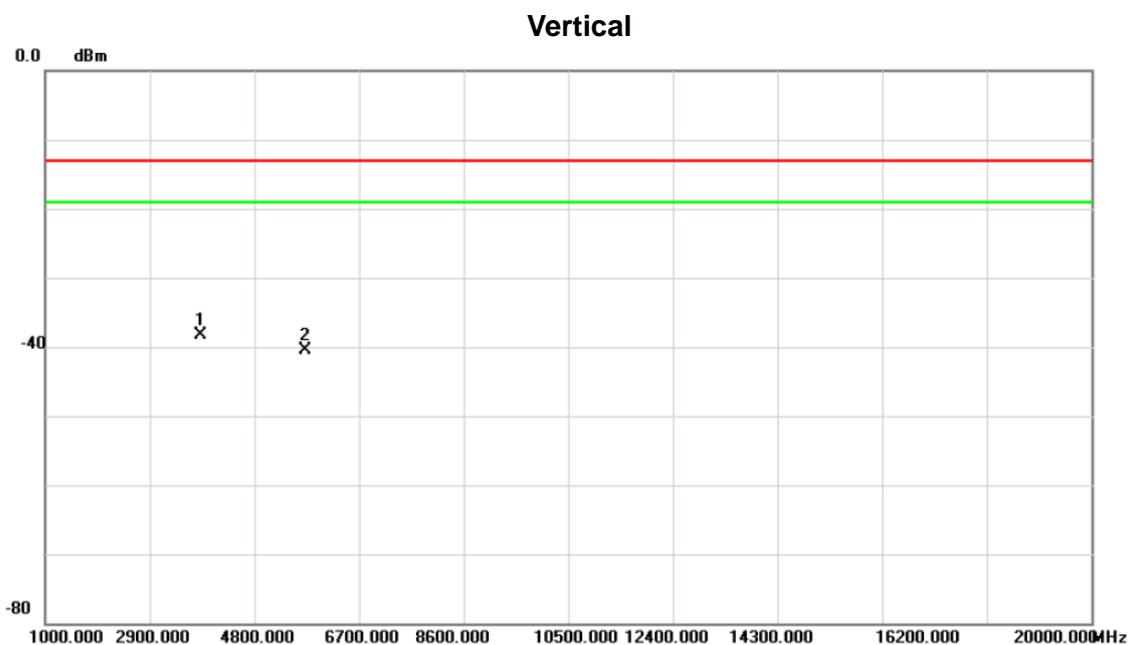

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3821.500	-44.79	6.54	-38.25	-13.00	-25.25	peak	
2		5731.000	-53.87	13.43	-40.44	-13.00	-27.44	peak	


Test Mode: TX CH810 GSM

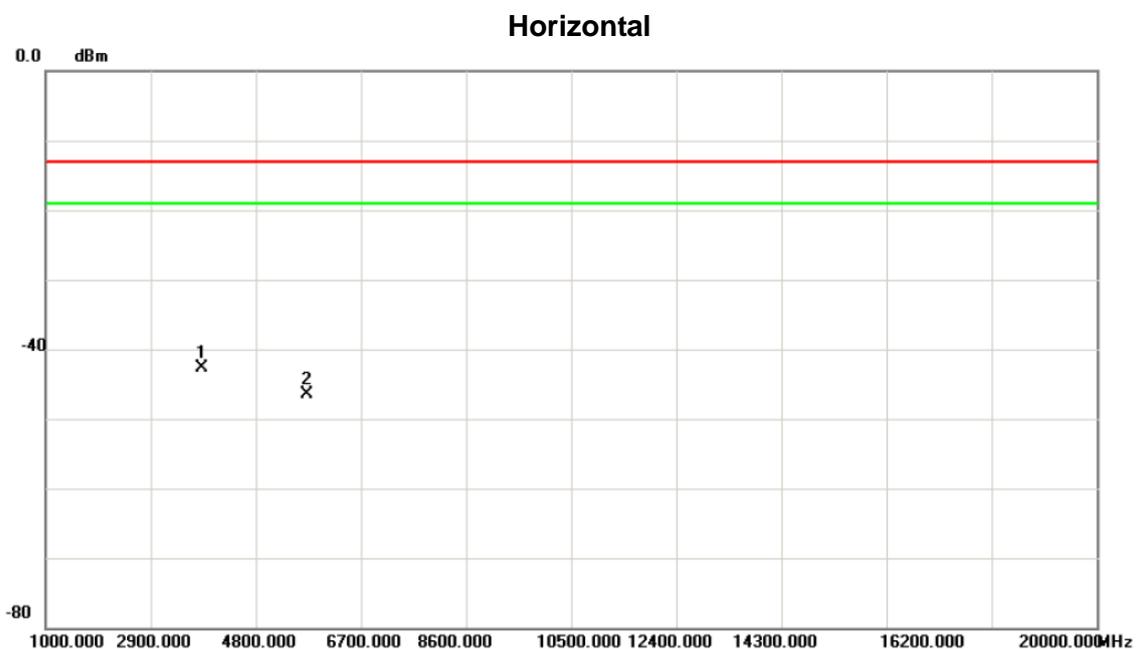

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3821.500	-50.22	7.51	-42.71	-13.00	-29.71	peak	
2		5731.000	-55.26	8.86	-46.40	-13.00	-33.40	peak	

Test Mode: TXCH512EDGE


Vertical

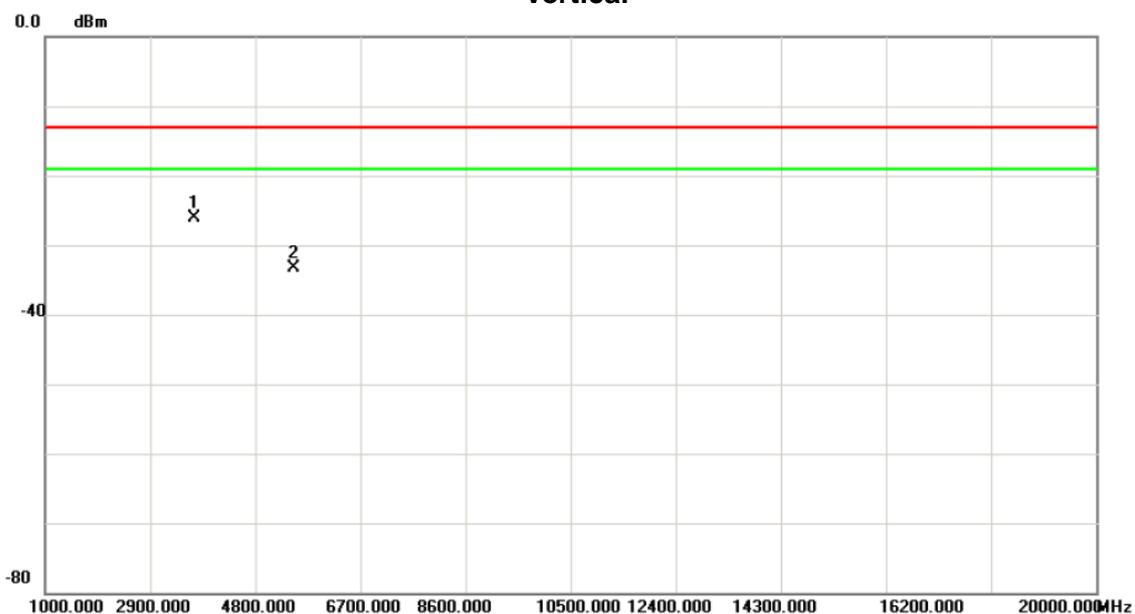

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3698.000	-32.09	5.93	-26.16	-13.00	-13.16	peak	
2		5503.000	-46.20	12.89	-33.31	-13.00	-20.31	peak	

Test Mode: TXCH512EDGE


### Horizontal

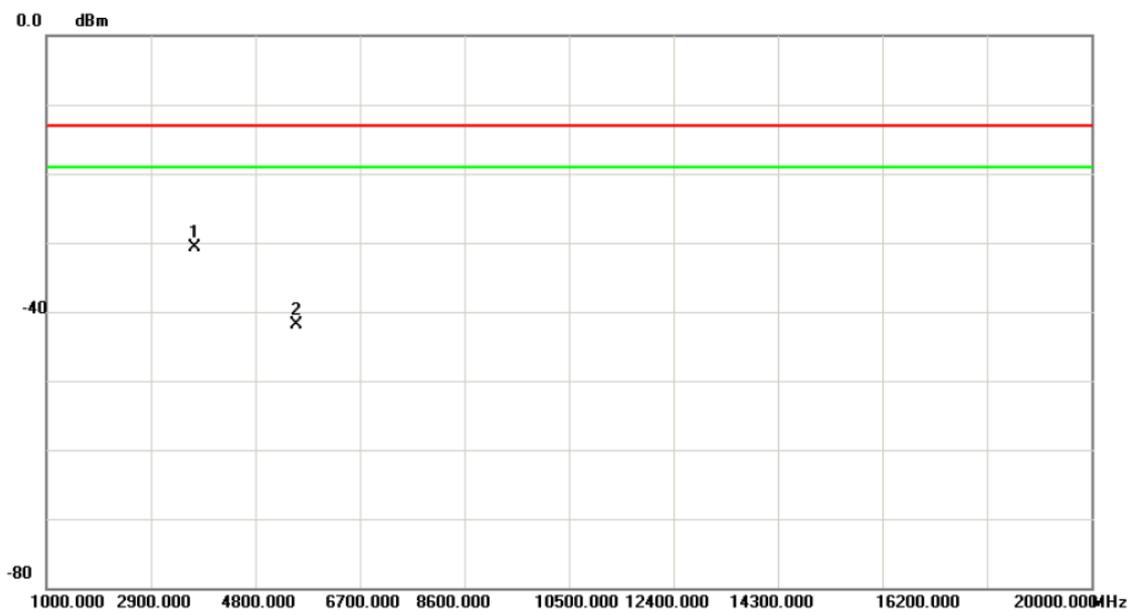

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3698.000	-38.12	7.49	-30.63	-13.00	-17.63	peak	
2		5550.500	-50.45	8.59	-41.86	-13.00	-28.86	peak	

Test Mode: TX CH661EDGE


Vertical

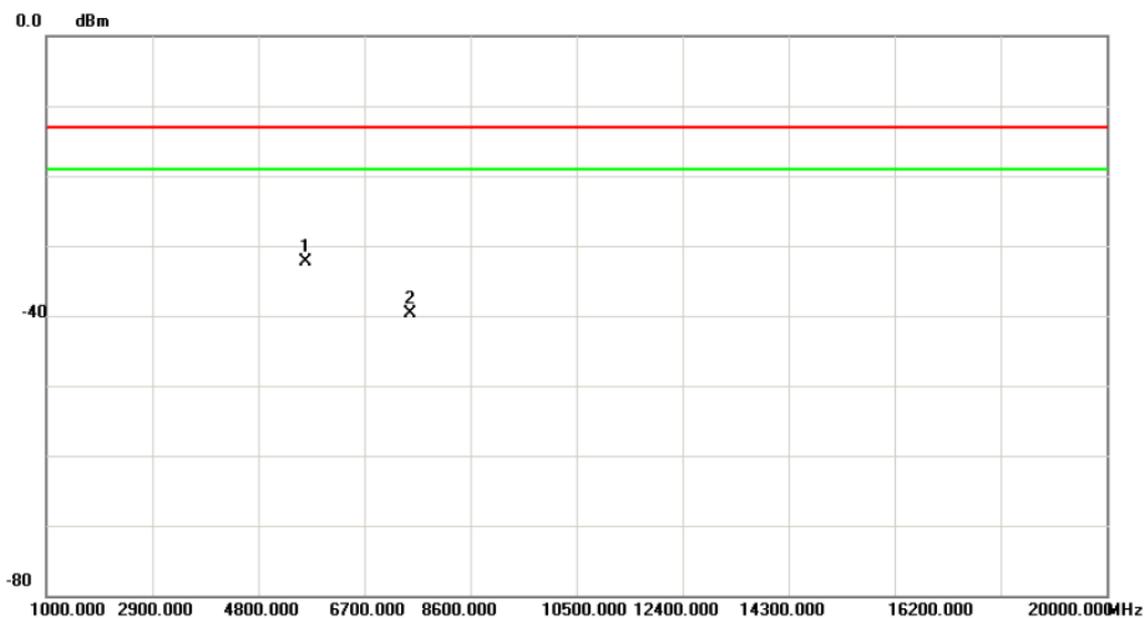

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	5636.000	-45.47	13.21	-32.26	-13.00	-19.26	peak	
2		7517.000	-53.69	13.96	-39.73	-13.00	-26.73	peak	

Test Mode: TX CH661EDGE


### Horizontal

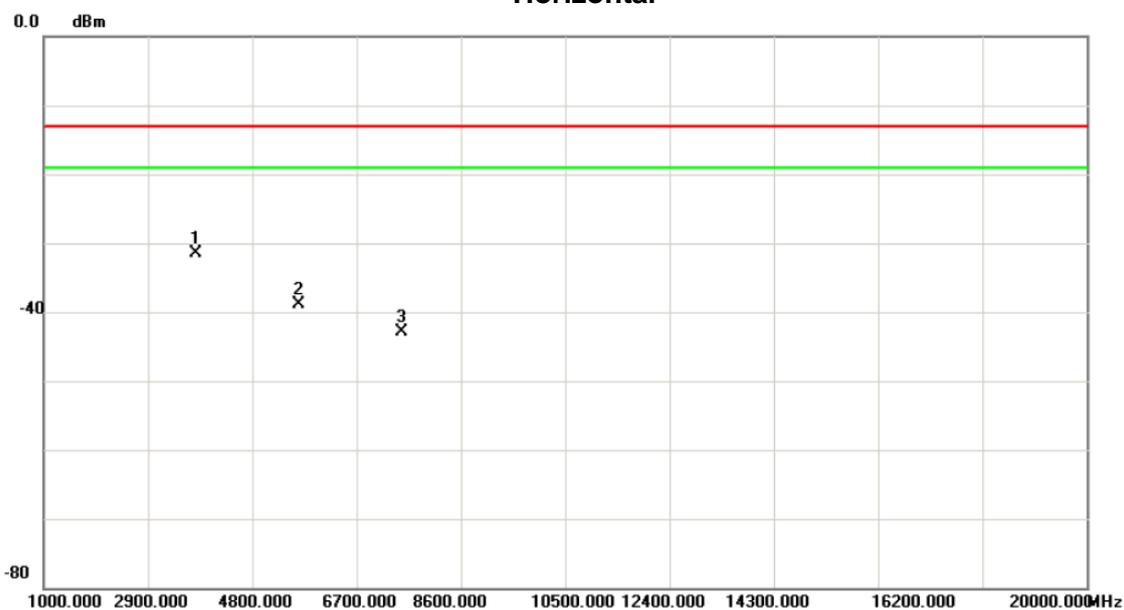

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	3764.500	-38.90	7.50	-31.40	-13.00	-18.40	peak	
2	5636.000	-47.59	8.72	-38.87	-13.00	-25.87	peak	
3	7517.000	-53.67	10.77	-42.90	-13.00	-29.90	peak	

Test Mode: TX CH810EDGE


Vertical

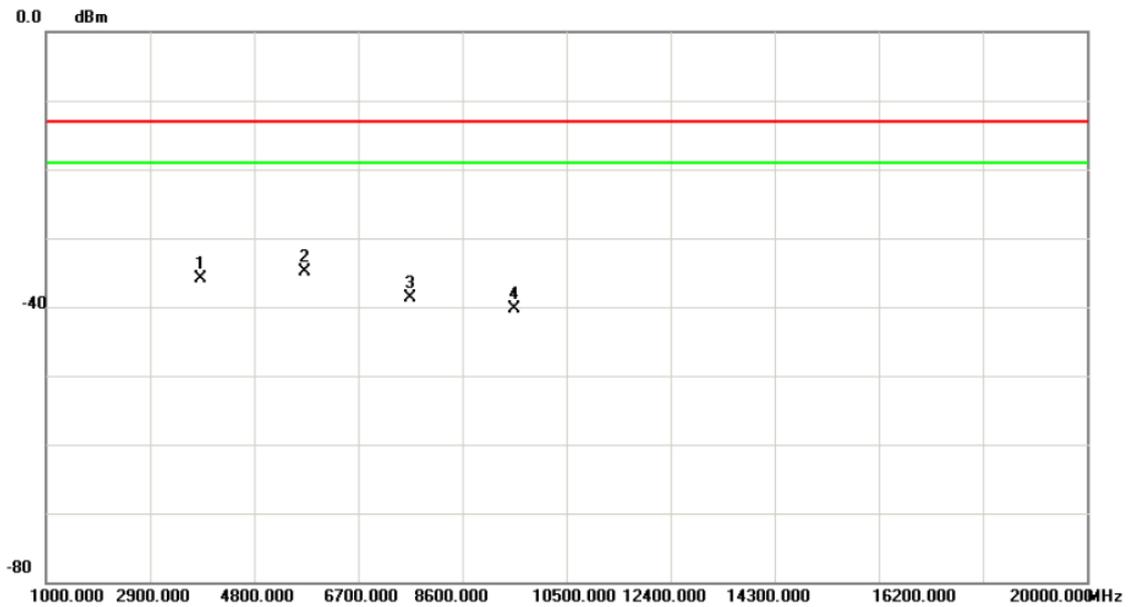

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		3821.500	-42.43	6.54	-35.89	-13.00	-22.89	peak	
2	*	5731.000	-48.28	13.43	-34.85	-13.00	-21.85	peak	
3		7640.500	-52.36	13.58	-38.78	-13.00	-25.78	peak	
4		9550.000	-55.29	14.90	-40.39	-13.00	-27.39	peak	

Test Mode: TX CH810EDGE


### Horizontal

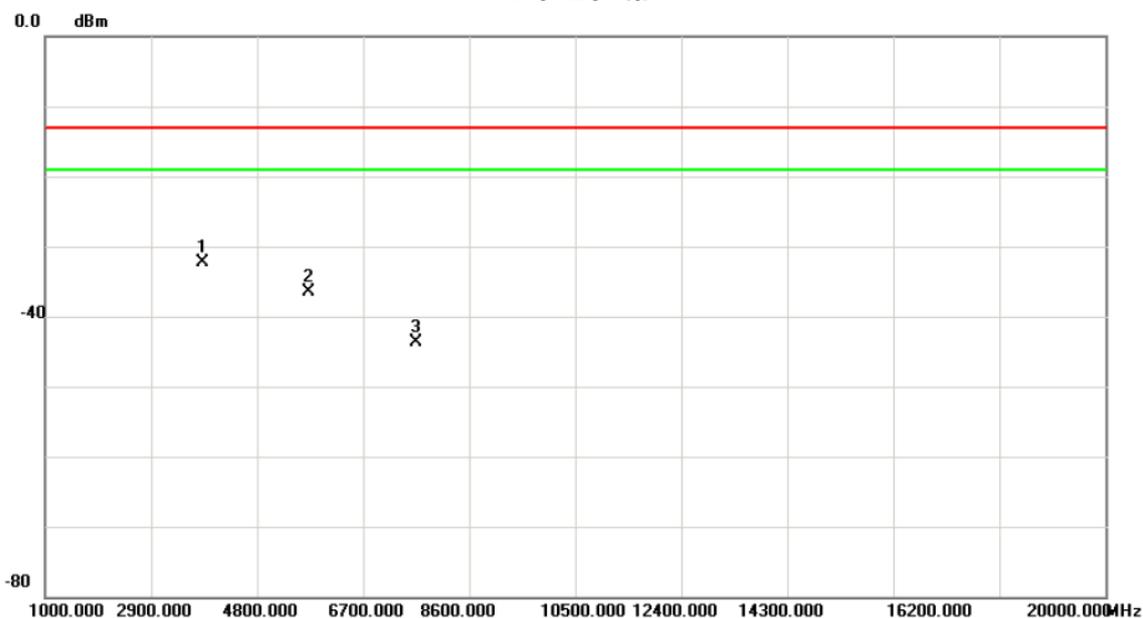


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3821.500	-39.89	7.51	-32.38	-13.00	-19.38	peak	
2		5731.000	-45.38	8.86	-36.52	-13.00	-23.52	peak	
3		7640.500	-54.38	10.60	-43.78	-13.00	-30.78	peak	

## ATTACHMENTE - BAND EDGE


### Band Edge on Configuration GSM / Channel 512-CONDUCTED MODE

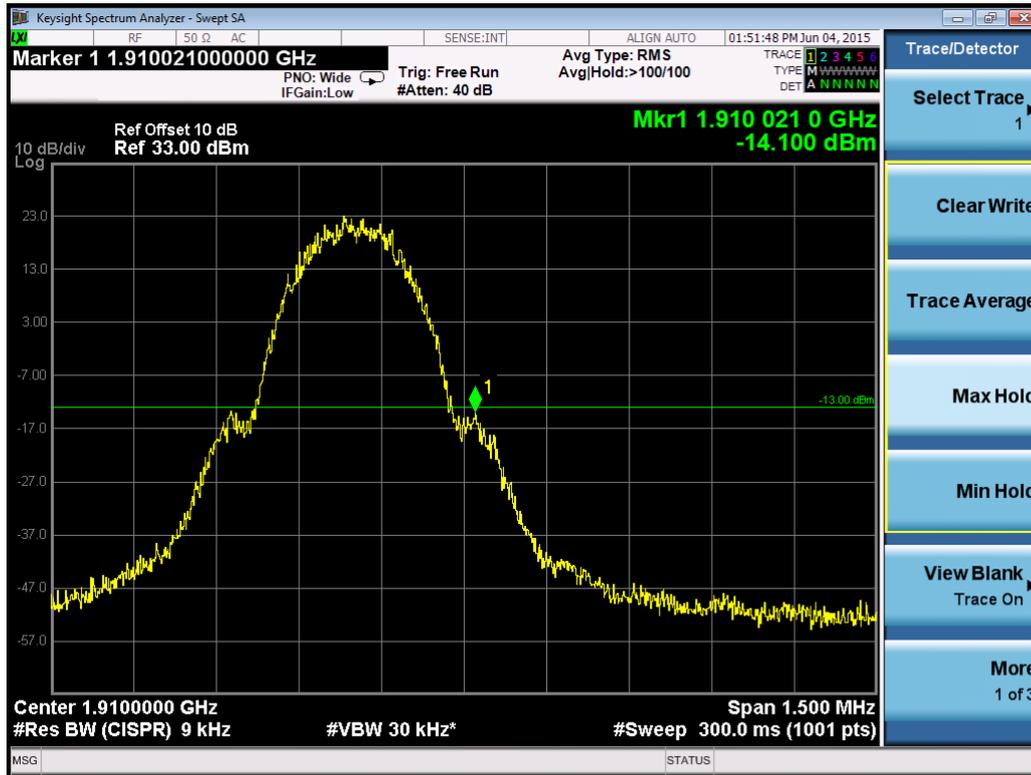


### Band Edge on Configuration GSM / Channel 810-CONDUCTED MODE

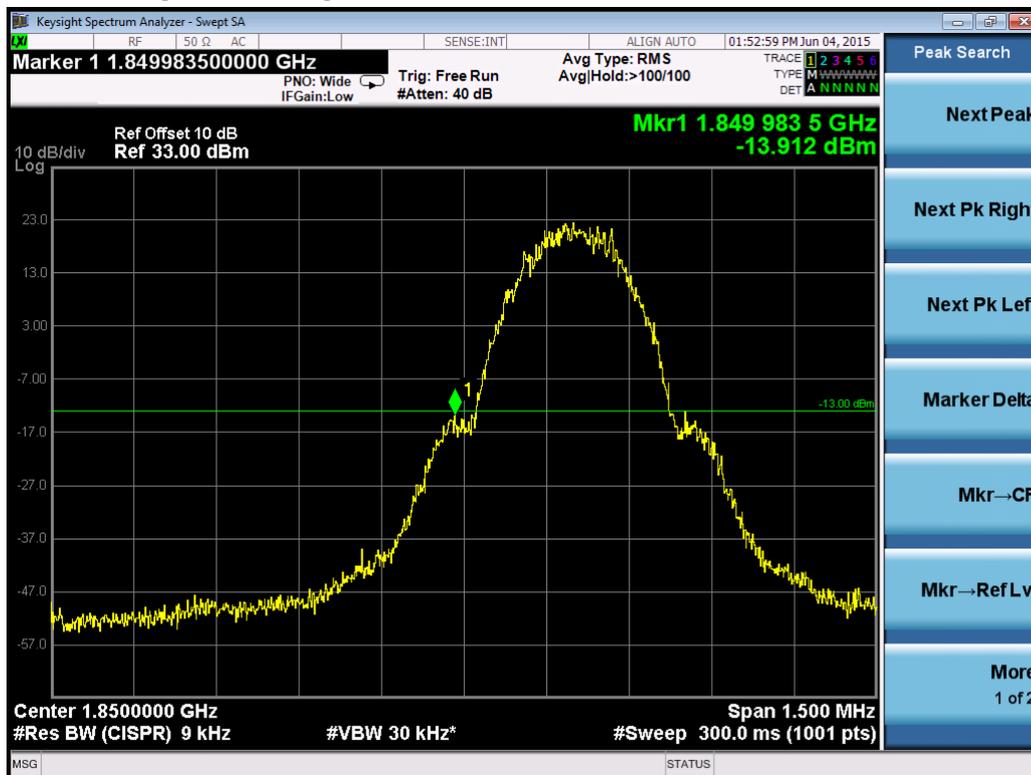


### Band Edge on Configuration GPRS / Channel 512-CONDUCTED MODE

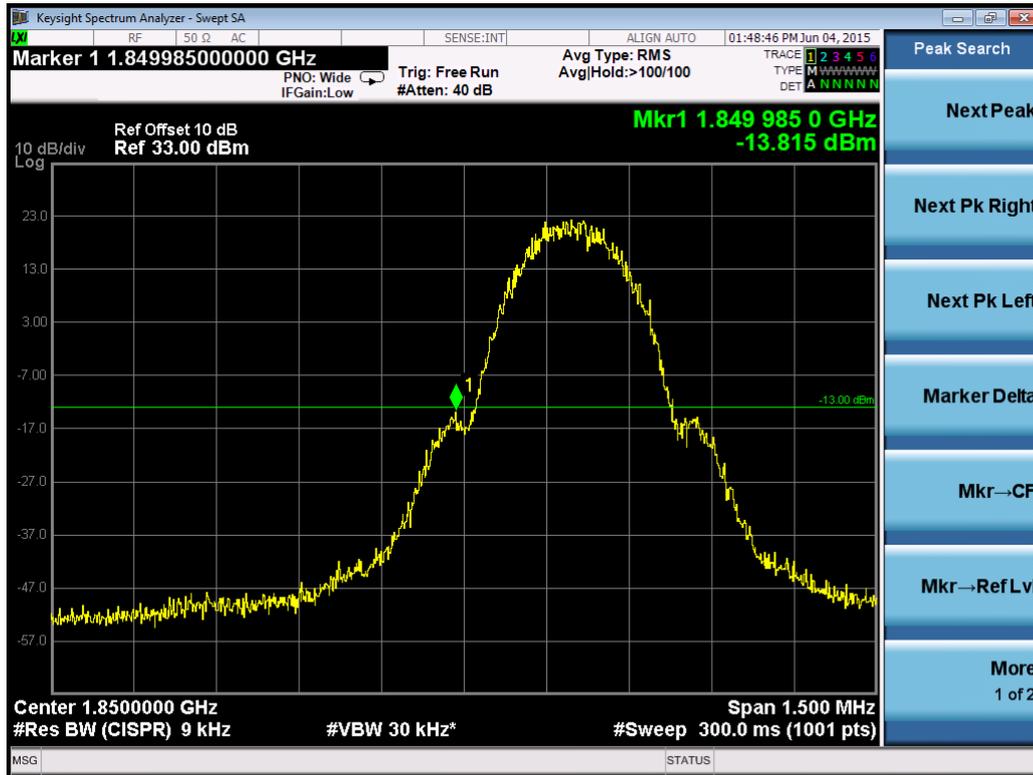


### Band Edge on Configuration GPRS / Channel 810-CONDUCTED MODE

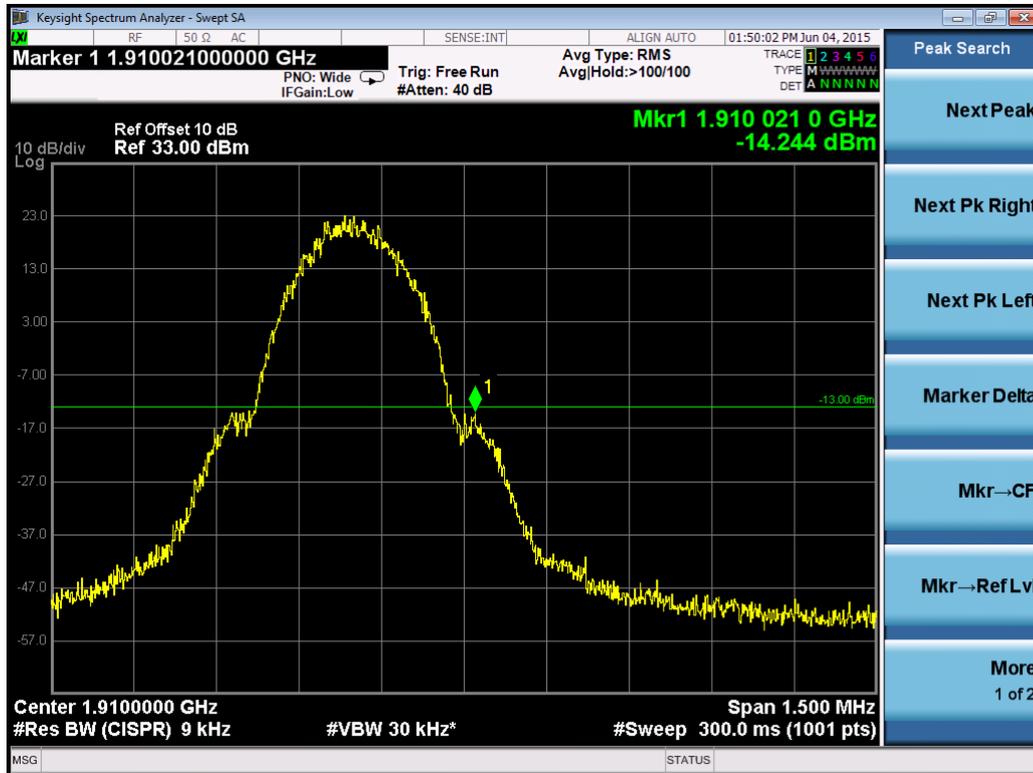

### Band Edge on Configuration EDGE / Channel 512-CONDUCTED MODE

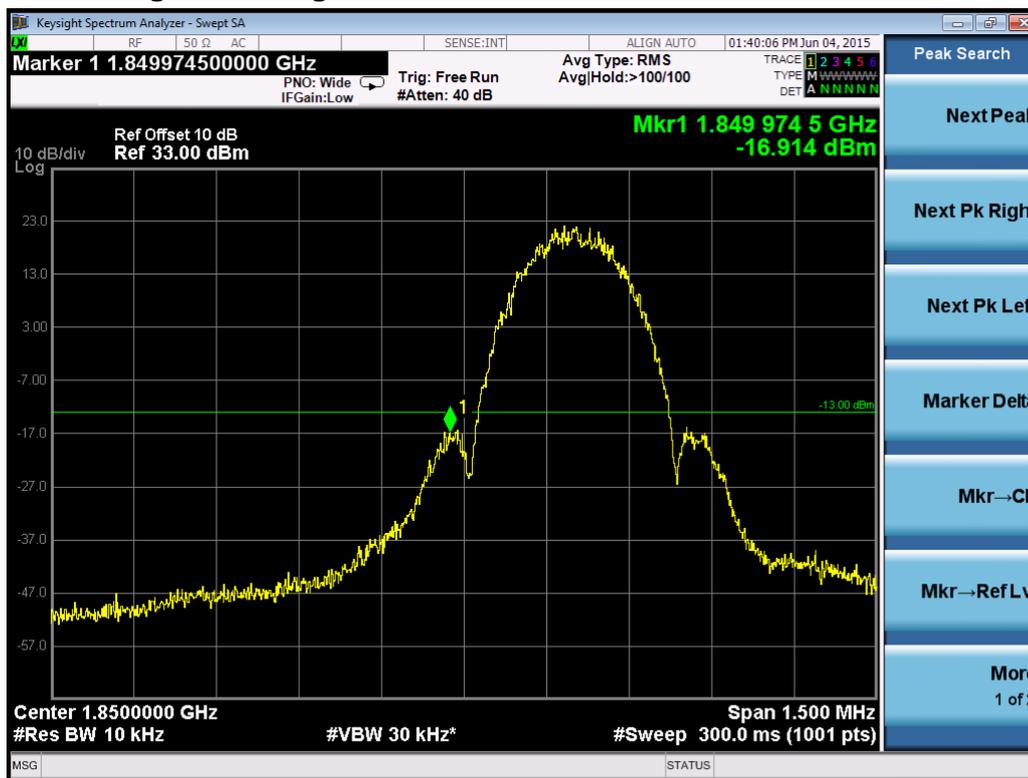

### Band Edge on Configuration EDGE / Channel 810-CONDUCTED MODE

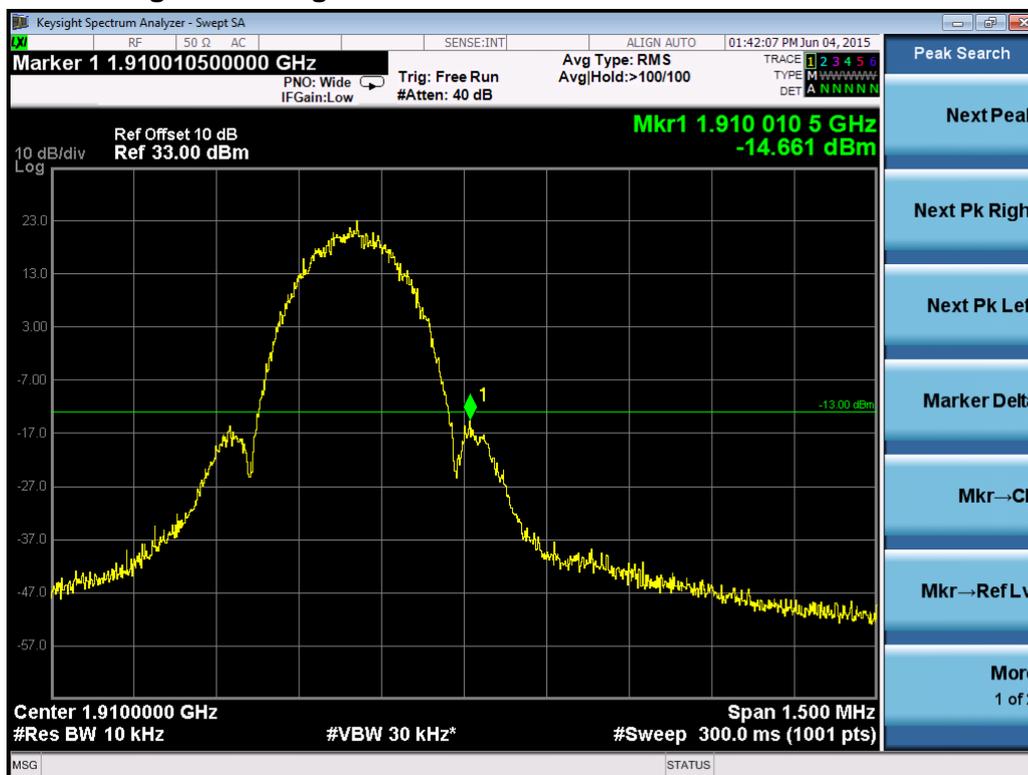

## ATTACHMENTF - FREQUENCY STABILITY

Test Mode:	GSM CH512
------------	-----------

### Voltage vs. Frequency Stability


Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-10	3.62	0.001956545	2.5
0	9.51	0.005139985	2.5
10	6.84	0.003696898	2.5
20	3.25	0.001756567	2.5
30	1.57	0.000848557	2.5
40	6.98	0.003772565	2.5
55	8.74	0.004723814	
Max. Deviation (ppm)	<b>9.51</b>	<b>0.005139985</b>	2.5

### Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.8	11.25	0.006080424	2.5
3.5	10.24	0.005534537	2.5
4.35	8.54	0.004615717	2.5
Max. Deviation (ppm)	<b>11.25</b>	<b>0.006080424</b>	2.5

## ATTACHMENTG - PEAK TO AVERAGE RATIO

### Peak to Average Ratio of Configuration-GSMchannel 661

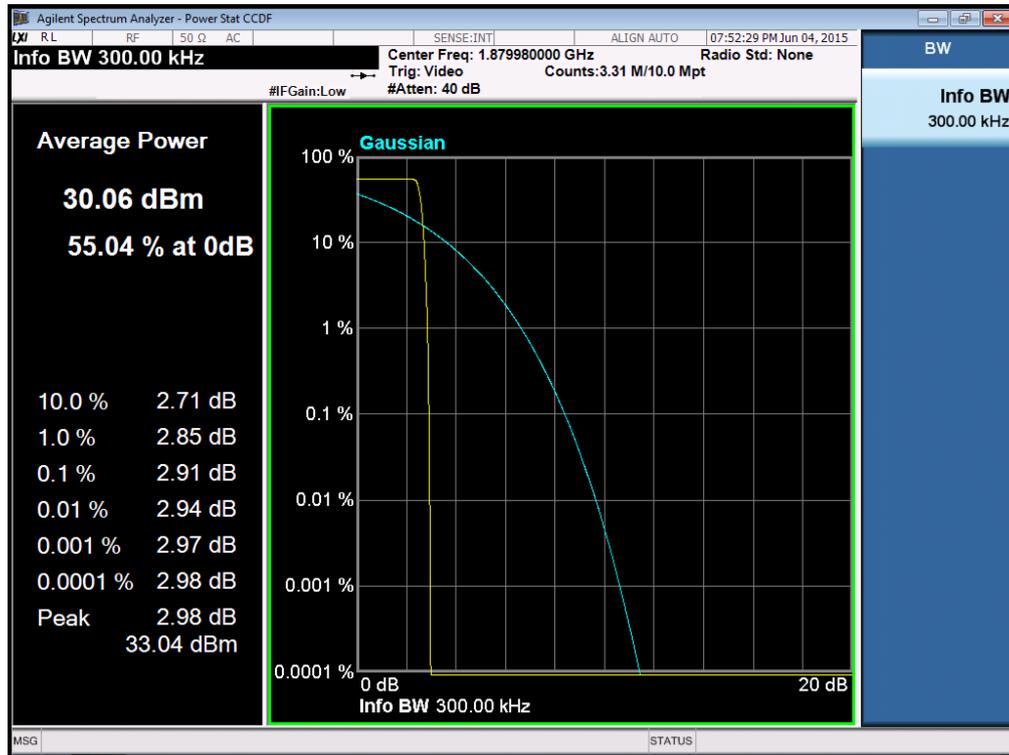

### Peak to Average Ratio of Configuration-EDGEchannel 661

