

FCC Test Report


FCC ID: QISY560-L02

Project No. : 1505C284
Equipment : Smart Phone
Model Name : HUAWEI Y560-L02, Y560-L02
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : May 27, 2015
Date of Test : May 27, 2015 ~ Jun. 11, 2015
Issued Date : Jun. 12, 2015
Tested by : BTL Inc.

Testing Engineer : 
(Kener Wu)

Technical Manager : 
(Jeff Yang)

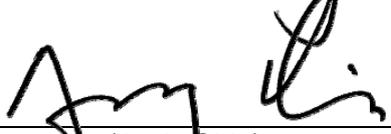Authorized Signatory : 
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
ATTACHMENT A - CONDUCTED EMISSION	19
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	46
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	73

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1505C284	Original Issue.	Jun. 12, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI Y560-L02, Y560-L02
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : May 27, 2015 ~ Jun. 11, 2015
Standard(s) : FCC Part 15, Subpart B:2014
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1505C284) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2014 ANSI C63.4-2009	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
C02	CISPR	150 KHz ~ 30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	Note
CB08	CISPR	30MHz ~ 200MHz	V	3.22	
		30MHz ~ 200MHz	H	3.55	
		200MHz ~ 1,000MHz	V	3.24	
		200MHz ~ 1,000MHz	H	3.11	
		1,000MHz ~ 18,000MHz	V	4.05	
		1,000MHz ~ 18,000MHz	H	3.97	
		18,000MHz ~ 40,000MHz	V	4.04	
		18,000MHz ~ 40,000MHz	H	4.01	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI Y560-L02, Y560-L02
Model Difference	Only differ in model name.
Power Source	#1 DC Voltage supplied from AC/DC adapter. Brand/Model: HUAWEI / HW-050100U01(US) Brand/Model: HUAWEI / HW-050100E01(EU) #2 Supplied from battery. Brand/Model: HUAWEI / HB474284RBC
Power Rating	#1 I/P: 100-240V~ 50/60H 0.2A O/P: DC 5V 1A #2 DC 3.8V 2000mAh

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT's maximum operating frequency is 2.6GHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.




Pretest Mode	Description
Mode 1	Adapter+earphone+camera on+idle
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

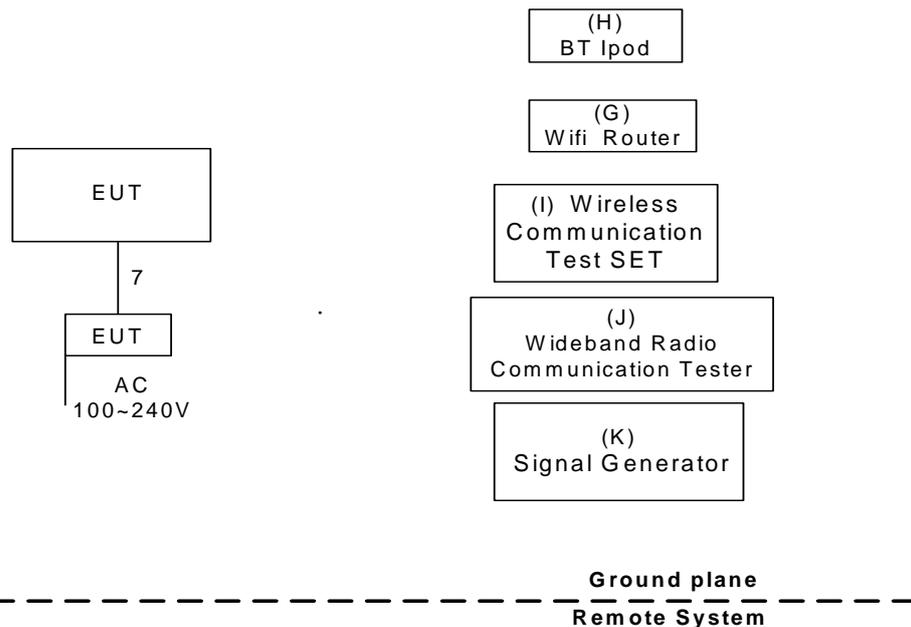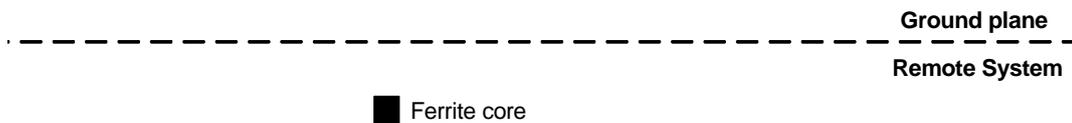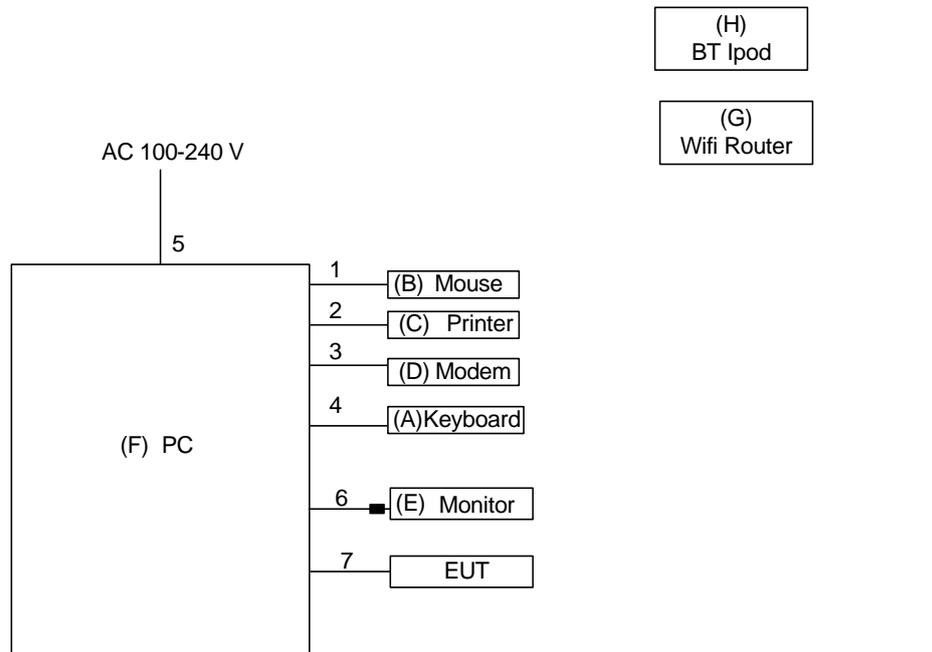

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB Keyboard	Dell	L100	DOC	CNORH659658 9071T08NE	
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-641 80-6AG-1WNS	
F	PC	Dell 745	DCSM	DOC	G7K832X	
G	Router	TP-LINK	TL-WR1041N	DOC	N/A	
H	iPod nano	Apple	A1446	BCG-A1446A	C7RJJR6NF0G V	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125	
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	-	USB Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

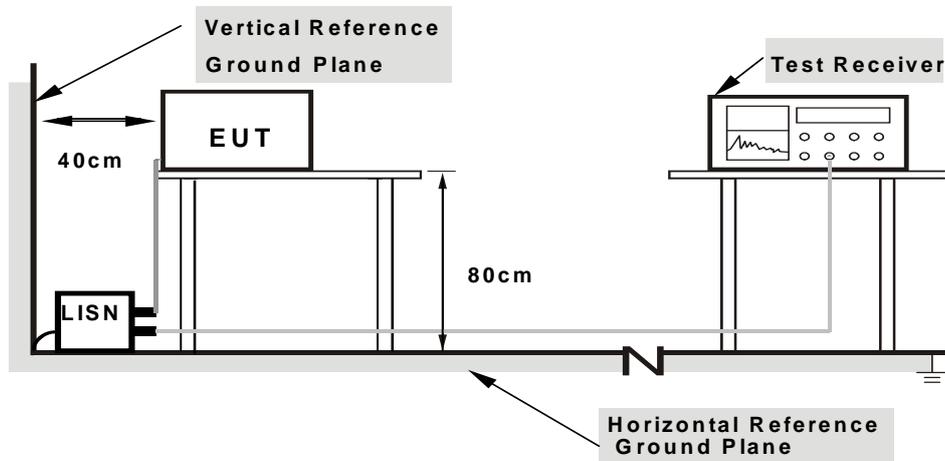

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25° C Relative Humidity: 51%

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following: FCC Part 15, Subpart B: 2014,.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

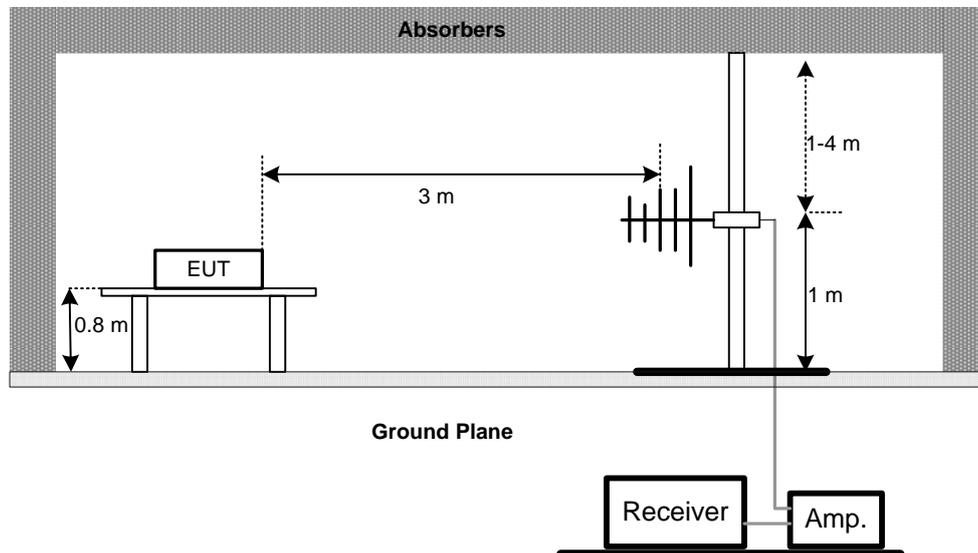

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

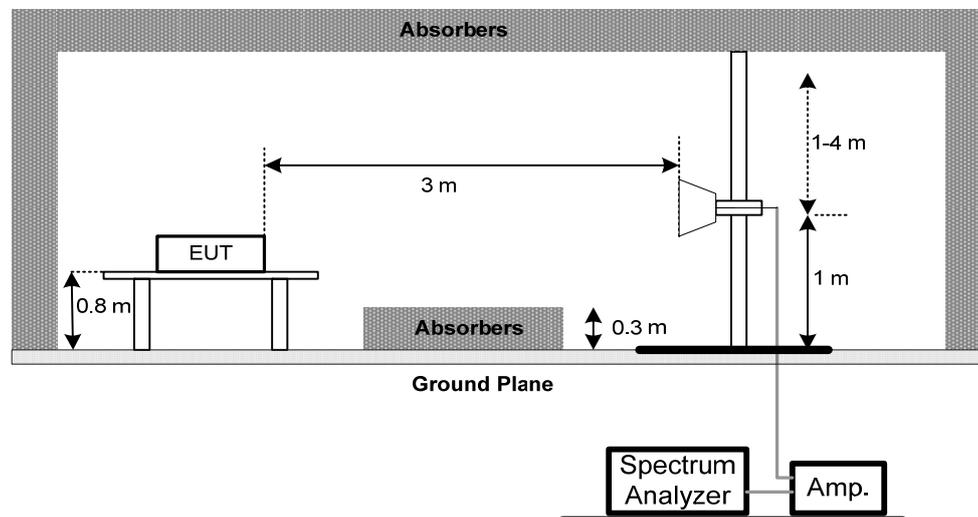

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 09, 2015
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Line

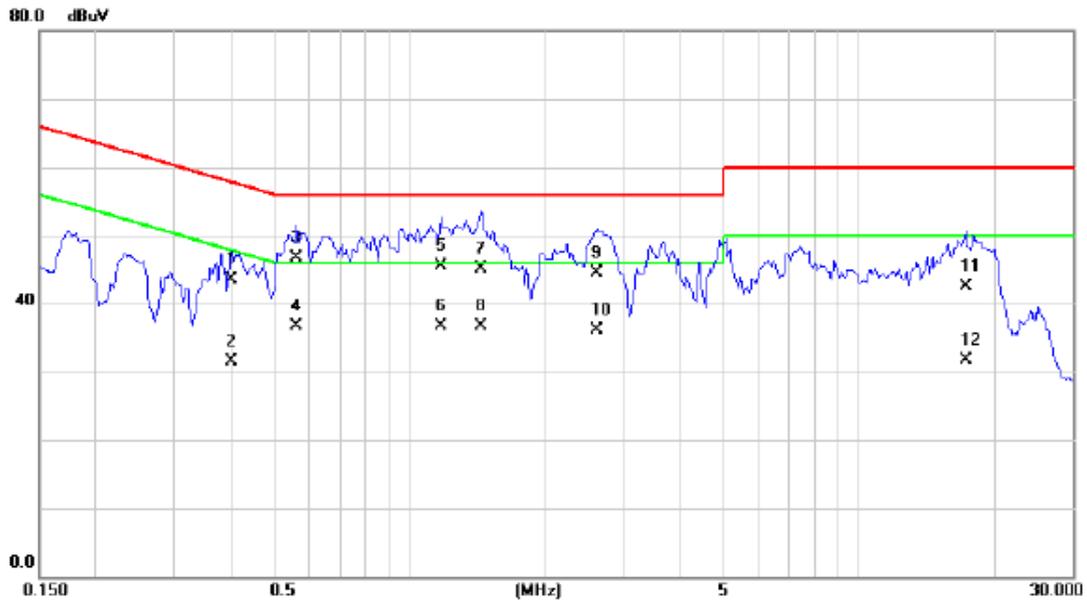

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4040	33.80	9.68	43.48	57.77	-14.29	QP	
2		0.4040	21.80	9.68	31.48	47.77	-16.29	AVG	
3		0.5602	37.00	9.70	46.70	56.00	-9.30	QP	
4		0.5602	27.00	9.70	36.70	46.00	-9.30	AVG	
5		1.1773	35.70	9.81	45.51	56.00	-10.49	QP	
6	*	1.1773	26.90	9.81	36.71	46.00	-9.29	AVG	
7		1.4470	35.30	9.84	45.14	56.00	-10.86	QP	
8		1.4470	26.80	9.84	36.64	46.00	-9.36	AVG	
9		2.6187	34.50	10.01	44.51	56.00	-11.49	QP	
10		2.6187	26.10	10.01	36.11	46.00	-9.89	AVG	
11		17.3594	32.60	9.84	42.44	60.00	-17.56	QP	
12		17.3594	21.90	9.84	31.74	50.00	-18.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Neutral

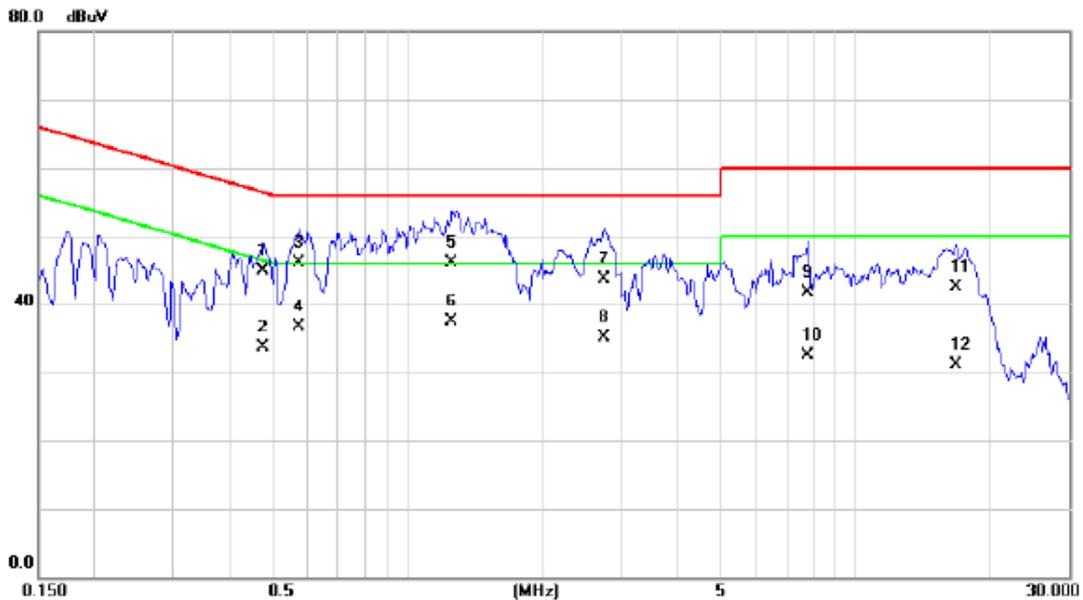

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4781	35.30	9.55	44.85	56.37	-11.52	QP	
2	0.4781	24.10	9.55	33.65	46.37	-12.72	AVG	
3	0.5720	36.60	9.56	46.16	56.00	-9.84	QP	
4	0.5720	27.20	9.56	36.76	46.00	-9.24	AVG	
5	1.2594	36.40	9.64	46.04	56.00	-9.96	QP	
6 *	1.2594	27.80	9.64	37.44	46.00	-8.56	AVG	
7	2.7398	34.00	9.79	43.79	56.00	-12.21	QP	
8	2.7398	25.40	9.79	35.19	46.00	-10.81	AVG	
9	7.8203	31.80	9.85	41.65	60.00	-18.35	QP	
10	7.8203	22.70	9.85	32.55	50.00	-17.45	AVG	
11	16.7813	32.60	9.93	42.53	60.00	-17.47	QP	
12	16.7813	21.20	9.93	31.13	50.00	-18.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK


Line

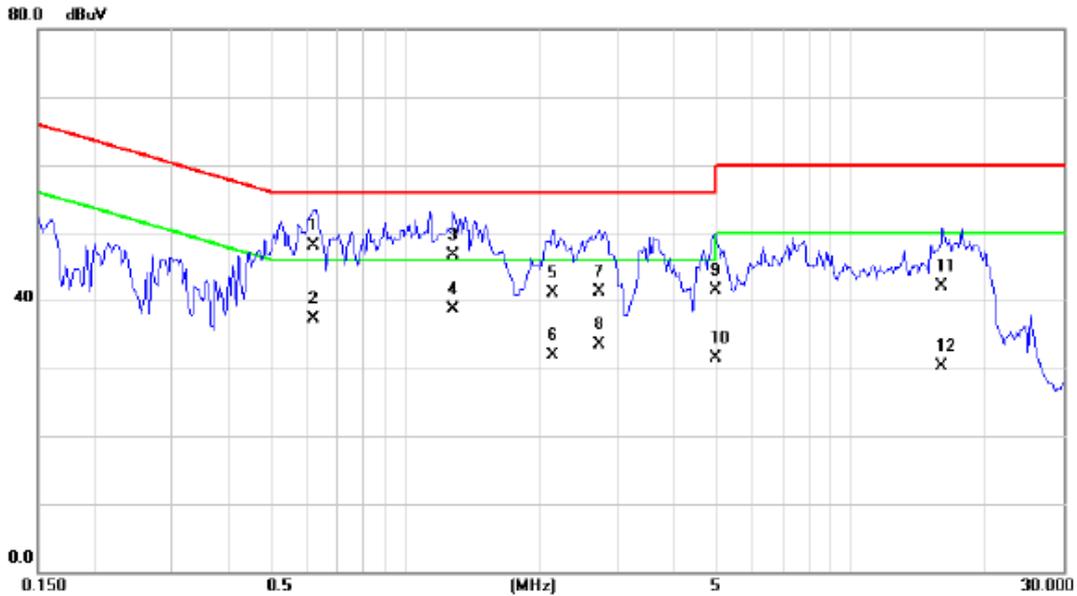

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.6227	38.40	9.73	48.13	56.00	-7.87	QP	
2	0.6227	27.60	9.73	37.33	46.00	-8.67	AVG	
3	1.2828	36.90	9.83	46.73	56.00	-9.27	QP	
4 *	1.2828	28.90	9.83	38.73	46.00	-7.27	AVG	
5	2.1538	31.10	9.94	41.04	56.00	-14.96	QP	
6	2.1538	22.00	9.94	31.94	46.00	-14.06	AVG	
7	2.7242	31.30	10.01	41.31	56.00	-14.69	QP	
8	2.7242	23.50	10.01	33.51	46.00	-12.49	AVG	
9	4.9570	31.50	9.99	41.49	56.00	-14.51	QP	
10	4.9570	21.50	9.99	31.49	46.00	-14.51	AVG	
11	16.0273	32.30	9.83	42.13	60.00	-17.87	QP	
12	16.0273	20.40	9.83	30.23	50.00	-19.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK


Neutral

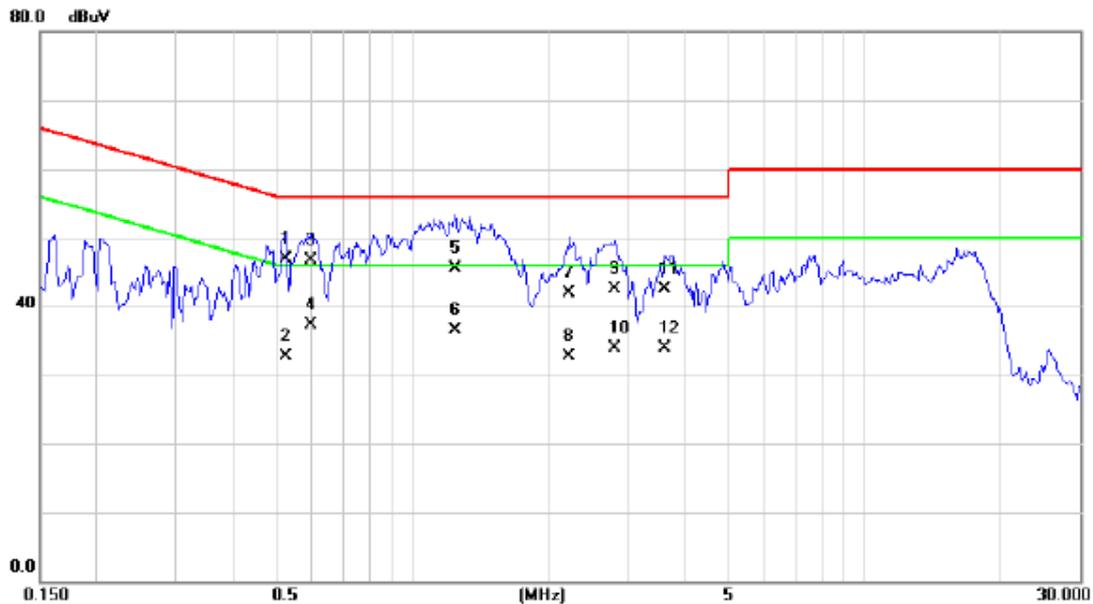

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5250	37.40	9.56	46.96	56.00	-9.04	QP	
2		0.5250	23.20	9.56	32.76	46.00	-13.24	AVG	
3		0.5992	37.20	9.56	46.76	56.00	-9.24	QP	
4	*	0.5992	27.70	9.56	37.26	46.00	-8.74	AVG	
5		1.2437	35.90	9.62	45.52	56.00	-10.48	QP	
6		1.2437	26.80	9.62	36.42	46.00	-9.58	AVG	
7		2.2320	32.10	9.74	41.84	56.00	-14.16	QP	
8		2.2320	22.90	9.74	32.64	46.00	-13.36	AVG	
9		2.8141	32.70	9.80	42.50	56.00	-13.50	QP	
10		2.8141	24.10	9.80	33.90	46.00	-12.10	AVG	
11		3.6328	32.60	9.88	42.48	56.00	-13.52	QP	
12		3.6328	24.10	9.88	33.98	46.00	-12.02	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: HK


Line

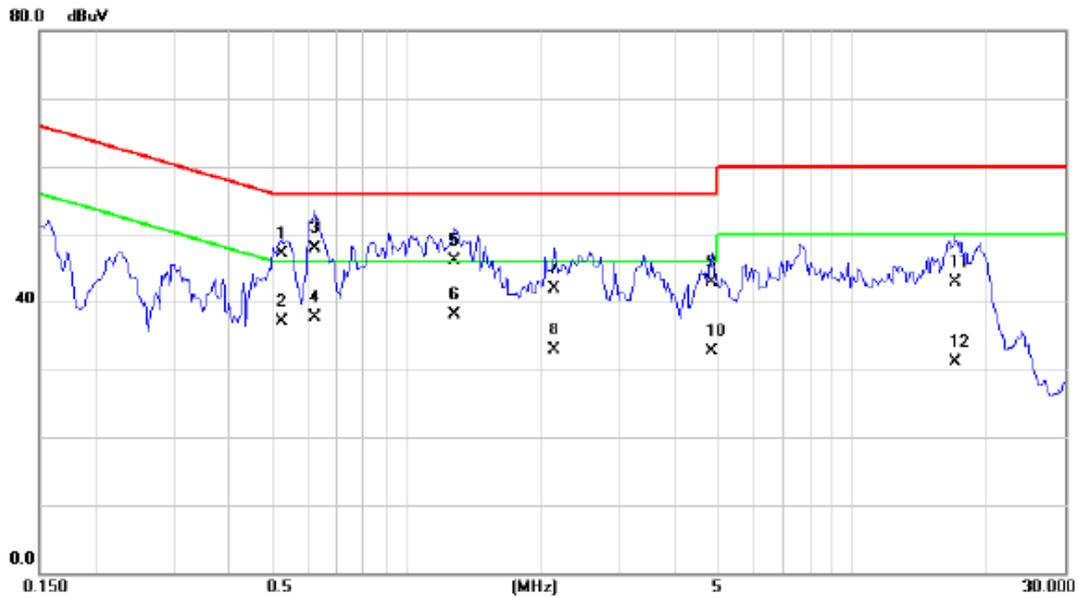

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5250	37.40	9.69	47.09	56.00	-8.91	QP	
2	0.5250	27.50	9.69	37.19	46.00	-8.81	AVG	
3	0.6226	38.10	9.73	47.83	56.00	-8.17	QP	
4	0.6226	28.00	9.73	37.73	46.00	-8.27	AVG	
5	1.2867	36.20	9.83	46.03	56.00	-9.97	QP	
6 *	1.2867	28.20	9.83	38.03	46.00	-7.97	AVG	
7	2.1500	32.00	9.94	41.94	56.00	-14.06	QP	
8	2.1500	22.90	9.94	32.84	46.00	-13.16	AVG	
9	4.8398	32.90	9.99	42.89	56.00	-13.11	QP	
10	4.8398	22.80	9.99	32.79	46.00	-13.21	AVG	
11	16.9960	33.00	9.84	42.84	60.00	-17.16	QP	
12	16.9960	21.20	9.84	31.04	50.00	-18.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: HK


Neutral

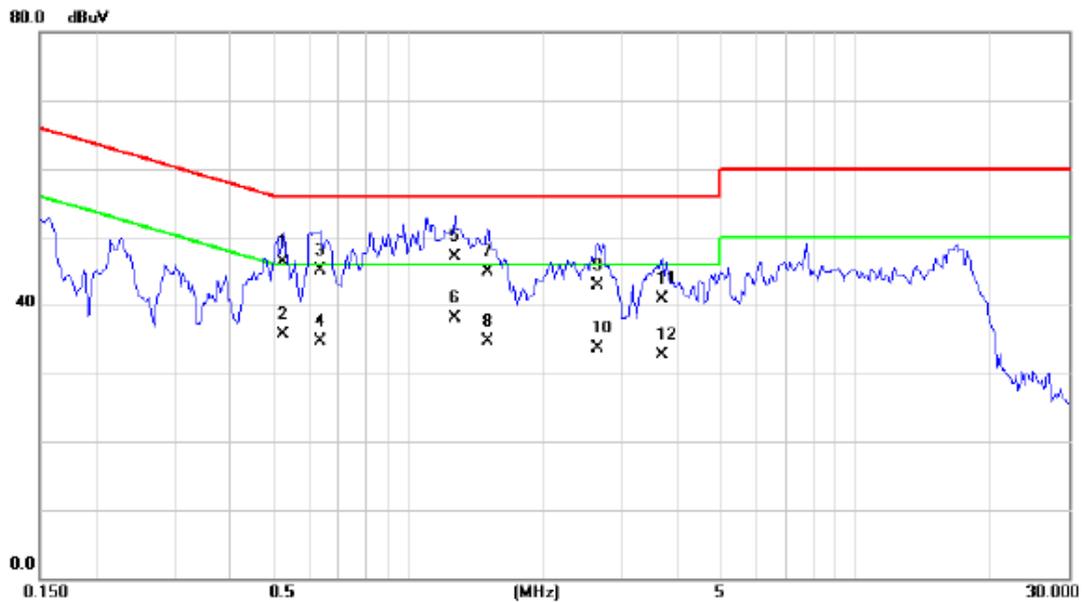

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5250	36.70	9.56	46.26	56.00	-9.74	QP	
2	0.5250	26.10	9.56	35.66	46.00	-10.34	AVG	
3	0.6344	35.50	9.55	45.05	56.00	-10.95	QP	
4	0.6344	25.20	9.55	34.75	46.00	-11.25	AVG	
5	1.2750	37.50	9.64	47.14	56.00	-8.86	QP	
6 *	1.2750	28.40	9.64	38.04	46.00	-7.96	AVG	
7	1.5055	35.30	9.66	44.96	56.00	-11.04	QP	
8	1.5055	25.00	9.66	34.66	46.00	-11.34	AVG	
9	2.6538	33.10	9.78	42.88	56.00	-13.12	QP	
10	2.6538	24.00	9.78	33.78	46.00	-12.22	AVG	
11	3.6914	31.00	9.88	40.88	56.00	-15.12	QP	
12	3.6914	22.80	9.88	32.68	46.00	-13.32	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: HK

Line

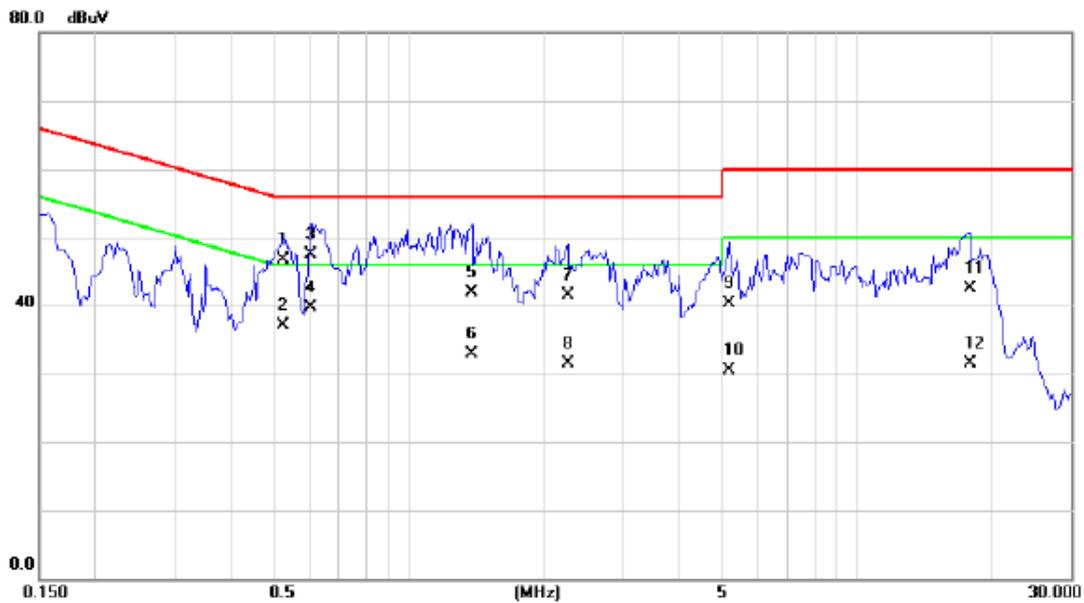

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5250	37.00	9.69	46.69	56.00	-9.31	QP	
2		0.5250	27.50	9.69	37.19	46.00	-8.81	AVG	
3		0.6070	37.80	9.72	47.52	56.00	-8.48	QP	
4	*	0.6070	30.00	9.72	39.72	46.00	-6.28	AVG	
5		1.3883	32.00	9.83	41.83	56.00	-14.17	QP	
6		1.3883	23.10	9.83	32.93	46.00	-13.07	AVG	
7		2.2633	31.50	9.96	41.46	56.00	-14.54	QP	
8		2.2633	21.60	9.96	31.56	46.00	-14.44	AVG	
9		5.1720	30.40	9.98	40.38	60.00	-19.62	QP	
10		5.1720	20.60	9.98	30.58	50.00	-19.42	AVG	
11		17.8711	32.70	9.83	42.53	60.00	-17.47	QP	
12		17.8711	21.60	9.83	31.43	50.00	-18.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: HK


Neutral



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5290	34.60	9.56	44.16	56.00	-11.84	QP	
2		0.5290	25.10	9.56	34.66	46.00	-11.34	AVG	
3		0.6031	36.80	9.56	46.36	56.00	-9.64	QP	
4	*	0.6031	27.80	9.56	37.36	46.00	-8.64	AVG	
5		1.1305	36.50	9.61	46.11	56.00	-9.89	QP	
6		1.1305	27.10	9.61	36.71	46.00	-9.29	AVG	
7		1.2944	35.30	9.64	44.94	56.00	-11.06	QP	
8		1.2944	27.10	9.64	36.74	46.00	-9.26	AVG	
9		2.6812	30.00	9.78	39.78	56.00	-16.22	QP	
10		2.6812	21.50	9.78	31.28	46.00	-14.72	AVG	
11		16.6758	31.80	9.93	41.73	60.00	-18.27	QP	
12		16.6758	21.30	9.93	31.23	50.00	-18.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: HK


Line

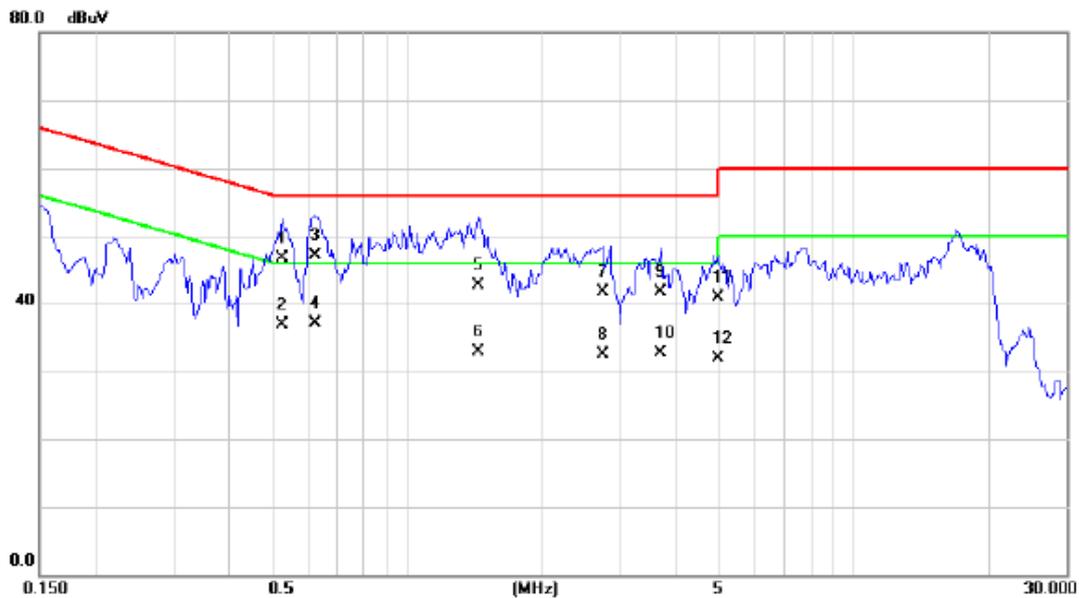

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5250	37.00	9.69	46.69	56.00	-9.31	QP	
2	0.5250	27.30	9.69	36.99	46.00	-9.01	AVG	
3	0.6266	37.30	9.73	47.03	56.00	-8.97	QP	
4 *	0.6266	27.40	9.73	37.13	46.00	-8.87	AVG	
5	1.4470	32.80	9.84	42.64	56.00	-13.36	QP	
6	1.4470	23.10	9.84	32.94	46.00	-13.06	AVG	
7	2.7398	31.60	10.01	41.61	56.00	-14.39	QP	
8	2.7398	22.40	10.01	32.41	46.00	-13.59	AVG	
9	3.7070	31.70	9.98	41.68	56.00	-14.32	QP	
10	3.7070	22.80	9.98	32.78	46.00	-13.22	AVG	
11	4.9531	31.00	9.99	40.99	56.00	-15.01	QP	
12	4.9531	21.90	9.99	31.89	46.00	-14.11	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: HK


Neutral

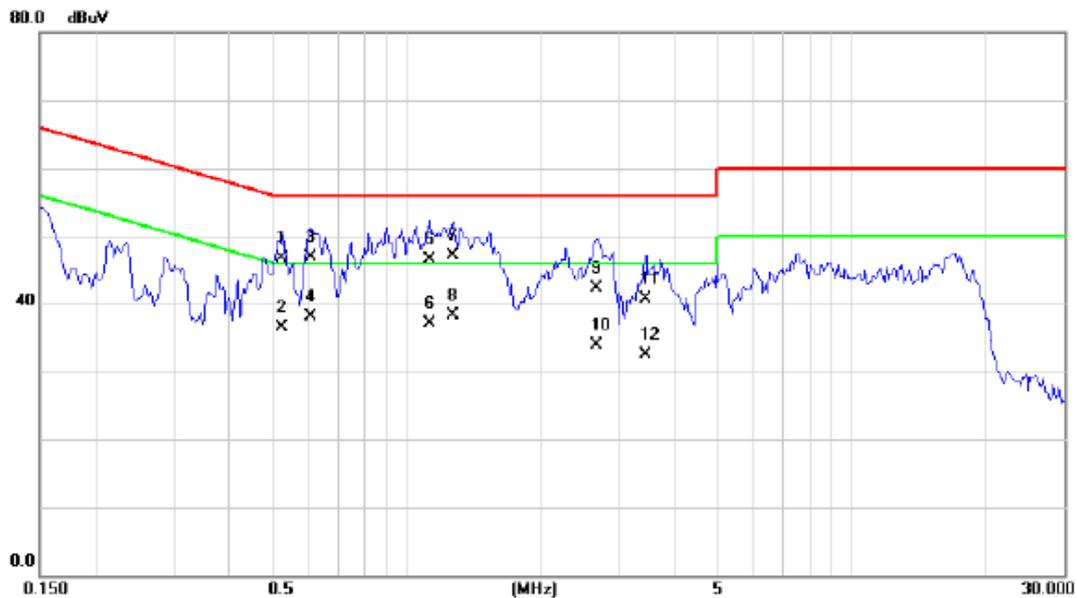

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5290	37.20	9.56	46.76	56.00	-9.24	QP	
2	0.5290	26.90	9.56	36.46	46.00	-9.54	AVG	
3	0.6110	37.30	9.56	46.86	56.00	-9.14	QP	
4	0.6110	28.60	9.56	38.16	46.00	-7.84	AVG	
5	1.1266	36.90	9.61	46.51	56.00	-9.49	QP	
6	1.1266	27.40	9.61	37.01	46.00	-8.99	AVG	
7	1.2750	37.50	9.64	47.14	56.00	-8.86	QP	
8 *	1.2750	28.70	9.64	38.34	46.00	-7.66	AVG	
9	2.6656	32.50	9.78	42.28	56.00	-13.72	QP	
10	2.6656	24.10	9.78	33.88	46.00	-12.12	AVG	
11	3.4531	30.80	9.86	40.66	56.00	-15.34	QP	
12	3.4531	22.70	9.86	32.56	46.00	-13.44	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Line

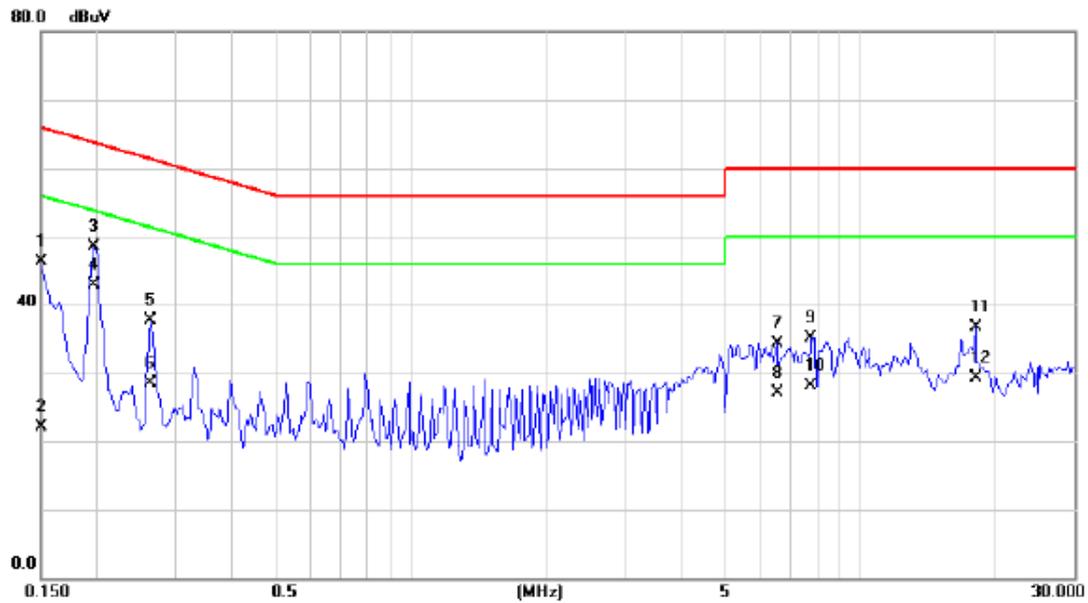

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.80	9.54	46.34	66.00	-19.66	QP	
2		0.1500	12.50	9.54	22.04	56.00	-33.96	AVG	
3		0.1970	38.94	9.57	48.51	63.74	-15.23	QP	
4	*	0.1970	33.40	9.57	42.97	53.74	-10.77	AVG	
5		0.2633	28.04	9.62	37.66	61.33	-23.67	QP	
6		0.2633	18.80	9.62	28.42	51.33	-22.91	AVG	
7		6.5273	24.44	9.94	34.38	60.00	-25.62	QP	
8		6.5273	17.10	9.94	27.04	50.00	-22.96	AVG	
9		7.7773	25.22	9.91	35.13	60.00	-24.87	QP	
10		7.7773	18.10	9.91	28.01	50.00	-21.99	AVG	
11		18.1133	26.89	9.83	36.72	60.00	-23.28	QP	
12		18.1133	19.50	9.83	29.33	50.00	-20.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Neutral

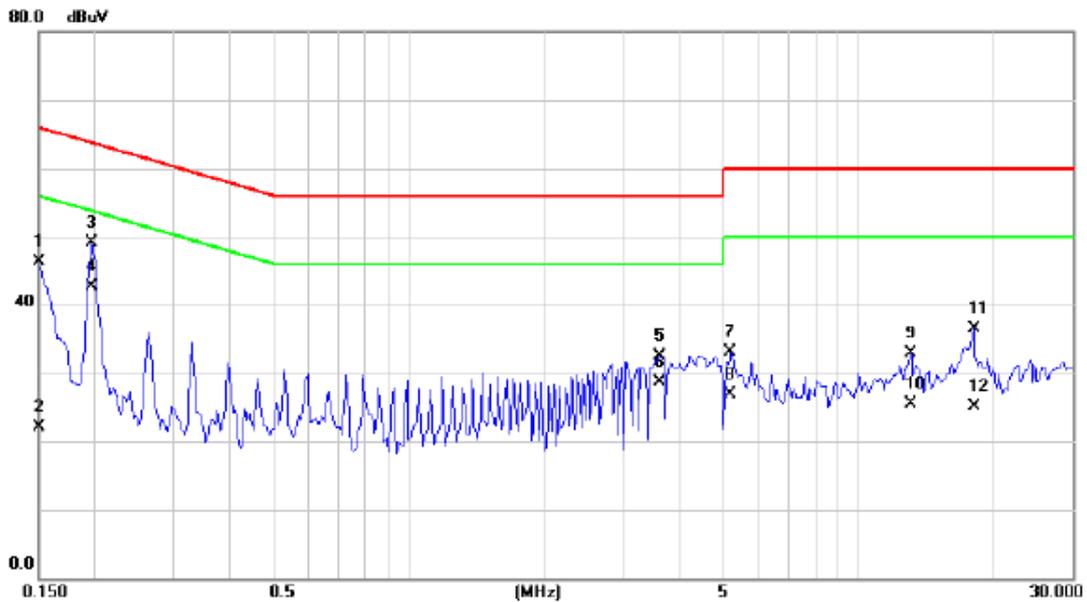

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.90	9.49	46.39	66.00	-19.61	QP	
2		0.1500	12.60	9.49	22.09	56.00	-33.91	AVG	
3		0.1970	39.51	9.50	49.01	63.74	-14.73	QP	
4	*	0.1970	33.30	9.50	42.80	53.74	-10.94	AVG	
5		3.6250	22.64	9.88	32.52	56.00	-23.48	QP	
6		3.6250	18.90	9.88	28.78	46.00	-17.22	AVG	
7		5.2070	23.28	9.90	33.18	60.00	-26.82	QP	
8		5.2070	17.10	9.90	27.00	50.00	-23.00	AVG	
9		13.1172	23.01	9.90	32.91	60.00	-27.09	QP	
10		13.1172	15.70	9.90	25.60	50.00	-24.40	AVG	
11		18.1172	26.63	9.95	36.58	60.00	-23.42	QP	
12		18.1172	15.20	9.95	25.15	50.00	-24.85	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: DAHONG


Line

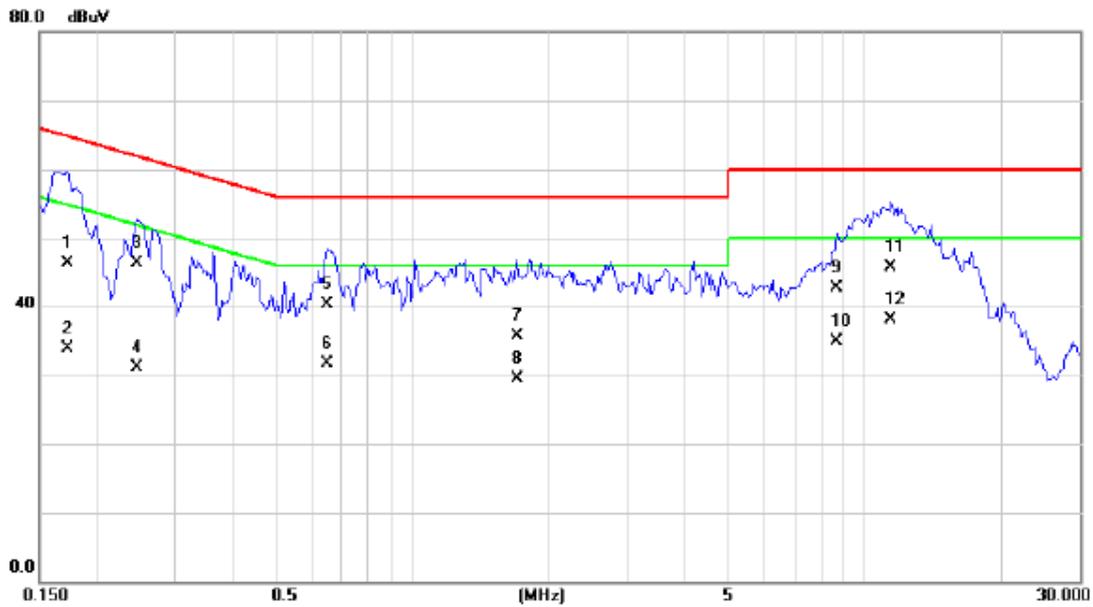

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1734	36.80	9.56	46.36	64.80	-18.44	QP	
2		0.1734	24.30	9.56	33.86	54.80	-20.94	AVG	
3		0.2477	36.70	9.61	46.31	61.83	-15.52	QP	
4		0.2477	21.40	9.61	31.01	51.83	-20.82	AVG	
5		0.6500	30.60	9.73	40.33	56.00	-15.67	QP	
6		0.6500	22.00	9.73	31.73	46.00	-14.27	AVG	
7		1.7125	25.80	9.87	35.67	56.00	-20.33	QP	
8		1.7125	19.60	9.87	29.47	46.00	-16.53	AVG	
9		8.7227	32.90	9.90	42.80	60.00	-17.20	QP	
10		8.7227	25.00	9.90	34.90	50.00	-15.10	AVG	
11		11.4570	35.90	9.87	45.77	60.00	-14.23	QP	
12	*	11.4570	28.30	9.87	38.17	50.00	-11.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: DAHONG


Neutral

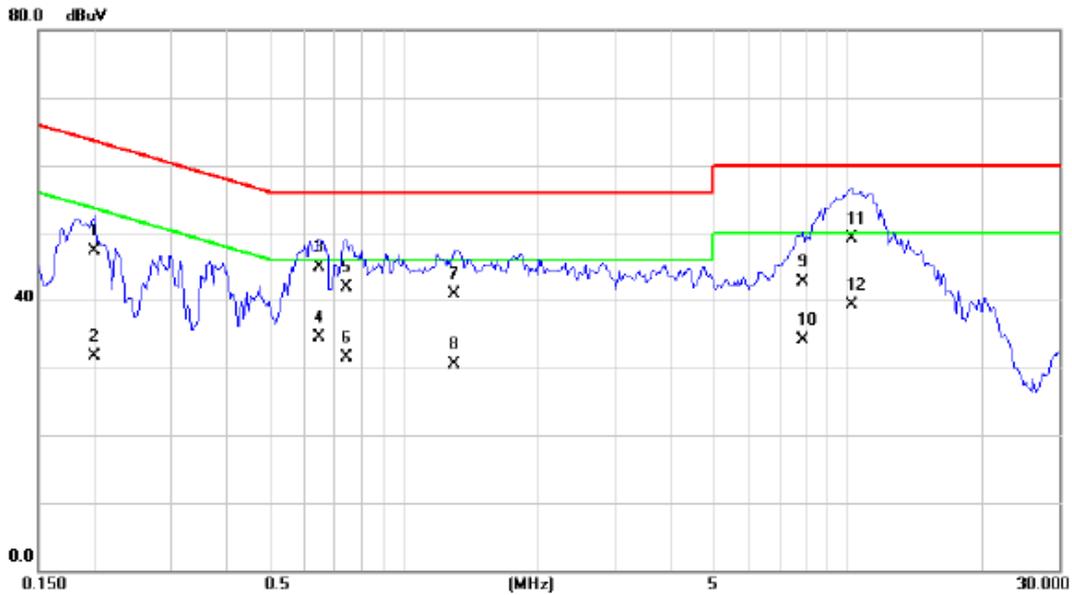

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2008	37.90	9.50	47.40	63.58	-16.18	QP	
2		0.2008	22.30	9.50	31.80	53.58	-21.78	AVG	
3		0.6461	35.30	9.55	44.85	56.00	-11.15	QP	
4		0.6461	24.90	9.55	34.45	46.00	-11.55	AVG	
5		0.7438	32.30	9.54	41.84	56.00	-14.16	QP	
6		0.7438	21.90	9.54	31.44	46.00	-14.56	AVG	
7		1.3023	31.20	9.64	40.84	56.00	-15.16	QP	
8		1.3023	20.80	9.64	30.44	46.00	-15.56	AVG	
9		7.9688	32.80	9.85	42.65	60.00	-17.35	QP	
10		7.9688	24.30	9.85	34.15	50.00	-15.85	AVG	
11		10.2266	39.30	9.85	49.15	60.00	-10.85	QP	
12	*	10.2266	29.40	9.85	39.25	50.00	-10.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: YINGJU


Line

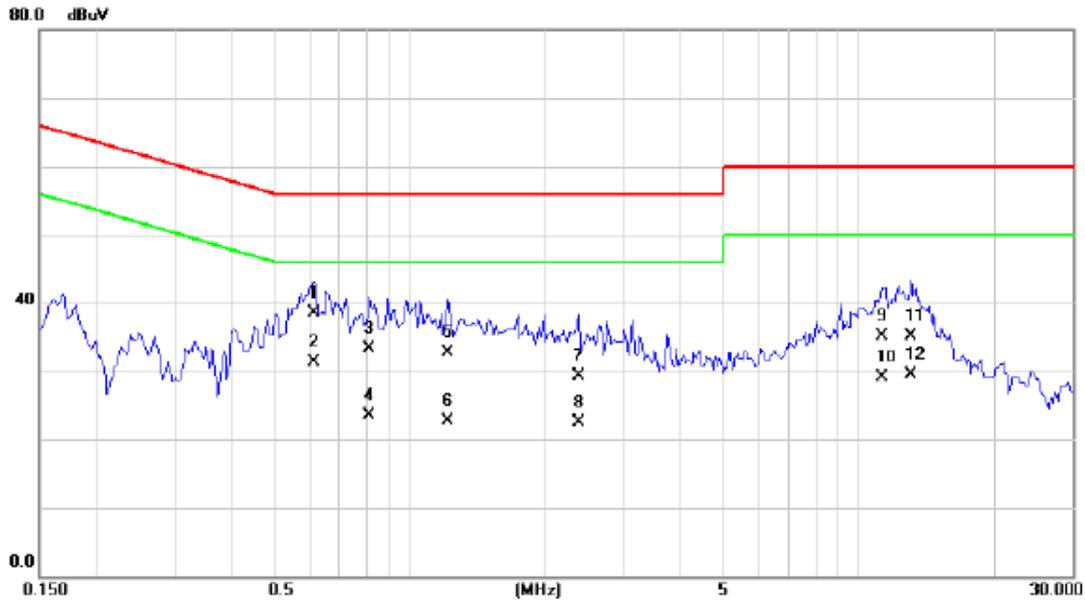

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.6148	28.80	9.72	38.52	56.00	-17.48	QP	
2	*	0.6148	21.60	9.72	31.32	46.00	-14.68	AVG	
3		0.8141	23.50	9.75	33.25	56.00	-22.75	QP	
4		0.8141	13.70	9.75	23.45	46.00	-22.55	AVG	
5		1.2203	22.90	9.81	32.71	56.00	-23.29	QP	
6		1.2203	12.80	9.81	22.61	46.00	-23.39	AVG	
7		2.3844	19.30	9.98	29.28	56.00	-26.72	QP	
8		2.3844	12.50	9.98	22.48	46.00	-23.52	AVG	
9		11.2813	25.20	9.87	35.07	60.00	-24.93	QP	
10		11.2813	19.30	9.87	29.17	50.00	-20.83	AVG	
11		13.0702	25.30	9.85	35.15	60.00	-24.85	QP	
12		13.0702	19.70	9.85	29.55	50.00	-20.45	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: YINGJU


Neutral

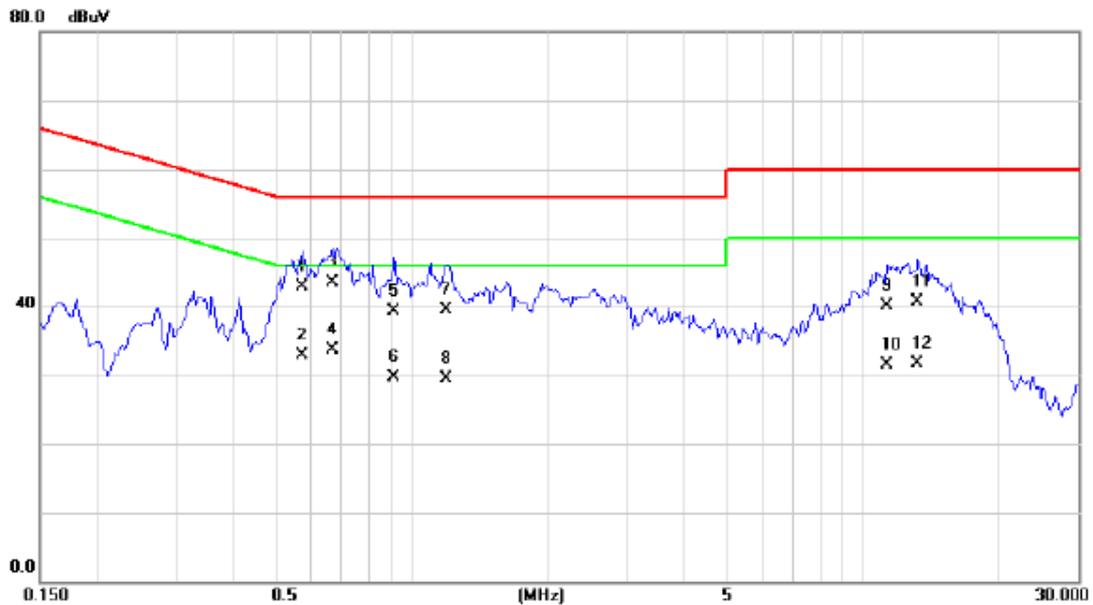

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5720	33.40	9.56	42.96	56.00	-13.04	QP	
2		0.5720	23.40	9.56	32.96	46.00	-13.04	AVG	
3		0.6695	34.00	9.54	43.54	56.00	-12.46	QP	
4	*	0.6695	24.20	9.54	33.74	46.00	-12.26	AVG	
5		0.9156	29.80	9.59	39.39	56.00	-16.61	QP	
6		0.9156	20.20	9.59	29.79	46.00	-16.21	AVG	
7		1.1930	29.90	9.62	39.52	56.00	-16.48	QP	
8		1.1930	19.80	9.62	29.42	46.00	-16.58	AVG	
9		11.3047	30.30	9.87	40.17	60.00	-19.83	QP	
10		11.3047	21.60	9.87	31.47	50.00	-18.53	AVG	
11		13.2266	30.90	9.90	40.80	60.00	-19.20	QP	
12		13.2266	21.90	9.90	31.80	50.00	-18.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Line

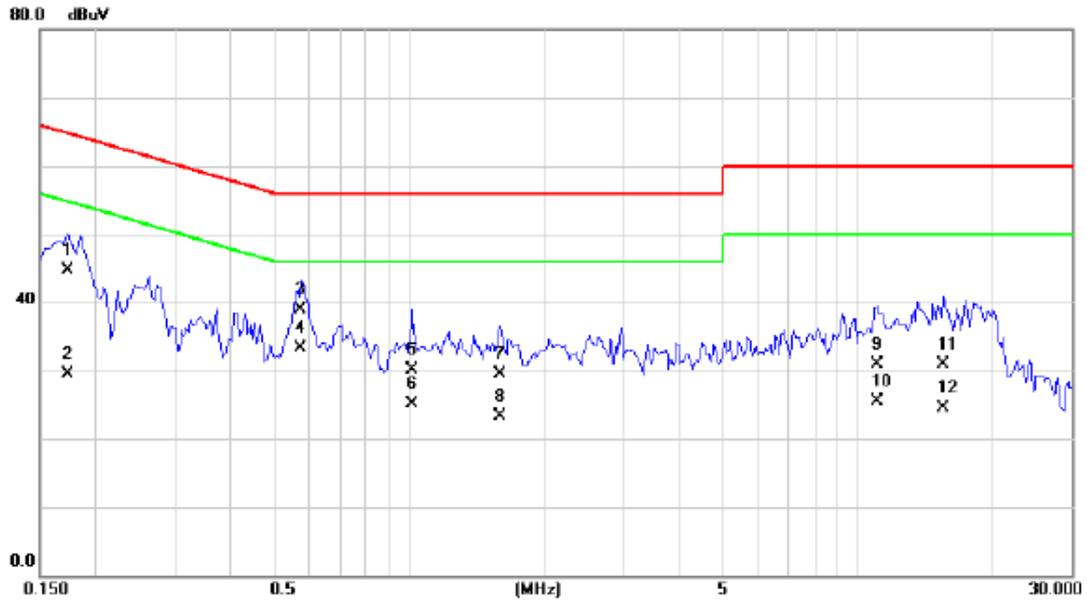

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1734	35.10	9.56	44.66	64.80	-20.14	QP	
2	0.1734	19.90	9.56	29.46	54.80	-25.34	AVG	
3	0.5720	29.20	9.71	38.91	56.00	-17.09	QP	
4 *	0.5720	23.50	9.71	33.21	46.00	-12.79	AVG	
5	1.0172	20.40	9.80	30.20	56.00	-25.80	QP	
6	1.0172	15.30	9.80	25.10	46.00	-20.90	AVG	
7	1.5953	19.60	9.85	29.45	56.00	-26.55	QP	
8	1.5953	13.50	9.85	23.35	46.00	-22.65	AVG	
9	11.0586	21.00	9.86	30.86	60.00	-29.14	QP	
10	11.0586	15.60	9.86	25.46	50.00	-24.54	AVG	
11	15.4961	21.10	9.82	30.92	60.00	-29.08	QP	
12	15.4961	14.70	9.82	24.52	50.00	-25.48	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Neutral

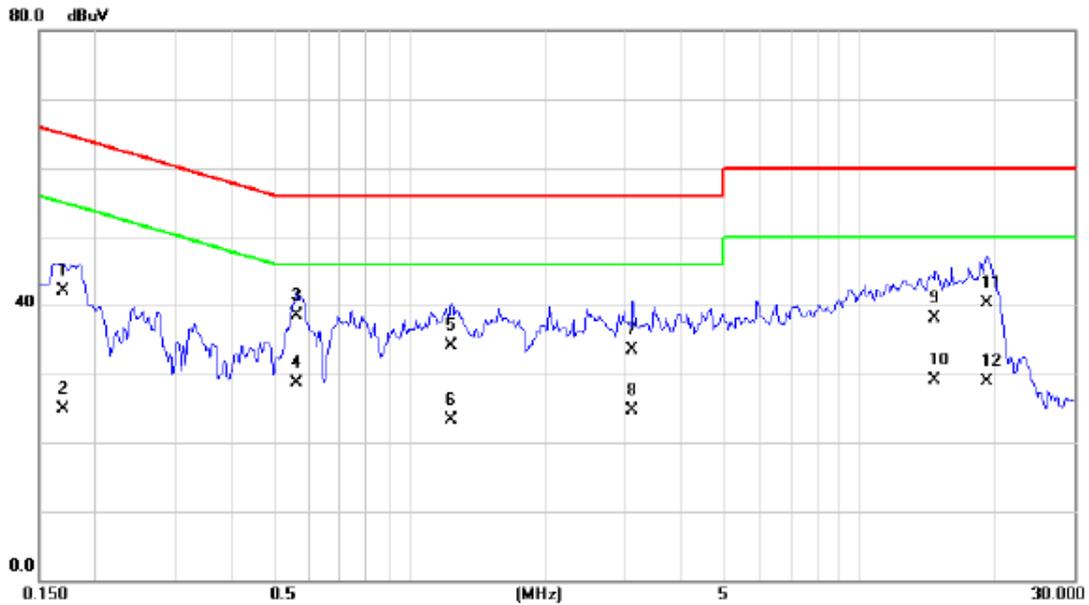

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1695	32.60	9.48	42.08	64.98	-22.90	QP	
2		0.1695	15.40	9.48	24.88	54.98	-30.10	AVG	
3		0.5602	29.00	9.56	38.56	56.00	-17.44	QP	
4	*	0.5602	19.20	9.56	28.76	46.00	-17.24	AVG	
5		1.2398	24.50	9.62	34.12	56.00	-21.88	QP	
6		1.2398	13.60	9.62	23.22	46.00	-22.78	AVG	
7		3.1366	23.70	9.83	33.53	56.00	-22.47	QP	
8		3.1366	14.80	9.83	24.63	46.00	-21.37	AVG	
9		14.7383	28.20	9.92	38.12	60.00	-21.88	QP	
10		14.7383	19.10	9.92	29.02	50.00	-20.98	AVG	
11		19.1405	30.30	9.96	40.26	60.00	-19.74	QP	
12		19.1405	19.00	9.96	28.96	50.00	-21.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: HK (EU Plug)


Line

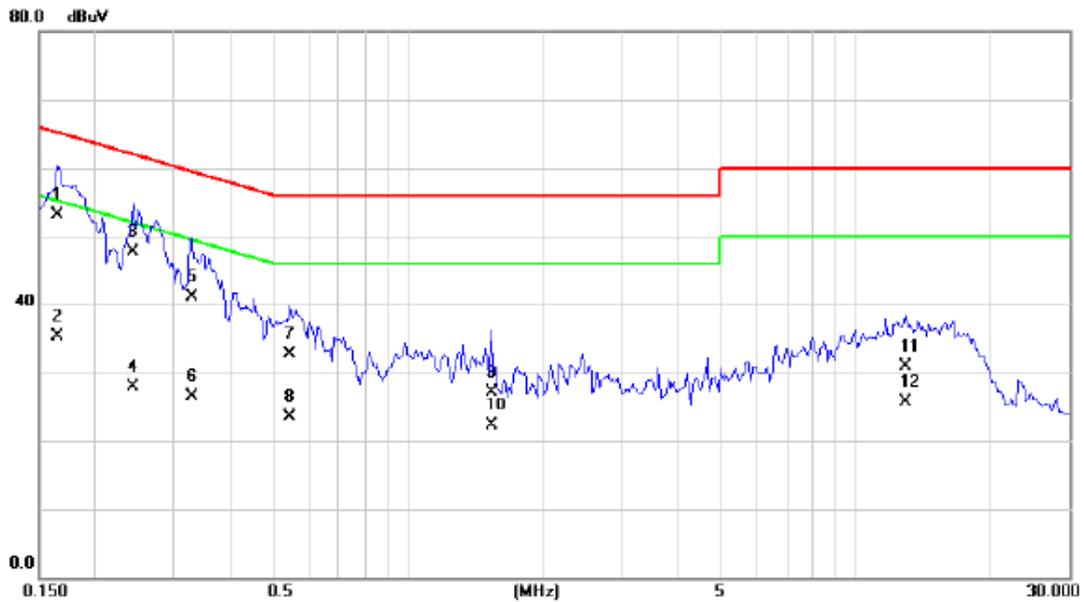

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1655	43.60	9.56	53.16	65.18	-12.02	QP	
2		0.1655	25.70	9.56	35.26	55.18	-19.92	AVG	
3		0.2437	38.10	9.60	47.70	61.97	-14.27	QP	
4		0.2437	18.30	9.60	27.90	51.97	-24.07	AVG	
5		0.3297	31.50	9.64	41.14	59.46	-18.32	QP	
6		0.3297	16.80	9.64	26.44	49.46	-23.02	AVG	
7		0.5445	23.00	9.70	32.70	56.00	-23.30	QP	
8		0.5445	13.90	9.70	23.60	46.00	-22.40	AVG	
9		1.5406	17.30	9.85	27.15	56.00	-28.85	QP	
10		1.5406	12.50	9.85	22.35	46.00	-23.65	AVG	
11		12.8594	21.10	9.84	30.94	60.00	-29.06	QP	
12		12.8594	15.90	9.84	25.74	50.00	-24.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: HK (EU Plug)


Neutral

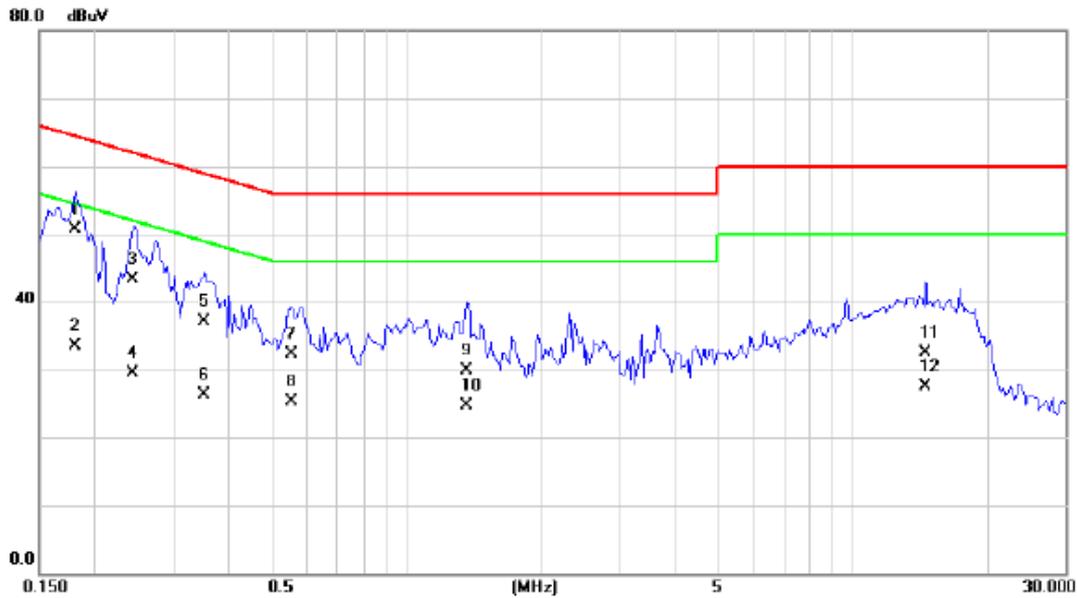

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1812	41.30	9.49	50.79	64.43	-13.64	QP	
2		0.1812	24.00	9.49	33.49	54.43	-20.94	AVG	
3		0.2437	33.70	9.51	43.21	61.97	-18.76	QP	
4		0.2437	20.00	9.51	29.51	51.97	-22.46	AVG	
5		0.3531	27.50	9.54	37.04	58.89	-21.85	QP	
6		0.3531	16.80	9.54	26.34	48.89	-22.55	AVG	
7		0.5523	22.80	9.56	32.36	56.00	-23.64	QP	
8		0.5523	15.70	9.56	25.26	46.00	-20.74	AVG	
9		1.3610	20.30	9.65	29.95	56.00	-26.05	QP	
10		1.3610	15.10	9.65	24.75	46.00	-21.25	AVG	
11		14.5860	22.60	9.92	32.52	60.00	-27.48	QP	
12		14.5860	17.50	9.92	27.42	50.00	-22.58	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: YINGJU (EU Plug)


Line

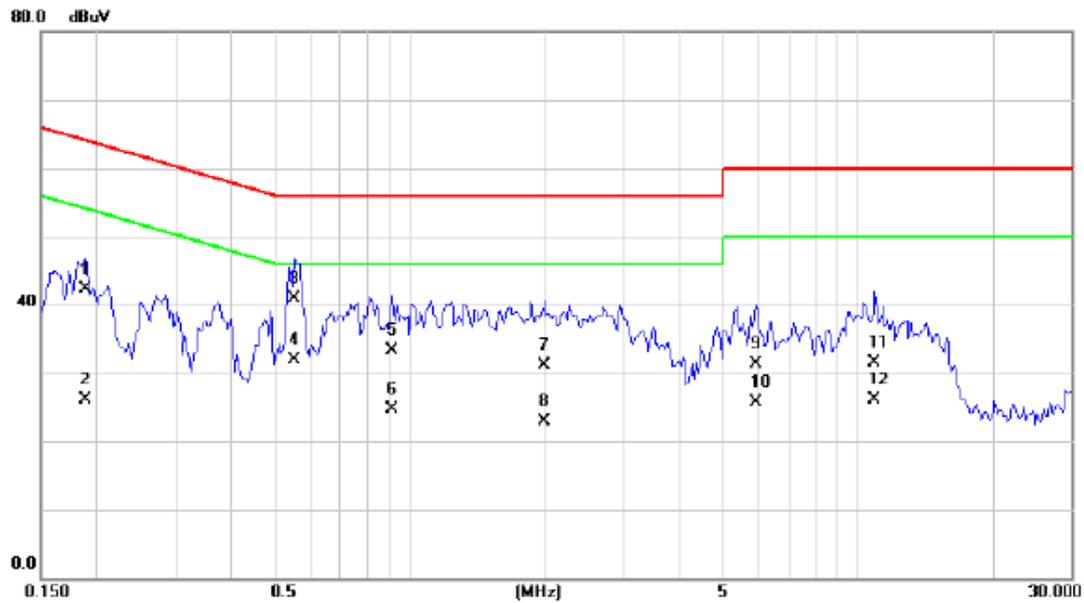

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1891	32.80	9.57	42.37	64.08	-21.71	QP	
2		0.1891	16.50	9.57	26.07	54.08	-28.01	AVG	
3		0.5523	31.20	9.70	40.90	56.00	-15.10	QP	
4	*	0.5523	22.30	9.70	32.00	46.00	-14.00	AVG	
5		0.9117	23.60	9.78	33.38	56.00	-22.62	QP	
6		0.9117	15.00	9.78	24.78	46.00	-21.22	AVG	
7		2.0016	21.10	9.92	31.02	56.00	-24.98	QP	
8		2.0016	12.90	9.92	22.82	46.00	-23.18	AVG	
9		5.9531	21.30	9.96	31.26	60.00	-28.74	QP	
10		5.9531	15.80	9.96	25.76	50.00	-24.24	AVG	
11		10.9570	21.60	9.87	31.47	60.00	-28.53	QP	
12		10.9570	16.30	9.87	26.17	50.00	-23.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: YINGJU (EU Plug)


Neutral

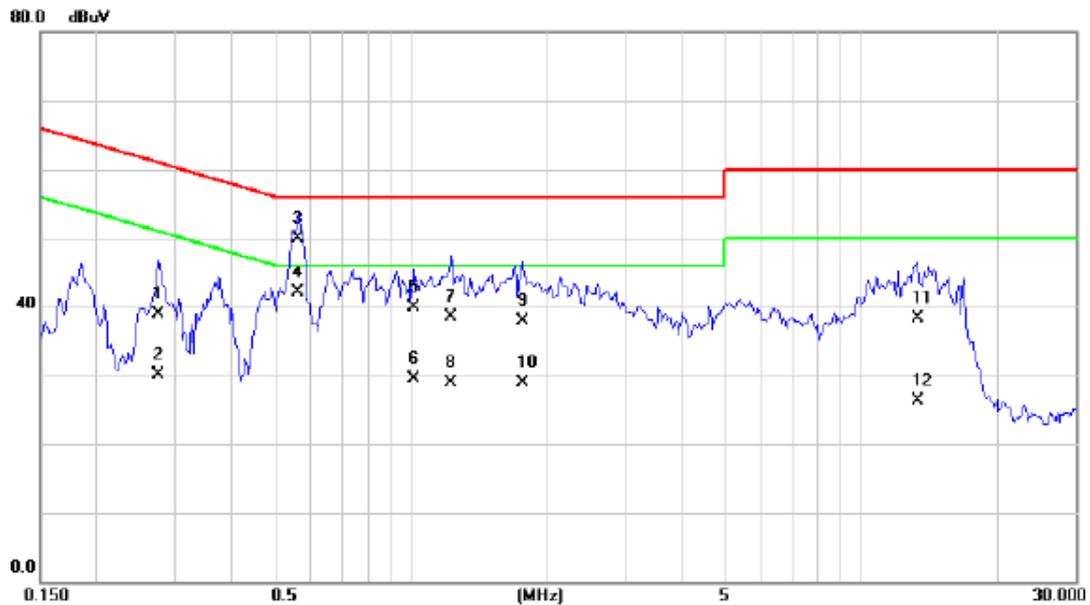

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2750	29.40	9.52	38.92	60.97	-22.05	QP	
2	0.2750	20.60	9.52	30.12	50.97	-20.85	AVG	
3	0.5641	40.40	9.56	49.96	56.00	-6.04	QP	
4 *	0.5641	32.50	9.56	42.06	46.00	-3.94	AVG	
5	1.0172	30.30	9.58	39.88	56.00	-16.12	QP	
6	1.0172	20.00	9.58	29.58	46.00	-16.42	AVG	
7	1.2320	28.90	9.62	38.52	56.00	-17.48	QP	
8	1.2320	19.20	9.62	28.82	46.00	-17.18	AVG	
9	1.7790	28.20	9.70	37.90	56.00	-18.10	QP	
10	1.7790	19.30	9.70	29.00	46.00	-17.00	AVG	
11	13.3438	28.50	9.90	38.40	60.00	-21.60	QP	
12	13.3438	16.40	9.90	26.30	50.00	-23.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: DAHONG (EU Plug)


Line

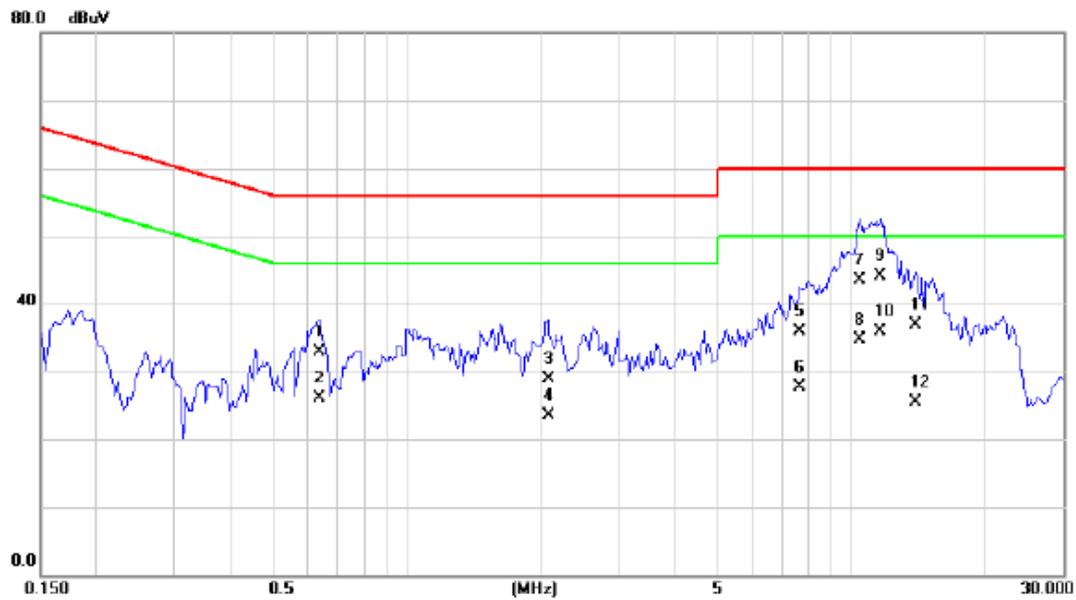

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.6344	23.10	9.73	32.83	56.00	-23.17	QP	
2		0.6344	16.30	9.73	26.03	46.00	-19.97	AVG	
3		2.0875	18.90	9.93	28.83	56.00	-27.17	QP	
4		2.0875	13.60	9.93	23.53	46.00	-22.47	AVG	
5		7.6602	26.10	9.90	36.00	60.00	-24.00	QP	
6		7.6602	17.80	9.90	27.70	50.00	-22.30	AVG	
7		10.4220	33.60	9.88	43.48	60.00	-16.52	QP	
8		10.4220	24.90	9.88	34.78	50.00	-15.22	AVG	
9		11.6826	34.30	9.86	44.16	60.00	-15.84	QP	
10	*	11.6826	26.10	9.86	35.96	50.00	-14.04	AVG	
11		13.9570	27.00	9.84	36.84	60.00	-23.16	QP	
12		13.9570	15.70	9.84	25.54	50.00	-24.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: DAHONG (EU Plug)


Neutral

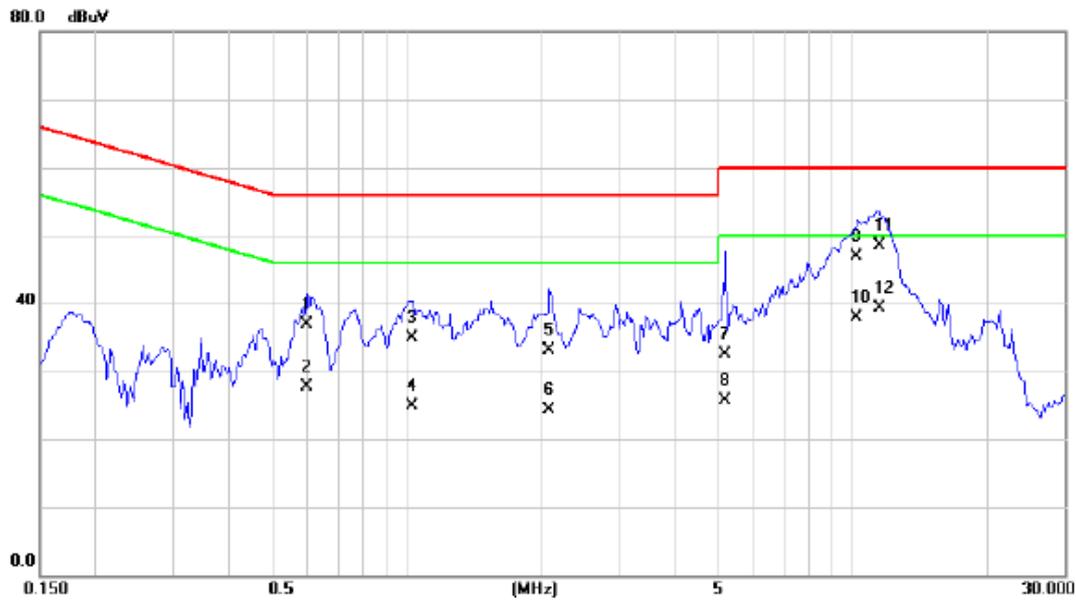

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5992	27.30	9.56	36.86	56.00	-19.14	QP	
2		0.5992	18.20	9.56	27.76	46.00	-18.24	AVG	
3		1.0265	25.40	9.59	34.99	56.00	-21.01	QP	
4		1.0265	15.40	9.59	24.99	46.00	-21.01	AVG	
5		2.0953	23.30	9.73	33.03	56.00	-22.97	QP	
6		2.0953	14.50	9.73	24.23	46.00	-21.77	AVG	
7		5.2148	22.60	9.90	32.50	60.00	-27.50	QP	
8		5.2148	15.90	9.90	25.80	50.00	-24.20	AVG	
9		10.2656	37.10	9.85	46.95	60.00	-13.05	QP	
10		10.2656	28.00	9.85	37.85	50.00	-12.15	AVG	
11		11.5391	38.60	9.87	48.47	60.00	-11.53	QP	
12	*	11.5391	29.50	9.87	39.37	50.00	-10.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD (EU Plug)


Line

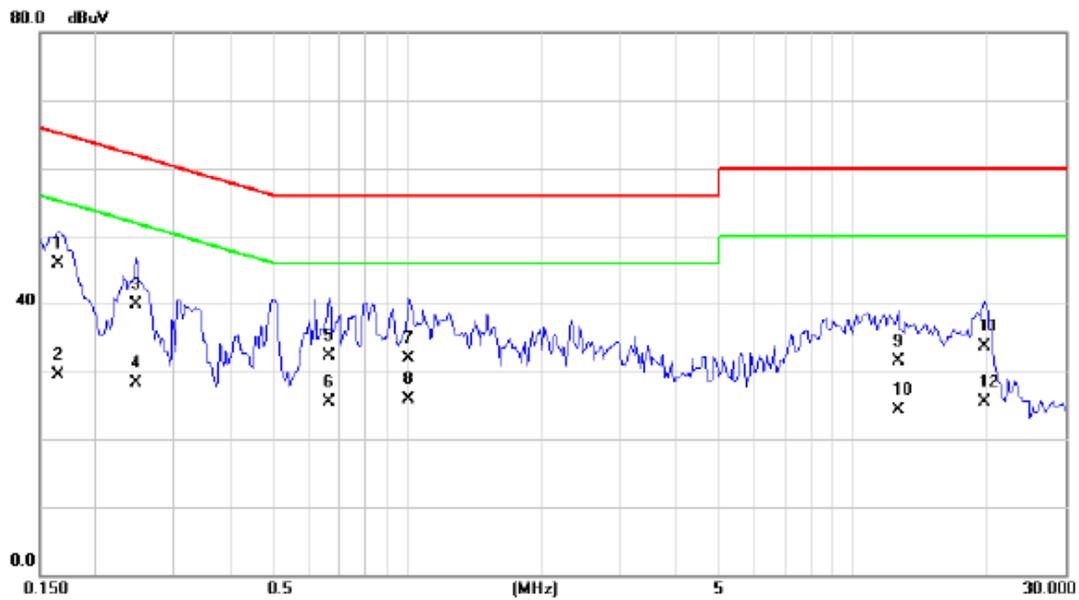

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1655	36.40	9.56	45.96	65.18	-19.22	QP	
2		0.1655	20.00	9.56	29.56	55.18	-25.62	AVG	
3		0.2477	30.30	9.61	39.91	61.83	-21.92	QP	
4		0.2477	18.60	9.61	28.21	51.83	-23.62	AVG	
5		0.6695	22.50	9.73	32.23	56.00	-23.77	QP	
6		0.6695	15.80	9.73	25.53	46.00	-20.47	AVG	
7		1.0094	22.20	9.80	32.00	56.00	-24.00	QP	
8		1.0094	16.10	9.80	25.90	46.00	-20.10	AVG	
9		12.6133	21.60	9.85	31.45	60.00	-28.55	QP	
10		12.6133	14.50	9.85	24.35	50.00	-25.65	AVG	
11		19.8047	23.80	9.85	33.65	60.00	-26.35	QP	
12		19.8047	15.60	9.85	25.45	50.00	-24.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD (EU Plug)

Neutral

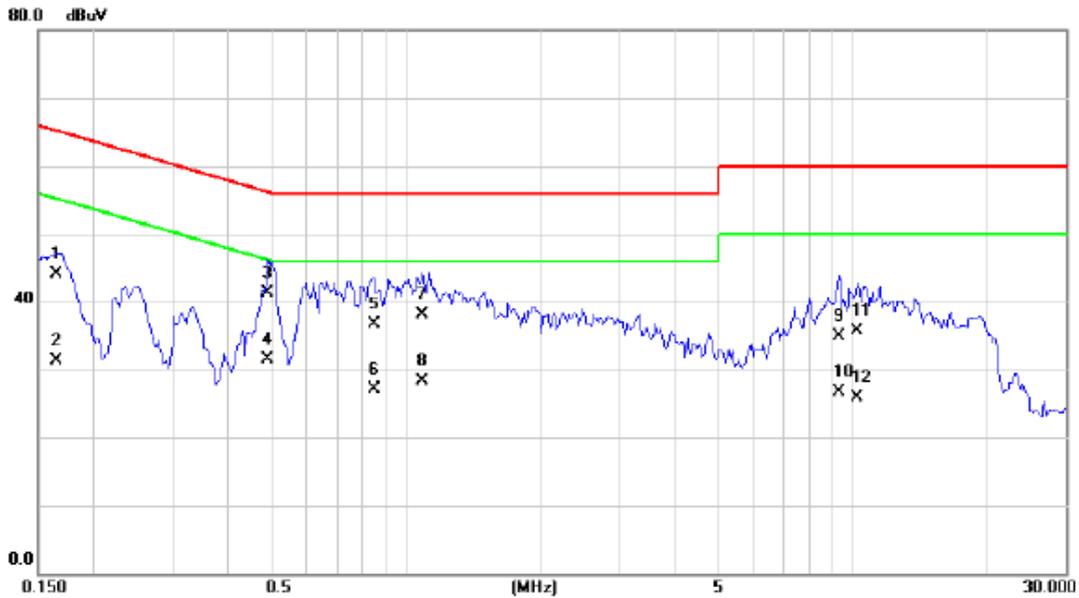


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1655	34.60	9.48	44.08	65.18	-21.10	QP	
2		0.1655	21.80	9.48	31.28	55.18	-23.90	AVG	
3		0.4898	31.70	9.56	41.26	56.17	-14.91	QP	
4	*	0.4898	22.00	9.56	31.56	46.17	-14.61	AVG	
5		0.8492	27.10	9.57	36.67	56.00	-19.33	QP	
6		0.8492	17.50	9.57	27.07	46.00	-18.93	AVG	
7		1.0914	28.60	9.60	38.20	56.00	-17.80	QP	
8		1.0914	18.80	9.60	28.40	46.00	-17.60	AVG	
9		9.3360	25.00	9.85	34.85	60.00	-25.15	QP	
10		9.3360	16.90	9.85	26.75	50.00	-23.25	AVG	
11		10.2227	25.80	9.85	35.65	60.00	-24.35	QP	
12		10.2227	16.00	9.85	25.85	50.00	-24.15	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)


Vertical

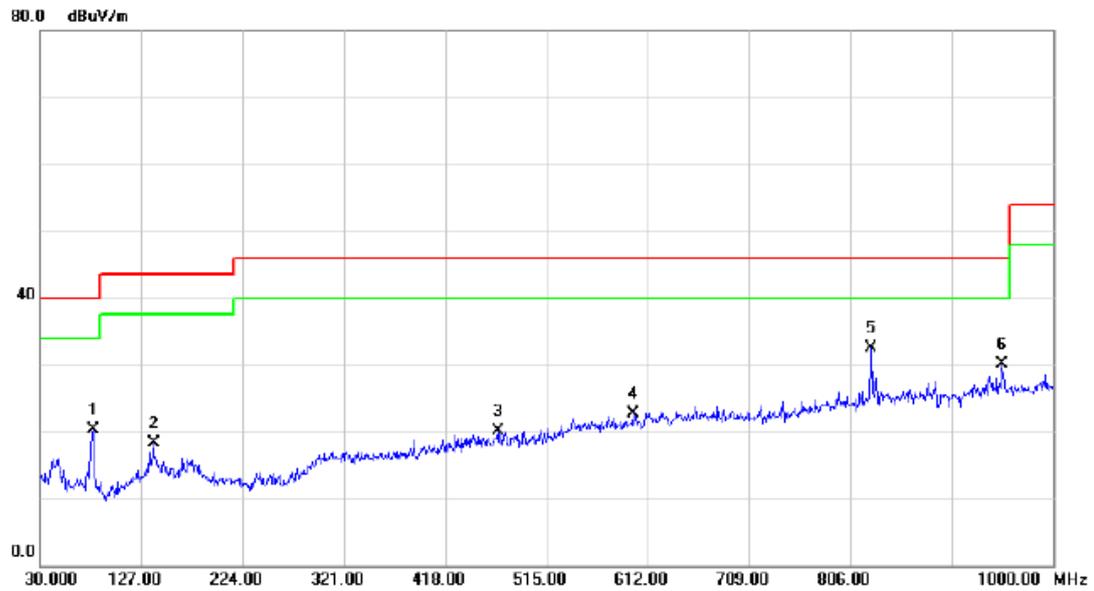

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	36.31	-16.03	20.28	40.00	-19.72	QP	
2		138.6400	32.22	-13.94	18.28	43.50	-25.22	QP	
3		468.4400	29.55	-9.51	20.04	46.00	-25.96	QP	
4		598.4200	29.56	-6.77	22.79	46.00	-23.21	QP	
5	*	826.3700	36.11	-3.54	32.57	46.00	-13.43	QP	
6		951.5000	31.99	-1.97	30.02	46.00	-15.98	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD(EU Plug)


Horizontal

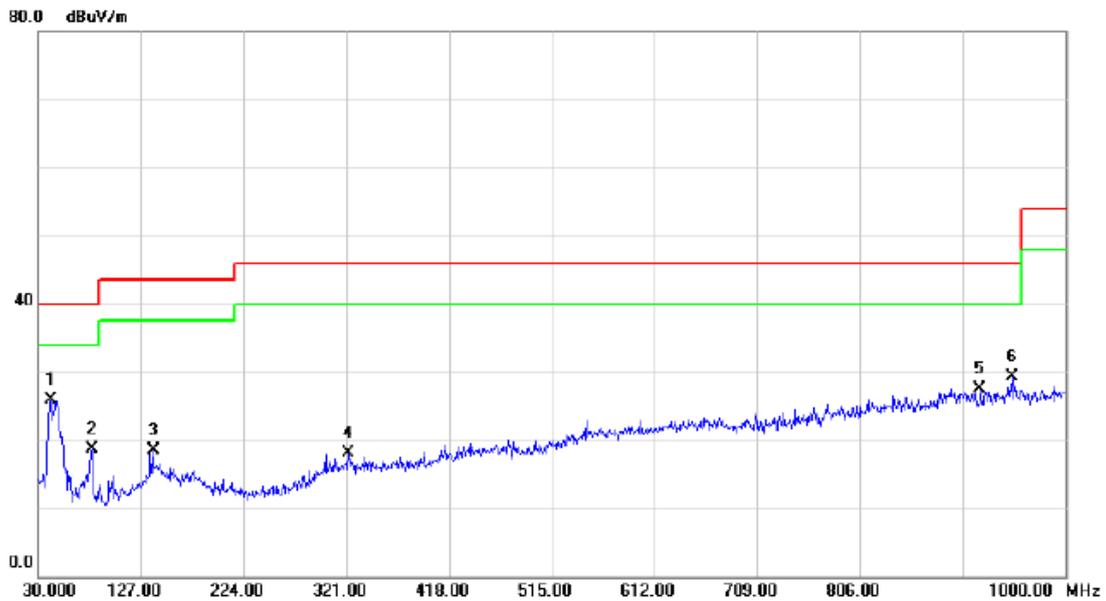

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	40.91	-14.97	25.94	40.00	-14.06	QP	
2		80.4400	34.71	-16.03	18.68	40.00	-21.32	QP	
3		138.6400	32.39	-13.94	18.45	43.50	-25.05	QP	
4		322.9400	29.05	-10.86	18.19	46.00	-27.81	QP	
5		919.4900	29.81	-2.26	27.55	46.00	-18.45	QP	
6		950.5300	31.34	-1.98	29.36	46.00	-16.64	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD(EU Plug)


Vertical

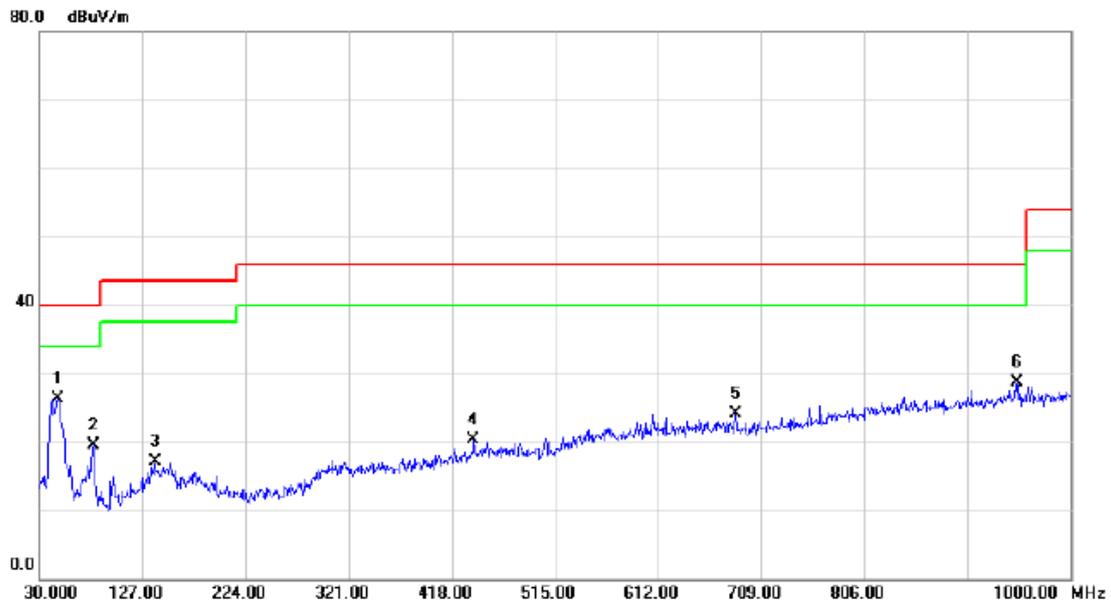

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	41.67	-15.45	26.22	40.00	-13.78	QP	
2		80.4400	35.63	-16.03	19.60	40.00	-20.40	QP	
3		138.6400	31.03	-13.94	17.09	43.50	-26.41	QP	
4		438.3700	29.95	-9.69	20.26	46.00	-25.74	QP	
5		684.7500	30.04	-6.01	24.03	46.00	-21.97	QP	
6		950.5300	30.74	-1.98	28.76	46.00	-17.24	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD(EU Plug)


Horizontal

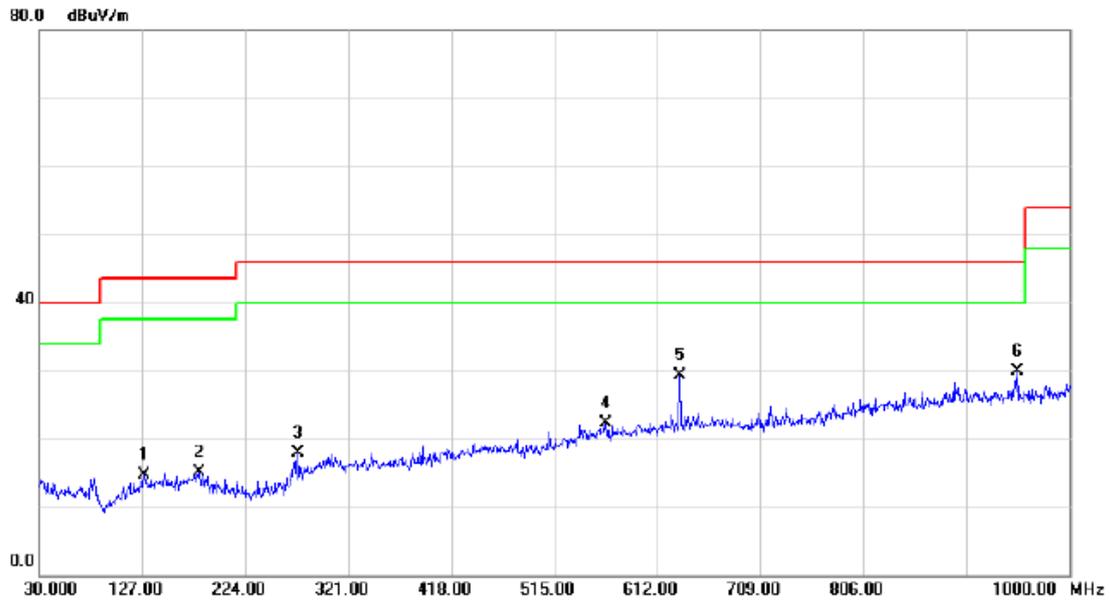

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		128.9400	28.50	-13.73	14.77	43.50	-28.73	QP	
2		180.3500	27.84	-12.79	15.05	43.50	-28.45	QP	
3		273.4700	31.70	-13.78	17.92	46.00	-28.08	QP	
4		563.5000	29.52	-7.18	22.34	46.00	-23.66	QP	
5		633.3400	35.35	-6.13	29.22	46.00	-16.78	QP	
6	*	951.5000	31.87	-1.97	29.90	46.00	-16.10	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD(EU Plug)


Vertical

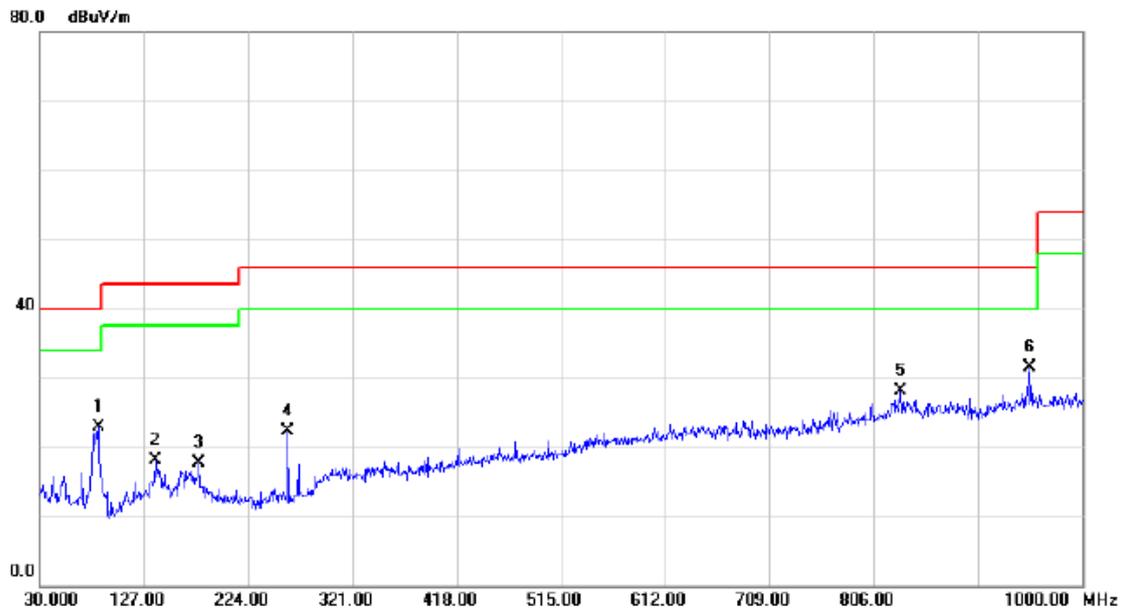

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		84.3200	39.32	-16.41	22.91	40.00	-17.09	QP	
2		137.6700	32.08	-13.91	18.17	43.50	-25.33	QP	
3		178.4100	30.39	-12.76	17.63	43.50	-25.87	QP	
4		260.8600	36.82	-14.60	22.22	46.00	-23.78	QP	
5		831.2200	31.48	-3.45	28.03	46.00	-17.97	QP	
6	*	951.5000	33.42	-1.97	31.45	46.00	-14.55	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD(EU Plug)


Horizontal

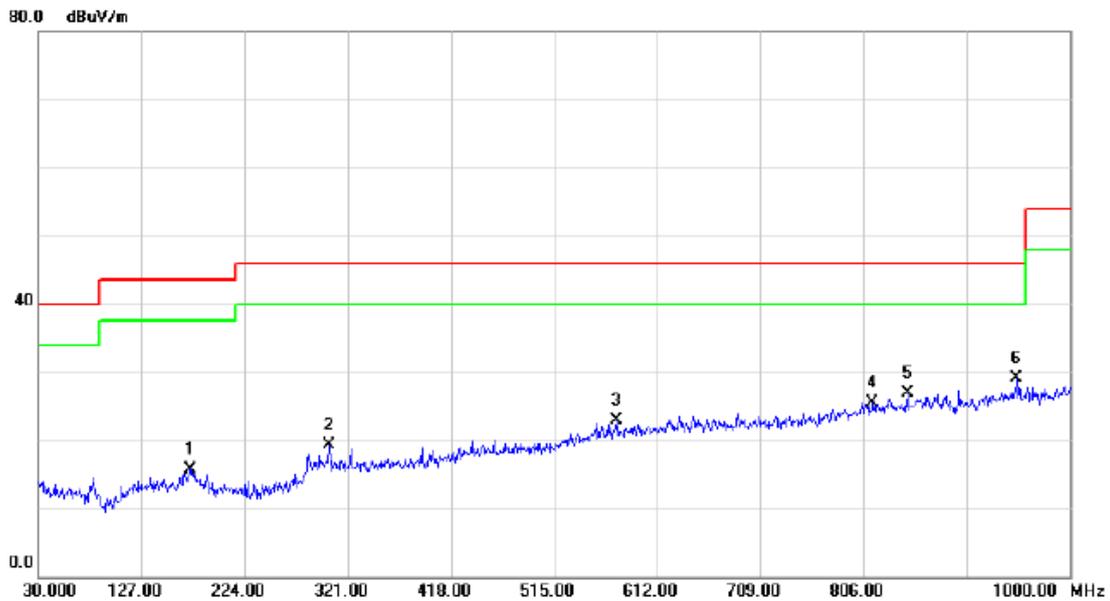

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		172.5900	28.59	-12.85	15.74	43.50	-27.76	QP	
2		303.5400	30.13	-10.81	19.32	46.00	-26.68	QP	
3		573.2000	30.00	-7.07	22.93	46.00	-23.07	QP	
4		814.7300	29.21	-3.72	25.49	46.00	-20.51	QP	
5		847.7100	30.01	-3.19	26.82	46.00	-19.18	QP	
6	*	950.5300	31.17	-1.98	29.19	46.00	-16.81	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD(EU Plug)


Vertical

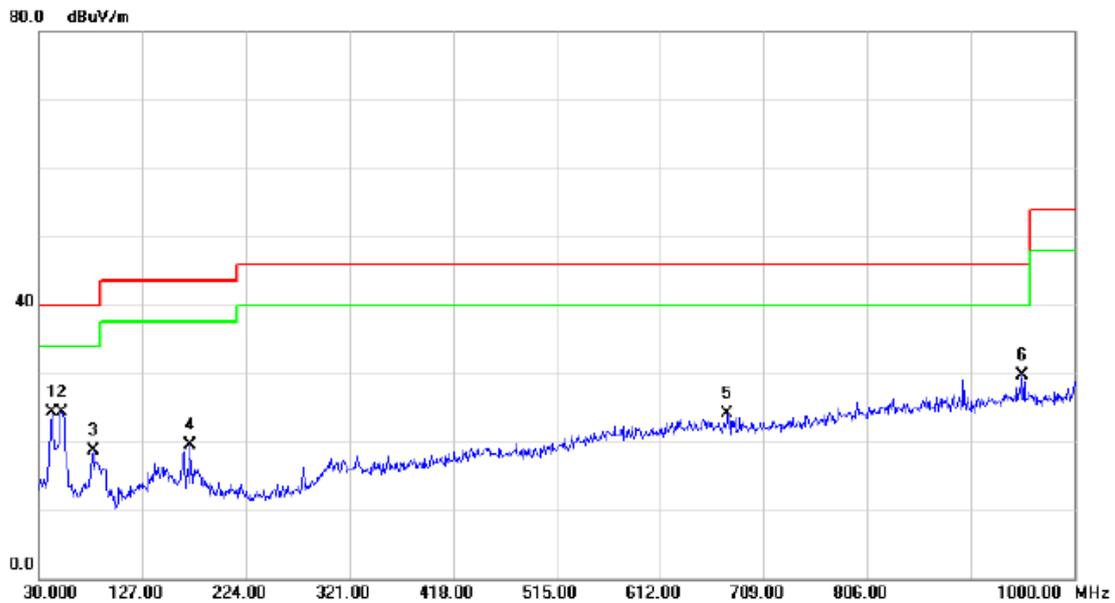

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	39.18	-14.97	24.21	40.00	-15.79	QP	
2	*	51.3400	39.41	-15.17	24.24	40.00	-15.76	QP	
3		80.4400	34.69	-16.03	18.66	40.00	-21.34	QP	
4		171.6200	32.31	-12.86	19.45	43.50	-24.05	QP	
5		675.0500	29.97	-5.95	24.02	46.00	-21.98	QP	
6		951.5000	31.66	-1.97	29.69	46.00	-16.31	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD(EU Plug)


Horizontal

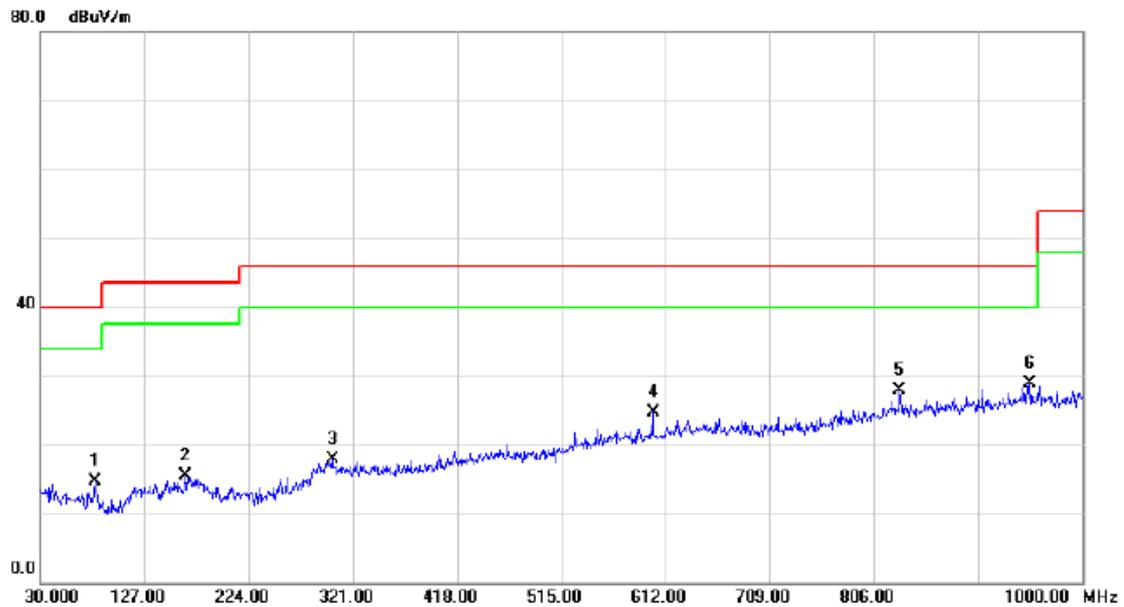

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	30.75	-16.03	14.72	40.00	-25.28	QP	
2		164.8300	28.87	-13.32	15.55	43.50	-27.95	QP	
3		301.6000	28.65	-10.81	17.84	46.00	-28.16	QP	
4		600.3600	31.52	-6.75	24.77	46.00	-21.23	QP	
5		830.2500	31.31	-3.48	27.83	46.00	-18.17	QP	
6	*	951.5000	30.90	-1.97	28.93	46.00	-17.07	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD(EU Plug)


Vertical

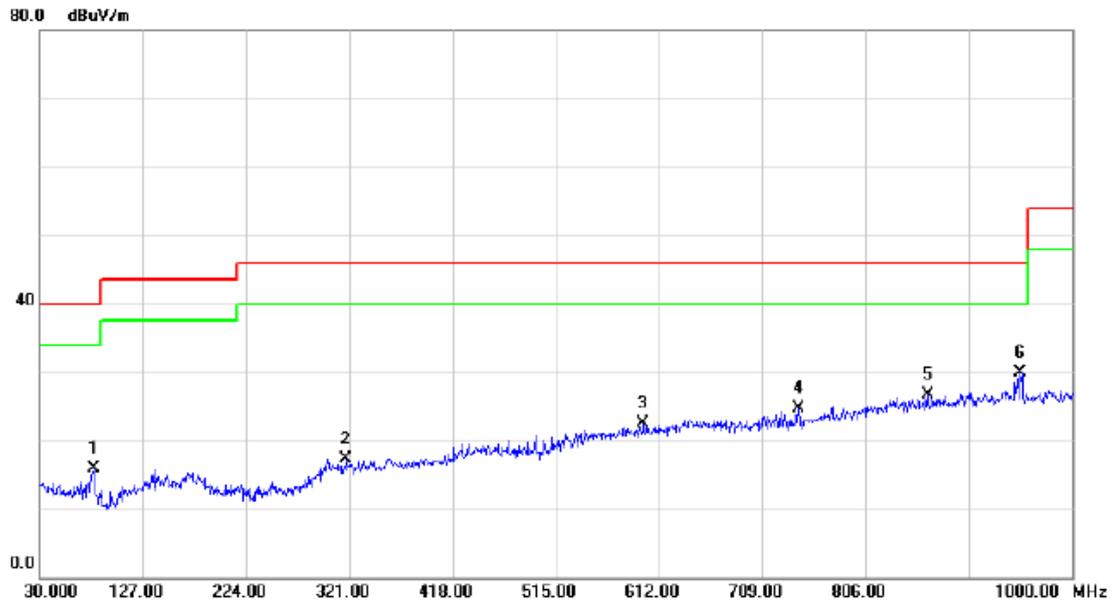

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	31.85	-16.03	15.82	40.00	-24.18	QP	
2		318.0900	28.25	-10.85	17.40	46.00	-28.60	QP	
3		597.4500	29.31	-6.80	22.51	46.00	-23.49	QP	
4		742.9500	30.37	-5.58	24.79	46.00	-21.21	QP	
5		864.2000	29.71	-2.95	26.76	46.00	-19.24	QP	
6	*	951.5000	31.97	-1.97	30.00	46.00	-16.00	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD(EU Plug)


Horizontal

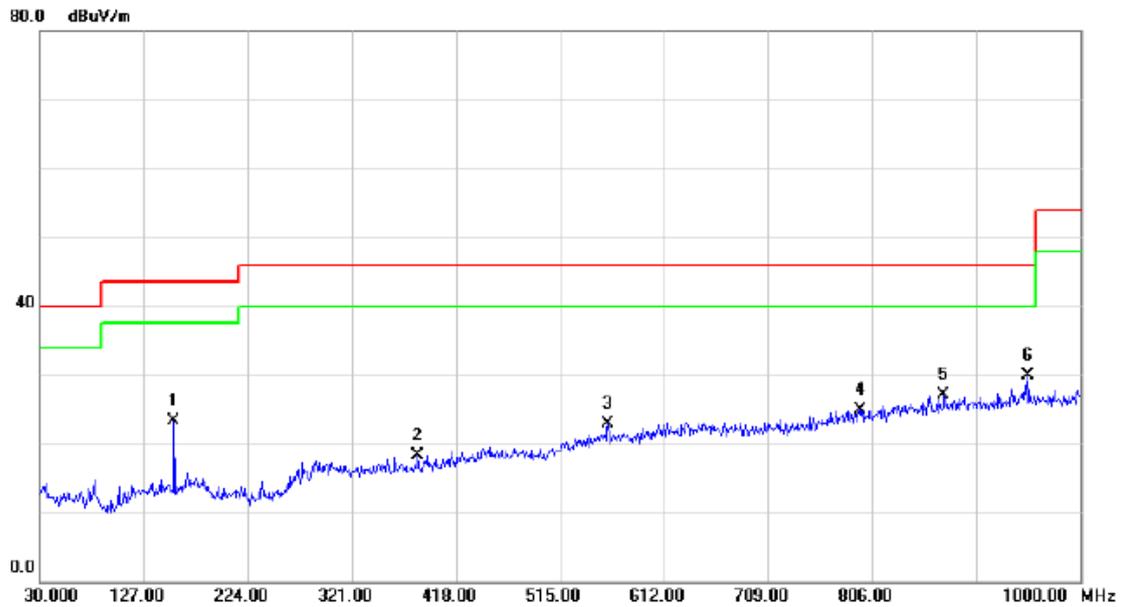

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		155.1300	36.99	-13.71	23.28	43.50	-20.22	QP	
2		382.1100	29.16	-10.86	18.30	46.00	-27.70	QP	
3		559.6200	30.08	-7.24	22.84	46.00	-23.16	QP	
4		795.3300	28.92	-4.11	24.81	46.00	-21.19	QP	
5		872.9300	29.94	-2.83	27.11	46.00	-18.89	QP	
6	*	951.5000	31.79	-1.97	29.82	46.00	-16.18	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Vertical

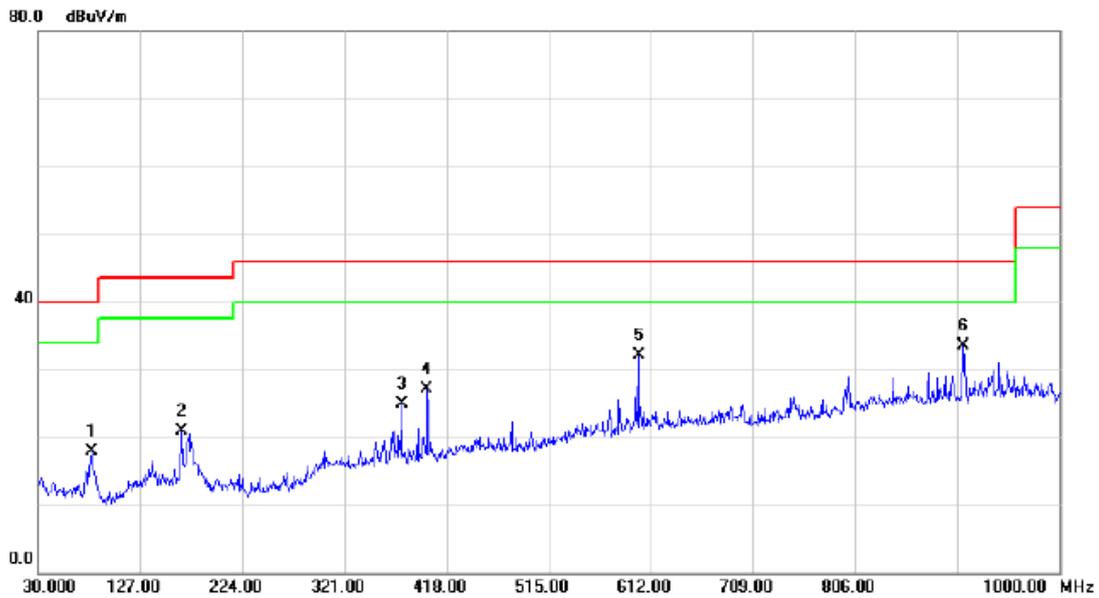

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	33.97	-16.03	17.94	40.00	-22.06	QP	
2		166.7700	33.96	-13.15	20.81	43.50	-22.69	QP	
3		375.3200	35.74	-10.88	24.86	46.00	-21.14	QP	
4		399.5700	37.92	-10.82	27.10	46.00	-18.90	QP	
5		600.3600	38.87	-6.75	32.12	46.00	-13.88	QP	
6	*	908.8200	35.92	-2.36	33.56	46.00	-12.44	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Horizontal

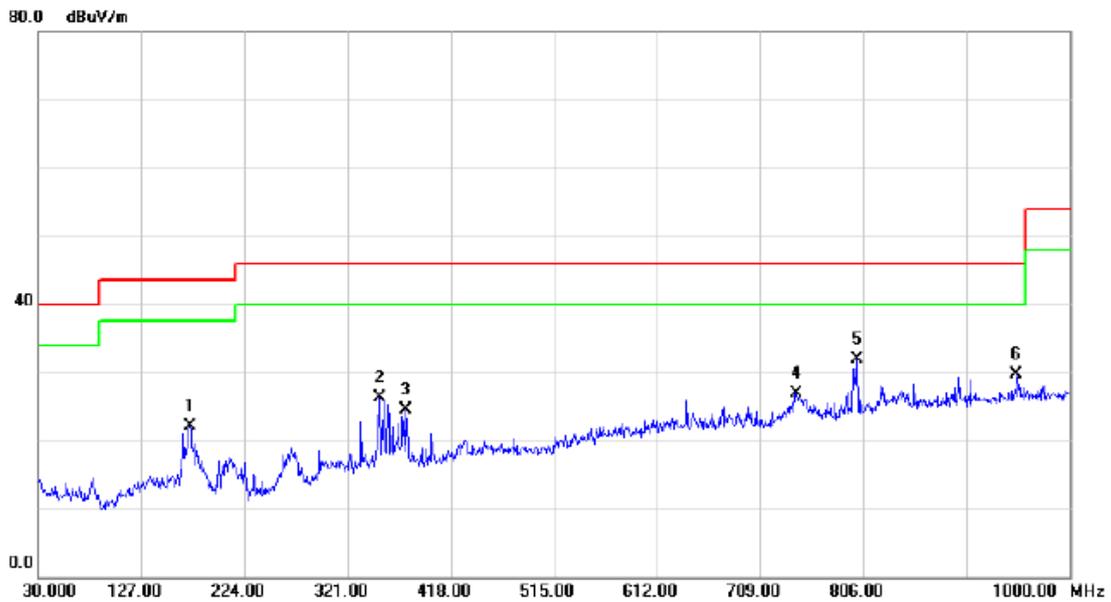

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		172.5900	34.97	-12.85	22.12	43.50	-21.38	QP	
2		351.0700	37.31	-10.94	26.37	46.00	-19.63	QP	
3		375.3200	35.31	-10.88	24.43	46.00	-21.57	QP	
4		742.9500	32.53	-5.58	26.95	46.00	-19.05	QP	
5	*	800.1800	35.90	-3.97	31.93	46.00	-14.07	QP	
6		950.5300	31.63	-1.98	29.65	46.00	-16.35	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Vertical

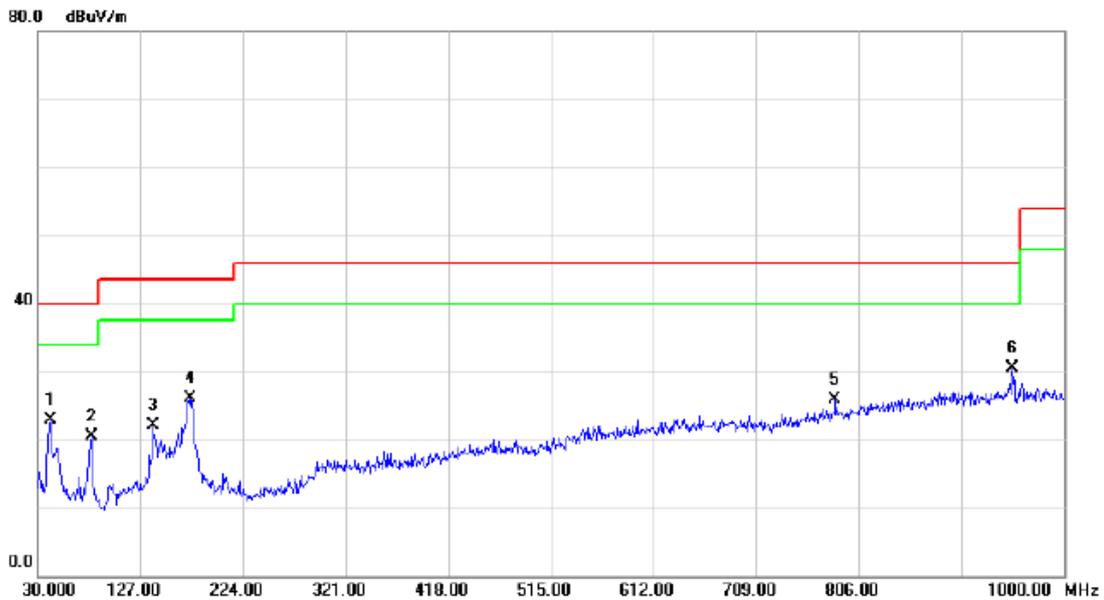

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	37.87	-14.97	22.90	40.00	-17.10	QP	
2		80.4400	36.58	-16.03	20.55	40.00	-19.45	QP	
3		138.6400	36.07	-13.94	22.13	43.50	-21.37	QP	
4		173.5600	38.87	-12.84	26.03	43.50	-17.47	QP	
5		783.6900	30.46	-4.47	25.99	46.00	-20.01	QP	
6	*	951.5000	32.55	-1.97	30.58	46.00	-15.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Horizontal

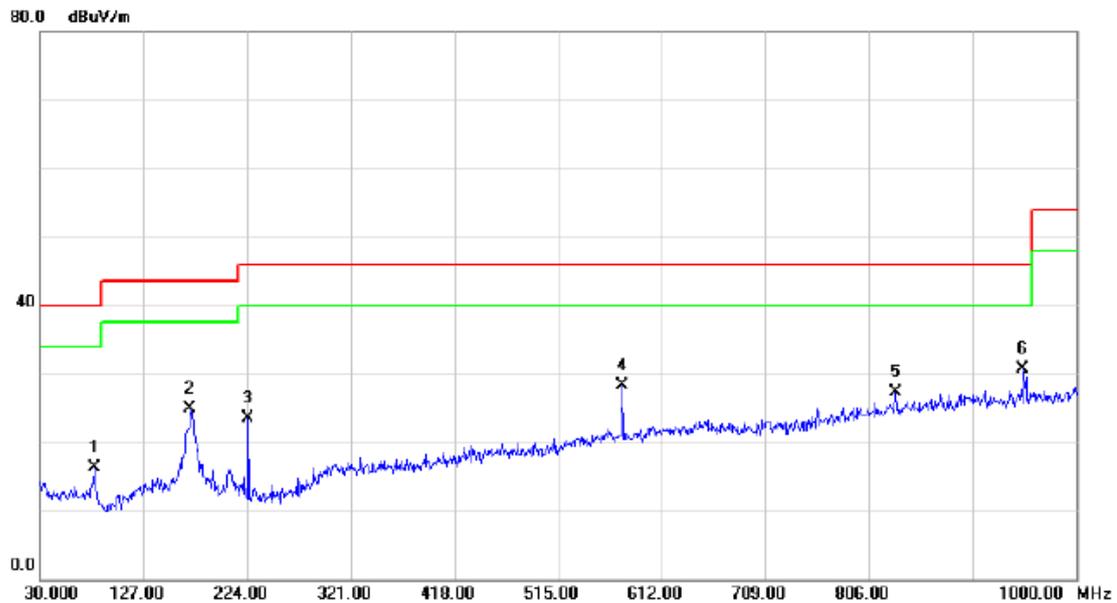

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	80.4400	32.36	-16.03	16.33	40.00	-23.67	QP	
2	170.6500	37.85	-12.88	24.97	43.50	-18.53	QP	
3	224.9700	38.41	-14.88	23.53	46.00	-22.47	QP	
4	575.1400	35.32	-7.05	28.27	46.00	-17.73	QP	
5	831.2200	30.75	-3.45	27.30	46.00	-18.70	QP	
6 *	950.5300	32.60	-1.98	30.62	46.00	-15.38	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Vertical

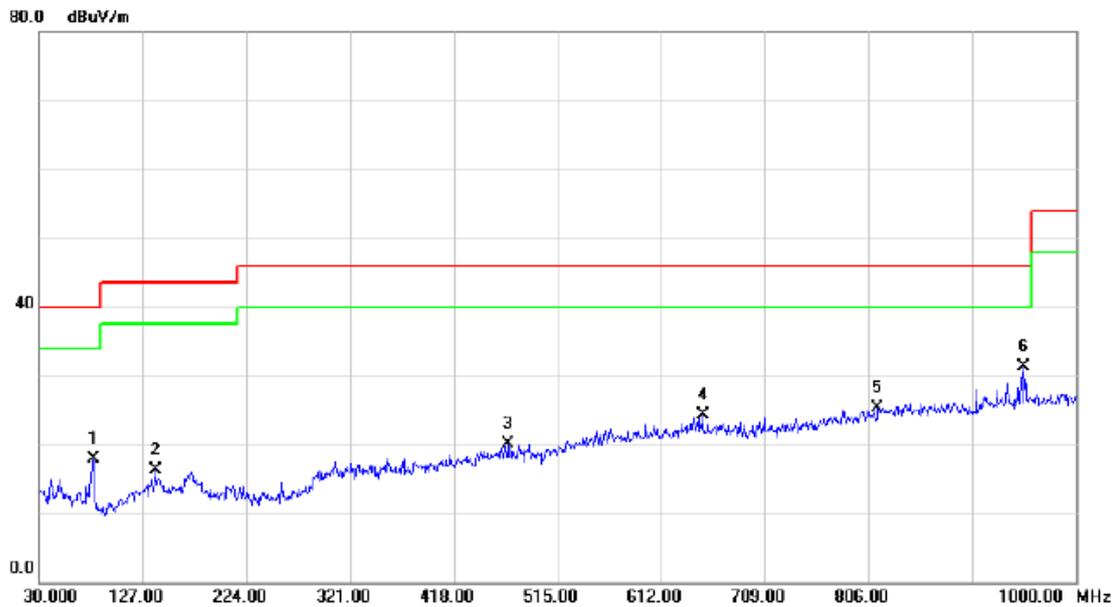

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	34.00	-16.03	17.97	40.00	-22.03	QP	
2		138.6400	30.33	-13.94	16.39	43.50	-27.11	QP	
3		469.4100	29.62	-9.52	20.10	46.00	-25.90	QP	
4		650.8000	30.09	-5.82	24.27	46.00	-21.73	QP	
5		814.7300	29.07	-3.72	25.35	46.00	-20.65	QP	
6	*	951.5000	33.20	-1.97	31.23	46.00	-14.77	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Horizontal

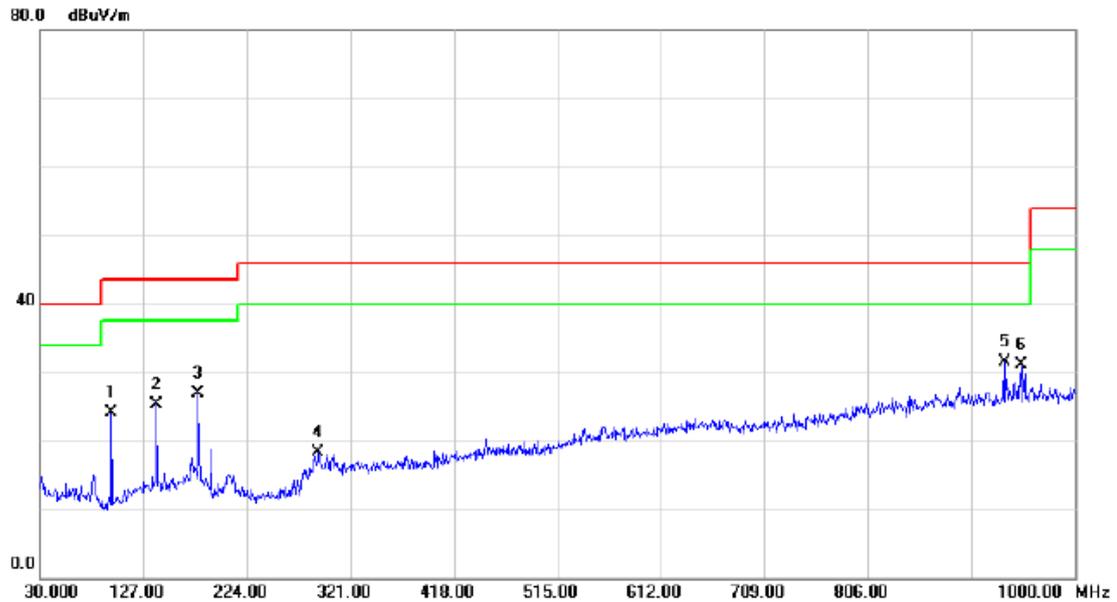

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	96.9300	40.81	-16.62	24.19	43.50	-19.31	QP	
2	139.6100	39.36	-13.96	25.40	43.50	-18.10	QP	
3	178.4100	39.71	-12.76	26.95	43.50	-16.55	QP	
4	290.9300	30.42	-12.16	18.26	46.00	-27.74	QP	
5 *	934.0400	33.60	-2.14	31.46	46.00	-14.54	QP	
6	950.5300	33.01	-1.98	31.03	46.00	-14.97	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Vertical

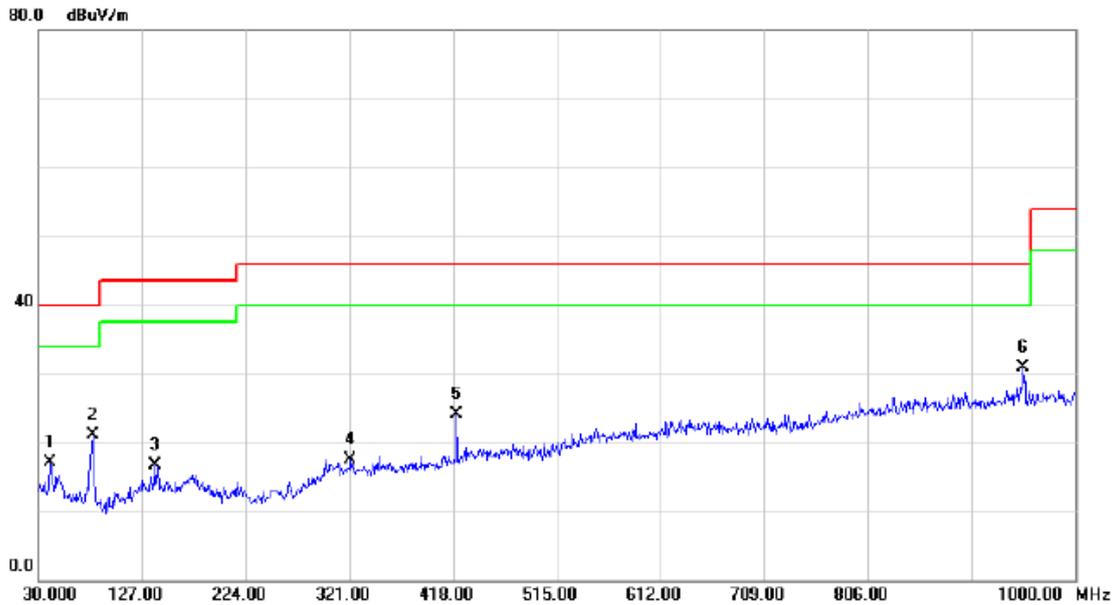

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	32.13	-14.97	17.16	40.00	-22.84	QP	
2		80.4400	37.16	-16.03	21.13	40.00	-18.87	QP	
3		138.6400	30.73	-13.94	16.79	43.50	-26.71	QP	
4		321.9700	28.38	-10.87	17.51	46.00	-28.49	QP	
5		420.9100	34.25	-10.21	24.04	46.00	-21.96	QP	
6	*	951.5000	32.80	-1.97	30.83	46.00	-15.17	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Horizontal

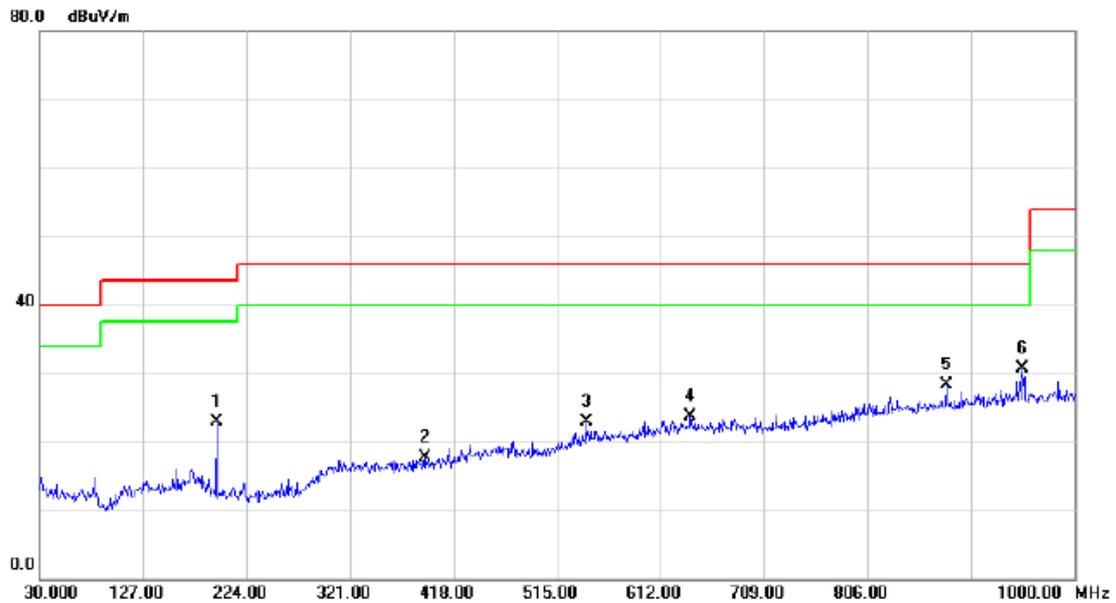

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		195.8700	37.31	-14.50	22.81	43.50	-20.69	QP	
2		390.8400	28.56	-10.85	17.71	46.00	-28.29	QP	
3		542.1600	30.63	-7.73	22.90	46.00	-23.10	QP	
4		640.1300	29.76	-6.00	23.76	46.00	-22.24	QP	
5		879.7200	31.06	-2.73	28.33	46.00	-17.67	QP	
6	*	951.5000	32.69	-1.97	30.72	46.00	-15.28	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Vertical

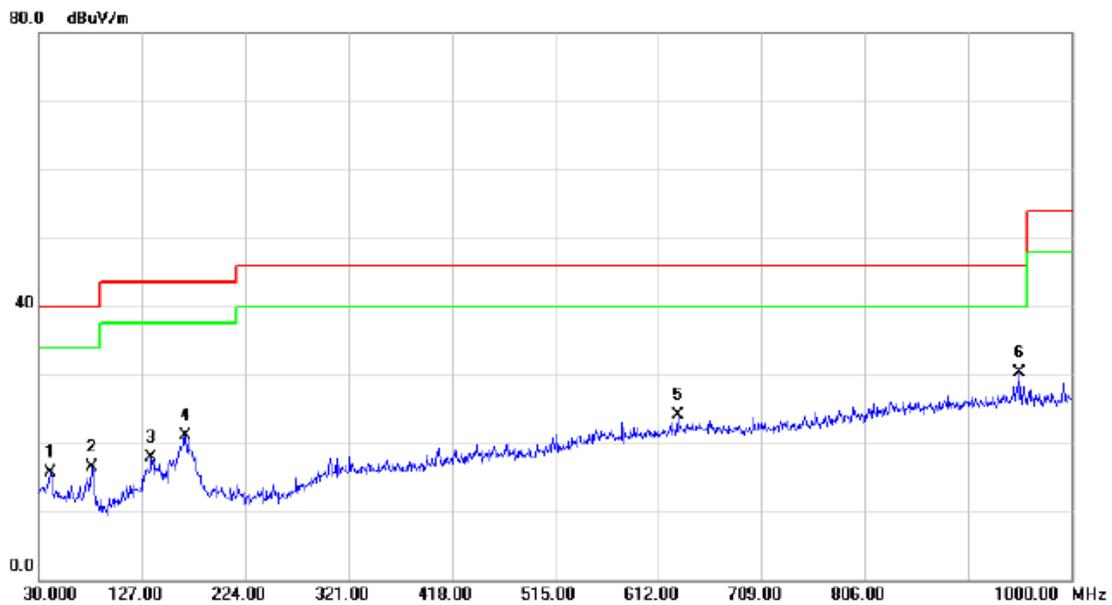

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	30.76	-14.97	15.79	40.00	-24.21	QP	
2		79.4700	32.46	-16.00	16.46	40.00	-23.54	QP	
3		135.7300	31.72	-13.85	17.87	43.50	-25.63	QP	
4		167.7400	34.11	-13.07	21.04	43.50	-22.46	QP	
5		630.4300	30.30	-6.17	24.13	46.00	-21.87	QP	
6	*	951.5000	32.33	-1.97	30.36	46.00	-15.64	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Horizontal

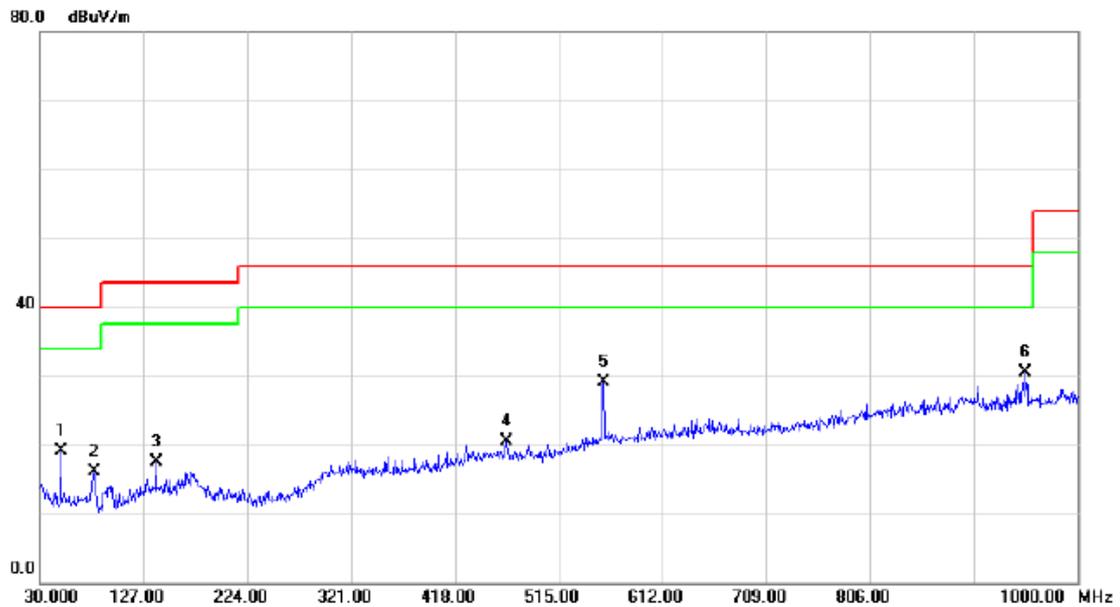

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	49.4000	34.49	-15.40	19.09	40.00	-20.91	QP	
2	80.4400	32.16	-16.03	16.13	40.00	-23.87	QP	
3	138.6400	31.35	-13.94	17.41	43.50	-26.09	QP	
4	466.5000	29.91	-9.50	20.41	46.00	-25.59	QP	
5	556.7100	36.37	-7.26	29.11	46.00	-16.89	QP	
6 *	951.5000	32.48	-1.97	30.51	46.00	-15.49	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG(EU Plug)


Vertical

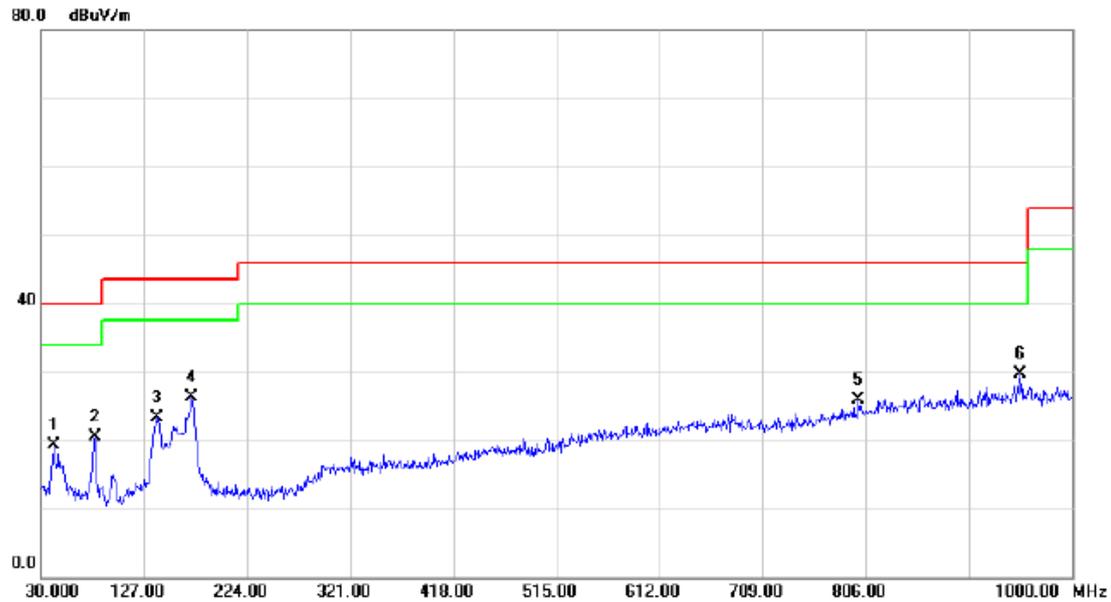

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	34.27	-14.97	19.30	40.00	-20.70	QP	
2		80.4400	36.56	-16.03	20.53	40.00	-19.47	QP	
3		138.6400	37.30	-13.94	23.36	43.50	-20.14	QP	
4		171.6200	39.11	-12.86	26.25	43.50	-17.25	QP	
5		799.2100	29.94	-3.99	25.95	46.00	-20.05	QP	
6	*	951.5000	31.72	-1.97	29.75	46.00	-16.25	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG(EU Plug)


Horizontal

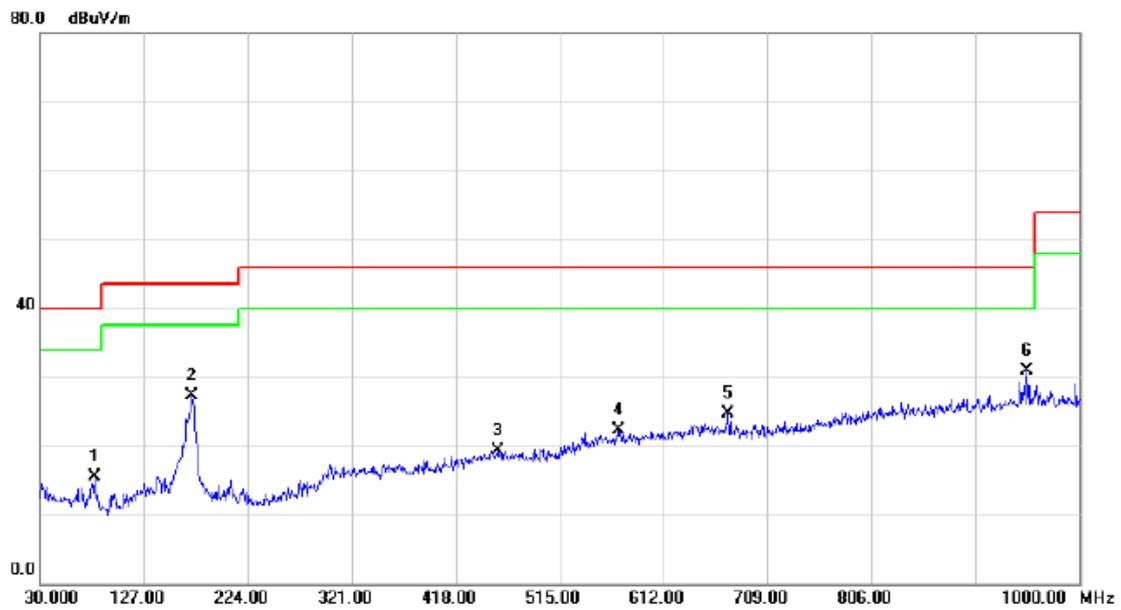

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	31.49	-16.03	15.46	40.00	-24.54	QP	
2		171.6200	40.09	-12.86	27.23	43.50	-16.27	QP	
3		456.8000	28.79	-9.41	19.38	46.00	-26.62	QP	
4		569.3200	29.37	-7.11	22.26	46.00	-23.74	QP	
5		672.1400	30.64	-5.94	24.70	46.00	-21.30	QP	
6	*	951.5000	32.78	-1.97	30.81	46.00	-15.19	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK(EU Plug)


Vertical

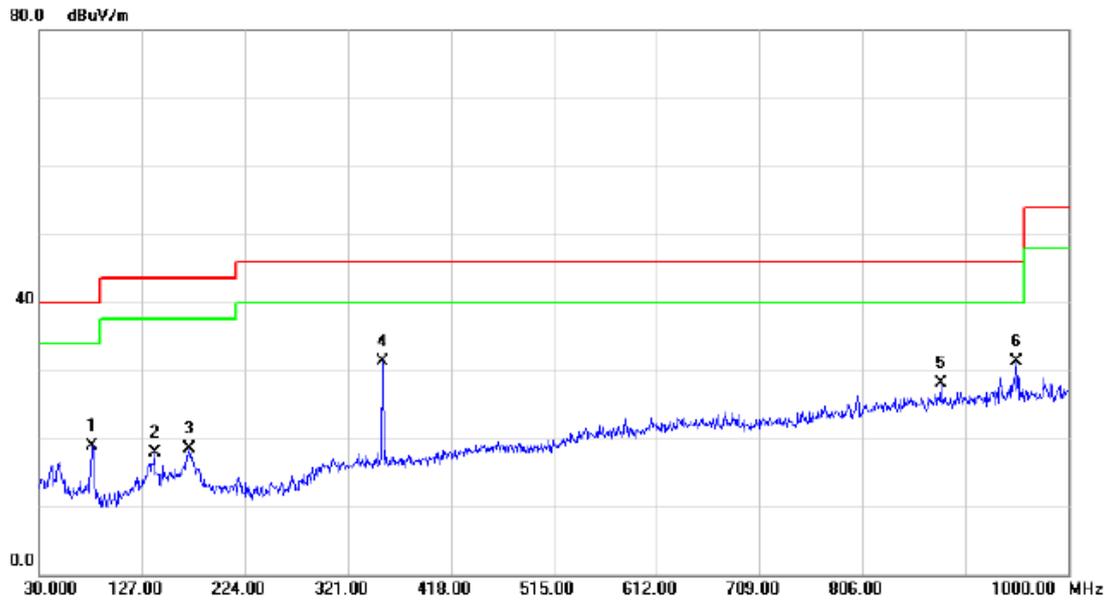

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		79.4700	34.87	-16.00	18.87	40.00	-21.13	QP	
2		138.6400	31.93	-13.94	17.99	43.50	-25.51	QP	
3		171.6200	31.28	-12.86	18.42	43.50	-25.08	QP	
4		353.9800	42.18	-10.93	31.25	46.00	-14.75	QP	
5		879.7200	30.79	-2.73	28.06	46.00	-17.94	QP	
6	*	951.5000	33.31	-1.97	31.34	46.00	-14.66	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK(EU Plug)


Horizontal

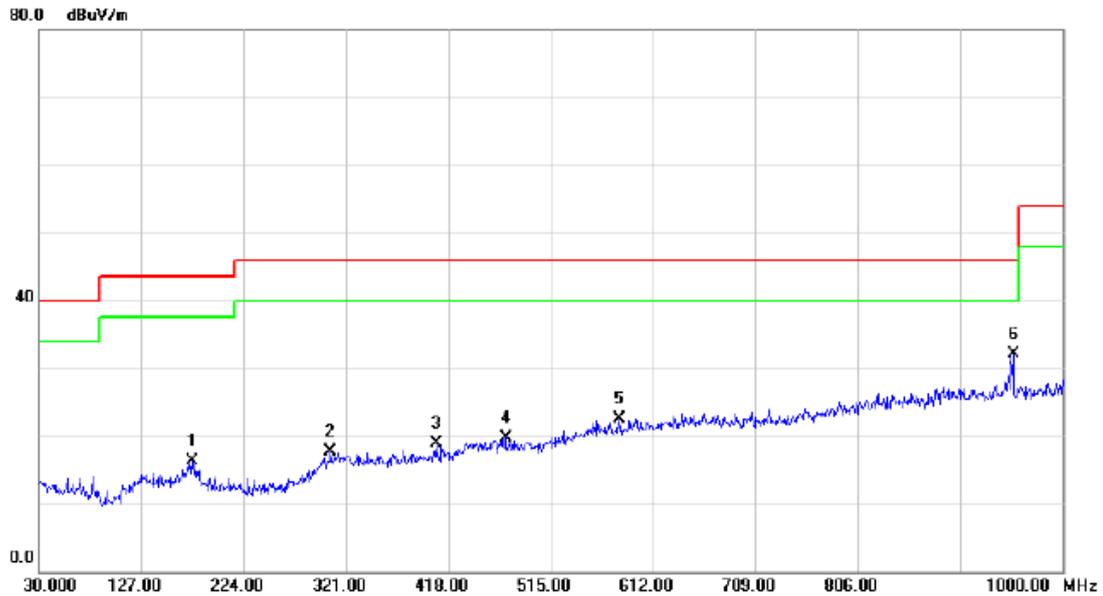

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		175.5000	29.09	-12.81	16.28	43.50	-27.22	QP	
2		306.4500	28.59	-10.82	17.77	46.00	-28.23	QP	
3		406.3600	29.57	-10.63	18.94	46.00	-27.06	QP	
4		472.3200	29.35	-9.55	19.80	46.00	-26.20	QP	
5		579.9900	29.40	-6.99	22.41	46.00	-23.59	QP	
6	*	953.4400	34.04	-1.95	32.09	46.00	-13.91	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU(EU Plug)


Vertical

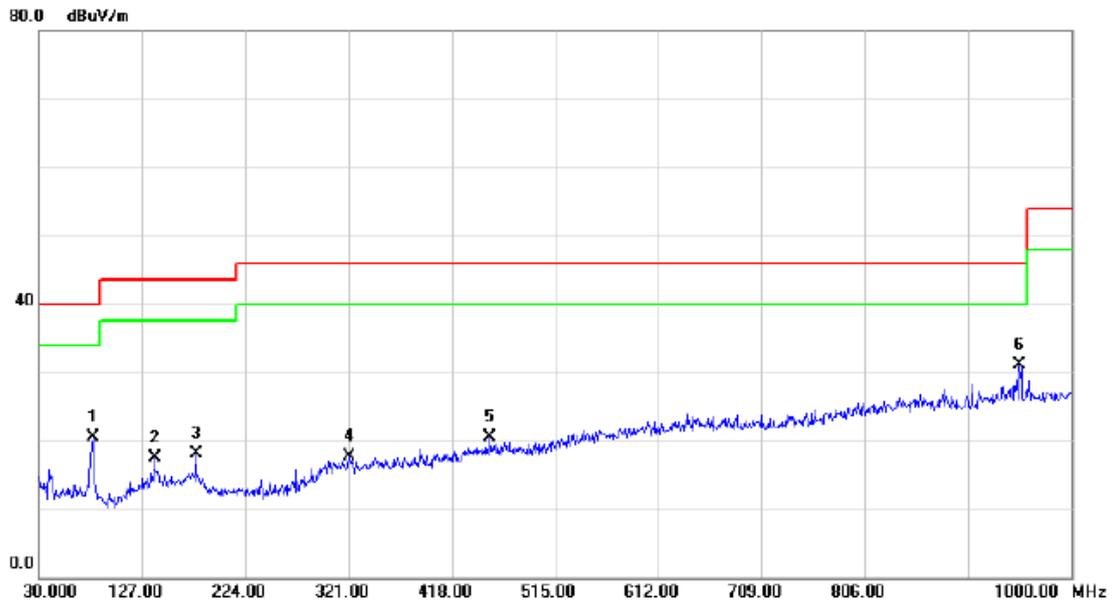

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	36.47	-16.03	20.44	40.00	-19.56	QP	
2		138.6400	31.40	-13.94	17.46	43.50	-26.04	QP	
3		177.4400	30.90	-12.77	18.13	43.50	-25.37	QP	
4		321.9700	28.59	-10.87	17.72	46.00	-28.28	QP	
5		453.8900	29.94	-9.38	20.56	46.00	-25.44	QP	
6	*	951.5000	33.05	-1.97	31.08	46.00	-14.92	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU(EU Plug)

Horizontal

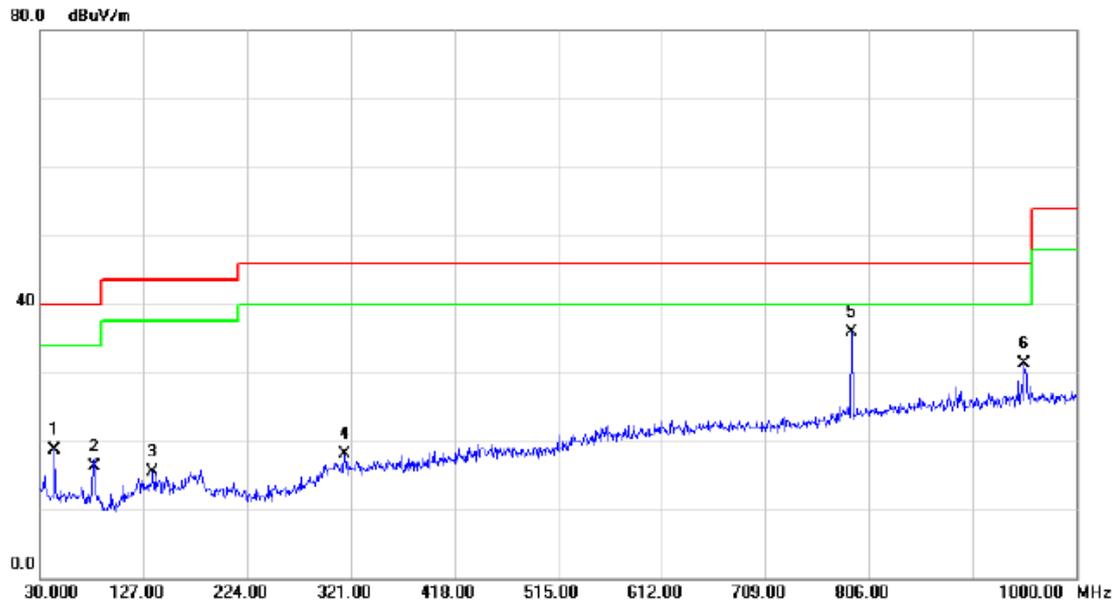


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	43.5800	34.00	-15.23	18.77	40.00	-21.23	QP	
2	81.4100	32.45	-16.13	16.32	40.00	-23.68	QP	
3	135.7300	29.40	-13.85	15.55	43.50	-27.95	QP	
4	315.1800	28.96	-10.84	18.12	46.00	-27.88	QP	
5 *	789.5100	40.18	-4.29	35.89	46.00	-10.11	QP	
6	951.5000	33.29	-1.97	31.32	46.00	-14.68	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)


Vertical

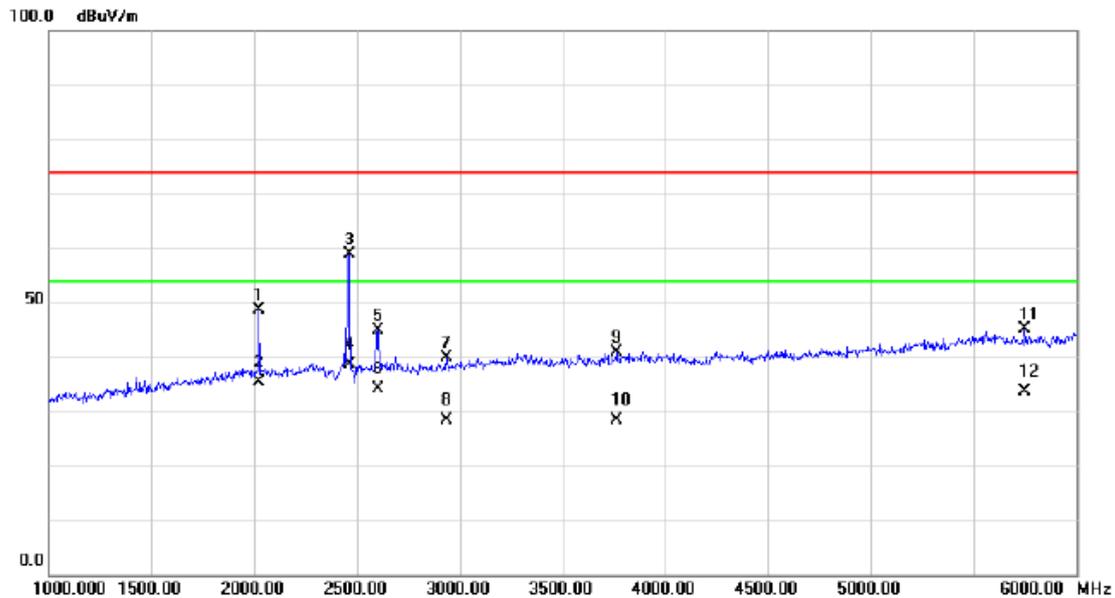

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2025.000	53.35	-4.76	48.59	74.00	-25.41	peak	
2		2025.000	40.26	-4.76	35.50	54.00	-18.50	AVG	
3	*	2460.000	63.51	-4.51	59.00	74.00	-15.00	peak	
4		2460.000	43.26	-4.51	38.75	54.00	-15.25	AVG	
5		2605.000	49.19	-4.34	44.85	74.00	-29.15	peak	
6		2605.000	38.55	-4.34	34.21	54.00	-19.79	AVG	
7		2935.000	43.75	-3.89	39.86	74.00	-34.14	peak	
8		2935.000	32.26	-3.89	28.37	54.00	-25.63	AVG	
9		3760.000	42.67	-1.79	40.88	74.00	-33.12	peak	
10		3760.000	30.26	-1.79	28.47	54.00	-25.53	AVG	
11		5750.000	42.80	2.34	45.14	74.00	-28.86	peak	
12		5750.000	31.30	2.34	33.64	54.00	-20.36	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD(EU Plug)


Horizontal

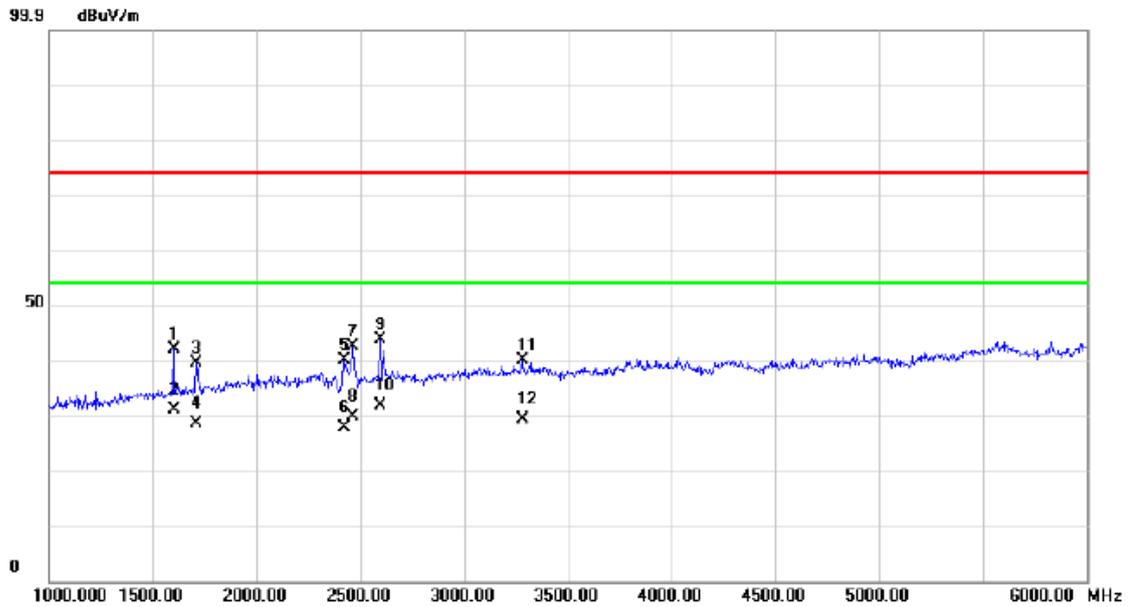

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1600.000	49.40	-7.35	42.05	74.00	-31.95	peak	
2	1600.000	38.26	-7.35	30.91	54.00	-23.09	AVG	
3	1710.000	46.26	-6.64	39.62	74.00	-34.38	peak	
4	1710.000	35.26	-6.64	28.62	54.00	-25.38	AVG	
5	2420.000	44.62	-4.53	40.09	74.00	-33.91	peak	
6	2420.000	32.26	-4.53	27.73	54.00	-26.27	AVG	
7	2465.000	47.01	-4.51	42.50	74.00	-31.50	peak	
8	2465.000	34.26	-4.51	29.75	54.00	-24.25	AVG	
9	2595.000	48.11	-4.36	43.75	74.00	-30.25	peak	
10 *	2595.000	36.26	-4.36	31.90	54.00	-22.10	AVG	
11	3280.000	43.16	-3.10	40.06	74.00	-33.94	peak	
12	3280.000	32.30	-3.10	29.20	54.00	-24.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD(EU Plug)


Vertical

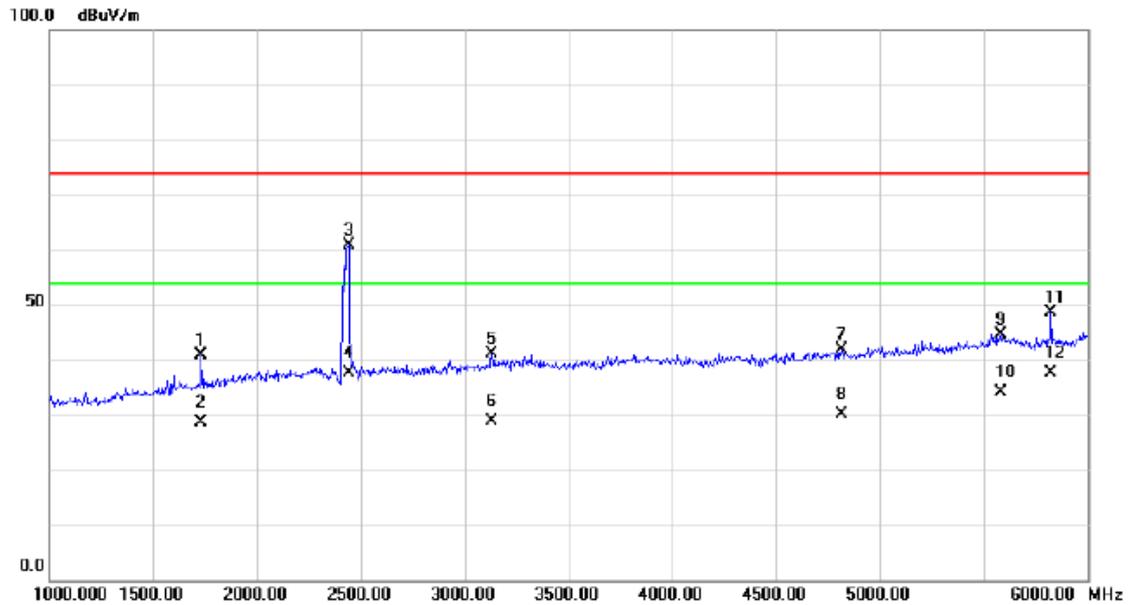

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1730.000	47.36	-6.51	40.85	74.00	-33.15	peak	
2		1730.000	35.26	-6.51	28.75	54.00	-25.25	AVG	
3	*	2440.000	65.51	-4.52	60.99	74.00	-13.01	peak	
4		2440.000	42.26	-4.52	37.74	54.00	-16.26	AVG	
5		3130.000	44.70	-3.48	41.22	74.00	-32.78	peak	
6		3130.000	32.26	-3.48	28.78	54.00	-25.22	AVG	
7		4815.000	42.01	-0.09	41.92	74.00	-32.08	peak	
8		4815.000	30.26	-0.09	30.17	54.00	-23.83	AVG	
9		5585.000	42.56	1.99	44.55	74.00	-29.45	peak	
10		5585.000	32.26	1.99	34.25	54.00	-19.75	AVG	
11		5825.000	46.05	2.50	48.55	74.00	-25.45	peak	
12		5825.000	35.20	2.50	37.70	54.00	-16.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD(EU Plug)


Horizontal

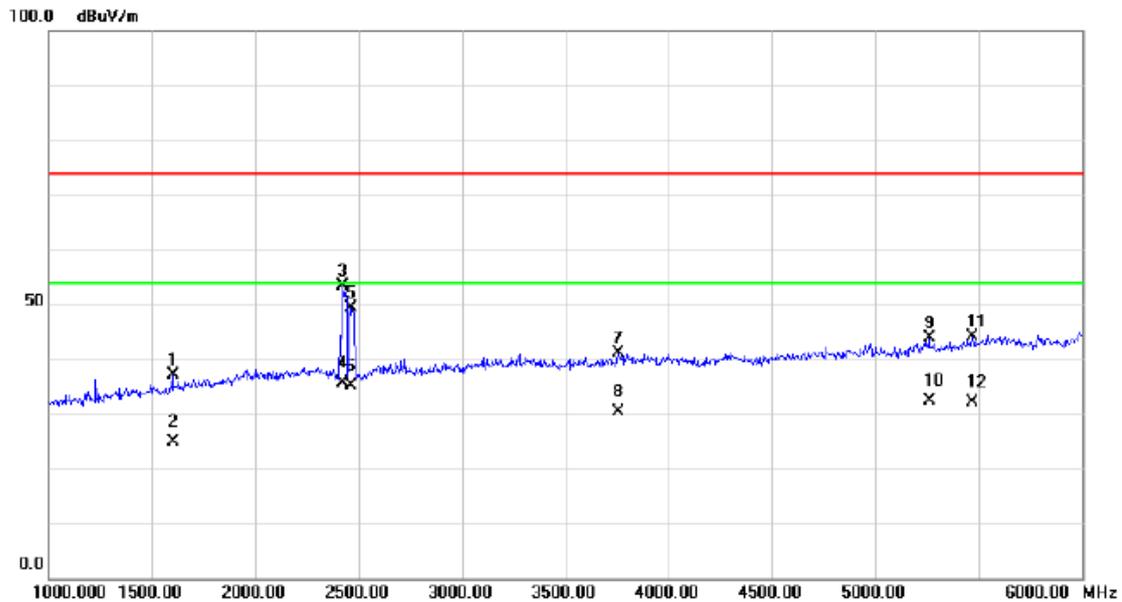

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1600.000	44.53	-7.35	37.18	74.00	-36.82	peak	
2		1600.000	32.26	-7.35	24.91	54.00	-29.09	AVG	
3		2425.000	57.80	-4.53	53.27	74.00	-20.73	peak	
4	*	2425.000	40.26	-4.53	35.73	54.00	-18.27	AVG	
5		2465.000	53.83	-4.51	49.32	74.00	-24.68	peak	
6		2465.000	39.55	-4.51	35.04	54.00	-18.96	AVG	
7		3755.000	42.92	-1.81	41.11	74.00	-32.89	peak	
8		3755.000	32.26	-1.81	30.45	54.00	-23.55	AVG	
9		5260.000	42.66	1.10	43.76	74.00	-30.24	peak	
10		5260.000	31.26	1.10	32.36	54.00	-21.64	AVG	
11		5470.000	42.43	1.72	44.15	74.00	-29.85	peak	
12		5470.000	30.36	1.72	32.08	54.00	-21.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD(EU Plug)


Vertical

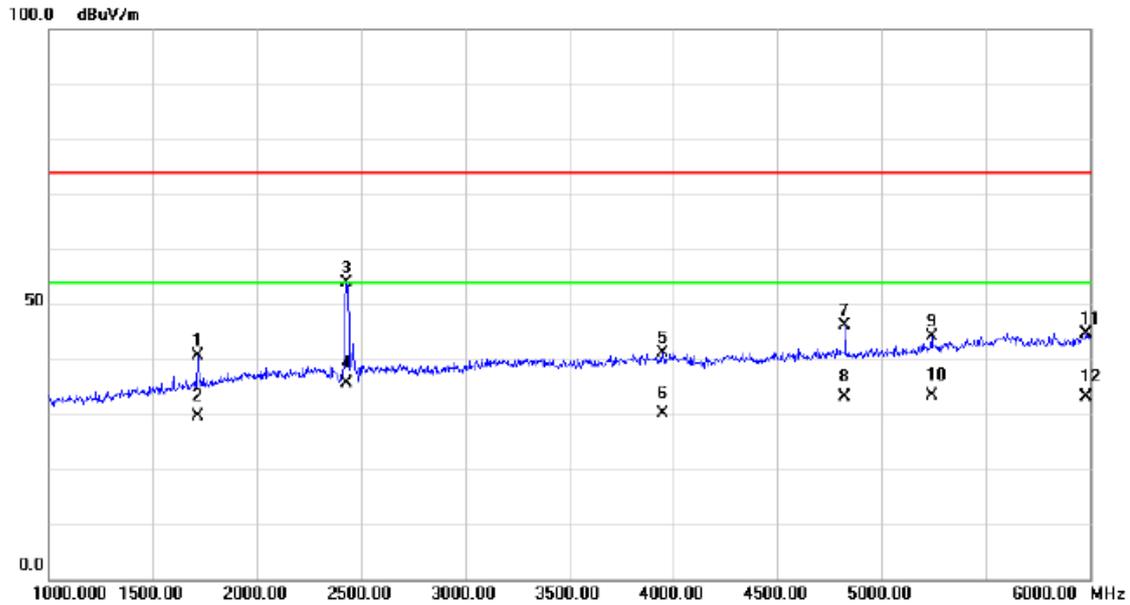

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1715.000	47.35	-6.61	40.74	74.00	-33.26	peak	
2		1715.000	36.26	-6.61	29.65	54.00	-24.35	AVG	
3		2430.000	58.35	-4.53	53.82	74.00	-20.18	peak	
4	*	2430.000	40.26	-4.53	35.73	54.00	-18.27	AVG	
5		3950.000	42.39	-1.24	41.15	74.00	-32.85	peak	
6		3950.000	31.26	-1.24	30.02	54.00	-23.98	AVG	
7		4825.000	46.17	-0.07	46.10	74.00	-27.90	peak	
8		4825.000	33.26	-0.07	33.19	54.00	-20.81	AVG	
9		5240.000	43.05	1.05	44.10	74.00	-29.90	peak	
10		5240.000	32.26	1.05	33.31	54.00	-20.69	AVG	
11		5980.000	41.90	2.83	44.73	74.00	-29.27	peak	
12		5980.000	30.40	2.83	33.23	54.00	-20.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD(EU Plug)


Horizontal

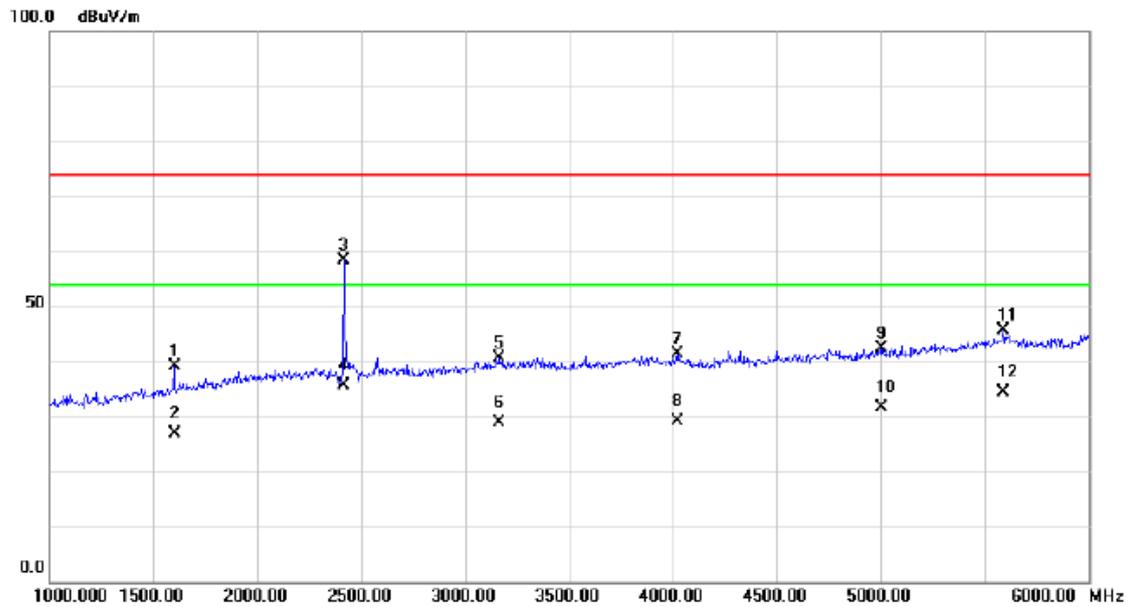

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1600.000	46.38	-7.35	39.03	74.00	-34.97	peak	
2		1600.000	34.26	-7.35	26.91	54.00	-27.09	AVG	
3	*	2415.000	62.96	-4.54	58.42	74.00	-15.58	peak	
4		2415.000	40.26	-4.54	35.72	54.00	-18.28	AVG	
5		3165.000	44.04	-3.38	40.66	74.00	-33.34	peak	
6		3165.000	32.26	-3.38	28.88	54.00	-25.12	AVG	
7		4020.000	42.56	-1.08	41.48	74.00	-32.52	peak	
8		4020.000	30.26	-1.08	29.18	54.00	-24.82	AVG	
9		5005.000	42.13	0.35	42.48	74.00	-31.52	peak	
10		5005.000	31.26	0.35	31.61	54.00	-22.39	AVG	
11		5590.000	43.70	1.99	45.69	74.00	-28.31	peak	
12		5590.000	32.50	1.99	34.49	54.00	-19.51	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD(EU Plug)


Vertical

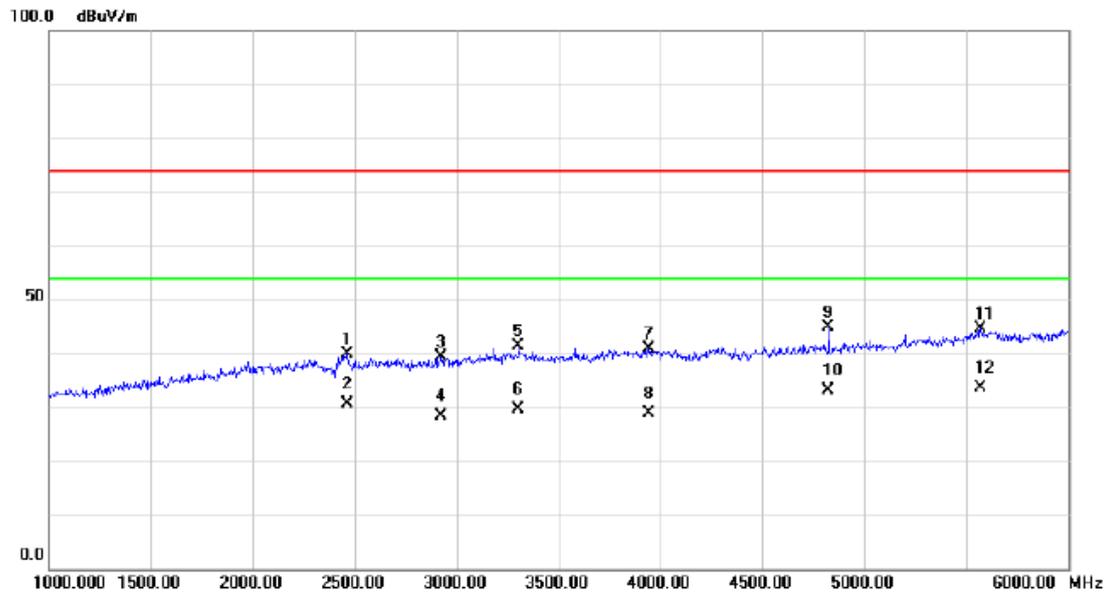

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2465.000	44.36	-4.51	39.85	74.00	-34.15	peak	
2	2465.000	35.26	-4.51	30.75	54.00	-23.25	AVG	
3	2925.000	43.34	-3.90	39.44	74.00	-34.56	peak	
4	2925.000	32.26	-3.90	28.36	54.00	-25.64	AVG	
5	3305.000	44.33	-3.04	41.29	74.00	-32.71	peak	
6	3305.000	32.66	-3.04	29.62	54.00	-24.38	AVG	
7	3940.000	42.14	-1.27	40.87	74.00	-33.13	peak	
8	3940.000	30.26	-1.27	28.99	54.00	-25.01	AVG	
9	4825.000	45.07	-0.07	45.00	74.00	-29.00	peak	
10	4825.000	33.26	-0.07	33.19	54.00	-20.81	AVG	
11	5570.000	42.70	1.95	44.65	74.00	-29.35	peak	
12 *	5570.000	31.80	1.95	33.75	54.00	-20.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD(EU Plug)


Horizontal

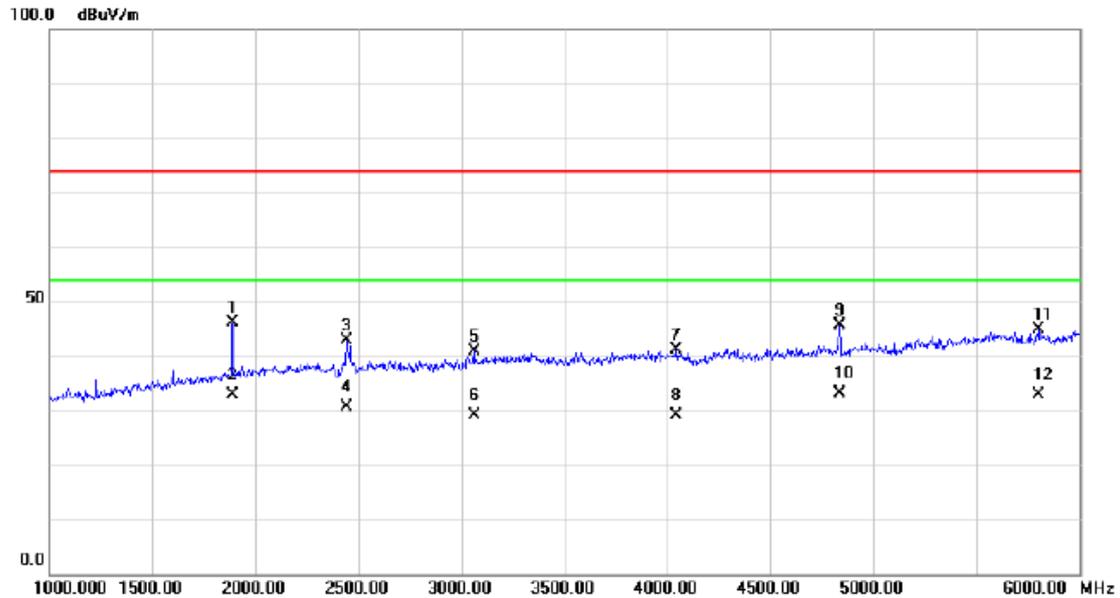

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1890.000	51.72	-5.48	46.24	74.00	-27.76	peak	
2	1890.000	38.26	-5.48	32.78	54.00	-21.22	AVG	
3	2440.000	47.30	-4.52	42.78	74.00	-31.22	peak	
4	2440.000	35.26	-4.52	30.74	54.00	-23.26	AVG	
5	3060.000	44.65	-3.65	41.00	74.00	-33.00	peak	
6	3060.000	32.66	-3.65	29.01	54.00	-24.99	AVG	
7	4045.000	42.17	-1.06	41.11	74.00	-32.89	peak	
8	4045.000	30.25	-1.06	29.19	54.00	-24.81	AVG	
9	4835.000	45.57	-0.05	45.52	74.00	-28.48	peak	
10 *	4835.000	33.26	-0.05	33.21	54.00	-20.79	AVG	
11	5805.000	42.34	2.46	44.80	74.00	-29.20	peak	
12	5805.000	30.40	2.46	32.86	54.00	-21.14	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD(EU Plug)


Vertical

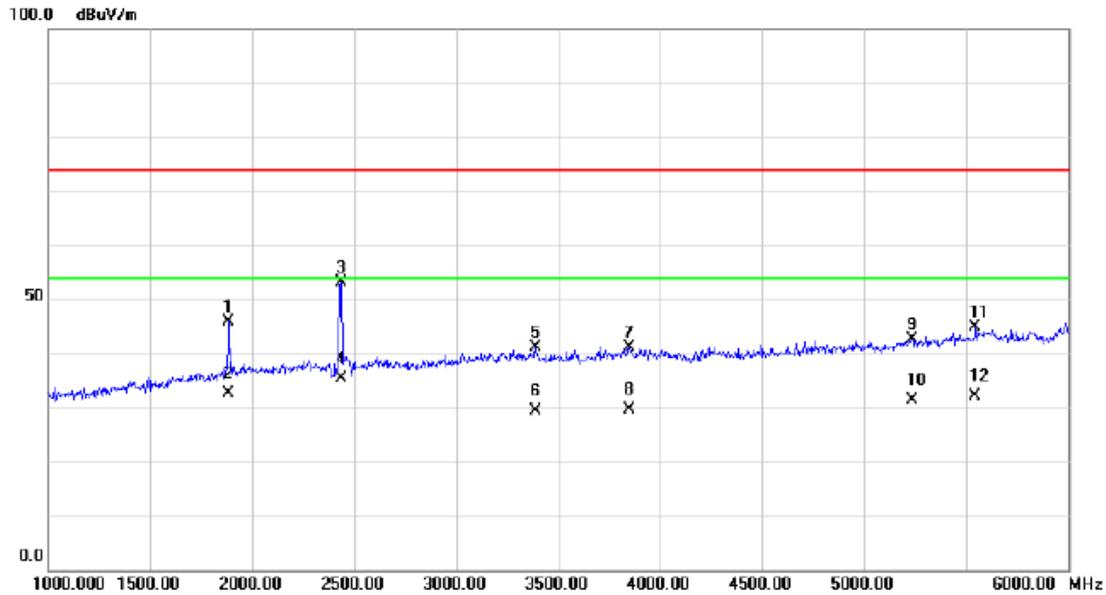

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1885.000	51.34	-5.51	45.83	74.00	-28.17	peak	
2		1885.000	38.26	-5.51	32.75	54.00	-21.25	AVG	
3		2435.000	57.73	-4.52	53.21	74.00	-20.79	peak	
4	*	2435.000	40.00	-4.52	35.48	54.00	-18.52	AVG	
5		3390.000	43.93	-2.82	41.11	74.00	-32.89	peak	
6		3390.000	32.30	-2.82	29.48	54.00	-24.52	AVG	
7		3850.000	42.77	-1.53	41.24	74.00	-32.76	peak	
8		3850.000	31.26	-1.53	29.73	54.00	-24.27	AVG	
9		5235.000	41.55	1.02	42.57	74.00	-31.43	peak	
10		5235.000	30.25	1.02	31.27	54.00	-22.73	AVG	
11		5545.000	43.06	1.90	44.96	74.00	-29.04	peak	
12		5545.000	30.14	1.90	32.04	54.00	-21.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD(EU Plug)


Horizontal

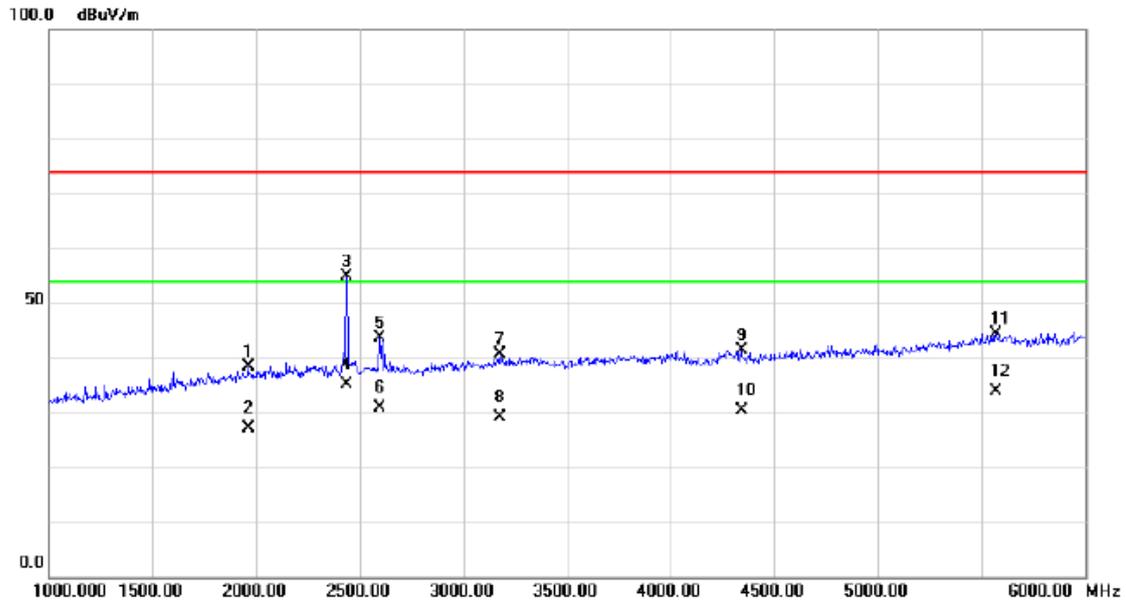

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1960.000	43.46	-5.02	38.44	74.00	-35.56	peak	
2	1960.000	32.26	-5.02	27.24	54.00	-26.76	AVG	
3	2435.000	59.43	-4.52	54.91	74.00	-19.09	peak	
4 *	2435.000	39.55	-4.52	35.03	54.00	-18.97	AVG	
5	2595.000	47.99	-4.36	43.63	74.00	-30.37	peak	
6	2595.000	35.26	-4.36	30.90	54.00	-23.10	AVG	
7	3175.000	44.09	-3.36	40.73	74.00	-33.27	peak	
8	3175.000	32.60	-3.36	29.24	54.00	-24.76	AVG	
9	4340.000	42.32	-0.91	41.41	74.00	-32.59	peak	
10	4340.000	31.26	-0.91	30.35	54.00	-23.65	AVG	
11	5570.000	42.52	1.95	44.47	74.00	-29.53	peak	
12	5570.000	32.00	1.95	33.95	54.00	-20.05	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Vertical

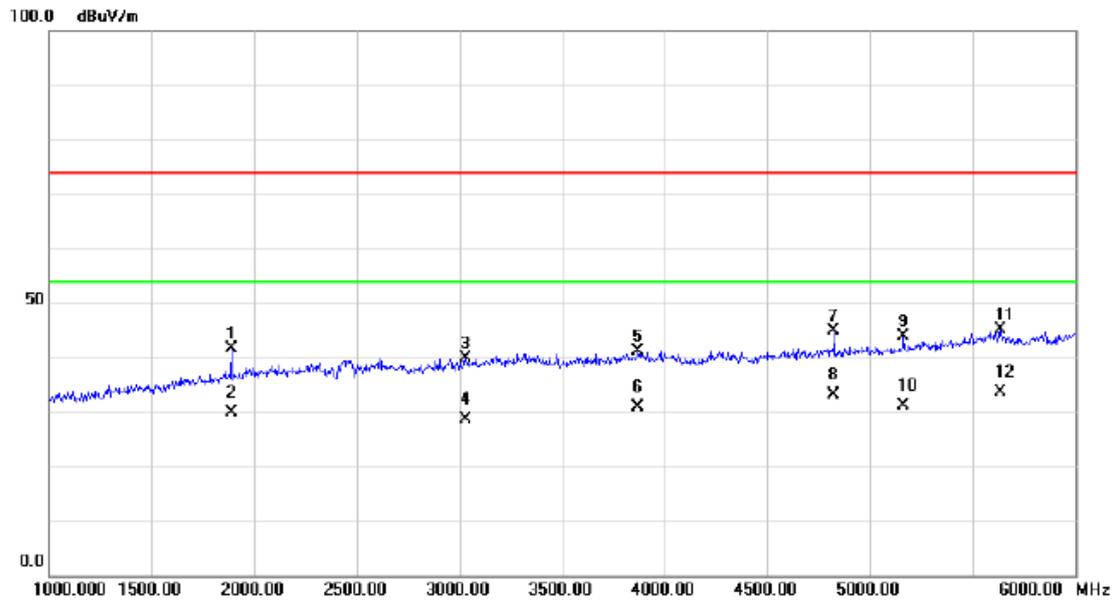

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1890.000	47.12	-5.48	41.64	74.00	-32.36	peak	
2		1890.000	35.26	-5.48	29.78	54.00	-24.22	AVG	
3		3030.000	43.67	-3.73	39.94	74.00	-34.06	peak	
4		3030.000	32.26	-3.73	28.53	54.00	-25.47	AVG	
5		3870.000	42.60	-1.46	41.14	74.00	-32.86	peak	
6		3870.000	32.26	-1.46	30.80	54.00	-23.20	AVG	
7		4825.000	44.90	-0.07	44.83	74.00	-29.17	peak	
8		4825.000	33.26	-0.07	33.19	54.00	-20.81	AVG	
9		5165.000	42.97	0.83	43.80	74.00	-30.20	peak	
10		5165.000	30.20	0.83	31.03	54.00	-22.97	AVG	
11		5635.000	43.04	2.10	45.14	74.00	-28.86	peak	
12	*	5635.000	31.60	2.10	33.70	54.00	-20.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Horizontal

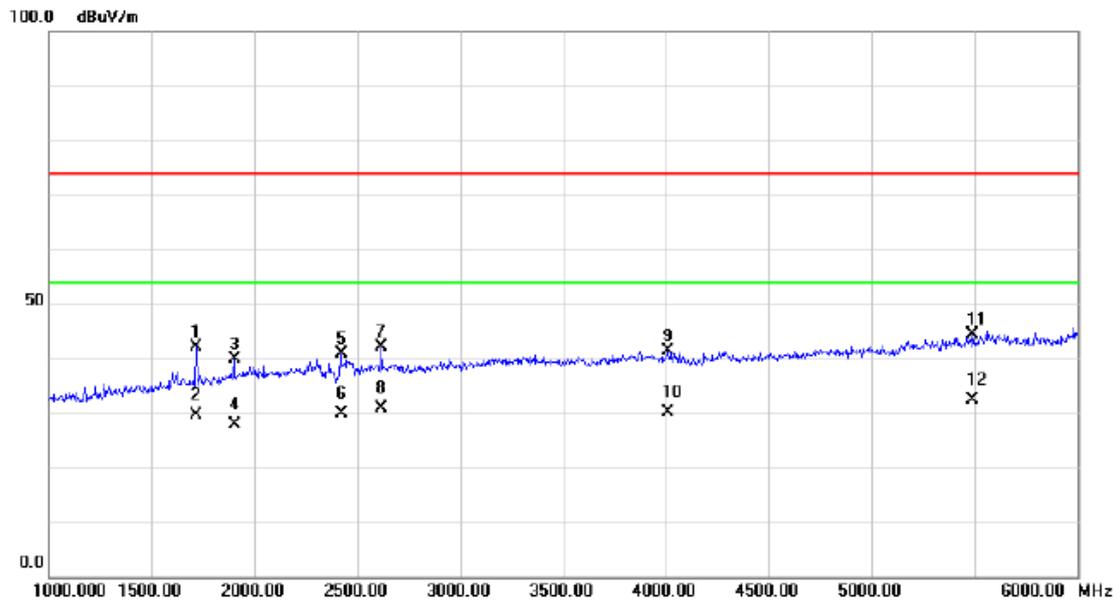

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1715.000	48.78	-6.61	42.17	74.00	-31.83	peak	
2		1715.000	36.26	-6.61	29.65	54.00	-24.35	AVG	
3		1900.000	45.39	-5.41	39.98	74.00	-34.02	peak	
4		1900.000	33.25	-5.41	27.84	54.00	-26.16	AVG	
5		2420.000	45.38	-4.53	40.85	74.00	-33.15	peak	
6		2420.000	34.50	-4.53	29.97	54.00	-24.03	AVG	
7		2615.000	46.48	-4.33	42.15	74.00	-31.85	peak	
8		2615.000	35.26	-4.33	30.93	54.00	-23.07	AVG	
9		4010.000	42.43	-1.08	41.35	74.00	-32.65	peak	
10		4010.000	31.26	-1.08	30.18	54.00	-23.82	AVG	
11		5490.000	42.63	1.78	44.41	74.00	-29.59	peak	
12	*	5490.000	30.60	1.78	32.38	54.00	-21.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: DAHONG


Vertical

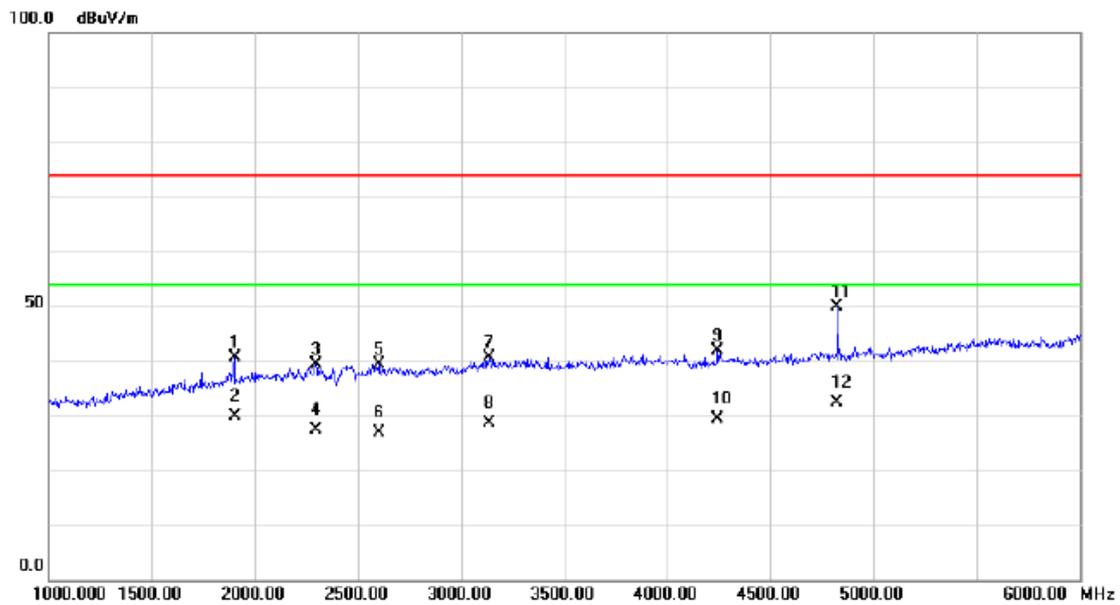

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1900.000	46.03	-5.41	40.62	74.00	-33.38	peak	
2		1900.000	35.26	-5.41	29.85	54.00	-24.15	AVG	
3		2295.000	43.99	-4.60	39.39	74.00	-34.61	peak	
4		2295.000	32.01	-4.60	27.41	54.00	-26.59	AVG	
5		2600.000	43.82	-4.35	39.47	74.00	-34.53	peak	
6		2600.000	31.26	-4.35	26.91	54.00	-27.09	AVG	
7		3135.000	44.05	-3.47	40.58	74.00	-33.42	peak	
8		3135.000	32.20	-3.47	28.73	54.00	-25.27	AVG	
9		4245.000	42.80	-0.96	41.84	74.00	-32.16	peak	
10		4245.000	30.25	-0.96	29.29	54.00	-24.71	AVG	
11		4825.000	50.02	-0.07	49.95	74.00	-24.05	peak	
12	*	4825.000	32.40	-0.07	32.33	54.00	-21.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: DAHONG


Horizontal

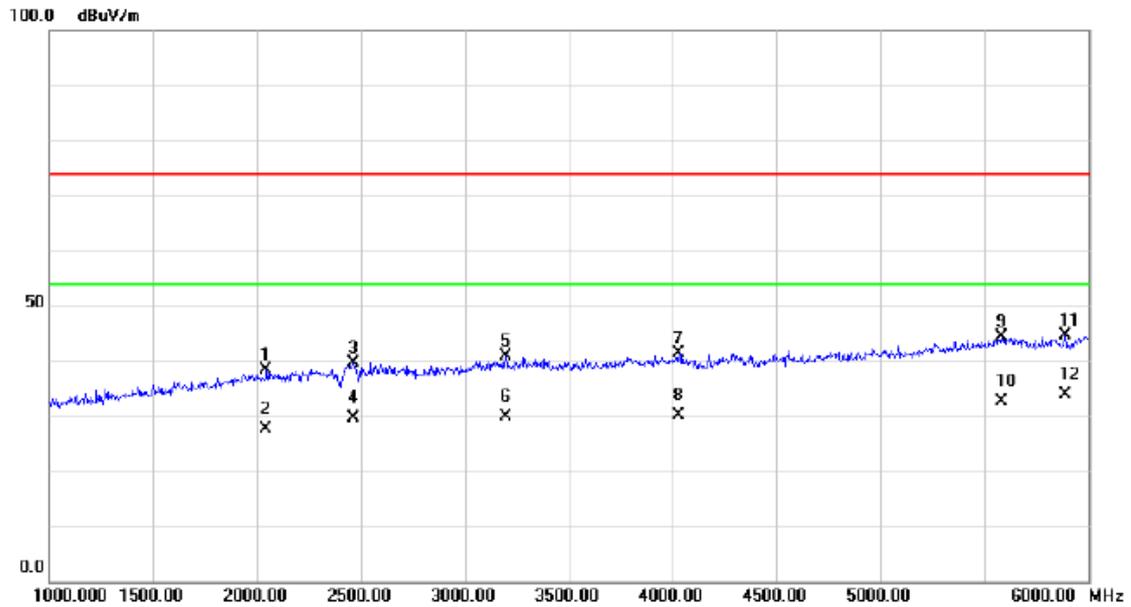

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2045.000	43.09	-4.74	38.35	74.00	-35.65	peak	
2	2045.000	32.32	-4.74	27.58	54.00	-26.42	AVG	
3	2460.000	44.26	-4.51	39.75	74.00	-34.25	peak	
4	2460.000	34.26	-4.51	29.75	54.00	-24.25	AVG	
5	3195.000	44.15	-3.31	40.84	74.00	-33.16	peak	
6	3195.000	33.26	-3.31	29.95	54.00	-24.05	AVG	
7	4030.000	42.51	-1.07	41.44	74.00	-32.56	peak	
8	4030.000	31.17	-1.07	30.10	54.00	-23.90	AVG	
9	5580.000	42.41	1.98	44.39	74.00	-29.61	peak	
10	5580.000	30.70	1.98	32.68	54.00	-21.32	AVG	
11	5890.000	42.04	2.63	44.67	74.00	-29.33	peak	
12 *	5890.000	31.20	2.63	33.83	54.00	-20.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK


Vertical

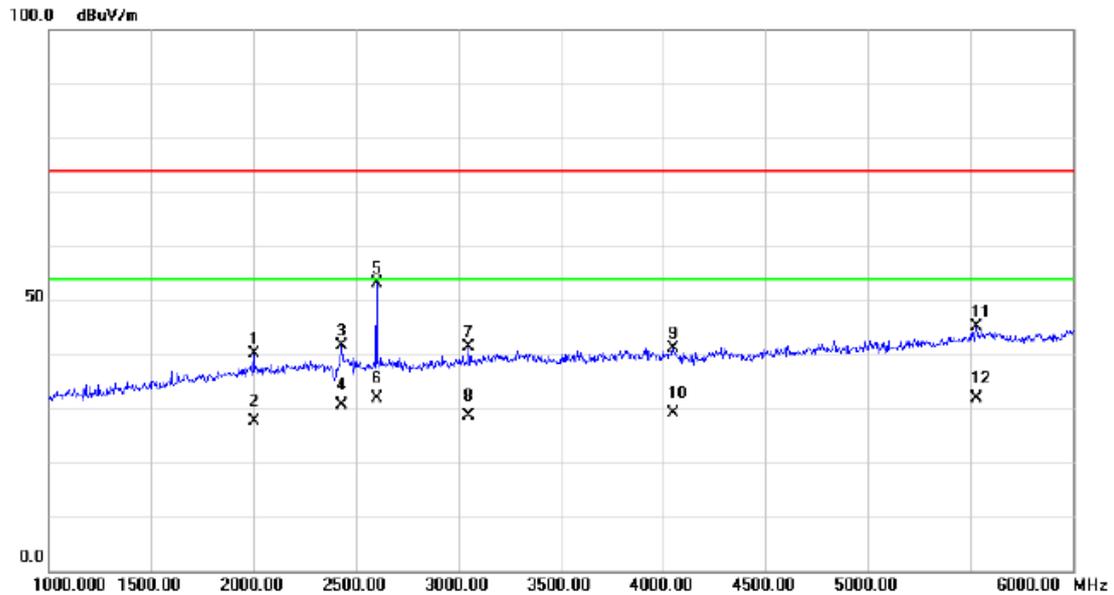

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2000.000	44.87	-4.77	40.10	74.00	-33.90	peak	
2	2000.000	32.30	-4.77	27.53	54.00	-26.47	AVG	
3	2430.000	46.07	-4.53	41.54	74.00	-32.46	peak	
4	2430.000	35.26	-4.53	30.73	54.00	-23.27	AVG	
5 *	2600.000	57.57	-4.35	53.22	74.00	-20.78	peak	
6	2600.000	36.26	-4.35	31.91	54.00	-22.09	AVG	
7	3050.000	45.07	-3.67	41.40	74.00	-32.60	peak	
8	3050.000	32.26	-3.67	28.59	54.00	-25.41	AVG	
9	4050.000	42.24	-1.06	41.18	74.00	-32.82	peak	
10	4050.000	30.25	-1.06	29.19	54.00	-24.81	AVG	
11	5530.000	43.18	1.87	45.05	74.00	-28.95	peak	
12	5530.000	30.10	1.87	31.97	54.00	-22.03	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK


Horizontal

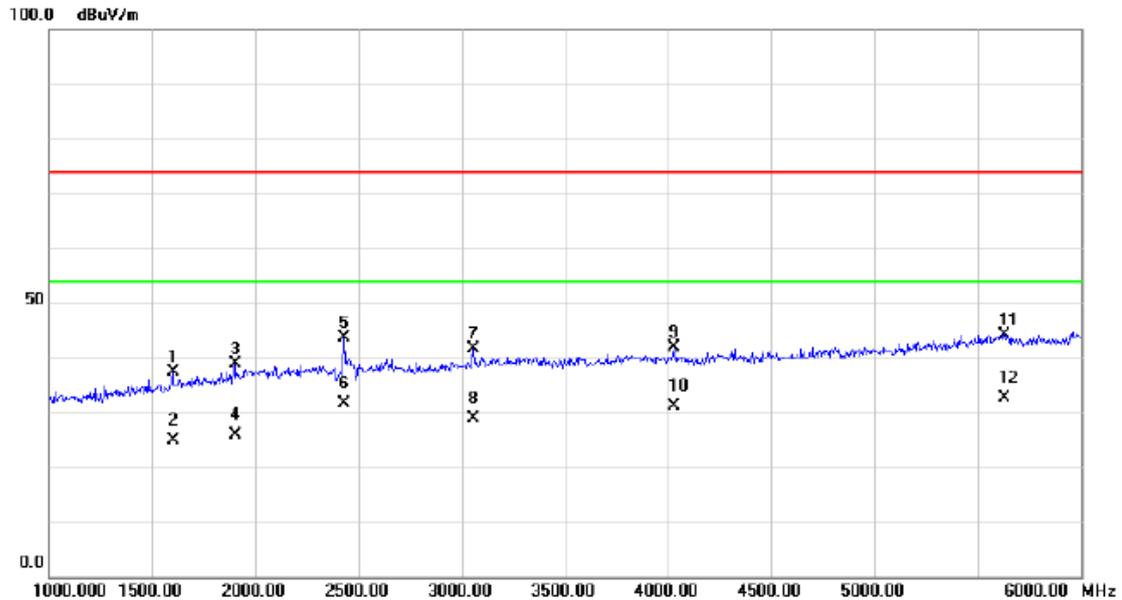

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1600.000	44.63	-7.35	37.28	74.00	-36.72	peak	
2	1600.000	32.26	-7.35	24.91	54.00	-29.09	AVG	
3	1900.000	44.17	-5.41	38.76	74.00	-35.24	peak	
4	1900.000	31.26	-5.41	25.85	54.00	-28.15	AVG	
5	2430.000	48.22	-4.53	43.69	74.00	-30.31	peak	
6	2430.000	36.25	-4.53	31.72	54.00	-22.28	AVG	
7	3055.000	45.39	-3.66	41.73	74.00	-32.27	peak	
8	3055.000	32.66	-3.66	29.00	54.00	-25.00	AVG	
9	4030.000	42.84	-1.07	41.77	74.00	-32.23	peak	
10	4030.000	32.15	-1.07	31.08	54.00	-22.92	AVG	
11	5630.000	42.17	2.08	44.25	74.00	-29.75	peak	
12 *	5630.000	30.45	2.08	32.53	54.00	-21.47	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: YINGJU


Vertical

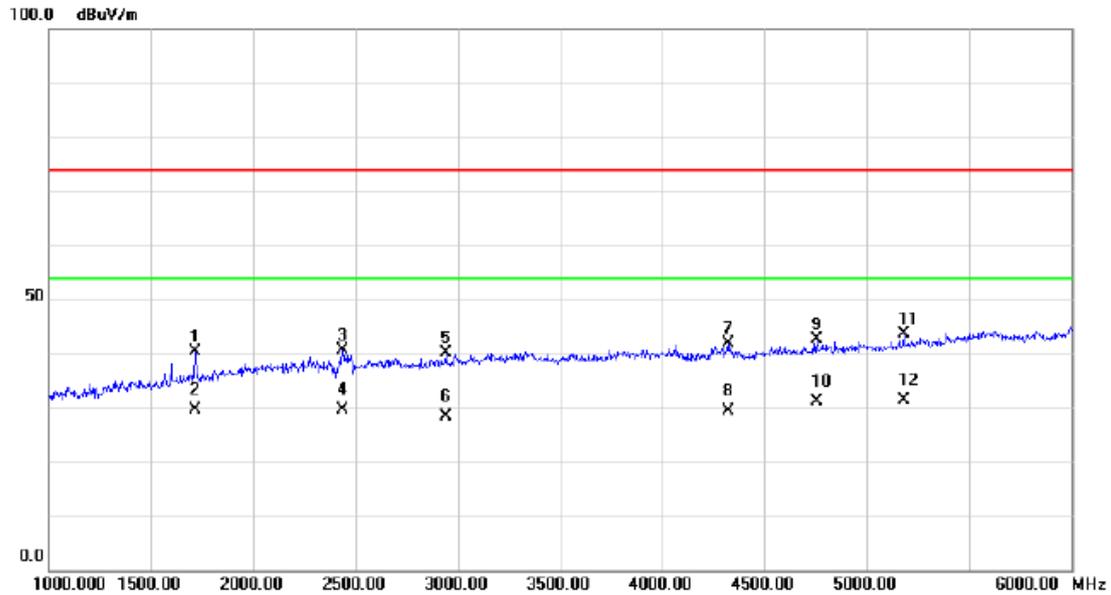

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1715.000	46.90	-6.61	40.29	74.00	-33.71	peak	
2		1715.000	36.26	-6.61	29.65	54.00	-24.35	AVG	
3		2435.000	45.10	-4.52	40.58	74.00	-33.42	peak	
4		2435.000	34.26	-4.52	29.74	54.00	-24.26	AVG	
5		2940.000	43.92	-3.89	40.03	74.00	-33.97	peak	
6		2940.000	32.26	-3.89	28.37	54.00	-25.63	AVG	
7		4320.000	42.74	-0.92	41.82	74.00	-32.18	peak	
8		4320.000	30.25	-0.92	29.33	54.00	-24.67	AVG	
9		4755.000	42.80	-0.23	42.57	74.00	-31.43	peak	
10		4755.000	31.26	-0.23	31.03	54.00	-22.97	AVG	
11		5180.000	42.77	0.87	43.64	74.00	-30.36	peak	
12	*	5180.000	30.60	0.87	31.47	54.00	-22.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: YINGJU


Horizontal

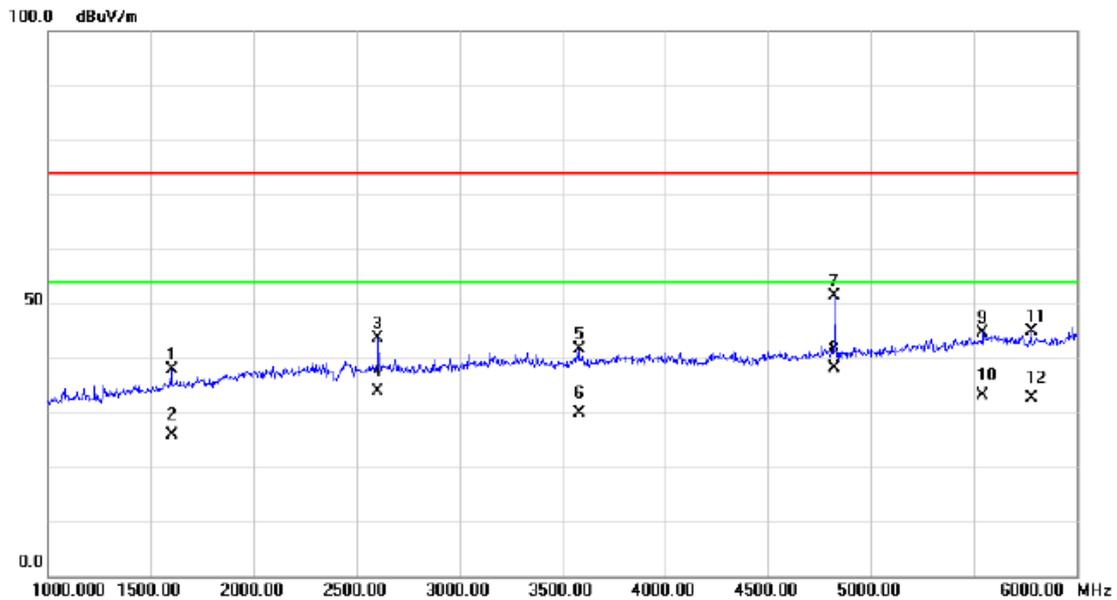

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1600.000	45.26	-7.35	37.91	74.00	-36.09	peak	
2	1600.000	33.26	-7.35	25.91	54.00	-28.09	AVG	
3	2605.000	48.08	-4.34	43.74	74.00	-30.26	peak	
4	2605.000	38.30	-4.34	33.96	54.00	-20.04	AVG	
5	3580.000	43.87	-2.32	41.55	74.00	-32.45	peak	
6	3580.000	32.13	-2.32	29.81	54.00	-24.19	AVG	
7	4825.000	51.54	-0.07	51.47	74.00	-22.53	peak	
8 *	4825.000	38.25	-0.07	38.18	54.00	-15.82	AVG	
9	5545.000	42.85	1.90	44.75	74.00	-29.25	peak	
10	5545.000	31.26	1.90	33.16	54.00	-20.84	AVG	
11	5780.000	42.39	2.40	44.79	74.00	-29.21	peak	
12	5780.000	30.30	2.40	32.70	54.00	-21.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Vertical

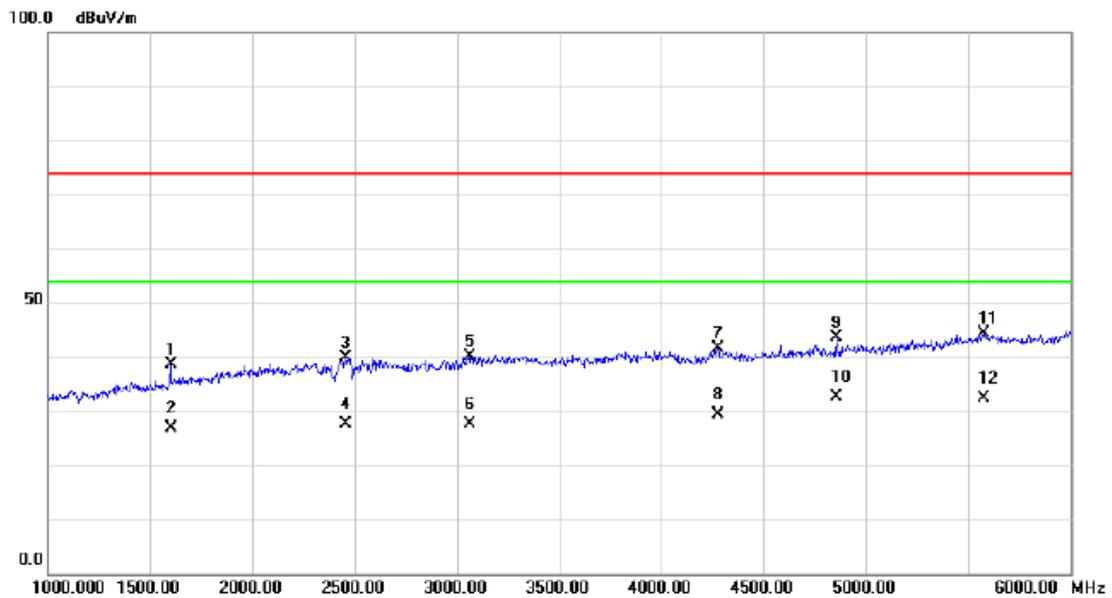

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1600.000	45.88	-7.35	38.53	74.00	-35.47	peak	
2	1600.000	34.26	-7.35	26.91	54.00	-27.09	AVG	
3	2455.000	44.27	-4.51	39.76	74.00	-34.24	peak	
4	2455.000	32.26	-4.51	27.75	54.00	-26.25	AVG	
5	3060.000	43.70	-3.65	40.05	74.00	-33.95	peak	
6	3060.000	31.25	-3.65	27.60	54.00	-26.40	AVG	
7	4275.000	42.62	-0.95	41.67	74.00	-32.33	peak	
8	4275.000	30.26	-0.95	29.31	54.00	-24.69	AVG	
9	4855.000	43.61	0.00	43.61	74.00	-30.39	peak	
10 *	4855.000	32.69	0.00	32.69	54.00	-21.31	AVG	
11	5575.000	42.49	1.96	44.45	74.00	-29.55	peak	
12	5575.000	30.30	1.96	32.26	54.00	-21.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Horizontal

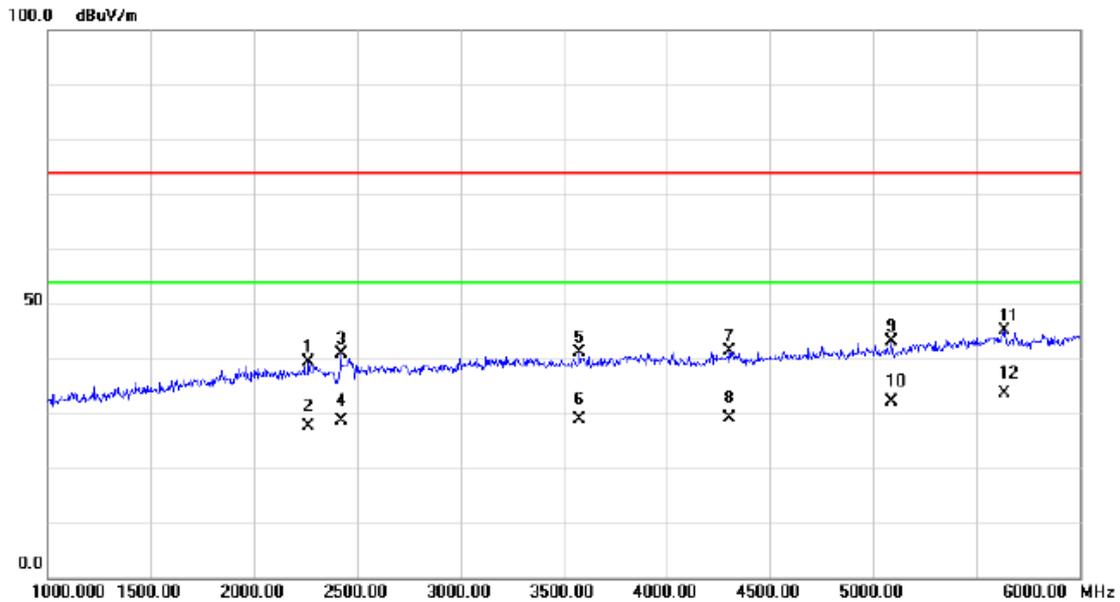

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2265.000	44.06	-4.62	39.44	74.00	-34.56	peak	
2	2265.000	32.30	-4.62	27.68	54.00	-26.32	AVG	
3	2420.000	45.38	-4.53	40.85	74.00	-33.15	peak	
4	2420.000	33.26	-4.53	28.73	54.00	-25.27	AVG	
5	3575.000	43.57	-2.33	41.24	74.00	-32.76	peak	
6	3575.000	31.25	-2.33	28.92	54.00	-25.08	AVG	
7	4305.000	42.33	-0.93	41.40	74.00	-32.60	peak	
8	4305.000	30.13	-0.93	29.20	54.00	-24.80	AVG	
9	5090.000	42.52	0.61	43.13	74.00	-30.87	peak	
10	5090.000	31.55	0.61	32.16	54.00	-21.84	AVG	
11	5635.000	42.96	2.10	45.06	74.00	-28.94	peak	
12 *	5635.000	31.60	2.10	33.70	54.00	-20.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: DAHONG(EU Plug)


Vertical

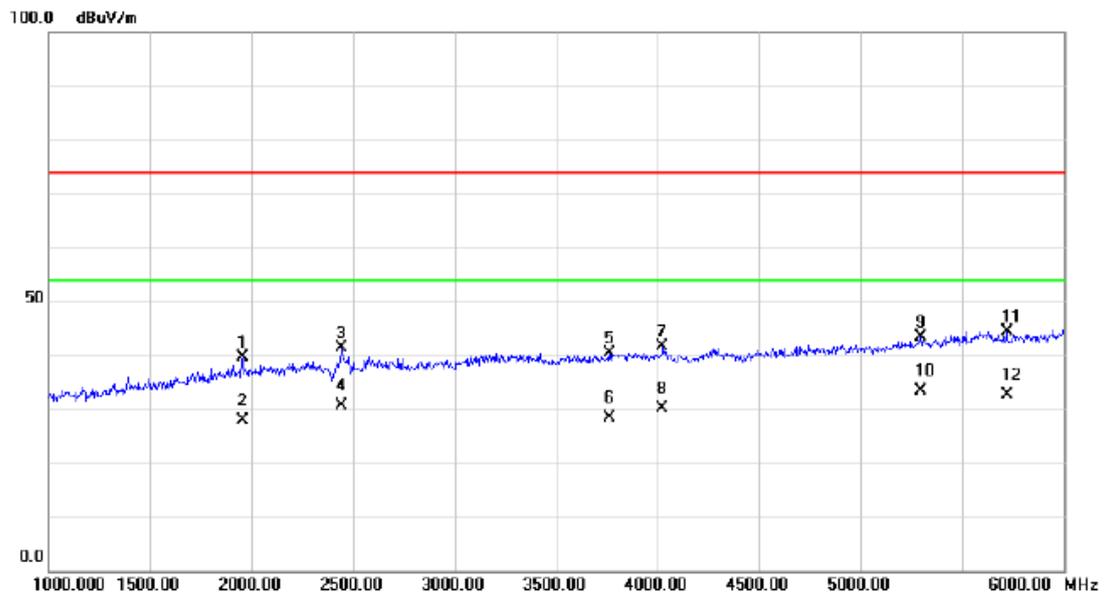

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1955.000	44.72	-5.06	39.66	74.00	-34.34	peak	
2		1955.000	33.02	-5.06	27.96	54.00	-26.04	AVG	
3		2445.000	45.86	-4.51	41.35	74.00	-32.65	peak	
4		2445.000	35.26	-4.51	30.75	54.00	-23.25	AVG	
5		3760.000	42.12	-1.79	40.33	74.00	-33.67	peak	
6		3760.000	30.15	-1.79	28.36	54.00	-25.64	AVG	
7		4025.000	42.66	-1.08	41.58	74.00	-32.42	peak	
8		4025.000	31.25	-1.08	30.17	54.00	-23.83	AVG	
9		5295.000	42.22	1.21	43.43	74.00	-30.57	peak	
10	*	5295.000	32.15	1.21	33.36	54.00	-20.64	AVG	
11		5720.000	42.17	2.27	44.44	74.00	-29.56	peak	
12		5720.000	30.40	2.27	32.67	54.00	-21.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: DAHONG(EU Plug)


Horizontal

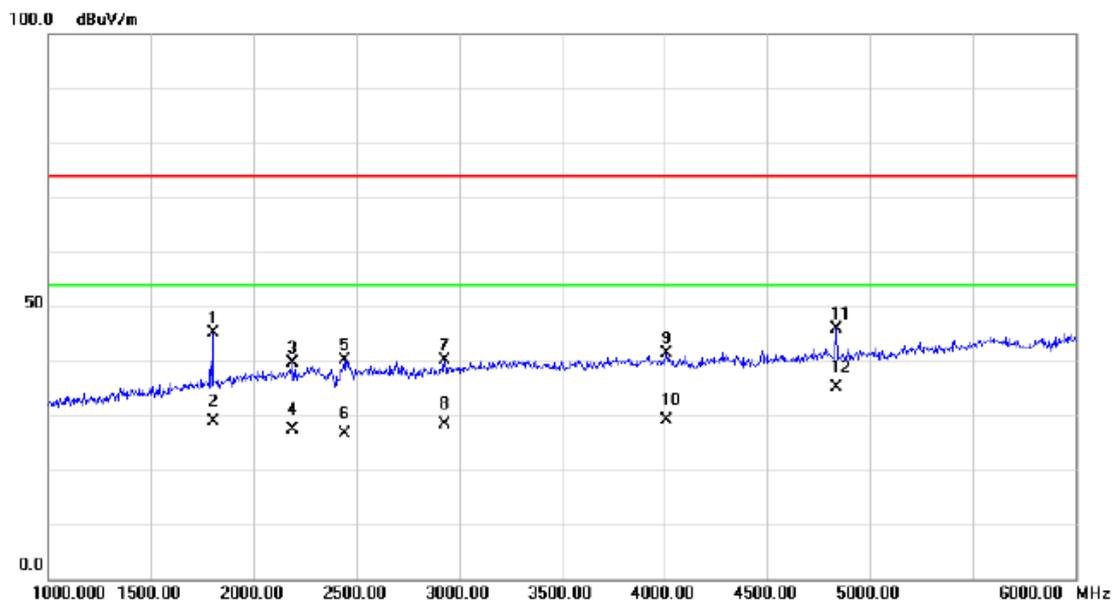

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1800.000	51.13	-6.06	45.07	74.00	-28.93	peak	
2		1800.000	35.06	-6.06	29.00	54.00	-25.00	AVG	
3		2190.000	44.32	-4.66	39.66	74.00	-34.34	peak	
4		2190.000	32.15	-4.66	27.49	54.00	-26.51	AVG	
5		2440.000	44.66	-4.52	40.14	74.00	-33.86	peak	
6		2440.000	31.26	-4.52	26.74	54.00	-27.26	AVG	
7		2930.000	43.95	-3.89	40.06	74.00	-33.94	peak	
8		2930.000	32.26	-3.89	28.37	54.00	-25.63	AVG	
9		4010.000	42.50	-1.08	41.42	74.00	-32.58	peak	
10		4010.000	30.26	-1.08	29.18	54.00	-24.82	AVG	
11		4835.000	46.03	-0.05	45.98	74.00	-28.02	peak	
12	*	4835.000	35.20	-0.05	35.15	54.00	-18.85	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK(EU Plug)


Vertical

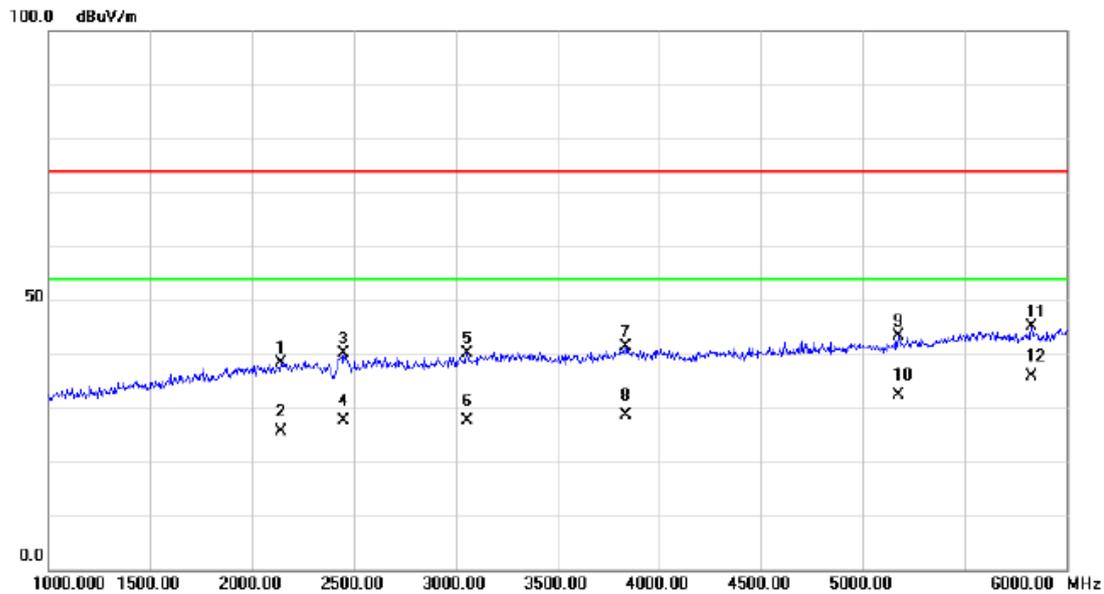

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2140.000	42.97	-4.69	38.28	74.00	-35.72	peak	
2		2140.000	30.26	-4.69	25.57	54.00	-28.43	AVG	
3		2450.000	44.53	-4.51	40.02	74.00	-33.98	peak	
4		2450.000	32.25	-4.51	27.74	54.00	-26.26	AVG	
5		3055.000	43.91	-3.66	40.25	74.00	-33.75	peak	
6		3055.000	31.26	-3.66	27.60	54.00	-26.40	AVG	
7		3835.000	42.97	-1.57	41.40	74.00	-32.60	peak	
8		3835.000	30.26	-1.57	28.69	54.00	-25.31	AVG	
9		5175.000	42.59	0.85	43.44	74.00	-30.56	peak	
10		5175.000	31.58	0.85	32.43	54.00	-21.57	AVG	
11		5830.000	42.66	2.51	45.17	74.00	-28.83	peak	
12	*	5830.000	33.26	2.51	35.77	54.00	-18.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: HK(EU Plug)


Horizontal

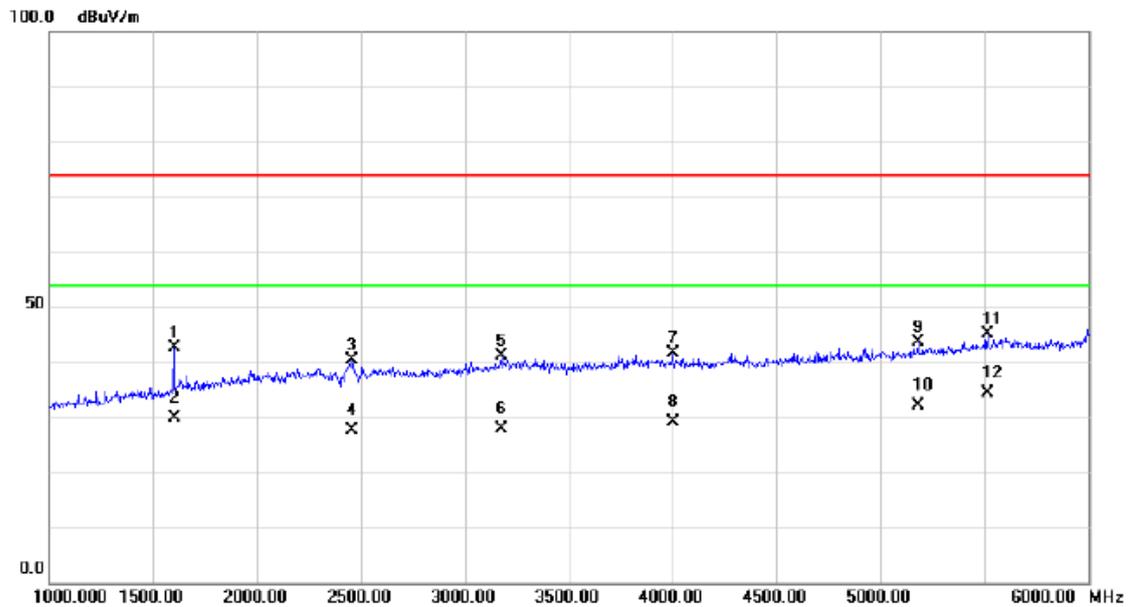

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1600.000	50.08	-7.35	42.73	74.00	-31.27	peak	
2	1600.000	37.26	-7.35	29.91	54.00	-24.09	AVG	
3	2455.000	44.99	-4.51	40.48	74.00	-33.52	peak	
4	2455.000	32.26	-4.51	27.75	54.00	-26.25	AVG	
5	3175.000	44.47	-3.36	41.11	74.00	-32.89	peak	
6	3175.000	31.26	-3.36	27.90	54.00	-26.10	AVG	
7	4000.000	42.68	-1.09	41.59	74.00	-32.41	peak	
8	4000.000	30.26	-1.09	29.17	54.00	-24.83	AVG	
9	5180.000	42.69	0.87	43.56	74.00	-30.44	peak	
10	5180.000	31.26	0.87	32.13	54.00	-21.87	AVG	
11	5515.000	43.26	1.83	45.09	74.00	-28.91	peak	
12 *	5515.000	32.60	1.83	34.43	54.00	-19.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: YINGJU(EU Plug)


Vertical

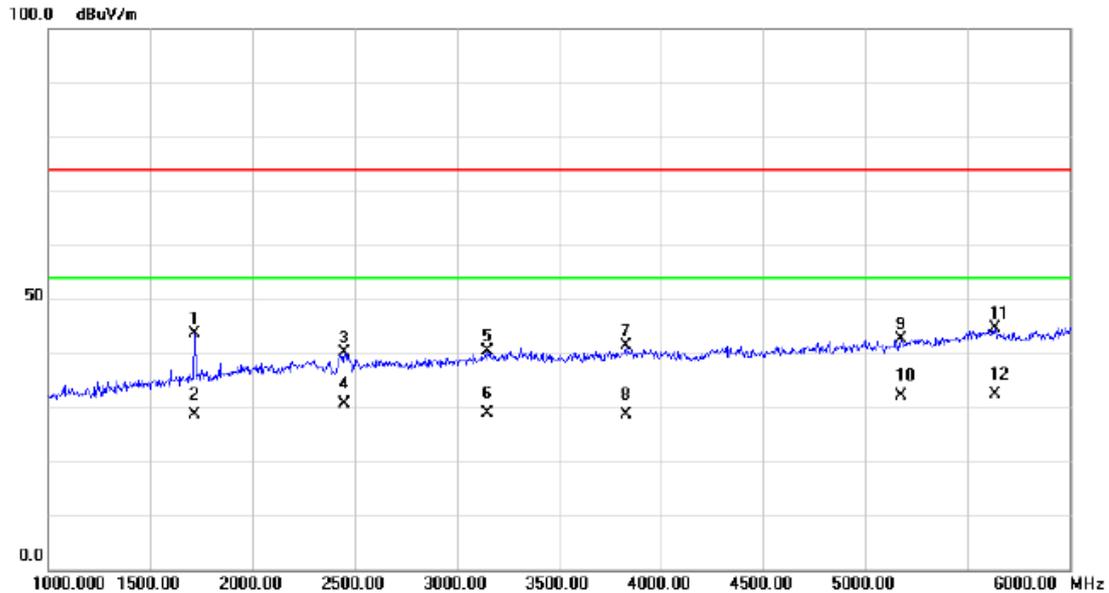

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1715.000	50.35	-6.61	43.74	74.00	-30.26	peak	
2		1715.000	35.26	-6.61	28.65	54.00	-25.35	AVG	
3		2450.000	44.56	-4.51	40.05	74.00	-33.95	peak	
4		2450.000	35.26	-4.51	30.75	54.00	-23.25	AVG	
5		3150.000	43.73	-3.42	40.31	74.00	-33.69	peak	
6		3150.000	32.26	-3.42	28.84	54.00	-25.16	AVG	
7		3830.000	42.93	-1.59	41.34	74.00	-32.66	peak	
8		3830.000	30.26	-1.59	28.67	54.00	-25.33	AVG	
9		5175.000	41.73	0.85	42.58	74.00	-31.42	peak	
10		5175.000	31.26	0.85	32.11	54.00	-21.89	AVG	
11		5635.000	42.57	2.10	44.67	74.00	-29.33	peak	
12	*	5635.000	30.30	2.10	32.40	54.00	-21.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: YINGJU(EU Plug)


Horizontal

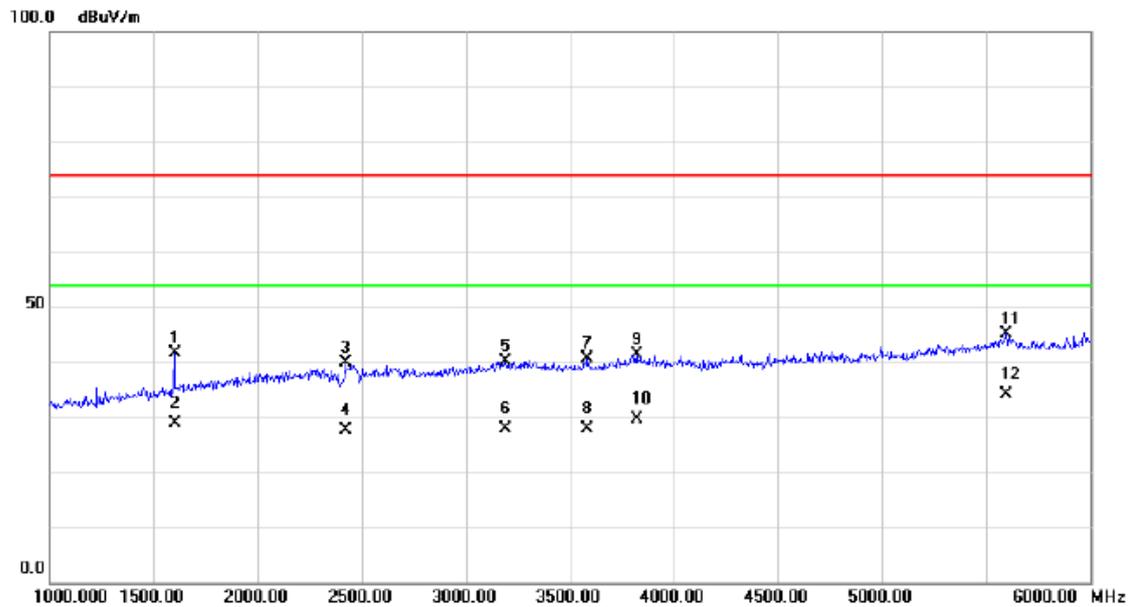

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1600.000	48.87	-7.35	41.52	74.00	-32.48	peak	
2		1600.000	36.26	-7.35	28.91	54.00	-25.09	AVG	
3		2420.000	44.46	-4.53	39.93	74.00	-34.07	peak	
4		2420.000	32.15	-4.53	27.62	54.00	-26.38	AVG	
5		3190.000	43.51	-3.32	40.19	74.00	-33.81	peak	
6		3190.000	31.25	-3.32	27.93	54.00	-26.07	AVG	
7		3585.000	42.91	-2.30	40.61	74.00	-33.39	peak	
8		3585.000	30.30	-2.30	28.00	54.00	-26.00	AVG	
9		3820.000	42.93	-1.61	41.32	74.00	-32.68	peak	
10		3820.000	31.26	-1.61	29.65	54.00	-24.35	AVG	
11		5595.000	43.24	2.01	45.25	74.00	-28.75	peak	
12	*	5595.000	32.05	2.01	34.06	54.00	-19.94	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Vertical

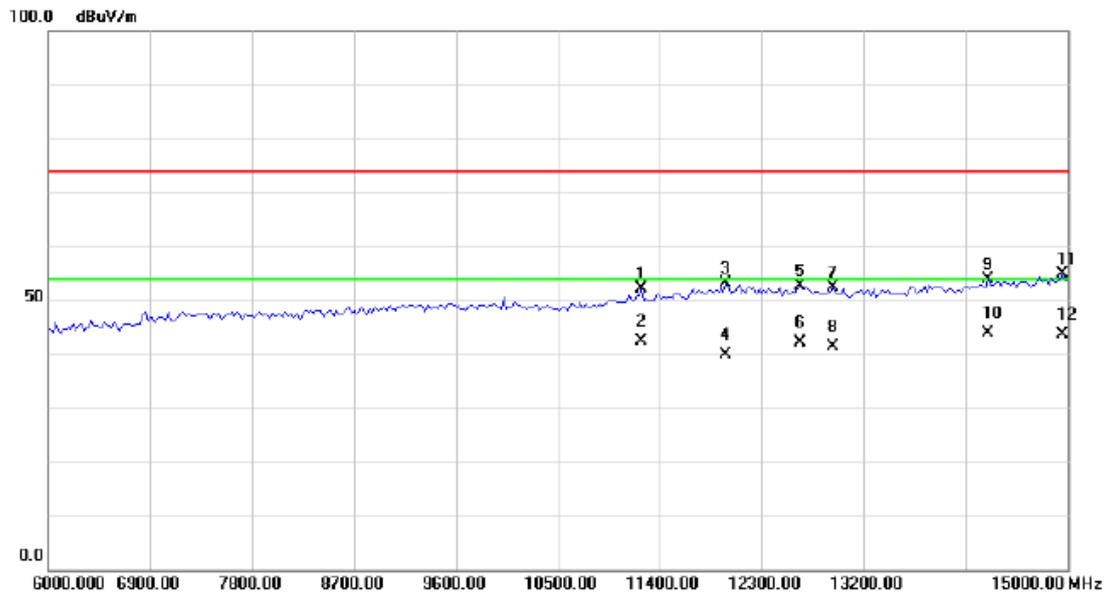

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11242.50	32.42	19.60	52.02	74.00	-21.98	peak	
2	11242.50	22.66	19.60	42.26	54.00	-11.74	AVG	
3	11985.00	32.18	20.87	53.05	74.00	-20.95	peak	
4	11985.00	19.02	20.87	39.89	54.00	-14.11	AVG	
5	12637.50	31.64	20.92	52.56	74.00	-21.44	peak	
6	12637.50	21.18	20.92	42.10	54.00	-11.90	AVG	
7	12930.00	31.20	21.06	52.26	74.00	-21.74	peak	
8	12930.00	20.44	21.06	41.50	54.00	-12.50	AVG	
9	14302.50	31.32	22.68	54.00	74.00	-20.00	peak	
10 *	14302.50	21.12	22.68	43.80	54.00	-10.20	AVG	
11	14955.00	32.17	22.60	54.77	74.00	-19.23	peak	
12	14955.00	21.10	22.60	43.70	54.00	-10.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD

Horizontal

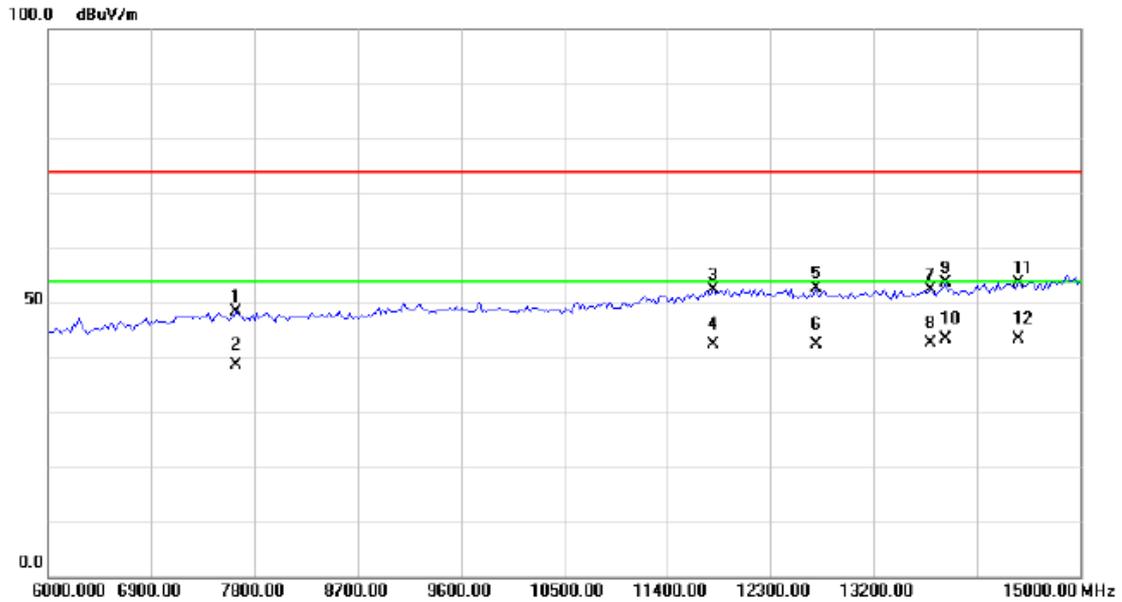

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7642.500	33.66	14.67	48.33	74.00	-25.67	peak	
2		7642.500	23.92	14.67	38.59	54.00	-15.41	AVG	
3		11805.00	31.75	20.60	52.35	74.00	-21.65	peak	
4		11805.00	21.90	20.60	42.50	54.00	-11.50	AVG	
5		12705.00	31.67	20.95	52.62	74.00	-21.38	peak	
6		12705.00	21.35	20.95	42.30	54.00	-11.70	AVG	
7		13695.00	30.62	21.70	52.32	74.00	-21.68	peak	
8		13695.00	21.00	21.70	42.70	54.00	-11.30	AVG	
9		13830.00	31.88	21.83	53.71	74.00	-20.29	peak	
10	*	13830.00	21.67	21.83	43.50	54.00	-10.50	AVG	
11		14460.00	30.66	23.03	53.69	74.00	-20.31	peak	
12		14460.00	20.27	23.03	43.30	54.00	-10.70	AVG	