


FCC Test Report


FCC ID: QISY560-L23

Project No. : 1505C241
Equipment : Smart Phone
Model Name : HUAWEI Y560-L23, Y560-L23
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : May 22, 2015
Date of Test : May 22, 2015 ~ May 29, 2015
Issued Date : Jun. 04, 2015
Tested by : BTL Inc.

Testing Engineer : 
(Kener Wu)

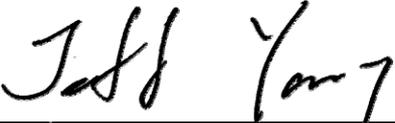Technical Manager : 
(Jeff Yang)

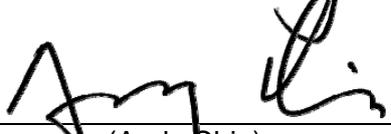Authorized Signatory : 
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
ATTACHMENT A - CONDUCTED EMISSION	19
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	46
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	73

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1505C241	Original Issue.	Jun. 04, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI Y560-L23, Y560-L23
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : May 22, 2015 ~ May 29, 2015
Standard(s) : FCC Part 15, Subpart B:2014
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1505C241) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2014 ANSI C63.4-2009	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	Note
C02	CISPR	150 KHz ~ 30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	Note
CB08	CISPR	30MHz ~ 200MHz	V	3.22	
		30MHz ~ 200MHz	H	3.55	
		200MHz ~ 1,000MHz	V	3.24	
		200MHz ~ 1,000MHz	H	3.11	
		1,000MHz ~ 18,000MHz	V	4.05	
		1,000MHz ~ 18,000MHz	H	3.97	
		18,000MHz ~ 40,000MHz	V	4.04	
		18,000MHz ~ 40,000MHz	H	4.01	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI Y560-L23, Y560-L23
Model Difference	Only differ in model name.
Power Source	#1 DC Voltage supplied from AC/DC adapter. Brand/Model: HUAWEI / HW-050100U01(US) Brand/Model: HUAWEI / HW-050100E01(EU) #2 Supplied from battery. Brand/Model: HUAWEI / HB474284RBC
Power Rating	#1 I/P: 100-240V~ 50/60H 0.2A O/P: DC 5V 1A #2 DC 3.8V 2000mAh

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT's maximum operating frequency is 4GHz

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Adapter+earphone+camera on+idle
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+earphone+camera on+idle
Mode 2	Adapter+earphone+playing+idle
Mode 3	Adapter+Speaker+playing+idle
Mode 4	Adapter+Speaker+Traffic
Mode 5	Adapter+earphone+Traffic
Mode 6	USB copy(EUT with PC)+earphone+idle

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

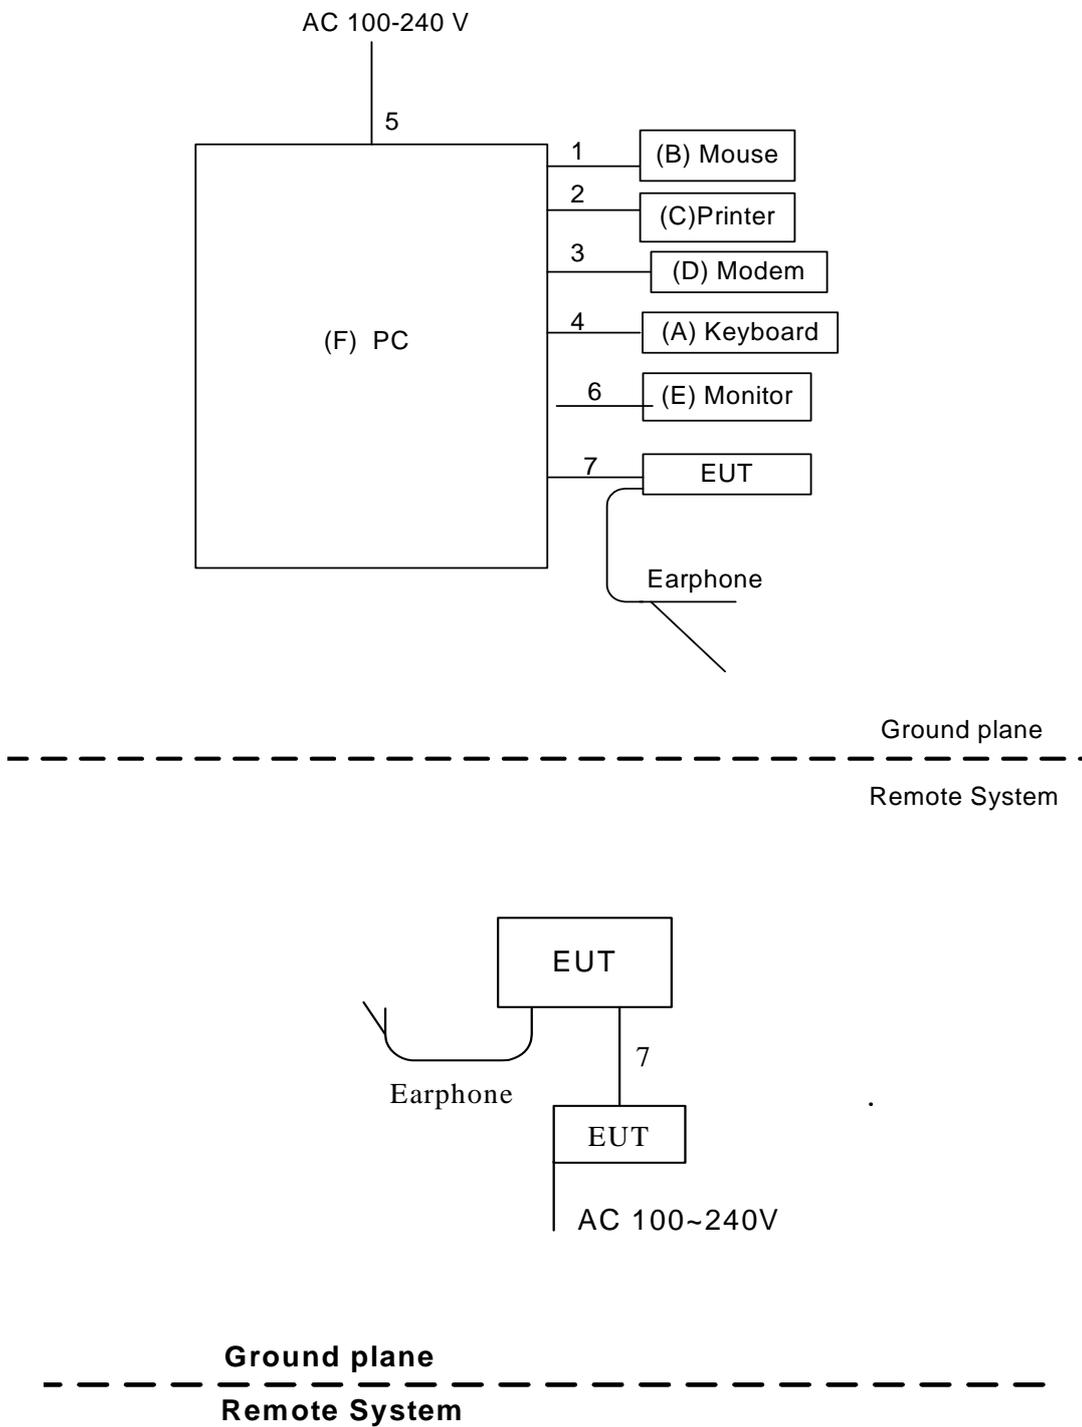

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB Keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD Monitor	Dell	E177FPc	DOC	CNOFJ179-6418 0-6AG-1WNS	
F	PC	Dell 745	DCSM	DOC	G7K832X	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	-	USB Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

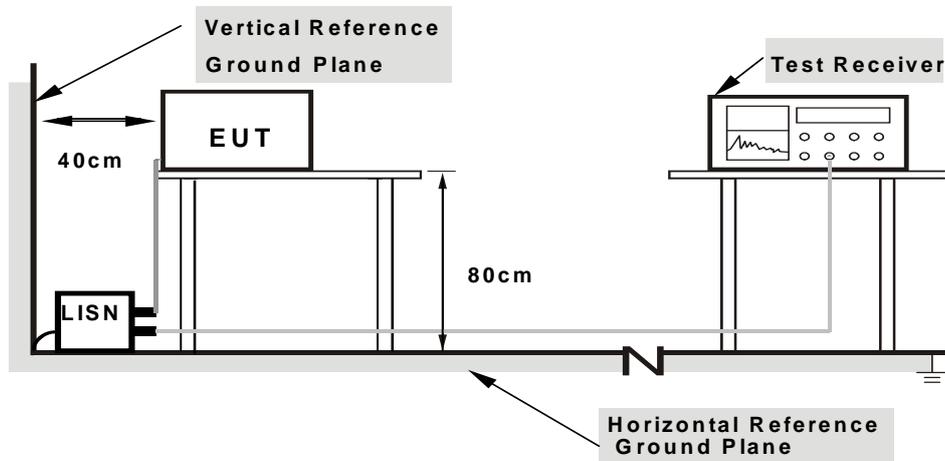

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

5.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

5.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25° C Relative Humidity: 51%

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following: FCC Part 15, Subpart B: 2014,.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

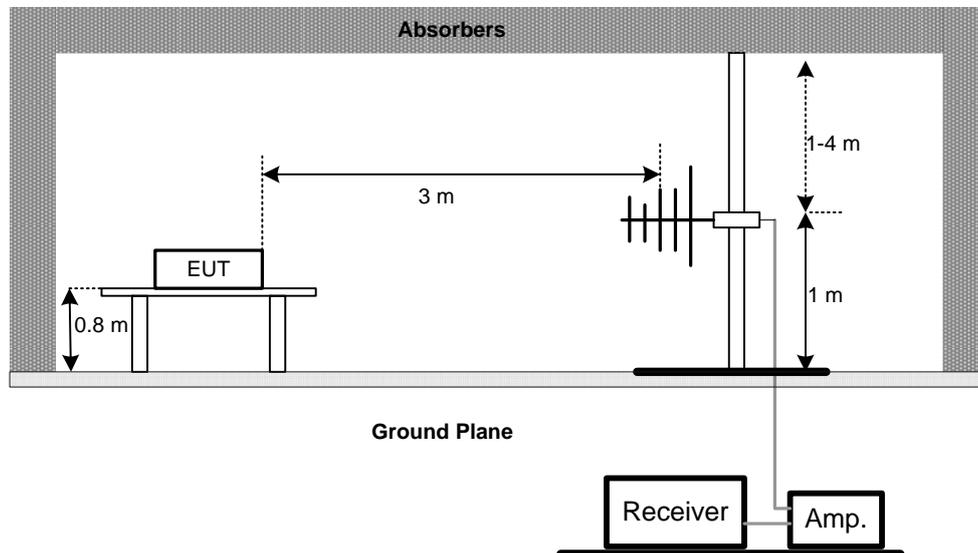

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

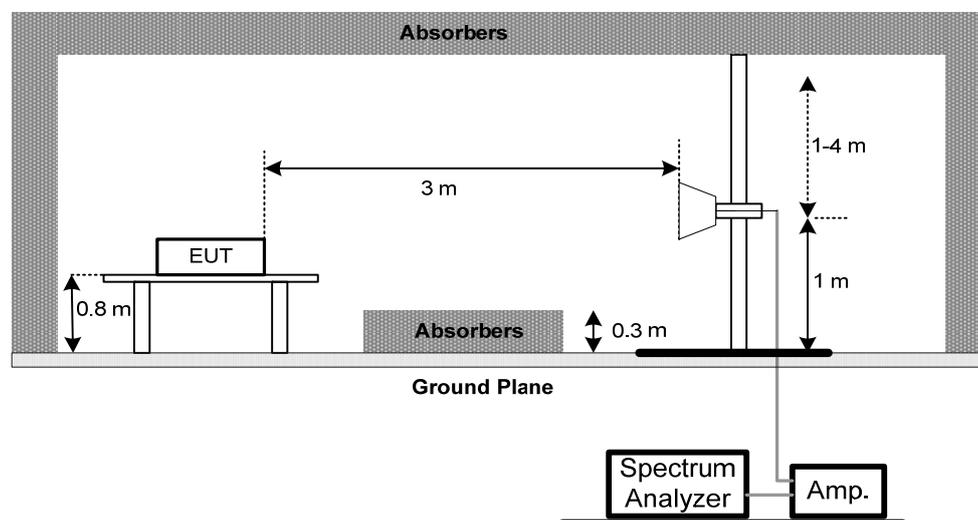

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SPA setting in RBW=120KHz, VBW=120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

5.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 15, 2015
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 09, 2015
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Line

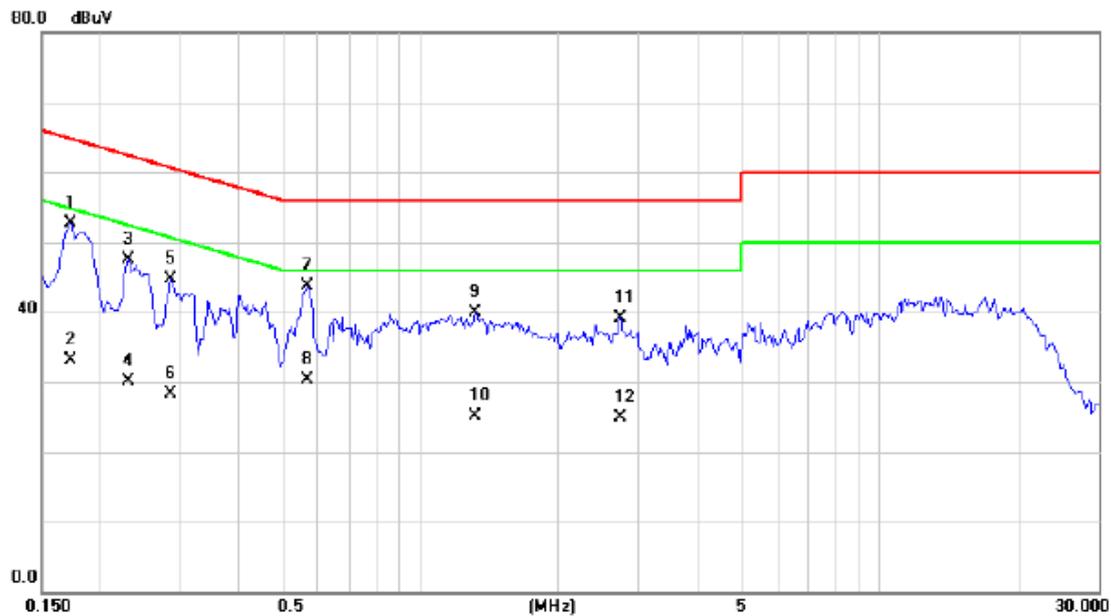

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1734	43.18	9.56	52.74	64.80	-12.06	QP	
2		0.1734	23.50	9.56	33.06	54.80	-21.74	AVG	
3		0.2320	37.96	9.60	47.56	62.38	-14.82	QP	
4		0.2320	20.60	9.60	30.20	52.38	-22.18	AVG	
5		0.2867	35.09	9.63	44.72	60.62	-15.90	QP	
6		0.2867	18.70	9.63	28.33	50.62	-22.29	AVG	
7		0.5680	34.02	9.71	43.73	56.00	-12.27	QP	
8		0.5680	20.60	9.71	30.31	46.00	-15.69	AVG	
9		1.3220	30.16	9.83	39.99	56.00	-16.01	QP	
10		1.3220	15.30	9.83	25.13	46.00	-20.87	AVG	
11		2.7281	29.19	10.01	39.20	56.00	-16.80	QP	
12		2.7281	14.90	10.01	24.91	46.00	-21.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Neutral

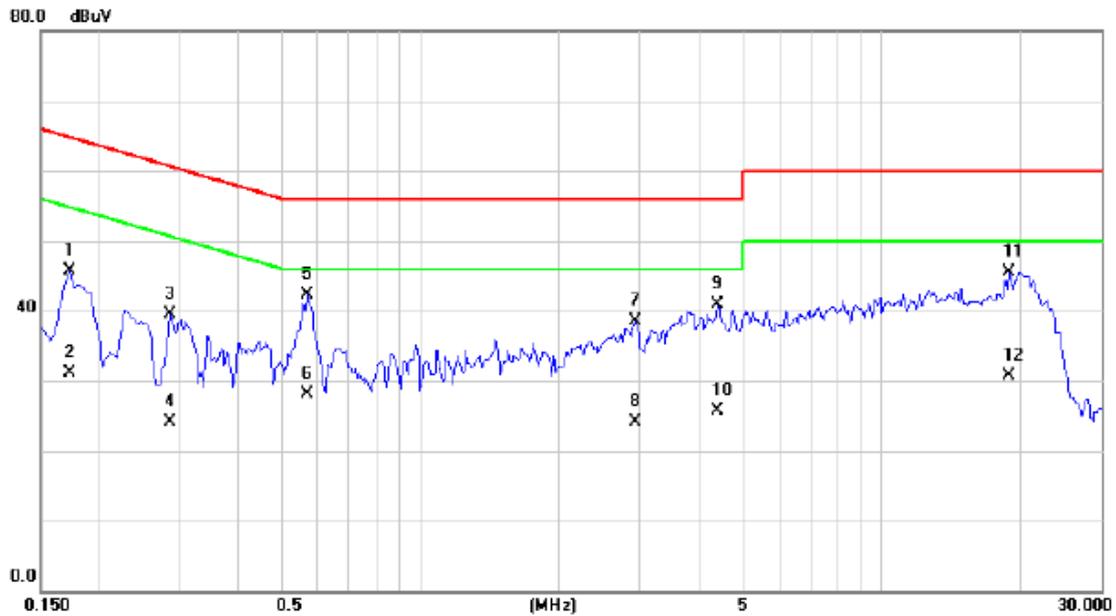

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1734	36.15	9.48	45.63	64.80	-19.17	QP	
2		0.1734	21.60	9.48	31.08	54.80	-23.72	AVG	
3		0.2867	29.97	9.52	39.49	60.62	-21.13	QP	
4		0.2867	14.50	9.52	24.02	50.62	-26.60	AVG	
5	*	0.5680	32.77	9.56	42.33	56.00	-13.67	QP	
6		0.5680	18.60	9.56	28.16	46.00	-17.84	AVG	
7		2.9195	28.73	9.80	38.53	56.00	-17.47	QP	
8		2.9195	14.30	9.80	24.10	46.00	-21.90	AVG	
9		4.4258	30.92	9.91	40.83	56.00	-15.17	QP	
10		4.4258	15.80	9.91	25.71	46.00	-20.29	AVG	
11		18.8945	35.59	9.96	45.55	60.00	-14.45	QP	
12		18.8945	20.70	9.96	30.66	50.00	-19.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Line

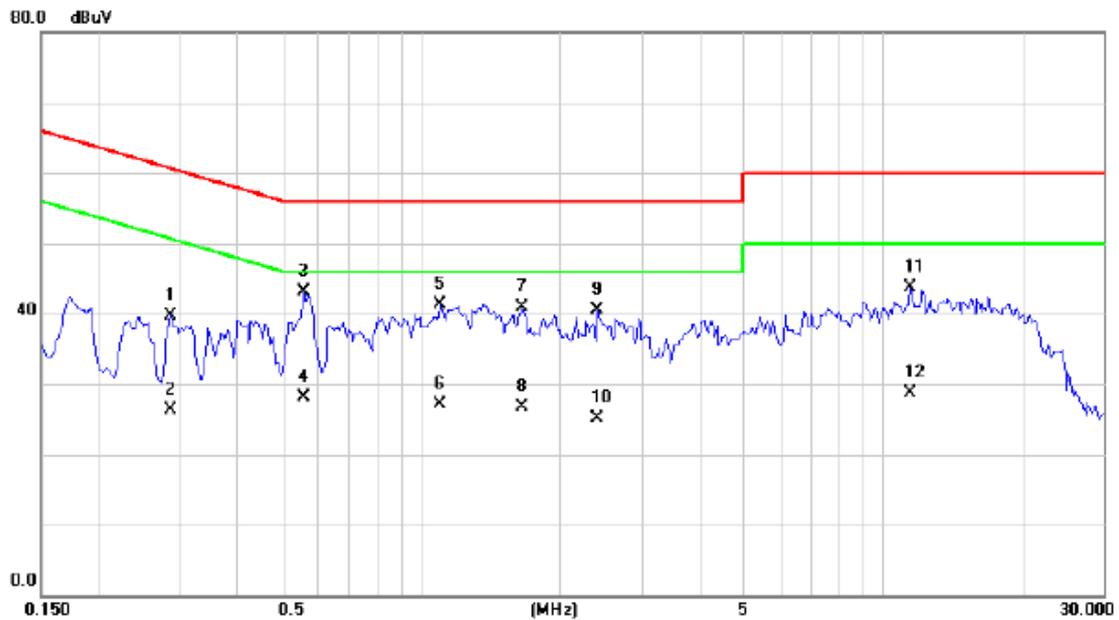

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2867	30.13	9.63	39.76	60.62	-20.86	QP	
2	0.2867	16.70	9.63	26.33	50.62	-24.29	AVG	
3 *	0.5563	33.39	9.70	43.09	56.00	-12.91	QP	
4	0.5563	18.50	9.70	28.20	46.00	-17.80	AVG	
5	1.0953	31.58	9.80	41.38	56.00	-14.62	QP	
6	1.0953	17.30	9.80	27.10	46.00	-18.90	AVG	
7	1.6540	31.04	9.86	40.90	56.00	-15.10	QP	
8	1.6540	16.80	9.86	26.66	46.00	-19.34	AVG	
9	2.4038	30.43	9.99	40.42	56.00	-15.58	QP	
10	2.4038	15.20	9.99	25.19	46.00	-20.81	AVG	
11	11.4805	33.91	9.86	43.77	60.00	-16.23	QP	
12	11.4805	18.90	9.86	28.76	50.00	-21.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Neutral

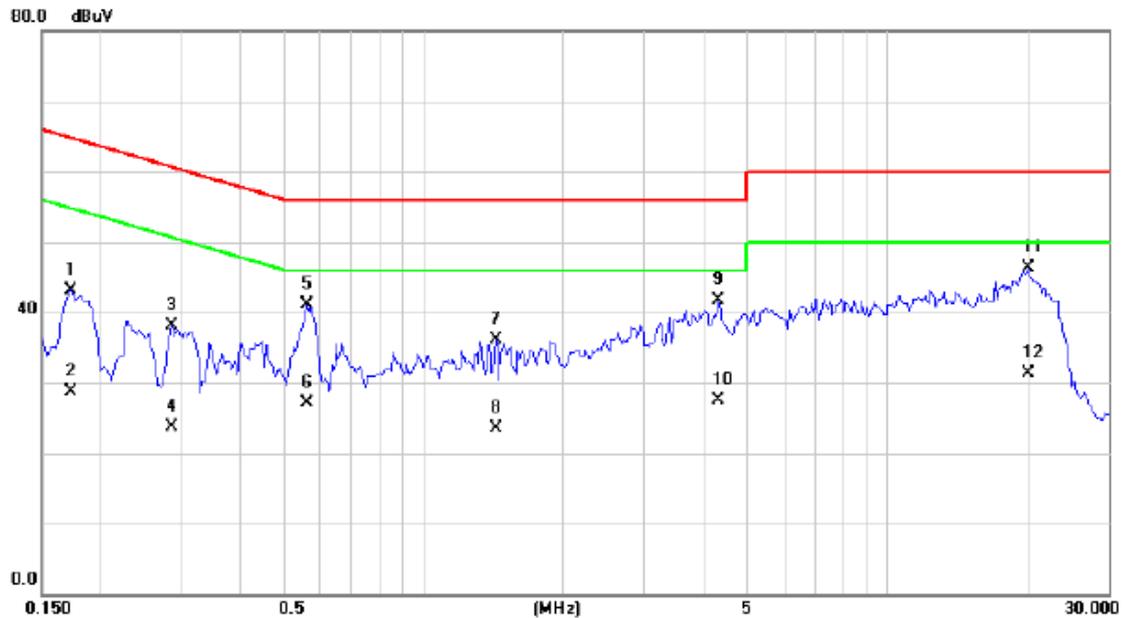

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1734	33.72	9.48	43.20	64.80	-21.60	QP	
2		0.1734	19.30	9.48	28.78	54.80	-26.02	AVG	
3		0.2867	28.50	9.52	38.02	60.62	-22.60	QP	
4		0.2867	14.20	9.52	23.72	50.62	-26.90	AVG	
5		0.5602	31.51	9.56	41.07	56.00	-14.93	QP	
6		0.5602	17.50	9.56	27.06	46.00	-18.94	AVG	
7		1.4391	26.51	9.65	36.16	56.00	-19.84	QP	
8		1.4391	13.80	9.65	23.45	46.00	-22.55	AVG	
9		4.3242	31.71	9.91	41.62	56.00	-14.38	QP	
10		4.3242	17.60	9.91	27.51	46.00	-18.49	AVG	
11	*	20.0898	36.38	9.97	46.35	60.00	-13.65	QP	
12		20.0898	21.30	9.97	31.27	50.00	-18.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD


Line

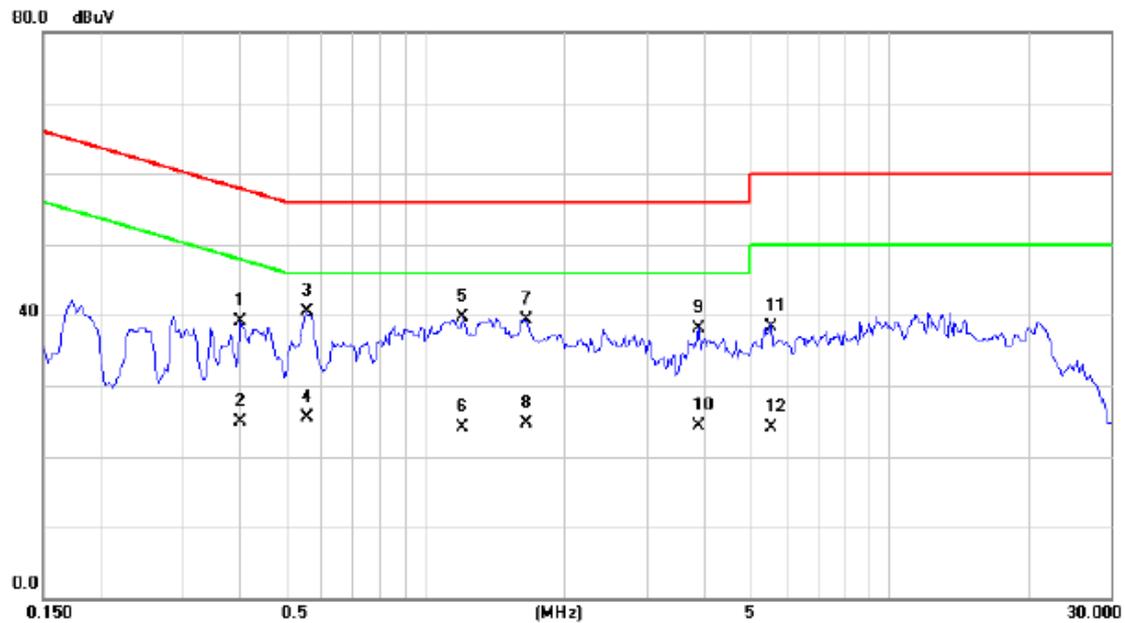

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1		0.4000	29.41	9.68	39.09	57.85	-18.76	QP	
2		0.4000	15.30	9.68	24.98	47.85	-22.87	AVG	
3	*	0.5563	30.72	9.70	40.42	56.00	-15.58	QP	
4		0.5563	15.80	9.70	25.50	46.00	-20.50	AVG	
5		1.2008	29.80	9.81	39.61	56.00	-16.39	QP	
6		1.2008	14.30	9.81	24.11	46.00	-21.89	AVG	
7		1.6461	29.51	9.86	39.37	56.00	-16.63	QP	
8		1.6461	14.90	9.86	24.76	46.00	-21.24	AVG	
9		3.8867	28.22	9.98	38.20	56.00	-17.80	QP	
10		3.8867	14.30	9.98	24.28	46.00	-21.72	AVG	
11		5.5347	28.32	9.97	38.29	60.00	-21.71	QP	
12		5.5347	14.10	9.97	24.07	50.00	-25.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD


Neutral

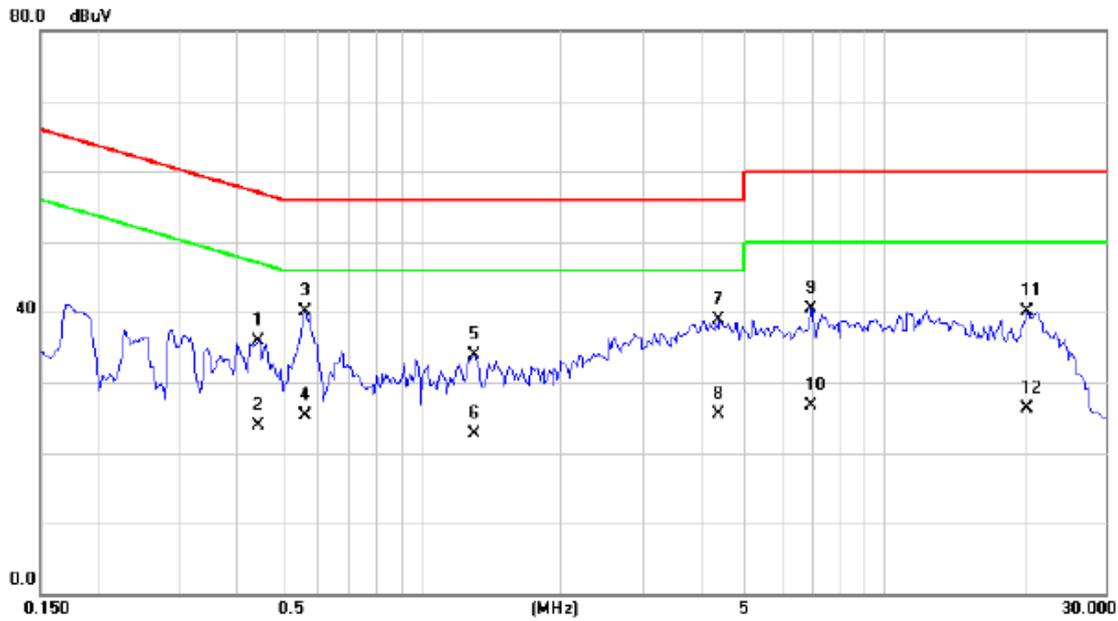

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4430	26.35	9.54	35.89	57.01	-21.12	QP	
2		0.4430	14.30	9.54	23.84	47.01	-23.17	AVG	
3	*	0.5602	30.62	9.56	40.18	56.00	-15.82	QP	
4		0.5602	15.70	9.56	25.26	46.00	-20.74	AVG	
5		1.3023	24.20	9.64	33.84	56.00	-22.16	QP	
6		1.3023	13.10	9.64	22.74	46.00	-23.26	AVG	
7		4.4023	29.01	9.91	38.92	56.00	-17.08	QP	
8		4.4023	15.60	9.91	25.51	46.00	-20.49	AVG	
9		6.9414	30.69	9.84	40.53	60.00	-19.47	QP	
10		6.9414	16.80	9.84	26.64	50.00	-23.36	AVG	
11		20.3360	30.12	9.97	40.09	60.00	-19.91	QP	
12		20.3360	16.30	9.97	26.27	50.00	-23.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Line

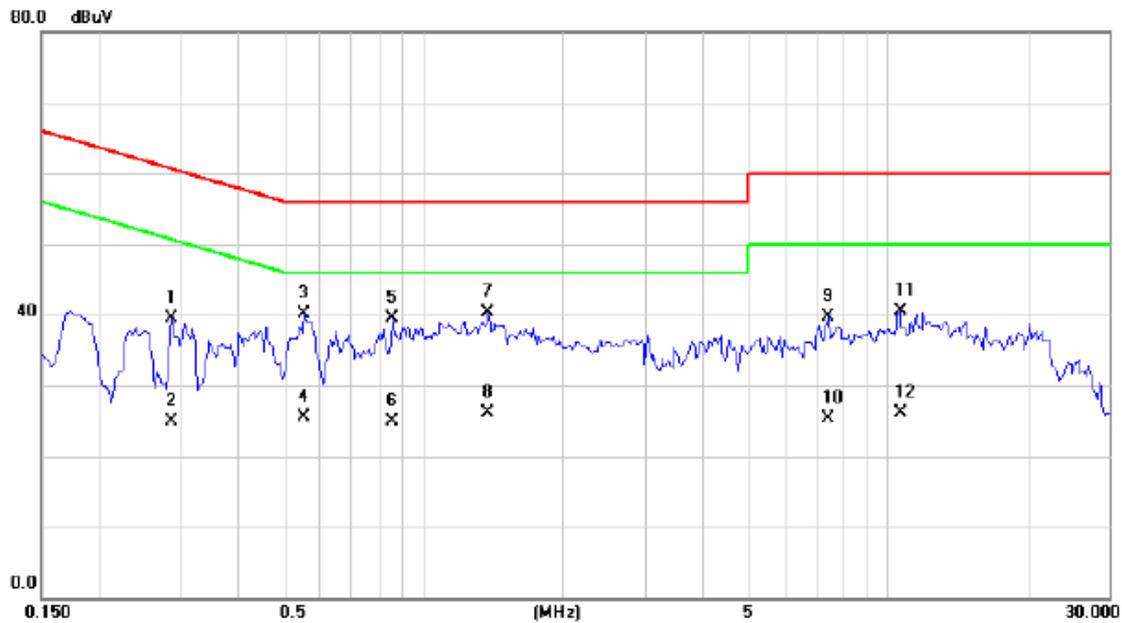

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2867	29.93	9.63	39.56	60.62	-21.06	QP	
2	0.2867	15.30	9.63	24.93	50.62	-25.69	AVG	
3	0.5523	30.42	9.70	40.12	56.00	-15.88	QP	
4	0.5523	15.80	9.70	25.50	46.00	-20.50	AVG	
5	0.8570	29.78	9.77	39.55	56.00	-16.45	QP	
6	0.8570	15.10	9.77	24.87	46.00	-21.13	AVG	
7 *	1.3766	30.46	9.83	40.29	56.00	-15.71	QP	
8	1.3766	16.20	9.83	26.03	46.00	-19.97	AVG	
9	7.4492	29.72	9.91	39.63	60.00	-20.37	QP	
10	7.4492	15.40	9.91	25.31	50.00	-24.69	AVG	
11	10.6602	30.65	9.87	40.52	60.00	-19.48	QP	
12	10.6602	16.30	9.87	26.17	50.00	-23.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Neutral

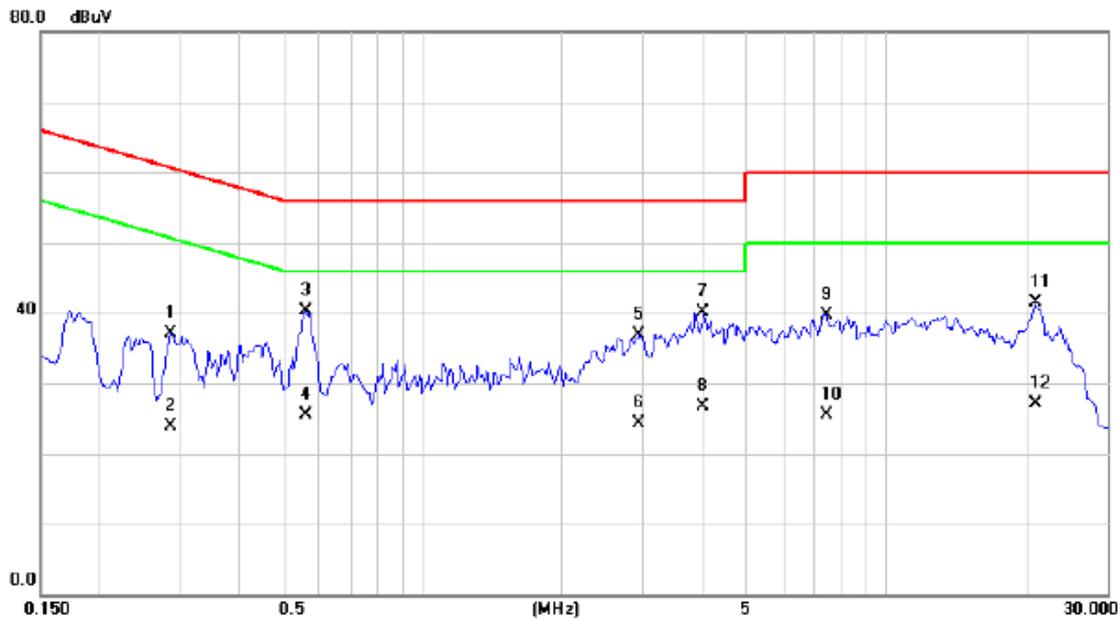

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2867	27.50	9.52	37.02	60.62	-23.60	QP	
2		0.2867	14.30	9.52	23.82	50.62	-26.80	AVG	
3	*	0.5602	30.78	9.56	40.34	56.00	-15.66	QP	
4		0.5602	15.90	9.56	25.46	46.00	-20.54	AVG	
5		2.9312	27.16	9.80	36.96	56.00	-19.04	QP	
6		2.9312	14.50	9.80	24.30	46.00	-21.70	AVG	
7		4.0313	30.25	9.92	40.17	56.00	-15.83	QP	
8		4.0313	16.80	9.92	26.72	46.00	-19.28	AVG	
9		7.4297	29.95	9.85	39.80	60.00	-20.20	QP	
10		7.4297	15.70	9.85	25.55	50.00	-24.45	AVG	
11		20.9648	31.48	9.98	41.46	60.00	-18.54	QP	
12		20.9648	17.20	9.98	27.18	50.00	-22.82	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Line

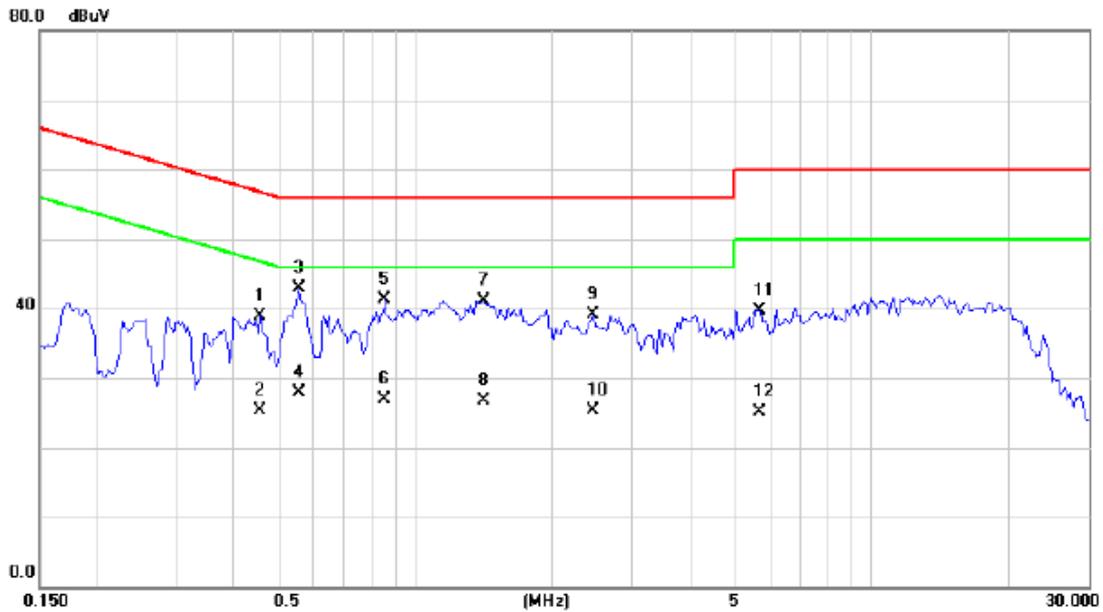

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4586	29.23	9.68	38.91	56.72	-17.81	QP	
2	0.4586	15.60	9.68	25.28	46.72	-21.44	AVG	
3 *	0.5563	33.13	9.70	42.83	56.00	-13.17	QP	
4	0.5563	18.30	9.70	28.00	46.00	-18.00	AVG	
5	0.8610	31.49	9.77	41.26	56.00	-14.74	QP	
6	0.8610	17.20	9.77	26.97	46.00	-19.03	AVG	
7	1.4117	31.32	9.83	41.15	56.00	-14.85	QP	
8	1.4117	16.90	9.83	26.73	46.00	-19.27	AVG	
9	2.4586	29.11	9.99	39.10	56.00	-16.90	QP	
10	2.4586	15.30	9.99	25.29	46.00	-20.71	AVG	
11	5.6953	29.83	9.96	39.79	60.00	-20.21	QP	
12	5.6953	15.10	9.96	25.06	50.00	-24.94	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Neutral

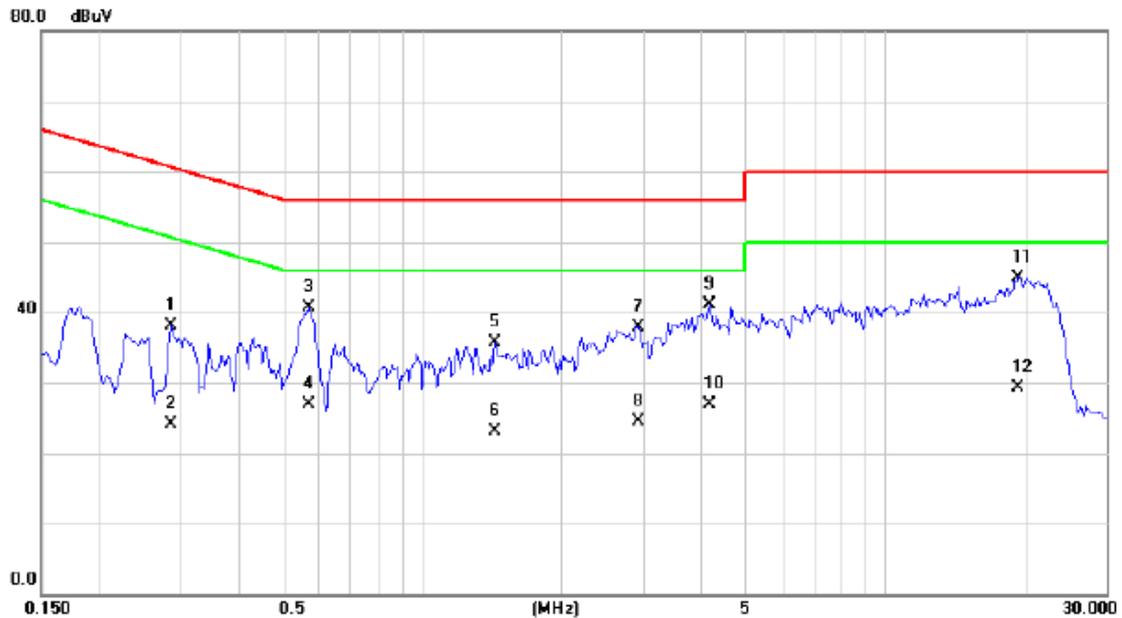

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2867	28.50	9.52	38.02	60.62	-22.60	QP	
2		0.2867	14.50	9.52	24.02	50.62	-26.60	AVG	
3		0.5680	31.11	9.56	40.67	56.00	-15.33	QP	
4		0.5680	17.30	9.56	26.86	46.00	-19.14	AVG	
5		1.4352	26.09	9.65	35.74	56.00	-20.26	QP	
6		1.4352	13.50	9.65	23.15	46.00	-22.85	AVG	
7		2.9352	28.15	9.80	37.95	56.00	-18.05	QP	
8		2.9352	14.80	9.80	24.60	46.00	-21.40	AVG	
9	*	4.1758	31.19	9.92	41.11	56.00	-14.89	QP	
10		4.1758	16.90	9.92	26.82	46.00	-19.18	AVG	
11		19.4180	34.93	9.97	44.90	60.00	-15.10	QP	
12		19.4180	19.30	9.97	29.27	50.00	-20.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Line

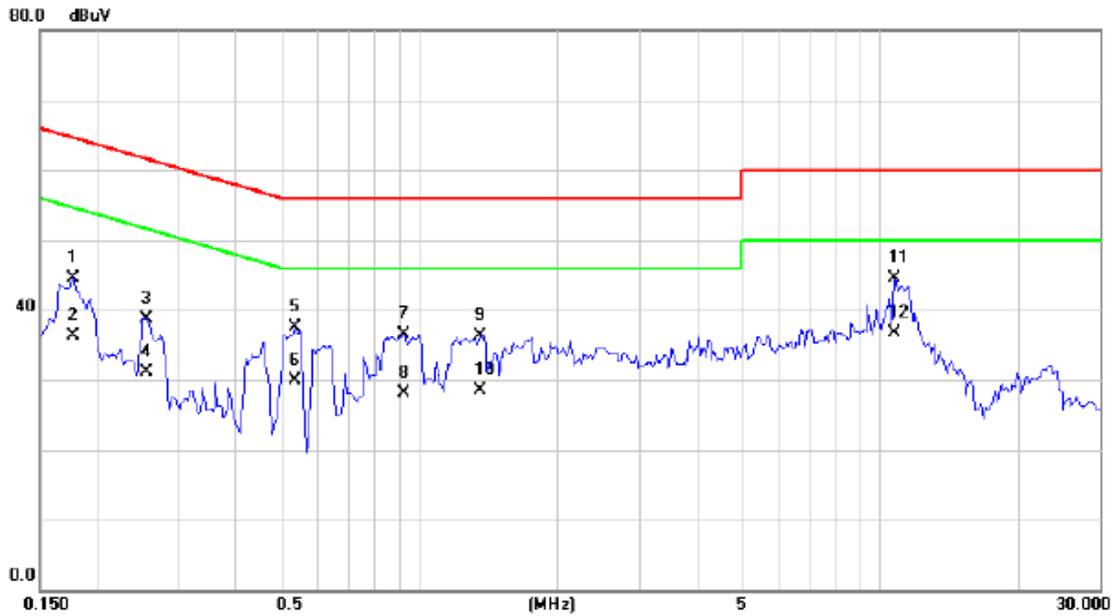

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1773	34.95	9.65	44.60	64.61	-20.01	QP	
2		0.1773	26.60	9.65	36.25	54.61	-18.36	AVG	
3		0.2555	29.05	9.66	38.71	61.58	-22.87	QP	
4		0.2555	21.50	9.66	31.16	51.58	-20.42	AVG	
5		0.5367	27.73	9.70	37.43	56.00	-18.57	QP	
6		0.5367	20.30	9.70	30.00	46.00	-16.00	AVG	
7		0.9234	26.83	9.74	36.57	56.00	-19.43	QP	
8		0.9234	18.40	9.74	28.14	46.00	-17.86	AVG	
9		1.3570	26.49	9.78	36.27	56.00	-19.73	QP	
10		1.3570	18.80	9.78	28.58	46.00	-17.42	AVG	
11		10.7813	34.30	10.11	44.41	60.00	-15.59	QP	
12	*	10.7813	26.50	10.11	36.61	50.00	-13.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle


Neutral

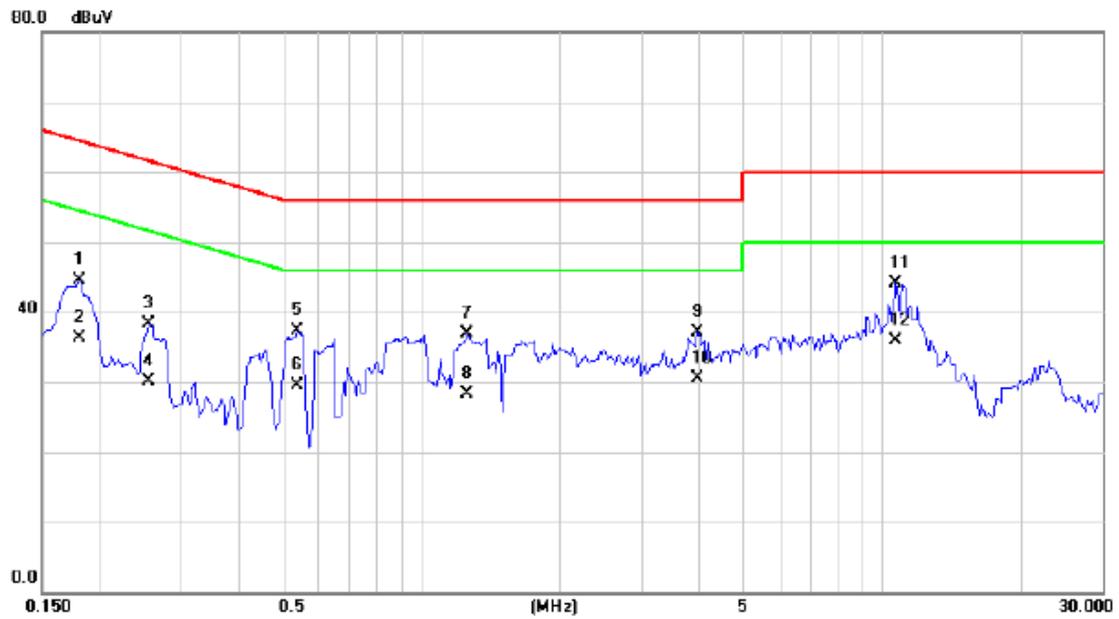

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1812	34.75	9.71	44.46	64.43	-19.97	QP	
2		0.1812	26.60	9.71	36.31	54.43	-18.12	AVG	
3		0.2555	28.64	9.72	38.36	61.58	-23.22	QP	
4		0.2555	20.30	9.72	30.02	51.58	-21.56	AVG	
5		0.5367	27.49	9.74	37.23	56.00	-18.77	QP	
6		0.5367	19.80	9.74	29.54	46.00	-16.46	AVG	
7		1.2594	27.02	9.79	36.81	56.00	-19.19	QP	
8		1.2594	18.60	9.79	28.39	46.00	-17.61	AVG	
9		3.9766	27.27	9.92	37.19	56.00	-18.81	QP	
10		3.9766	20.50	9.92	30.42	46.00	-15.58	AVG	
11		10.7147	33.90	10.23	44.13	60.00	-15.87	QP	
12	*	10.7147	25.60	10.23	35.83	50.00	-14.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Line

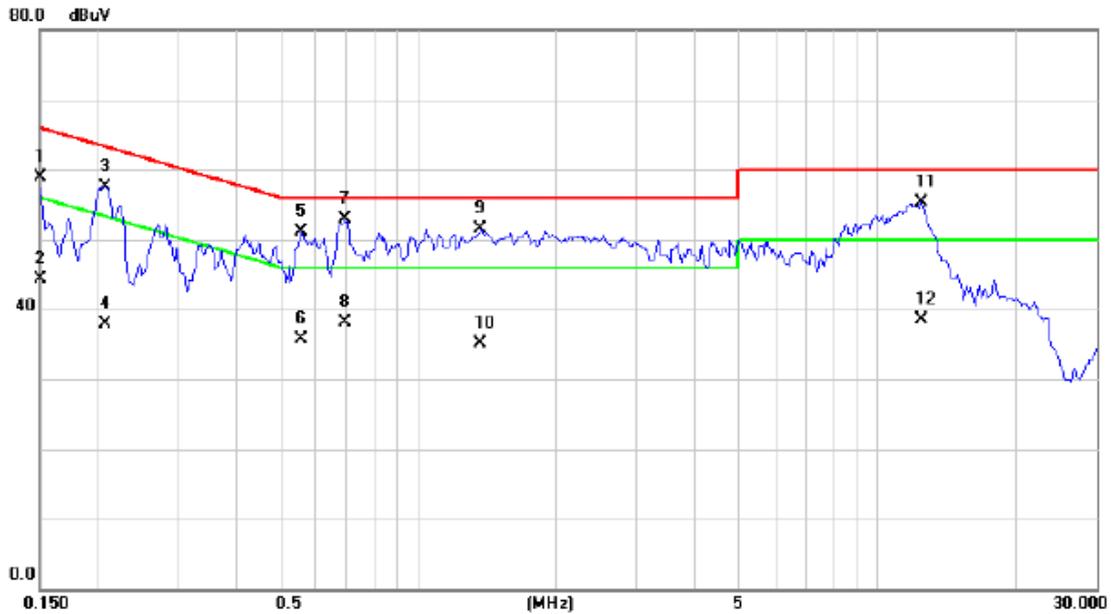

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	49.28	9.54	58.82	66.00	-7.18	QP	
2		0.1500	34.70	9.54	44.24	56.00	-11.76	AVG	
3		0.2086	47.87	9.58	57.45	63.26	-5.81	QP	
4		0.2086	28.40	9.58	37.98	53.26	-15.28	AVG	
5		0.5563	41.33	9.70	51.03	56.00	-4.97	QP	
6		0.5563	26.10	9.70	35.80	46.00	-10.20	AVG	
7	*	0.6970	43.22	9.74	52.96	56.00	-3.04	QP	
8		0.6970	28.30	9.74	38.04	46.00	-7.96	AVG	
9		1.3727	41.70	9.83	51.53	56.00	-4.47	QP	
10		1.3727	25.30	9.83	35.13	46.00	-10.87	AVG	
11		12.4570	45.46	9.85	55.31	60.00	-4.69	QP	
12		12.4570	28.70	9.85	38.55	50.00	-11.45	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Neutral

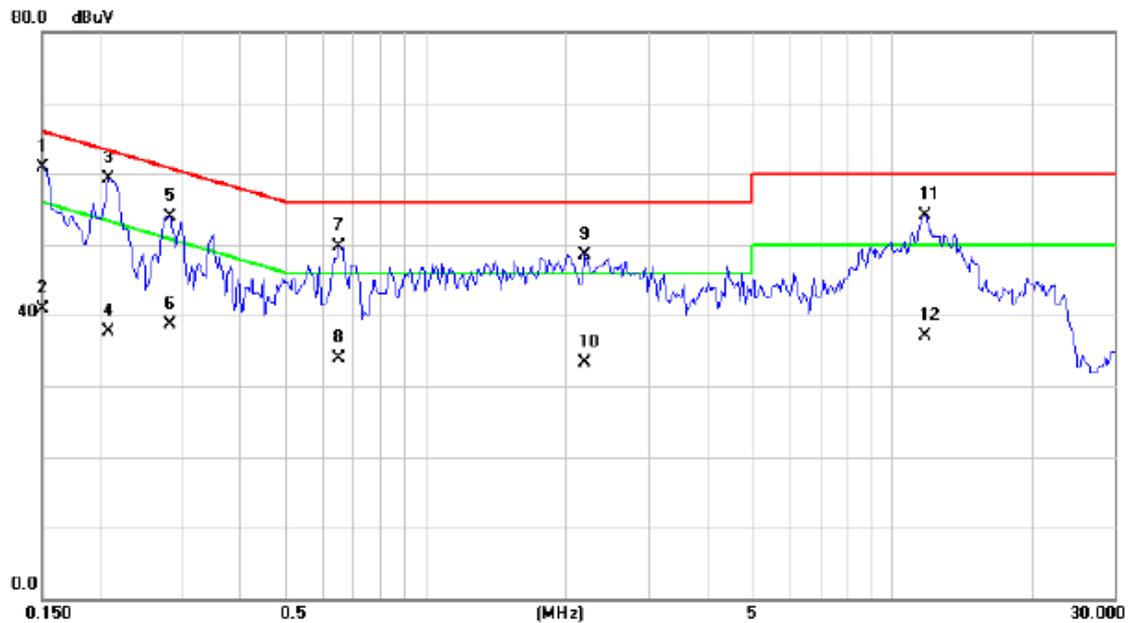

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	51.51	9.49	61.00	66.00	-5.00	QP	
2	0.1500	31.50	9.49	40.99	56.00	-15.01	AVG	
3 *	0.2086	49.85	9.50	59.35	63.26	-3.91	QP	
4	0.2086	28.30	9.50	37.80	53.26	-15.46	AVG	
5	0.2828	44.44	9.52	53.96	60.73	-6.77	QP	
6	0.2828	29.10	9.52	38.62	50.73	-12.11	AVG	
7	0.6540	40.18	9.54	49.72	56.00	-6.28	QP	
8	0.6540	24.30	9.54	33.84	46.00	-12.16	AVG	
9	2.1970	38.80	9.74	48.54	56.00	-7.46	QP	
10	2.1970	23.50	9.74	33.24	46.00	-12.76	AVG	
11	11.8008	44.21	9.87	54.08	60.00	-5.92	QP	
12	11.8008	27.30	9.87	37.17	50.00	-12.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Line

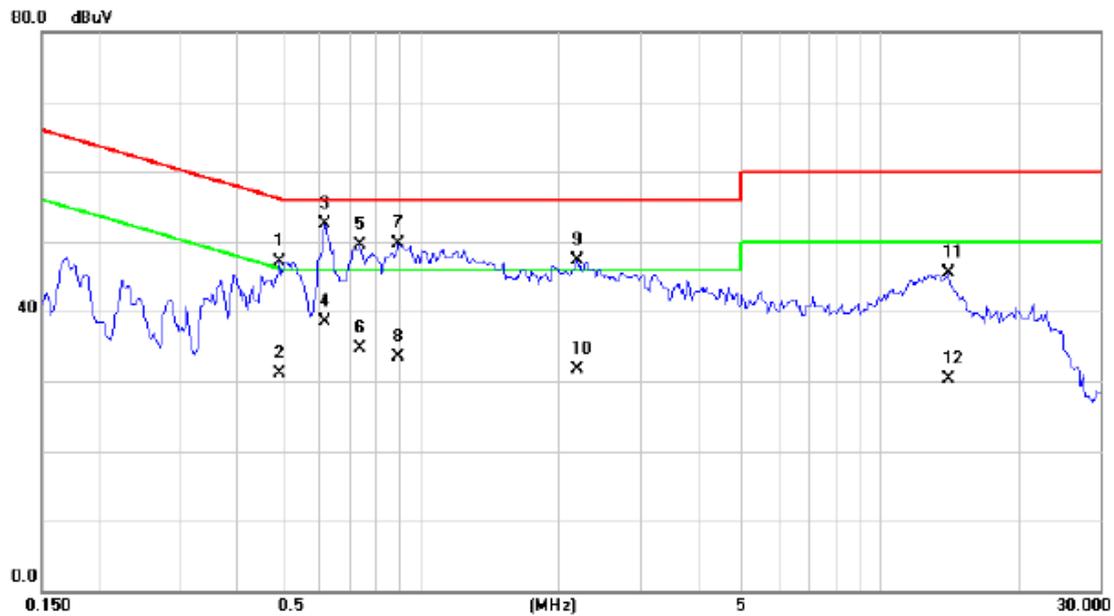

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4938	37.52	9.68	47.20	56.10	-8.90	QP	
2	0.4938	21.50	9.68	31.18	46.10	-14.92	AVG	
3 *	0.6188	42.75	9.73	52.48	56.00	-3.52	QP	
4	0.6188	28.70	9.73	38.43	46.00	-7.57	AVG	
5	0.7398	39.67	9.74	49.41	56.00	-6.59	QP	
6	0.7398	24.90	9.74	34.64	46.00	-11.36	AVG	
7	0.8961	39.93	9.77	49.70	56.00	-6.30	QP	
8	0.8961	23.80	9.77	33.57	46.00	-12.43	AVG	
9	2.2008	37.28	9.95	47.23	56.00	-8.77	QP	
10	2.2008	21.70	9.95	31.65	46.00	-14.35	AVG	
11	14.0898	35.74	9.83	45.57	60.00	-14.43	QP	
12	14.0898	20.40	9.83	30.23	50.00	-19.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Neutral

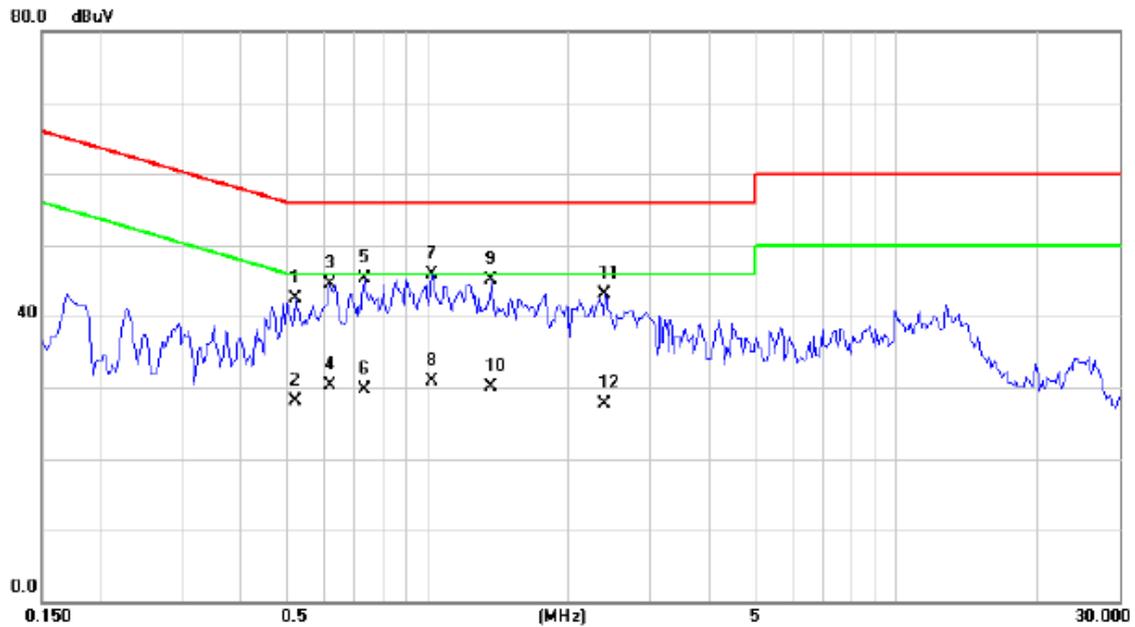

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5211	33.03	9.56	42.59	56.00	-13.41	QP	
2	0.5211	18.60	9.56	28.16	46.00	-17.84	AVG	
3	0.6188	34.88	9.56	44.44	56.00	-11.56	QP	
4	0.6188	20.70	9.56	30.26	46.00	-15.74	AVG	
5	0.7320	35.69	9.54	45.23	56.00	-10.77	QP	
6	0.7320	20.10	9.54	29.64	46.00	-16.36	AVG	
7 *	1.0250	36.30	9.59	45.89	56.00	-10.11	QP	
8	1.0250	21.30	9.59	30.89	46.00	-15.11	AVG	
9	1.3687	35.54	9.65	45.19	56.00	-10.81	QP	
10	1.3687	20.50	9.65	30.15	46.00	-15.85	AVG	
11	2.3922	33.40	9.76	43.16	56.00	-12.84	QP	
12	2.3922	17.90	9.76	27.66	46.00	-18.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Line

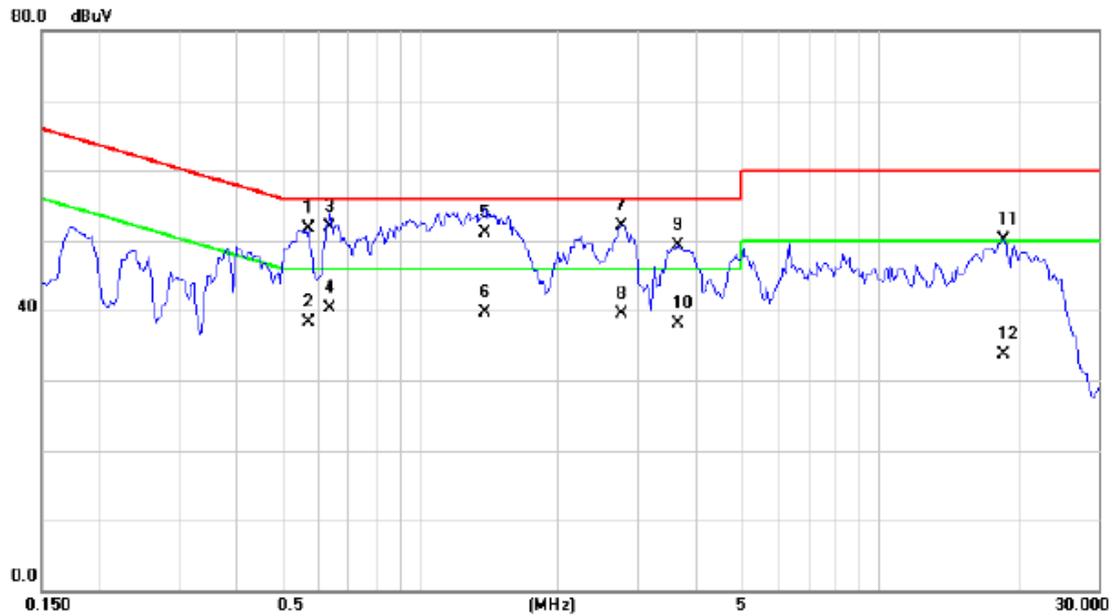

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5720	42.04	9.71	51.75	56.00	-4.25	QP	
2	0.5720	28.60	9.71	38.31	46.00	-7.69	AVG	
3	0.6382	42.10	9.73	51.83	56.00	-4.17	QP	
4	0.6382	30.60	9.73	40.33	46.00	-5.67	AVG	
5	1.3844	41.30	9.83	51.13	56.00	-4.87	QP	
6	1.3844	29.80	9.83	39.63	46.00	-6.37	AVG	
7 *	2.7437	42.12	10.01	52.13	56.00	-3.87	QP	
8	2.7437	29.40	10.01	39.41	46.00	-6.59	AVG	
9	3.6445	39.23	9.99	49.22	56.00	-6.78	QP	
10	3.6445	28.20	9.99	38.19	46.00	-7.81	AVG	
11	18.6836	40.35	9.84	50.19	60.00	-9.81	QP	
12	18.6836	23.90	9.84	33.74	50.00	-16.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Neutral

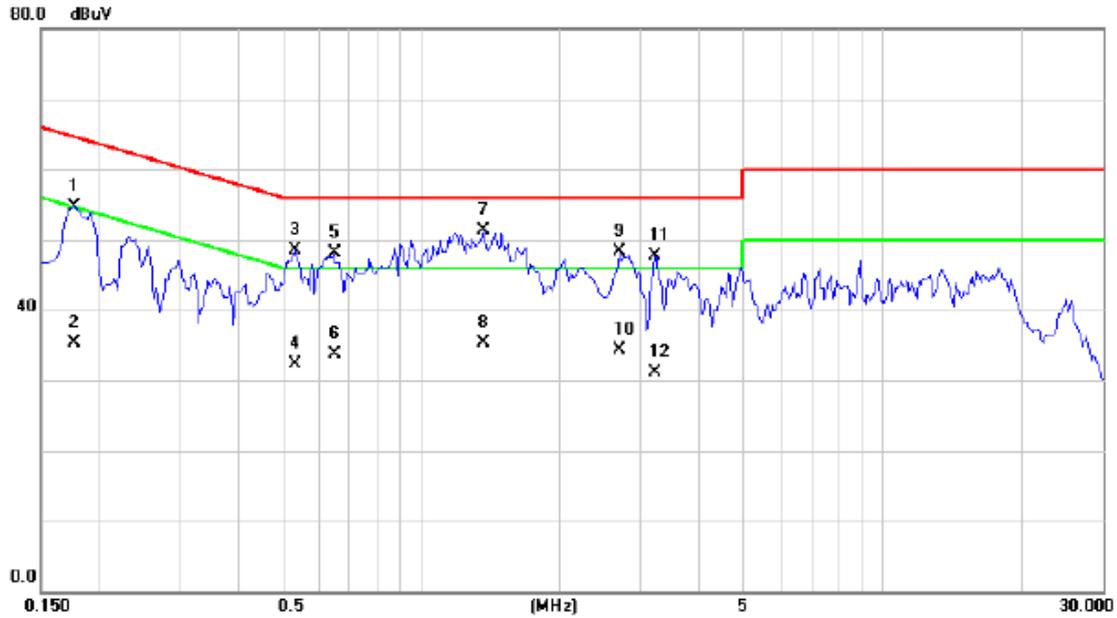

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1773	45.32	9.48	54.80	64.61	-9.81	QP	
2	X	0.1773	25.80	9.48	35.28	54.61	-19.33	AVG	
3	X	0.5328	38.93	9.56	48.49	56.00	-7.51	QP	
4	X	0.5328	22.70	9.56	32.26	46.00	-13.74	AVG	
5	X	0.6500	38.50	9.54	48.04	56.00	-7.96	QP	
6	X	0.6500	24.20	9.54	33.74	46.00	-12.26	AVG	
7	*	1.3648	41.72	9.65	51.37	56.00	-4.63	QP	
8	X	1.3648	25.70	9.65	35.35	46.00	-10.65	AVG	
9	X	2.6891	38.46	9.79	48.25	56.00	-7.75	QP	
10	X	2.6891	24.50	9.79	34.29	46.00	-11.71	AVG	
11	X	3.2227	37.92	9.84	47.76	56.00	-8.24	QP	
12	X	3.2227	21.30	9.84	31.14	46.00	-14.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)


Line

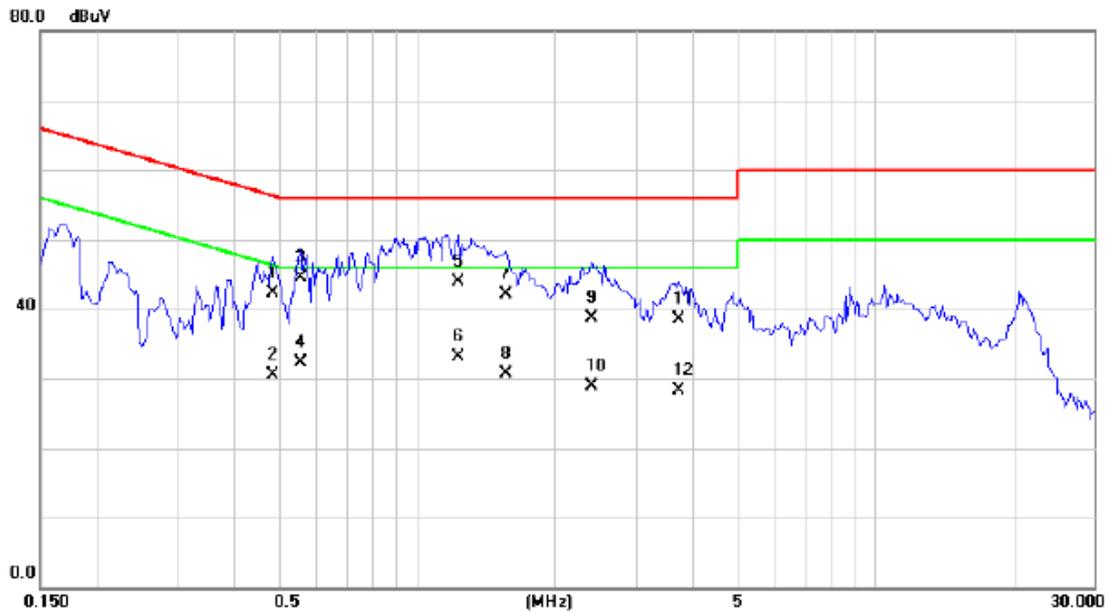

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4820	32.60	9.68	42.28	56.30	-14.02	QP	
2	0.4820	20.90	9.68	30.58	46.30	-15.72	AVG	
3 *	0.5562	34.90	9.70	44.60	56.00	-11.40	QP	
4	0.5562	22.60	9.70	32.30	46.00	-13.70	AVG	
5	1.2320	34.00	9.81	43.81	56.00	-12.19	QP	
6	1.2320	23.30	9.81	33.11	46.00	-12.89	AVG	
7	1.5640	32.20	9.85	42.05	56.00	-13.95	QP	
8	1.5640	20.80	9.85	30.65	46.00	-15.35	AVG	
9	2.4040	28.70	9.99	38.69	56.00	-17.31	QP	
10	2.4040	19.00	9.99	28.99	46.00	-17.01	AVG	
11	3.7225	28.50	9.98	38.48	56.00	-17.52	QP	
12	3.7225	18.40	9.98	28.38	46.00	-17.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)


Neutral

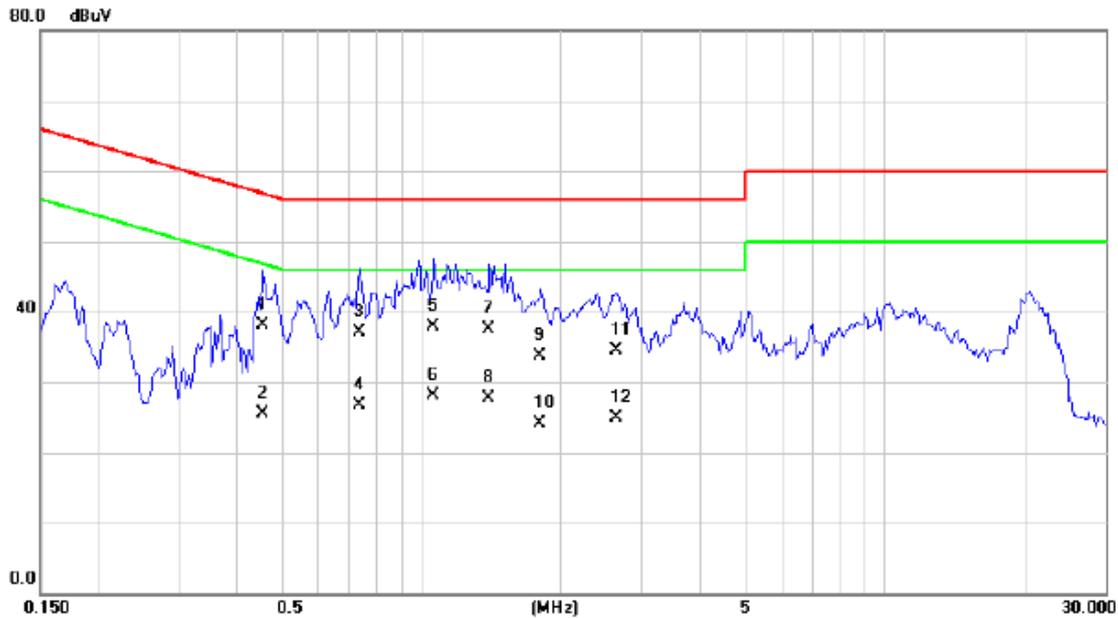

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4547	28.60	9.55	38.15	56.79	-18.64	QP	
2	0.4547	16.00	9.55	25.55	46.79	-21.24	AVG	
3	0.7320	27.60	9.54	37.14	56.00	-18.86	QP	
4	0.7320	17.10	9.54	26.64	46.00	-19.36	AVG	
5	1.0602	28.30	9.59	37.89	56.00	-18.11	QP	
6 *	1.0602	18.50	9.59	28.09	46.00	-17.91	AVG	
7	1.4000	27.90	9.65	37.55	56.00	-18.45	QP	
8	1.4000	18.00	9.65	27.65	46.00	-18.35	AVG	
9	1.8062	24.00	9.70	33.70	56.00	-22.30	QP	
10	1.8062	14.50	9.70	24.20	46.00	-21.80	AVG	
11	2.6461	24.70	9.78	34.48	56.00	-21.52	QP	
12	2.6461	15.20	9.78	24.98	46.00	-21.02	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU (EU Plug)


Line

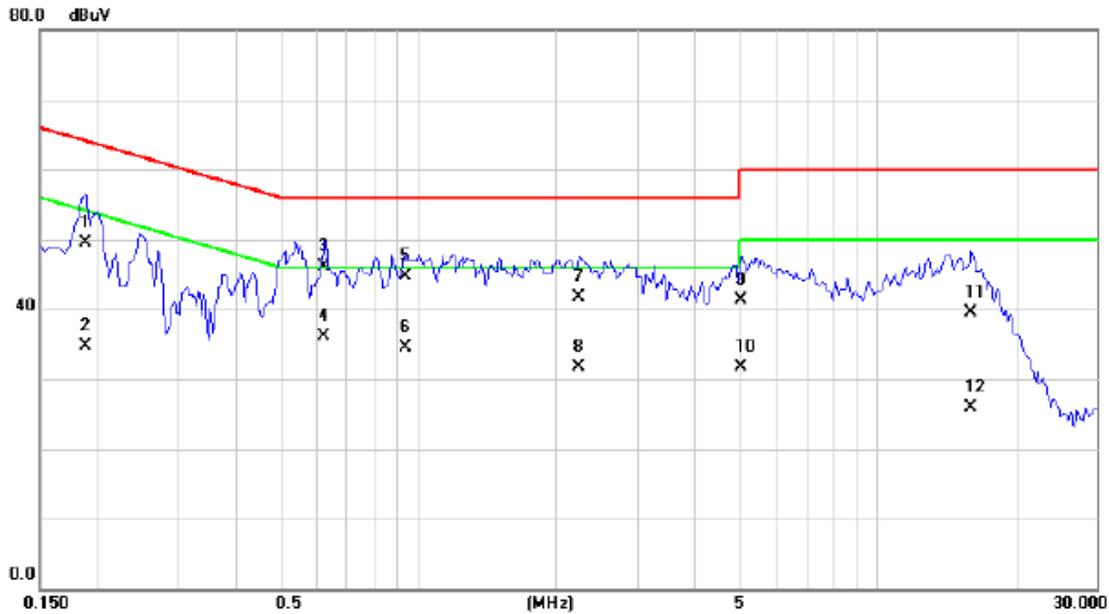

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1891	40.00	9.57	49.57	64.08	-14.51	QP	
2		0.1891	25.10	9.57	34.67	54.08	-19.41	AVG	
3	*	0.6266	36.40	9.73	46.13	56.00	-9.87	QP	
4		0.6266	26.30	9.73	36.03	46.00	-9.97	AVG	
5		0.9430	34.90	9.78	44.68	56.00	-11.32	QP	
6		0.9430	24.70	9.78	34.48	46.00	-11.52	AVG	
7		2.2477	31.80	9.95	41.75	56.00	-14.25	QP	
8		2.2477	21.70	9.95	31.65	46.00	-14.35	AVG	
9		5.0430	31.40	9.99	41.39	60.00	-18.61	QP	
10		5.0430	21.80	9.99	31.79	50.00	-18.21	AVG	
11		16.0273	29.70	9.83	39.53	60.00	-20.47	QP	
12		16.0273	16.00	9.83	25.83	50.00	-24.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU (EU Plug)


Neutral

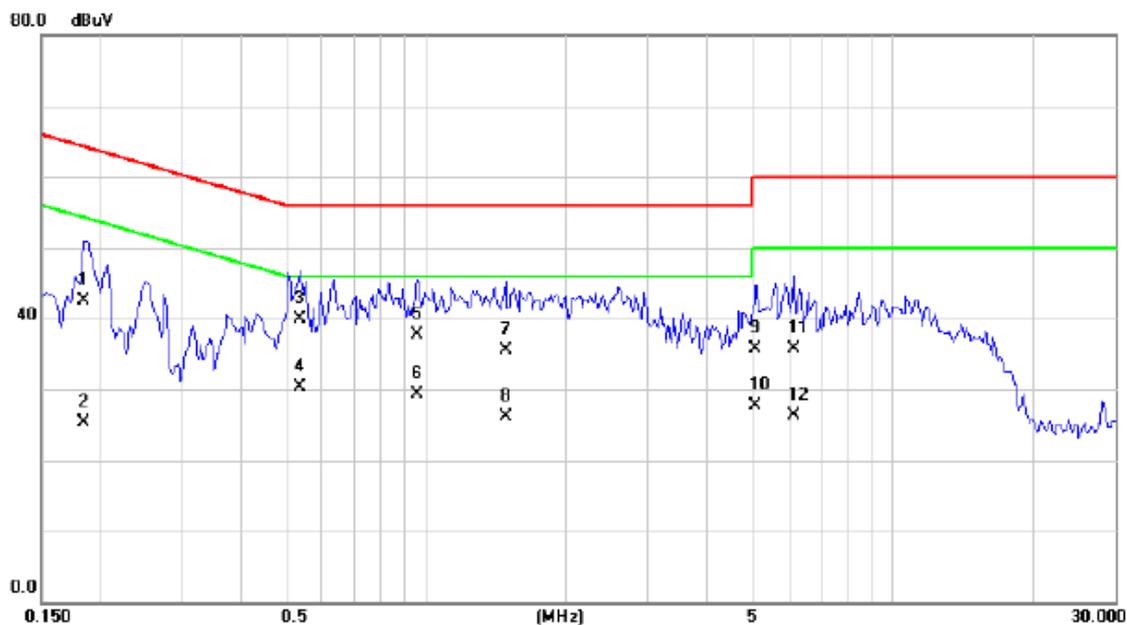

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1852	33.11	9.49	42.60	64.25	-21.65	QP	
2		0.1852	15.90	9.49	25.39	54.25	-28.86	AVG	
3		0.5367	30.40	9.56	39.96	56.00	-16.04	QP	
4	*	0.5367	20.70	9.56	30.26	46.00	-15.74	AVG	
5		0.9625	28.10	9.58	37.68	56.00	-18.32	QP	
6		0.9625	19.80	9.58	29.38	46.00	-16.62	AVG	
7		1.4820	25.90	9.66	35.56	56.00	-20.44	QP	
8		1.4820	16.50	9.66	26.16	46.00	-19.84	AVG	
9		5.1094	25.90	9.90	35.80	60.00	-24.20	QP	
10		5.1094	17.90	9.90	27.80	50.00	-22.20	AVG	
11		6.1288	25.80	9.87	35.67	60.00	-24.33	QP	
12		6.1288	16.50	9.87	26.37	50.00	-23.63	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HONG (EU Plug)


Line

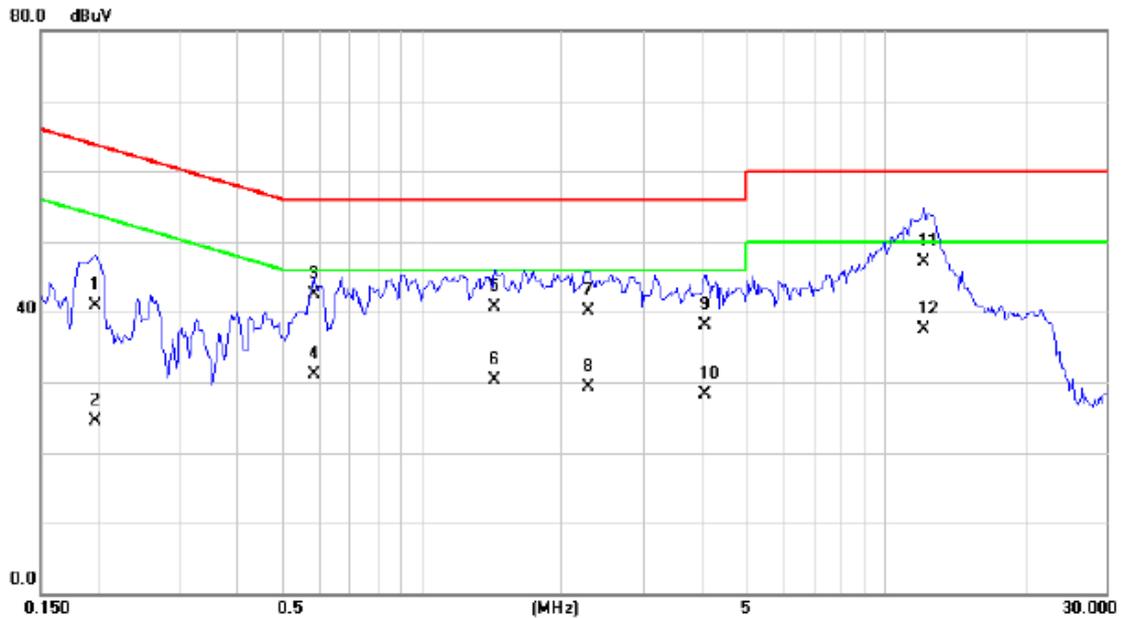

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1970	31.40	9.57	40.97	63.74	-22.77	QP	
2	0.1970	15.00	9.57	24.57	53.74	-29.17	AVG	
3	0.5836	32.70	9.71	42.41	56.00	-13.59	QP	
4	0.5836	21.30	9.71	31.01	46.00	-14.99	AVG	
5	1.4352	30.90	9.84	40.74	56.00	-15.26	QP	
6	1.4352	20.50	9.84	30.34	46.00	-15.66	AVG	
7	2.2945	30.10	9.96	40.06	56.00	-15.94	QP	
8	2.2945	19.40	9.96	29.36	46.00	-16.64	AVG	
9	4.0858	28.20	9.97	38.17	56.00	-17.83	QP	
10	4.0858	18.30	9.97	28.27	46.00	-17.73	AVG	
11	12.1484	37.20	9.86	47.06	60.00	-12.94	QP	
12 *	12.1484	27.60	9.86	37.46	50.00	-12.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG (EU Plug)


Neutral

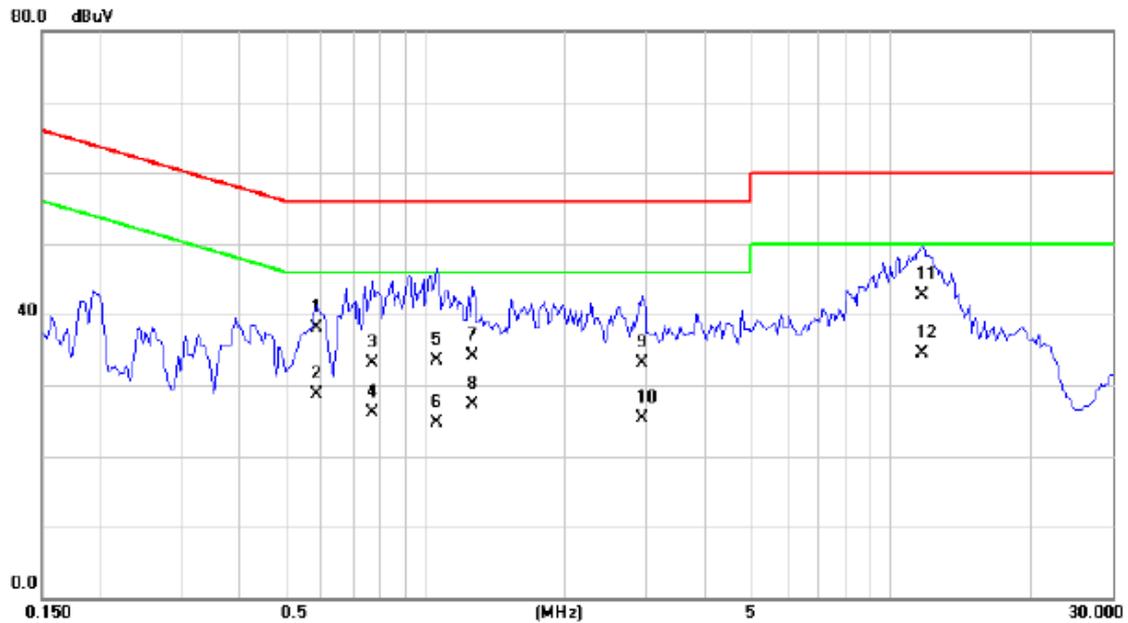

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.5836	28.50	9.56	38.06	56.00	-17.94	QP	
2	0.5836	19.20	9.56	28.76	46.00	-17.24	AVG	
3	0.7711	23.60	9.55	33.15	56.00	-22.85	QP	
4	0.7711	16.50	9.55	26.05	46.00	-19.95	AVG	
5	1.0562	24.00	9.59	33.59	56.00	-22.41	QP	
6	1.0562	15.10	9.59	24.69	46.00	-21.31	AVG	
7	1.2672	24.40	9.64	34.04	56.00	-21.96	QP	
8	1.2672	17.70	9.64	27.34	46.00	-18.66	AVG	
9	2.9195	23.30	9.80	33.10	56.00	-22.90	QP	
10	2.9195	15.60	9.80	25.40	46.00	-20.60	AVG	
11	11.7383	32.80	9.87	42.67	60.00	-17.33	QP	
12 *	11.7383	24.60	9.87	34.47	50.00	-15.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK (EU Plug)


Line

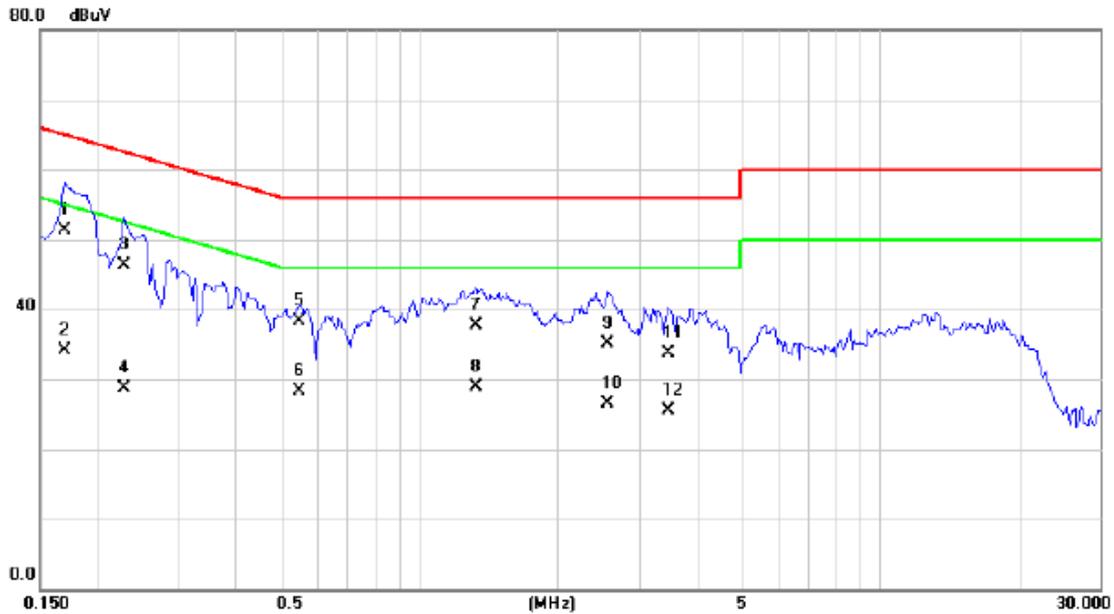

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1695	41.80	9.56	51.36	64.98	-13.62	QP	
2		0.1695	24.60	9.56	34.16	54.98	-20.82	AVG	
3		0.2281	36.70	9.59	46.29	62.52	-16.23	QP	
4		0.2281	19.20	9.59	28.79	52.52	-23.73	AVG	
5		0.5484	28.60	9.70	38.30	56.00	-17.70	QP	
6		0.5484	18.60	9.70	28.30	46.00	-17.70	AVG	
7		1.3258	27.80	9.83	37.63	56.00	-18.37	QP	
8		1.3258	19.10	9.83	28.93	46.00	-17.07	AVG	
9		2.5602	25.20	10.00	35.20	56.00	-20.80	QP	
10		2.5602	16.50	10.00	26.50	46.00	-19.50	AVG	
11		3.4727	23.80	10.00	33.80	56.00	-22.20	QP	
12		3.4727	15.60	10.00	25.60	46.00	-20.40	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK (EU Plug)

Neutral

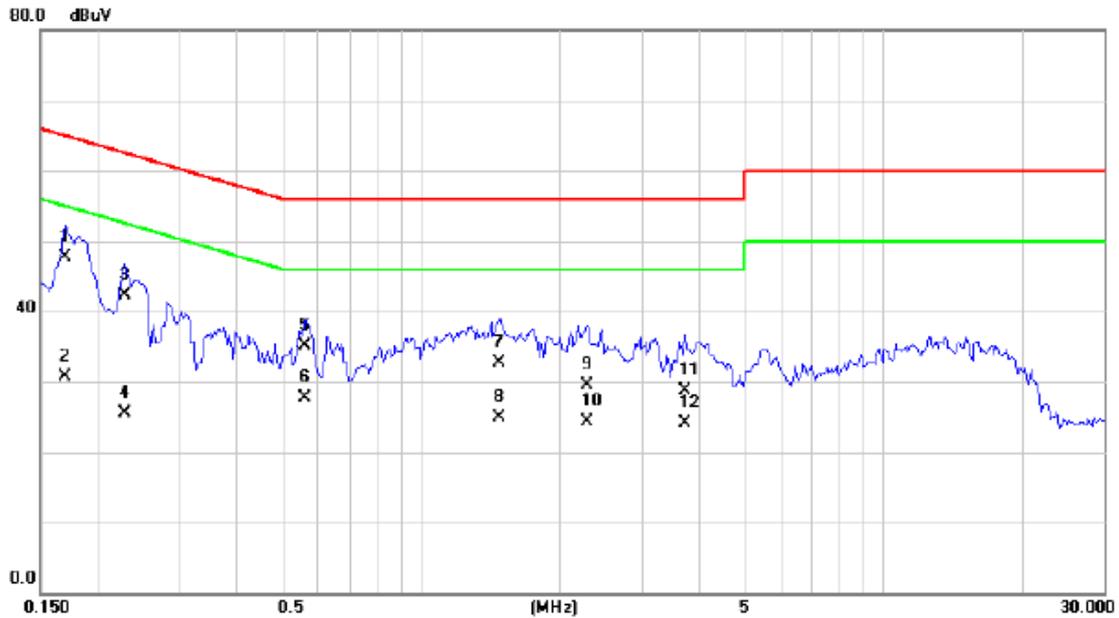


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1695	38.20	9.48	47.68	64.98	-17.30	QP	
2		0.1695	21.20	9.48	30.68	54.98	-24.30	AVG	
3		0.2281	32.70	9.51	42.21	62.52	-20.31	QP	
4		0.2281	15.90	9.51	25.41	52.52	-27.11	AVG	
5		0.5641	25.60	9.56	35.16	56.00	-20.84	QP	
6		0.5641	18.10	9.56	27.66	46.00	-18.34	AVG	
7		1.4781	23.00	9.66	32.66	56.00	-23.34	QP	
8		1.4781	15.30	9.66	24.96	46.00	-21.04	AVG	
9		2.2945	19.80	9.74	29.54	56.00	-26.46	QP	
10		2.2945	14.50	9.74	24.24	46.00	-21.76	AVG	
11		3.7266	18.80	9.89	28.69	56.00	-27.31	QP	
12		3.7266	14.30	9.89	24.19	46.00	-21.81	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Vertical

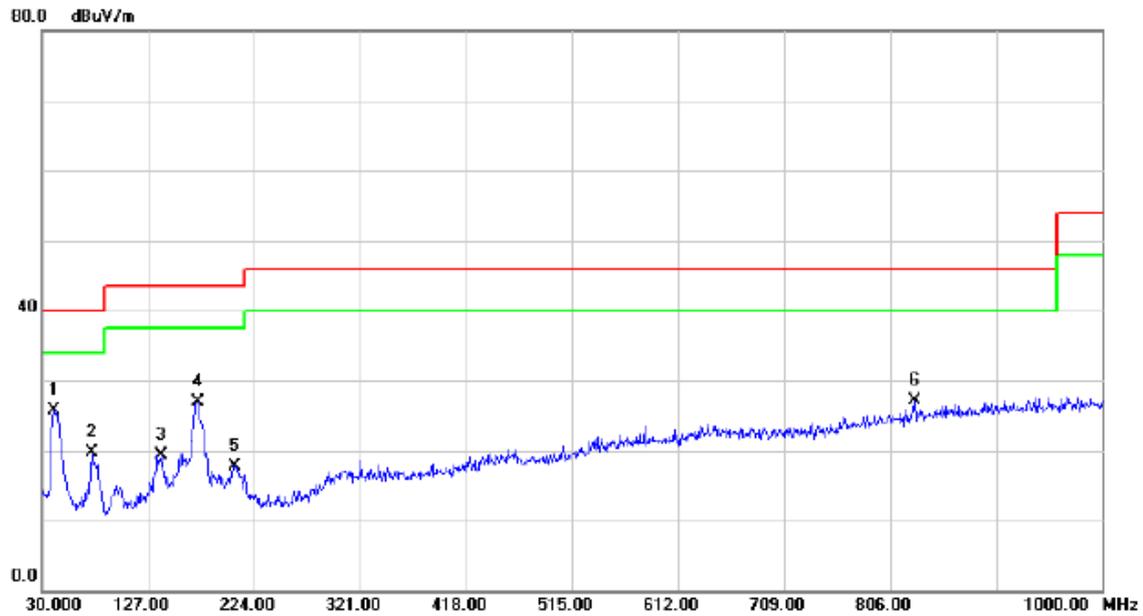

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	40.68	-14.97	25.71	40.00	-14.29	QP	
2		75.5900	35.80	-16.05	19.75	40.00	-20.25	QP	
3		138.6400	33.26	-13.94	19.32	43.50	-24.18	QP	
4		172.5900	39.76	-12.85	26.91	43.50	-16.59	QP	
5		206.5400	32.34	-14.58	17.76	43.50	-25.74	QP	
6		828.3100	30.68	-3.50	27.18	46.00	-18.82	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Horizontal

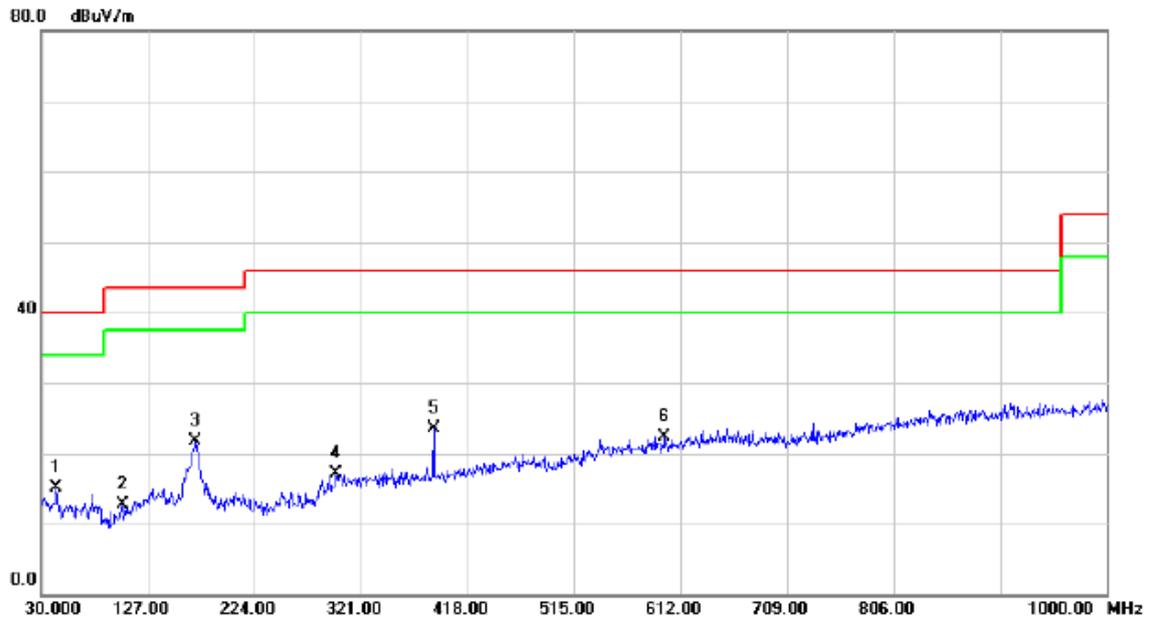

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		43.5800	30.26	-15.23	15.03	40.00	-24.97	QP	
2		103.7200	28.56	-15.88	12.68	43.50	-30.82	QP	
3	*	170.6500	34.57	-12.88	21.69	43.50	-21.81	QP	
4		298.6900	28.14	-10.99	17.15	46.00	-28.85	QP	
5		386.9600	34.45	-10.86	23.59	46.00	-22.41	QP	
6		597.4500	29.16	-6.80	22.36	46.00	-23.64	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Vertical

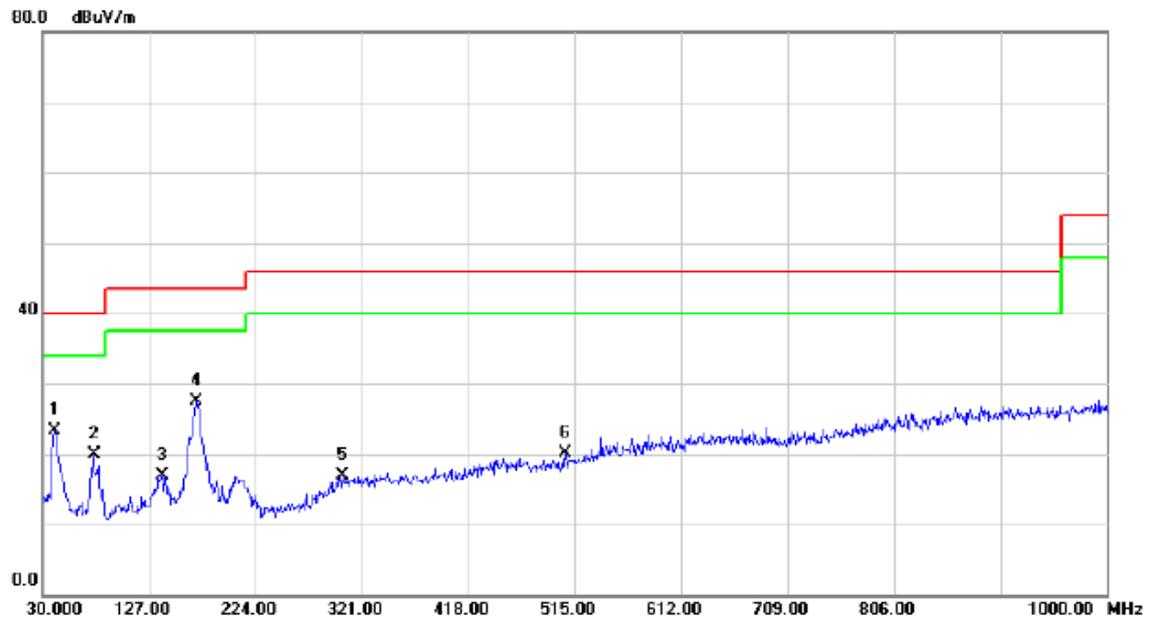

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	38.18	-14.97	23.21	40.00	-16.79	QP	
2		76.5600	35.88	-16.04	19.84	40.00	-20.16	QP	
3		138.6400	30.85	-13.94	16.91	43.50	-26.59	QP	
4	*	170.6500	40.33	-12.88	27.45	43.50	-16.05	QP	
5		303.5400	27.80	-10.81	16.99	46.00	-29.01	QP	
6		506.2700	29.59	-9.48	20.11	46.00	-25.89	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Horizontal

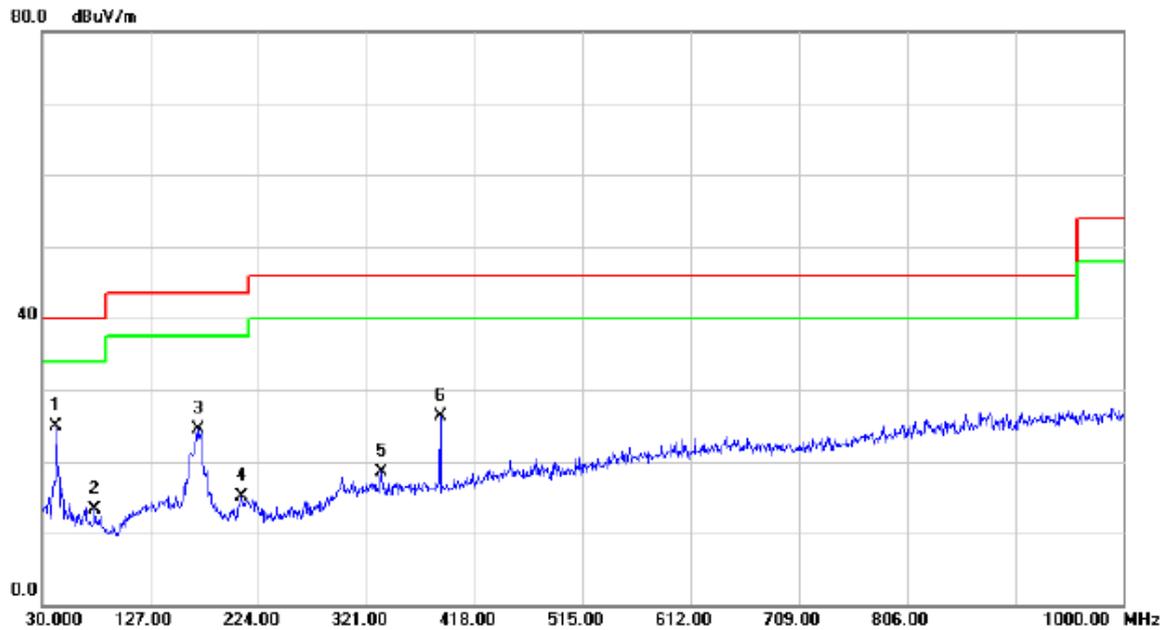

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	39.91	-15.07	24.84	40.00	-15.16	QP	
2		77.5300	29.34	-16.02	13.32	40.00	-26.68	QP	
3		169.6800	37.37	-12.91	24.46	43.50	-19.04	QP	
4		209.4500	29.57	-14.54	15.03	43.50	-28.47	QP	
5		334.5800	29.31	-10.90	18.41	46.00	-27.59	QP	
6		386.9600	37.15	-10.86	26.29	46.00	-19.71	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD


Vertical

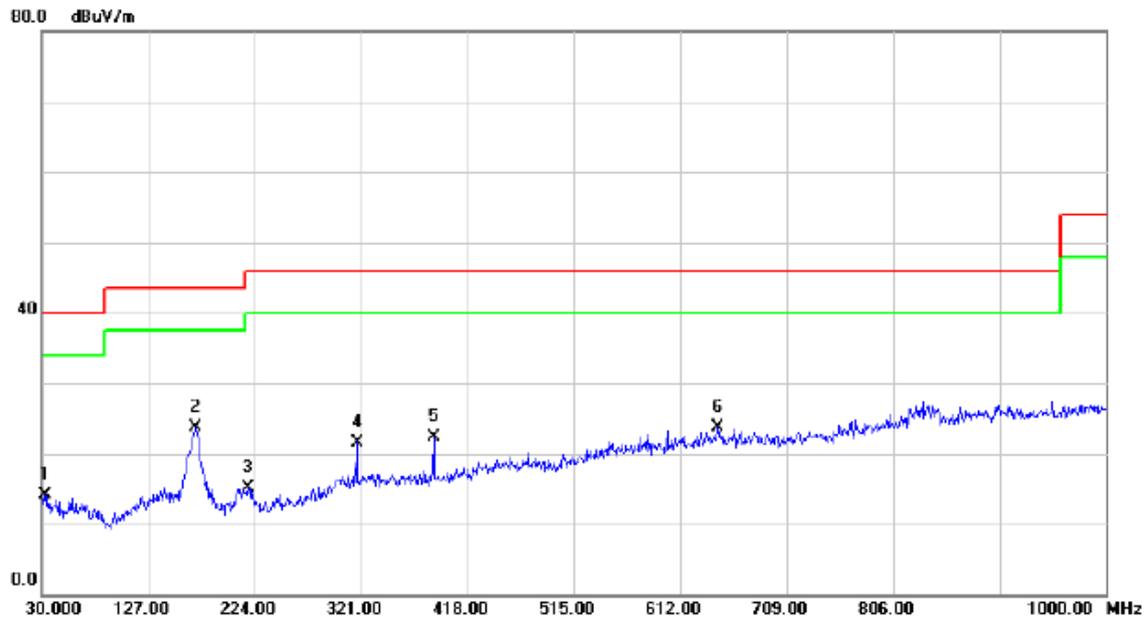

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.9100	28.09	-13.90	14.19	40.00	-25.81	QP	
2	*	170.6500	36.64	-12.88	23.76	43.50	-19.74	QP	
3		218.1800	29.71	-14.51	15.20	46.00	-30.80	QP	
4		317.1200	32.45	-10.85	21.60	46.00	-24.40	QP	
5		386.9600	33.12	-10.86	22.26	46.00	-23.74	QP	
6		645.9500	29.67	-5.89	23.78	46.00	-22.22	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD


Horizontal

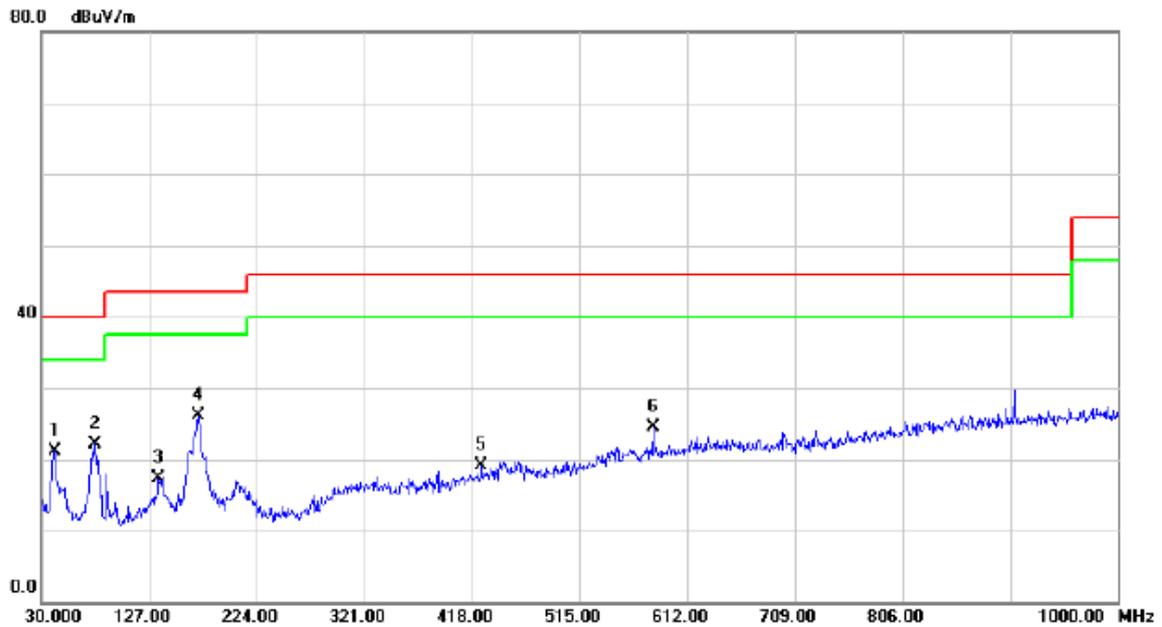

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	36.14	-14.97	21.17	40.00	-18.83	QP	
2		78.5000	38.14	-16.01	22.13	40.00	-17.87	QP	
3		135.7300	31.24	-13.85	17.39	43.50	-26.11	QP	
4	*	171.6200	38.92	-12.86	26.06	43.50	-17.44	QP	
5		426.7300	29.08	-10.03	19.05	46.00	-26.95	QP	
6		580.9600	31.52	-6.99	24.53	46.00	-21.47	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Vertical

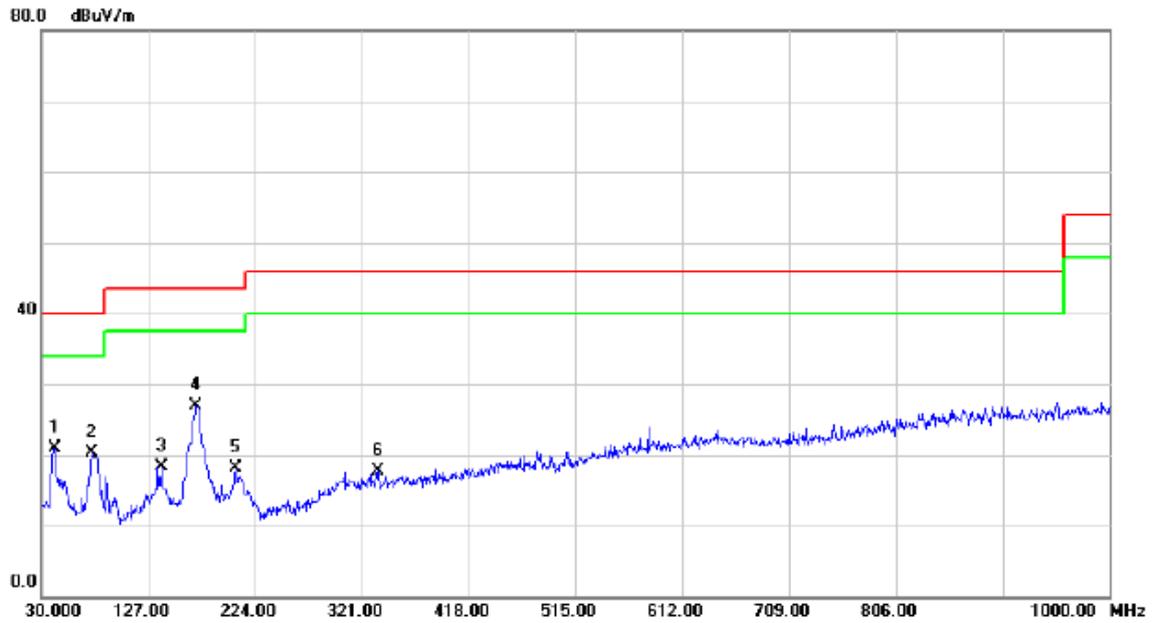

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	35.95	-14.97	20.98	40.00	-19.02	QP	
2		75.5900	36.26	-16.05	20.21	40.00	-19.79	QP	
3		138.6400	32.19	-13.94	18.25	43.50	-25.25	QP	
4	*	170.6500	39.86	-12.88	26.98	43.50	-16.52	QP	
5		206.5400	32.60	-14.58	18.02	43.50	-25.48	QP	
6		335.5500	28.69	-10.90	17.79	46.00	-28.21	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Horizontal

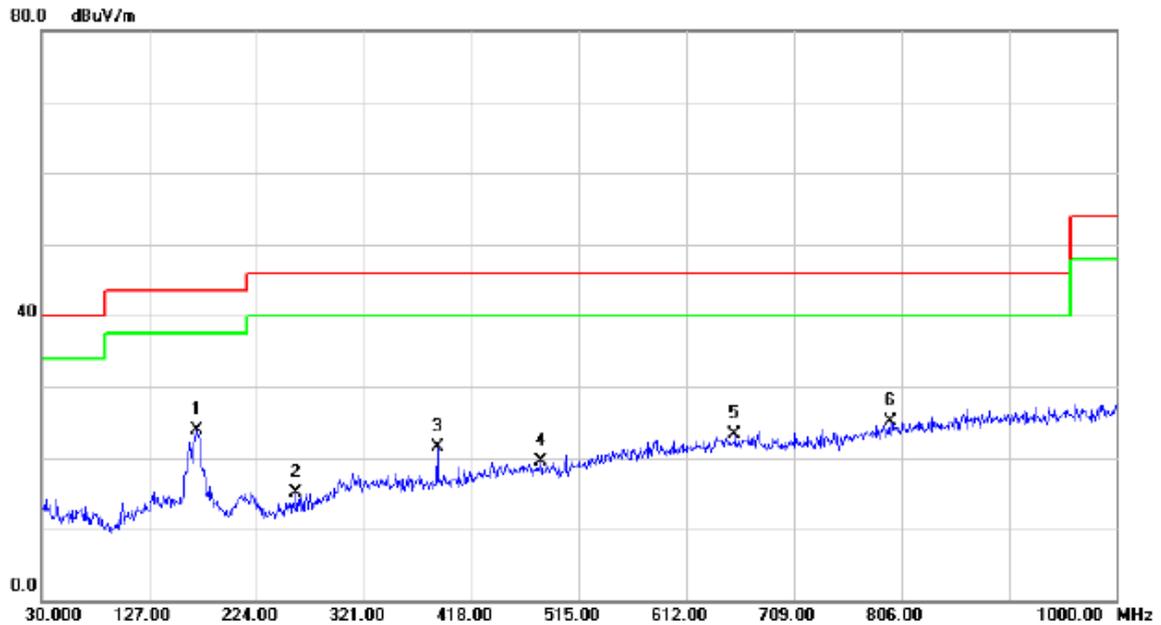

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	170.6500	36.72	-12.88	23.84	43.50	-19.66	QP	
2		259.8900	29.85	-14.66	15.19	46.00	-30.81	QP	
3		386.9600	32.31	-10.86	21.45	46.00	-24.55	QP	
4		480.0800	29.14	-9.61	19.53	46.00	-26.47	QP	
5		655.6500	29.16	-5.85	23.31	46.00	-22.69	QP	
6		796.3000	29.23	-4.08	25.15	46.00	-20.85	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Vertical

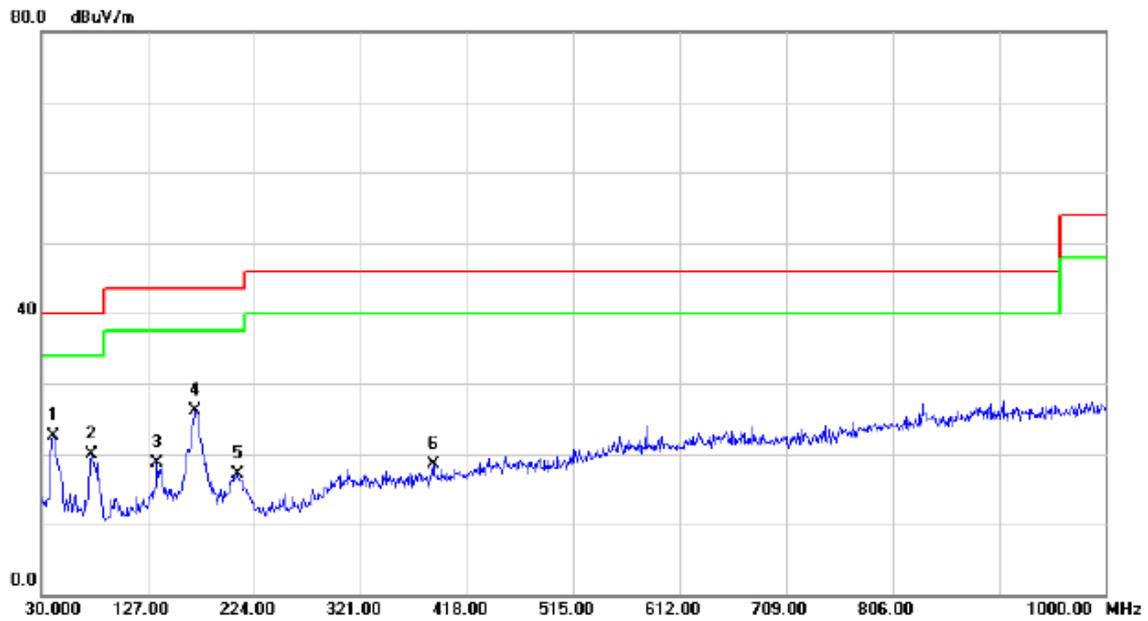

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	37.51	-14.97	22.54	40.00	-17.46	QP	
2		75.5900	36.01	-16.05	19.96	40.00	-20.04	QP	
3		135.7300	32.58	-13.85	18.73	43.50	-24.77	QP	
4	*	170.6500	38.94	-12.88	26.06	43.50	-17.44	QP	
5		208.4800	31.69	-14.56	17.13	43.50	-26.37	QP	
6		386.9600	29.35	-10.86	18.49	46.00	-27.51	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Horizontal

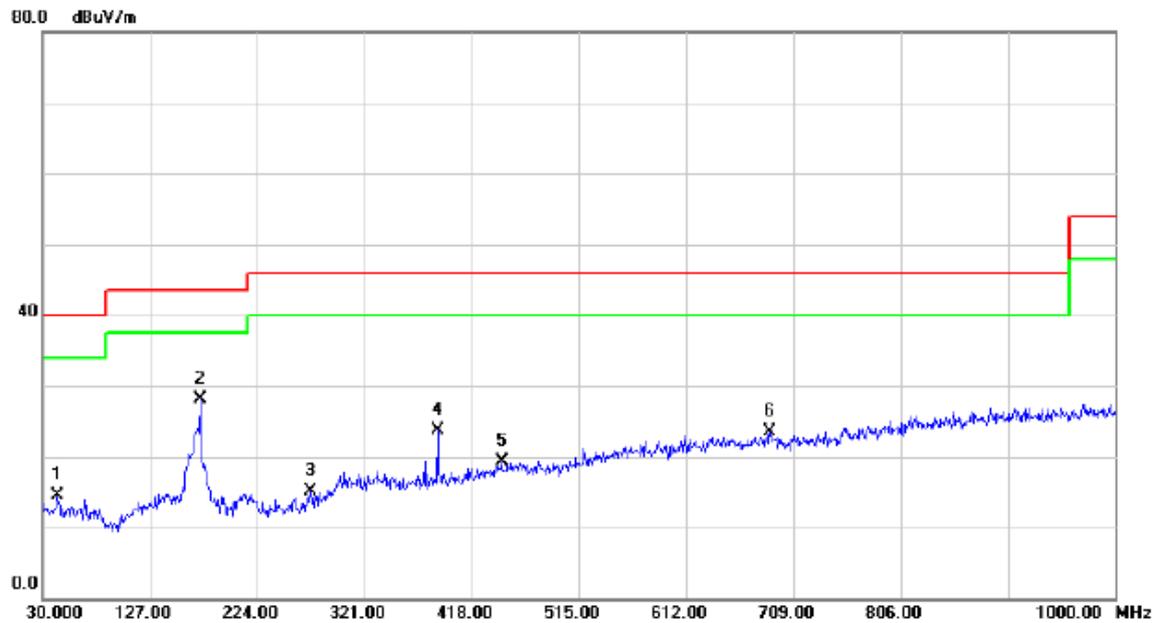

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		43.5800	29.79	-15.23	14.56	40.00	-25.44	QP	
2	*	172.5900	41.04	-12.85	28.19	43.50	-15.31	QP	
3		272.5000	29.01	-13.83	15.18	46.00	-30.82	QP	
4		386.9600	34.56	-10.86	23.70	46.00	-22.30	QP	
5		445.1600	28.81	-9.49	19.32	46.00	-26.68	QP	
6		687.6600	29.60	-6.02	23.58	46.00	-22.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Vertical

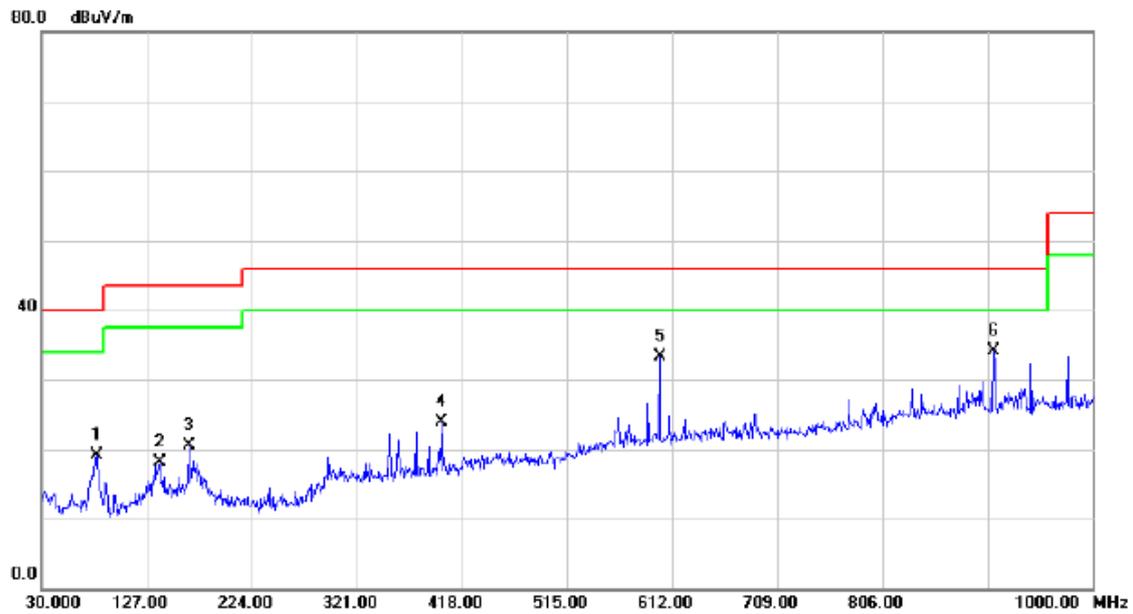

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		80.4400	35.07	-16.03	19.04	40.00	-20.96	QP	
2		138.6400	32.11	-13.94	18.17	43.50	-25.33	QP	
3		165.8000	33.74	-13.23	20.51	43.50	-22.99	QP	
4		399.5700	34.69	-10.82	23.87	46.00	-22.13	QP	
5		600.3600	40.10	-6.75	33.35	46.00	-12.65	QP	
6	*	908.8200	36.37	-2.36	34.01	46.00	-11.99	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Horizontal

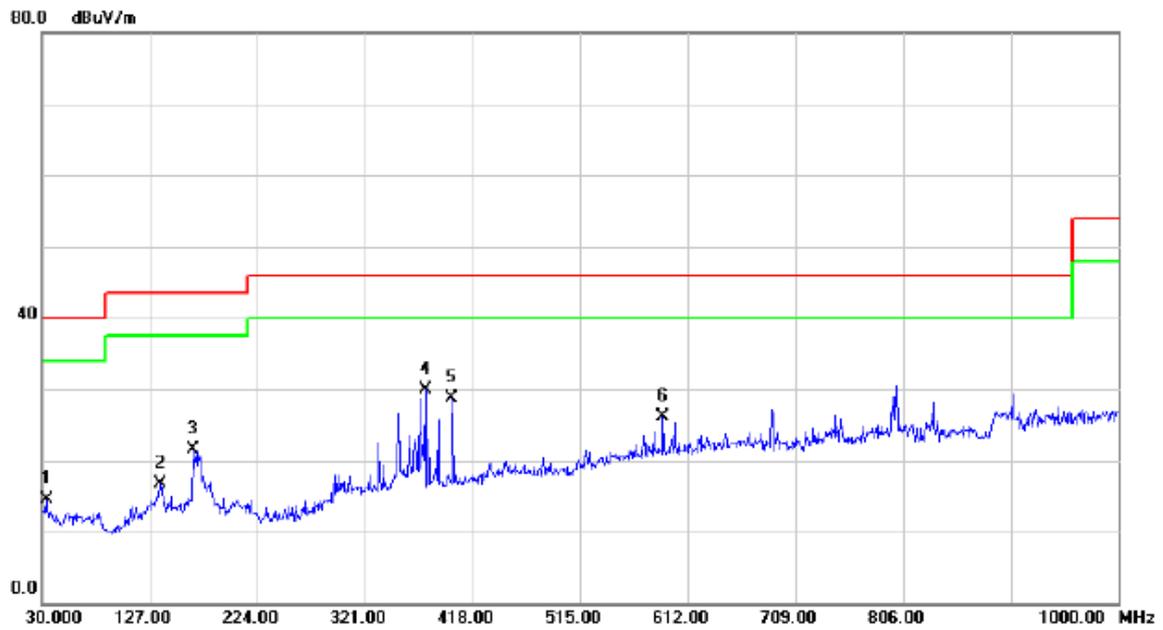

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		33.8800	28.50	-13.91	14.59	40.00	-25.41	QP	
2		136.7000	30.60	-13.87	16.73	43.50	-26.77	QP	
3		166.7700	34.64	-13.15	21.49	43.50	-22.01	QP	
4	*	375.3200	40.80	-10.88	29.92	46.00	-16.08	QP	
5		399.5700	39.56	-10.82	28.74	46.00	-17.26	QP	
6		589.6900	33.02	-6.87	26.15	46.00	-19.85	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Vertical

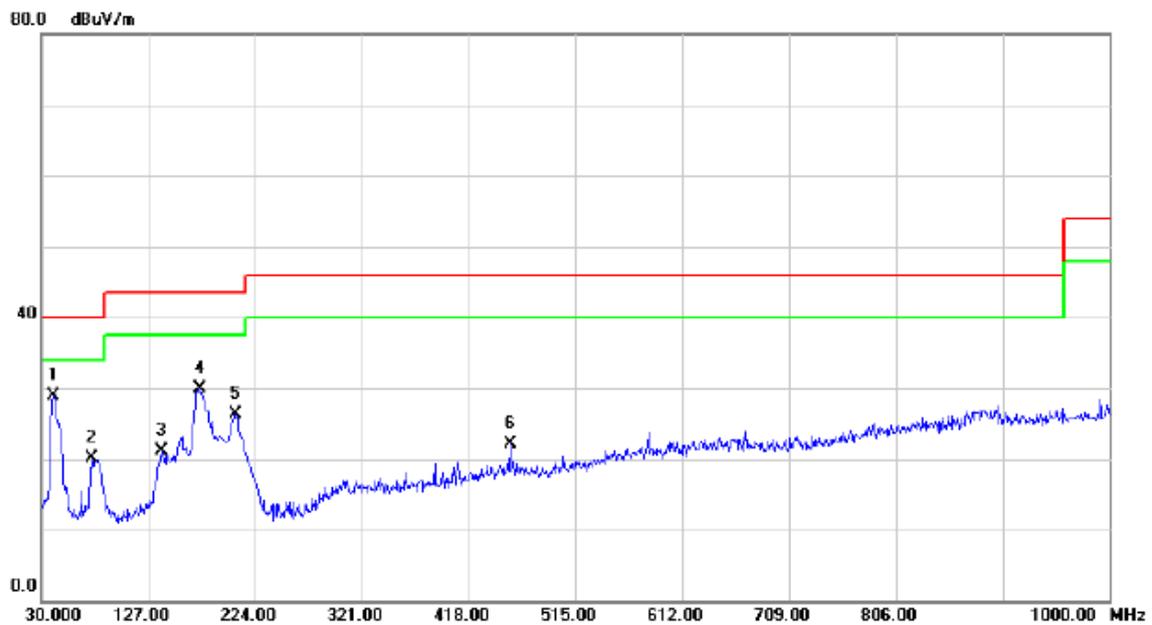

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	43.85	-14.97	28.88	40.00	-11.12	QP	
2		75.5900	36.06	-16.05	20.01	40.00	-19.99	QP	
3		139.6100	35.11	-13.96	21.15	43.50	-22.35	QP	
4		174.5300	42.66	-12.82	29.84	43.50	-13.66	QP	
5		206.5400	40.87	-14.58	26.29	43.50	-17.21	QP	
6		455.8300	31.43	-9.40	22.03	46.00	-23.97	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Horizontal

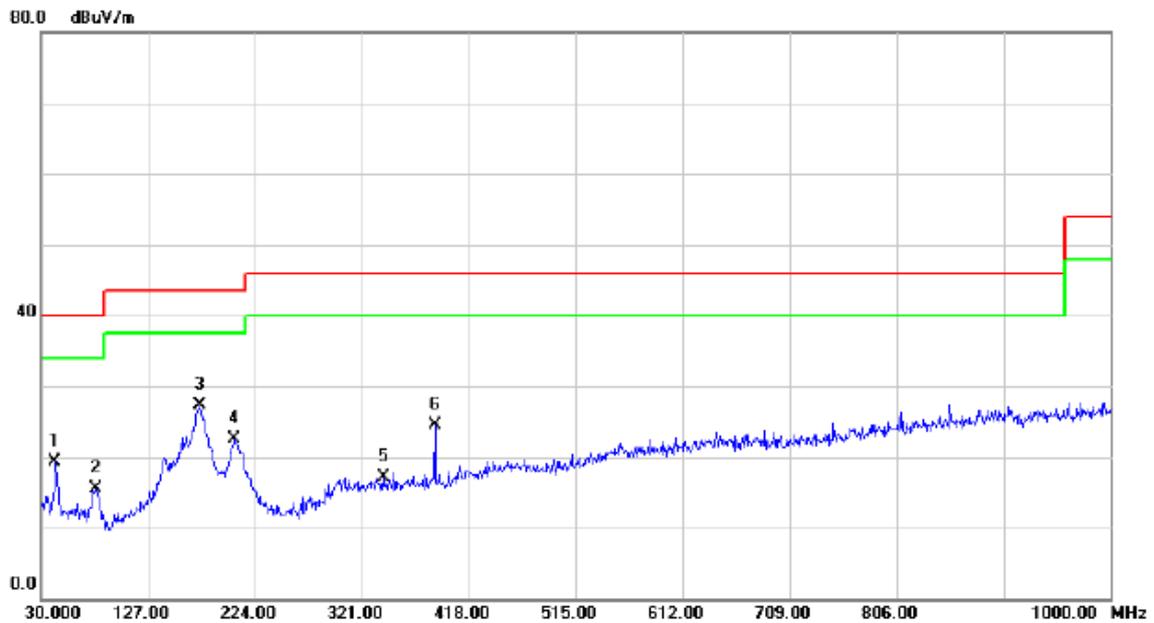

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	34.43	-15.07	19.36	40.00	-20.64	QP	
2		79.4700	31.55	-16.00	15.55	40.00	-24.45	QP	
3	*	173.5600	40.17	-12.84	27.33	43.50	-16.17	QP	
4		205.5700	37.07	-14.59	22.48	43.50	-21.02	QP	
5		340.4000	28.07	-10.91	17.16	46.00	-28.84	QP	
6		386.9600	35.34	-10.86	24.48	46.00	-21.52	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Vertical

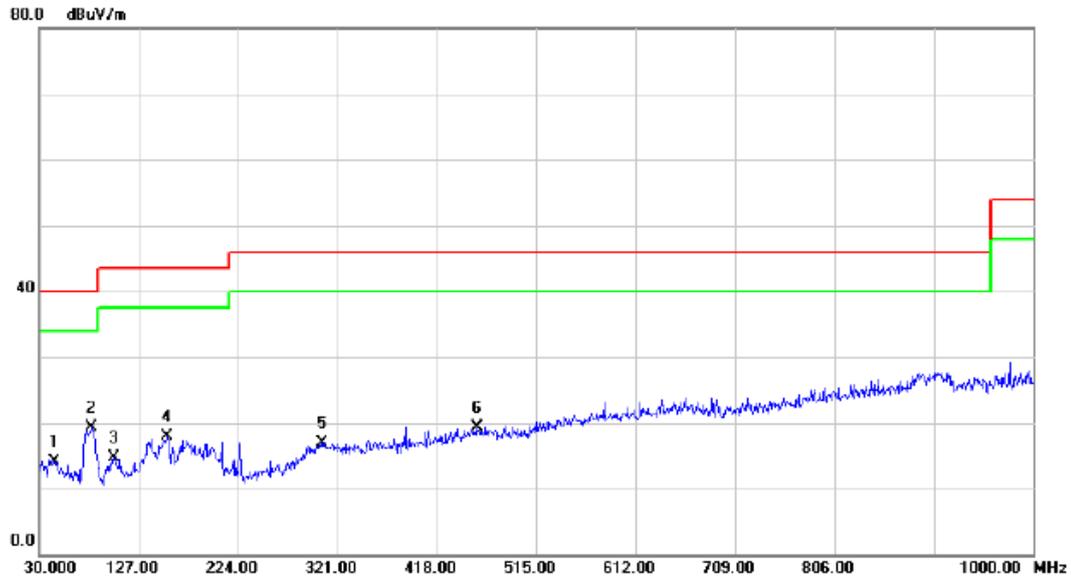

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	29.44	-15.25	14.19	40.00	-25.81	QP	
2	*	81.4100	35.36	-16.13	19.23	40.00	-20.77	QP	
3		102.7500	30.68	-15.99	14.69	43.50	-28.81	QP	
4		155.1300	31.56	-13.71	17.85	43.50	-25.65	QP	
5		305.4800	27.82	-10.82	17.00	46.00	-29.00	QP	
6		456.8000	28.76	-9.41	19.35	46.00	-26.65	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Horizontal

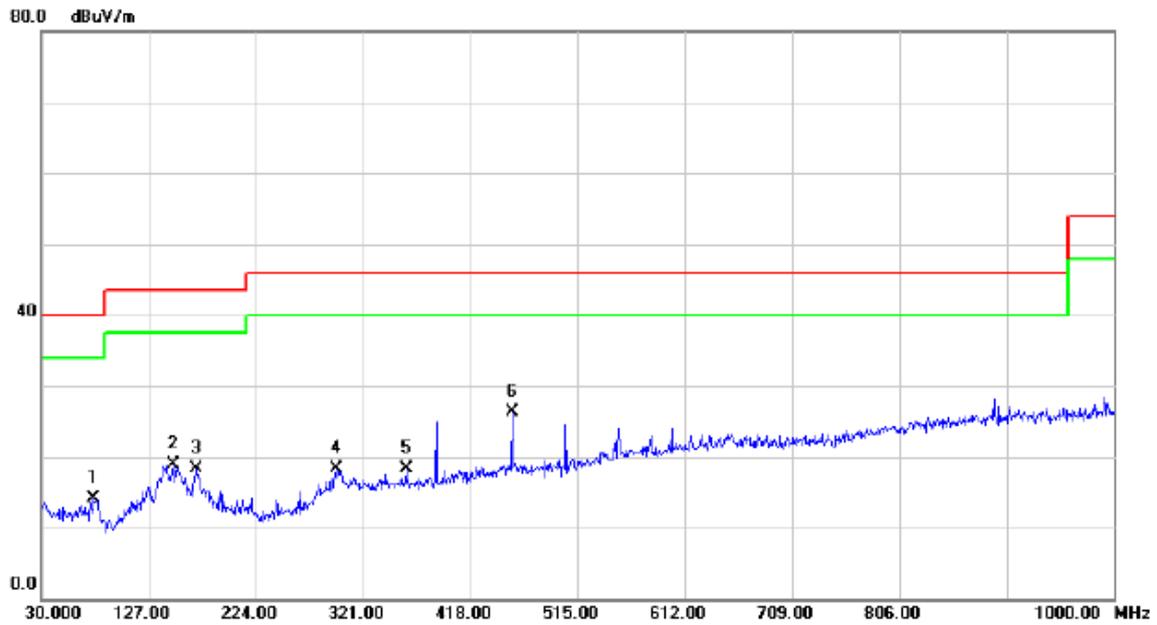

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		77.5300	30.07	-16.02	14.05	40.00	-25.95	QP	
2		149.3100	32.70	-13.72	18.98	43.50	-24.52	QP	
3		170.6500	31.09	-12.88	18.21	43.50	-25.29	QP	
4		296.7500	29.50	-11.28	18.22	46.00	-27.78	QP	
5		359.8000	29.28	-10.92	18.36	46.00	-27.64	QP	
6	*	455.8300	35.67	-9.40	26.27	46.00	-19.73	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Vertical

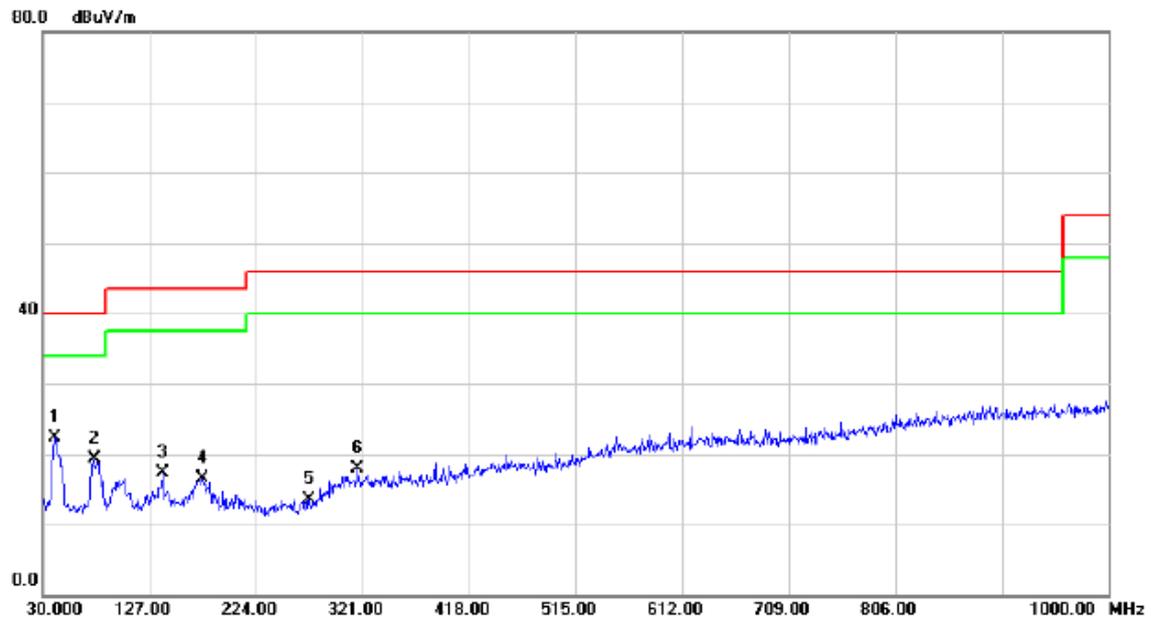

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	37.29	-14.97	22.32	40.00	-17.68	QP	
2		76.5600	35.42	-16.04	19.38	40.00	-20.62	QP	
3		138.6400	31.25	-13.94	17.31	43.50	-26.19	QP	
4		175.5000	29.36	-12.81	16.55	43.50	-26.95	QP	
5		272.5000	27.31	-13.83	13.48	46.00	-32.52	QP	
6		316.1500	28.69	-10.85	17.84	46.00	-28.16	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Horizontal

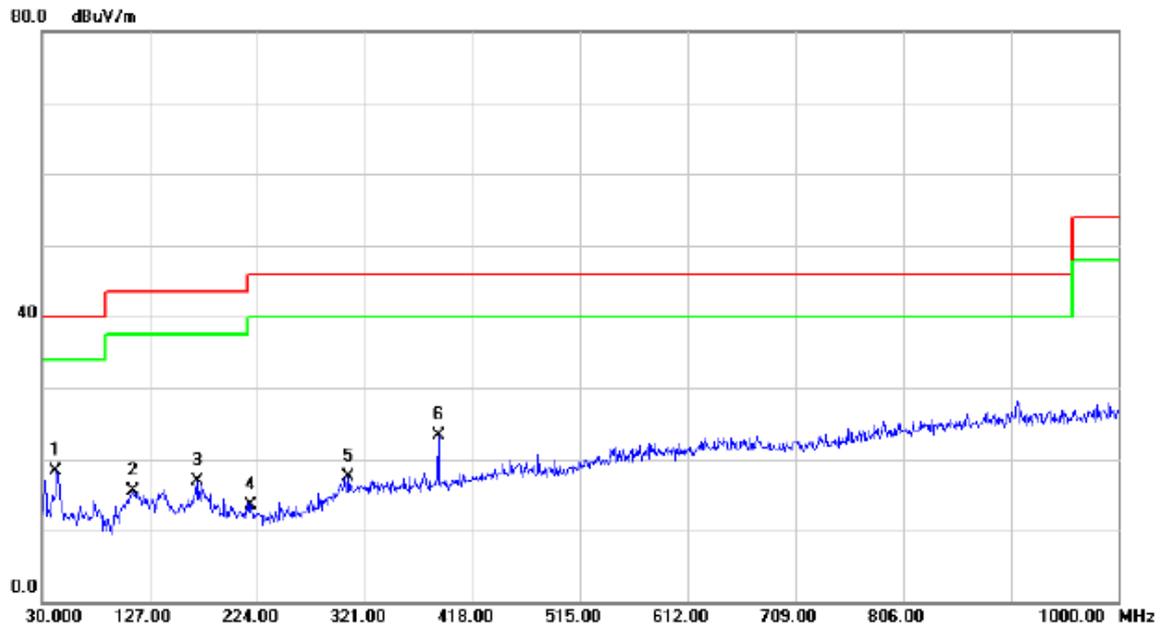

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	33.42	-15.07	18.35	40.00	-21.65	QP	
2		112.4500	30.48	-14.95	15.53	43.50	-27.97	QP	
3		169.6800	29.72	-12.91	16.81	43.50	-26.69	QP	
4		218.1800	27.93	-14.51	13.42	46.00	-32.58	QP	
5		306.4500	28.29	-10.82	17.47	46.00	-28.53	QP	
6		386.9600	34.12	-10.86	23.26	46.00	-22.74	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)

Vertical

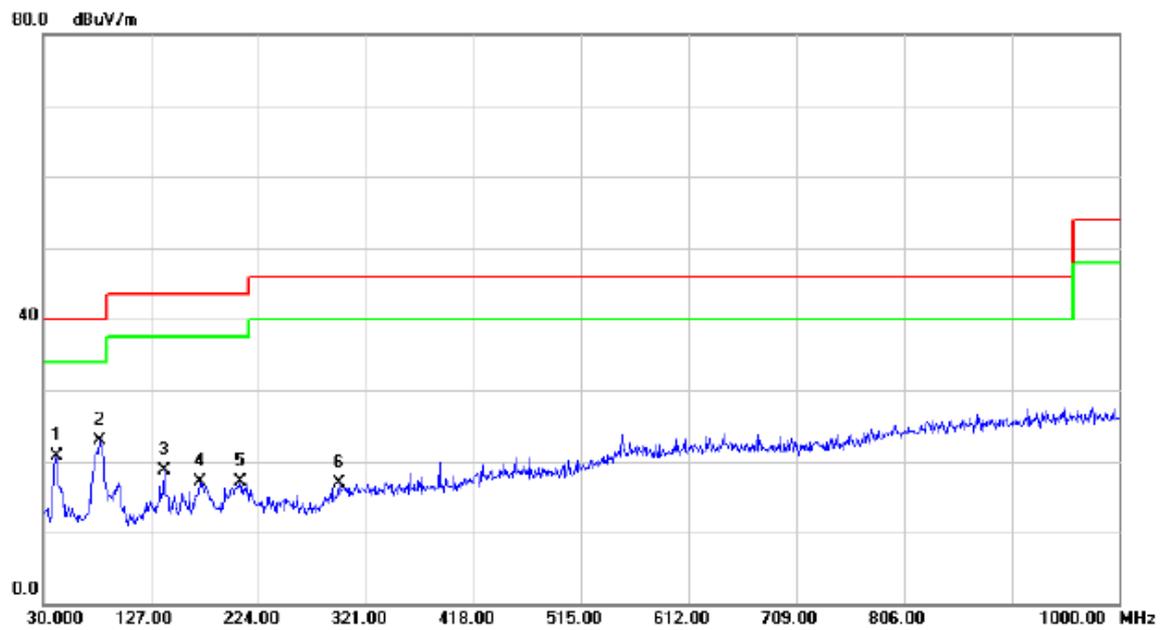

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	35.66	-14.97	20.69	40.00	-19.31	QP	
2	*	80.4400	38.93	-16.03	22.90	40.00	-17.10	QP	
3		138.6400	32.74	-13.94	18.80	43.50	-24.70	QP	
4		171.6200	29.99	-12.86	17.13	43.50	-26.37	QP	
5		207.5100	31.66	-14.57	17.09	43.50	-26.41	QP	
6		296.7500	28.25	-11.28	16.97	46.00	-29.03	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		77.5300	32.39	-16.02	16.37	40.00	-23.63	QP	
2		132.8200	28.91	-13.77	15.14	43.50	-28.36	QP	
3		172.5900	28.38	-12.85	15.53	43.50	-27.97	QP	
4		316.1500	28.98	-10.85	18.13	46.00	-27.87	QP	
5		559.6200	30.03	-7.24	22.79	46.00	-23.21	QP	
6	*	653.7100	29.44	-5.83	23.61	46.00	-22.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG(EU Plug)


Vertical

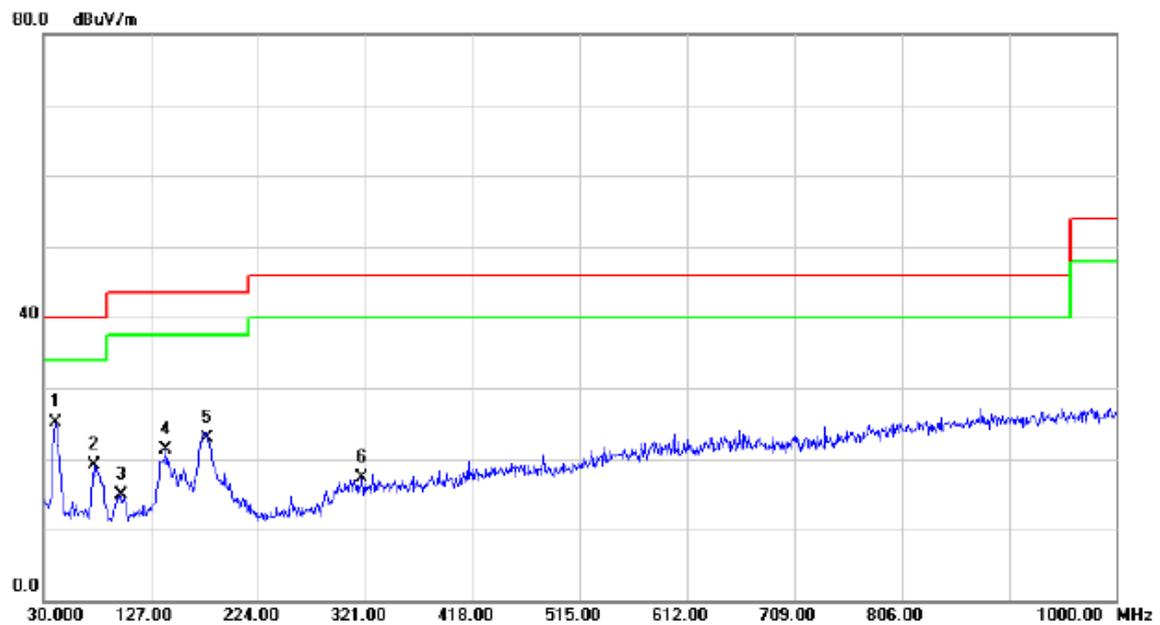

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	40.08	-14.97	25.11	40.00	-14.89	QP	
2		75.5900	35.20	-16.05	19.15	40.00	-20.85	QP	
3		99.8400	31.28	-16.31	14.97	43.50	-28.53	QP	
4		140.5800	35.20	-13.97	21.23	43.50	-22.27	QP	
5		179.3800	35.59	-12.75	22.84	43.50	-20.66	QP	
6		318.0900	28.11	-10.85	17.26	46.00	-28.74	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG(EU Plug)


Horizontal

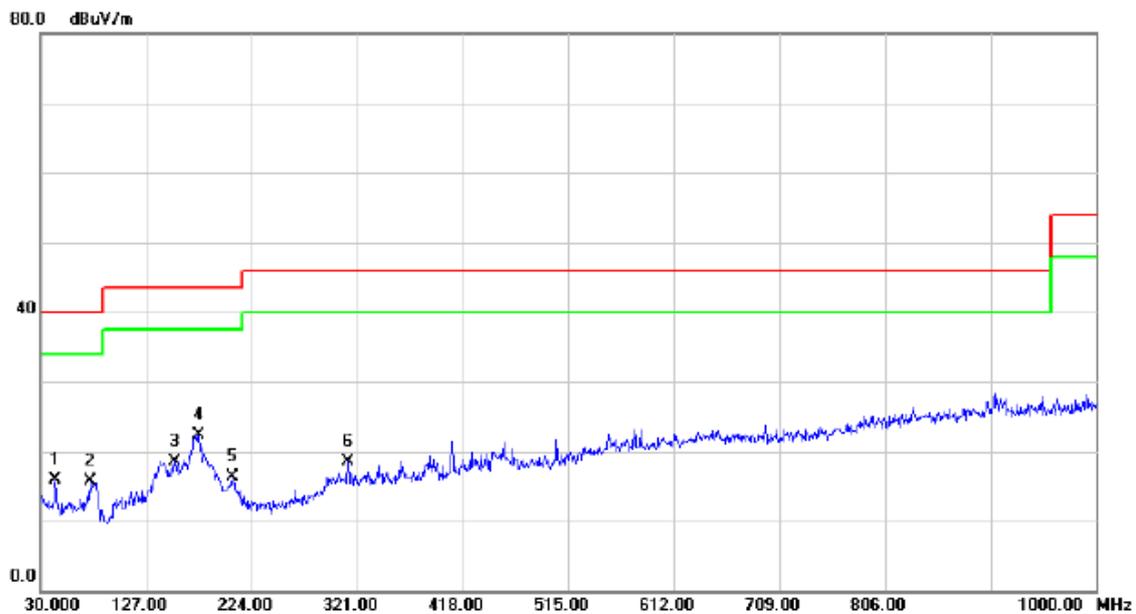

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		43.5800	31.09	-15.23	15.86	40.00	-24.14	QP	
2		75.5900	31.69	-16.05	15.64	40.00	-24.36	QP	
3		153.1900	32.23	-13.71	18.52	43.50	-24.98	QP	
4	*	175.5000	35.09	-12.81	22.28	43.50	-21.22	QP	
5		206.5400	30.83	-14.58	16.25	43.50	-27.25	QP	
6		312.2700	29.34	-10.84	18.50	46.00	-27.50	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK(EU Plug)


Vertical

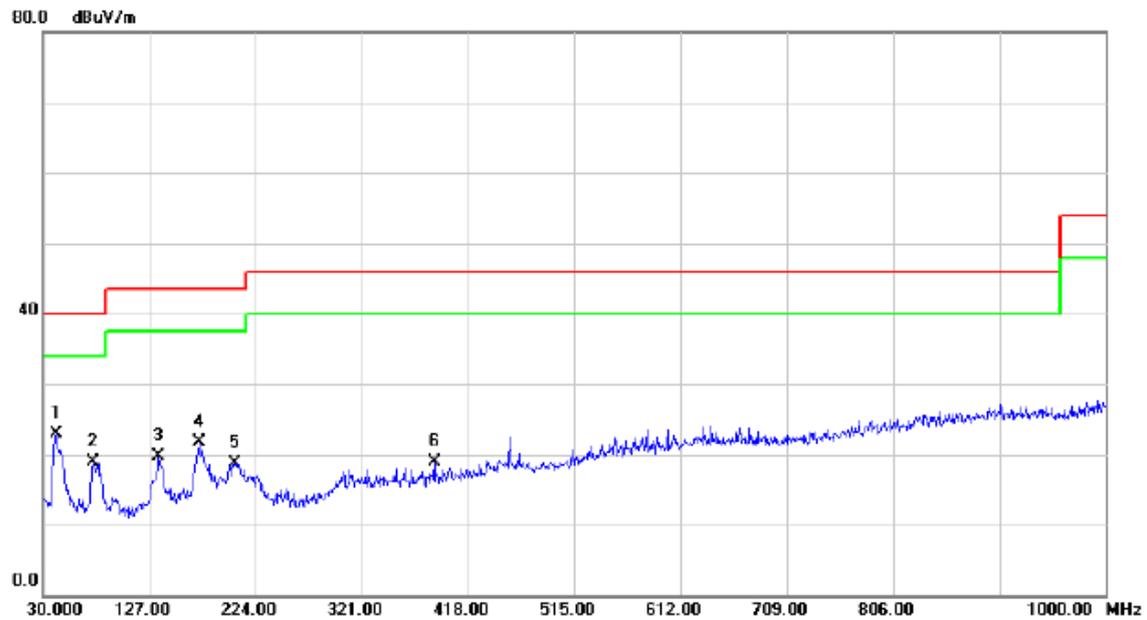

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	37.84	-14.97	22.87	40.00	-17.13	QP	
2		75.5900	35.03	-16.05	18.98	40.00	-21.02	QP	
3		135.7300	33.48	-13.85	19.63	43.50	-23.87	QP	
4		172.5900	34.48	-12.85	21.63	43.50	-21.87	QP	
5		205.5700	33.30	-14.59	18.71	43.50	-24.79	QP	
6		386.9600	29.86	-10.86	19.00	46.00	-27.00	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK(EU Plug)


Horizontal

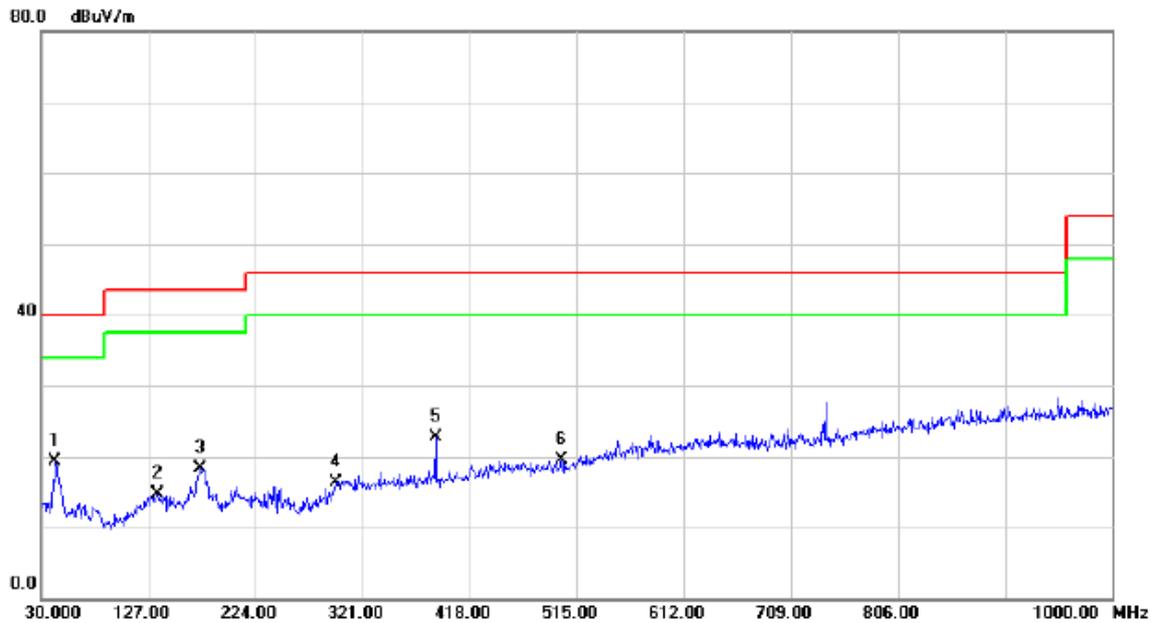

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	34.45	-15.07	19.38	40.00	-20.62	QP	
2		134.7600	28.56	-13.83	14.73	43.50	-28.77	QP	
3		173.5600	31.20	-12.84	18.36	43.50	-25.14	QP	
4		296.7500	27.55	-11.28	16.27	46.00	-29.73	QP	
5		386.9600	33.53	-10.86	22.67	46.00	-23.33	QP	
6		501.4200	29.19	-9.72	19.47	46.00	-26.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU(EU Plug)


Vertical

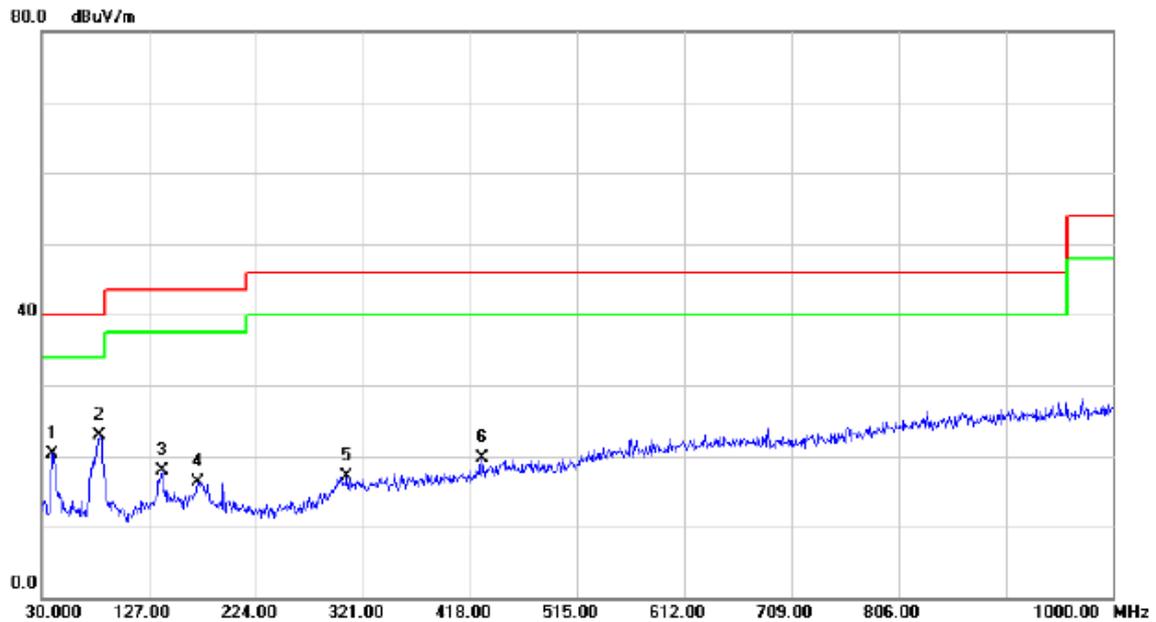

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	35.20	-14.95	20.25	40.00	-19.75	QP	
2	*	82.3800	39.18	-16.22	22.96	40.00	-17.04	QP	
3		138.6400	31.89	-13.94	17.95	43.50	-25.55	QP	
4		171.6200	29.12	-12.86	16.26	43.50	-27.24	QP	
5		306.4500	28.00	-10.82	17.18	46.00	-28.82	QP	
6		428.6700	29.63	-9.98	19.65	46.00	-26.35	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU(EU Plug)

Horizontal

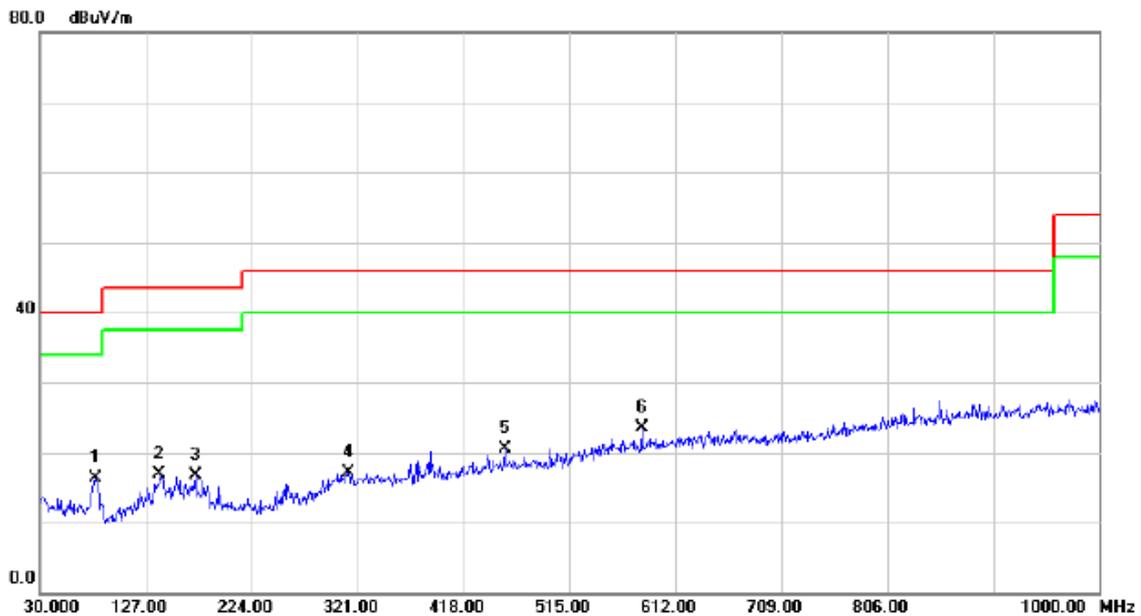


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		81.4100	32.48	-16.13	16.35	40.00	-23.65	QP	
2		139.6100	30.86	-13.96	16.90	43.50	-26.60	QP	
3		172.5900	29.65	-12.85	16.80	43.50	-26.70	QP	
4		312.2700	27.87	-10.84	17.03	46.00	-28.97	QP	
5		455.8300	29.86	-9.40	20.46	46.00	-25.54	QP	
6	*	580.9600	30.47	-6.99	23.48	46.00	-22.52	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Vertical

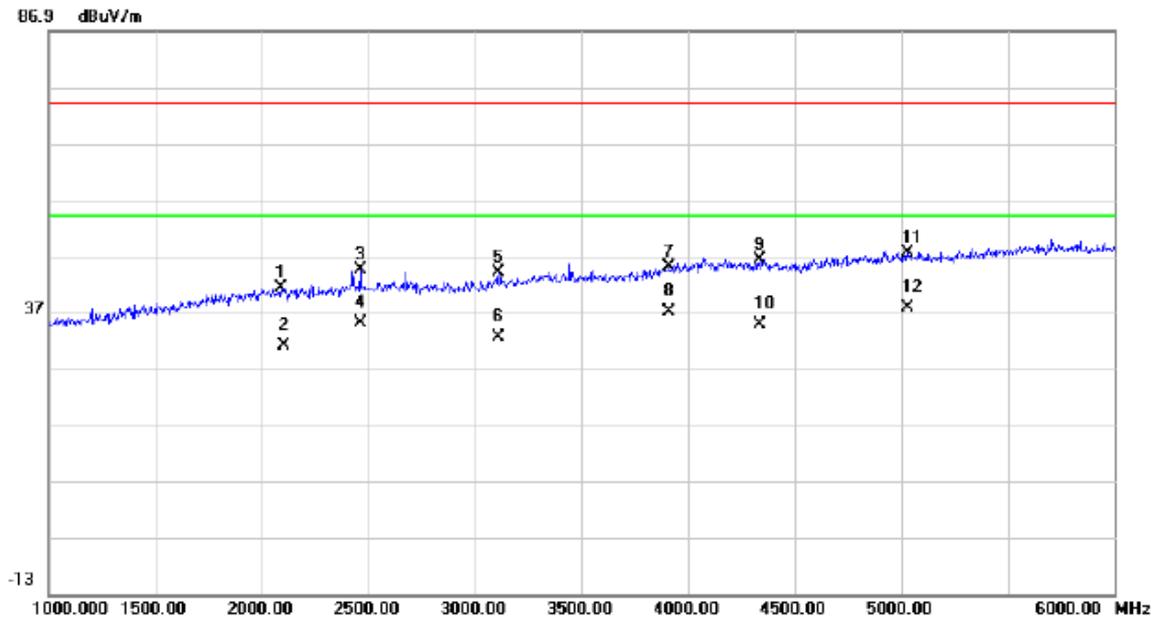

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2090.000	42.49	-1.13	41.36	74.00	-32.64	peak	
2		2090.000	32.15	-1.13	31.02	54.00	-22.98	AVG	
3		2460.000	45.24	-0.70	44.54	74.00	-29.46	peak	
4		2460.000	35.62	-0.70	34.92	54.00	-19.08	AVG	
5		3110.000	43.72	0.39	44.11	74.00	-29.89	peak	
6		3110.000	32.23	0.39	32.62	54.00	-21.38	AVG	
7		3910.000	41.11	3.80	44.91	74.00	-29.09	peak	
8		3910.000	33.16	3.80	36.96	54.00	-17.04	AVG	
9		4335.000	41.45	4.77	46.22	74.00	-27.78	peak	
10		4335.000	30.12	4.77	34.89	54.00	-19.11	AVG	
11		5030.000	41.04	6.42	47.46	74.00	-26.54	peak	
12	*	5030.000	31.25	6.42	37.67	54.00	-16.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD


Horizontal

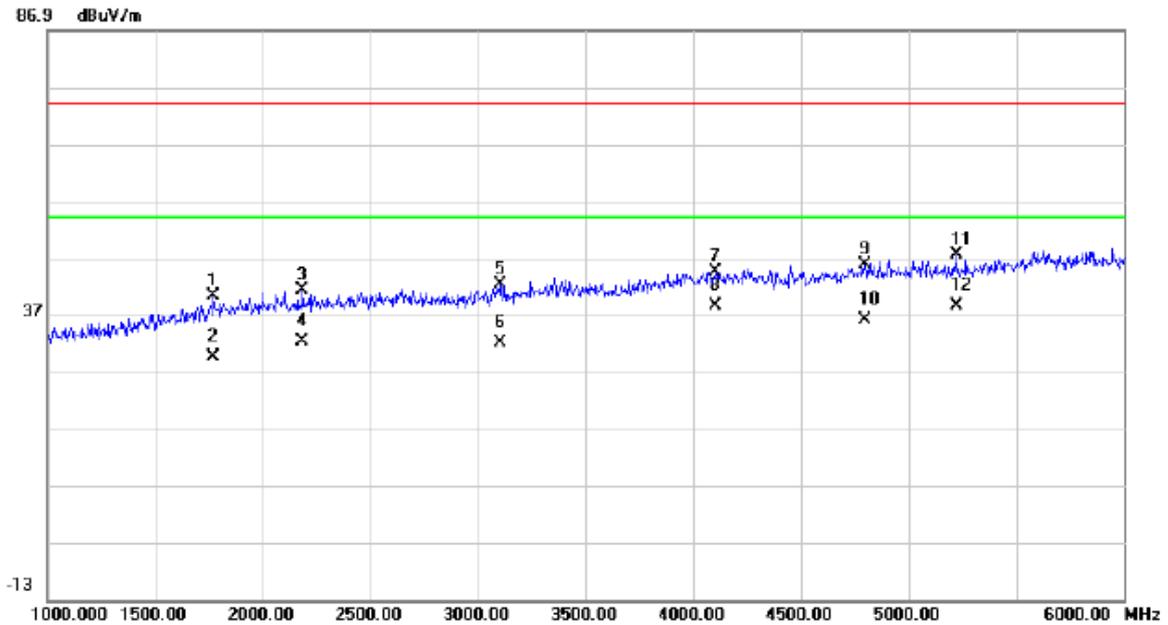

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1770.000	43.03	-2.87	40.16	74.00	-33.84	peak	
2	1770.000	32.50	-2.87	29.63	54.00	-24.37	AVG	
3	2185.000	42.27	-1.01	41.26	74.00	-32.74	peak	
4	2185.000	33.22	-1.01	32.21	54.00	-21.79	AVG	
5	3105.000	41.94	0.38	42.32	74.00	-31.68	peak	
6	3105.000	31.60	0.38	31.98	54.00	-22.02	AVG	
7	4105.000	40.16	4.43	44.59	74.00	-29.41	peak	
8 *	4105.000	34.12	4.43	38.55	54.00	-15.45	AVG	
9	4795.000	39.97	5.79	45.76	74.00	-28.24	peak	
10	4795.000	30.25	5.79	36.04	54.00	-17.96	AVG	
11	5220.000	40.49	6.93	47.42	74.00	-26.58	peak	
12	5220.000	31.55	6.93	38.48	54.00	-15.52	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Vertical

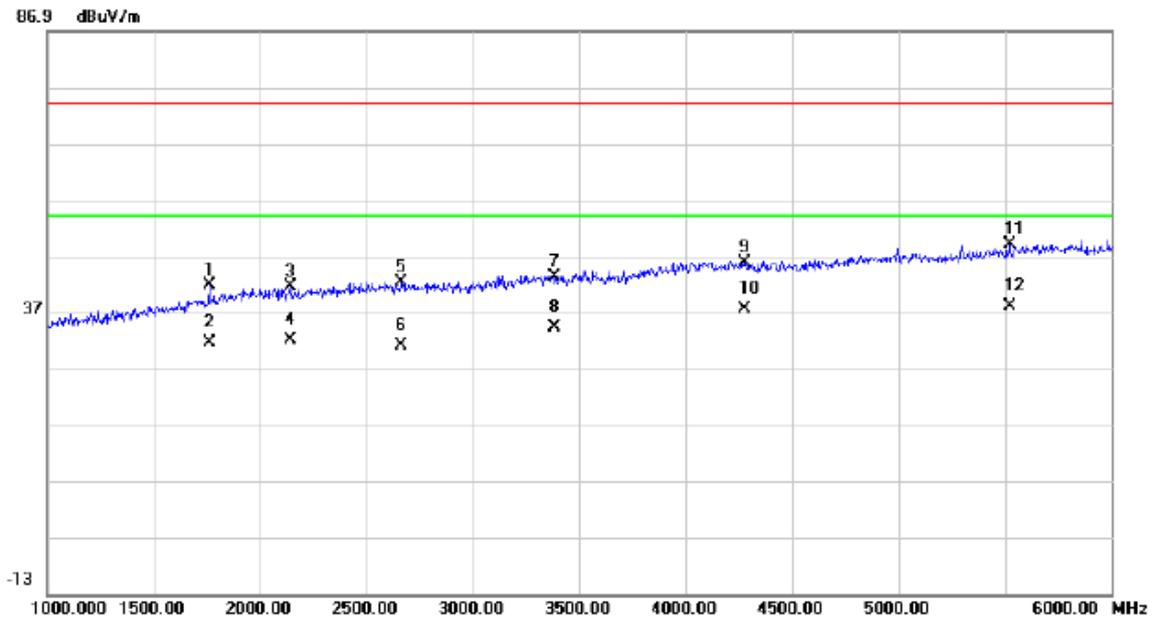

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1760.000	44.75	-2.92	41.83	74.00	-32.17	peak	
2	1760.000	34.50	-2.92	31.58	54.00	-22.42	AVG	
3	2140.000	42.69	-1.07	41.62	74.00	-32.38	peak	
4	2140.000	33.20	-1.07	32.13	54.00	-21.87	AVG	
5	2665.000	42.77	-0.42	42.35	74.00	-31.65	peak	
6	2665.000	31.45	-0.42	31.03	54.00	-22.97	AVG	
7	3380.000	42.14	1.24	43.38	74.00	-30.62	peak	
8	3380.000	33.15	1.24	34.39	54.00	-19.61	AVG	
9	4275.000	41.04	4.67	45.71	74.00	-28.29	peak	
10	4275.000	32.84	4.67	37.51	54.00	-16.49	AVG	
11	5520.000	41.31	7.71	49.02	74.00	-24.98	peak	
12 *	5520.000	30.25	7.71	37.96	54.00	-16.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+playing+idle
Note:	Adapter: BYD


Horizontal

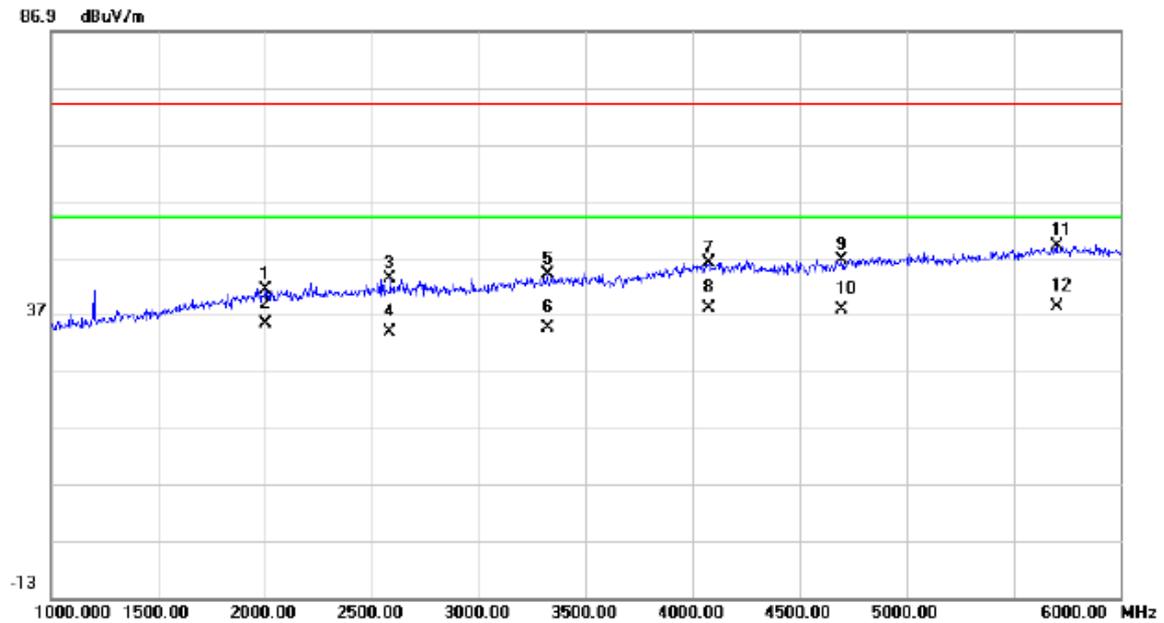

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2000.000	42.49	-1.23	41.26	74.00	-32.74	peak	
2		2000.000	36.52	-1.23	35.29	54.00	-18.71	AVG	
3		2585.000	43.79	-0.53	43.26	74.00	-30.74	peak	
4		2585.000	34.37	-0.53	33.84	54.00	-20.16	AVG	
5		3320.000	42.87	1.06	43.93	74.00	-30.07	peak	
6		3320.000	33.41	1.06	34.47	54.00	-19.53	AVG	
7		4075.000	41.65	4.39	46.04	74.00	-27.96	peak	
8		4075.000	33.56	4.39	37.95	54.00	-16.05	AVG	
9		4695.000	41.02	5.53	46.55	74.00	-27.45	peak	
10		4695.000	32.15	5.53	37.68	54.00	-16.32	AVG	
11		5700.000	41.03	8.04	49.07	74.00	-24.93	peak	
12	*	5700.000	30.12	8.04	38.16	54.00	-15.84	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD


Vertical

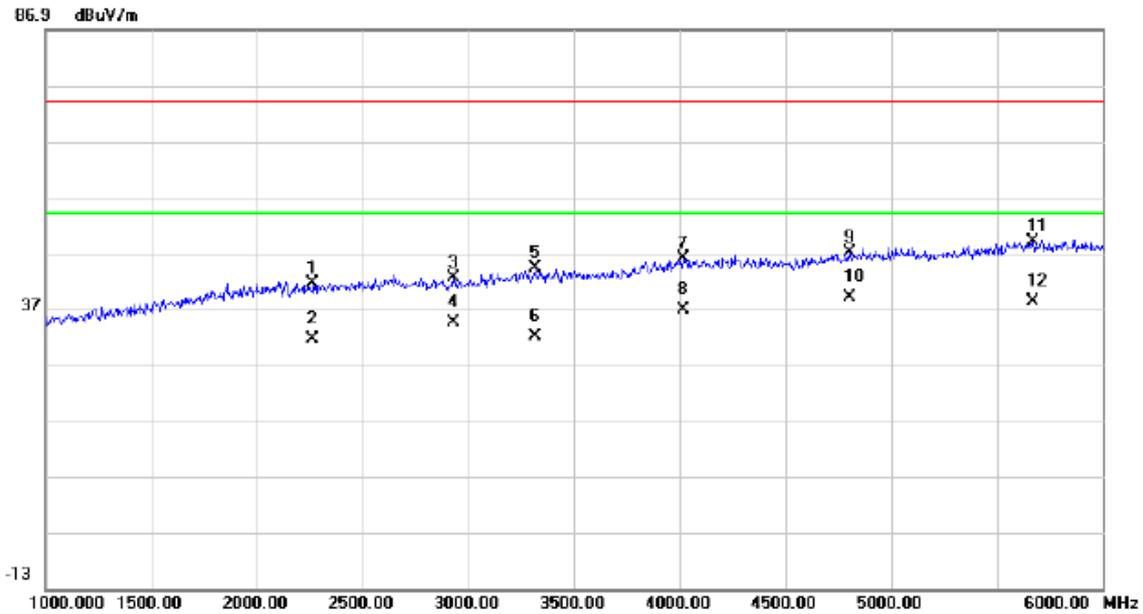

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2265.000	42.45	-0.93	41.52	74.00	-32.48	peak	
2		2265.000	32.57	-0.93	31.64	54.00	-22.36	AVG	
3		2930.000	42.65	-0.04	42.61	74.00	-31.39	peak	
4		2930.000	34.45	-0.04	34.41	54.00	-19.59	AVG	
5		3315.000	43.26	1.04	44.30	74.00	-29.70	peak	
6		3315.000	31.06	1.04	32.10	54.00	-21.90	AVG	
7		4015.000	41.71	4.30	46.01	74.00	-27.99	peak	
8		4015.000	32.54	4.30	36.84	54.00	-17.16	AVG	
9		4800.000	41.23	5.80	47.03	74.00	-26.97	peak	
10	*	4800.000	33.24	5.80	39.04	54.00	-14.96	AVG	
11		5670.000	41.11	7.99	49.10	74.00	-24.90	peak	
12		5670.000	30.25	7.99	38.24	54.00	-15.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+playing+idle
Note:	Adapter: BYD


Horizontal

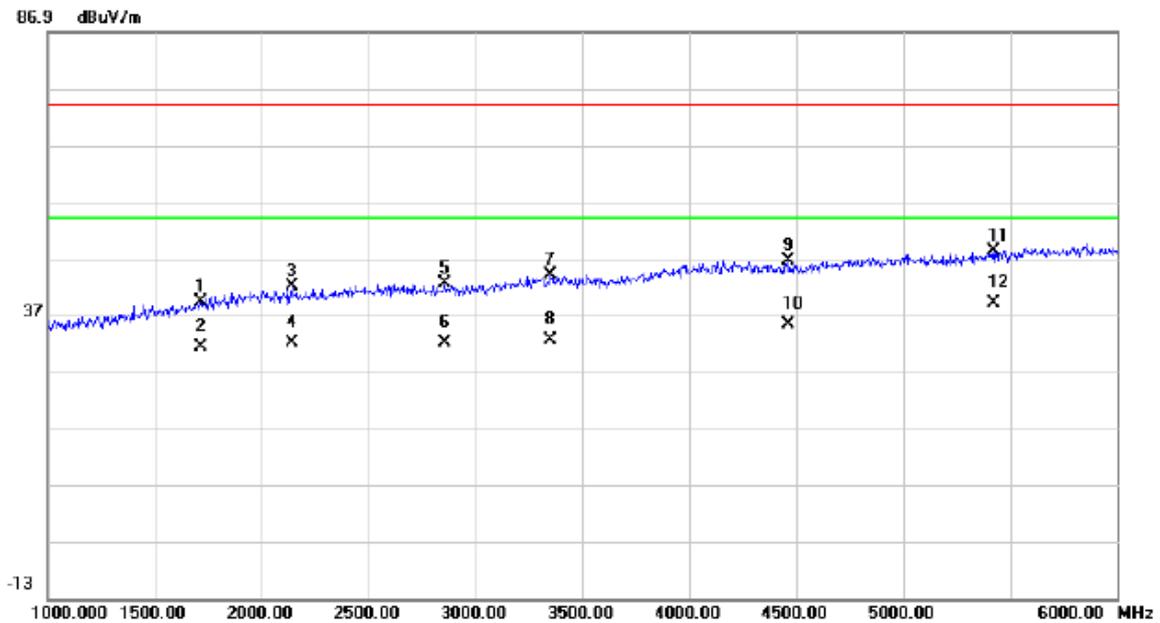

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1715.000	42.43	-3.25	39.18	74.00	-34.82	peak	
2		1715.000	34.50	-3.25	31.25	54.00	-22.75	AVG	
3		2140.000	43.14	-1.07	42.07	74.00	-31.93	peak	
4		2140.000	33.12	-1.07	32.05	54.00	-21.95	AVG	
5		2855.000	42.81	-0.16	42.65	74.00	-31.35	peak	
6		2855.000	32.16	-0.16	32.00	54.00	-22.00	AVG	
7		3350.000	42.87	1.15	44.02	74.00	-29.98	peak	
8		3350.000	31.42	1.15	32.57	54.00	-21.43	AVG	
9		4460.000	41.53	4.95	46.48	74.00	-27.52	peak	
10		4460.000	30.25	4.95	35.20	54.00	-18.80	AVG	
11		5425.000	40.83	7.47	48.30	74.00	-25.70	peak	
12	*	5425.000	31.55	7.47	39.02	54.00	-14.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Vertical

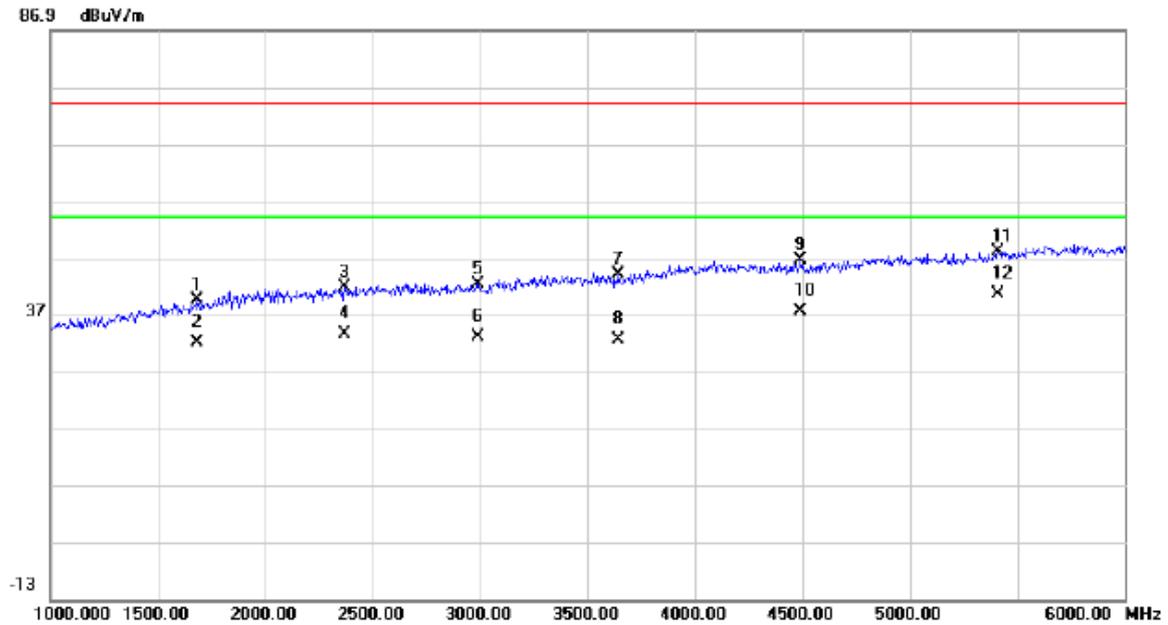

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1680.000	42.96	-3.49	39.47	74.00	-34.53	peak	
2		1680.000	35.60	-3.49	32.11	54.00	-21.89	AVG	
3		2370.000	42.48	-0.81	41.67	74.00	-32.33	peak	
4		2370.000	34.30	-0.81	33.49	54.00	-20.51	AVG	
5		2990.000	42.34	0.03	42.37	74.00	-31.63	peak	
6		2990.000	33.12	0.03	33.15	54.00	-20.85	AVG	
7		3645.000	41.59	2.39	43.98	74.00	-30.02	peak	
8		3645.000	30.15	2.39	32.54	54.00	-21.46	AVG	
9		4490.000	41.59	4.99	46.58	74.00	-27.42	peak	
10		4490.000	32.60	4.99	37.59	54.00	-16.41	AVG	
11		5410.000	40.56	7.43	47.99	74.00	-26.01	peak	
12	*	5410.000	33.15	7.43	40.58	54.00	-13.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Speaker+Traffic
Note:	Adapter: BYD


Horizontal

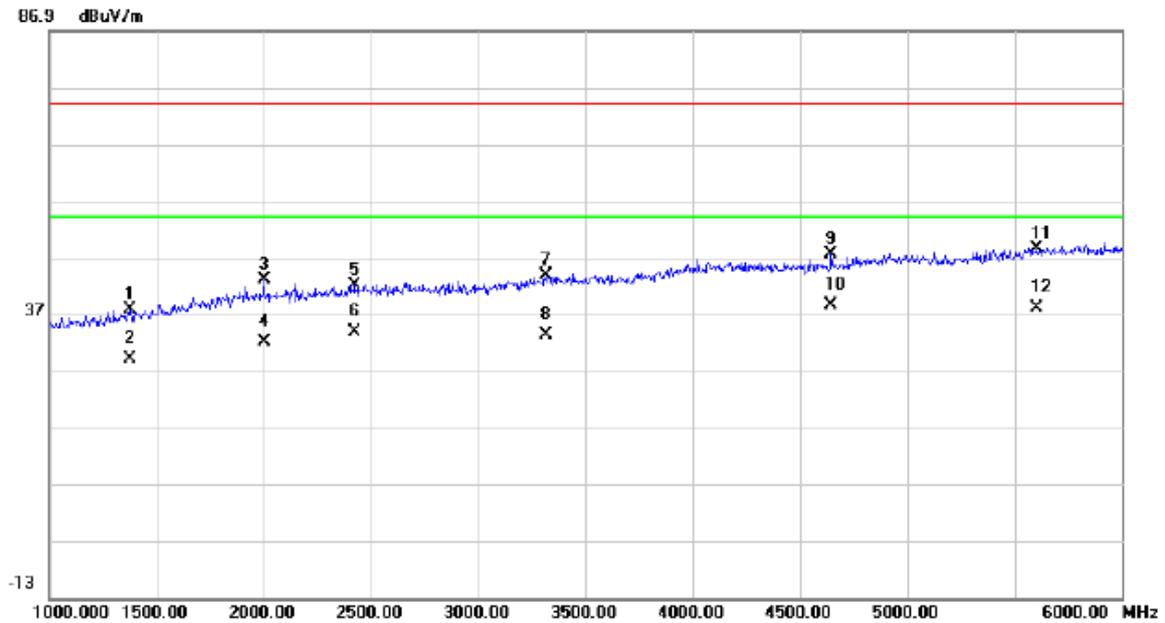

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1375.000	43.53	-5.64	37.89	74.00	-36.11	peak	
2		1375.000	34.56	-5.64	28.92	54.00	-25.08	AVG	
3		2000.000	44.26	-1.23	43.03	74.00	-30.97	peak	
4		2000.000	33.26	-1.23	32.03	54.00	-21.97	AVG	
5		2425.000	42.81	-0.74	42.07	74.00	-31.93	peak	
6		2425.000	34.60	-0.74	33.86	54.00	-20.14	AVG	
7		3315.000	42.66	1.04	43.70	74.00	-30.30	peak	
8		3315.000	32.15	1.04	33.19	54.00	-20.81	AVG	
9		4645.000	42.04	5.39	47.43	74.00	-26.57	peak	
10	*	4645.000	33.15	5.39	38.54	54.00	-15.46	AVG	
11		5600.000	40.77	7.86	48.63	74.00	-25.37	peak	
12		5600.000	30.15	7.86	38.01	54.00	-15.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Vertical

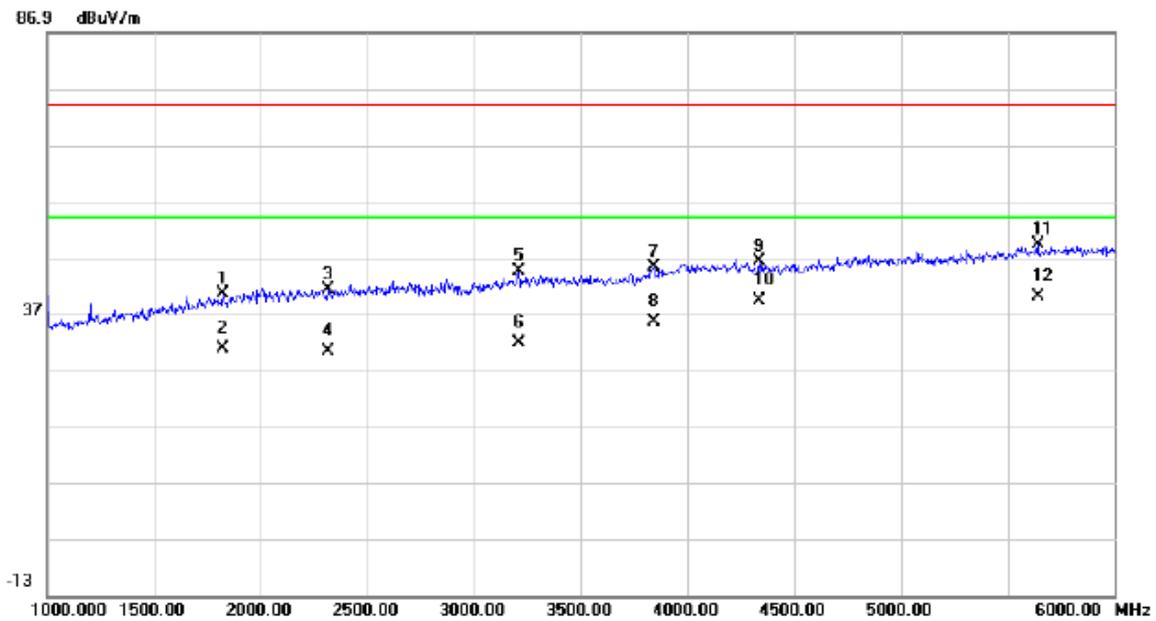

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1820.000	43.14	-2.51	40.63	74.00	-33.37	peak	
2		1820.000	33.20	-2.51	30.69	54.00	-23.31	AVG	
3		2315.000	42.14	-0.87	41.27	74.00	-32.73	peak	
4		2315.000	31.23	-0.87	30.36	54.00	-23.64	AVG	
5		3210.000	43.72	0.70	44.42	74.00	-29.58	peak	
6		3210.000	31.05	0.70	31.75	54.00	-22.25	AVG	
7		3840.000	41.79	3.42	45.21	74.00	-28.79	peak	
8		3840.000	32.03	3.42	35.45	54.00	-18.55	AVG	
9		4335.000	41.43	4.77	46.20	74.00	-27.80	peak	
10		4335.000	34.45	4.77	39.22	54.00	-14.78	AVG	
11		5640.000	41.35	7.93	49.28	74.00	-24.72	peak	
12	*	5640.000	32.20	7.93	40.13	54.00	-13.87	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Horizontal

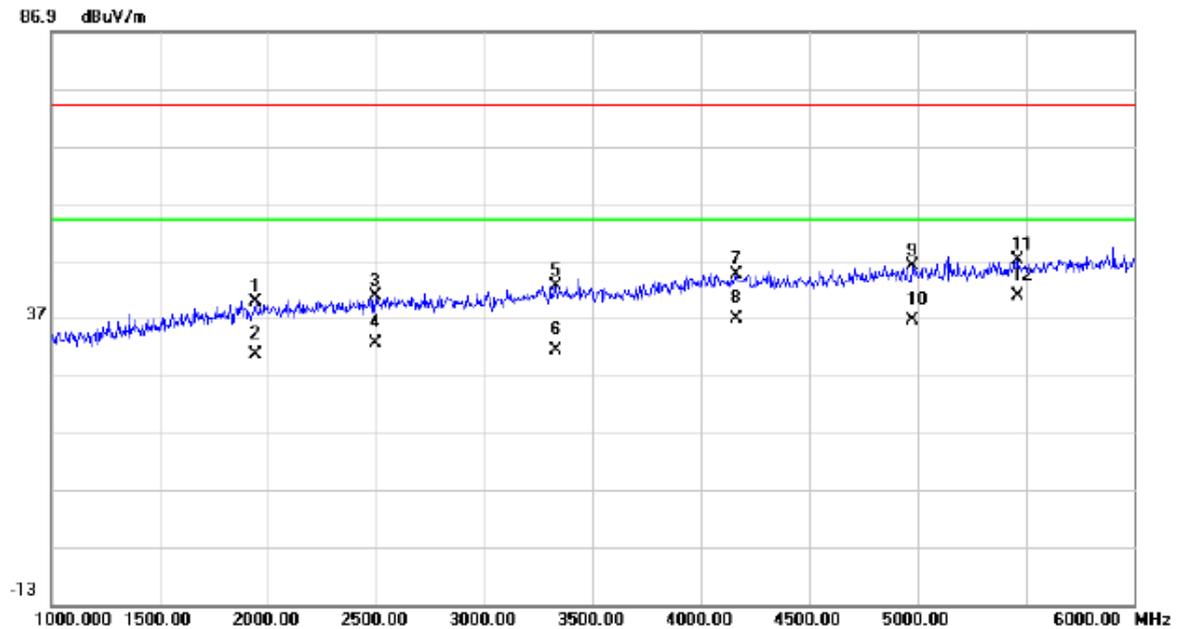

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1940.000	41.53	-1.66	39.87	74.00	-34.13	peak	
2		1940.000	32.30	-1.66	30.64	54.00	-23.36	AVG	
3		2495.000	41.35	-0.65	40.70	74.00	-33.30	peak	
4		2495.000	33.12	-0.65	32.47	54.00	-21.53	AVG	
5		3330.000	41.44	1.08	42.52	74.00	-31.48	peak	
6		3330.000	30.12	1.08	31.20	54.00	-22.80	AVG	
7		4165.000	40.09	4.52	44.61	74.00	-29.39	peak	
8		4165.000	32.16	4.52	36.68	54.00	-17.32	AVG	
9		4975.000	39.73	6.27	46.00	74.00	-28.00	peak	
10		4975.000	30.18	6.27	36.45	54.00	-17.55	AVG	
11		5465.000	39.45	7.58	47.03	74.00	-26.97	peak	
12	*	5465.000	33.21	7.58	40.79	54.00	-13.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Vertical

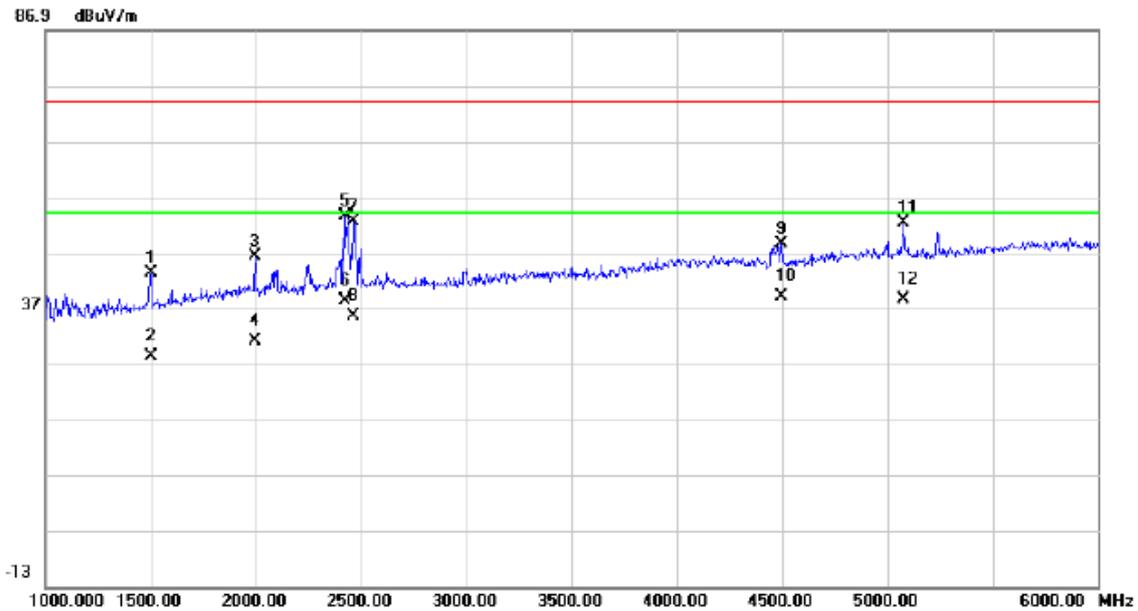

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	48.17	-4.78	43.39	74.00	-30.61	peak	
2		1500.000	33.15	-4.78	28.37	54.00	-25.63	AVG	
3		1995.000	47.62	-1.26	46.36	74.00	-27.64	peak	
4		1995.000	32.30	-1.26	31.04	54.00	-22.96	AVG	
5		2420.000	54.20	-0.75	53.45	74.00	-20.55	peak	
6		2420.000	39.12	-0.75	38.37	54.00	-15.63	AVG	
7		2465.000	53.15	-0.70	52.45	74.00	-21.55	peak	
8		2465.000	36.12	-0.70	35.42	54.00	-18.58	AVG	
9		4495.000	43.43	5.01	48.44	74.00	-25.56	peak	
10	*	4495.000	34.13	5.01	39.14	54.00	-14.86	AVG	
11		5075.000	45.69	6.54	52.23	74.00	-21.77	peak	
12		5075.000	32.11	6.54	38.65	54.00	-15.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+earphone+idle


Horizontal

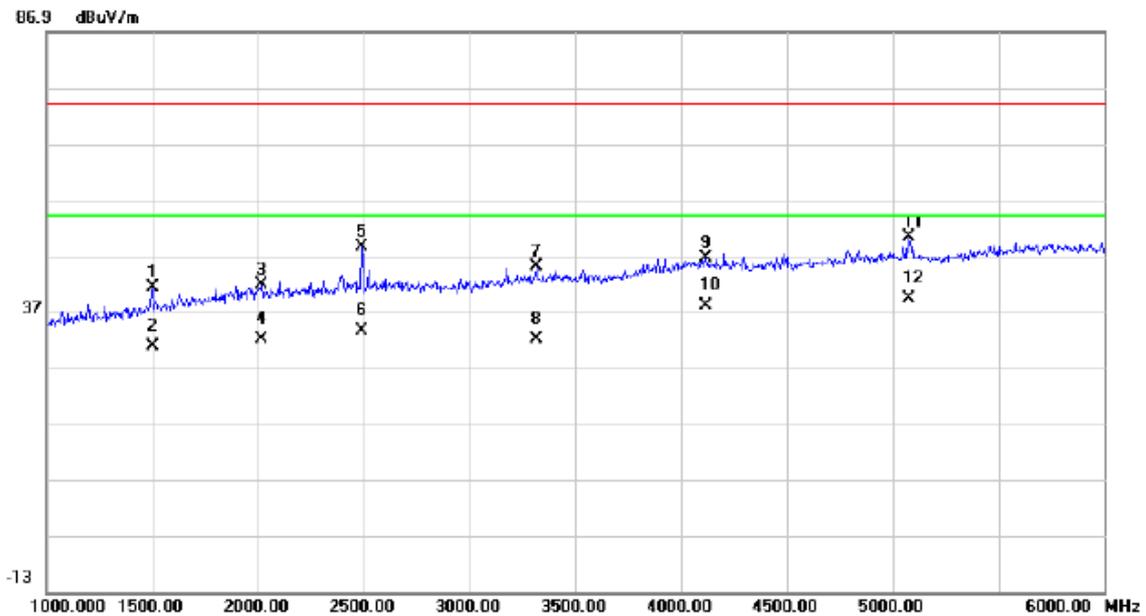

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	46.03	-4.78	41.25	74.00	-32.75	peak	
2		1500.000	35.60	-4.78	30.82	54.00	-23.18	AVG	
3		2015.000	42.90	-1.21	41.69	74.00	-32.31	peak	
4		2015.000	33.16	-1.21	31.95	54.00	-22.05	AVG	
5		2490.000	49.09	-0.67	48.42	74.00	-25.58	peak	
6		2490.000	34.30	-0.67	33.63	54.00	-20.37	AVG	
7		3315.000	43.89	1.04	44.93	74.00	-29.07	peak	
8		3315.000	31.09	1.04	32.13	54.00	-21.87	AVG	
9		4115.000	41.99	4.45	46.44	74.00	-27.56	peak	
10		4115.000	33.54	4.45	37.99	54.00	-16.01	AVG	
11		5075.000	43.80	6.54	50.34	74.00	-23.66	peak	
12	*	5075.000	32.70	6.54	39.24	54.00	-14.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Vertical

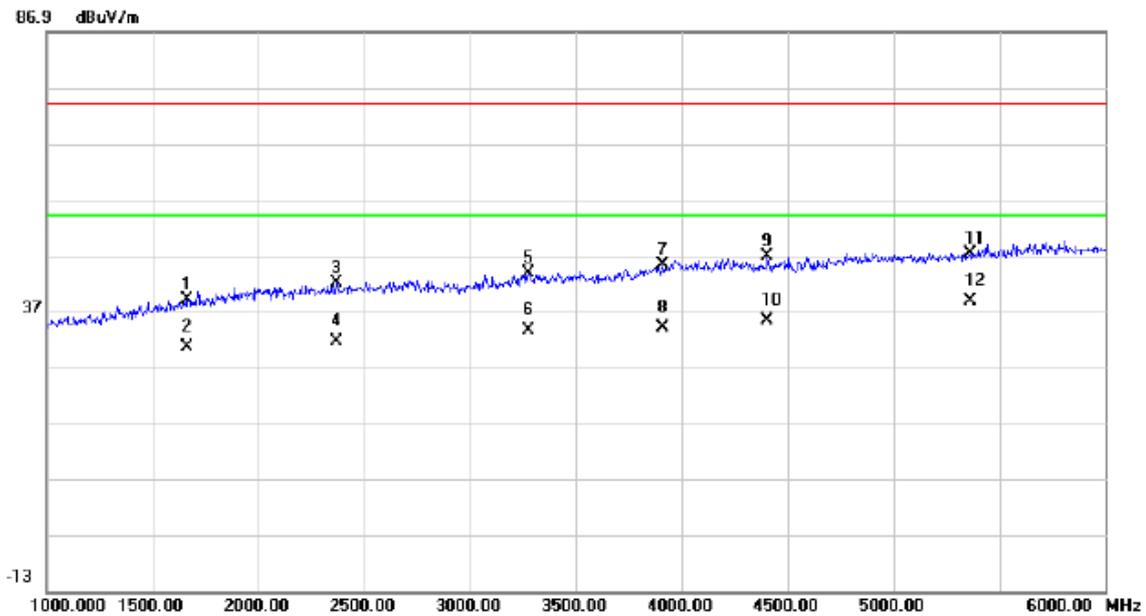

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1665.000	42.70	-3.60	39.10	74.00	-34.90	peak	
2	1665.000	34.15	-3.60	30.55	54.00	-23.45	AVG	
3	2370.000	42.87	-0.81	42.06	74.00	-31.94	peak	
4	2370.000	32.36	-0.81	31.55	54.00	-22.45	AVG	
5	3275.000	42.79	0.91	43.70	74.00	-30.30	peak	
6	3275.000	32.67	0.91	33.58	54.00	-20.42	AVG	
7	3910.000	41.57	3.80	45.37	74.00	-28.63	peak	
8	3910.000	30.16	3.80	33.96	54.00	-20.04	AVG	
9	4405.000	41.89	4.86	46.75	74.00	-27.25	peak	
10	4405.000	30.52	4.86	35.38	54.00	-18.62	AVG	
11	5360.000	40.05	7.29	47.34	74.00	-26.66	peak	
12 *	5360.000	31.44	7.29	38.73	54.00	-15.27	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG


Horizontal

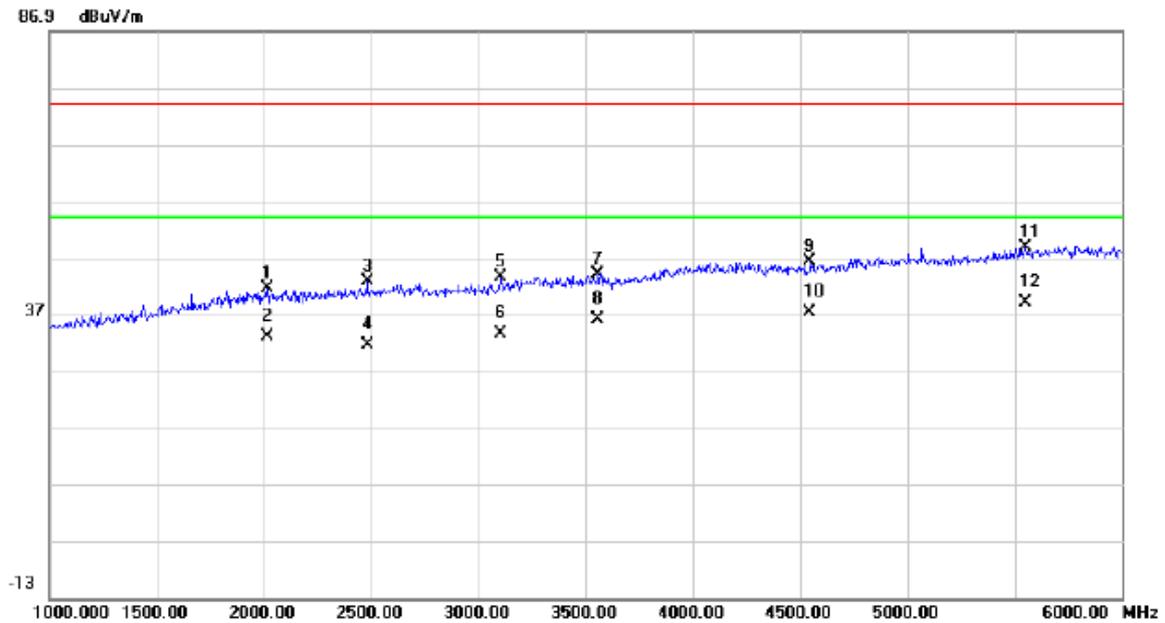

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2015.000	42.67	-1.21	41.46	74.00	-32.54	peak	
2		2015.000	34.20	-1.21	32.99	54.00	-21.01	AVG	
3		2480.000	43.41	-0.68	42.73	74.00	-31.27	peak	
4		2480.000	32.15	-0.68	31.47	54.00	-22.53	AVG	
5		3105.000	43.03	0.38	43.41	74.00	-30.59	peak	
6		3105.000	33.16	0.38	33.54	54.00	-20.46	AVG	
7		3555.000	42.25	1.90	44.15	74.00	-29.85	peak	
8		3555.000	34.12	1.90	36.02	54.00	-17.98	AVG	
9		4545.000	41.05	5.13	46.18	74.00	-27.82	peak	
10		4545.000	32.15	5.13	37.28	54.00	-16.72	AVG	
11		5550.000	41.07	7.76	48.83	74.00	-25.17	peak	
12	*	5550.000	31.25	7.76	39.01	54.00	-14.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Vertical

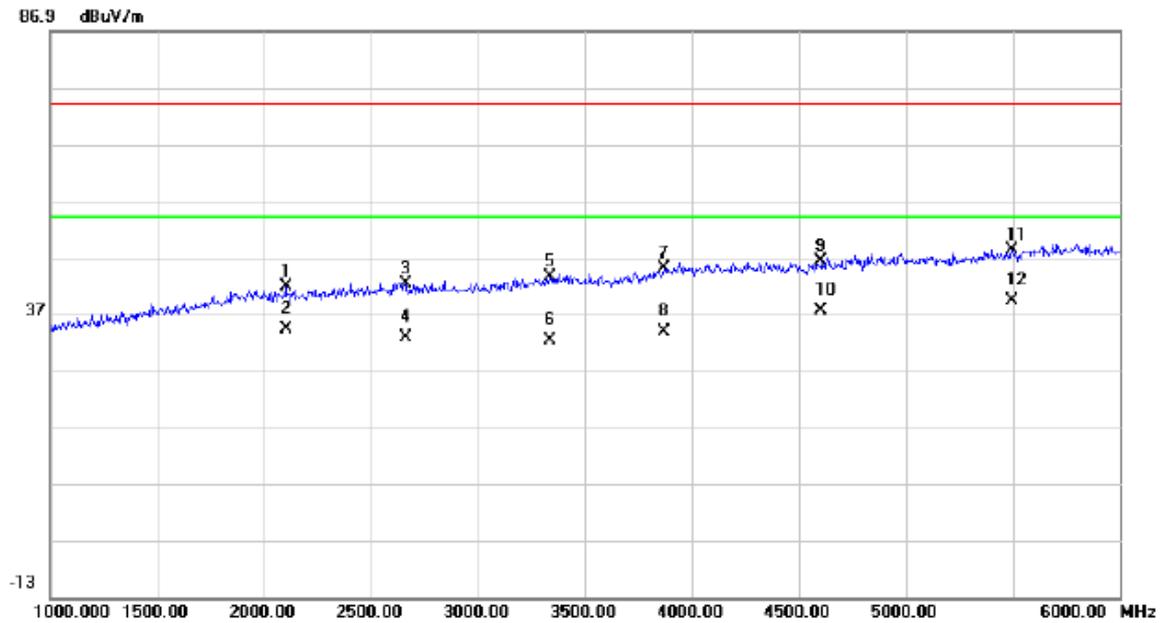

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2100.000	42.78	-1.11	41.67	74.00	-32.33	peak	
2		2100.000	35.45	-1.11	34.34	54.00	-19.66	AVG	
3		2660.000	42.73	-0.42	42.31	74.00	-31.69	peak	
4		2660.000	33.20	-0.42	32.78	54.00	-21.22	AVG	
5		3335.000	42.34	1.10	43.44	74.00	-30.56	peak	
6		3335.000	31.26	1.10	32.36	54.00	-21.64	AVG	
7		3870.000	41.39	3.60	44.99	74.00	-29.01	peak	
8		3870.000	30.15	3.60	33.75	54.00	-20.25	AVG	
9		4605.000	41.04	5.29	46.33	74.00	-27.67	peak	
10		4605.000	32.16	5.29	37.45	54.00	-16.55	AVG	
11		5495.000	40.51	7.65	48.16	74.00	-25.84	peak	
12	*	5495.000	31.70	7.65	39.35	54.00	-14.65	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK


Horizontal

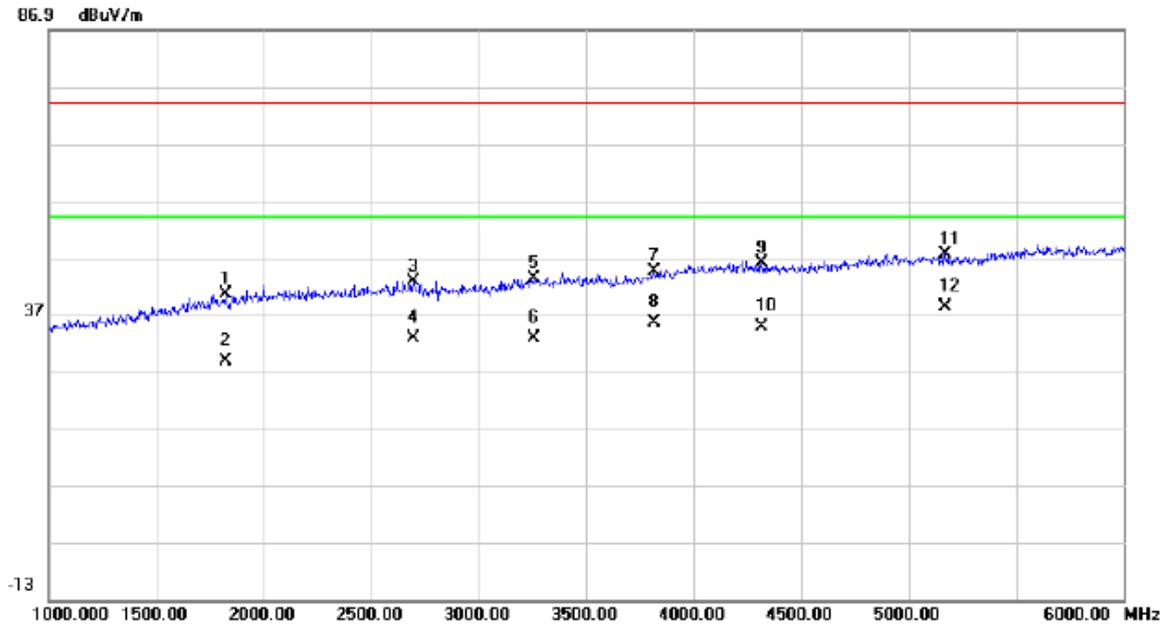

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1825.000	43.03	-2.47	40.56	74.00	-33.44	peak	
2		1825.000	31.26	-2.47	28.79	54.00	-25.21	AVG	
3		2695.000	43.26	-0.38	42.88	74.00	-31.12	peak	
4		2695.000	33.21	-0.38	32.83	54.00	-21.17	AVG	
5		3255.000	42.44	0.85	43.29	74.00	-30.71	peak	
6		3255.000	32.03	0.85	32.88	54.00	-21.12	AVG	
7		3815.000	41.27	3.29	44.56	74.00	-29.44	peak	
8		3815.000	32.16	3.29	35.45	54.00	-18.55	AVG	
9		4315.000	41.24	4.74	45.98	74.00	-28.02	peak	
10		4315.000	30.16	4.74	34.90	54.00	-19.10	AVG	
11		5170.000	40.73	6.79	47.52	74.00	-26.48	peak	
12	*	5170.000	31.52	6.79	38.31	54.00	-15.69	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Vertical

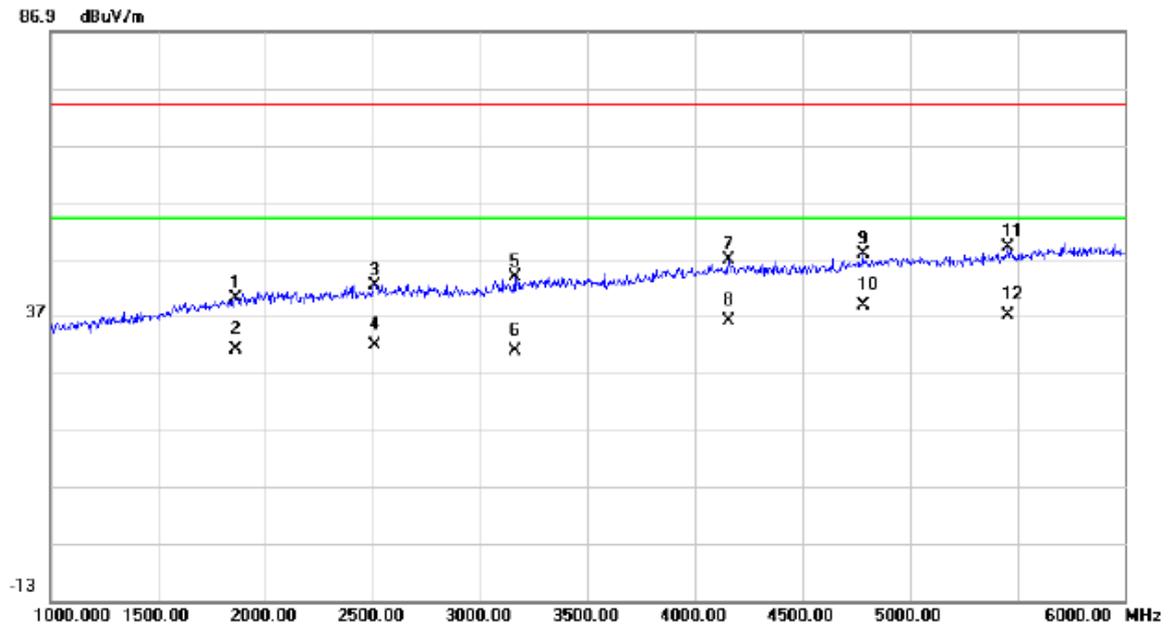

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1860.000	42.26	-2.22	40.04	74.00	-33.96	peak	
2		1860.000	33.16	-2.22	30.94	54.00	-23.06	AVG	
3		2510.000	42.92	-0.64	42.28	74.00	-31.72	peak	
4		2510.000	32.45	-0.64	31.81	54.00	-22.19	AVG	
5		3160.000	43.25	0.55	43.80	74.00	-30.20	peak	
6		3160.000	30.16	0.55	30.71	54.00	-23.29	AVG	
7		4155.000	42.27	4.50	46.77	74.00	-27.23	peak	
8		4155.000	31.52	4.50	36.02	54.00	-17.98	AVG	
9		4780.000	41.96	5.76	47.72	74.00	-26.28	peak	
10	*	4780.000	33.14	5.76	38.90	54.00	-15.10	AVG	
11		5455.000	41.38	7.54	48.92	74.00	-25.08	peak	
12		5455.000	29.54	7.54	37.08	54.00	-16.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU


Horizontal

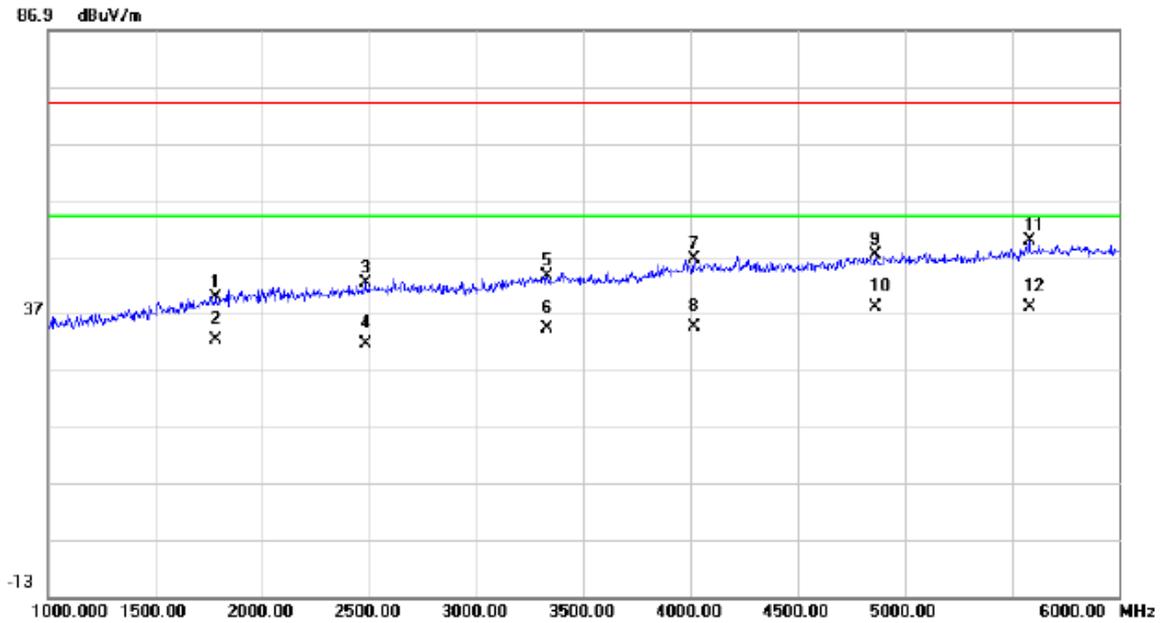

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1780.000	42.66	-2.79	39.87	74.00	-34.13	peak	
2		1780.000	35.12	-2.79	32.33	54.00	-21.67	AVG	
3		2485.000	42.98	-0.67	42.31	74.00	-31.69	peak	
4		2485.000	32.13	-0.67	31.46	54.00	-22.54	AVG	
5		3330.000	42.51	1.08	43.59	74.00	-30.41	peak	
6		3330.000	33.12	1.08	34.20	54.00	-19.80	AVG	
7		4015.000	42.15	4.30	46.45	74.00	-27.55	peak	
8		4015.000	30.15	4.30	34.45	54.00	-19.55	AVG	
9		4860.000	41.21	5.96	47.17	74.00	-26.83	peak	
10	*	4860.000	32.12	5.96	38.08	54.00	-15.92	AVG	
11		5580.000	41.91	7.82	49.73	74.00	-24.27	peak	
12		5580.000	30.12	7.82	37.94	54.00	-16.06	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)


Vertical

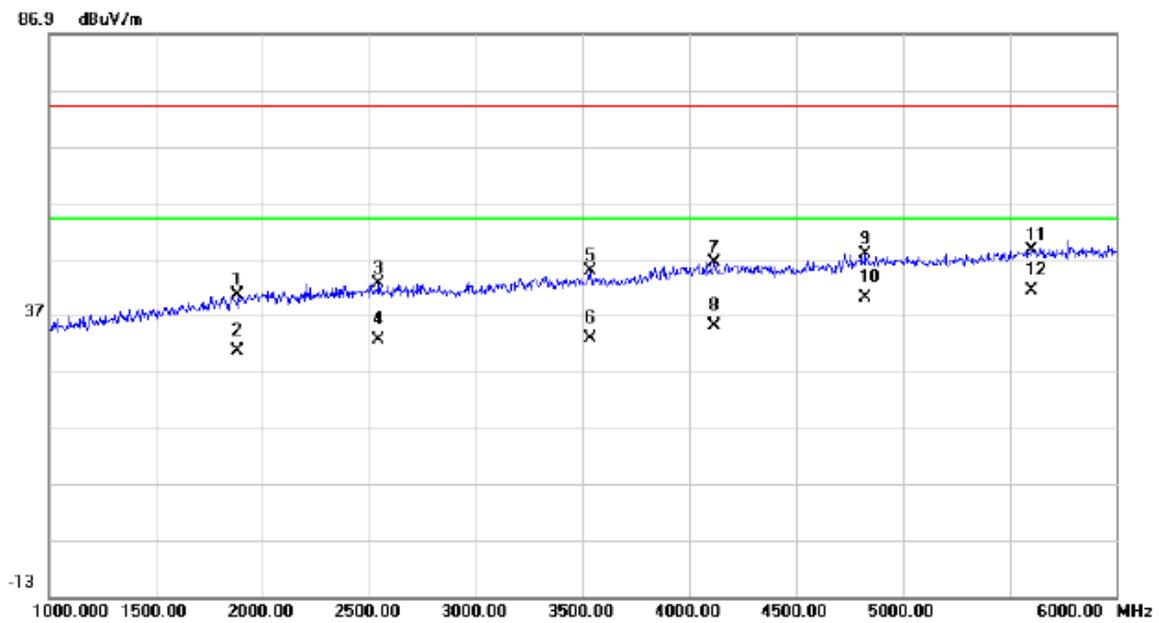

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1885.000	42.50	-2.04	40.46	74.00	-33.54	peak	
2		1885.000	32.50	-2.04	30.46	54.00	-23.54	AVG	
3		2545.000	43.13	-0.60	42.53	74.00	-31.47	peak	
4		2545.000	33.20	-0.60	32.60	54.00	-21.40	AVG	
5		3535.000	42.98	1.80	44.78	74.00	-29.22	peak	
6		3535.000	31.06	1.80	32.86	54.00	-21.14	AVG	
7		4115.000	41.86	4.45	46.31	74.00	-27.69	peak	
8		4115.000	30.53	4.45	34.98	54.00	-19.02	AVG	
9		4825.000	41.97	5.87	47.84	74.00	-26.16	peak	
10		4825.000	34.05	5.87	39.92	54.00	-14.08	AVG	
11		5605.000	40.76	7.86	48.62	74.00	-25.38	peak	
12	*	5605.000	33.35	7.86	41.21	54.00	-12.79	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: BYD (EU Plug)


Horizontal

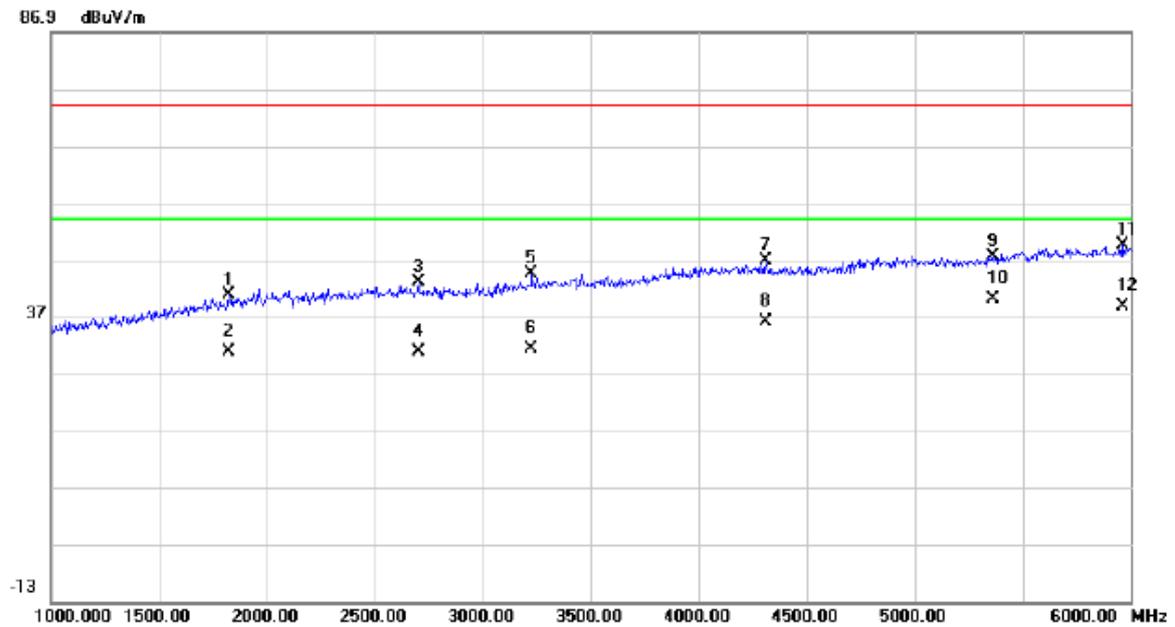

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1820.000	43.33	-2.51	40.82	74.00	-33.18	peak	
2		1820.000	33.25	-2.51	30.74	54.00	-23.26	AVG	
3		2700.000	43.45	-0.37	43.08	74.00	-30.92	peak	
4		2700.000	31.24	-0.37	30.87	54.00	-23.13	AVG	
5		3225.000	43.77	0.75	44.52	74.00	-29.48	peak	
6		3225.000	30.62	0.75	31.37	54.00	-22.63	AVG	
7		4310.000	41.97	4.74	46.71	74.00	-27.29	peak	
8		4310.000	31.24	4.74	35.98	54.00	-18.02	AVG	
9		5360.000	40.26	7.29	47.55	74.00	-26.45	peak	
10	*	5360.000	32.67	7.29	39.96	54.00	-14.04	AVG	
11		5960.000	40.95	8.54	49.49	74.00	-24.51	peak	
12		5960.000	30.17	8.54	38.71	54.00	-15.29	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG(EU Plug)


Vertical

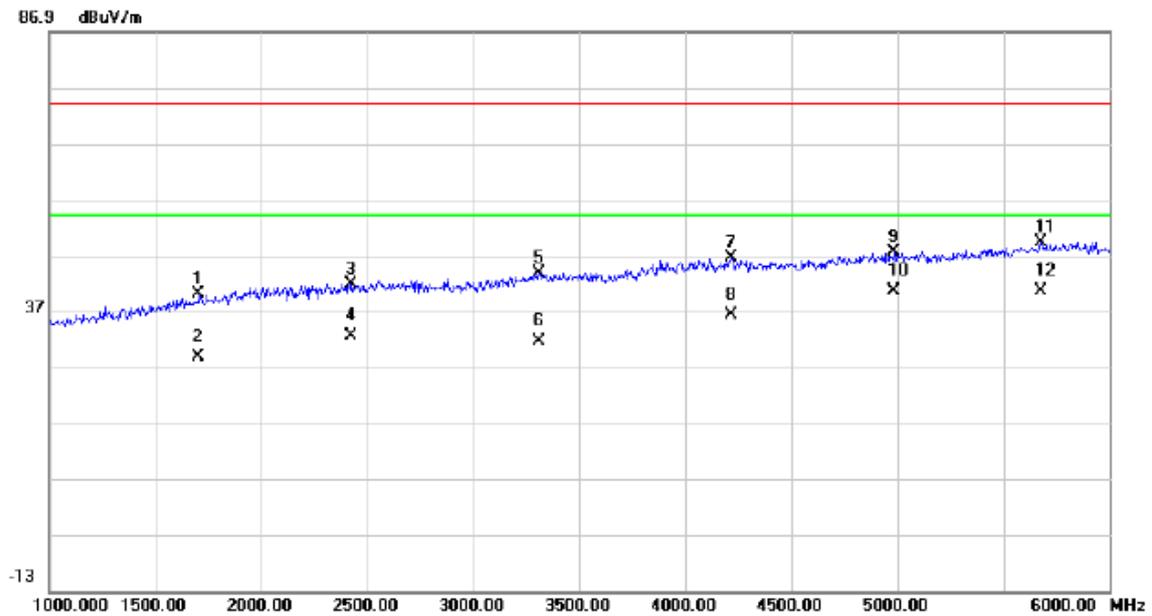

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1705.000	43.23	-3.32	39.91	74.00	-34.09	peak	
2		1705.000	32.16	-3.32	28.84	54.00	-25.16	AVG	
3		2425.000	42.56	-0.74	41.82	74.00	-32.18	peak	
4		2425.000	33.15	-0.74	32.41	54.00	-21.59	AVG	
5		3310.000	42.86	1.01	43.87	74.00	-30.13	peak	
6		3310.000	30.54	1.01	31.55	54.00	-22.45	AVG	
7		4215.000	41.87	4.59	46.46	74.00	-27.54	peak	
8		4215.000	31.62	4.59	36.21	54.00	-17.79	AVG	
9		4985.000	41.15	6.29	47.44	74.00	-26.56	peak	
10		4985.000	34.16	6.29	40.45	54.00	-13.55	AVG	
11		5675.000	41.28	8.00	49.28	74.00	-24.72	peak	
12	*	5675.000	32.50	8.00	40.50	54.00	-13.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: DAHONG(EU Plug)


Horizontal

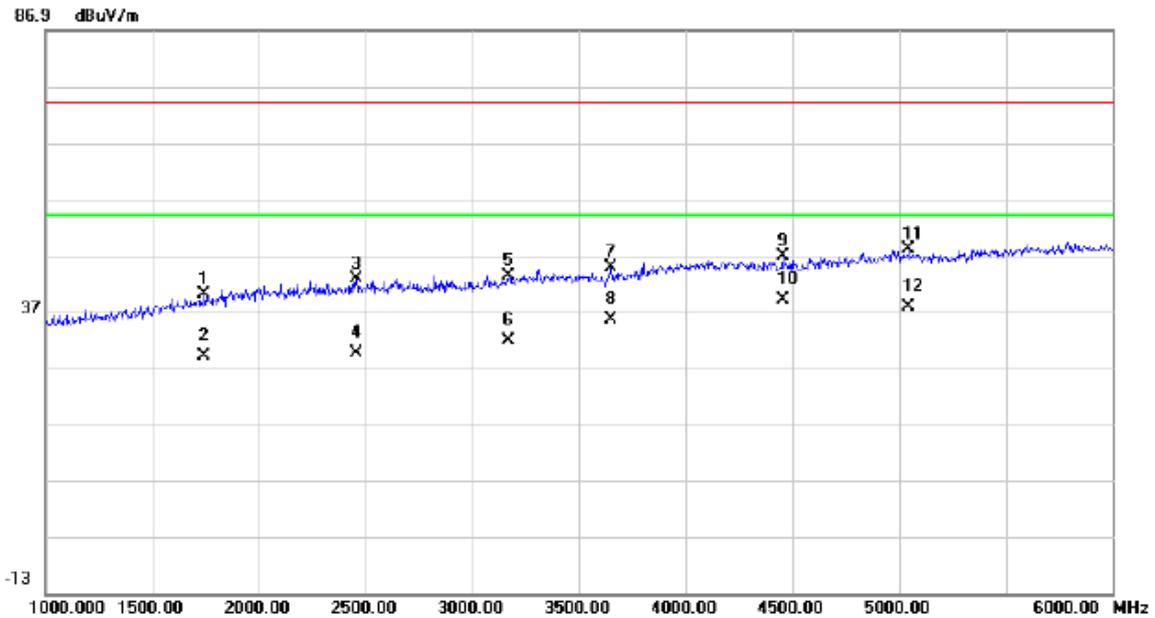

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1745.000	43.06	-3.04	40.02	74.00	-33.98	peak	
2	1745.000	32.13	-3.04	29.09	54.00	-24.91	AVG	
3	2455.000	43.59	-0.71	42.88	74.00	-31.12	peak	
4	2455.000	30.16	-0.71	29.45	54.00	-24.55	AVG	
5	3170.000	42.79	0.59	43.38	74.00	-30.62	peak	
6	3170.000	31.25	0.59	31.84	54.00	-22.16	AVG	
7	3650.000	42.26	2.41	44.67	74.00	-29.33	peak	
8	3650.000	33.15	2.41	35.56	54.00	-18.44	AVG	
9	4455.000	41.85	4.94	46.79	74.00	-27.21	peak	
10 *	4455.000	34.01	4.94	38.95	54.00	-15.05	AVG	
11	5045.000	41.52	6.46	47.98	74.00	-26.02	peak	
12	5045.000	31.20	6.46	37.66	54.00	-16.34	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK(EU Plug)


Vertical

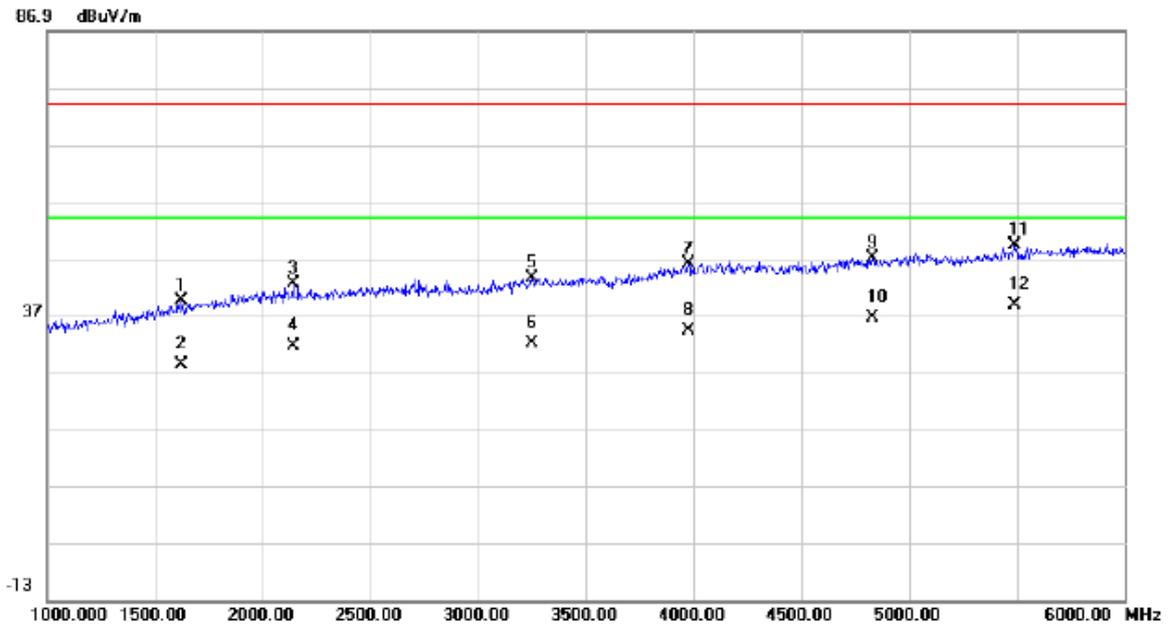

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1625.000	43.45	-3.89	39.56	74.00	-34.44	peak	
2		1625.000	32.16	-3.89	28.27	54.00	-25.73	AVG	
3		2140.000	43.58	-1.07	42.51	74.00	-31.49	peak	
4		2140.000	32.54	-1.07	31.47	54.00	-22.53	AVG	
5		3250.000	42.58	0.83	43.41	74.00	-30.59	peak	
6		3250.000	31.26	0.83	32.09	54.00	-21.91	AVG	
7		3975.000	41.95	4.15	46.10	74.00	-27.90	peak	
8		3975.000	30.15	4.15	34.30	54.00	-19.70	AVG	
9		4830.000	41.21	5.88	47.09	74.00	-26.91	peak	
10		4830.000	30.64	5.88	36.52	54.00	-17.48	AVG	
11		5490.000	41.63	7.64	49.27	74.00	-24.73	peak	
12	*	5490.000	31.12	7.64	38.76	54.00	-15.24	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: HK(EU Plug)


Horizontal

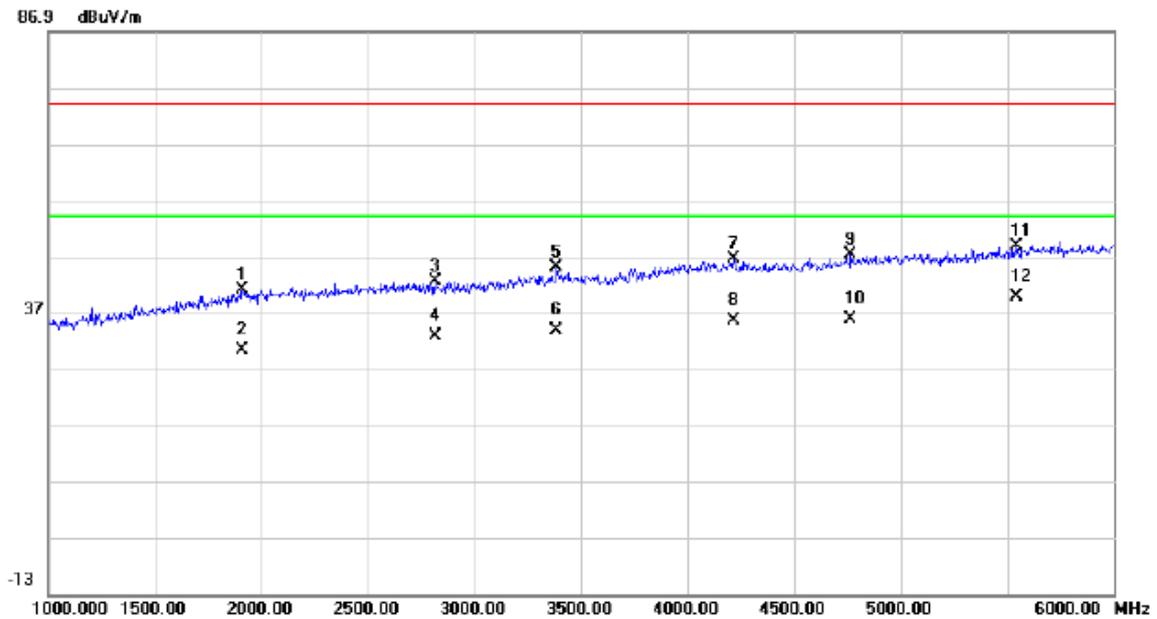

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1910.000	43.01	-1.87	41.14	74.00	-32.86	peak	
2		1910.000	32.06	-1.87	30.19	54.00	-23.81	AVG	
3		2815.000	42.71	-0.22	42.49	74.00	-31.51	peak	
4		2815.000	33.01	-0.22	32.79	54.00	-21.21	AVG	
5		3385.000	43.71	1.25	44.96	74.00	-29.04	peak	
6		3385.000	32.54	1.25	33.79	54.00	-20.21	AVG	
7		4215.000	41.96	4.59	46.55	74.00	-27.45	peak	
8		4215.000	31.04	4.59	35.63	54.00	-18.37	AVG	
9		4765.000	41.44	5.72	47.16	74.00	-26.84	peak	
10		4765.000	30.15	5.72	35.87	54.00	-18.13	AVG	
11		5545.000	41.06	7.75	48.81	74.00	-25.19	peak	
12	*	5545.000	32.08	7.75	39.83	54.00	-14.17	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU(EU Plug)


Vertical

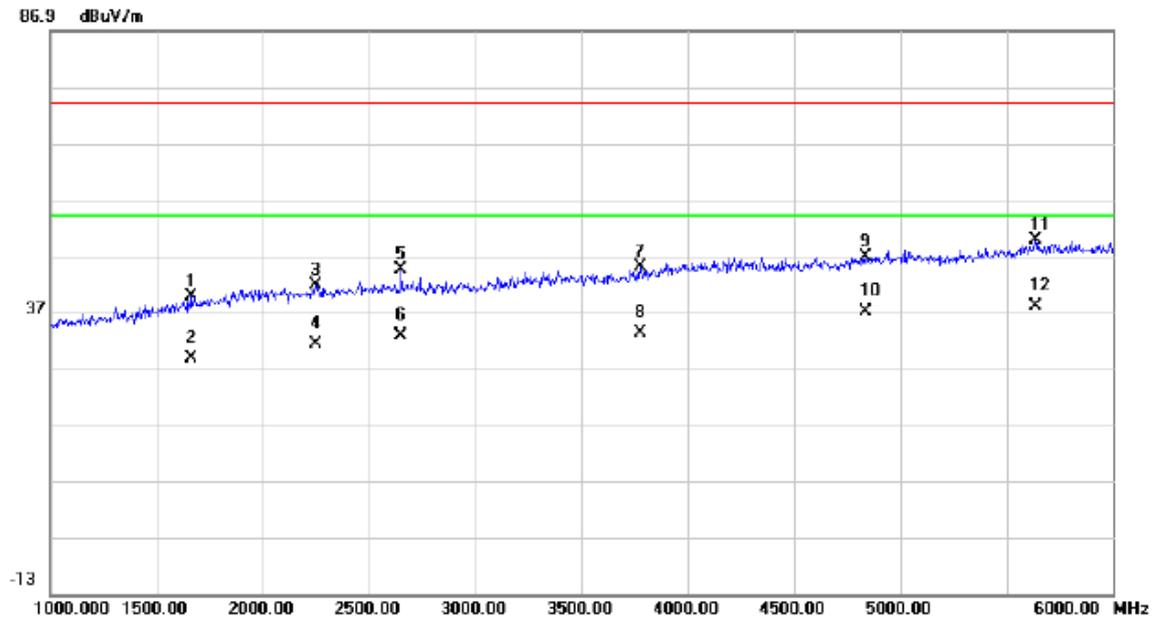

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1665.000	43.45	-3.60	39.85	74.00	-34.15	peak	
2		1665.000	32.30	-3.60	28.70	54.00	-25.30	AVG	
3		2250.000	42.81	-0.94	41.87	74.00	-32.13	peak	
4		2250.000	32.16	-0.94	31.22	54.00	-22.78	AVG	
5		2650.000	45.01	-0.44	44.57	74.00	-29.43	peak	
6		2650.000	33.12	-0.44	32.68	54.00	-21.32	AVG	
7		3775.000	41.99	3.09	45.08	74.00	-28.92	peak	
8		3775.000	30.16	3.09	33.25	54.00	-20.75	AVG	
9		4835.000	40.90	5.89	46.79	74.00	-27.21	peak	
10		4835.000	31.25	5.89	37.14	54.00	-16.86	AVG	
11		5635.000	41.84	7.93	49.77	74.00	-24.23	peak	
12	*	5635.000	30.12	7.93	38.05	54.00	-15.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+camera on+idle
Note:	Adapter: YINGJU(EU Plug)


Horizontal

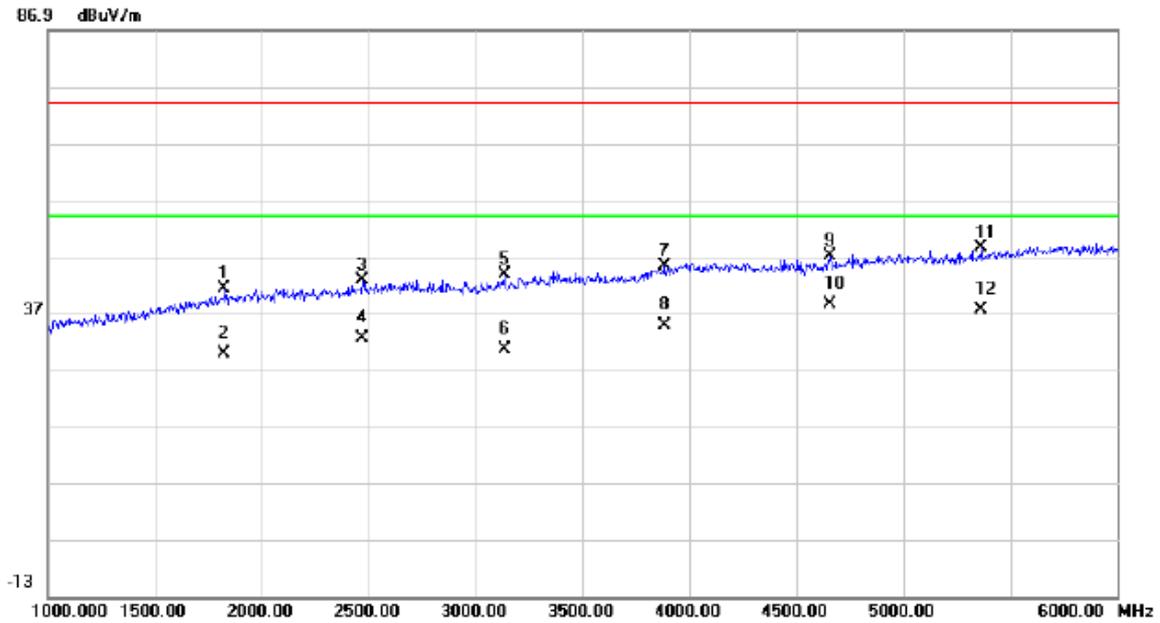

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1825.000	43.70	-2.47	41.23	74.00	-32.77	peak	
2		1825.000	32.13	-2.47	29.66	54.00	-24.34	AVG	
3		2470.000	43.40	-0.69	42.71	74.00	-31.29	peak	
4		2470.000	33.12	-0.69	32.43	54.00	-21.57	AVG	
5		3135.000	43.36	0.46	43.82	74.00	-30.18	peak	
6		3135.000	30.13	0.46	30.59	54.00	-23.41	AVG	
7		3885.000	41.53	3.67	45.20	74.00	-28.80	peak	
8		3885.000	31.12	3.67	34.79	54.00	-19.21	AVG	
9		4655.000	41.54	5.41	46.95	74.00	-27.05	peak	
10	*	4655.000	33.15	5.41	38.56	54.00	-15.44	AVG	
11		5365.000	41.31	7.31	48.62	74.00	-25.38	peak	
12		5365.000	30.16	7.31	37.47	54.00	-16.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD


Vertical

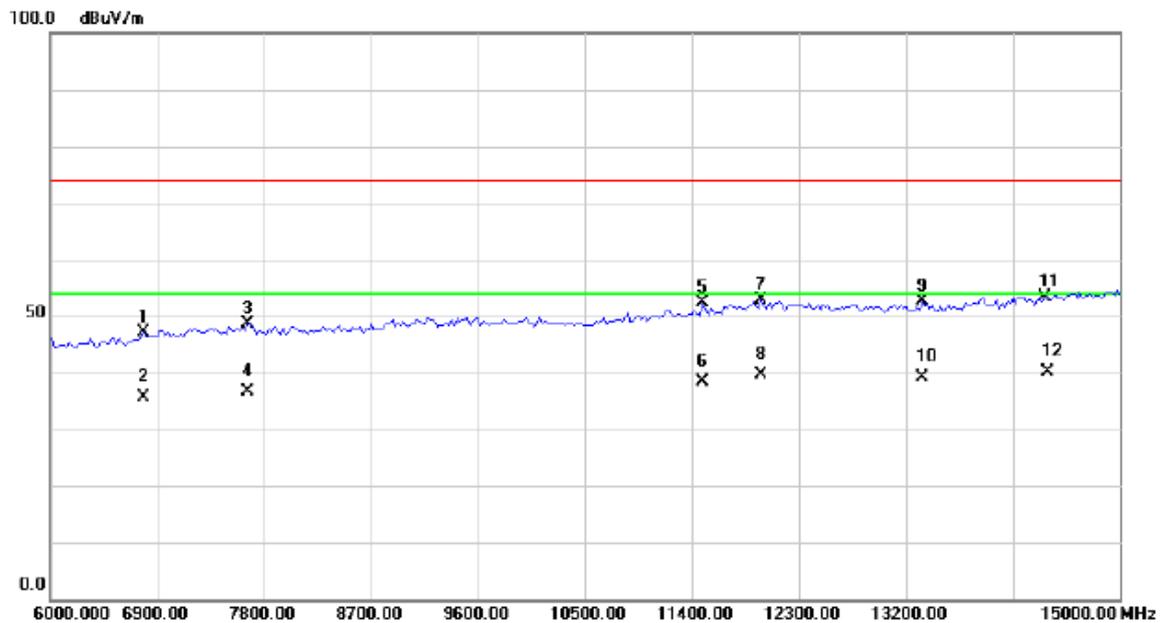

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6787.500	33.94	13.13	47.07	74.00	-26.93	peak	
2		6787.500	22.49	13.13	35.62	54.00	-18.38	AVG	
3		7665.000	34.06	14.69	48.75	74.00	-25.25	peak	
4		7665.000	21.89	14.69	36.58	54.00	-17.42	AVG	
5		11490.00	32.32	20.13	52.45	74.00	-21.55	peak	
6		11490.00	18.33	20.13	38.46	54.00	-15.54	AVG	
7		11985.00	31.91	20.87	52.78	74.00	-21.22	peak	
8		11985.00	18.85	20.87	39.72	54.00	-14.28	AVG	
9		13335.00	31.18	21.36	52.54	74.00	-21.46	peak	
10		13335.00	17.85	21.36	39.21	54.00	-14.79	AVG	
11		14370.00	30.54	22.83	53.37	74.00	-20.63	peak	
12	*	14370.00	17.42	22.83	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+earphone+Traffic
Note:	Adapter: BYD

Horizontal

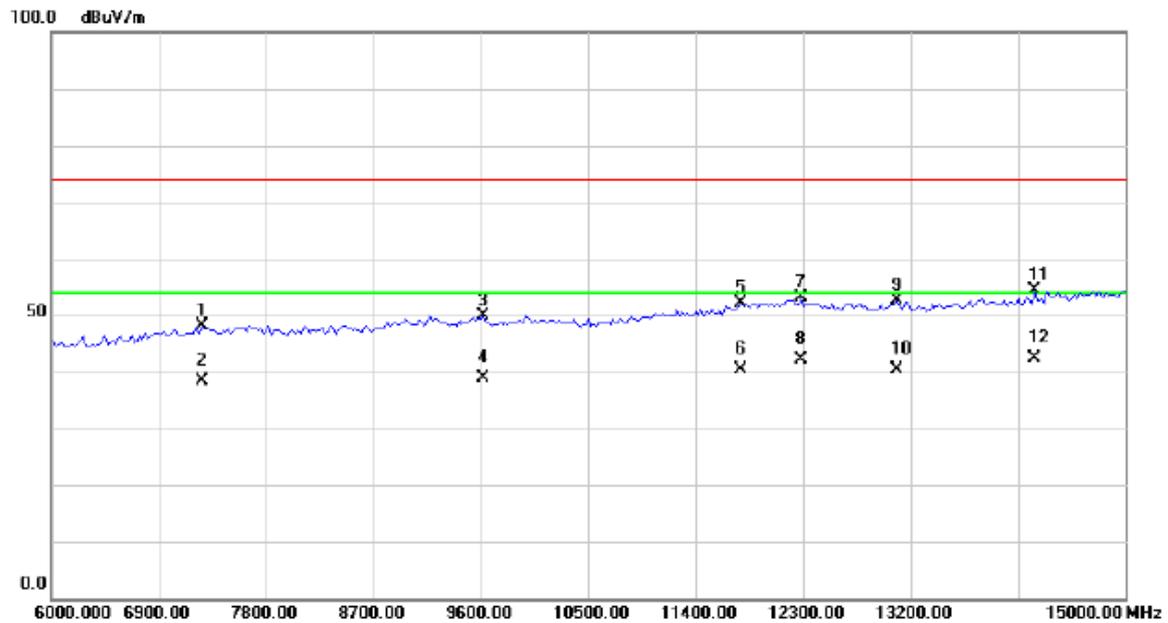

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7260.000	33.78	14.27	48.05	74.00	-25.95	peak	
2	7260.000	23.99	14.27	38.26	54.00	-15.74	AVG	
3	9622.500	32.79	17.16	49.95	74.00	-24.05	peak	
4	9622.500	21.62	17.16	38.78	54.00	-15.22	AVG	
5	11782.50	31.65	20.57	52.22	74.00	-21.78	peak	
6	11782.50	19.69	20.57	40.26	54.00	-13.74	AVG	
7	12277.50	32.14	20.87	53.01	74.00	-20.99	peak	
8	12277.50	21.29	20.87	42.16	54.00	-11.84	AVG	
9	13087.50	31.37	21.16	52.53	74.00	-21.47	peak	
10	13087.50	19.20	21.16	40.36	54.00	-13.64	AVG	
11	14235.00	31.94	22.53	54.47	74.00	-19.53	peak	
12 *	14235.00	19.77	22.53	42.30	54.00	-11.70	AVG	