

FCC Test Report

Project No. : 1503C053
Equipment : Smart Phone
Model Name : HUAWEI Y635-L02; Y635-L02
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Mar. 06, 2015
Date of Test : Mar. 06, 2015~ Mar. 16, 2015
Issued Date : Mar. 17, 2015
Tested by : BTL Inc.

Testing Engineer : Kener Wu
(Kener Wu)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St., NeiHu District, Taipei City
114, Taiwan.

TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 .EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 TESTPROCEDURE	13
4.1.3 DEVIATIONFROMTESTSTANDARD	13
4.1.4 TESTSETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	15
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATIONFROMTESTSTANDARD	16
4.2.4 TESTSETUP	17
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS(30 TO 1000 MHZ)	18
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . MEASUREMENT INSTRUMENTS LIST	19
6.EUT TEST PHOTO	20
ATTACHMENT A - CONDUCTED EMISSION	23
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	34
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	55

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1503C053	Original Issue.	Mar. 17, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI Y635-L02; Y635-L02
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Mar. 06, 2015~ Mar. 16, 2015
Standard(s) : FCC Part 15, Subpart B :2013
ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1503C053) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2013	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C02/CB08** at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR16-4-2:

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
C02	CISPR	150 KHz~30MHz	2.59	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
CB08	CISPR	30MHz~200MHz	V	3.22	
		30MHz~200MHz	H	3.55	
		200MHz~ 1,000MHz	V	3.24	
		200MHz~ 1,000MHz	H	3.11	
		1,000MHz~18,000MHz	V	4.05	
		1,000MHz~18,000MHz	H	3.97	
		18,000MHz~40,000MHz	V	4.04	
		18,000MHz~40,000MHz	H	4.01	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI Y635-L02; Y635-L02
Model Difference	Only differ in model name.
PowerSource	#1 DC voltage supplied from AC/DC adapter. (1) Manufacturer /Model: HK/HW-050100E2W (2) Manufacturer /Model: BYD/HW-050100E2W #2 Supplied from Li-ion battery. Brand/Model: HUAWEI/HB474284RBC
Power Rating	#1 I/P: 100-240V~50/60Hz 0.2A O/P: 5.0V/1.0A #2 DC 3.8V 2000mAH

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Item	Mfr/Brand	Model.
USB Cable	Unirise Communication Technology Co., Ltd.	LSA00570
	Connrex (Shen Zhen) Industrial, Ltd.	02450989
	Chang Shu Honglin Technology Co.,Ltd.	130-25076
	Shen Zhen Pang Ngai Industrial Co.,Ltd.	H09-000369
Earphone	GoerTek Inc	HA1-3
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD.	1293#+3283# 3.5MM-150
	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	MEMD1532B 528000
Adapter	HK	HW-050100E 2W
	BYD	HW-050100E 2W

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+Earphone+Playing+idle+WiFi+GPS
Mode 2	Adapter + Earphone +Camera onon+BT+idle
Mode 3	Adapter+ Traffic
Mode 4	Playing+idle+WiFi+GPS+Speaker
Mode 5	USB Copy(EUT with PC) +Earphone+idle
Mode 6	Adapter +Playing+idle+WiFi+GPS+Speaker



The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted/ Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Earphone+Playing+idle+WiFi+GPS
Mode 2	Adapter + Earphone +Camera onon+BT+idle
Mode 3	Adapter+ Traffic
Mode 4	Playing+idle+WiFi+GPS+Speaker
Mode 5	USB Copy(EUT with PC) +Earphone+idle
Mode 6	Adapter +Playing+idle+WiFi+GPS+Speaker


Note: The EUT is tested with 4 USB cables,3 earphones and 2 adapters seperately, It has been confirmed by pre-test that the difference between all adapters and earphones is little.So we only select one adapter and one earphone for testing ,This report only records the worst result.

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode: USB Copy(EUT with PC) +Earphone+idle

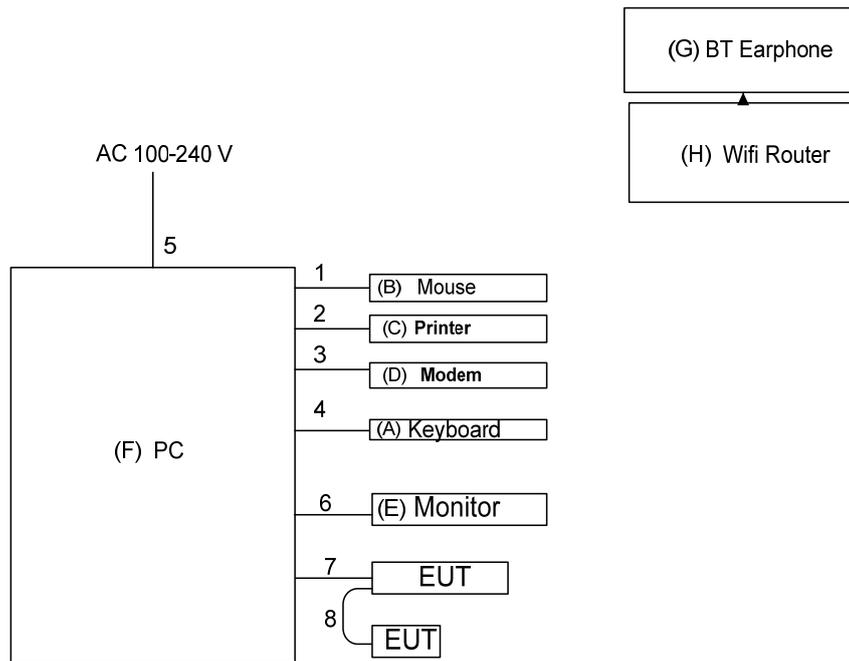

**Mode: Adapter+Earphone+Playing+idle+WiFi+GPS / Adapter + Earphone +Camera
on+BT+idle / Adapter+ Traffic / Adapter +Playing+idle+WiFi+GPS+Speaker (All with Adapter)**

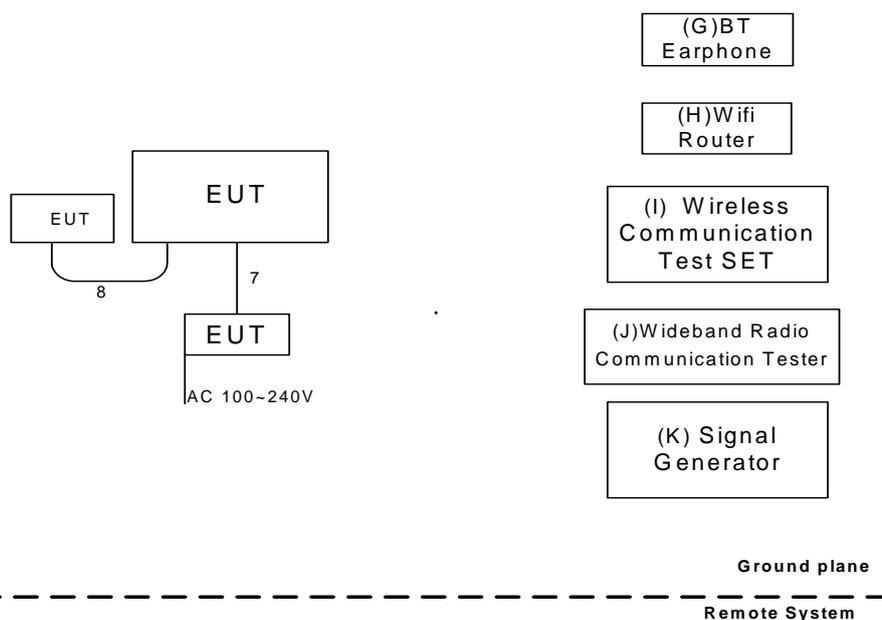

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	DOC	0603002131	
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-641 80-6AG-1WNS	
F	PC	DELL	7010 MT	DOC	7LRQ2W1	
G	BT Earphone	N/A	N/A	N/A	N/A	
H	Router	TP-LINK	TL-WR1041N	DOC	N/A	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125	
K	Signal Generator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.05m	USB Cable
8	NO	NO	1.3m	Audio Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150 KHZ-30 MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TESTSETUP

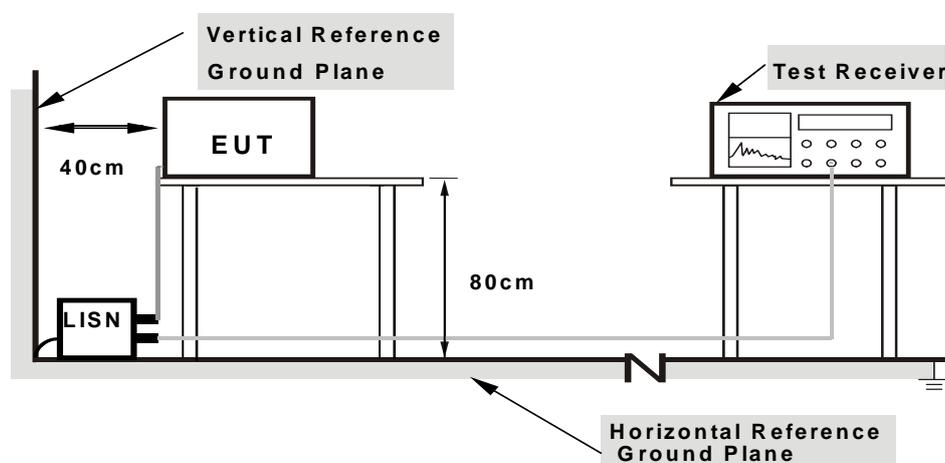

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.
 Temperature: 21°C Relative Humidity: 51%

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency(MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B: 2013; ICES-003 Issue 5: 2012.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TESTSETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

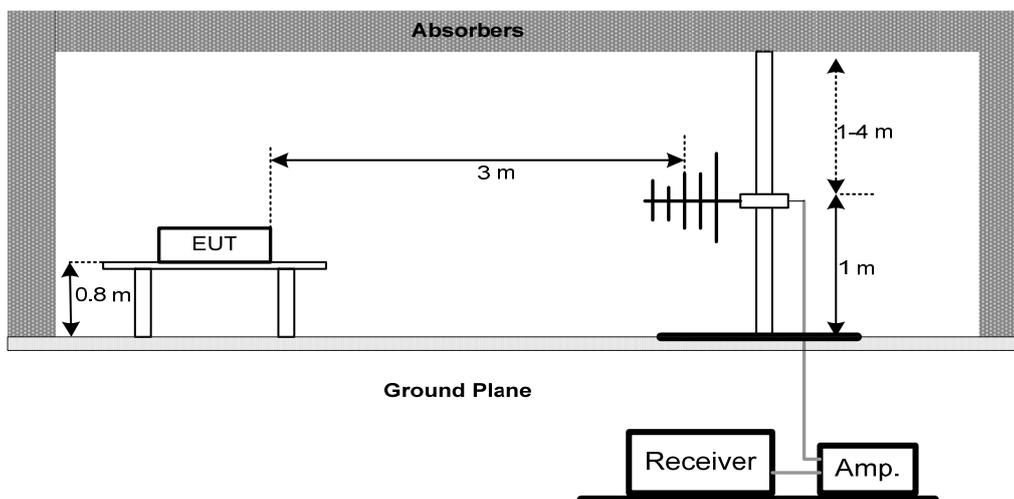

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

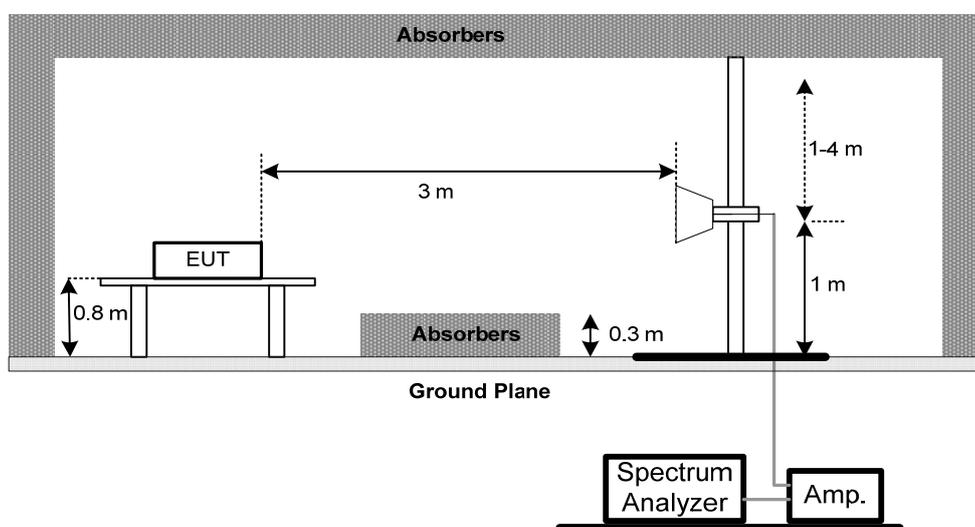

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS(30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 30°CRelative Humidity: 52%

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Modewith Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 30°CRelative Humidity: 52%

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST


Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	V-LISN	Schwarzbeck	NSLK 8127	8127-685	Jun. 02, 2015
3	Test Cable	TIMES	CFD300-NL	C02	Jun. 15, 2015
4	EMI Test Receiver	Agilent	N9038A	MY51210215	Feb. 23, 2016
5	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jun. 17, 2015
2	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 17, 2015
3	Microflex Cable	Harbour industries	27478LL142	1M	May. 12, 2015
4	Test Cable	TIMES	LMR-400	12M	May. 13, 2015
5	Test Cable	TIMES	LMR-400	3M	May. 13, 2015
6	EMI Test Receiver	Agilent	N9038A	MY51210215	Feb. 23, 2016
7	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jun. 14, 2015
8	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 15, 2015
9	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May. 12, 2015
10	Microflex Cable	EMC	S104-SMA	8M	May. 14, 2015
11	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May. 12, 2015
12	EMI Test Receiver	Agilent	N9038A	MY51210215	Feb. 23, 2016
13	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is One Year.

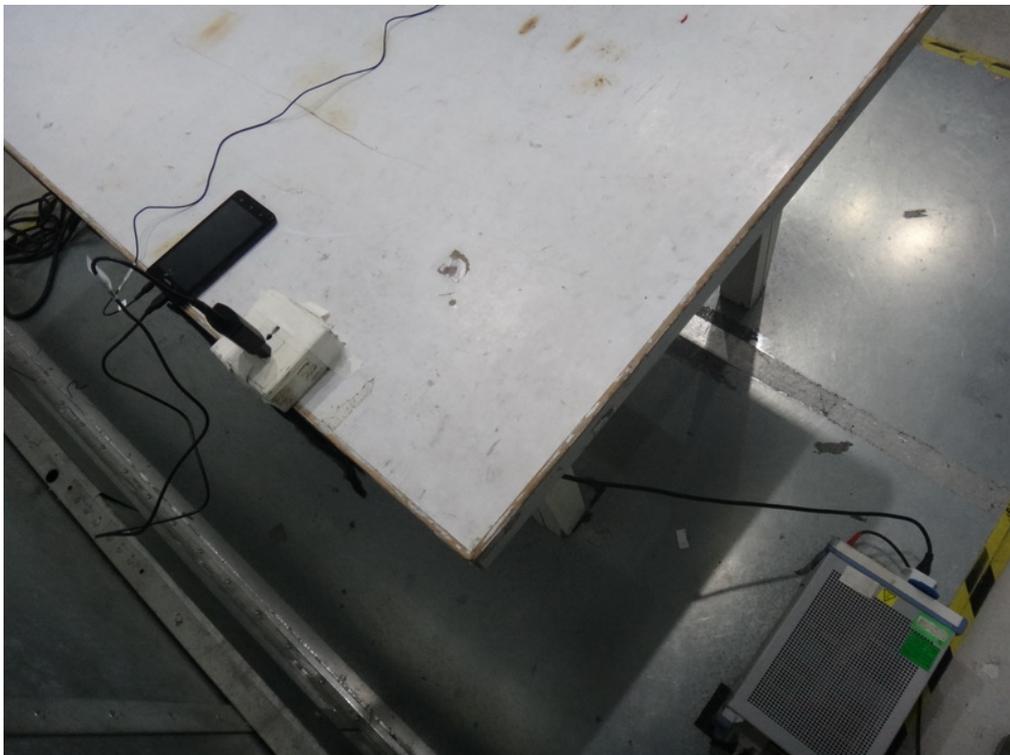6.EUT TEST PHOTO**Conducted Measurement Photos**

**Radiated Measurement Photos
Below 1G**

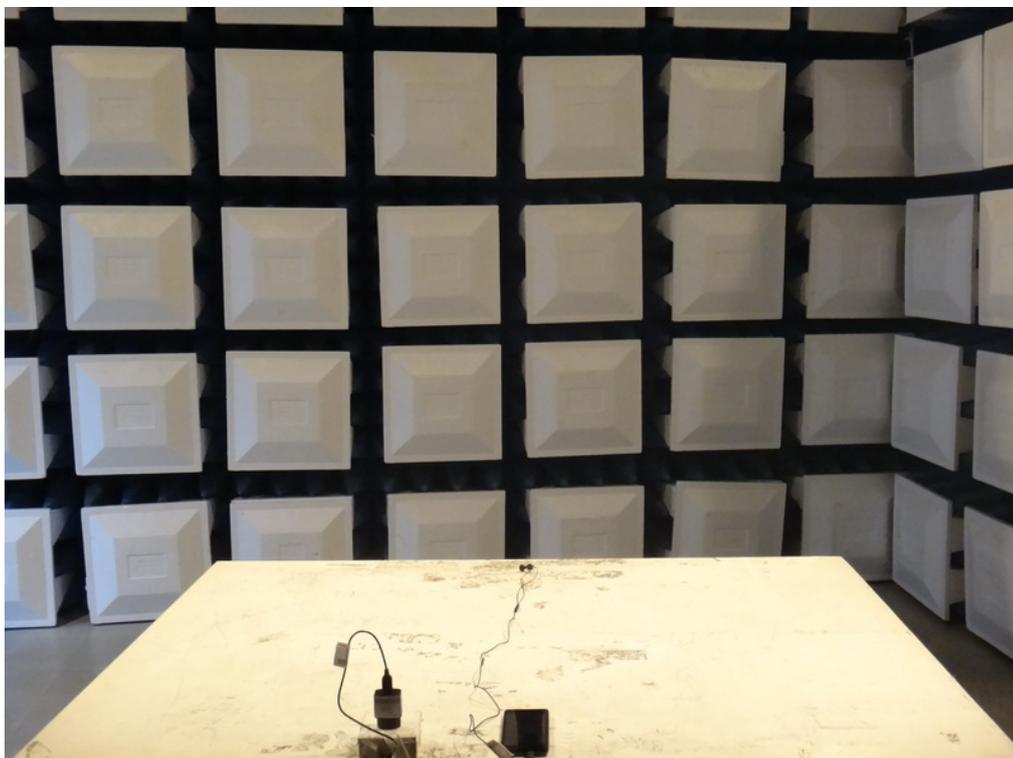


**Radiated Measurement Photos
Above 1G**

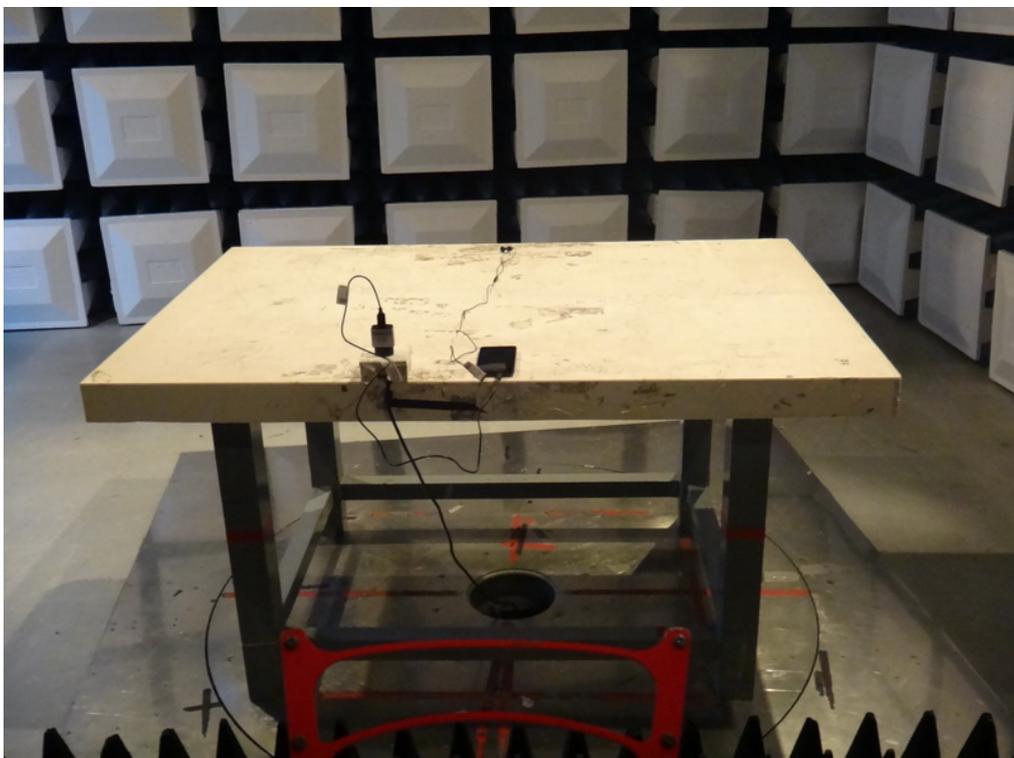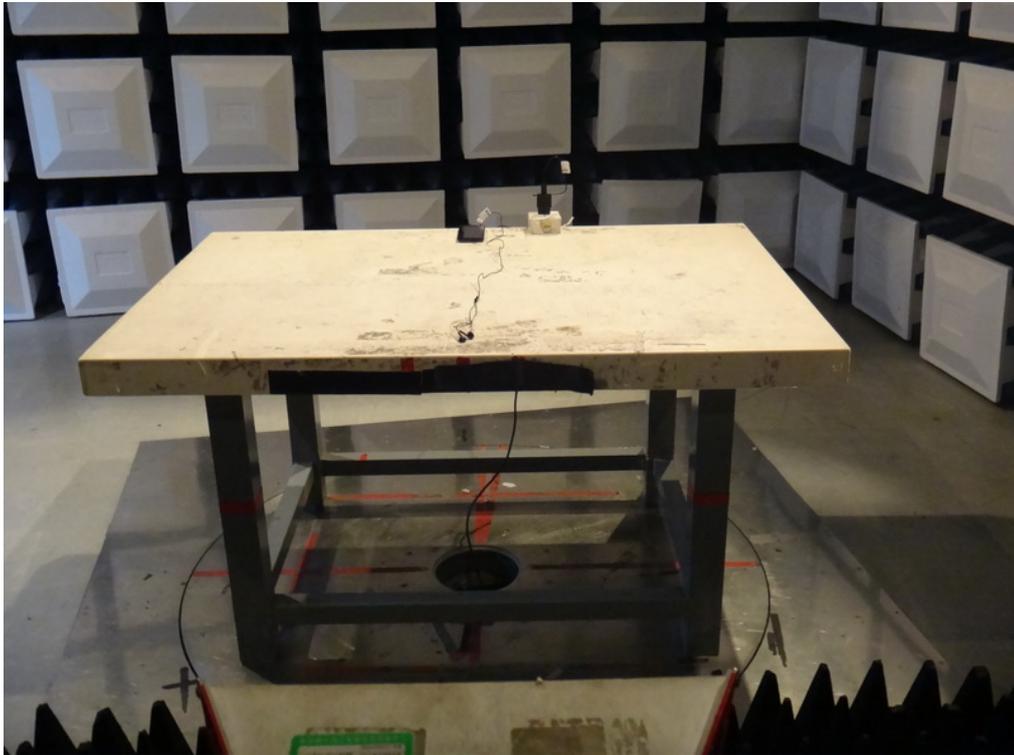

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter: HK; Earphone: HA1-3


Line

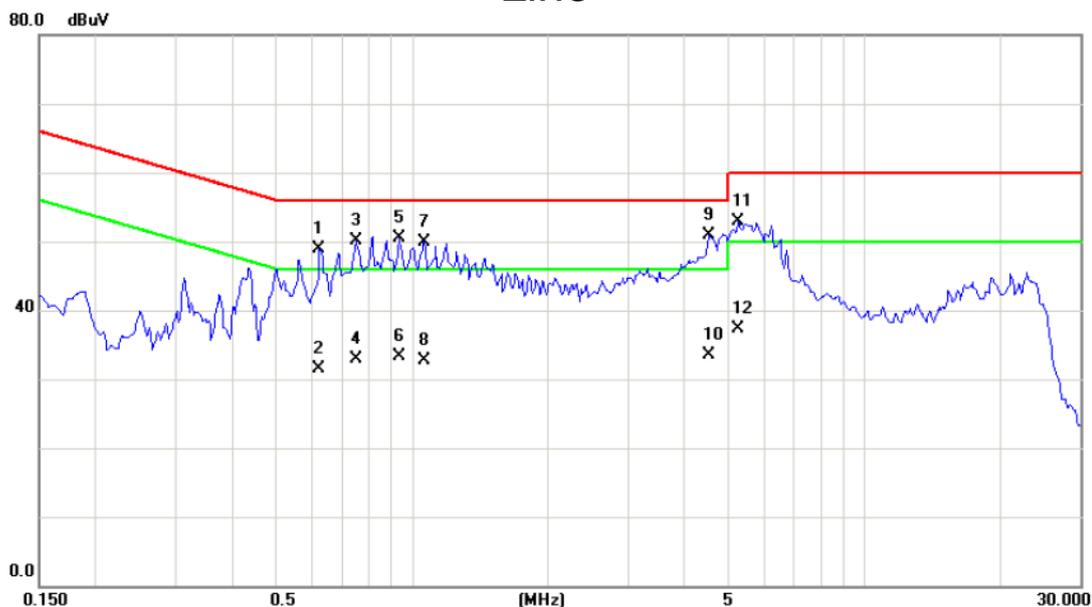

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.6266	39.05	9.80	48.85	56.00	-7.15	QP	
2		0.6266	21.61	9.80	31.41	46.00	-14.59	AVG	
3		0.7516	40.38	9.69	50.07	56.00	-5.93	QP	
4		0.7516	23.14	9.69	32.83	46.00	-13.17	AVG	
5		0.9391	40.86	9.70	50.56	56.00	-5.44	QP	
6		0.9391	23.54	9.70	33.24	46.00	-12.76	AVG	
7		1.0680	40.16	9.70	49.86	56.00	-6.14	QP	
8		1.0680	23.04	9.70	32.74	46.00	-13.26	AVG	
9	*	4.5352	41.09	9.90	50.99	56.00	-5.01	QP	
10		4.5352	23.67	9.90	33.57	46.00	-12.43	AVG	
11		5.2656	43.00	9.94	52.94	60.00	-7.06	QP	
12		5.2656	27.36	9.94	37.30	50.00	-12.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter: HK; Earphone: HA1-3


Neutral

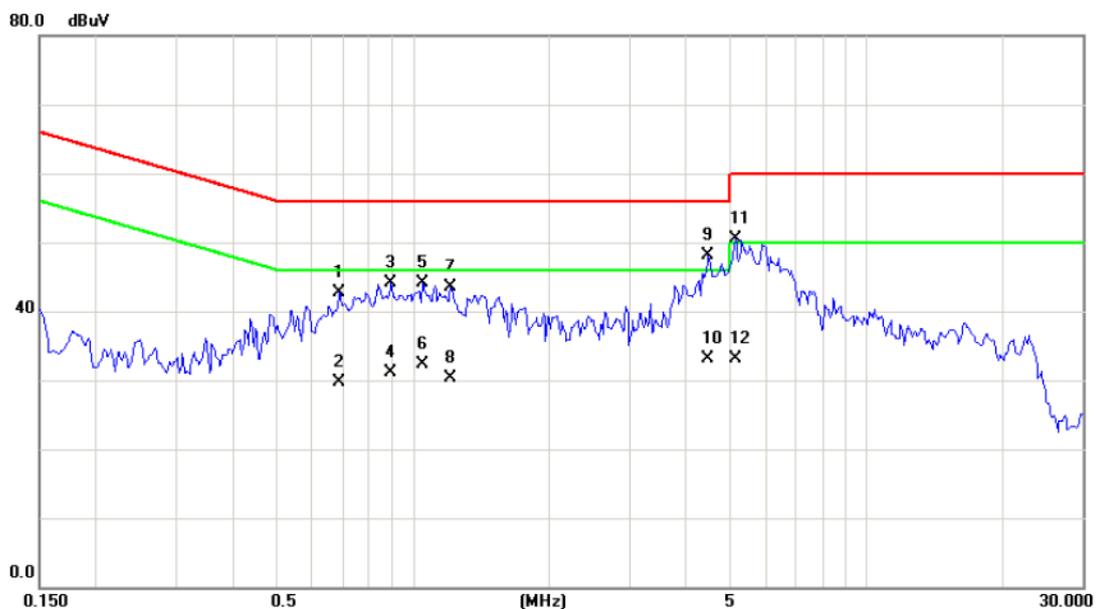

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.6891	33.06	9.71	42.77	56.00	-13.23	QP	
2	0.6891	20.09	9.71	29.80	46.00	-16.20	AVG	
3	0.8961	34.42	9.70	44.12	56.00	-11.88	QP	
4	0.8961	21.42	9.70	31.12	46.00	-14.88	AVG	
5	1.0523	34.33	9.70	44.03	56.00	-11.97	QP	
6	1.0523	22.52	9.70	32.22	46.00	-13.78	AVG	
7	1.2125	33.82	9.71	43.53	56.00	-12.47	QP	
8	1.2125	20.52	9.71	30.23	46.00	-15.77	AVG	
9 *	4.4883	38.26	9.90	48.16	56.00	-7.84	QP	
10	4.4883	23.14	9.90	33.04	46.00	-12.96	AVG	
11	5.1445	40.62	9.93	50.55	60.00	-9.45	QP	
12	5.1445	23.24	9.93	33.17	50.00	-16.83	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Note:	Adapter:BYD ; Earphone:1293#+3283# 3.5MM-150


Line

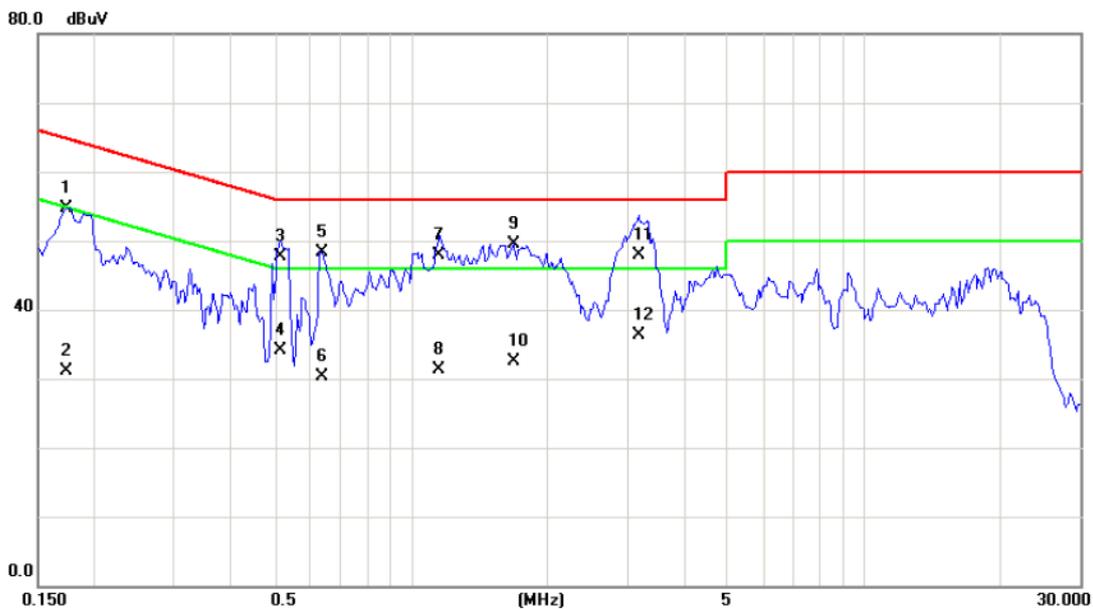

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1734	45.15	9.65	54.80	64.80	-10.00	QP	
2	0.1734	21.38	9.65	31.03	54.80	-23.77	AVG	
3	0.5132	37.82	9.97	47.79	56.00	-8.21	QP	
4	0.5132	24.12	9.97	34.09	46.00	-11.91	AVG	
5	0.6382	38.56	9.79	48.35	56.00	-7.65	QP	
6	0.6382	20.42	9.79	30.21	46.00	-15.79	AVG	
7	1.1578	38.14	9.71	47.85	56.00	-8.15	QP	
8	1.1578	21.54	9.71	31.25	46.00	-14.75	AVG	
9 *	1.6812	39.86	9.74	49.60	56.00	-6.40	QP	
10	1.6812	22.86	9.74	32.60	46.00	-13.40	AVG	
11	3.1836	38.06	9.83	47.89	56.00	-8.11	QP	
12	3.1836	26.46	9.83	36.29	46.00	-9.71	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Note:	Adapter:BYD ; Earphone:1293#+3283# 3.5MM-150


Neutral

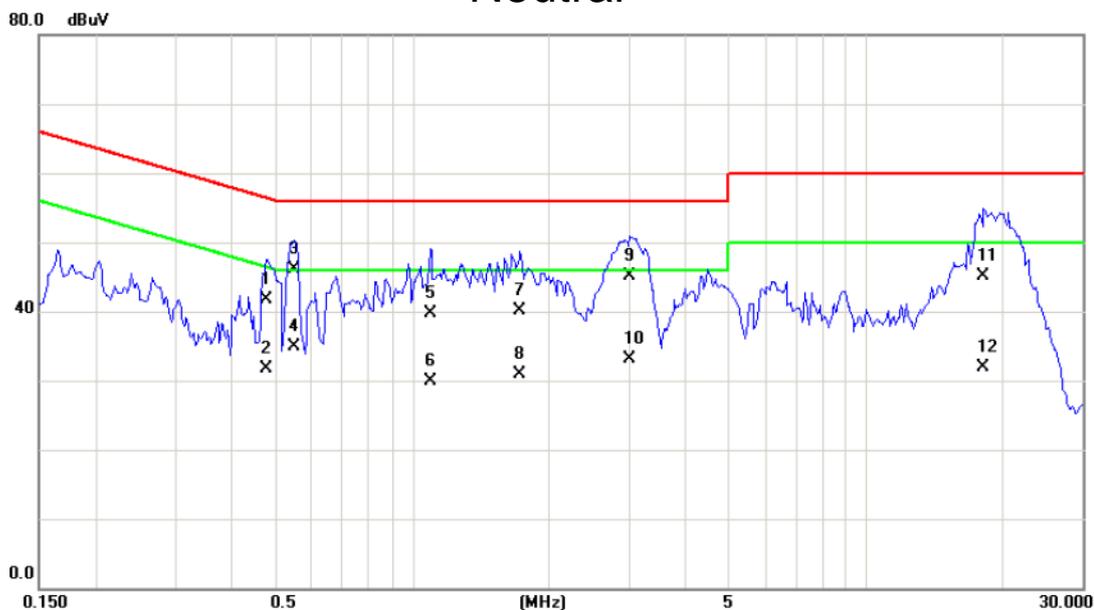

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4781	31.71	9.97	41.68	56.37	-14.69	QP	
2		0.4781	21.71	9.97	31.68	46.37	-14.69	AVG	
3	*	0.5484	36.27	9.91	46.18	56.00	-9.82	QP	
4		0.5484	24.97	9.91	34.88	46.00	-11.12	AVG	
5		1.0992	30.03	9.70	39.73	56.00	-16.27	QP	
6		1.0992	20.13	9.70	29.83	46.00	-16.17	AVG	
7		1.7320	30.33	9.75	40.08	56.00	-15.92	QP	
8		1.7320	21.23	9.75	30.98	46.00	-15.02	AVG	
9		3.0195	35.24	9.82	45.06	56.00	-10.94	QP	
10		3.0195	23.34	9.82	33.16	46.00	-12.84	AVG	
11		18.1914	34.77	10.40	45.17	60.00	-14.83	QP	
12		18.1914	21.47	10.40	31.87	50.00	-18.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic
Note:	Adapter:HK


Line

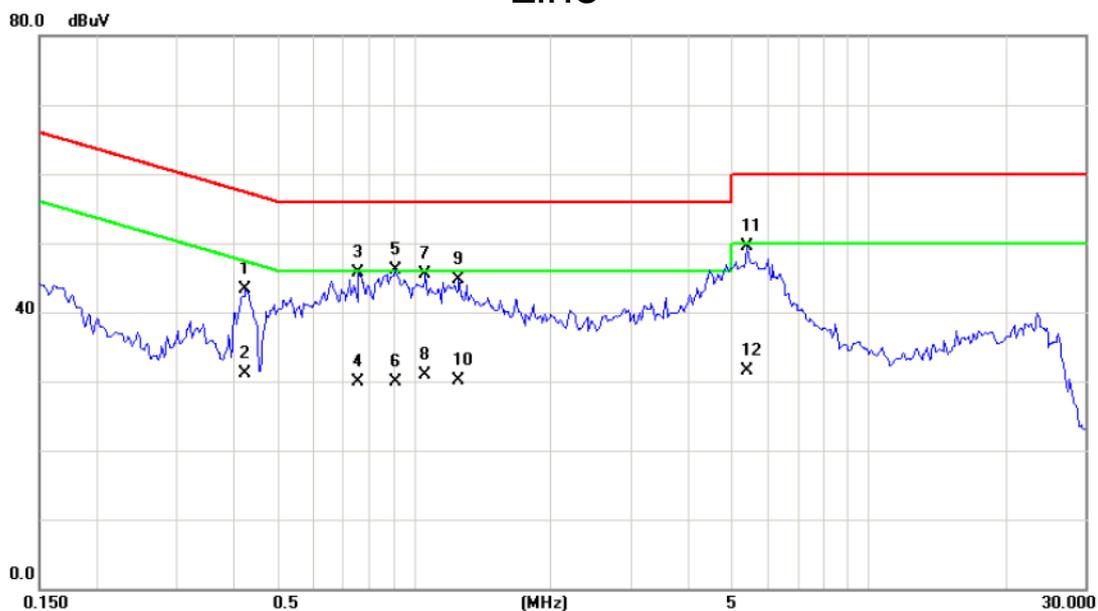

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4273	33.30	9.91	43.21	57.31	-14.10	QP	
2	0.4273	21.17	9.91	31.08	47.31	-16.23	AVG	
3	0.7554	35.99	9.69	45.68	56.00	-10.32	QP	
4	0.7554	20.14	9.69	29.83	46.00	-16.17	AVG	
5 *	0.9117	36.45	9.70	46.15	56.00	-9.85	QP	
6	0.9117	20.24	9.70	29.94	46.00	-16.06	AVG	
7	1.0601	35.75	9.70	45.45	56.00	-10.55	QP	
8	1.0601	21.14	9.70	30.84	46.00	-15.16	AVG	
9	1.2593	34.91	9.72	44.63	56.00	-11.37	QP	
10	1.2593	20.34	9.72	30.06	46.00	-15.94	AVG	
11	5.4062	39.65	9.94	49.59	60.00	-10.41	QP	
12	5.4062	21.56	9.94	31.50	50.00	-18.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic
Note:	Adapter:HK


Neutral

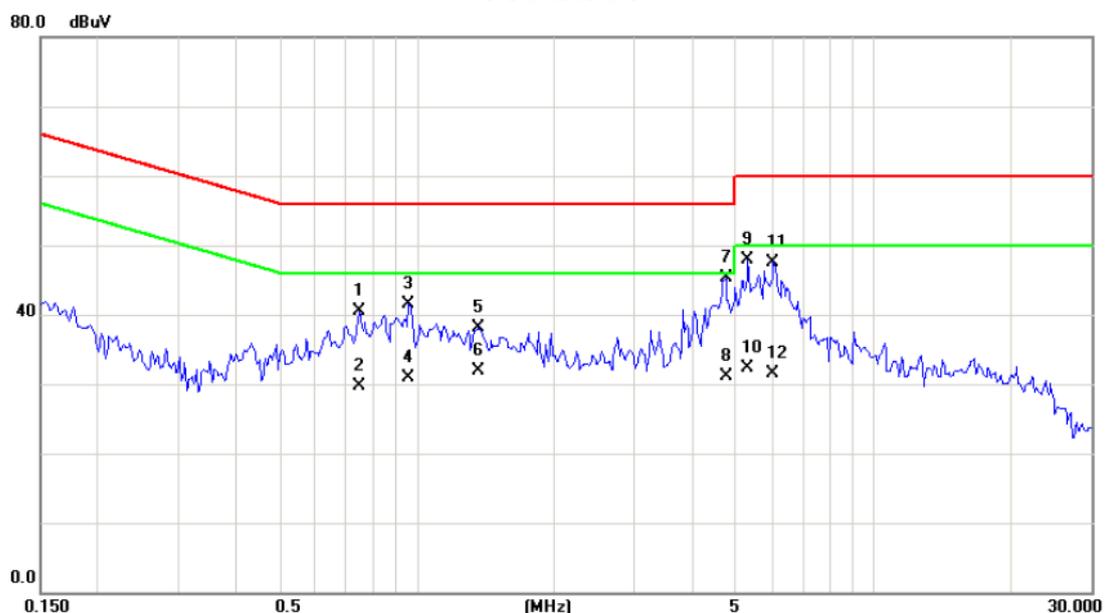

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.7477	30.74	9.69	40.43	56.00	-15.57	QP	
2	0.7477	20.11	9.69	29.80	46.00	-16.20	AVG	
3	0.9625	31.86	9.70	41.56	56.00	-14.44	QP	
4	0.9625	21.22	9.70	30.92	46.00	-15.08	AVG	
5	1.3648	28.44	9.73	38.17	56.00	-17.83	QP	
6	1.3648	22.22	9.73	31.95	46.00	-14.05	AVG	
7 *	4.7500	35.39	9.91	45.30	56.00	-10.70	QP	
8	4.7500	21.15	9.91	31.06	46.00	-14.94	AVG	
9	5.3125	38.03	9.94	47.97	60.00	-12.03	QP	
10	5.3125	22.35	9.94	32.29	50.00	-17.71	AVG	
11	6.0547	37.63	9.96	47.59	60.00	-12.41	QP	
12	6.0547	21.58	9.96	31.54	50.00	-18.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	Earphone:MEMD1532B528000


Line

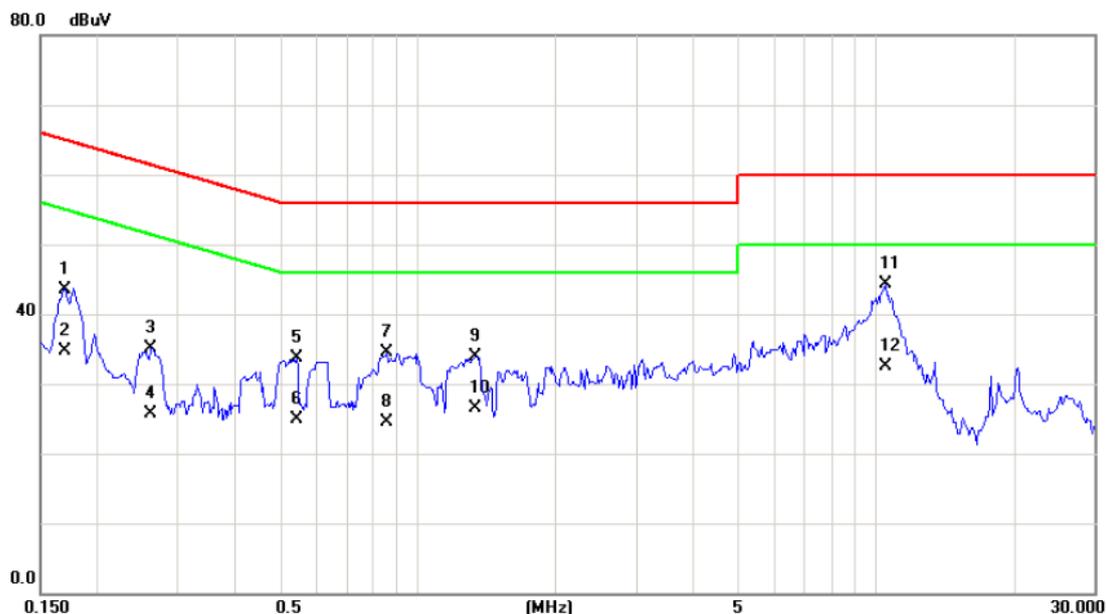

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1695	33.95	9.65	43.60	64.98	-21.38	QP	
2		0.1695	24.98	9.65	34.63	54.98	-20.35	AVG	
3		0.2615	25.41	9.72	35.13	61.38	-26.25	QP	
4		0.2615	16.06	9.72	25.78	51.38	-25.60	AVG	
5		0.5443	23.69	9.92	33.61	56.00	-22.39	QP	
6		0.5443	14.96	9.92	24.88	46.00	-21.12	AVG	
7		0.8610	24.90	9.69	34.59	56.00	-21.41	QP	
8		0.8610	14.88	9.69	24.57	46.00	-21.43	AVG	
9		1.3378	24.17	9.73	33.90	56.00	-22.10	QP	
10		1.3378	16.77	9.73	26.50	46.00	-19.50	AVG	
11	*	10.5080	34.31	10.08	44.39	60.00	-15.61	QP	
12		10.5080	22.42	10.08	32.50	50.00	-17.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	Earphone:MEMD1532B528000


Neutral

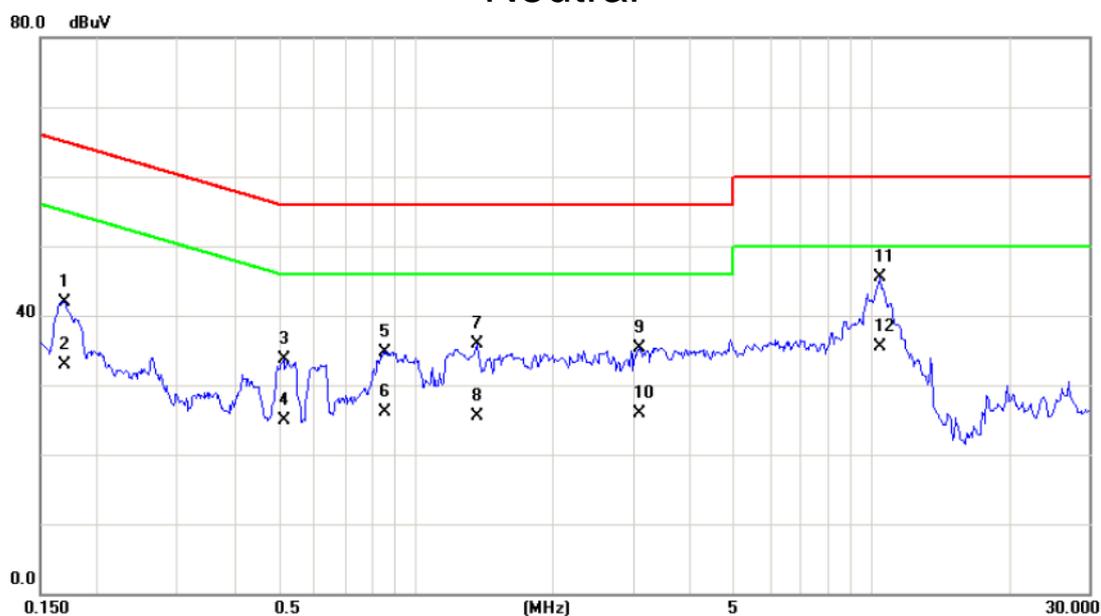

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1695	32.25	9.65	41.90	64.98	-23.08	QP	
2	0.1695	23.17	9.65	32.82	54.98	-22.16	AVG	
3	0.5131	23.79	9.97	33.76	56.00	-22.24	QP	
4	0.5131	14.87	9.97	24.84	46.00	-21.16	AVG	
5	0.8527	25.11	9.69	34.80	56.00	-21.20	QP	
6	0.8527	16.38	9.69	26.07	46.00	-19.93	AVG	
7	1.3648	26.13	9.73	35.86	56.00	-20.14	QP	
8	1.3648	15.77	9.73	25.50	46.00	-20.50	AVG	
9	3.0937	25.38	9.83	35.21	56.00	-20.79	QP	
10	3.0937	16.16	9.83	25.99	46.00	-20.01	AVG	
11 *	10.4882	35.43	10.08	45.51	60.00	-14.49	QP	
12	10.4882	25.43	10.08	35.51	50.00	-14.49	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter +Playing+idle+WiFi+GPS+Speaker
Note:	Adapter:BYD


Line

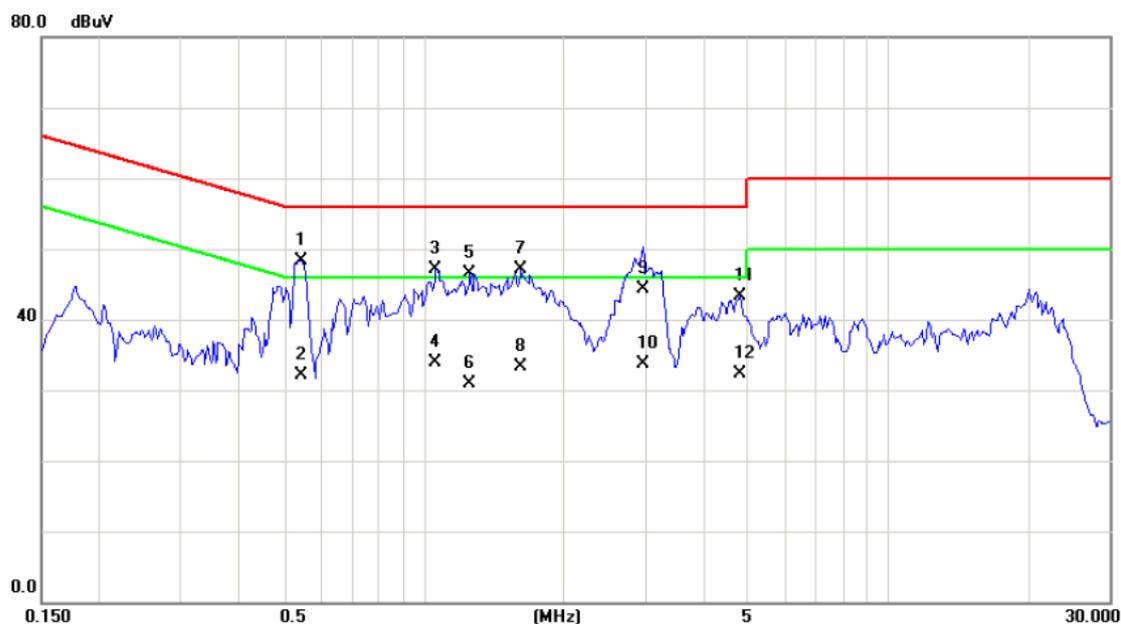

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.5445	38.36	9.92	48.28	56.00	-7.72	QP	
2		0.5445	22.17	9.92	32.09	46.00	-13.91	AVG	
3		1.0640	37.37	9.70	47.07	56.00	-8.93	QP	
4		1.0640	24.14	9.70	33.84	46.00	-12.16	AVG	
5		1.2593	36.83	9.72	46.55	56.00	-9.45	QP	
6		1.2593	21.24	9.72	30.96	46.00	-15.04	AVG	
7		1.6226	37.27	9.74	47.01	56.00	-8.99	QP	
8		1.6226	23.55	9.74	33.29	46.00	-12.71	AVG	
9		2.9624	34.45	9.82	44.27	56.00	-11.73	QP	
10		2.9624	23.95	9.82	33.77	46.00	-12.23	AVG	
11		4.8007	33.33	9.92	43.25	56.00	-12.75	QP	
12		4.8007	22.46	9.92	32.38	46.00	-13.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter +Playing+idle+WiFi+GPS+Speaker
Note:	Adapter:BYD

Neutral

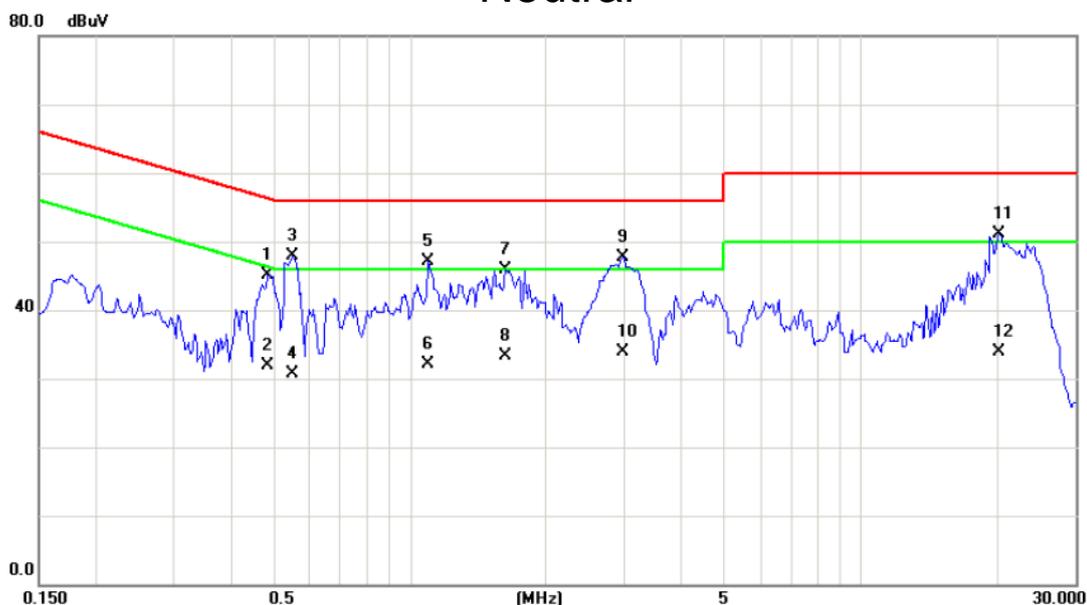


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4820	35.19	9.97	45.16	56.30	-11.14	QP	
2		0.4820	21.91	9.97	31.88	46.30	-14.42	AVG	
3	*	0.5484	37.95	9.91	47.86	56.00	-8.14	QP	
4		0.5484	20.87	9.91	30.78	46.00	-15.22	AVG	
5		1.0953	37.40	9.70	47.10	56.00	-8.90	QP	
6		1.0953	22.43	9.70	32.13	46.00	-13.87	AVG	
7		1.6304	36.08	9.74	45.82	56.00	-10.18	QP	
8		1.6304	23.53	9.74	33.27	46.00	-12.73	AVG	
9		2.9742	37.98	9.82	47.80	56.00	-8.20	QP	
10		2.9742	24.04	9.82	33.86	46.00	-12.14	AVG	
11		20.3320	40.54	10.54	51.08	60.00	-8.92	QP	
12		20.3320	23.31	10.54	33.85	50.00	-16.15	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: HA1-3


Vertical

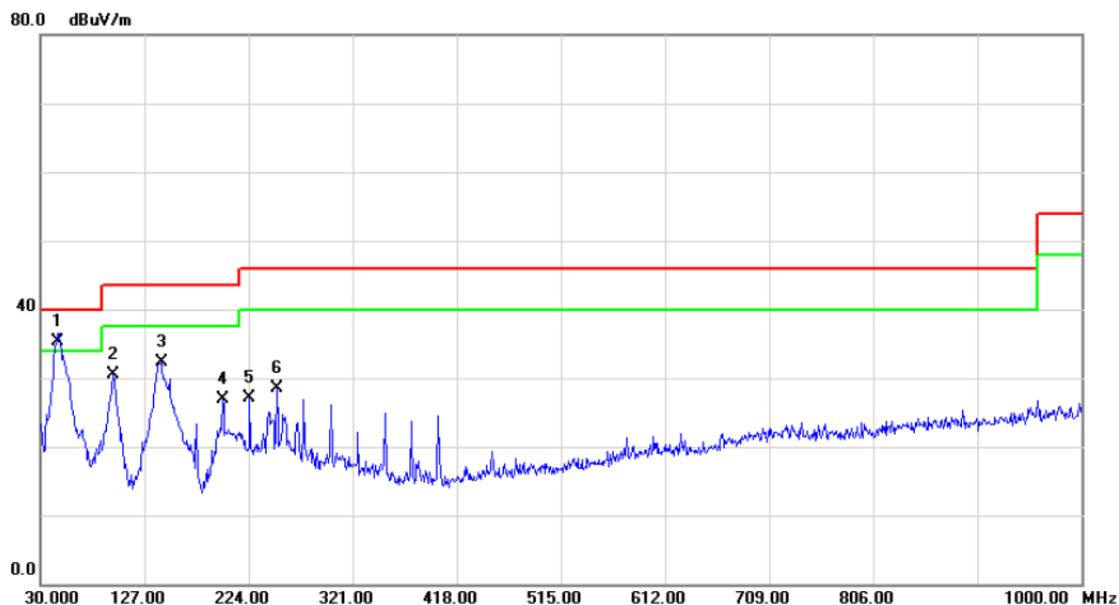

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	46.4900	48.90	-13.69	35.21	40.00	-4.79	QP	
2		97.9000	49.63	-19.14	30.49	43.50	-13.01	QP	
3		142.5200	46.70	-14.34	32.36	43.50	-11.14	QP	
4		199.7500	43.54	-16.72	26.82	43.50	-16.68	QP	
5		224.9700	43.40	-16.21	27.19	46.00	-18.81	QP	
6		250.1900	43.53	-15.12	28.41	46.00	-17.59	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: HA1-3


Horizontal

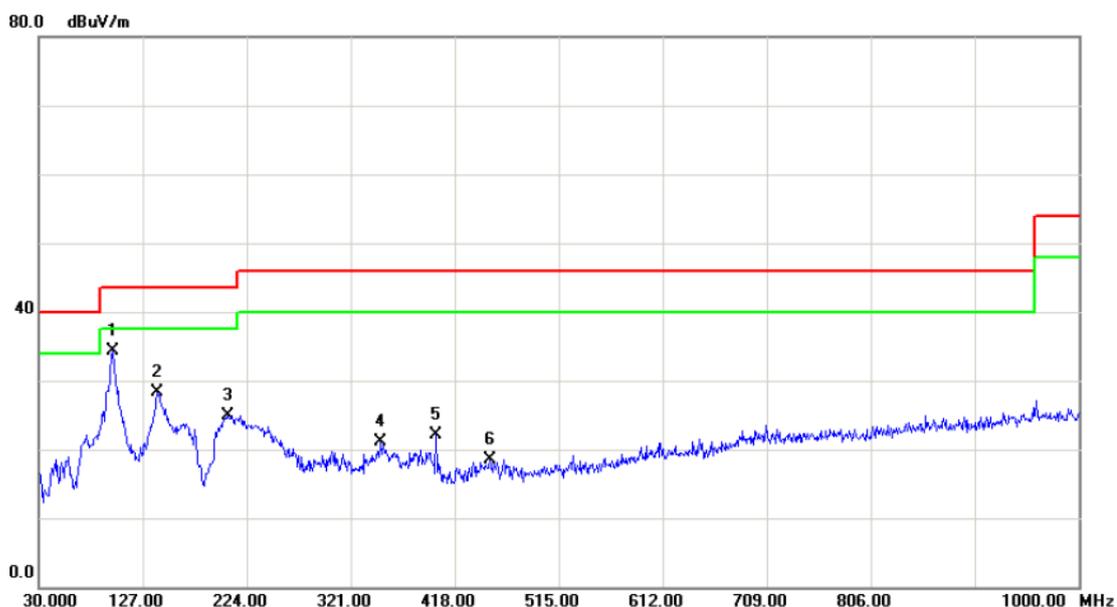

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	98.8700	53.23	-18.99	34.24	43.50	-9.26	QP	
2		140.5800	42.69	-14.42	28.27	43.50	-15.23	QP	
3		206.5400	41.53	-16.62	24.91	43.50	-18.59	QP	
4		349.1300	33.41	-12.26	21.15	46.00	-24.85	QP	
5		400.5400	33.27	-11.08	22.19	46.00	-23.81	QP	
6		450.9800	28.22	-9.66	18.56	46.00	-27.44	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: MEMD1532B528000


Vertical

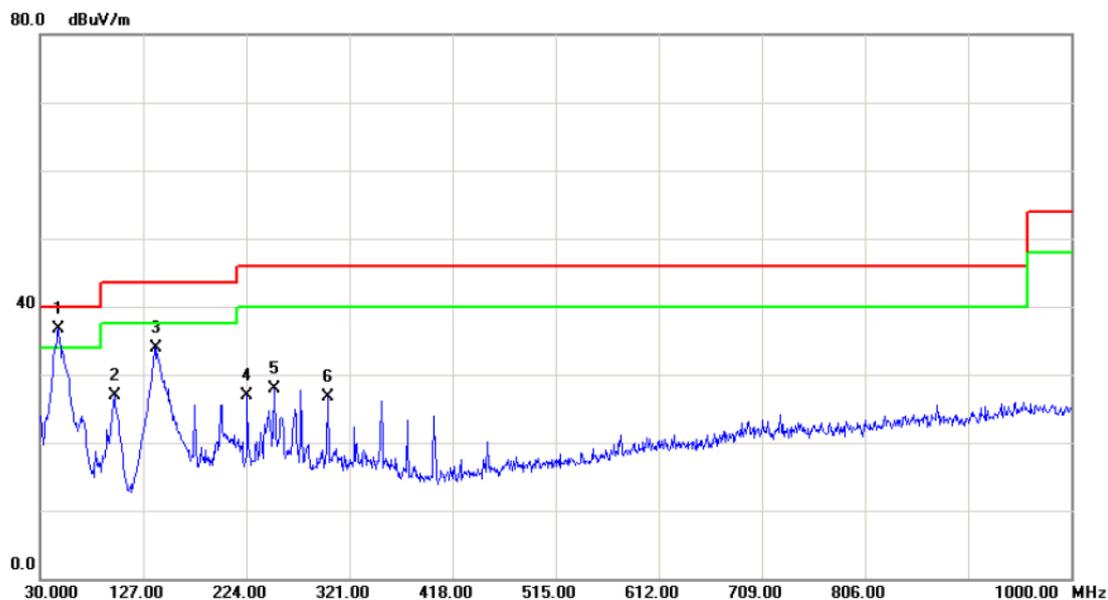

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	50.34	-13.69	36.65	40.00	-3.35	QP	
2		99.8400	45.81	-18.84	26.97	43.50	-16.53	QP	
3		139.6100	48.47	-14.48	33.99	43.50	-9.51	QP	
4		224.9700	43.12	-16.21	26.91	46.00	-19.09	QP	
5		250.1900	43.02	-15.12	27.90	46.00	-18.10	QP	
6		300.6300	40.09	-13.48	26.61	46.00	-19.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: MEMD1532B528000


Horizontal

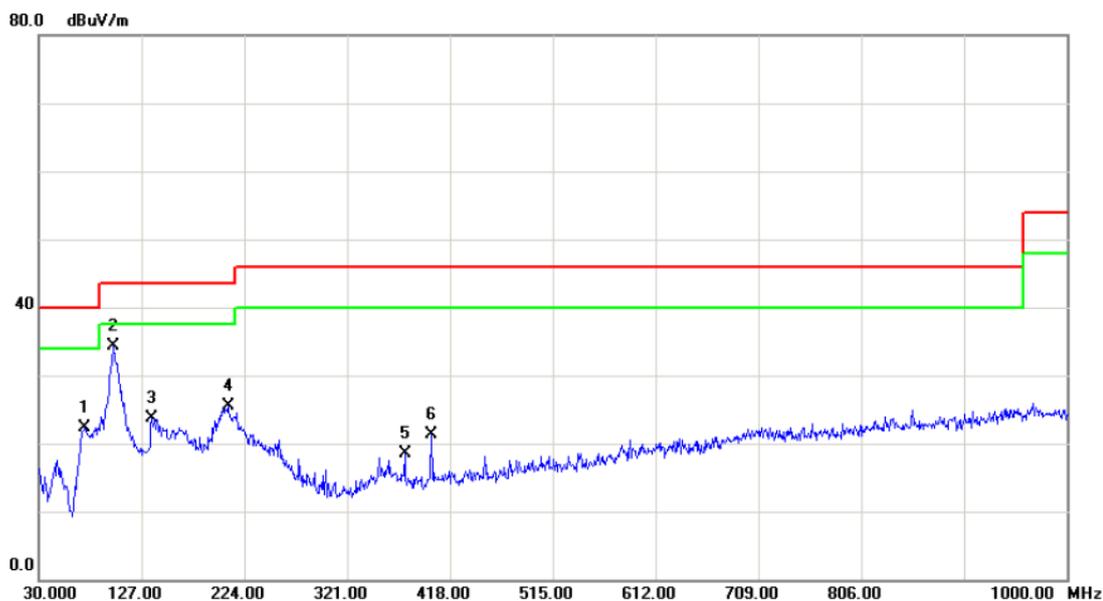

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		73.6500	39.21	-16.93	22.28	40.00	-17.72	QP	
2	*	100.8100	52.91	-18.70	34.21	43.50	-9.29	QP	
3		136.7000	38.50	-14.73	23.77	43.50	-19.73	QP	
4		208.4800	42.08	-16.59	25.49	43.50	-18.01	QP	
5		375.3200	30.15	-11.71	18.44	46.00	-27.56	QP	
6		400.5400	32.41	-11.08	21.33	46.00	-24.67	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Vertical

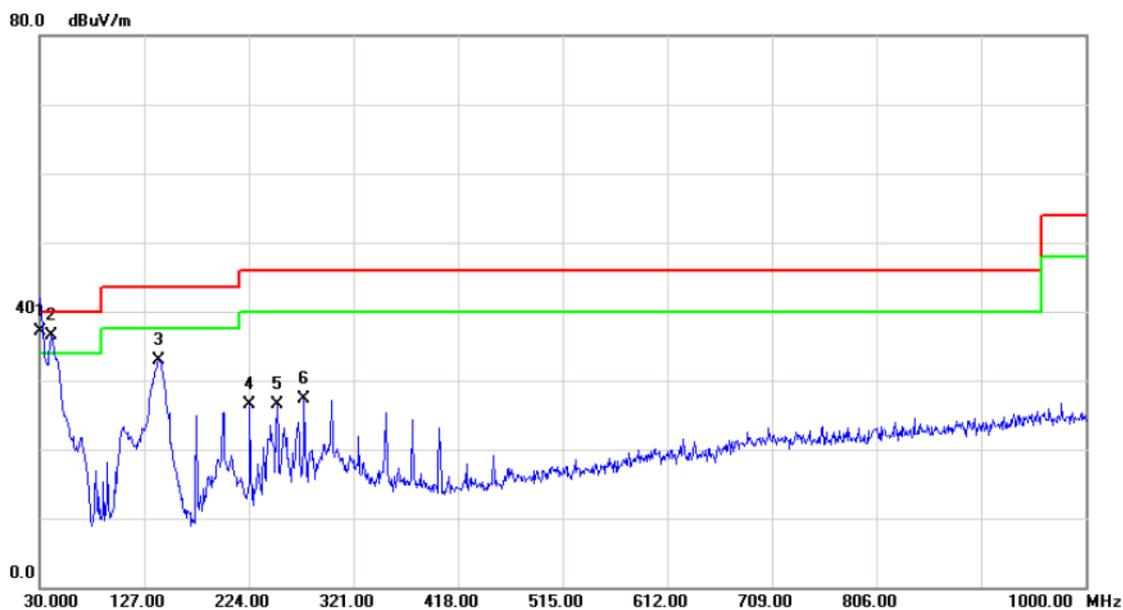

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	52.18	-15.08	37.10	40.00	-2.90	QP	
2	!	40.6700	50.59	-14.13	36.46	40.00	-3.54	QP	
3		140.5800	47.33	-14.42	32.91	43.50	-10.59	QP	
4		224.9700	42.62	-16.21	26.41	46.00	-19.59	QP	
5		250.1900	41.63	-15.12	26.51	46.00	-19.49	QP	
6		275.4100	41.32	-14.07	27.25	46.00	-18.75	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Horizontal

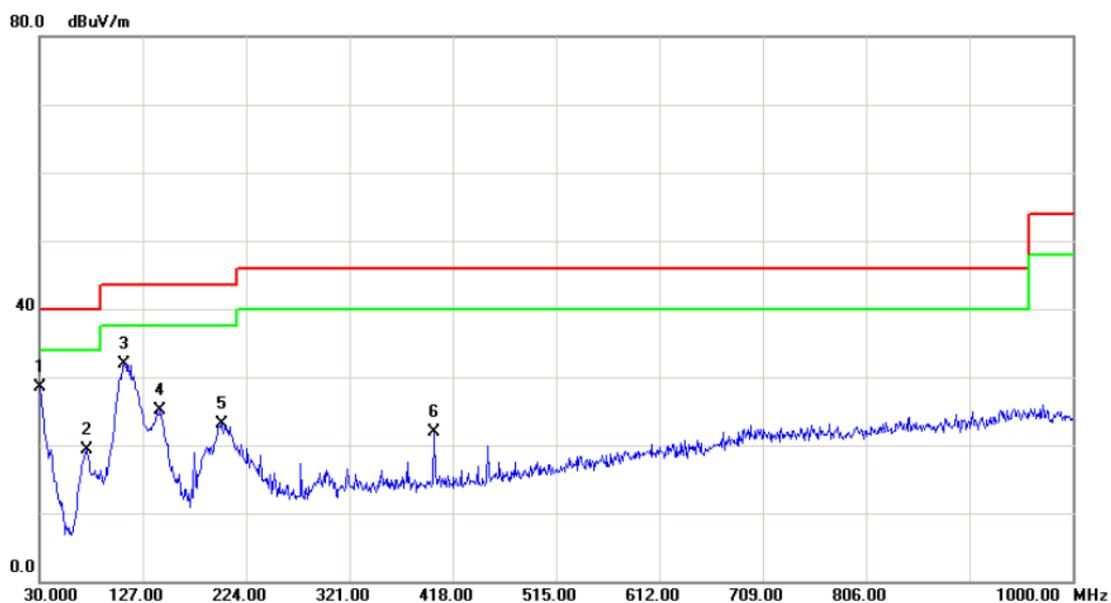

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	43.58	-15.09	28.49	40.00	-11.51	QP	
2		74.6200	36.44	-17.11	19.33	40.00	-20.67	QP	
3		109.5400	49.37	-17.39	31.98	43.50	-11.52	QP	
4		143.4900	39.36	-14.31	25.05	43.50	-18.45	QP	
5		200.7200	39.72	-16.71	23.01	43.50	-20.49	QP	
6		400.5400	32.98	-11.08	21.90	46.00	-24.10	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Vertical

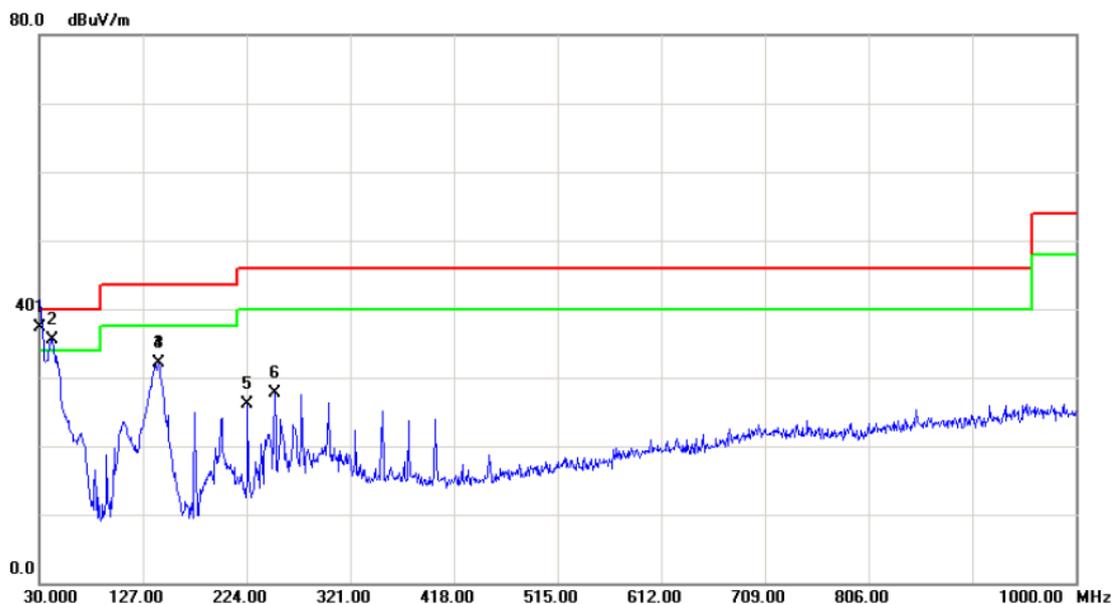

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	52.48	-15.08	37.40	40.00	-2.60	QP	
2	!	41.6400	49.61	-14.03	35.58	40.00	-4.42	QP	
3		141.5500	46.42	-14.38	32.04	43.50	-11.46	QP	
4		141.5500	46.42	-14.38	32.04	43.50	-11.46	QP	
5		224.9700	42.33	-16.21	26.12	46.00	-19.88	QP	
6		250.1900	42.77	-15.12	27.65	46.00	-18.35	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Horizontal

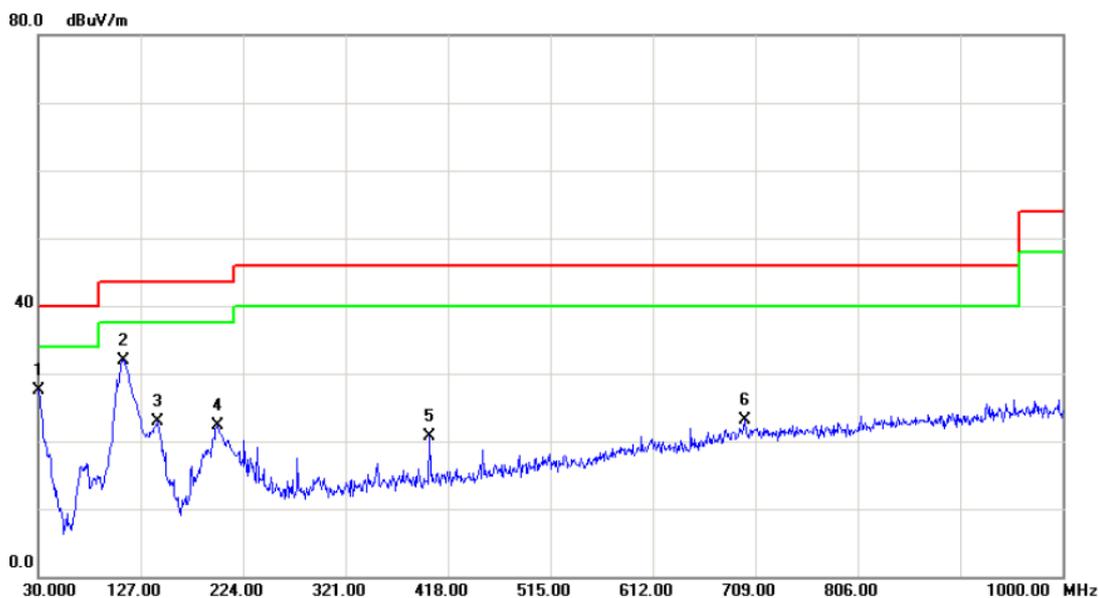

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	42.61	-15.08	27.53	40.00	-12.47	QP	
2	*	110.5100	49.22	-17.26	31.96	43.50	-11.54	QP	
3		142.5200	37.29	-14.34	22.95	43.50	-20.55	QP	
4		199.7500	39.00	-16.72	22.28	43.50	-21.22	QP	
5		400.5400	31.77	-11.08	20.69	46.00	-25.31	QP	
6		699.3000	28.54	-5.44	23.10	46.00	-22.90	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic
Note:	Adapter:BYD


Vertical

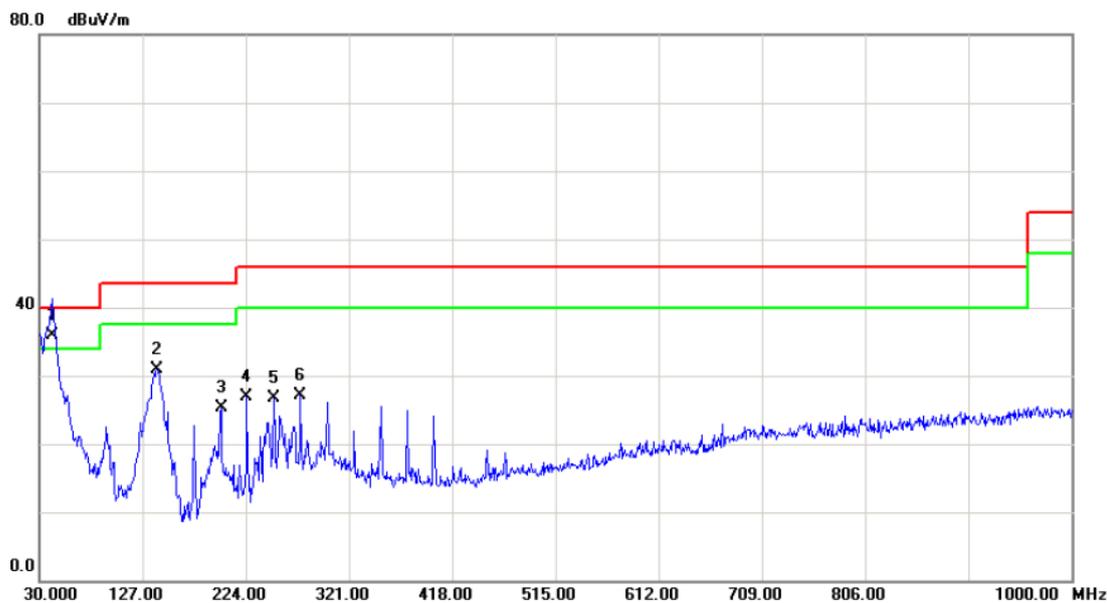

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	49.95	-14.03	35.92	40.00	-4.08	QP	
2		140.5800	45.39	-14.42	30.97	43.50	-12.53	QP	
3		200.7200	41.94	-16.71	25.23	43.50	-18.27	QP	
4		224.9700	43.15	-16.21	26.94	46.00	-19.06	QP	
5		250.1900	41.78	-15.12	26.66	46.00	-19.34	QP	
6		275.4100	41.16	-14.07	27.09	46.00	-18.91	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic
Note:	Adapter:BYD


Horizontal

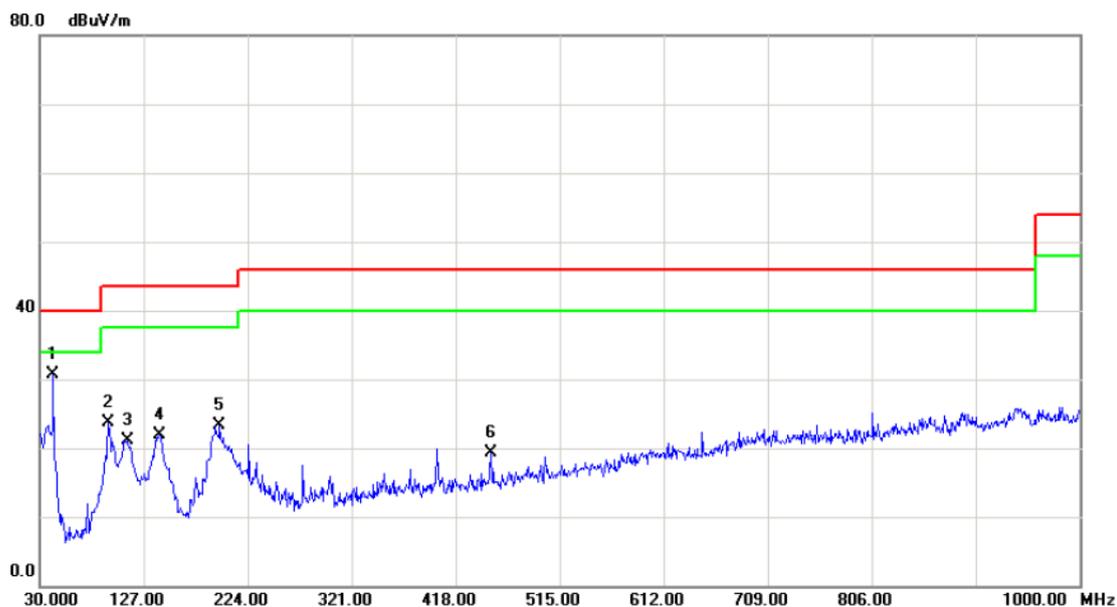

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	44.55	-13.92	30.63	40.00	-9.37	QP	
2		94.0200	43.38	-19.72	23.66	43.50	-19.84	QP	
3		111.4800	38.21	-17.16	21.05	43.50	-22.45	QP	
4		141.5500	36.38	-14.38	22.00	43.50	-21.50	QP	
5		197.8100	39.96	-16.71	23.25	43.50	-20.25	QP	
6		450.9800	29.01	-9.66	19.35	46.00	-26.65	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+WiFi+GPS+Speaker
Note:	N/A


Vertical

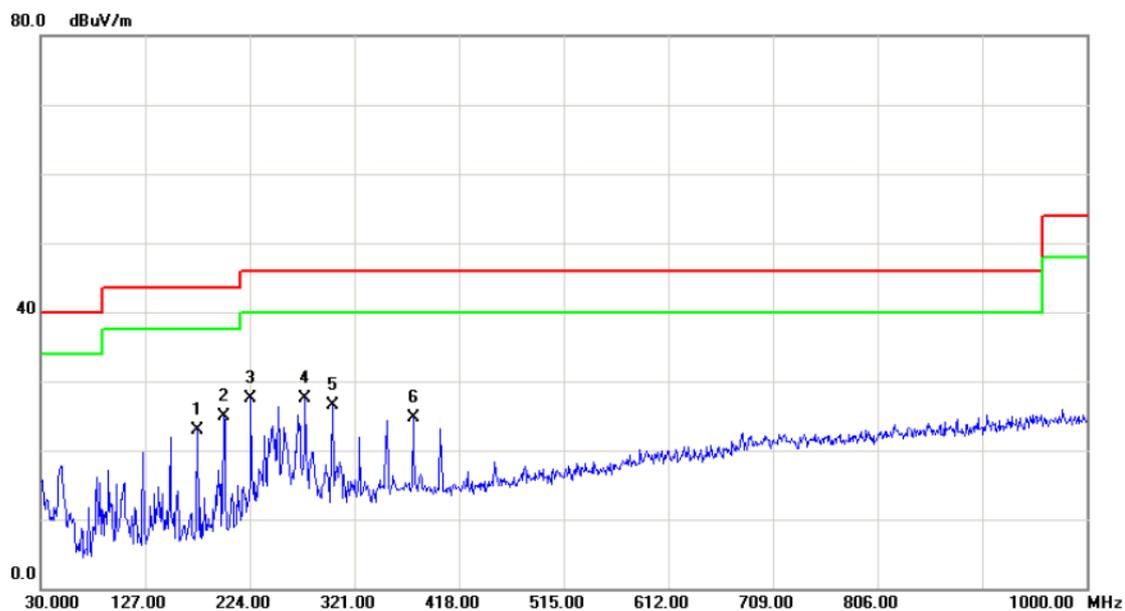

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		175.5000	37.88	-14.97	22.91	43.50	-20.59	QP	
2		199.7500	41.69	-16.72	24.97	43.50	-18.53	QP	
3	*	224.9700	43.70	-16.21	27.49	46.00	-18.51	QP	
4		275.4100	41.52	-14.07	27.45	46.00	-18.55	QP	
5		300.6300	39.89	-13.48	26.41	46.00	-19.59	QP	
6		375.3200	36.48	-11.71	24.77	46.00	-21.23	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+WiFi+GPS+Speaker
Note:	N/A


Horizontal

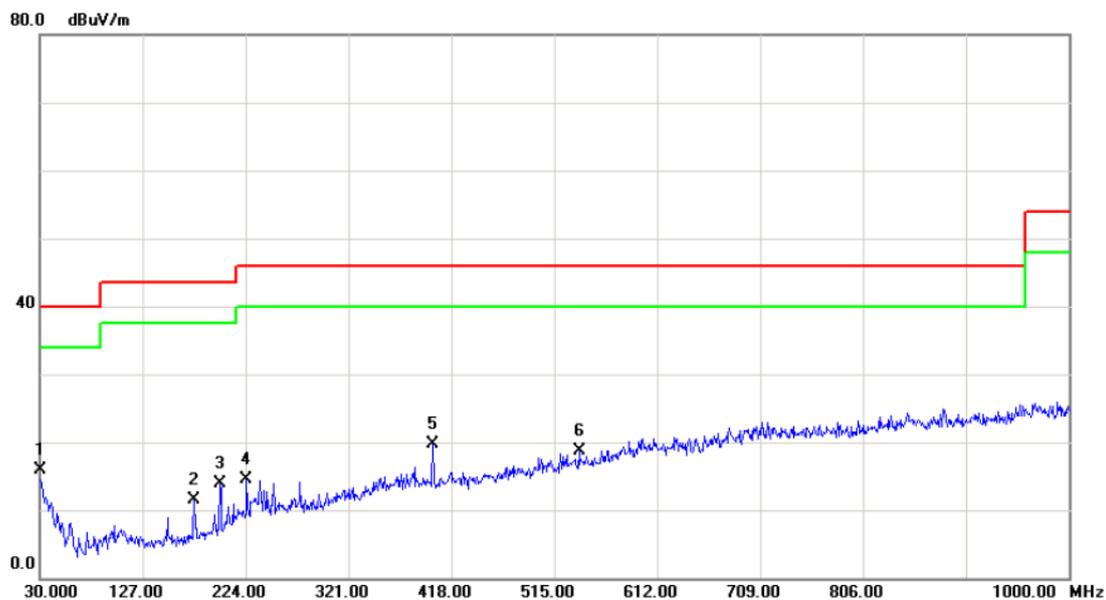

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	31.03	-15.08	15.95	40.00	-24.05	QP	
2		175.5000	26.49	-14.97	11.52	43.50	-31.98	QP	
3		199.7500	30.57	-16.72	13.85	43.50	-29.65	QP	
4		224.9700	30.62	-16.21	14.41	46.00	-31.59	QP	
5		400.5400	30.70	-11.08	19.62	46.00	-26.38	QP	
6		538.2800	26.96	-8.29	18.67	46.00	-27.33	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:H09-000369 ; Earphone:1293#+3283# 3.5MM-150


Vertical

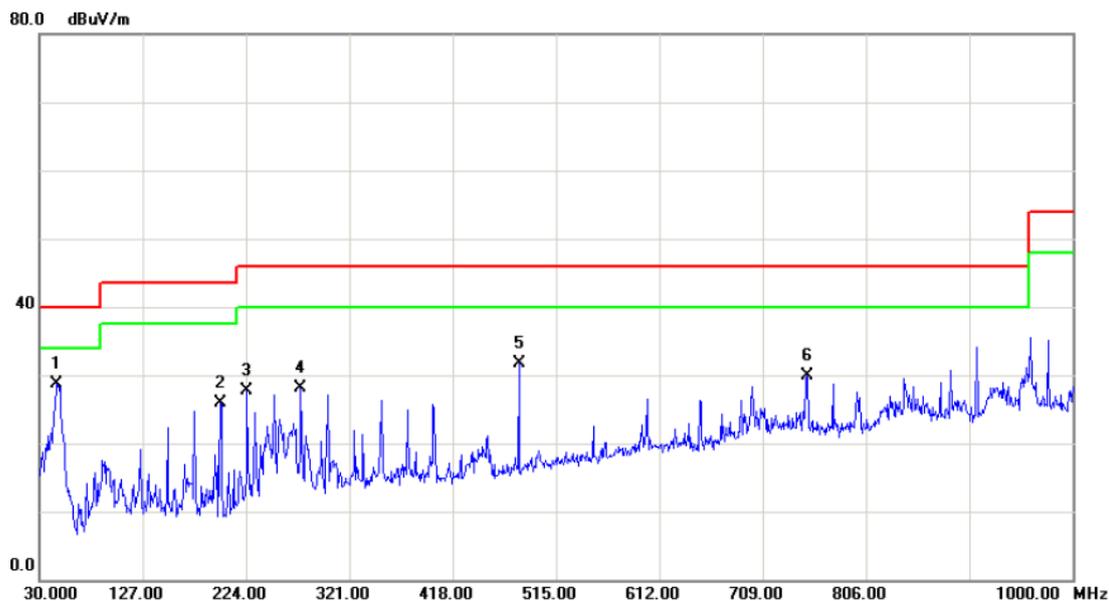

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	46.4900	42.44	-13.69	28.75	40.00	-11.25	QP	
2		199.7500	42.66	-16.72	25.94	43.50	-17.56	QP	
3		224.9700	43.90	-16.21	27.69	46.00	-18.31	QP	
4		275.4100	42.21	-14.07	28.14	46.00	-17.86	QP	
5		480.0800	41.09	-9.45	31.64	46.00	-14.36	QP	
6		750.7100	34.99	-5.01	29.98	46.00	-16.02	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:H09-000369 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

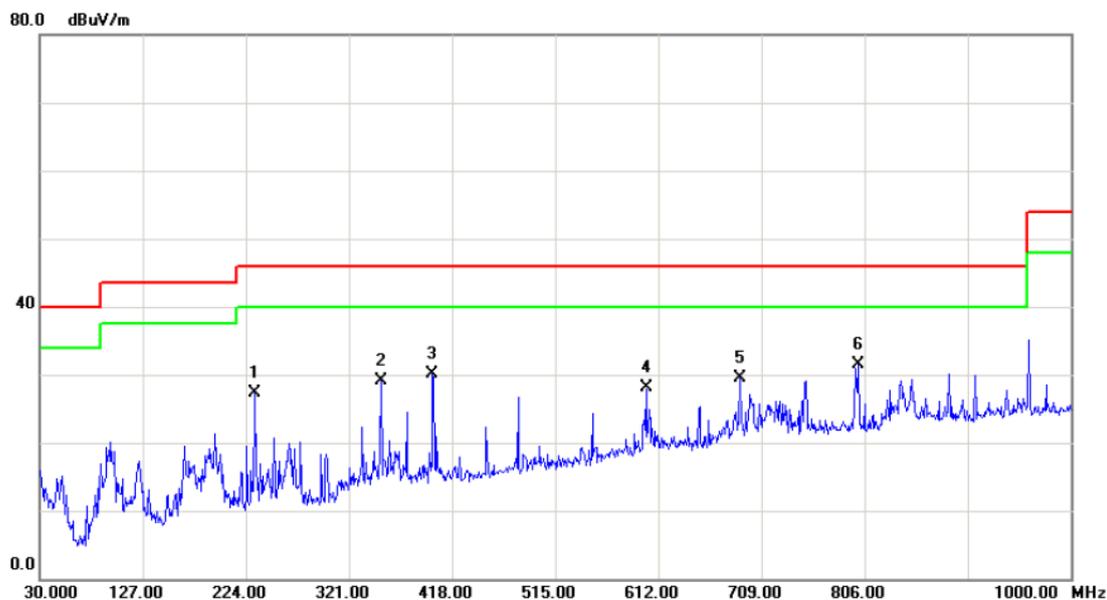

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		232.7300	43.00	-15.68	27.32	46.00	-18.68	QP	
2		351.0700	41.34	-12.24	29.10	46.00	-16.90	QP	
3		399.5700	41.30	-11.10	30.20	46.00	-15.80	QP	
4		600.3600	35.47	-7.46	28.01	46.00	-17.99	QP	
5		688.6300	35.32	-5.76	29.56	46.00	-16.44	QP	
6	*	800.1800	36.24	-4.74	31.50	46.00	-14.50	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:LSA00570 ; Earphone:1293#+3283# 3.5MM-150


Vertical

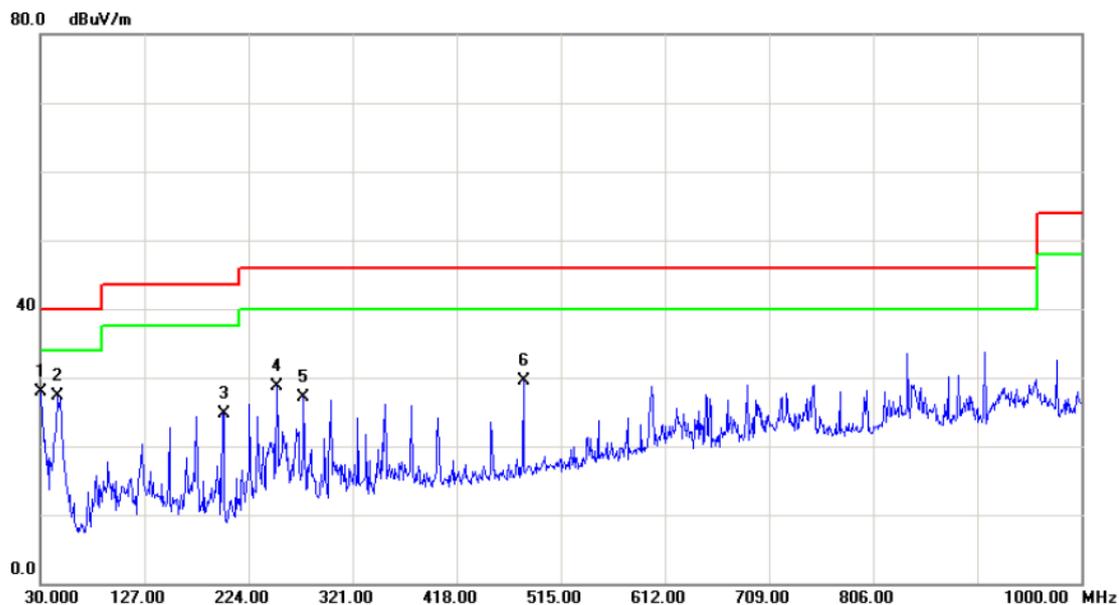

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.9700	43.06	-15.09	27.97	40.00	-12.03	QP	
2		45.5200	40.96	-13.68	27.28	40.00	-12.72	QP	
3		199.7500	41.34	-16.72	24.62	43.50	-18.88	QP	
4		250.1900	43.84	-15.12	28.72	46.00	-17.28	QP	
5		275.4100	41.16	-14.07	27.09	46.00	-18.91	QP	
6		480.0800	39.03	-9.45	29.58	46.00	-16.42	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:LSA00570 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

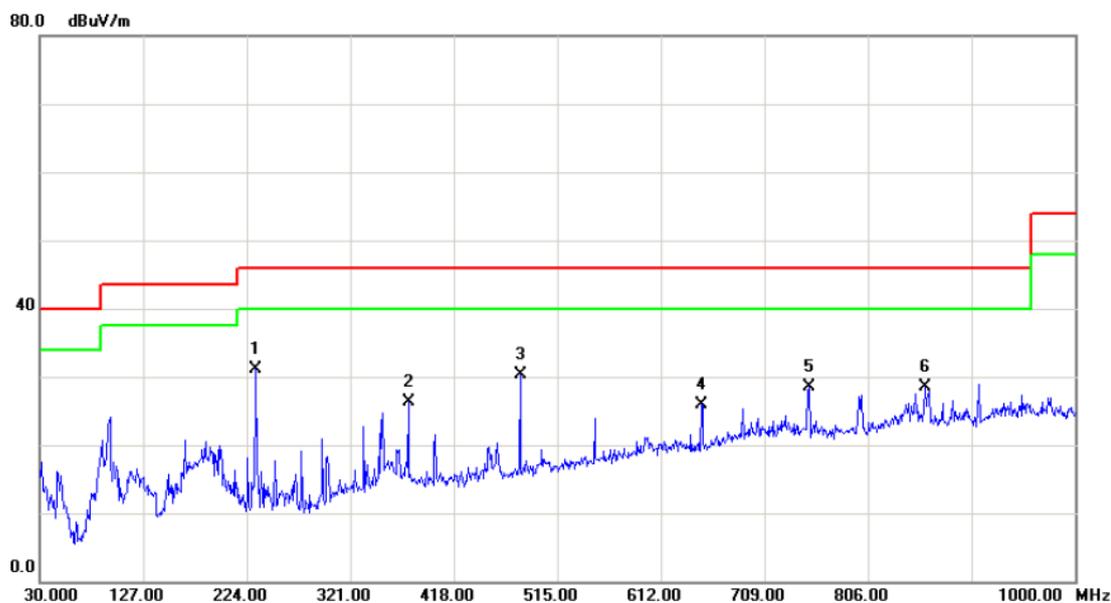

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	232.7300	46.81	-15.68	31.13	46.00	-14.87	QP	
2		375.3200	38.00	-11.71	26.29	46.00	-19.71	QP	
3		480.0800	39.66	-9.45	30.21	46.00	-15.79	QP	
4		649.8300	32.89	-6.91	25.98	46.00	-20.02	QP	
5		750.7100	33.44	-5.01	28.43	46.00	-17.57	QP	
6		859.3500	32.13	-3.66	28.47	46.00	-17.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:02450989 ; Earphone:1293#+3283# 3.5MM-150


Vertical

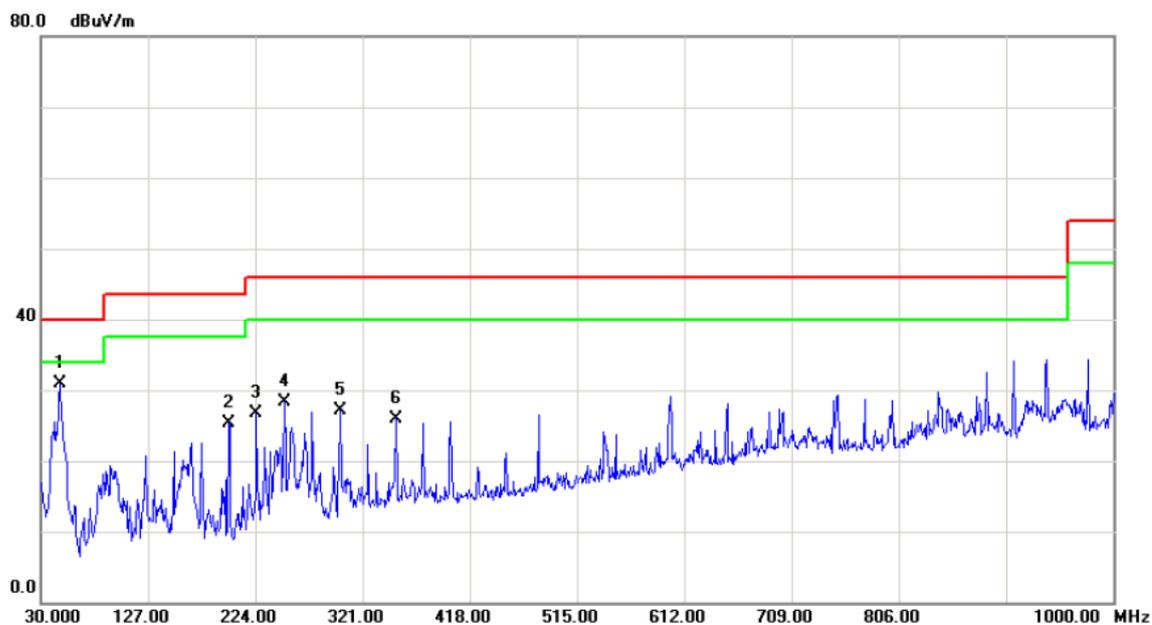

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	47.4600	44.50	-13.69	30.81	40.00	-9.19	QP	
2		199.7500	42.01	-16.72	25.29	43.50	-18.21	QP	
3		224.9700	42.87	-16.21	26.66	46.00	-19.34	QP	
4		250.1900	43.37	-15.12	28.25	46.00	-17.75	QP	
5		300.6300	40.57	-13.48	27.09	46.00	-18.91	QP	
6		351.0700	38.12	-12.24	25.88	46.00	-20.12	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:02450989 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

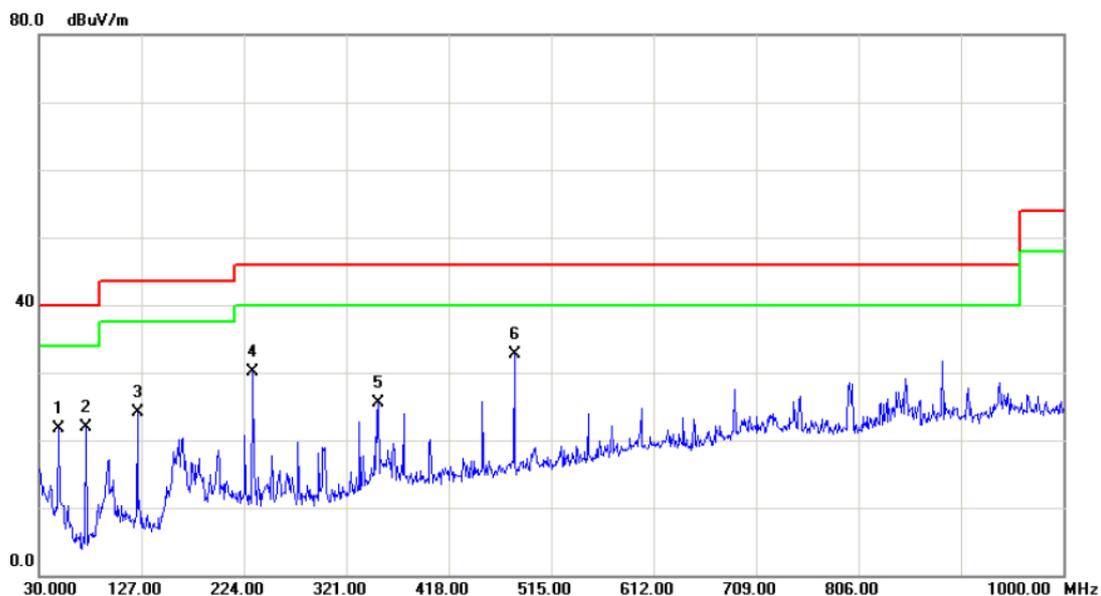

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	35.39	-13.69	21.70	40.00	-18.30	QP	
2		74.6200	38.93	-17.11	21.82	40.00	-18.18	QP	
3		123.1200	40.05	-15.94	24.11	43.50	-19.39	QP	
4		232.7300	45.79	-15.68	30.11	46.00	-15.89	QP	
5		351.0700	37.81	-12.24	25.57	46.00	-20.43	QP	
6	*	480.0800	42.09	-9.45	32.64	46.00	-13.36	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:130-25076 ; Earphone:1293#+3283# 3.5MM-150


Vertical

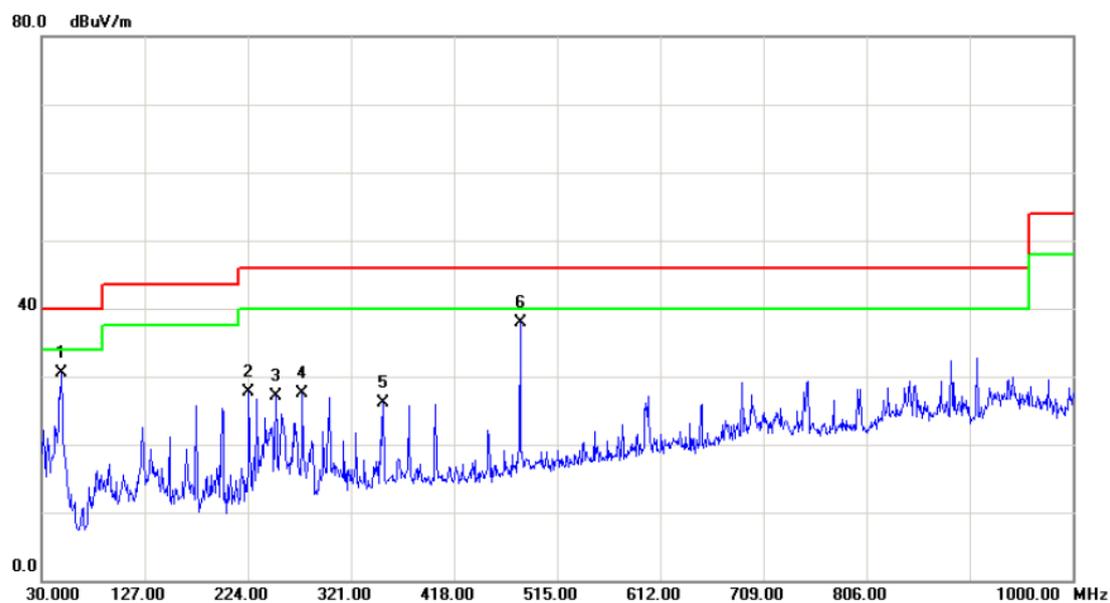

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	44.16	-13.69	30.47	40.00	-9.53	QP	
2		224.9700	43.92	-16.21	27.71	46.00	-18.29	QP	
3		250.1900	42.15	-15.12	27.03	46.00	-18.97	QP	
4		275.4100	41.54	-14.07	27.47	46.00	-18.53	QP	
5		351.0700	38.29	-12.24	26.05	46.00	-19.95	QP	
6	*	480.0800	47.36	-9.45	37.91	46.00	-8.09	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:130-25076 ; Earphone:1293#+3283# 3.5MM-150

Horizontal

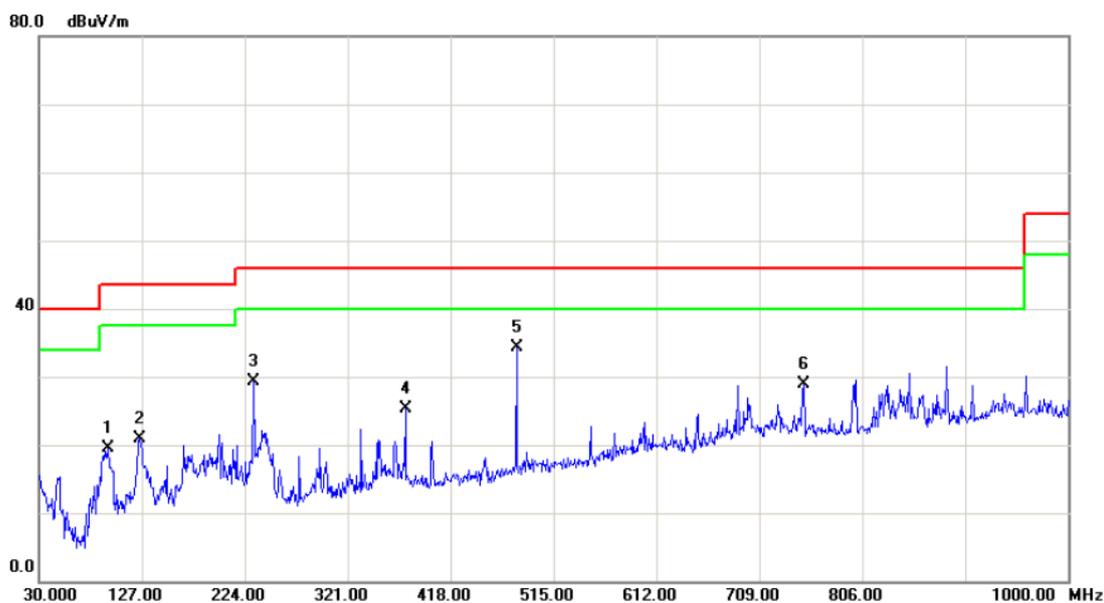


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		94.9900	39.09	-19.58	19.51	43.50	-23.99	QP	
2		125.0600	36.68	-15.75	20.93	43.50	-22.57	QP	
3		232.7300	45.02	-15.68	29.34	46.00	-16.66	QP	
4		375.3200	37.09	-11.71	25.38	46.00	-20.62	QP	
5	*	480.0800	43.69	-9.45	34.24	46.00	-11.76	QP	
6		750.7100	33.85	-5.01	28.84	46.00	-17.16	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: HA1-3


Vertical

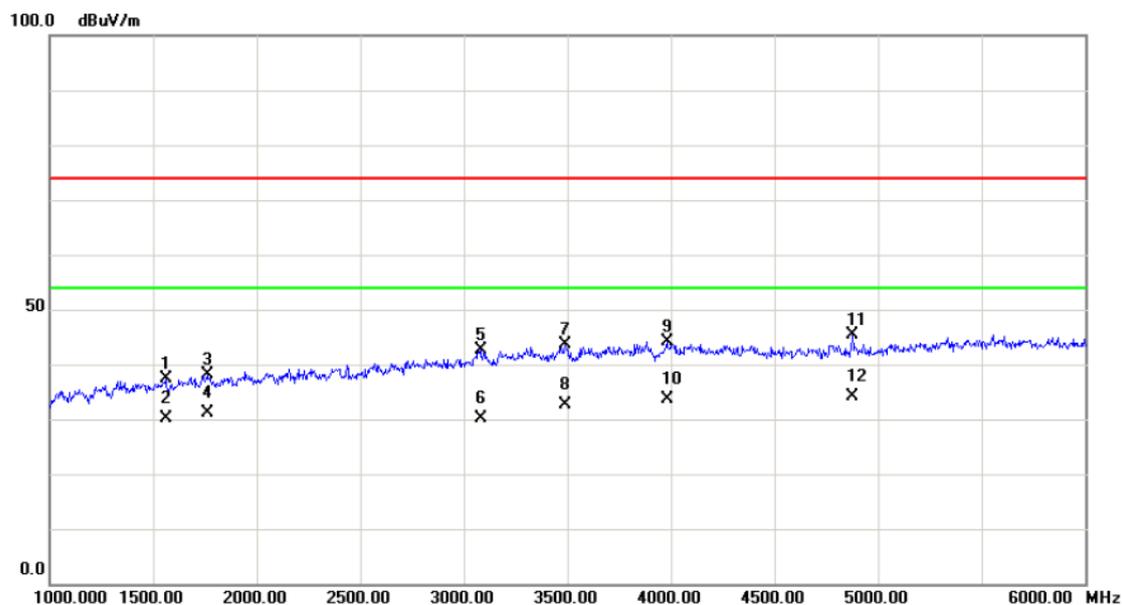

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1560.000	41.10	-3.79	37.31	74.00	-36.69	peak	
2		1560.000	34.04	-3.79	30.25	54.00	-23.75	AVG	
3		1760.000	41.08	-2.93	38.15	74.00	-35.85	peak	
4		1760.000	34.18	-2.93	31.25	54.00	-22.75	AVG	
5		3082.500	40.63	2.03	42.66	74.00	-31.34	peak	
6		3082.500	28.22	2.03	30.25	54.00	-23.75	AVG	
7		3492.500	40.77	2.98	43.75	74.00	-30.25	peak	
8		3492.500	29.54	2.98	32.52	54.00	-21.48	AVG	
9		3980.000	37.66	6.48	44.14	74.00	-29.86	peak	
10		3980.000	27.04	6.48	33.52	54.00	-20.48	AVG	
11		4875.000	37.86	7.46	45.32	74.00	-28.68	peak	
12	*	4875.000	26.79	7.46	34.25	54.00	-19.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Cable:	Adapter:HK; Earphone: HA1-3


Horizontal

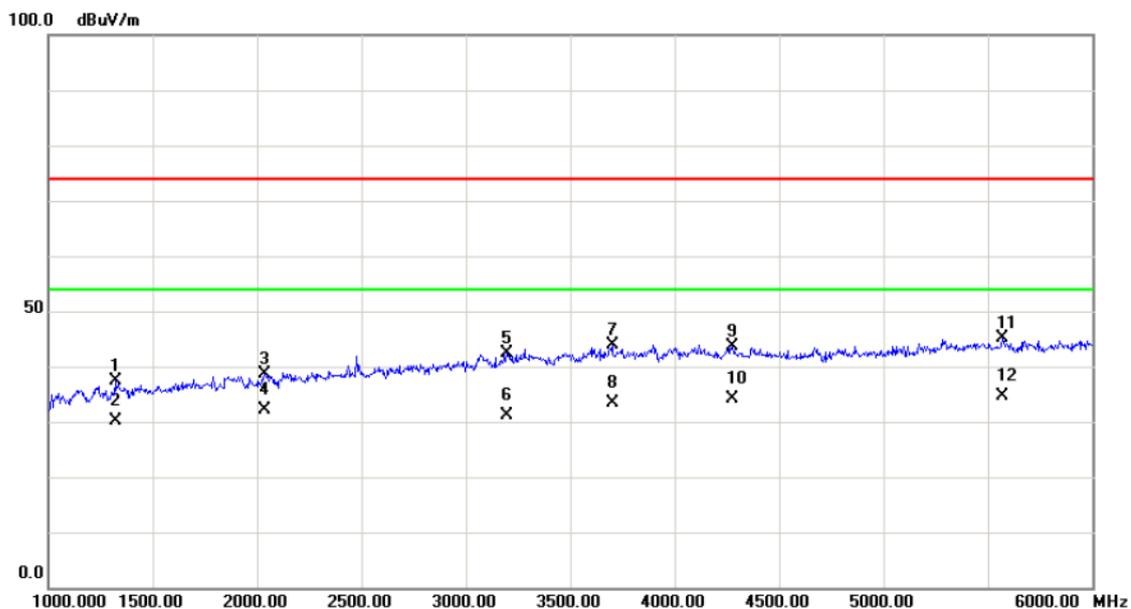

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1322.500	42.05	-4.59	37.46	74.00	-36.54	peak	
2		1322.500	34.84	-4.59	30.25	54.00	-23.75	AVG	
3		2037.500	40.32	-1.73	38.59	74.00	-35.41	peak	
4		2037.500	33.75	-1.73	32.02	54.00	-21.98	AVG	
5		3197.500	40.17	2.30	42.47	74.00	-31.53	peak	
6		3197.500	28.95	2.30	31.25	54.00	-22.75	AVG	
7		3700.000	39.41	4.45	43.86	74.00	-30.14	peak	
8		3700.000	29.05	4.45	33.50	54.00	-20.50	AVG	
9		4275.000	36.94	6.78	43.72	74.00	-30.28	peak	
10		4275.000	27.24	6.78	34.02	54.00	-19.98	AVG	
11		5570.000	35.88	9.23	45.11	74.00	-28.89	peak	
12	*	5570.000	25.39	9.23	34.62	54.00	-19.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: MEMD1532B528000


Vertical

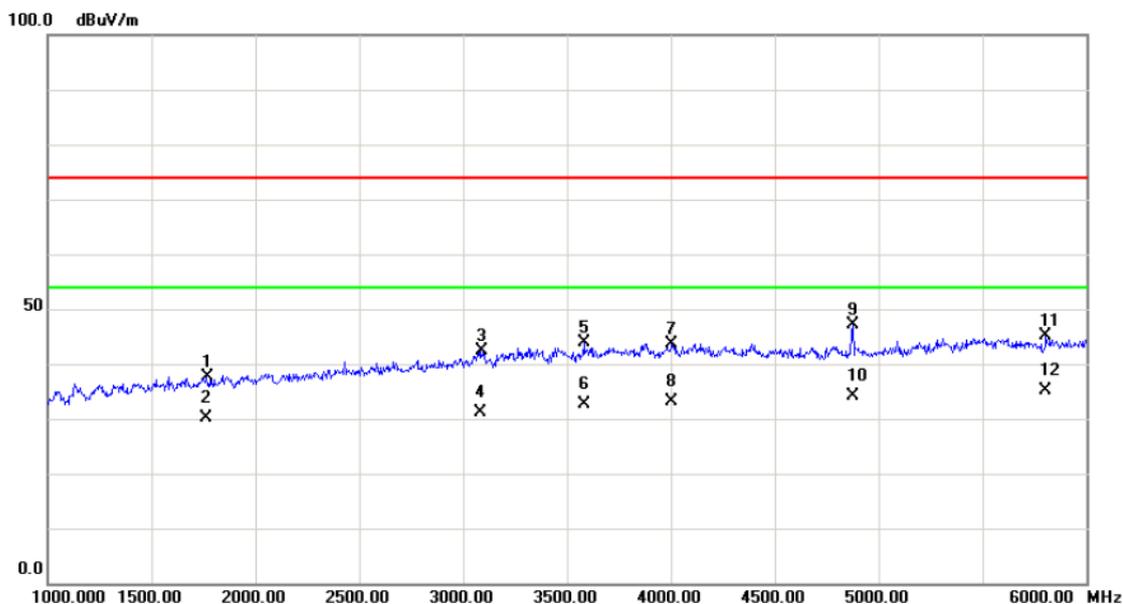

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1767.500	40.44	-2.89	37.55	74.00	-36.45	peak	
2		1767.500	33.14	-2.89	30.25	54.00	-23.75	AVG	
3		3087.500	40.22	2.04	42.26	74.00	-31.74	peak	
4		3087.500	29.21	2.04	31.25	54.00	-22.75	AVG	
5		3580.000	40.19	3.58	43.77	74.00	-30.23	peak	
6		3580.000	29.04	3.58	32.62	54.00	-21.38	AVG	
7		4005.000	37.08	6.62	43.70	74.00	-30.30	peak	
8		4005.000	26.63	6.62	33.25	54.00	-20.75	AVG	
9		4875.000	39.64	7.46	47.10	74.00	-26.90	peak	
10		4875.000	26.79	7.46	34.25	54.00	-19.75	AVG	
11		5805.000	35.56	9.52	45.08	74.00	-28.92	peak	
12	*	5805.000	25.50	9.52	35.02	54.00	-18.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Cable:	Adapter:HK; Earphone: MEMD1532B528000


Horizontal

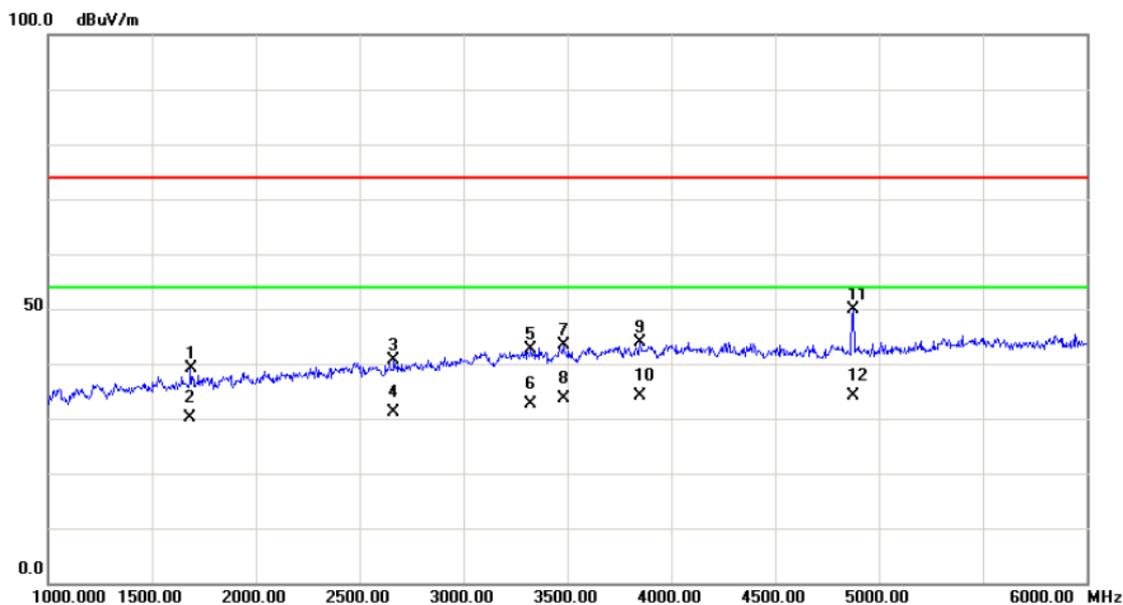

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1687.500	42.38	-3.24	39.14	74.00	-34.86	peak	
2		1687.500	33.49	-3.24	30.25	54.00	-23.75	AVG	
3		2665.000	40.04	0.66	40.70	74.00	-33.30	peak	
4		2665.000	30.39	0.66	31.05	54.00	-22.95	AVG	
5		3325.000	39.91	2.60	42.51	74.00	-31.49	peak	
6		3325.000	29.92	2.60	32.52	54.00	-21.48	AVG	
7		3480.000	40.41	2.96	43.37	74.00	-30.63	peak	
8		3480.000	30.66	2.96	33.62	54.00	-20.38	AVG	
9		3852.500	38.45	5.54	43.99	74.00	-30.01	peak	
10		3852.500	28.48	5.54	34.02	54.00	-19.98	AVG	
11		4875.000	42.35	7.46	49.81	74.00	-24.19	peak	
12	*	4875.000	26.59	7.46	34.05	54.00	-19.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Vertical

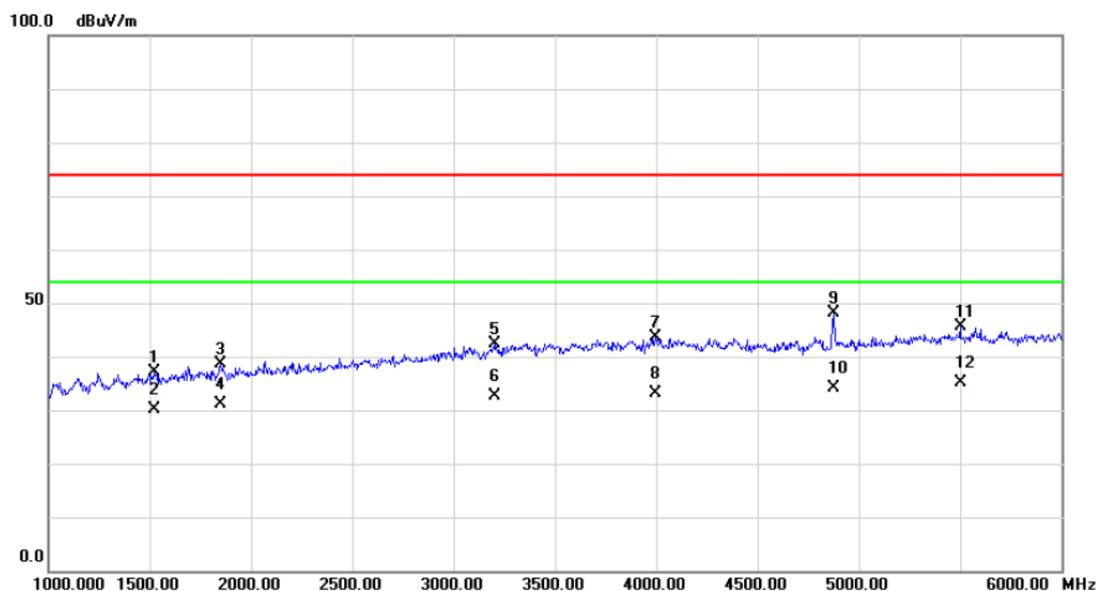

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1522.500	41.08	-3.97	37.11	74.00	-36.89	peak	
2	1522.500	34.22	-3.97	30.25	54.00	-23.75	AVG	
3	1850.000	41.11	-2.54	38.57	74.00	-35.43	peak	
4	1850.000	33.79	-2.54	31.25	54.00	-22.75	AVG	
5	3205.000	40.10	2.32	42.42	74.00	-31.58	peak	
6	3205.000	30.30	2.32	32.62	54.00	-21.38	AVG	
7	3995.000	36.92	6.59	43.51	74.00	-30.49	peak	
8	3995.000	26.46	6.59	33.05	54.00	-20.95	AVG	
9	4875.000	40.79	7.46	48.25	74.00	-25.75	peak	
10	4875.000	26.56	7.46	34.02	54.00	-19.98	AVG	
11	5502.500	36.37	9.14	45.51	74.00	-28.49	peak	
12 *	5502.500	25.87	9.14	35.01	54.00	-18.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Cable:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Horizontal

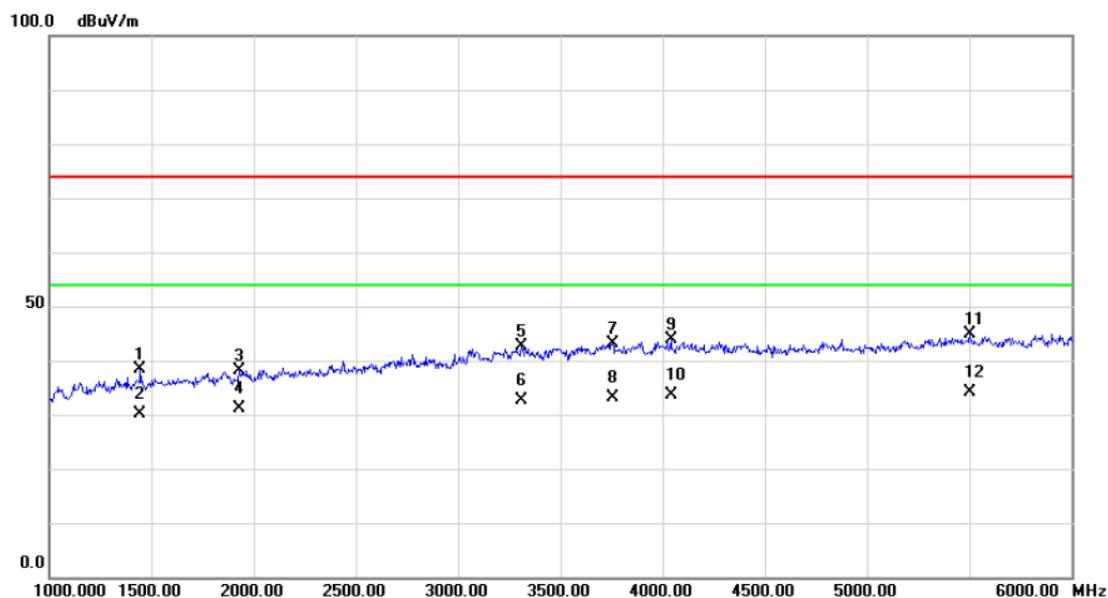

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1445.000	42.61	-4.23	38.38	74.00	-35.62	peak	
2	1445.000	34.48	-4.23	30.25	54.00	-23.75	AVG	
3	1930.000	40.40	-2.18	38.22	74.00	-35.78	peak	
4	1930.000	33.43	-2.18	31.25	54.00	-22.75	AVG	
5	3312.500	40.10	2.56	42.66	74.00	-31.34	peak	
6	3312.500	30.06	2.56	32.62	54.00	-21.38	AVG	
7	3757.500	38.38	4.86	43.24	74.00	-30.76	peak	
8	3757.500	28.16	4.86	33.02	54.00	-20.98	AVG	
9	4040.000	37.17	6.65	43.82	74.00	-30.18	peak	
10	4040.000	26.97	6.65	33.62	54.00	-20.38	AVG	
11	5500.000	35.62	9.14	44.76	74.00	-29.24	peak	
12 *	5500.000	25.11	9.14	34.25	54.00	-19.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Vertical

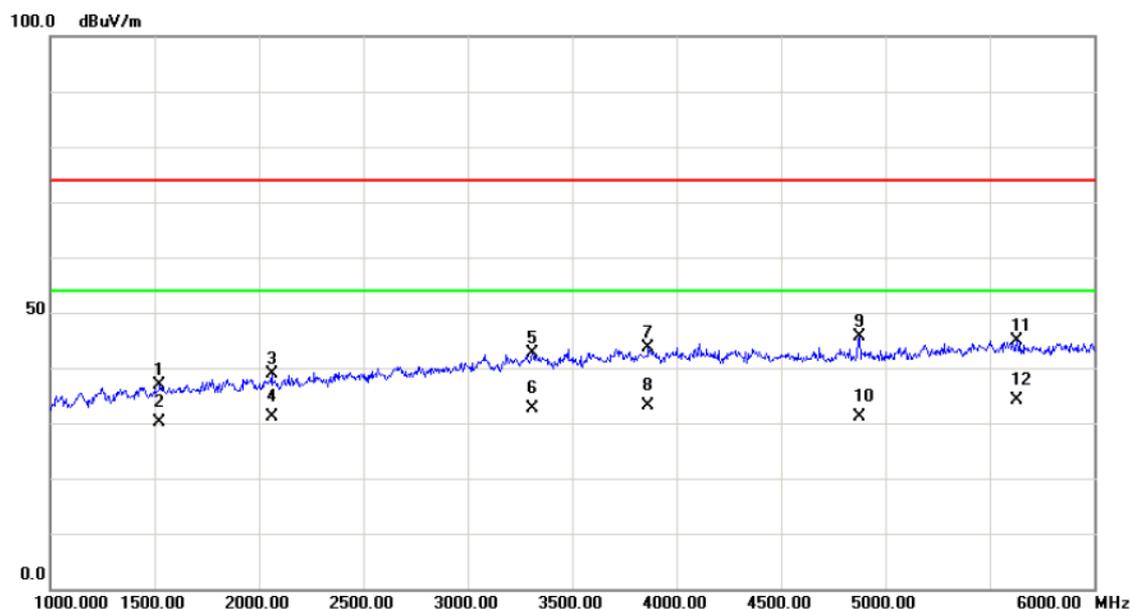

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1525.000	40.72	-3.96	36.76	74.00	-37.24	peak	
2	1525.000	34.21	-3.96	30.25	54.00	-23.75	AVG	
3	2060.000	40.45	-1.64	38.81	74.00	-35.19	peak	
4	2060.000	32.89	-1.64	31.25	54.00	-22.75	AVG	
5	3312.500	39.99	2.56	42.55	74.00	-31.45	peak	
6	3312.500	30.06	2.56	32.62	54.00	-21.38	AVG	
7	3865.000	37.88	5.64	43.52	74.00	-30.48	peak	
8	3865.000	27.37	5.64	33.01	54.00	-20.99	AVG	
9	4875.000	38.05	7.46	45.51	74.00	-28.49	peak	
10	4875.000	23.79	7.46	31.25	54.00	-22.75	AVG	
11	5630.000	35.62	9.30	44.92	74.00	-29.08	peak	
12 *	5630.000	24.75	9.30	34.05	54.00	-19.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Cable:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Horizontal

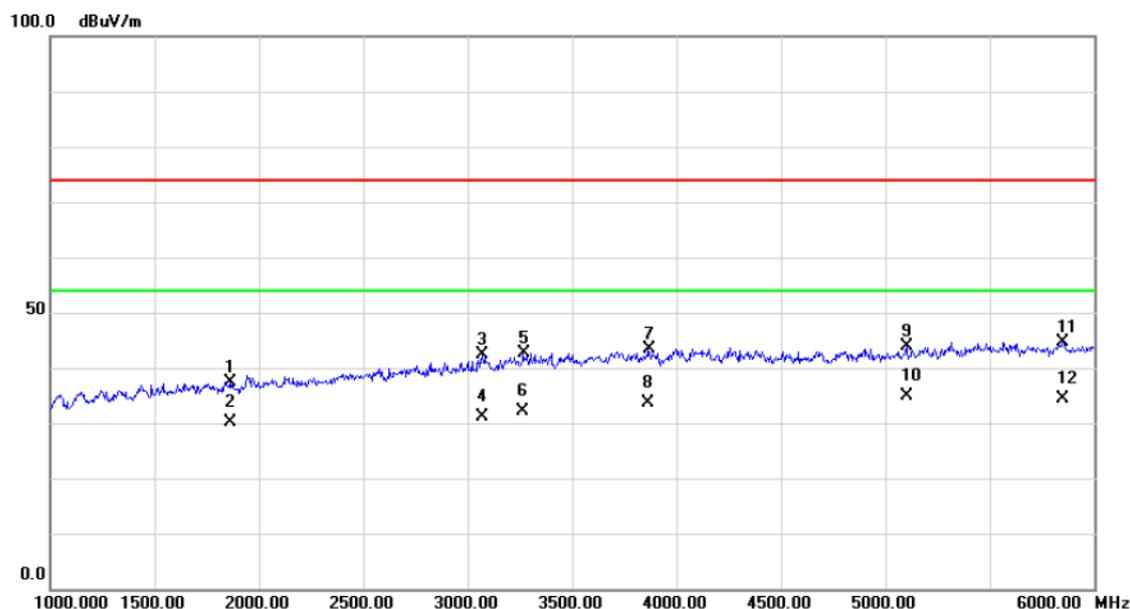

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1865.000	39.94	-2.47	37.47	74.00	-36.53	peak	
2	1865.000	32.72	-2.47	30.25	54.00	-23.75	AVG	
3	3072.500	40.41	2.01	42.42	74.00	-31.58	peak	
4	3072.500	29.24	2.01	31.25	54.00	-22.75	AVG	
5	3267.500	40.06	2.46	42.52	74.00	-31.48	peak	
6	3267.500	29.56	2.46	32.02	54.00	-21.98	AVG	
7	3867.500	37.81	5.65	43.46	74.00	-30.54	peak	
8	3867.500	27.97	5.65	33.62	54.00	-20.38	AVG	
9	5102.500	35.93	7.94	43.87	74.00	-30.13	peak	
10 *	5102.500	27.06	7.94	35.00	54.00	-19.00	AVG	
11	5850.000	35.04	9.57	44.61	74.00	-29.39	peak	
12	5850.000	24.93	9.57	34.50	54.00	-19.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic
Note:	Adapter:BYD


Vertical

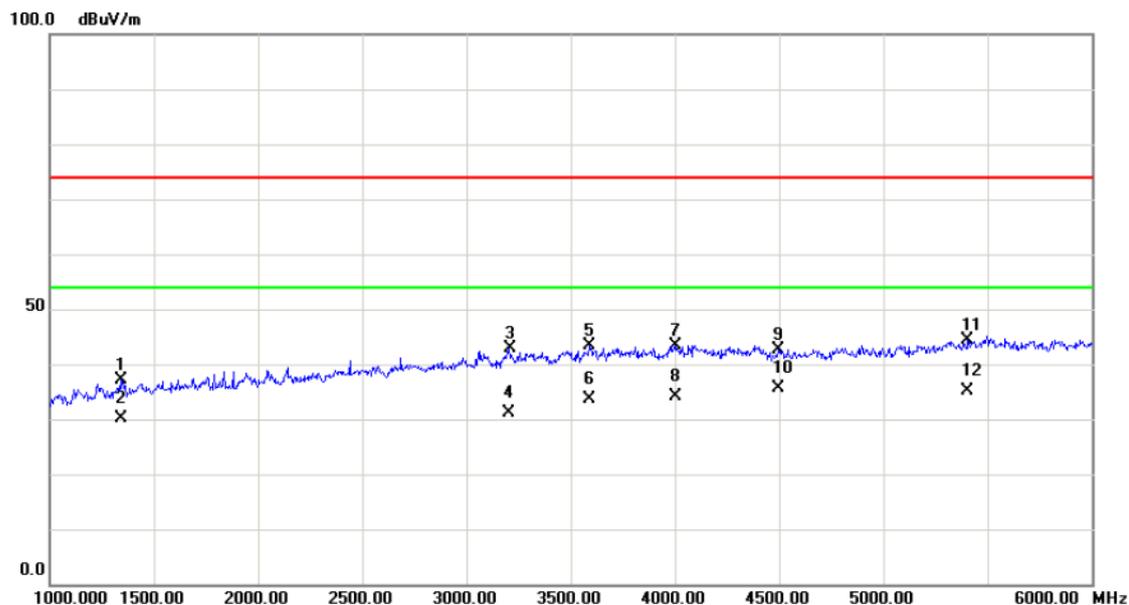

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1342.500	41.70	-4.52	37.18	74.00	-36.82	peak	
2		1342.500	34.77	-4.52	30.25	54.00	-23.75	AVG	
3		3207.500	40.57	2.32	42.89	74.00	-31.11	peak	
4		3207.500	28.93	2.32	31.25	54.00	-22.75	AVG	
5		3592.500	39.62	3.66	43.28	74.00	-30.72	peak	
6		3592.500	29.86	3.66	33.52	54.00	-20.48	AVG	
7		4000.000	36.84	6.62	43.46	74.00	-30.54	peak	
8		4000.000	27.43	6.62	34.05	54.00	-19.95	AVG	
9		4495.000	35.80	6.92	42.72	74.00	-31.28	peak	
10	*	4495.000	28.70	6.92	35.62	54.00	-18.38	AVG	
11		5405.000	35.46	8.86	44.32	74.00	-29.68	peak	
12		5405.000	26.15	8.86	35.01	54.00	-18.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic
Cable:	Adapter:BYD


Horizontal

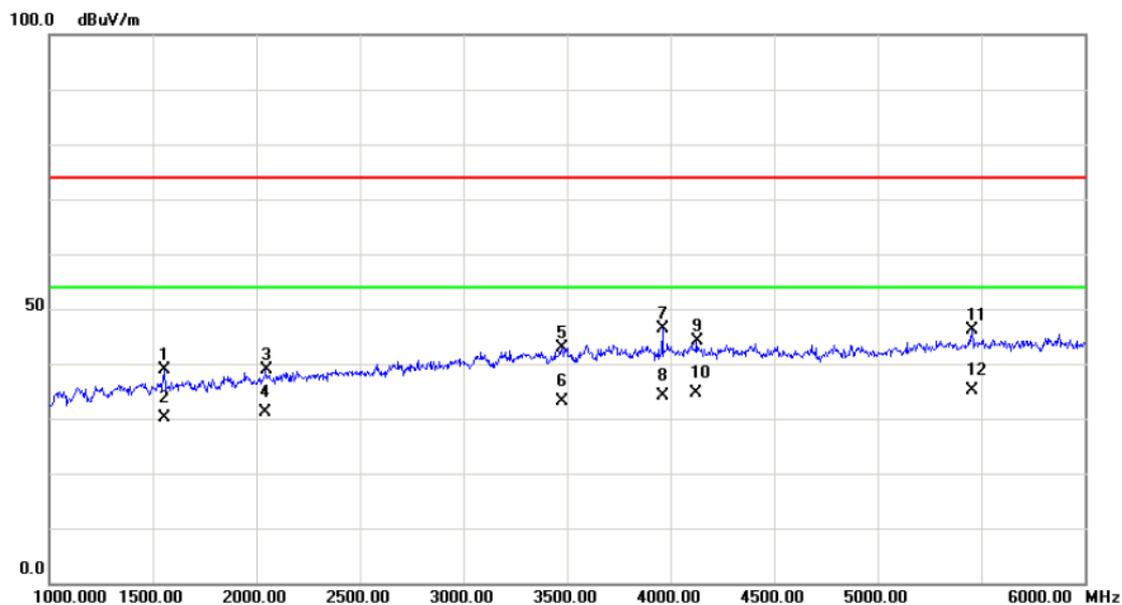

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1555.000	42.63	-3.83	38.80	74.00	-35.20	peak	
2	1555.000	34.08	-3.83	30.25	54.00	-23.75	AVG	
3	2047.500	40.54	-1.70	38.84	74.00	-35.16	peak	
4	2047.500	32.95	-1.70	31.25	54.00	-22.75	AVG	
5	3477.500	40.03	2.95	42.98	74.00	-31.02	peak	
6	3477.500	30.30	2.95	33.25	54.00	-20.75	AVG	
7	3962.500	40.04	6.36	46.40	74.00	-27.60	peak	
8	3962.500	27.69	6.36	34.05	54.00	-19.95	AVG	
9	4127.500	37.32	6.69	44.01	74.00	-29.99	peak	
10	4127.500	27.93	6.69	34.62	54.00	-19.38	AVG	
11	5457.500	37.07	9.01	46.08	74.00	-27.92	peak	
12 *	5457.500	26.01	9.01	35.02	54.00	-18.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+WiFi+GPS+Speaker
Note:	N/A


Vertical

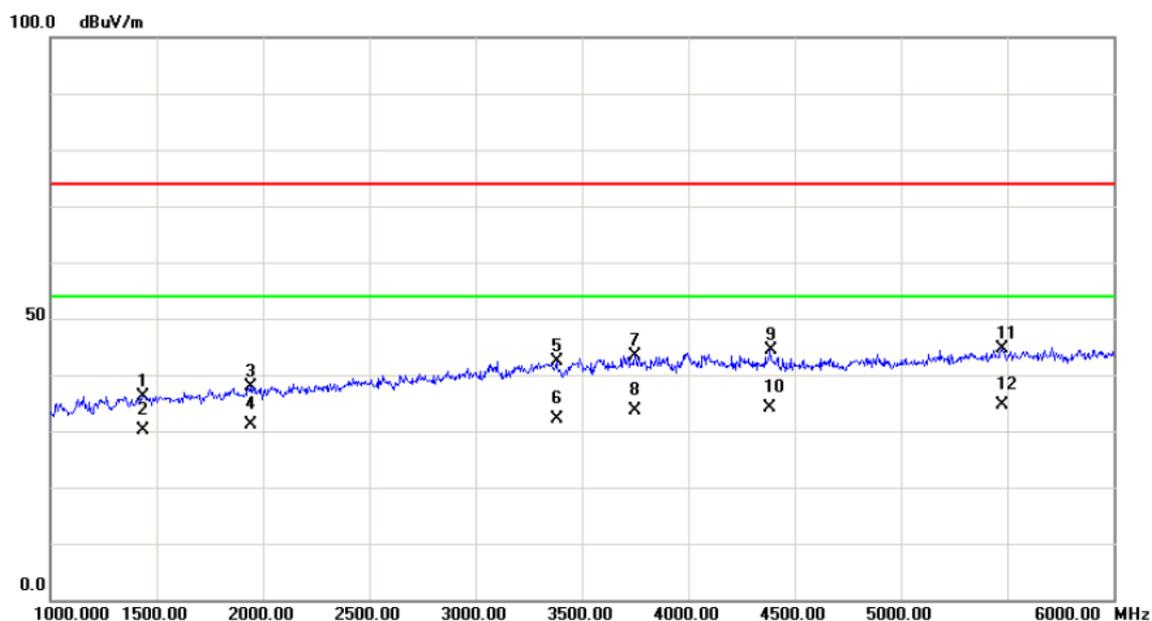

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1435.000	40.34	-4.25	36.09	74.00	-37.91	peak	
2		1435.000	34.50	-4.25	30.25	54.00	-23.75	AVG	
3		1940.000	40.05	-2.15	37.90	74.00	-36.10	peak	
4		1940.000	33.40	-2.15	31.25	54.00	-22.75	AVG	
5		3382.500	39.73	2.72	42.45	74.00	-31.55	peak	
6		3382.500	29.30	2.72	32.02	54.00	-21.98	AVG	
7		3750.000	38.68	4.82	43.50	74.00	-30.50	peak	
8		3750.000	28.80	4.82	33.62	54.00	-20.38	AVG	
9		4387.500	37.55	6.85	44.40	74.00	-29.60	peak	
10		4387.500	27.20	6.85	34.05	54.00	-19.95	AVG	
11		5475.000	35.50	9.07	44.57	74.00	-29.43	peak	
12	*	5475.000	25.55	9.07	34.62	54.00	-19.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+WiFi+GPS+Speaker
Cable:	N/A


Horizontal

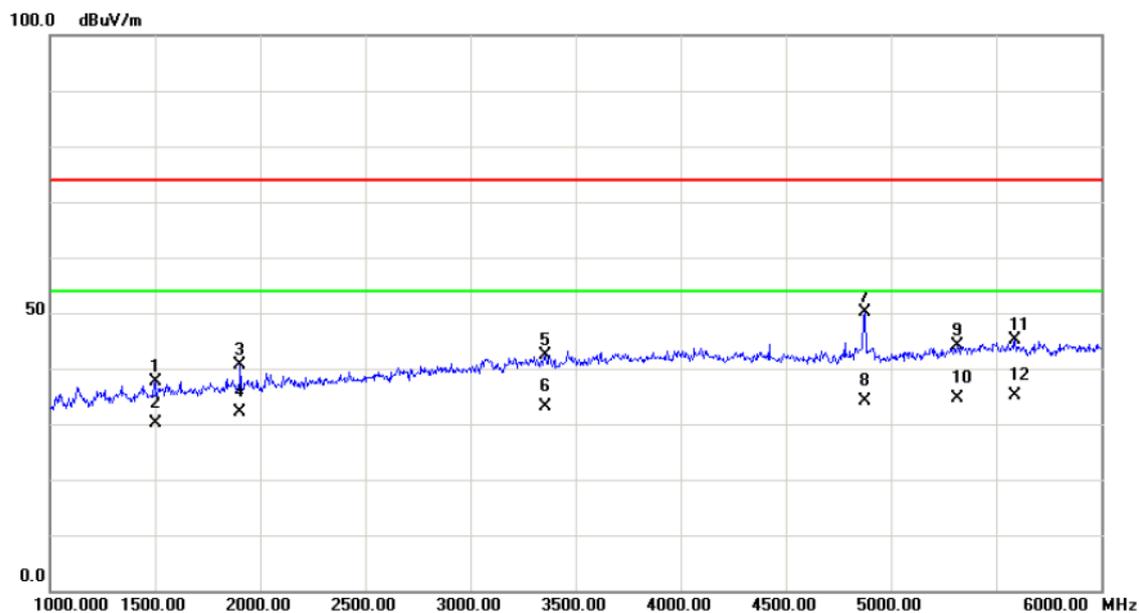

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1500.000	41.57	-4.06	37.51	74.00	-36.49	peak	
2	1500.000	34.31	-4.06	30.25	54.00	-23.75	AVG	
3	1905.000	42.88	-2.30	40.58	74.00	-33.42	peak	
4	1905.000	34.35	-2.30	32.05	54.00	-21.95	AVG	
5	3357.500	39.75	2.67	42.42	74.00	-31.58	peak	
6	3357.500	30.58	2.67	33.25	54.00	-20.75	AVG	
7	4875.000	42.79	7.46	50.25	74.00	-23.75	peak	
8	4875.000	26.59	7.46	34.05	54.00	-19.95	AVG	
9	5315.000	35.54	8.59	44.13	74.00	-29.87	peak	
10	5315.000	26.03	8.59	34.62	54.00	-19.38	AVG	
11	5590.000	35.78	9.25	45.03	74.00	-28.97	peak	
12 *	5590.000	25.77	9.25	35.02	54.00	-18.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:H09-000369 ; Earphone:1293#+3283# 3.5MM-150


Vertical

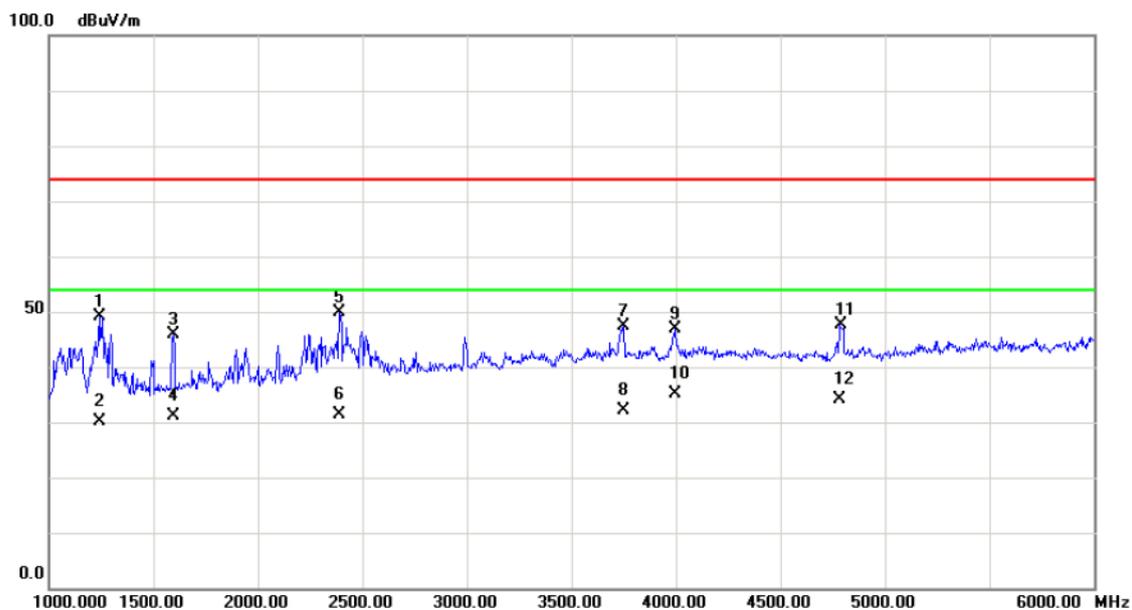

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1242.500	53.95	-4.82	49.13	74.00	-24.87	peak	
2		1242.500	34.84	-4.82	30.02	54.00	-23.98	AVG	
3		1595.000	49.50	-3.65	45.85	74.00	-28.15	peak	
4		1595.000	34.67	-3.65	31.02	54.00	-22.98	AVG	
5		2390.000	50.11	-0.35	49.76	74.00	-24.24	peak	
6		2390.000	31.61	-0.35	31.26	54.00	-22.74	AVG	
7		3750.000	42.50	4.82	47.32	74.00	-26.68	peak	
8		3750.000	27.20	4.82	32.02	54.00	-21.98	AVG	
9		3997.500	40.25	6.61	46.86	74.00	-27.14	peak	
10	*	3997.500	28.41	6.61	35.02	54.00	-18.98	AVG	
11		4787.500	40.35	7.34	47.69	74.00	-26.31	peak	
12		4787.500	26.68	7.34	34.02	54.00	-19.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable: H09-000369 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

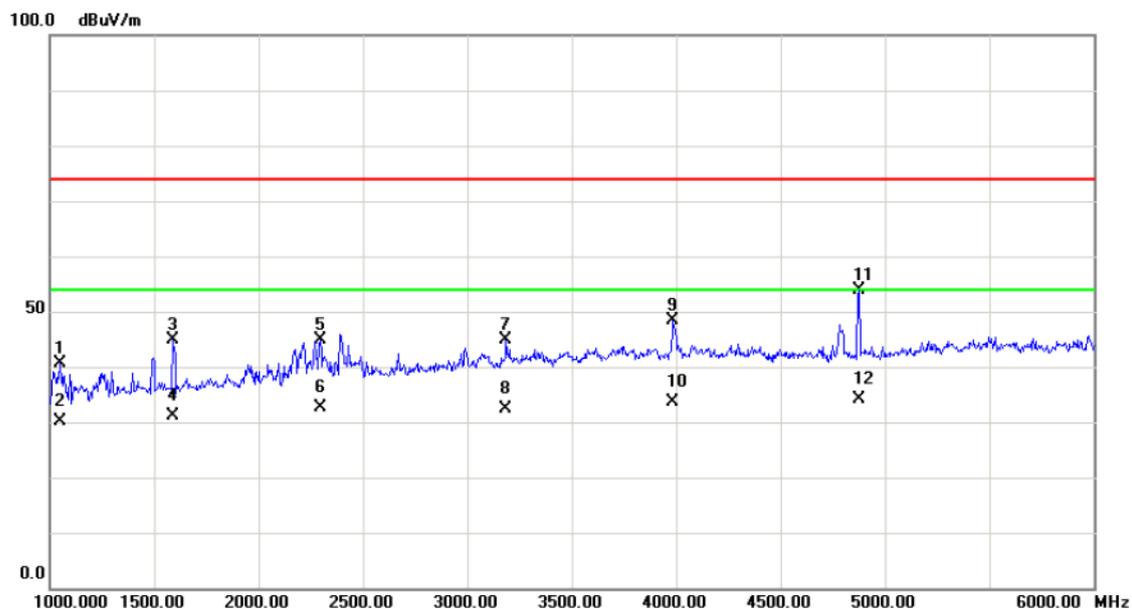

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1052.500	46.04	-5.39	40.65	74.00	-33.35	peak	
2		1052.500	35.41	-5.39	30.02	54.00	-23.98	AVG	
3		1592.500	48.56	-3.65	44.91	74.00	-29.09	peak	
4		1592.500	34.90	-3.65	31.25	54.00	-22.75	AVG	
5		2295.000	45.68	-0.73	44.95	74.00	-29.05	peak	
6		2295.000	33.35	-0.73	32.62	54.00	-21.38	AVG	
7		3185.000	42.68	2.27	44.95	74.00	-29.05	peak	
8		3185.000	30.23	2.27	32.50	54.00	-21.50	AVG	
9		3985.000	41.96	6.51	48.47	74.00	-25.53	peak	
10		3985.000	27.11	6.51	33.62	54.00	-20.38	AVG	
11		4875.000	46.36	7.46	53.82	74.00	-20.18	peak	
12	*	4875.000	26.59	7.46	34.05	54.00	-19.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:LSA00570 ; Earphone:1293#+3283# 3.5MM-150


Vertical

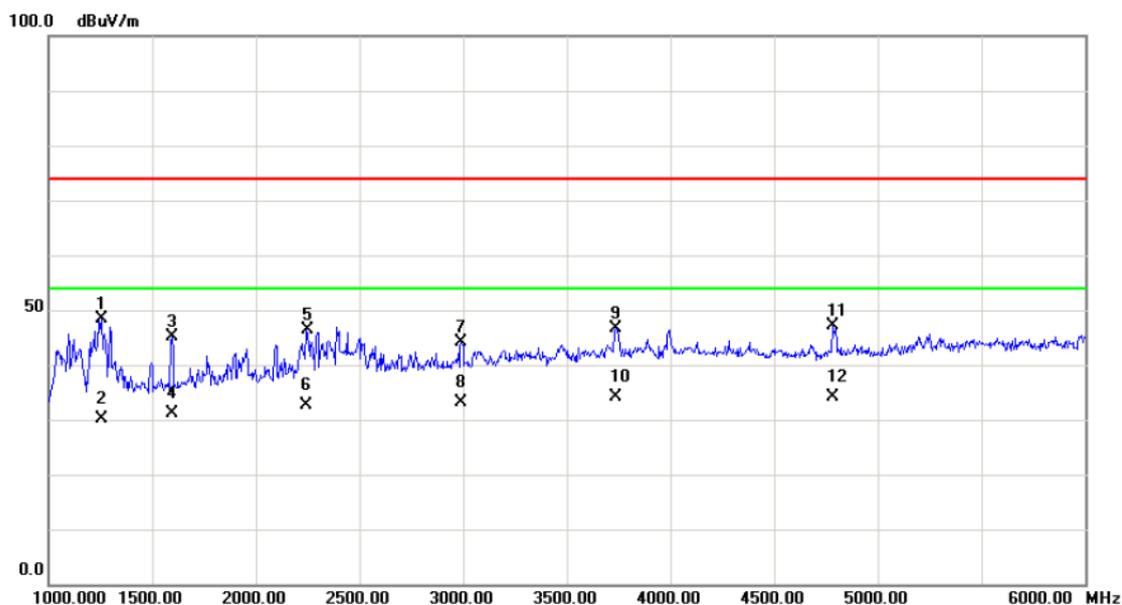

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1255.000	53.23	-4.79	48.44	74.00	-25.56	peak	
2	1255.000	35.04	-4.79	30.25	54.00	-23.75	AVG	
3	1595.000	48.86	-3.65	45.21	74.00	-28.79	peak	
4	1595.000	34.90	-3.65	31.25	54.00	-22.75	AVG	
5	2247.500	47.24	-0.91	46.33	74.00	-27.67	peak	
6	2247.500	33.53	-0.91	32.62	54.00	-21.38	AVG	
7	2992.500	42.25	1.81	44.06	74.00	-29.94	peak	
8	2992.500	31.21	1.81	33.02	54.00	-20.98	AVG	
9	3737.500	42.01	4.73	46.74	74.00	-27.26	peak	
10	3737.500	29.29	4.73	34.02	54.00	-19.98	AVG	
11	4782.500	39.91	7.33	47.24	74.00	-26.76	peak	
12 *	4782.500	26.92	7.33	34.25	54.00	-19.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:LSA00570 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

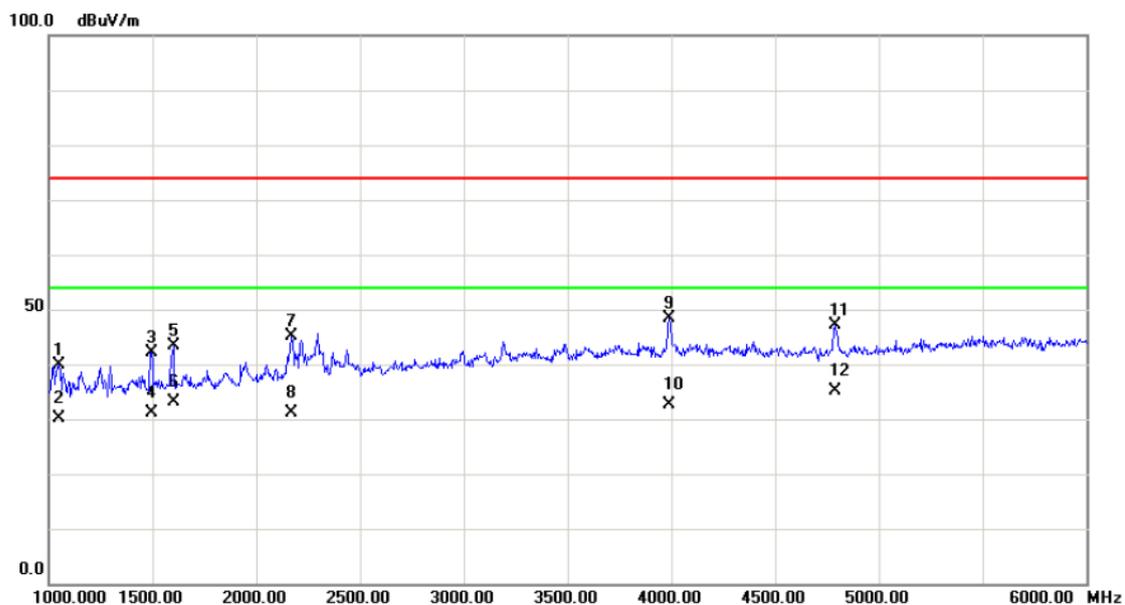

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1052.500	45.35	-5.39	39.96	74.00	-34.04	peak	
2	1052.500	35.64	-5.39	30.25	54.00	-23.75	AVG	
3	1497.500	46.28	-4.06	42.22	74.00	-31.78	peak	
4	1497.500	35.31	-4.06	31.25	54.00	-22.75	AVG	
5	1600.000	47.04	-3.63	43.41	74.00	-30.59	peak	
6	1600.000	36.88	-3.63	33.25	54.00	-20.75	AVG	
7	2172.500	46.40	-1.20	45.20	74.00	-28.80	peak	
8	2172.500	32.45	-1.20	31.25	54.00	-22.75	AVG	
9	3992.500	41.89	6.57	48.46	74.00	-25.54	peak	
10	3992.500	26.05	6.57	32.62	54.00	-21.38	AVG	
11	4790.000	39.89	7.34	47.23	74.00	-26.77	peak	
12 *	4790.000	27.68	7.34	35.02	54.00	-18.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:02450989 ; Earphone:1293#+3283# 3.5MM-150


Vertical

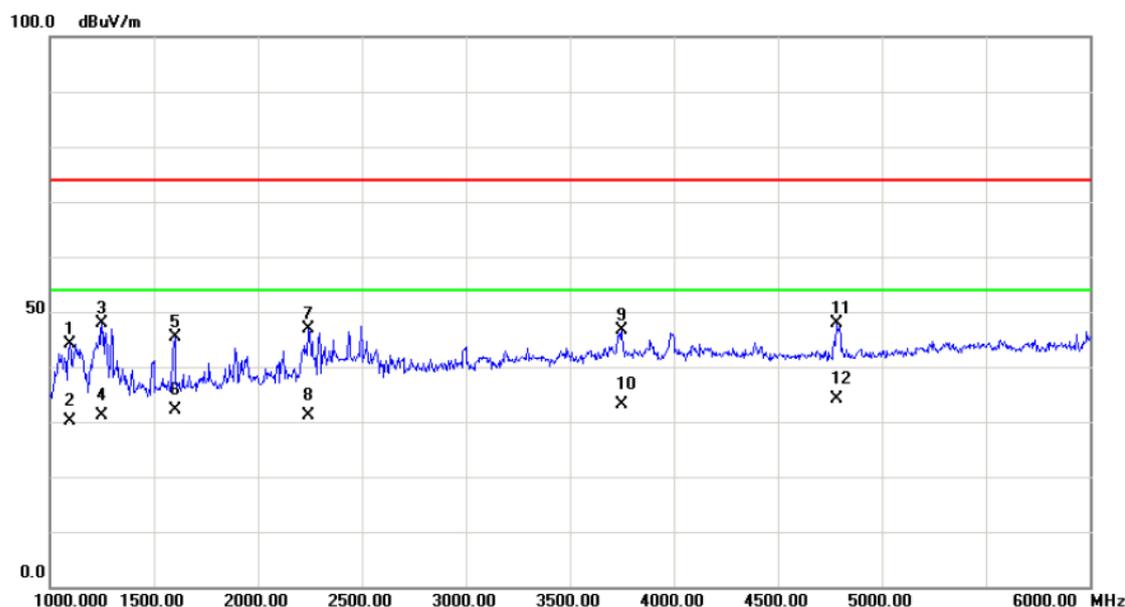

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1095.000	49.33	-5.26	44.07	74.00	-29.93	peak	
2		1095.000	35.27	-5.26	30.01	54.00	-23.99	AVG	
3		1252.500	52.77	-4.80	47.97	74.00	-26.03	peak	
4		1252.500	35.82	-4.80	31.02	54.00	-22.98	AVG	
5		1600.000	49.04	-3.63	45.41	74.00	-28.59	peak	
6		1600.000	35.65	-3.63	32.02	54.00	-21.98	AVG	
7		2245.000	47.84	-0.92	46.92	74.00	-27.08	peak	
8		2245.000	32.17	-0.92	31.25	54.00	-22.75	AVG	
9		3750.000	41.89	4.82	46.71	74.00	-27.29	peak	
10		3750.000	28.38	4.82	33.20	54.00	-20.80	AVG	
11		4780.000	40.63	7.33	47.96	74.00	-26.04	peak	
12	*	4780.000	26.92	7.33	34.25	54.00	-19.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:02450989 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

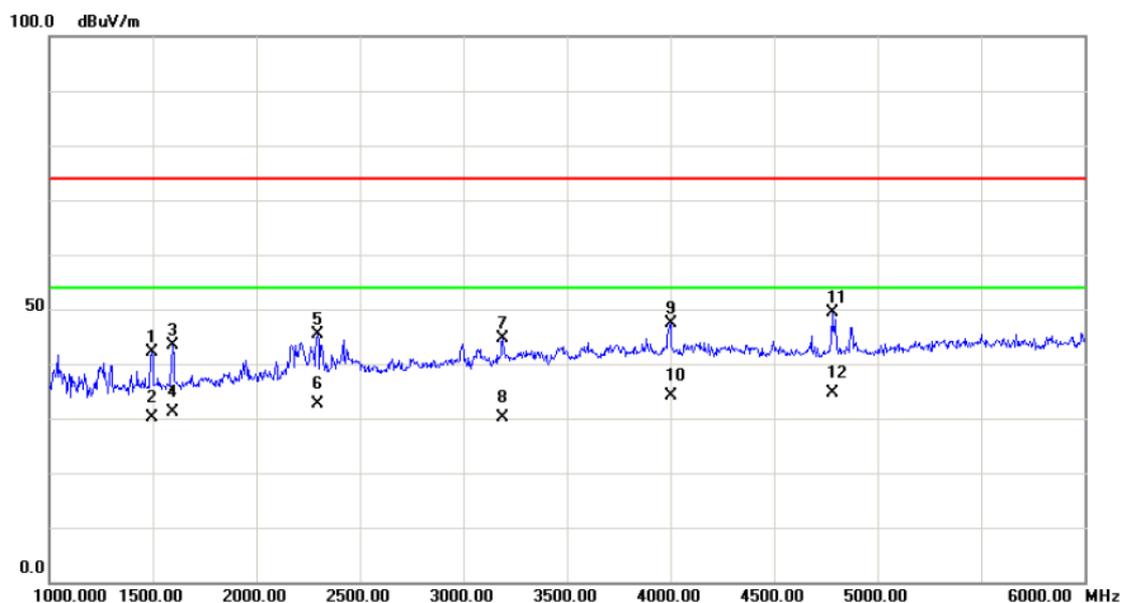

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1497.500	46.29	-4.06	42.23	74.00	-31.77	peak	
2		1497.500	34.30	-4.06	30.24	54.00	-23.76	AVG	
3		1597.500	47.08	-3.63	43.45	74.00	-30.55	peak	
4		1597.500	34.88	-3.63	31.25	54.00	-22.75	AVG	
5		2297.500	45.98	-0.71	45.27	74.00	-28.73	peak	
6		2297.500	33.23	-0.71	32.52	54.00	-21.48	AVG	
7		3192.500	42.43	2.29	44.72	74.00	-29.28	peak	
8		3192.500	27.96	2.29	30.25	54.00	-23.75	AVG	
9		4000.000	40.70	6.62	47.32	74.00	-26.68	peak	
10		4000.000	27.40	6.62	34.02	54.00	-19.98	AVG	
11		4782.500	42.01	7.33	49.34	74.00	-24.66	peak	
12	*	4782.500	27.29	7.33	34.62	54.00	-19.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:130-25076 ; Earphone:1293#+3283# 3.5MM-150


Vertical

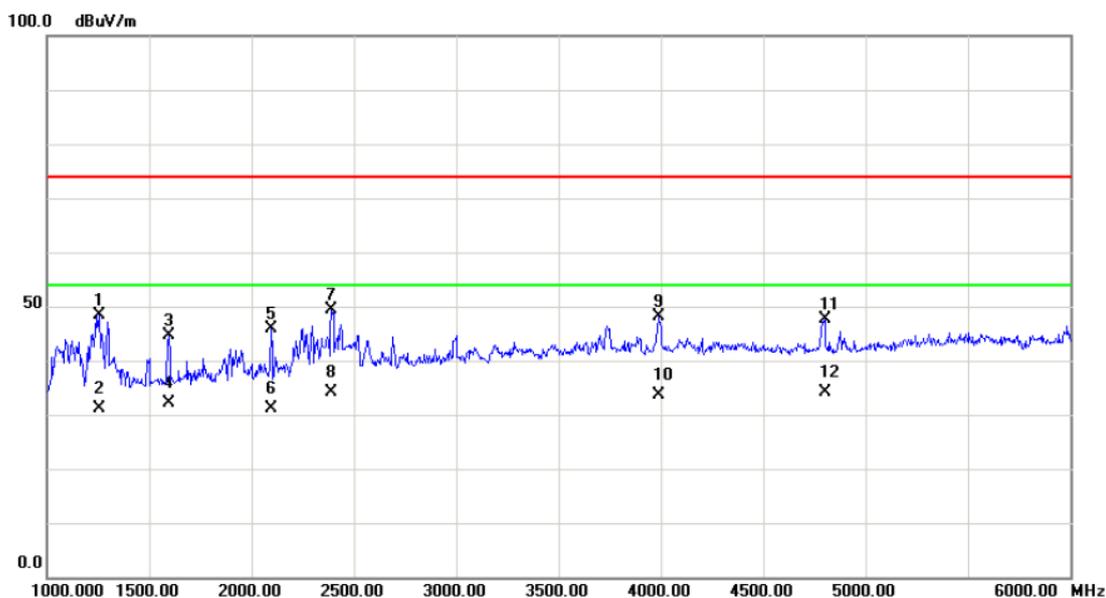

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1255.000	53.22	-4.79	48.43	74.00	-25.57	peak	
2		1255.000	35.81	-4.79	31.02	54.00	-22.98	AVG	
3		1597.500	48.32	-3.63	44.69	74.00	-29.31	peak	
4		1597.500	35.65	-3.63	32.02	54.00	-21.98	AVG	
5		2095.000	47.48	-1.52	45.96	74.00	-28.04	peak	
6		2095.000	32.77	-1.52	31.25	54.00	-22.75	AVG	
7		2392.500	49.71	-0.35	49.36	74.00	-24.64	peak	
8		2392.500	34.37	-0.35	34.02	54.00	-19.98	AVG	
9		3992.500	41.54	6.57	48.11	74.00	-25.89	peak	
10		3992.500	27.05	6.57	33.62	54.00	-20.38	AVG	
11		4800.000	40.26	7.35	47.61	74.00	-26.39	peak	
12	*	4800.000	26.70	7.35	34.05	54.00	-19.95	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:130-25076 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

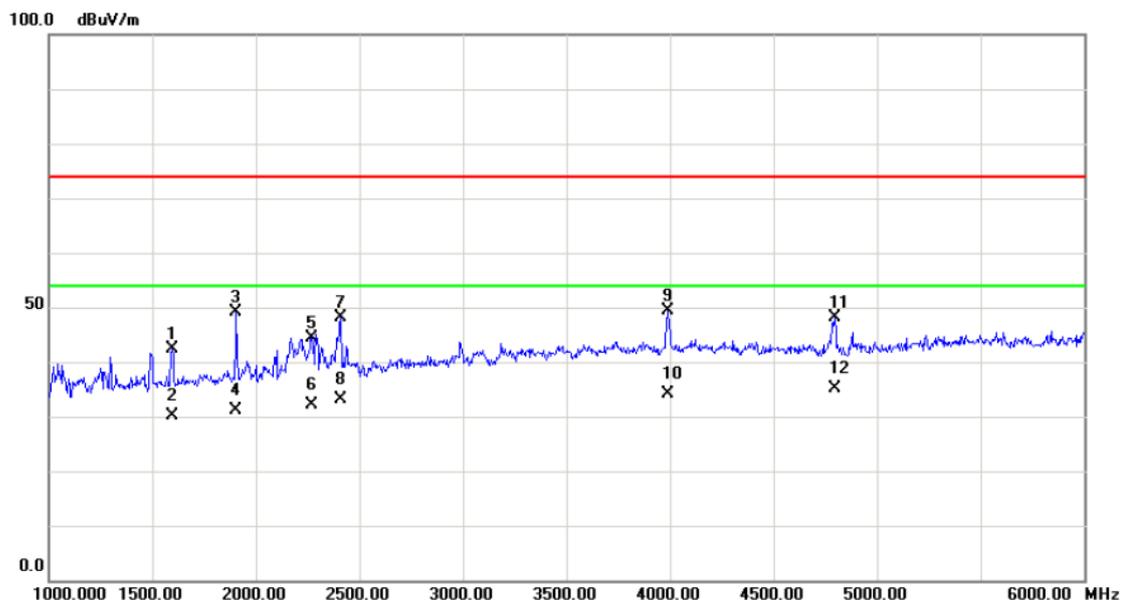

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1595.000	46.06	-3.65	42.41	74.00	-31.59	peak	
2		1595.000	33.90	-3.65	30.25	54.00	-23.75	AVG	
3		1905.000	51.54	-2.30	49.24	74.00	-24.76	peak	
4		1905.000	33.32	-2.30	31.02	54.00	-22.98	AVG	
5		2272.500	45.24	-0.81	44.43	74.00	-29.57	peak	
6		2272.500	32.83	-0.81	32.02	54.00	-21.98	AVG	
7		2410.000	48.31	-0.28	48.03	74.00	-25.97	peak	
8		2410.000	33.53	-0.28	33.25	54.00	-20.75	AVG	
9		3990.000	42.81	6.54	49.35	74.00	-24.65	peak	
10		3990.000	27.48	6.54	34.02	54.00	-19.98	AVG	
11		4795.000	40.80	7.34	48.14	74.00	-25.86	peak	
12	*	4795.000	27.67	7.34	35.01	54.00	-18.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: HA1-3


Vertical

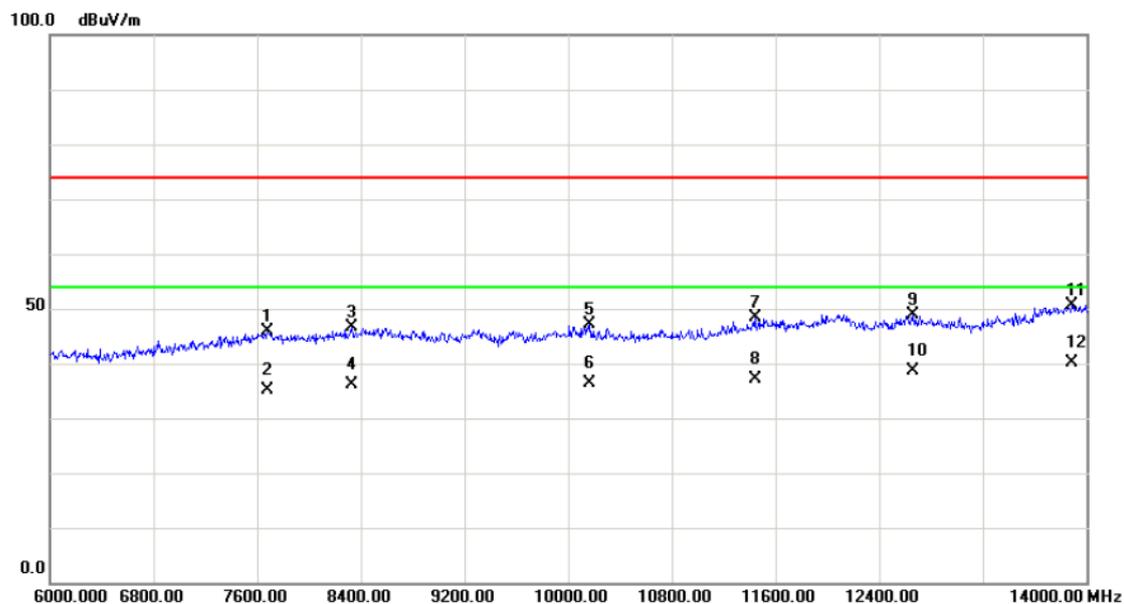

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7684.000	29.84	16.02	45.86	74.00	-28.14	peak	
2	7684.000	19.00	16.02	35.02	54.00	-18.98	AVG	
3	8332.000	31.07	15.62	46.69	74.00	-27.31	peak	
4	8332.000	20.40	15.62	36.02	54.00	-17.98	AVG	
5	10168.00	31.66	15.37	47.03	74.00	-26.97	peak	
6	10168.00	20.93	15.37	36.30	54.00	-17.70	AVG	
7	11444.00	28.14	20.17	48.31	74.00	-25.69	peak	
8	11444.00	16.88	20.17	37.05	54.00	-16.95	AVG	
9	12664.00	29.92	19.07	48.99	74.00	-25.01	peak	
10	12664.00	19.55	19.07	38.62	54.00	-15.38	AVG	
11	13892.00	25.95	24.75	50.70	74.00	-23.30	peak	
12 *	13892.00	15.50	24.75	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Cable:	Adapter:HK; Earphone: HA1-3


Horizontal

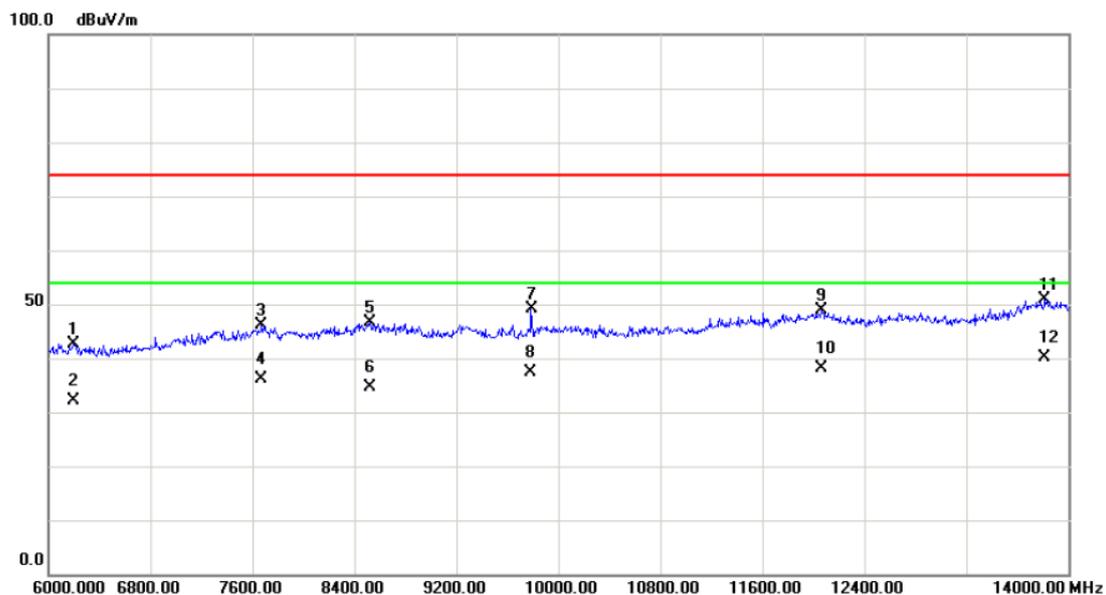

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6200.000	32.08	10.61	42.69	74.00	-31.31	peak	
2		6200.000	21.44	10.61	32.05	54.00	-21.95	AVG	
3		7672.000	30.03	16.01	46.04	74.00	-27.96	peak	
4		7672.000	20.19	16.01	36.20	54.00	-17.80	AVG	
5		8520.000	31.31	15.42	46.73	74.00	-27.27	peak	
6		8520.000	19.10	15.42	34.52	54.00	-19.48	AVG	
7		9788.000	33.55	15.68	49.23	74.00	-24.77	peak	
8		9788.000	21.60	15.68	37.28	54.00	-16.72	AVG	
9		12064.00	26.22	22.59	48.81	74.00	-25.19	peak	
10		12064.00	15.61	22.59	38.20	54.00	-15.80	AVG	
11		13816.00	26.54	24.35	50.89	74.00	-23.11	peak	
12	*	13816.00	15.90	24.35	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:HK; Earphone: MEMD1532B528000


Vertical

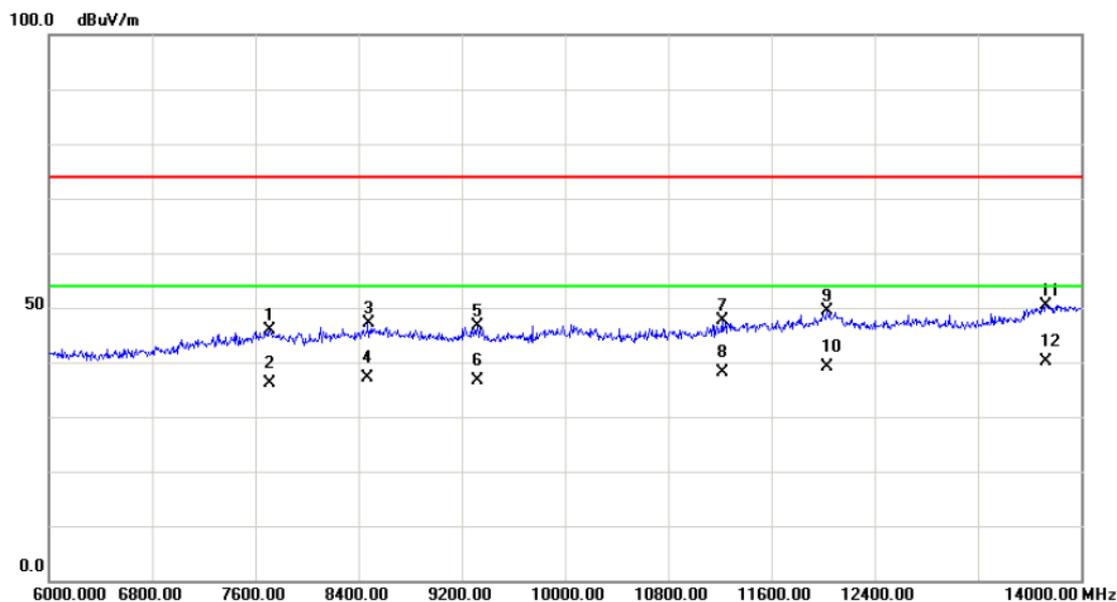

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7712.000	29.83	16.03	45.86	74.00	-28.14	peak	
2		7712.000	20.22	16.03	36.25	54.00	-17.75	AVG	
3		8476.000	31.79	15.43	47.22	74.00	-26.78	peak	
4		8476.000	21.62	15.43	37.05	54.00	-16.95	AVG	
5		9320.000	31.07	15.53	46.60	74.00	-27.40	peak	
6		9320.000	20.99	15.53	36.52	54.00	-17.48	AVG	
7		11220.00	27.37	20.28	47.65	74.00	-26.35	peak	
8		11220.00	17.77	20.28	38.05	54.00	-15.95	AVG	
9		12032.00	26.41	22.96	49.37	74.00	-24.63	peak	
10		12032.00	16.06	22.96	39.02	54.00	-14.98	AVG	
11		13728.00	26.53	23.87	50.40	74.00	-23.60	peak	
12	*	13728.00	16.38	23.87	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Cable:	Adapter:HK; Earphone: MEMD1532B528000


Horizontal

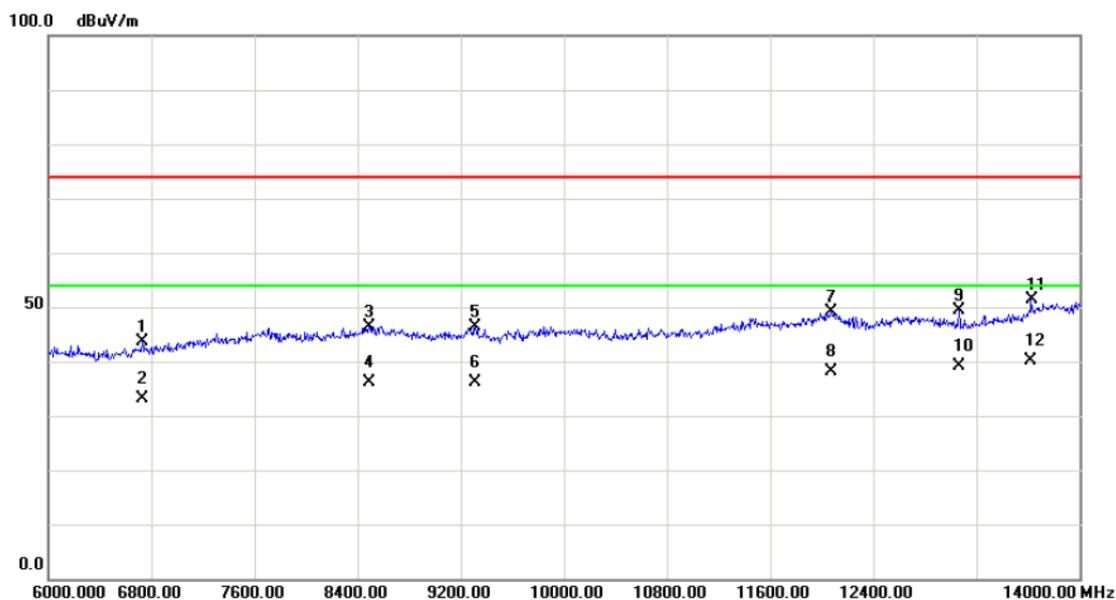

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6728.000	30.88	12.79	43.67	74.00	-30.33	peak	
2		6728.000	20.26	12.79	33.05	54.00	-20.95	AVG	
3		8488.000	31.09	15.41	46.50	74.00	-27.50	peak	
4		8488.000	20.84	15.41	36.25	54.00	-17.75	AVG	
5		9316.000	30.93	15.54	46.47	74.00	-27.53	peak	
6		9316.000	20.71	15.54	36.25	54.00	-17.75	AVG	
7		12076.00	26.70	22.46	49.16	74.00	-24.84	peak	
8		12076.00	15.79	22.46	38.25	54.00	-15.75	AVG	
9		13064.00	27.35	22.00	49.35	74.00	-24.65	peak	
10		13064.00	17.02	22.00	39.02	54.00	-14.98	AVG	
11		13628.00	27.97	23.33	51.30	74.00	-22.70	peak	
12	*	13628.00	16.87	23.33	40.20	54.00	-13.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Earphone+Playing+idle+WiFi+GPS
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Vertical

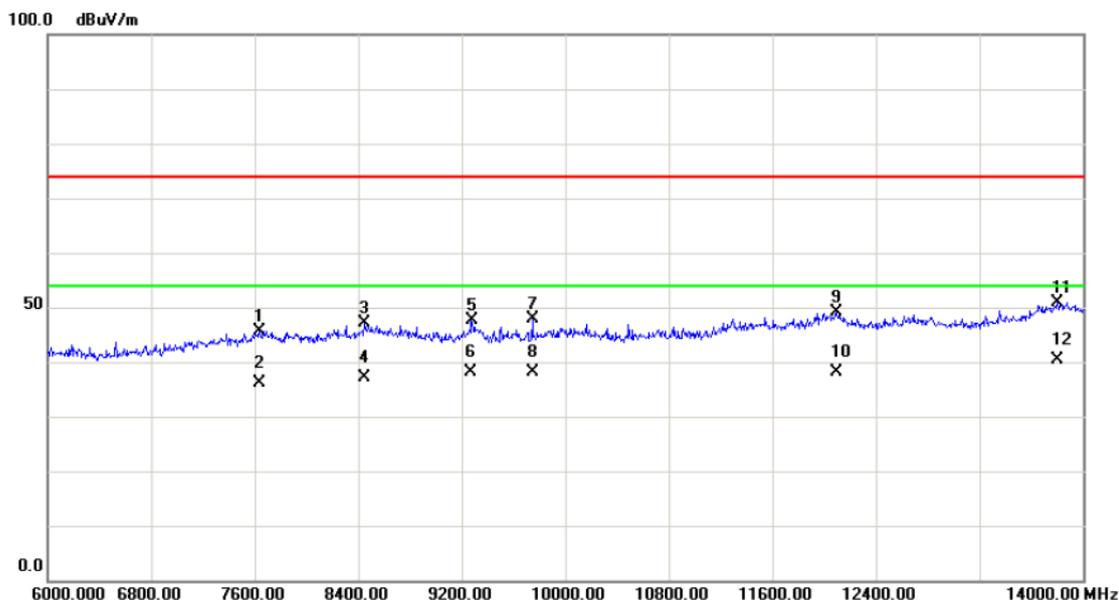

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7632.000	29.66	16.01	45.67	74.00	-28.33	peak	
2		7632.000	20.01	16.01	36.02	54.00	-17.98	AVG	
3		8448.000	31.64	15.46	47.10	74.00	-26.90	peak	
4		8448.000	21.59	15.46	37.05	54.00	-16.95	AVG	
5		9276.000	31.89	15.62	47.51	74.00	-26.49	peak	
6		9276.000	22.40	15.62	38.02	54.00	-15.98	AVG	
7		9748.000	32.17	15.62	47.79	74.00	-26.21	peak	
8		9748.000	22.53	15.62	38.15	54.00	-15.85	AVG	
9		12100.00	26.99	22.19	49.18	74.00	-24.82	peak	
10		12100.00	15.86	22.19	38.05	54.00	-15.95	AVG	
11		13804.00	26.70	24.28	50.98	74.00	-23.02	peak	
12	*	13804.00	16.04	24.28	40.32	54.00	-13.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Cable:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Horizontal

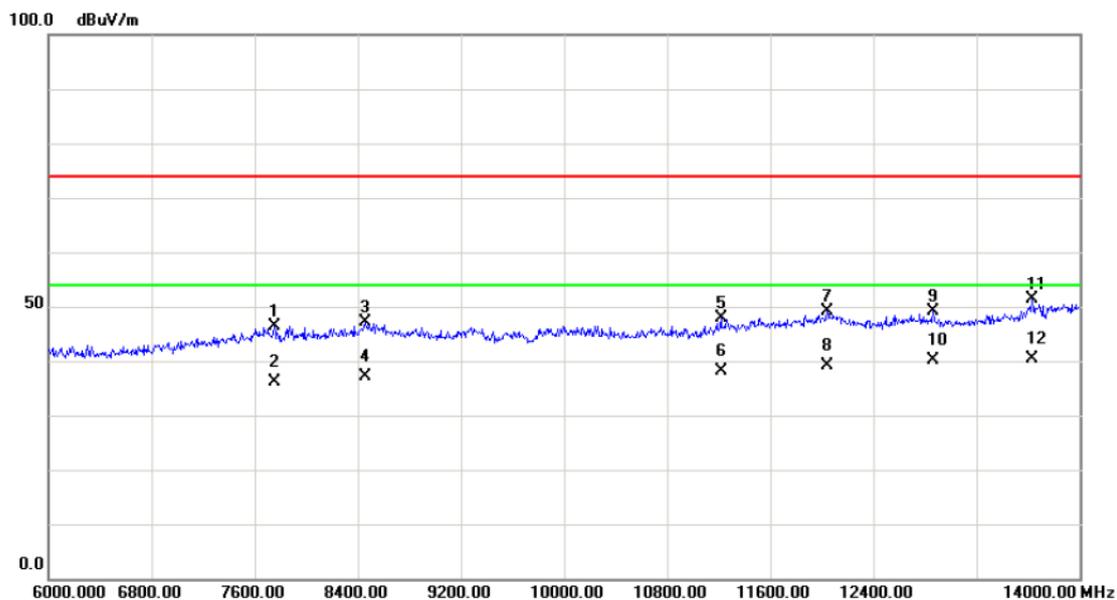

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7756.000	30.34	16.04	46.38	74.00	-27.62	peak	
2		7756.000	20.01	16.04	36.05	54.00	-17.95	AVG	
3		8456.000	31.67	15.45	47.12	74.00	-26.88	peak	
4		8456.000	21.60	15.45	37.05	54.00	-16.95	AVG	
5		11216.00	27.71	20.28	47.99	74.00	-26.01	peak	
6		11216.00	17.74	20.28	38.02	54.00	-15.98	AVG	
7		12044.00	26.41	22.82	49.23	74.00	-24.77	peak	
8		12044.00	16.23	22.82	39.05	54.00	-14.95	AVG	
9		12864.00	28.50	20.75	49.25	74.00	-24.75	peak	
10		12864.00	19.50	20.75	40.25	54.00	-13.75	AVG	
11		13636.00	27.96	23.37	51.33	74.00	-22.67	peak	
12	*	13636.00	16.99	23.37	40.36	54.00	-13.64	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Vertical

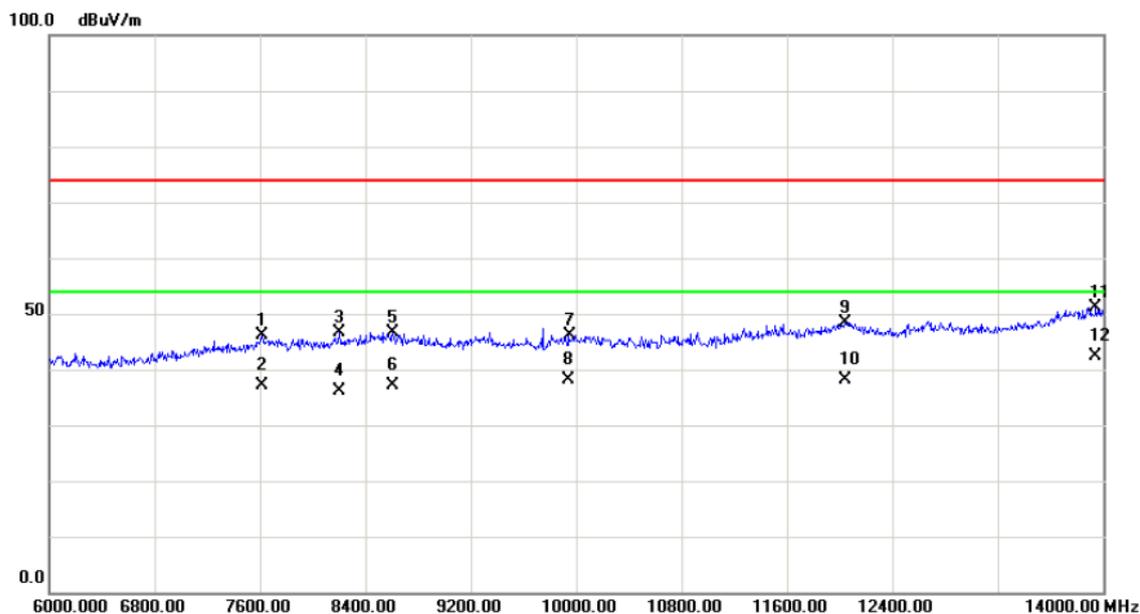

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7620.000	30.12	16.00	46.12	74.00	-27.88	peak	
2		7620.000	21.05	16.00	37.05	54.00	-16.95	AVG	
3		8200.000	30.88	15.81	46.69	74.00	-27.31	peak	
4		8200.000	20.24	15.81	36.05	54.00	-17.95	AVG	
5		8612.000	31.07	15.56	46.63	74.00	-27.37	peak	
6		8612.000	21.49	15.56	37.05	54.00	-16.95	AVG	
7		9948.000	30.18	15.97	46.15	74.00	-27.85	peak	
8		9948.000	22.08	15.97	38.05	54.00	-15.95	AVG	
9		12040.000	25.44	22.87	48.31	74.00	-25.69	peak	
10		12040.000	15.18	22.87	38.05	54.00	-15.95	AVG	
11		13944.000	26.04	25.03	51.07	74.00	-22.93	peak	
12	*	13944.000	17.27	25.03	42.30	54.00	-11.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter + Earphone +Camera on+BT+idle
Note:	Adapter:BYD; Earphone: 1293#+3283# 3.5MM-150


Horizontal

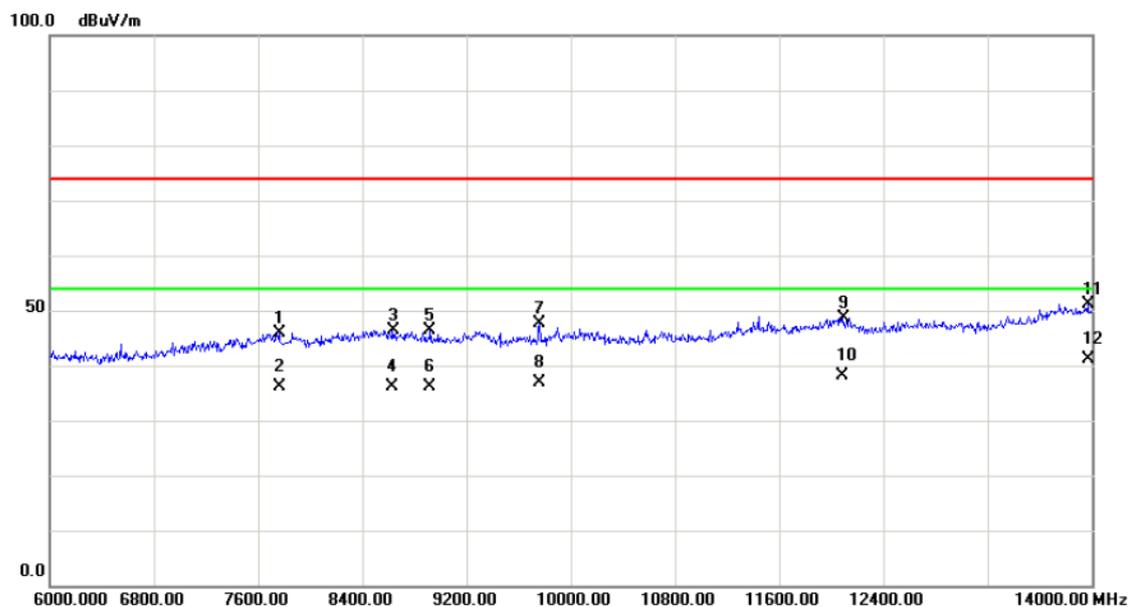

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7760.000	29.81	16.04	45.85	74.00	-28.15	peak	
2		7760.000	19.98	16.04	36.02	54.00	-17.98	AVG	
3		8636.000	30.86	15.60	46.46	74.00	-27.54	peak	
4		8636.000	20.42	15.60	36.02	54.00	-17.98	AVG	
5		8920.000	30.41	16.04	46.45	74.00	-27.55	peak	
6		8920.000	20.21	16.04	36.25	54.00	-17.75	AVG	
7		9764.000	31.91	15.64	47.55	74.00	-26.45	peak	
8		9764.000	21.17	15.64	36.81	54.00	-17.19	AVG	
9		12092.000	26.44	22.28	48.72	74.00	-25.28	peak	
10		12092.000	15.77	22.28	38.05	54.00	-15.95	AVG	
11		13968.000	25.94	25.16	51.10	74.00	-22.90	peak	
12	*	13968.000	16.04	25.16	41.20	54.00	-12.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic
Note:	Adapter:BYD


Vertical

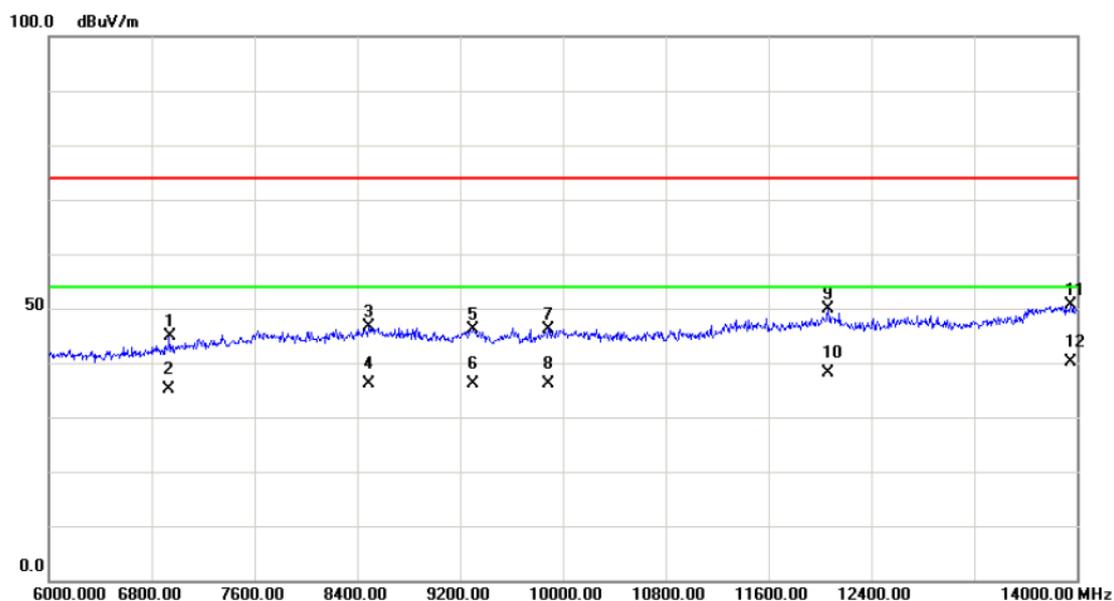

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6940.000	31.26	13.63	44.89	74.00	-29.11	peak	
2		6940.000	21.39	13.63	35.02	54.00	-18.98	AVG	
3		8492.000	31.28	15.40	46.68	74.00	-27.32	peak	
4		8492.000	20.62	15.40	36.02	54.00	-17.98	AVG	
5		9304.000	30.65	15.55	46.20	74.00	-27.80	peak	
6		9304.000	20.47	15.55	36.02	54.00	-17.98	AVG	
7		9892.000	30.38	15.87	46.25	74.00	-27.75	peak	
8		9892.000	20.17	15.87	36.04	54.00	-17.96	AVG	
9		12064.000	27.37	22.59	49.96	74.00	-24.04	peak	
10		12064.000	15.46	22.59	38.05	54.00	-15.95	AVG	
11		13952.000	25.60	25.07	50.67	74.00	-23.33	peak	
12	*	13952.000	15.18	25.07	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Traffic
Note:	Adapter:BYD


Horizontal

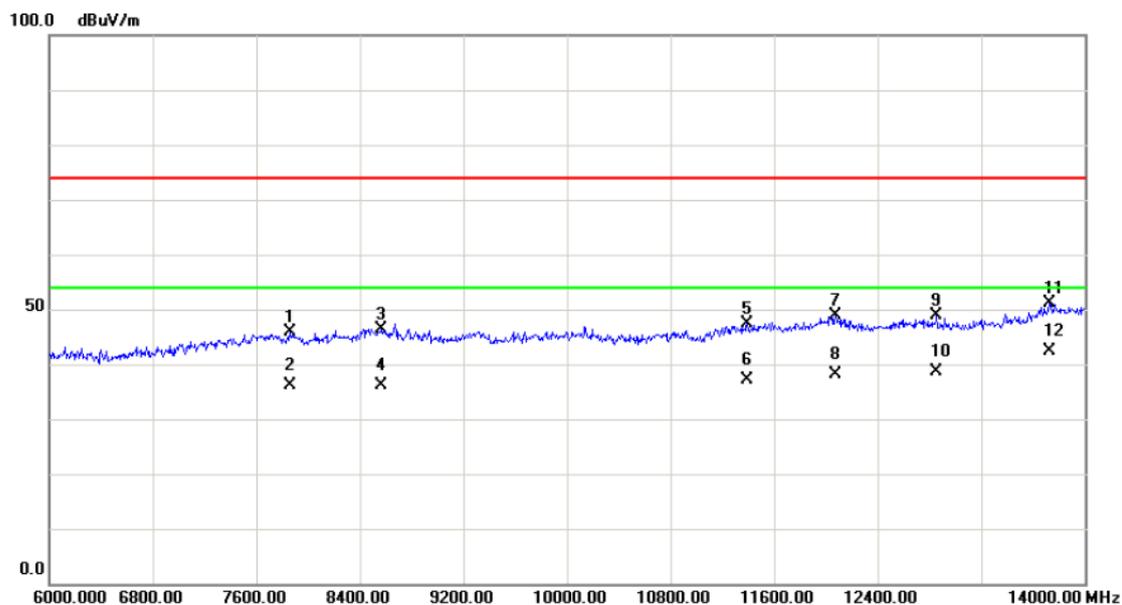

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7856.000	29.72	16.06	45.78	74.00	-28.22	peak	
2	7856.000	19.96	16.06	36.02	54.00	-17.98	AVG	
3	8568.000	31.00	15.49	46.49	74.00	-27.51	peak	
4	8568.000	20.53	15.49	36.02	54.00	-17.98	AVG	
5	11396.000	27.10	20.19	47.29	74.00	-26.71	peak	
6	11396.000	17.01	20.19	37.20	54.00	-16.80	AVG	
7	12076.000	26.31	22.46	48.77	74.00	-25.23	peak	
8	12076.000	15.56	22.46	38.02	54.00	-15.98	AVG	
9	12856.000	28.11	20.68	48.79	74.00	-25.21	peak	
10	12856.000	17.94	20.68	38.62	54.00	-15.38	AVG	
11	13728.000	27.30	23.87	51.17	74.00	-22.83	peak	
12 *	13728.000	18.43	23.87	42.30	54.00	-11.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+WiFi+GPS+Speaker
Note:	-


Vertical

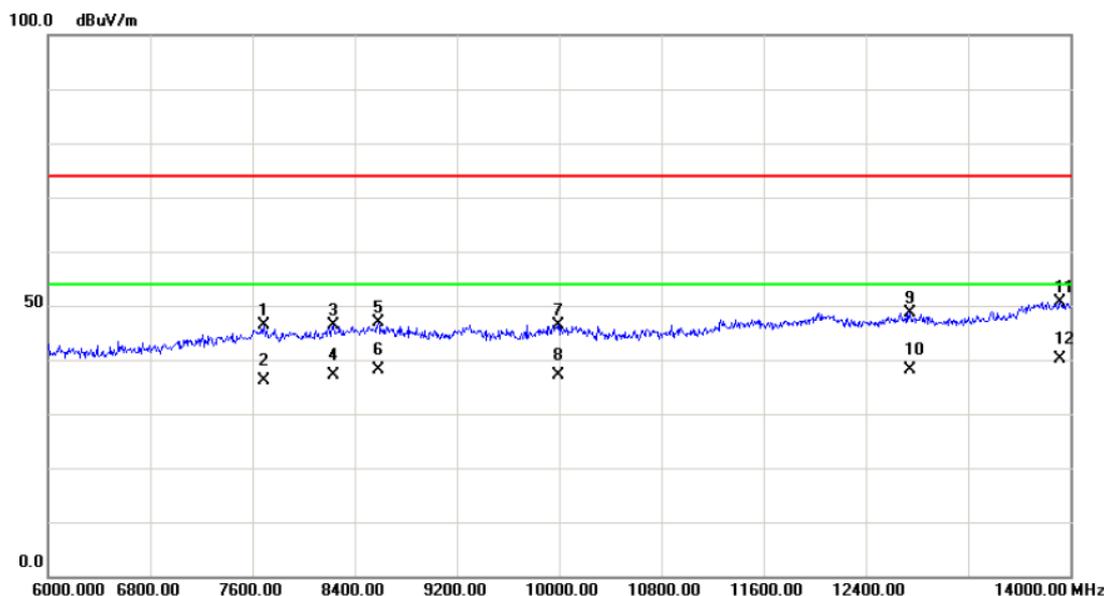

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7692.000	30.36	16.02	46.38	74.00	-27.62	peak	
2		7692.000	20.03	16.02	36.05	54.00	-17.95	AVG	
3		8232.000	30.62	15.77	46.39	74.00	-27.61	peak	
4		8232.000	21.28	15.77	37.05	54.00	-16.95	AVG	
5		8588.000	31.36	15.52	46.88	74.00	-27.12	peak	
6		8588.000	22.50	15.52	38.02	54.00	-15.98	AVG	
7		9992.000	30.42	16.04	46.46	74.00	-27.54	peak	
8		9992.000	21.01	16.04	37.05	54.00	-16.95	AVG	
9		12748.00	28.84	19.78	48.62	74.00	-25.38	peak	
10		12748.00	18.27	19.78	38.05	54.00	-15.95	AVG	
11		13920.00	25.73	24.89	50.62	74.00	-23.38	peak	
12	*	13920.00	15.33	24.89	40.22	54.00	-13.78	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Playing+idle+WiFi+GPS+Speaker
Note:	-


Horizontal

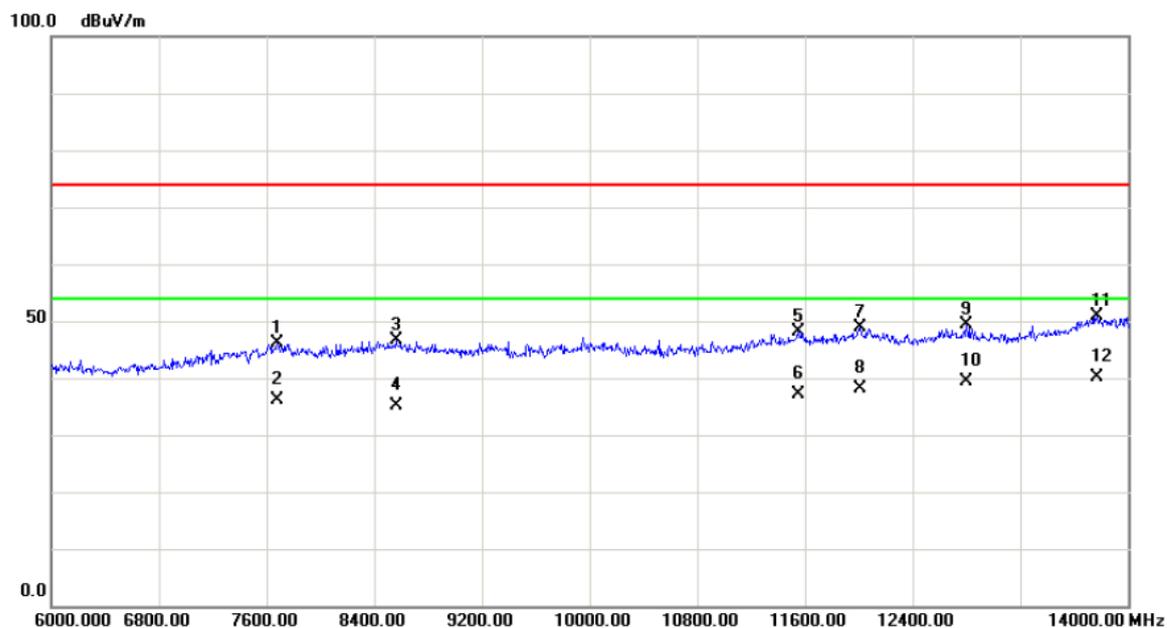

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7684.000	30.15	16.02	46.17	74.00	-27.83	peak	
2		7684.000	20.00	16.02	36.02	54.00	-17.98	AVG	
3		8560.000	31.16	15.48	46.64	74.00	-27.36	peak	
4		8560.000	19.54	15.48	35.02	54.00	-18.98	AVG	
5		11556.00	27.51	20.50	48.01	74.00	-25.99	peak	
6		11556.00	16.55	20.50	37.05	54.00	-16.95	AVG	
7		12008.00	25.53	23.23	48.76	74.00	-25.24	peak	
8		12008.00	14.79	23.23	38.02	54.00	-15.98	AVG	
9		12804.00	29.04	20.25	49.29	74.00	-24.71	peak	
10		12804.00	19.17	20.25	39.42	54.00	-14.58	AVG	
11		13772.00	26.90	24.10	51.00	74.00	-23.00	peak	
12	*	13772.00	16.15	24.10	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:H09-000369 ; Earphone:1293#+3283# 3.5MM-150


Vertical

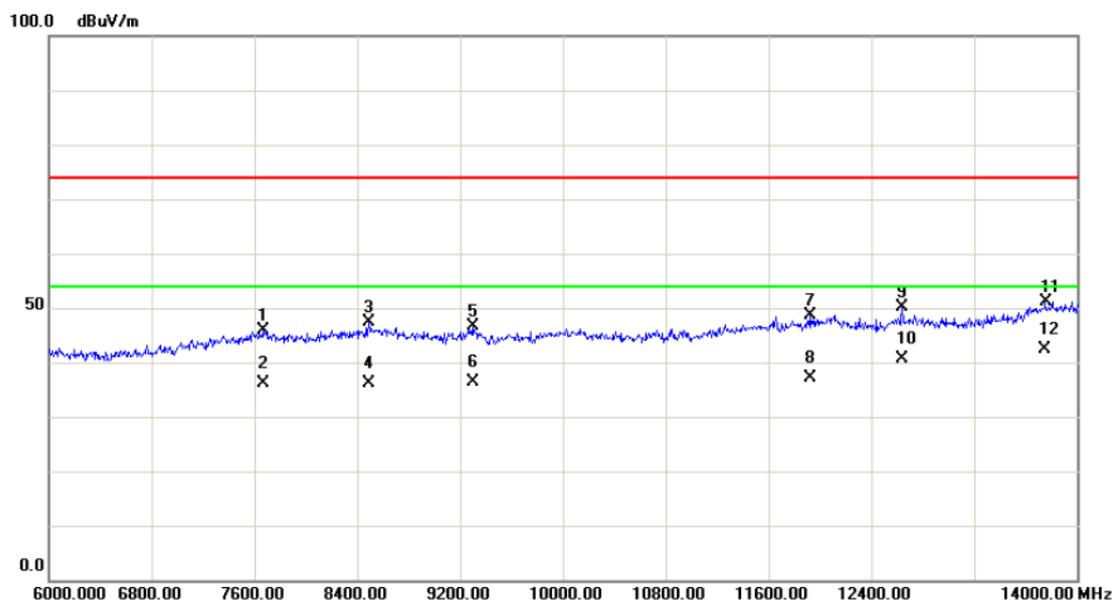

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7664.000	29.76	16.01	45.77	74.00	-28.23	peak	
2	7664.000	20.04	16.01	36.05	54.00	-17.95	AVG	
3	8492.000	32.07	15.40	47.47	74.00	-26.53	peak	
4	8492.000	20.65	15.40	36.05	54.00	-17.95	AVG	
5	9296.000	30.97	15.58	46.55	74.00	-27.45	peak	
6	9296.000	20.83	15.58	36.41	54.00	-17.59	AVG	
7	11920.00	25.80	22.81	48.61	74.00	-25.39	peak	
8	11920.00	14.24	22.81	37.05	54.00	-16.95	AVG	
9	12640.00	31.37	18.86	50.23	74.00	-23.77	peak	
10	12640.00	21.65	18.86	40.51	54.00	-13.49	AVG	
11	13756.00	27.22	24.02	51.24	74.00	-22.76	peak	
12 *	13756.00	18.28	24.02	42.30	54.00	-11.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:H09-000369 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

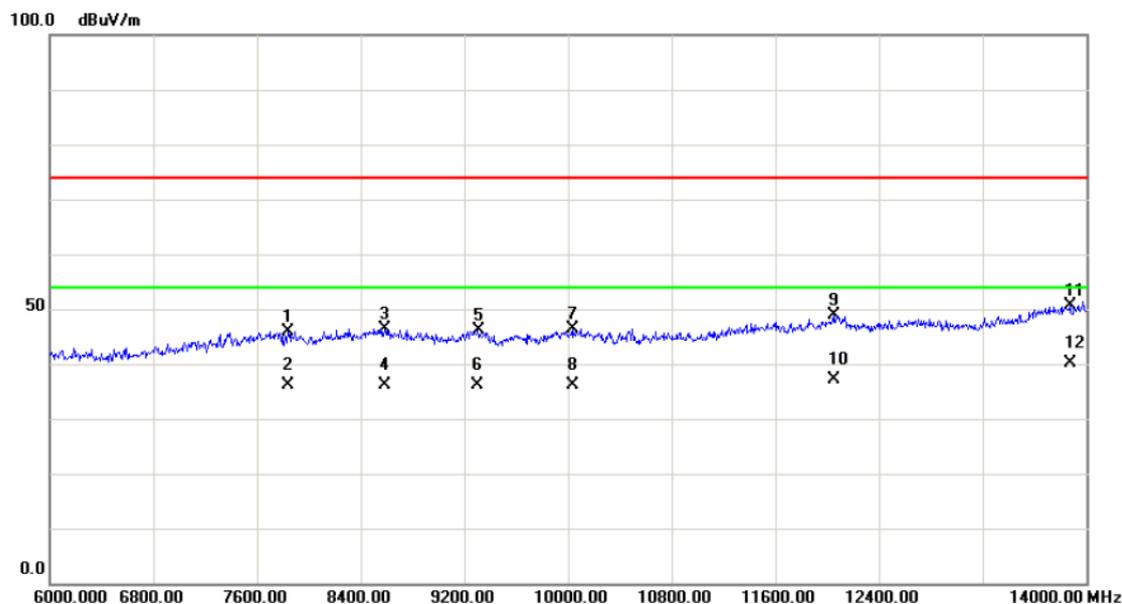

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7840.000	29.72	16.05	45.77	74.00	-28.23	peak	
2		7840.000	20.00	16.05	36.05	54.00	-17.95	AVG	
3		8584.000	30.92	15.52	46.44	74.00	-27.56	peak	
4		8584.000	20.53	15.52	36.05	54.00	-17.95	AVG	
5		9308.000	30.46	15.55	46.01	74.00	-27.99	peak	
6		9308.000	20.49	15.55	36.04	54.00	-17.96	AVG	
7		10032.000	30.42	15.92	46.34	74.00	-27.66	peak	
8		10032.000	20.13	15.92	36.05	54.00	-17.95	AVG	
9		12048.000	26.06	22.77	48.83	74.00	-25.17	peak	
10		12048.000	14.28	22.77	37.05	54.00	-16.95	AVG	
11		13872.000	26.04	24.64	50.68	74.00	-23.32	peak	
12	*	13872.000	15.56	24.64	40.20	54.00	-13.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:LSA00570 ; Earphone:1293#+3283# 3.5MM-150


Vertical

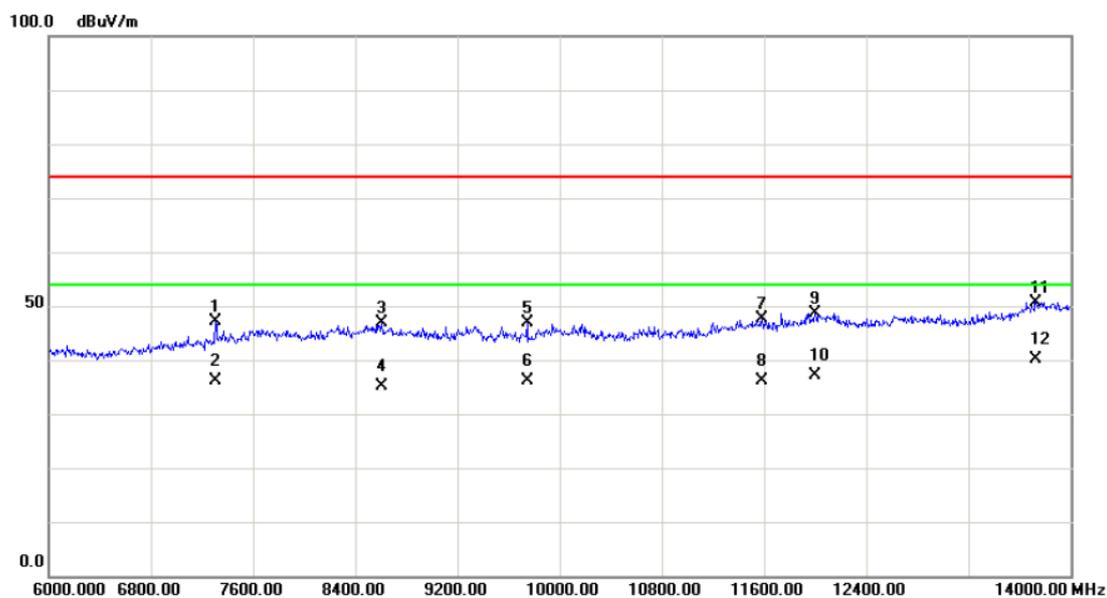

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7308.000	31.98	15.17	47.15	74.00	-26.85	peak	
2		7308.000	20.88	15.17	36.05	54.00	-17.95	AVG	
3		8612.000	31.37	15.56	46.93	74.00	-27.07	peak	
4		8612.000	19.49	15.56	35.05	54.00	-18.95	AVG	
5		9748.000	31.33	15.62	46.95	74.00	-27.05	peak	
6		9748.000	20.43	15.62	36.05	54.00	-17.95	AVG	
7		11588.00	27.03	20.69	47.72	74.00	-26.28	peak	
8		11588.00	15.36	20.69	36.05	54.00	-17.95	AVG	
9		12004.00	25.36	23.28	48.64	74.00	-25.36	peak	
10		12004.00	13.77	23.28	37.05	54.00	-16.95	AVG	
11		13732.00	26.86	23.88	50.74	74.00	-23.26	peak	
12	*	13732.00	16.37	23.88	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:LSA00570 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

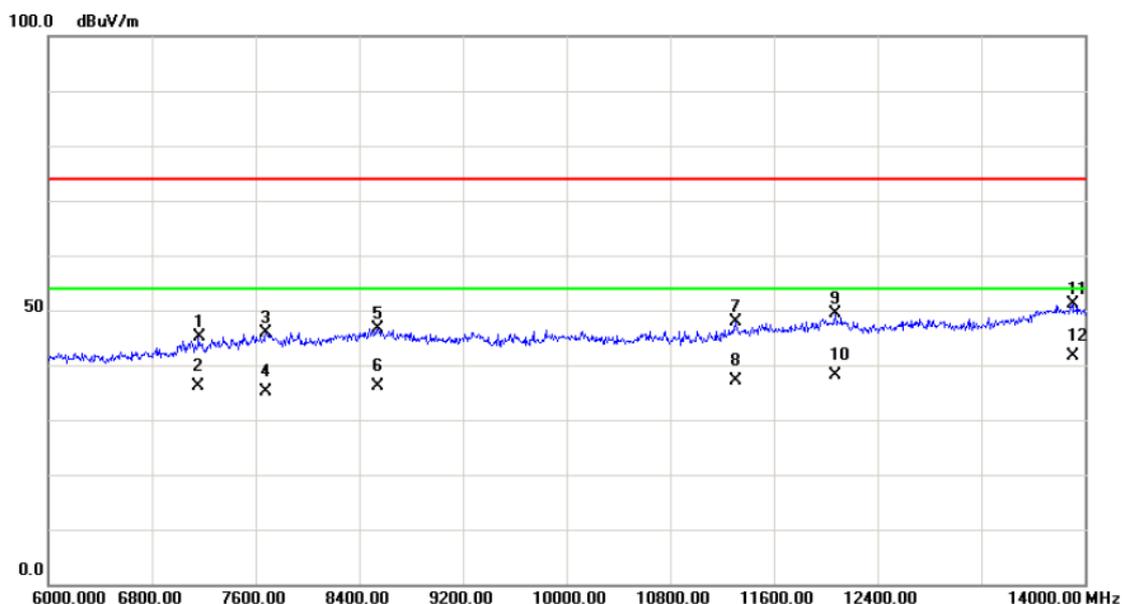

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7164.000	30.49	14.57	45.06	74.00	-28.94	peak	
2		7164.000	21.48	14.57	36.05	54.00	-17.95	AVG	
3		7680.000	29.84	16.02	45.86	74.00	-28.14	peak	
4		7680.000	19.00	16.02	35.02	54.00	-18.98	AVG	
5		8544.000	31.23	15.46	46.69	74.00	-27.31	peak	
6		8544.000	20.59	15.46	36.05	54.00	-17.95	AVG	
7		11308.000	27.76	20.24	48.00	74.00	-26.00	peak	
8		11308.000	16.81	20.24	37.05	54.00	-16.95	AVG	
9		12076.000	26.84	22.46	49.30	74.00	-24.70	peak	
10		12076.000	15.59	22.46	38.05	54.00	-15.95	AVG	
11		13904.000	26.36	24.82	51.18	74.00	-22.82	peak	
12	*	13904.000	16.73	24.82	41.55	54.00	-12.45	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:02450989 ; Earphone:1293#+3283# 3.5MM-150


Vertical

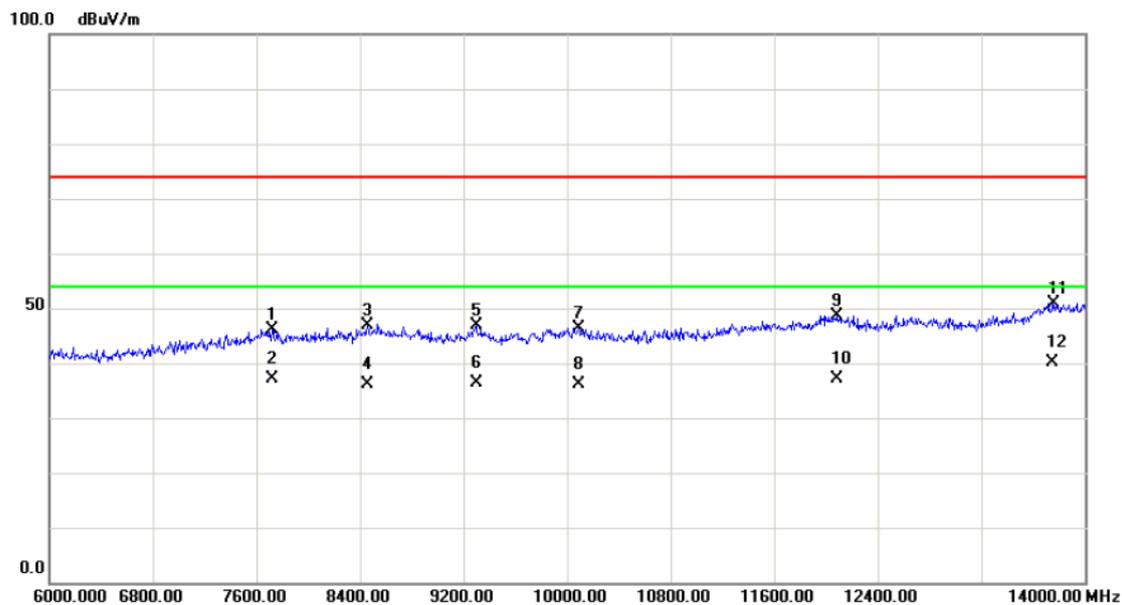

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7720.000	30.03	16.03	46.06	74.00	-27.94	peak	
2		7720.000	20.99	16.03	37.02	54.00	-16.98	AVG	
3		8456.000	31.35	15.45	46.80	74.00	-27.20	peak	
4		8456.000	20.60	15.45	36.05	54.00	-17.95	AVG	
5		9300.000	31.29	15.57	46.86	74.00	-27.14	peak	
6		9300.000	20.84	15.57	36.41	54.00	-17.59	AVG	
7		10088.000	30.78	15.70	46.48	74.00	-27.52	peak	
8		10088.000	20.35	15.70	36.05	54.00	-17.95	AVG	
9		12084.000	26.26	22.37	48.63	74.00	-25.37	peak	
10		12084.000	14.68	22.37	37.05	54.00	-16.95	AVG	
11		13756.000	26.89	24.02	50.91	74.00	-23.09	peak	
12	*	13756.000	16.23	24.02	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:02450989 ; Earphone:1293#+3283# 3.5MM-150


Horizontal

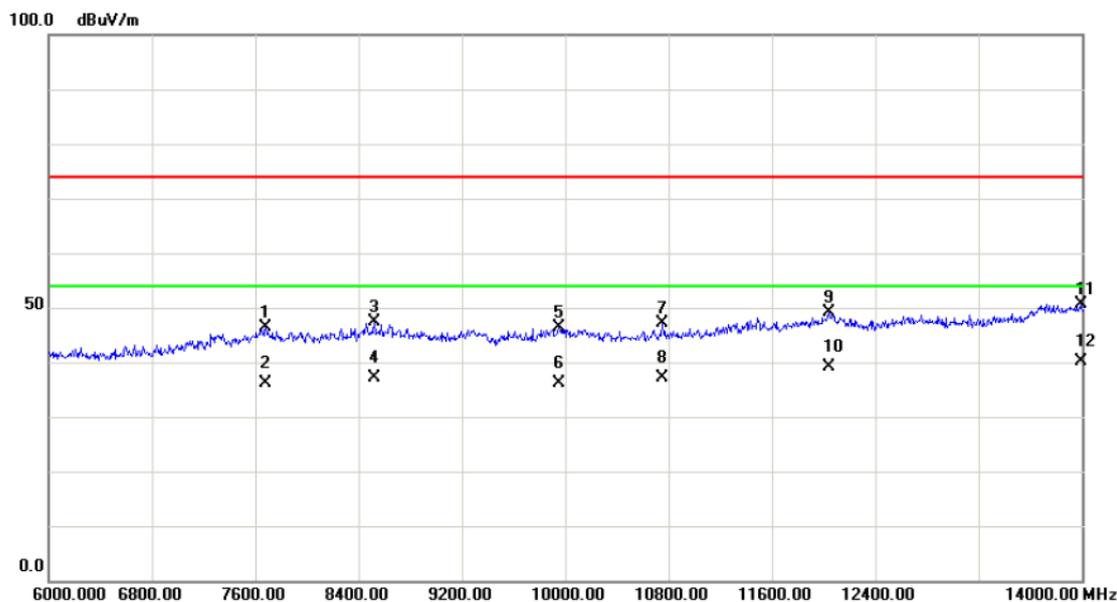

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7680.000	30.28	16.02	46.30	74.00	-27.70	peak	
2		7680.000	20.03	16.02	36.05	54.00	-17.95	AVG	
3		8520.000	32.02	15.42	47.44	74.00	-26.56	peak	
4		8520.000	21.63	15.42	37.05	54.00	-16.95	AVG	
5		9952.000	30.44	15.98	46.42	74.00	-27.58	peak	
6		9952.000	20.22	15.98	36.20	54.00	-17.80	AVG	
7		10752.00	29.95	17.21	47.16	74.00	-26.84	peak	
8		10752.00	19.84	17.21	37.05	54.00	-16.95	AVG	
9		12040.00	26.23	22.87	49.10	74.00	-24.90	peak	
10		12040.00	16.18	22.87	39.05	54.00	-14.95	AVG	
11		13992.00	25.44	25.29	50.73	74.00	-23.27	peak	
12	*	13992.00	14.96	25.29	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:130-25076 ; Earphone:1293#+3283# 3.5MM-150


Vertical

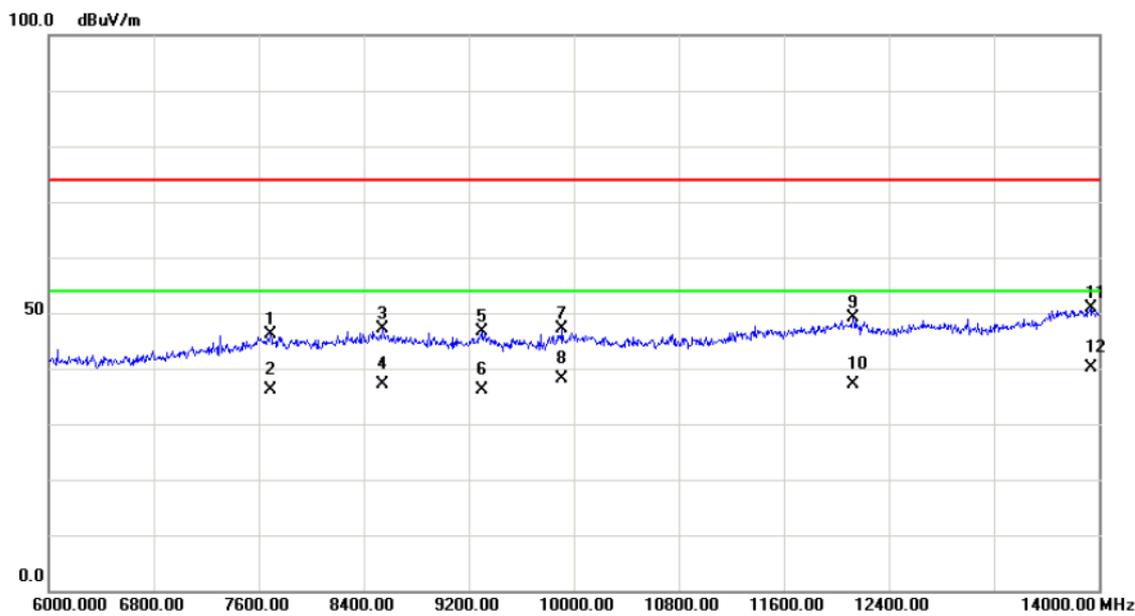

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7688.000	30.10	16.02	46.12	74.00	-27.88	peak	
2		7688.000	20.03	16.02	36.05	54.00	-17.95	AVG	
3		8544.000	31.64	15.46	47.10	74.00	-26.90	peak	
4		8544.000	21.59	15.46	37.05	54.00	-16.95	AVG	
5		9300.000	31.07	15.57	46.64	74.00	-27.36	peak	
6		9300.000	20.48	15.57	36.05	54.00	-17.95	AVG	
7		9912.000	31.13	15.90	47.03	74.00	-26.97	peak	
8		9912.000	22.15	15.90	38.05	54.00	-15.95	AVG	
9		12132.00	27.24	21.83	49.07	74.00	-24.93	peak	
10		12132.00	15.22	21.83	37.05	54.00	-16.95	AVG	
11		13936.00	25.88	24.99	50.87	74.00	-23.13	peak	
12	*	13936.00	15.26	24.99	40.25	54.00	-13.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle
Note:	USB Cable:130-25076 ; Earphone:1293#+3283# 3.5MM-150

Horizontal

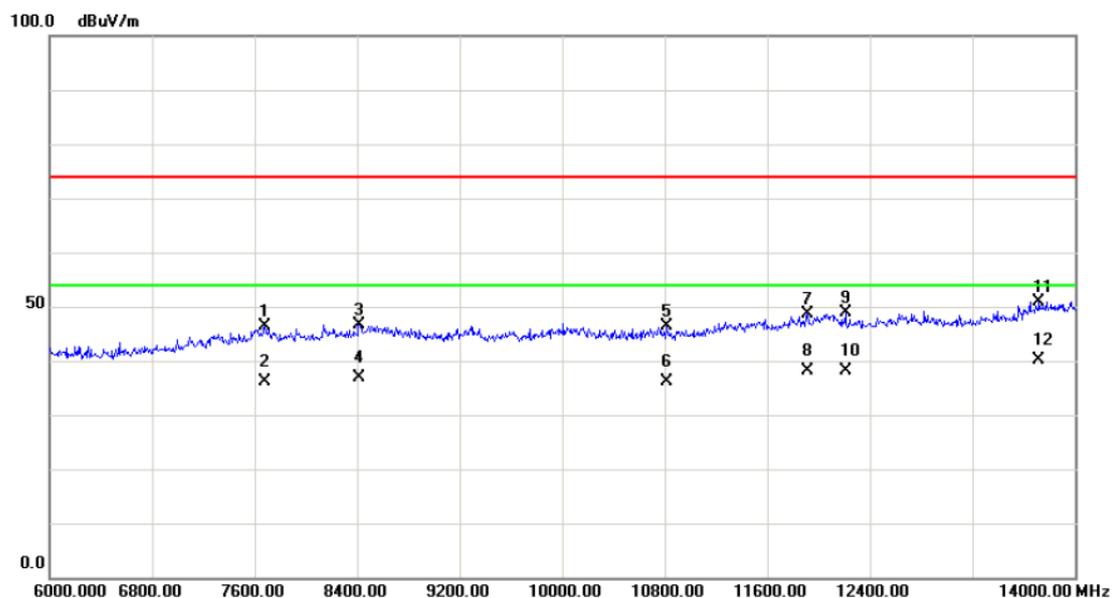

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7684.000	30.25	16.02	46.27	74.00	-27.73	peak	
2		7684.000	20.03	16.02	36.05	54.00	-17.95	AVG	
3		8416.000	31.10	15.51	46.61	74.00	-27.39	peak	
4		8416.000	21.49	15.51	37.00	54.00	-17.00	AVG	
5		10820.00	28.26	18.08	46.34	74.00	-27.66	peak	
6		10820.00	17.97	18.08	36.05	54.00	-17.95	AVG	
7		11912.00	25.98	22.77	48.75	74.00	-25.25	peak	
8		11912.00	15.28	22.77	38.05	54.00	-15.95	AVG	
9		12212.00	27.91	20.93	48.84	74.00	-25.16	peak	
10		12212.00	17.12	20.93	38.05	54.00	-15.95	AVG	
11		13720.00	27.14	23.82	50.96	74.00	-23.04	peak	
12	*	13720.00	16.43	23.82	40.25	54.00	-13.75	AVG	