

FCC SAR Test Report

FCC ID: QISY635-L03

Project No. : 1501C177
Equipment : Smart Phone
Model Name : HUAWEI Y635-L03, Y635-L03
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Jan. 23, 2015
Date of Test : Jan. 23, 2015~ Feb. 27, 2015
Issued Date : Feb. 27, 2015
Tested by : BTL Inc.

Testing Engineer : 

(Super Jiang)

Technical Manager : 

(Leo Hung)

Authorized Signatory : 

(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China.
TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**), or National Institute of Standards and Technology (**NIST**) .

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . GENERAL SUMMARY	6
2 . RF EMISSIONS MEASUREMENT	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 STATEMENT OF COMPLIANCE	8
3.2 GENERAL DESCRIPTION OF EUT	9
3.3 HOTSPOT POWER REDUCTION SPECIFICATION FOR SAR	11
3.4 LABORATORY ENVIRONMENT	12
3.5 MAIN TEST INSTRUMENTS	12
4 .SAR MEASUREMENTS SYSTEM CONFIGURATION	14
4.1 SAR MEASUREMENT SET-UP	14
4.2 DASY5E-FIELDPROBESYSTEM	15
5 . SYSTEM VERIFICATION PROCEDURE	23
5.1 TISSUE VERIFICATION	23
5.2 SYSTEM CHECK	25
5.3 SYSTEM CHECK PROCEDURE	26
6 .SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	27
6.1 SAR MEASUREMENT VARIABILITY	27
6.2 SAR MEASUREMENT UNCERTAINTY	27
7 .SAR TEST CONFIGURATION	28
7.1 GSM TEST CONFIGURATION	28
7.2 UMTS TEST CONFIGURATION	29
7.3 LTE TEST CONFIGURATION	35
7.4 WIFI 2.4G TEST CONFIGURATION	37
8 .TEST RESULT	38
8.1 CONDUCTED POWER RESULTS	38
8.2 SAR TEST RESULTS	74
8.3 MULTIPLE TRANSMITTER EVALUATION	106
APPENDIX	129
1. TEST LAYOUT	129

Table of Contents

Page

2. SYSTEM CHECK PLOTS	132
3.SAR MEASUREMENT PLOTS	132
4. CALIBRATION CERTIFICATE	132
5. EUT TESTING POSITION AND ANTENNA LOCATION	133

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCC-SAR-1501C177	Original Issue.	Feb. 27, 2015

1. GENERAL SUMMARY

Equipment	Smart Phone
Model Name	HUAWEI Y635-L03, Y635-L03
Brand Name	HUAWEI
Model Difference	Only differ in model name.
Manufacturer	Huawei Technologies Co., Ltd.
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Standard(s)	<p>ANSI Std C95.1-1992 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz. (IEEE Std C95.1-1991)</p> <p>IEEE Std 1528-2003 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p>IEEE Std 1528a-2005 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)</p> <p>KDB941225 D01 3G SAR Procedures v03 KDB941225 D05 SAR for LTE Devices v02r03 KDB941225 D06 Hotspot Mode V02 KDB447498 D01 General RF Exposure Guidance v05r02 KDB648474 D04 SAR Handsets Multi Xmitter and Ant v01r02 KDB248227 D01 SAR meas for 802.11 a/b/g v01r02 KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03 KDB865664 D02 SAR Reporting v01r01 KDB690783 D01 SAR Listings on Grants v01r03</p>

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC-SAR-1501C177) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. RF EMISSIONS MEASUREMENT

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR room** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town,Dong Guan, China.523792

2.2 MEASUREMENT UNCERTAINTY

Uncertainty Component	Uncertainty Value	Probability Distribution	Divisor	C _i (1g)	Standard Uncertainty ±1%	V _i or V _{eff}
Measurement System						
Probe Calibration (k=1)	5.9	Normal	1	1	5.9	∞
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
Hemispherical Iso ropy	9.6	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
Boundary Effect	1.0	Rectangular	$\sqrt{3}$	1	0.6	∞
Linearity	4 7	Rectangular	$\sqrt{3}$	1	2.7	∞
System Detection Limit	1.0	Rectangular	$\sqrt{3}$	1	0.6	∞
Readout Electronics	0.3	Normal	1	1	0.3	∞
Response Time	0.8	Rectangular	$\sqrt{3}$	1	0.5	∞
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1.5	∞
RF Ambient Conditions-Noise	3.0	Rectangular	$\sqrt{3}$	1	1.7	∞
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	Rectangular	$\sqrt{3}$	1	0.2	∞
Probe Positioning with respect to Phantom Shell	2.9	Rectangular	$\sqrt{3}$	1	1.7	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	1.0	Rectangular	$\sqrt{3}$	1	0.6	∞
Test Sample Related						
Test sample Positioning	2.9	Normal	1	1	2.9	145
Device Holder Uncertainty	3.6	Normal	1	1	3.6	5
Output Power Variation - SAR drift measurement	5.0	Rectangular	$\sqrt{3}$	1	2.9	∞
Phantom and Setup						
Phantom Uncertainty (shape and thickness tolerances)	4.0	Rectangular	$\sqrt{3}$	1	2.3	∞
Liquid Conductivity - deviation from target value	5.0	Rectangular	$\sqrt{3}$	0.64	1.8	∞
Liquid Conductivity - measurement uncertainty	2.5	Normal	1	0.64	1.6	∞
Liquid Permittivity - deviation from target values	5.0	Rectangular	$\sqrt{3}$	0.6	1.7	∞
Liquid Permittivity - measurement uncertainty	2.5	Normal	1	0.6	1.5	∞
Combined standard uncertainty		RSS	-	-	10.9	387
Expanded uncertainty		k=2	-	-	21.9	-

3. GENERAL INFORMATION

3.1 STATEMENT OF COMPLIANCE

The maximum results of Specific Absorption Rate (SAR) found during testing for HUAWEI Y635-L03, Y635-L03 are as below Table.

Band	Max Reported SAR(W/kg)		
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)
GSM850	0.428	0.594	0.586
GSM1900	0.374	0.453	0.211
UMTS Band II	0.684	0.631	0.734
UMTS Band IV	0.369	1.133	0.758
UMTS Band V	0.540	0.656	0.540
LTE Band II	0.433	0.498	0.442
LTE Band IV	0.159	0.940	0.446
LTE Band V	0.407	0.506	0.474
LTE Band VII	0.658	0.709	0.517
LTE Band XII	0.261	0.288	0.251
LTE Band XVII	0.271	0.245	0.248
WiFi 2.4G	1.323	0.205	0.474
The highest simultaneous SAR value is 1.599W/kg per KDB690783 D01			

Note:

1)* For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005.

3.2 GENERAL DESCRIPTION OF EUT

Tested Mode(s)	GSM850/1900, UMTS Band V/II/IV LTE Band II/IV/V/VII/XII/XVII,WiFi (tested),BT		
Modulation Technology	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM), WiFi(DSSS/OFDM)		
Operation Frequency Range(s)	Band	TX (MHz)	RX (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band V	824-849	869-894
	UMTS Band II	1850-1910	1930-1990
	LTE Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	LTE Band XII	699-716	729-746
	LTE Band XVII	704-716	734-746
	Bluetooth	2400 ~2483.5	
	WIFI	2400 ~2483.5	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band IV)		
	3, tested with power control "all 1"(UMTS Band V)		
	3, tested with power control "all 1"(UMTS Band II)		
	3, tested with power control "all Max"(LTE Band II)		
	3, tested with power control "all Max"(LTE Band IV)		
	3, tested with power control "all Max"(LTE Band V)		
	3, tested with power control "all Max"(LTE Band VII)		
	3, tested with power control "all Max"(LTE Band XII)		
	3, tested with power control "all Max"(LTE Band XVII)		

Test Channels(low-mid-high):	128-190-251 (GSM850)
	512-661-810 (GSM1900)
	4132-4182-4233 (UMTS Band V)
	9262-9400-9538 (UMTS Band II)
	1312-1413-1513 (UMTS Band IV)
	18607-18900-19193(LTE Band II BW=1.4MHz)
	18615-18900-19185(LTE Band II BW=3MHz)
	18625-18900-19175(LTE Band II BW=5MHz)
	18650-18900-19150(LTE Band II BW=10MHz)
	18675-18900-19125(LTE Band II BW=15MHz)
	18700-18900-19100(LTE Band II BW=20MHz)
	19957-20175-20393(LTE Band IV BW=1.4MHz)
	19965-20175-20385(LTE Band IV BW=3MHz)
	19975-20175-20375(LTE Band IV BW=5MHz)
	20000-20175-20350(LTE Band IV BW=10MHz)
	20025-20175-20325(LTE Band IV BW=15MHz)
	20050-20175-20300(LTE Band IV BW=20MHz)
	20407-20525-20643(LTE Band V BW=1.4MHz)
	20415-20525-20635(LTE Band V BW=3MHz)
	20425-20525-20625(LTE Band V BW=5MHz)
	20450-20525-20600(LTE Band V BW=10MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	23017-23095-23173(LTE Band XII BW=1.4MHz)
	23025-23095-23165(LTE Band XII BW=3MHz)
	230035-23095-23155(LTE Band XII BW=5MHz)
	23060-23095-23130(LTE Band XII BW=10MHz)
	23755-23790-23825(LTE Band XVII BW=5MHz)
23780-23790-23800(LTE Band XVII BW=10MHz)	
1-6-11 (WiFi)	
Battery Information	Model Name: HB474284RBC DC 3.8V 2000mAh S/N: 1658LCEA25G2979A
	Model Name: HB474284RBC DC 3.8V 2000mAh S/N: 1660BAEC17LC02A7C
Hardware	Y635-L03V100R001C900B003
Software	EMUI3.0

3.3 HOTSPOT POWER REDUCTION SPECIFICATION FOR SAR

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation. A fixed level power reduction is applied when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered. A KDB inquiry with prior confirmation through that the triggering conditions for the specific implementation has been submitted and the guidance provided in KDB 388624 D02 item 17(a) can be satisfied

Item	Description
Supporting power reduction or not	Yes
Frequency Band(s) using power reduction	GSM 850 (GMSK) ,GSM1900 (GMSK) , UMTS Band II, UMTS Band V,UMTS Band IV, LTE Band II, LTE Band IV, LTE Band V, LTE Band VII, LTE Band XII, LTE Band XVII
Power reduction feature	A fixed power reduction is applied when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
Triggering conditions	Only hotspot mode (wireless routing) and nothing else is used to trigger this power reduction.
Full power and reduced power specifications	See Section 8.1
All simultaneous voice and data transmissions combinations and considerations	See Section 8.3

3.4 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

3.5 MAIN TEST INSTRUMENTS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Data Acquisition Electronics	Speag	DAE4	1390	Sep. 15, 2015
2	E-field Probe	Speag	EX3DV4	3898	Mar. 10, 2015
3	E-field Probe	Speag	EX3DV4	3932	Jan. 30, 2016
4	Electro Optical Converter	Speag	ECO90	1151	N/A
5	SAMT win Phantom	Speag	SAM	1784	N/A
6	System Validation Dipole	Speag	D750V3	1095	Sep. 22, 2015
7	System Validation Dipole	Speag	D835V2	4d160	Sep. 22, 2015
8	System Validation Dipole	Speag	D1750V2	1101	Sep. 19, 2015
9	System Validation Dipole	Speag	D1900V2	5d179	Sep. 18, 2015
10	System Validation Dipole	Speag	D2450V2	919	Sep. 17, 2015
11	System Validation Dipole	Speag	D2600V2	1067	Sep. 18, 2015
12	Power Amplifier	Speag	ZHL-42W	N/A	N/A
13	Power Amplifier	Speag	ZVE-8G	N/A	N/A
14	ENA Network Analyzer	Agilent	E5071C	MY46102965	Mar. 29, 2015
15	Dielectric Probe Kit	Agilent	85070E	2593	N/A
16	P-series power meter	Agilent	N1911A	MY45100473	Mar. 29, 2015
17	wideband power sensor	Agilent	N1921A	MY51100041	Mar. 29, 2015
18	Power Meter	Anritsu	ML2487A	6K00004714	Mar. 16, 2015
19	Power Meter Sensor	Anritsu	MA2491A	34138	Mar. 16, 2015
20	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Nov. 02, 2015
21	Low pass filter	Mini-Circuits	SLP-2950+	M108294	Mar. 29, 2015
22	Attenuator	Mini-Circuits	VAT-10+	31317-1	Mar. 29, 2015
23	Attenuator	Mini-Circuits	VAT-10+	31317-2	Mar. 29, 2015
24	Attenuator	MEB	300-affn-03	314	Mar. 29, 2015

25	Dual directional coupler	Agilent	777D	50208	Mar. 29, 2015
26	Wideband radio communication tester	R&S	CMW500	12010002K50-122125-PJ	Mar. 29, 2015
27	8960 Series 10 Wireless Com Test set	Agilent	E5515E	MY53211053	Jun. 13, 2015

Remark: " N/A" denotes no model name, serial No. or calibration specified.
All calibration period of equipment list is one year.


4. SAR MEASUREMENTS SYSTEM CONFIGURATION

4.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.1.1 Test Setup Layout

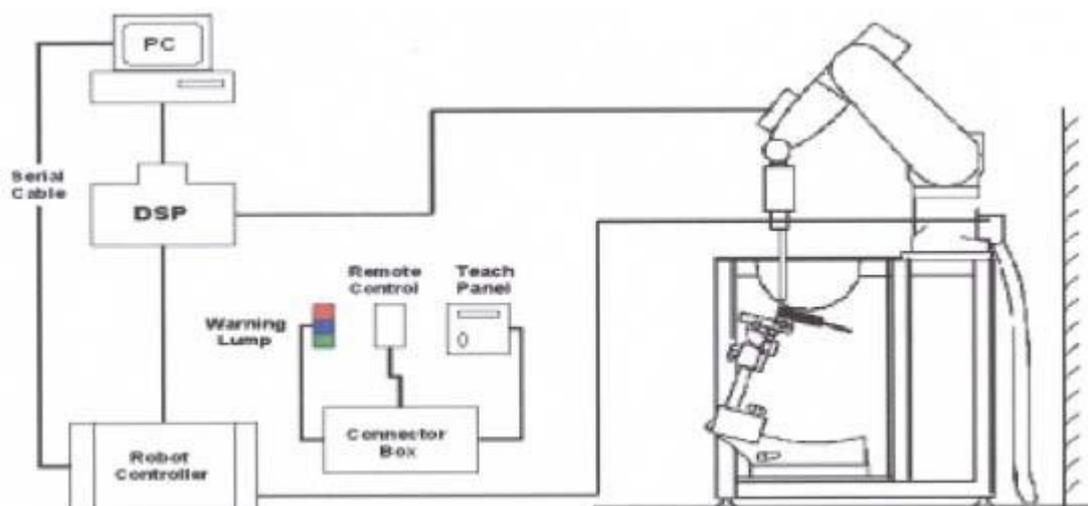

4.2 DASY5E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

4.2.1 EX3DV4 PROBE SPECIFICATION

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



EX3DV4 E-field Probe

4.2.2E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

4.2.3 OTHER TEST EQUIPMENT

4.2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

4.2.3.2 Phantom

The SAM twin phantom is a berglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6 mm). The phantom has three measurement areas:

- _ Left hand
- _ Right hand
- _ Flat phantom

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during o-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible.



SAM twin Phantom

4.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement.

Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{mm}$ and 4-6 GHz - $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{mm}$, 3-4 GHz - $\leq 4\text{mm}$ and 4-6GHz - $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x- and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximum Area Scan resolution (Δx_{area} , Δy_{area})	Maximum Zoom Scan spatial resolution (Δx_{Zoom} , Δy_{Zoom})	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥22mm

4.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

4.2.6 DATA STORAGE AND EVALUATION

4.2.5.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

4.4.2 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, a ₁₀ , a ₁₁ , a ₁₂
	Conversion factor	ConvF _i
	Diode compression point	Dcp _i
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASYS components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V _i = compensated signal of channel i	(i = x, y, z)
	U _i = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp _i = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With V_i = compensated signal of channel i (i = x, y, z)

Norm_i = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

5. SYSTEM VERIFICATION PROCEDURE

5.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue					
Frequency Band (MHz)	750	835	1800	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt(NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
TritonX-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1800	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt(NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
TritonX-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp. (°C)	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
Body	750	55.55 (52.77~58.34)	0.97 (0.92~1.02)	55.48	0.973	20.8	2015/2/5
	835	55.2 (52.44~57.96)	0.97 (0.92~1.02)	54.92	0.968	20.8	2015/2/2
	1750	53.44 (50.64~56.11)	1.49 (1.42~1.56)	53.07	1.482	20.8	2015/2/3
	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	53.18	1.531	20.8	2015/1/28
Head	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	41.98	0.891	20.8	2015/2/6
	835	41.5 (39.43~43.58)	0.9 (0.86~0.95)	41.46	0.898	20.8	2015/2/2
	1750	40.08 (38.08~42.08)	1.37 (1.30~1.44)	39.91	1.375	20.8	2015/2/4
	1900	40 (38.00~42.00)	1.4 (1.33~1.47)	40.02	1.406	20.8	2015/1/31
	2450	39.2 (37.24~41.16)	1.8 (1.71~1.89)	39.08	1.792	20.8	2015/2/10
	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	39.11	1.961	20.8	2015/1/31
Body	835	55.2 (52.44~57.96)	0.97 (0.92~1.02)	54.97	0.965	21.3	02/26/2015
	1750	53.44 (50.64~56.11)	1.49 (1.42~1.56)	53.12	1.476	21.3	02/27/2015
	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	53.29	1.522	21.3	02/26/2015
	2450	52.7 (50.07~55.35)	1.95 (1.85~2.05)	52.68	1.936	21.3	02/25/2015
	2600	52.51 (49.88~55.14)	2.16 (2.05~2.27)	53.43	2.206	21.3	02/25/2015
Head	835	41.5 (39.43~43.58)	0.9 (0.86~0.95)	41.33	0.891	21.3	02/26/2015
	1750	40.08 (38.08~42.08)	1.37 (1.30~1.44)	40.05	1.386	21.3	02/26/2015
	1900	40 (38.00~42.00)	1.4 (1.33~1.47)	39.15	1.398	21.3	02/26/2015

Note:

- 1)The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2)KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3)The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

5.2 SYSTEM CHECK


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

System Check	Measured Frequency (MHz)	Target SAR (1W) (+/-10%) 1-g(mW/g)	Measured SAR (Normalized to 1W)1-g(mW/g)	Liquid Temp. (°C)	Test Date		
S N / 3 8 9 8	Body	750	8.67 (7.803~9.537)	7.96	21.1	02/05/2015	
		835	9.56 (8.604~10.516)	10.04	21.1	02/02/2015	
		1750	37.9 (34.11~41.69)	35.2	21.1	02/03/2015	
		1900	39.5 (35.55~43.45)	41.2	21.1	01/28/2015	
	Head	750	8.46 (7.614~9.306)	8.2	21.1	02/06/2015	
		835	9.43 (8.487~10.373)	9.68	21.1	02/02/2015	
		1750	36.1 (32.49~39.71)	35.76	21.1	02/04/2015	
		1900	39.8 (35.82~43.78)	39.12	21.1	01/31/2015	
		2450	51.5 (46.35~56.65)	53.6	21.1	02/10/2015	
		2600	58 (52.2~63.8)	59.2	21.1	01/31/2015	
		S N / 3 9 3 2	Body	835	9.56 (8.604~10.516)	9.24	20.8
	1750			37.9 (34.11~41.69)	35.16	20.8	02/27/2015
	1900			39.5 (35.55~43.45)	40.8	20.8	02/26/2015
	2450			50.7 (45.63~55.77)	50.4	20.8	02/25/2015
2600	57.4 (51.66~63.14)			56.4	20.8	02/25/2015	
Head	835			9.43 (8.487~10.373)	9.6	20.8	02/26/2015
	1750		36.1 (32.49~39.71)	38.88	20.8	02/26/2015	
	1900		39.8 (35.82~43.78)	39.08	20.8	02/26/2015	

5.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

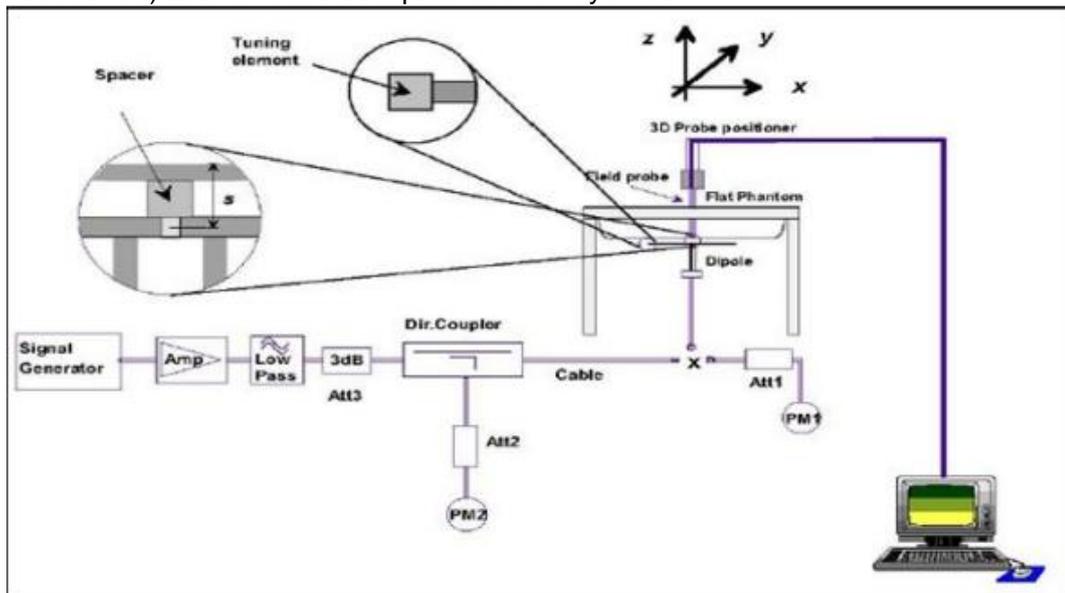

6.SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

6.1SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r03, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

6.2SAR MEASUREMENT UNCERTAINTY

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis.

7.SAR TEST CONFIGURATION

7.1GSM TEST CONFIGURATION

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0	0	0
	2 TX slots	3	3	2
	3 TX slots	5	5	4
	4 TX slots	6	6	5
GSM850 (hotspot)	1 TX slot	0	0	0
	2 TX slots	3	3	2
	3 TX slots	5	5	4
	4 TX slots	6.8	6.8	5
GSM1900	1 TX slot	0	0	0
	2 TX slots	3	3	2
	3 TX slots	5	5	4
	4 TX slots	6	6	5
GSM1900 (hotspot)	1 TX slot	0	0	0
	2 TX slots	3.5	3.5	2
	3 TX slots	5.5	5.5	4
	4 TX slots	6.6	6.6	5

7.2UMTS TEST CONFIGURATION

1. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s" for WCDMA/HSDPA or applying the required inner loop power control procedure to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) Should be tabulated in the SAR report. All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

2. WCDMA

(1).Head SAR Measurements

SAR for Head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise SAR is measured on the maximum output channel in 12.2 kbps AMR with 3.4 kbps SRB (signalling radio bearer) using the exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

(2).Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all "1s". SAR for other spreading codes and multiple DPDCHn, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

3. HSDPA

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when $\Delta ACK, \Delta NACK,$

$\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c / β_d ^o	β_{hs} (1) ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

4. HSDPA

Body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-set 1 and QPSK for FRC and 12.2kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the “WCDMA Handset” and „Release 5 HSDPA Data Device” sections of 3G device.

Subtests for UMTS Release 6 HSUPA

Sub-test [⊖]	β_c [⊖]	β_d [⊖]	β_d (SF) [⊖]	β_c/β_d [⊖]	$\beta_{hs}^{(1)}$ [⊖]	β_{ec} [⊖]	β_{ed} [⊖]	β_c (SF) [⊖]	β_{ed} [⊖] (code) [⊖]	CM ⁽²⁾ [⊖] (dB) [⊖]	MP R [⊖] (dB) [⊖]	AG ⁽⁴⁾ Inde ^x [⊖]	E-TFC I [⊖]
1 [⊖]	11/15 ⁽³⁾ [⊖]	15/15 ⁽³⁾ [⊖]	64 [⊖]	11/15 ⁽³⁾ [⊖]	22/15 [⊖]	209/225 [⊖]	1039/225 [⊖]	4 [⊖]	1 [⊖]	1.0 [⊖]	0.0 [⊖]	20 [⊖]	75 [⊖]
2 [⊖]	6/15 [⊖]	15/15 [⊖]	64 [⊖]	6/15 [⊖]	12/15 [⊖]	12/15 [⊖]	94/75 [⊖]	4 [⊖]	1 [⊖]	3.0 [⊖]	2.0 [⊖]	12 [⊖]	67 [⊖]
3 [⊖]	15/15 [⊖]	9/15 [⊖]	64 [⊖]	15/9 [⊖]	30/15 [⊖]	30/15 [⊖]	$\beta_{ed1}:47/15$ [⊖] $\beta_{ed2}:47/15$ [⊖]	4 [⊖]	2 [⊖]	2.0 [⊖]	1.0 [⊖]	15 [⊖]	92 [⊖]
4 [⊖]	2/15 [⊖]	15/15 [⊖]	64 [⊖]	2/15 [⊖]	4/15 [⊖]	2/15 [⊖]	56/75 [⊖]	4 [⊖]	1 [⊖]	3.0 [⊖]	2.0 [⊖]	17 [⊖]	71 [⊖]
5 [⊖]	15/15 ⁽⁴⁾ [⊖]	15/15 ⁽⁴⁾ [⊖]	64 [⊖]	15/15 ⁽⁴⁾ [⊖]	30/15 [⊖]	24/15 [⊖]	134/15 [⊖]	4 [⊖]	1 [⊖]	1.0 [⊖]	0.0 [⊖]	21 [⊖]	81 [⊖]

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference[⊖]

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurementperiod (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ [⊖]

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurementperiod (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ [⊖]

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g[⊖]

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.[⊖]

HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

5. DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0 Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI"s
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Note:

1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.

2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

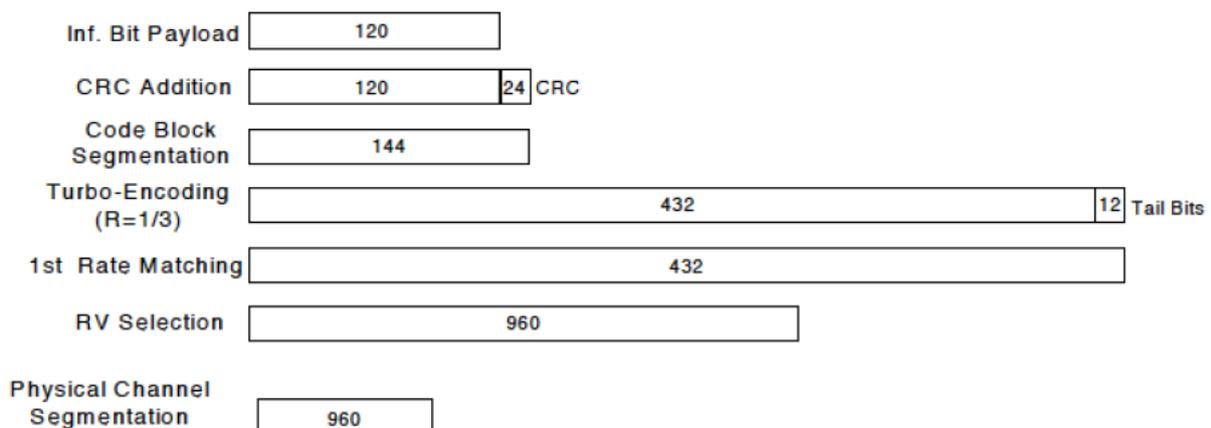


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: Δ ACK, Δ NACK and Δ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

7.3 LTE TEST CONFIGURATION

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r03. The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

1. Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2. MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The LTE Band VII (Hotspot disabled) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 8	> 12	> 16	> 18	1
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 8	> 12	> 16	> 18	2

The LTE Band VII(Hotspot activated) MPR of the device is as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	≤8	≤ 12	≤16	≤ 18	0
QPSK	>8	> 12	>16	> 18	1
16 QAM	≤8	≤ 12	≤16	≤ 18	0
16 QAM	>8	> 12	>16	> 18	1

3. A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of “NS_01” on the base station simulator.

4. LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

7.4 WIFI 2.4G TEST CONFIGURATION

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however, if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1#	√	△
		2.437	6#	√	△
		2.462	11#	√	△

Notes:

√ = "default test channels"

△ = possible 802.11g channels with maximum average output $\frac{1}{4}$ dB the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

8. TEST RESULT

8.1 CONDUCTED POWER RESULTS

8.1.1 CONDUCTED POWER MEASUREMENTS OF GSM850

1) Conducted power measurement results of GSM850(Hotspot disabled)

GSM850		Tune Up	Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
			128CH	190CH	251CH		128CH	190CH	251CH
GSM (CS)		33.50	31.93	31.79	31.53	-9.19	22.74	22.60	22.34
GPRS/ EDGE (GMSK)	1 Tx Slot	33.50	31.93	31.79	31.53	-9.19	22.74	22.60	22.34
	2 Tx Slots	30.50	29.35	29.16	29.07	-6.13	23.22	23.03	22.94
	3 Tx Slots	28.50	27.61	27.38	27.32	-4.42	23.19	22.96	22.90
	4 Tx Slots	27.50	26.75	26.45	26.29	-3.18	23.57	23.27	23.11
EDGE (8PSK)	1 Tx Slot	27.00	26.01	26.06	25.92	-9.19	16.82	16.87	16.73
	2 Tx Slots	25.00	23.53	23.46	23.44	-6.13	17.40	17.33	17.31
	3 Tx Slots	23.00	21.57	21.49	21.41	-4.42	17.15	17.07	16.99
	4 Tx Slots	22.00	20.50	20.39	20.05	-3.18	17.32	17.21	16.87

2) Conducted power measurement results of GSM850(Hotspot activated)

GSM850		Tune Up	Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
			128CH	190CH	251CH		128CH	190CH	251CH
GSM (CS)		33.00	31.53	31.28	31.11	-9.19	22.34	22.09	21.92
GPRS/ EDGE (GMSK)	1 Tx Slot	33.00	31.40	31.05	31.10	-9.19	22.21	21.86	21.91
	2 Tx Slots	30.00	28.19	28.06	28.03	-6.13	22.06	21.93	21.9
	3 Tx Slots	28.00	26.22	26.31	26.92	-4.42	21.8	21.89	22.5
	4 Tx Slots	26.20	24.87	24.65	24.54	-3.18	21.69	21.47	21.36
EDGE (8PSK)	1 Tx Slot	27.00	26.03	26.05	25.89	-9.19	16.84	16.86	16.7
	2 Tx Slots	25.00	23.20	23.49	23.44	-6.13	17.07	17.36	17.31
	3 Tx Slots	23.00	21.60	21.45	21.44	-4.42	17.18	17.03	17.02
	4 Tx Slots	22.00	20.52	20.38	20.10	-3.18	17.34	17.2	16.92

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 time slots.
- 3) Per KDB941225 D01v03, the bolded GPRS2Tx mode was selected for SAR testing according to the highest frame –averaged output power table.

8.1.2 CONDUCTED POWER MEASUREMENTS OF GSM1900

1) Conducted power measurement results of GSM1900(Hotspot disabled)

GSM1900		Tune Up	Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
			512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		30.50	29.02	28.68	28.97	-9.19	19.83	19.49	19.78
GPRS/ EDGE (GMSK)	1 Tx Slot	30.50	29.02	28.68	28.97	-9.19	19.83	19.49	19.78
	2 Tx Slots	27.50	25.93	25.66	25.63	-6.13	19.8	19.53	19.50
	3 Tx Slots	25.50	24.26	23.84	24.01	-4.42	19.84	19.42	19.59
	4 Tx Slots	24.50	22.94	22.68	22.83	-3.18	19.76	19.50	19.65
EDGE (8PSK)	1 Tx Slot	26.00	24.96	24.98	24.96	-9.19	15.77	15.79	15.77
	2 Tx Slots	24.00	22.49	22.51	22.42	-6.13	16.36	16.38	16.29
	3 Tx Slots	22.00	20.51	20.45	20.41	-4.42	16.09	16.03	15.99
	4 Tx Slots	21.00	19.30	19.13	19.10	-3.18	16.12	15.95	15.92

2) Conducted power measurement results of GSM1900(Hotspot activated)

GSM1900		Tune Up	Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
			512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		30.00	28.47	28.65	28.63	-9.19	19.28	19.46	19.44
GPRS/ EDGE (GMSK)	1 Tx Slot	30.00	28.08	28.72	28.54	-9.19	18.89	19.53	19.35
	2 Tx Slots	26.50	24.85	24.46	24.36	-6.13	18.72	18.33	18.23
	3 Tx Slots	24.50	22.85	22.36	23.27	-4.42	18.43	17.94	18.85
	4 Tx Slots	23.40	21.57	22.03	21.99	-3.18	18.39	18.85	18.81
EDGE (8PSK)	1 Tx Slot	26.00	24.93	24.95	24.92	-9.19	15.74	15.76	15.73
	2 Tx Slots	24.00	22.51	22.52	22.43	-6.13	16.38	16.39	16.3
	3 Tx Slots	22.00	20.52	20.43	20.53	-4.42	16.1	16.01	16.11
	4 Tx Slots	21.00	19.47	19.26	19.20	-3.18	16.29	16.08	16.02

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 time slots.
- 3) Per KDB941225 D01v03, the bolded GPRS 1Tx mode was selected for SAR testing according to the highest frame –averaged output power table.

8.1.3 CONDUCTED POWER MEASUREMENTS OF UMTS 850 Band V

1) Conducted power measurement results of UMTS850 Band V(Hotspot disabled)

UMTS850 (Band V)		Tune-up	SAR Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.00	23.84	23.68	23.74
	64kbps RMC	24.00	23.90	23.76	23.87
	144kbps RMC	24.00	23.96	23.84	23.83
	384kbps RMC	24.00	23.92	23.81	23.91
HSDPA	Subtest 1	23.50	22.68	22.74	22.71
	Subtest 2	23.50	22.62	22.52	22.57
	Subtest 3	22.50	22.11	22.10	22.11
	Subtest 4	22.50	22.06	22.07	22.09
HSUPA	Subtest 1	22.50	22.12	21.98	22.37
	Subtest 2	22.00	21.08	21.12	21.15
	Subtest 3	22.50	21.41	21.43	21.51
	Subtest 4	22.50	21.76	21.68	21.81
	Subtest 5	22.50	21.90	22.01	22.03

2) Conducted power measurement results of UMTS850 Band V (Hotspot activated)

UMTS850 (Band V)		Tune-up	SAR Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	22.50	21.22	21.04	21.11
	64kbps RMC	22.50	21.29	21.13	21.09
	144kbps RMC	22.50	21.35	21.11	21.03
	384kbps RMC	22.50	21.38	21.05	21.09
HSDPA	Subtest 1	22.00	20.94	20.84	20.69
	Subtest 2	22.00	20.02	20.80	20.78
	Subtest 3	21.00	19.99	19.78	19.85
	Subtest 4	21.00	19.95	19.72	19.82
HSUPA	Subtest 1	21.00	20.77	20.35	20.65
	Subtest 2	20.50	19.72	19.42	19.58
	Subtest 3	20.50	19.68	19.48	19.53
	Subtest 4	20.50	19.71	19.46	19.50
	Subtest 5	20.50	19.92	19.67	19.81

Note:

1) The conducted power of UMTS Band V is measured with RMS detector.

2) Note: Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

8.1.4 CONDUCTED POWER MEASUREMENTS OF UMTS1900 Band II

1) Conducted power measurement results of UMTS1900 Band II(Hotspot disabled)

UMTS1900 (Band II)		Tune-up	SAR Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	24.00	23.55	23.09	23.26
	64kbps RMC	24.00	23.58	23.22	23.28
	144kbps RMC	24.00	23.54	23.18	23.34
	384kbps RMC	24.00	23.61	23.28	23.31
HSDPA	Subtest 1	23.50	22.45	22.16	22.20
	Subtest 2	23.50	22.37	22.02	22.15
	Subtest 3	22.50	21.90	21.54	21.28
	Subtest 4	22.50	21.87	21.54	21.58
HSUPA	Subtest 1	23.50	22.49	21.93	22.00
	Subtest 2	22.50	21.61	21.17	21.07
	Subtest 3	22.50	21.55	20.31	21.01
	Subtest 4	22.50	22.15	21.73	21.51
	Subtest 5	23.00	22.47	21.91	21.05

2) Conducted power measurement results of UMTS1900 Band II(Hotspot activated)

UMTS1900 (Band II)		Tune-up	SAR Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	20.30	19.50	19.40	19.30
	64kbps RMC	20.30	18.94	18.88	20.49
	144kbps RMC	20.30	19.01	18.87	20.53
	384kbps RMC	20.30	19.03	18.89	20.47
HSDPA	Subtest 1	19.80	17.98	18.00	19.62
	Subtest 2	19.80	17.96	17.96	19.59
	Subtest 3	18.80	18.01	18.04	18.57
	Subtest 4	18.80	18.02	17.96	17.64
HSUPA	Subtest 1	19.80	18.90	18.79	18.31
	Subtest 2	18.80	17.75	17.81	17.40
	Subtest 3	18.80	17.85	17.73	17.38
	Subtest 4	18.80	17.79	17.76	17.34
	Subtest 5	19.30	17.85	17.62	17.24

Note:

1) The conducted power of UMTS Band II is measured with RMS detector.

2)Note: Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

8.1.5 CONDUCTED POWER MEASUREMENTS OF UMTS1700 Band IV

1) Conducted power measurement results of UMTS1700 Band IV(Hotspot disabled)

UMTS1700 (Band IV)		Tune-up	SAR Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	23.00	22.93	22.99	22.82
	64kbps RMC	23.00	22.87	22.91	22.90
	144kbps RMC	23.00	22.98	22.98	22.86
	384kbps RMC	23.00	22.94	22.95	22.94
HSDPA	Subtest 1	22.50	21.00	21.00	21.00
	Subtest 2	22.50	21.00	21.00	21.00
	Subtest 3	21.50	20.00	20.00	20.00
	Subtest 4	21.00	19.00	19.00	19.00
HSUPA	Subtest 1	22.50	21.84	21.92	21.81
	Subtest 2	21.00	20.89	20.95	20.88
	Subtest 3	21.50	20.90	20.87	20.03
	Subtest 4	21.50	21.38	21.07	21.00
	Subtest 5	22.50	21.36	21.35	21.15

2) Conducted power measurement results of UMTS1700 Band IV(Hotspot activated)

UMTS1700 (Band IV)		Tune-up	SAR Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	18.50	18.03	18.00	18.05
	64kbps RMC	18.50	17.91	18.01	18.09
	144kbps RMC	18.50	18.00	18.03	17.95
	384kbps RMC	18.50	17.92	18.11	17.99
HSDPA	Subtest 1	19.00	16.01	16.23	16.28
	Subtest 2	19.00	15.97	16.12	16.23
	Subtest 3	18.00	16.03	16.17	16.15
	Subtest 4	18.00	16.09	16.19	16.24
HSUPA	Subtest 1	19.00	16.95	16.89	16.98
	Subtest 2	17.50	16.84	17.08	16.93
	Subtest 3	18.00	16.89	16.87	16.95
	Subtest 4	18.00	16.87	16.91	17.04
	Subtest 5	18.00	16.45	16.87	17.11

Note:

1) The conducted power of UMTS Band II is measured with RMS detector.

2)Note: Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

8.1.6 CONDUCTED POWER MEASUREMENTS OF LTE Band II

1) Conducted power measurement results of LTE Band II (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18607	18900	19193
1.4MHz	QPSK	1	0	23.40	22.85	22.74	22.95
		1	3	23.40	22.77	22.67	22.88
		1	5	23.40	22.86	22.67	22.97
		12	0	23.40	22.77	22.64	22.88
		12	2	23.40	22.83	22.68	22.88
		12	3	23.40	22.83	22.63	22.97
	16QAM	25	0	23.40	21.81	21.76	21.92
		1	0	22.40	21.80	21.72	21.87
		1	3	22.40	21.81	21.74	21.96
		1	5	22.40	21.86	21.76	22.06
		12	0	22.40	21.83	21.77	22.01
		12	2	22.40	21.89	21.73	21.99
		12	3	22.40	21.86	21.70	22.00
		25	0	22.40	20.92	20.83	21.12
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18615	18900	19185
3MHz	QPSK	1	0	23.40	22.76	22.58	22.77
		1	7	23.40	22.82	22.55	22.84
		1	14	23.40	22.92	22.69	22.93
		12	0	22.40	21.83	21.68	21.83
		12	4	22.40	21.82	21.70	21.89
		12	7	22.40	21.81	21.63	21.86
		25	0	22.40	21.85	21.66	21.85
	16QAM	1	0	22.40	21.97	21.89	21.96
		1	7	22.40	21.92	21.77	21.99
		1	14	22.40	22.02	21.85	22.07
		12	0	21.40	20.84	20.68	20.89
		12	4	21.40	20.86	20.67	20.98
		12	7	21.40	20.93	20.69	20.91
		25	0	21.40	20.84	20.67	20.81

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18625	18900	19175
5MHz	QPSK	1	0	23.40	22.92	22.79	23.01
		1	13	23.40	22.99	22.72	23.03
		1	24	23.40	22.99	22.83	23.15
		12	0	22.40	21.80	21.68	21.75
		12	6	22.40	21.86	21.69	21.81
		12	11	22.40	21.92	21.59	21.89
		25	0	22.40	21.80	21.64	21.78
	16QAM	1	0	22.40	21.65	21.60	21.67
		1	13	22.40	21.78	21.63	21.76
		1	24	22.40	21.80	21.64	21.93
		12	0	21.40	20.93	20.64	20.78
		12	6	21.40	20.87	20.68	20.79
		12	11	21.40	20.92	20.60	20.91
		25	0	21.40	20.72	20.54	20.69
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18650	18900	19150
10MHz	QPSK	1	0	23.40	22.72	22.72	22.58
		1	25	23.40	22.79	22.59	22.75
		1	49	23.40	22.72	22.60	22.92
		25	0	22.40	21.86	21.73	21.66
		25	13	22.40	21.76	21.63	21.74
		25	25	22.40	21.75	21.56	21.68
		50	0	22.40	21.73	21.56	21.54
	16QAM	1	0	22.40	21.87	21.91	21.77
		1	25	22.40	21.92	21.75	21.89
		1	49	22.40	21.90	21.62	22.06
		25	0	21.40	20.70	20.58	20.62
		25	13	21.40	20.69	20.50	20.73
		25	25	21.40	20.66	20.44	20.65
		50	0	21.40	20.69	20.54	20.58

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18675	18900	19125
15MHz	QPSK	1	0	23.40	22.76	22.60	22.59
		1	38	23.40	22.75	22.54	22.66
		1	74	23.40	22.61	22.43	22.87
		36	0	22.40	21.78	21.64	21.54
		36	18	22.40	21.70	21.53	21.57
		36	39	22.40	21.65	21.50	21.58
		75	0	22.40	21.57	21.45	21.42
	16QAM	1	0	22.40	21.90	21.79	21.66
		1	38	22.40	21.96	21.77	21.87
		1	74	22.40	21.82	21.49	22.03
		36	0	21.40	20.83	20.60	20.53
		36	18	21.40	20.69	20.52	20.64
		36	39	21.40	20.71	20.53	20.69
		75	0	21.40	20.61	20.46	20.55
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18700	18900	19100
20MHz	QPSK	1	0	23.40	22.84	22.57	22.60
		1	50	23.40	22.74	22.63	22.66
		1	99	23.40	22.56	22.58	22.89
		50	0	22.40	21.74	21.65	21.41
		50	25	22.40	21.67	21.53	21.42
		50	50	22.40	21.61	21.47	21.47
		100	0	22.40	21.62	21.50	21.51
	16QAM	1	0	22.40	21.95	21.91	21.81
		1	50	22.40	21.94	21.88	21.86
		1	99	22.40	21.78	21.79	22.30
		50	0	21.40	20.65	20.60	20.44
		50	25	21.40	20.60	20.48	20.47
		50	50	21.40	20.54	20.41	20.53
		100	0	21.40	20.57	20.48	20.59

2) Conducted power measurement results of LTE Band II (Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18607	18900	19193
1.4MHz	QPSK	1	0	20.5	20.36	20.38	20.26
		1	3	20.5	20.24	20.27	20.11
		1	5	20.5	20.31	20.43	20.40
		12	0	20.5	20.32	20.33	20.45
		12	2	20.5	20.37	20.41	20.39
		12	3	20.5	20.13	20.24	20.38
		25	0	20.5	20.21	20.22	20.25
	16QAM	1	0	20.5	20.25	20.29	20.31
		1	3	20.5	20.14	20.19	20.14
		1	5	20.5	20.31	20.32	20.39
		12	0	20.5	20.20	20.27	20.26
		12	2	20.5	20.22	20.20	20.33
		12	3	20.5	20.34	20.29	20.21
		25	0	20.5	20.18	20.19	20.23
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18615	18900	19185
3MHz	QPSK	1	0	20.5	20.28	20.30	20.18
		1	7	20.5	20.21	20.24	20.08
		1	14	20.5	20.19	20.31	20.28
		12	0	20.5	20.20	20.21	20.33
		12	4	20.5	20.21	20.25	20.23
		12	7	20.5	20.30	20.41	20.55
		25	0	20.5	20.24	20.25	20.28
	16QAM	1	0	20.5	20.43	20.47	20.49
		1	7	20.5	20.33	20.38	20.33
		1	14	20.5	20.32	20.33	20.40
		12	0	20.5	20.19	20.26	20.25
		12	4	20.5	20.26	20.24	20.37
		12	7	20.5	20.49	20.44	20.36
		25	0	20.5	20.31	20.32	20.36

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18625	18900	19175
5MHz	QPSK	1	0	20.5	20.25	20.27	20.15
		1	13	20.5	20.24	20.27	20.11
		1	24	20.5	20.13	20.25	20.22
		12	0	20.5	20.21	20.22	20.34
		12	6	20.5	20.24	20.28	20.26
		12	11	20.5	20.24	20.35	20.26
		25	0	20.5	20.31	20.32	20.35
	16QAM	1	0	20.5	19.99	20.03	20.05
		1	13	20.5	20.18	20.23	20.18
		1	24	20.5	20.04	20.05	20.12
		12	0	20.5	20.23	20.30	20.29
		12	6	20.5	20.25	20.23	20.36
		12	11	20.5	20.34	20.29	20.21
		25	0	20.5	20.28	20.29	20.33
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18650	18900	19150
10MHz	QPSK	1	0	20.5	20.21	20.23	20.11
		1	25	20.5	20.24	20.27	20.11
		1	49	20.5	20.22	20.34	20.31
		25	0	20.5	20.11	20.12	20.24
		25	13	20.5	20.31	20.35	20.33
		25	25	20.5	20.21	20.32	20.46
		50	0	20.5	20.18	20.19	20.22
	16QAM	1	0	20.5	19.78	19.82	19.84
		1	25	20.5	19.81	19.86	19.81
		1	49	20.5	19.87	19.88	19.95
		25	0	20.5	20.02	20.09	20.08
		25	13	20.5	20.27	20.25	20.38
		25	25	20.5	20.23	20.18	20.10
		50	0	20.5	20.22	20.23	20.27

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18675	18900	19125
15MHz	QPSK	1	0	20.5	20.21	20.23	20.11
		1	38	20.5	20.18	20.21	20.05
		1	74	20.5	20.13	20.25	20.22
		36	0	20.5	20.23	20.24	20.36
		36	18	20.5	20.24	20.28	20.26
		36	39	20.5	20.25	20.36	20.24
		75	0	20.5	20.09	20.10	20.13
	16QAM	1	0	20.5	19.97	20.01	20.03
		1	38	20.5	19.85	19.90	19.85
		1	74	20.5	19.95	19.96	20.03
		36	0	20.5	20.14	20.21	20.20
		36	18	20.5	20.21	20.19	20.32
		36	39	20.5	20.07	20.02	19.94
		75	0	20.5	20.21	20.22	20.26
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					18700	18900	19100
20MHz	QPSK	1	0	20.50	20.41	20.26	20.39
		1	50	20.50	20.32	20.32	20.31
		1	99	20.50	20.22	20.43	20.30
		50	0	20.50	20.22	20.22	20.21
		50	25	20.50	20.24	20.17	20.20
		50	50	20.50	20.26	20.28	20.25
		100	0	20.50	20.27	20.25	20.27
	16QAM	1	0	20.50	20.18	20.22	20.32
		1	50	20.50	20.25	20.27	20.28
		1	99	20.50	20.16	20.33	20.25
		50	0	20.50	20.22	20.19	20.18
		50	25	20.50	20.26	20.14	20.23
		50	50	20.50	20.21	20.28	20.26
		100	0	20.50	20.18	20.23	20.17

8.1.7 CONDUCTED POWER MEASUREMENTS OF LTE Band IV

1) Conducted power measurement results of LTE Band IV (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19957	20175	20393
1.4MHz	QPSK	1	0	22.00	21.85	21.76	21.77
		1	2	22.00	21.77	21.73	21.59
		1	5	22.00	21.81	21.79	21.63
		3	0	22.00	21.76	21.73	21.76
		3	1	22.00	21.8	21.75	21.71
		3	2	22.00	21.82	21.79	21.73
	16QAM	6	0	22.00	20.95	20.8	20.83
		1	0	21.00	20.88	20.8	20.72
		1	2	21.00	20.89	20.81	20.73
		1	5	21.00	20.86	20.88	20.78
		3	0	21.00	20.9	20.88	20.8
		3	1	21.00	20.92	20.76	20.75
		3	2	21.00	20.87	20.81	20.77
	6	0	21.00	19.96	19.94	19.89	
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19965	20175	20385
3MHz	QPSK	1	0	22.00	21.73	21.69	21.7
		1	7	22.00	21.69	21.75	21.7
		1	14	22.00	21.63	21.8	21.61
		8	0	21.00	20.92	20.69	20.75
		8	4	21.00	20.86	20.77	20.73
		8	7	21.00	20.81	20.8	20.77
		15	0	21.00	20.87	20.74	20.76
	16QAM	1	0	22.00	21.01	20.89	20.87
		1	7	22.00	20.95	20.88	20.89
		1	14	22.00	20.87	20.95	20.84
		8	0	20.00	19.87	19.86	19.8
		8	4	20.00	19.86	19.88	19.73
		8	7	20.00	19.8	19.91	19.78
		15	0	20.00	19.87	19.9	19.72

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19975	20175	20375
5MHz	QPSK	1	0	22.00	21.94	21.88	21.93
		1	13	22.00	21.76	21.89	21.78
		1	24	22.00	21.82	21.97	21.74
		12	0	21.00	20.86	20.74	20.87
		12	6	21.00	20.77	20.78	20.84
		12	11	21.00	20.74	20.82	20.7
		25	0	21.00	20.74	20.67	20.75
	16QAM	1	0	21.00	20.71	20.6	20.75
		1	13	21.00	20.66	20.69	20.69
		1	24	21.00	20.65	20.8	20.66
		12	0	20.00	19.89	19.83	19.88
		12	6	20.00	19.81	19.81	19.78
		12	11	20.00	19.68	19.87	19.71
		25	0	20.00	19.68	19.75	19.71
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20000	20175	20350
10MHz	QPSK	1	0	22.00	21.75	21.69	21.79
		1	25	22.00	21.53	21.75	21.69
		1	49	22.00	21.64	21.73	21.58
		25	0	21.00	20.67	20.66	20.82
		25	13	21.00	20.64	20.64	20.75
		25	25	21.00	20.69	20.81	20.75
		50	0	21.00	20.62	20.68	20.72
	16QAM	1	0	22.00	21.02	20.85	21.06
		1	25	22.00	20.77	20.89	20.9
		1	49	22.00	20.73	20.89	20.78
		25	0	20.00	19.65	19.6	19.69
		25	13	20.00	19.53	19.69	19.7
		25	25	20.00	19.57	19.76	19.59
		50	0	20.00	19.57	19.69	19.72

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20025	20175	20325
15MHz	QPSK	1	0	22.00	21.73	21.67	21.79
		1	38	22.00	21.54	21.72	21.7
		1	74	22.00	21.68	21.77	21.55
		36	0	21.00	20.65	20.6	20.77
		36	18	21.00	20.63	20.65	20.79
		36	39	21.00	20.54	20.69	20.67
		75	0	21.00	20.61	20.53	20.77
	16QAM	1	0	21.00	20.94	20.84	20.95
		1	38	21.00	20.84	20.88	20.97
		1	74	21.00	20.87	20.98	20.83
		36	0	20.00	19.72	19.64	19.73
		36	18	20.00	19.62	19.68	19.72
		36	39	20.00	19.61	19.82	19.7
		75	0	20.00	19.59	19.57	19.68
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20050	20175	20300
20MHz	QPSK	1	0	22.00	21.88	21.84	21.96
		1	50	22.00	21.74	21.85	21.89
		1	99	22.00	21.76	21.87	21.78
		50	0	21.00	20.65	20.57	20.77
		50	25	21.00	20.62	20.62	20.73
		50	50	21.00	20.58	20.67	20.67
		100	0	21.00	20.64	20.61	20.8
	16QAM	1	0	22.00	20.96	20.91	20.98
		1	50	22.00	20.91	20.92	21.05
		1	99	22.00	20.91	21.04	20.86
		50	0	20.00	19.59	19.59	19.66
		50	25	20.00	19.63	19.66	19.72
		50	50	20.00	19.59	19.64	19.69
		100	0	20.00	19.59	19.67	19.73

2) Conducted power measurement results of LTE Band IV (Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19957	20175	20393
1.4MHz	QPSK	1	0	17.30	16.93	16.95	16.83
		1	2	17.30	16.96	16.99	16.83
		1	5	17.30	16.99	17.11	17.08
		3	0	17.30	16.93	16.94	17.06
		3	1	17.30	16.94	16.98	16.96
		3	2	17.30	17.04	17.15	17.19
		6	0	17.30	16.93	16.94	16.97
	16QAM	1	0	17.30	16.89	16.93	16.95
		1	2	17.30	16.92	16.97	16.92
		1	5	17.30	16.94	16.95	17.02
		3	0	17.30	16.95	17.02	17.01
		3	1	17.30	16.97	16.95	17.08
		3	2	17.30	16.95	16.90	16.82
		6	0	17.30	16.97	16.98	17.02
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19965	20175	20385
3MHz	QPSK	1	0	17.30	16.93	16.95	16.83
		1	7	17.30	17.13	17.16	17.00
		1	14	17.30	16.89	17.01	16.98
		8	0	17.30	16.92	16.93	17.05
		8	4	17.30	16.86	16.90	16.88
		8	7	17.30	16.91	17.02	17.16
		15	0	17.30	16.89	16.90	16.93
	16QAM	1	0	17.30	16.84	16.88	16.90
		1	7	17.30	17.03	17.08	17.03
		1	14	17.30	17.16	17.17	17.24
		8	0	17.30	17.14	17.21	17.20
		8	4	17.30	17.08	17.06	17.19
		8	7	17.30	17.06	17.01	16.93
		15	0	17.30	16.98	16.99	17.03

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					19975	20175	20375
5MHz	QPSK	1	0	17.30	16.78	16.80	16.68
		1	13	17.30	16.83	16.86	16.70
		1	24	17.30	16.89	17.01	16.98
		12	0	17.30	16.92	16.93	17.05
		12	6	17.30	16.99	17.03	17.01
		12	11	17.30	17.01	17.12	17.26
		25	0	17.30	17.07	17.08	17.01
	16QAM	1	0	17.30	16.89	16.93	16.95
		1	13	17.30	16.88	16.93	16.88
		1	24	17.30	16.94	16.95	17.02
		12	0	17.30	16.97	17.04	17.03
		12	6	17.30	16.91	16.89	17.02
		12	11	17.30	16.99	16.94	16.86
		25	0	17.30	17.01	17.02	17.06
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20000	20175	20350
10MHz	QPSK	1	0	17.30	16.63	16.65	16.53
		1	25	17.30	16.54	16.57	16.41
		1	49	17.30	16.58	16.70	16.67
		25	0	17.30	16.87	16.88	17.00
		25	13	17.30	16.89	16.93	16.91
		25	25	17.30	16.76	16.87	17.01
		50	0	17.30	16.83	16.84	16.87
	16QAM	1	0	17.30	16.54	16.58	16.60
		1	25	17.30	16.53	16.58	16.53
		1	49	17.30	16.92	16.93	17.00
		25	0	17.30	16.88	16.95	16.94
		25	13	17.30	16.69	16.67	16.80
		25	25	17.30	16.73	16.68	16.60
		50	0	17.30	16.88	16.89	16.93

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20025	20175	20325
15MHz	QPSK	1	0	17.30	16.96	16.98	16.86
		1	38	17.30	16.87	16.90	16.74
		1	74	17.30	16.85	16.97	16.94
		36	0	17.30	16.87	16.88	17.00
		36	18	17.30	16.79	16.83	16.81
		36	39	17.30	16.89	17.00	17.14
		75	0	17.30	16.75	16.76	16.79
	16QAM	1	0	17.30	16.79	16.83	16.85
		1	38	17.30	16.76	16.81	16.76
		1	74	17.30	16.85	16.86	16.93
		36	0	17.30	16.87	16.94	16.93
		36	18	17.30	16.79	16.77	16.90
		36	39	17.30	16.87	16.82	16.74
		75	0	17.30	16.96	16.97	17.01
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20050	20175	20300
20MHz	QPSK	1	0	17.30	17.05	17.01	17.15
		1	50	17.30	17.14	17.12	17.05
		1	99	17.30	17.15	17.19	17.06
		50	0	17.30	17.02	16.80	16.99
		50	25	17.30	17.01	16.98	16.89
		50	50	17.30	17.01	17.08	16.83
		100	0	17.30	17.06	17.02	16.85
	16QAM	1	0	17.30	16.96	16.87	16.89
		1	50	17.30	16.96	16.93	17.01
		1	99	17.30	16.92	16.85	16.94
		50	0	17.30	17.03	16.82	16.89
		50	25	17.30	16.83	16.79	16.83
		50	50	17.30	16.89	16.95	16.86
		100	0	17.30	16.82	16.83	16.94

8.1.8 CONDUCTED POWER MEASUREMENTS OF LTE Band V

1) Conducted power measurement results of LTE Band V (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20407	20525	20643
1.4MHz	QPSK	1	0	23.40	22.53	22.5	22.43
		1	2	23.40	22.47	22.44	22.39
		1	5	23.40	22.47	22.42	22.26
		3	0	23.40	22.5	22.42	22.61
		3	1	23.40	22.5	22.47	22.51
		3	2	23.40	22.53	22.45	22.39
	16QAM	6	0	23.40	21.64	21.52	22.49
		1	0	22.40	21.66	21.52	21.74
		1	2	22.40	21.64	21.52	21.7
		1	5	22.40	21.65	21.57	21.36
		3	0	22.40	21.73	21.58	21.57
		3	1	22.40	21.65	21.6	21.46
		3	2	22.40	21.69	21.58	21.33
	6	0	22.40	20.79	20.66	21.42	
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20415	20525	20635
3MHz	QPSK	1	0	23.40	22.43	22.3	22.42
		1	7	23.40	22.39	22.36	22.43
		1	14	23.40	22.47	22.44	22.04
		8	0	22.40	21.56	21.41	21.63
		8	4	22.40	21.49	21.52	21.61
		8	7	22.40	21.48	21.48	21.53
		15	0	22.40	21.58	21.38	21.63
	16QAM	1	0	22.40	21.81	21.57	21.81
		1	7	22.40	21.69	21.65	21.7
		1	14	22.40	21.68	21.68	21.32
		8	0	22.40	20.66	20.46	21.96
		8	4	22.40	20.67	20.57	21.76
		8	7	22.40	20.61	20.58	21.46
		15	0	22.40	20.63	20.46	21.65

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20425	20525	20625
5MHz	QPSK	1	0	23.40	22.65	22.51	22.64
		1	13	23.40	22.63	22.6	22.65
		1	24	23.40	22.51	22.56	21.71
		12	0	22.40	21.56	21.45	21.5
		12	6	22.40	21.62	21.38	21.59
		12	11	22.40	21.64	21.44	21.56
		25	0	22.40	21.52	21.32	21.53
	16QAM	1	0	22.40	21.55	21.32	21.39
		1	13	22.40	21.52	21.41	21.49
		1	24	22.40	21.42	21.39	20.88
		12	0	21.40	20.58	20.48	20.62
		12	6	21.40	20.63	20.4	20.62
		12	11	21.40	20.63	20.54	20.64
		25	0	21.40	20.49	20.32	20.46
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20450	20525	20600
10MHz	QPSK	1	0	23.40	22.39	22.29	22.43
		1	25	23.40	22.31	22.44	22.37
		1	49	23.40	22.4	22.43	21.61
		25	0	22.40	21.51	21.39	21.41
		25	13	22.40	21.46	21.34	21.36
		25	25	22.40	21.31	21.37	21.44
		50	0	22.40	21.36	21.26	21.29
	16QAM	1	0	22.40	21.77	21.58	21.71
		1	25	22.40	21.62	21.63	21.65
		1	49	22.40	21.64	21.68	21.01
		25	0	21.40	20.47	20.31	20.39
		25	13	21.40	20.45	20.26	20.39
		25	25	21.40	20.33	20.35	20.43
		50	0	21.40	20.39	20.31	20.38

2) Conducted power measurement results of LTE Band V (Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20407	20525	20643
1.4MHz	QPSK	1	0	21.60	20.67	20.69	20.57
		1	2	21.60	20.86	20.89	20.73
		1	5	21.60	20.98	21.1	21.07
		3	0	21.60	20.93	20.94	21.06
		3	1	21.60	20.96	21	20.98
		3	2	21.60	20.87	20.98	21.12
	16QAM	6	0	21.60	20.88	20.89	20.92
		1	0	21.60	20.77	20.81	20.83
		1	2	21.60	20.64	20.69	20.64
		1	5	21.60	20.67	20.68	20.75
		3	0	21.60	20.73	20.8	20.79
		3	1	21.60	20.87	20.85	20.98
		3	2	21.60	20.82	20.77	20.69
	6	0	21.60	20.94	20.95	20.99	
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20415	20525	20635
3MHz	QPSK	1	0	21.60	20.93	20.95	20.83
		1	7	21.60	20.96	20.99	20.83
		1	14	21.60	20.87	20.99	20.96
		8	0	21.60	20.95	20.96	21.08
		8	4	21.60	20.94	20.98	20.96
		8	7	21.60	20.63	20.74	20.88
		15	0	21.60	20.74	20.75	20.78
	16QAM	1	0	21.60	21.04	21.08	21.1
		1	7	21.60	21.22	21.27	21.22
		1	14	21.60	20.98	20.99	21.06
		8	0	21.60	20.59	20.66	20.65
		8	4	21.60	20.63	20.61	20.74
		8	7	21.60	20.78	20.73	20.65
		15	0	21.60	20.62	20.63	20.67

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20425	20525	20625
5MHz	QPSK	1	0	21.60	21.09	21.11	20.99
		1	13	21.60	20.87	20.9	20.74
		1	24	21.60	21.04	21.16	21.13
		12	0	21.60	20.98	20.99	21.11
		12	6	21.60	20.93	20.97	20.95
		12	11	21.60	20.89	21	21.14
		25	0	21.60	21.03	21.04	21.07
	16QAM	1	0	21.60	20.93	20.97	20.99
		1	13	21.60	20.87	20.92	20.87
		1	24	21.60	20.84	20.85	20.92
		12	0	21.60	20.34	20.41	20.4
		12	6	21.60	20.38	20.36	20.49
		12	11	21.60	20.41	20.36	20.28
		25	0	21.60	20.05	20.06	20.1
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20450	20525	20600
10MHz	QPSK	1	0	21.60	20.76	20.78	20.71
		1	25	21.60	20.85	20.87	20.79
		1	49	21.60	20.91	20.95	20.82
		25	0	21.60	20.69	20.76	20.69
		25	13	21.60	20.68	20.75	20.71
		25	25	21.60	20.73	20.62	20.7
		50	0	21.60	20.75	20.63	20.69
	16QAM	1	0	21.60	20.29	20.45	20.37
		1	25	21.60	20.35	20.42	20.41
		1	49	21.60	20.31	20.44	20.43
		25	0	21.60	20.25	20.33	20.48
		25	13	21.60	20.27	20.37	20.42
		25	25	21.60	20.31	20.29	20.43
		50	0	21.60	20.26	20.22	20.22

8.1.9 CONDUCTED POWER MEASUREMENTS OF LTE Band VII

1) Conducted power measurement results of LTE Band VII (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20775	21100	21425
5MHz	QPSK	1	0	23.40	22.17	22.34	22.37
		1	13	23.40	22.15	22.39	22.41
		1	24	23.40	22.18	22.39	22.39
		12	0	22.40	21.08	21.21	21.24
		12	6	22.40	21.07	21.3	21.25
		12	11	22.40	21.11	21.22	21.27
	16QAM	25	0	22.40	20.98	21.15	21.18
		1	0	22.40	21.04	21.17	21.18
		1	13	22.40	21.04	21.24	21.27
		1	24	22.40	21.06	21.31	21.31
		12	0	21.40	20.24	20.3	20.31
		12	6	21.40	20.23	20.38	20.34
		12	11	21.40	20.26	20.38	20.31
	25	0	21.40	20.31	20.25	20.31	
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20800	21100	21400
10MHz	QPSK	1	0	23.40	22	22.14	22.24
		1	25	23.40	21.99	22.19	22.18
		1	49	23.40	22.07	22.17	22.26
		25	0	22.40	21.05	21.16	21.12
		25	13	22.40	20.95	21.17	21.1
		25	25	22.40	20.87	21.16	21.13
		50	0	22.40	20.87	21.04	21.03
	16QAM	1	0	22.40	21.31	21.46	21.5
		1	25	22.40	21.27	21.44	21.39
		1	49	22.40	21.3	21.43	21.45
		25	0	21.40	19.98	20.36	20.21
		25	13	21.40	19.97	20.34	20.22
		25	25	21.40	19.99	20.21	20.31
		50	0	21.40	19.91	20.25	20.23

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20825	21100	21375
15MHz	QPSK	1	0	23.40	22.04	22.15	22.2
		1	38	23.40	22.05	22.25	22.31
		1	74	23.40	22.01	22.2	22.22
		36	0	22.40	20.91	21.01	21.08
		36	18	22.40	20.83	21.02	21.1
		36	39	22.40	20.89	21.09	21
		75	0	22.40	20.79	20.94	20.93
	16QAM	1	0	22.40	21.3	21.4	21.43
		1	38	22.40	21.34	21.56	21.53
		1	74	22.40	21.3	21.52	21.42
		36	0	21.40	20.21	20.21	20.22
		36	18	21.40	20.22	20.21	20.22
		36	39	21.40	20.2	20.17	20.29
		75	0	21.40	20.23	20.21	20.25
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20850	21100	21350
20MHz	QPSK	1	0	23.40	22.12	22.2	22.3
		1	50	23.40	22.1	22.27	22.33
		1	99	23.40	22.12	22.33	22.25
		50	0	22.40	20.84	20.97	20.99
		50	25	22.40	20.81	21.01	21.02
		50	50	22.40	20.85	21.12	20.96
		100	0	22.40	20.91	21.04	21.1
	16QAM	1	0	22.40	21.46	21.45	21.5
		1	50	22.40	21.36	21.54	21.53
		1	99	22.40	21.35	21.63	21.54
		50	0	21.40	20.2	20.22	20.28
		50	25	21.40	20.19	20.24	20.23
		50	50	21.40	20.31	20.23	20.26
		100	0	21.40	20.23	20.29	20.27

2) Conducted power measurement results of LTE Band VII (Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20775	21100	21425
5MHz	QPSK	1	0	17.20	15.85	15.87	15.75
		1	13	17.20	15.95	15.98	15.82
		1	24	17.20	15.83	15.95	15.92
		12	0	17.20	15.88	15.89	16.01
		12	6	17.20	15.89	15.93	15.91
		12	11	17.20	15.92	16.03	16.17
		25	0	17.20	15.85	15.86	15.89
	16QAM	1	0	17.20	15.58	15.62	15.64
		1	13	17.20	15.55	15.6	15.55
		1	24	17.20	15.56	15.57	15.64
		12	0	17.20	15.89	15.96	15.95
		12	6	17.20	15.94	15.92	16.05
		12	11	17.20	15.91	15.86	15.78
		25	0	17.20	15.86	15.87	15.91
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20800	21100	21400
10MHz	QPSK	1	0	17.20	15.75	15.77	15.65
		1	25	17.20	15.79	15.82	15.66
		1	49	17.20	15.77	15.89	15.86
		25	0	17.20	15.74	15.75	15.87
		25	13	17.20	15.76	15.8	15.78
		25	25	17.20	15.73	15.84	15.98
		50	0	17.20	15.77	15.78	15.81
	16QAM	1	0	17.20	15.54	15.58	15.6
		1	25	17.20	15.58	15.63	15.58
		1	49	17.20	15.53	15.54	15.61
		25	0	17.20	15.71	15.78	15.77
		25	13	17.20	15.7	15.68	15.81
		25	25	17.20	15.72	15.67	15.59
		50	0	17.20	15.78	15.79	15.83

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20825	21100	21375
15MHz	QPSK	1	0	17.20	15.74	15.76	15.64
		1	38	17.20	15.77	15.8	15.64
		1	74	17.20	15.76	15.88	15.85
		36	0	17.20	15.78	15.79	15.91
		36	18	17.20	15.73	15.77	15.75
		36	39	17.20	15.87	15.98	16.12
		75	0	17.20	15.73	15.74	15.77
	16QAM	1	0	17.20	15.53	15.57	15.59
		1	38	17.20	15.49	15.54	15.49
		1	74	17.20	15.48	15.49	15.56
		36	0	17.20	15.63	15.7	15.69
		36	18	17.20	15.69	15.67	15.8
		36	39	17.20	15.79	15.74	15.66
		75	0	17.20	15.62	15.63	15.67
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					20850	21100	21350
20MHz	QPSK	1	0	17.20	15.66	15.55	15.54
		1	50	17.20	15.58	15.64	15.43
		1	99	17.20	15.56	15.66	15.57
		50	0	17.20	15.35	15.52	15.3
		50	25	17.20	15.27	15.57	15.28
		50	50	17.20	15.43	15.56	15.32
		100	0	17.20	15.41	15.59	15.26
	16QAM	1	0	17.20	15.52	15.46	15.49
		1	50	17.20	15.42	15.5	15.42
		1	99	17.20	15.43	15.53	15.38
		50	0	17.20	15.47	15.39	15.31
		50	25	17.20	15.36	15.42	15.29
		50	50	17.20	15.33	15.41	15.35
		100	0	17.20	15.31	15.44	15.33

8.1.10 CONDUCTED POWER MEASUREMENTS OF LTE Band XII

1) Conducted power measurement results of LTE Band XII (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23017	23095	23173
1.4MHz	QPSK	1	0	23.40	22.63	22.56	22.46
		1	2	23.40	22.49	22.54	22.38
		1	5	23.40	22.56	22.53	22.44
		3	0	23.40	22.53	22.59	22.46
		3	1	23.40	22.5	22.48	22.42
		3	2	23.40	22.51	22.56	22.47
	16QAM	6	0	23.40	21.55	21.58	21.46
		1	0	22.40	21.61	21.59	21.5
		1	2	22.40	21.6	21.58	21.47
		1	5	22.40	21.58	21.66	21.53
		3	0	22.40	21.63	21.67	21.47
		3	1	22.40	21.62	21.66	21.49
		3	2	22.40	21.6	21.64	21.52
		6	0	22.40	20.67	20.7	20.6
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23025	23095	23165
3MHz	QPSK	1	0	23.40	22.49	22.53	22.44
		1	7	23.40	22.51	22.48	22.43
		1	14	23.40	22.61	22.51	22.42
		8	0	22.40	21.51	21.62	21.46
		8	4	22.40	21.61	21.54	21.48
		8	7	22.40	21.65	21.54	21.45
		15	0	22.40	21.58	21.54	21.5
	16QAM	1	0	22.40	21.79	21.84	21.65
		1	7	22.40	21.75	21.74	21.66
		1	14	22.40	21.81	21.72	21.59
		8	0	21.40	20.6	20.67	20.62
		8	4	21.40	20.66	20.63	20.5
		8	7	21.40	20.67	20.6	20.54
		15	0	21.40	20.63	20.58	20.59

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23035	23095	23155
5MHz	QPSK	1	0	23.40	22.77	22.73	22.7
		1	13	23.40	22.79	22.62	22.54
		1	24	23.40	22.75	22.62	22.59
		12	0	22.40	21.56	21.61	21.45
		12	6	22.40	21.63	21.53	21.44
		12	11	22.40	21.61	21.44	21.4
		25	0	22.40	21.55	21.5	21.38
	16QAM	1	0	22.40	21.48	21.53	21.49
		1	13	22.40	21.57	21.47	21.36
		1	24	22.40	21.6	21.44	21.38
		12	0	21.40	20.63	20.63	20.55
		12	6	21.40	20.68	20.56	20.52
		12	11	21.40	20.63	20.55	20.54
		25	0	21.40	20.58	20.46	20.33
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23060	23095	23130
10MHz	QPSK	1	0	23.40	22.41	22.55	22.54
		1	25	23.40	22.42	22.45	22.37
		1	49	23.40	22.42	22.44	22.41
		25	0	22.40	21.59	21.59	21.44
		25	13	22.40	21.54	21.46	21.39
		25	25	22.40	21.58	21.44	21.44
		50	0	22.40	21.44	21.37	21.34
	16QAM	1	0	22.40	21.69	21.74	21.76
		1	25	22.40	21.72	21.7	21.63
		1	49	22.40	21.68	21.64	21.62
		25	0	21.40	20.54	20.49	20.35
		25	13	21.40	20.52	20.41	20.39
		25	25	21.40	20.47	20.32	20.42
		50	0	21.40	20.43	20.41	20.33

2) Conducted power measurement results of LTE Band XII (Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High	
					23017	23095	23173	
1.4MHz	QPSK	1	0	21.60	21.32	21.34	21.22	
		1	2	21.60	21.32	21.35	21.19	
		1	5	21.60	21.26	21.38	21.35	
		3	0	21.60	21.33	21.34	21.46	
		3	1	21.60	21.28	21.32	21.3	
		3	2	21.60	21.24	21.35	21.49	
	16QAM	6	0	21.60	21.19	21.2	21.23	
		1	0	21.60	20.87	20.91	20.93	
		1	2	21.60	20.89	20.94	20.89	
		1	5	21.60	20.79	20.8	20.87	
		3	0	21.60	20.65	20.72	20.71	
		3	1	21.60	20.81	20.79	20.92	
	3MHz	QPSK	3	2	21.60	20.61	20.56	20.48
			6	0	21.60	20.64	20.65	20.69
1			0	21.60	21.22	21.24	21.12	
1			7	21.60	21.21	21.24	21.08	
1			14	21.60	21.34	21.46	21.43	
8			0	21.60	21.26	21.27	21.39	
8			4	21.60	21.28	21.32	21.3	
8		7	21.60	21.15	21.26	21.4		
16QAM	15	0	21.60	21.14	21.15	21.18		
	1	0	21.60	20.89	20.93	20.95		
	1	7	21.60	20.76	20.81	20.76		
	1	14	21.60	20.87	20.88	20.95		
	8	0	21.60	20.86	20.93	20.92		
	8	4	21.60	20.86	20.84	20.97		
	8	7	21.60	20.85	20.8	20.72		
	15	0	21.60	20.34	20.35	20.39		

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23035	23095	23155
5MHz	QPSK	1	0	21.60	21.37	21.39	21.27
		1	13	21.60	21.35	21.38	21.22
		1	24	21.60	21.29	21.41	21.38
		12	0	21.60	21.23	21.24	21.36
		12	6	21.60	21.36	21.4	21.38
		12	11	21.60	21.29	21.4	21.38
		25	0	21.60	21.21	21.22	21.25
	16QAM	1	0	21.60	20.86	20.9	20.92
		1	13	21.60	20.79	20.84	20.79
		1	24	21.60	20.77	20.78	20.85
		12	0	21.60	20.86	20.93	20.92
		12	6	21.60	20.5	20.48	20.61
		12	11	21.60	20.63	20.58	20.5
		25	0	21.60	20.58	20.59	20.63
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23060	23095	23130
10MHz	QPSK	1	0	21.60	21.39	21.46	21.25
		1	25	21.60	21.43	21.32	21.21
		1	49	21.60	21.41	21.25	21.28
		25	0	21.60	21.33	21.42	21.2
		25	13	21.60	21.37	21.29	21.23
		25	25	21.60	21.33	21.23	21.25
		50	0	21.60	21.3	21.24	21.18
	16QAM	1	0	21.60	21.07	20.94	20.87
		1	25	21.60	20.97	20.8	20.78
		1	49	21.60	20.81	20.58	20.72
		25	0	21.60	20.72	20.6	20.74
		25	13	21.60	20.37	20.49	20.57
		25	25	21.60	20.27	20.41	20.5
		50	0	21.60	20.22	20.39	20.47

8.1.11 CONDUCTED POWER MEASUREMENTS OF LTE Band XVII

1) Conducted power measurement results of LTE Band XVII (Hotspot disabled)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23755	23790	23825
5MHz	QPSK	1	0	23.40	22.87	22.81	22.78
		1	13	23.40	22.87	22.8	22.89
		1	24	23.40	22.86	22.88	22.76
		12	0	22.40	21.78	21.78	21.78
		12	6	22.40	21.81	21.69	21.75
		12	11	22.40	21.82	21.64	21.65
	16QAM	25	0	22.40	21.76	21.7	21.62
		1	0	22.40	21.75	21.62	21.53
		1	13	22.40	21.69	21.64	21.63
		1	24	22.40	21.67	21.63	21.53
		12	0	21.40	20.9	20.79	20.82
		12	6	21.40	20.82	20.71	20.79
		12	11	21.40	20.86	20.72	20.7
		25	0	21.40	20.66	20.61	20.62
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23780	23790	23800
10MHz	QPSK	1	0	23.40	22.67	22.7	22.64
		1	25	23.40	22.6	22.63	22.59
		1	49	23.40	22.6	22.63	22.59
		25	0	22.40	21.66	21.75	21.67
		25	13	22.40	21.65	21.67	21.61
		25	25	22.40	21.67	21.63	21.55
		50	0	22.40	21.56	21.58	21.6
	16QAM	1	0	22.40	21.98	21.95	21.84
		1	25	22.40	21.86	21.87	21.82
		1	49	22.40	21.77	21.81	21.77
		25	0	21.40	20.64	20.71	20.65
		25	13	21.40	20.59	20.57	20.53
		25	25	21.40	20.63	20.59	20.56
		50	0	21.40	20.61	20.57	20.64

2) Conducted power measurement results of LTE Band XVII (Hotspot activated)

Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23755	23790	23825
5MHz	QPSK	1	0	21.60	21.17	21.19	21.07
		1	13	21.60	21.31	21.34	21.18
		1	24	21.60	21.32	21.44	21.41
		12	0	21.60	21.35	21.36	21.48
		12	6	21.60	21.32	21.36	21.34
		12	11	21.60	21.37	21.48	21.22
	16QAM	25	0	21.60	21.38	21.39	21.42
		1	0	21.60	20.79	20.83	20.85
		1	13	21.60	20.85	20.9	20.85
		1	24	21.60	20.78	20.79	20.86
		12	0	21.60	20.56	20.63	20.62
		12	6	21.60	20.45	20.43	20.56
		12	11	21.60	20.58	20.53	20.45
	25	0	21.60	20.67	20.68	20.72	
Bandwidth	Modulation	RB size	RB offset	Tune-up	Low	Mid	High
					23780	23790	23800
10MHz	QPSK	1	0	21.60	21.42	21.48	21.45
		1	25	21.60	21.38	21.42	21.43
		1	49	21.60	21.36	21.34	21.44
		25	0	21.60	21.39	21.41	21.31
		25	13	21.60	21.31	21.45	21.29
		25	25	21.60	21.38	21.34	21.23
		50	0	21.60	21.22	21.23	21.3
	16QAM	1	0	21.60	20.8	20.94	21.02
		1	25	21.60	20.75	20.92	20.96
		1	49	21.60	20.89	20.93	20.87
		25	0	21.60	20.61	20.5	20.43
		25	13	21.60	20.53	20.53	20.48
		25	25	21.60	20.46	20.51	20.45
		50	0	21.60	20.41	20.48	20.41

8.1.12 CONDUCTED POWER MEASUREMENTS OF WiFi 2.4G

WiFi 2.4G	Frequency (MHz)	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2412	17.00	16.67	16.23	16.21	16.63	-	-	-	-
	2437	17.00	15.73	15.22	15.43	15.82	-	-	-	-
	2462	17.00	16.43	16.16	16.3	16.22	-	-	-	-

WiFi 2.4G	Frequency (MHz)	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			6	9	12	18	24	36	48	54
802.11g	2412	12.00	11.55	11.62	11.47	11.66	11.67	11.42	11.72	11.71
	2437	12.00	10.98	10.89	10.85	10.55	10.87	10.67	10.92	10.91
	2462	12.00	11.75	11.87	11.05	11.95	11.04	11.08	11.11	11.07

WiFi 2.4G	Frequency (MHz)	Tune-up	Average Power (dBm) for Data Rates (Mbps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT20	2412	11.00	10.00	10.66	10.14	10.21	10.03	10.21	10.17	10.26
	2437	11.00	9.52	9.41	9.55	9.64	9.42	9.45	9.55	9.67
	2462	11.00	10.63	10.32	10.55	10.45	10.45	10.62	10.56	10.69

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227, for WiFi 2.4GHz, highest average RF output power channel for the lowest data rate of 802.11b mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode.

8.1.13 CONDUCTED POWER MEASUREMENTS OF BT

BT 2450 MHz	Average Conducted Power (dBm)			Tune Up
	CH0	CH39	CH78	
DH5	7.27	9.34	7.96	11
2DH5	5.26	7.35	5.93	11
3DH5	5.26	7.35	5.93	11

BT 2450 MHz	Average Conducted Power (dBm)			Tune Up
	CH0	CH19	CH39	
BT (4.0)	-0.20	2.60	1.40	3

Note:

- 1) The conducted power of BT is measured with RMS detector.

8.2 SAR TEST RESULTS

General Notes:

- 1) Per KDB447498 D01v05r02, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
- 4) Per KDB941225 D06v02, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r02, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

GSM Notes:

- 1) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 2) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

UMTS Notes:

Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

LTE notes:

- 1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices v02r03. The general test procedures used for SAR testing can be found in Section 7.3.
- 2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

WLAN Notes:

Per KDB248227D01v01r02 and October 2012/April 2013 FCC/TCB workshop meeting notes:

1) For WiFi 2.4GHz, highest average RF output power channel for the lowest data rate of 802.11b mode was selected for SAR evaluation. SAR test at higher data rates and higher order modulations (including 802.11g/n) were not required since the maximum average output power for each of these configurations is not more than 1/4dB higher than the tested channel for the lowest data rate of 802.11b mode.

8.2.1 SAR MEASUREMENT RESULT OF GSM850

1. Head SAR test results of GSM850

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Right Cheek	190	836.6	0.07	33.5	31.79	0.268	0.397	1
GSM	Right Cheek	128	824.2	0.07	33.5	31.93	0.267	0.383	2
GSM	Right Cheek	251	848.6	0.07	33.5	31.53	0.272	0.428	3
GSM	Right Tilt	190	836.6	0.03	33.5	31.79	0.181	0.268	4
GSM	Left Cheek	190	836.6	0.05	33.5	31.79	0.229	0.339	5
GSM	Left Tilt	190	836.6	0.06	33.5	31.79	0.22	0.326	6
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Right Cheek	190	836.6	0.07	33.5	31.79	0.238	0.353	7

2. Body-Worn SAR test results of GSM850

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Front	190	836.6	-0.05	33.5	31.79	0.3	0.445	1
GSM	Back	190	836.6	0.05	33.5	31.79	0.401	0.594	2
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Back	190	836.6	-0.02	33.5	31.79	0.303	0.449	3

3. Hotspot SAR test results of GSM850

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GPRS 2TX	Front	190	836.6	-0.05	30	28.06	0.244	0.381	1
GPRS 2TX	Back	190	836.6	-0.02	30	28.06	0.375	0.586	2
GPRS 2TX	Left	190	836.6	0.02	30	28.06	0.261	0.408	3
GPRS 2TX	Right	190	836.6	-0.03	30	28.06	0.266	0.416	4
GPRS 2TX	Bottom	190	836.6	-0.04	30	28.06	0.0225	0.035	5
Test at worst position with the battery 2#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GPRS 2TX	Back	190	836.6	-0.01	30	28.06	0.365	0.571	6

8.2.2 SAR MEASUREMENT RESULT OF GSM1900

1. Head SAR test results of GSM1900

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Right Cheek	661	1880	-0.01	30.5	28.68	0.246	0.374	1
GSM	Right Cheek	512	1850.2	-0.03	30.5	29.02	0.212	0.298	2
GSM	Right Cheek	810	1909.8	0.02	30.5	28.97	0.239	0.340	3
GSM	Right Tilt	661	1880	-0.04	30.5	28.68	0.133	0.202	4
GSM	Left Cheek	661	1880	-0.03	30.5	28.68	0.229	0.348	5
GSM	Left Tilt	661	1880	0.02	30.5	28.68	0.17	0.258	6
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Right Cheek	661	1880	0.02	30.5	28.68	0.238	0.362	7

2. Body-Worn SAR test results of GSM1900

Test data with the battery 1## 15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Front	661	1880	-0.02	30.5	28.68	0.103	0.157	1
GSM	Back	661	1880	-0.03	30.5	28.68	0.19	0.289	2
Test at worst position with the battery 2## 15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GSM	Back	661	1880	-0.07	30.5	28.68	0.298	0.453	3

3. Hotspot SAR test results of GSM1900

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GPRS 1TX	Front	661	1880	-0.02	30	28.72	0.0481	0.065	1
GPRS 1TX	Back	661	1880	-0.07	30	28.72	0.0983	0.132	2
GPRS 1TX	Left	661	1880	0.01	30	28.72	0.0484	0.065	3
GPRS 1TX	Right	661	1880	0.02	30	28.72	0.064	0.086	4
GPRS 1TX	Bottom	661	1880	0.03	30	28.72	0.132	0.177	5
Test at worst position with the battery 2#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
GPRS 1TX	Bottom	661	1880	0.03	30	28.72	0.157	0.211	6

8.2.3 SAR MEASUREMENT RESULT OF UMTS Band V

1. Head SAR test results of UMTS Band V

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	4182	836.6	0.03	24	23.68	0.478	0.515	1
RMC	Right Tilt	4182	836.6	-0.02	24	23.68	0.281	0.302	2
RMC	Left Cheek	4182	836.6	-0.05	24	23.68	0.502	0.540	3
RMC	Left Tilt	4182	836.6	0	24	23.68	0.31	0.334	4
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Left Cheek	4182	836.6	-0.05	24	23.68	0.479	0.516	5

2. Body-Worn SAR test results of UMTS Band V

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	4182	836.6	-0.02	24	23.68	0.484	0.521	1
RMC	Back	4182	836.6	0.03	24	23.68	0.609	0.656	2
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Back	4182	836.6	-0.03	24	23.68	0.581	0.625	3

3. Hotspot SAR test results of UMTS Band V

Test data with the battery 1#10mm

Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	4182	836.6	0.08	22.5	21.04	0.274	0.383	1
RMC	Back	4182	836.6	-0.01	22.5	21.04	0.386	0.540	2
RMC	Left	4182	836.6	0.09	22.5	21.04	0.265	0.371	3
RMC	Right	4182	836.6	0.04	22.5	21.04	0.277	0.388	4
RMC	Bottom	4182	836.6	-0.06	22.5	21.04	0.041	0.057	5

Test at worst position with the battery 2#10mm

Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Back	4182	836.6	0.09	22.5	21.04	0.381	0.533	6

8.2.4 SAR MEASUREMENT RESULT OF UMTS Band IV

1. Head SAR test results of UMTS Band IV

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	1413	1732.6	0.05	23	22.99	0.35	0.351	1
RMC	Right Tilt	1413	1732.6	0.02	23	22.99	0.2	0.200	2
RMC	Left Cheek	1413	1732.6	-0.02	23	22.99	0.17	0.170	3
RMC	Left Tilt	1413	1732.6	0.04	23	22.99	0.217	0.218	4
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	1413	1732.6	-0.01	23	22.99	0.368	0.369	5

2. Body-Worn SAR test results of UMTS Band IV

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	1413	1732.6	-0.03	23	22.99	0.283	0.284	1
RMC	Back	1413	1732.6	-0.09	23	22.99	0.998	1.000	2
RMC	Back	1312	1712.4	-0.05	23	22.93	1.01	1.026	3
RMC	Back	1513	1752.6	-0.05	23	22.82	0.923	0.962	4
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Back	1413	1732.6	-0.03	23	22.99	1.13	1.133	5

3. Hotspot SAR test results of UMTS Band IV

Test data with the battery 1#10mm

Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	1413	1732.6	0.02	18.5	18	0.172	0.193	1
RMC	Back	1413	1732.6	0.06	18.5	18	0.641	0.719	2
RMC	Left	1413	1732.6	-0.02	18.5	18	0.0414	0.046	3
RMC	Right	1413	1732.6	0.06	18.5	18	0.0738	0.083	4
RMC	Bottom	1413	1732.6	0.08	18.5	18	0.469	0.526	5

Test at worst position with the battery 2#10mm

Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Back	1413	1732.6	-0.03	18.5	18	0.676	0.758	6

8.2.5 SAR MEASUREMENT RESULT OF UMTS Band II

1. Head SAR test results of UMTS Band II

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	9400	1880	0.04	24	23.09	0.434	0.535	1
RMC	Right Cheek	9262	1852.4	0.01	24	23.55	0.528	0.586	2
RMC	Right Cheek	9538	1907.6	-0.04	24	23.26	0.551	0.653	3
RMC	Right Tilt	9400	1880	0.05	24	23.09	0.25	0.308	4
RMC	Left Cheek	9400	1880	0.02	24	23.09	0.309	0.381	5
RMC	Left Tilt	9400	1880	0.01	24	23.09	0.261	0.322	6
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Right Cheek	9400	1880	-0.01	24	23.09	0.555	0.684	7

2. Body-Worn SAR test results of UMTS Band II

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	9400	1880	0.03	24	23.09	0.19	0.234	1
RMC	Back	9400	1880	-0.01	24	23.09	0.366	0.451	2
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Back	9400	1880	0.08	24	23.09	0.512	0.631	3

3. Hotspot SAR test results of UMTS Band II

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Front	9400	1880	0.02	20.3	19.40	0.243	0.299	1
RMC	Back	9400	1880	-0.06	20.3	19.40	0.597	0.734	2
RMC	Left	9400	1880	0.07	20.3	19.40	0.139	0.171	3
RMC	Right	9400	1880	0.06	20.3	19.40	0.191	0.235	4
RMC	Bottom	9400	1880	-0.08	20.3	19.40	0.354	0.436	5
Test at worst position with the battery 2#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
RMC	Back	9400	1880	0.03	20.3	19.40	0.349	0.429	6

8.2.6 SAR MEASUREMENT RESULT OF LTE Band II

1. Head SAR test results of LTE Band II

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Right Cheek	19100	1900	0.01	23.4	22.89	0.385	0.433	1
	Right Tilt	19100	1900	0.02	23.4	22.89	0.245	0.276	2
	Left Cheek	19100	1900	0.03	23.4	22.89	0.220	0.247	3
	Left Tilt	19100	1900	0.09	23.4	22.89	0.209	0.235	4
20M 50%RB/0#	Right Cheek	18700	1860	0.02	22.4	21.74	0.268	0.312	5
	Right Tilt	18700	1860	0.1	22.4	21.74	0.148	0.172	6
	Left Cheek	18700	1860	0.02	22.4	21.74	0.175	0.204	7
	Left Tilt	18700	1860	0.06	22.4	21.74	0.137	0.159	8
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Right Cheek	19100	1900	0.01	22.4	22.89	0.263	0.296	9

2. Body-Worn SAR test results of LTE Band II

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Front	19100	1900	-0.02	23.4	22.89	0.210	0.236	1
	Back	19100	1900	-0.03	23.4	22.89	0.383	0.431	2
20M 50%RB/0#	Front	18700	1860	0.03	22.4	21.74	0.146	0.170	3
	Back	18700	1860	0.07	22.4	21.74	0.428	0.498	4
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 50%RB/0#	Back	18700	1860	0.07	22.4	21.74	0.428	0.498	5

3. Hotspot SAR test results of LTE Band II

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Front	18900	1880	-0.02	20.5	20.43	0.121	0.123	1
	Back	18900	1880	0.02	20.5	20.43	0.389	0.395	2
	Left	18900	1880	0.02	20.5	20.43	0.0635	0.065	3
	Right	18900	1880	-0.01	20.5	20.43	0.0868	0.088	4
	Bottom	18900	1880	0.09	20.5	20.43	0.19	0.193	5
20M 50%RB/ 50#	Front	18900	1880	0.03	20.5	20.28	0.138	0.145	6
	Back	18900	1880	0.04	20.5	20.28	0.42	0.442	7
	Left	18900	1880	0.02	20.5	20.28	0.0623	0.066	8
	Right	18900	1880	0.06	20.5	20.28	0.0926	0.097	9
	Bottom	18900	1880	0.01	20.5	20.28	0.209	0.220	10
Test at worst position with the battery 2#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 50%RB/ 50#	Back	18900	1880	0.03	20.5	20.28	0.399	0.420	11

8.2.7 SAR MEASUREMENT RESULT OF LTE Band IV

1. Head SAR test results of LTE Band IV

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/0#	Right Cheek	20300	1745	0.02	22	21.96	0.0419	0.042	1
	Right Tilt	20300	1745	0.03	22	21.96	0.00983	0.010	2
	Left Cheek	20300	1745	-0.04	22	21.96	0.072	0.073	3
	Left Tilt	20300	1745	0.06	22	21.96	0.0903	0.091	4
20M 50%RB/ 0#	Right Cheek	20300	1745	0.01	21	20.77	0.0412	0.043	5
	Right Tilt	20300	1745	0.08	21	20.77	0.0228	0.024	6
	Left Cheek	20300	1745	-0.03	21	20.77	0.151	0.159	7
	Left Tilt	20300	1745	0.02	21	20.77	0.0736	0.078	8
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 50%RB/ 0#	Left Tilt	20300	1745	0.02	21	20.77	0.0145	0.015	9

2. Body-Worn SAR test results of LTE Band IV

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/0#	Front	20300	1745	0.05	22	21.96	0.268	0.270	1
	Back (99#)	20175	1732.5	-0.01	22	21.87	0.912	0.940	2
	Back (0#)	20050	1720	0.01	22	21.88	0.833	0.856	3
	Back	20300	1745	-0.02	22	21.96	0.883	0.891	4
20M 50%RB/ 0#	Front	20300	1745	0.03	21	20.77	0.205	0.216	5
	Back	20300	1745	-0.02	21	20.77	0.659	0.695	6
20M 100%RB /0#	Back	20300	1745	0.01	21	20.64	0.674	0.732	7
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/0#	Back	20175	1732.5	0.05	22	21.87	0.825	0.850	8
Repeat SAR Test at worst position									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Back	20175	1732.5	0.02	22	21.87	0.846	0.872	9

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurement was >1.20 or when the original or repeated measurement was ≥ 1.45 W/kg.

3. Hotspot SAR test results of LTE Band IV

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Front	20175	1732.5	0.02	17.3	17.19	0.112	0.115	1
	Back	20175	1732.5	-0.04	17.3	17.19	0.379	0.389	2
	Left	20175	1732.5	0.02	17.3	17.19	0.0446	0.046	3
	Right	20175	1732.5	-0.03	17.3	17.19	0.0249	0.026	4
	Bottom	20175	1732.5	-0.08	17.3	17.19	0.24	0.246	5
20M 50%RB/ 50#	Front	20175	1732.5	0.03	17.3	17.08	0.11	0.116	6
	Back	20175	1732.5	0.04	17.3	17.08	0.424	0.446	7
	Left	20175	1732.5	0.03	17.3	17.08	0.02416	0.025	8
	Right	20175	1732.5	0.04	17.3	17.08	0.0428	0.045	9
	Bottom	20175	1732.5	-0.02	17.3	17.08	0.228	0.240	10
Test at worst position with the battery 2#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 50%RB/ 50#	Back	20175	1732.5	0.06	17.3	17.08	0.391	0.411	11

8.2.8 SAR MEASUREMENT RESULT OF LTE Band V

1. Head SAR test results of LTE Band V

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/25#	Right Cheek	20525	836.5	0.05	23.4	22.44	0.272	0.339	1
	Right Tilt	20525	836.5	0.03	23.4	22.44	0.186	0.232	2
	Left Cheek	20525	836.5	0.06	23.4	22.44	0.326	0.407	3
	Left Tilt	20525	836.5	-0.01	23.4	22.44	0.22	0.274	4
10M 50%RB/ 0#	Right Cheek	20450	826.5	0.03	22.4	21.51	0.141	0.173	5
	Right Tilt	20450	826.5	0	22.4	21.51	0.190	0.233	6
	Left Cheek	20450	826.5	-0.03	22.4	21.51	0.287	0.352	7
	Left Tilt	20450	826.5	0.03	22.4	21.51	0.093	0.114	8
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/25#	Left Cheek	20525	836.5	-0.02	23.4	22.44	0.321	0.400	9

2. Body-Worn SAR test results of LTE Band V

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M	Front	20525	836.5	-0.04	23.4	22.44	0.326	0.407	1
1RB/25#	Back	20525	836.5	-0.04	23.4	22.44	0.4	0.499	2
10M	Front	20450	826.5	-0.05	22.4	21.51	0.268	0.329	3
50%RB/0#	Back	20450	826.5	0.09	22.4	21.51	0.364	0.447	4
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/25#	Back	20525	836.5	-0.06	23.4	22.44	0.406	0.506	5

3. Hotspot SAR test results of LTE Band V

Test data with the battery 1#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/49#	Front	20525	836.5	-0.02	21.6	20.95	0.242	0.281	1
	Back	20525	836.5	0	21.6	20.95	0.334	0.388	2
	Left	20525	836.5	0.01	21.6	20.95	0.228	0.265	3
	Right	20525	836.5	-0.01	21.6	20.95	0.228	0.265	4
	Bottom	20525	836.5	0.01	21.6	20.95	0.0458	0.053	5
10M 50%RB/ 0#	Front	20525	836.5	-0.06	21.6	20.76	0.233	0.283	6
	Back	20525	836.5	-0.02	21.6	20.76	0.324	0.393	7
	Left	20525	836.5	-0.02	21.6	20.76	0.324	0.393	8
	Right	20525	836.5	0.01	21.6	20.76	0.219	0.266	9
	Bottom	20525	836.5	0.04	21.6	20.76	0.033	0.040	10
Test at worst position with the battery 2#10mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 50%RB/ 0#	Back	20525	836.5	0.01	21.6	20.76	0.391	0.474	11

8.2.9 SAR MEASUREMENT RESULT OF LTE Band VII

1. Head SAR test results of LTE Band VII

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Right Cheek	21100	2535	0.03	23.4	22.33	0.241	0.308	1
	Right Tilt	21100	2535	0.04	23.4	22.33	0.103	0.132	2
	Left Cheek	21100	2535	0.05	23.4	22.33	0.514	0.658	3
	Left Cheek	20850	2535	-0.03	23.4	22.12	0.43	0.577	4
	Left Cheek	21350	2535	0.06	23.4	22.33	0.464	0.594	5
	Left Tilt	21100	2535	-0.05	23.4	22.33	0.114	0.146	6
20M 50%RB/ 50#	Right Cheek	21100	2535	0.03	22.4	21.12	0.179	0.240	7
	Right Tilt	21100	2535	0.06	22.4	21.12	0.0724	0.097	8
	Left Cheek	21100	2535	0.07	22.4	21.12	0.373	0.501	9
	Left Tilt	21100	2535	0.06	22.4	21.12	0.0927	0.124	10
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Left Cheek	21100	2535	0.06	23.4	22.33	0.424	0.542	11

2. Body-Worn SAR test results of LTE Band VII

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Front	21100	2535	0.09	23.4	22.33	0.350	0.451	1
	Back	21100	2535	0.09	23.4	22.33	0.550	0.709	2
20M 50%RB/ 50#	Front	21100	2535	0.05	22.4	21.12	0.101	0.136	3
	Back	21100	2535	0.09	22.4	21.12	0.191	0.256	4
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Back	21100	2535	0.03	23.4	22.33	0.449	0.578	5

3. Hotspot SAR test results of LTE Band VII

Test data with the battery 1#10mm

Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 1RB/99#	Front	21100	2535	0.02	17.2	15.66	0.129	0.184	1
	Back	21100	2535	0.08	17.2	15.66	0.255	0.364	2
	Left	21100	2535	0	17.2	15.66	0.03	0.043	3
	Right	21100	2535	0.04	17.2	15.66	0.027	0.038	4
	Bottom	21100	2535	0.03	17.2	15.66	0.288	0.411	5
20M 50%RB/ 25#	Front	21100	2535	0.08	17.2	15.57	0.199	0.290	6
	Back	21100	2535	-0.06	17.2	15.57	0.355	0.517	7
	Left	21100	2535	-0.06	17.2	15.57	0.046	0.067	8
	Right	21100	2535	0.06	17.2	15.57	0.031	0.045	9
	Bottom	21100	2535	0.07	17.2	15.57	0.284	0.413	10

Test at worst position with the battery 2#10mm

Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
20M 50%RB/ 25#	Bottom	21100	2535	0.01	17.2	15.57	0.284	0.413	11

8.2.10 SAR MEASUREMENT RESULT OF LTE Band XII

1. Head SAR test results of LTE Band XII

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Right Cheek	23095	707.5	0.05	23.4	22.55	0.181	0.220	1
	Right Tilt	23095	707.5	0.07	23.4	22.55	0.0963	0.117	2
	Left Cheek	23095	707.5	0.06	23.4	22.55	0.215	0.261	3
	Left Tilt	23095	707.5	0.02	23.4	22.55	0.157	0.191	4
10M 50%RB/ 0#	Right Cheek	23095	707.5	0.04	22.4	21.59	0.159	0.192	5
	Right Tilt	23095	707.5	0.07	22.4	21.59	0.0848	0.102	6
	Left Cheek	23095	707.5	-0.02	22.4	21.59	0.177	0.213	7
	Left Tilt	23095	707.5	0.09	22.4	21.59	0.108	0.130	8
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Left Cheek	23095	707.5	-0.07	22.4	22.55	0.205	0.249	9

2. Body-Worn SAR test results of LTE Band XII

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M	Front	23095	707.5	-0.03	23.4	22.55	0.181	0.220	1
1RB/0#	Back	23095	707.5	0	23.4	22.55	0.236	0.287	2
10M	Front	23095	707.5	0.07	22.4	21.59	0.195	0.235	3
50%RB/0#	Back	23095	707.5	-0.05	22.4	21.59	0.183	0.221	4
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Back	23095	707.5	-0.02	22.4	21.55	0.237	0.288	5

3. Hotspot SAR test results of LTE Band XII

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Front	23095	707.5	0.01	21.6	21.46	0.114	0.118	1
	Back	23095	707.5	-0.08	21.6	21.46	0.141	0.146	2
	Left	23095	707.5	0.07	21.6	21.46	0.112	0.116	3
	Right	23095	707.5	0	21.6	21.46	0.1	0.103	4
	Bottom	23095	707.5	0.03	21.6	21.46	0.0235	0.024	5
10M 50%RB/ 0#	Front	23095	707.5	-0.06	21.6	21.42	0.161	0.168	6
	Back	23095	707.5	0.02	21.6	21.42	0.212	0.221	7
	Left	23095	707.5	0.05	21.6	21.42	0.132	0.138	8
	Right	23095	707.5	-0.02	21.6	21.42	0.104	0.108	9
	Bottom	23095	707.5	-0.03	21.6	21.42	0.0243	0.025	10
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 50%RB/ 0#	Back	23095	707.5	-0.16	21.6	21.42	0.241	0.251	11

8.2.11 SAR MEASUREMENT RESULT OF LTE Band XVII

1. Head SAR test results of LTE Band XVII

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Right Cheek	23790	710	0.05	23.4	22.7	0.212	0.249	1
	Right Tilt	23790	710	0.07	23.4	22.7	0.102	0.120	2
	Left Cheek	23790	710	0.05	23.4	22.7	0.228	0.268	3
	Left Tilt	23790	710	0.07	23.4	22.7	0.157	0.184	4
10M 50%RB/ 0#	Right Cheek	23790	710	0.04	22.4	21.75	0.166	0.193	5
	Right Tilt	23790	710	0.06	22.4	21.75	0.082	0.095	6
	Left Cheek	23790	710	0.02	22.4	21.75	0.188	0.218	7
	Left Tilt	23790	710	0.02	22.4	21.75	0.13	0.151	8
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Left Cheek	23790	710	0.08	23.4	22.7	0.231	0.271	9

2. Body-Worn SAR test results of LTE Band XVII

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M	Front	23790	710	0.02	23.4	22.7	0.031	0.036	1
1RB/0#	Back	23790	710	0.01	23.4	22.7	0.04	0.047	2
10M	Front	23790	710	-0.07	22.4	21.58	0.0373	0.045	3
50%RB/0#	Back	23790	710	0.02	22.4	21.58	0.0395	0.048	4
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M	Back	23790	710	-0.09	22.4	21.58	0.203	0.245	5

3. Hotspot SAR test results of LTE Band XVII

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 1RB/0#	Front	23790	710	-0.02	21.6	21.48	0.0463	0.048	1
	Back	23790	710	0.08	21.6	21.48	0.0321	0.033	2
	Left	23790	710	-0.01	21.6	21.48	0.0165	0.017	3
	Right	23790	710	0	21.6	21.48	0.018	0.019	4
	Bottom	23790	710	0	21.6	21.48	0.0402	0.041	5
10M 50%RB/ 13#	Front	23790	710	-0.01	21.6	21.45	0.053	0.055	6
	Back	23790	710	-0.05	21.6	21.45	0.0615	0.064	7
	Left	23790	710	0.03	21.6	21.45	0.0136	0.014	8
	Right	23790	710	0.04	21.6	21.45	0.0189	0.020	9
	Bottom	23790	710	0.05	21.6	21.45	0.0281	0.029	10
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
10M 50%RB/ 13#	Back	23790	710	0.02	21.6	21.28	0.24	0.248	11

8.2.12 SAR MEASUREMENT RESULT OF WiFi 2.4G

1. Head SAR test results of WiFi 2.4G

Test data with the battery 1#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Right Cheek	1	2412	0.08	17	16.67	0.97	1.047	1
	Right Cheek	11	2462	-0.04	17	16.43	1.16	1.323	2
	Right Cheek	6	2437	0.03	17	15.73	0.588	0.788	3
	Right Tilt	1	2412	-0.03	17	16.67	1	1.079	4
	Right Tilt	11	2462	0.01	17	16.43	1.16	1.323	5
	Right Tilt	6	2437	0.03	17	15.73	0.56	0.750	6
	Left Cheek	1	2412	0.07	17	16.67	0.76	0.820	7
	Left Cheek	11	2462	0.08	17	16.43	0.516	0.588	8
	Left Cheek	6	2437	0.03	17	15.73	0.312	0.418	9
	Left Tilt	1	2412	0.01	17	16.67	1.01	1.090	10
	Left Tilt	11	2462	0.03	17	16.43	0.742	0.846	11
	Left Tilt	6	2437	0.04	17	15.73	0.456	0.611	12
Test at worst position with the battery 2#									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Right Cheek	11	2462	0.02	17	16.43	1.12	1.277	13
Repeat SAR Test at worst position									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Right Cheek	11	2462	0.03	17	16.43	1.05	1.197	14

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurement was >1.20 or when the original or repeated measurement was ≥ 1.45 W/kg.

2. Body-Worn SAR test results of WiFi 2.4G

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Front	1	2412	-0.05	17	16.67	0.19	0.205	1
	Back	1	2412	-0.02	17	16.67	0.177	0.191	2
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Front	1	2412	0.07	17	16.67	0.176	0.190	3


3. Hotspot SAR test results of WiFi 2.4G

Test data with the battery 1#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Front	1	2412	0.02	17	16.67	0.306	0.330	1
	Back	1	2412	0.02	17	16.67	0.432	0.466	2
	Left	1	2412	0.12	17	16.67	0.197	0.213	3
	Right	1	2412	0.01	17	16.67	0.0301	0.032	4
	Top	1	2412	0.06	17	16.67	0.29	0.313	5
Test at worst position with the battery 2#15mm									
Mode	Test Position	CH	Freq.	Drift (dB)	Power(dBm)		SAR Value (W/kg)1-g	Reported SAR	Graph Results
					Tune up	Conducted			
802.11b	Top	1	2412	0	17	16.67	0.439	0.474	6

8.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05r02.

The location of the antennas inside mobile phone is shown as below picture:

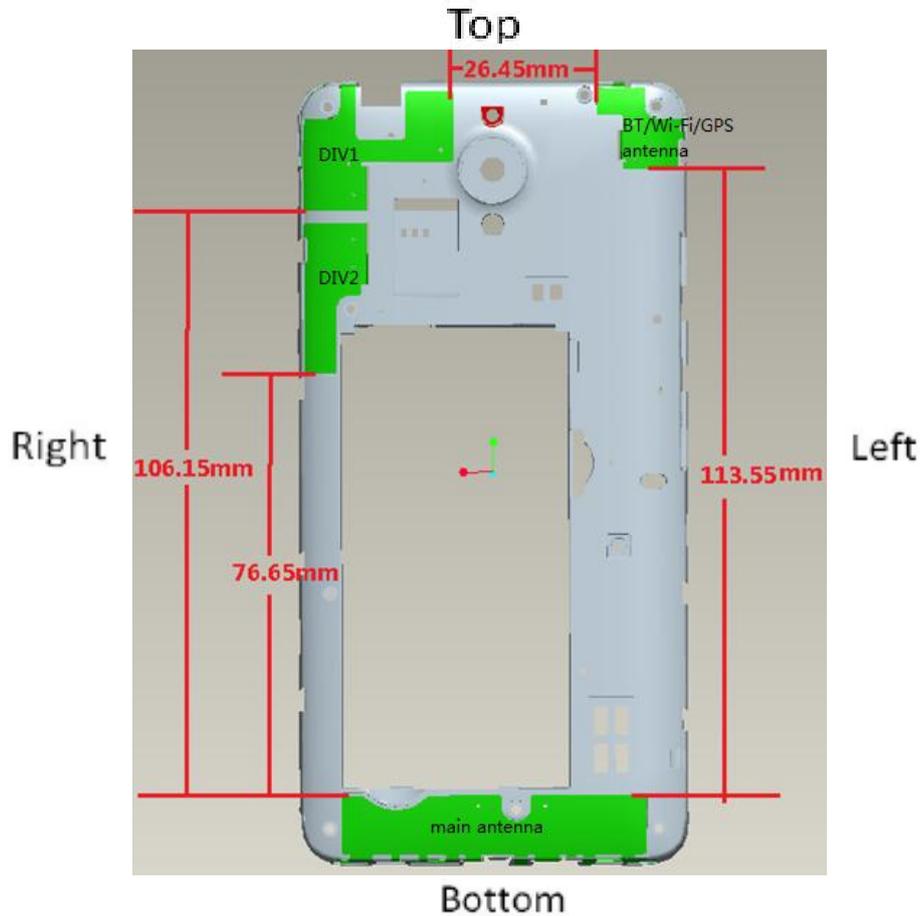

Note:

1) Diversity antenna is used to improve the acceptance of performance of the main antenna, it does not have a transmitter function.

Sides for SAR testing

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
GSM850	Hotspot	YES	YES	YES	YES	NO	YES
GSM1900	Hotspot	YES	YES	YES	YES	NO	YES
UMTS Band II	Hotspot	YES	YES	YES	YES	NO	YES
UMTS Band IV	Hotspot	YES	YES	YES	YES	NO	YES
UMTS Band V	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band II	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band IV	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band V	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band VII	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band XII	Hotspot	YES	YES	YES	YES	NO	YES
LTE Band XVII	Hotspot	YES	YES	YES	YES	NO	YES
WiFi	Hotspot	YES	YES	NO	YES	YES	NO

Note: Per KDB 941225 D06, particular DUT edges were not required to be evaluated for Hotspot SAR if the antenna-to-edge distance is greater than 2.5cm.

8.3.1 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01v05, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Standalone SAR test exclusion for BT

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body-Worn	11	12.59	15	2450	1.04	3	Yes

Note:

- 1)* - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Estimated SAR calculation for BT

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
BT	Body-Worn	11	12.95	15	2450	7.5	0.176

Note: * - maximum possible output power declared by manufacturer

8.3.2 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01v05 r02, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Head	Body-worn	Hotspot
1	GSM (Voice) + WiFi 2.4G	Yes	Yes	N/A
2	GPRS/EDGE (DATA) + WiFi 2.4G	N/A	N/A	Yes
3	GSM(Voice) +BT	N/A	Yes	N/A
4	GPRS/EDGE(DATA)+BT	N/A	N/A	N/A
5	UMTS(Voice)+WiFi 2.4G	Yes	Yes	N/A
6	UMTS(DATA)+WiFi 2.4G	N/A	Yes	Yes
7	UMTS(Voice)+BT	N/A	Yes	N/A
8	UMTS(DATA)+BT	N/A	Yes	N/A
9	LTE(DATA)+WiFi 2.4G	Yes*	Yes*	Yes
10	LTE(DATA)+BT	N/A	Yes*	N/A

Note:

- i)* VOIP 3rd party applications may possibly be installed and used by the end user.
- ii) Wi-Fi 2.4G and Bluetooth share the same antenna and can't transmit simultaneously.
- iii) 2G&3G&4G share the same antenna and can't transmit simultaneously.
- iv) The device does not support DTM function.
- v) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

8.3.3 SAR SUMMATION SCENARIO

Simultaneous TX Combination of GSM850 and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		GSM850	WiFi			
Head	Right Cheek	0.428	1.323	1.751	0.028	See 8.3.4
	Right Tilt	0.268	1.323	1.591	N/A	N/A
	Left Cheek	0.339	0.820	1.159	N/A	N/A
	Left Tilt	0.326	1.090	1.416	N/A	N/A
Body-Worn	Front	0.445	0.205	0.650	N/	N/A
	Back	0.594	0.191	0.785	N/A	N/A
Hotspot	Front	0.381	0.330	0.711	N/A	N/A
	Back	0.586	0.474	1.060	N/A	N/A
	Left	0.408	0.213	0.621	N/A	N/A
	Right	0.416	0.032	0.448	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.035	0.000	0.035	N/A	N/A

Simultaneous TX Combination of GSM1900 and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		GSM1900	WiFi			
Head	Right Cheek	0.374	1.323	1.697	0.024	See 8.3.4
	Right Tilt	0.202	1.323	1.525	N/A	N/A
	Left Cheek	0.348	0.820	1.168	N/A	N/A
	Left Tilt	0.258	1.090	1.348	N/A	N/A
Body-Worn	Front	0.157	0.205	0.362	N/A	N/
	Back	0.453	0.191	0.644	N/A	N/A
Hotspot	Front	0.065	0.330	0.395	N/A	N/A
	Back	0.132	0.474	0.606	N/A	N/A
	Left	0.065	0.213	0.278	N/A	N/A
	Right	0.086	0.032	0.118	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.211	0.000	0.211	N/A	N/A

Simultaneous TX Combination of UMTS Band II and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		UMTS Band II	WiFi			
Head	Right Cheek	0.684	1.323	2.007	0.029	See 8.3.4
	Right Tilt	0.308	1.323	1.631	0.033	See 8.3.4
	Left Cheek	0.381	0.820	1.201	N/A	N/A
	Left Tilt	0.322	1.090	1.308	N/A	N/A
Body-Worn	Front	0.234	0.205	0.439	N/A	N/A
	Back	0.631	0.191	0.822	N/A	N/A
Hotspot	Front	0.299	0.330	0.629	N/A	N/A
	Back	0.734	0.474	1.208	N/A	N/A
	Left	0.171	0.213	0.384	N/A	N/A
	Right	0.235	0.032	0.267	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.429	0.000	0.429	N/A	N/A

Simultaneous TX Combination of UMTS Band IV and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		UMTS Band IV	WiFi			
Head	Right Cheek	0.369	1.323	1.692	0.023	See 8.3.4
	Right Tilt	0.200	1.323	1.523	N/A	N/A
	Left Cheek	0.170	0.820	0.990	N/A	N/A
	Left Tilt	0.218	1.090	1.308	N/A	N/A
Body-Worn	Front	0.284	0.205	0.489	N/A	N/A
	Back	1.133	0.191	1.324	N/A	N/A
Hotspot	Front	0.193	0.330	0.523	N/A	N/A
	Back	0.758	0.474	1.232	N/A	N/A
	Left	0.046	0.213	0.259	N/A	N/A
	Right	0.083	0.032	0.115	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.526	0.000	0.526	N/A	N/A

Simultaneous TX Combination of UMTS Band V and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		UMTS Band V	WiFi			
Head	Right Cheek	0.515	1.323	1.838	0.029	See 8.3.4
	Right Tilt	0.302	1.323	1.625	0.036	See 8.3.4
	Left Cheek	0.540	0.820	1.360	N/A	N/A
	Left Tilt	0.334	1.090	1.424	N/A	N/A
Body-Worn	Front	0.521	0.205	0.726	N/A	N/A
	Back	0.656	0.191	0.847	N/A	N/A
Hotspot	Front	0.383	0.330	0.713	N/A	N/A
	Back	0.540	0.474	1.014	N/A	N/A
	Left	0.371	0.213	0.584	N/A	N/A
	Right	0.388	0.032	0.420	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.057	0.000	0.057	N/A	N/A

Simultaneous TX Combination of LTE Band II and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band II	WiFi			
Head	Right Cheek	0.433	1.323	1.756	0.024	See 8.3.4
	Right Tilt	0.276	1.323	1.599	N/A	N/A
	Left Cheek	0.247	0.820	1.067	N/A	N/A
	Left Tilt	0.235	1.090	1.325	N/A	N/A
Body-Worn	Front	0.236	0.205	0.441	N/A	N/A
	Back	0.498	0.191	0.689	N/A	N/A
Hotspot	Front	0.145	0.330	0.475	N/A	N/A
	Back	0.442	0.474	0.916	N/A	N/A
	Left	0.066	0.213	0.279	N/A	N/A
	Right	0.097	0.032	0.129	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.220	0.000	0.220	N/A	N/A

Simultaneous TX Combination of LTE Band IV and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTEBand IV	WiFi			
Head	Right Cheek	0.043	1.323	1.366	N/A	N/A
	Right Tilt	0.024	1.323	1.347	N/A	N/A
	Left Cheek	0.159	0.820	0.979	N/A	N/A
	Left Tilt	0.091	1.090	1.181	N/A	N/A
Body-Worn	Front	0.270	0.205	0.475	N/A	N/A
	Back	0.940	0.191	1.131	N/A	N/A
Hotspot	Front	0.116	0.330	0.446	N/A	N/A
	Back	0.446	0.474	0.920	N/A	N/A
	Left	0.046	0.213	0.259	N/A	N/A
	Right	0.045	0.032	0.077	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.246	0.000	0.246	N/A	N/A

Simultaneous TX Combination of LTE Band V and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band V	WiFi			
Head	Right Cheek	0.339	1.323	1.662	0.028	See 8.3.4
	Right Tilt	0.233	1.323	1.556	N/A	N/A
	Left Cheek	0.407	0.820	1.224	N/A	N/A
	Left Tilt	0.274	1.090	1.364	N/A	N/A
Body-Worn	Front	0.407	0.205	0.663	N/A	N/A
	Back	0.506	0.191	0.716	N/A	N/A
Hotspot	Front	0.283	0.330	0.612	N/A	N/A
	Back	0.474	0.474	0.697	N/A	N/A
	Left	0.393	0.213	0.613	N/A	N/A
	Right	0.266	0.032	0.948	N/A	N/A
	Top	0.000	0.313	0.606	N/A	N/A
	Bottom	0.053	0.000	0.298	N/A	N/A

Simultaneous TX Combination of LTE Band VII and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band VII	WiFi			
Head	Right Cheek	0.308	1.323	1.631	0.022	See 8.3.4
	Right Tilt	0.132	1.323	1.455	N/A	N/A
	Left Cheek	0.658	0.820	1.478	N/A	N/A
	Left Tilt	0.146	1.090	1.236	N/A	N/A
Body-Worn	Front	0.451	0.205	0.656	N/A	N/A
	Back	0.709	0.191	0.900	N/A	N/A
Hotspot	Front	0.290	0.330	0.620	N/A	N/A
	Back	0.517	0.474	0.991	N/A	N/A
	Left	0.067	0.213	0.280	N/A	N/A
	Right	0.045	0.032	0.077	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.413	0.000	0.413	N/A	N/A

Simultaneous TX Combination of LTE Band XII and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band XII	WiFi			
Head	Right Cheek	0.220	1.323	1.543	N/A	N/A
	Right Tilt	0.117	1.323	1.440	N/A	N/A
	Left Cheek	0.261	0.820	1.081	N/A	N/A
	Left Tilt	0.191	1.090	1.281	N/A	N/A
Body-Worn	Front	0.235	0.205	0.440	N/A	N/A
	Back	0.288	0.191	0.479	N/A	N/A
Hotspot	Front	0.168	0.330	0.498	N/A	N/A
	Back	0.251	0.474	0.725	N/A	N/A
	Left	0.138	0.213	0.351	N/A	N/A
	Right	0.108	0.032	0.140	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.025	0.000	0.025	N/A	N/A

Simultaneous TX Combination of LTE Band XVII and WiFi.

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band XVII	WiFi			
Head	Right Cheek	0.249	1.323	1.572	N/A	N/A
	Right Tilt	0.120	1.323	1.443	N/A	N/A
	Left Cheek	0.271	0.820	1.091	N/A	N/A
	Left Tilt	0.184	1.090	1.274	N/A	N/A
Body-Worn	Front	0.045	0.205	0.250	N/	N/A
	Back	0.245	0.191	0.436	N/A	N/A
Hotspot	Front	0.055	0.330	0.385	N/A	N/A
	Back	0.248	0.474	0.722	N/A	N/A
	Left	0.017	0.213	0.230	N/A	N/A
	Right	0.020	0.032	0.052	N/A	N/A
	Top	0.000	0.313	0.313	N/A	N/A
	Bottom	0.041	0.000	0.041	N/A	N/A

Simultaneous TX Combination of GSM850 and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		GSM850	BT			
Body-Worn	Front	0.445	0.176	0.621	N/A	N/A
	Back	0.594	0.176	0.770	N/A	N/A

Simultaneous TX Combination of GSM1900 and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		GSM1900	BT			
Body-Worn	Front	0.157	0.176	0.333	/A	N/A
	Back	0.453	0.176	0.629	N/A	N/A

Simultaneous TX Combination of UMTS Band II and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		UMTS Band II	BT			
Body-Worn	Front	0.234	0.176	0.410	N/A	N/A
	Back	0.631	0.176	0.807	N/A	N/A

Simultaneous TX Combination of UMTS Band IV and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		UMTS Band IV	BT			
Body-Worn	Front	0.284	0.176	0.460	N/A	N/A
	Back	1.000	0.176	1.176	N/A	N/A

Simultaneous TX Combination of UMTS Band V and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		UMTS Band V	BT			
Body-Worn	Front	0.521	0.176	0.697	N/A	N/A
	Back	0.656	0.176	0.832	N/A	N/A

Simultaneous TX Combination of LTE Band II and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band II	BT			
Body-Worn	Front	0.13	0.176	0.306	N/A	N/A
	Back	0.427	0.176	0.603	N/A	N/A

Simultaneous TX Combination of LTE Band IV and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band IV	BT			
Body-Worn	Front	0.270	0.176	0.446	N/A	N/A
	Back	0.940	0.176	1.116	N/A	N/A

Simultaneous TX Combination of LTE Band V and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band V	BT			
Body-Worn	Front	0.407	0.176	0.583	N/A	N/A
	Back	0.506	0.176	0.682	N/A	N/A

Simultaneous TX Combination of LTE Band VII and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band VII	BT			
Body-Worn	Front	0.451	0.176	0.627	N/A	N/A
	Back	0.709	0.176	0.885	N/A	N/A

Simultaneous TX Combination of LTE Band XII and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band XII	BT			
Body-Worn	Front	0.235	0.176	0.411	N/A	N/A
	Back	0.288	0.176	0.464	N/A	N/A

Simultaneous TX Combination of LTE Band XVII and BT

Test Position		Scaled SAR _{Max}		ΣSAR	SPLSR	Remark
		LTE Band XVII	BT			
Body-Worn	Front	0.045	0.176	0.221	N/A	N/A
	Back	0.245	0.176	0.421	N/A	N/A

8.3.4 SIMULTANEOUS TRANSMISSION CONCLUSION

According to KDB447498 D01v05, When the sum of SAR is larger than limit, SAR test exclusion is determined by the SAR to peak location separation ratio(SPLSR).When the SAR to peak location ratio for each pair of antennas is ≤ 0.04 , simultaneous SAR evaluation is not required.


When SAR is measured for both antennas in the pair the peak location separation distance is computed by the following fomula:

$$\text{Distance}_{Tx1-Tx2} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = (SAR_1 + SAR_2)^{1.5}/R_i$$

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location should be translated onto the test device to determine the peak location separation for the antenna pair. The ERP location on the phantom is aligned with the ERP location on the handset, with 6mm separation in the z coordinate due to the ear spacer. A measured peak location can be translated onto the handset, with respect to the ERP location, by ignoring the 6 mm offset in the z coordinate. The assumed peak location of the antenna with estimated SAR can also be determined with respect to the ERP location on the handset. The peak location separation distance is estimated by the x and y coordinated of the peaks, referenced to the ERP location. While flat phantoms are not expected to have these issues, the same peak translation approach should be applied to determine peak location separation.

- 1) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with GSM850 and WiFi 2.4G.
The Peak SAR location is as below:

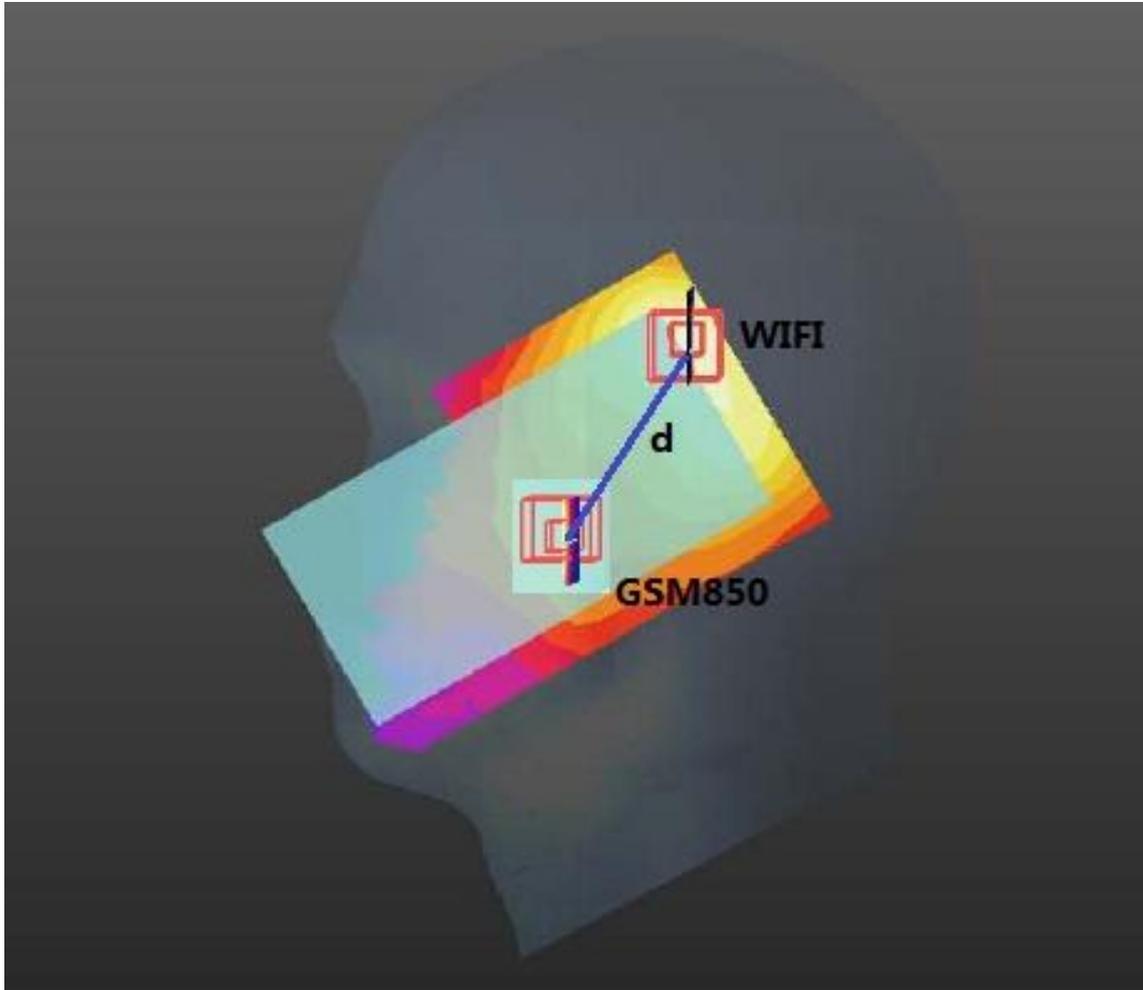


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
GSM850	0.343	0.059	-0.262	-0.176
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.428	83.06	0.028	0.04	Not Required

- 2) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with GSM1900 and WiFi 2.4G.
The Peak SAR location is as below:

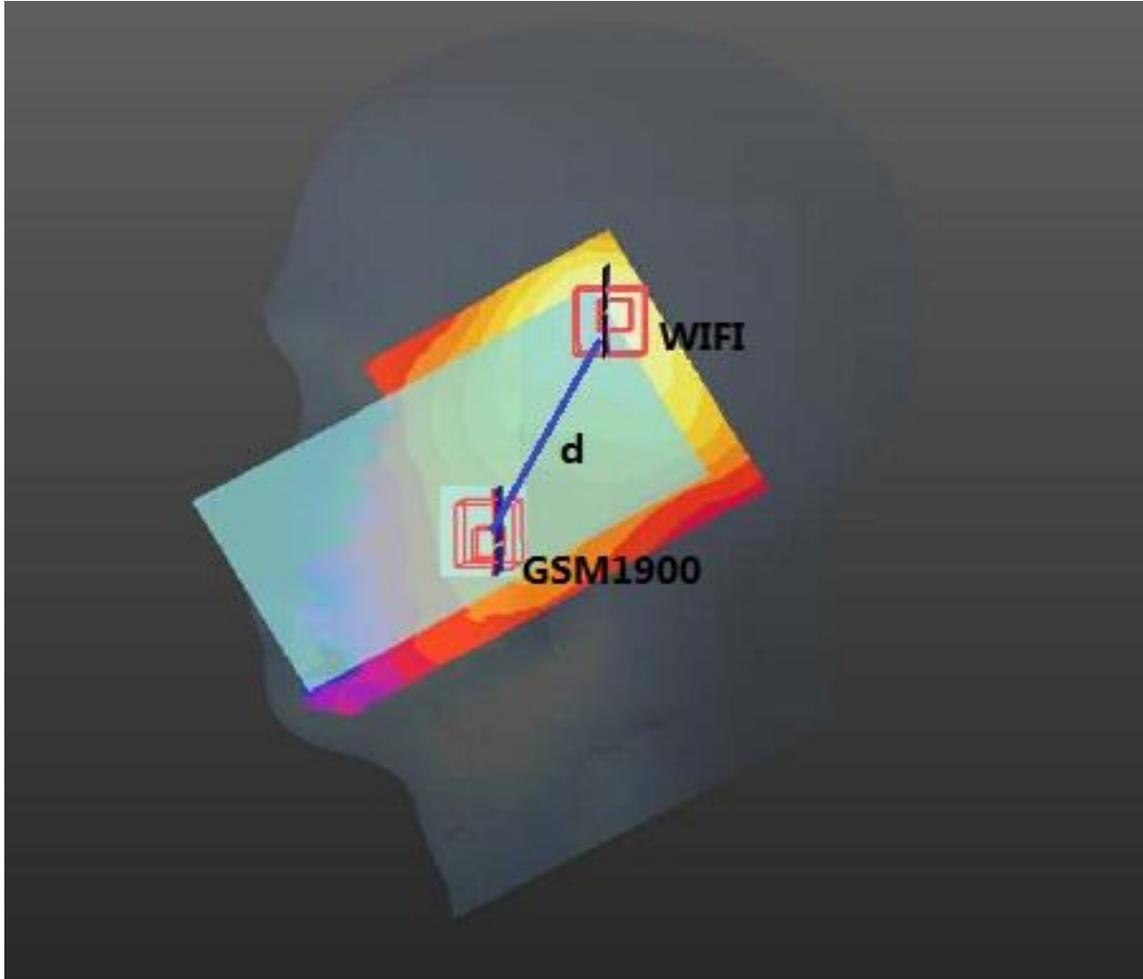


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
GSM1900	0.373	0.0652	-0.254	-0.174
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.374	92.97	0.024	0.04	Not Required

- 3) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with UMTS Band II and WiFi 2.4G.
The Peak SAR location is as below:

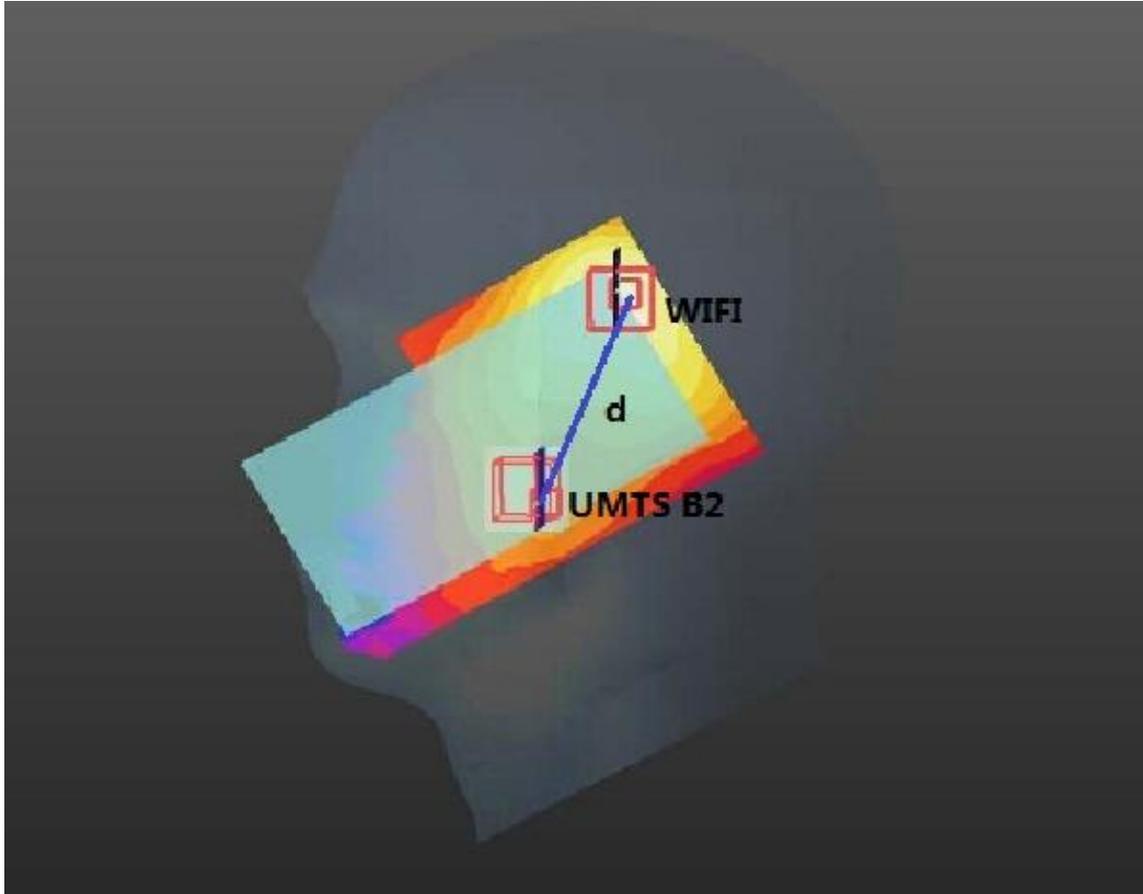


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
UMTS Band II	2.02	0.0745	-0.252	-0.172
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.684	99.38	0.029	0.04	Not Required

- 4) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with UMTS Band IV and WiFi 2.4G.
The Peak SAR location is as below:

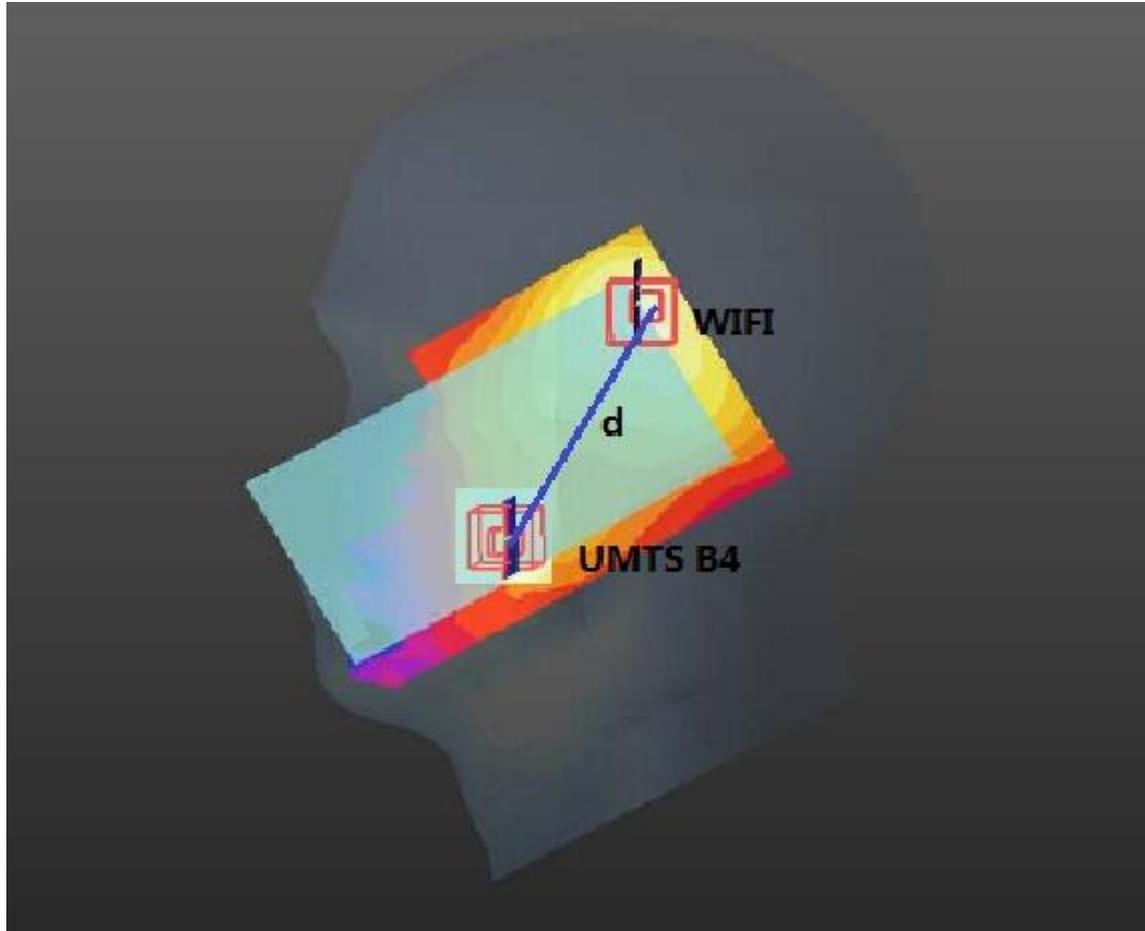


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
UMTS Band IV	0.544	0.0631	-0.252	-0.174
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.369	93.79	0.023	0.04	Not Required

- 5) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with UMTS Band V and WiFi 2.4G.
The Peak SAR location is as below:

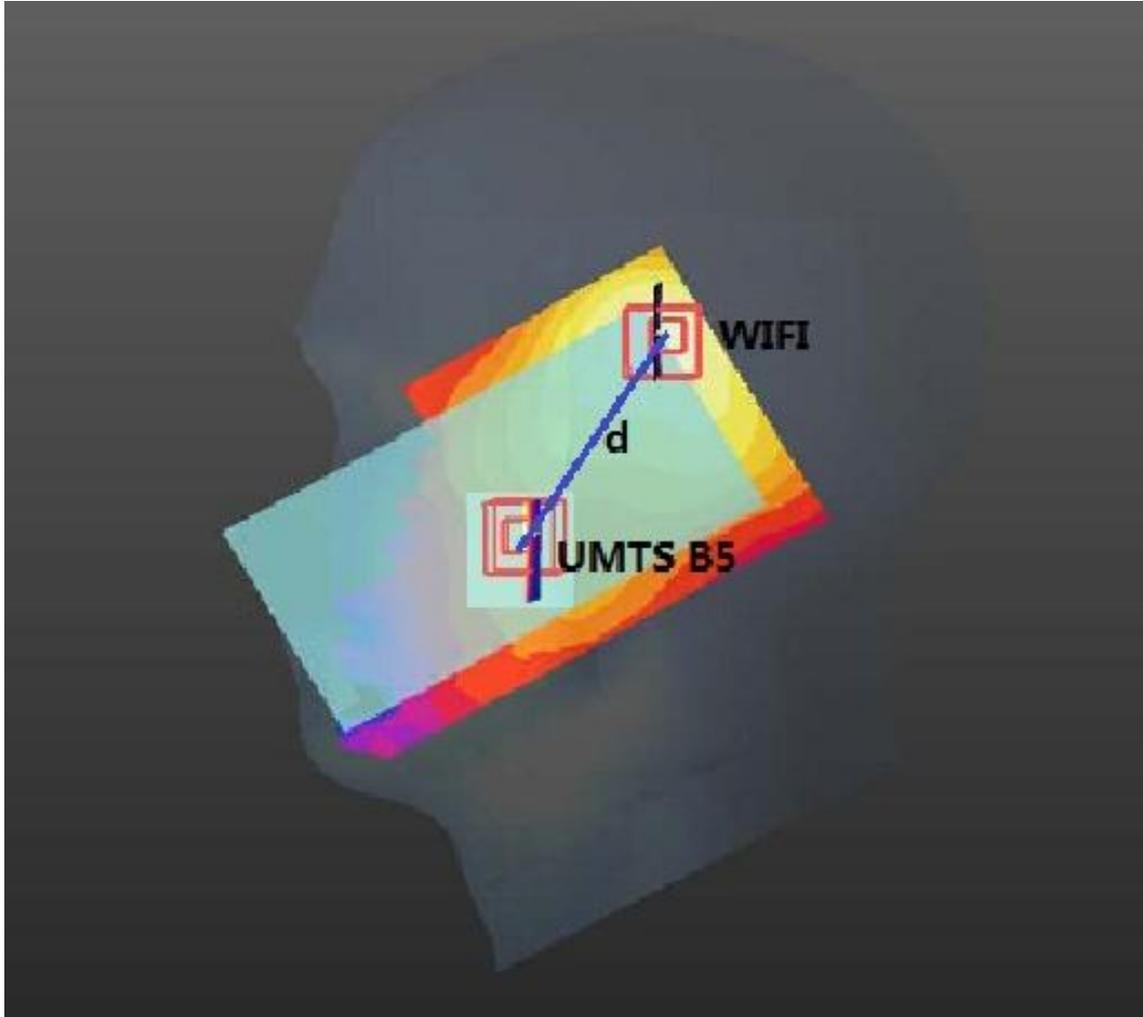


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
UMTS Band V	0.614	0.0667	-0.263	-0.175
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.515	85.94	0.029	0.04	Not Required

- 6) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with LTE Band II and WiFi 2.4G.
The Peak SAR location is as below:

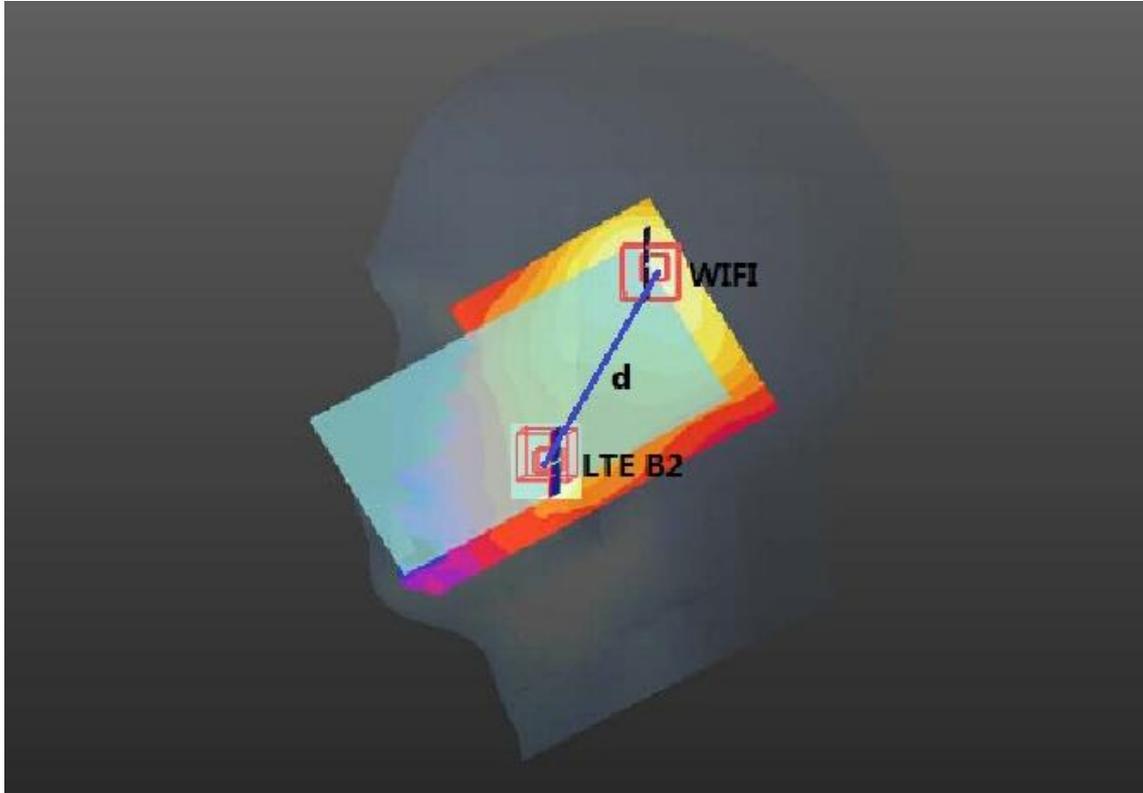


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
LTE Band II	0.591	0.0626	-0.249	-0.174
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.433	96.27	0.024	0.04	Not Required

7) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with LTE Band V and WiFi 2.4G.

The Peak SAR location is as below:

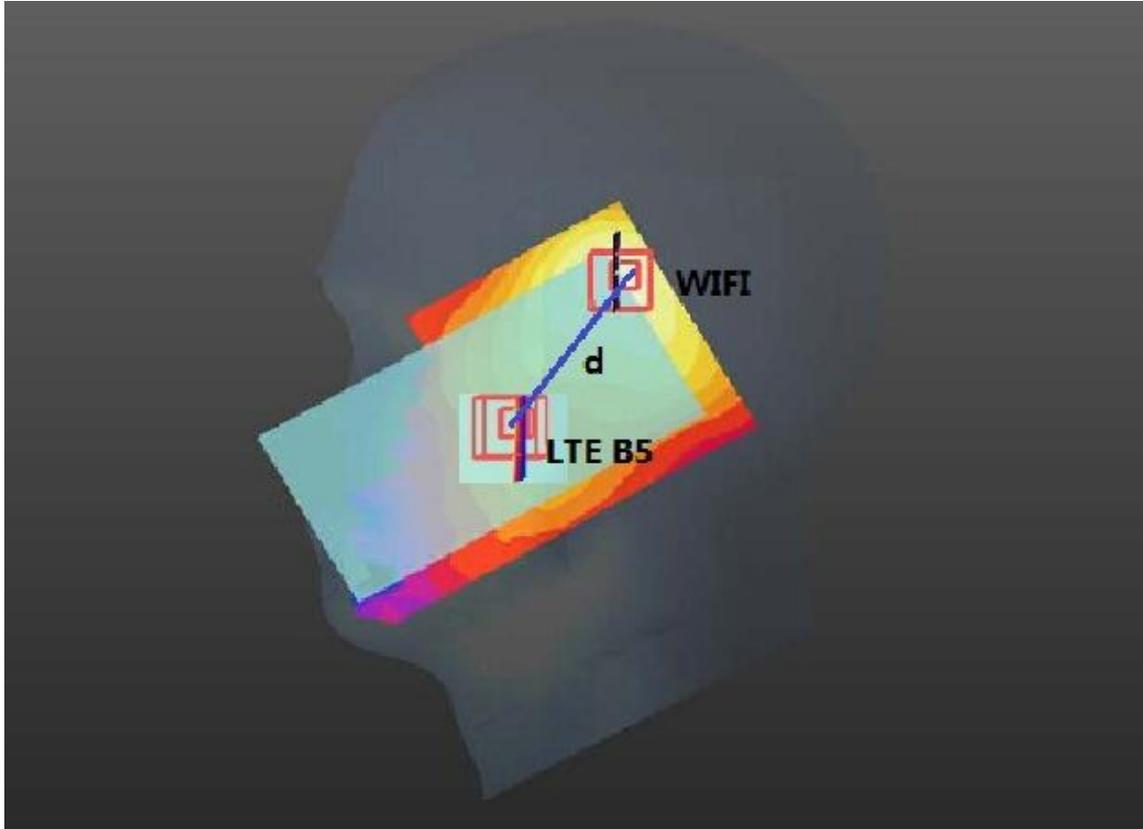


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
LTE Band V	0.343	0.0599	-0.269	-0.176
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.339	77.33	0.028	0.04	Not Required

- 8) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with LTE Band VII and WiFi 2.4G.
The Peak SAR location is as below:

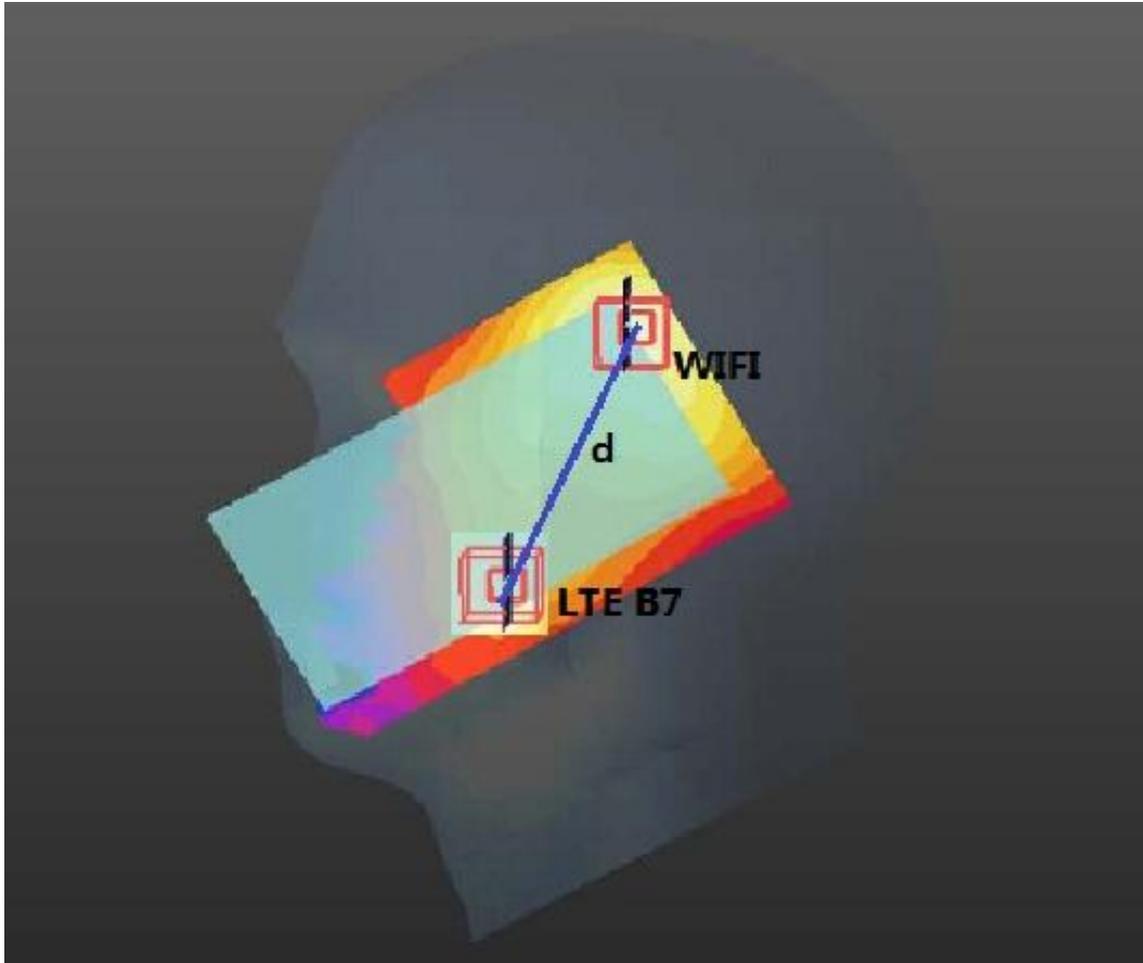


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
LTE Band VII	0.467	0.0582	-0.248	-0.175
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.308	95.41	0.022	0.04	Not Required

9) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head Tilted configuration with UMTS Band II and WiFi 2.4G.

The Peak SAR location is as below:

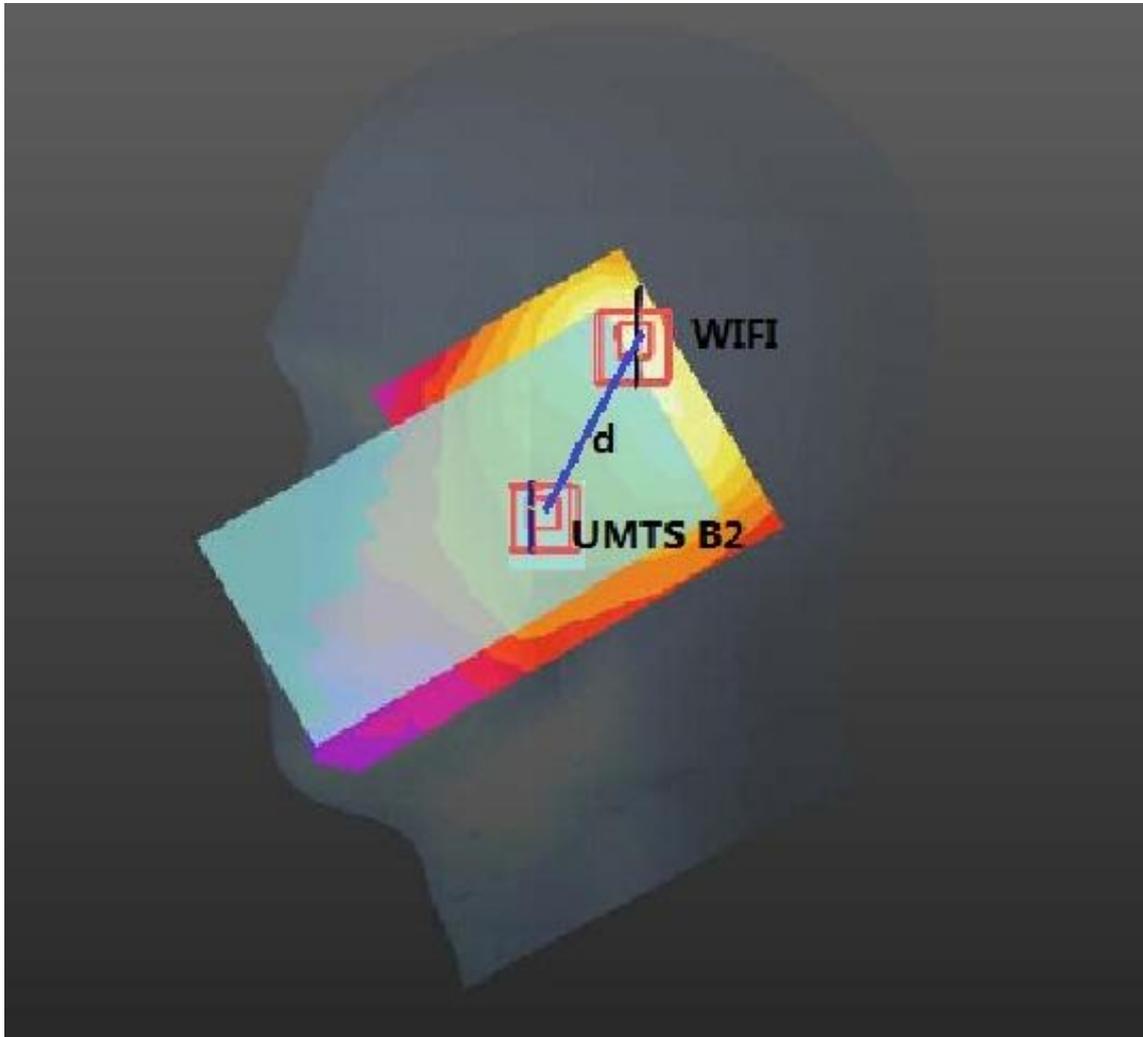


Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
UMTS Band II	0.382	0.0455	-0.279	-0.175
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.308	62.41	0.033	0.04	Not Required

- 10) The sum of aggregate 1g SAR was above 1.6 W/Kg for Right head touched cheek configuration with UMTS Band V and WiFi 2.4G.
The Peak SAR location is as below:

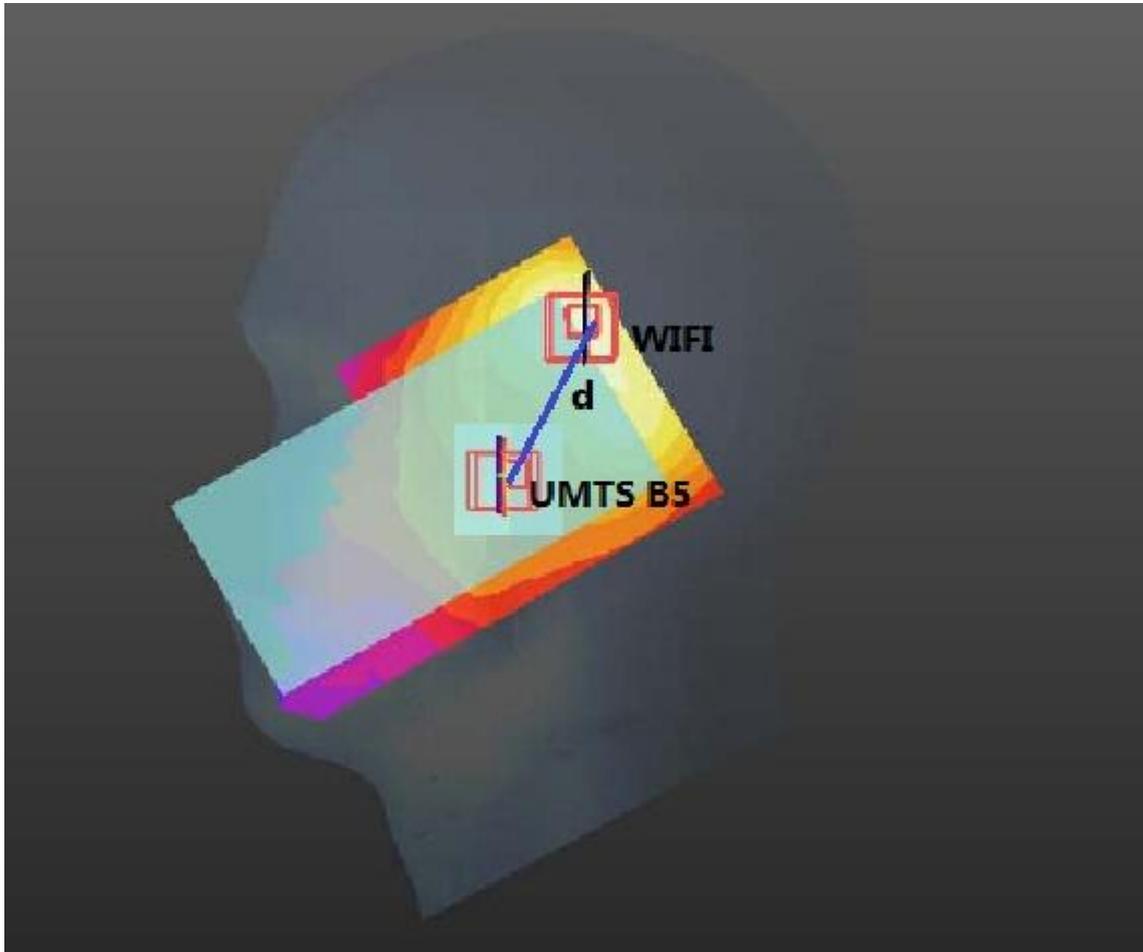

Mode	Peak SAR	X	Y	Z
	mW/g	m	m	m
UMTS Band V	0.337	0.0443	-0.283	-0.176
WiFi	2.88	0.0214	-0.336	-0.173

The SAR to peak location ratio calculation is as below:

Test Position	SAR1(W/Kg)	SAR2 (W/Kg)	Ri(mm)	SPLSR	Ratio Limit	Simultaneous SAR
Right Head touch cheek	1.323	0.302	58.35	0.028	0.036	Not Required

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v05r02.

APPENDIX

1. Test Layout

Specific Absorption Rate Test Layout




Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)


Body 835MHz 15.4cm



Head 835MHz 15.5cm

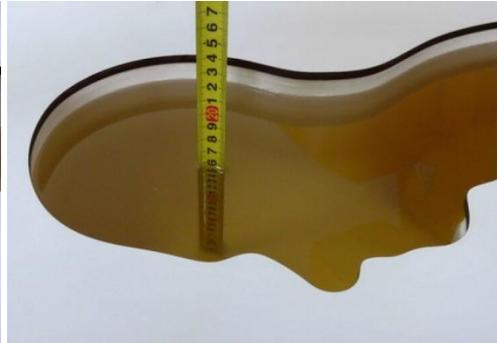


Body 750MHz 15.5cm

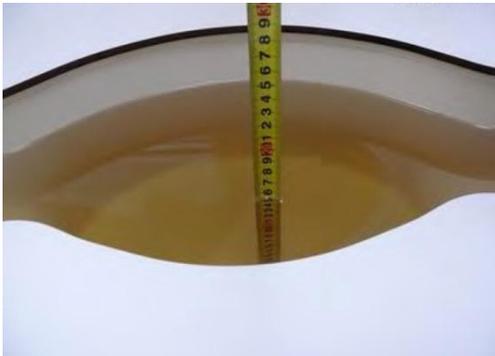

Head 750MHz 15.5cm




Body 1750MHz 15.2cm

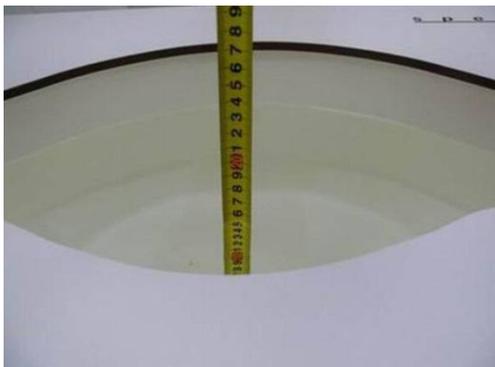

Head 1750MHz 15.2cm




Body 1900MHz 15.2cm

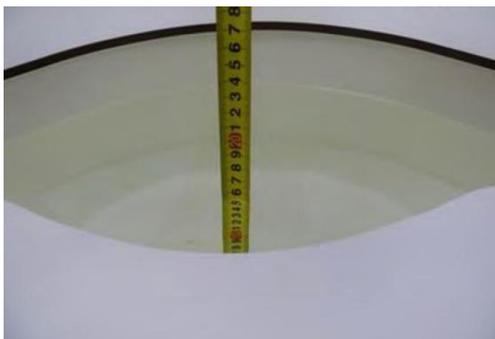

Head 1900MHz 15.2cm




Body 2450MHz 15.3cm

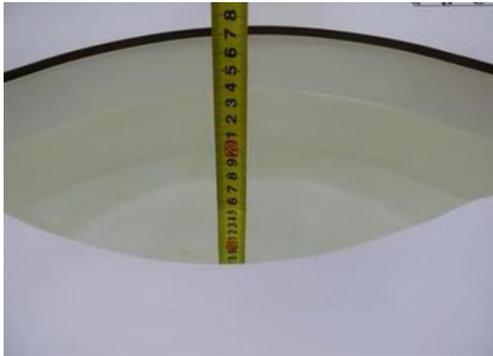

Head 2450MHz 15.3cm



Body 2600MHz 15.3cm

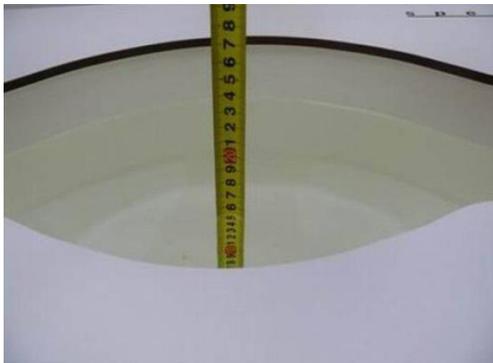

Head 2600MHz 15.3cm



2. System Check Plots

(Pls See Appendix A.)

3.SAR Measurement Plots

(Pls See Appendix B.)

4. Calibration Certificate

(Pls See Appendix C.)

5. EUT Testing Position and Antenna Location


Test Position Left hand tilted




Test Position Left hand touch cheek



Test Position Right hand tilted

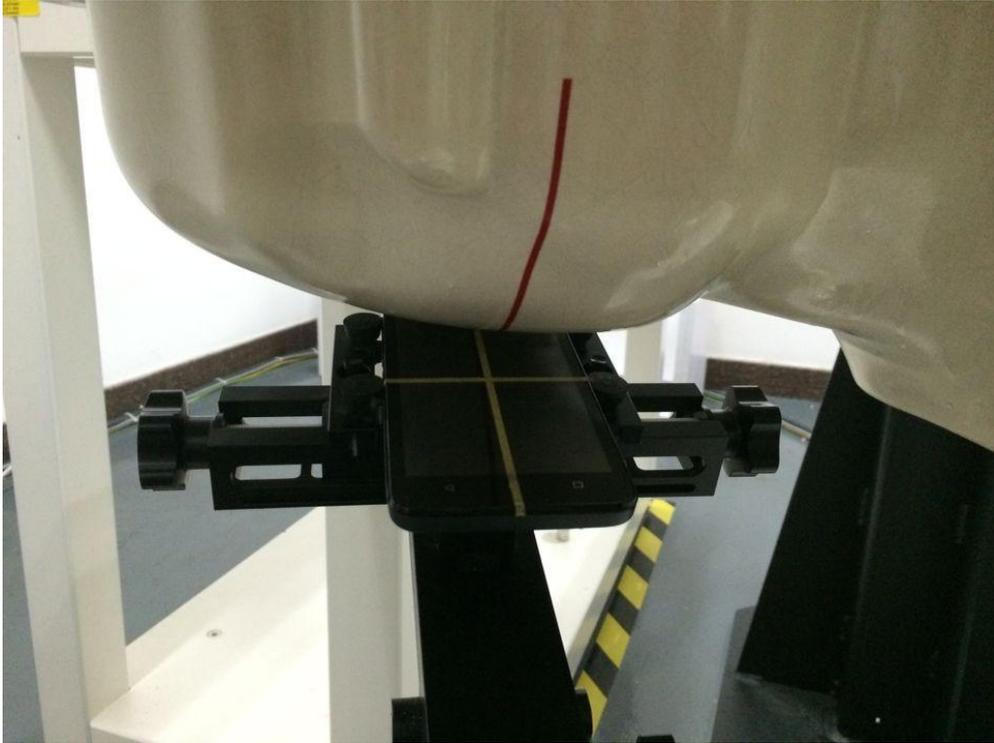

Test Position Right hand touch cheek

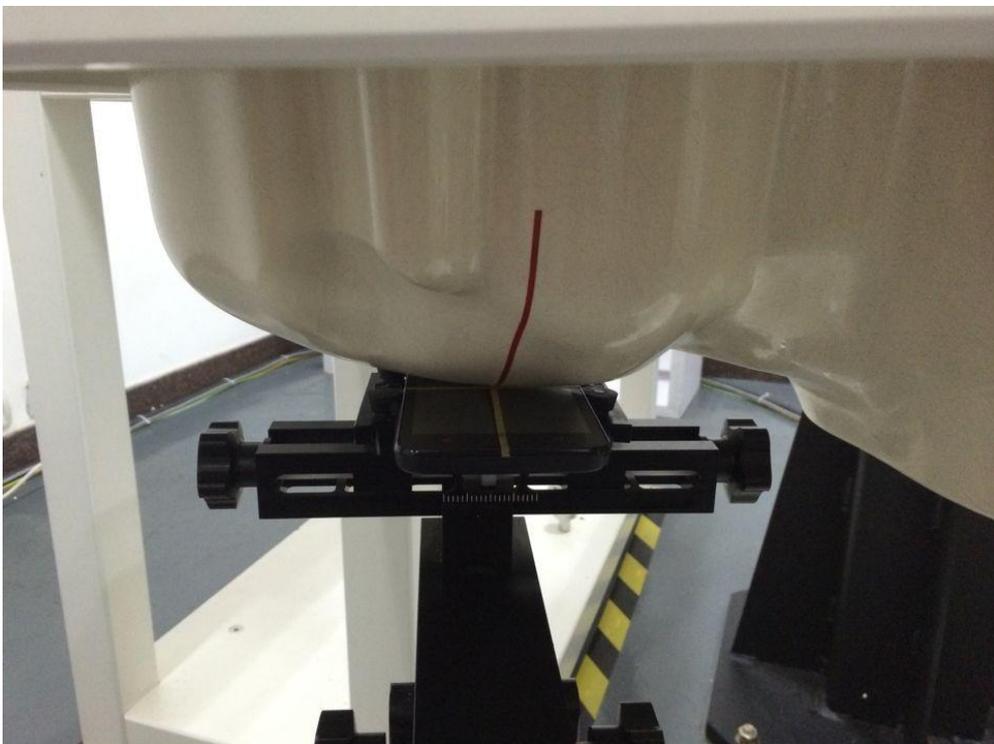

Test Position Back




Test Position Back




Test Position Bottom




Test Position Front

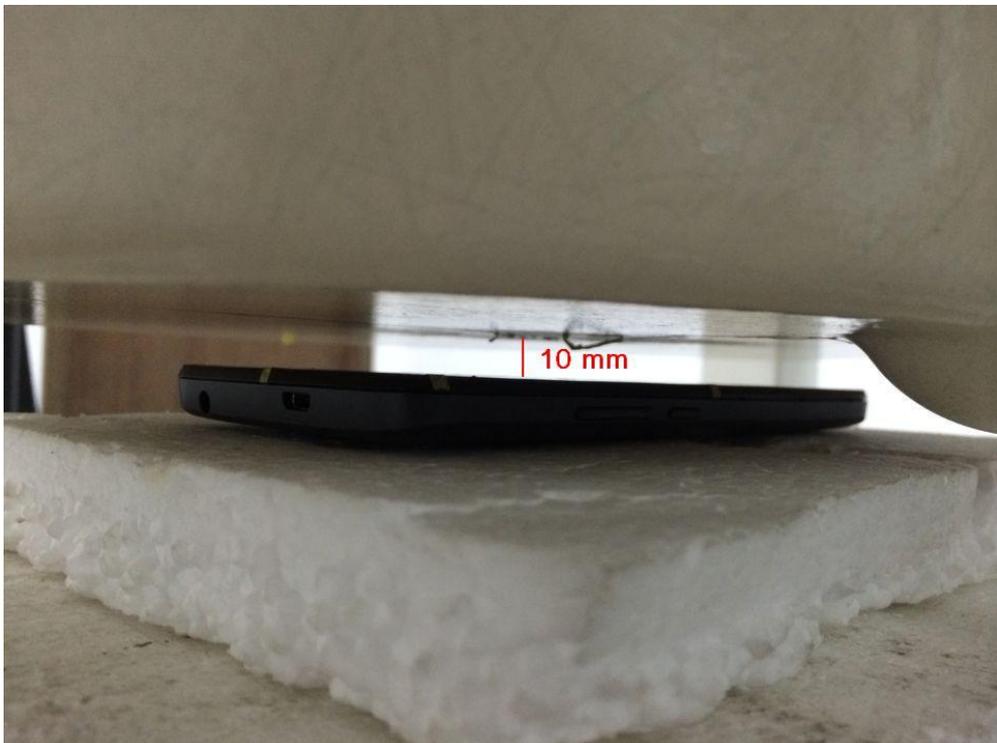

Test Position Front

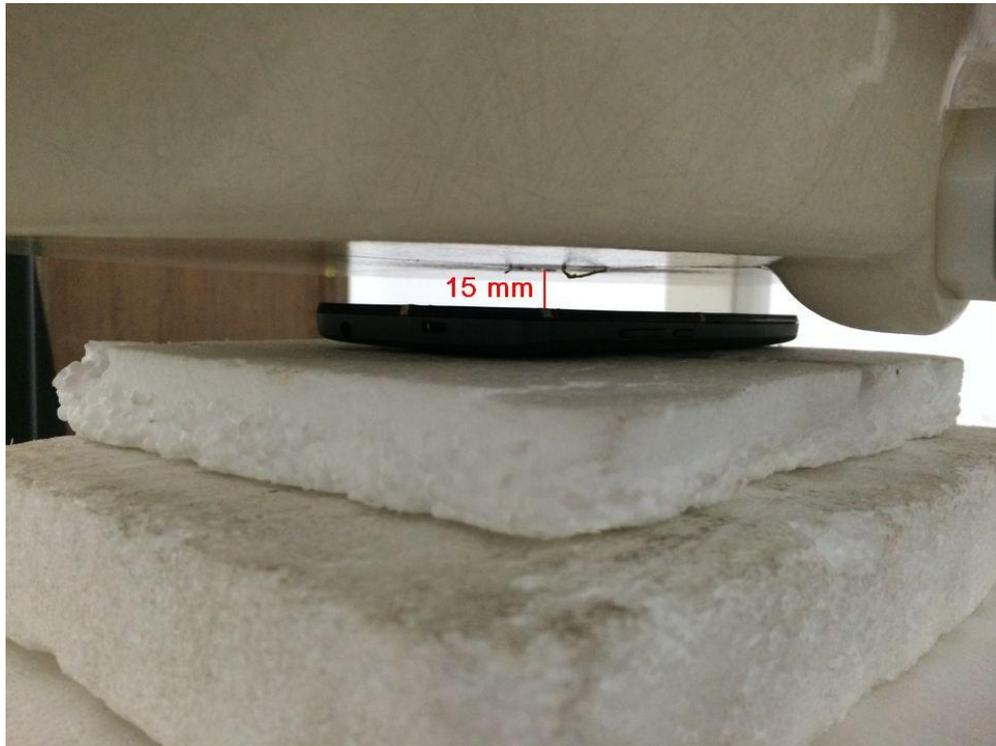

Test Position Left

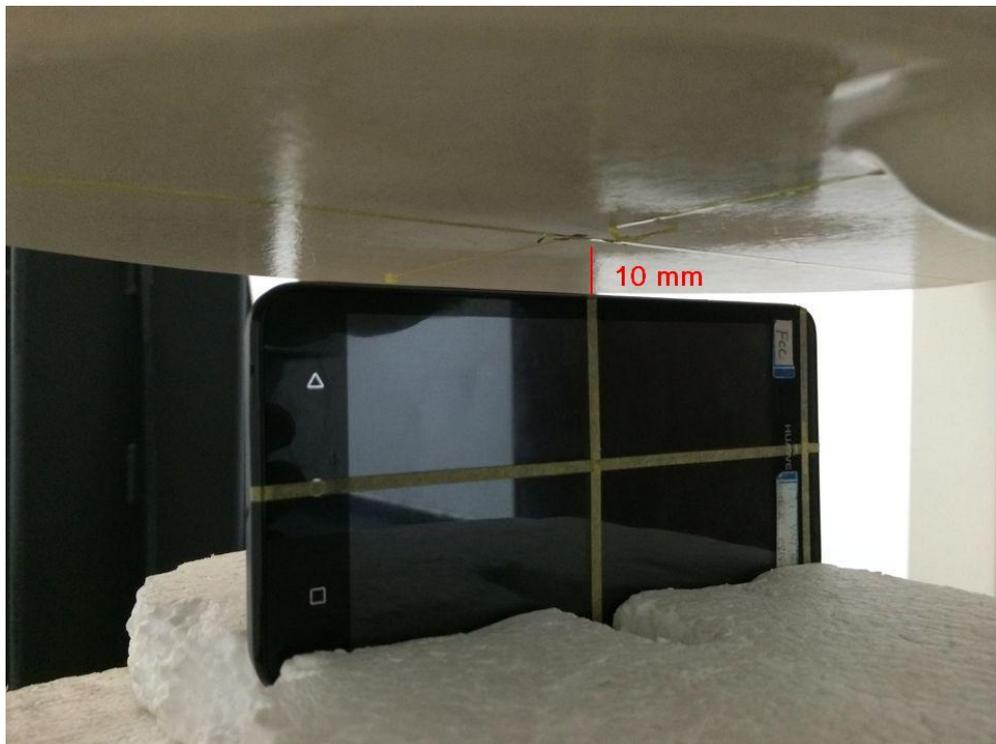

Test Position Right



Test Position Top

