



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE ! BALTIMORE, MARYLAND 21230-3432 ! PHONE (410) 354-3300 ! FAX (410) 354-3313

July 6, 2007

Motorola, Inc  
1064 Greenwood Blvd. Suite 400  
Lake Mary, FL 32746

Dear Bob Greenway,

Enclosed is the EMC test report for compliance testing of the Motorola, Inc, MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g) as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart C.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Samantha Sharbonda  
Documentation Department

Reference: (\Motorola, Inc\EMC22037-FCC247 REV. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo, the Standards Council of Canada Logo, or the Nationally Recognized Testing Laboratory (NRTL) Letters in this report reflects MET Accreditation under these programs, these letters, logo, or statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government. This letter of transmittal is not a part of the attached report.



*The Nation's First Licensed Nationally Recognized Testing Laboratory*





Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

CFR Title 47, Part 15, Subpart C

## Electromagnetic Compatibility Test Report

for the

**Motorola, Inc**  
**MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)**

Verified under  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Part 15.247, Subpart C  
for Intentional Radiators

**MET Report: EMC22037-FCC247 REV. 1**

July 6, 2007

### Prepared For:

**Motorola, Inc**  
**1064 Greenwood Blvd. Suite 400**  
**Lake Mary, FL 32746**

Prepared By:  
**MET Laboratories, Inc.**  
914 W. Patapsco Avenue  
Baltimore, Maryland 21230



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

CFR Title 47, Part 15, Subpart C

## Electromagnetic Compatibility Test Report

for the

**Motorola, Inc**  
**MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)**

### Tested Under

the FCC Certification Rules  
contained in  
Title 47 of the CFR, Part 15.247, Subpart C  
for Intentional Radiators

Jeffrey Hazen  
Project Engineer, Electromagnetic Compatibility Lab

Samantha Sharbonda  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15.407, of the FCC Rules under normal use and maintenance.

Dusmantha Tennakoon,  
Wireless Coordinator, Electromagnetic Compatibility Lab



## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	July 5, 2007	Initial Issue.
1	July 6, 2007	Editorial Change



## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
1.1	Purpose of Test .....	2
1.2	Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration.....</b>	<b>3</b>
2.1	Overview.....	4
2.2	References.....	5
2.3	Test Site .....	5
2.4	Description of Test Sample.....	5
2.5	Equipment Configuration.....	6
2.6	Support Equipment .....	7
2.7	Ports and Cabling Information .....	7
2.8	Mode of Operation .....	7
2.9	Modifications .....	8
a)	Modifications to EUT .....	8
b)	Modifications to Test Standard.....	8
2.10	Disposition of EUT .....	9
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators .....</b>	<b>10</b>
§ 15.203	Antenna Requirement.....	11
§ 15.205	Band Edge Emissions .....	12
§ 15.207(a)	Conducted Emissions Limits.....	22
§ 15.209(a)	Radiated Emissions – Spurious.....	30
§ 15.247(a)	6 dB Bandwidth .....	43
§ 15.247(b)	Peak Power Output .....	49
§ 15.247(d)	Spurious Emissions Requirements – RF Conducted.....	57
§ 15.247(e)	Peak Power Spectral Density .....	69
<b>IV.</b>	<b>Test Equipment .....</b>	<b>74</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information.....</b>	<b>76</b>
5.1	Certification Information .....	77
5.2	Label and User's Manual Information .....	81



## List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing .....	2
Table 2. Equipment Configuration .....	6
Table 3. Support Equipment .....	7
Table 4. Ports and Cabling Information.....	7
Table 5. Restricted Bands of Operation from FCC Part 15, § 15.205 .....	12
Table 6. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a).....	22
Table 7. Conducted Emissions - Voltage, Phase (120 VAC) .....	23
Table 8. Conducted Emissions - Voltage, Neutral (120 VAC).....	23
Table 9. Conducted Emissions - Voltage, Phase Line (120 VAC).....	25
Table 10. Conducted Emissions - Voltage, Neutral Line (120 VAC).....	25
Table 11. Conducted Emissions - Voltage, Phase (120 VAC) .....	27
Table 12. Conducted Emissions - Voltage, Neutral (120 VAC).....	27
Table 13. Restricted Bands of Operation from FCC Part 15, § 15.205 .....	30
Table 14. Radiated Emissions Limits from § 15.209 (a) .....	31
Table 15. Radiated Emissions.....	32
Table 16. 6 dB Bandwidth Test Results for 802.11b Mode.....	44
Table 17. 6 dB Bandwidth Test Results for 802.11g Mode.....	44
Table 18. Output Power Requirements from §15.247 .....	49
Table 19. Peak Output Power for 802.11b.....	50
Table 20. Peak Output Power for 802.11g.....	50
Table 21. Limits for Maximum Permissible Exposure.....	55
Table 22. Peak Power Spectral Density Test Results for 802.11b Mode.....	69
Table 23. Peak Power Spectral Density Test Results for 802.11g Mode.....	69

## List of Figures

Figure 1. Block Diagram of Test Configuration (Radiated Emissions) .....	6
--	---

## List of Photographs

Photograph 1. Band Edge Test Setup .....	21
Photograph 2. Conducted Emission Test Setup.....	29
Photograph 3. Spurious Radiated Emissions, Test Setup .....	42
Photograph 4. 6 dB Bandwidth Test Setup.....	48
Photograph 5. Peak Power Output, Test Setup .....	54
Photograph 6. Spurious Conducted Emissions, Test Setup .....	68
Photograph 7. Peak Power Spectral Density Test Setup.....	73



## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<math>\mu</math>A</b>	Decibels above one <b>microamp</b>
<b>dB<math>\mu</math>V</b>	Decibels above one <b>microvolt</b>
<b>dB<math>\mu</math>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b><math>\mu</math>H</b>	<b>microhenry</b>
<b><math>\mu</math></b>	<b>microfarad</b>
<b><math>\mu</math>s</b>	<b>microseconds</b>
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Executive Summary  
CFR Title 47, Part 15, Subpart C

## I. Executive Summary



## 1.1 Purpose of Test

An EMC evaluation was performed to determine compliance of the Motorola, Inc, MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g), with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g). Motorola, Inc should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g), has been **permanently discontinued**

## 1.2 Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Motorola, Inc, purchase order number NP3251529. All tests were conducted using measurement procedure ANSI C63.4-2003.

Reference	Description	Results
Title 47 of the CFR, Part 15, Subpart C, §15.207	AC Power Line Conducted Emissions	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.203/15.247(b)(c)	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.205(d)	Band Edge Emissions	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(b)(3)	Maximum Peak Conducted Output Power	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(d)	Spurious Radiated Emissions	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(e)	Peak Power Spectral Density	Compliant

Table 1 Executive Summary of EMC Part 15.247 Compliance Testing



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47, Part 15, Subpart C

## II. Equipment Configuration



## 2.1 Overview

MET Laboratories, Inc. was contracted by Motorola, Inc to perform testing on the MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g), under Motorola, Inc's purchase order number NP3251529.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Motorola, Inc, MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g).

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)
<b>Model(s) Covered:</b>	MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)
<b>EUT Specifications:</b>	Primary Power: 120VAC
	FCC ID: QJE-MM4300-58
	Type of Modulations: CCK/OFDM
	Equipment Code: DTS
	Peak RF Conducted Output Power: 0.476 Watts
	EUT TX Frequency Ranges: 2412 MHz – 2462 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Evaluated by:</b>	Jeffrey Hazen
<b>Date(s):</b>	July 6, 2007

\* Note: The 5.8 GHz radio is addressed under a separate FCC Part 15.407 test report.



## 2.2 References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI/NCSL Z540-1-1994</b>	Calibration Laboratories and Measuring and Test Equipment - General Requirements
<b>ANSI/ISO/IEC 17025:2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories

## 2.3 Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0).

## 2.4 Description of Test Sample

The MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g), Equipment Under Test (EUT), is a dual radio units. The system operates at 2.4 GHz (ISM band 802.11 b/g) and 5.X GHz using an Atheros AP30 chipset.

Note: The 5.8 GHz radio contained in this device is reported under a separate FCC Part 15.407 MET test report.

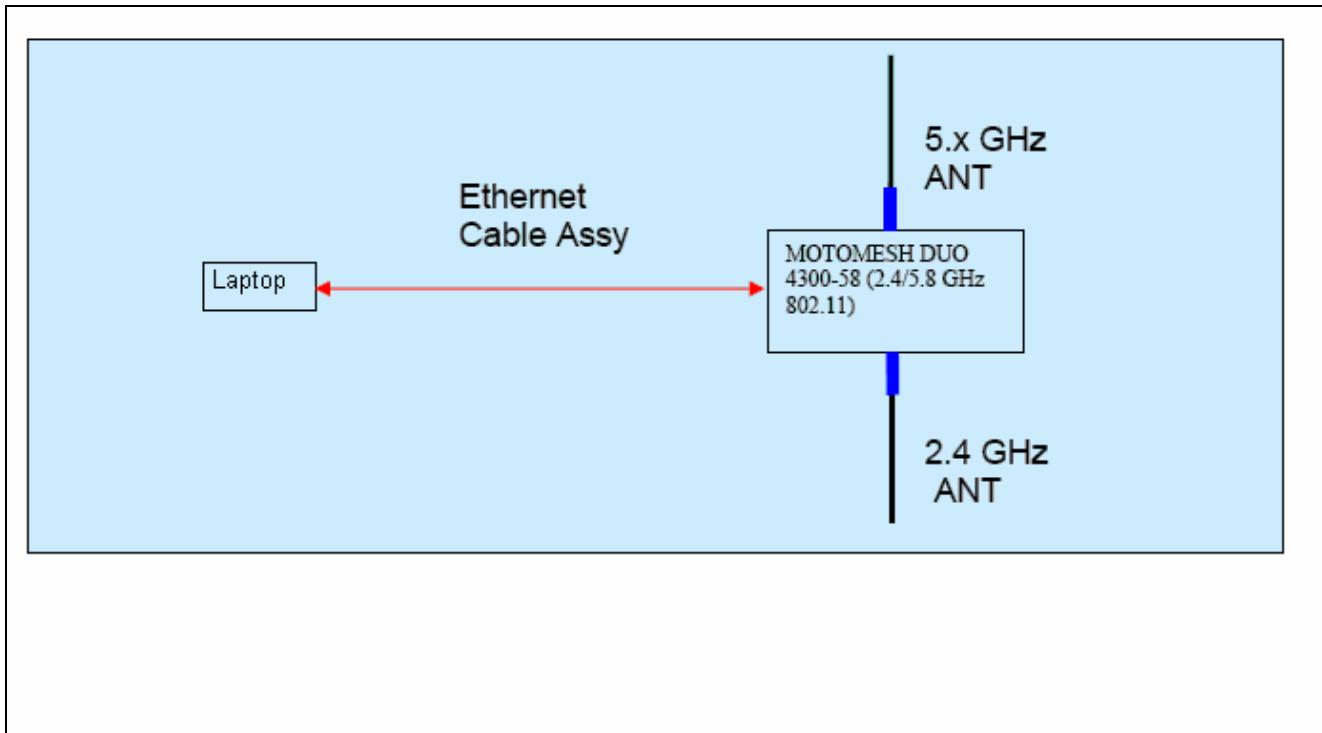


Figure 1. Block Diagram of Test Configuration (Radiated Emissions)

## 2.5 Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, etc., incorporated as part of the EUT is included in the following list.

Name / Description	Model Number	Serial Number
MOTOMESH Duo (2.4/5.8 GHz 802.11)	4300-58	MAC: 00:05:12:0F:01:17

Table 2. Equipment Configuration



## 2.6 Support Equipment

Motorola, Inc supplied support equipment necessary for the operation and testing of the MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g). All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number
1	Laptop Computer	Dell	Inspiron 3800
2	Laptop Computer	Toshiba	Satellite Pro M10-5405

Table 3. Support Equipment

## 2.7 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded?	Termination Box ID & Port ID
1	ETH	8-pin / RJ45 ETH cat5 cable assembly	1	3	Y	ETH port of laptop
2	PWR	4-pin / pwr plug power cord cable assembly	1	2	N	Standard 120 VAC outlet
3	Antenna – AP30, 2.4 ghz	2.4 ghz 8 dbi Antenna	1	-	N/a	-
4	Antenna – AP30, 5.x ghz	5.x ghz 9 dbi Antenna	1	-	N/a	-

Table 4. Ports and Cabling Information

## 2.8 Mode of Operation

AP30 – Mesh Atheros control through Atheros Radio Test (ART) for the wireless radio tests.



## 2.9 Modifications

### a) Modifications to EUT

The EUT was modified in the following ways:

- 1.) RF cable on the 2.4G side due to excessive loss and bad VSWR.
- 2.) Wrong calibration on the 2.4 side due to poor RF Cable.
- 3.) RF cable on the 5.4/5.8G side due to excessive loss and bad VSWR.
- 4.) Wrong calibration on the 5.4/5.8 side due to poor RF Cable.

In order to meet the restricted band levels, the output power level for the unit in 802.11b/g mode must be software controlled per channel as follows:

Mode	Channel #	Power (dBm)
802.11b	1	27
	2	27
	3	27
	4	27
	5	27
	6	27
	7	27
	8	27
	9	27
	10	26
	11	25
802.11g	1	23
	2	23
	3	23
	4	23
	5	25
	6	25
	7	25
	8	24
	9	23
	10	22
	11	20

### b) Modifications to Test Standard

No modifications were made to the test standard.



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47, Part 15, Subpart C

## 2.10 Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Motorola, Inc upon completion of testing.



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

### III. Electromagnetic Compatibility Criteria for Intentional Radiators



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The 2.4 GHz antenna gain is declared at 8 dBi. The antennas and unit are professionally installed. The EUT is therefore compliant with §15.203.

Motorola, Inc., may also ship the EUT with the following antennas for the 2.4GHz transmitter. These antennas are of equal or lesser gain than the antenna with which the EUT was tested. All antennas are omni directional antennas:

Name / Description	Gain	Manufacturer	Model Number
2.4-2.5 GHz Antenna	8 dBi	MaxRad	Z3260
2.4-2.5 GHz Antenna	6 dBi	MaxRad	Z3261
2.4-2.5 GHz Antenna	4 dBi	MaxRad	Z3262

**Test Engineer(s):** Jeffrey Hazen

**Test Date(s):** 4/30/2007



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.205 Band Edge Emissions

**Test Requirement(s):** **§ 15.205 (a):** Except as shown in paragraph (d) of **15.205 Restricted bands of operation**, only spurious emissions are permitted in any of the frequency bands specified in Table 5:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Note
13.36–13.41.			
Note : Above 38.6			

Table 5. Restricted Bands of Operation from FCC Part 15, § 15.205

**Test Procedure:** The EUT was set up at maximum power. All eleven channels were tested. It was verified that the channels tested were within the band 2400-2480 MHz and not infringing upon the restricted bands. All plots provided show corrected data.

**Test Results:** The EUT was found compliant with the requirements of this section.

**Test Engineer(s):** Jeffrey Hazen



**Test Date(s):** 5/3/2007





Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C



## 802.11b

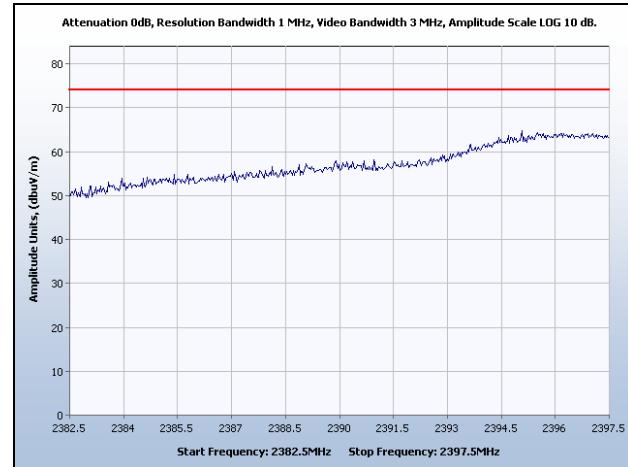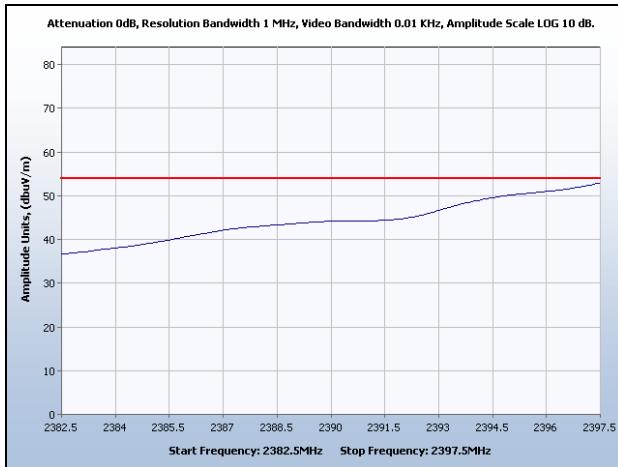

### Restricted Band Low Edge, Channel 1, 27 dBm, Average

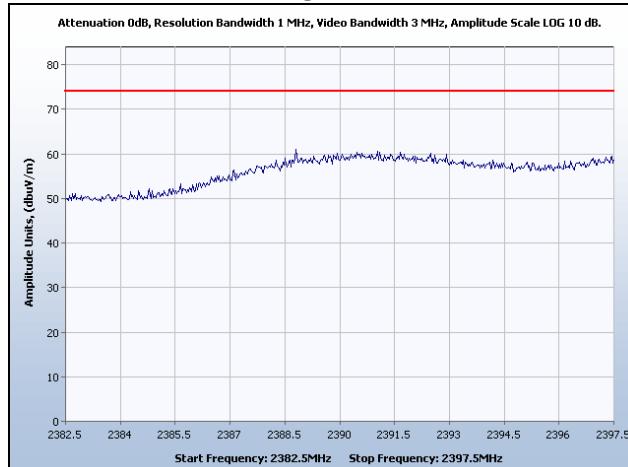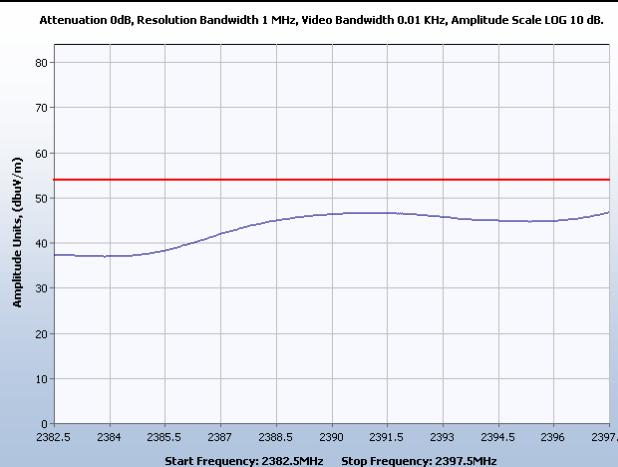

### Restricted Band Low Edge, Channel 2, 27 dBm, Average

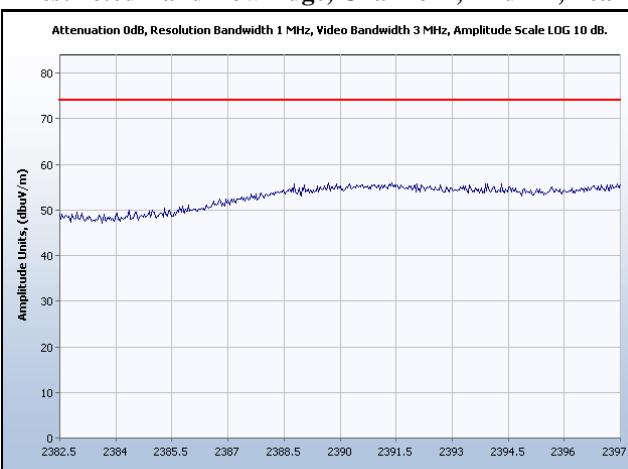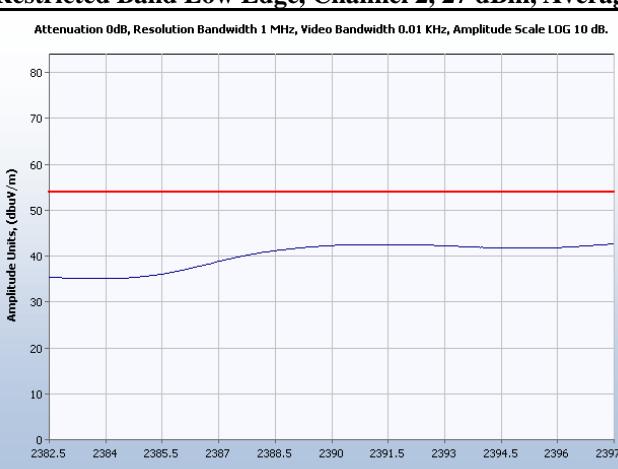

### Restricted Band Low Edge, Channel 3, 27 dBm, Average



### Restricted Band Low Edge, Channel 3, 27 dBm, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11b

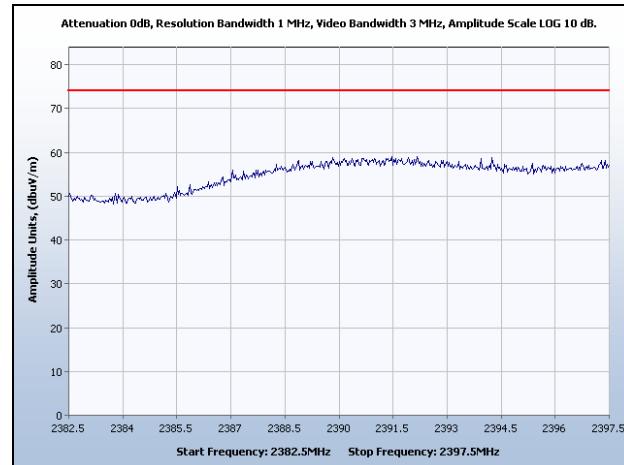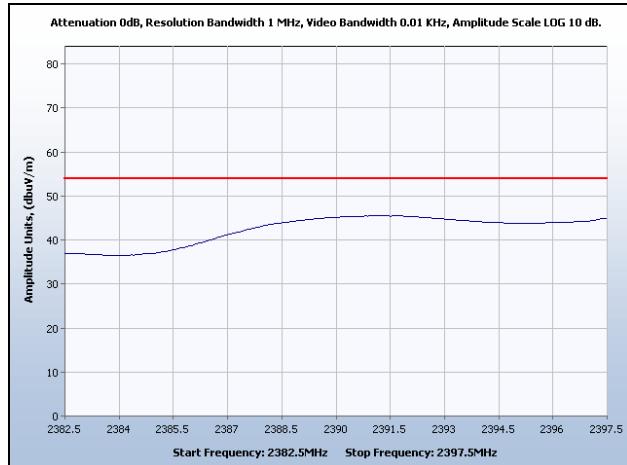


### Restricted Band Low Edge, Channel 6, 27 dBm, Average

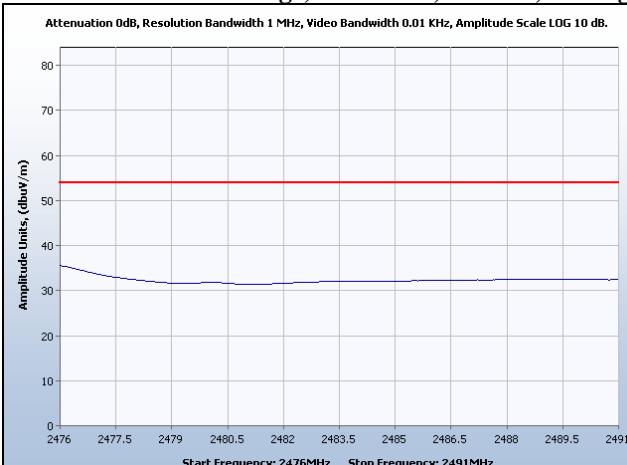


### Restricted Band Low Edge, Channel 6, 27 dBm, Peak

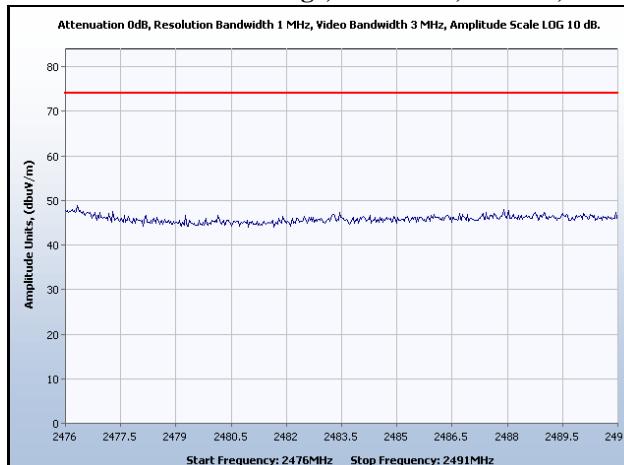

### Restricted Band High Edge, Channel 6, 27 dBm, Average

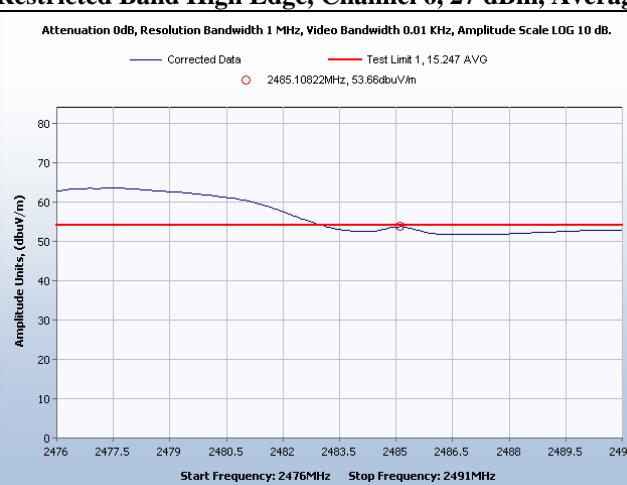

### Restricted Band High Edge, Channel 6, 27 dBm, Peak

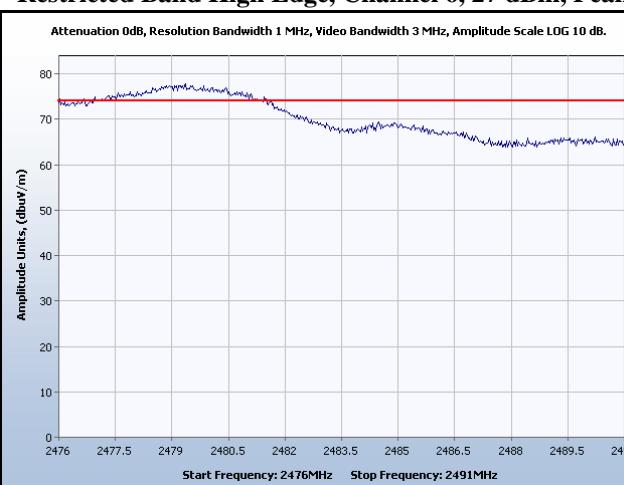

### Restricted Band High Edge, Channel 9, 27 dBm, Average


### Restricted Band High Edge, Channel 9, 27 dBm, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11b

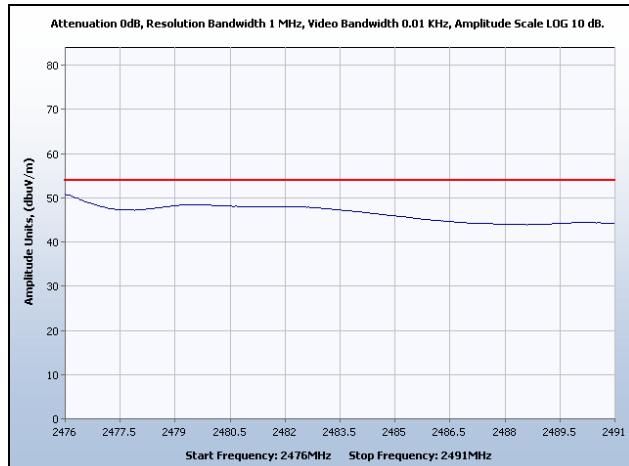


### Restricted Band High Edge, Channel 10, 26 dBm, Average

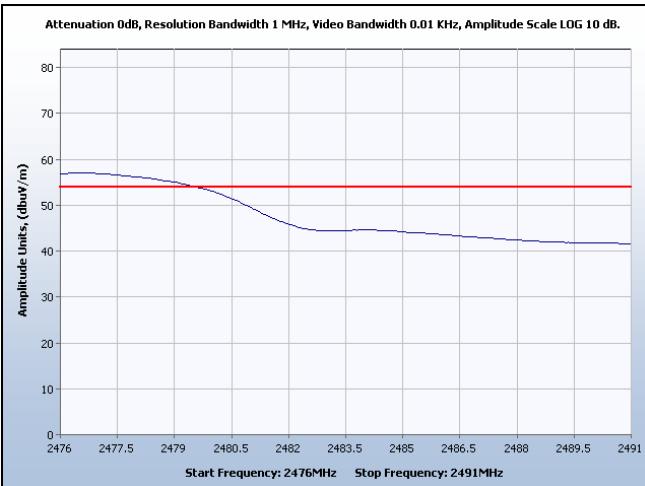

### Restricted Band High Edge, Channel 11, 25 dBm, Average

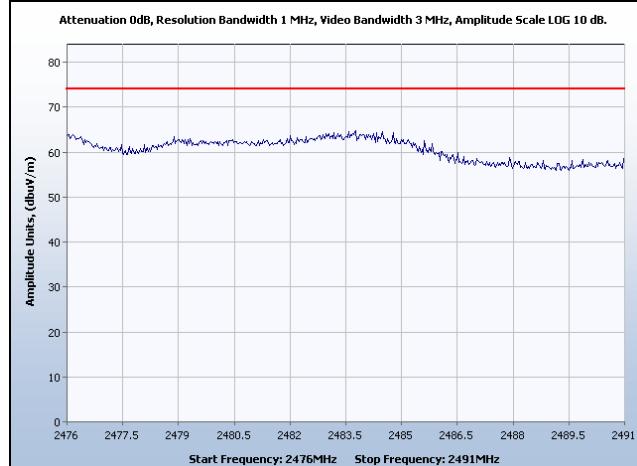

### Restricted Band High Edge, Channel 10, 26 dBm, Peak

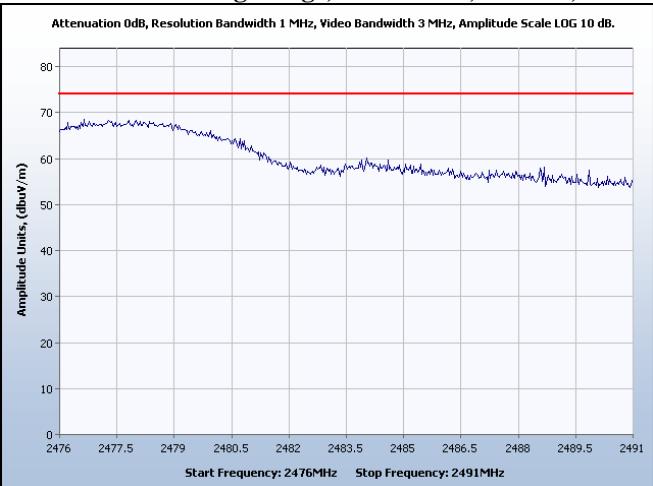



### Restricted Band High Edge, Channel 11, 25 dBm, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11g

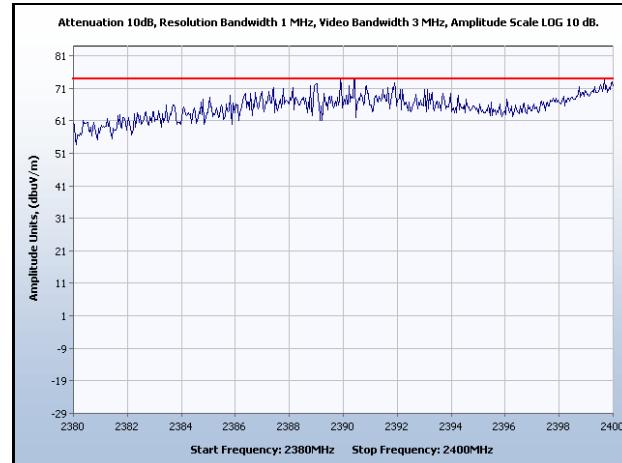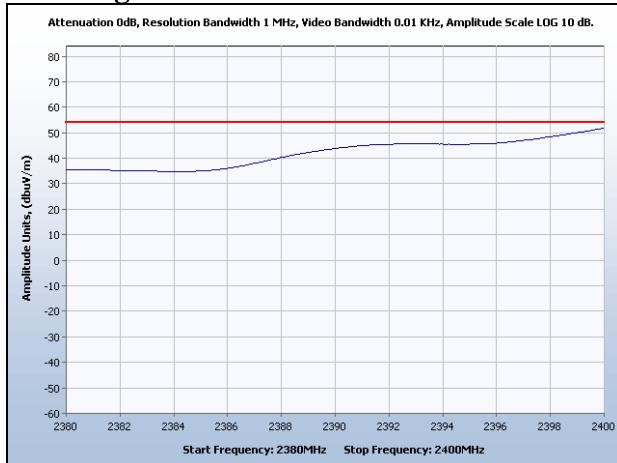


### Restricted Band Low Edge, Channel 1, 23 dBm, Average

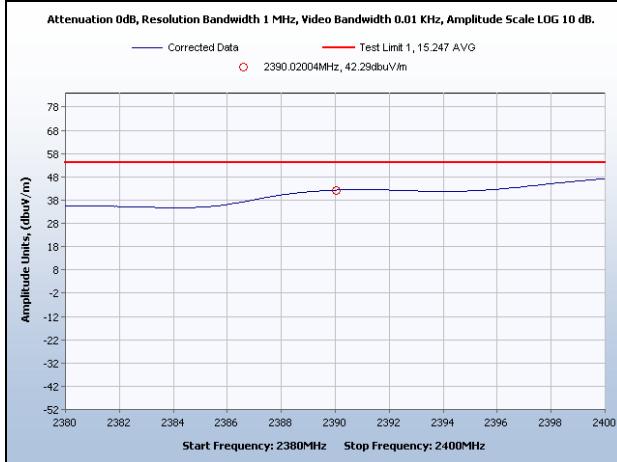


### Restricted Band Low Edge, Channel 1, 23 dBm, Peak

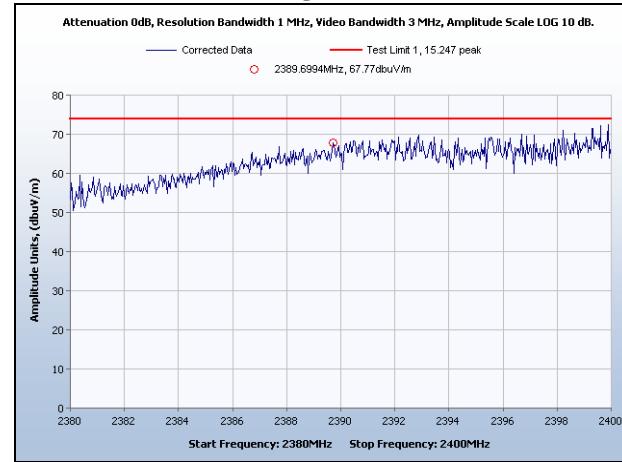

### Restricted Band Low Edge, Channel 2, 23 dBm, Average

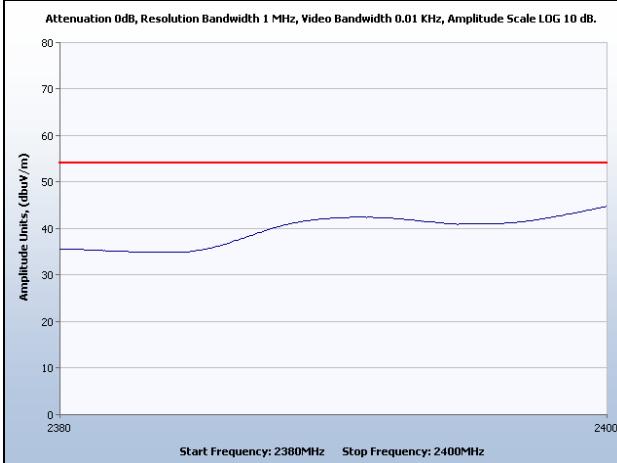

### Restricted Band Low Edge, Channel 2, 23 dBm, Peak

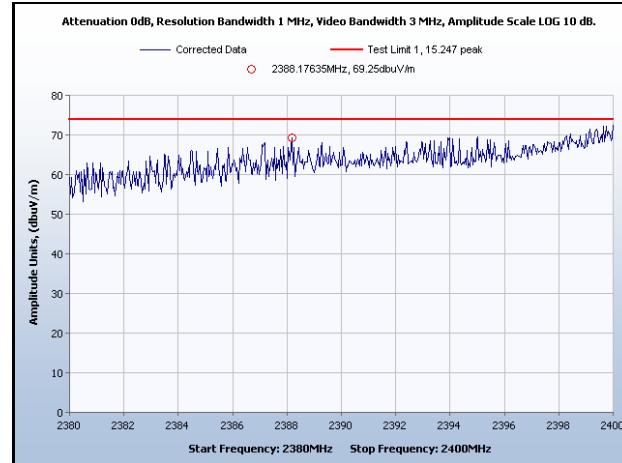

### Restricted Band Low Edge, Channel 3, 23 dBm, Average



### Restricted Band Low Edge, Channel 3, 23 dBm, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11g

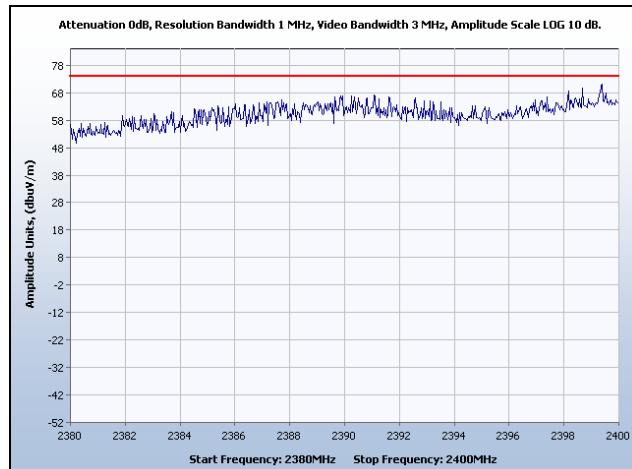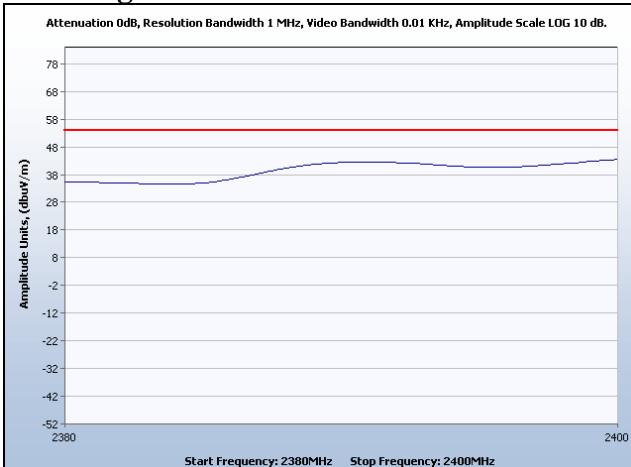


## Restricted Band Low Edge, Channel 4, 23 dBm, Average

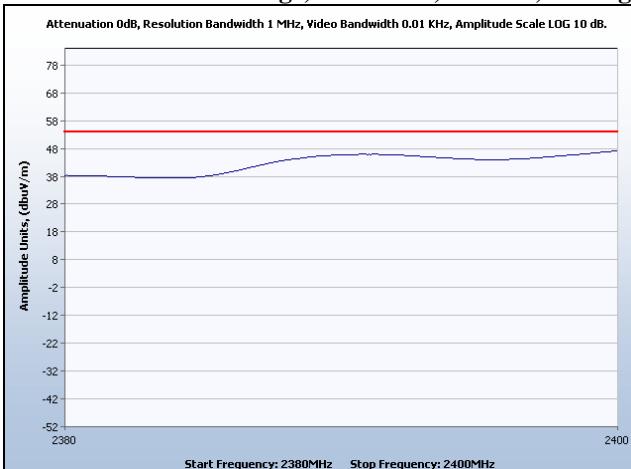


## Restricted Band Low Edge, Channel 4, 23 dBm, Peak

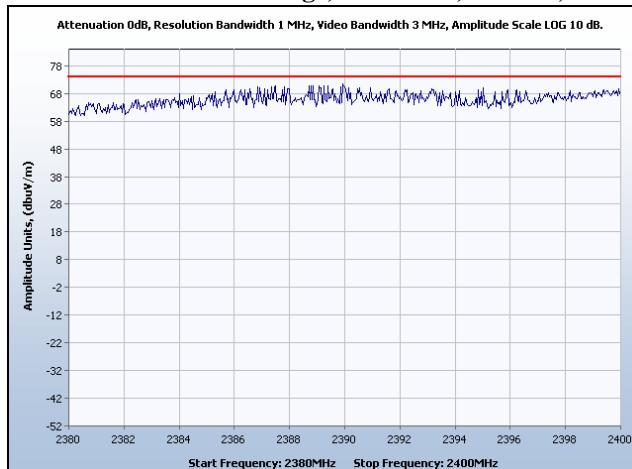

## Restricted Band Low Edge, Channel 5, 25 dBm, Average

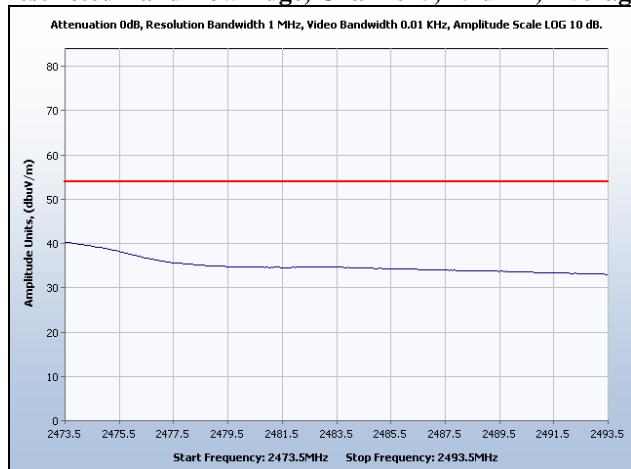

## Restricted Band Low Edge, Channel 5, 25 dBm, Peak

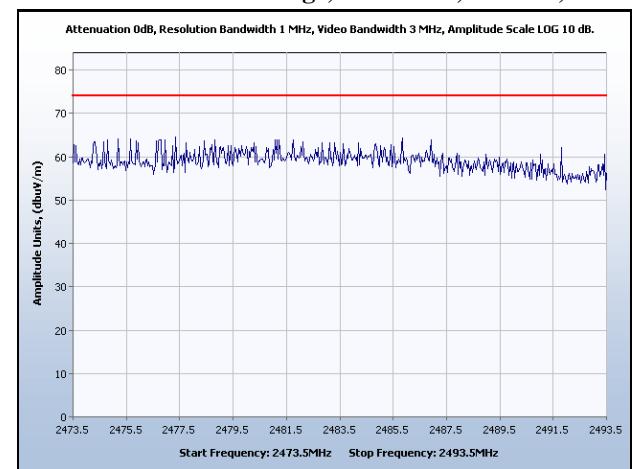

## Restricted Band High Edge, Channel 5, 25 dBm, Average



## Restricted Band High Edge, Channel 5, 25 dBm, Peak





Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C



## 802.11g

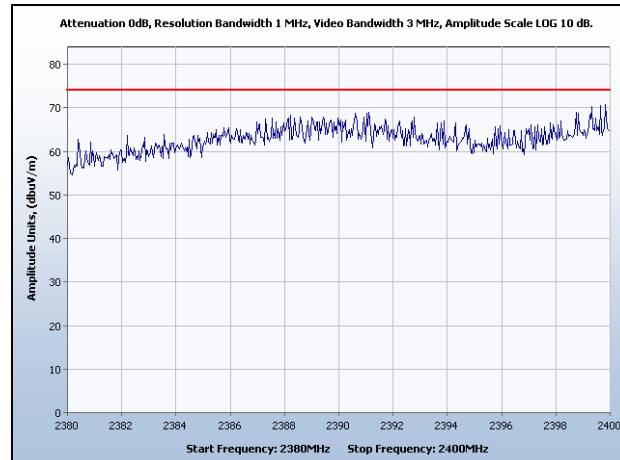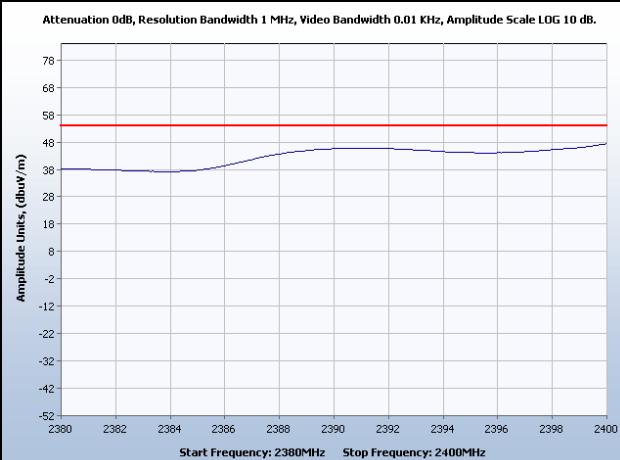

## Restricted Band Low Edge, Channel 6, 25 dBm, Average

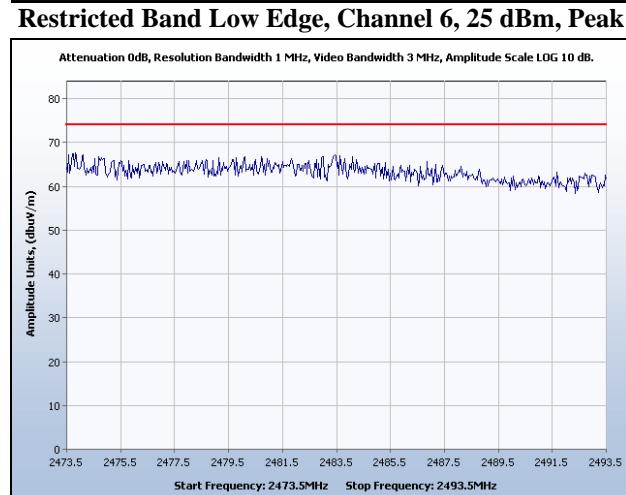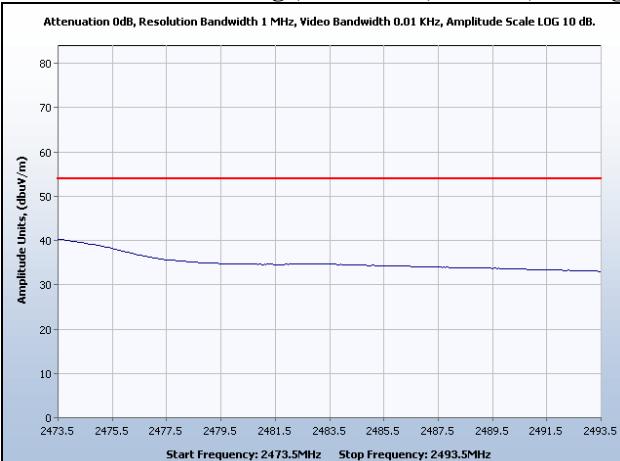

## Restricted Band High Edge, Channel 6, 25 dBm, Average

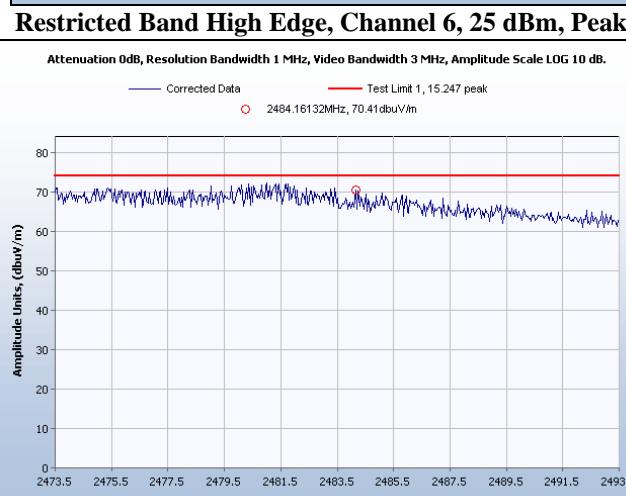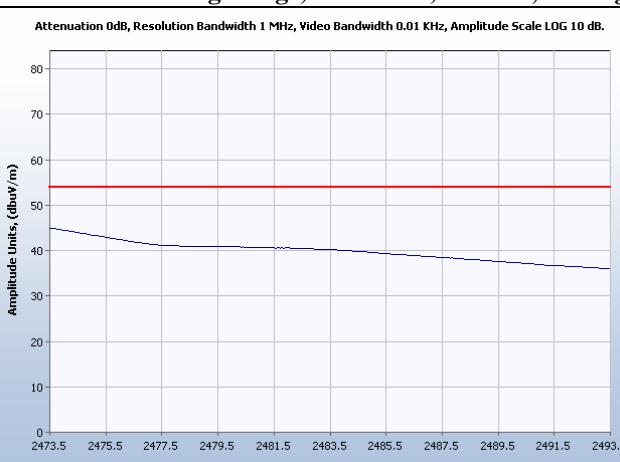

## Restricted Band High Edge, Channel 7, 25 dBm, Average



## Restricted Band High Edge, Channel 7, 25 dBm, Peak





Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C



## 802.11g

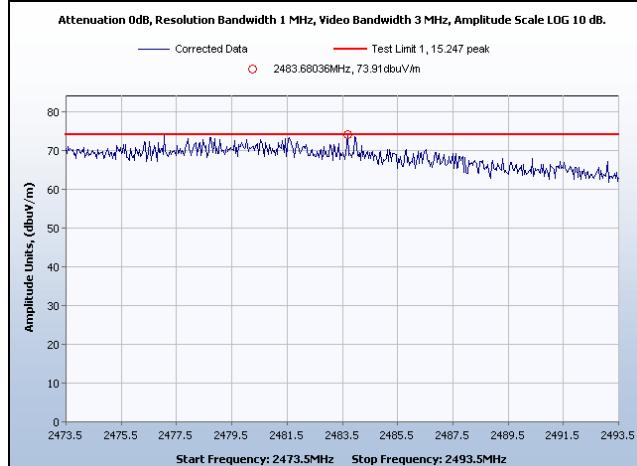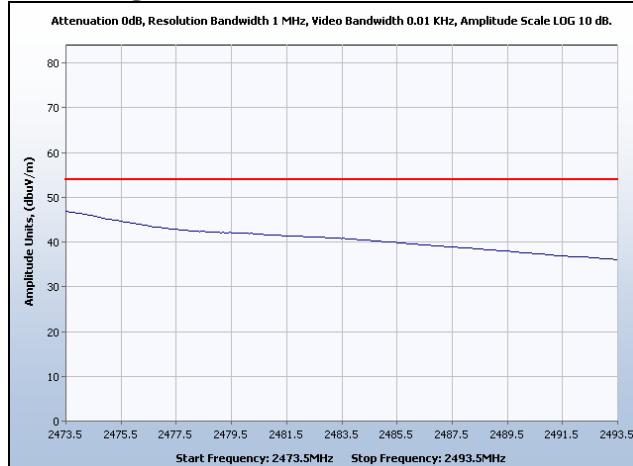

### Restricted Band High Edge, Channel 8, 24 dBm, Average

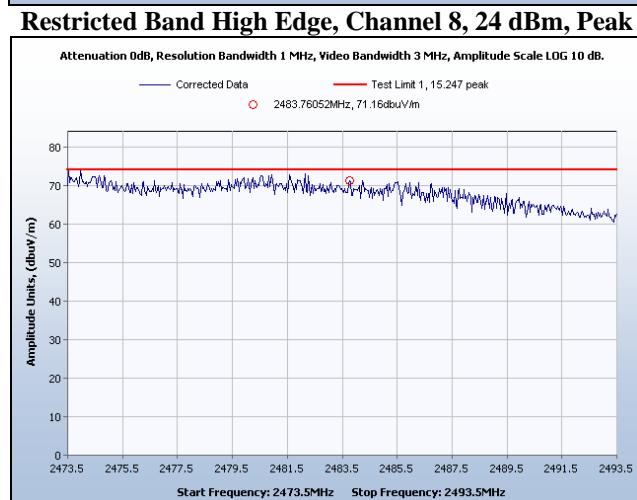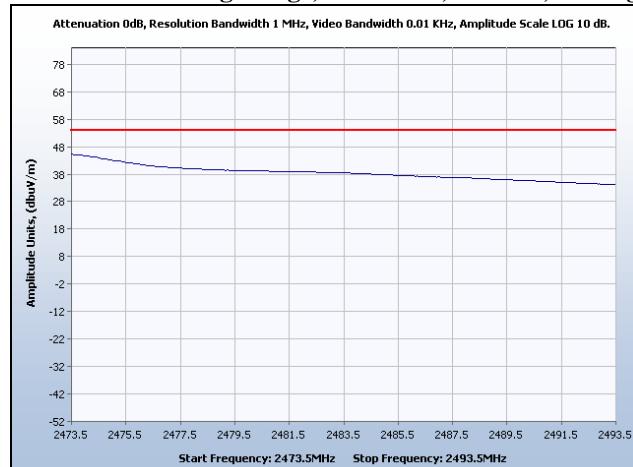

### Restricted Band High Edge, Channel 9, 23 dBm, Average

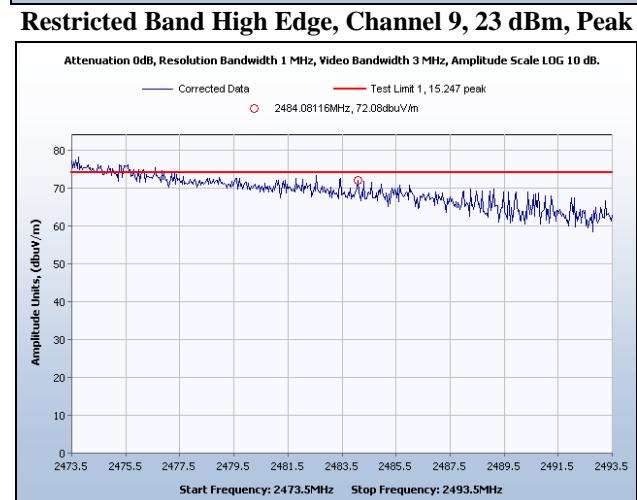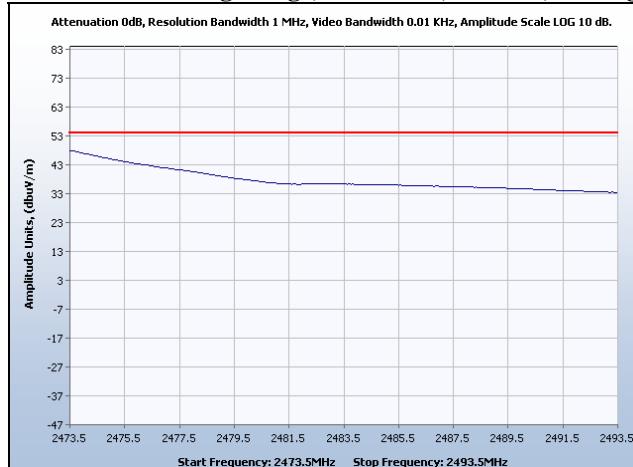

### Restricted Band High Edge, Channel 10, 22 dBm, Average



### Restricted Band High Edge, Channel 10, 22 dBm, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11g

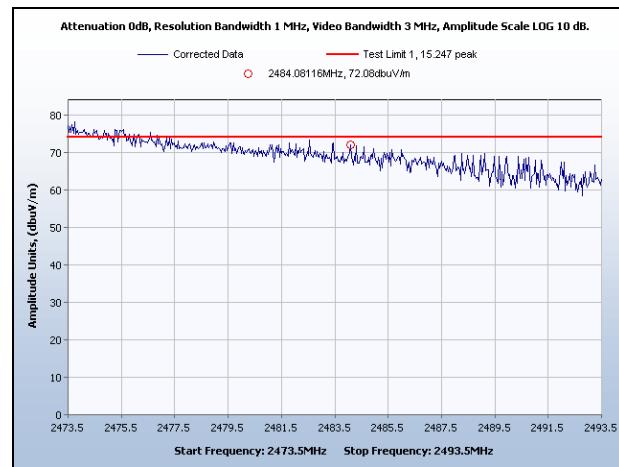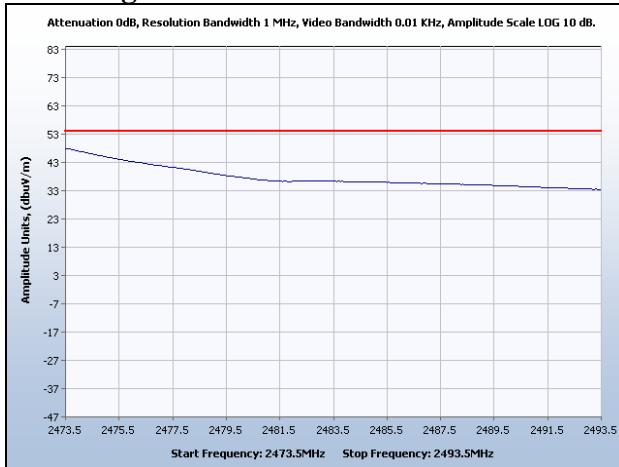

### Restricted Band High Edge, Channel 10, 22 dBm, Average

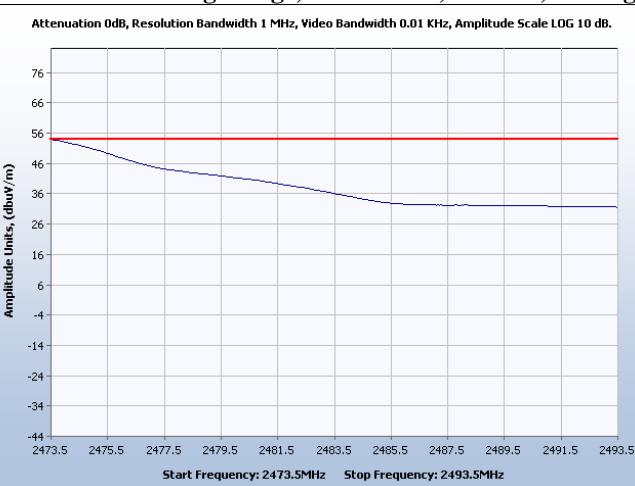

### Restricted Band High Edge, Channel 10, 22 dBm, Peak

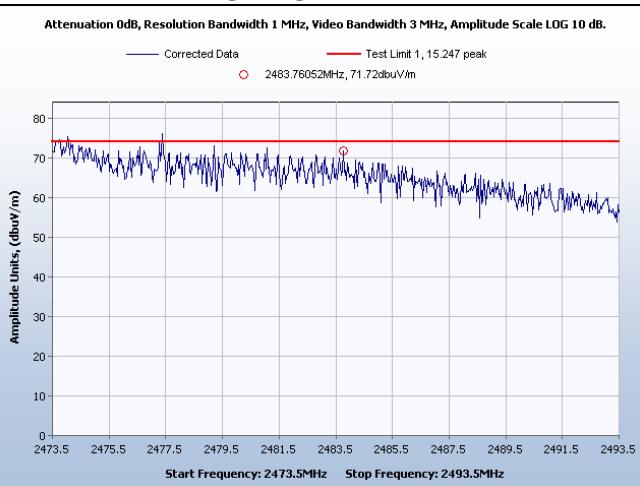


### Restricted Band High Edge, Channel 11, 20 dBm, Average

### Restricted Band High Edge, Channel 11, 20 dBm, Peak

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.205 Band Edge Emissions

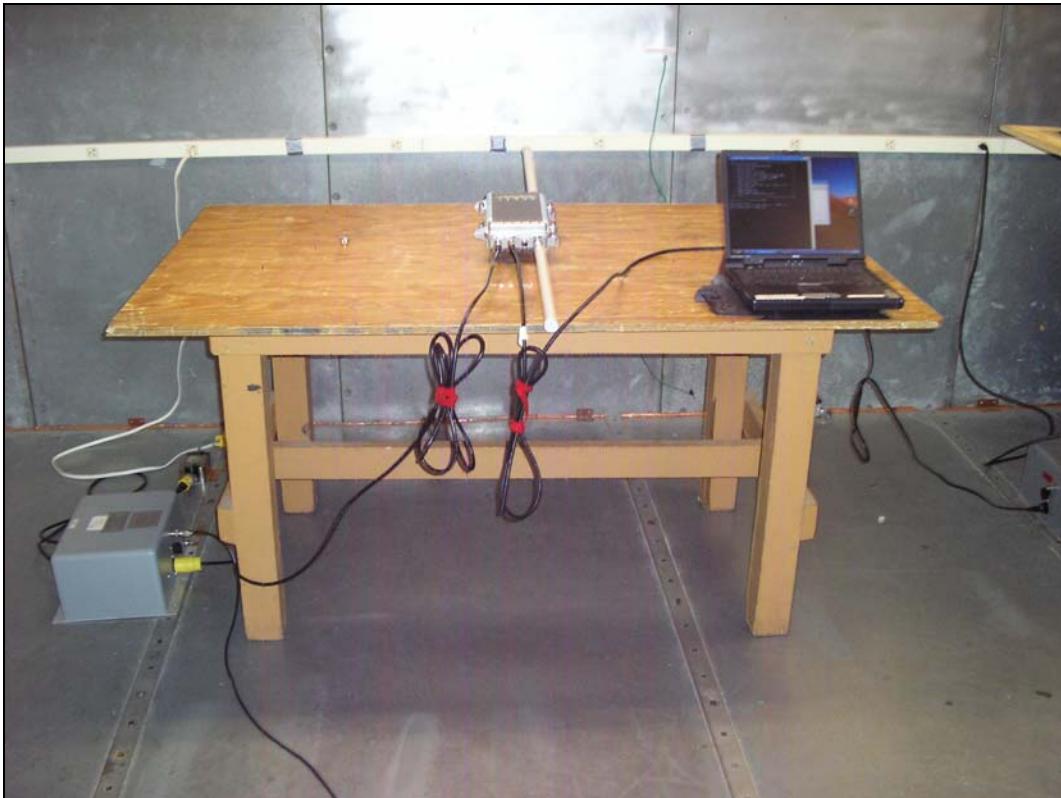

Photograph 1. Band Edge Test Setup



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits

**Test Requirement(s):**

**§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 6. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.

The EUT was operated in its normal mode of operation. Stimulating it with the RFID tag made no difference in the conducted emissions.

**Test Results:**

The EUT was found compliant with the Conducted Emission limits of §15.207(a) for Intentional Radiators. See following pages for detailed test results.

**Test Engineer(s):**

Jeffrey Hazen

**Test Date(s):**

4/3/2007



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits

#### Channel 1

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.157	39.4	0.0969	39.4969	65.62	-26.22	13.8	0.0969	13.8969	55.62	-41.7231
0.177	47.2	0.1309	47.3309	64.63	-17.43	36	0.1309	36.1309	54.63	-18.4991
0.193	35.4	0.1581	35.5581	63.91	-28.51	11.5	0.1581	11.6581	53.91	-42.2519
0.223	31.6	0.17	31.77	62.71	-31.11	9.9	0.17	10.07	52.71	-42.64
0.234	39.1	0.17	39.27	62.31	-23.21	25.8	0.17	25.97	52.31	-26.34
0.288	27.7	0.17	27.87	60.58	-32.88	14.6	0.17	14.77	50.58	-35.81
0.292	31.4	0.17	31.57	60.47	-29.07	20.1	0.17	20.27	50.47	-30.2

Table 7. Conducted Emissions - Voltage, Phase (120 VAC)



Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.153	42.6	0.0901	42.6901	65.84	-23.24	16	0.0901	16.0901	55.84	-39.7499
0.168	41.2	0.1156	41.3156	65.06	-23.86	31.9	0.1156	32.0156	55.06	-23.0444
0.177	45.1	0.1309	45.2309	64.63	-19.53	37.8	0.1309	37.9309	54.63	-16.6991
0.182	40.4	0.1394	40.5394	64.39	-23.99	32.7	0.1394	32.8394	54.39	-21.5506
0.19	37.9	0.153	38.053	64.04	-26.14	19.9	0.153	20.053	54.04	-33.987
0.198	36.7	0.1666	36.8666	63.69	-26.99	14	0.1666	14.1666	53.69	-39.5234

Table 8. Conducted Emissions - Voltage, Neutral (120 VAC)



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

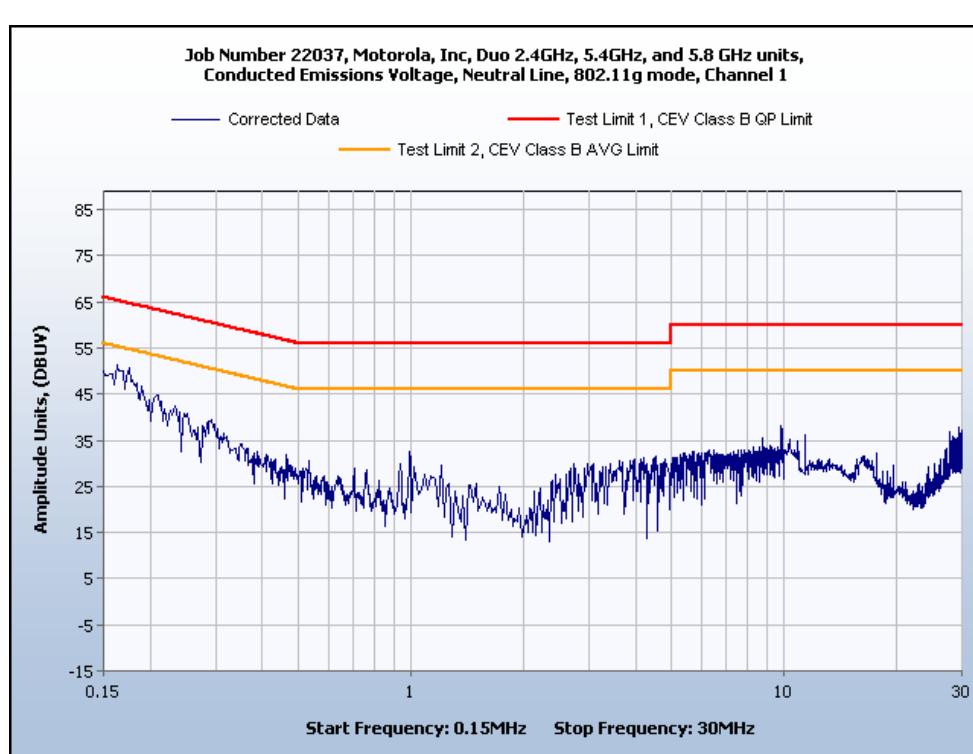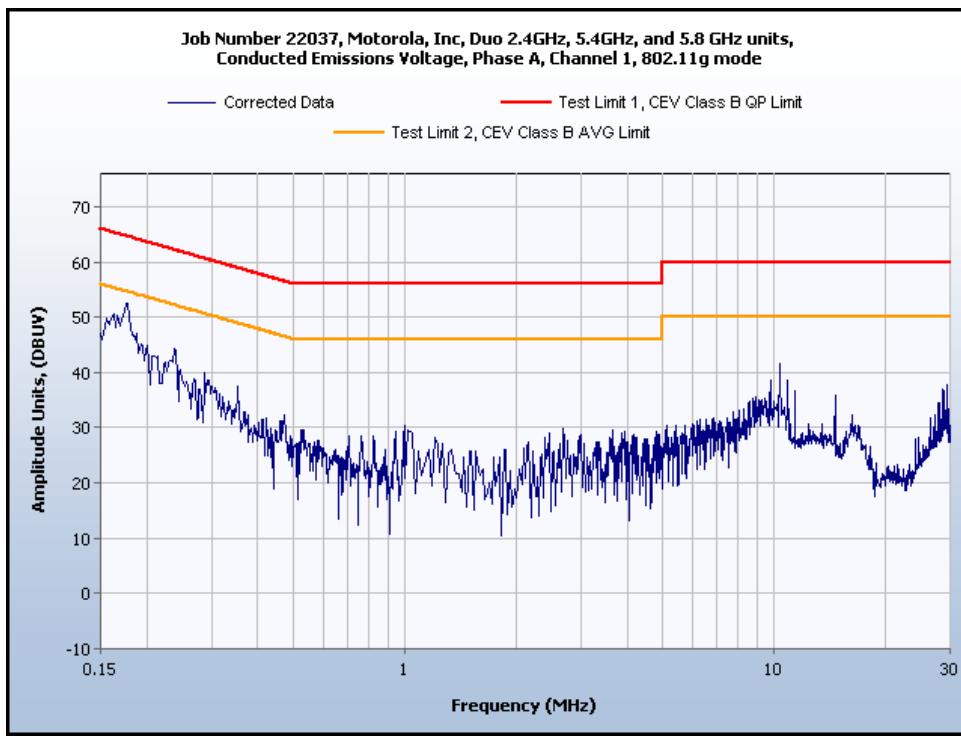



### Channel 6

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.16	40.2	0.102	40.302	65.46	-25.26	15.3	0.102	15.402	55.46	-40.058
0.175	49.3	0.1275	49.4275	64.72	-15.42	37.2	0.1275	37.3275	54.72	-17.3925
0.189	37.6	0.1513	37.7513	64.08	-26.48	23	0.1513	23.1513	54.08	-30.9287
0.189	37.6	0.1513	37.7513	64.08	-26.48	23	0.1513	23.1513	54.08	-30.9287
0.234	40.9	0.17	41.07	62.31	-21.41	27.4	0.17	27.57	52.31	-24.74
0.26	30	0.17	30.17	61.43	-31.43	2.9	0.17	3.07	51.43	-48.36
0.292	32.7	0.17	32.87	60.47	-27.77	20.5	0.17	20.67	50.47	-29.8

Table 9. Conducted Emissions - Voltage, Phase Line (120 VAC)


Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.158	41	0.0986	41.0986	65.57	-24.57	11.8	0.0986	11.8986	55.57	-43.6714
0.175	46.4	0.1275	46.5275	64.72	-18.32	38	0.1275	38.1275	54.72	-16.5925
0.192	37.3	0.1564	37.4564	63.95	-26.65	14.6	0.1564	14.7564	53.95	-39.1936
0.2	36.2	0.17	36.37	63.61	-27.41	1.6	0.17	1.77	53.61	-51.84
0.233	36.9	0.17	37.07	62.34	-25.44	26.9	0.17	27.07	52.34	-25.27
0.245	31.9	0.17	32.07	61.93	-30.03	14	0.17	14.17	51.93	-37.76
0.247	31.4	0.17	31.57	61.86	-30.46	8.5	0.17	8.67	51.86	-43.19

Table 10. Conducted Emissions - Voltage, Neutral Line (120 VAC)




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

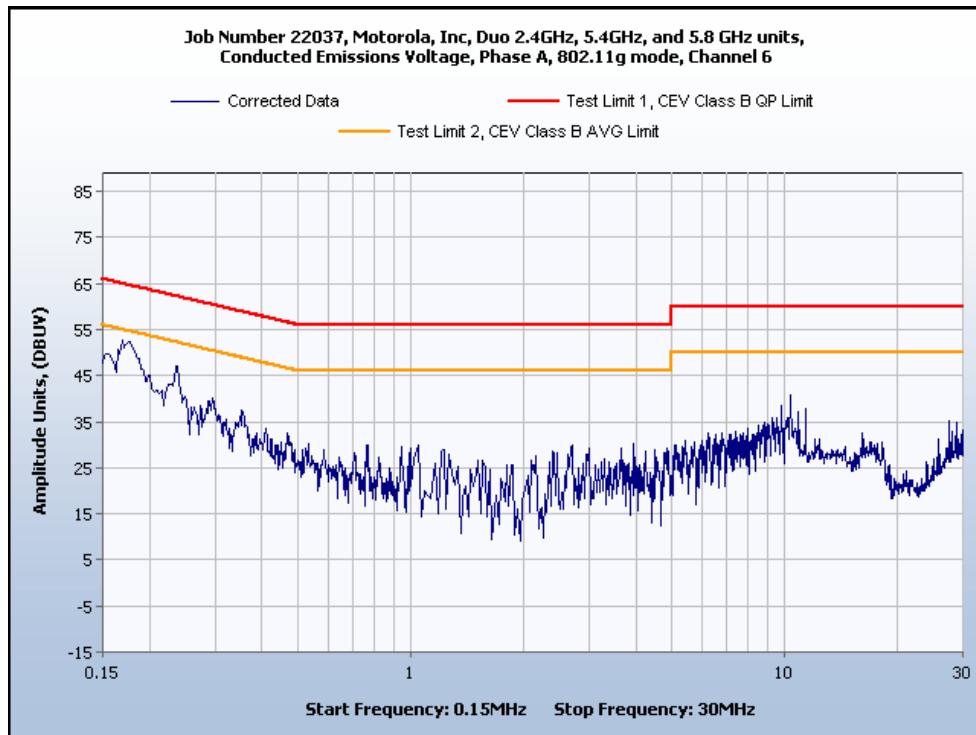

Channel 6 Phase Line Plot

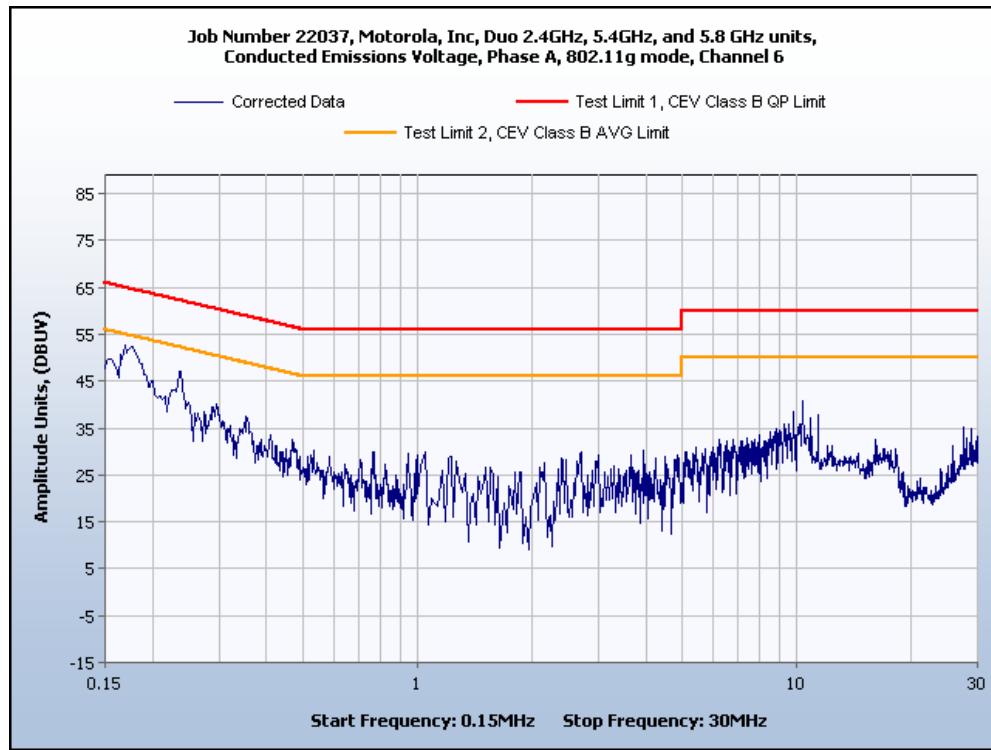

Channel 6 Neutral Line Plot



## Channel 11

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.15	43.6	0.085	43.685	66	-22.4	2.3	0.085	2.385	56	-53.615
0.159	42.2	0.1003	42.3003	65.52	-23.32	13.5	0.1003	13.6003	55.52	-41.9197
0.168	42	0.1156	42.1156	65.06	-23.06	30.8	0.1156	30.9156	55.06	-24.1444
0.174	44.7	0.1258	44.8258	64.77	-20.07	35.1	0.1258	35.2258	54.77	-19.5442
0.181	41	0.1377	41.1377	64.44	-23.44	29.4	0.1377	29.5377	54.44	-24.9023
0.188	39.2	0.1496	39.3496	64.12	-24.92	17.8	0.1496	17.9496	54.12	-36.1704
0.203	37.5	0.17	37.67	63.49	-25.99	8.6	0.17	8.77	53.49	-44.72

Table 11. Conducted Emissions - Voltage, Phase (120 VAC)


Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.156	42.6	0.0952	42.6952	65.67	-23.07	11.5	0.0952	11.5952	55.67	-44.0748
0.16	42.1	0.102	42.202	65.46	-23.36	20.5	0.102	20.602	55.46	-34.858
0.17	43.4	0.119	43.519	64.96	-21.56	36.5	0.119	36.619	54.96	-18.341
0.184	40	0.1428	40.1428	64.3	-24.3	31.1	0.1428	31.2428	54.3	-23.0572
0.196	38.2	0.1632	38.3632	63.78	-25.58	9.1	0.1632	9.2632	53.78	-44.5168
0.2	38	0.17	38.17	63.61	-25.61	4.1	0.17	4.27	53.61	-49.34
0.156	42.6	0.0952	42.6952	65.67	-23.07	11.5	0.0952	11.5952	55.67	-44.0748

Table 12. Conducted Emissions - Voltage, Neutral (120 VAC)




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

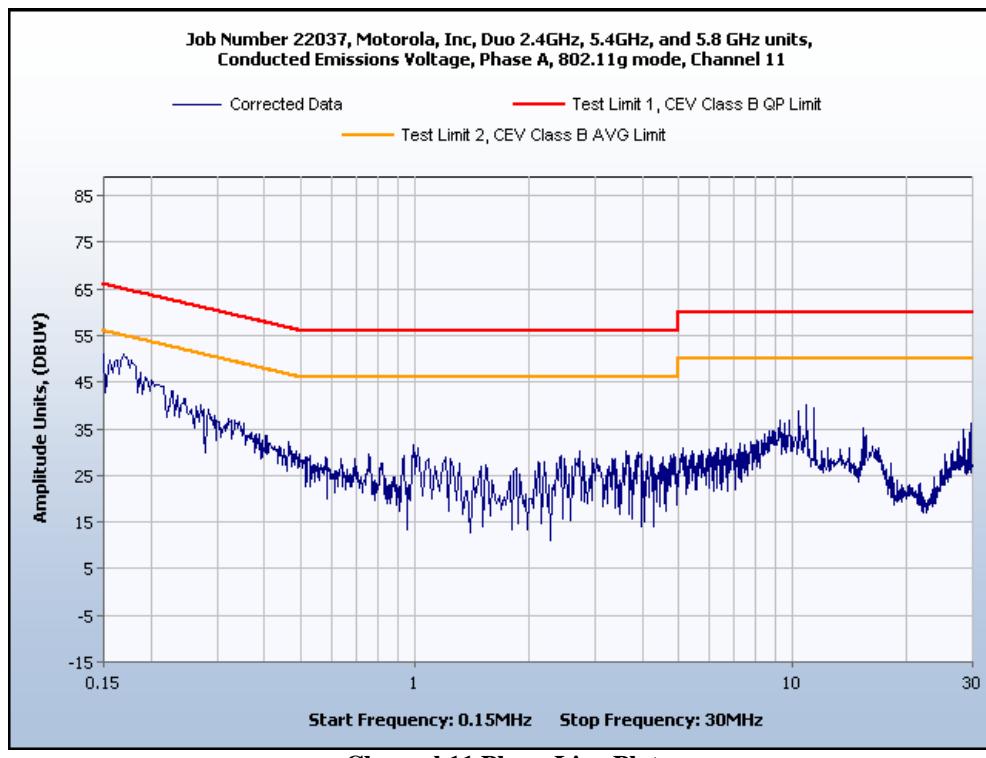

Channel 11 Phase Line Plot

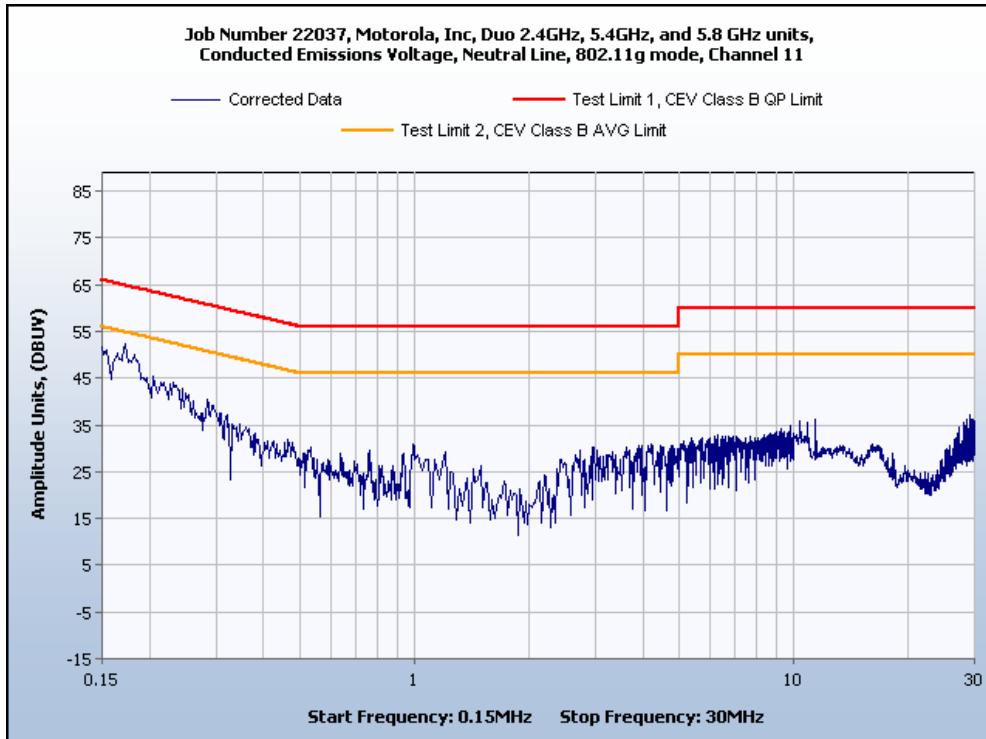

Channel 11 Neutral Line Plot




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits

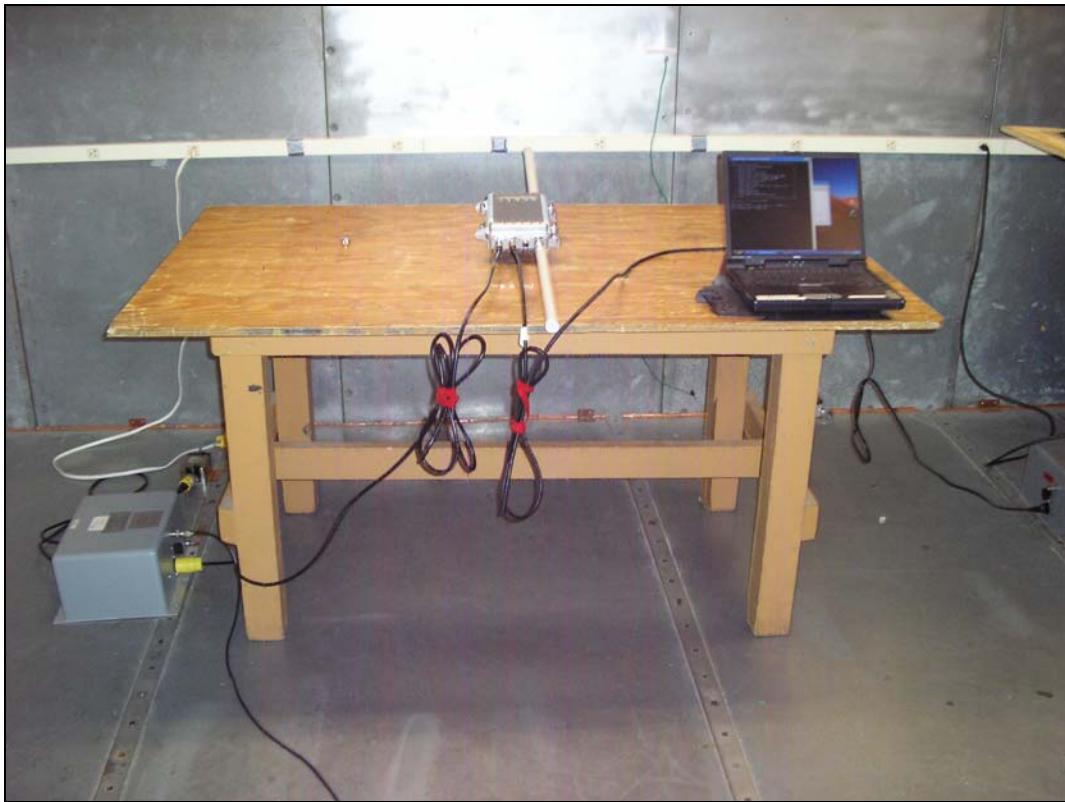

Photograph 2. Conducted Emission Test Setup



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.205 § 15.209 Radiated Emissions – Unintentional Spurious

**Test Requirement(s):** **§ 15.205 (a):** Except as shown in paragraph (d) of **15.205 Restricted bands of operation**, only spurious emissions are permitted in any of the frequency bands specified in Table 13:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Note
13.36–13.41.			

Note: Above 38.6

Table 13. Restricted Bands of Operation from FCC Part 15, § 15.205

**§ 15.205 (b):** (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§ 15.35 (b):** ...When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules...



Frequency (MHz)	Field Strength (Microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

**Table 14. Radiated Emissions Limits from § 15.209 (a)**

**Test Procedure:** For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

The EUT was first setup in its normal mode of operation and placed on a 1.4 m high on a pvc stand inside a semi-anechoic chamber. Measurements were performed with the EUT rotated 360° and varying the adjustable antenna mast with 1 m to 4 m height to determine the worst case orientation for maximum emissions. This showed the emissions most commonly associated with the unintentional digital section.

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35 (b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For radiated Spurious emissions, the EUT was scanned from 1 GHz to 25 GHz, excluding the band 2.3 GHz to 2.5 GHz, which was covered under Band Edge Emissions. In order to demonstrate compliance, measurements were taken in the form of peak plots shown with a peak and an average limit line. The plots were made at a 1m measurement distance and corrected for cable loss, distance correction, and antenna correction factors, by the capture software. At each channel of interest, the EUT was rotated about all three of its orthogonal axes.

Peak measurements, which exceeded the average limit line were remeasured using video averaging and plotted against an average limit line. Channels 0, 6, and 11 were tested.



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

**Test Results:** The EUT was found compliant with the requirements of this section.

**Test Engineer(s):** Jeffrey Hazen

**Test Date(s):** 6/01/2007

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuv)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuv)	Limit (dBuv)	Margin (dB)
32.011	113	H	3.21	17.88	5.69	0.38	0.00	23.94	40.00	-16.06
32.011	55	V	0.98	29.60	5.85	0.38	0.00	35.82	40.00	-4.18
280.016	0	H	1.92	19.95	12.40	1.42	0.00	33.77	46.00	-12.23
280.016	263	V	1.11	12.18	11.90	1.42	0.00	25.50	46.00	-20.50
330.002	288	H	1.98	15.94	13.80	1.57	0.00	31.31	46.00	-14.69
330.002	86	V	1.24	9.92	14.10	1.57	0.00	25.59	46.00	-20.41
330.006	284	H	1.86	15.66	13.80	1.57	0.00	31.03	46.00	-14.97
330.006	271	V	0.98	13.92	14.10	1.57	0.00	29.59	46.00	-16.41
440.009*	44	H	1.03	27.71	16.20	1.83	0.00	45.74	46.00	-0.26
440.009	90	V	2.33	20.71	16.70	1.83	0.00	39.24	46.00	-6.76
879.987	61	H	1.00	17.36	22.40	2.82	0.00	42.58	46.00	-3.42
879.987	86	V	2.01	16.56	21.80	2.82	0.00	41.18	46.00	-4.82

**Table 15. Radiated Emissions**

Note 1: \* - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.



Note 2: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula:  $20\log(3\text{ m}/10\text{ m})$  as expressed in the 'Distance Correction' column.




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11b

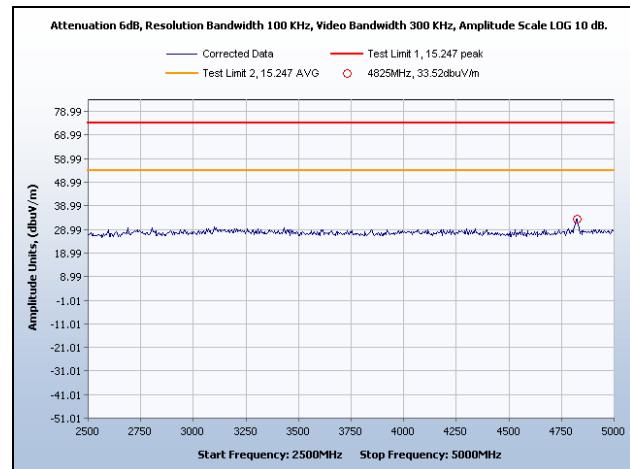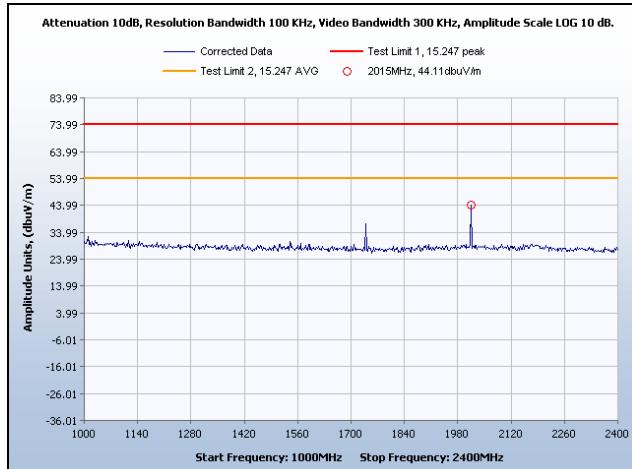


## Spurious Radiated Emissions, Channel 1, 1.2-4 GHz

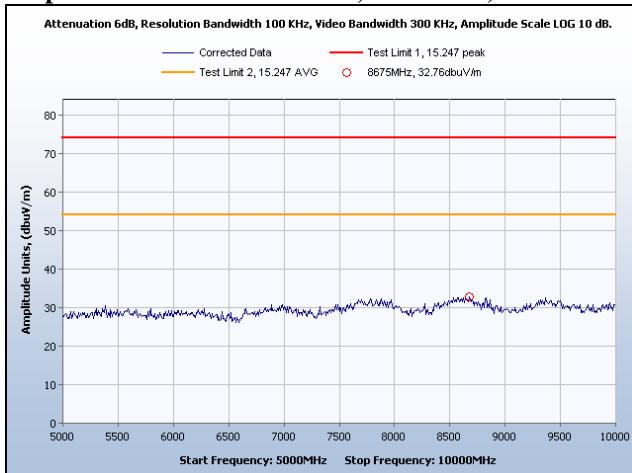


## Spurious Radiated Emissions, Channel 1, 2-5.5 GHz

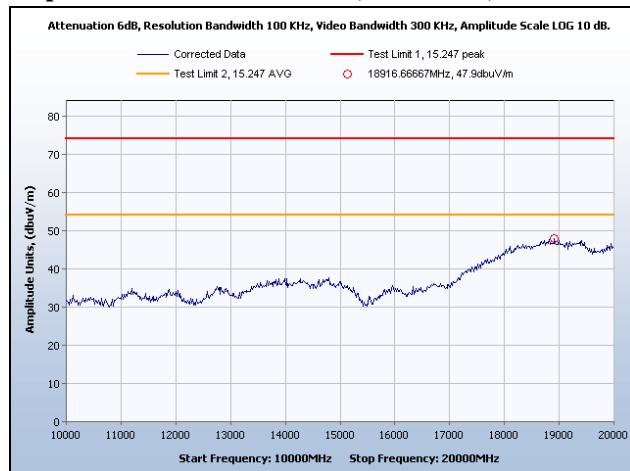

## Spurious Radiated Emissions, Channel 1, 5-10 GHz

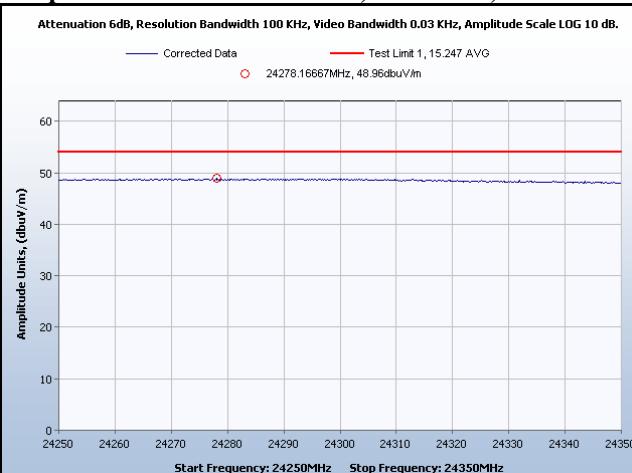

## Spurious Radiated Emissions, Channel 1, 10-20 GHz

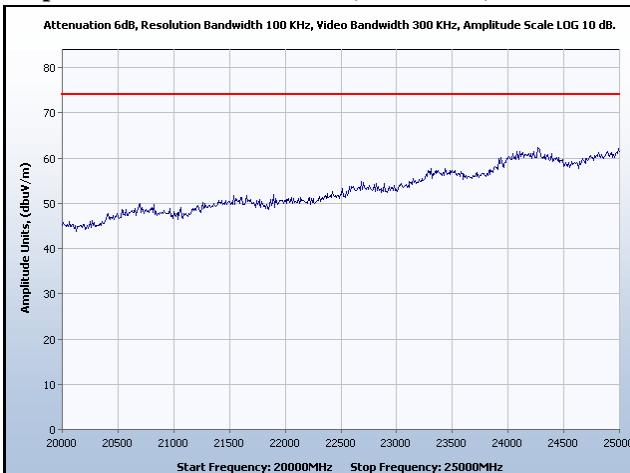

## Spurious Radiated Emissions, Channel 1, 20-25 GHz Average


## Spurious Radiated Emissions, Channel 1, 20-25 GHz, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11b

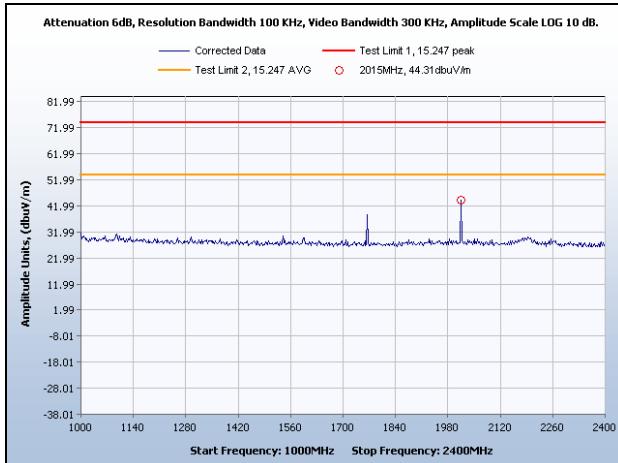


## SpuriousRadiated Emissions, Channel 6, 1.2-4 GHz

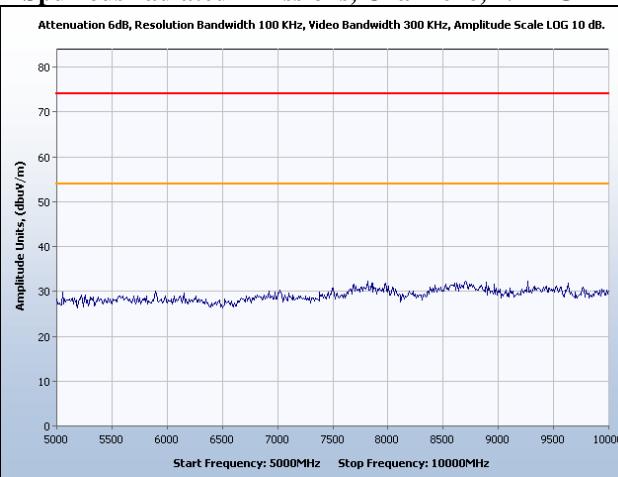


## SpuriousRadiated Emissions, Channel 6, 5-10 GHz

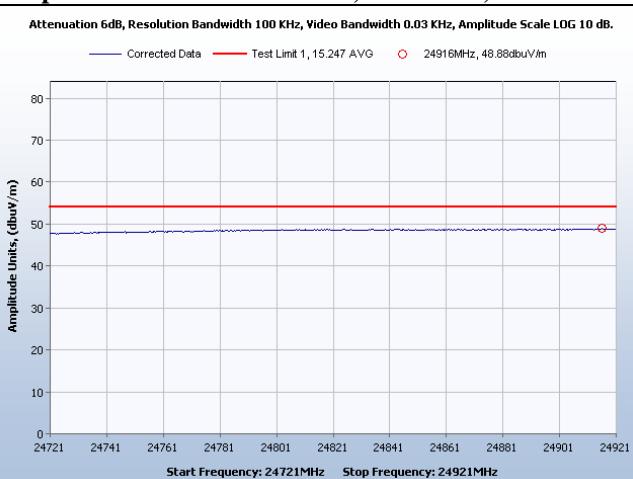


## SpuriousRadiated Emissions, Channel 6, 20-25 GHz Average

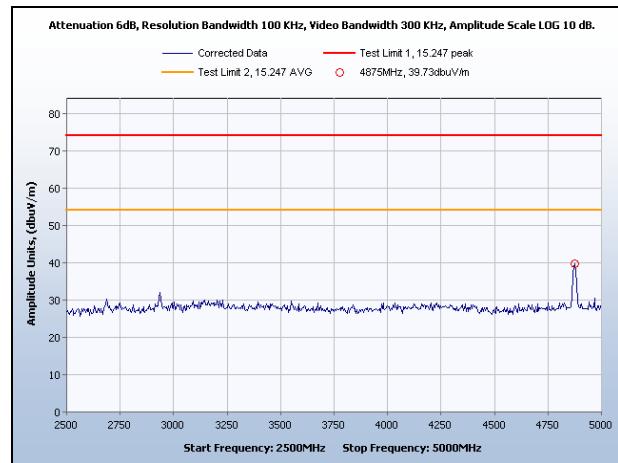

## SpuriousRadiated Emissions, Channel 6, 2-5.5 GHz

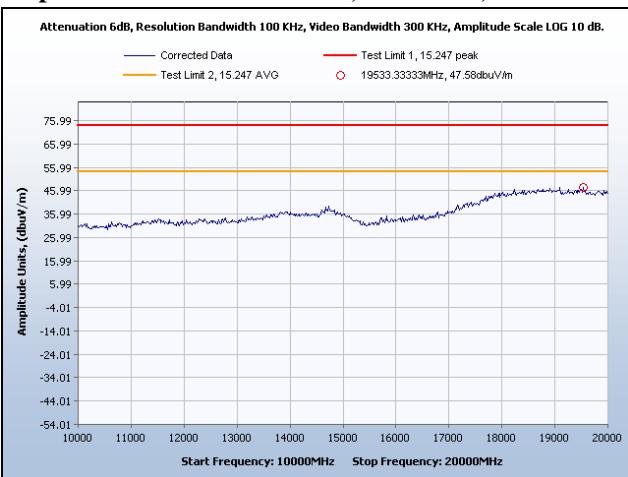

## SpuriousRadiated Emissions, Channel 6, 10-20 GHz

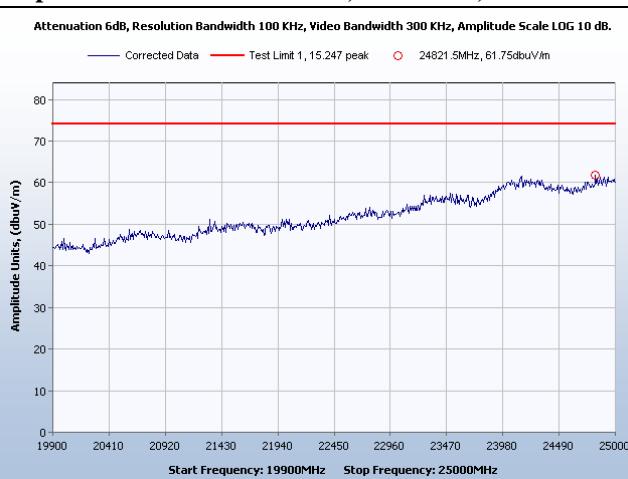


## SpuriousRadiated Emissions, Channel 6, 20-25 GHz, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11b

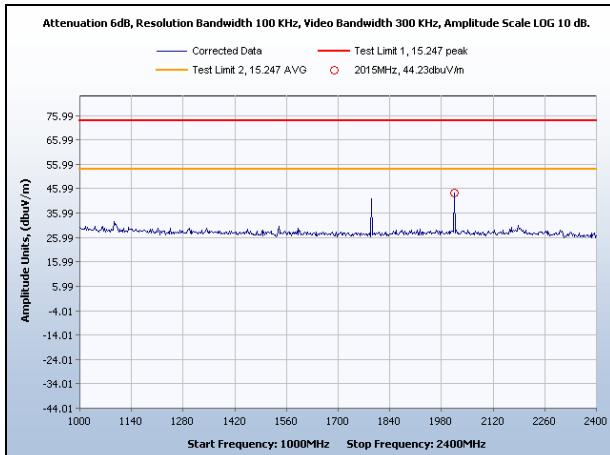


### Spurious Radiated Emissions, Channel 11, 1.2-4 GHz

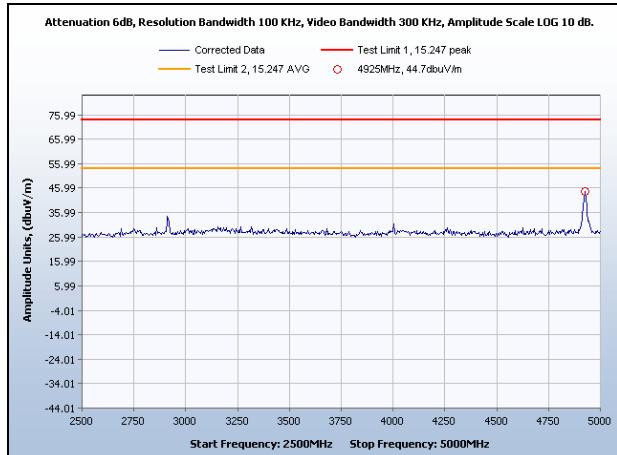


### Spurious Radiated Emissions, Channel 11, 1.2-4 GHz

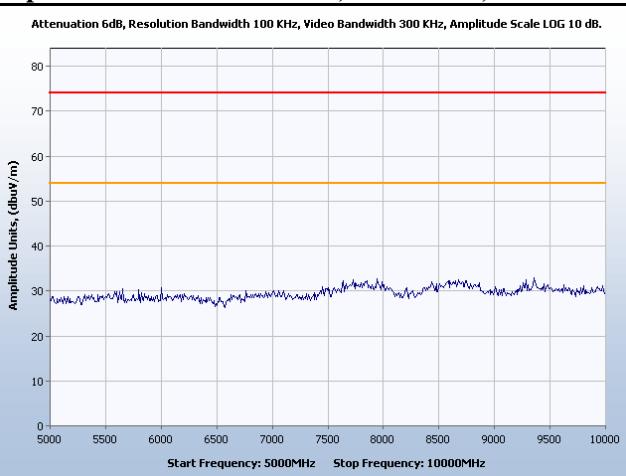


### Spurious Radiated Emissions, Channel 11, 5-10 GHz

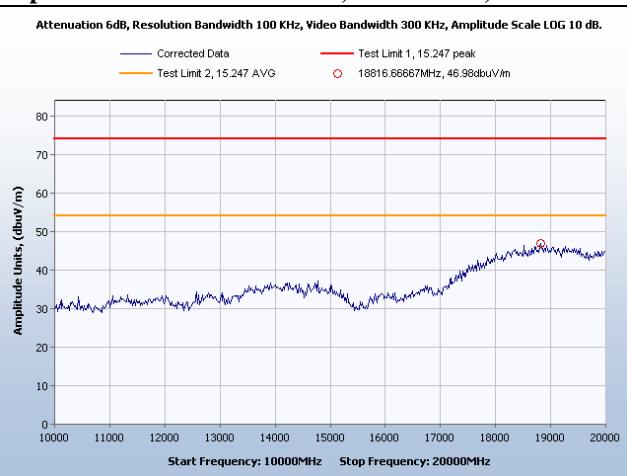

### Spurious Radiated Emissions, Channel 11, 5-10 GHz

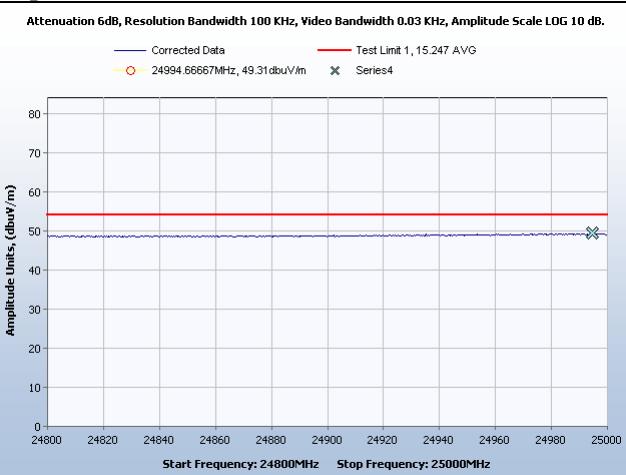

### Spurious Radiated Emissions, Channel 11, 20-25 GHz Average

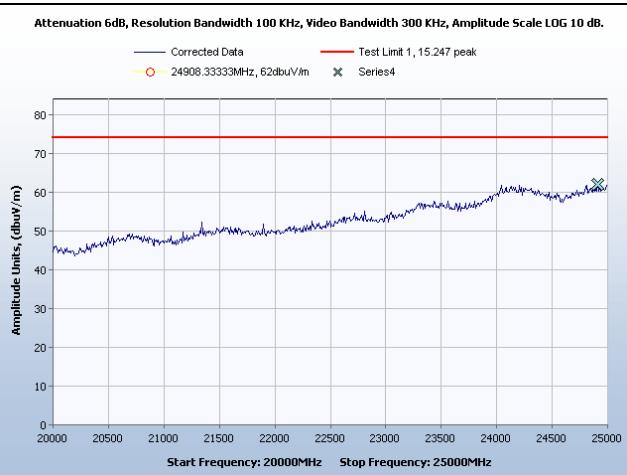


### Spurious Radiated Emissions, Channel 11, 20-25 GHz, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11g

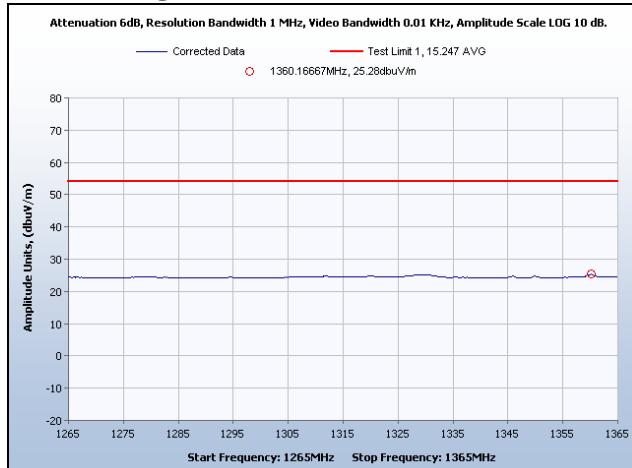


## Spurious Radiated Emissions, Channel 1, 1.2-4 GHz, Average

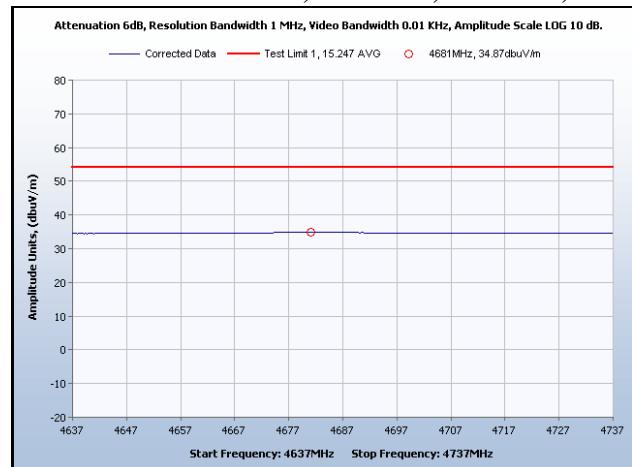


## Spurious Radiated Emissions, Channel 1, 1.2-4 GHz, Peak

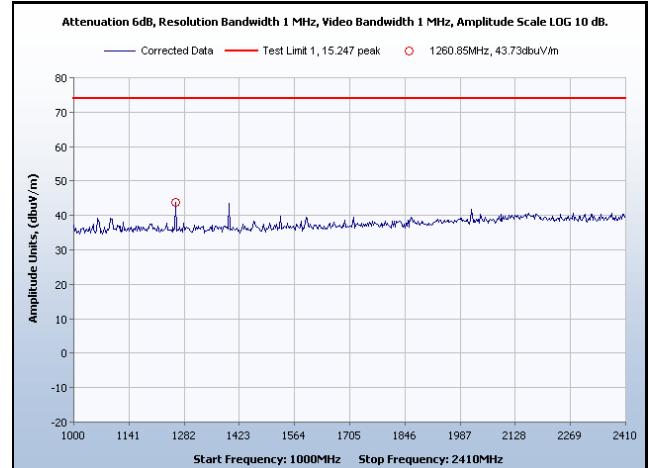

## Spurious Radiated Emissions, Channel 1, 1.2-4 GHz, Peak

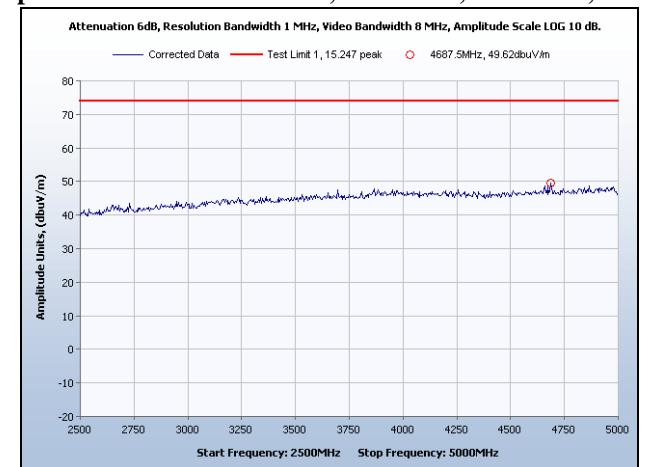

## Spurious Radiated Emissions, Channel 1, 2-5.5 GHz, Average

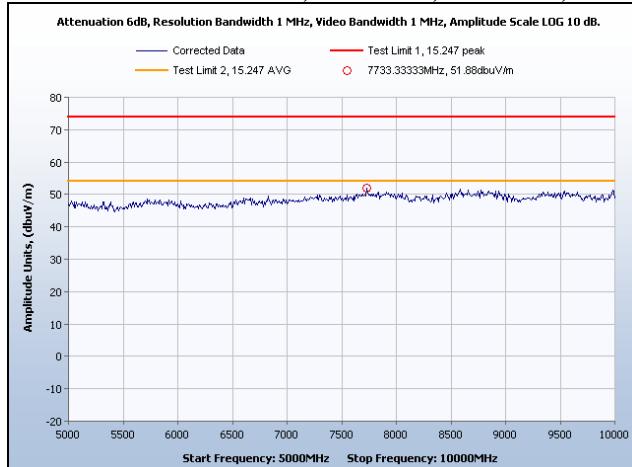


## Spurious Radiated Emissions, Channel 1, 2-5.5 GHz, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11g

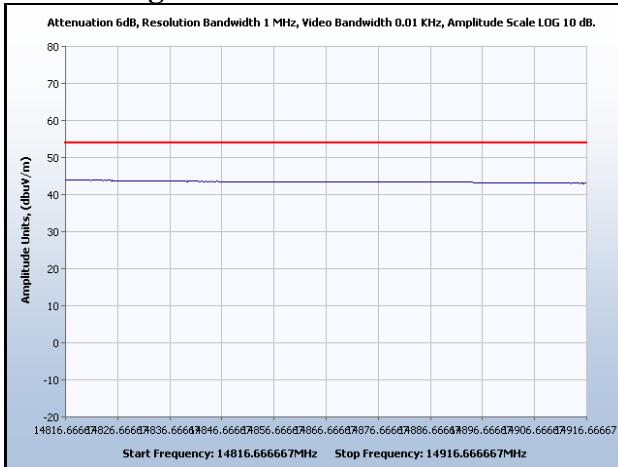


Spurious Radiated Emissions, Channel 1, 10-20 GHz, Average

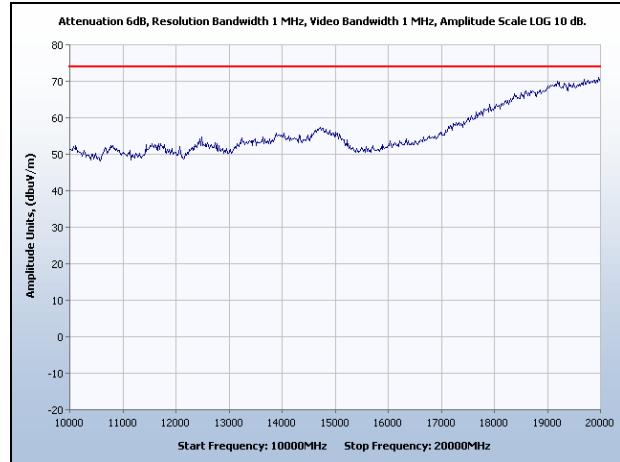

Spurious Radiated Emissions, Channel 1, 10-20 GHz, Peak

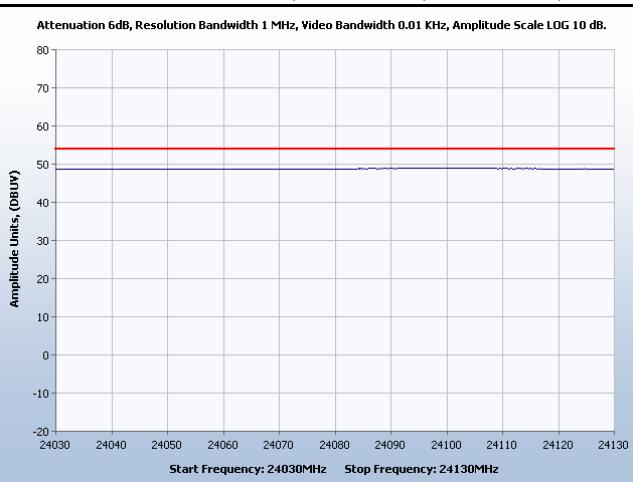

Spurious Radiated Emissions, Channel 1, 20-25 GHz, Average

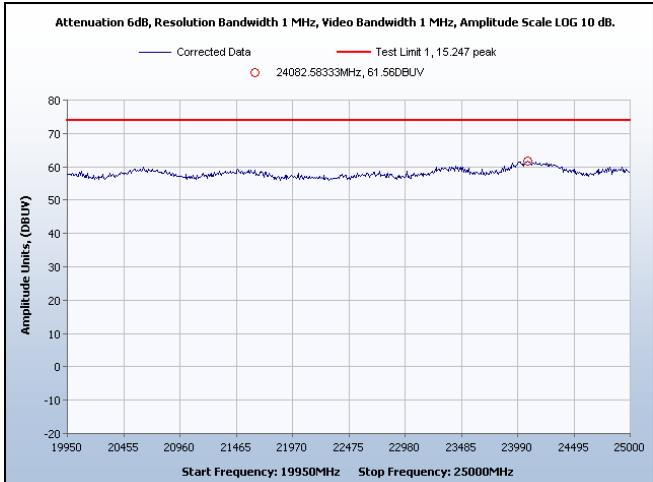


Spurious Radiated Emissions, Channel 1, 20-25 GHz, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11g

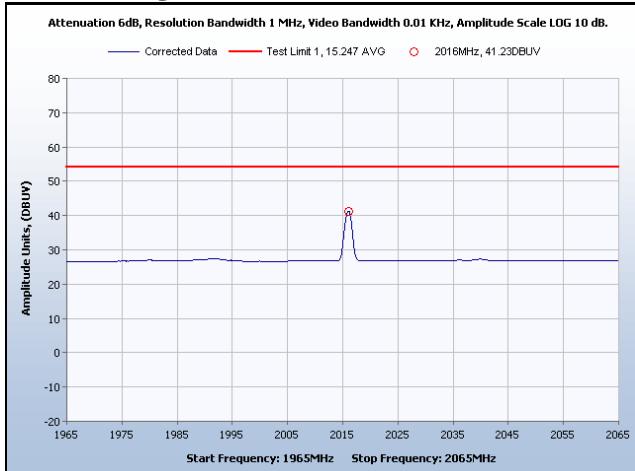


### Spurious Radiated Emissions, Channel 6, 1.2-4 GHz, Average

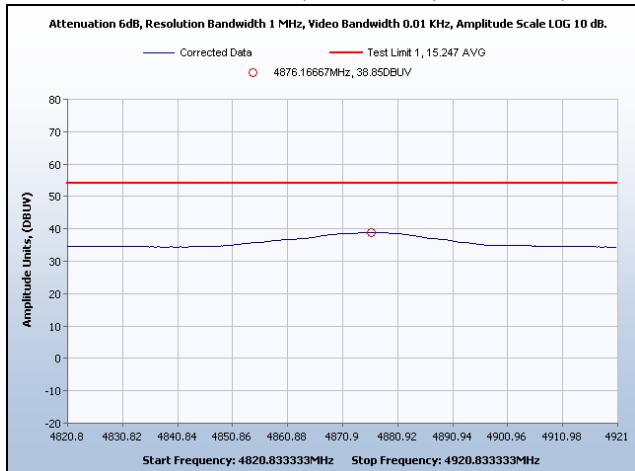


### Spurious Radiated Emissions, Channel 6, 1.2-4 GHz, Peak

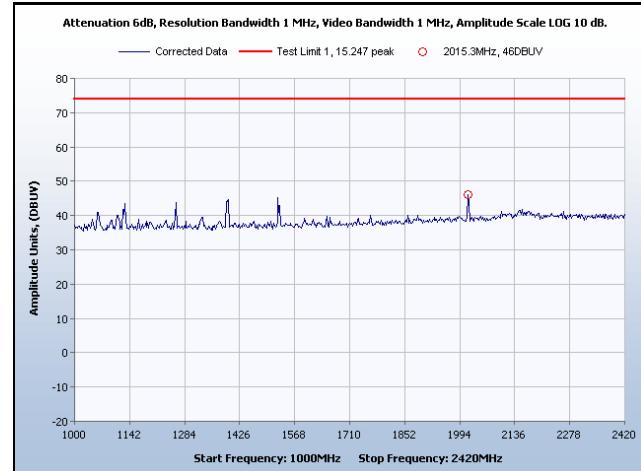

### Spurious Radiated Emissions, Channel 6, 1.2-4 GHz, Peak

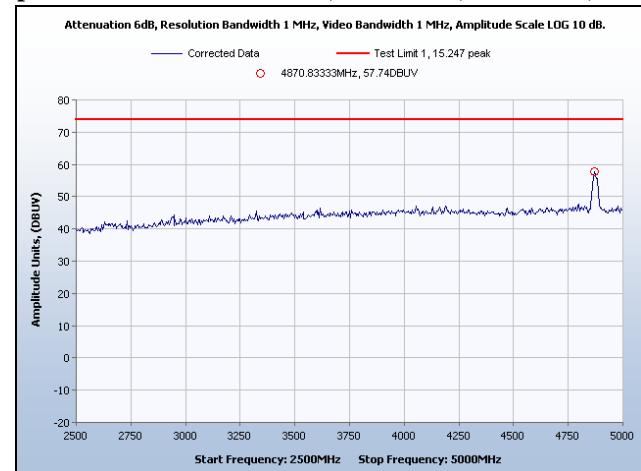

### Spurious Radiated Emissions, Channel 6, 1.2-4 GHz, Peak

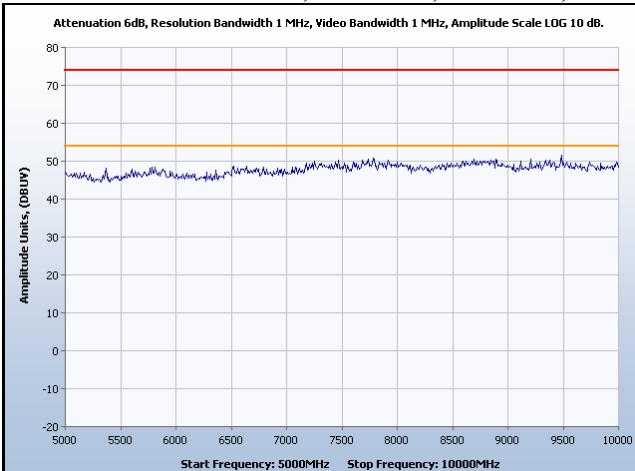



### Spurious Radiated Emissions, Channel 6, 2-5.5 GHz, Average




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

## 802.11g

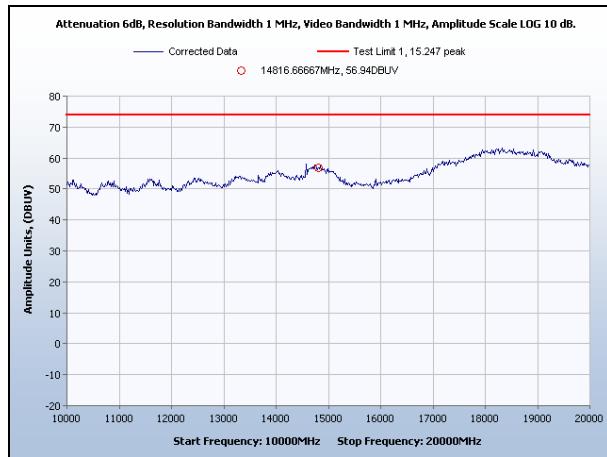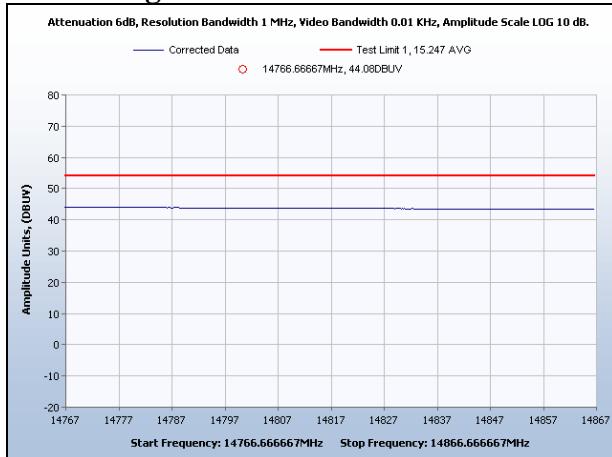


Spurious Radiated Emissions, Channel 6, 10-20 GHz, Average

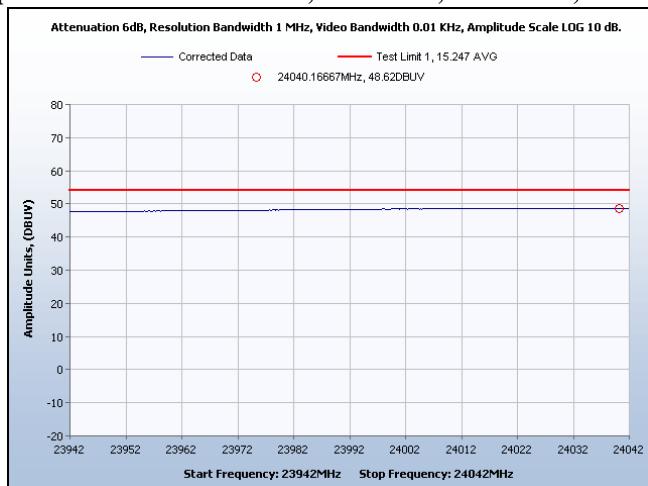

Spurious Radiated Emissions, Channel 6, 20-25 GHz, Average

Spurious Radiated Emissions, Channel 6, 10-20 GHz, Peak

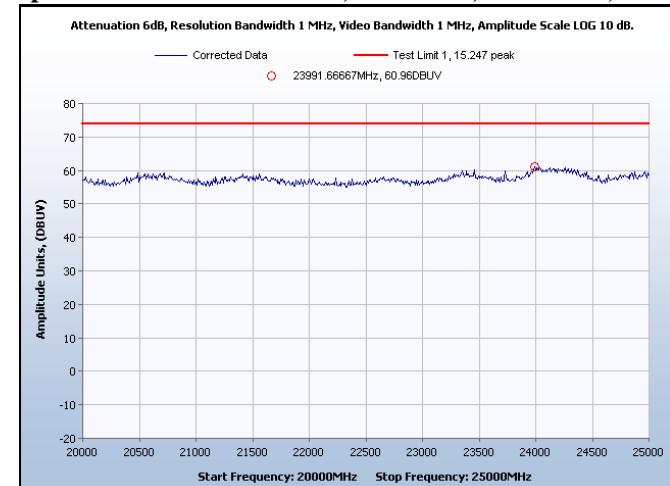



Spurious Radiated Emissions, Channel 6, 20-25 GHz, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C


## 802.11g

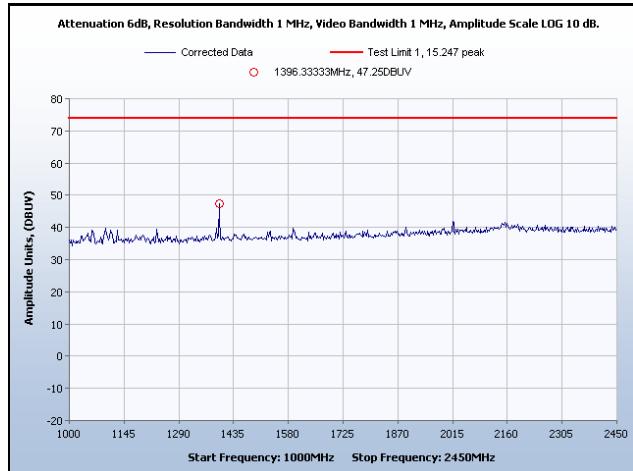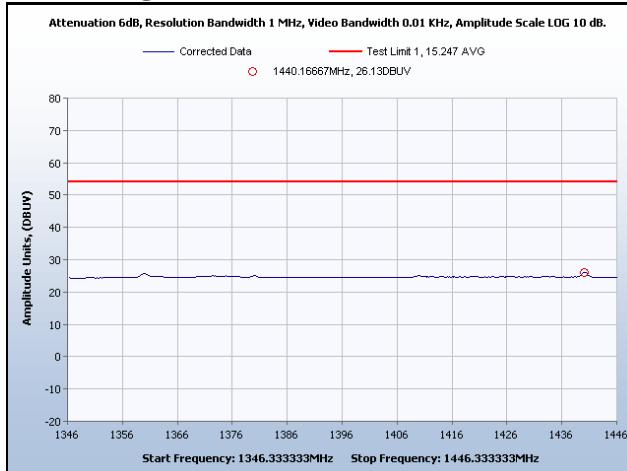

## Spurious Radiated Emissions, Channel 11, 1.2-4 GHz, Average

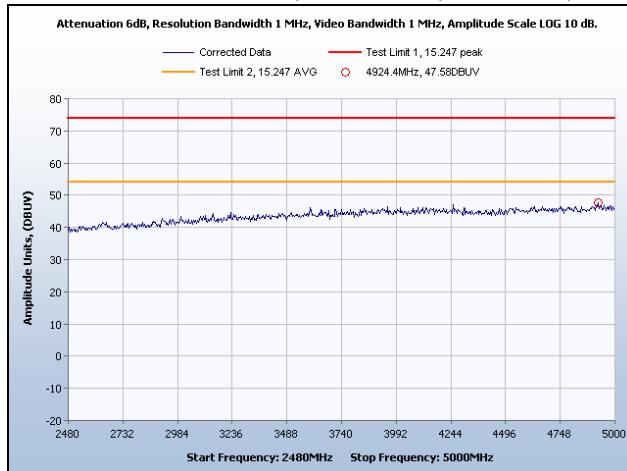

## Spurious Radiated Emissions, Channel 11, 1.2-4 GHz, Peak

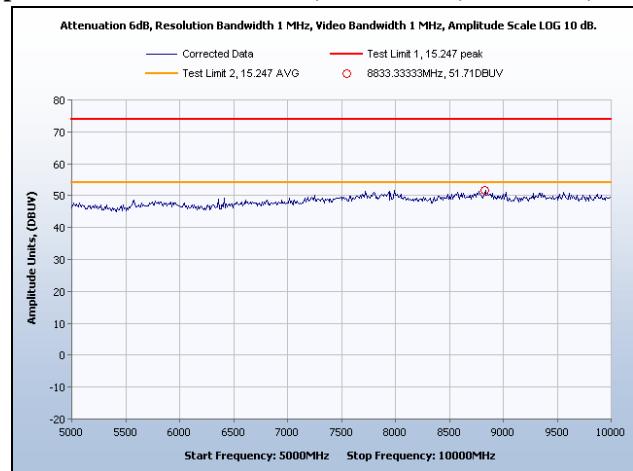

## Spurious Radiated Emissions, Channel 11, 2-5.5 GHz



## Spurious Radiated Emissions, Channel 11, 5-10 GHz




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

## 802.11g

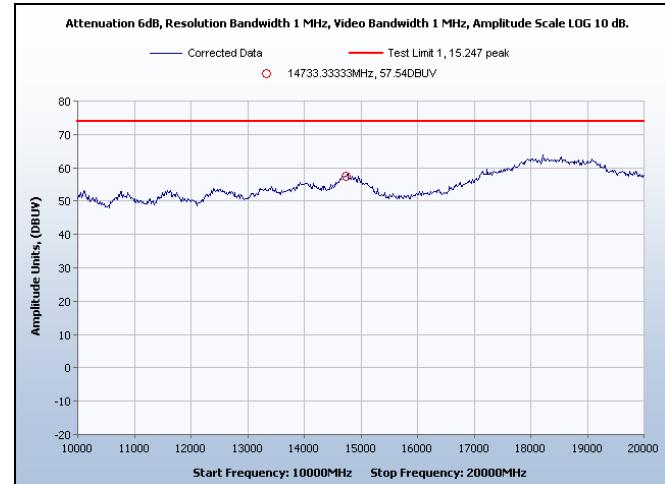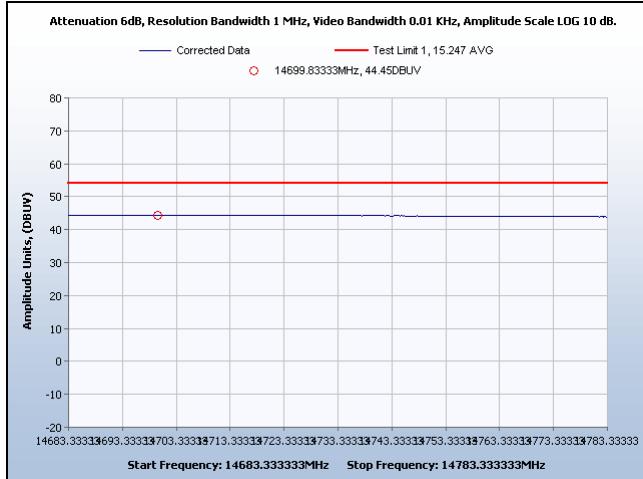


## Spurious Radiated Emissions, Channel 11, 10-20 GHz, Average

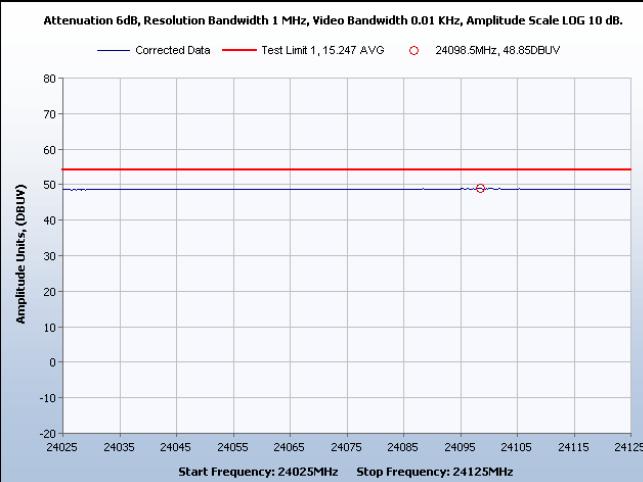

## Spurious Radiated Emissions, Channel 11, 20-25 GHz, Average

## Spurious Radiated Emissions, Channel 11, 10-20 GHz, Peak

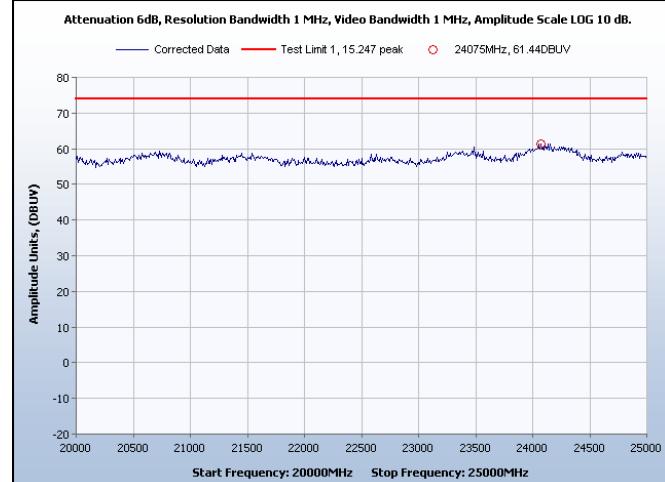

## Spurious Radiated Emissions, Channel 11, 20-25 GHz, Peak




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.109; § 15.209 Radiated Emissions Limits

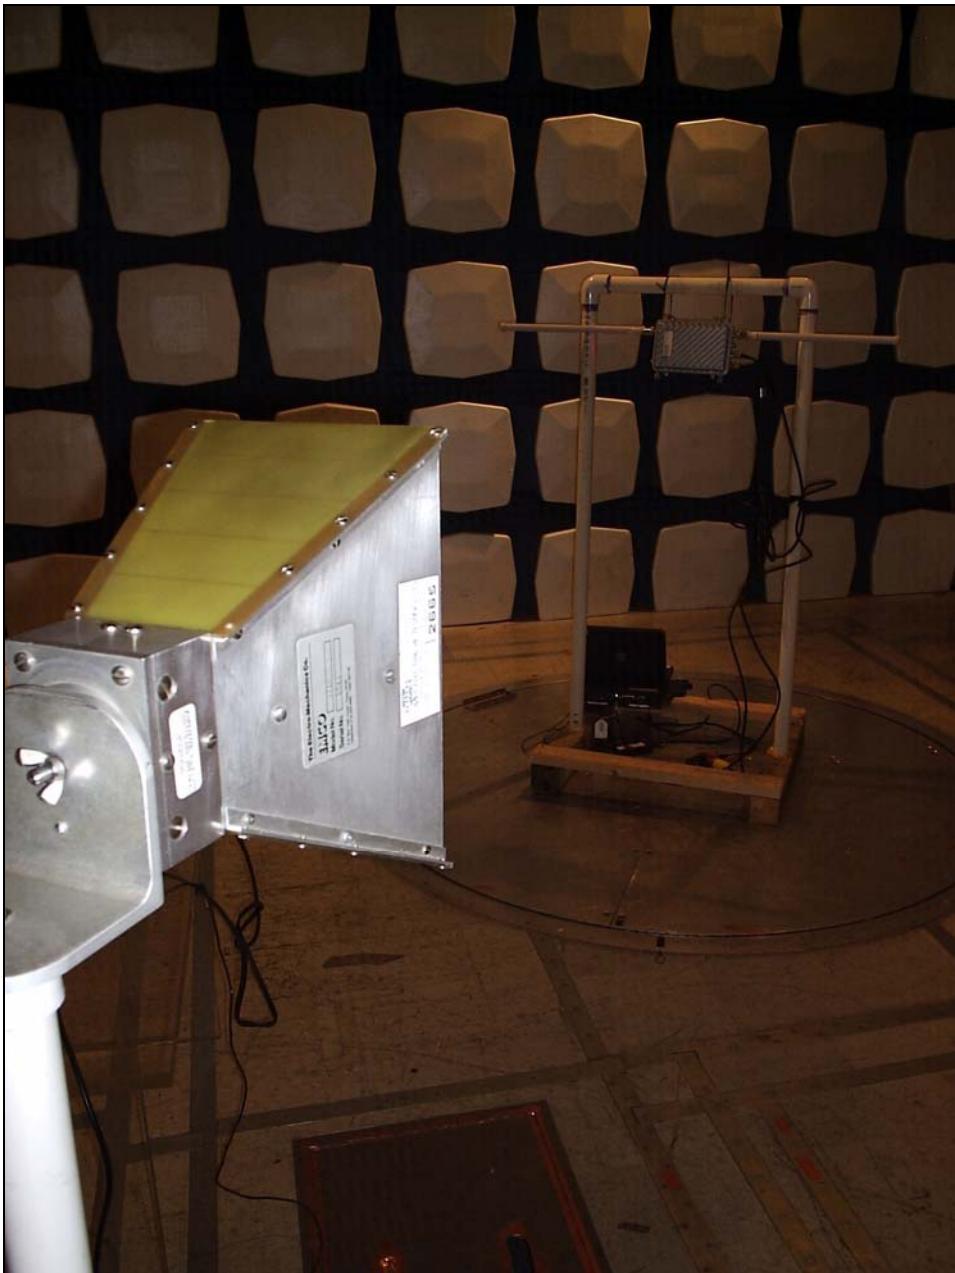

Photograph 3. Spurious Radiated Emissions, Test Setup



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a) 6 dB Bandwidth

**Test Requirements:**

**§ 15.247(a):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

**§ 15.247(a)(2):** For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

**Test Procedure:**

The transmitter was set to the channels 0, 6, and 11 at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW of 100 kHz, VBW > RBW. The 6 dB Bandwidth was measured and recorded.

**Test Results:**

Equipment complies with § 15.247 (a). The 6 dB Bandwidth was determined from the plots on the following pages.

**Test Engineer(s):** Jeffrey Hazen

**Test Date(s):** 5/17/2007



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a) 6 dB Bandwidth

Channel	Measured 6 dB Bandwidth	Test Limit (kHz)
1	11.94 MHz	500 kHz
6	10.81 MHz	500 kHz
11	10.56 MHz	500 kHz

Table 16. 6 dB Bandwidth Test Results for 802.11b Mode


Channel	Measured 6 dB Bandwidth	Test Limit (kHz)
1	16.3 MHz	500 kHz
6	16.45 MHz	500 kHz
11	16.5 MHz	500 kHz

Table 17. 6 dB Bandwidth Test Results for 802.11g Mode




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

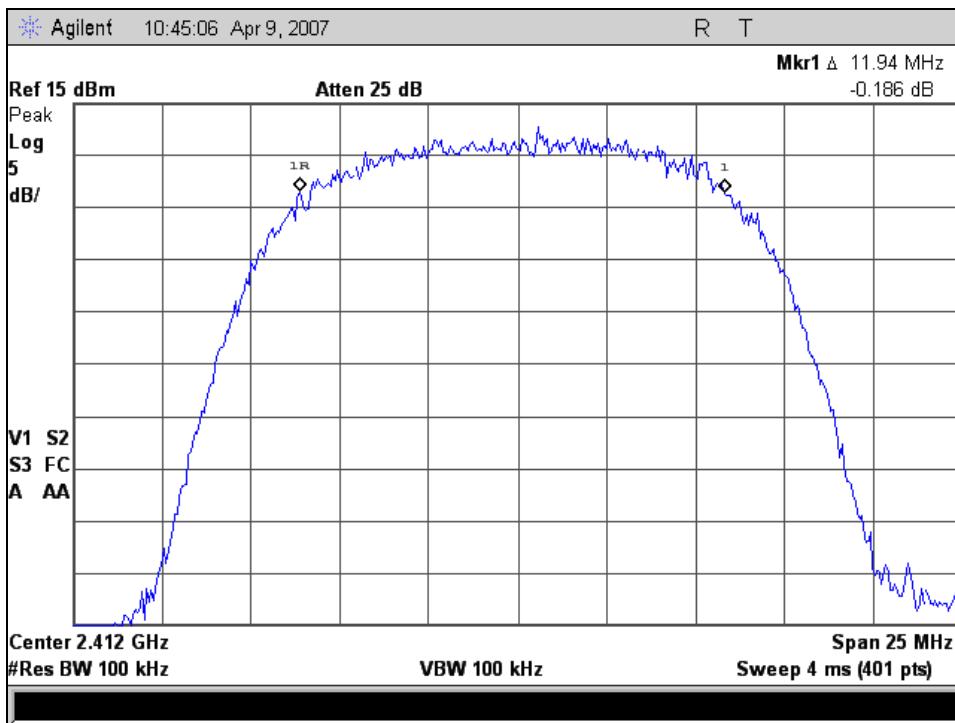

6 dB Occupied Bandwidth, 802.11b, Channel 1

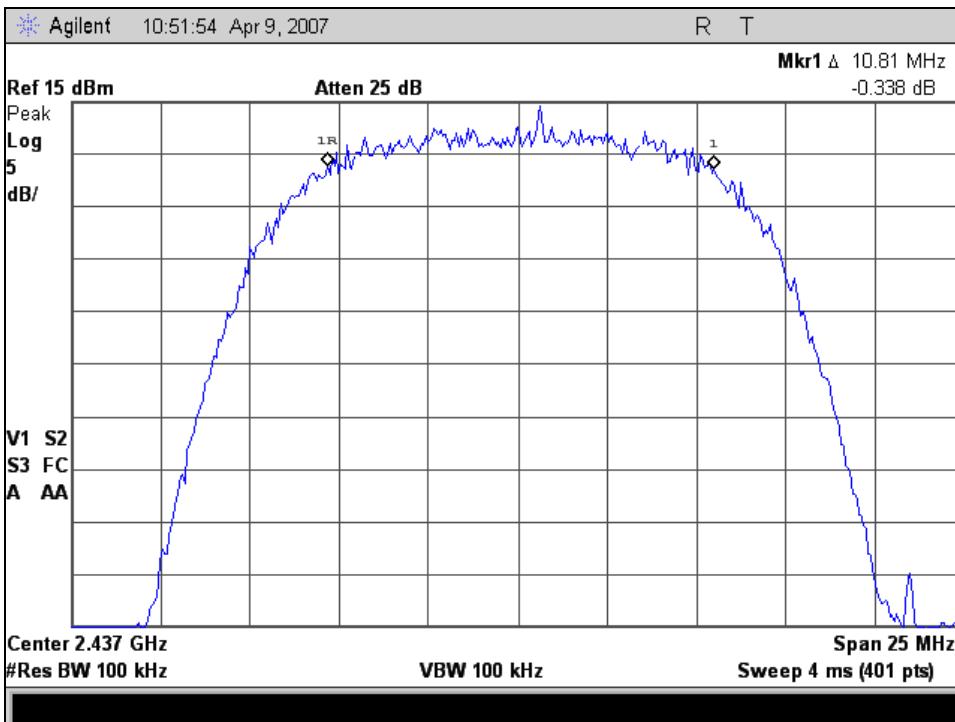



6 dB Occupied Bandwidth, 802.11b, Channel 6



Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

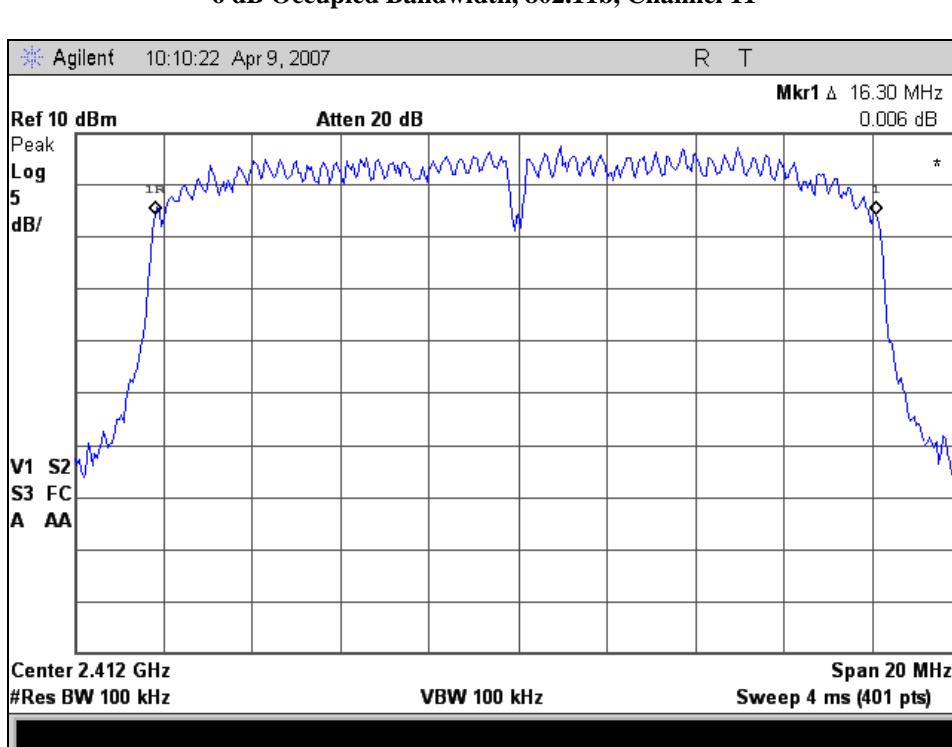
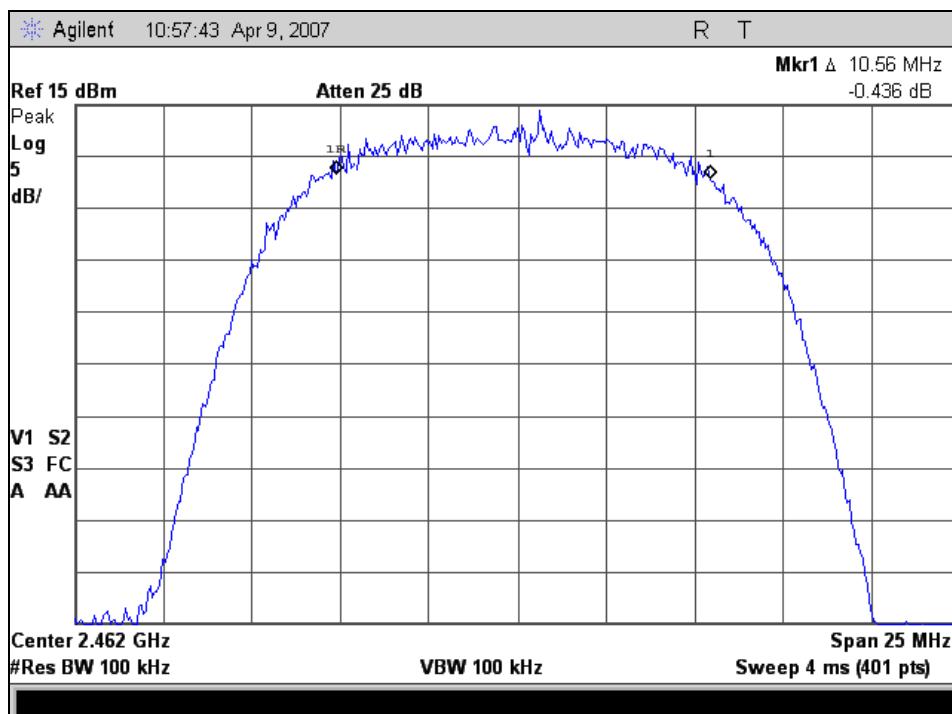




Motorola, Inc


MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

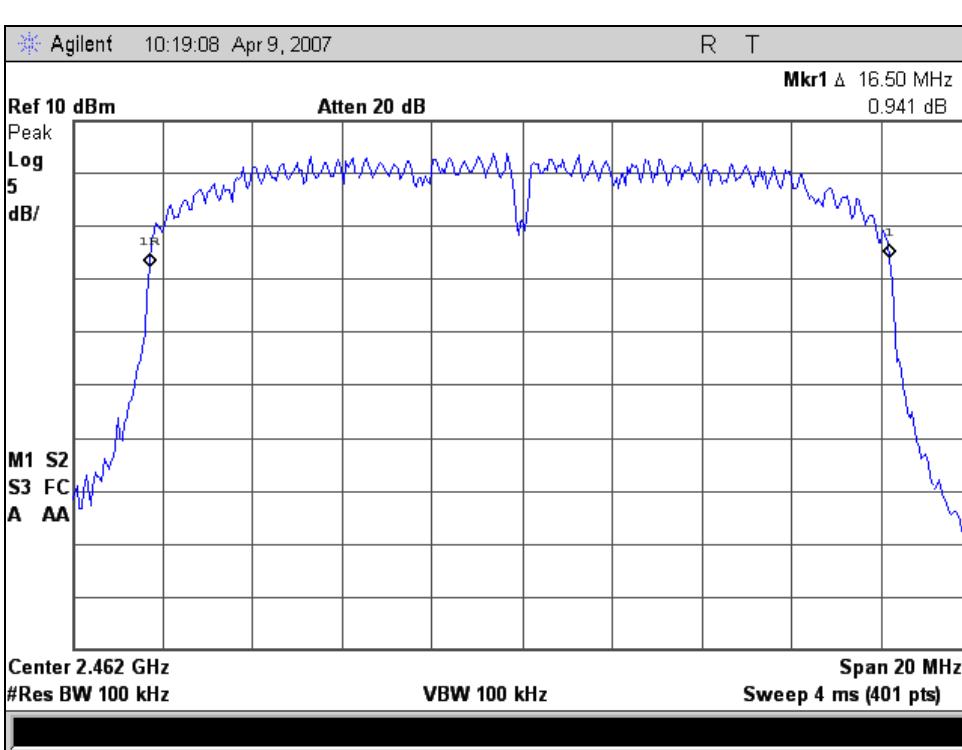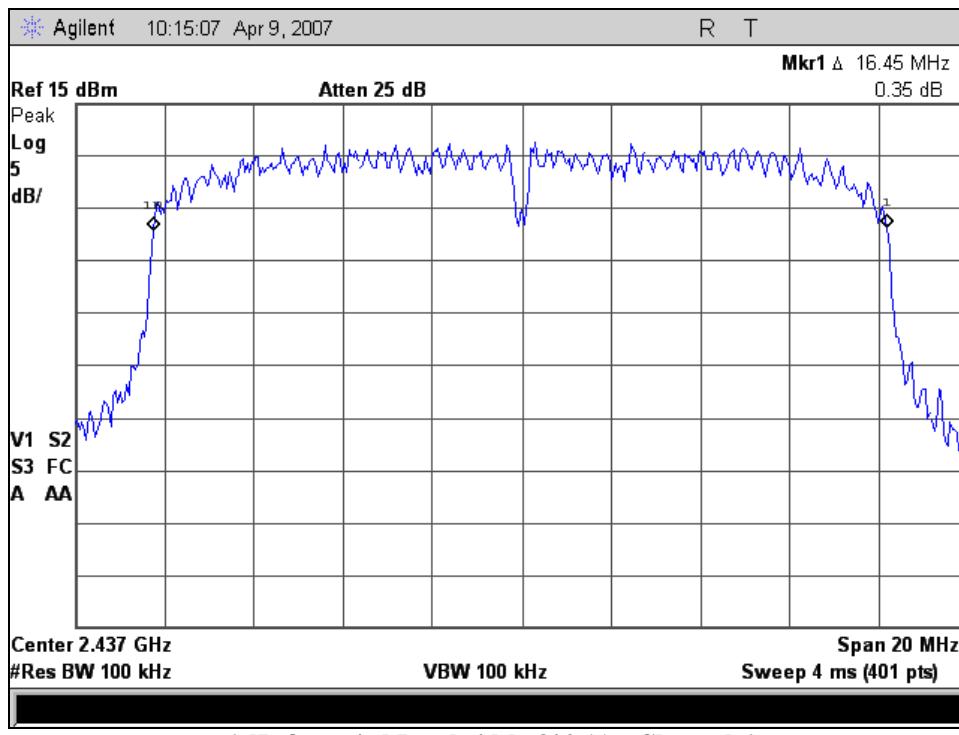

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a) 6 dB Bandwidth

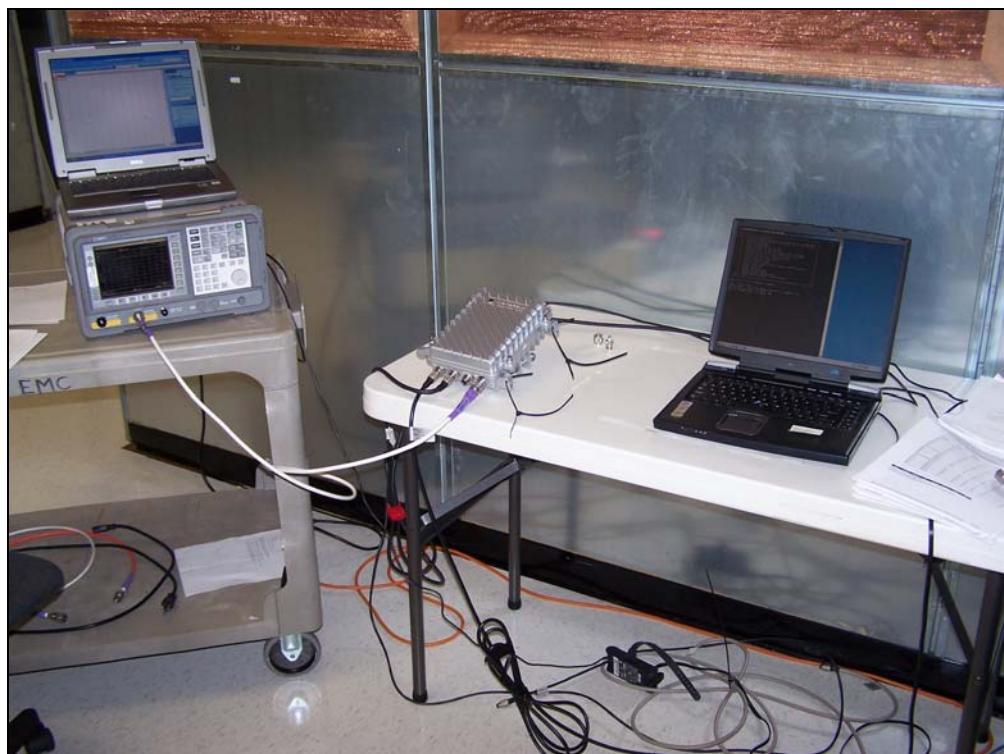

Photograph 4. 6 dB Bandwidth Test Setup



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

**Table 18. Output Power Requirements from §15.247**

**§15.247(c):** if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 18, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Procedure:** The transmitter was connected to a calibrated PSA Spectrum Analyzer. The EUT was measured at each channel and corrected for cable losses.

**Test Results:** Equipment complies with the Peak Power Output limits of § 15.247(b).

Channel #	Measured Output Power (dBm)
1	26.77
6	25.66
11	25.06

Table 19. Peak Output Power for 802.11b

Channel #	Measured Output Power (dBm)
1	21.10
6	25.45
11	21.03

Table 20. Peak Output Power for 802.11g


**Test Engineer(s):** Jeffrey Hazen

**Test Date(s):** May 4, 2007



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

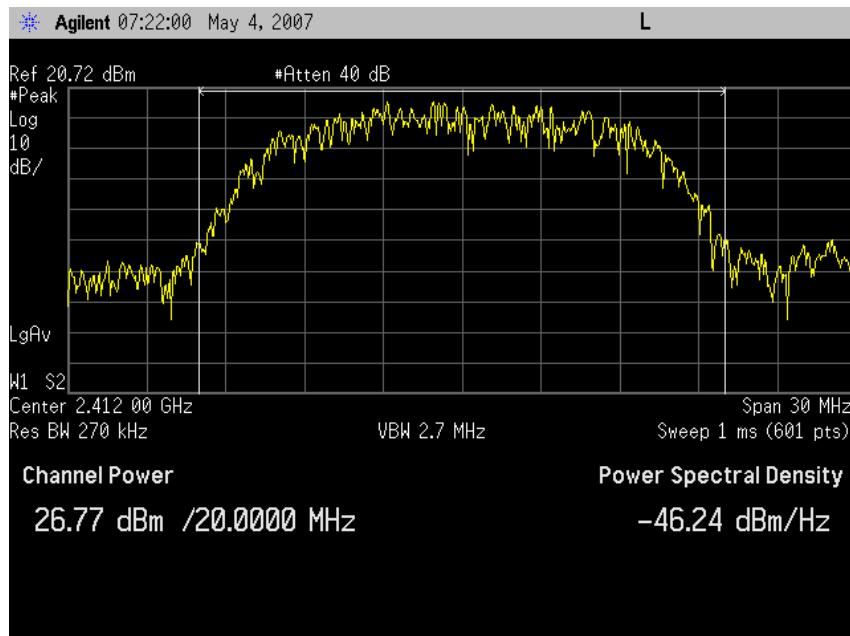

Peak Output Power, 802.11b, Channel 1




Peak Output Power,, 802.11b, Channel 6




Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

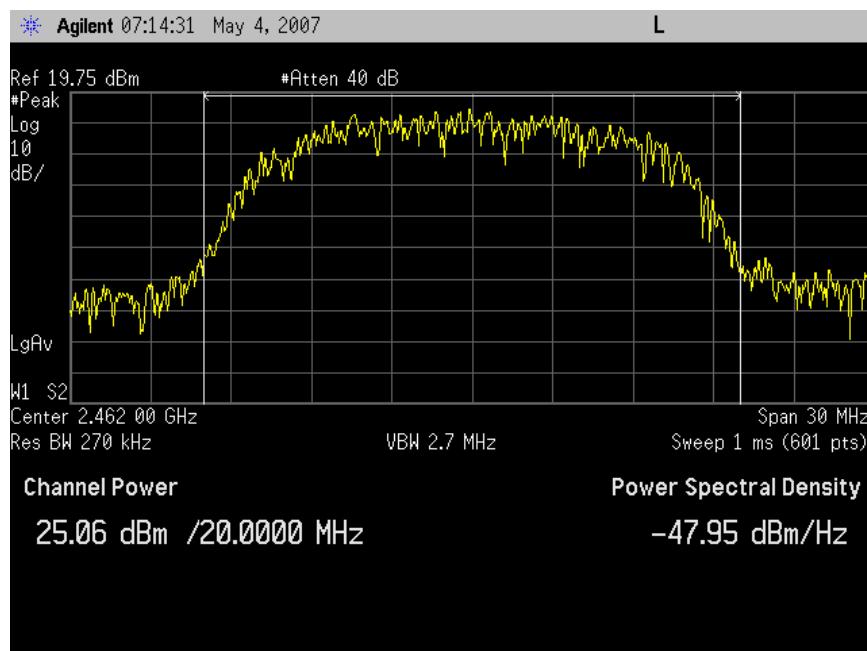

Peak Output Power, 802.11b, Channel 11

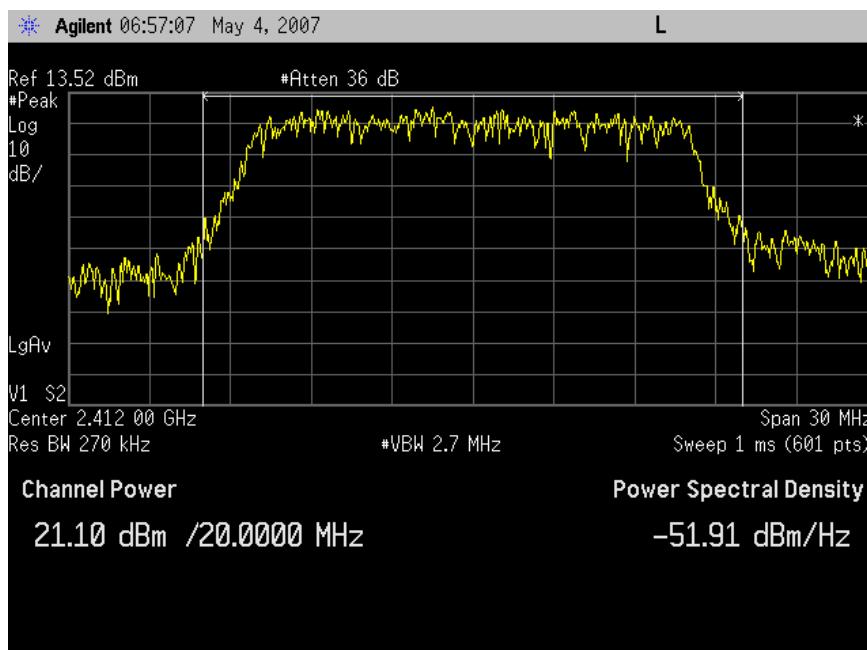


Peak Output Power, 802.11g, Channel 1



Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

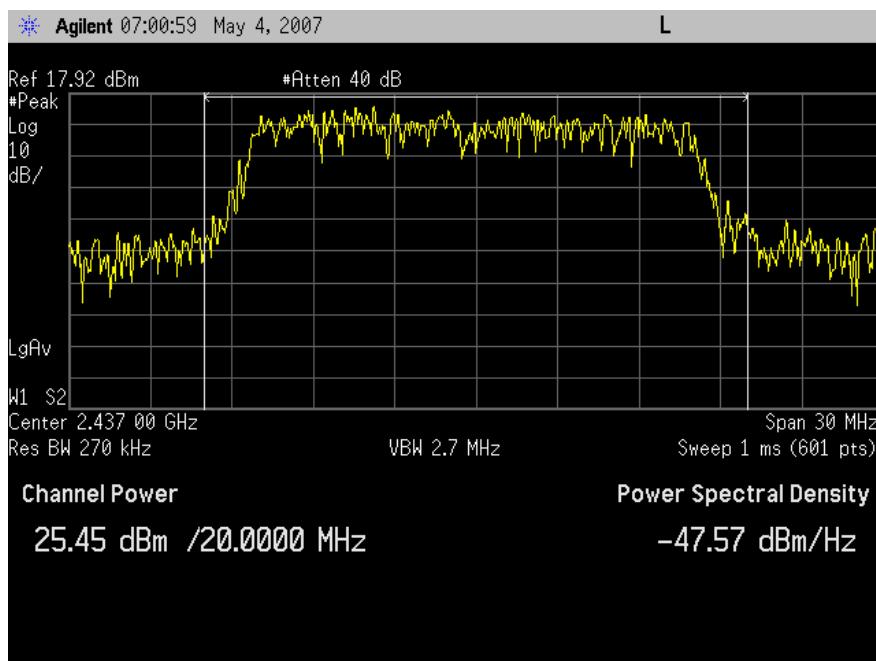

Peak Output Power, 802.11g, Channel 6



Peak Output Power, 802.11g, Channel 11



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output



Photograph 5. Peak Power Output, Test Setup



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) RF Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
<b>(A) Limits for Occupational/Control Exposures</b>				
30-300	61.4	0.163	1.0	6
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
30-300	27.5	0.073	0.2	30
300-1,500	--	--	F/1,500	30
1,500-100,000	--	--	1.0	30

**Table 21. Limits for Maximum Permissible Exposure**

Note: F=Frequency in MHz

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where,

S = Power Density mW/m<sup>2</sup>

P = Power Input to antenna mili Watts

G = Numeric Antenna Gain

R = Distance to the center of radiation of the antenna (20 cm for Mobile minimum distance)



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) RF Exposure

**Test Procedures:** Antenna substitution was used, in order to find the maximum EIRP. The methods of TIA/EIA 603 were used. From the EIRP, the power density was calculated.

**Test Results:** The EUT was found compliant with the requirements of this section.

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 26.77dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup>**.

EUT maximum antenna gain = 8 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where,

S = Power Density mW/m<sup>2</sup>

P = Power Input to antenna mili Watts

G = Numeric Antenna Gain

R = Distance to the center of radiation of the antenna (20 cm for Mobile minimum distance)

$$\text{Antenna Numeric Gain} = 10^{\text{dBi}/10}$$

$$\text{Power at antenna port} = 476.5 \text{ mW}$$

$$\text{Antenna Gain} = 8 \text{ dBi}$$

$$\text{Numeric antenna gain} = 10^{8/10} = 6.31$$

$$S = (476.5)(6.31) / 4(3.1416)(20)^2$$

$$S = 0.598 \text{ mW/cm}^2$$

Therefore, the EUT meets the Uncontrolled Exposure limit.

**Test Engineer(s):** Jeffrey Hazen

**Test Date(s):** 6/4/2007



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Spurious Emissions – RF Conducted

**Test Requirements:**

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**Test Procedure:**

The EUT was configured with the control software to transmit at maximum power. The transmit output was connected to the analyzer through an attenuator. RBW = 100 kHz, VBW  $\geq$  RBW. Testing was performed for channels 0, 6, and 11.

**Test Results:**

The EUT was found compliant with the requirements of this section.

**Test Engineer(s):**

Jeffrey Hazen


**Test Date(s):**

4/9/2007




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

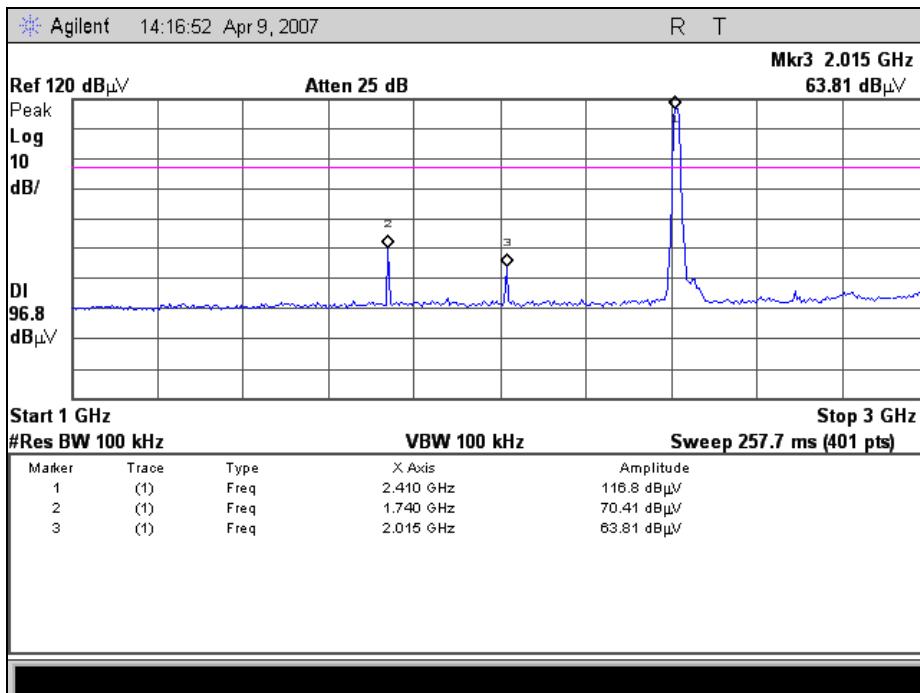

RF Conducted Spurious Emissions, 802.11b, Channel 1, 1-3 GHz

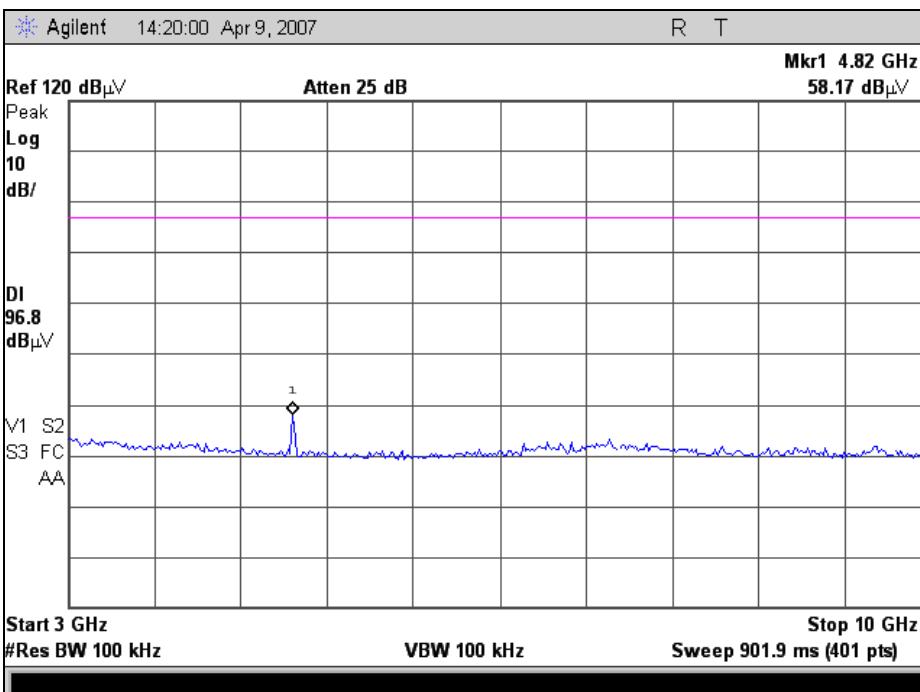


RF Conducted Spurious Emissions, 802.11b, Channel 1, 3-10 GHz




Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

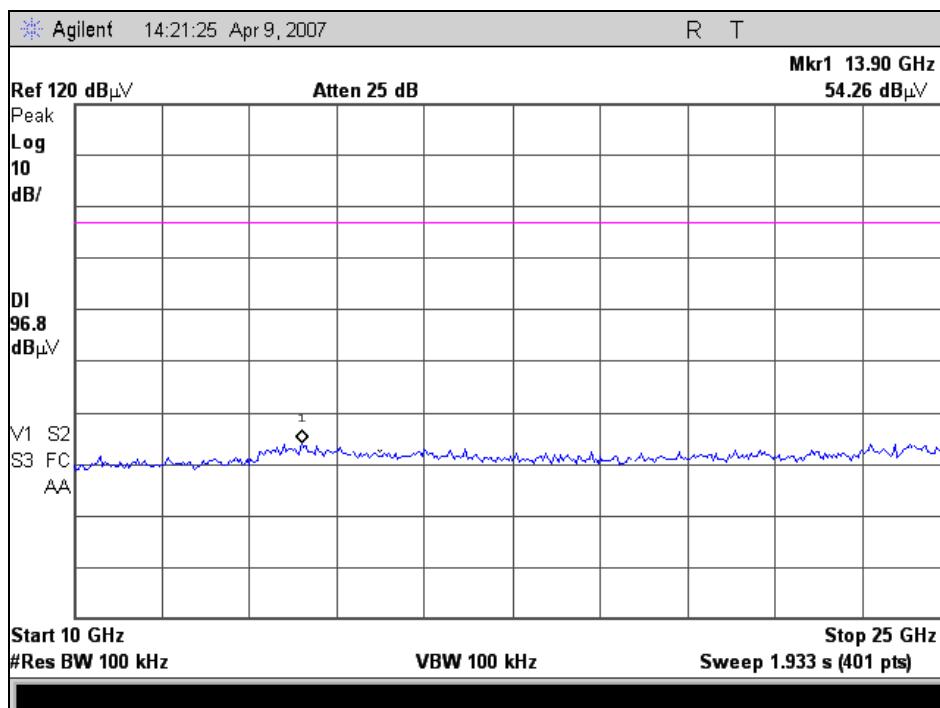

RF Conducted Spurious Emissions, 802.11b, Channel 1, 10-25 GHz

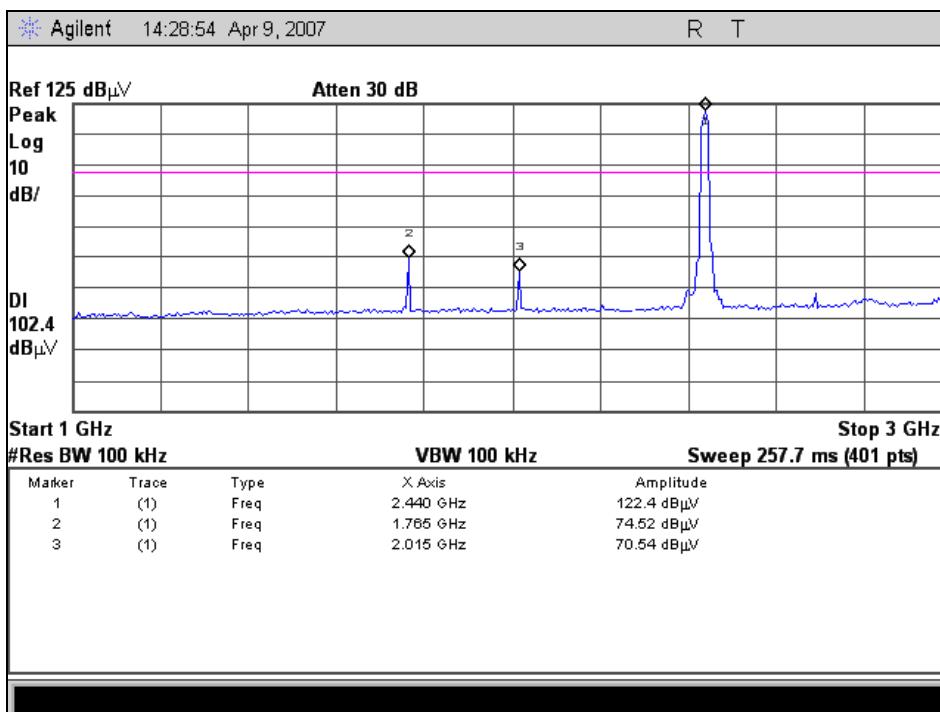


RF Conducted Spurious Emissions, 802.11b, Channel 6, 1-3 GHz




Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

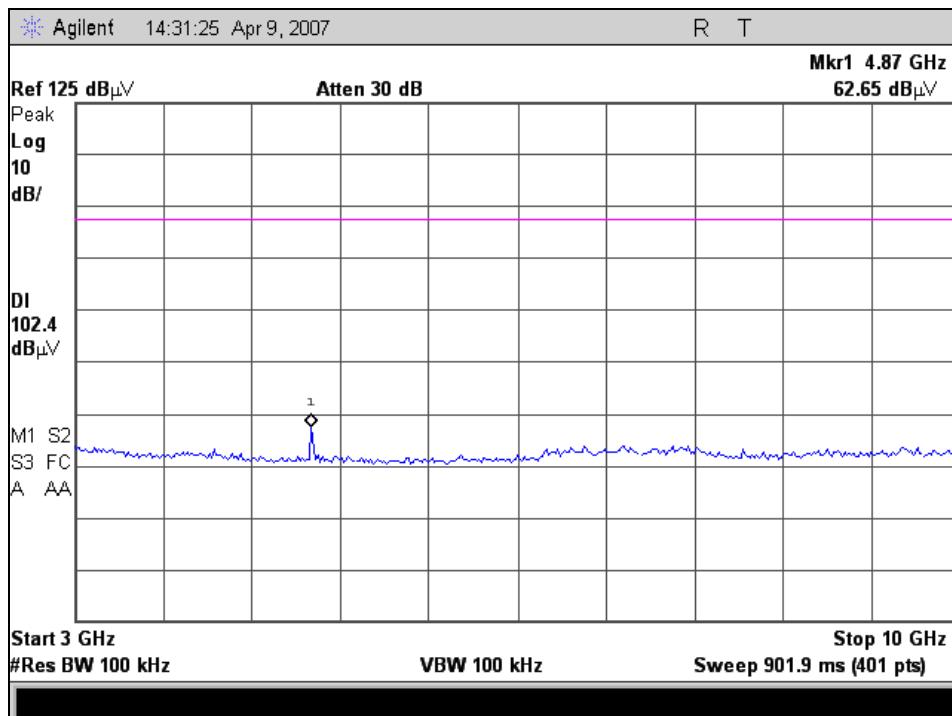

RF Conducted Spurious Emissions, 802.11b, Channel 6, 3-10 GHz


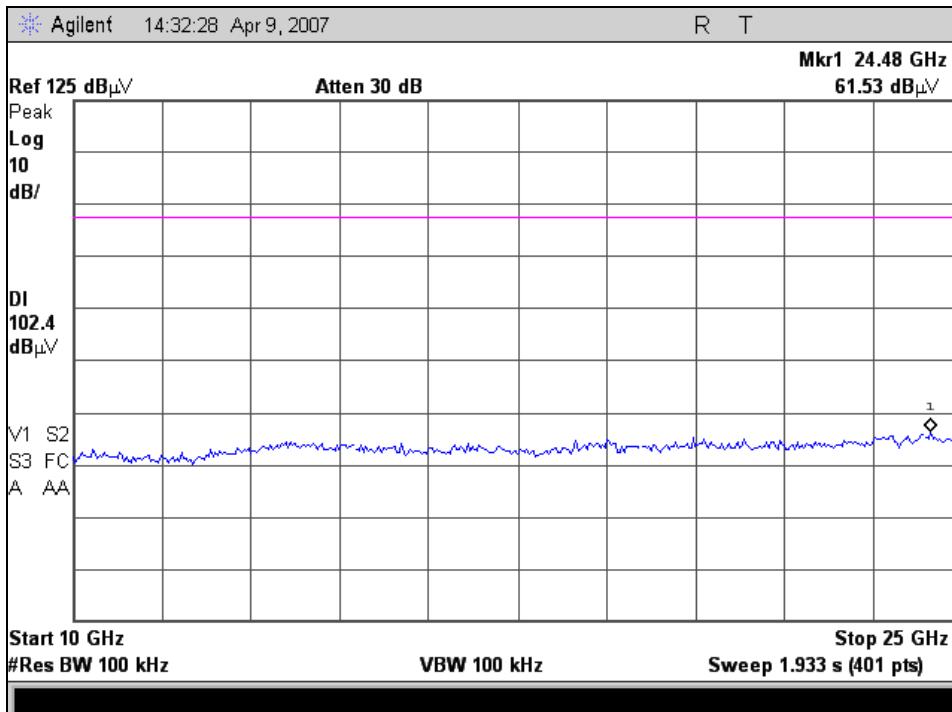


RF Conducted Spurious Emissions, 802.11b, Channel 6, 10-25 GHz



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)


Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

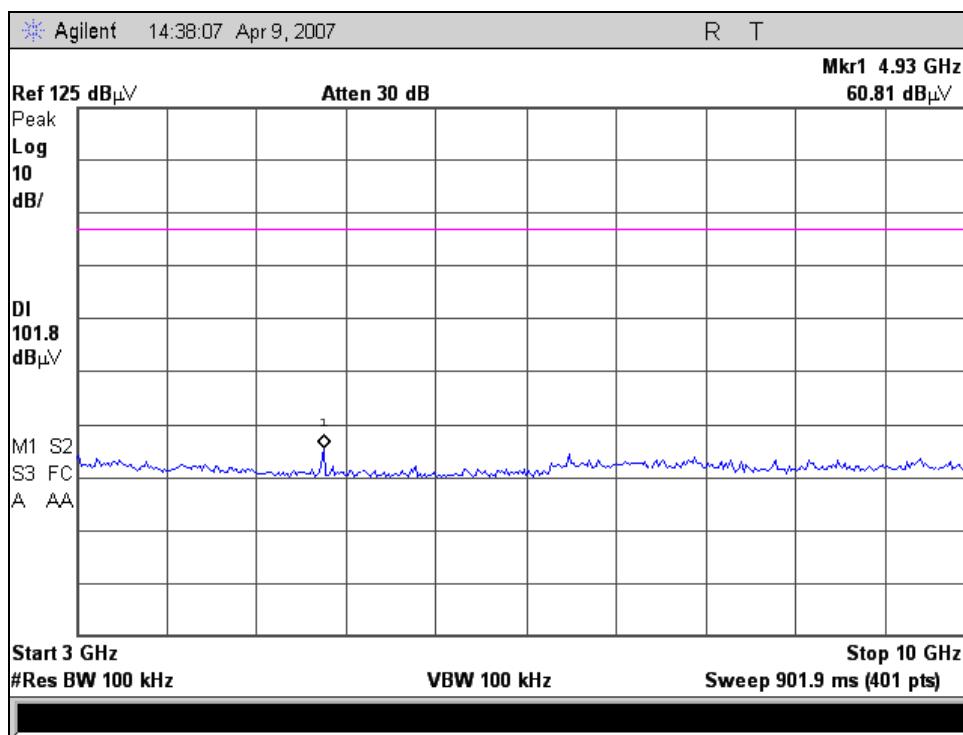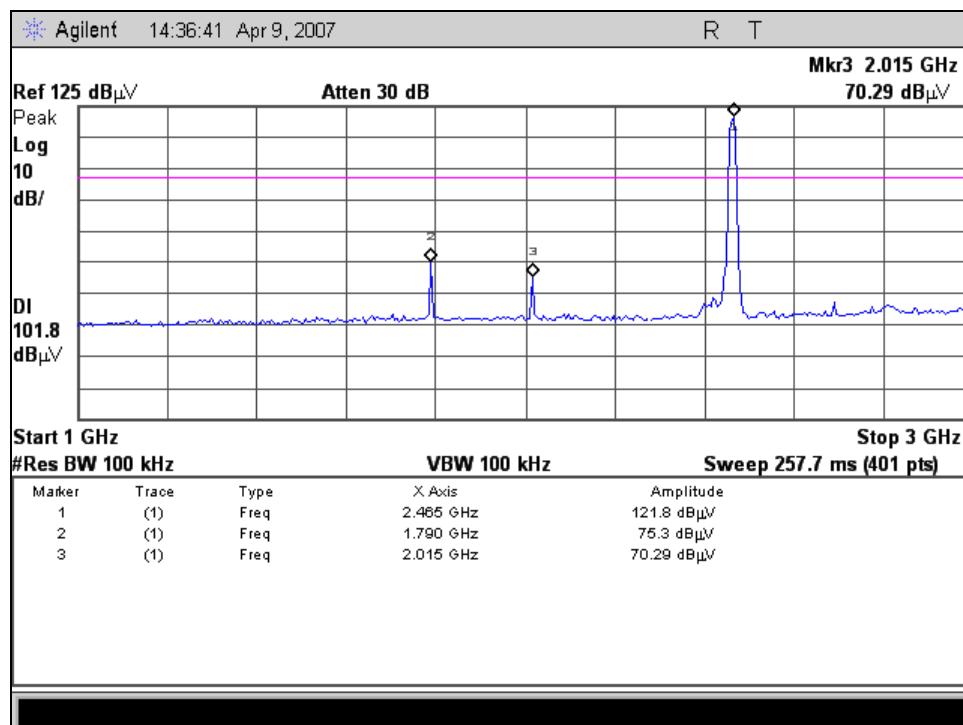



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

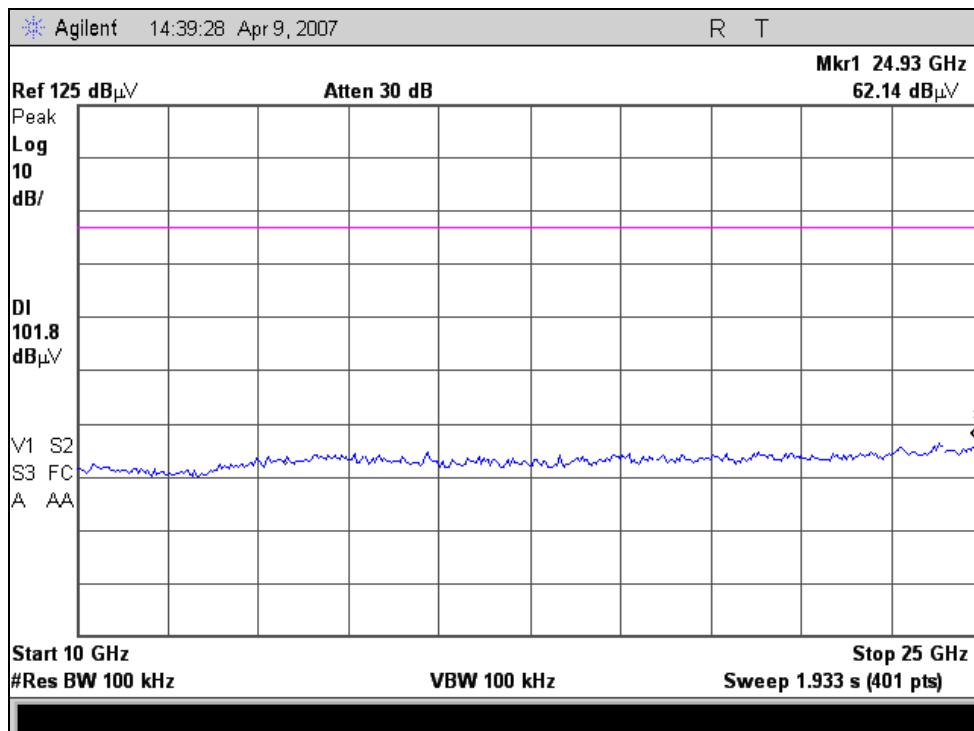


RF Conducted Spurious Emissions, 802.11b, Channel 11, 10-25 GHz




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

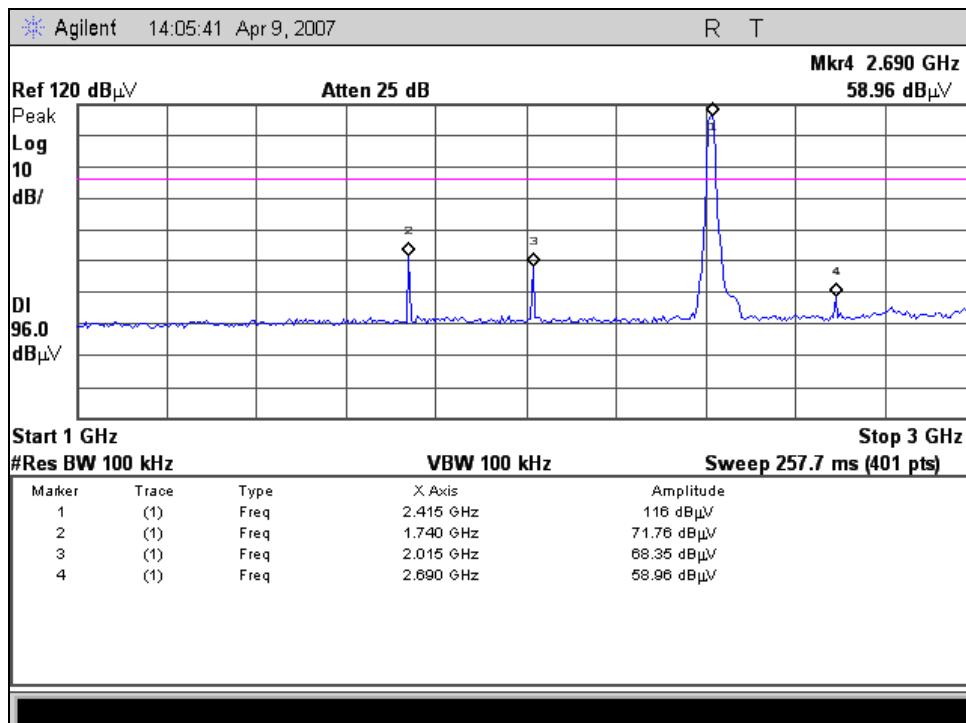

RF Conducted Spurious Emissions, 802.11g, Channel 1, 1-3 GHz

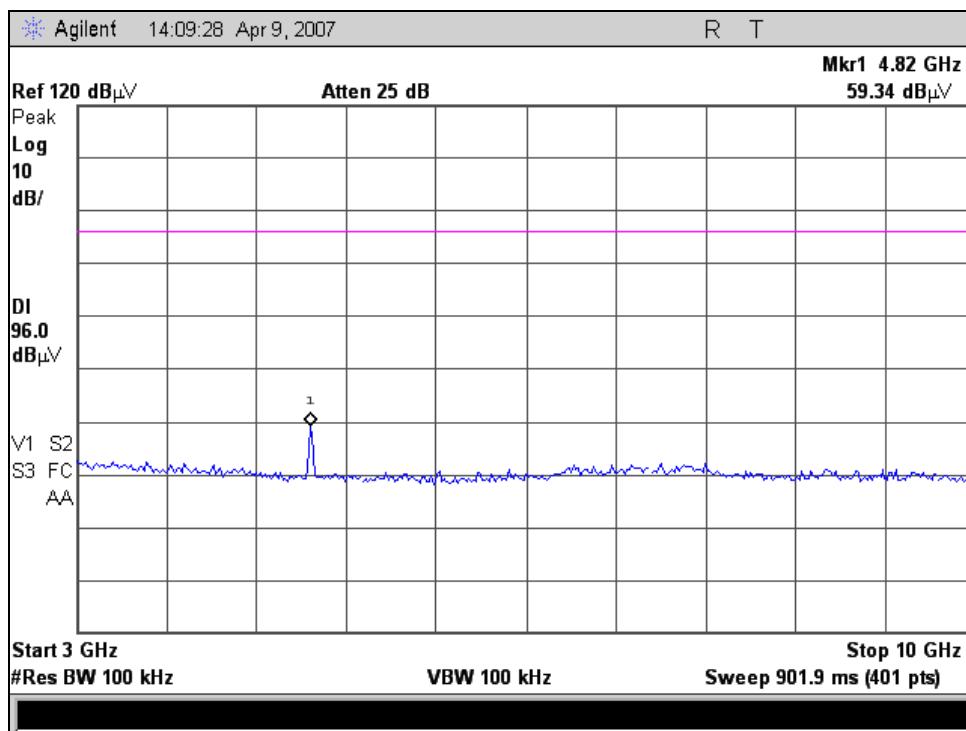


RF Conducted Spurious Emissions, 802.11g, Channel 1, 3-10 GHz




Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

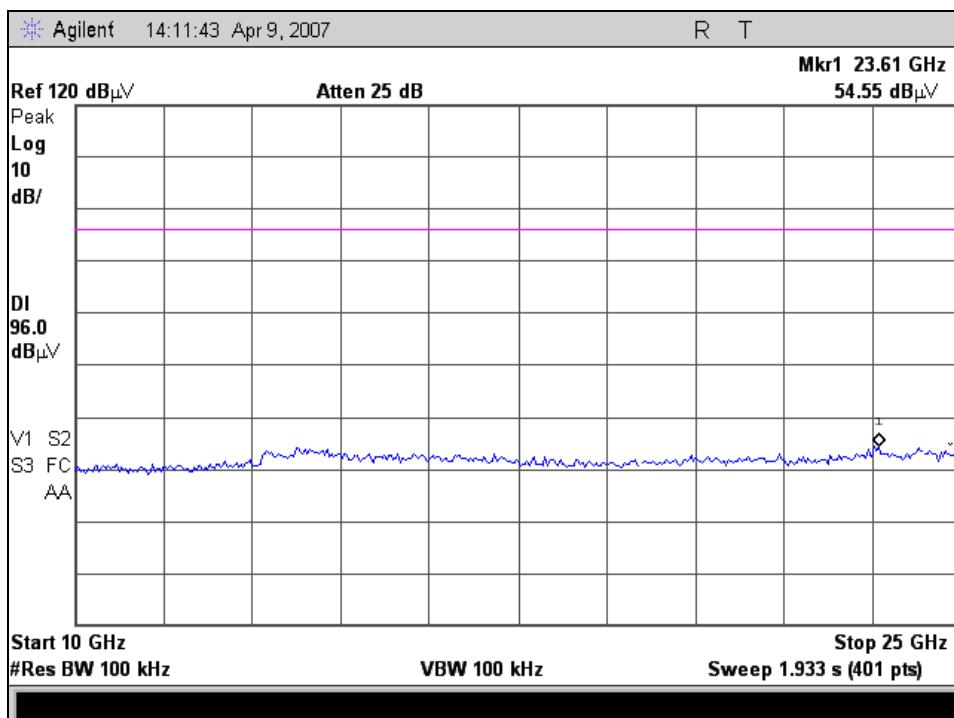

RF Conducted Spurious Emissions, 802.11g, Channel 1, 10-25 GHz

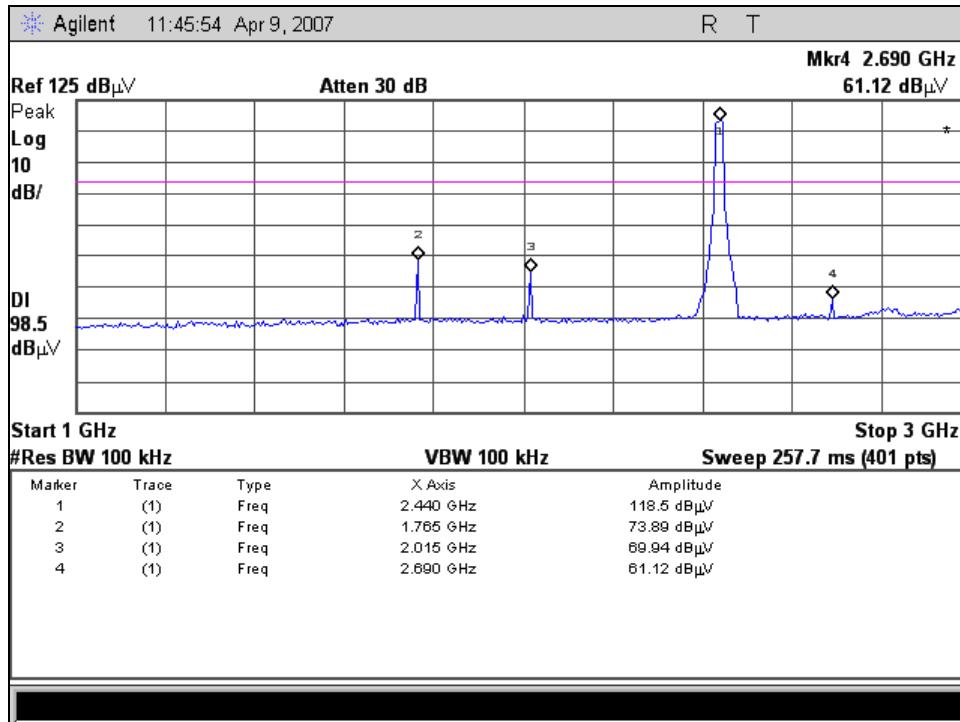


RF Conducted Spurious Emissions, 802.11g, Channel 6, 1-3 GHz




Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

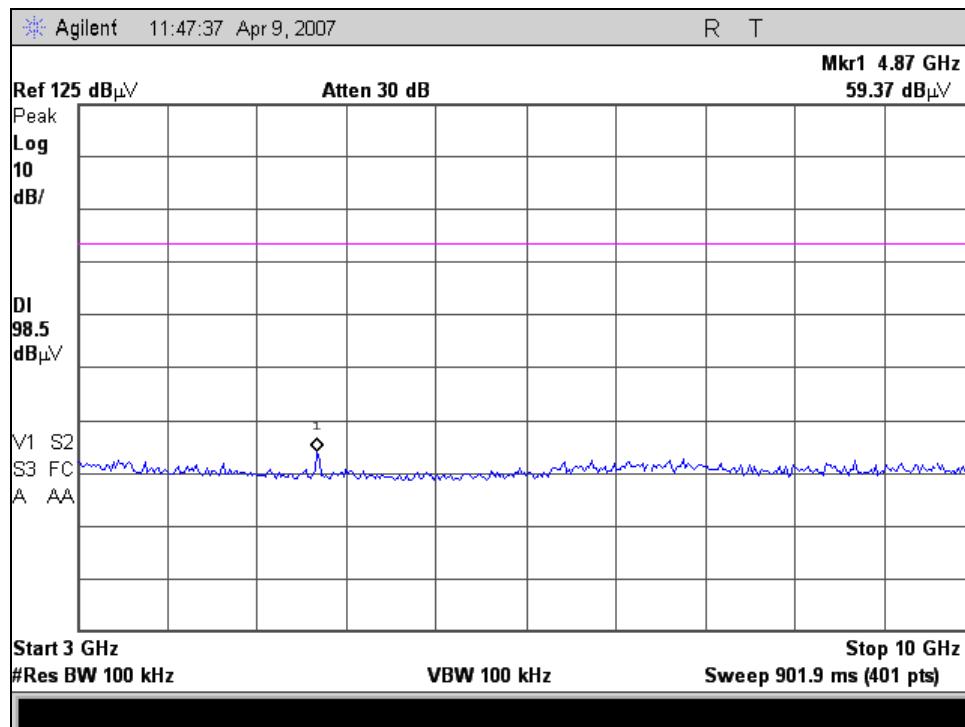

RF Conducted Spurious Emissions, 802.11g, Channel 6, 3-10 GHz

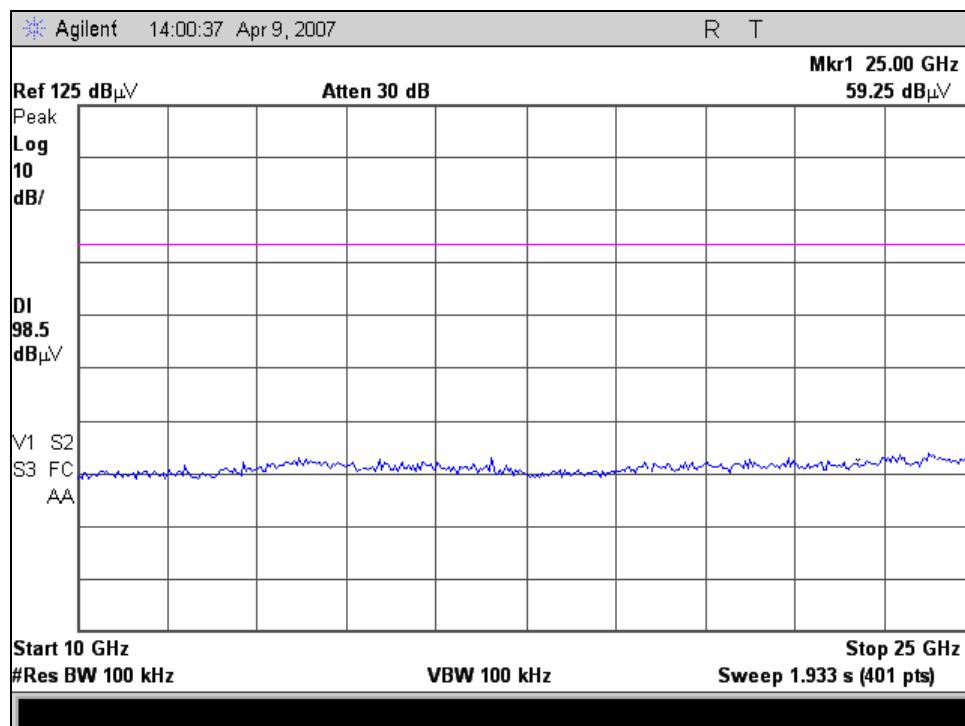



RF Conducted Spurious Emissions, 802.11g, Channel 6, 10-25 GHz



Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

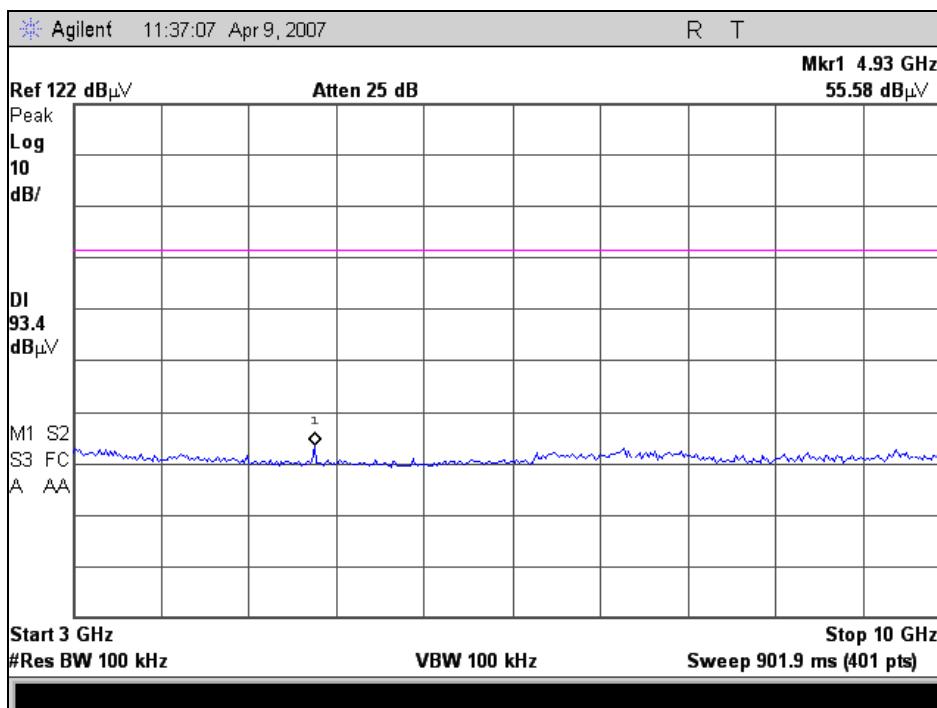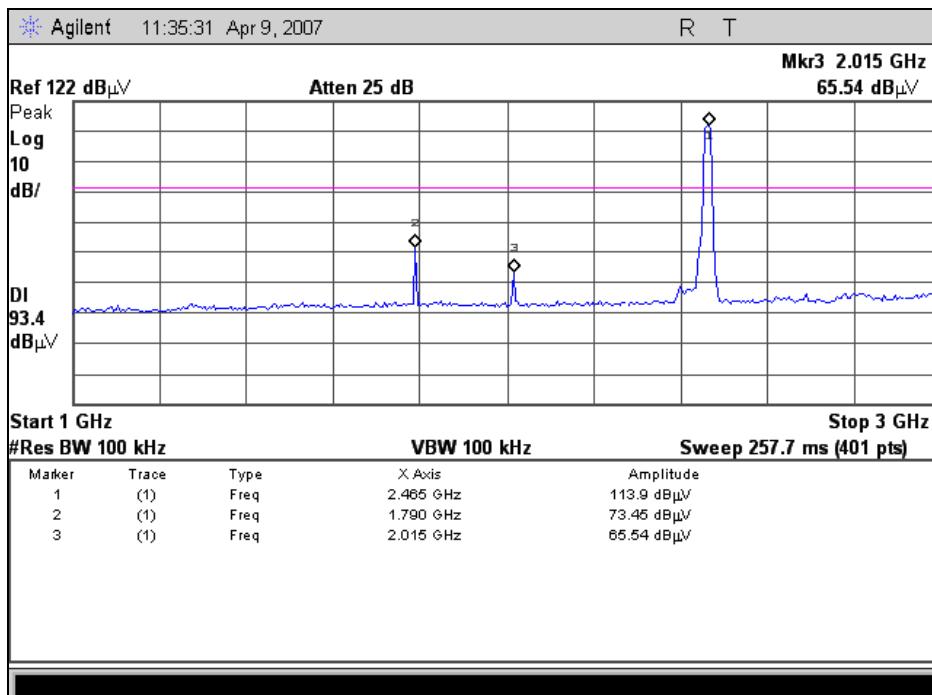





Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

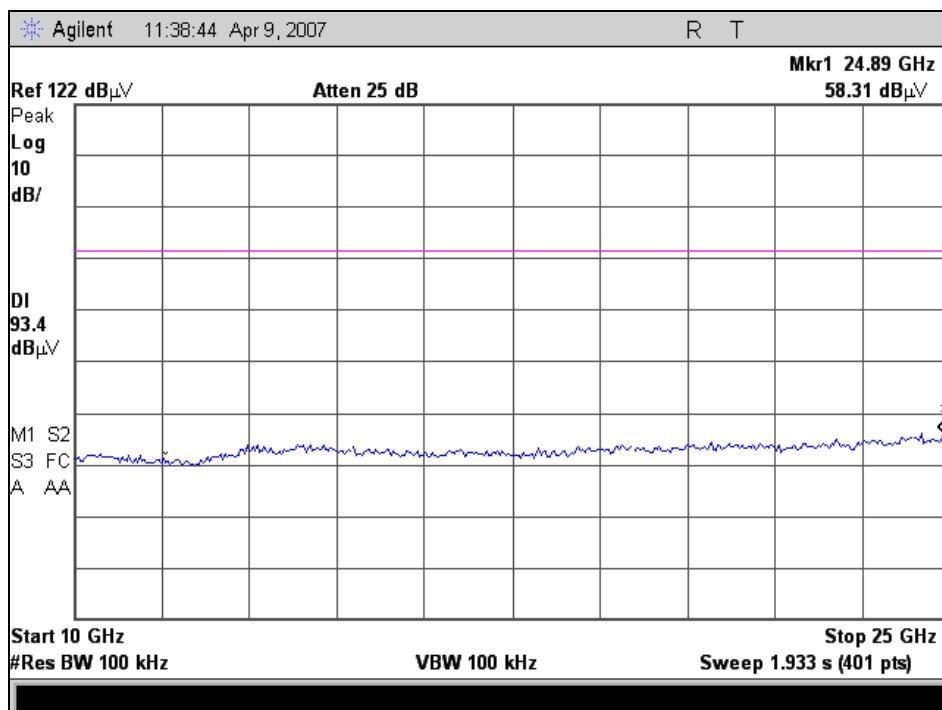

## Electromagnetic Compatibility Criteria for Intentional Radiators

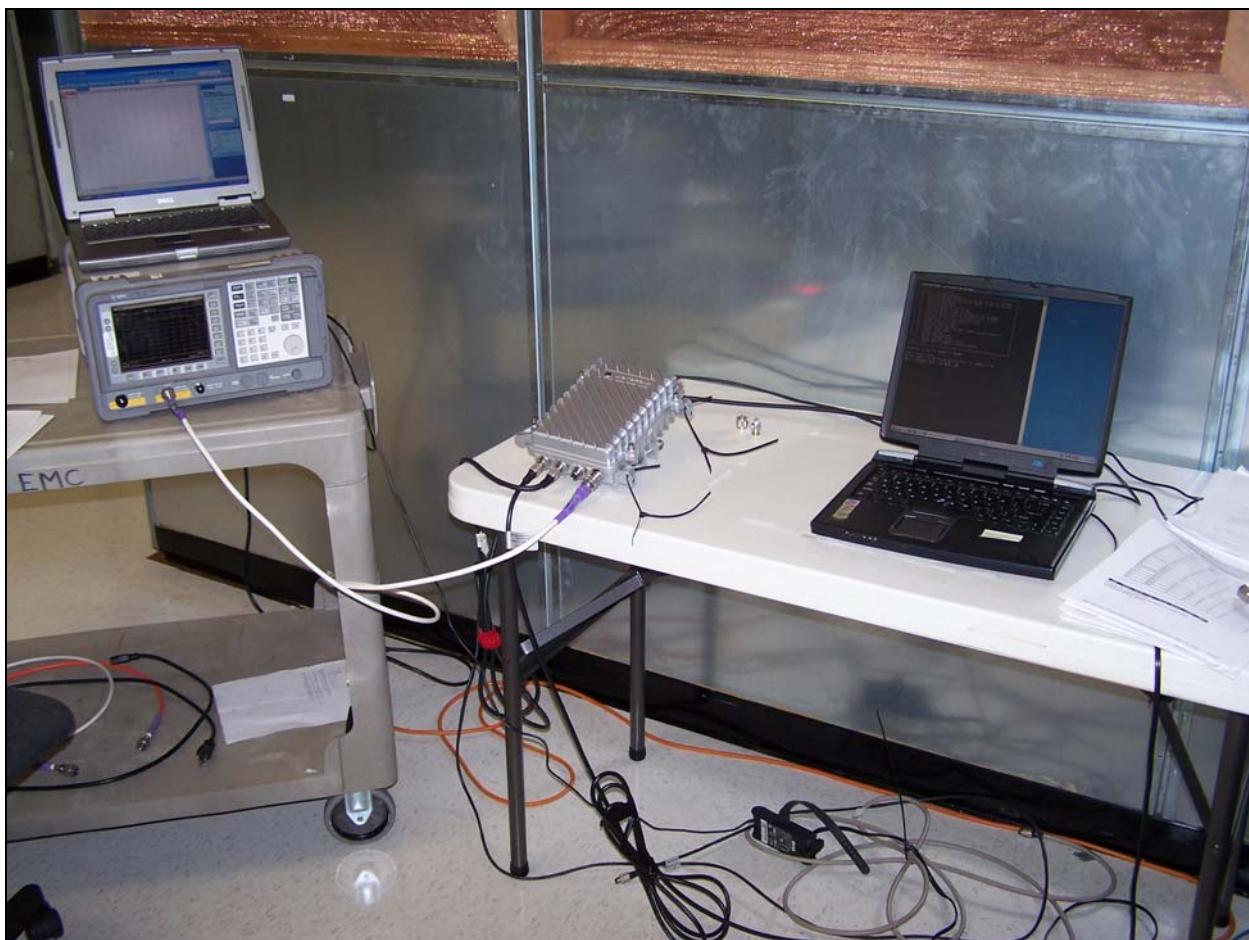

Photograph 6. Spurious Conducted Emissions, Test Setup



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density

**Test Requirements:**

**§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Procedure:**

The transmitter was connected directly to a Spectrum Analyzer. The power level was set to the maximum level.

RBW = 3 kHz, VBW>RBW

Sweep = Span/ 3 kHz

**Test Results:**

Equipment complies with the peak power spectral density limits of **§ 15.247 (e)**. The peak power spectral density was determined from plots on the following page(s).

**Test Engineer(s):**

Jeffrey Hazen

**Test Date(s):**

5/4/2007

Channel	Measured PPSD (dBm)	Test Limit (dBm)
1	2.87	8
6	0.82	8
11	4.08	8

Table 22. Peak Power Spectral Density Test Results for 802.11b Mode

Channel	Measured PPSD (dBm)	Test Limit (dBm)
1	-5.4	8
6	0.69	8
11	-4.05	8



Table 23. Peak Power Spectral Density Test Results for 802.11g Mode



Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

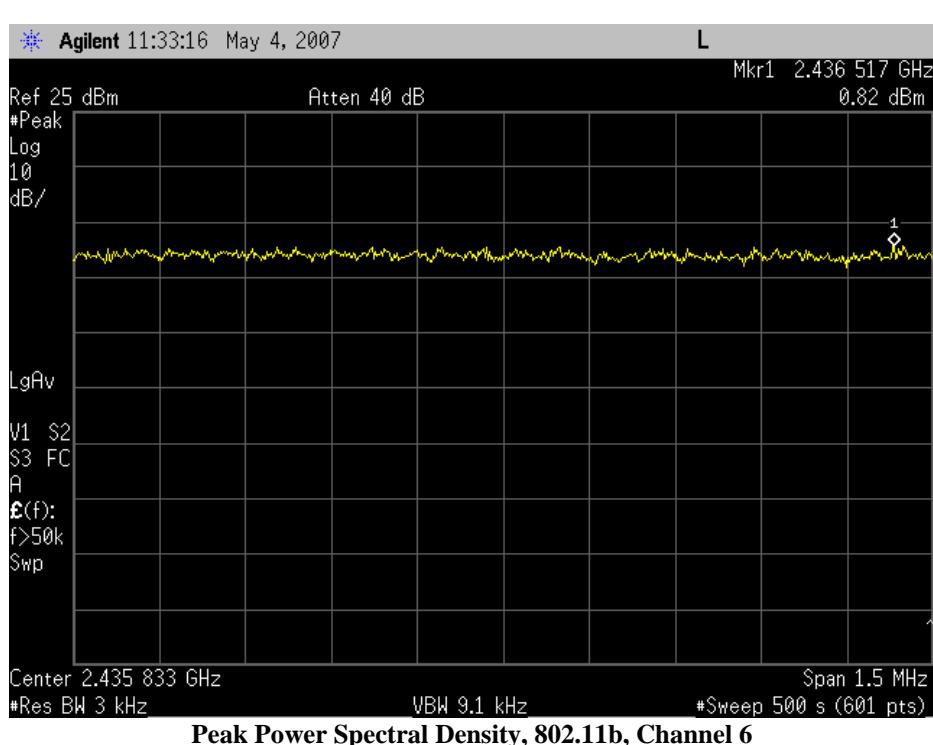
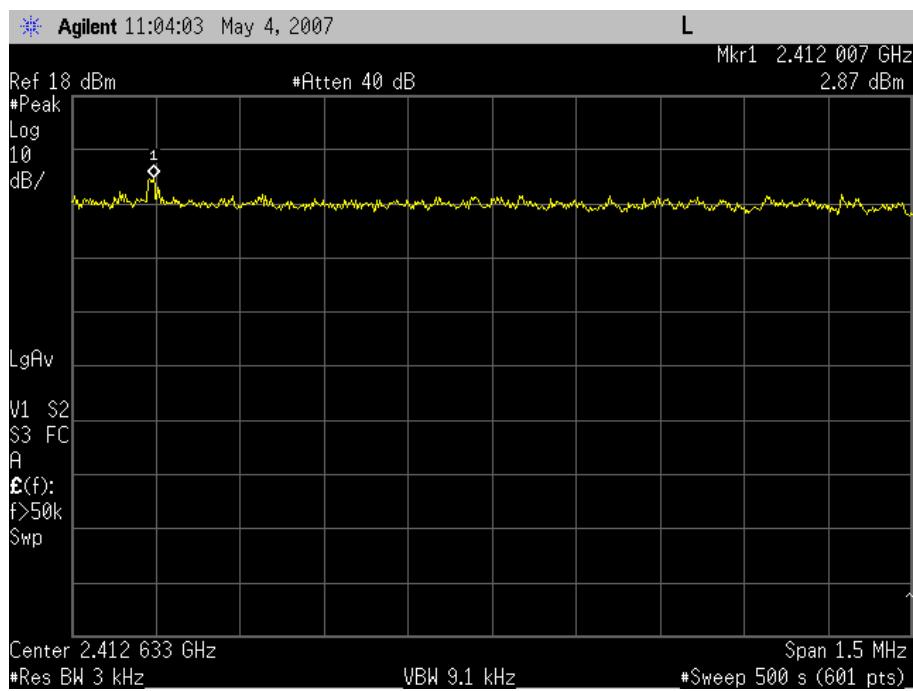




Motorola, Inc

MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)


Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

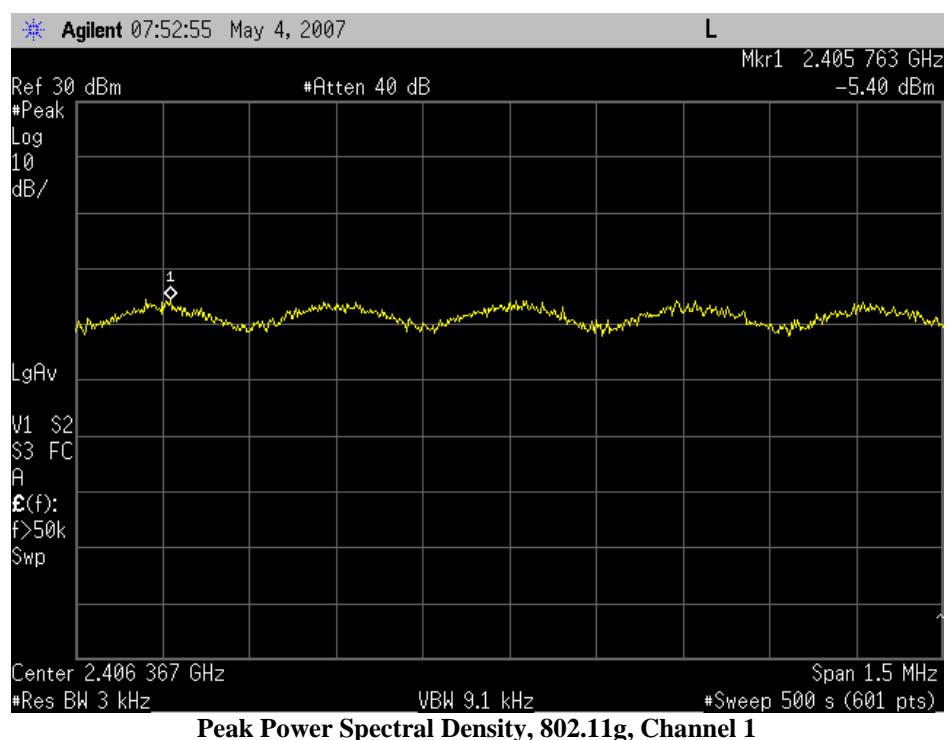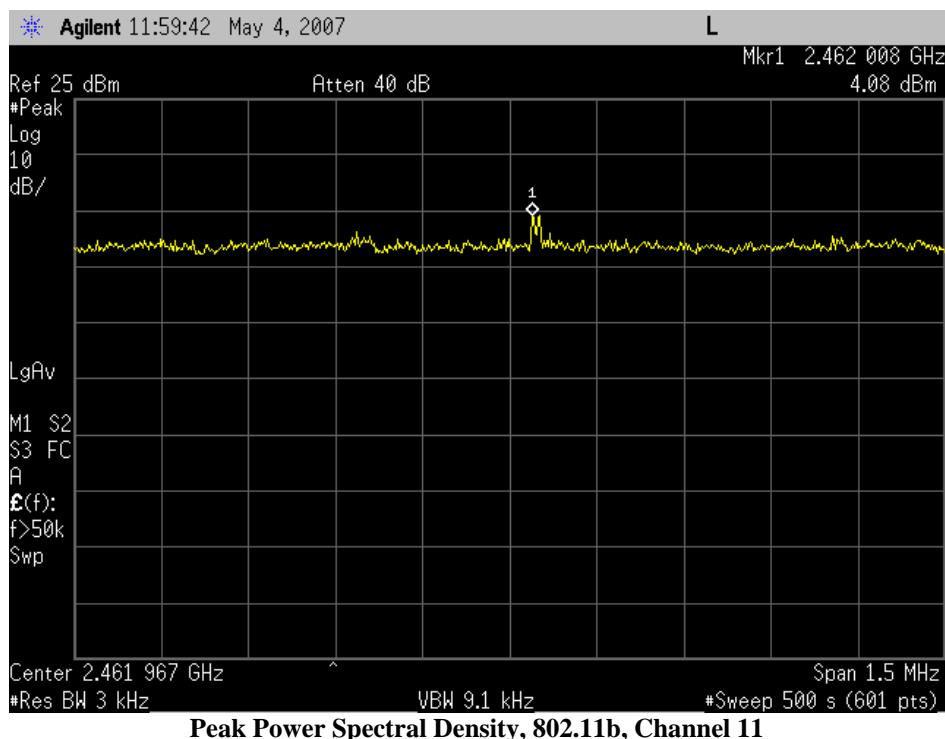



**Motorola, Inc**  
**MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)**

## Electromagnetic Compatibility Criteria for Intentional Radiators CFR Title 47, Part 15, Subpart C

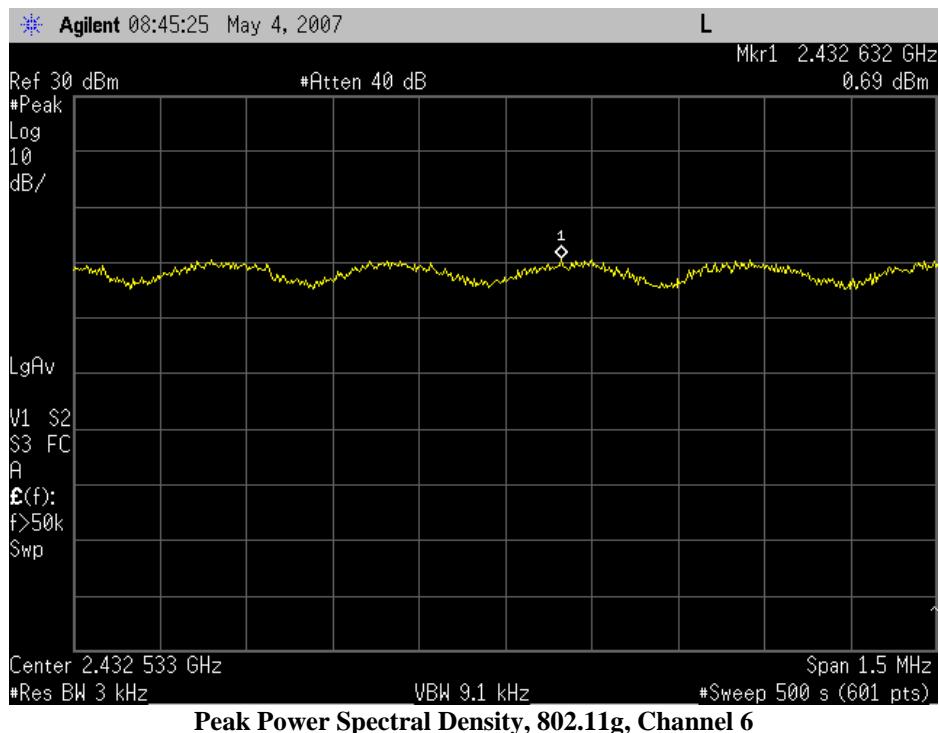



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Criteria for Intentional Radiators  
CFR Title 47, Part 15, Subpart C

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density



Photograph 7. Peak Power Spectral Density Test Setup



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47, Part 15, Subpart C

## IV. Test Equipment



## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Test Name: Conducted Emissions					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4405	EMC TEST ROOM 2	MET	N/A	CAL NOT REQUIRED	
1T4156	SPECTRUM ANALYZER; EMC	HEWLETT PACKARD	8594EM	10/06/2006	10/06/2007
1T4564	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	09/01/2006	09/01/2007
1T4212	LISN; SWITCH	SOLAR ELECTRONICS CO	9252-R-24-BNC	12/18/2006	12/18/2007
1T4554	THERMO-HYGROMETER	CONTROL COMPANY	56-627-9	04/11/2006	04/11/2008
Test Name: Radiated Emissions					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	02/17/2006	01/17/2009
1T2665	ANTENNA; HORN	EMCO	3115	04/17/2007	04/17/2008
1T4414	MICROWAVE PRE-AMPLIFIER	AH SYSTEMS	PAM-0118	SEE NOTE	
US42070103	PSA	AGILENT	E4448A	02/20/2007	02/20/2008
1T4592	RF FILTER KIT	VARIOUS	N/A	SEE NOTE	
Test Name: 6 dB Bandwidth					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4553	THERMO-HYGROMETER	CONTROL COMPANY	56-627-9	03/03/2006	03/03/2008
1T4351	SPECTRUM ANALYZER	AGILENT	E7405A	10/13/2006	10/13/2007
Test Name: Peak Power Output					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
US42070103	PSA	AGILENT	E4448A	02/20/2007	02/20/2008
1T4554	THERMO-HYGROMETER	CONTROL COMPANY	56-627-9	04/11/2006	04/11/2008
Test Name: Spurious Emissions					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4553	THERMO-HYGROMETER	CONTROL COMPANY	56-627-9	03/03/2006	03/03/2008
1T4351	SPECTRUM ANALYZER	AGILENT	E7405A	10/13/2006	10/13/2007
Test Name: Peak Power Spectral Density					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
US42070103	PSA	AGILENT	E4448A	02/20/2007	02/20/2008
1T4554	THERMO-HYGROMETER	CONTROL COMPANY	56-627-9	04/11/2006	04/11/2008

**Note:** Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Motorola, Inc  
MOTOMESH Duo 4300-58 (2.4/5.8 GHz 802.11b/g)

Electromagnetic Compatibility  
Certification & User's Manual Information  
CFR Title 47, Part 15, Subpart C

## V. Certification & User's Manual Information



## Certification & User's Manual Information

### 5.1 Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing*;
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



## Certification & User's Manual Information

### 5.2 Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.