


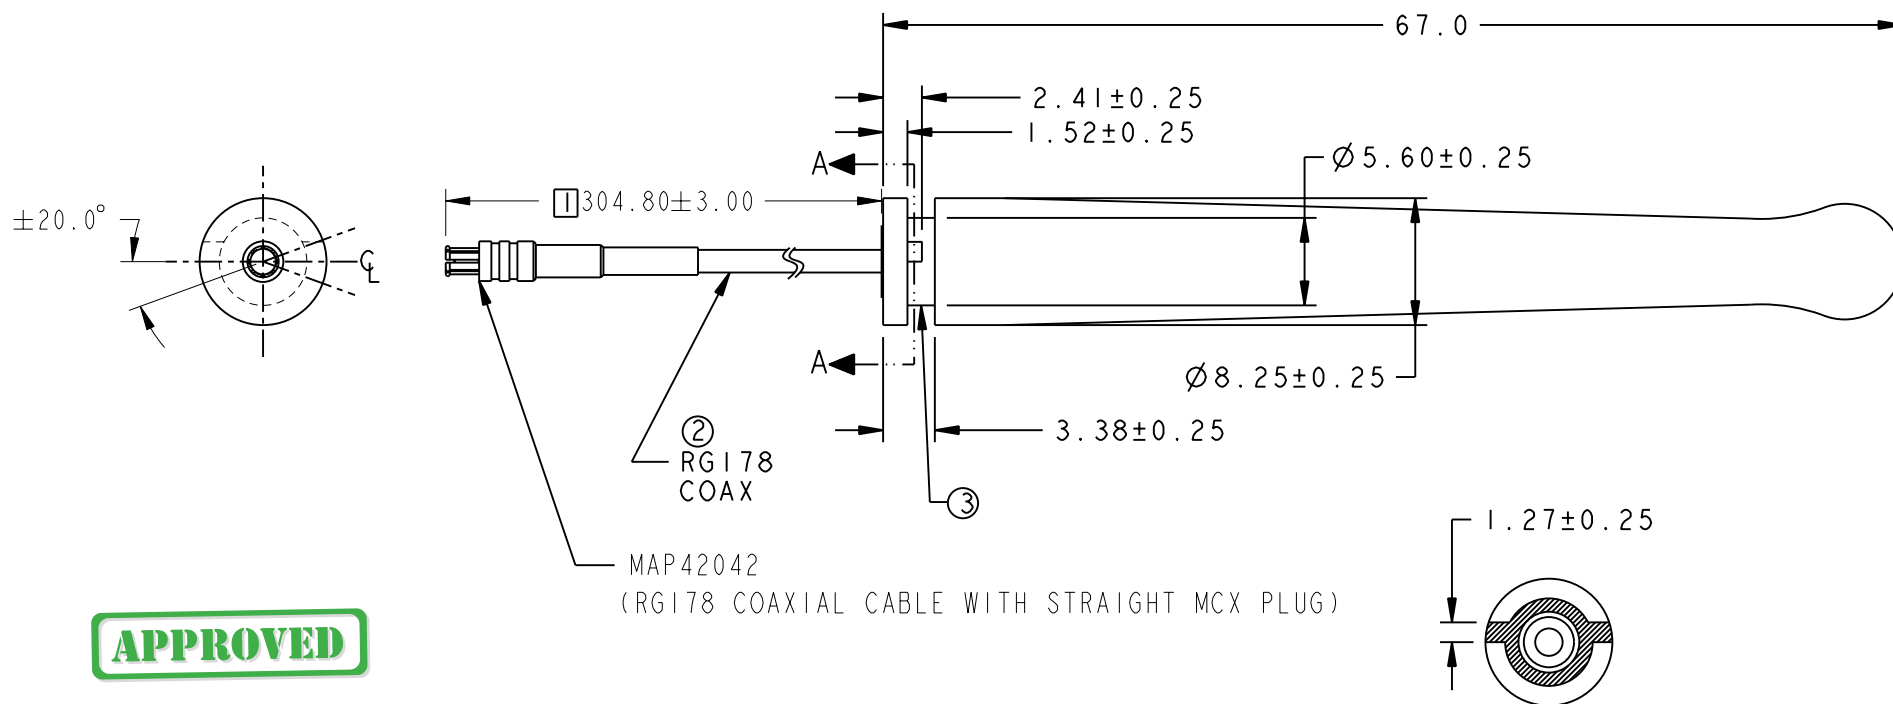

APPROVED

SECTION A-A

NOTES:

1 SPECIFICATIONS:

FREQUENCY RANGE: 2.4-2.5 GHz

POWER RATING: 10 WATTS

IMPEDANCE: 50 OHMS NOMINAL

OPERATING TEMPERATURE: -40°C - +80°C

② CABLE PULL IN-LINE - 40N MIN

③ STRENGTH OF INTERLOCK FEATURE: 100 N TYP
WITH I.D. OF HOUSING AT Ø5.60

④ FINAL ADJUSTMENT OF CONNECTOR IS
PERMISSIBLE BY ADJUSTING CABLE ORIENTATION

ISS	REVISIONS	DATE	CK	APP	SCALE: NTS	TOL. (UNLESS STATED)		
					DR: KUA	CK: POR	.X	= ± 0.3
							.XX	= ± 0.13
							ANGULAR	= ± 30'
								PHONE 6-04-3989298
					CENTURION			FAX 6-04-3989198
					WIRELESS COMPONENTS			NO.8.(LOT5353) LRG.JELAWAT 4 BANDAR
					WCP2400 MMCX WITH 12" RG178 COAX CABLE			SEBERANG JAYA, 13700 PERAI P. PINANG
					MATERIAL: N/A			
					DATE:	DWG. NO. :	PG.	REV
					17/5/04	MAF94058	1/3	DI

CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS OF A PROPRIETARY NATURE. IT MAY NOT BE REPRODUCED OR USED WITHOUT EXPRESS WRITTEN PERMISSION OF CENTURION WIRELESS COMPONENTS P. PINANG

DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.
THIS DRAWING WAS GENERATED VIA PRO/ENGINEER

COPYRIGHT 2004 CENTURION WIRELESS COMPONENTS P4873