

# FCC Part 15

# EMI TEST REPORT

## of

E.U.T. : Bluetooth Telephony Base  
MODEL : BT41  
FCC ID. : QLM0040405

for

APPLICANT : Antonio Precise Products Manufactory Ltd.

ADDRESS : 3/F, Photonics Centre, No. 2 Science Park East Avenue,  
Hong Kong Science Park, Shatin, Honk Kong

Test Performed by

**ELECTRONICS TESTING CENTER, TAIWAN**  
NO. 8 LANE 29, WENMIMG ROAD,  
LOSHAN TSUN, KWEISHAN HSIANG,  
TAOYUAN, TAIWAN, R.O.C.

Tel:(03)3280026#570~576  
Fax:(03)3276188

Report Number : ET93S-05-209-01

# TEST REPORT CERTIFICATION

Applicant : Antonio Precise Products Manufactory Ltd.  
3/F, Photonics Centre, No. 2 Science Park East Avenue, Hong Kong Science Park,  
Shatin, Honk Kong

Manufacturer : Antonio Precise Products Manufactory Ltd.  
3/F, Photonics Centre, No. 2 Science Park East Avenue, Hong Kong Science Park,  
Shatin, Honk Kong

Description of EUT :  
a) Type of EUT : Bluetooth Telephony Base  
b) Trade Name : Bluetooth Telephony Base  
c) Model No. : BT41  
d) Power Supply : AC Adaptor (A20635N)  
Input: 120VAC, 60Hz, 5W ; Output: 5.5VDC, 350mA

Regulation Applied : FCC Rules and Regulations Part 15 Subpart B & C (2003)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.  
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Issued Date : May 31, 2004

Test Engineer : Mark

Approve & Authorized Signer : Win-Po Tsai  
Signature  
Win-Po Tsai  
Manager of EMC Testing Department  
Electronics Testing Center, Taiwan

Table of Contents	Page
<b>1 GENERAL INFORMATION .....</b>	<b>1</b>
1.1 Product Description .....	1
1.2 Characteristics of Device .....	1
1.3 Test Methodology .....	1
1.4 Modification List of EUT .....	1
1.5 Test Facility .....	1
<b>2 PROVISIONS APPLICABLE.....</b>	<b>2</b>
2.1 Definition .....	2
2.2 Requirement for Compliance .....	3
2.3 Restricted Bands of Operation .....	5
2.4 Labeling Requirement.....	5
2.5 User Information .....	6
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
3.1 Justification.....	7
3.2 Devices for Tested System.....	7
<b>4 RADIATED EMISSION MEASUREMENT .....</b>	<b>8</b>
4.1 Applicable Standard.....	8
4.2 Measurement Procedure .....	8
4.3 Measuring Instrument .....	10
4.4 Radiated Emission Data.....	11
4.4.1 RF Portion.....	11
4.4.2 Other Emission .....	14
4.5 Field Strength Calculation .....	16
<b>5 CONDUCTED EMISSION MEASUREMENT.....</b>	<b>17</b>
5.1 Standard Applicable.....	17
5.2 Measurement Procedure .....	17
5.3 Conducted Emission Data.....	18
5.4 Result Data Calculation .....	27
5.5 Conducted Measurement Equipment .....	27
<b>6 ANTENNA REQUIREMENT .....</b>	<b>28</b>
6.1 Standard Applicable.....	28
6.2 Antenna Construction and Directional Gain.....	28
<b>7 20dB EMISSION BANDWIDTH MEASUREMENT .....</b>	<b>29</b>
7.1 Standard Applicable.....	29
7.2 Measurement Procedure .....	29

7.3 Measurement Equipment .....	29
7.4 Measurement Data .....	30
<b>8 OUTPUT POWER MEASUREMENT.....</b>	<b>34</b>
8.1 Standard Applicable.....	34
8.2 Measurement Procedure .....	34
8.3 Measurement Equipment .....	34
8.4 Measurement Data .....	35
<b>9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT .....</b>	<b>39</b>
9.1 Standard Applicable.....	39
9.2 Measurement Procedure .....	39
9.3 Measurement Equipment .....	39
9.4 Measurement Data .....	40
<b>10 RADIATED MEASUREMENT AT BANDEDGE WITH FUNDAMENTAL FREQUENCIES..</b>	<b>46</b>
10.1 Standard Applicable.....	46
10.2 Measurement Procedure .....	46
10.3 Measuring Instrument .....	47
10.4 Radiated Emission Data.....	48
<b>11 NUMBER OF HOPPING CHANNELS.....</b>	<b>49</b>
11.1 Standard Applicable.....	49
11.2 Measurement Procedure .....	49
11.3 Measurement Equipment .....	49
11.4 Measurement Data .....	49
<b>12 CHANNEL CARRIER FREQUENCIES SEPERATION .....</b>	<b>51</b>
12.1 Standard Applicable.....	51
12.2 Measurement Procedure .....	51
12.3 Measurement Equipment .....	51
12.4 Measurement Data .....	52
<b>13 POWER SPECTRAL DENSITY .....</b>	<b>56</b>
13.1 Standard Applicable.....	56
13.2 Measurement Procedure .....	56
13.3 Measurement Equipment .....	56
13.4 Measurement Data .....	57
<b>14 DWELL TIME .....</b>	<b>61</b>
14.1 Standard Applicable.....	61
14.2 Measurement Procedure .....	61
14.3 Measurement Equipment .....	61

14.4 Measurement Data .....	61
-----------------------------	----

# 1 GENERAL INFORMATION

## 1.1 Product Description

- a) Type of EUT : Bluetooth Telephony Base
- b) Trade Name : Bluetooth Telephony Base
- c) Model No. : BT41
- d) Power Supply : AC Adaptor (A20635N)  
Input: 120VAC, 60Hz, 5W ; Output: 5.5VDC, 350mA

## 1.2 Characteristics of Device

The EUT is a Bluetooth Telephony Base based on the Bluetooth technology. Bluetooth is a short-range radio link intended to be a cable replacement between portable or fixed electronic devices. Bluetooth operates in the unlicensed ISM Band at 2.4GHz. In this band, 79 RF channels spaced 1MHz apart are defined.

## 1.3 Test Methodology

The Bluetooth Telephony Base designed with a transmitting method of Frequency Hopping spread spectrum, which operates at 2.4 GHz ISM band. The rated output power is  $-1.5\text{dBm}$  (0.708 mW).

## 1.4 Modification List of EUT

N/A

## 1.5 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

**Note :** A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\*Decreases with the logarithm of the frequency.

For intentional device, according to § 15.207(a) Line Conducted Emission Limits is same as above table.

### (2) Radiated Emission Requirement

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB $\mu$ V/m	Radiated $\mu$ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### (3) Antenna Requirement

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**(4) 20dB Bandwidth Requirement**

For frequency hopping systems, according to 15.247(a)(1), hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

**(5) Output Power Requirement**

For frequency hopping systems, according to 15.247(1), operating in the 2400-2483.5MHz band employing at least 75 hopping channels. The maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**(6) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

**(7) Number of Hopping Channels**

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels.

**(8) Channel Carrier Frequencies Separation**

According to 15.247(a)(1)(iii), the frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

**(9) Dwell Time**

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

**(10) Power Spectral Density**

According to 15.247(d), for bluetooth device, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3. SYSTEM TEST CONFIGURATION


#### 3.1 Justification

For the purposes of this test report ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT during the test. Notebook PC was used to control the RF channel under the highest, middle and lowest frequency and transmit the maximum RF power. Customer would not use it. But nevertheless ancillary equipment can influence the test results..

#### 3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
*Bluetooth Telephony Base	Antonio Precise Products Manufactury Ltd.	BT41	1.9m, Unshielded Line
Telephone	ROMEO	TE-506	1.8m, Unshielded Line
Notebook PC	ASUS	L7245	3.3m, Unshielded Power Line (Adaptor)
Power Supply	GW	GPC-6030D	0.8m*2, Unshielded Line
Test Jig	----	----	1.8m, Unshielded RS232 Line 0.1m, Unshielded Control Line

Remark “\*” means equipment under test.

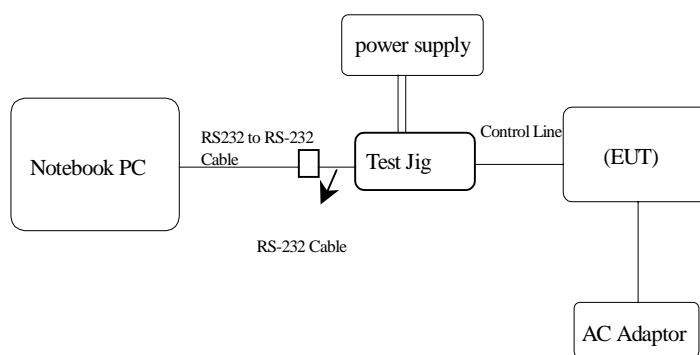

Note: During both conducted and radiated testing, the “Notebook PC” and “RS-232 to RS-232 Cable” would be taken off from the system after every setting were completed.

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with § 15.109(a).

For intentional radiators, according to § 15.247 (a), operation under this provision is limited to frequency hopping and digitally modulated, and the out band emission shall be comply with § 15.247 (c)

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, it is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions. For emission frequencies measured above 1 GHz, a pre-scan be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission, placement of ANT. cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


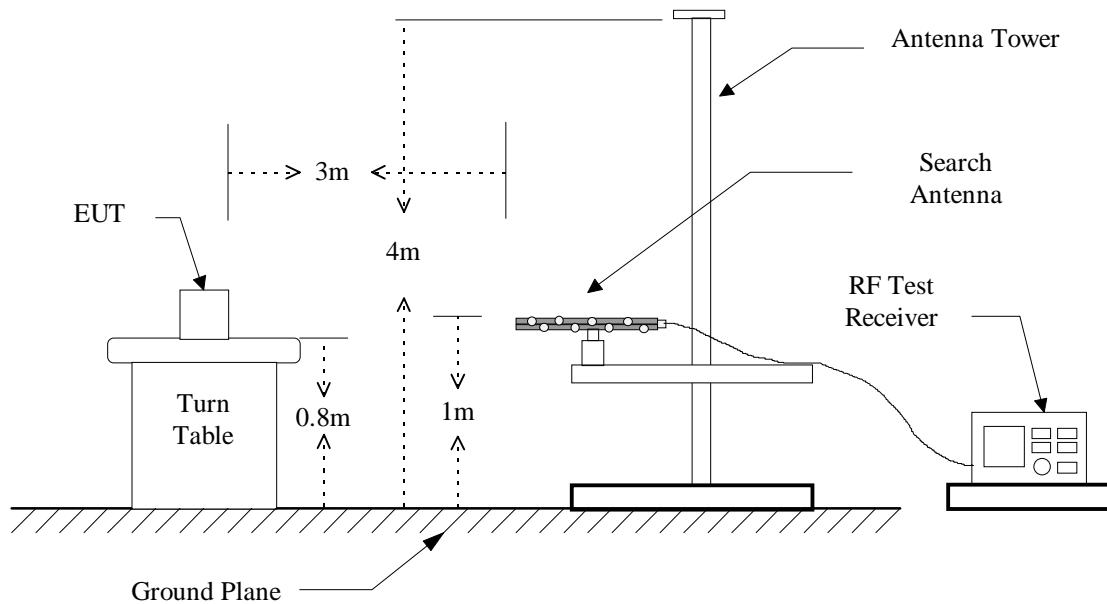


Figure 2 : Frequencies measured above 1 GHz configuration

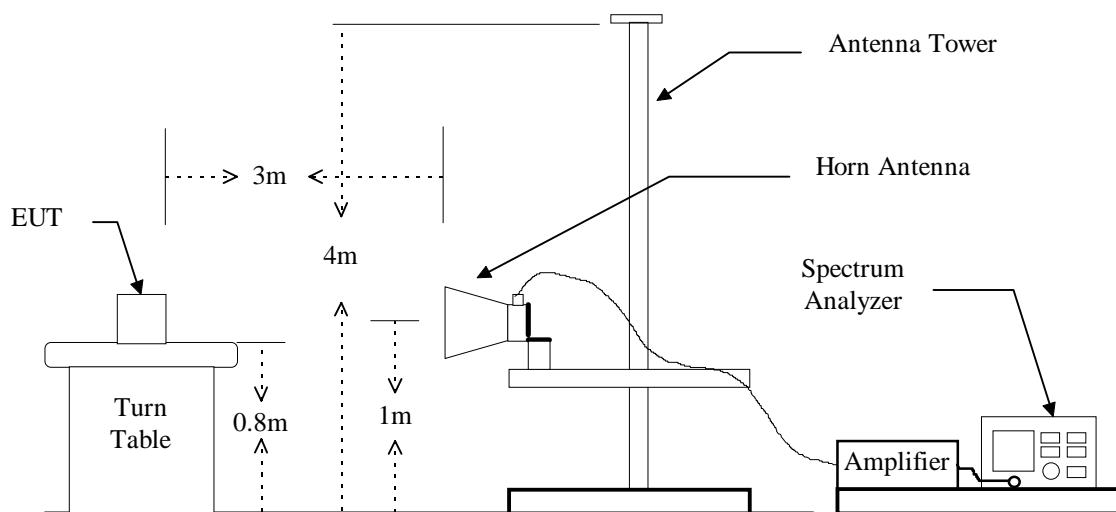

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Hewlett-Packard	8546A	08/27/2004
Horn Antenna	EMCO	3115	06/05/2005
LogBicone Antenna	Schwarzbeck	9160	10/28/2004
Horn Antenna	EMCO	3116	06/28/2004
Preamplifier	Hewlett-Packard	8449B	09/04/2004
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

## 4.4 Radiated Emission Data

### 4.4.1 RF Portion

#### a) Channel 0

Operation Mode : Transmitting

Fundamental Frequency : 2402 MHz

Test Date : May 31, 2004      Temperature : 23      Humidity : 69%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
1201.430	54.2	50.7	59.8	57.7	-13.9	45.9	43.9	74.0	54.0	-10.1	32	1.5
4804.000	54.2	50.7	56.0	40.2	-4.6	51.4	46.1	74.0	54.0	-7.9	134	1.0
12010.000	---	---	---	---	2.9	---	---	74.0	54.0	---	---	---
16216.000	---	---	---	---	3.8	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

## b) Channel 39

Operation Mode : Transmitting

Fundamental Frequency : 2441 MHz

Test Date : May 31, 2004      Temperature : 23      Humidity : 69%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
1220.950	58.7	55.5	56.7	52.7	-13.9	44.8	41.6	74.0	54.0	-12.4	312	1.5
4882.000	67.8	44.2	61.0	41.8	-4.6	63.2	39.6	74.0	54.0	-10.8	188	1.0
7323.000	51.0	38.0	54.3	39.3	-1.0	53.3	38.3	74.0	54.0	-15.7	181	1.5
12205.000	---	---	---	---	2.9	---	---	74.0	54.0	---	---	---
19528.000	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

## c) Channel 78

Operation Mode : Transmitting

Fundamental Frequency : 2480 MHz

Test Date : May 31, 2004      Temperature : 23      Humidity : 69%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
1240.350	59.8	55.2	59.3	57.3	-13.9	45.9	43.4	74.0	54.0	-10.6	310	1.5
4960.000	66.2	43.8	63.2	42.6	-4.6	61.6	39.2	74.0	54.0	-12.4	187	1.5
7440.000	---	---	---	---	-1.0	---	---	74.0	54.0	---	---	---
12400.000	---	---	---	---	2.9	---	---	74.0	54.0	---	---	---
19840.000	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---
22320.000	---	---	---	---	1.3	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.
3. Item “Margin” referred to Average limit while there is only peak result.
4. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.

**4.4.2 Other Emission**

## a) Operation Mode: 2402MHz

Test Date : May 31, 2004

Temperature : 23

Humidity : 69%

Emission Frequency ( MHz )	Meter Reading		CORR'd Factor ( dB )	Results		Limit (3m) (dBuV/m)	Margins ( dB )	Table Degree		Ant. High				
	( dBuV )			( dBuV/m )				( deg )		( m )				
	HOR.	VERT.		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.			
48.430	***	22.7	13.6	***	36.3	40.0	-3.7	***	32	***	1.0			
65.890	17.9	***	11.6	29.5	***	40.0	-10.5	32	***	1.5	***			
67.830	***	23.4	11.6	***	35.0	40.0	-5.0	***	148	***	1.0			
106.630	***	20.3	12.5	***	32.8	43.5	-10.7	***	253	***	1.5			
121.180	***	20.1	13.5	***	33.6	43.5	-9.9	***	64	***	1.5			
128.940	***	19.2	14.6	***	33.8	43.5	-9.7	***	132	***	1.0			
130.880	11.4	***	14.6	26.0	***	43.5	-17.5	173	***	1.5	***			
148.340	11.2	***	15.1	26.3	***	43.5	-17.2	242	***	1.0	***			
164.830	11.8	***	14.9	26.7	***	43.5	-16.8	212	***	1.5	***			
184.230	13.2	***	14.1	27.3	***	43.5	-16.2	174	***	1.0	***			
184.230	***	13.2	14.1	***	27.3	43.5	-16.2	***	214	***	1.0			
198.780	17.3	***	13.0	30.3	***	43.5	-13.2	86	***	1.0	***			

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “\*\*\*” means that the emissions level is too low to be measured.
3. Remark “#“ means the noise was low, so record the peak value.
4. Item “Margin” referred to Q.P. limit while there is only peak result.

## b) Operation Mode: 2441MHz

Test Date : May 31, 2004

Temperature : 23

Humidity : 69%

Emission Frequency ( MHz )	Meter Reading ( dBuV )		CORR'd Factor ( dB )	Results ( dBuV/m )		Limit (3m) (dBuV/m)	Margins ( dB )	Table Degree (deg)		Ant. High (m)	
	HOR.	VERT.		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
47.320	***	22.6	13.6	***	36.2	40.0	-3.8	***	32	***	1.5
65.830	17.7	***	11.6	29.3	***	40.0	-10.7	48	***	1.0	***
67.310	***	23.3	11.6	***	34.9	40.0	-5.1	***	242	***	1.5
106.830	***	20.1	12.5	***	32.6	43.5	-10.9	***	302	***	1.0
122.410	***	20.0	13.5	***	33.5	43.5	-10.0	***	309	***	1.0
127.420	***	19.1	14.6	***	33.7	43.5	-9.8	***	254	***	1.5
130.920	11.5	***	14.6	26.1	***	43.5	-17.4	132	***	1.5	***
148.330	11.3	***	15.1	26.4	***	43.5	-17.1	192	***	1.0	***
165.740	10.4	***	15.4	25.8	***	43.5	-17.7	112	***	1.5	***
185.320	14.1	***	13.1	27.2	***	43.5	-16.3	83	***	1.5	***
185.420	***	14.3	13.1	***	27.4	43.5	-16.1	***	184	***	1.5
198.720	17.1	***	13.0	30.1	***	43.5	-13.4	243	***	1.5	***

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “\*\*\*” means that the emissions level is too low to be measured.
3. Remark “#“ means the noise was low, so record the peak value.
4. Item “Margin” referred to Q.P. limit while there is only peak result.

## c) Operation Mode: 2480MHz

Test Date : May 31, 2004

Temperature : 23

Humidity : 69%

Emission Frequency ( MHz )	Meter Reading ( dBuV )		CORR'd Factor ( dB )	Results ( dBuV/m )		Limit (3m) (dBuV/m)	Margins ( dB )	Table Degree (deg)		Ant. High (m)	
	HOR.	VERT.		HOR.	VERT.			HOR.	VERT.	HOR.	VERT.
47.980	***	22.6	13.6	***	36.2	40.0	-3.8	***	32	***	1.5
66.310	17.8	***	11.6	29.4	***	40.0	-10.6	42	***	1.5	***
67.960	***	23.2	11.6	***	34.8	40.0	-5.2	***	63	***	1.0
108.210	***	19.9	12.5	***	32.4	43.5	-11.1	***	27	***	1.0
122.840	***	19.7	13.5	***	33.2	43.5	-10.3	***	308	***	1.5
129.280	***	18.6	14.6	***	33.2	43.5	-10.3	***	243	***	1.5
131.840	11.4	***	14.6	26.0	***	43.5	-17.5	132	***	1.0	***
148.210	11.0	***	15.1	26.1	***	43.5	-17.4	46	***	1.0	***
165.460	11.4	***	15.4	26.8	***	43.5	-16.7	328	***	1.5	***
184.140	13.1	***	14.1	27.2	***	43.5	-16.3	272	***	1.5	***
185.960	***	14.7	13.1	***	27.8	43.5	-15.7	***	184	***	1.5
199.860	17.2	***	13.0	30.2	***	43.5	-13.3	243	***	1.5	***

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “\*\*\*” means that the emissions level is too low to be measured.
3. Remark “#“ means the noise was low, so record the peak value.
4. Item “Margin” referred to Q.P. limit while there is only peak result.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

## 5 CONDUCTED EMISSION MEASUREMENT


### 5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.

### 5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

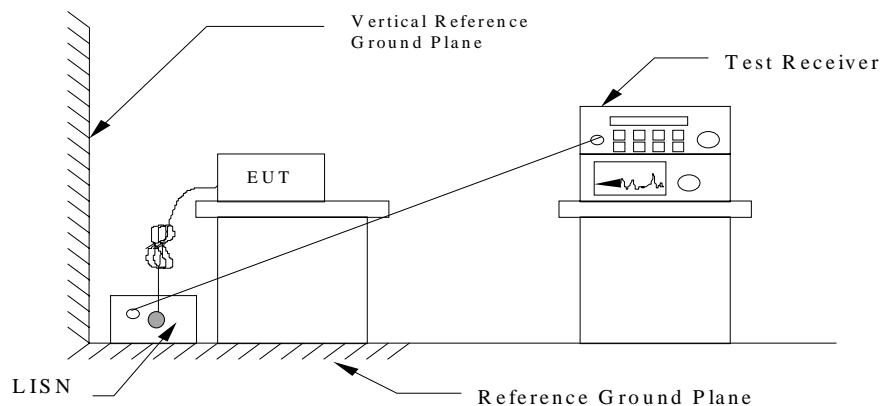

### 5.3 Conducted Emission Data

a) Operation Mode: 2402MHz

Test Date : May 31, 2004

Temperature : 22

Humidity : 68%

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB) Q.P. or AVG.		
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value			
	L1	L2	L1	L2		L1	L2	L1	L2					
0.150	36.8	***	----	----	0.2	37.0	***	----	----	66.0	56.0	-29.0		
0.167	34.7	***	----	----	0.2	34.9	***	----	----	65.1	55.1	-30.2		
0.177	***	31.8	----	----	0.2	***	32.0	----	----	64.6	54.6	-32.6		
0.181	30.2	***	----	----	0.2	30.4	***	----	----	64.4	54.4	-34.0		
0.196	33.0	***	----	----	0.2	33.2	***	----	----	63.8	53.8	-30.6		
0.204	***	31.7	----	----	0.2	***	31.9	----	----	63.4	53.4	-31.5		
0.220	***	33.8	----	----	0.2	***	34.0	----	----	62.8	52.8	-28.8		
0.224	32.1	***	----	----	0.2	32.3	***	----	----	62.7	52.7	-30.4		
0.247	***	33.5	----	----	0.2	***	33.7	----	----	61.9	51.9	-28.2		
0.251	31.5	***	----	----	0.2	31.7	***	----	----	61.7	51.7	-30.0		
0.275	***	32.7	----	----	0.2	***	32.9	----	----	61.0	51.0	-28.1		
0.298	***	31.7	----	----	0.2	***	31.9	----	----	60.3	50.3	-28.4		

Note:


1. The full frequency range scanning test data is shown in appendix 2 pages.
2. “\*\*\*” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.
4. The estimated measurement uncertainty of the result measurement is  $\pm$  2.5dB.

**Note : Please refer to page 19 to page 20 for chart**

**Conducted Emission****Peak Value**

EUT: BT41  
Manuf:   
Op Cond: 2402MHz  
Operator: MARK  
Test Spec: FCC PART15 ClassB  
Comment: L1


Prescan Measurement:      Detector: X PK  
                                  Meas Time: see scan settings  
                                  Peaks: 8  
                                  Acc Margin: 25 dB

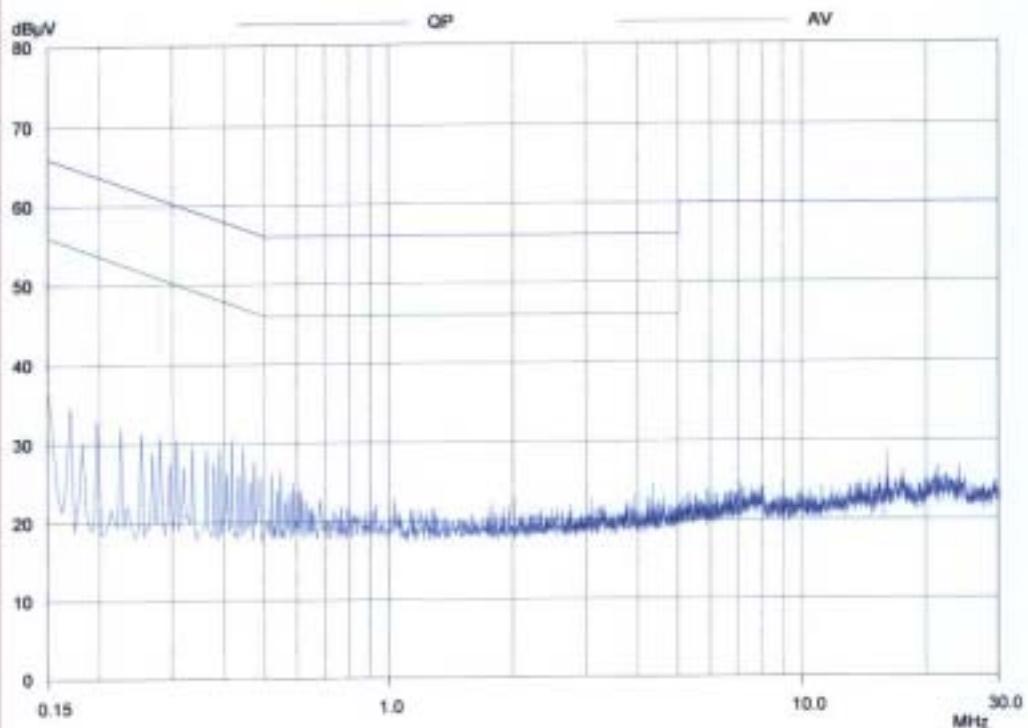

**Conducted Emission****Peak Value**

EUT: BT41  
Manif:  
Op Cond: 2402MHz  
Operator: MARK  
Test Spec: FCC PART15 ClassB  
Comment: L2

Prescan Measurement: Detector: X PK  
Meas Time: see scan settings  
Peaks: 8  
Acc Margin: 25 dB

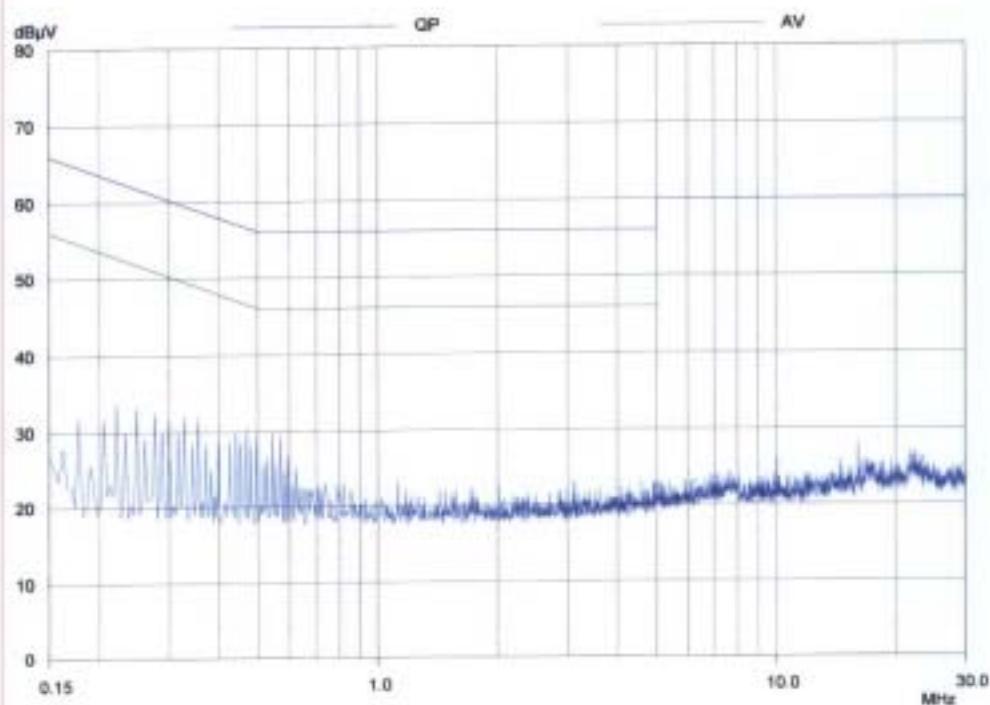

## b) Operation Mode: 2441MHz

Test Date : May 31, 2004

Temperature : 22

Humidity : 68%

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB) Q.P. or AVG.		
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value			
	L1	L2	L1	L2		L1	L2	L1	L2					
0.150	37.1	***	----	----	0.2	37.3	***	----	----	66.0	56.0	-28.7		
0.157	***	35.0	----	----	0.2	***	35.2	----	----	65.6	55.6	-30.4		
0.169	35.1	***	----	----	0.2	35.3	***	----	----	65.0	55.0	-29.7		
0.173	***	31.9	----	----	0.2	***	32.1	----	----	64.8	54.8	-32.7		
0.185	***	33.2	----	----	0.2	***	33.4	----	----	64.3	54.3	-30.9		
0.196	34.2	***	----	----	0.2	34.4	***	----	----	63.8	53.8	-29.4		
0.215	32.0	***	----	----	0.2	32.2	***	----	----	63.0	53.0	-30.8		
0.239	***	33.2	----	----	0.2	***	33.4	----	----	62.1	52.1	-28.7		
0.267	***	32.1	----	----	0.2	***	32.3	----	----	61.2	51.2	-28.9		
0.282	32.4	***	----	----	0.2	32.6	***	----	----	60.8	50.8	-28.2		
0.306	32.0	***	----	----	0.2	32.2	***	----	----	60.1	50.1	-27.9		
0.321	***	31.3	----	----	0.2	***	31.5	----	----	59.7	49.7	-28.2		

## Note:


1. The full frequency range scanning test data is shown in appendix 2 pages.
2. “\*\*\*” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.
4. The estimated measurement uncertainty of the result measurement is  $\pm$  2.5dB.

***Note : Please refer to page 22 to page 23 for chart***

**Conducted Emission****Peak Value**

EUT: BT41  
Manuf:  
Op Cond: 2441MHz  
Operator: MARK  
Test Spec: FCC PART15 ClassB  
Comment: L1


Prescan Measurement:      Detector: X PK  
                                  Meas Time: see scan settings  
                                  Peaks: 8  
                                  Acc Margin: 25 dB

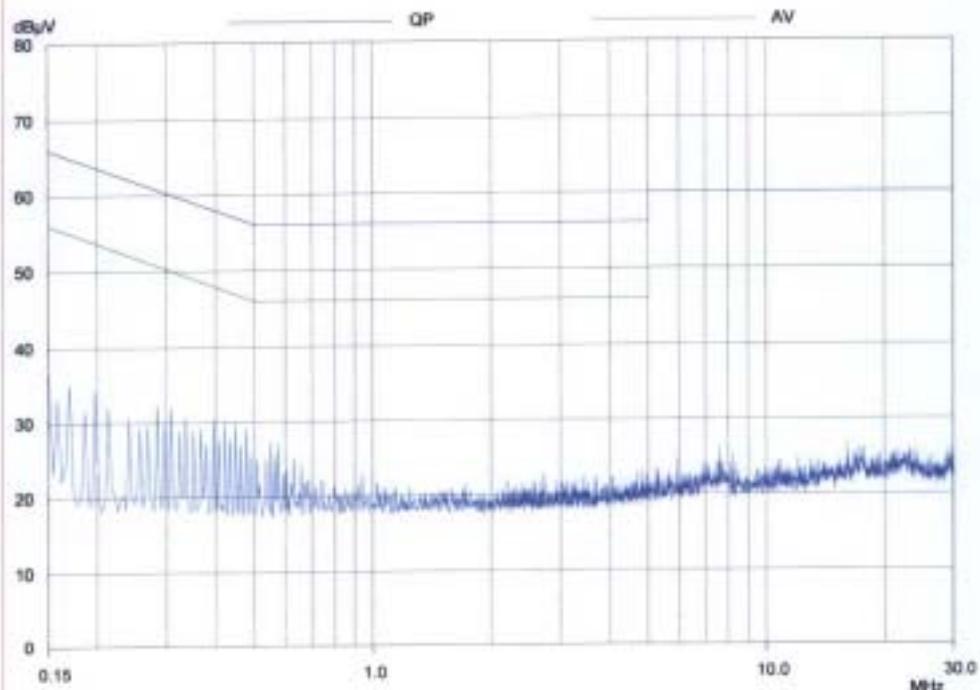

**Conducted Emission****Peak Value**

EUT: BT41  
Manuf:  
Op Cond: 2441MHz  
Operator: MARK  
Test Spec: FCC PART15 ClassB  
Comment: L2

PreScan Measurement:      Detector: X PK  
                                  Meas Time: see scan settings  
                                  Peaks: 8  
                                  Acc Margin: 25 dB

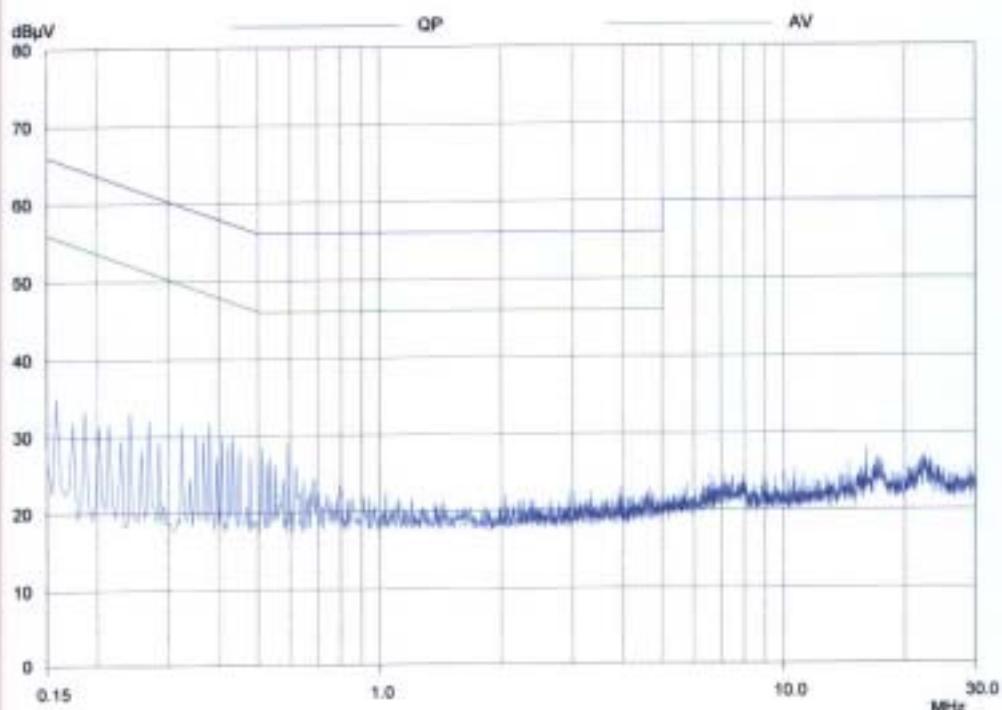

c) Operation Mode: 2480MHz

Test Date : May 31, 2004

Temperature : 22

Humidity : 68%

Freq. (MHz)	Meter Reading (dBuV)				Factor (dB)	Result (dBuV)				Limit (dBuV)		Margins (dB) Q.P. or AVG.		
	Q.P Value		AVG. Value			Q.P Value		AVG. Value		Q.P Value	AVG. Value			
	L1	L2	L1	L2		L1	L2	L1	L2					
0.150	36.2	***	----	----	0.2	36.4	***	----	----	66.0	56.0	-29.6		
0.165	***	36.5	----	----	0.2	***	36.7	----	----	65.2	55.2	-28.5		
0.181	35.4	***	----	----	0.2	35.6	***	----	----	64.4	54.4	-28.8		
0.192	***	34.3	----	----	0.2	***	34.5	----	----	63.9	53.9	-29.4		
0.208	34.4	***	----	----	0.2	34.6	***	----	----	63.3	53.3	-28.7		
0.220	***	33.6	----	----	0.2	***	33.8	----	----	62.8	52.8	-29.0		
0.235	32.9	***	----	----	0.2	33.1	***	----	----	62.3	52.3	-29.2		
0.247	***	2.7	----	----	0.2	***	2.9	----	----	61.9	51.9	-51.9		
0.275	***	32.7	----	----	0.2	***	32.9	----	----	61.0	51.0	-28.1		
0.294	32.7	***	----	----	0.2	32.9	***	----	----	60.4	50.4	-27.5		
0.357	***	32.6	----	----	0.2	***	32.8	----	----	58.8	48.8	-26.0		
0.404	31.4	***	----	----	0.2	31.6	***	----	----	57.8	47.8	-26.2		

Note:


1. The full frequency range scanning test data is shown in appendix 2 pages.
2. “\*\*\*” means the value was too low to be measured.
3. If the data table appeared symbol of “----” means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.
4. The estimated measurement uncertainty of the result measurement is  $\pm$  2.5dB.

***Note : Please refer to page 25 to page 26 for chart***

**Conducted Emission****Peak Value**

EUT: BT41  
Manuf:  
Op Cond: 2480MHz  
Operator: MARK  
Test Spec: FCC PART15 ClassB  
Comment: L1


Prescan Measurement:      Detector: X PK  
                                  Meas Time: see scan settings  
                                  Peaks: 8  
                                  Acc Margin: 25 dB

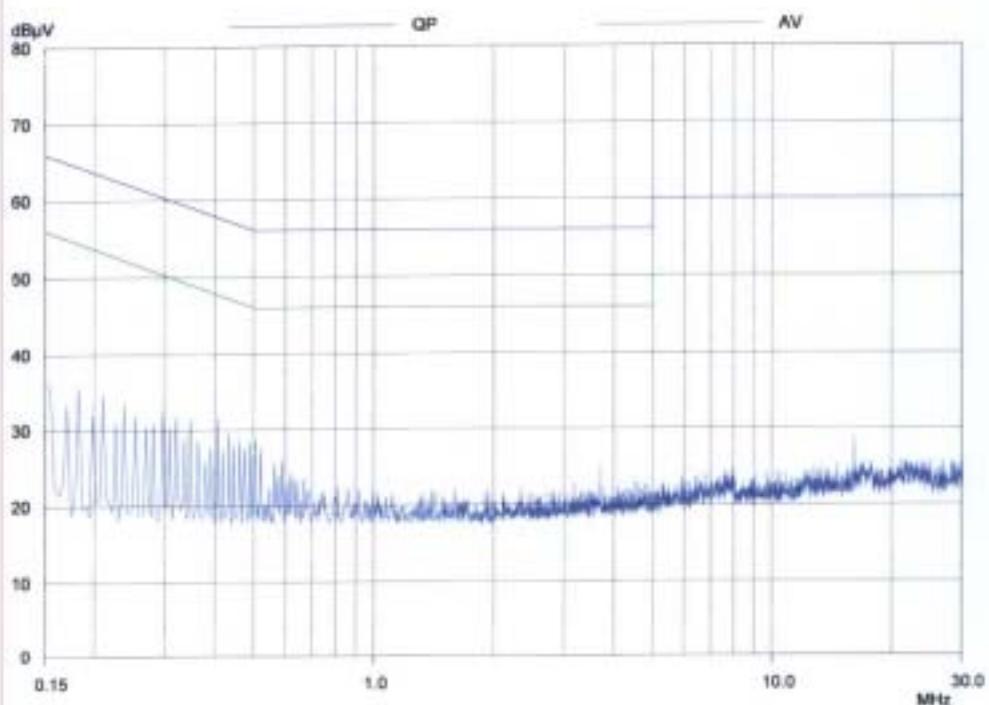

**Conducted Emission****Peak Value**

EUT: BT41  
Manuf:  
Op Cond: 2480MHz  
Operator: MARK  
Test Spec: FCC PART15 ClassB  
Comment: L2

Prescan Measurement: Detector: X PK  
Meas Time: see scan settings  
Peaks: 8  
Acc Margin: 25 dB

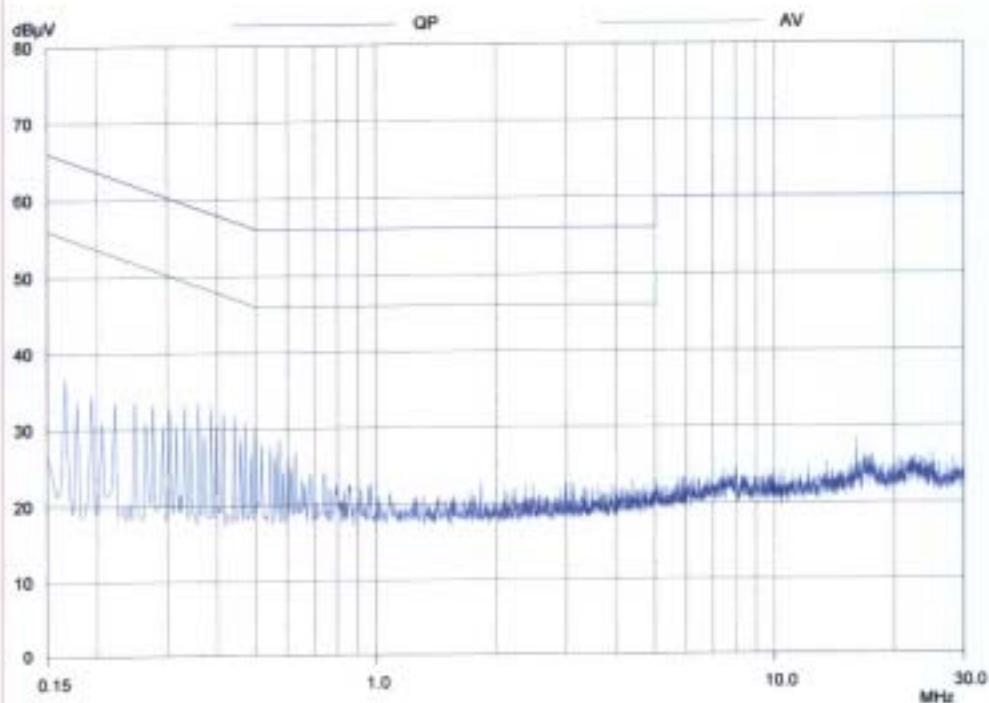

## 5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR} \text{ (Included Cable Loss)}$$

Assume a receiver reading of 22.5 dB  $\mu$  V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB  $\mu$  V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \text{ } \mu \text{ V} \end{aligned}$$

## 5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test.

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde and Schwarz	ESCS30	09/18/2004
Line Impedance Stabilization network	Telemeter	NNB-4/32T	03/27/2005
Line Impedance Stabilization network	Rolf Heine	NNB-2/16Z	04/04/2005

## 6 ANTENNA REQUIREMENT

### 6.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to § 15.247 (b), if Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.2 Antenna Construction and Directional Gain

Highly efficient special antennas fix on the PCB. The directional gain of antenna used for Receiving is typical 0dBi.(Declare by applicant)

## 7 20dB EMISSION BANDWIDTH MEASUREMENT


### 7.1 Standard Applicable

According to 15.247(a)(1), for frequency hopping systems, hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect it to measurement instrument. Then set it to any convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.

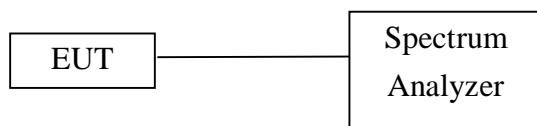

### 7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 7.4 Measurement Data


Test Date : May 27, 2004


Temperature : 22


Humidity: 68%

- a) Channel 0 : 20 dB Emission Bandwidth is 803KHz
- b) Channel 39 : 20 dB Emission Bandwidth is 817 KHz
- c) Channel 78 : 20 dB Emission Bandwidth is 817 KHz

*Note: Please refer to page 31 to page 33 for chart*

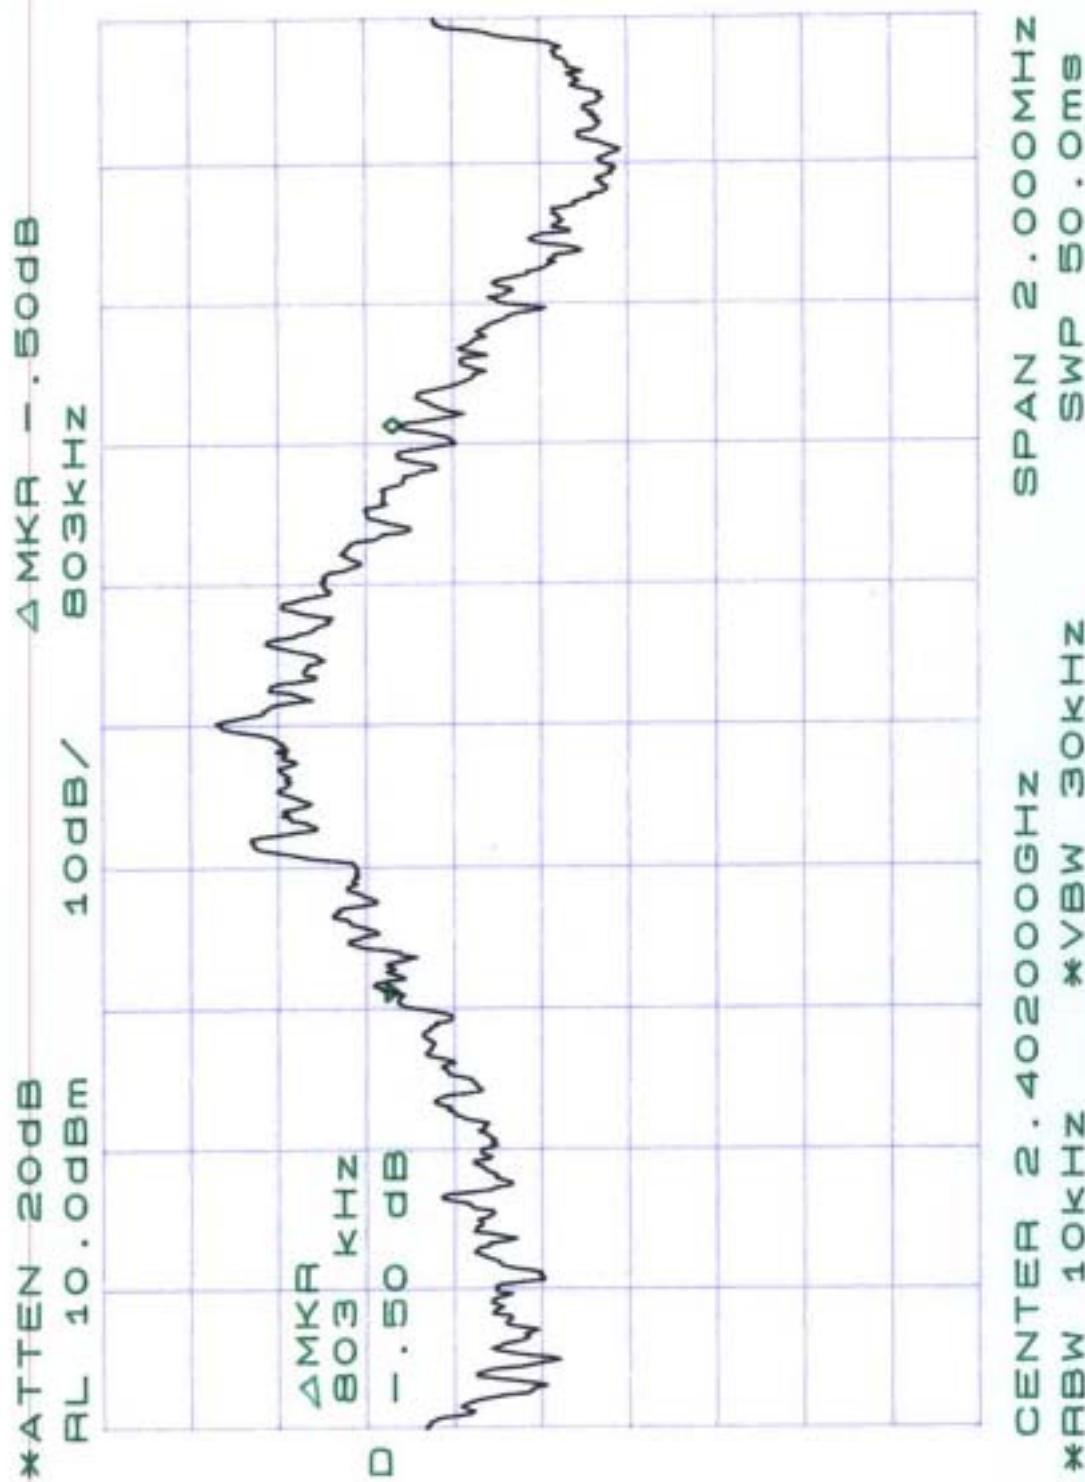

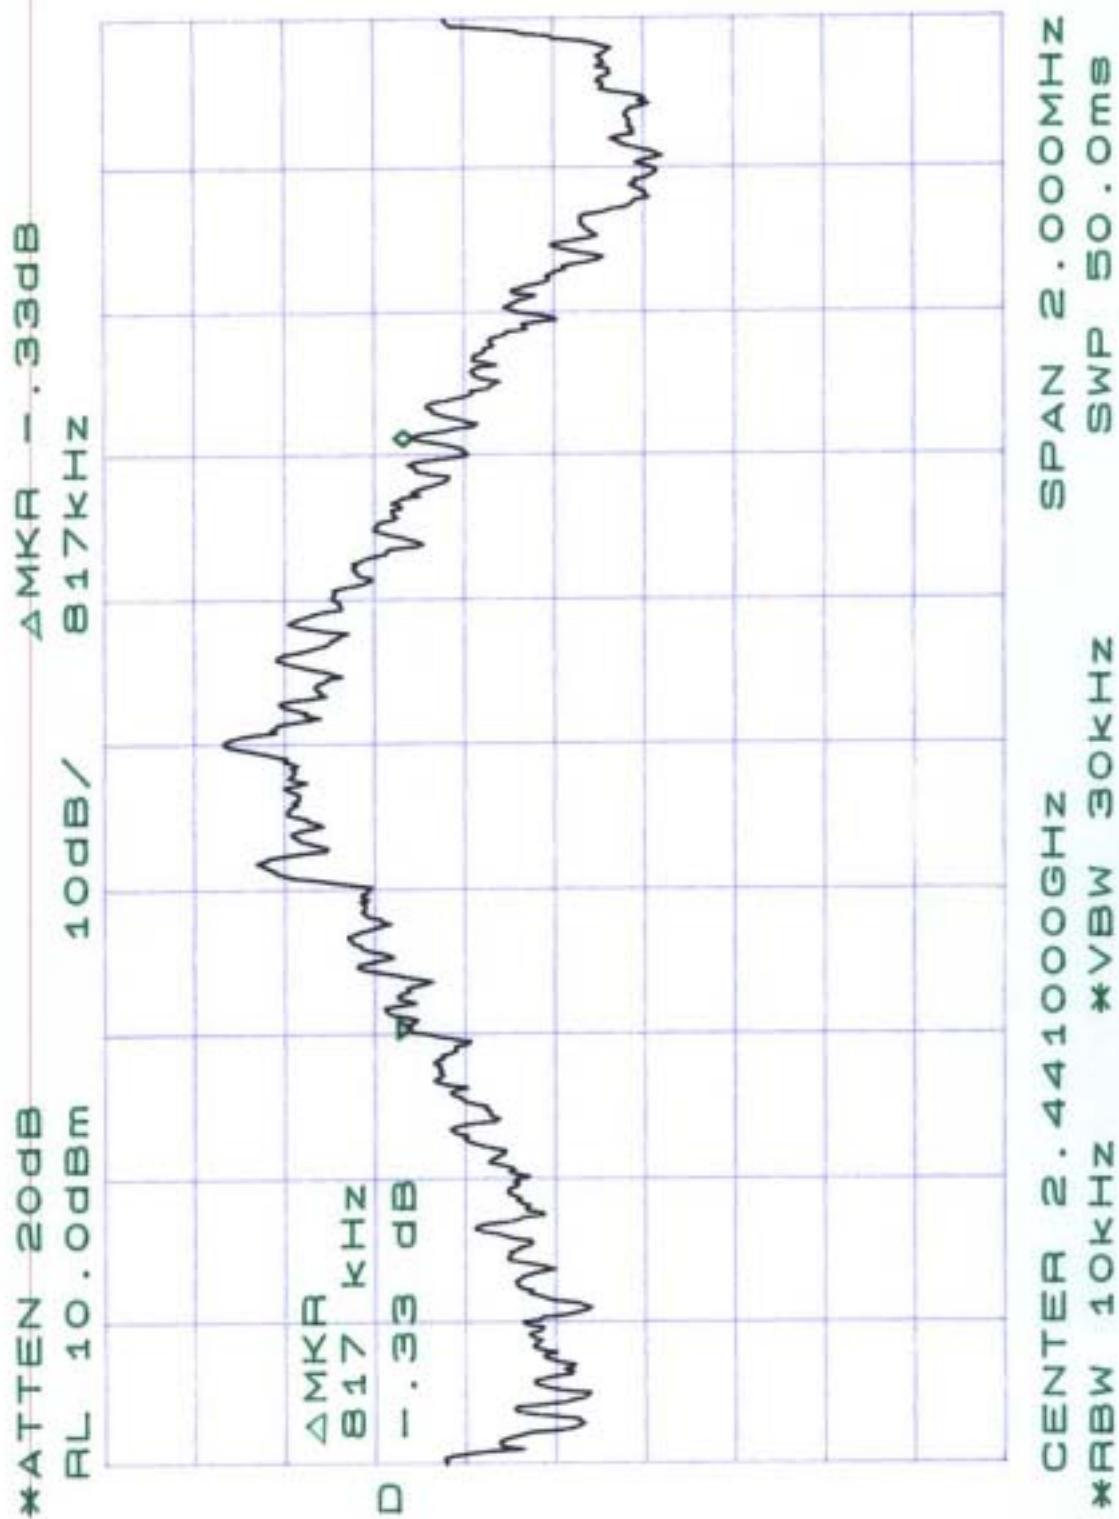

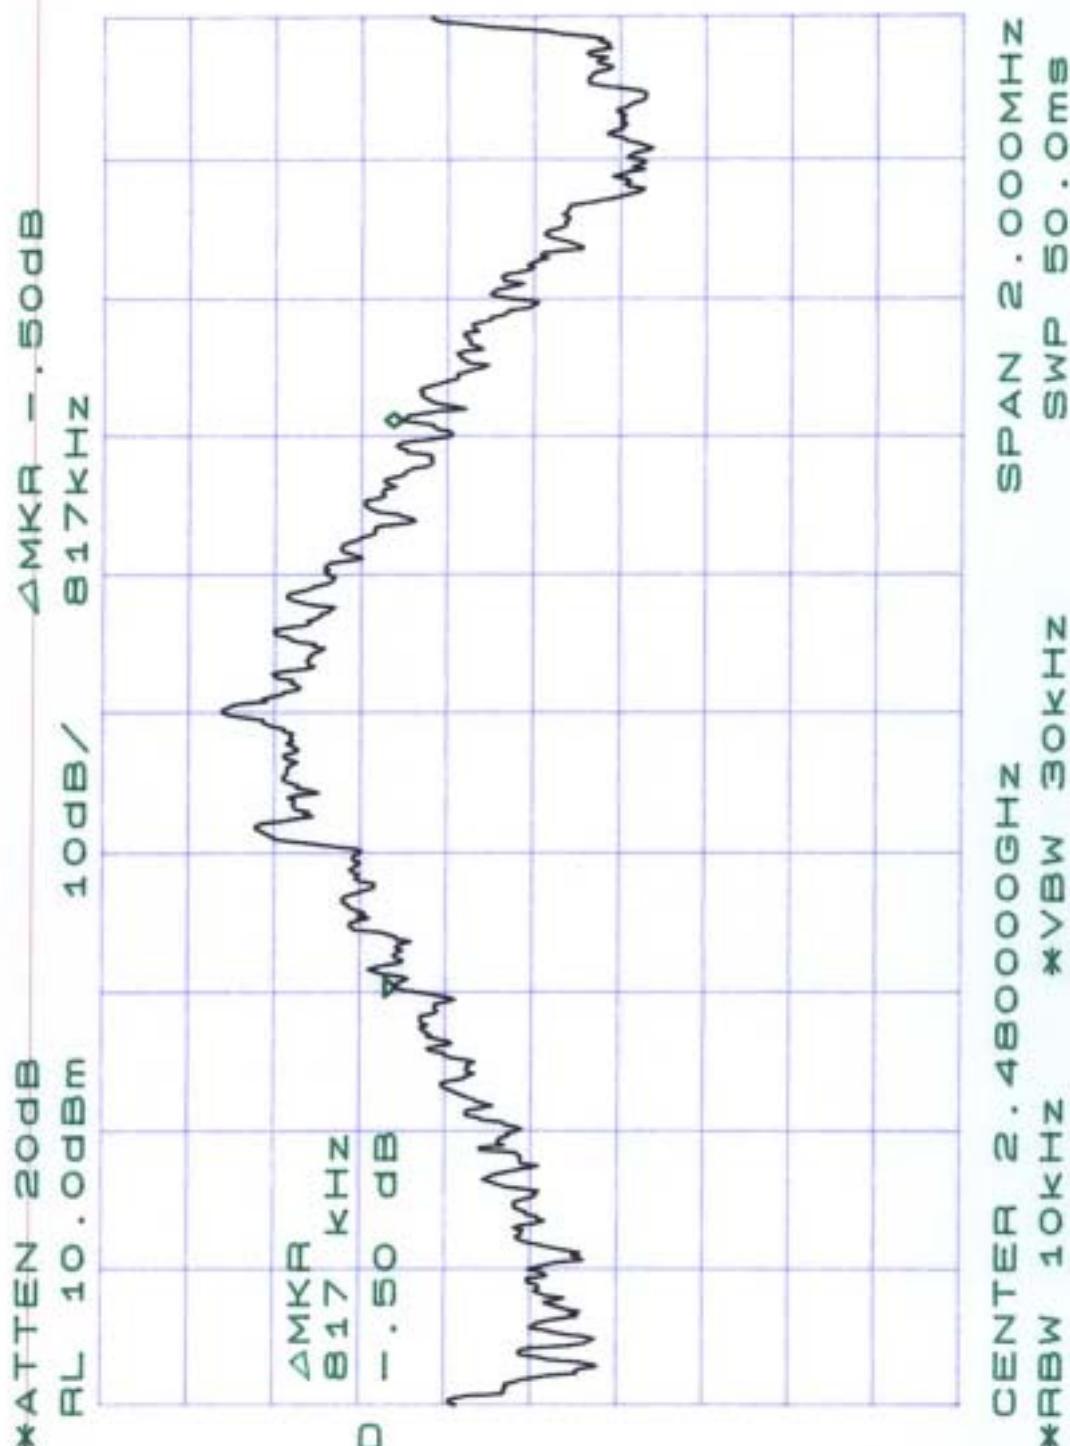

## 8 OUTPUT POWER MEASUREMENT

### 8.1 Standard Applicable

For frequency hopping system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If Receiving antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

### 8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 8.4 Measurement Data


Test Date : May 27, 2004


Temperature : 22


Humidity: 68%

- a) Channel 0 : Output Peak Power is  $-1.83\text{dBm}$  or  $0.656\text{ mW}$
- b) Channel 39 : Output Peak Power is  $-1.50\text{ dBm}$  or  $0.708\text{ mW}$
- c) Channel 78 : Output Peak Power is  $-2.00\text{ dBm}$  or  $0.631\text{ mW}$

*Note: Please refer to page 36 to page 38 for chart*

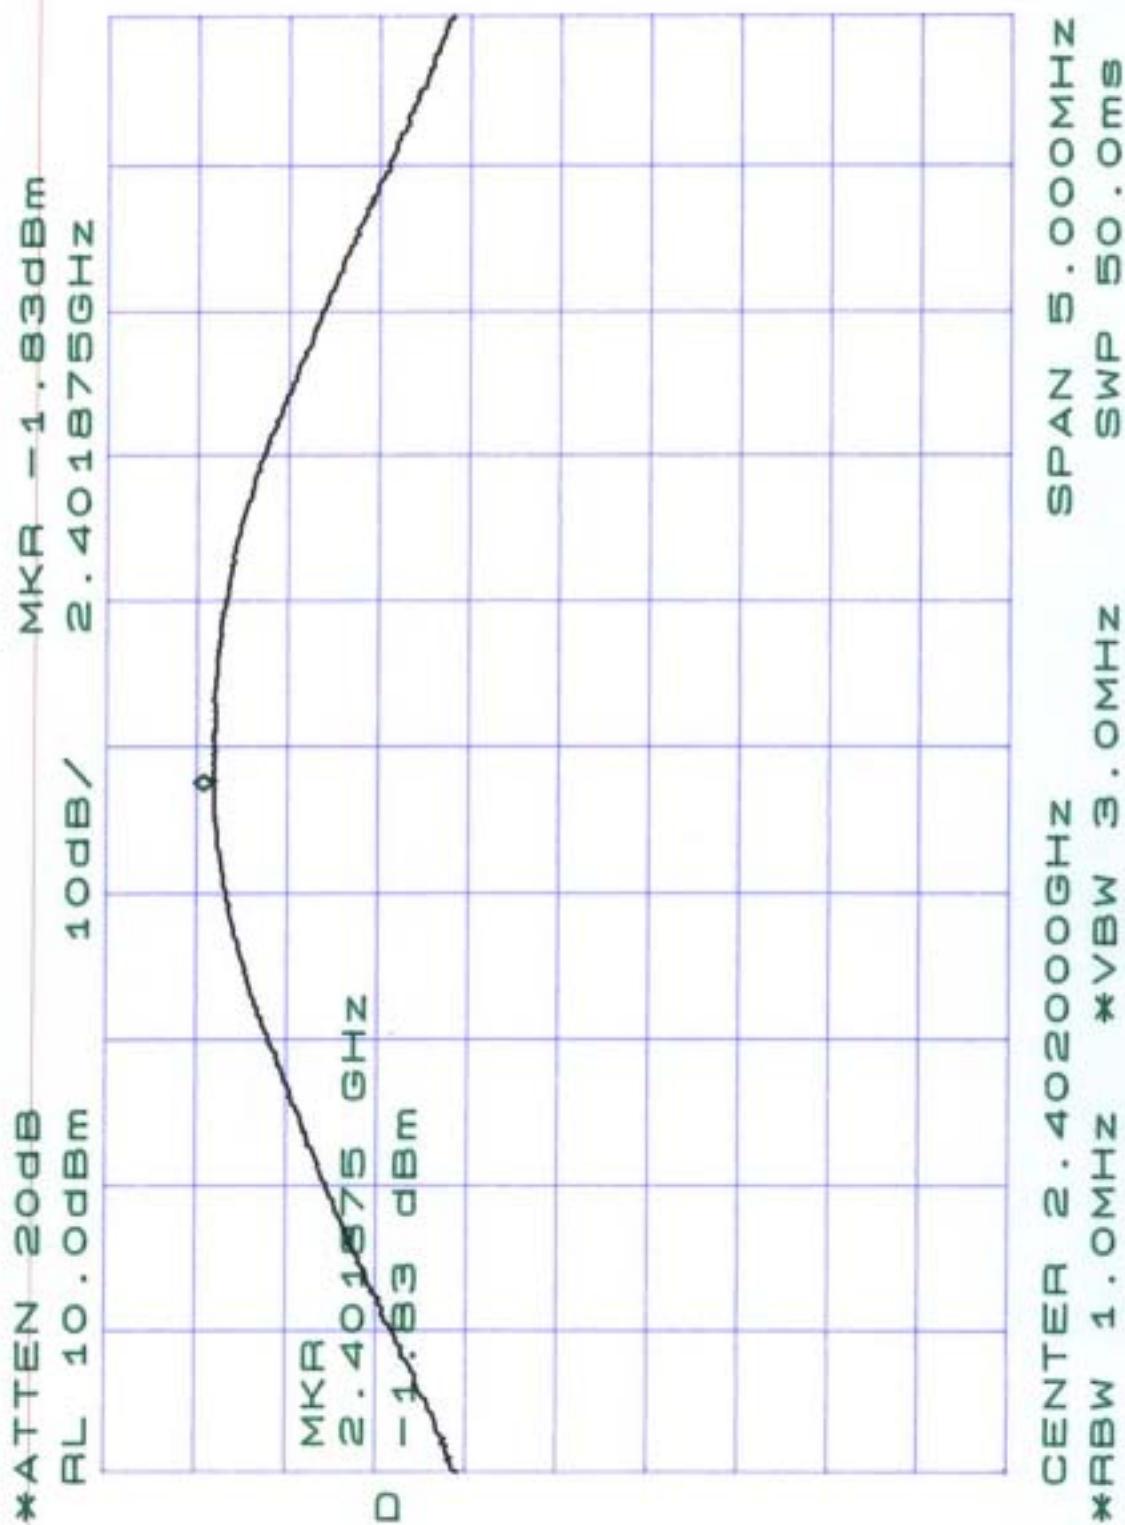

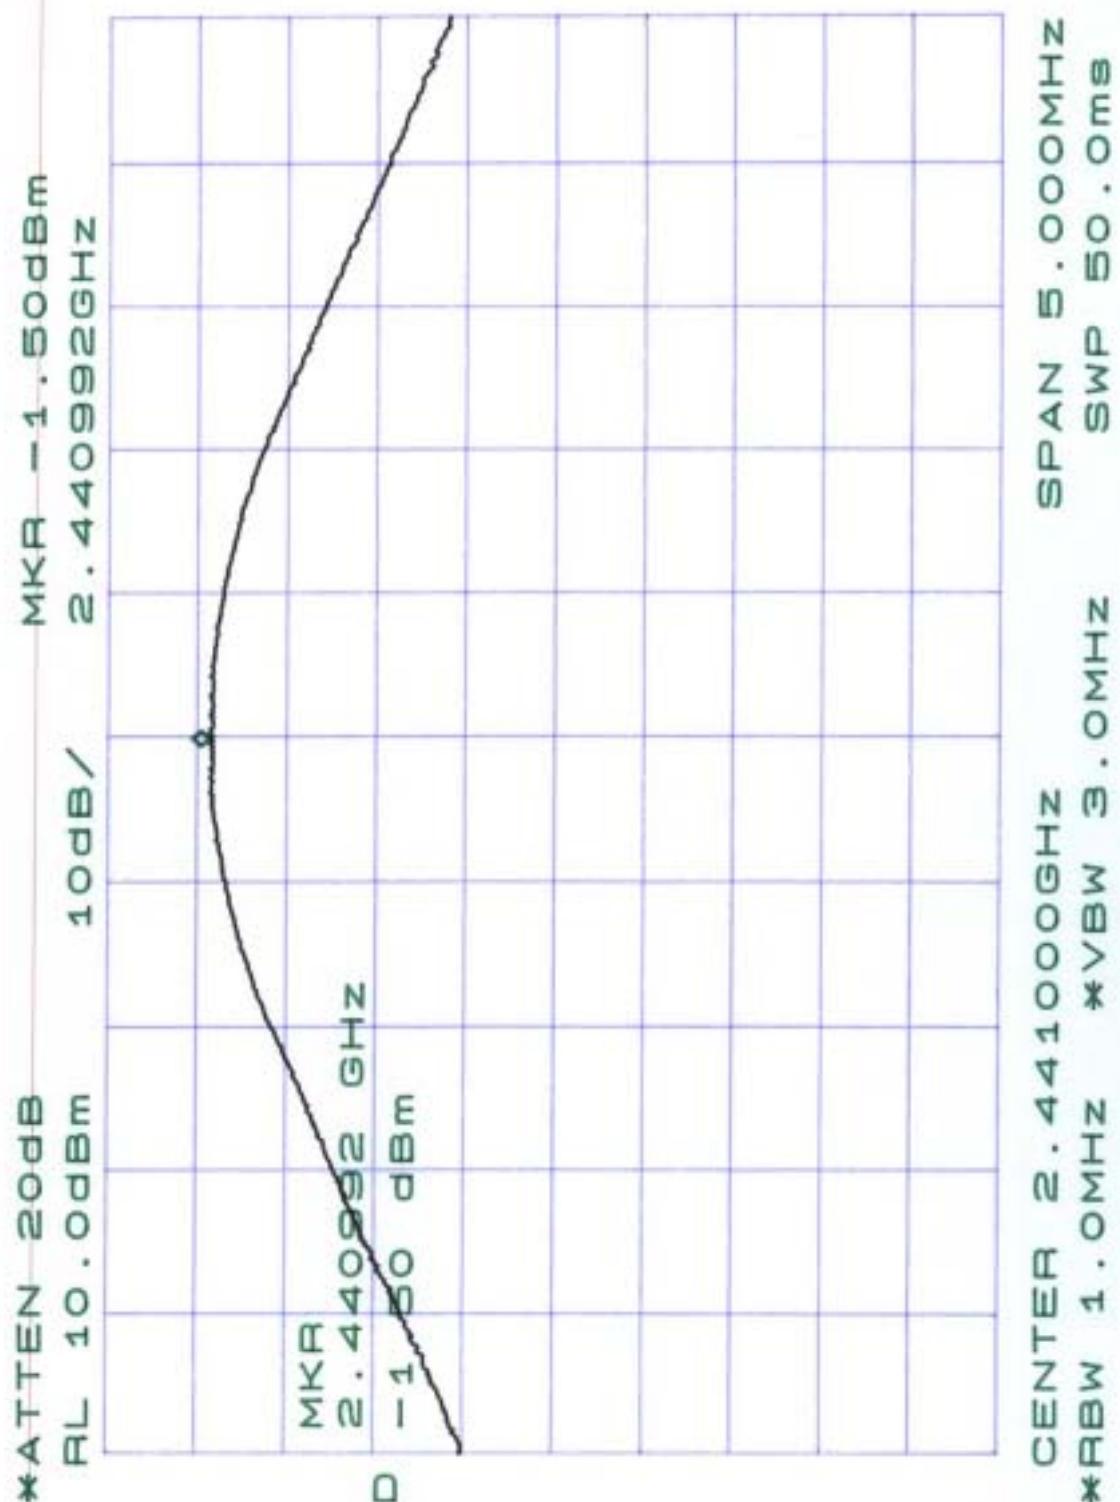

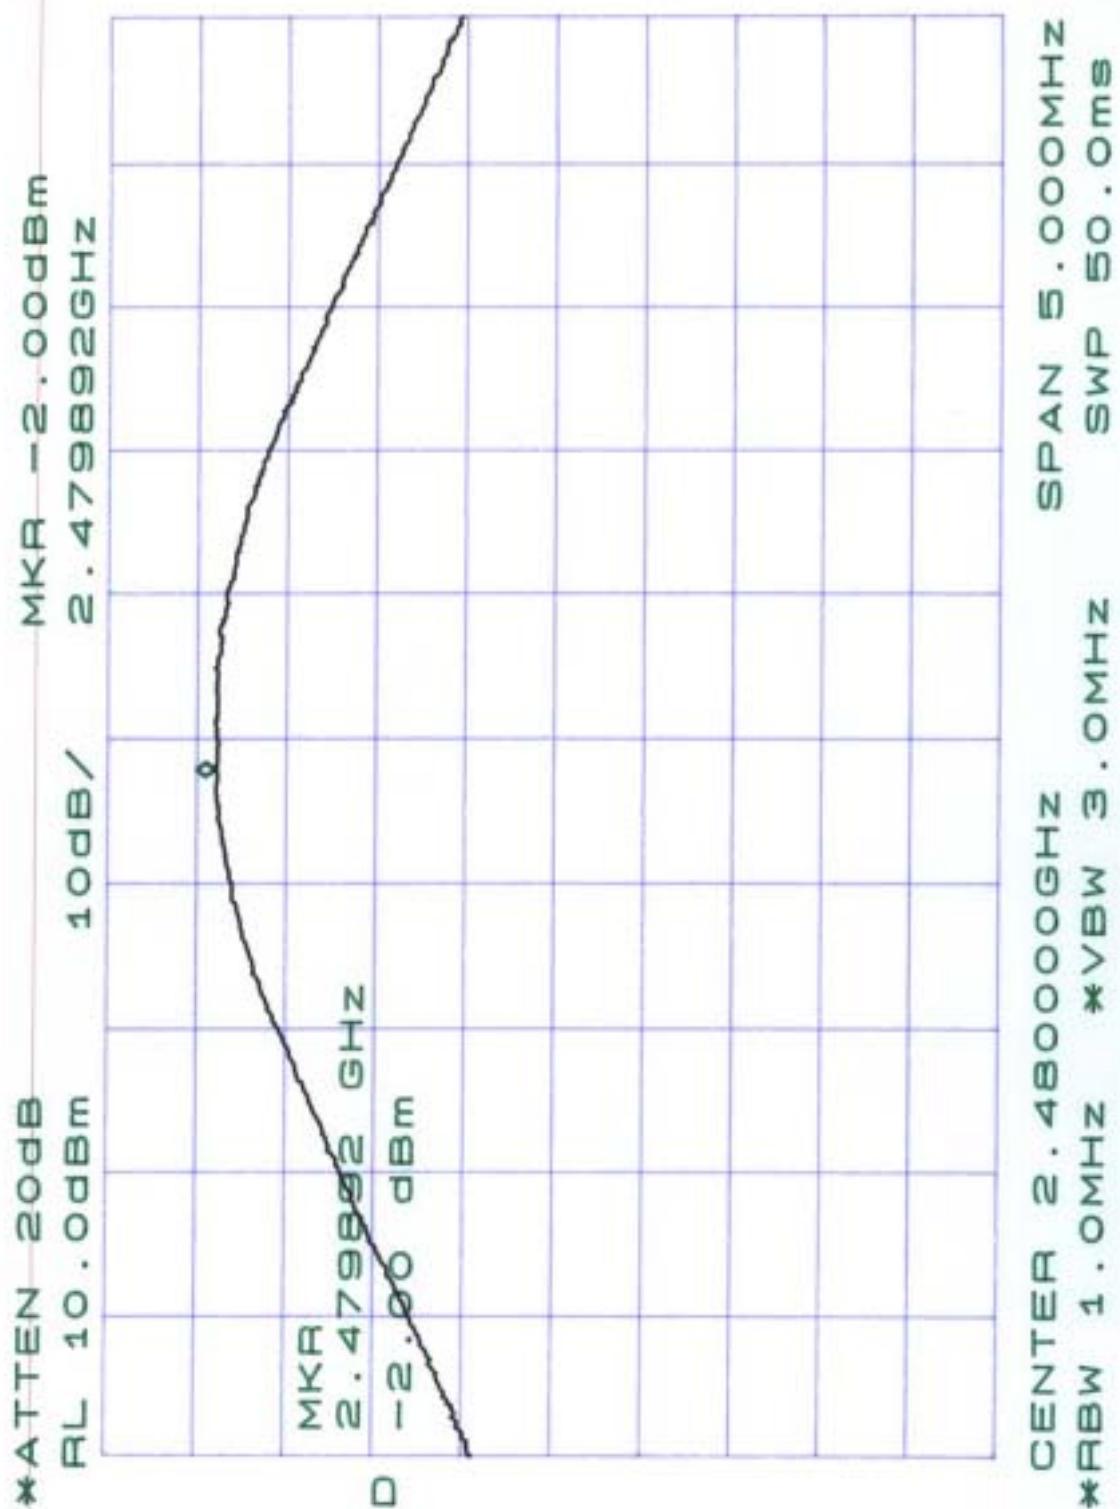

## 9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 9.4 Measurement Data


Test Date : May 27, 2004


Temperature : 22


Humidity: 68%


- a) Lower Band Edge : maximum value is -39.67 dBm that is attenuated more than 20dB
- b) Upper Band Edge : maximum value is -50.67 dBm that is attenuated more than 20dB


*Note: Please refer to page 41 to page 45 for chart*

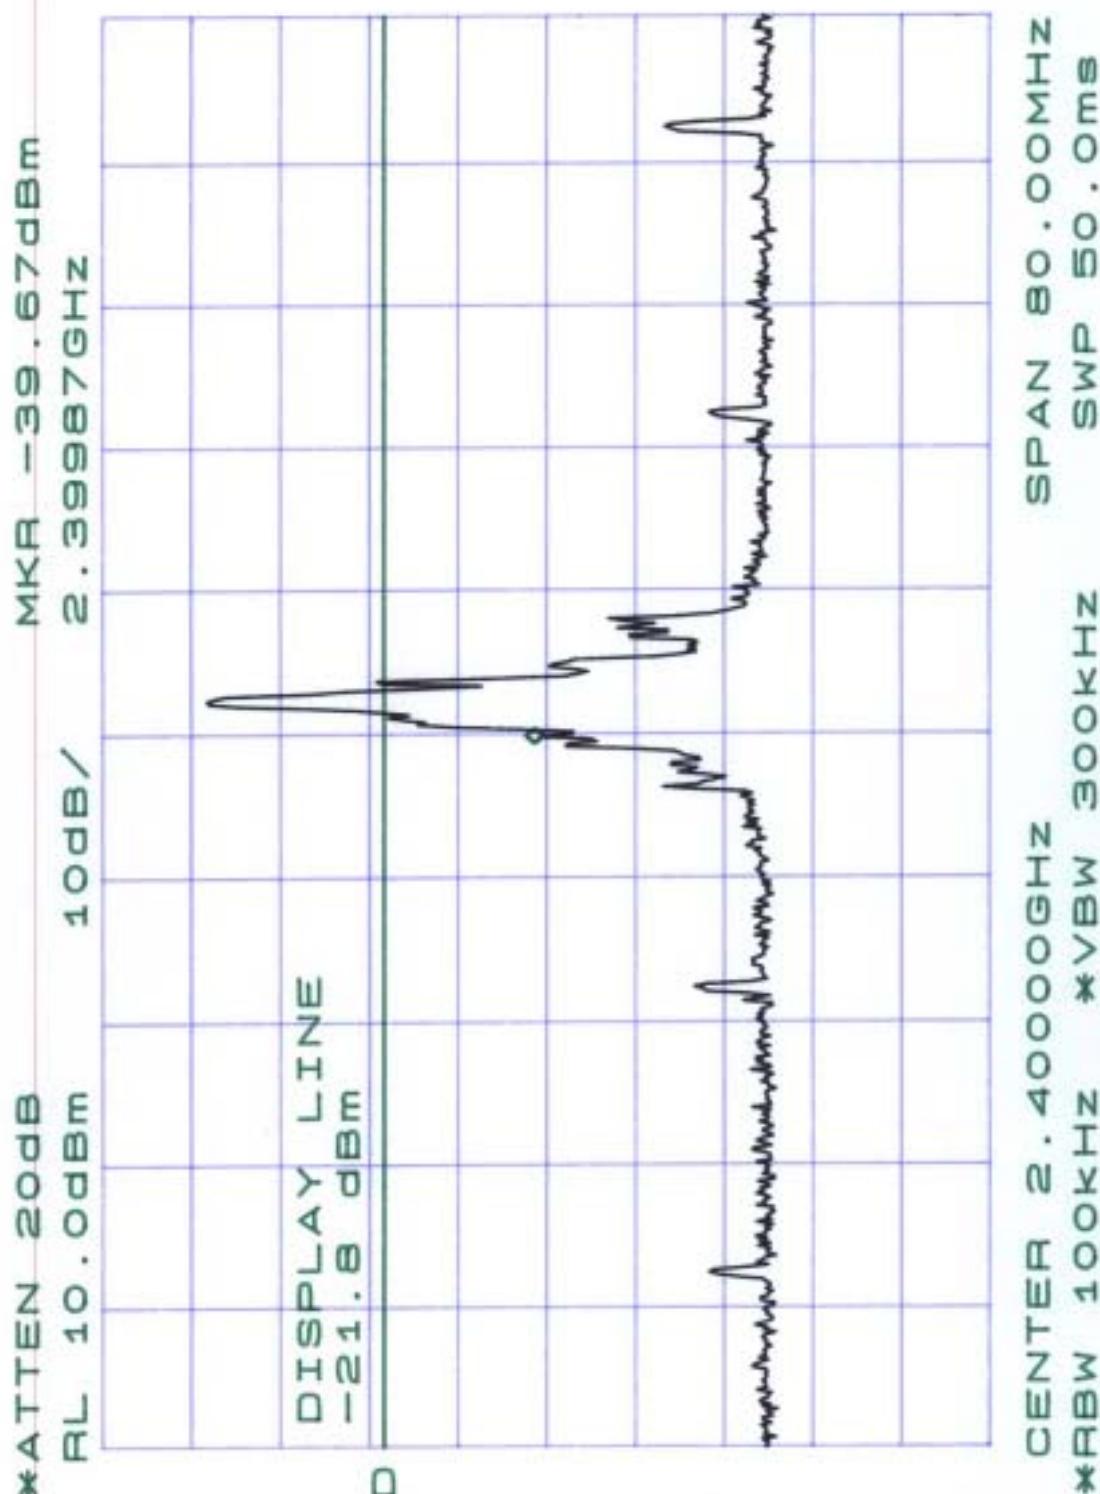

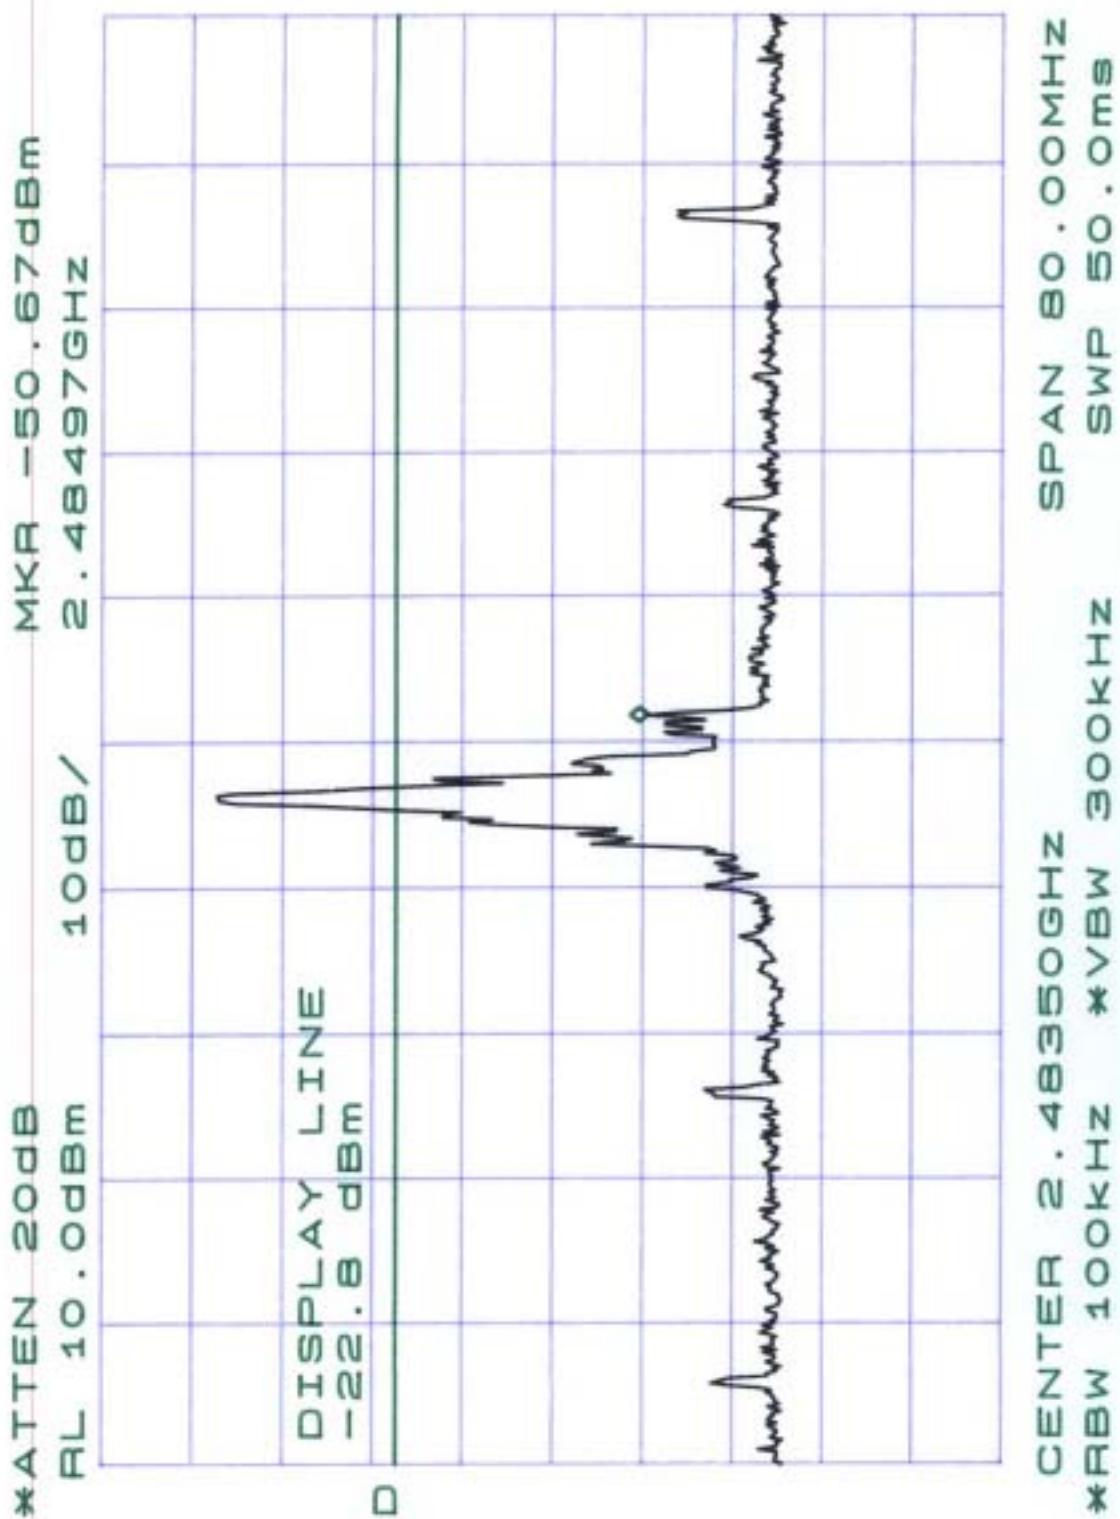

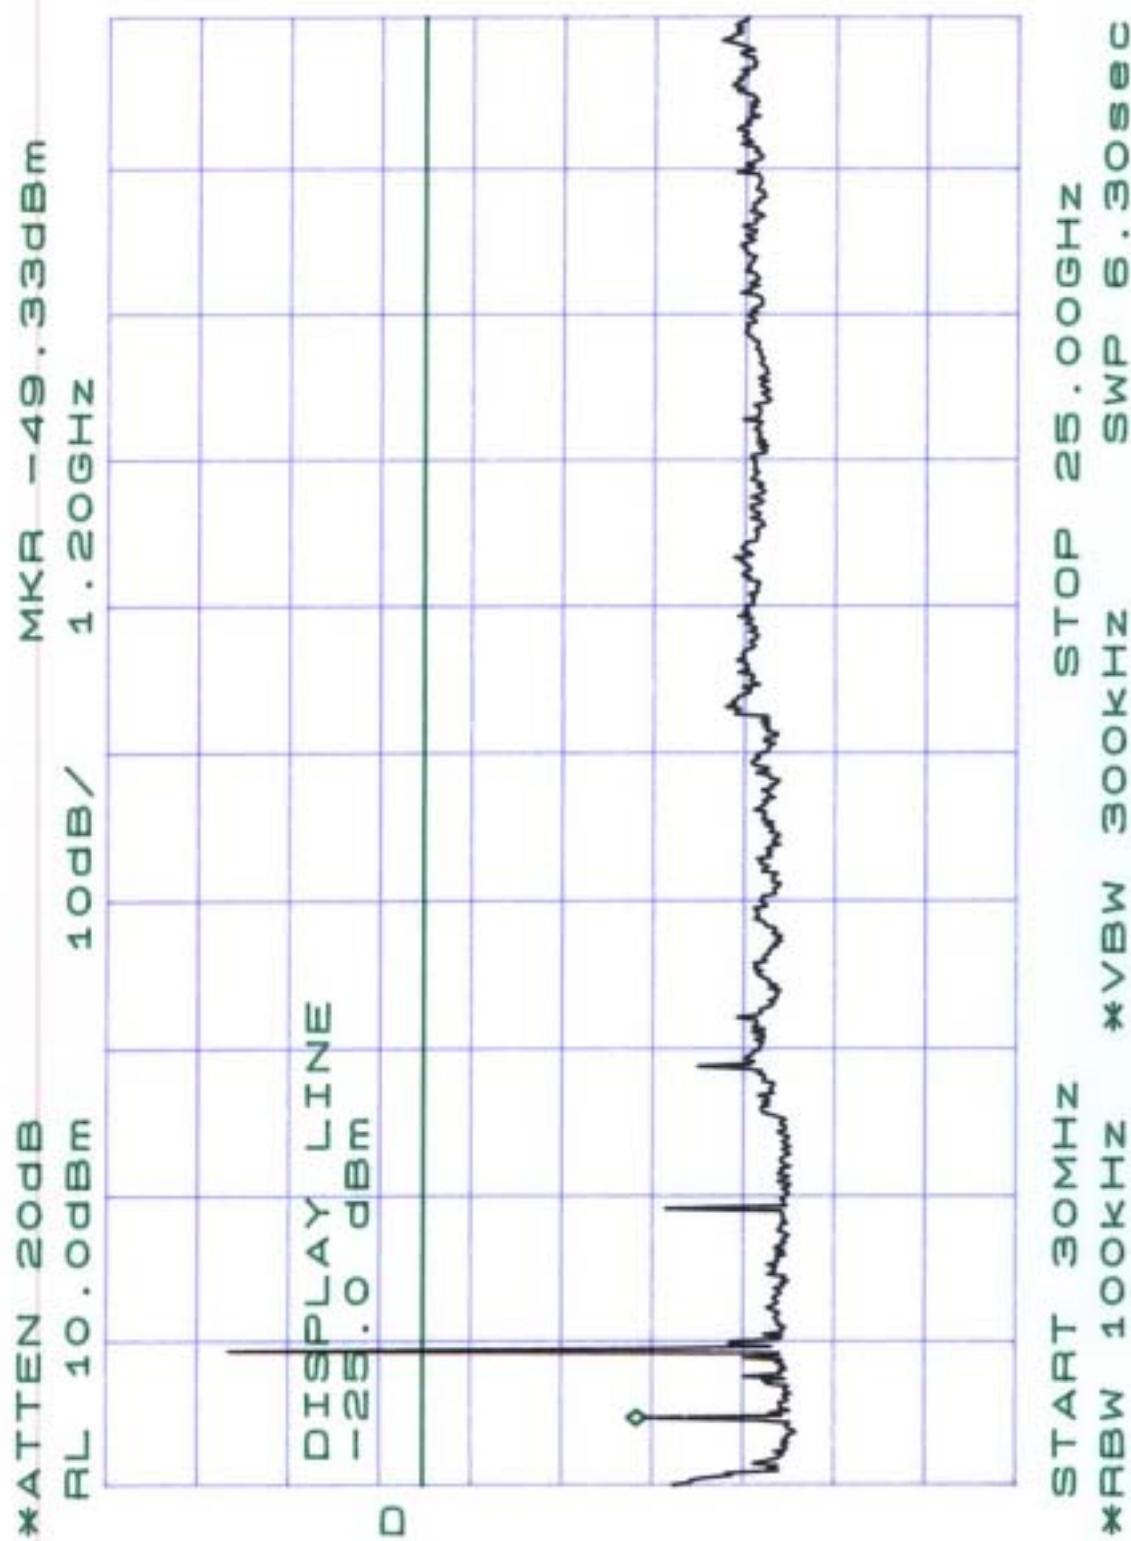

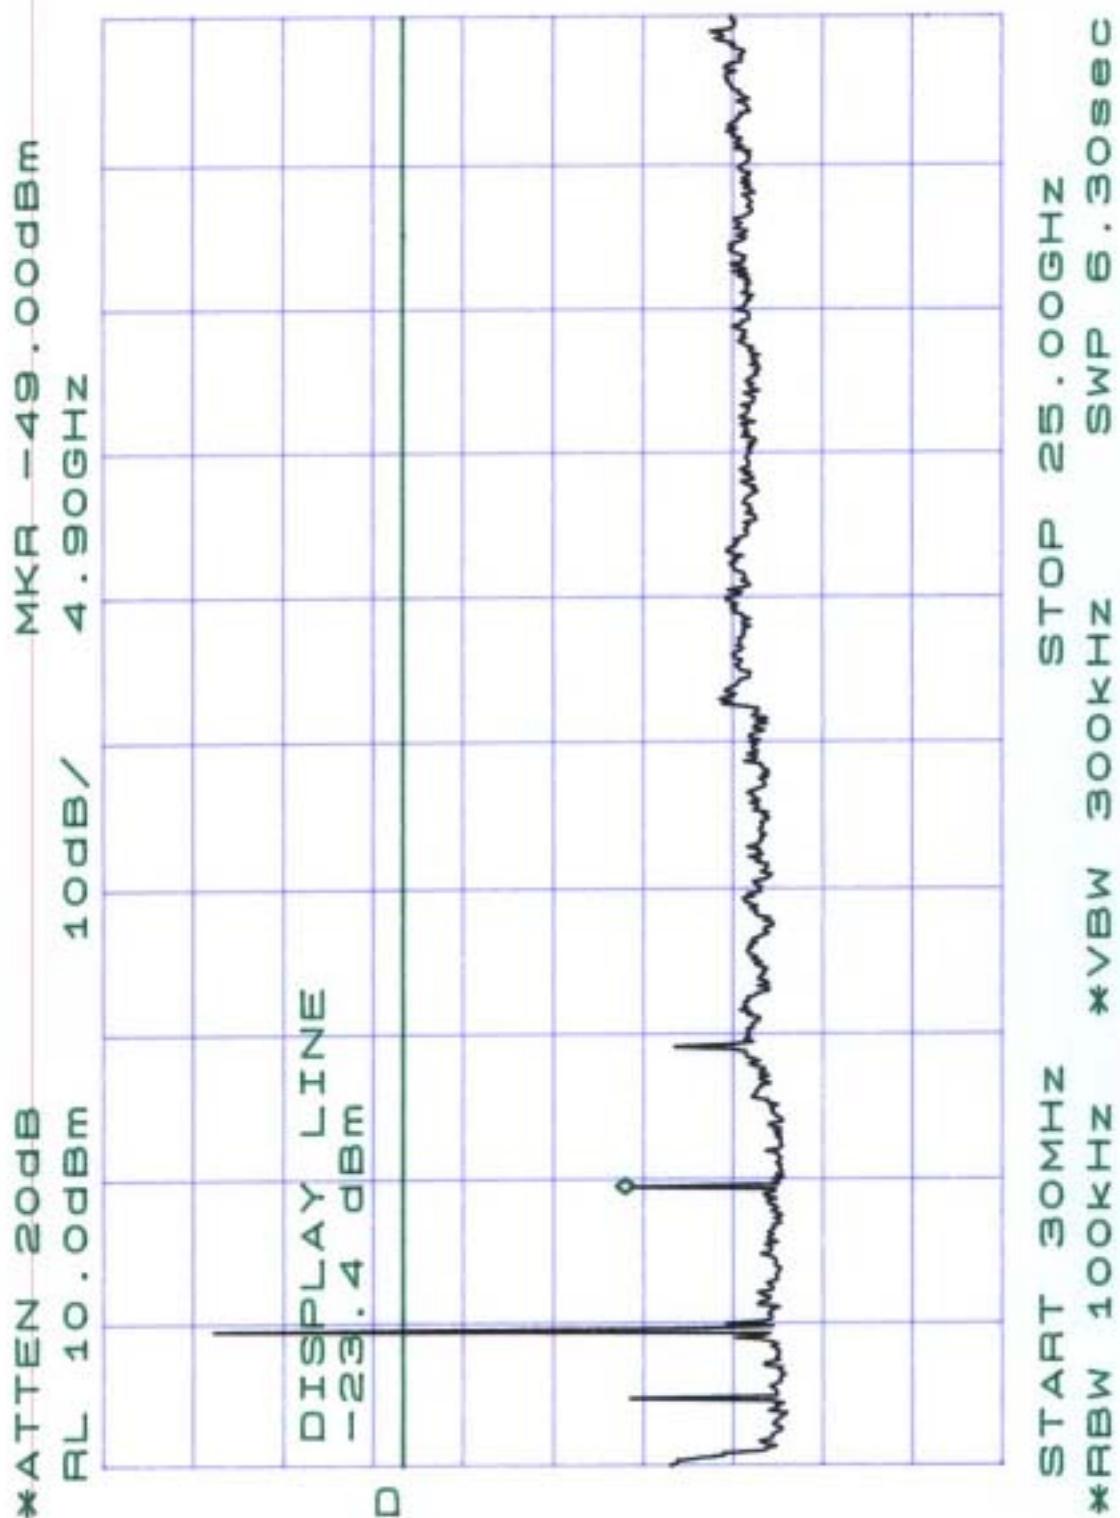

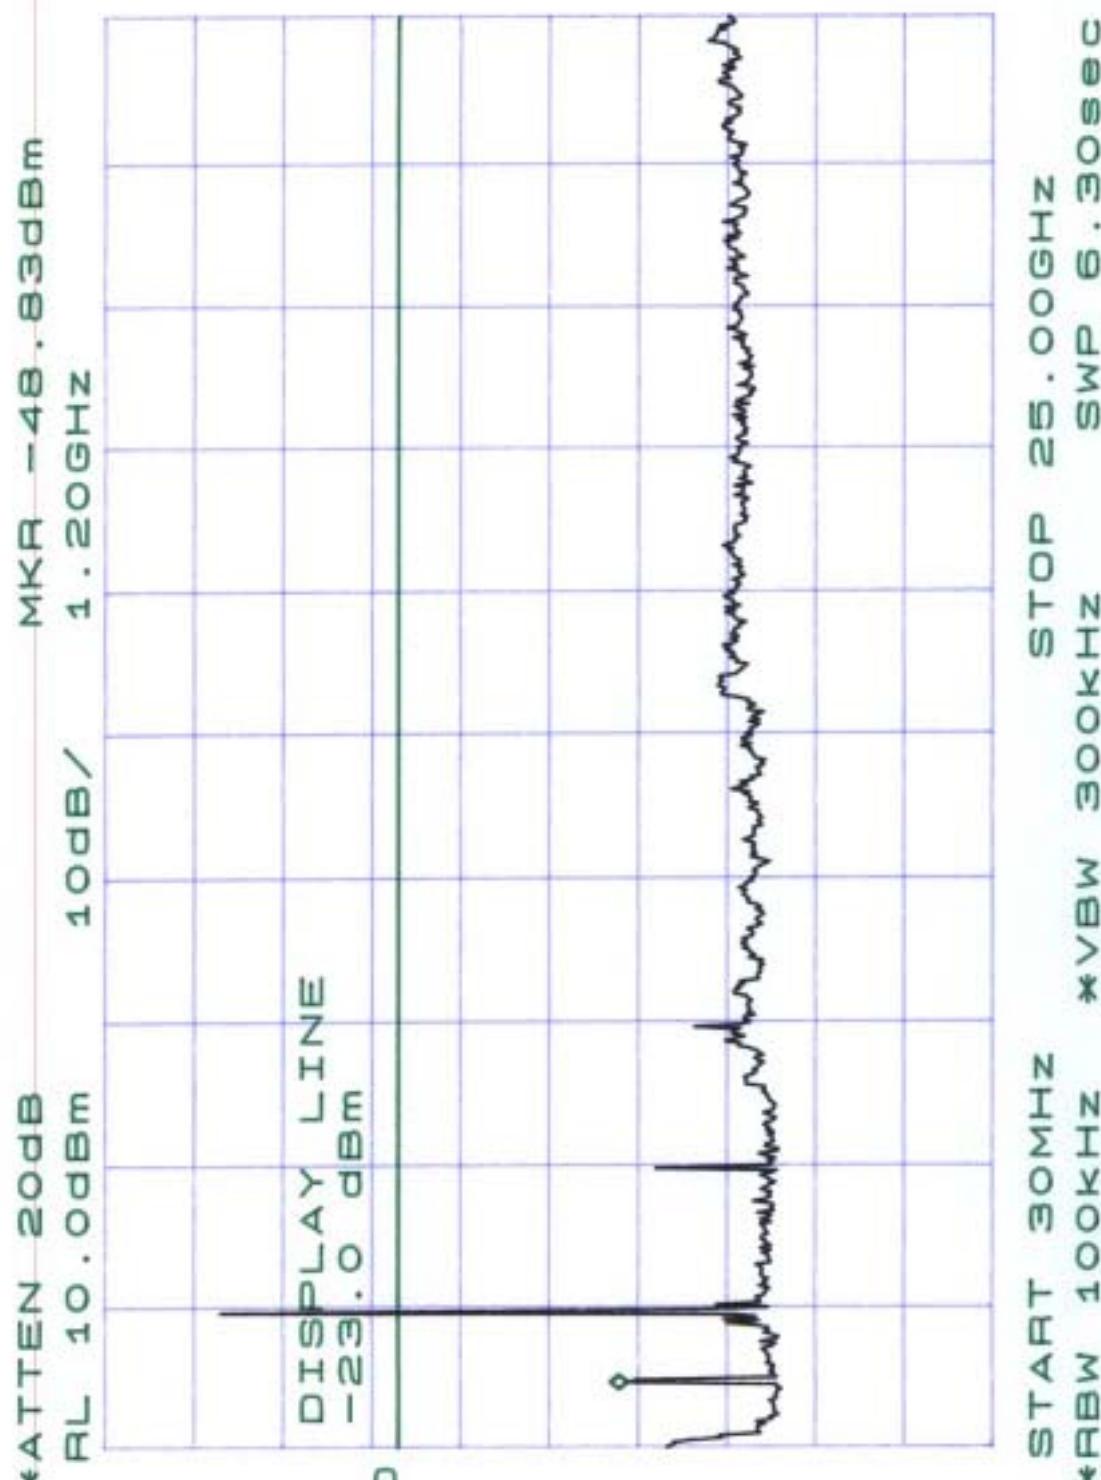

## 10 RADIATED MEASUREMENT AT BANDEDGE WITH FUNDAMENTAL FREQUENCIES

### 10.1 Standard Applicable

According to 15.247(c), radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

### 10.2 Measurement Procedure

1. The setup of testing was shown in figure 2.
2. Set the spectrum analyzer on 1MHz resolution bandwidth for each frequency measured.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Measurement applied to channel0、39、78, recorded the result.

### 10.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Next Cal. Due
EMI Test Receiver	Hewlett-Packard	8546A	08/27/2004
Horn Antenna	EMCO	3115	06/05/2005
LogBicone Antenna	Schwarzbeck	9160	10/28/2004
Horn Antenna	EMCO	3116	06/28/2004
Preamplifier	Hewlett-Packard	8449B	09/04/2004
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
2390 & 2483.5	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

## 10.4 Radiated Emission Data

### a) Channel 0

Operation Mode : Transmitting /Receiving

Fundamental Frequency : 2402 MHz

Test Date : May 27, 2004 Temperature : 22 Humidity: 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
2390.000	30.8	207	30.7	20.6	28.3	59.1	49.0	74.0	54.0	-5.0	32	1.5
2483.500	31.2	21.3	30.9	21.0	28.3	59.5	49.6	74.0	54.0	-4.4	213	1.5

### b) Channel 39

Operation Mode : Transmitting / Receiving

Fundamental Frequency : 2441MHz

Test Date : May 27, 2004 Temperature : 22 Humidity: 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
2390.000	30.7	20.6	30.8	20.6	28.3	59.1	48.9	74.0	54.0	-5.1	64	1.5
2483.500	31.1	21.2	31.1	20.9	28.3	59.4	49.5	74.0	54.0	-4.5	142	1.5

### c) Channel 78

Operation Mode : Transmitting / Receiving

Fundamental Frequency : 2480 MHz

Test Date : May 27, 2004 Temperature : 22 Humidity: 68%

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave	(H/V Max.)		
2390.500	30.7	20.7	30.9	20.7	28.3	59.2	49.0	74.0	54.0	-5.0	132	1.5
2483.500	31.2	21.3	31.0	21.1	28.3	59.5	49.6	74.0	54.0	-4.4	234	1.5

## 11 Number of Hopping Channels

### 11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems, operating in the 2400-2483.5MHz band employing at least 75 hopping channels

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to hopping operating mode and set spectrum analyzer maximum to measure the number of hopping channels.

### 11.3 Measurement Equipment


Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7440A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

### 11.4 Measurement Data

Test Date : May 27, 2004 Temperature : 22 Humidity: 68%

Number of hopping channels = 79 channels

*Note: Please refer to page 50 for chart*

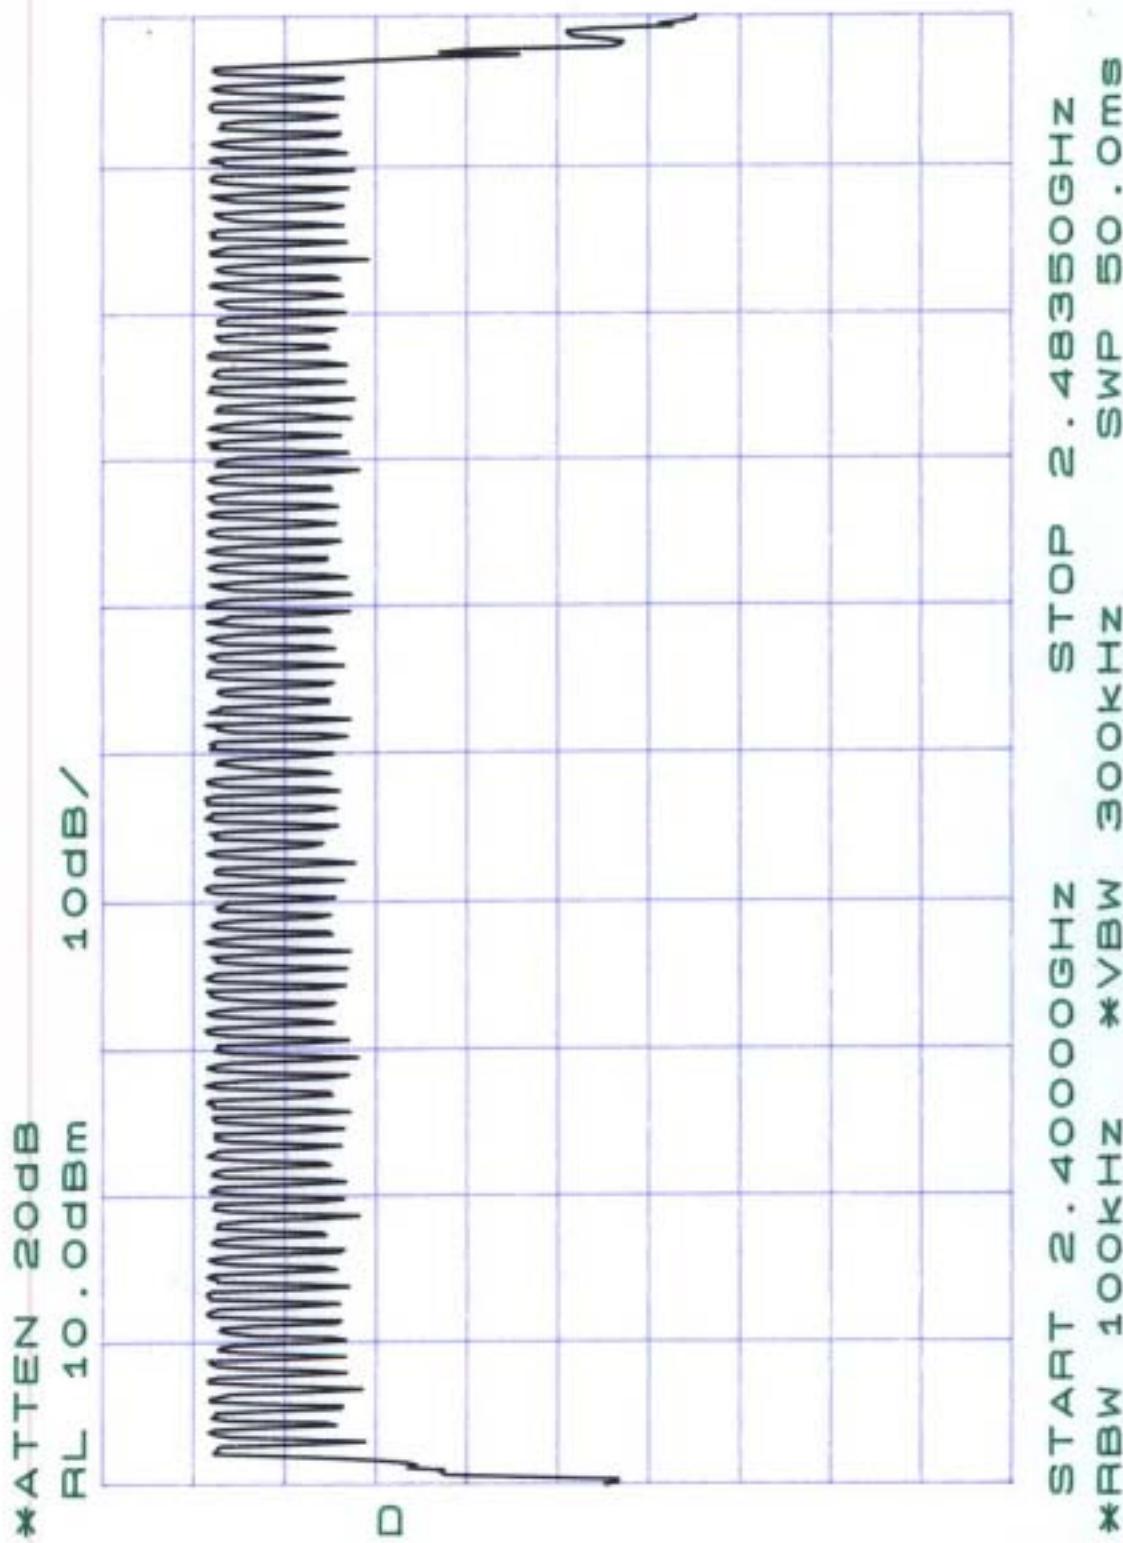

## 12 Channel Carrier Frequencies Separation

### 12.1 Standard Applicable

According to 15.247(a)(1), the frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

### 12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measurement frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set spectrum analyzer maximum hold to measure channel carrier frequency , then adjust channel carrier frequency to adjacent channel.
4. Repeat above procedure until all measured frequencies were complete.

### 12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

## 12.4 Measurement Data


Test Date : May 27, 2004


Temperature : 22


Humidity: 68%

- a) 2402MHz channel separation is 1MHz
- b) 2441MHz channel separation is 1MHz
- c) 2480MHz channel separation is 1MHz

*Note: Please refer to page 53 to page 55 for chart*

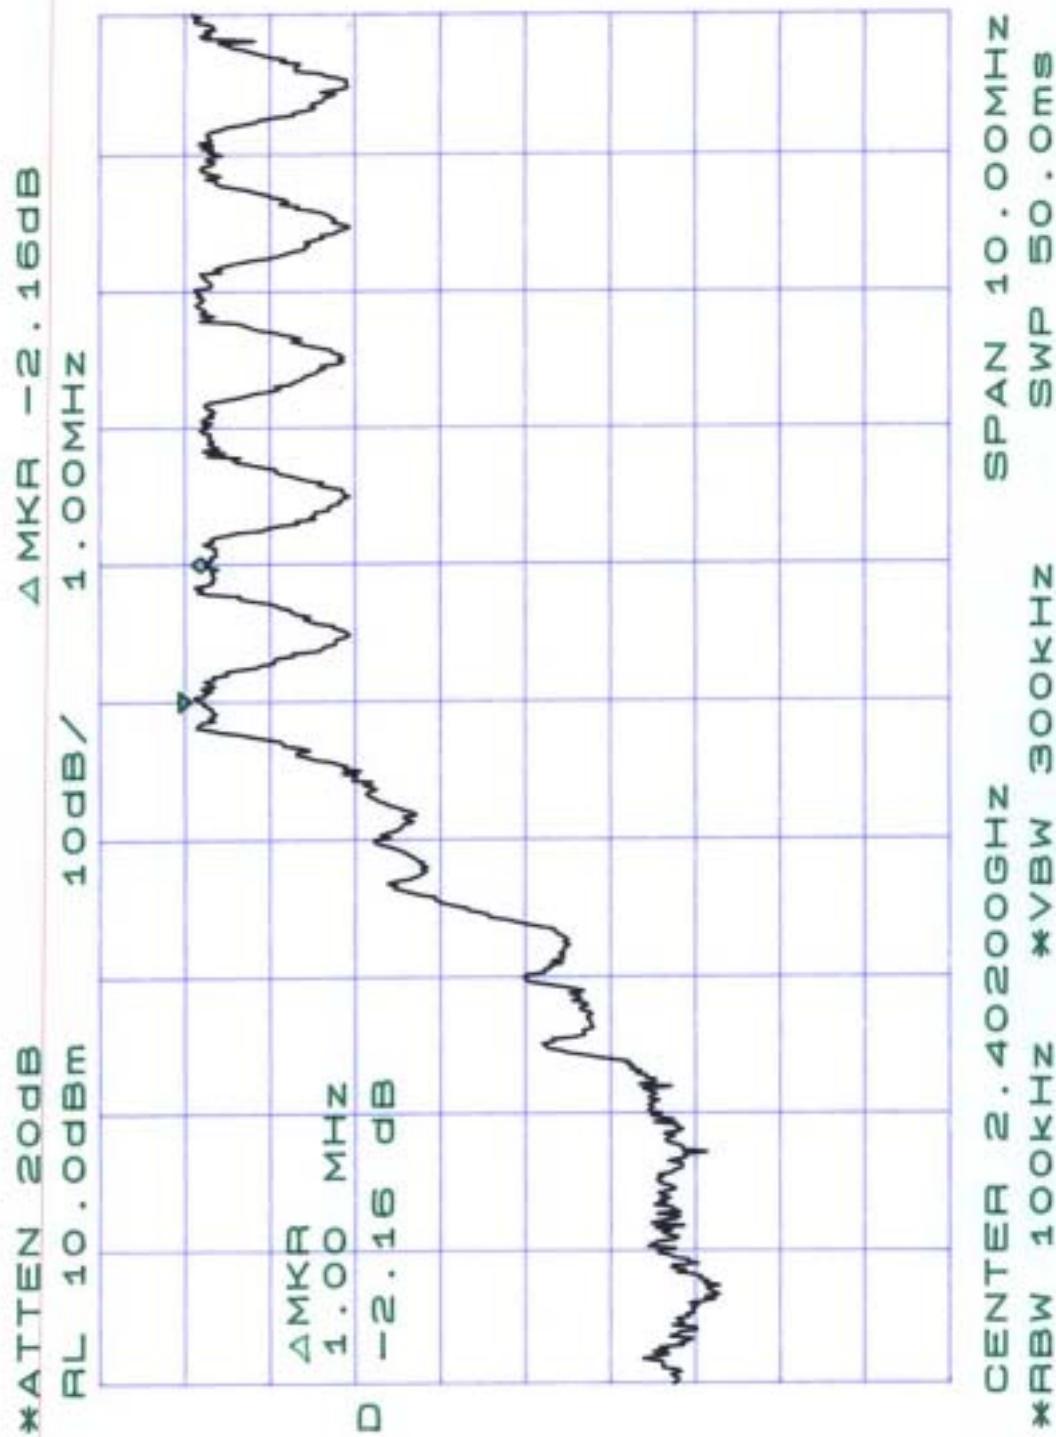

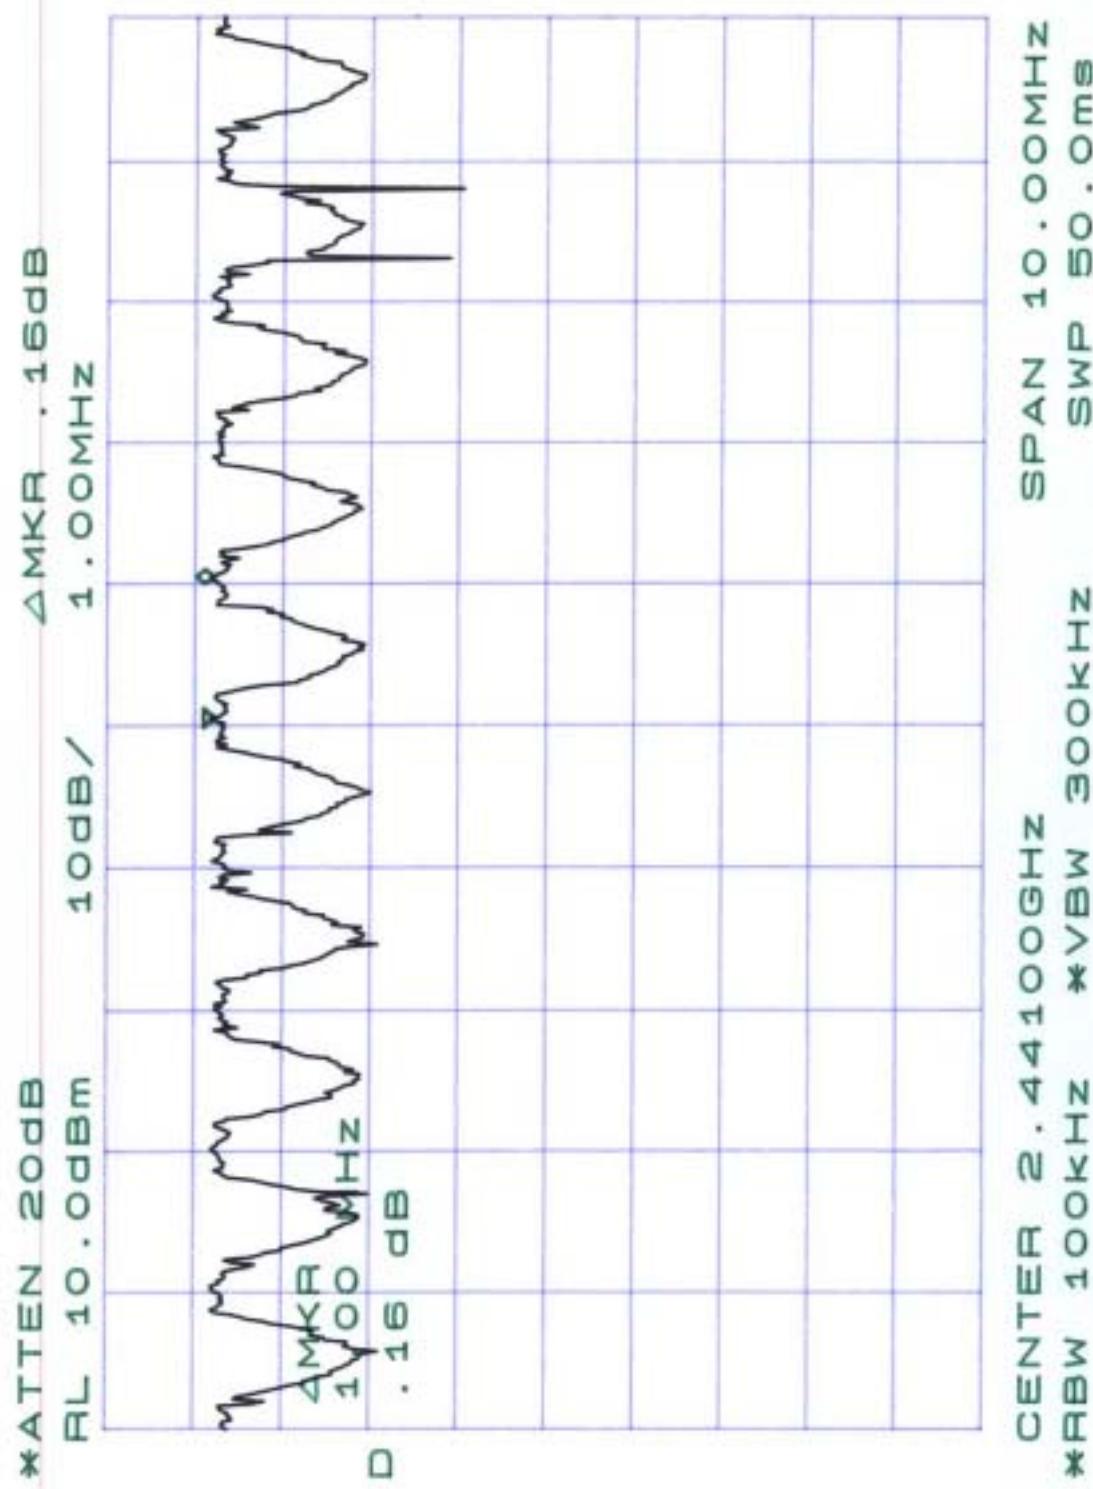

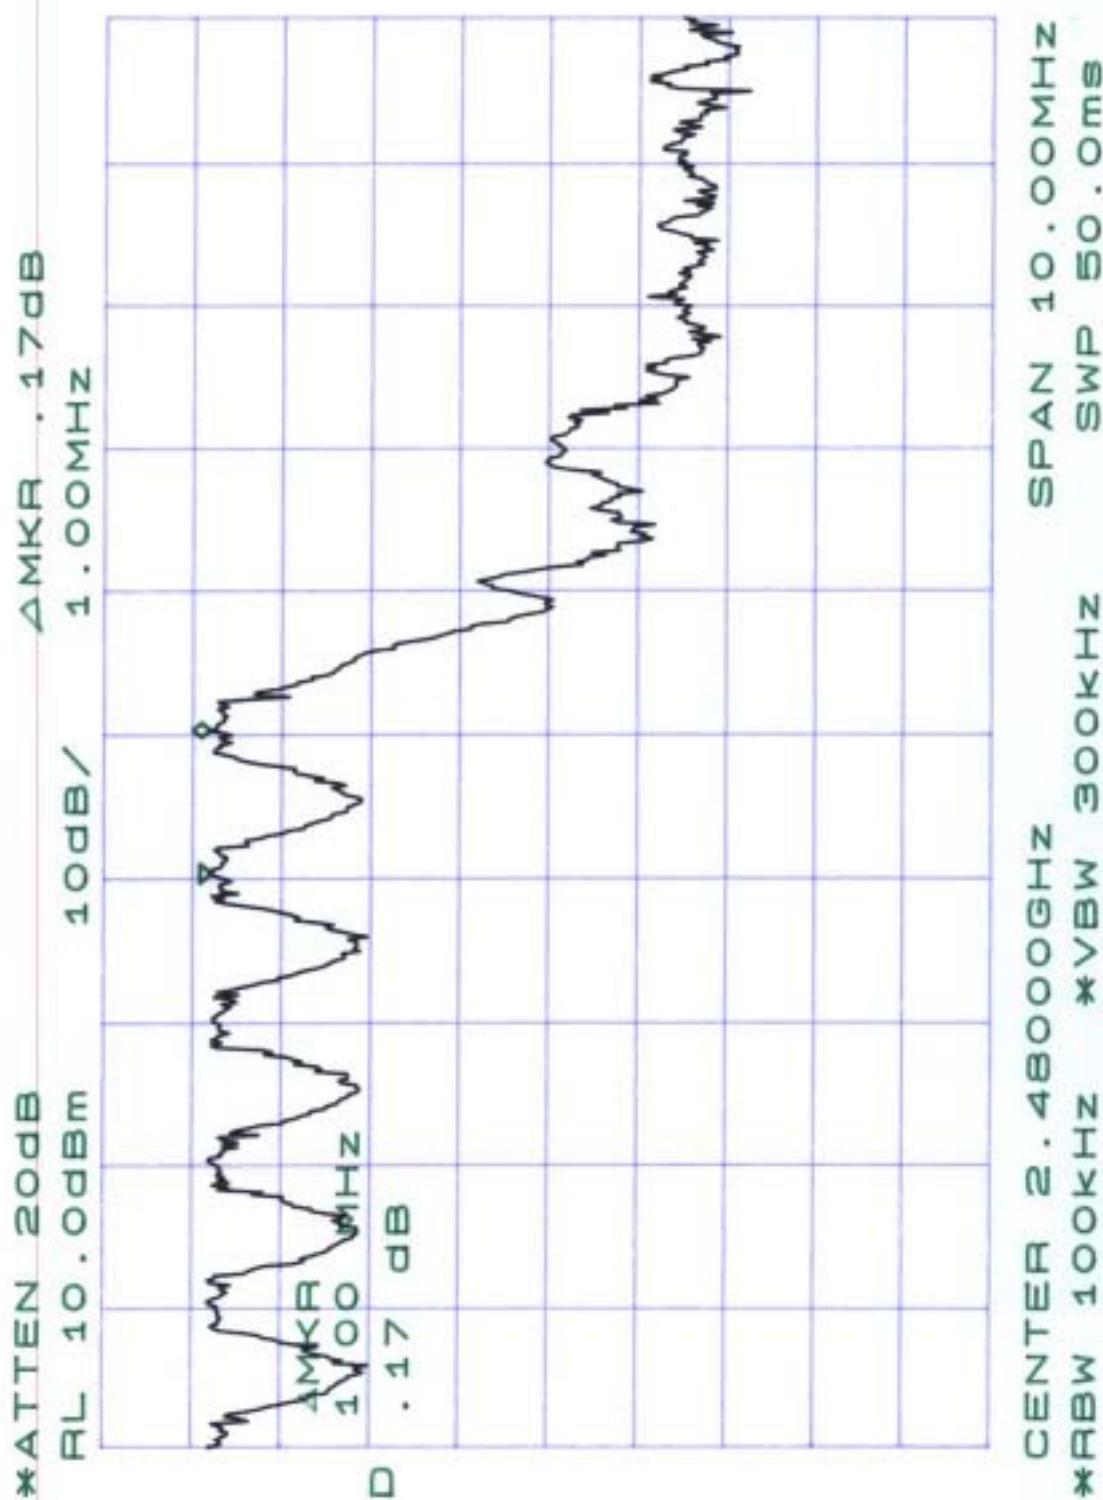

## 13 POWER SPECTRAL DENSITY

### 13.1 Standard Applicable

According to 15.247(d), for bluetooth device, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 3kHz, VBW to 30 kHz, sweep 300kHz and sweep time 100 sec.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

### 13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

### 13.4 Measurement Data


Test Date : May 27, 2004


Temperature : 22


Humidity: 68%

- a) Channel 0 : Power Spectral Density is -14.17 dBm
- b) Channel 39 : Power Spectral Density is -13.33 dBm
- c) Channel 78 : Power Spectral Density is -13.17 dBm

*Note: Please refer to page 58 to page 60 for chart*

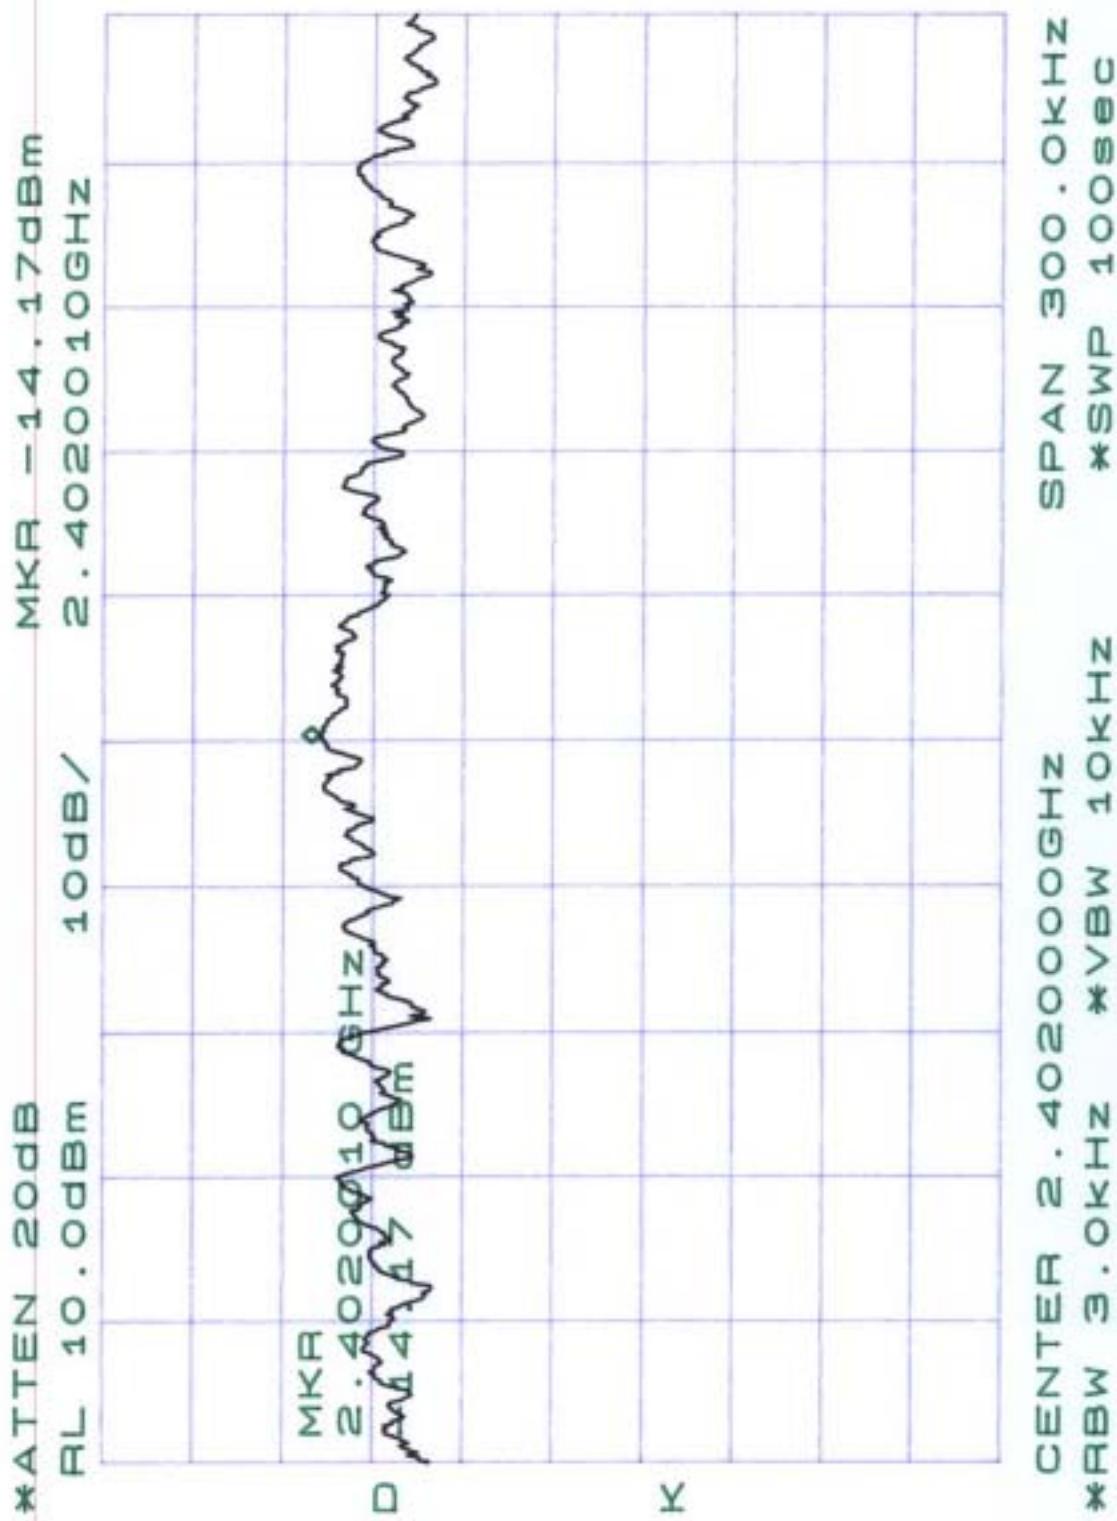

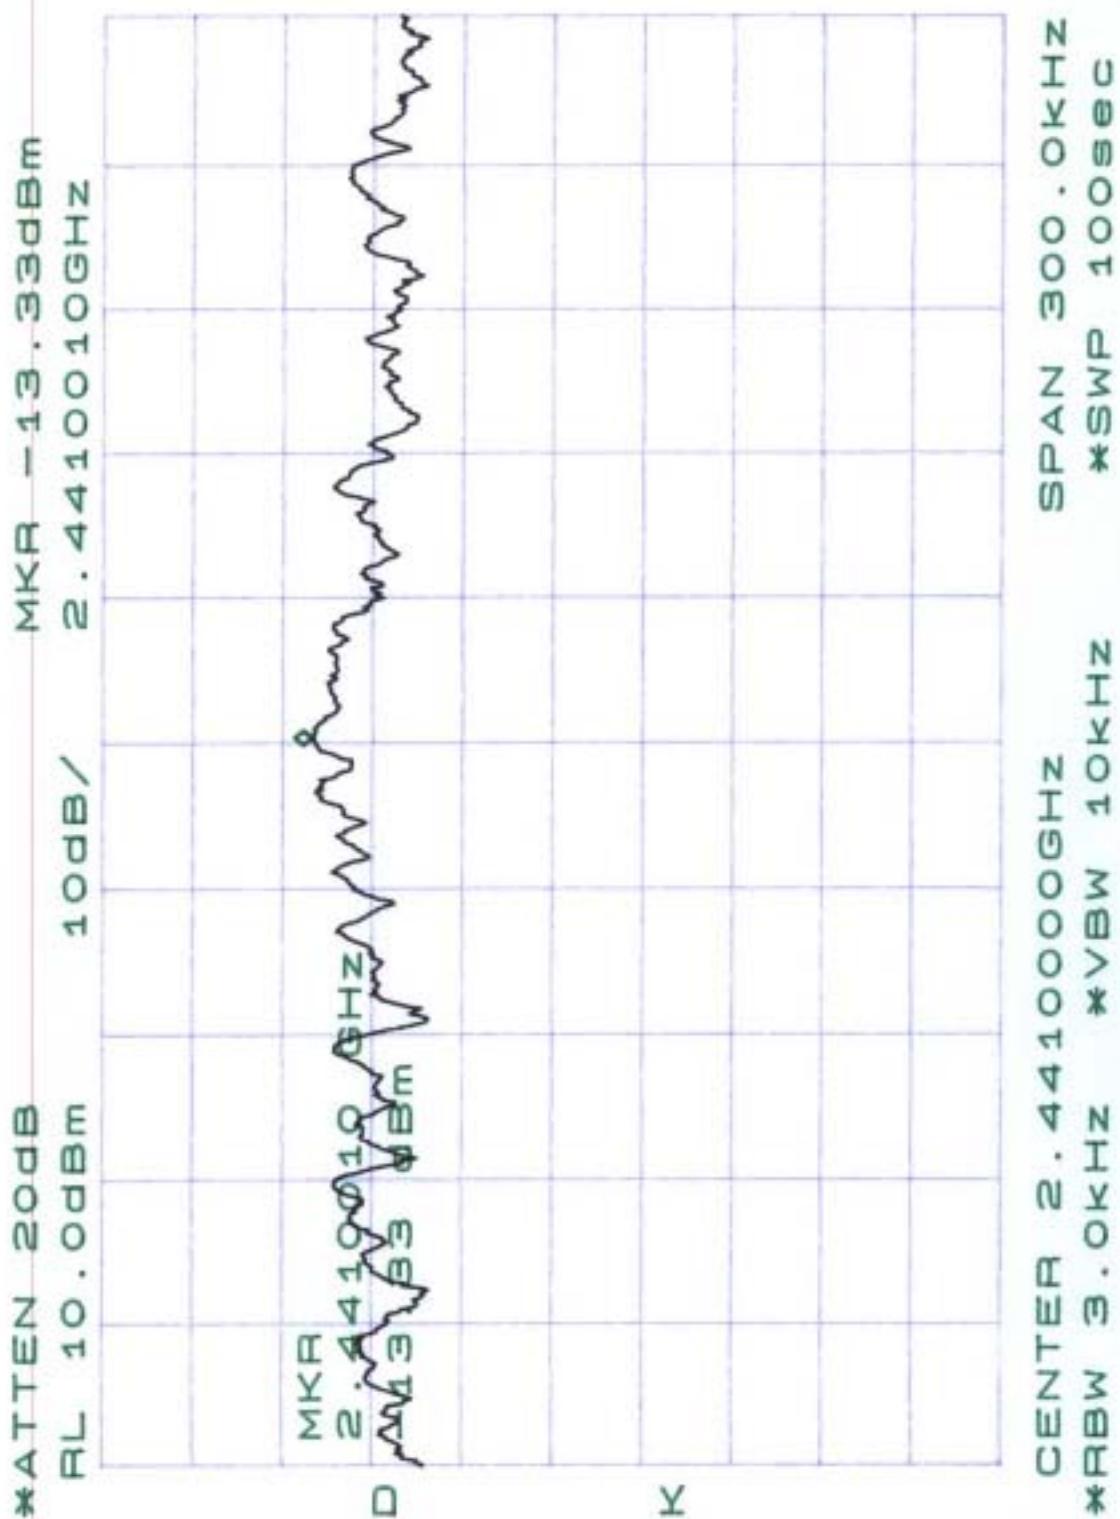

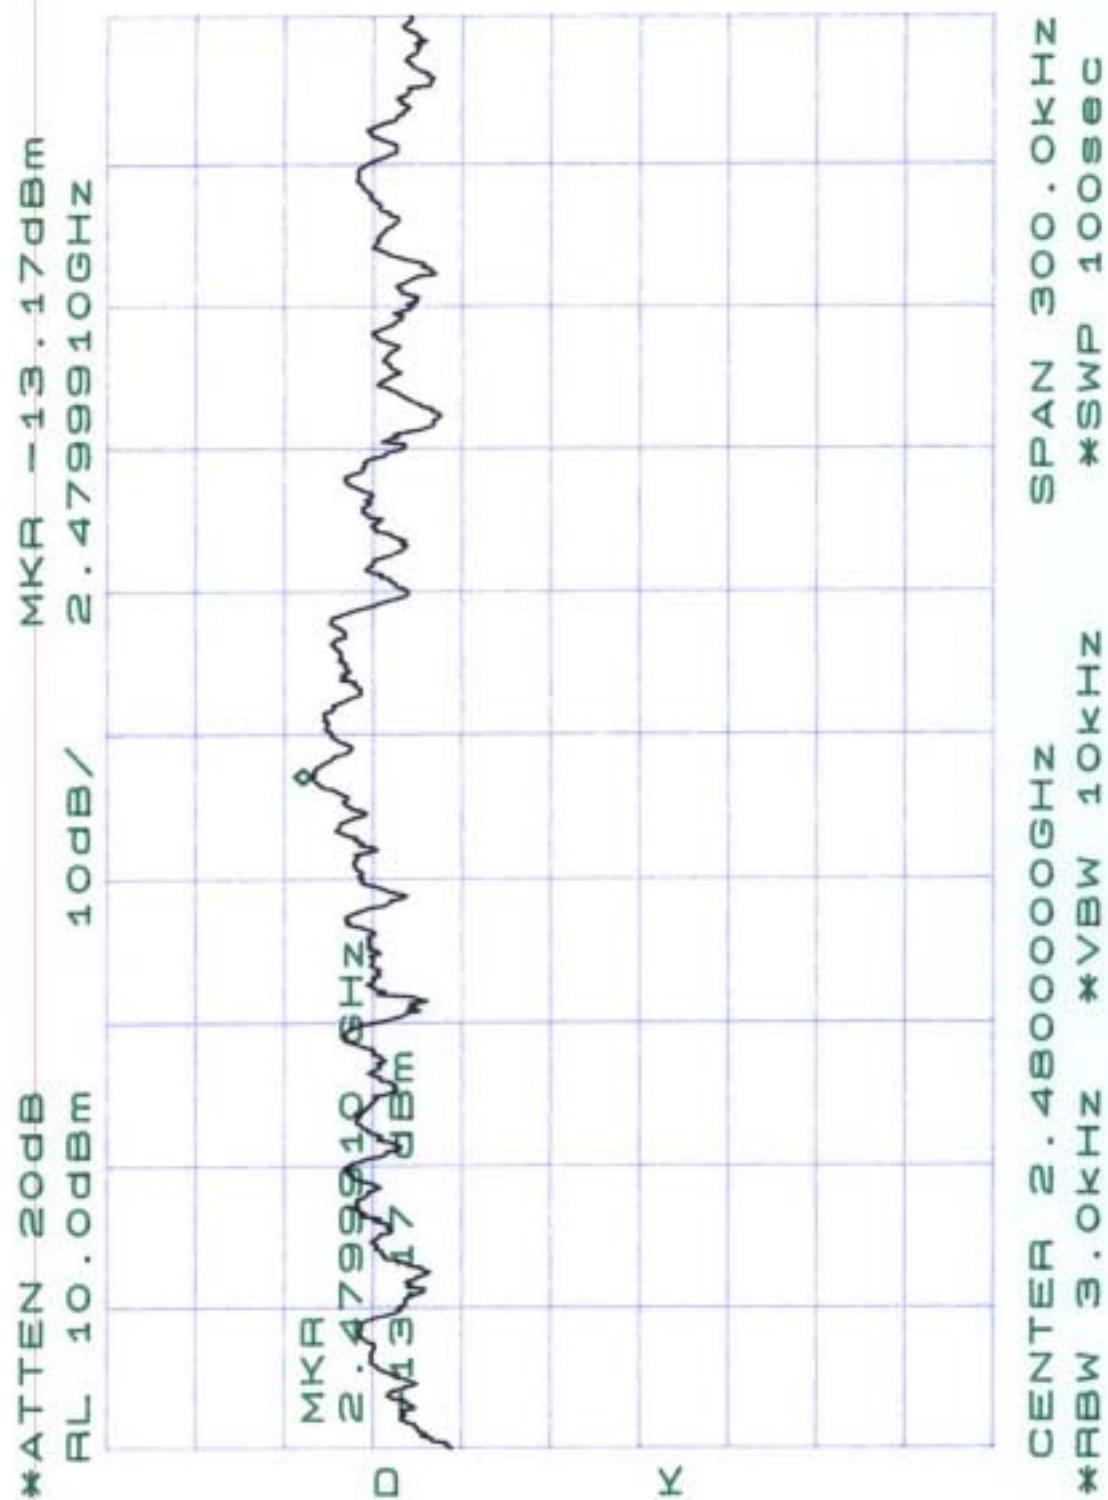

## 14 Dwell Time

### 14.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping system in the 2400-2483.5MHz band employing at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels employed.

### 14.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The setup of the EUT as shown in figure 4.

### 14.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Plotter	Hewlett-Packard	7550A	N/A
Spectrum Analyzer	Hewlett-Packard	8564EC	09/10/2004

### 14.4 Measurement Data

Test Date : May 27, 2004 Temperature : 22 Humidity: 68%

Test period=0.4(second/channel)×79 channel=31.6sec

- a) 2402MHz dwell time=  $550\text{us} \times \frac{800}{79} \times 31.6 = 176\text{ms}$
- b) 2441MHz dwell time=  $550\text{us} \times \frac{800}{79} \times 31.6 = 176\text{ms}$
- c) 2480MHz dwell time=  $550\text{us} \times \frac{800}{79} \times 31.6 = 176\text{ms}$

*Note: Please refer to page 62 to page 67 for chart*

