



TEST REPORT

For

Xingtel Xiamen Group Co., Ltd.

Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District,
Xiamen, Fujian, China

FCC ID: QMHA1600BT

Report Type: Original Report	Product Type: DECT 6.0 Amplified Cordless Freedom Deluxe Phone
Test Engineer: Henry Ding	
Report Number: RSZ120726001-00BT	
Report Date: 2012-08-13	
Reviewed By: RF Leader	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP* or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	7
FCC §15.247(i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
STANDARD APPLICABLE	8
FCC §15.203 – ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	14
APPLICABLE STANDARD	14
MEASUREMENT UNCERTAINTY	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
TEST EQUIPMENT LIST AND DETAILS.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING	21

APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	26
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(d) - BAND EDGES TESTING	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	36
DECLARATION LETTER.....	38

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Xingtel Xiamen Group Co., Ltd.*'s product, model number: *A1600BT BUN (FCC ID: QMHA1600BT)* or the "EUT" in this report was a base unit of *DECT 6.0 Amplified Cordless Freedom Deluxe Phone*, which was measured approximately: 243 mm (L) x 241.5 mm (W) x 94 mm (H), rated input voltage: DC 7.5V adapter.

Adapter information:

Model: P12-075100 US

Input: AC 100-240 V, 50/60 Hz, 0.3A

Output: DC 7.5V, 1.0A

Note: The serial products, model A1600BT BUN, A1600BT and A1600E-BT are electrically identical, we select A1600BT BUN to test, the difference among them is only model number due to different combination, and please refers to the attached declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 1207139 (Assigned by BACL, Shenzhen). The EUT was received on 2012-07-26.*

Objective

This report is prepared on behalf of *Xingtel Xiamen Group Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15D PUE submissions and FCC Part 15D PUB submission of portable part portion with FCC ID: QMHA1600BT

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

EUT Exercise Software

Software: CSR BlueTest3

Version: Release Build


Equipment Modifications

No modification was made to the EUT tested.

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detectable DC Power Cable	1.5	EUT	Adapter

Block Diagram of Test Setup

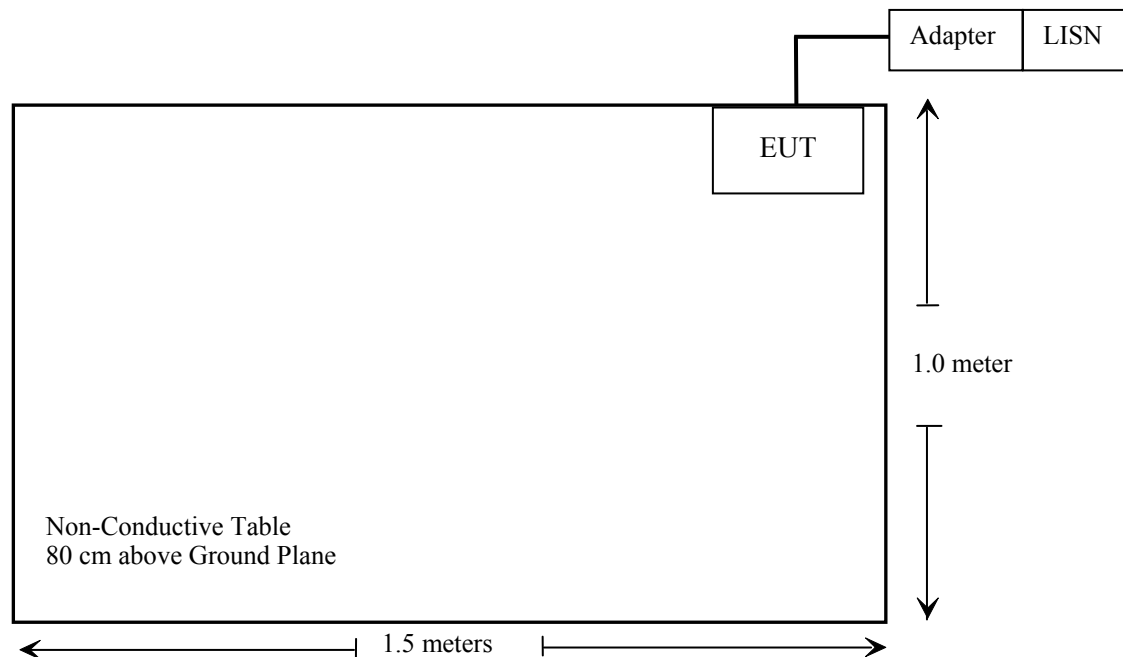

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247(i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mw/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Calculation

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally **numeric** gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402	3	2.0	-1.03	0.79	20	0.0003	1.0

Result: The EUT meets FCC MPE limit at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB antenna connect to bluetooth module, which in accordance to section 15.203, the maximum gain is 3 dBi. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR-16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence).

EUT Setup

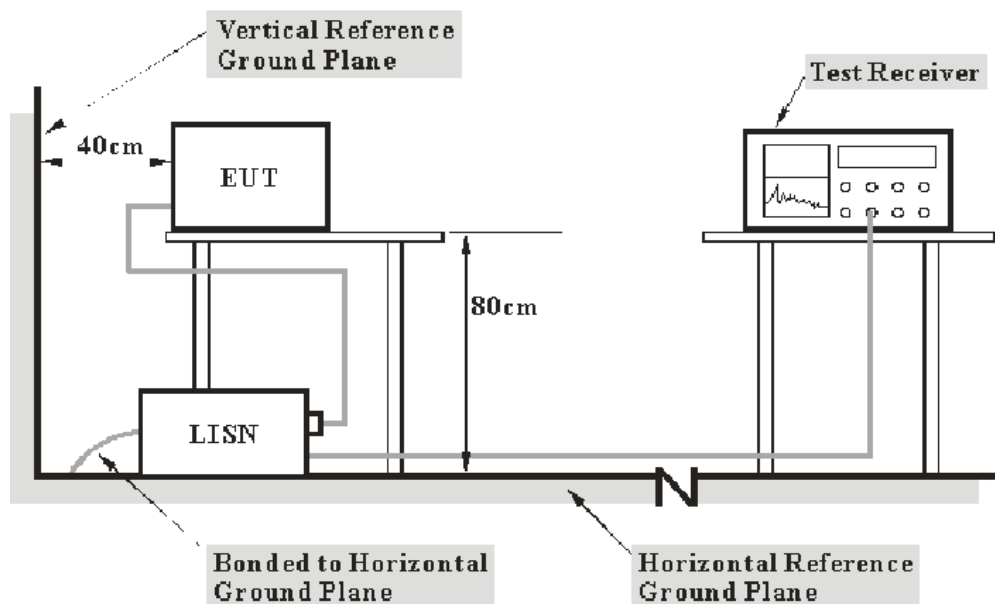

Note: 1. Support units were connected to second LISN.

- Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-11-17	2012-11-16
Rohde & Schwarz	Attenuator	ESH3Z2	DE25985	2012-07-08	2013-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

10.32 dB at 0.385 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Henry Ding on 2012-08-08.

Test Mode: Transmitting

AC 120 V, 60 Hz, Line:

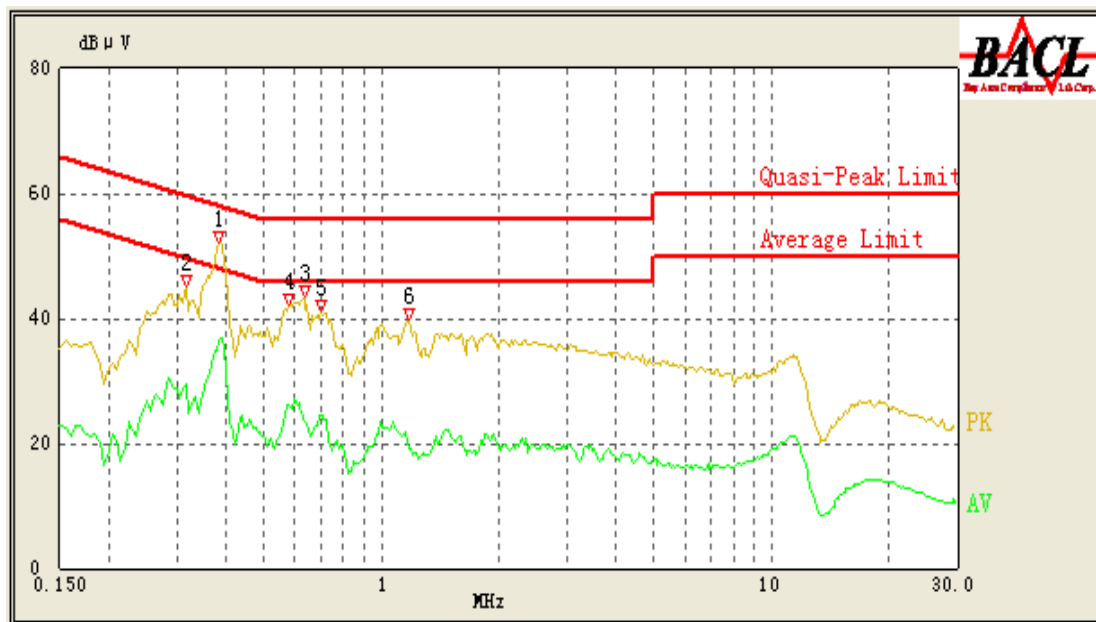

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.385	48.97	10.26	59.29	10.32	QP
0.385	36.66	10.26	49.29	12.63	Ave.
0.580	39.19	10.24	56.00	16.81	QP
0.635	38.50	10.23	56.00	17.50	QP
0.700	37.68	10.22	56.00	18.32	QP
0.580	26.08	10.24	46.00	19.92	Ave.
0.315	40.56	10.26	61.29	20.73	QP
0.705	24.48	10.22	46.00	21.52	Ave.
0.315	29.52	10.26	51.29	21.77	Ave.
0.630	24.03	10.23	46.00	21.97	Ave.
1.180	33.36	10.18	56.00	22.64	QP
1.180	19.24	10.18	46.00	26.76	Ave.

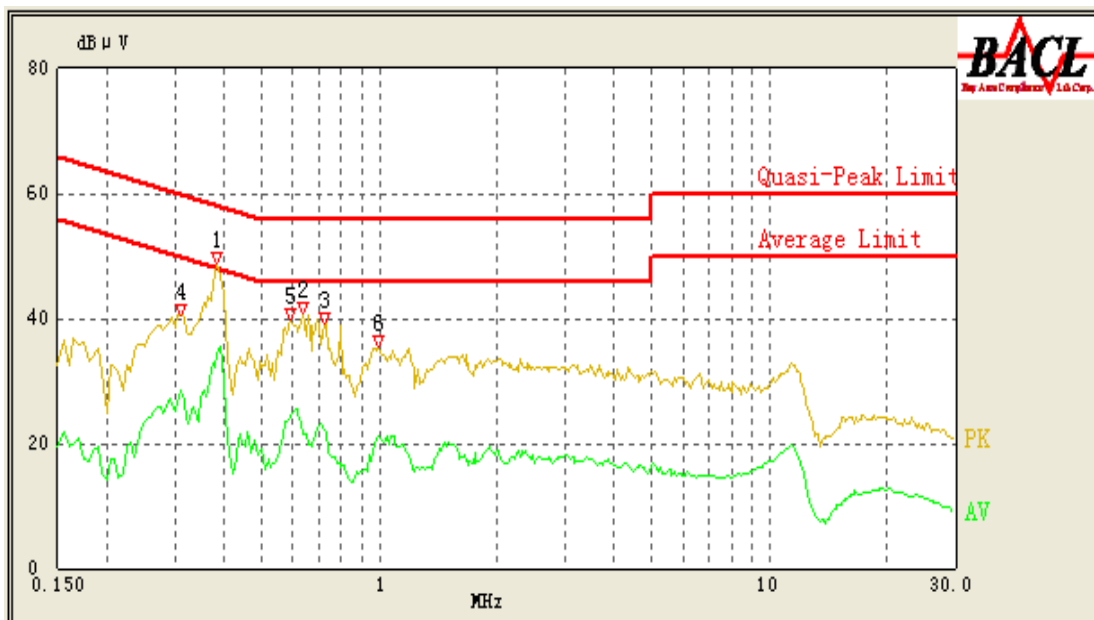AC 120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.385	44.11	10.25	59.29	15.18	QP
0.385	34.01	10.25	49.29	15.28	Ave.
0.590	34.64	10.23	56.00	21.36	QP
0.590	24.30	10.23	46.00	21.70	Ave.
0.640	33.36	10.22	56.00	22.64	QP
0.310	28.39	10.25	51.43	23.04	Ave.
0.725	32.82	10.21	56.00	23.18	QP
0.720	22.17	10.21	46.00	23.83	Ave.
0.640	21.45	10.22	46.00	24.55	Ave.
0.995	21.33	10.17	46.00	24.67	Ave.
0.310	36.28	10.25	61.43	25.15	QP
0.995	30.47	10.17	56.00	25.53	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence).

EUT Setup

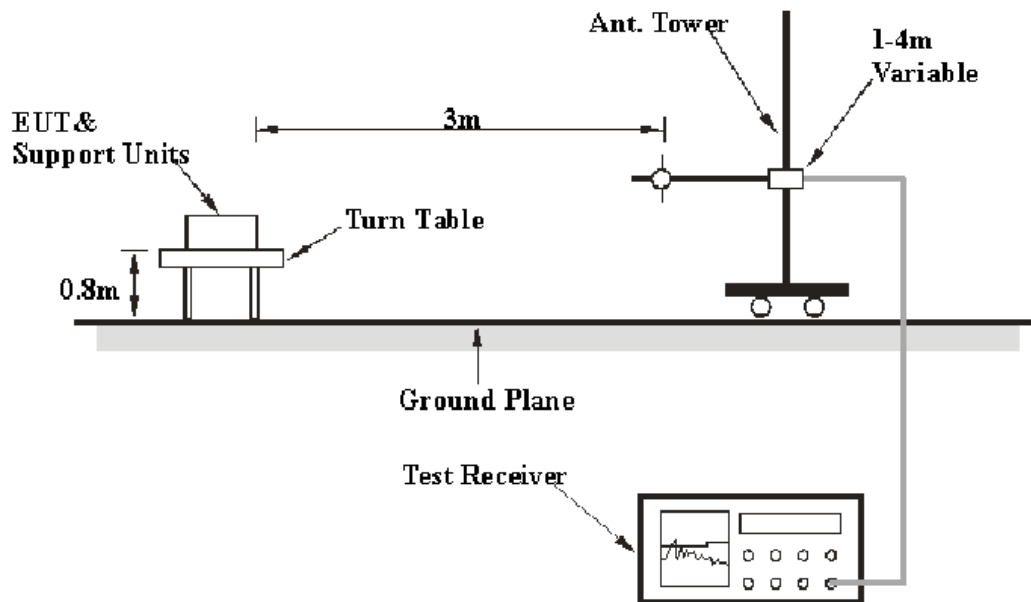

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz to 1GHz and peak and Average detection modes for frequencies above 1GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Electro-Mechanics	Horn antenna	3116	9510-2270	2011-10-14	2012-11-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

3.6 dB at 1626.9 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Henry Ding on 2012-08-08.

30 MHz ~ 25 GHz:

Test mode: Transmitting

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna			Cable Loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)	Factor (dB)				Limit (dBuV/m)	Margin (dB)
Low Channel (2402 MHz)											
2402.0	83.96	PK	213	1.2	H	29.60	3.03	26.50	90.09	/	/
2402.0	71.29	Ave.	213	1.2	H	29.60	3.03	26.50	77.42	/	/
2402.0	85.86	PK	115	1.2	V	29.60	3.03	26.50	91.99	/	/
2402.0	74.46	Ave.	115	1.2	V	29.60	3.03	26.50	80.59	/	/
1626.6	47.88	Ave.	43	1.3	V	25.90	2.37	26.50	49.65	54.00	4.35
4804.0	34.31	Ave.	37	1.1	V	34.60	4.30	26.50	46.71	54.00	7.29
4804.0	46.72	PK	37	1.1	V	34.60	4.30	26.50	59.12	74.00	14.88
7206.0	17.28	Ave.	96	1.2	H	37.90	5.22	26.50	33.90	54.00	20.10
1626.6	50.69	PK	43	1.3	V	25.90	2.37	26.50	52.46	74.00	21.54
7206.0	33.69	PK	96	1.2	H	37.90	5.22	26.50	50.31	74.00	23.69
2486.1	22.81	Ave.	13	1.2	V	29.60	3.03	26.50	28.94	54.00	25.06
2365.3	22.37	Ave.	7	1.1	H	29.00	2.98	26.50	27.85	54.00	26.15
2331.3	22.26	Ave.	106	1.2	V	29.00	2.98	26.50	27.74	54.00	26.26
2486.1	36.59	PK	13	1.2	V	29.60	3.03	26.50	42.72	74.00	31.28
2365.3	36.87	PK	7	1.1	H	29.00	2.98	26.50	42.35	74.00	31.65
2331.3	36.32	PK	106	1.2	V	29.00	2.98	26.50	41.80	74.00	32.20

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna			Cable Loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)	Factor (dB)				Limit (dBuV/m)	Margin (dB)
Middle Channel (2441 MHz)											
2441.0	83.22	PK	43	1.2	H	30.60	3.11	26.50	90.43	/	/
2441.0	71.64	Ave.	43	1.2	H	30.60	3.11	26.50	78.85	/	/
2441.0	85.23	PK	86	1.3	V	30.20	3.11	26.50	92.04	/	/
2441.0	74.86	Ave.	86	1.3	V	30.20	3.11	26.50	81.67	/	/
1626.9	48.63	Ave.	41	1.2	V	25.90	2.37	26.50	50.40	54.00	3.60*
4882.0	35.09	Ave.	163	1.1	V	34.60	4.36	26.50	47.55	54.00	6.45
4882.0	47.83	PK	163	1.1	V	34.60	4.36	26.50	60.29	74.00	13.71
7323.0	20.01	Ave.	5	1.2	H	37.90	5.09	26.50	36.50	54.00	17.50
1626.9	50.83	PK	41	1.2	V	25.90	2.37	26.50	52.60	74.00	21.40
7323.0	34.29	PK	5	1.2	H	37.90	5.09	26.50	50.78	74.00	23.22
2483.6	22.81	Ave.	83	1.2	V	29.60	3.03	26.50	28.94	54.00	25.06
2334.1	22.18	Ave.	44	1.1	V	29.00	2.98	26.50	27.66	54.00	26.34
2365.7	22.14	Ave.	67	1.2	H	29.00	2.98	26.50	27.62	54.00	26.38
2483.6	36.97	PK	83	1.2	V	29.60	3.03	26.50	43.10	74.00	30.90
2334.1	36.85	PK	44	1.1	V	29.00	2.98	26.50	42.33	74.00	31.67
2365.7	36.05	PK	67	1.2	H	29.00	2.98	26.50	41.53	74.00	32.47
High Channel (2480 MHz)											
2480.0	84.96	PK	22	1.3	H	30.60	3.11	26.50	92.17	/	/
2480.0	72.67	Ave.	22	1.3	H	30.60	3.11	26.50	79.88	/	/
2480.0	84.76	PK	96	1.2	V	30.20	3.11	26.50	91.57	/	/
2480.0	73.29	Ave.	96	1.2	V	30.20	3.11	26.50	80.10	/	/
4960.0	36.53	Ave.	42	1.2	V	34.60	4.40	26.50	49.03	54.00	4.97
1627.3	46.93	Ave.	93	1.2	V	25.90	2.37	26.50	48.70	54.00	5.30
4960.0	48.91	PK	42	1.2	V	34.60	4.40	26.50	61.41	74.00	12.59
2483.5	31.37	Ave.	89	1.2	V	29.60	3.03	26.50	37.50	54.00	16.50
7440.0	17.88	Ave.	168	1.3	H	37.20	5.20	26.50	33.78	54.00	20.22
1627.3	48.67	PK	93	1.2	V	25.90	2.37	26.50	50.44	74.00	23.56
7440.0	33.95	PK	168	1.3	H	37.20	5.20	26.50	49.85	74.00	24.15
2483.5	42.86	PK	89	1.2	V	29.60	3.03	26.50	48.99	74.00	25.01
2331.1	22.85	Ave.	44	1.2	V	29.00	2.98	26.50	28.33	54.00	25.67
2368.5	22.81	Ave.	237	1.1	H	29.00	2.98	26.50	28.29	54.00	25.71
2331.1	36.52	PK	44	1.2	V	29.00	2.98	26.50	42.00	74.00	32.00
2368.5	36.29	PK	237	1.1	H	29.00	2.98	26.50	41.77	74.00	32.23

*Within measurement uncertainty

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in Operating mode, radio spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


* The testing was performed by Henry Ding on 2012-08-02.

Test Result: Compliance.


Please refer to following tables and plots

Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
Low	2402	1.004	0.625	Pass
Adjacent	2403			
Middle	2441	1.004	0.625	Pass
Adjacent	2440			
High	2480	1.004	0.625	Pass
Adjacent	2479			


Low Channel

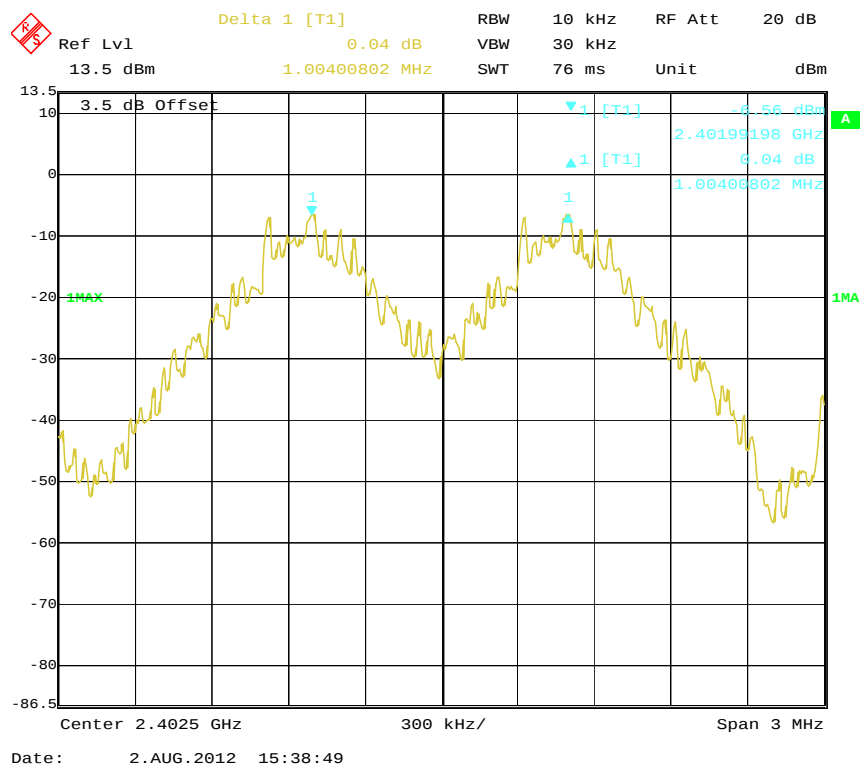

Middle Channel

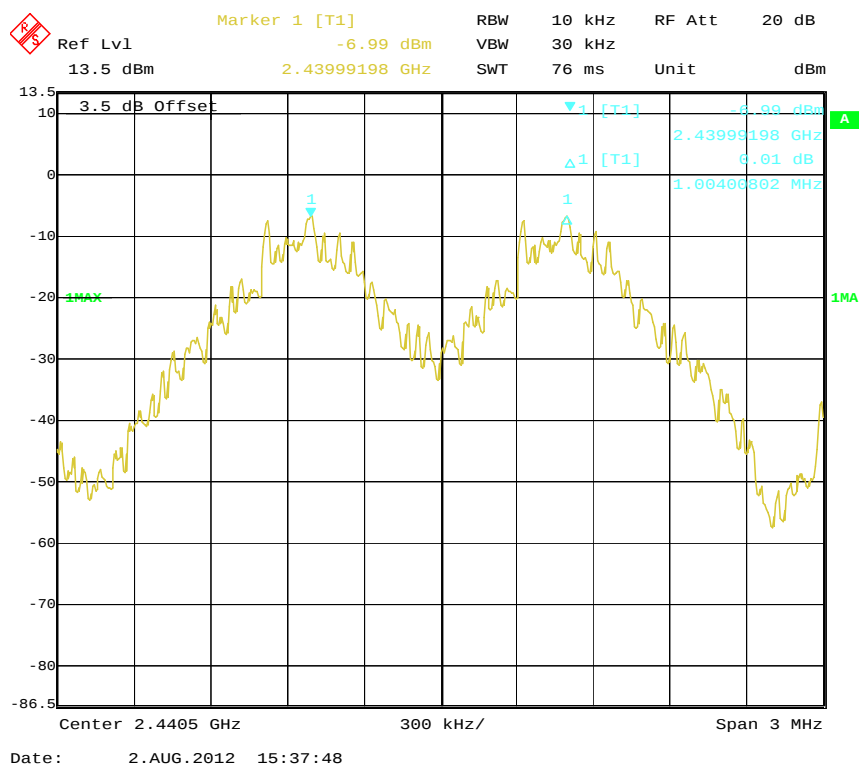

High Channel

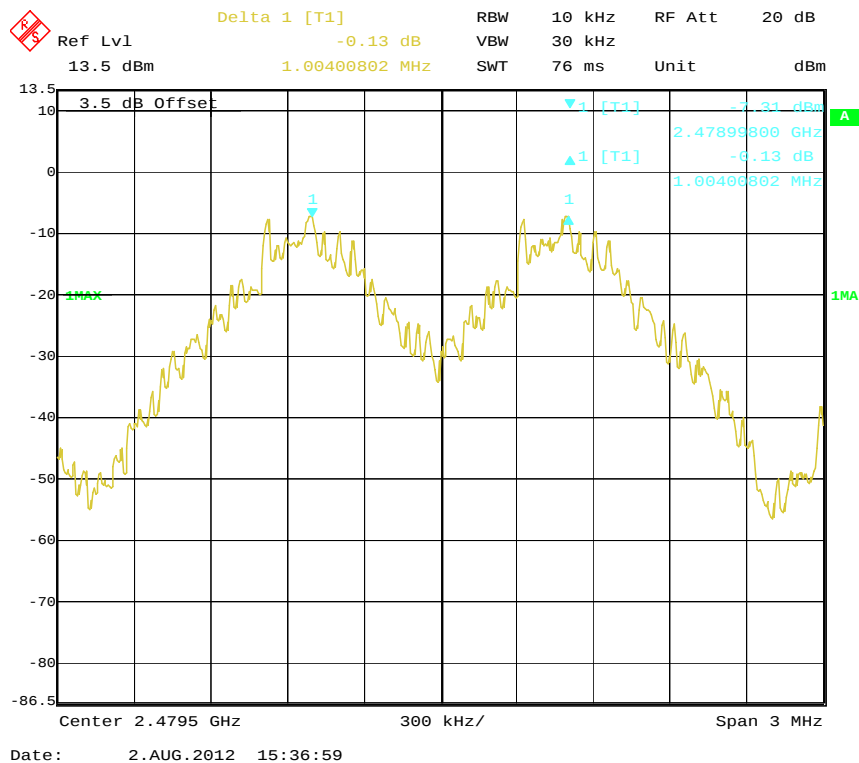

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


* The testing was performed by Henry Ding on 2012-08-02.

Test Result: Compliance.


Please refer to following tables and plots

Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
Low	2402	0.938
Middle	2441	0.938
High	2480	0.938


Low Channel

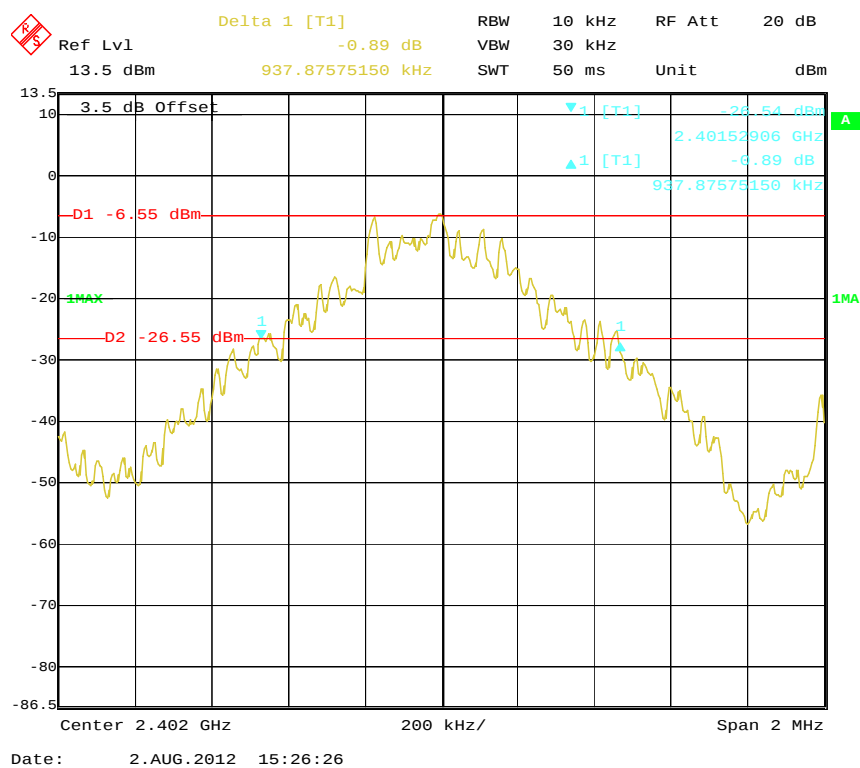

Middle Channel

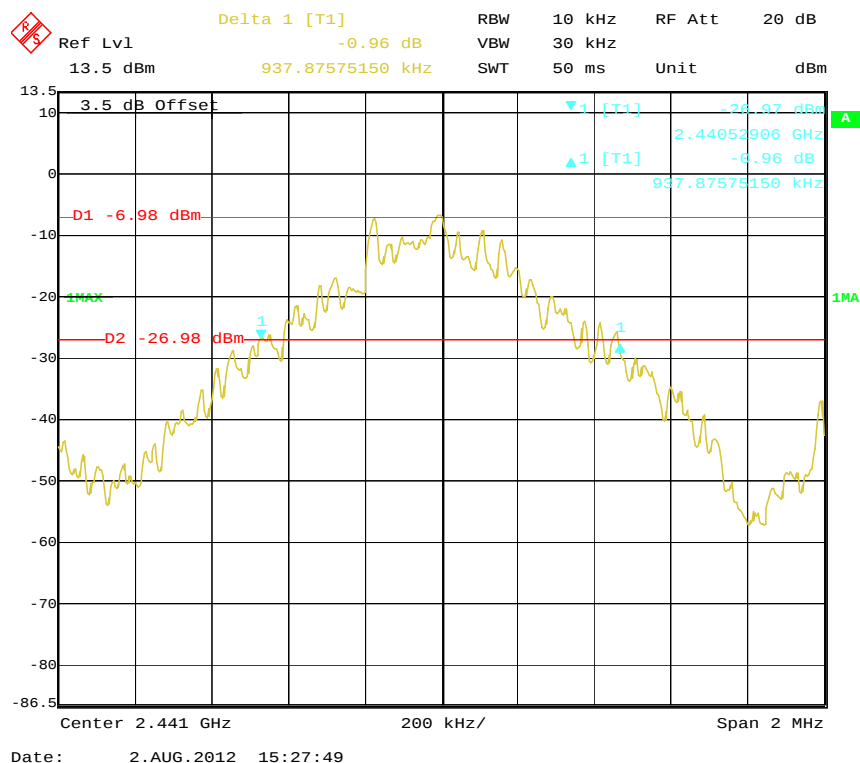

High Channel

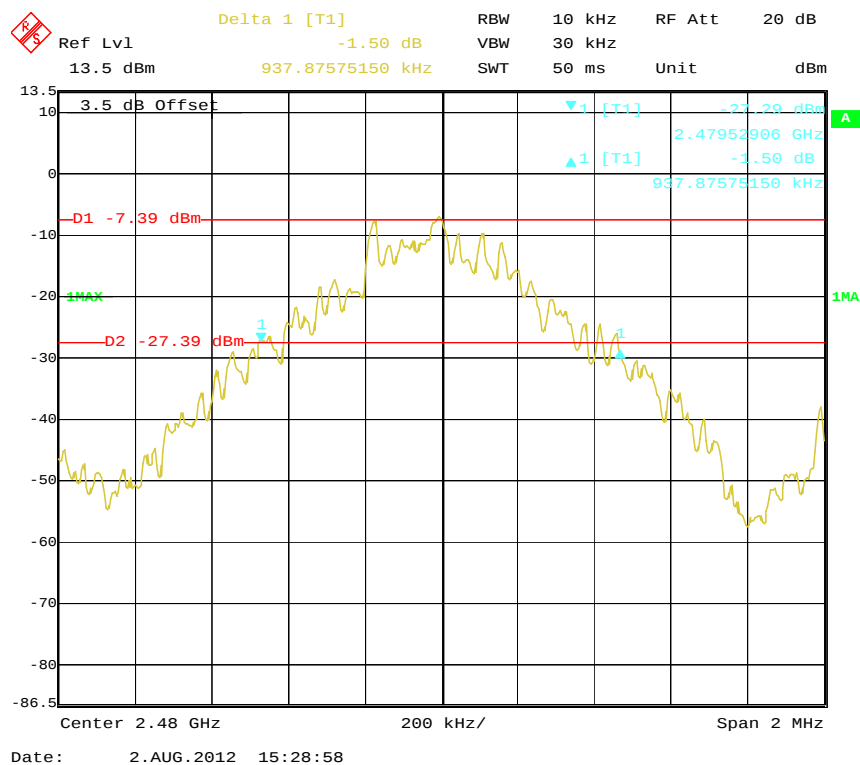

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Henry Ding on 2012-08-02.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	79	≥ 15

Number of Hopping Channels

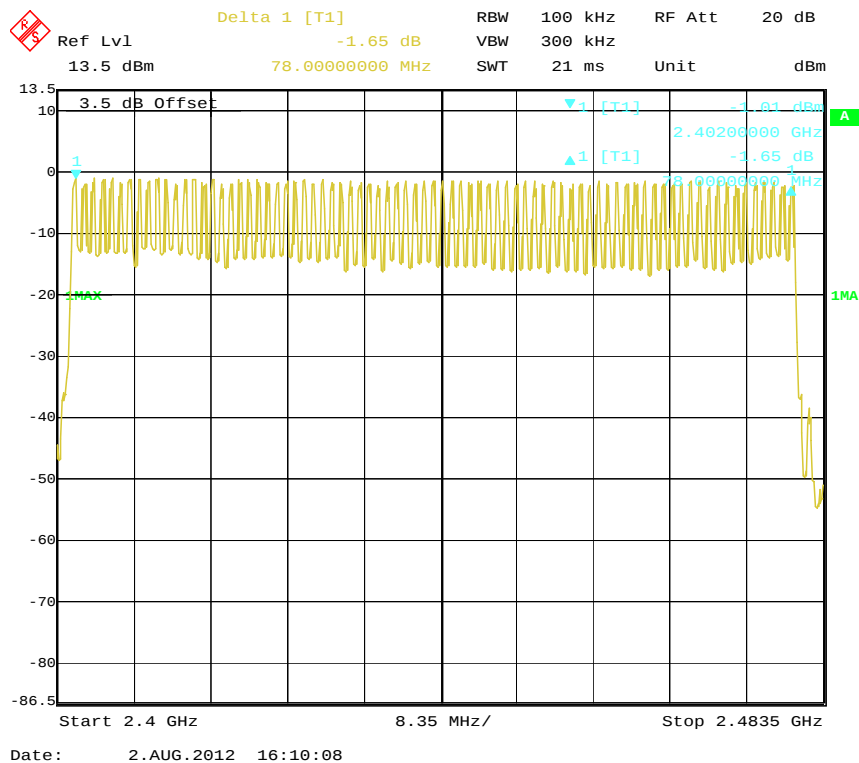

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S
Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Henry Ding on 2012-08-02.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
DH 1	Low	0.431	0.1379	0.4	Pass
	Middle	0.431	0.1379	0.4	Pass
	High	0.431	0.1379	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
DH 3	Low	1.693	0.2709	0.4	Pass
	Middle	1.693	0.2709	0.4	Pass
	High	1.693	0.2709	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
DH 5	Low	2.976	0.3174	0.4	Pass
	Middle	2.976	0.3174	0.4	Pass
	High	2.976	0.3174	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


Pulse time, Low Channel, DH1

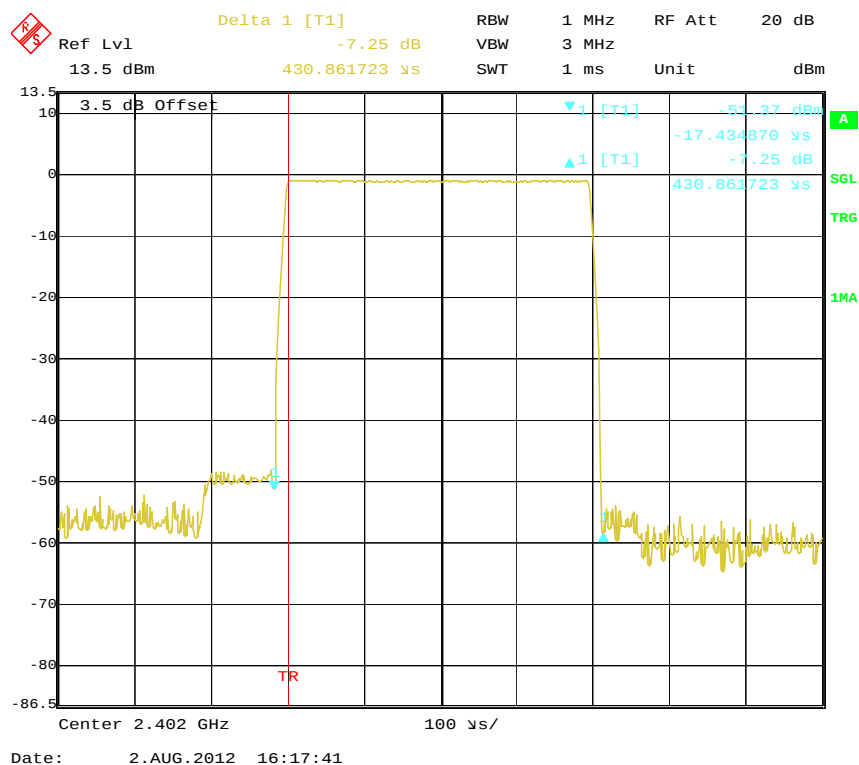


Pulse time, Middle Channel, DH1

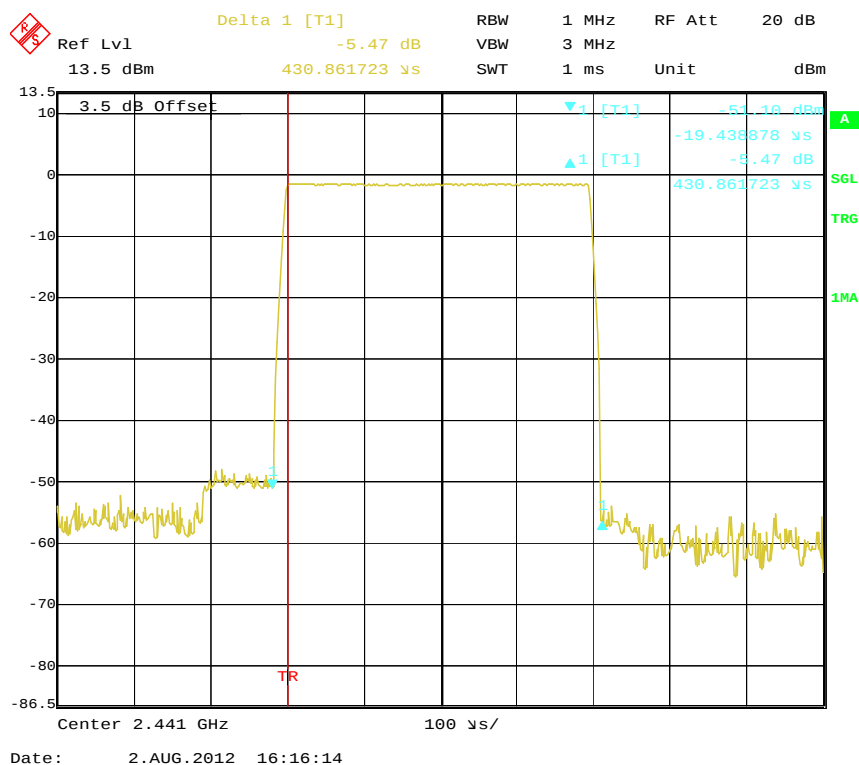


Pulse time, High Channel, DH1

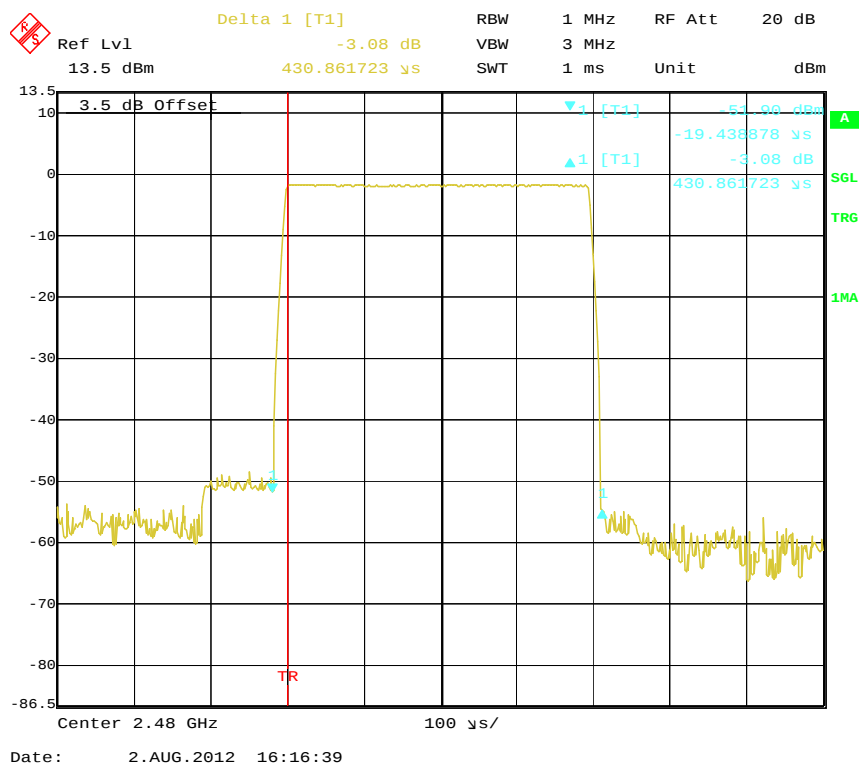


Pulse time, Low Channel, DH3

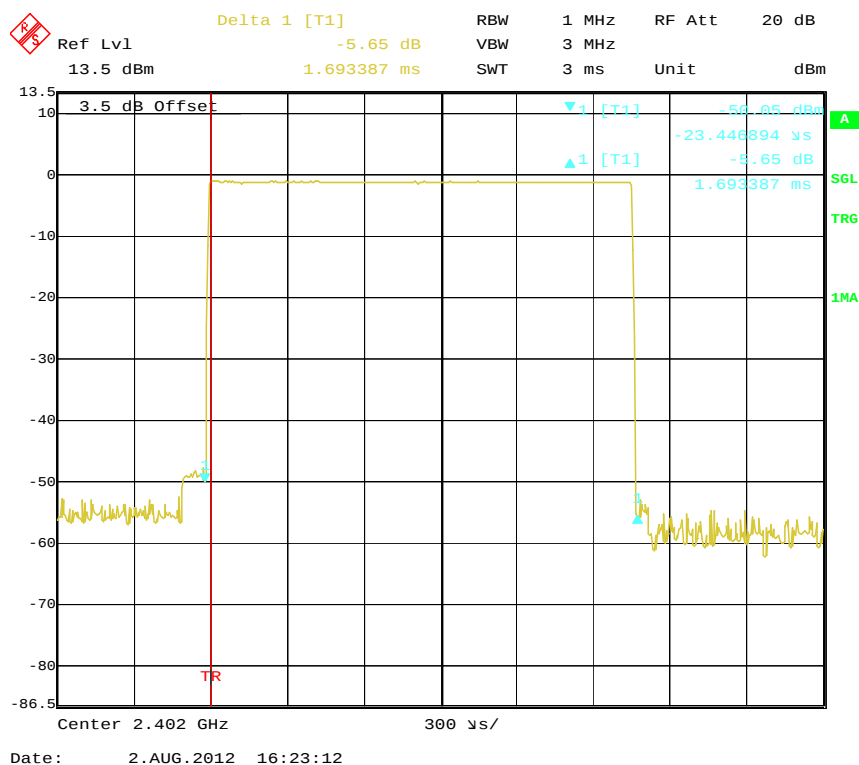


Pulse time, Middle Channel, DH3

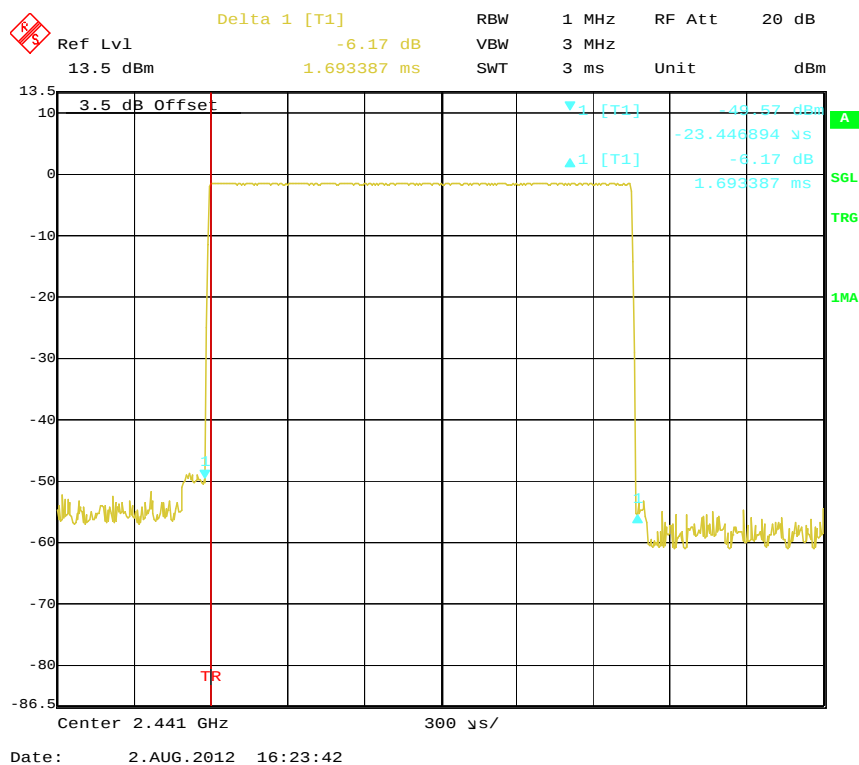


Pulse time, High Channel, DH3

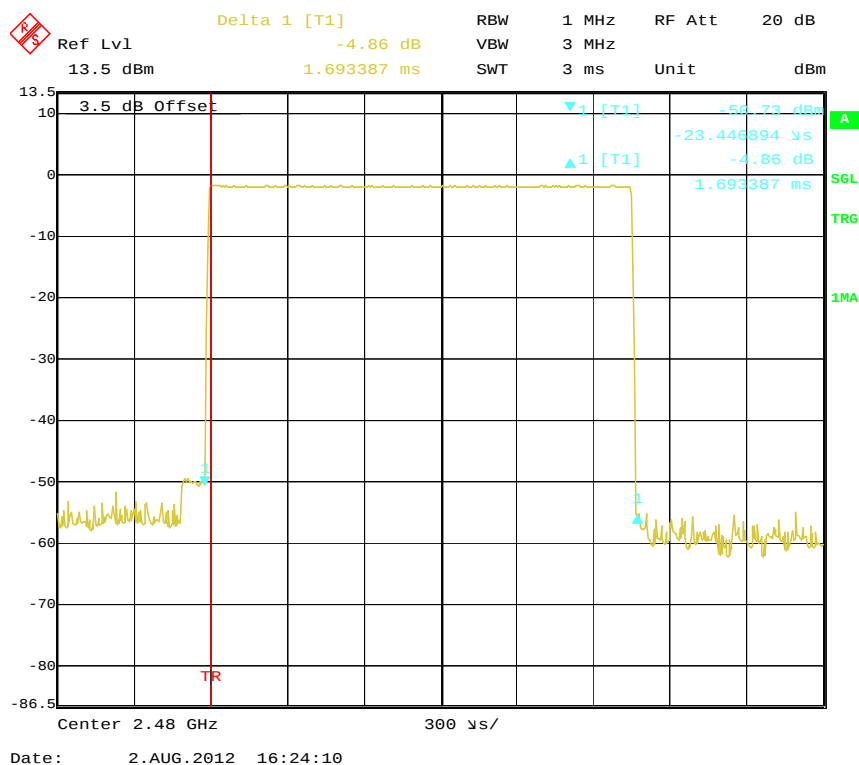


Pulse time, Low Channel, DH5

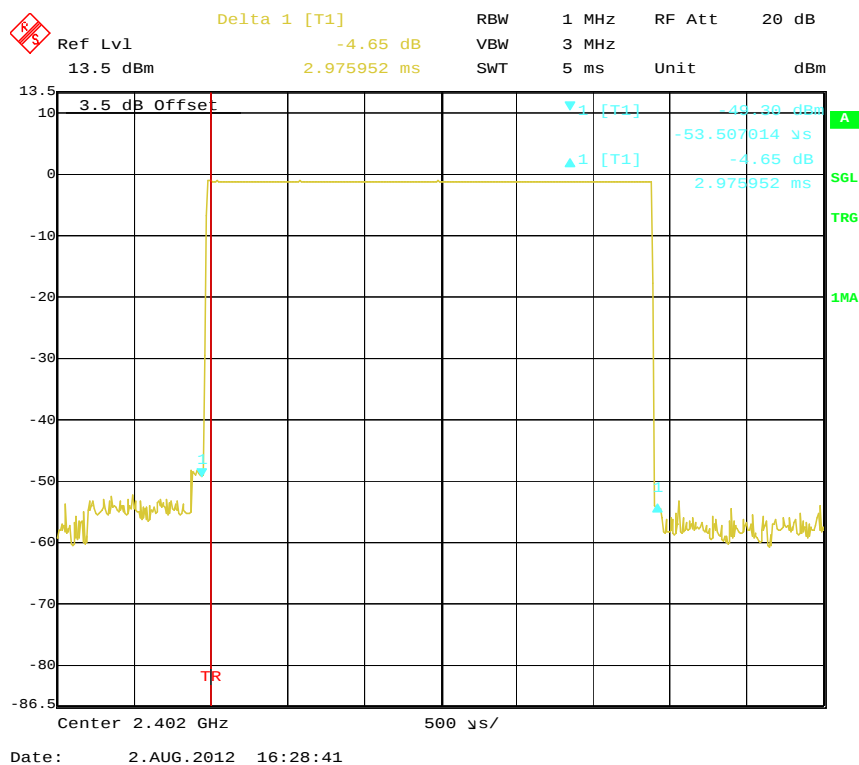

Pulse time, Middle Channel, DH5

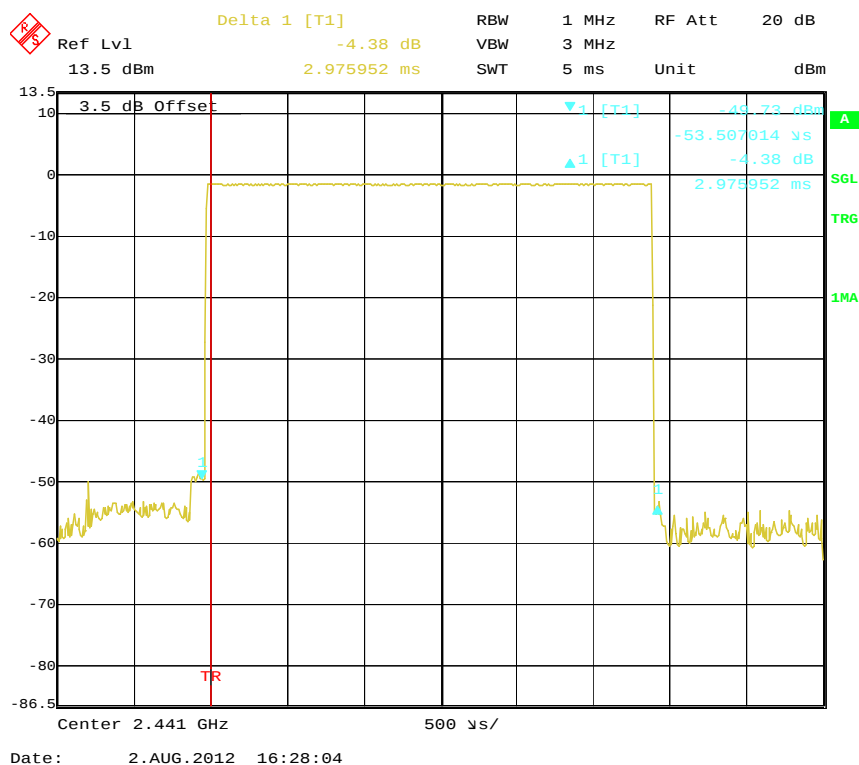

Pulse time, High Channel, DH5

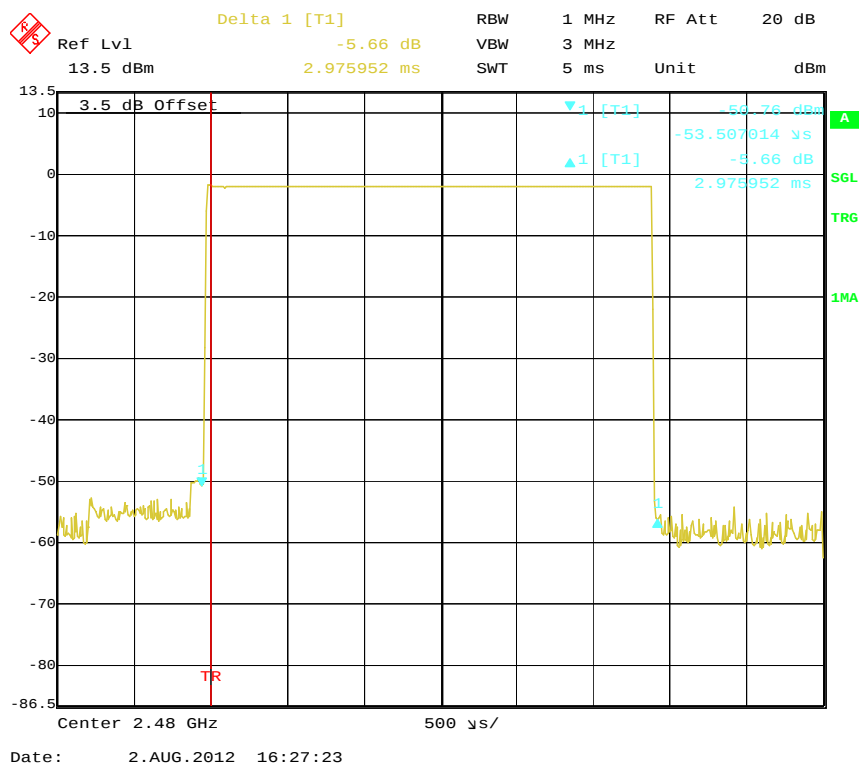


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.

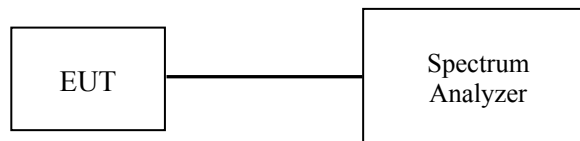

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa


* The testing was performed by Henry Ding on 2012-08-02.

Test Result: Compliance.


Channel	Channel frequency (MHz)	Peak Conducted Output Power		Limit (mW)
		(dBm)	(mW)	
Low channel	2402	-1.03	0.789	1000
Middle channel	2441	-1.49	0.710	1000
High channel	2480	-1.74	0.670	1000

[illegible]

Middle Channel

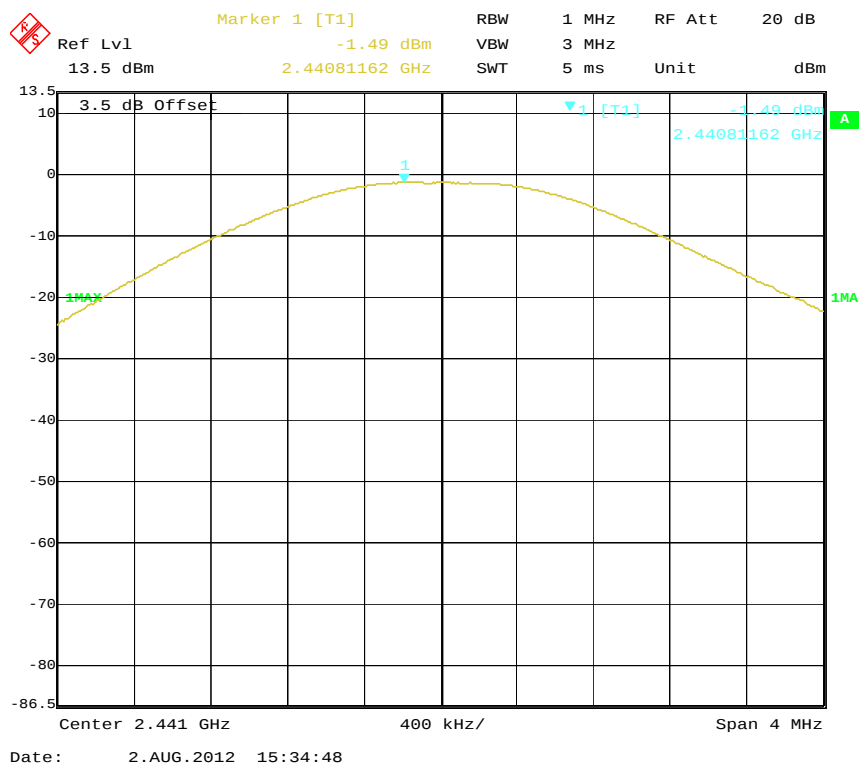

High Channel

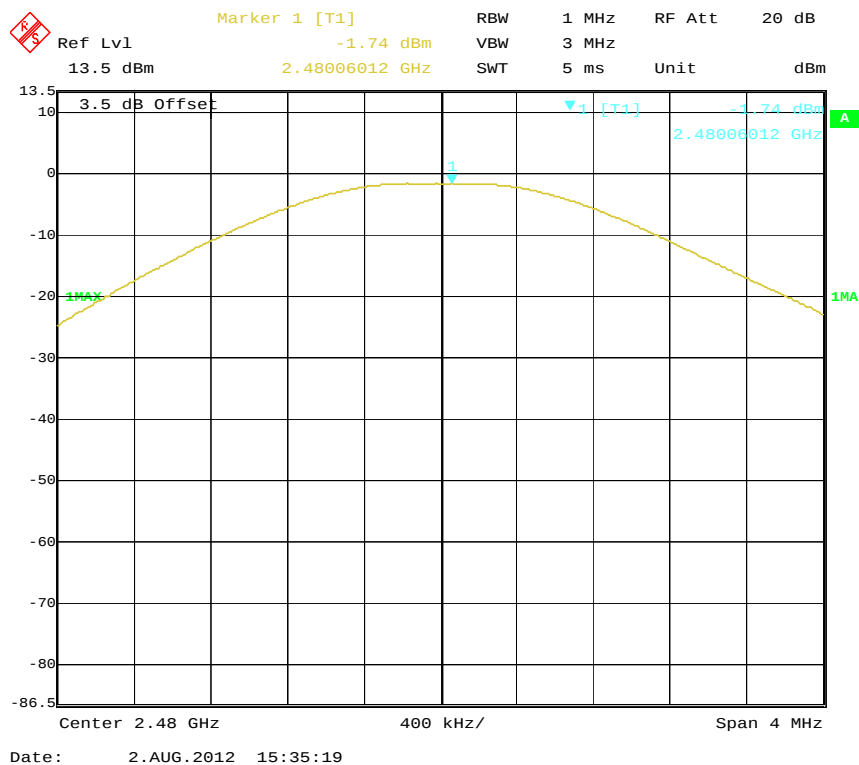

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in Operating mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa


*The testing was performed by Henry Ding on 2012-08-02.

Test Result: Compliance.


Test Mode: Transmitting

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2400.00	44.24	20
2484.52	46.66	20

Please refer to follow plots:

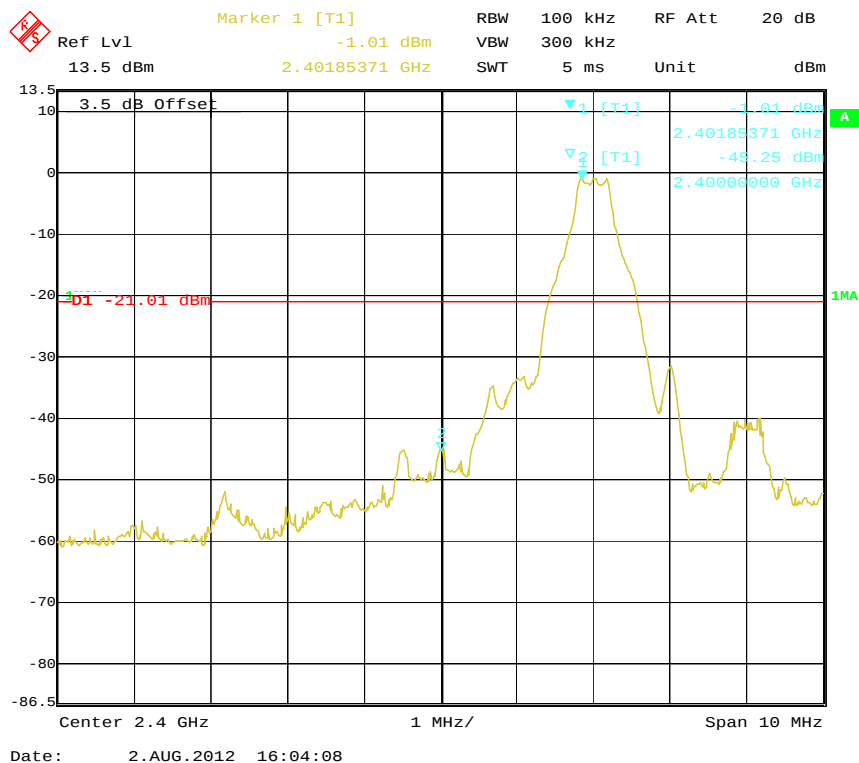Band Edge: Left Side

Band Edge: Right Side

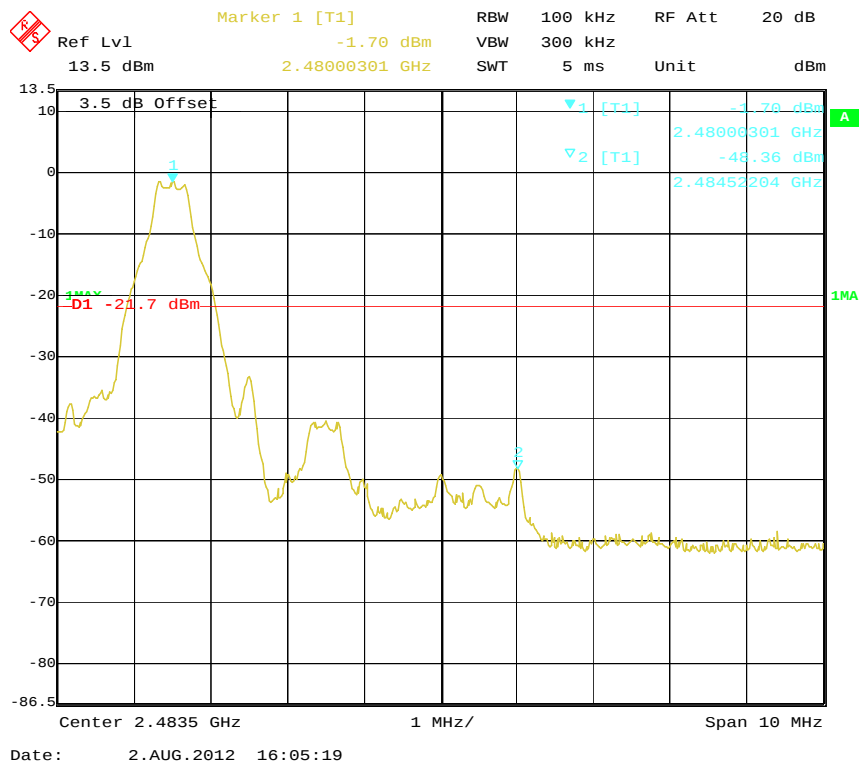

DECLARATION LETTER



XINGTEL XIAMEN GROUP CO., LTD.

Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial
District, Xiamen 361006, P R China
E-mail: info@xingtel.com Website: //www.xingtel.com

Tel: +86-592-562-5929
+86-592-603-6442 (6 lines)
Fax: +86-592-603-7860

To: Bay Area Compliance Laboratories Corp

Declaration of Similarity

To whom it may concern,

We, Xingtel Xiamen Group Co., Ltd.

Address: Xingtel Building, Chuangxin Road, Torch Hi-tech Industrial District, Xiamen, 361006,
China

Hereby declare that

Product Name: DECT 6.0 Amplified Cordless Freedom Deluxe Phone

Trade Name: ClearSounds

Model number	Combination
A1600BT	1base+1handset
A1600BT BUN	1base+2handsets+1charger
A1600E-BT	1handset+1charger

All models are electrically and mechanically identical, the only difference between them are the model number and combination for the marketing purpose! **A1600BT BUN** was tested by **BACL**.

Regards,
Xingtel Xiamen Group Co., Ltd.

Simon Liu

Director

July 25, 2012

***** END OF REPORT *****