

FCC Part 15B Compliance Test Report

Test Report no.:	Tre_FCC_0719_03.doc	Date of Report:	28.6.2007
Number of pages:	15	Customer's Contact person:	Bill Griffin
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation 12278 Scripps Summit Drive SAN DIEGO CA. 92131 USA Tel. +1 858 831 5000 Fax. +1 858 831 6500
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-276 / Battery BL-5C, AC charger AC-3, Headset HS-40, Data cable CA-101, Laptop IBM Thinkpad T22, AC adapter 02K6543, Printer HP deskjet 1600CC3540A, Digital camera FUJI DS-7, Serial cable for camera, Parallel cable for printer		
FCC ID:	QMNRM-276	IC:	661X-RM276
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	7.5.2007
Testing completed	10.5.2007
The customer's contact person	Bill Griffin
Test Plan referred to	T:\Projects\
Notes	-
Document name	T:\Projects\RM-276\EMC\Results\FCC\Tre_FCC_0719_03.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II(1900)/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. GSM and WCDMA bands are tested in idle mode. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-276	004401012485765	4053	-	Vp md3.01	41083
Battery	BL-5C	-	-	-	-	41087
AC Charger	AC-3	-	-	-	-	41027
Headset	HS-40	-	-	-	-	41085
AC Charger	AC-3	-	-	-	-	41027
Data cable	CA-101	-	-	-	-	41066
Laptop	IBM Thinkpad T22	555V2PT	-	-	-	40201
AC Adapter	02K6543	-	-	-	-	40202
Printer	HP deskjet 1600CC3540A	USB8302546	-	-	-	40077
Digital camera	FUJI DS-7	7102516	-	-	-	40076
Serial cable for camera	-	-	-	-	-	40088
Parallel cable for printer	-	-	-	-	-	40087

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (9)	Radiated emissions	PASSED

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5	Radiated emissions	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	3
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	5
2.1. Test setup	5
2.2. Test method and limit.....	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
2.5. Bluetooth Test results	8
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9) 9	
3.1. Test setup	9
3.2. Test method and limit.....	9
3.3. GSM 850 Test results	10
3.4. GSM 1900 Test results	11
3.5. Bluetooth Test results	13
4. Test Equipment.....	15
4.1. Conducted measurements	15
4.2. Radiated measurements	15

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-276 DUT 41083
Accessories with DUT numbers	HS-40 DUT 41085, BL-5C DUT 41087, AC-3 41027, CA-101 DUT 41066, IBM Thinkpad T22 DUT 40201, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, FUJI DS-7 DUT 40076, Serial cable for camera DUT 40088, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 99.1
Date of measurements	9.5.2007
Measured by	Jari Jantunen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

RX mode, channel 190 / 881.6 MHz

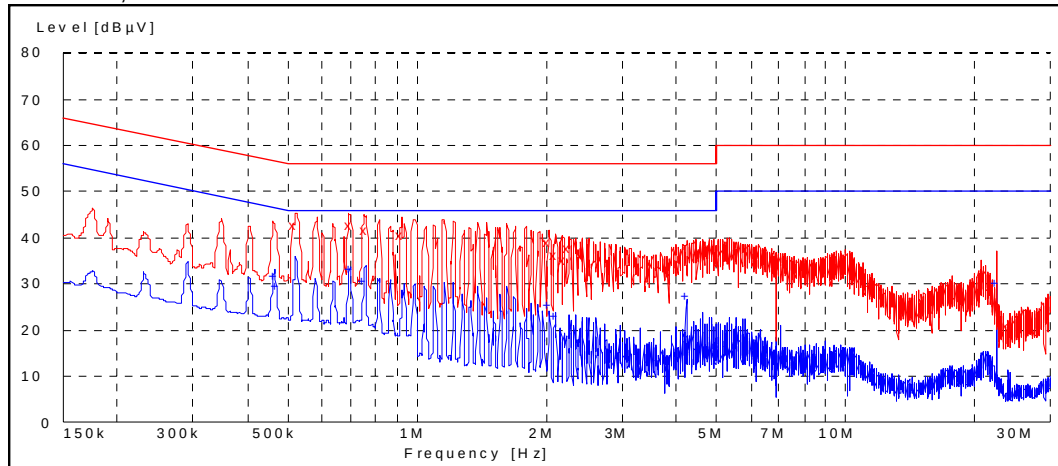

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.520000	42.70	L1	PASSED
0.695000	42.90	L1	PASSED
0.760000	41.70	L1	PASSED
0.925000	40.60	N	PASSED
2.040000	39.10	L1	PASSED
2.105000	36.40	N	PASSED
2.210000	35.20	N	PASSED
2.275000	37.80	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.465000	31.80	L1	PASSED
0.470000	29.50	N	PASSED
0.695000	33.20	L1	PASSED
0.750000	30.60	L1	PASSED
2.035000	25.30	L1	PASSED
2.110000	23.10	N	PASSED
4.240000	27.30	L1	PASSED
22.500000	30.20	L1	PASSED

2.4. GSM 1900 Test results

RX mode, channel 661 / 1960.0 MHz

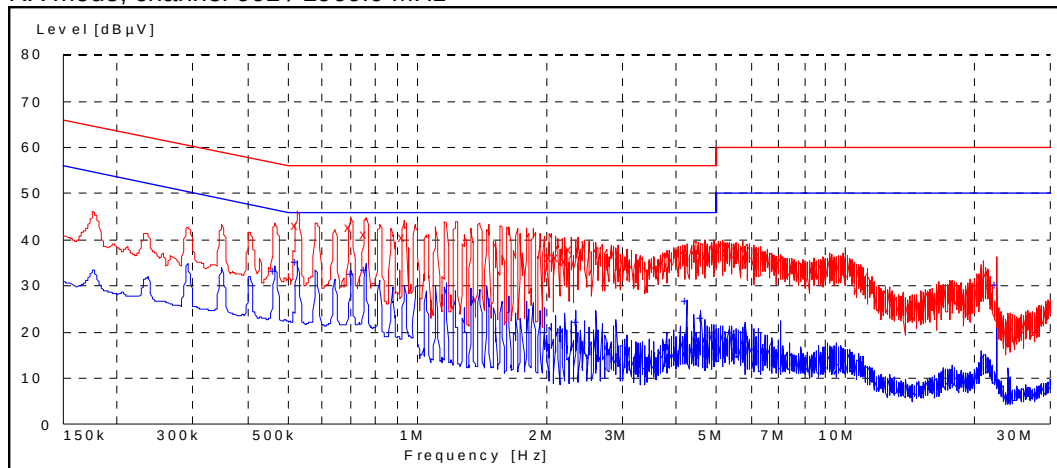

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.525000	43.00	L1	PASSED
0.700000	42.80	L1	PASSED
0.765000	41.20	N	PASSED
0.930000	40.60	N	PASSED
2.055000	36.30	N	PASSED
2.135000	36.30	N	PASSED
2.230000	35.50	N	PASSED
2.295000	38.00	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.465000	33.20	L1	PASSED
0.525000	35.20	L1	PASSED
0.705000	32.60	N	PASSED
0.760000	33.60	L1	PASSED
2.370000	22.20	N	PASSED
4.240000	26.70	L1	PASSED
4.635000	23.00	L1	PASSED
22.500000	30.20	L1	PASSED

2.5. Bluetooth Test results

TX mode, channel 40 / 2442 MHz

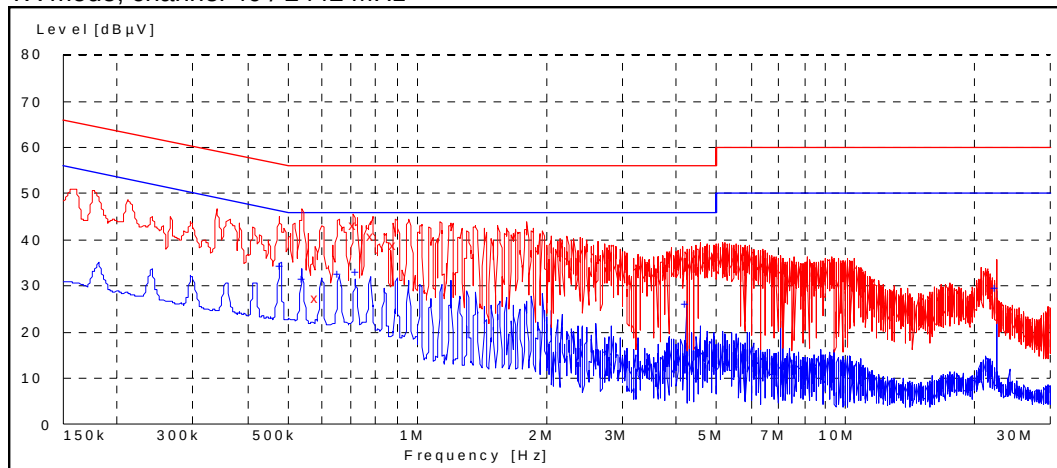

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.585000	27.20	L1	PASSED
0.720000	43.00	L1	PASSED
0.785000	40.70	N	PASSED
0.895000	38.90	N	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.480000	34.30	L1	PASSED
0.545000	31.60	L1	PASSED
0.660000	32.50	L1	PASSED
0.725000	33.00	N	PASSED
4.240000	26.10	N	PASSED
22.500000	29.50	L1	PASSED

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	RM-274 DUT 41083
Accessories with DUT numbers	HS-40 DUT 41085, BL-5C DUT 41087, AC-3 41027, CA-101 DUT 41066, IBM Thinkpad T22 DUT 40201, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, FUJI DS-7 DUT 40076, Serial cable for camera DUT 40088, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 45 / 99.1
Date of measurements	10.5.2007
Measured by	Jari Jantunen

3.1. Test setup

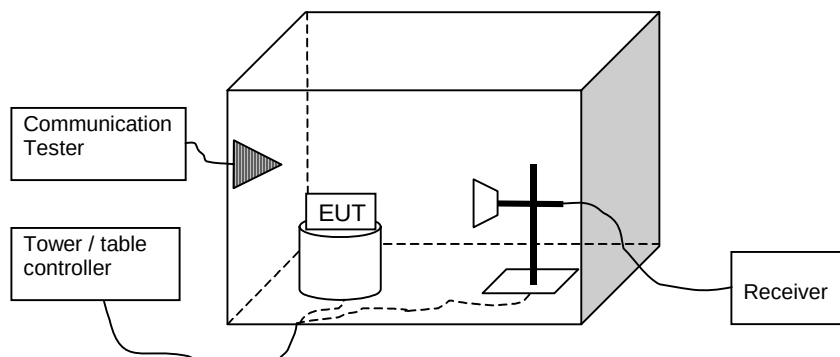

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations. The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	39.20	91.20	44.30	-5.1	VERTICAL	PASSED
6953.600000	42.90	139.64	42.00	0.9	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	25.80	19.50	30.90	-5.1	VERTICAL	PASSED
6953.600000	30.00	31.62	29.10	0.9	VERTICAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
49.878958	31.80	38.90	66.80	-35.0	VERTICAL	PASSED
99.739479	43.10	142.89	78.50	-35.4	VERTICAL	PASSED
618.136473	31.10	35.89	57.00	-25.9	VERTICAL	PASSED
645.590581	31.00	35.48	56.00	-25.0	VERTICAL	PASSED
795.691182	33.00	44.67	56.00	-23.0	VERTICAL	PASSED
916.233667	31.90	39.36	53.40	-21.5	HORIZONTAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1293.591182	53.50	473.15	71.50	-18.0	VERTICAL	PASSED
1295.589178	55.30	582.10	73.30	-18.0	VERTICAL	PASSED
1493.989980	54.40	524.81	71.10	-16.7	VERTICAL	PASSED
3526.400000	39.10	90.16	43.90	-4.80	VERTICAL	PASSED
7052.800000	41.30	116.14	40.50	0.80	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1093.190381	28.40	26.30	48.30	-19.9	VERTICAL	PASSED
1258.519038	27.80	24.55	46.50	-18.7	VERTICAL	PASSED
1291.089178	29.10	28.51	47.20	-18.1	VERTICAL	PASSED
1294.591182	34.70	54.33	52.70	-18.0	VERTICAL	PASSED
1493.489980	32.70	43.15	49.40	-16.7	VERTICAL	PASSED
1665.832665	27.40	23.44	42.50	-15.1	VERTICAL	PASSED
1991.483968	35.40	58.88	47.40	-12.0	VERTICAL	PASSED
3526.400000	25.80	19.50	30.60	-4.80	HORIZONTAL	PASSED
7052.800000	28.10	25.41	27.30	0.80	VERTICAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	39.00	89.13	43.60	-4.6	VERTICAL	PASSED
7150.400000	40.70	108.39	39.20	1.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	26.00	19.95	30.60	-4.6	VERTICAL	PASSED
7150.400000	27.90	24.83	26.40	1.5	VERTICAL	PASSED

3.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	40.00	100.00	42.40	-2.4	HORIZONTAL	PASSED
7720.000000	42.10	127.35	39.40	2.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	27.30	23.17	29.70	-2.4	VERTICAL	PASSED
7720.000000	29.30	29.17	26.60	2.7	VERTICAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
49.778958	30.60	33.88	65.60	-35.0	VERTICAL	PASSED
99.779960	38.80	87.10	74.20	-35.4	VERTICAL	PASSED
637.674549	31.80	38.90	57.30	-25.5	VERTICAL	PASSED
647.394589	31.30	36.73	56.20	-24.9	VERTICAL	PASSED
697.494790	39.10	90.16	63.20	-24.1	VERTICAL	PASSED
752.905010	31.10	35.89	54.40	-23.3	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1295.089178	55.30	582.10	73.30	-18.0	VERTICAL	PASSED
3920.000000	40.00	100.00	42.40	-2.40	VERTICAL	PASSED
7840.000000	42.20	128.82	39.40	2.80	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1233.464930	31.10	35.89	50.20	-19.1	VERTICAL	PASSED
1260.519038	31.50	37.58	50.20	-18.7	VERTICAL	PASSED
1292.589178	30.70	34.28	48.70	-18.0	VERTICAL	PASSED
1994.483968	32.70	43.15	44.60	-11.9	VERTICAL	PASSED
2429.359719	29.00	28.18	37.80	-8.8	VERTICAL	PASSED
3920.000000	27.30	23.17	29.70	-2.40	VERTICAL	PASSED
7840.000000	29.30	29.17	26.50	2.80	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	44.30	164.06	47.00	-2.7	VERTICAL	PASSED
7960.000000	42.60	134.90	39.50	3.1	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	28.80	27.54	31.50	-2.7	VERTICAL	PASSED
7960.000000	29.60	30.20	26.50	3.1	VERTICAL	PASSED

3.5. Bluetooth Test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	38.90	88.10	40.60	-1.7	VERTICAL	PASSED
7206.000000	41.40	117.49	39.70	1.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	26.10	20.18	27.80	-1.7	VERTICAL	PASSED
7206.000000	28.30	26.00	26.60	1.7	VERTICAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.076353	6.90	2.21	18.30	-11.4	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3984.461924	44.20	162.18	46.90	-2.7	VERTICAL	PASSED
4918.831663	39.70	96.61	41.10	-1.4	VERTICAL	PASSED
4950.395792	40.40	104.71	41.60	-1.2	HORIZONTAL	PASSED
7276.561122	42.30	130.32	39.90	2.4	VERTICAL	PASSED
7346.191383	42.50	133.35	40.10	2.4	HORIZONTAL	PASSED
7401.297595	42.60	134.90	39.80	2.8	HORIZONTAL	PASSED
7405.805611	42.00	125.89	39.20	2.8	HORIZONTAL	PASSED
17315.123246	50.90	350.75	33.80	17.1	HORIZONTAL	PASSED
17963.927856	54.40	524.81	33.20	21.2	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3983.961924	28.80	27.54	31.50	-2.7	VERTICAL	PASSED
4917.331663	27.10	22.65	28.50	-1.4	VERTICAL	PASSED
4950.895792	27.30	23.17	28.50	-1.2	HORIZONTAL	PASSED
7284.561122	29.50	29.85	27.10	2.4	VERTICAL	PASSED
7343.691383	29.30	29.17	26.90	2.4	HORIZONTAL	PASSED
7396.797595	29.40	29.51	26.60	2.8	HORIZONTAL	PASSED
7404.305611	29.60	30.20	26.80	2.8	HORIZONTAL	PASSED
17960.427856	42.00	125.89	20.80	21.2	VERTICAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.10	101.16	41.30	-1.2	HORIZONTAL	PASSED
7440.000000	42.40	131.83	39.70	2.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4960.000000	27.80	24.55	29.00	-1.2	VERTICAL	PASSED
7440.000000	29.40	29.51	26.70	2.7	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B