

Appendix B


Output Power

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 433.393MHz, Emax: 76.43dBV/m, RBW: 100kHz

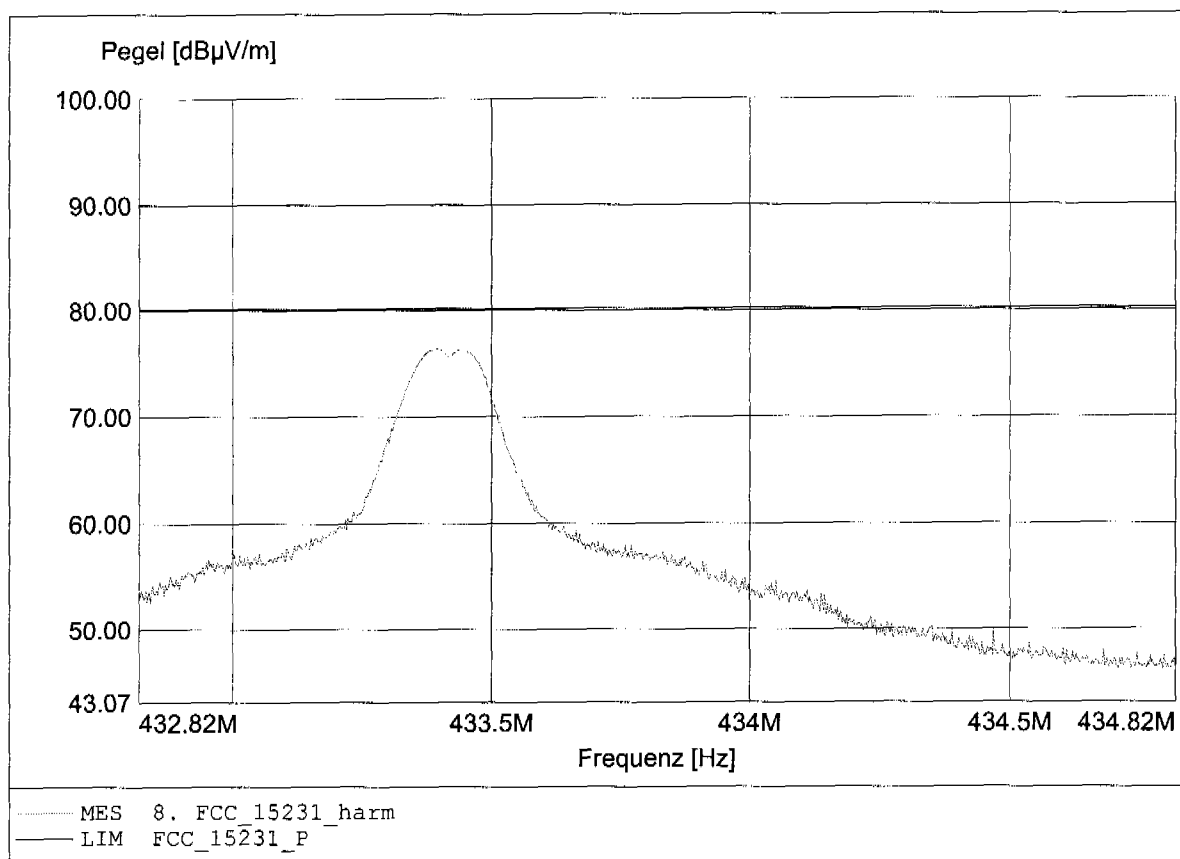


Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to S15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 433.391MHz, Emax: 62.26dBµV/m, RBW: 100kHz

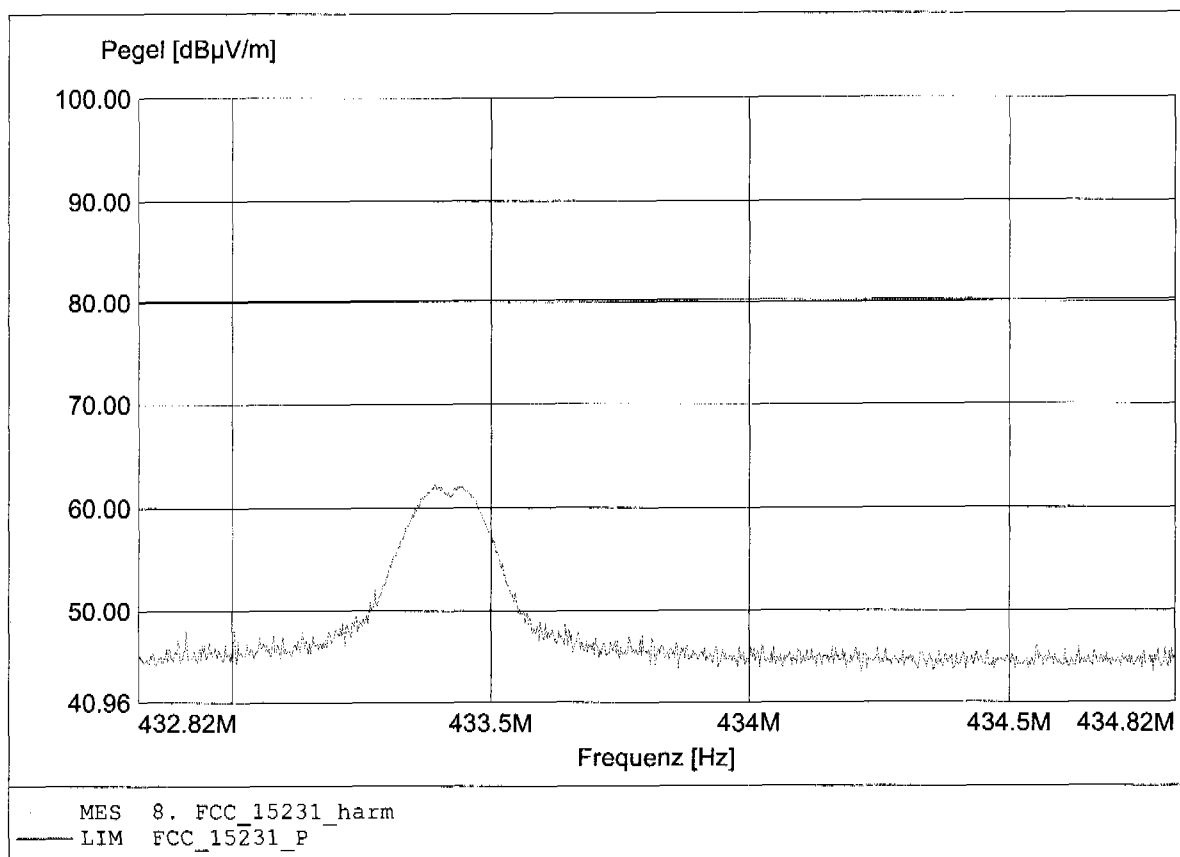

Appendix C


Spurious Emissions radiated, Transmitter

Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.500MHz, Emax: 26.99dBµV/m, RBW: 100kHz

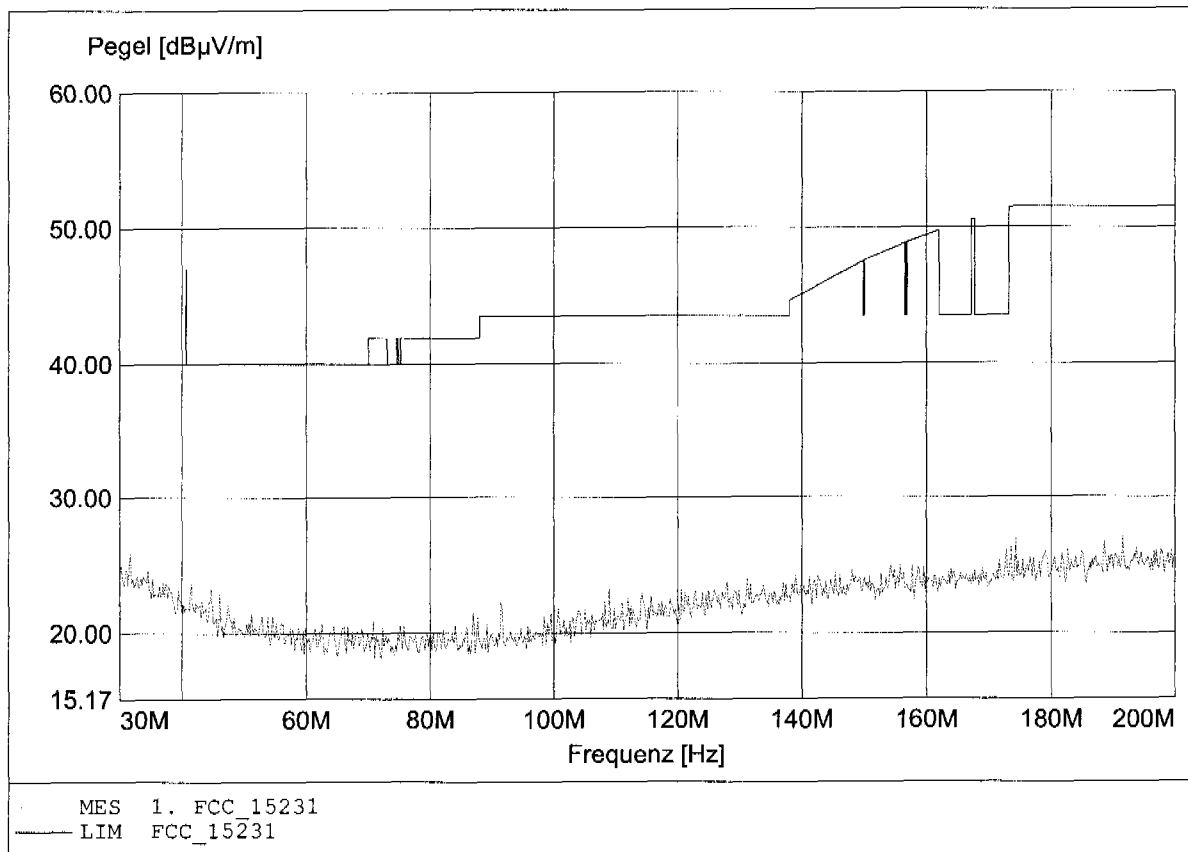


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.500MHz, Emax: 25.64dBµV/m, RBW: 100kHz

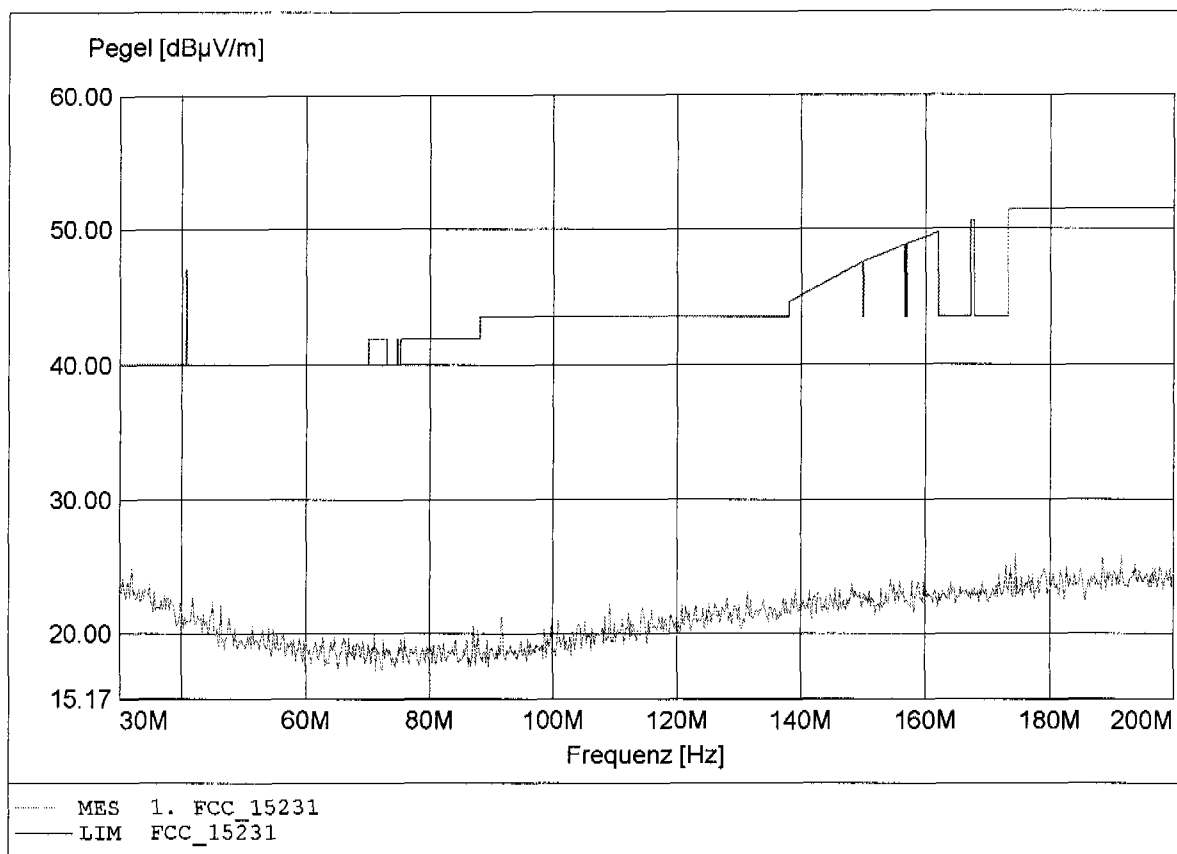


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 999.111MHz, Emax: 15.91dBµV/m, RBW: 100kHz

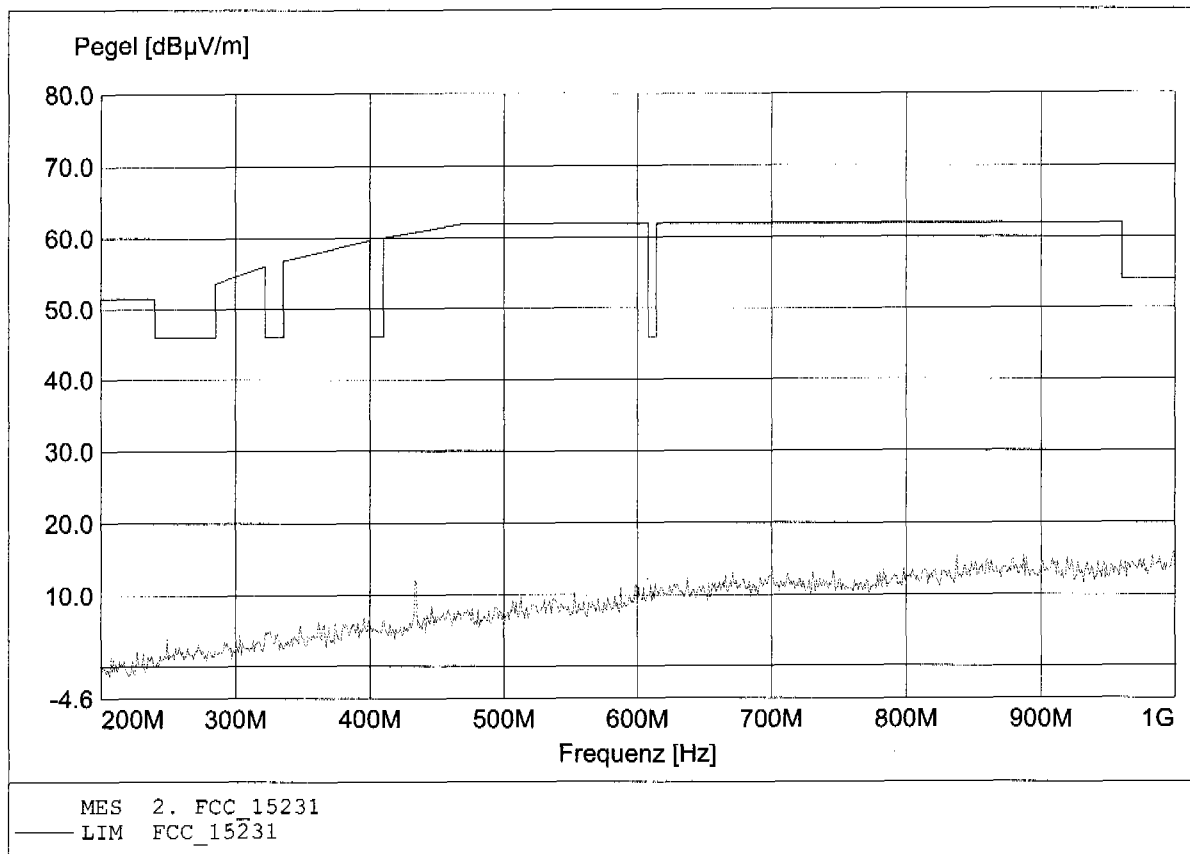


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to S15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 433.778MHz, Emax: 38.06dBµV/m, RBW: 100kHz

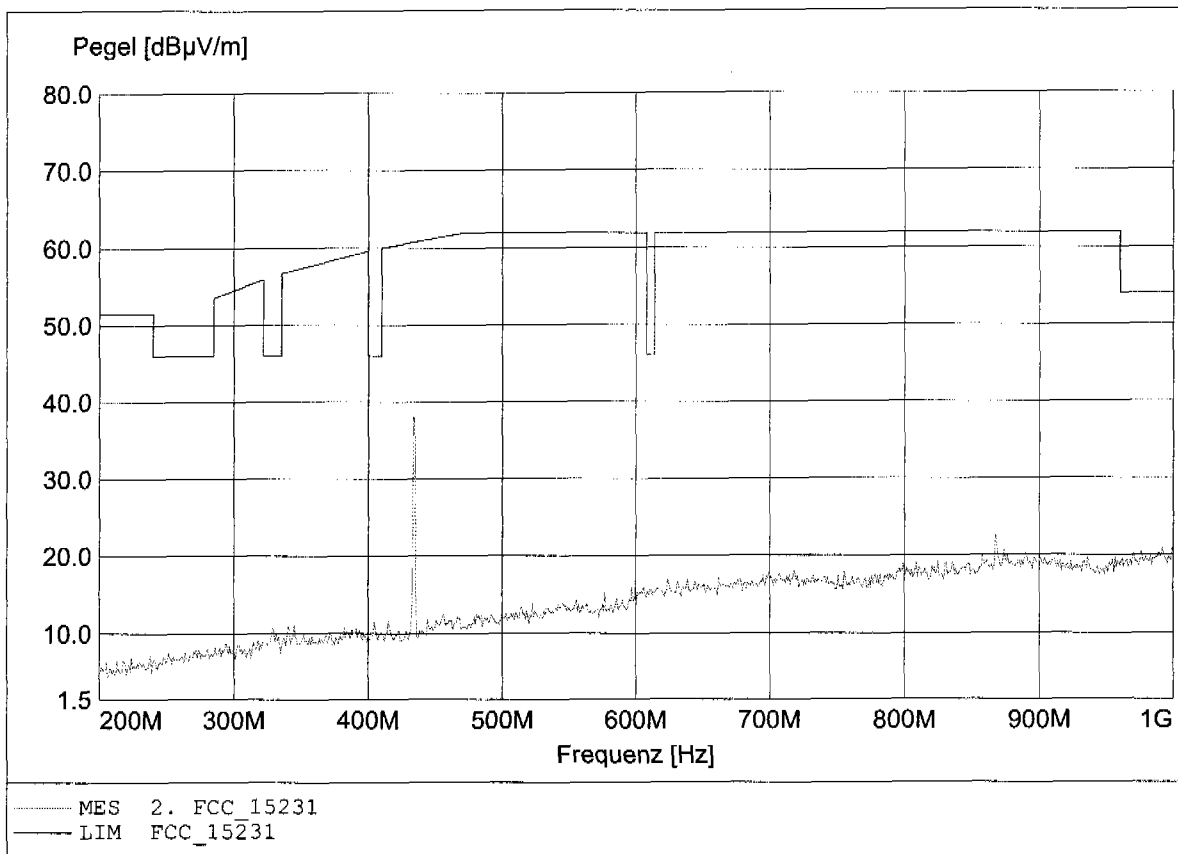


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 867.556MHz, Emax: 28.21dBµV/m, RBW: 100kHz

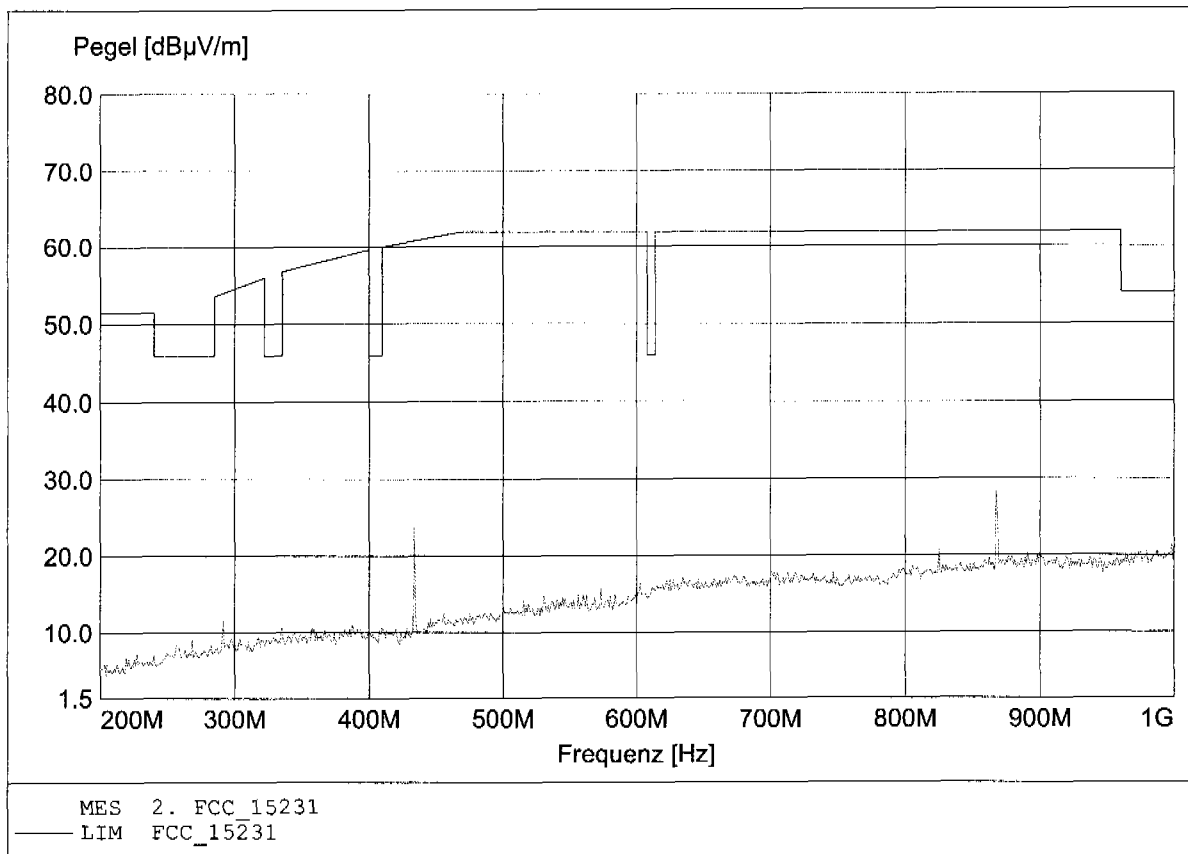


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.650GHz, Emax: 34.68dBµV/m, RBW: 1MHz

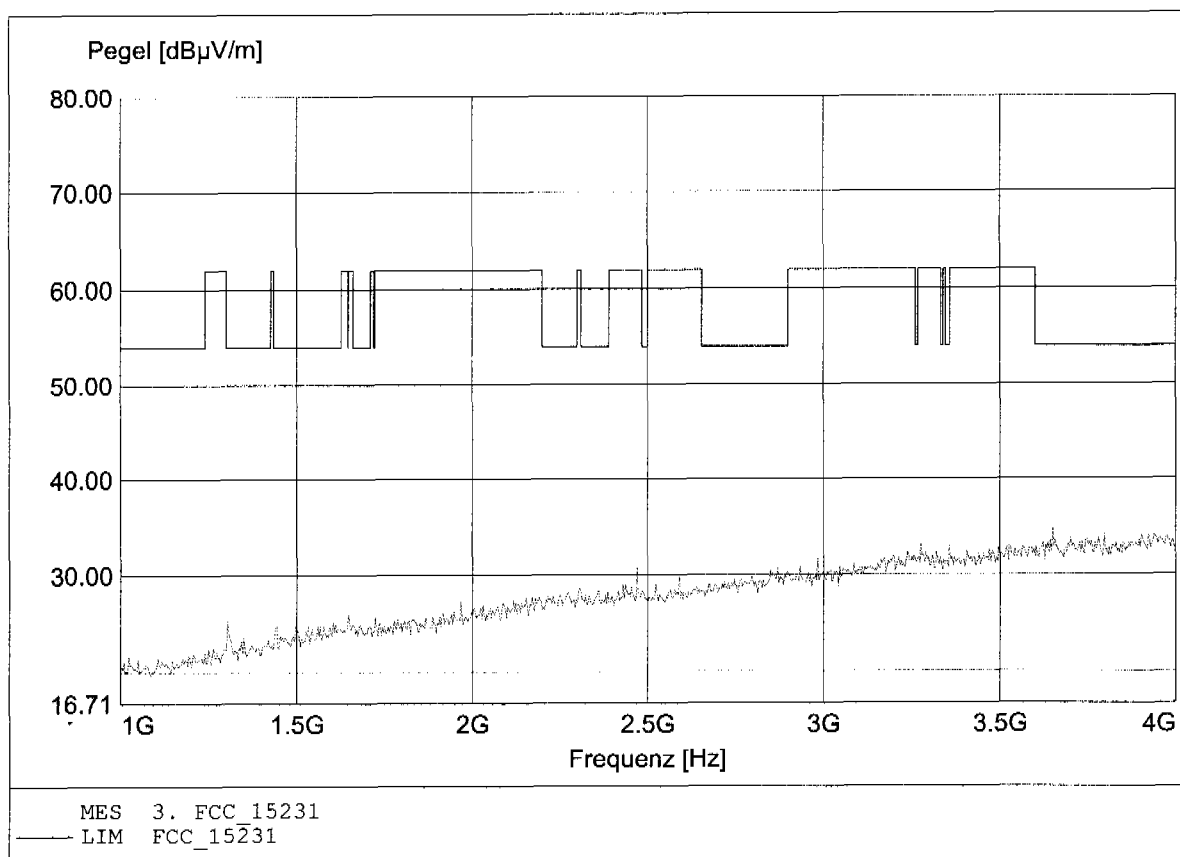


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to S15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, amplif.
Comment 2: Freq: 3.960GHz, Emax: 34.32dBµV/m, RBW: 1MHz

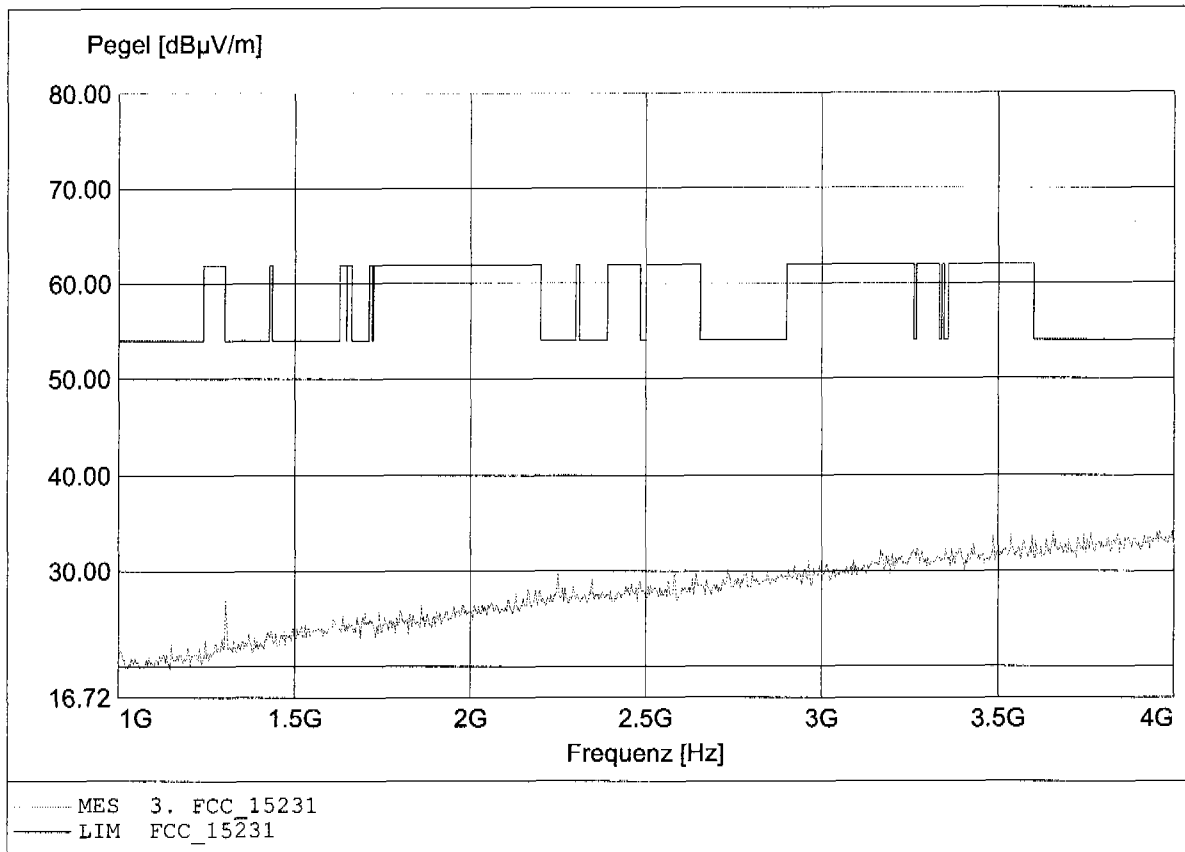


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 7.573GHz, Emax: 37.92dBµV/m, RBW: 1MHz

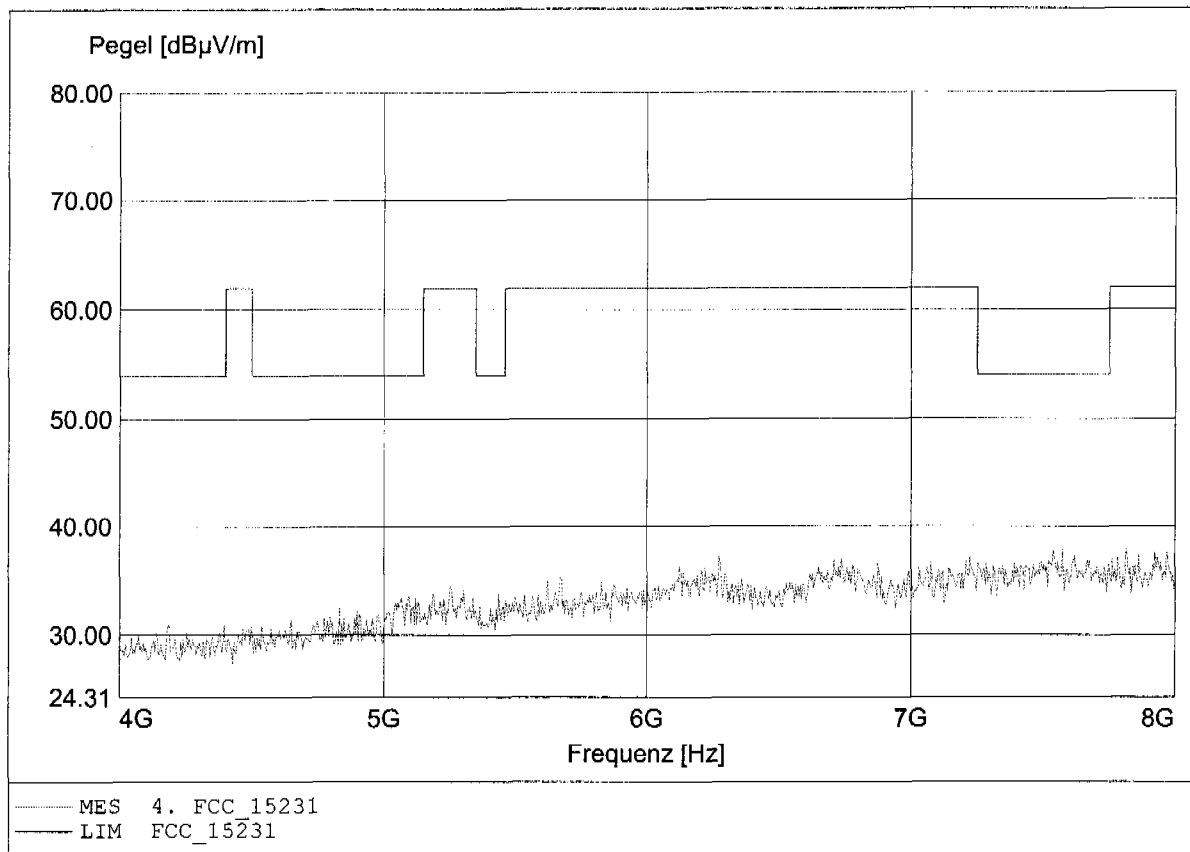


Spurious emissions Field Strength Tx

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to §15.231, peak detector
Comment 1: Dist.: 3m, Ant.: HL 025, ampl.+HP.
Comment 2: Freq: 7.609GHz, Emax: 37.93dBµV/m, RBW: 1MHz

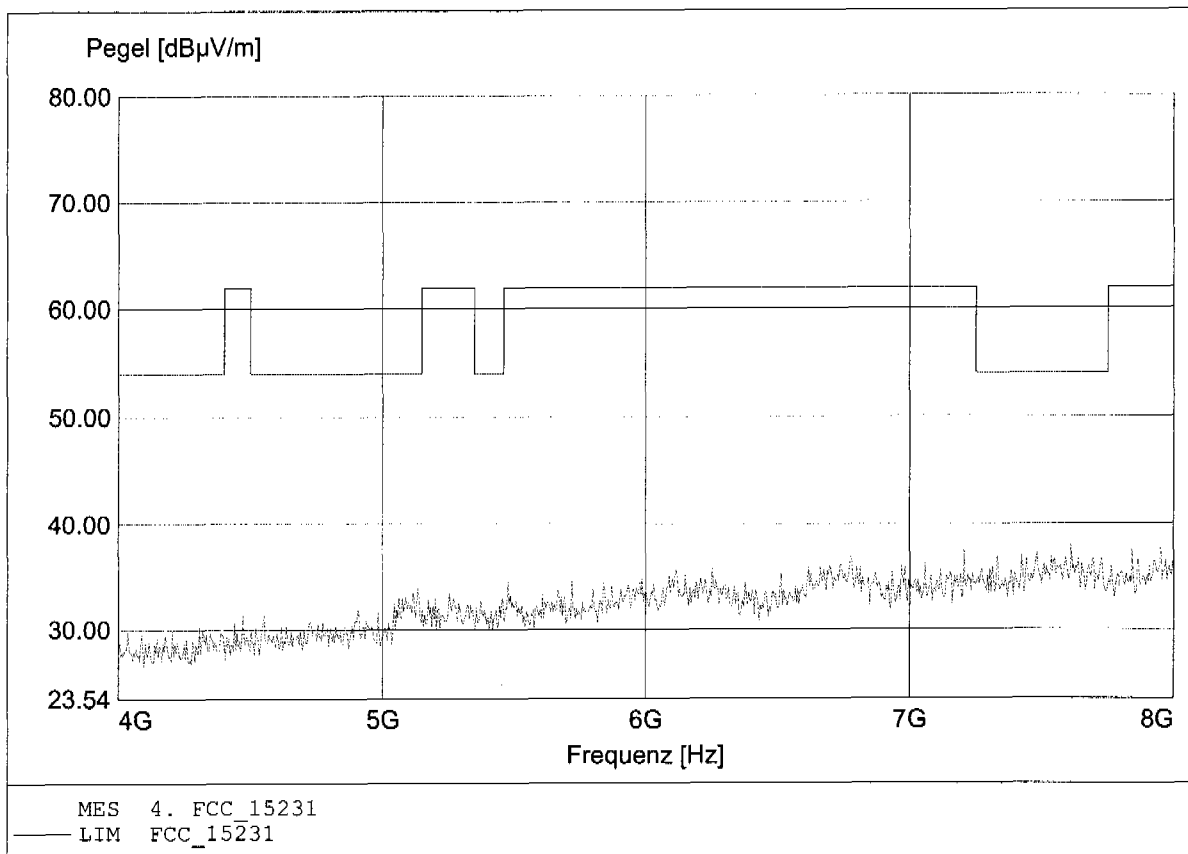

Appendix D

Bandwidth



Company :

digades GmbH


Type of product :

MMI Remote Control

Model no :

D3; C6

channel bandwidth

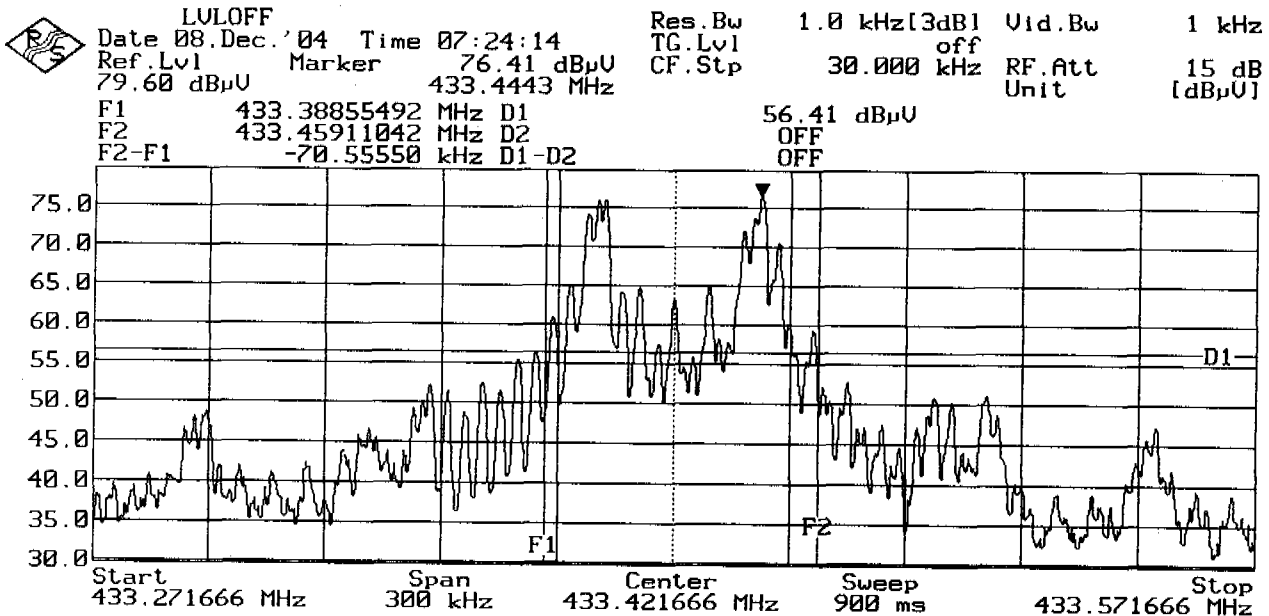

Appendix E

Spurious Emissions radiated, Receiving

Appendix F


Automatical Deactivation

switch off time

FCC RULES PART 15, SUBPART C

Approval Holder: digades GmbH
EUT / Model : MMI Remote Control / D3

Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 25°C / 3 V
Test Specification: according to S15.231

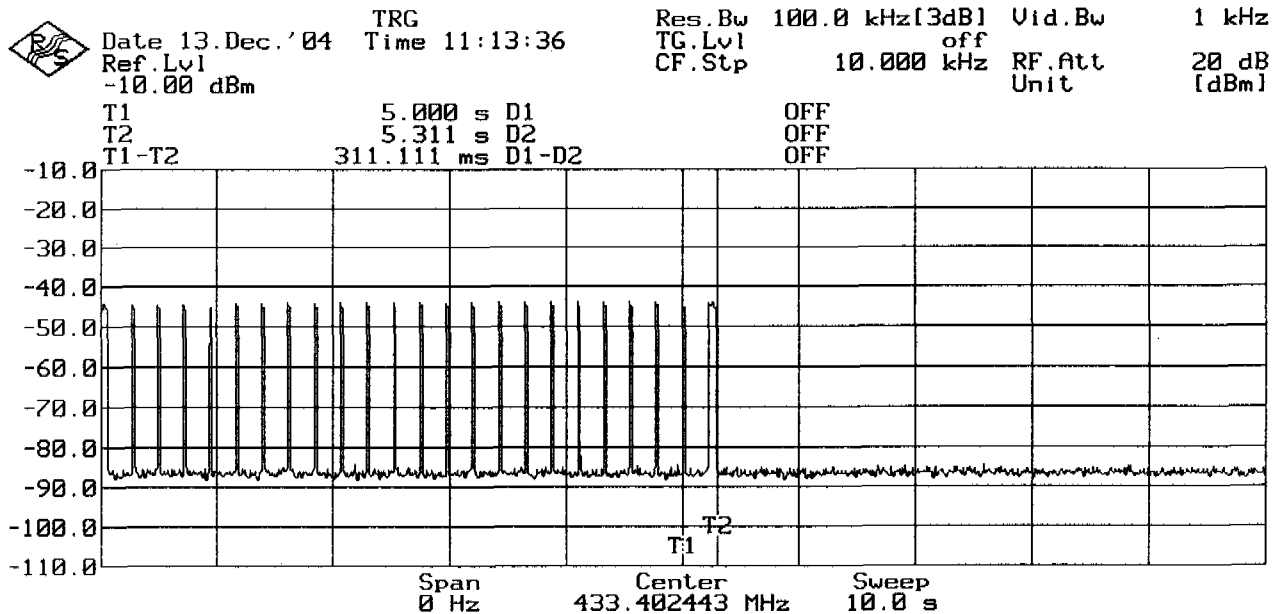

Appendix G

Conducted Measurement at (AC) Power Line