



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION  
TEST REPORT**

**FOR**

**RECESSED DOOR/WINDOW SENSOR**

**MODEL NUMBER: EV-DW4917**

**FCC ID: QNPEV-DW4917**

**REPORT NUMBER: 05U3631-1**

**ISSUE DATE: SEPTEMBER 28, 2005**

*Prepared for*

**SECURE WIRELESS, INC.  
1185 PARK CENTER DRIVE, SUITE A/B  
VISTA, CA 92083, USA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP®**  
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A	9/28/05	Initial Issue	Thu Chan

## TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS .....	4
2. TEST METHODOLOGY .....	5
3. FACILITIES AND ACCREDITATION .....	5
4. CALIBRATION AND UNCERTAINTY .....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	5
5. EQUIPMENT UNDER TEST .....	6
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>SOFTWARE AND FIRMWARE</i> .....	6
5.3. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	6
5.4. <i>MODIFICATION REPORT</i> .....	6
5.5. <i>DESCRIPTION OF TEST SETUP</i> .....	7
6. TEST AND MEASUREMENT EQUIPMENT .....	9
7. LIMITS AND RESULTS .....	10
7.1.1. 20dB BANDWIDTH .....	10
7.1.2. MAXIMUM MODULATION PERCENTAGE (M%).....	12
7.1.3. LESS THAN 5 SECONDS PLOT .....	17
7.2. <i>RADIATED EMISSIONS</i> .....	19
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	19
8. SETUP PHOTOS .....	24

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SECURE WIRELESS SYSTEMS INC  
1185 PARK CENTER DRIVE, SUITE A/B  
VISTA, CA 92083, U.S.A

**EUT DESCRIPTION:** Recessed Door/Window Sensor

**MODEL:** EV-DW4917

**SERIAL NUMBER:** 2455D6

**DATE TESTED:** SEPTEMBER 28, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



---

THU CHAN  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

CHIN PANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Equipment Type	<b>433.92MHz Transmitter</b>
Fundamental Frequency	<b>433.92 MHz</b>
Power Source	<b>3V Battery</b>
Transmitting Time	<b>Periodic &lt;5 seconds</b>
Manufacturer	<b>Secure Wireless, Inc.</b>

### 5.2. SOFTWARE AND FIRMWARE

To activate continuous transmission, holding the magnet near the cap for two second and then removing it should be sufficient to make the Sensor continues transmit.

### 5.3. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined by X, Y, and Z-axis. The highest measured output power was at Y-axis.

### 5.4. MODIFICATION REPORT

The changes made to reduce harmonics emissions, as shown on the attached schematics are as follows:  
C10 was changed from 30 pF to 18 pF  
C11 was changed from 3.3 pF to 3.0 pF.  
C7 was changed from 680 pF to 220 pF  
C8 was changed from 220 pF to 680 pF.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

N/A


### I/O CABLES

N/A

### TEST SETUP

The EUT is stand-alone unit and is battery operated.

**SETUP DIAGRAM FOR TESTS**

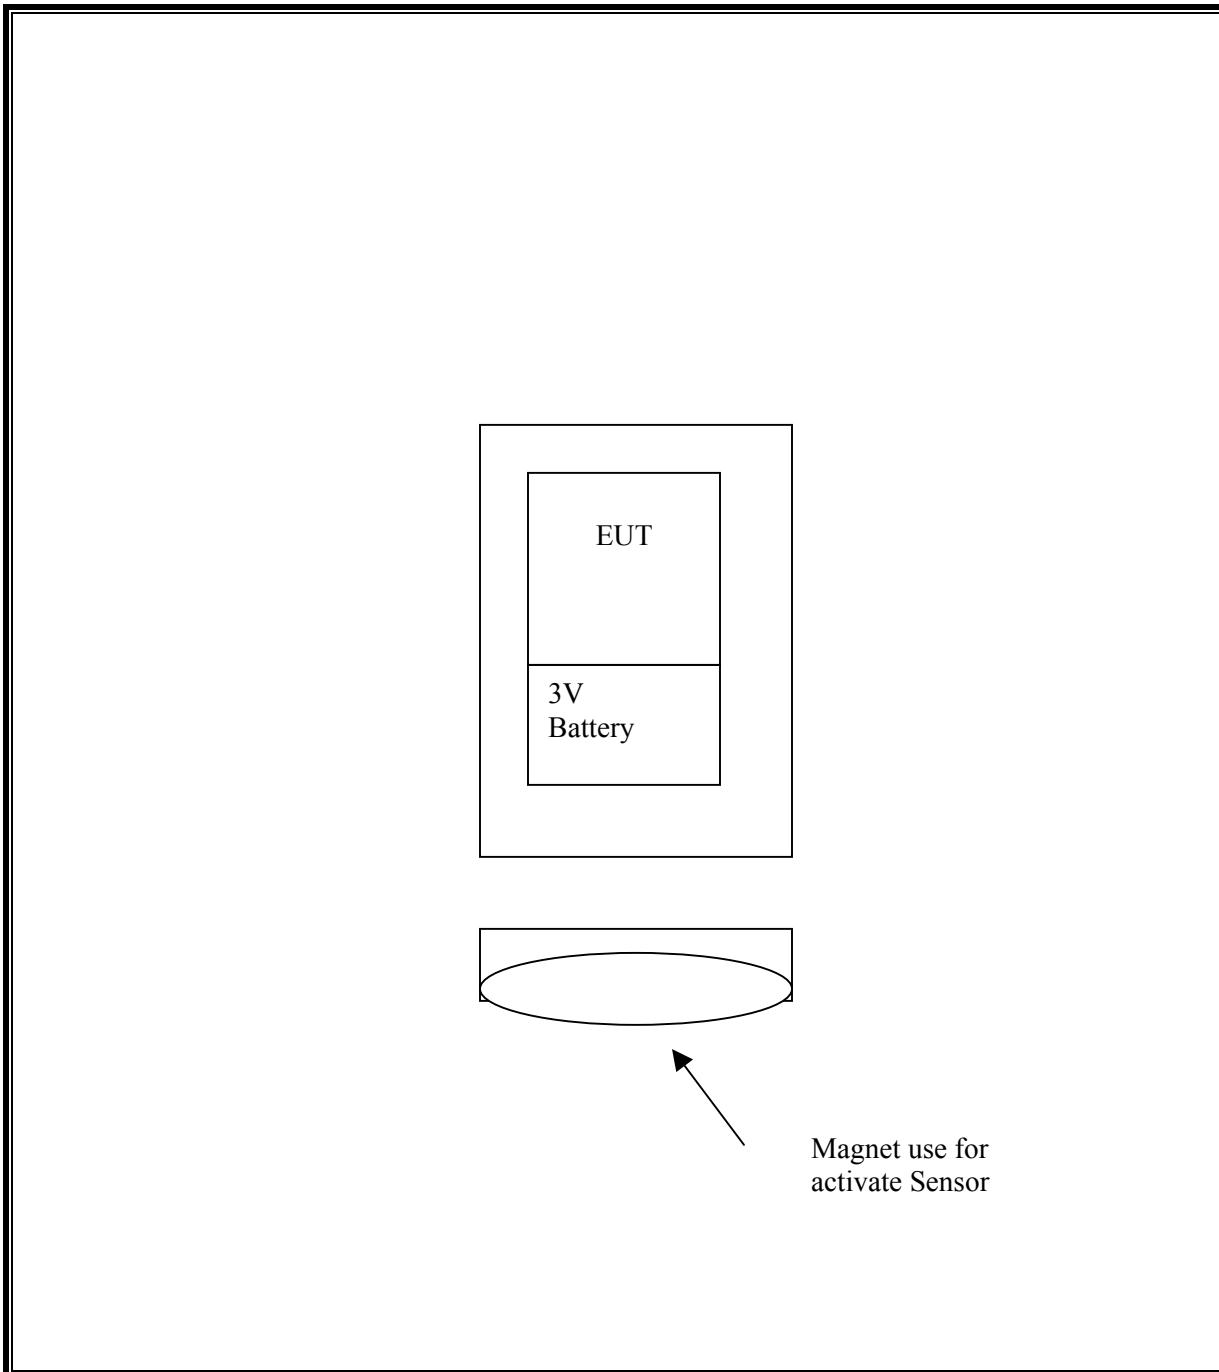

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Antenna, Log Periodic 200 ~ 1000 MHz	EMCO	3146	9107-3163	3/3/2006
Preamplifier, 1300MHz	HP	8447D	2944A06550	8/26/2006
Quasi-Peak Adaptor	HP	85650A	2521A01038	1/15/2006
SA Display Section 3	HP	85662A	2314A04793	1/15/2006
SA RF Section, 1.5 GHz	HP	85680A	2314A02604	1/15/2006
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	MY43360112	3/28/2006
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/2006
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-SP	924342	8/17/2006
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29310	4/22/2006

## 7. LIMITS AND RESULTS

### 7.1.1. 20dB BANDWIDTH

#### LIMIT

§15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 100 KHz. The VBW is set to 100 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.


#### RESULTS

No non-compliance noted:

20dB Bandwidth

Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Margin (KHz)
433.92	408	1084.8	-676.8

**20dB BANDWIDTH**

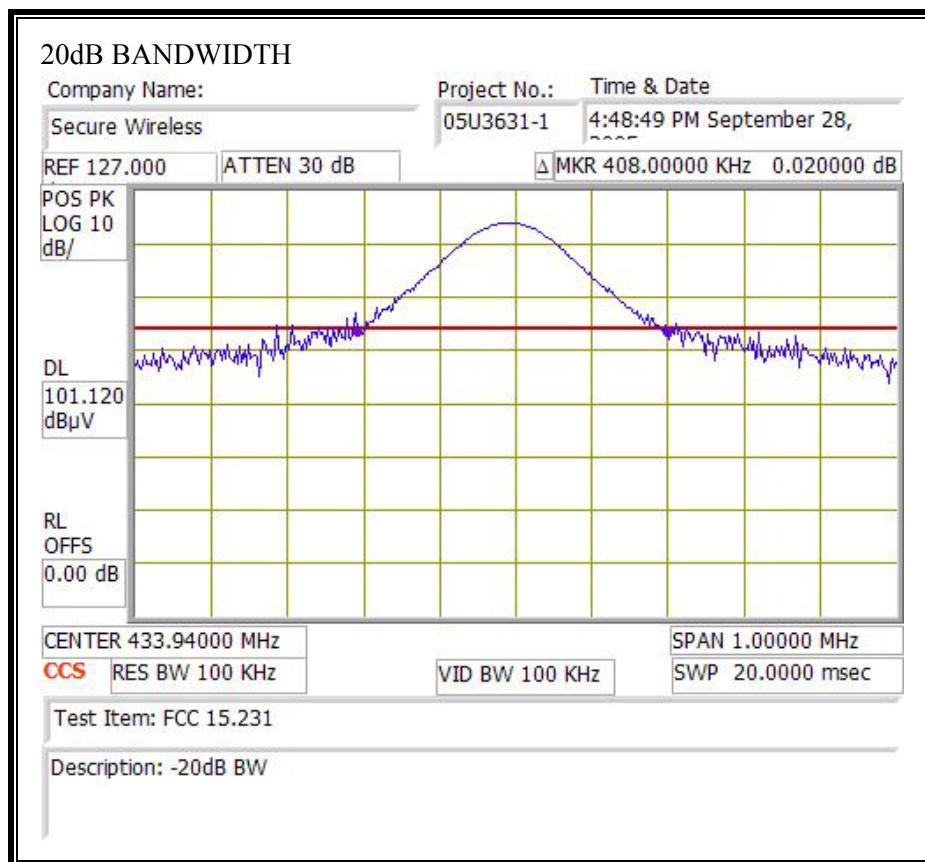

### **7.1.2. MAXIMUM MODULATION PERCENTAGE (M%)**

#### **LIMIT**

§15.35 (c) the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

#### **CALCULATION:**

Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is  
(# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T


#### **RESULTS**

No non-compliance noted:


**MAXIMUM MODULATION PERCENTAGE**

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
250	2.56	1	0.24	26	0.09	-21.11


ONE PERIOD

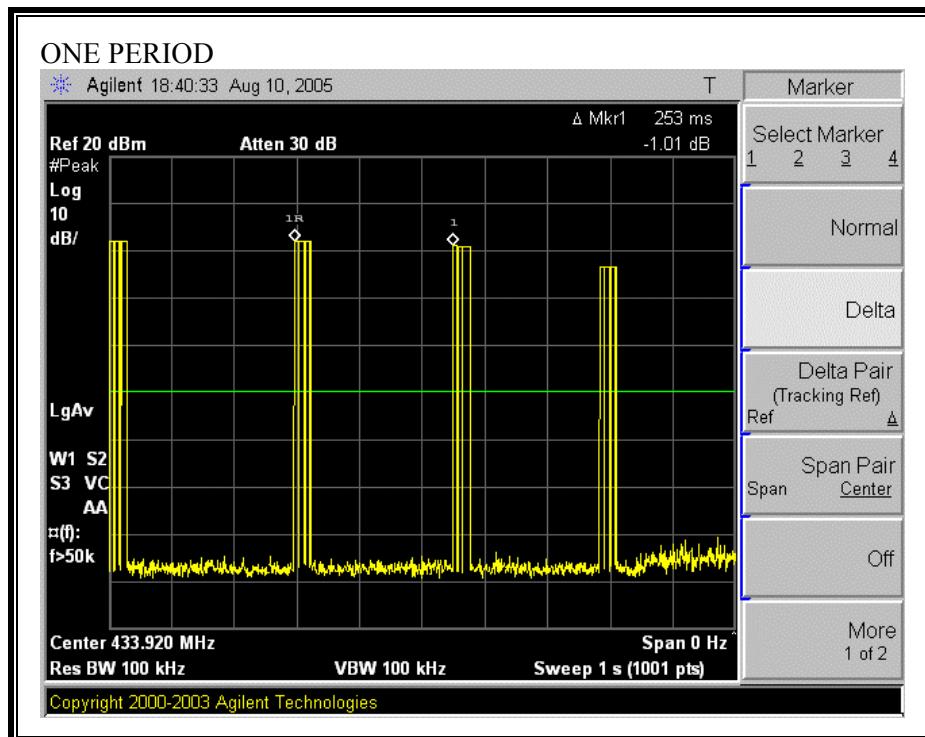

LONG PULSE WIDTH

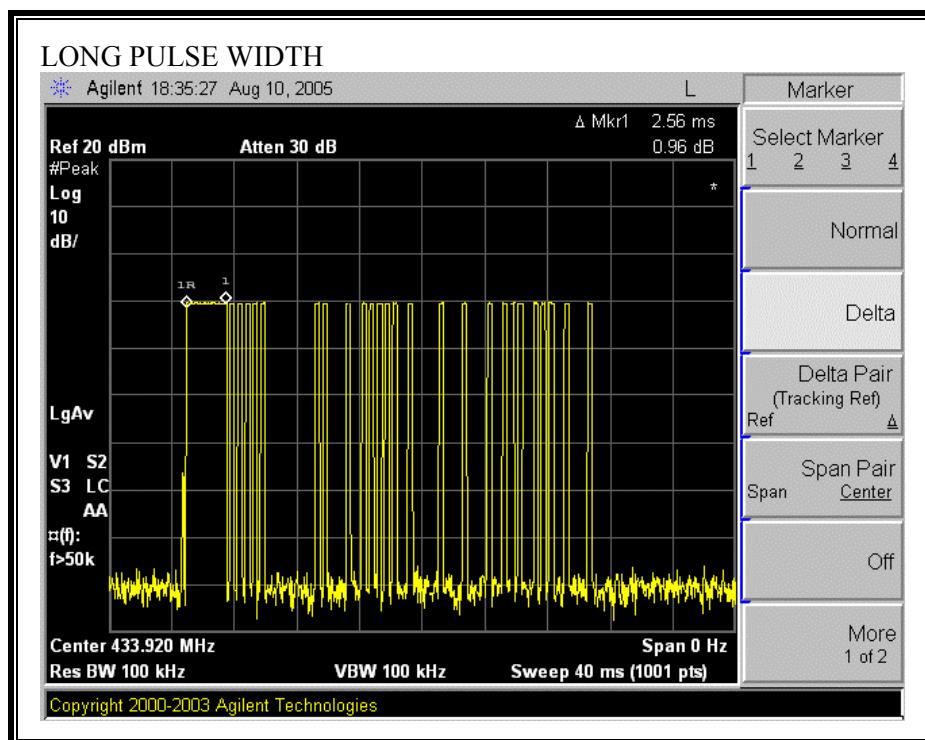

SHORT PULSE WIDTH

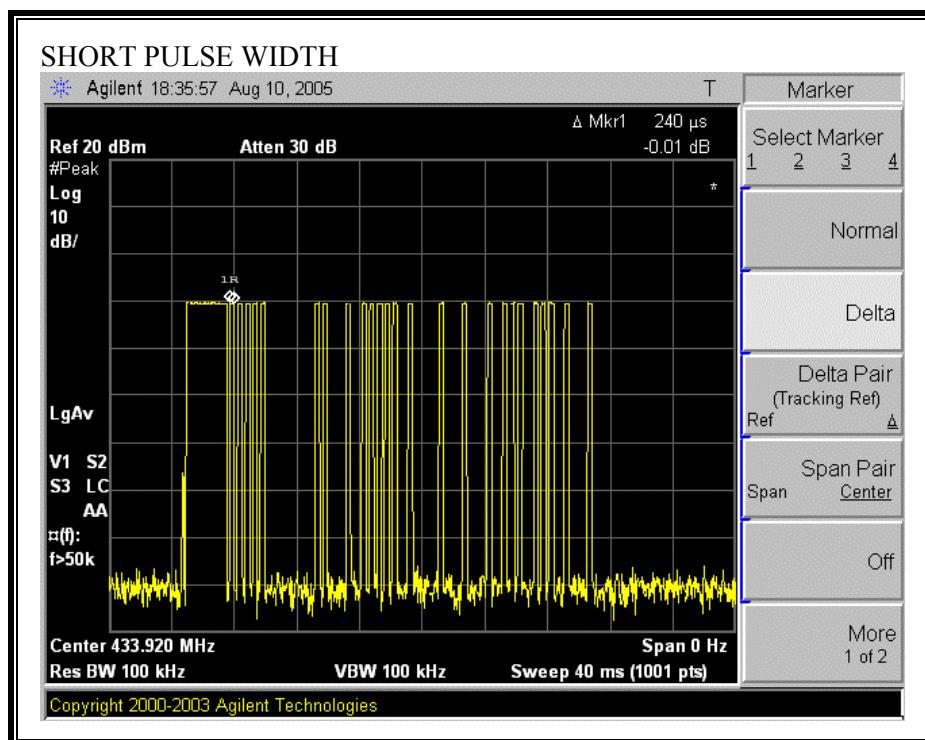

### 7.1.3. LESS THAN 5 SECONDS PLOT

#### LIMIT

§15.231 (a) (1) a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(a) (2) a transmitter activated automatically shall cease transmission within 5 seconds after activation.


#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

#### RESULTS

No non-compliance noted:

LESS THAN 5 SECONDS

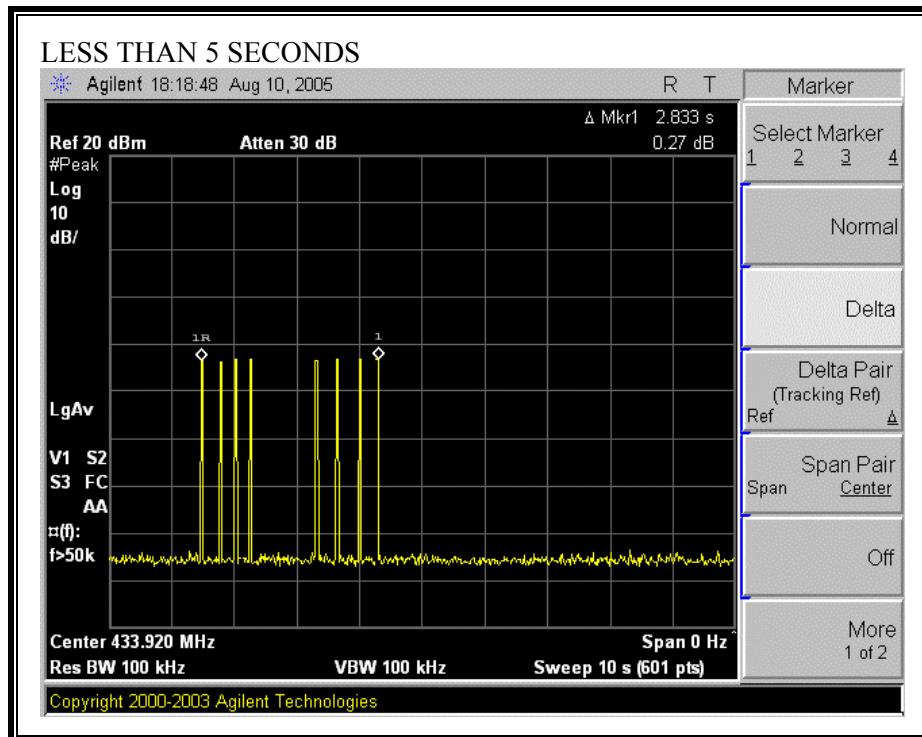

## 7.2. RADIATED EMISSIONS

### 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.231 (b) In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency Spurious Emissions (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 <sup>1</sup>	50 to 150 <sup>1</sup>
174 - 260	1,500	150
260 - 470	1,500 to 5,000 <sup>1</sup>	150 to 500 <sup>1</sup>
Above 470	5,000	500

<sup>1</sup>Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

**FUNDAMENTAL, HARMONICS AND SPURIOUS EMISSIONS 30 – 1000 MHz**

<b>COMPLIANCE</b> Certification Services														
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP														
561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888														
<b>Company:</b> Secure Wireless <b>EUT Description:</b> Recessed Door/Window Sensor <b>Test Configuration :</b> EUT only <b>Type of Test:</b> FCC 15.231b <b>Mode of Operation:</b> Transmitting														
<b>M% = <math>((t_1+t_2+t_3+\dots)/T) = 88\%</math></b>														
<b>Av Reading = Pk Reading + 20*log(M%)</b>														
<b>20 * log (M%) = -21.10</b>														
Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)
X-Position ( EUT Lay down )														
433.92	62.70	42.70	17.00	1.82	0.00	81.52	61.52	100.83	80.83	-19.31	-19.31	3mV	0.00	1.00
433.92	66.80	46.80	17.00	1.82	0.00	85.62	65.62	100.83	80.83	-15.21	-15.21	3mH	0.00	1.75
Y-Position ( EUT Standup )														
433.92	68.60	48.60	17.00	1.82	0.00	87.42	67.42	100.83	80.83	-13.41	-13.41	3mV	0.00	1.00
433.92	60.80	40.80	17.00	1.82	0.00	79.62	59.62	100.83	80.83	-21.21	-21.21	3mH	0.00	2.00
Z-Position ( EUT sideway )														
433.92	66.00	46.00	17.00	1.82	0.00	84.82	64.82	100.83	80.83	-16.01	-16.01	3mV	0.00	1.00
433.92	64.90	44.90	17.00	1.82	0.00	83.72	63.72	100.83	80.83	-17.11	-17.11	3mH	0.00	2.00
2nd Harmonic														
Y position is the Worst Case														
867.86	64.00	44.00	22.63	2.83	26.82	62.64	42.64	80.83	60.83	-18.19	-18.19	3mV	0.00	1.00
867.86	53.50	33.50	22.63	2.83	26.82	52.14	32.14	80.83	60.83	-28.69	-28.69	3mH	0.00	2.00

## HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz

09/27/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																													
Test Engr: Chin Pang																													
Project #: 05U3631																													
Company: Secure Wireless																													
EUT Descrip.: Recessed Door/Window Sensor																													
EUT M/N: WS4917																													
Test Target: FCC 15.231																													
Mode Oper: Transmitter																													
Note: Average =Peak-duty cycle																													
Test Equipment:																													
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz																	
T120; S/N: 29310 @3m				T87 Miteq 924342																									
Hi Frequency Cables																													
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter													
Chin 197538001				Chin 200354001								HPF_1.5GHz																	
Peak Measurements RBW=VBW=1MHz																													
Average Measurements RBW=1MHz ; VBW=10Hz																													
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)														
Y position is the worst case																													
1.300	3.0	86.0	66.0	28.8	1.6	-44.9	0.0	0.1	71.7	51.7	74	54	-2.3	-2.3	V														
1.736	3.0	90.1	70.1	30.6	1.9	-44.9	0.0	0.3	77.9	57.9	80.8	60.8	-2.9	-2.9	V														
2.170	3.0	84.9	64.9	31.7	2.1	-44.8	0.0	0.5	74.3	54.3	80.8	60.8	-6.5	-6.5	V														
2.603	3.0	80.3	60.3	32.0	2.3	-44.6	0.0	0.6	70.5	50.5	80.8	60.8	-10.3	-10.3	V														
3.038	3.0	80.3	60.3	32.4	2.5	-44.2	0.0	0.6	71.6	51.6	80.8	60.8	-9.3	-9.3	V														
3.472	3.0	83.4	63.4	32.8	2.6	-44.5	0.0	0.6	74.9	54.9	80.8	60.8	-5.9	-5.9	V														
3.905	3.0	80.2	60.2	33.3	2.8	-44.8	0.0	0.6	72.1	52.1	74	54	-1.9	-1.9	V														
4.430	3.0	79.2	59.2	33.6	3.0	-45.1	0.0	0.6	71.4	51.4	80.8	60.8	-9.4	-9.4	V														
1.300	3.0	75.0	55.0	28.8	1.6	-44.9	0.0	0.0	60.6	40.6	74	54	-13.4	-13.4	H														
1.736	3.0	86.0	66.0	30.6	1.9	-44.8	0.0	0.3	73.9	53.9	80.8	60.8	-6.9	-6.9	H														
2.170	3.0	81.0	61.0	31.7	2.1	-44.8	0.0	0.5	70.4	50.4	80.8	60.8	-10.4	-10.4	H														
2.603	3.0	72.0	52.0	32.0	2.3	-44.6	0.0	0.6	62.2	42.2	80.8	60.8	-18.6	-18.6	H														
3.038	3.0	82.2	62.2	32.4	2.5	-44.2	0.0	0.6	73.5	53.5	80.8	60.8	-7.4	-7.4	H														
3.472	3.0	75.0	55.0	32.8	2.6	-44.5	0.0	0.6	66.6	46.6	80.8	60.8	-14.3	-14.3	H														
3.905	3.0	77.5	57.5	33.3	2.8	-44.8	0.0	0.6	69.4	49.4	74	54	-4.6	-4.6	H														
4.430	3.0	80.0	60.0	33.6	3.0	-45.1	0.0	0.6	72.2	52.2	80.8	60.8	-8.7	-8.7	H														
f	Measurement Frequency							Amp	Preamp Gain																				
Dist	Distance to Antenna							D Corr	Distance Correct to 3 meters																				
Read	Analyzer Reading							Avg	Average Field Strength @ 3 m																				
AF	Antenna Factor							Peak	Calculated Peak Field Strength																				
CL	Cable Loss							HPF	High Pass Filter																				

## 8. SETUP PHOTOS

### RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION







**END OF REPORT**