



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

T R A N S M I T T E R      C E R T I F I C A T I O N

of

FCC ID: QQLC3310  
MODEL: C3310

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 2, 22, 24E, 22.901d, Confidentiality

DATE OF REPORT: February 7, 2003

ON THE BEHALF OF THE APPLICANT:

AirLink Communications, Inc.

AT THE REQUEST OF:

P.O. 0020828

AirLink Communications, Inc.  
472 Kato Terrace  
Fremont, CA 94539

Attention of:

Jim Baichtal  
510-226-4201; FAX: -4299  
email: jim@airlink.com

SUPERVISED BY:

Morton Flom, P. Eng.

LIST OF EXHIBITS  
(FCC **CERTIFICATION** (CELLULAR TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: AirLink Communications, Inc.

FCC ID: QQLC3310

BY APPLICANT:

|  |   |
|--|---|
| 1. LETTER OF AUTHORIZATION   | x |
| 2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)                            |   |
| <input checked="" type="checkbox"/> LABEL                            |   |
| <input checked="" type="checkbox"/> LOCATION OF LABEL                |   |
| <input checked="" type="checkbox"/> COMPLIANCE STATEMENT             |   |
| <input checked="" type="checkbox"/> LOCATION OF COMPLIANCE STATEMENT |   |
| 3. PHOTOGRAPHS, 2.1033(c)(12)  | x |
| 4. CONFIDENTIALITY REQUEST: 0.457 and 0.459                          | x |
| 5. DOCUMENTATION: 2.1033(c)  |   |
| (3) USER MANUAL  | x |
| (9) TUNE UP INFO   | x |
| (10) SCHEMATIC DIAGRAM   | x |
| (10) CIRCUIT DESCRIPTION   | x |
| BLOCK DIAGRAM  | x |
| PARTS LIST   | x |
| ACTIVE DEVICES   | x |
| 6. MPE REPORT  | x |

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

| RULE                             | DESCRIPTION  | PAGE |
|----------------------------------|--|------|
|                                  | Test Report  | 1    |
| 2.1033(c)                        | General Information Required                       | 2    |
| 2.1033(c)(14)                    | Rule Summary                                       | 5    |
|                                  | General Information                                | 6    |
|                                  | Standard Test Conditions and Engineering Practices | 6    |
| 2.1046(a)                        | Carrier Output Power (Conducted)                   | 7    |
| 2.1046(a)                        | ERP Carrier Power (Radiated)                       | 9    |
| 2.1049(c)(1), 22                 |  |      |
|                                  | Emission Masks (Occupied Bandwidth)                | 11   |
| 2.1051, 2.1049(c), 24, 24.238(b) |  |      |
|                                  | Transmitter Conducted Measurements                 | 19   |
| 2.1051, 22.917                   | Spurious Emissions at Antenna Terminals            | 27   |
| 2.1053(a)                        | Field Strength of Spurious Radiation               | 30   |
| 2.1055(a)(1)                     | Frequency Stability (Temperature Variation)        | 34   |
| 2.1055(b)(1)                     | Frequency Stability (Voltage Variation)            | 37   |
| 2.202(g)                         | Necessary Bandwidth and Emission Bandwidth         | 38   |

PAGE NO.

1 of 38.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0320010

d) Client: AirLink Communications, Inc.  
472 Kato Terrace  
Fremont, CA 94539

e) Identification: C3310  
FCC ID: QQLC3310  
Description: CDMA Modem

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: February 7, 2003  
EUT Received: January 29, 2003

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:

  
Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 38.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

2, 22, 24E, 22.901d, Confidentiality

Sub-part 2.1033(c)(1): NAME AND ADDRESS OF APPLICANT:AirLink Communications, Inc.  
472 Kato Terrace  
Fremont, CA 94539MANUFACTURER:

Applicant

(c)(2): FCC ID: QQLC3310MODEL NO: C3310(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 1M25F9W(c)(5): FREQUENCY RANGE, MHz: 824.04 to 848  
1850 to 1910(c)(6): POWER RATING, Watts: 0.25  
   Switchable       Variable       x N/AFCC GRANT NOTE:BC - The output power is  
continuously variable from  
the value listed in this  
entry to 5%-10% of the  
value listed.(c)(7): MAXIMUM POWER RATING, Watts: 0.6

PAGE NO.

3 of 38.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,  
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = 600 ma  
COLLECTOR VOLTAGE, Vdc = 3.3  
SUPPLY VOLTAGE, Vdc = 12

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

       ATTACHED EXHIBITS  
      x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 38.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.



"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 38.

Sub-part

2.1033(c)(14): TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- x 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- x 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- x 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 - Fixed Microwave Services

PAGE NO.

6 of 38.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 38.

NAME OF TEST: Carrier Output Power (Conducted)

SPECIFICATION: 47 CFR 2.1046(a)

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .

MEASUREMENT RESULTS

| Frequency, MHz | High Power, dbm | High Power mw |
|----------------|-----------------|---------------|
| 824.04         | 23.48           | 222.8         |
| 836.4          | 23.72           | 235.5         |
| 848.97         | 21.86           | 153.5         |
| 1851.25        | 23.87           | 243.8         |
| 1880           | 23.23           | 210.4         |
| 1908.75        | 23.3            | 213.8         |

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

8 of 38.

## TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT  
 TEST 2: FREQUENCY STABILITY

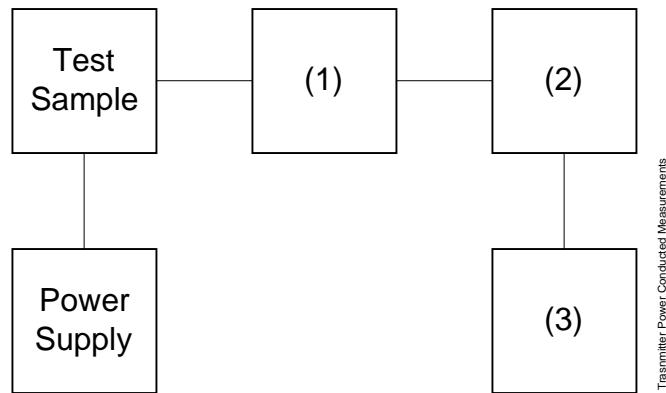

| Asset Description<br>(as applicable) | s/n        |
|--------------------------------------|------------|
| (1) COAXIAL ATTENUATOR               |            |
| i00122 Narda 766-10                  | 7802       |
| i00123 Narda 766-10                  | 7802A      |
| i00069 Bird 8329 (30 dB)             | 1006       |
| i00113 Sierra 661A-3D                | 1059       |
| (2) POWER METERS                     |            |
| i00014 HP 435A                       | 1733A05836 |
| i00039 HP 436A                       | 2709A26776 |
| i00020 HP 8901A POWER MODE           | 2105A01087 |
| (3) FREQUENCY COUNTER                |            |
| i00042 HP 5383A                      | 1628A00959 |
| i00019 HP 5334B                      | 2704A00347 |
| i00020 HP 8901A FREQUENCY MODE       | 2105A01087 |

PAGE NO.

9 of 38.

NAME OF TEST:

ERP Carrier Power (Radiated)


SPECIFICATION:

TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

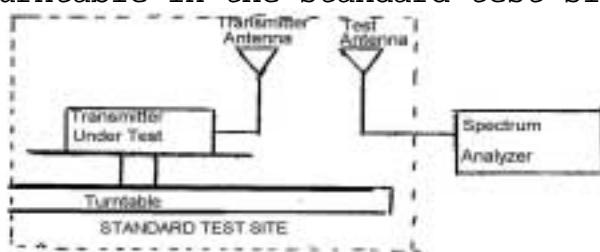

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \Sigma 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

RESULTS ATTACHED

PAGE NO.

10 of 38.

NAME OF TEST:

ERP Carrier Power (Radiated)

RESULTS

|                     | 824 MHz     |                  | 836.4 MHz   |                  | 848.2 MHz   |                  |
|---------------------|-------------|------------------|-------------|------------------|-------------|------------------|
|                     | LVL,<br>dbm | Path<br>Loss, db | LVL,<br>dbm | Path<br>Loss, db | LVL,<br>dbm | Path<br>Loss, db |
| 0°                  | 23.7        | 0.7              | 23.1        | 1.0              | 21.1        | 1.8              |
| 45°                 | 21.9        | 0.7              | 22.4        | 1.0              | 19.9        | 1.8              |
| 90°                 | 22.5        | 0.7              | 21.8        | 1.0              | 23.1        | 1.8              |
| 135°                | 23.2        | 0.7              | 23.6        | 1.0              | 20.6        | 1.8              |
| 180°                | 22.3        | 0.7              | 22.8        | 1.0              | 21.9        | 1.8              |
| 225°                | 23.9        | 0.7              | 21.8        | 1.0              | 19.7        | 1.8              |
| 270°                | 22.2        | 0.7              | 21.8        | 1.0              | 20.6        | 1.8              |
| 315°                | 21.8        | 0.7              | 20.3        | 1.0              | 20.9        | 1.8              |
| Av. Radiated Power: |             | 23.7 dbm         | 836.4 MHz   |                  | 848.2 MHz   |                  |
|                     |             | 23.2 dbm         |             |                  | 22.8 dbm    |                  |

|                     | 1851.25 MHz |                  | 1880 MHz    |                  | 1908.75 MHz |                  |
|---------------------|-------------|------------------|-------------|------------------|-------------|------------------|
|                     | LVL,<br>dbm | Path<br>Loss, db | LVL,<br>dbm | Path<br>Loss, db | LVL,<br>dbm | Path<br>Loss, db |
| 0°                  | 20.8        | 3.2              | 24.8        | 3.3              | 16.1        | 3.3              |
| 45°                 | 16.4        | 3.2              | 24.7        | 3.3              | 13.6        | 3.3              |
| 90°                 | 18.8        | 3.2              | 21.9        | 3.3              | 21.0        | 3.3              |
| 135°                | 18.1        | 3.2              | 17.4        | 3.3              | 21.4        | 3.3              |
| 180°                | 14.1        | 3.2              | 23.3        | 3.3              | 18.2        | 3.3              |
| 225°                | 17.3        | 3.2              | 20.6        | 3.3              | 19.7        | 3.3              |
| 270°                | 17.9        | 3.2              | 19.7        | 3.3              | 17.0        | 3.3              |
| 315°                | 19.3        | 3.2              | 13.3        | 3.3              | 8.0         | 3.3              |
| Av. Radiated Power: |             | 18.9 dbm         | 1880 MHz    |                  | 1908.75 MHz |                  |
|                     |             | 23.9 dbm         |             |                  | 20.2 dbm    |                  |

PAGE NO. 11 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1), 22

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 2.5$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

12 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02b0034: 2003-Jan-31 Fri  
 STATE: 2:High Power

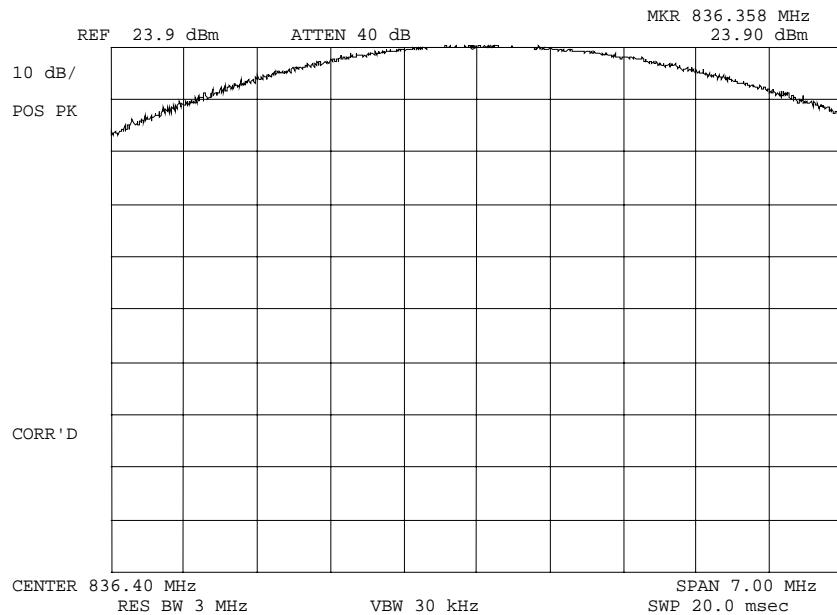

POWER: HIGH  
 MODULATION: CDMA 800  
 REFERENCE LEVEL

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

13 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02b0028: 2003-Jan-31 Fri  
 STATE: 1:Low Power

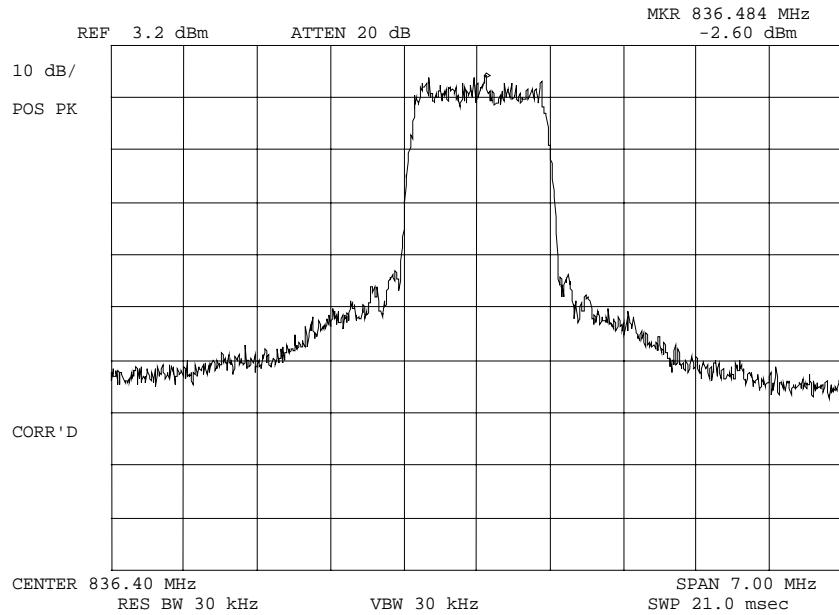

POWER: LOW  
 MODULATION: CDMA 800


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

14 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02b0031: 2003-Jan-31 Fri  
 STATE: 2:High Power

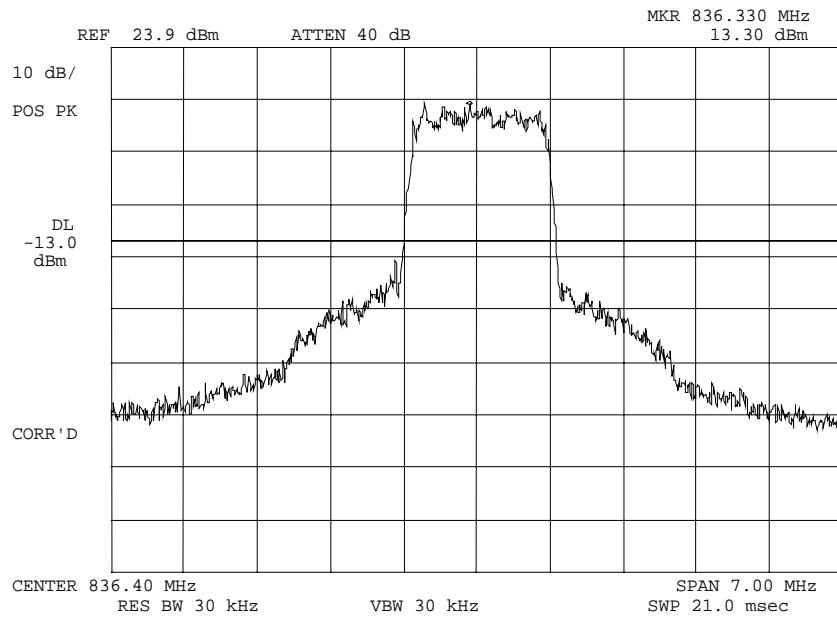

POWER: HIGH  
 MODULATION: CDMA 800


PERFORMED BY:

  
 Doug Noble, B.A.S. E.E.T.

PAGE NO.

15 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02b0029: 2003-Jan-31 Fri  
 STATE: 2:High Power

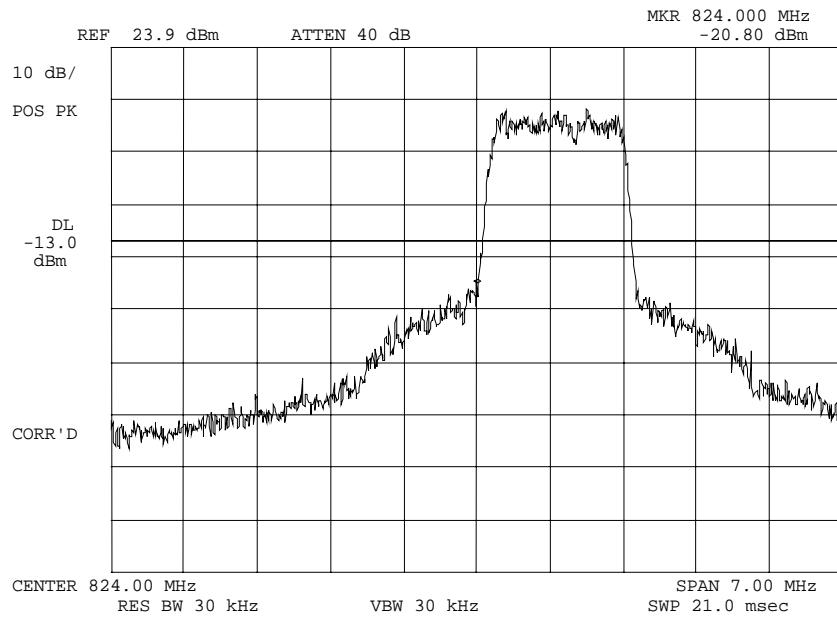

POWER: HIGH  
 MODULATION: CDMA 800  
 LOWER BANDEDGE CH 1014

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

16 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02b0030: 2003-Jan-31 Fri  
 STATE: 2:High Power

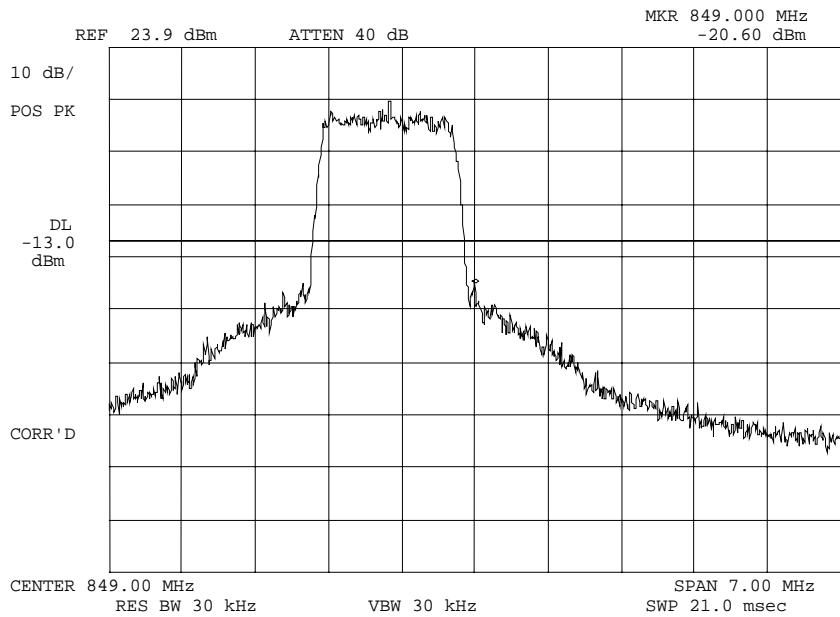

POWER: HIGH  
 MODULATION: CDMA 800  
 UPPER BANDEDGE CH 773


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

17 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02b0033: 2003-Jan-31 Fri  
 STATE: 1:Low Power

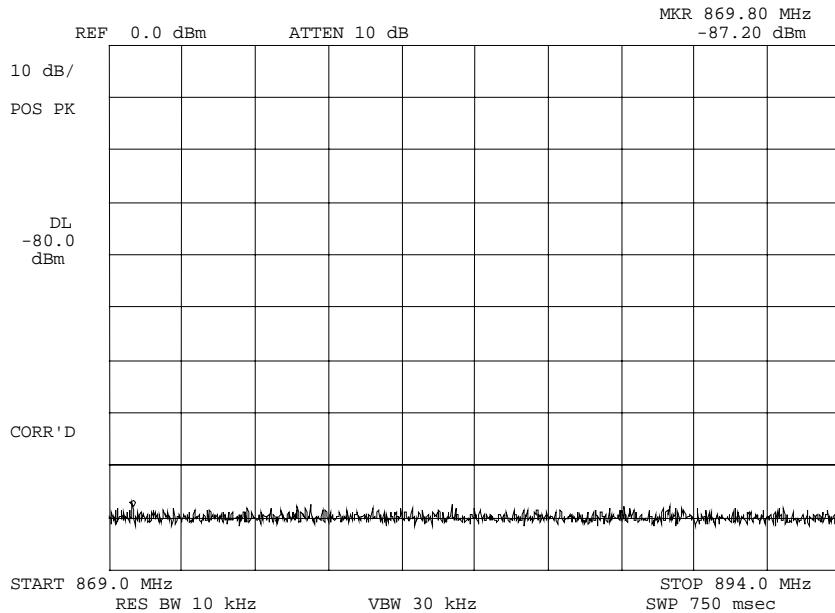

POWER: LOW  
 MODULATION: CDMA 800  
 TX SPURS IN RX CRITICAL  
 BAND

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

18 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02b0032: 2003-Jan-31 Fri  
 STATE: 2:High Power

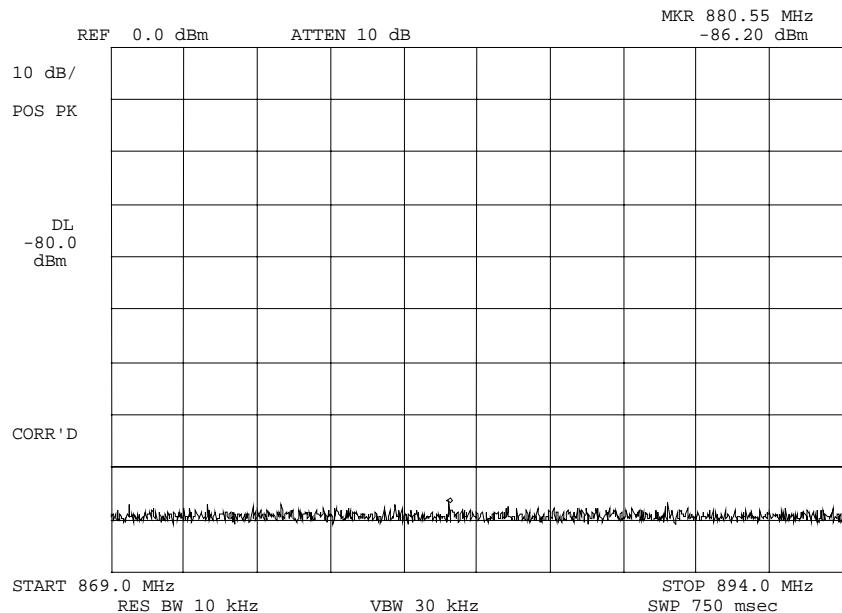

POWER: HIGH  
 MODULATION: CDMA 800  
 TX SPURS IN RX CRITICAL  
 BAND

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 19 of 38.

NAME OF TEST: Transmitter Conducted Measurements

SPECIFICATION: 47 CFR 2.1051: Unwanted (spurious) Emissions  
2.1049(c), 24.238(b): Occupied Bandwidth  
24: Emissions at Band Edges

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the designated frequency block(s) were measured.
3. MEASUREMENT RESULTS: ATTACHED

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

20 of 38.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

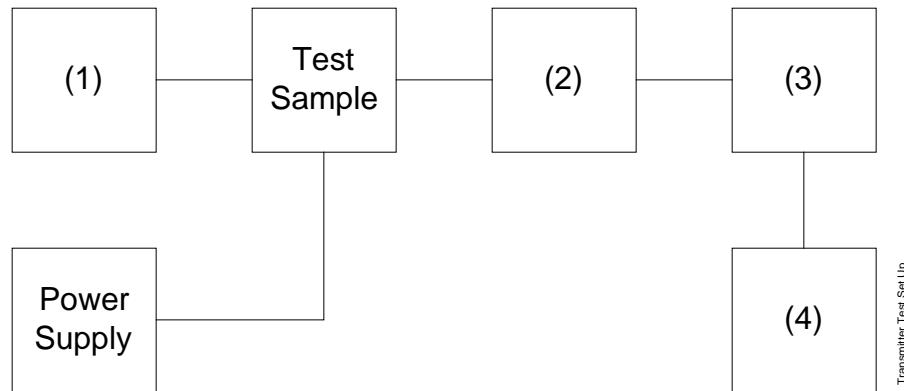


| Asset Description<br>(as applicable)  |  | s/n        |
|---------------------------------------|--|------------|
| (1) <u>AUDIO OSCILLATOR/GENERATOR</u> |  |            |
| i00010 HP 204D                        |  | 1105A04683 |
| i00017 HP 8903A                       |  | 2216A01753 |
| i00012 HP 3312A                       |  | 1432A11250 |
| (2) <u>COAXIAL ATTENUATOR</u>         |  |            |
| i00122 Narda 766-10                   |  | 7802       |
| i00123 Narda 766-10                   |  | 7802A      |
| i00069 Bird 8329 (30 dB)              |  | 1006       |
| i00113 Sierra 661A-3D                 |  | 1059       |
| (3) <u>FILTERS; NOTCH, HP, LP, BP</u> |  |            |
| i00126 Eagle TNF-1                    |  | 100-250    |
| i00125 Eagle TNF-1                    |  | 50-60      |
| i00124 Eagle TNF-1                    |  | 250-850    |
| (4) <u>SPECTRUM ANALYZER</u>          |  |            |
| i00048 HP 8566B                       |  | 2511A01467 |
| i00029 HP 8563E                       |  | 3213A00104 |

PAGE NO.

21 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0035: 2003-Jan-31 Fri  
 STATE: 2:High Power

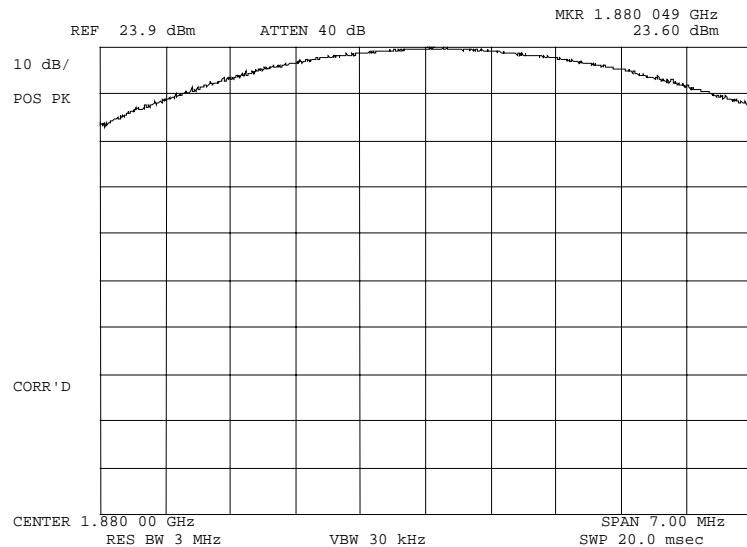

POWER: HIGH  
 MODULATION: CDMA PCS BAND  
 REFERENCE LEVEL

PERFORMED BY:




Doug Noble, B.A.S. E.E.T.

PAGE NO.

22 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0037: 2003-Jan-31 Fri  
 STATE: 1:Low Power

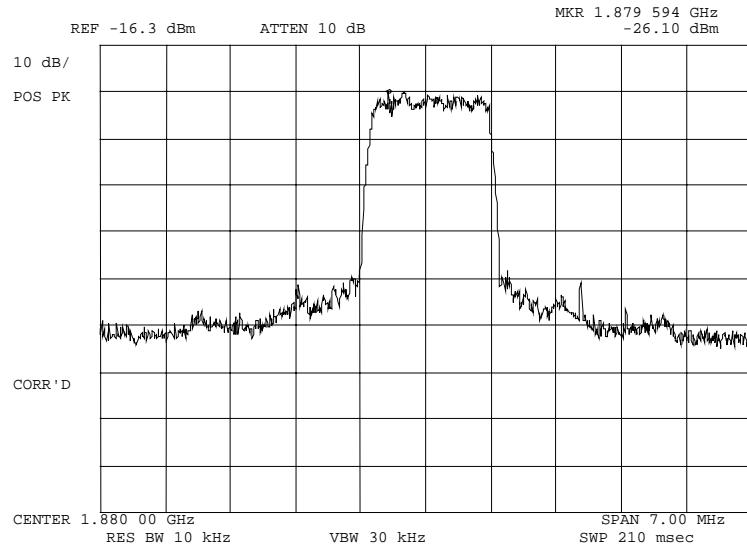

POWER: LOW  
 MODULATION: CDMA PCS BAND


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.  


PAGE NO.

23 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0036: 2003-Jan-31 Fri  
 STATE: 2:High Power

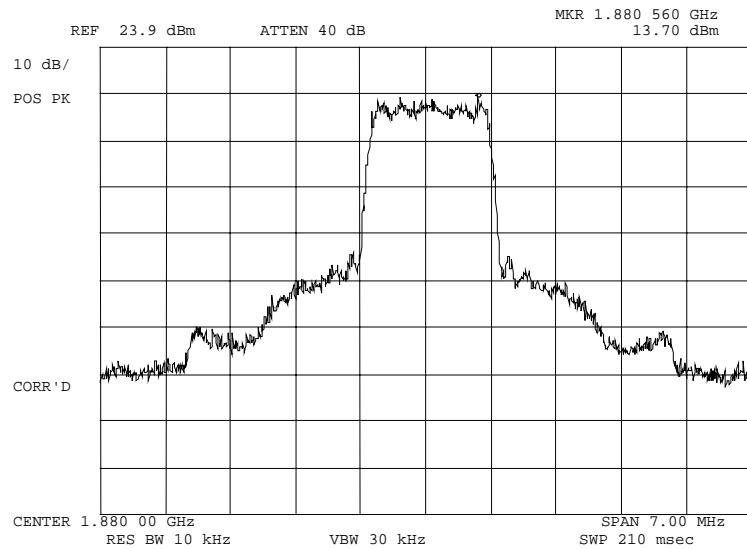

POWER: HIGH  
 MODULATION: CDMA PCS BAND


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

24 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0039: 2003-Jan-31 Fri  
 STATE: 2:High Power

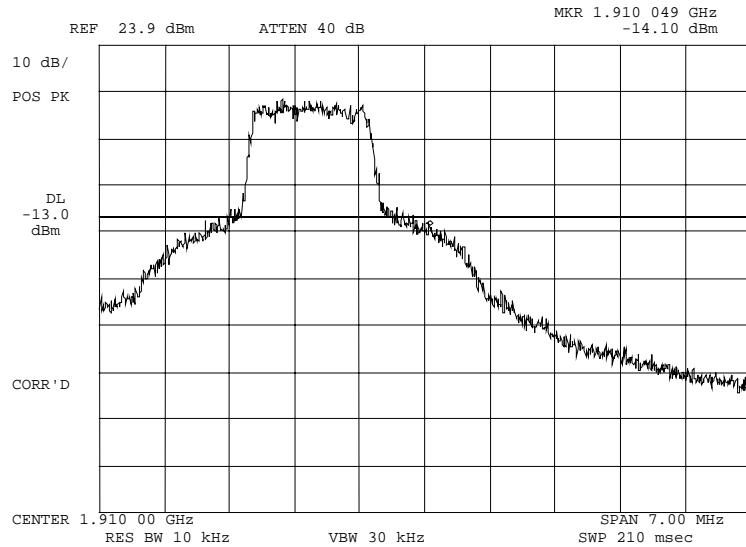

POWER: HIGH  
 MODULATION: CDMA PCS BAND  
 UPPER BANDEDGE CH 1175


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

25 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0040: 2003-Jan-31 Fri  
 STATE: 2:High Power

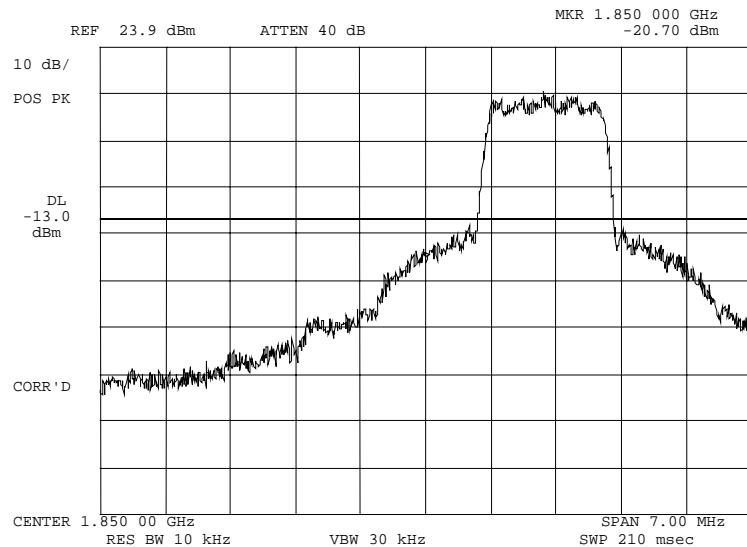

POWER: HIGH  
 MODULATION: CDMA PCS BAND  
 LOWER BANDEDGE CH 025


PERFORMED BY:

  
 Doug Noble, B.A.S. E.E.T.

PAGE NO.

26 of 38.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
 g02a0038: 2003-Jan-31 Fri  
 STATE: 2:High Power

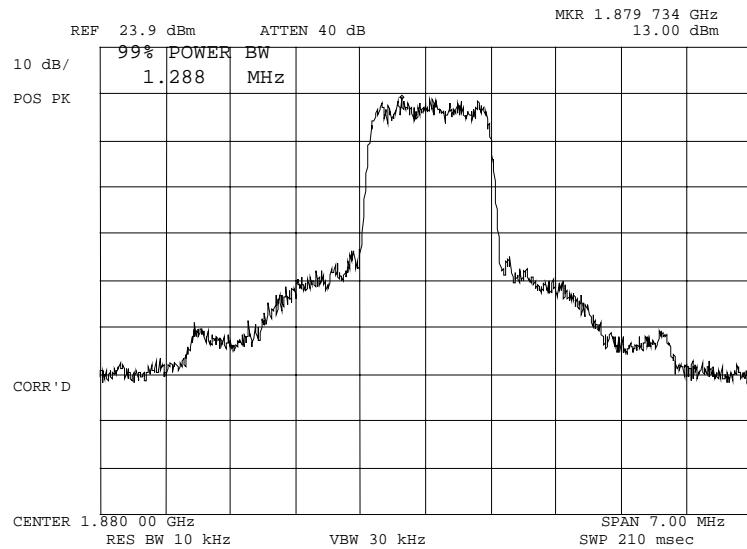

POWER: HIGH  
 MODULATION: CDMA PCS BAND  
 99 % POWER BANDWIDTH

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 27 of 38.

NAME OF TEST: Spurious Emissions at Antenna Terminals

SPECIFICATION: 47 CFR 2.1051, 22.917

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a coaxial attenuator and then to a Spectrum Analyzer.
2. A notch filter was introduced to reduce or eliminate spurious emission which could be generated internally in the spectrum analyzer.
3. Measurements were made over the range from 45 kHz to 10 GHz for the worst case modulation so both the highest and lowest R.F. power settings.
4. All other emissions were 20 dB or more below the limit.
5. Spectrum analyzer bandwidth was set to section 22.917(h) as applicable.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

28 of 38.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)  
 g0310167: 2003-Jan-31 Fri 12:28:00  
 STATE: 2:High Power

| FREQUENCY TUNED,<br>MHz | FREQUENCY<br>EMISSION, MHz | LEVEL, dBm | LEVEL, dBc | MARGIN, dB |
|-------------------------|----------------------------|------------|------------|------------|
| 824.040000              | 1648.218900                | -45.2      | -72.9      | -32.2      |
| 836.400000              | 1672.666600                | -46.4      | -74.1      | -33.4      |
| 848.970000              | 1697.709600                | -46.5      | -74.2      | -33.5      |
| 824.040000              | 2471.915600                | -45.1      | -72.8      | -32.1      |
| 836.400000              | 2508.992100                | -48.5      | -76.2      | -35.5      |
| 848.970000              | 2546.999500                | -48.2      | -75.9      | -35.2      |
| 824.040000              | 3296.241500                | -48.5      | -76.2      | -35.5      |
| 836.400000              | 3345.537500                | -49.2      | -76.9      | -36.2      |
| 848.970000              | 3395.872500                | -48.7      | -76.4      | -35.7      |
| 824.040000              | 4119.972100                | -48.5      | -76.2      | -35.5      |
| 836.400000              | 4182.148400                | -48.5      | -76.2      | -35.5      |
| 848.970000              | 4244.971000                | -46.8      | -74.5      | -33.8      |
| 824.040000              | 4943.998100                | -48.6      | -76.3      | -35.6      |
| 836.400000              | 5018.291500                | -47.9      | -75.6      | -34.9      |
| 848.970000              | 5093.802000                | -48.5      | -76.2      | -35.5      |
| 824.040000              | 5768.376000                | -48.8      | -76.5      | -35.8      |
| 836.400000              | 5854.836300                | -41.8      | -69.5      | -28.8      |
| 848.970000              | 5942.700400                | -41.6      | -69.3      | -28.6      |
| 824.040000              | 6592.140300                | -41.7      | -69.4      | -28.7      |
| 836.400000              | 6691.437500                | -41.5      | -69.2      | -28.5      |
| 848.970000              | 6791.896400                | -42.3      | -70        | -29.3      |
| 824.040000              | 7416.558600                | -40.8      | -68.5      | -27.8      |
| 836.400000              | 7527.635300                | -41.7      | -69.4      | -28.7      |
| 848.970000              | 7640.896300                | -42.4      | -70.1      | -29.4      |
| 824.040000              | 8240.425400                | -41.6      | -69.3      | -28.6      |
| 836.400000              | 8363.986600                | -42.4      | -70.1      | -29.4      |
| 848.970000              | 8489.890700                | -42.6      | -70.3      | -29.6      |
| 824.040000              | 9064.304100                | -41.5      | -69.2      | -28.5      |
| 836.400000              | 9200.380100                | -42.9      | -70.6      | -29.9      |
| 848.970000              | 9338.583400                | -41.7      | -69.4      | -28.7      |
| 824.040000              | 9888.525800                | -42.3      | -70        | -29.3      |
| 836.400000              | 10036.570500               | -42.2      | -69.9      | -29.2      |
| 848.970000              | 10187.710700               | -41.5      | -69.2      | -28.5      |
| 824.040000              | 10712.349800               | -42.4      | -70.1      | -29.4      |
| 836.400000              | 10873.220900               | -41.7      | -69.4      | -28.7      |
| 848.970000              | 11036.537300               | -41.6      | -69.3      | -28.6      |
| 824.040000              | 11536.527600               | -41.2      | -68.9      | -28.2      |
| 836.400000              | 11709.540800               | -41.5      | -69.2      | -28.5      |
| 848.970000              | 11885.704900               | -40.6      | -68.3      | -27.6      |
| 824.040000              | 12360.611400               | -41.6      | -69.3      | -28.6      |
| 836.400000              | 12545.925000               | -37.8      | -65.5      | -24.8      |
| 848.970000              | 12734.430500               | -37.4      | -65.1      | -24.4      |



PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

29 of 38.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)  
 g0310174: 2003-Jan-31 Fri 14:30:00  
 STATE: 2:High Power

| FREQUENCY TUNED,<br>MHz | FREQUENCY<br>EMISSION, MHz | LEVEL, dBm | LEVEL, dBc | MARGIN, dB |
|-------------------------|----------------------------|------------|------------|------------|
| 1851.250000             | 1861.200000                | -34        | -58.8      | -21        |
| 1880.000000             | 1870.440000                | -35.1      | -59.9      | -22.1      |
| 1908.750000             | 1890.070000                | -34.7      | -59.5      | -21.7      |
| 1908.750000             | 1898.880000                | -33.4      | -58.2      | -20.4      |
| 1851.250000             | 3702.510000                | -53.1      | -77.9      | -40.1      |
| 1880.000000             | 3760.001000                | -54        | -78.8      | -41        |
| 1908.750000             | 3817.604000                | -52.9      | -77.7      | -39.9      |
| 1851.250000             | 5553.528600                | -54.1      | -78.9      | -41.1      |
| 1880.000000             | 5640.194900                | -54.5      | -79.3      | -41.5      |
| 1908.750000             | 5726.416900                | -53.7      | -78.5      | -40.7      |
| 1851.250000             | 7404.905900                | -47.8      | -72.6      | -34.8      |
| 1880.000000             | 7520.144900                | -46.7      | -71.5      | -33.7      |
| 1908.750000             | 7634.876000                | -47.6      | -72.4      | -34.6      |
| 1851.250000             | 9256.487500                | -46.8      | -71.6      | -33.8      |
| 1880.000000             | 9399.875100                | -48.6      | -73.4      | -35.6      |
| 1908.750000             | 9543.691800                | -47.9      | -72.7      | -34.9      |
| 1851.250000             | 11107.329300               | -47.5      | -72.3      | -34.5      |
| 1880.000000             | 11280.087600               | -47.9      | -72.7      | -34.9      |
| 1908.750000             | 11452.511900               | -47.5      | -72.3      | -34.5      |
| 1851.250000             | 12958.938900               | -43.1      | -67.9      | -30.1      |
| 1880.000000             | 13159.810300               | -42.5      | -67.3      | -29.5      |
| 1908.750000             | 13361.278000               | -43.4      | -68.2      | -30.4      |
| 1851.250000             | 14809.879500               | -41.4      | -66.2      | -28.4      |
| 1880.000000             | 15039.811600               | -42.9      | -67.7      | -29.9      |
| 1908.750000             | 15270.124000               | -41.3      | -66.1      | -28.3      |
| 1851.250000             | 16661.341500               | -41.5      | -66.3      | -28.5      |
| 1880.000000             | 16919.933800               | -42.2      | -67        | -29.2      |
| 1908.750000             | 17178.961900               | -41.8      | -66.6      | -28.8      |
| 1851.250000             | 18512.360500               | -41.3      | -66.1      | -28.3      |
| 1880.000000             | 18800.207200               | -36.9      | -61.7      | -23.9      |
| 1908.750000             | 19087.565700               | -36        | -60.8      | -23        |
| 1851.250000             | 20363.708900               | -34.8      | -59.6      | -21.8      |
| 1880.000000             | 20679.839300               | -34.9      | -59.7      | -21.9      |
| 1908.750000             | 20996.127000               | -34.1      | -58.9      | -21.1      |

PERFORMED BY:

  
 Doug Noble, B.A.S. E.E.T.

PAGE NO. 30 of 38.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
  - 2) Video Bandwidth  $\geq$  3 times Resolution Bandwidth, or 30 kHz (22.917)
  - 3) Sweep Speed  $\leq$  2000 Hz/second
  - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

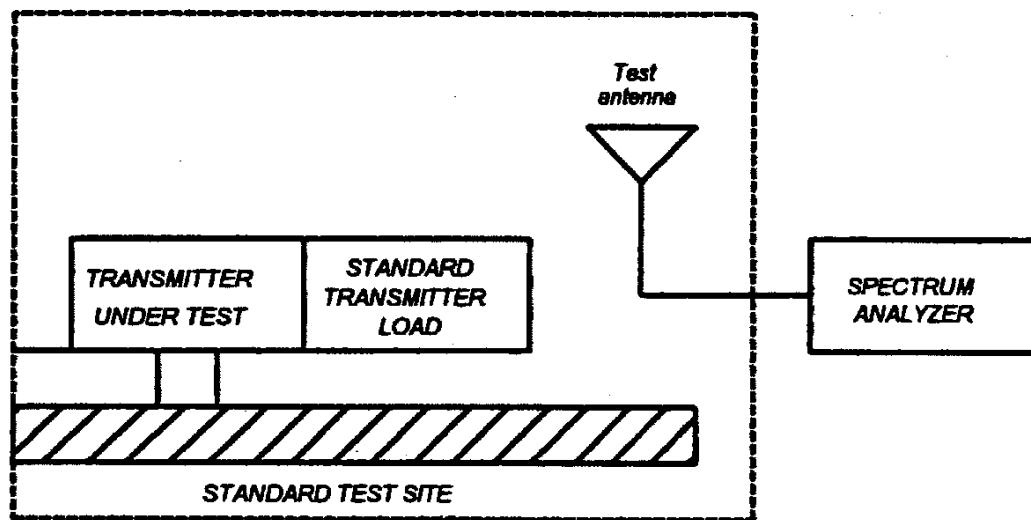

PAGE NO.


31 of 38.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

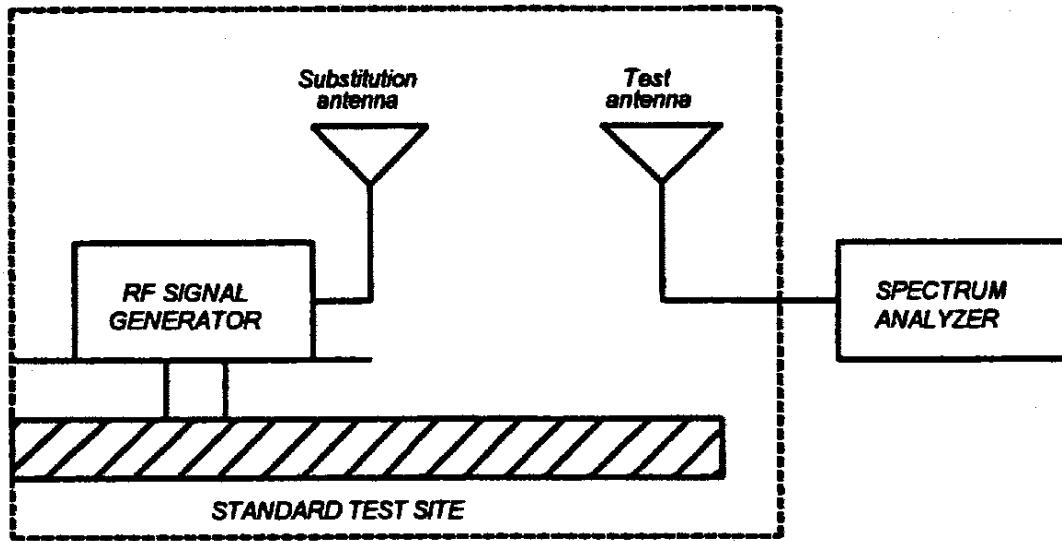

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO.

32 of 38.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =  
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step 1}$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

| Asset<br>(as applicable)               | Description                 | s/n        | Cycle  | Last Cal |
|--|-----------------------------|------------|--------|----------|
| Per ANSI C63.4-1992/2000 Draft, 10.1.4 |                             |            |        |          |
| <u>TRANSDUCER</u>                      |                             |            |        |          |
| i00088                                 | EMCO 3109-B 25MHz-300MHz    | 2336       | 12 mo. | Sep-02   |
| i00065                                 | EMCO 3301-B Active Monopole | 2635       | 12 mo. | Sep-02   |
| i00089                                 | Aprel 2001 200MHz-1GHz      | 001500     | 12 mo. | Sep-02   |
| i00103                                 | EMCO 3115 1GHz-18GHz        | 9208-3925  | 12 mo. | Sep-02   |
| <u>AMPLIFIER</u>                       |                             |            |        |          |
| i00028                                 | HP 8449A                    | 2749A00121 | 12 mo. | Mar-02   |
| Per ANSI C63.4-1992/2000 Draft, 10.1.4 |                             |            |        |          |
| Per ANSI C63.4-1992/2000 Draft, 10.1.4 |                             |            |        |          |
| <u>SPECTRUM ANALYZER</u>               |                             |            |        |          |
| i00029                                 | HP 8563E                    | 3213A00104 | 12 mo. | Jan-03   |
| i00033                                 | HP 85462A                   | 3625A00357 | 12 mo. | Jan-03   |
| i00048                                 | HP 8566B                    | 2511AD1467 | 6 mo.  | Jan-03   |

PAGE NO.

33 of 38.

NAME OF TEST:

Field Strength of Spurious Radiation

STATE: 2:High Power g0310150: 2003-Jan-29 Wed 11:58:00

| FREQUENCY TUNED,<br>MHz | FREQUENCY<br>EMISSION, MHz | ERP, dBm | ERP, dbc |
|-------------------------|----------------------------|----------|----------|
| 836.400000              | 1672.833334                | -67      | ≤ -76.9  |
| 836.400000              | 2509.200001                | -61      | ≤ -76.9  |
| 836.400000              | 3345.650001                | -60      | ≤ -76.9  |
| 836.400000              | 4182.066668                | -58.1    | ≤ -76.9  |
| 836.400000              | 5018.483335                | -57.8    | ≤ -76.9  |
| 836.400000              | 5854.900002                | -55.1    | ≤ -76.9  |
| 836.400000              | 6691.316669                | -55.8    | ≤ -76.9  |
| 836.400000              | 7527.733336                | -54.6    | ≤ -76.9  |
| 836.400000              | 8364.150003                | -52.9    | ≤ -76.9  |

STATE: 2:High Power g0310149: 2003-Jan-29 Wed 11:32:00

| FREQUENCY TUNED,<br>MHz | FREQUENCY<br>EMISSION, MHz | ERP, dBm | EIRP, dbc |
|-------------------------|----------------------------|----------|-----------|
| 1880.000000             | 3760.033334                | -47.4    | ≤ -57     |
| 1880.000000             | 5640.050001                | -44.5    | ≤ -57     |
| 1880.000000             | 7520.066668                | -44.6    | ≤ -57     |
| 1880.000000             | 9400.083335                | -40.7    | ≤ -57     |
| 1880.000000             | 11280.100002               | -40.2    | ≤ -57     |
| 1880.000000             | 13160.116669               | -38.6    | ≤ -57     |
| 1880.000000             | 15040.133336               | -38.1    | ≤ -57     |
| 1880.000000             | 16920.150003               | -35.1    | ≤ -57     |

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.



PAGE NO. 34 of 38.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

35 of 38.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY  
 TEST B. CARRIER FREQUENCY STABILITY  
 TEST C. OPERATIONAL PERFORMANCE STABILITY  
 TEST D. HUMIDITY  
 TEST E. VIBRATION  
 TEST F. ENVIRONMENTAL TEMPERATURE  
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION  
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

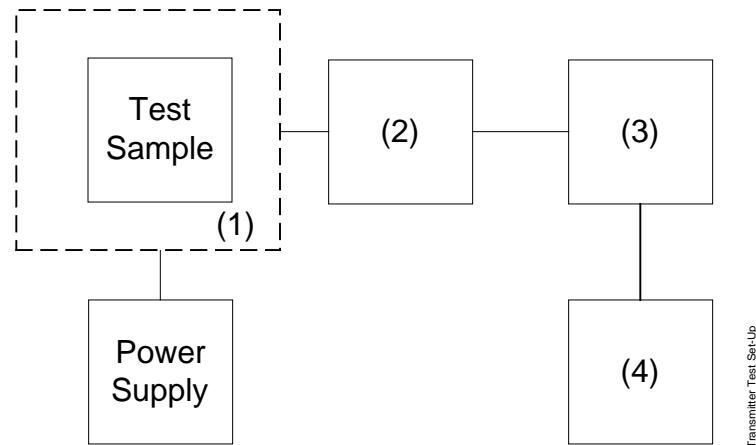

Transmitter Test Set Up

| Asset Description<br>(as applicable) |  | s/n          |
|--------------------------------------|--|--------------|
| (1) TEMPERATURE, HUMIDITY, VIBRATION |  |              |
| i00027 Tenney Temp. Chamber          |  | 9083-765-234 |
| i00 Weber Humidity Chamber           |  |              |
| i00 L.A.B. RVH 18-100                |  |              |
| (2) COAXIAL ATTENUATOR               |  |              |
| i00122 NARDA 766-10                  |  | 7802         |
| i00123 NARDA 766-10                  |  | 7802A        |
| i00113 SIERRA 661A-3D                |  | 1059         |
| i00069 BIRD 8329 (30 dB)             |  | 10066        |
| (3) R.F. POWER                       |  |              |
| i00014 HP 435A POWER METER           |  | 1733A05839   |
| i00039 HP 436A POWER METER           |  | 2709A26776   |
| i00020 HP 8901A POWER MODE           |  | 2105A01087   |
| (4) FREQUENCY COUNTER                |  |              |
| i00042 HP 5383A                      |  | 1628A00959   |
| i00019 HP 5334B                      |  | 2704A00347   |
| i00020 HP 8901A                      |  | 2105A01087   |

PAGE NO.


36 of 38. AMENDED March 3, 2003

NAME OF TEST:

Frequency Stability (Temperature Variation)

| <u>TEMPERATURE, °C</u> | <u>CHANGE, Hz</u> | <u>PPM</u> |
|------------------------|-------------------|------------|
| -30                    | 231               | 0.28       |
| -20                    | 264               | 0.32       |
| -10                    | 214               | 0.26       |
| 0                      | 115               | 0.14       |
| 10                     | 58                | 0.07       |
| 20                     | 41                | 0.05       |
| 30                     | -25               | -0.3       |
| 40                     | -288              | -0.35      |
| 50                     | -387              | -0.47      |

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.

PAGE NO. 37 of 38.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055 (b)(1)

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at  $25\pm5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.  
Use 'best' data only.';

RESULTS: Frequency Stability (Voltage Variation)

g02b0036: 2003-Jan-30

STATE: 0:General

|                             |   |      |
|-----------------------------|---|------|
| LIMIT, ppm                  | = | 5    |
| LIMIT, Hz                   | = | 4182 |
| BATTERY END POINT (Voltage) | = | 15   |

| % of STV | Voltage | Frequency, MHz | Change, Hz | Change, ppm |
|----------|---------|----------------|------------|-------------|
| 85       | 16.4    | 836.410220     | -1680      | -2.01       |
| 100      | 19.3    | 836.411900     | 0          | 0.00        |
| 115      | 22.19   | 836.412810     | 910        | 1.09        |
| 78       | 15      | 836.412110     | 210        | 0.25        |

LIMIT: Must remain within authorized frequency block.

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.

PAGE NO. 38 of 38.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 1M25F9W

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B<sub>N</sub>), kHz = 1,250  
(measured at the 99.75% power bandwidth)

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

END OF TEST REPORT

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.