



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan

## TEST REPORT

Reference No.:A08011606  
Report No.:FCCA08011606  
FCC ID: QSWSYSTEM122B  
Page: 1 of 18  
Date: Jan. 26, 2008

Product Name: PMS  
Model Number: ZMS-2  
Applicant: ZENTAN TECHNOLOGY CO., LTD.  
NO. 92, HSING-SHENG RD., CHIA-LI CHENG,  
TAINAN HSIEN, TAIWAN, R.O.C.  
Date of Receipt: Jan. 16, 2008  
Finished date of Test: Jan. 25, 2008  
Applicable Standards: 47 CFR Part 15, Subpart C  
ANSI C63.4: 2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : shun Wang auth., Date: Jan. 26, 2008  
(Jeff Yu)

Approved By : JH, Date: 1/26/2008  
(Johnson Ho, Director)

**NVLAP**<sup>®</sup>

Lab Code: 200099-0  
FMNG-059.10 REPORT

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 2 of 18 Date: Jan. 26, 2008
--	--------------------	---

## Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT .....	3
1.1	DOCUMENT POLICY .....	3
1.2	TEST STATEMENT .....	3
2.	DESCRIPTION OF EUT AND TEST MODE .....	4
2.1	GENERAL DESCRIPTION OF EUT .....	4
2.2	DESCRIPTION OF EUT INTERNAL DEVICE .....	4
2.3	DESCRIPTION OF TEST MODE .....	4
2.4	DESCRIPTION OF SUPPORT UNIT .....	5
3.	DESCRIPTION OF APPLIED STANDARDS .....	5
4.	RADIATED EMISSION TEST .....	6
4.1	RADIATED EMISSION LIMIT .....	6
4.2	TEST EQUIPMENT .....	7
4.3	TEST SET-UP .....	8
4.4	TEST PROCEDURE .....	9
4.5	EUT OPERATING CONDITION .....	9
4.6	RADIATED EMISSION TEST RESULT .....	10
5.	CONDUCTED EMISSION TEST FOR POWER PORT .....	12
6	TIME DOMAIN AND DUTY CYCLE TEST .....	13
6.1	TEST EQUIPMENT .....	13
6.2	TEST SET-UP .....	13
6.3	TEST PROCEDURE .....	13
6.4	EUT OPERATING CONDITION .....	13
6.5	TIME DOMAIN AND DUTY CYCLE TEST RESULT .....	14
7.	PHOTOS OF TESTING .....	16
8	TERMS OF ABRIVATION .....	18

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 3 of 18 Date: Jan. 26, 2008
--	--------------------	---

## 1. DOCUMENT POLICY AND TEST STATEMENT

### 1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- Each test or calibration report bearing the term and/or symbol shall include a statement that the report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- DC power source, 3V from Lithium battery, was used during the test.

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 4 of 18 Date: Jan. 26, 2008
--	--------------------	---

## 2. DESCRIPTION OF EUT AND TEST MODE

### 2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PMS
MODEL NO.	ZMS-2
CABLE	N/A
TYPE	Prototype
POWER SUPPLY	DC 4.5V, 0.5mA
FREQUENCY BAND	127kHz
NUMBER OF CHANNEL	1
CHANNEL SPACING	0
MODULATION TYPE	PULSE
DUTY CYCLE	0.8~5%
MODE OF OPERATION	simplex
BIT RATE OF TRANSMISSION	1000 bit/sec
ANTENNA TYPE	coil
OPERATING TEMPERATURE RANGE	-10~55°C

**NOTE :** For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

### 2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

### 2.3 DESCRIPTION OF TEST MODE

N/A (It is only applicable to more than one test mode.)

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 5 of 18 Date: Jan. 26, 2008
--	--------------------	---

## 2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID / DOC	CABLE
1	HEART RATEMONITOR	CARDIOsport	GT3	N/A	N/A

**NOTE :** For the actual test configuration, please refer to the photos of testing.

## 3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of radio product and according to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

ANSI C63.4: 2003

All tests have been performed and recorded as per the above standards.

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 6 of 18 Date: Jan. 26, 2008
--	--------------------	---

#### 4. RADIATED EMISSION TEST

##### 4.1 RADIATED EMISSION LIMIT

All emission from EUT, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

FCC Part 15, Subpart C Section 15.209.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH ( $\mu$ V/m)
0.009 - 0.490	300	2400/F(kHz)
0.490-1.705	300	2400/F(kHz)
1.705-30.0	30	30
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
ABOVE 960	3	500

**NOTE** : 1. In the emission tables above , the tighter limit applies at the band edges.

2. Distance refers to the distance between measuring instrument , antenna , and the closest point of any part of the device or system.

According to the FCC Part 15, Subpart A Section 15.31(f)(2), the extrapolation factor of 40 dB/decade is used for measurement distances different then specified in with limits for frequencies below 30 MHz.

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 7 of 18 Date: Jan. 26, 2008
--	--------------------	---

## 4.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9kHz TO 2.75 GHz	ROHDE & SCHWARZ	ESCS30 / 830245/012	OCT. 2008 ETC
BI-LOG ANTENNA	26 MHz TO 2 GHz	EMCO	3142B / 0005-1534	NOV. 2008 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	NOV. 2008 SRT
COAXIAL CABLE	25M	TIMES	J400 / #25M	AUG. 2008 ETC
FILTER	2 LINE, 30A	FIL.COIL	FC-943 / 869	NCR

**NOTE:**

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.




**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan

# TEST REPORT

Reference No.:A08011606  
Report No.:FCCA08011606  
FCC ID: QSWSYSTEM122B  
Page: 8 of 18  
Date: Jan. 26, 2008

## 4.3 TEST SET-UP

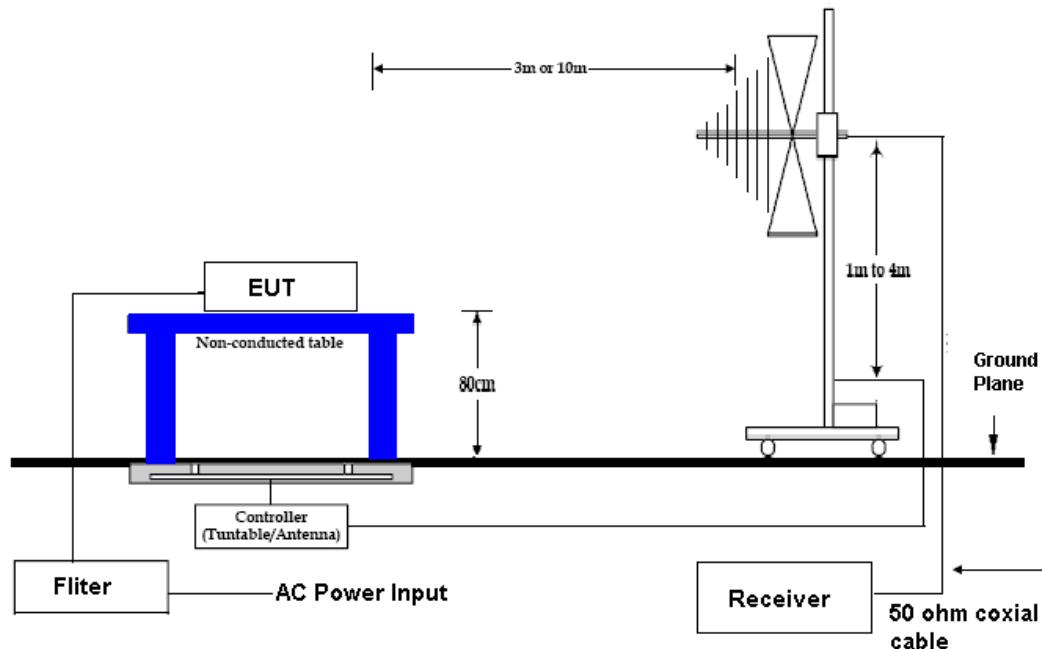

### NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 9 of 18 Date: Jan. 26, 2008
---	--------------------	---

#### 4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4. The measurements were made at an open area test site with 3 meter measurement distance. The frequency spectrum measured started from 9 kHz. All readings were quasi-peak value with 200Hz resolution bandwidth at frequency below 150kHz, and with 9kHz resolution bandwidth between 150 kHz and 30MHz . Under 30MHz to 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver.

#### 4.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 10 of 18 Date: Jan. 26, 2008
--	--------------------	--

#### 4.6 RADIATED EMISSION TEST RESULT

Temperature:	24 °C	Humidity:	63%RH
Ferquency Range:	9kHz – 30MHz	Measured Distance:	3m
Spectrum Detector:	Q.P.	Tested by	Jeff Yu

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
0.126	0.03	20.20	38.00	58.23	105.60	-47.37
0.241	0.03	20.20	15.40	35.63	99.96	-64.33
0.356	0.01	20.20	12.90	33.11	96.58	-63.47
0.507	0.00	20.20	10.20	30.40	93.50	-63.10
0.634	0.00	20.10	*	*	91.56	*
0.761	0.00	20.10	*	*	89.98	*
0.888	0.00	20.10	*	*	88.64	*
1.015	0.00	20.10	*	*	87.47	*
1.269	0.00	20.08	*	*	85.53	*

**NOTE :**

1. Measurement uncertainty is less than +/- 4dB
2. "": Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss
4. Limit(dBuV/m)=20log{2400/F(kHz)}(The measurement distance at 300m)+40log(300/3)(The measurement distance at 3m)-20log(377)
5. The field strength of other emission frequencies were very low against the limit.
6. (F) : Fundamental frequency of transmitter.

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 11 of 18 Date: Jan. 26, 2008
---	----------------------	--

Temperature: 24 °C  
 Ferquency Range: 30 – 1000 MHz  
 Spectrum Detector: Q.P.

Humidity: 63%RH  
 Measured Distance: 3m  
 Tested by Jeff Yu

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
217.5900	2.60	10.28	16.4	29.28	46.0	16.72
270.6900	2.98	12.38	7.3	22.66	46.0	23.34
306.3400	3.05	13.83	5.2	22.08	46.0	23.92
491.9200	4.08	16.08	4.3	24.46	46.0	21.54
599.9000	4.60	17.39	6.4	28.39	46.0	17.61
711.1200	5.07	21.10	5.9	32.07	46.0	13.93

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
167.7600	2.28	10.12	17.2	29.6	43.5	13.9
264.0500	2.90	12.12	16.4	31.42	46.0	14.58
401.4450	3.61	15.90	3.8	23.31	46.0	22.69
542.6000	4.33	16.65	4.2	25.18	46.0	20.82
646.9400	4.75	19.06	3.6	27.41	46.0	18.59
730.0820	5.13	21.27	7.6	34	46.0	12

**NOTE :**

1. Measurement uncertainty is less than +/- 4dB
2. \*\*: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.
6. (\*): The emission always below noise.



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan

## **TEST REPORT**

Reference No.:A08011606  
Report No.:FCCA08011606  
FCC ID: QSWSYSTEM122B  
Page: 12 of 18  
Date: Jan. 26, 2008

### **5. CONDUCTED EMISSION TEST FOR POWER PORT**

The test item was not performed, because the EUT uses 3Vdc battery as power source.

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 13 of 18 Date: Jan. 26, 2008
--	--------------------	--

## 6 TIME DOMAIN AND DUTY CYCLE TEST

### 6.1 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
Oscilloscope	100MHz 200Ms a/s	HP	54645A/ US39151317	APR. 2008 HP, ITRI

**NOTE:** The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

### 6.2 TEST SET-UP



### 6.3 TEST PROCEDURE

The EUT was transmitting continuously. The oscilloscope recorded signal values. The simulator's signal was imitated for normal use mode. The number of heartbeat is 130 times at one minute during the test.

### 6.4 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan

## TEST REPORT

Reference No.:A08011606  
Report No.:FCCA08011606  
FCC ID: QSWSYSTEM122B  
Page: 14 of 18  
Date: Jan. 26, 2008


### 6.5 TIME DOMAIN AND DUTY CYCLE TEST RESULT

Temperature: 23 °C Humidity: 58%RH  
Tested by Jeff Yu Tested Date: Jan. 23, 2008

#### TIME DOMAIN:

Frequency (kHz)	Period (ms)	Duty cycle (%)	PASS/FAIL
126.0	1988.6	0.67	PASS

Time on:

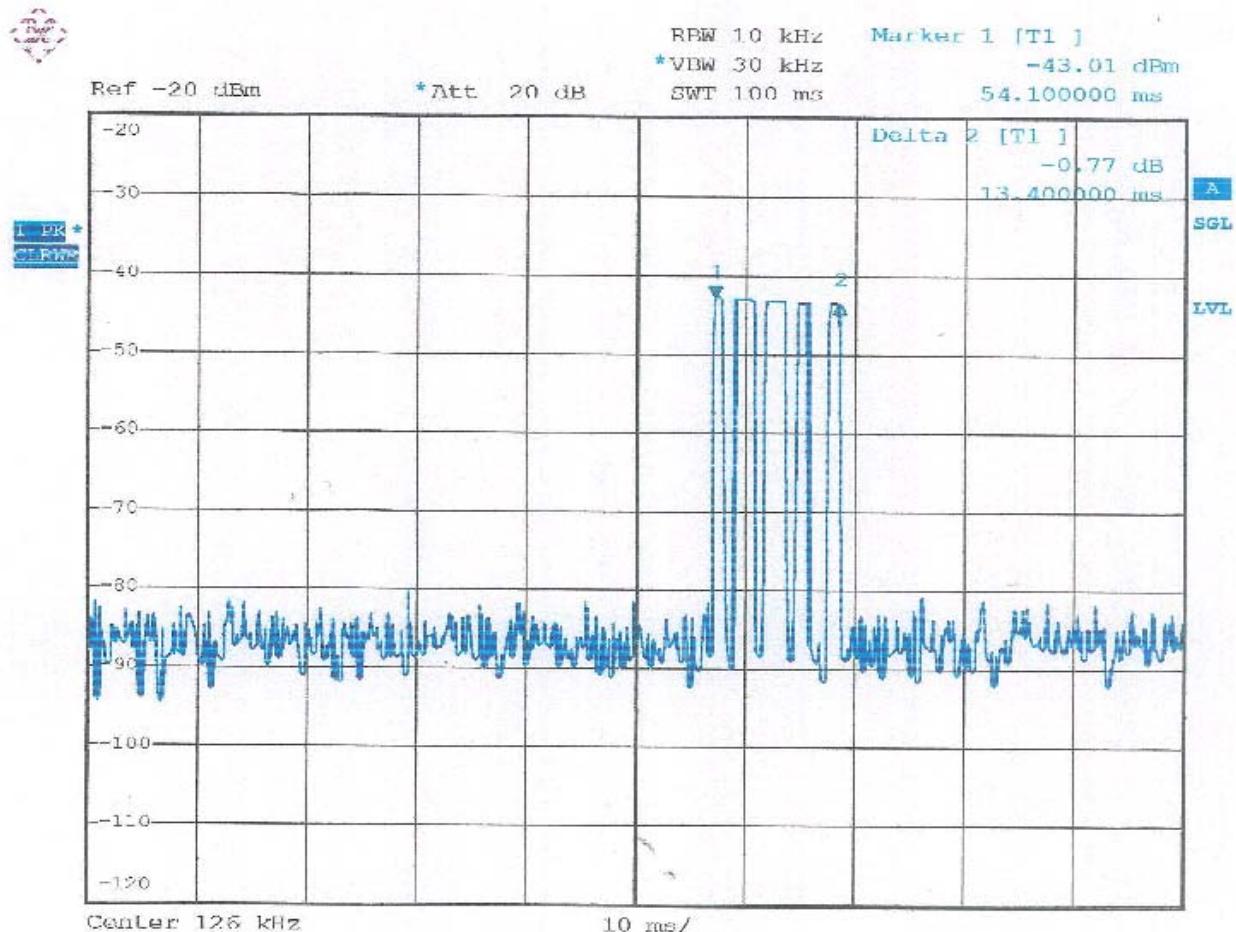




**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan

# TEST REPORT

Reference No.:A08011606  
Report No.:FCCA08011606  
FCC ID: QSWSYSTEM122B  
Page: 15 of 18  
Date: Jan. 26, 2008

Total time:

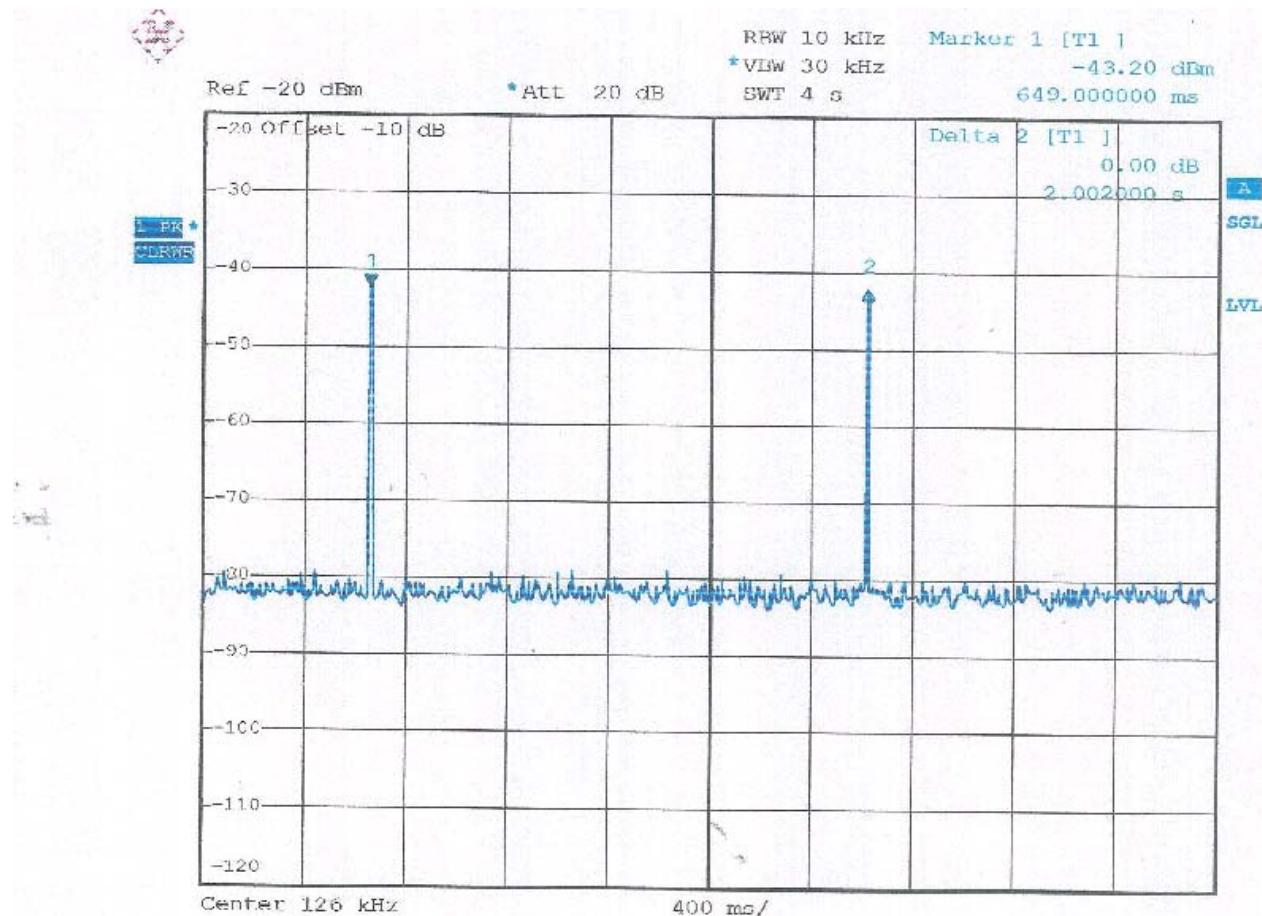

 <b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<b>TEST REPORT</b>	Reference No.:A08011606 Report No.:FCCA08011606 FCC ID: QSWSYSTEM122B Page: 18 of 18 Date: Jan. 26, 2008
--	--------------------	--

## 8 TERMS OF ABRIVATION

AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction