

## FCC Part 15B Compliance Test Report

<b>Test Report no.:</b>	FCC15B_RM-697_16.docx	<b>Date of Report:</b>	17-Sep-2010
<b>Number of pages:</b>	10	<b>Customer's Contact person:</b>	Mohammad El-Haj
<b>Testing laboratory:</b>	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	<b>Customer:</b>	Nokia Corporation Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550
<b>FCC listing no.:</b>	99059		
<b>IC recognition no.:</b>	661AL-1		
<b>Tested devices/ accessories:</b>	<b>Phone RM-697 / Battery BL-4U / AC-Charger AC-8E / Harddisk RPHD-U / Laptop Lenovo T61 / USB Cable CA-101D</b>		
<b>FCC ID:</b>	QTKRM-697	<b>IC:</b>	
<b>Supplement reports:</b>	-		
<b>Testing has been carried out in accordance with:</b>	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
<b>Documentation:</b>	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
<b>Test Results:</b>	<b>The EUT complies with the requirements in respect of all parameters subject to the test.</b> The test results relate only to devices specified in this document		
<b>Date and signature for the contents:</b>			

**Christian Andersen, System Specialist, EMC**

## 1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	31-Aug-2010
Testing completed	17-Sep-2010
The customer's contact person	09-Oct-10
Test Plan referred to	T:\Projects\RM-697\TestPlan\RS_testplan_RM-697_EMCC_FCC_SAR.xls
Notes	-
Document name	T:\Projects\RM-697\EMCC\FCC15B_RM-697_16.docx

### 1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/VIII/) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and WLAN and Bluetooth.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-697	004402/13/108361/4	2200	-	0.0.109	24092
Battery	BL-4U	4955400203010405902;0670560	-	-	-	24084
AC-Charger	AC-8E	4868670162510602628;0675387	-	-	-	24078
Harddisk	RPHD-U	-	-	-	-	20643
Laptop	Lenovo T61	1S7665D71L3W8321	-	-	-	24950
USB Cable	CA-101D	07303689034D1205516	-	-	-	24892
Phone	RM-697	004402/13/108387/9	2200	-	0.0.109	24099
Battery	BL-4U	4955400093210401068;0670560	-	-	-	24091
Headset	WH-102	0694323022523104246	-	-	-	24079
USB Cable	CA-101D	07303689034D1205516	-	-	-	24892

### 1.2. Summary of Test Results

#### Bluetooth:

Section in CFR 47	Section in ICES-003 (RSS-139)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Laboratory.


## CONTENTS

<b>1. Summary for FCC Part 15B Compliance Test Report.....</b>	<b>2</b>
1.1. EUT and Accessory Information .....	2
1.2. Summary of Test Results .....	2
<b>2. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6).....</b>	<b>4</b>
2.2. Test method and limit .....	4
2.3. Bluetooth Test results .....	6
<b>3. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....</b>	<b>7</b>
3.2. Test method and limit .....	7
<b>4. Test Equipment.....</b>	<b>9</b>
4.1. Conducted measurements .....	9
4.2. Radiated measurements .....	9

## 2. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)

<b>EUT with DUT number</b>	RM-697, DUT 24092
<b>Accessories with DUT numbers</b>	BL-4U, DUT 24084 ; AC-8E, DUT 24078 ; RPHD-U, DUT 20643 ; T61, DUT 24950 ; CA-101D, DUT 24892
<b>Operation Voltage [V] / [Hz]</b>	115V / 60Hz
<b>Results</b>	PASSED
<b>Remarks</b>	Continuous data transfer was active between the phone and the computer during the test.
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	23 / 41 / 99.96
<b>Date of measurements</b>	17-Sep-2010
<b>Measured by</b>	Ruben Hansen

### 2.1.1 Test Setup

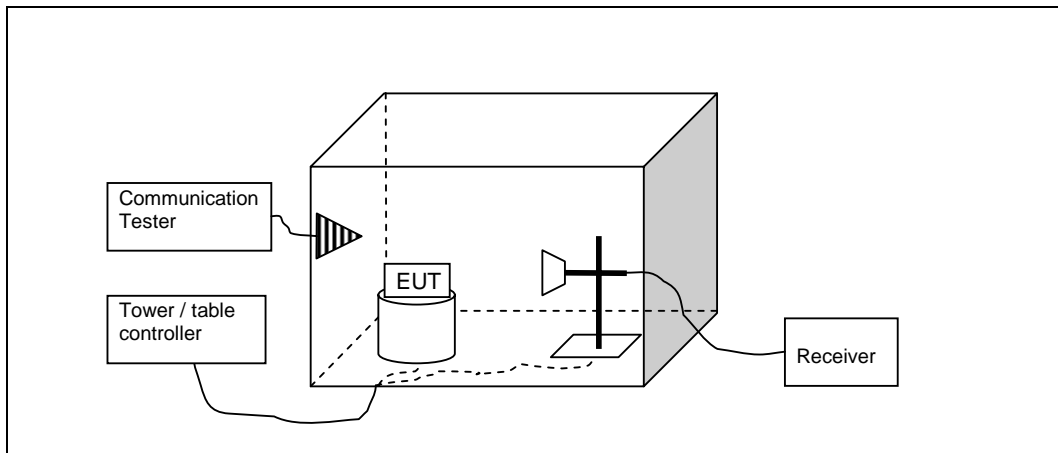

### 2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable loss, antenna factor and preamplifier gain ( $A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$ ).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dB $\mu$ V/m]	Average limit [dB $\mu$ V/m]	Peak limit [dB $\mu$ V/m]
30 - 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

## 2.3. Bluetooth Test results

### 2.3.1 GFSK modulation, PRBS packet type

TX mode, Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4805	41.45	118.141	39.65	1.8	VERTICAL	PASSED
7206.1	50.63	340.134	39.17	11.46	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4805	28.4	26.3	26.6	1.8	VERTICAL	PASSED
7206.1	37.45	74.593	25.99	11.46	VERTICAL	PASSED

TX mode, Channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
31.29	28.92	27.932	40.82	-11.9	VERTICAL	PASSED
35.393	34.13	50.869	48.79	-14.66	VERTICAL	PASSED
40.943	29.09	28.49	47.4	-18.31	VERTICAL	PASSED
41.042	29.56	30.043	47.94	-18.38	VERTICAL	PASSED
45.831	24.84	17.462	46.42	-21.58	VERTICAL	PASSED
71.984	29.48	29.799	55.31	-25.83	HORIZONTAL	PASSED
194.74	26.64	21.486	52.66	-26.02	VERTICAL	PASSED
663.878	42.57	134.447	57.37	-14.8	VERTICAL	PASSED

TX mode, Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4960	38.80	87.10	38.90	-0.1	VERTICAL	PASSED
7440	45.70	192.75	36.10	9.6	VERTICAL	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4960	26.00	19.95	26.10	-0.1	VERTICAL	PASSED
7440	32.30	41.21	22.70	9.6	VERTICAL	PASSED

### 3. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

<b>EUT with DUT number</b>	RM-697, DUT 24099
<b>Accessories with DUT numbers</b>	BL-4U, DUT 24091 ; WH-102, DUT 24079 ; CA-101D, DUT 24892 ; T61, DUT 24950
<b>Operation Voltage [V] / [Hz]</b>	115 / 60
<b>Results</b>	Passed
<b>Remarks</b>	Continuous data transfer was active between the phone and the computer during the test.
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	22 / 41 / 108
<b>Date of measurements</b>	23-Sep-2010
<b>Measured by</b>	Bo Moltved Christiansen

#### 3.1.1 Test Setup

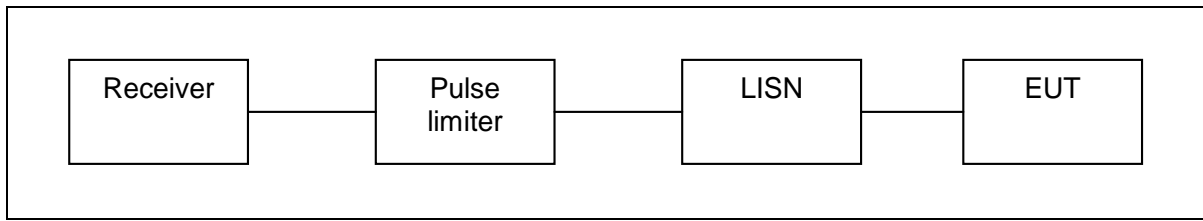

#### 3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V/m] = U_{RX} + A_{TOT}$$


Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dB $\mu$ V]	Average limit [dB $\mu$ V]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

### 3.2.1 BT Test Results

#### GFSK

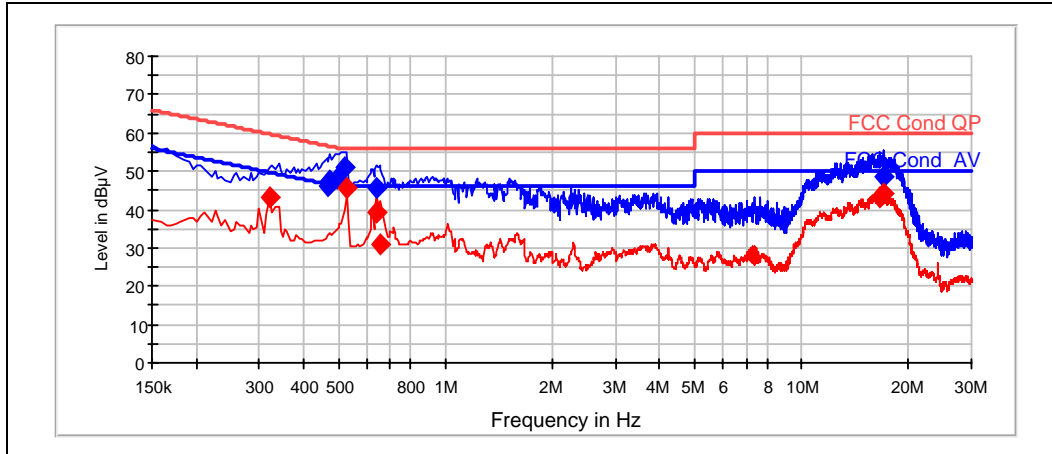

#### Quasi peak

Frequency [MHz]	U [dBµV]	IF-BW[kHz]	Line	Margin	Result
0.465	46.38	10	N	10.2	Passed
0.475	47.75	10	N	8.63	Passed
0.495	48.3	10	N	7.78	Passed
0.52	51.2	10	N	4.8	Passed
0.64	45.47	10	N	10.5	Passed
16.965	48.65	10	N	11.4	Passed

#### Average

Frequency [MHz]	U [dBµV]	IF-BW[kHz]	Line	Margin	Result
0.32	42.97	10	N	6.71	Passed
0.53	45.59	10	N	0.4	Passed
0.64	39.49	10	N	6.5	Passed
0.655	30.97	10	N	15	Passed
16.68	43.32	10	N	6.7	Passed
16.965	44.25	10	N	5.8	Passed



## 4. Test Equipment

### 4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	DC Power Supply	HP6632A	Hewlett Packard	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B

### 4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
20078	Relay 2x6 Chnl $\mu$ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl $\mu$ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl $\mu$ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
1999	Receiver	EMI Test Receiver 20Hz-26,5GHz ESI	Rohde&Schwarz	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
15191	Turntable Controller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B