

JQA APPLICATION NO.: 400-20682
Issue Date : January 29, 2003
Page 1 of 26

EMI TEST REPORT

JQA APPLICATION NO. : 400-20682

Model No. : BX-3

Type of Equipment : Wireless Information System
(Transmitter)

Regulations Applied : CFR 47 FCC Rules and Regulations Part 15

FCC ID : QULBSX3

Applicant : Mitsui & Co., Ltd. Nagoya Office Machinery Division


Address : 16-21, Meieki Minami 1-chome, Nakamura-ku, Nagoya-city,
Aichi-prefecture 450-8677, Japan

Manufacture : Harmony Co., Ltd.

Address : 3-62 Sameganji, Jushiyama-mura, Ama-gun,
Aichi-prefecture, Japan

Received date of EUT : December 26, 2002

Final Judgment : **Passed**

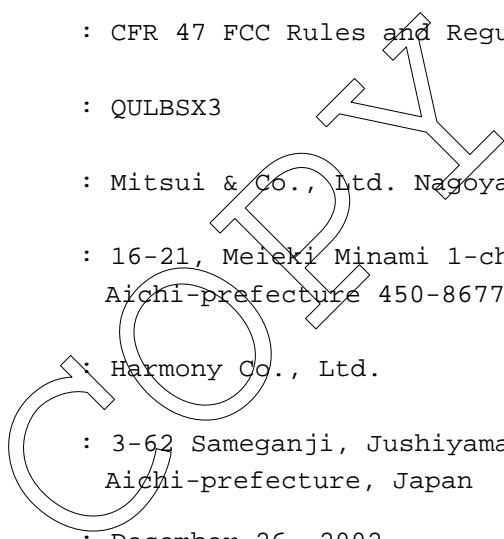

Test results in this report are obtained in use of equipment that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and Communication Research Laboratory (CRL) of Japan.

The test results only respond to the tested sample. This report should not be reproduced except in full, without the written approval of JQA EMC Engineering Dept. Testing Div.

TABLE OF CONTENTS

	Page
1 Documentation	
1.1 Test Regulation	3
1.2 General Information	3
1.3 Test Condition	4 - 8
1.4 EUT Modifications / Deviation from Standard	9
1.5 Test results	10
1.6 Summary	11
1.7 Test Configuration / Operation of EUT	12
1.8 EUT Arrangement(Drawing)	13
1.9 Preliminary Test and Test-setup (Drawings)	14 - 19
1.10 EUT Arrangement (Photographs)	20 - 21
2 Test Data	
2.1 AC Power Line Conducted Emission	N/A
2.2 Radiated Emission (Electric Field)	22 - 24
2.3 Frequency Stability	N/A
2.4 Occupied Bandwidth	25 - 26

1 DOCUMENTATION**1.1 TEST REGULATION**

FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) Intentional Radiators

Test procedure :

AC power line conducted emission, radiated emission, frequency stability and occupied bandwidth tests were performed according to the procedures in ANSI C63.4-1992.

1.2 GENERAL INFORMATION**1.2.1 Test facility :**

1) Test Facility located at EMC Engineering Dept. Testing Div. :

- No.2 and 3 Anechoic Chambers(3 meters Site).
- Shielded Enclosure.

Expiration date of FCC test facility filing : May 27, 2005

2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.

NVLAP Lab Code : 200189-0 (Effective through : June 30, 2003)

1.2.2 Description of the Equipment Under Test (EUT) :

1) Type of Equipment	: Wireless Information System (Transmitter)
2) Product Type	: Prototype
3) Category	: Security/Remote Control Transmitter
4) EUT Authorization	: Certification
5) FCC ID	: QULBSX3
6) Trade Name	: BELSTAR
7) Model No.	: BX-3
8) Operating Frequency Range	: 298.8 MHz
9) Highest Frequency Used in the EUT	: 298.8 MHz
10) Serial No.	: None
11) Date of Manufacture	: None
12) Power Rating	: DC 3.0V(Battery)
13) EUT Grounding	: None

1.2.3 Definitions for symbols used in this test report :

x - indicates that the listed condition, standard or equipment is applicable for this report.

 - indicates that the listed condition, standard or equipment is not applicable for this report.

1.3 TEST CONDITION**1.3.1 The measurement of the AC Power Line Conducted Emission**

 - was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

 - Shielded Enclosure
 - Anechoic Chamber No. 2 (portable Type)

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<u> </u> - Test Receiver	ESH-2	Rohde & Schwarz	880370/016	May 2002	1 Year
<u> </u> - Test Receiver	ESH-3	Rohde & Schwarz	881460/030	May 2002	1 Year
<u> </u> - Test Receiver	ESHS10	Rohde & Schwarz	835871/004	May 2002	1 Year
<u> </u> - LISN(for Peripheral)	KNW-407	Kyoritsu Electrical	8-833-6	Apr. 2002	1 Year
<u> </u> - LISN(for EUT)	KNW-407	Kyoritsu Electrical	8-855-2	Apr. 2002	1 Year
<u> </u> - LISN	KNW-407	Kyoritsu Electrical	8-757-1	Apr. 2002	1 Year
<u> </u> - RF Cable	3D-2W	Fujikura	155-21-006E0	Apr. 2002	1 Year
<u> </u> - RF Cable	3D-2W	Fujikura	155-21-007E0	Apr. 2002	1 Year
<u> </u> - 50ohm Termination		SUHNER	154-06-501E0	Jan. 2003	1 Year
<u> </u> - 50ohm Termination		SUHNER	154-06-502E0	Jan. 2003	1 Year

1.3.2 The measurement of the Radiated Emission(9 kHz - 30 MHz)

 - was performed in the following test site.
x - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan


 - Anechoic Chamber No. 2 (3 meters)
 - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : N/A
2) Interval : N/A

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<u> </u> - Test Receiver	ESH-2	Rohde & Schwarz	880370/016	May 2002	1 Year
<u> </u> - Test Receiver	ESH-3	Rohde & Schwarz	881460/030	May 2002	1 Year
<u> </u> - Test Receiver	ESHS10	Rohde & Schwarz	835871/004	May 2002	1 Year
<u> </u> - Test Receiver	ESVS10	Rohde & Schwarz	826148/002	May 2002	1 Year
<u> </u> - Antenna	HFH2-Z2	Rohde & Schwarz	881058/62	Nov 2002	1 Year
<u> </u> - RF Cable	RG-213/U	F & G	155-21-010E0	Apr. 2002	1 Year

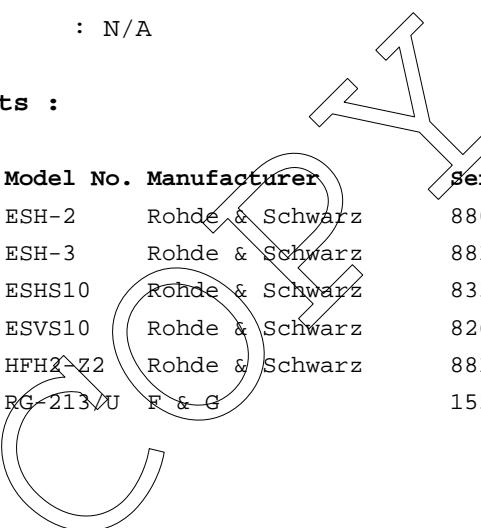

1.3.3 The measurement of the Radiated Emission(30 MHz - 1000 MHz)

- was performed in the following test site.
 - was not applicable.


Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- Anechoic Chamber No. 2 (3 meters)
 - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date :March, 2002
2) Interval :1 year

**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Oct. 2002	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Oct. 2002	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2648A00522	Oct. 2002	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	Apr. 2002	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2091A00933	Apr. 2002	1 Year
<input type="checkbox"/> - Test Receiver	ESV	Rohde & Schwarz	872148/039	May 2002	1 Year
<input checked="" type="checkbox"/> - Test Receiver	ESVS10	Rohde & Schwarz	826148/002	May 2002	1 Year
<input type="checkbox"/> - Test Receiver	ESVS10	Rohde & Schwarz	832699/001	May 2002	1 Year
<input type="checkbox"/> - Antenna	KBA-511	Kyoritsu Electrical	0-170-1	Nov. 2002	1 Year
<input type="checkbox"/> - Antenna	KBA-511A	Kyoritsu Electrical	0-201-13	Nov. 2002	1 Year
<input type="checkbox"/> - Antenna	KBA-611	Kyoritsu Electrical	0-147-14	Nov. 2002	1 Year
<input type="checkbox"/> - Antenna	KBA-611	Kyoritsu Electrical	0-210-5	Nov. 2002	1 Year
<input checked="" type="checkbox"/> - Biconical Antenna	BBA9106	Schwarzbeck	VHA91031150	Nov. 2002	1 Year
<input type="checkbox"/> - Biconical Antenna	BBA9106	Schwarzbeck	11905078E0	Nov. 2002	1 Year
<input checked="" type="checkbox"/> - Log-Periodic Antenna	UHALP9107	Schwarzbeck	11905079E0	Nov. 2002	1 Year
<input type="checkbox"/> - Log-Periodic Antenna	UHALP9107	Schwarzbeck	11905110	Nov. 2002	1 Year
<input checked="" type="checkbox"/> - RF Cable	5D-2W	Fujikura	155-21-001E0	Feb. 2002	1 Year
<input type="checkbox"/> - RF Cable	5D-2W	Fujikura	155-21-002E0	Feb. 2002	1 Year

1.3.4 The measurement of the Radiated Emission(Above 1000 MHz)

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- No. 2 site (3 meters)
 - No. 3 site (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : N/A
2) Interval : N/A

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Oct. 2002	1 Year
<input checked="" type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Oct. 2002	1 Year
<input checked="" type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2648A00522	Oct. 2002	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	Apr. 2002	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2091A00933	Apr. 2002	1 Year
<input checked="" type="checkbox"/> - Log-Periodic Antenna	HL 025	Rohde & Schwarz	340182/015	Jan. 2003	1 Year
<input type="checkbox"/> - RF Amplifier	DBP-0102N5334272B	DBS Microwave Inc.	012	June 2002	1 Year
<input checked="" type="checkbox"/> - RF Amplifier	WJ-6882-814	Watkins-Johnson	0414	June 2002	1 Year
<input type="checkbox"/> - RF Amplifier	WJ-5315-556	Watkins-Johnson	106	June 2002	1 Year
<input type="checkbox"/> - RF Amplifier	WJ-5320-307	Watkins-Johnson	645	June 2002	1 Year
<input checked="" type="checkbox"/> - RF Cable(10m)	S 04272B	Suhner	155-21-011E0	May 2002	1 Year
<input type="checkbox"/> - RF Cable(2m)	SUCOFLEX 104	Suhner	155-21-012E0	May 2002	1 Year
<input checked="" type="checkbox"/> - RF Cable(1m)	SUCOFLEX 104	Suhner	155-21-013E0	May 2002	1 Year
<input type="checkbox"/> - RF Cable(1m)	S 04272B	Suhner	155-21-015E0	June 2002	1 Year
<input type="checkbox"/> - Test Receiver	ESI26	Rohde & Schwarz	100043	Aug. 2002	1 Year

1.3.5 The measurement of the Frequency Stability - was performed.x - was not applicable.**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<u> </u> - Frequency Counter	53131A	Hewlett Packard	3546A11807	May 2002	1 Year
<u> </u> - Oven	-	Ohnishi Co. Ltd.	-	May 2002	1 Year
<u> </u> - DC Power Supply	6628A	Hewlett Packard	3224A00284	June 2002	1 Year

1.3.6 The measurement of the Occupied Bandwidthx - was performed. - was not applicable.**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<u> </u> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Oct. 2002	1 Year
<u>x</u> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Oct. 2002	1 Year
<u> </u> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	Apr. 2002	1 Year
<u> </u> - Function Generator	3325B	Hewlett Packard	2847A03284	July 2002	1 Year
<u> </u> - FM Linear Detector	MS61A	Anritsu Corp.	M77486	Oct. 2002	1 Year
<u> </u> - Level Meter	ML422C	Anritsu Corp.	M87571	June 2002	1 Year
<u> </u> - Measuring Amplifier	2636	B & K	1614851	June 2002	1 Year
<u> </u> - AF Amplifier	P-500L	Accuphase	BOY806	Feb. 2002	1 Year
<u> </u> - Microphone	4134	B & K	1269477	May 2002	1 Year
<u> </u> - Preamplifier	2639	B & K	1268763	May 2002	1 Year
<u> </u> - Pistonphone	4220	B & K	1165008	Mar. 2002	1 Year
<u> </u> - Artificial Mouth	4227	B & K	1274869	N/A	N/A

1.4 EUT MODIFICATION / Deviation from Standard**1.4.1 EUT MODIFICATION**

-No modifications were conducted by JQA to achieve compliance to Class B levels.
 -To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant :


Date :


Typed Name :

Position :

1.4.2 Deviation from Standard:

- No deviations from the standard described in clause 1.1.
 - The following deviations were employed from the standard described in clause 1.1:

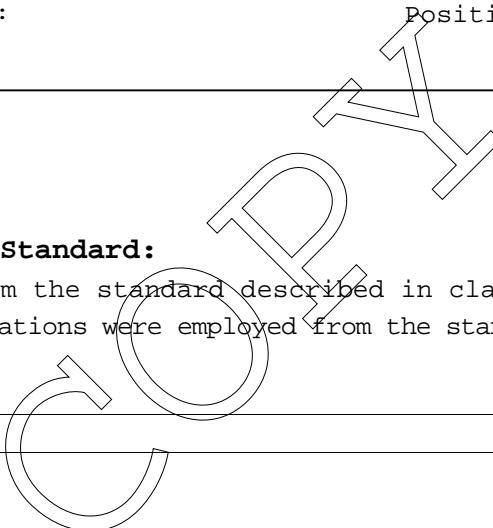

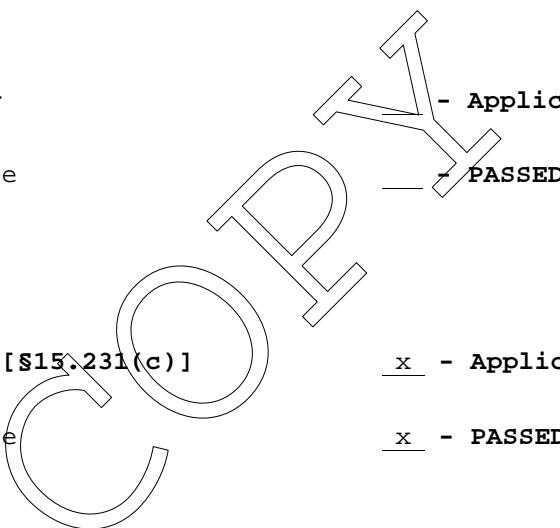1.5 TEST RESULTS**AC Power Line Conducted Emission** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks :****Radiated Emission [§15.231(b)]** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks:****Frequency Stability** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks:****Occupied Bandwidth [§15.231(c)]** - Applicable - NOT ApplicableThe requirements are - PASSED - NOT PASSED**Remarks:**

1.6 SUMMARY**General Remarks :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) under the test configuration, as shown in clause 1.7 to 1.10.

The conclusion for the test items which are required by the applied regulation is indicated under the final judgment.

Final Judgment :

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.1.
- fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.
- doesn't fulfill the test regulation mentioned on clause 1.1.

Begin of testing : January 8, 2003


End of testing : January 10, 2003

- JAPAN QUALITY ASSURANCE ORGANIZATION -
Approved by:



Masaaki Takahashi
Senior Manager
JQA EMC Engineering Dept.

Signatories:
Issued by:



Shigeru Osawa
Assistant Manager
JQA EMC Engineering Dept.


1.7 TEST CONFIGURATION / OPERATION OF EUT**1.7.1 Test Configuration****The equipment under test (EUT) consists of :**


Item	Manufacturer	Model No.	FCC ID	Serial No.
Wireless Information System (Transmitter)	Harmony Co., Ltd.	BX-3	QULBSX3	None

1.7.2 Operating condition

Power supply Voltage : 3.0 VDC(Battery)

The tests have been carried out under the transmitting condition.

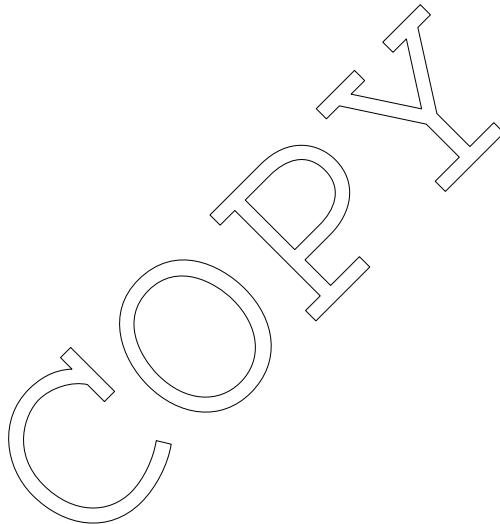

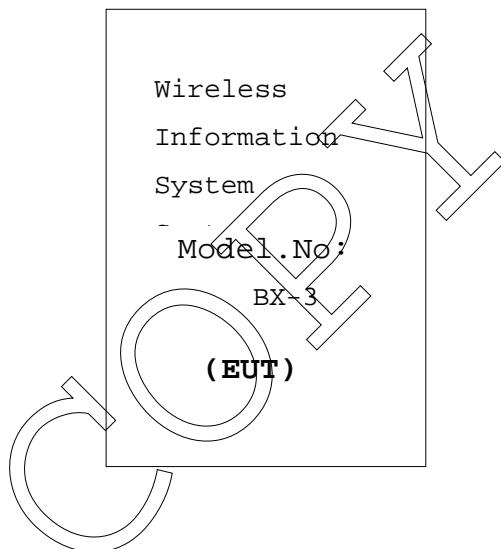1.8 EUT ARRANGEMENT (DRAWINGS)

1.9 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

1.9.1 AC Power Line Conducted Emission (150 kHz - 30 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.3.1, the AC power line preliminary conducted emissions measurements were carried out.


The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

Shielded Enclosure

- Side View -


Vertical Ground Plane

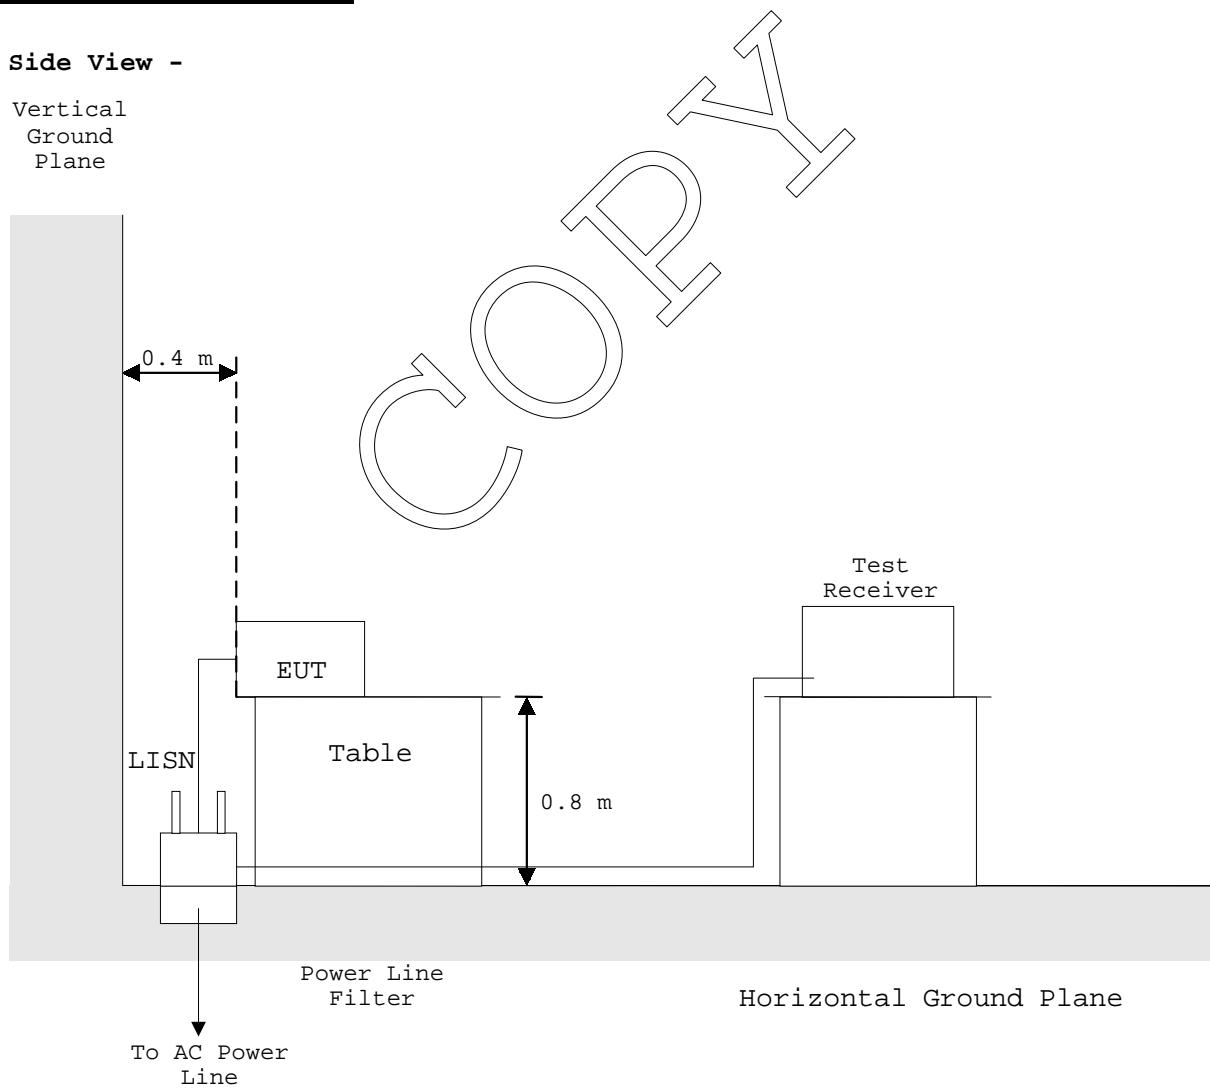

1.9.2 Radiated Emission (9 kHz - 30 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

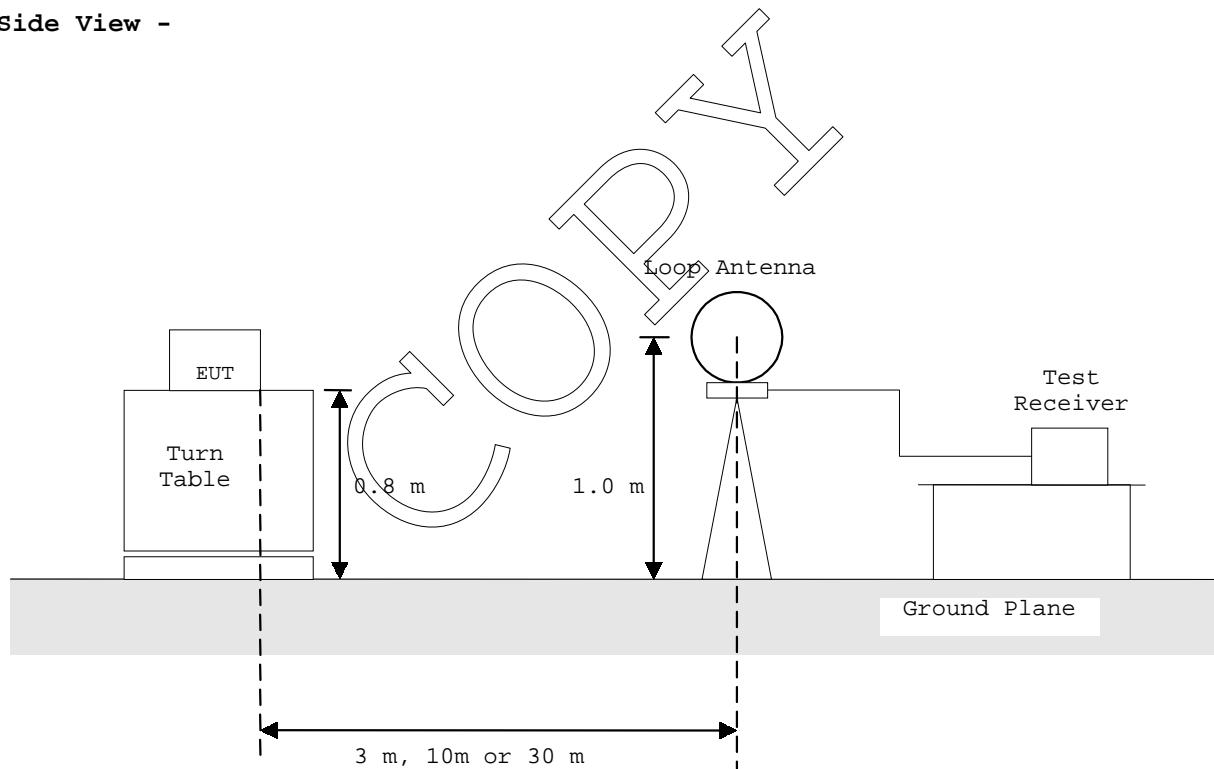- Side View -

1.9.3 Radiated Emission (30 MHz - 1000 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

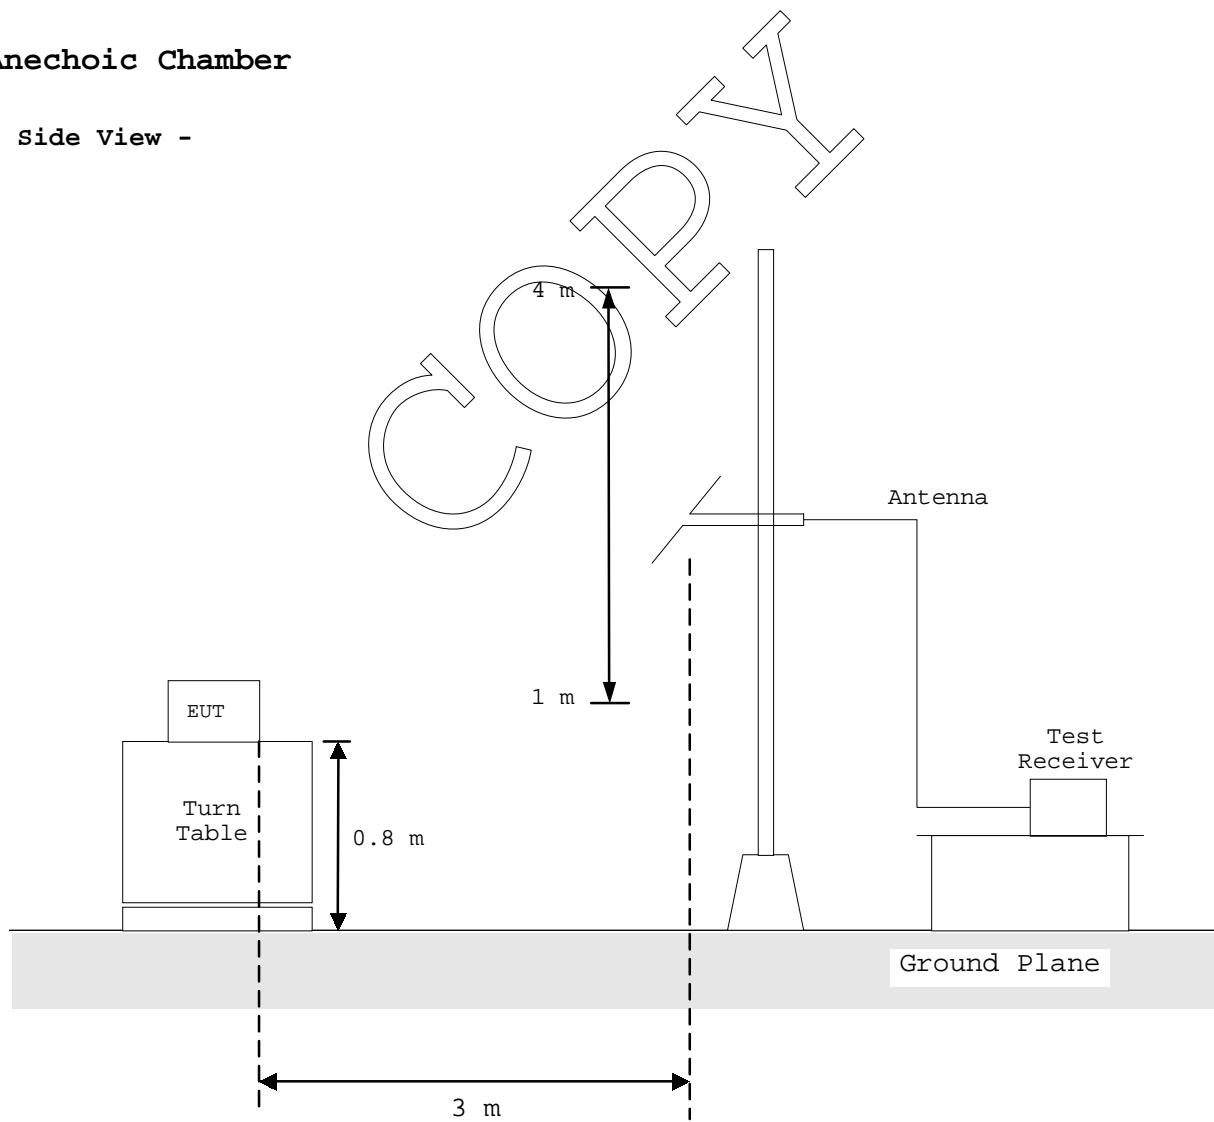Anechoic Chamber**- Side View -**

1.9.4 Radiated Emission (Above 1 GHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

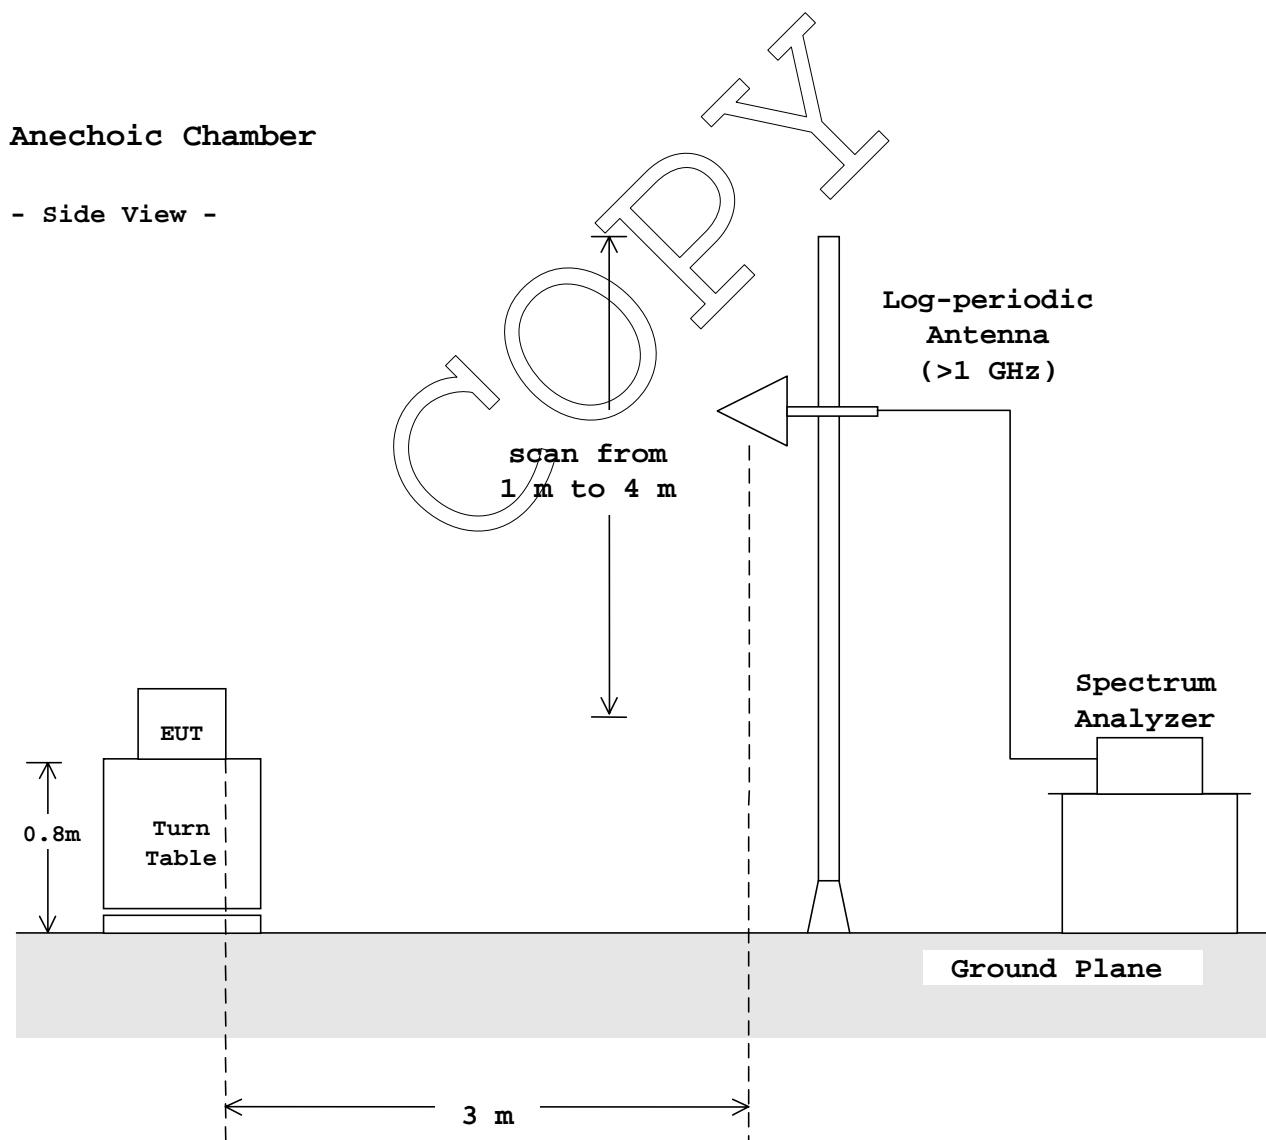

1.9.5 Frequency Stability :

According to description of ANSI C63.4-1992 sec.13.1.5 and sec.13.1.6, the frequency stability measurements were carried out. By using frequency counter with suitable RF amplifier, the carrier frequency of the transmitter under test was measured with a temperature variation of -20°C to $+50^{\circ}\text{C}$ at the normal supply voltage, and if required, with a variation in the primary voltage from 85 % to 115 % the rated supply voltage at the temperature of $+20^{\circ}\text{C}$.


These measurements were carried out after allow sufficient time (approximately 1 hour) for the temperature of the chamber to stabilize.

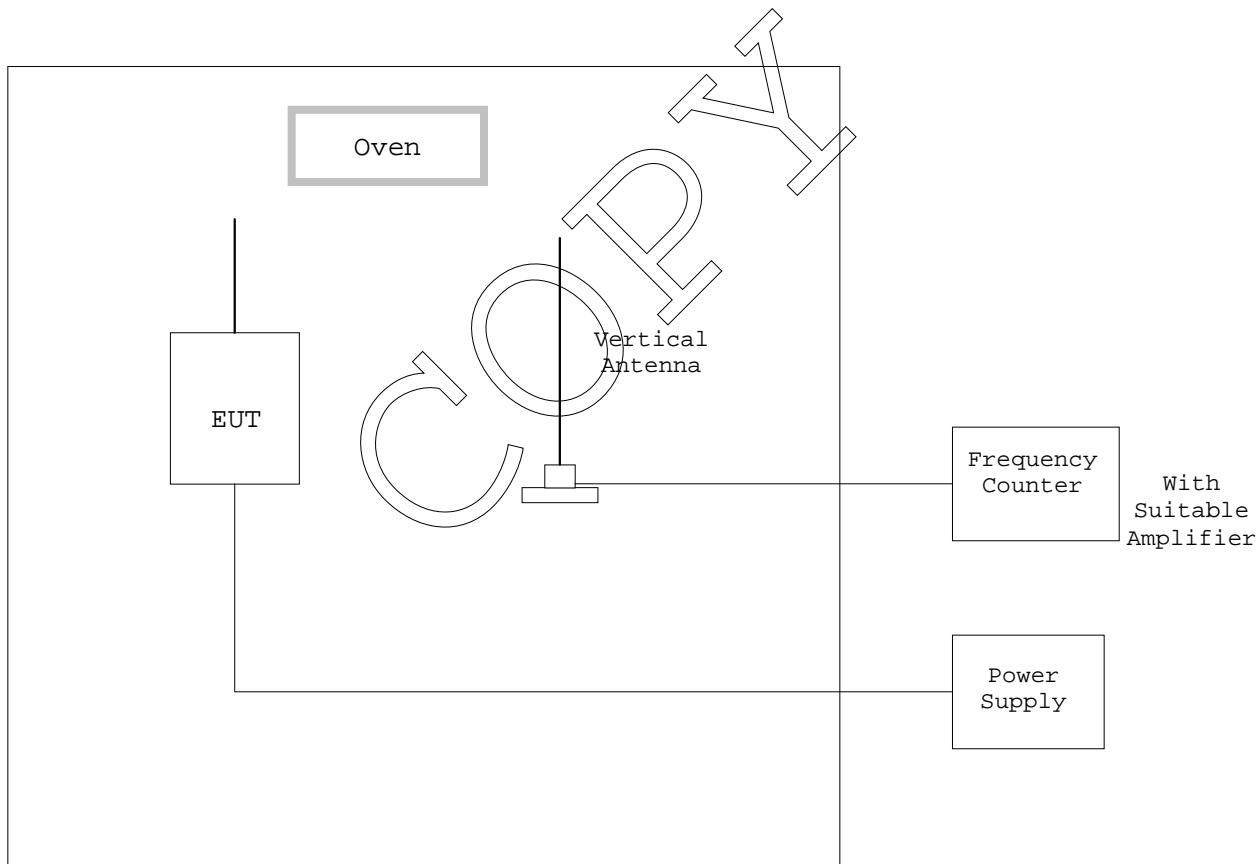

1.9.6 Occupied Bandwidth :

According to description of ANSI C63.4-1992 sec.13.1.7, the occupied bandwidth measurements were carried out. By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the emission were made under the transmitting modes of the EUT.


The resolution bandwidth of spectrum analyzer was set to the value specified in sec.13.1.7.

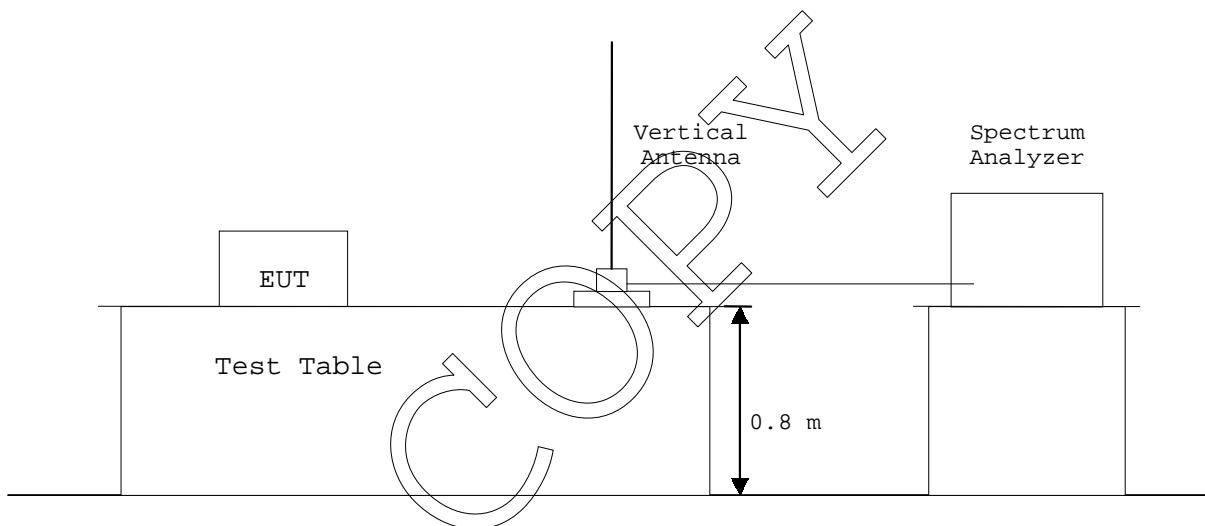

1.10 TEST ARRANGEMENT (PHOTOGRAPHS)

PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT

Photograph present configuration with maximum emission

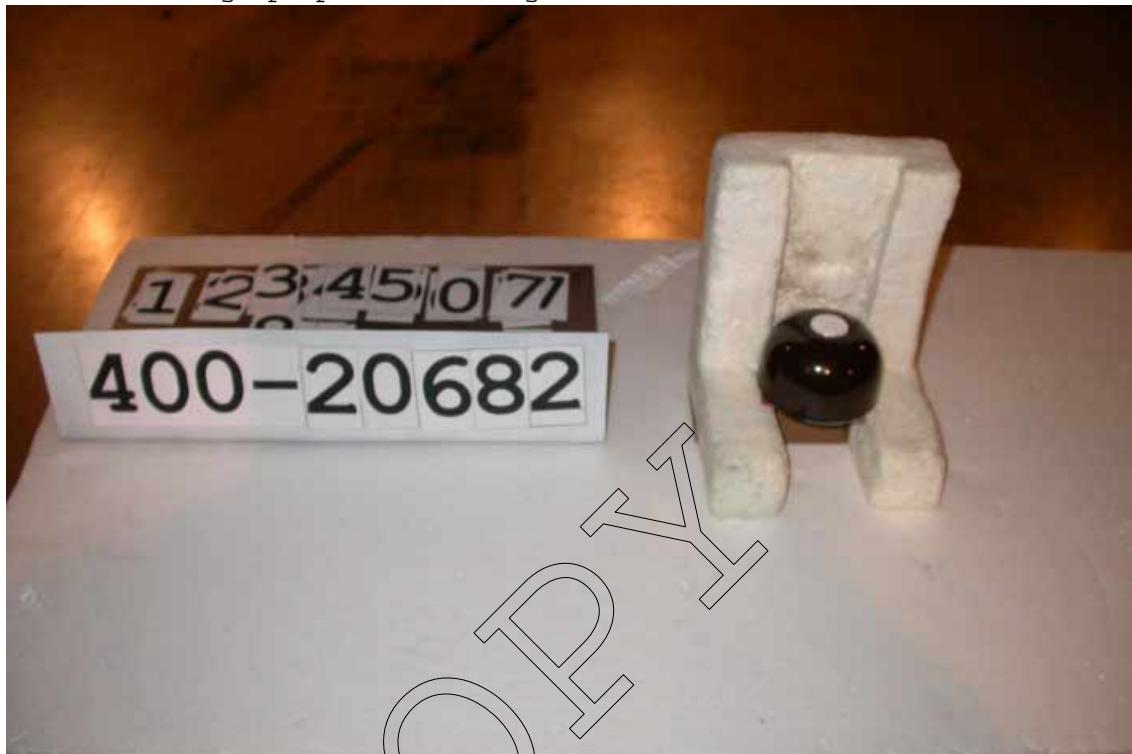



OPY1
COPY1

TEST DATA**2.2 Radiated Emissions Measurement**

Operating Frequency : 298.8 MHz

Distance of Measurement : 3.0 meters

Date : January 8, 2003

Temp. : 21 °C Humi. : 42 %

Frequ- ency (MHz)	P-A Factor (dB)	Antenna Factor (dB)	Polari- zation	Meter Reading			Limits		Emission Levels		Margins	
				QP	AV	Peak	QP/AV	Peak	QP/AV	Peak	QP/AV	Peak
298.8	0.0	21.7	H	45.9	-	-	74.6	94.6	67.6	-	7.0	-
49.8	0.0	11.6	V	0.8	-	-	54.6	74.6	12.4	-	42.2	-
99.6	0.0	11.0	V	2.3	-	-	54.6	74.6	13.3	-	41.3	-
149.4	0.0	15.8	H	4.9	-	-	54.6	74.6	20.7	-	33.9	-
348.6	0.0	18.2	H	12.8	-	-	54.6	74.6	31.0	-	23.6	-
398.4	0.0	19.0	H	5.0	-	-	54.6	74.6	24.0	-	30.6	-
448.2	0.0	20.1	V	6.6	-	-	54.6	74.6	26.7	-	27.9	-
597.2	0.0	23.2	V	2.0	-	-	54.6	74.6	25.2	-	29.4	-

Notes :

- 1) The spectrum was checked from 30 MHz to 1000 MHz.
- 2) The cable loss is included in the antenna factor.
- 3) The symbol of "<" means "or less".
- 4) The symbol of ">" means "or greater".
- 5) A sample calculation(QP/AV) was made at 298.8 (MHz).

$$PA + Af + Mr = 0 + 21.7 + 45.9 = 67.6 \text{ (dBuV/m)}$$

PA = Peak to Average Factor(P-A Factor)
Af = Antenna Factor
Mr = Meter Reading

6) Measuring Instrument Setting :

Detector function	Resolution	Bandwidth	Video Bandwidth
Quasi-peak(QP)	120 kHz	-	
Average(AV)	1 MHz	10 Hz	
Peak	1 MHz	1 MHz	

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polariza- tion	Meter Reading (dBuV)	AV	Peak	Limits (dBuV/m)	AV	Peak	Emission Levels (dBuV/m)	AV	Peak	Margins (dB)
1.4940	0.0	28.6	V <	6.0 < 19.0	54.0	74.0 < 34.6 < 47.6	19.4 > 26.4						

Notes : 1) The spectrum was checked from 1.0 GHz to tenth harmonics.

2) The cable loss, amp. gain and antenna factor are included in the correction factor.

3) The symbol of "<"means "or less".

4) The symbol of ">"means "or greater".

5) A sample calculation(AV) was made at 1.494 (GHz).

$$PA + Cf + Mr = 0 + 28.6 + 19 = 47.6 \text{ (dBuV/m)}$$

PA = Peak to Average Factor(P-A Factor)

Cf = Correction Factor

Mr = Meter Reading

6) Measuring Instrument Setting :


Detector function Resolution Bandwidth Video Bandwidth

Average(AV)	1 MHz	10 Hz
Peak	1 MHz	1 MHz

Holdover time after manual release[§15.231(a)(1)]

Max 1.15 s

(Manufacturer designed)


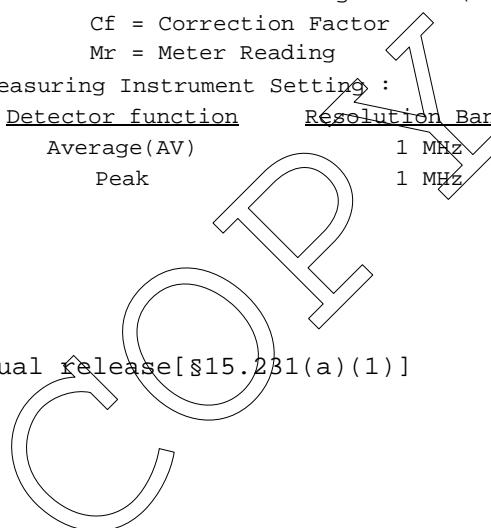


Tested by :

Y. Nakajima
Yoichi Nakajima
Testing Engineer


RADIATED EMISSION MEASUREMENT

Model No. : BX-3

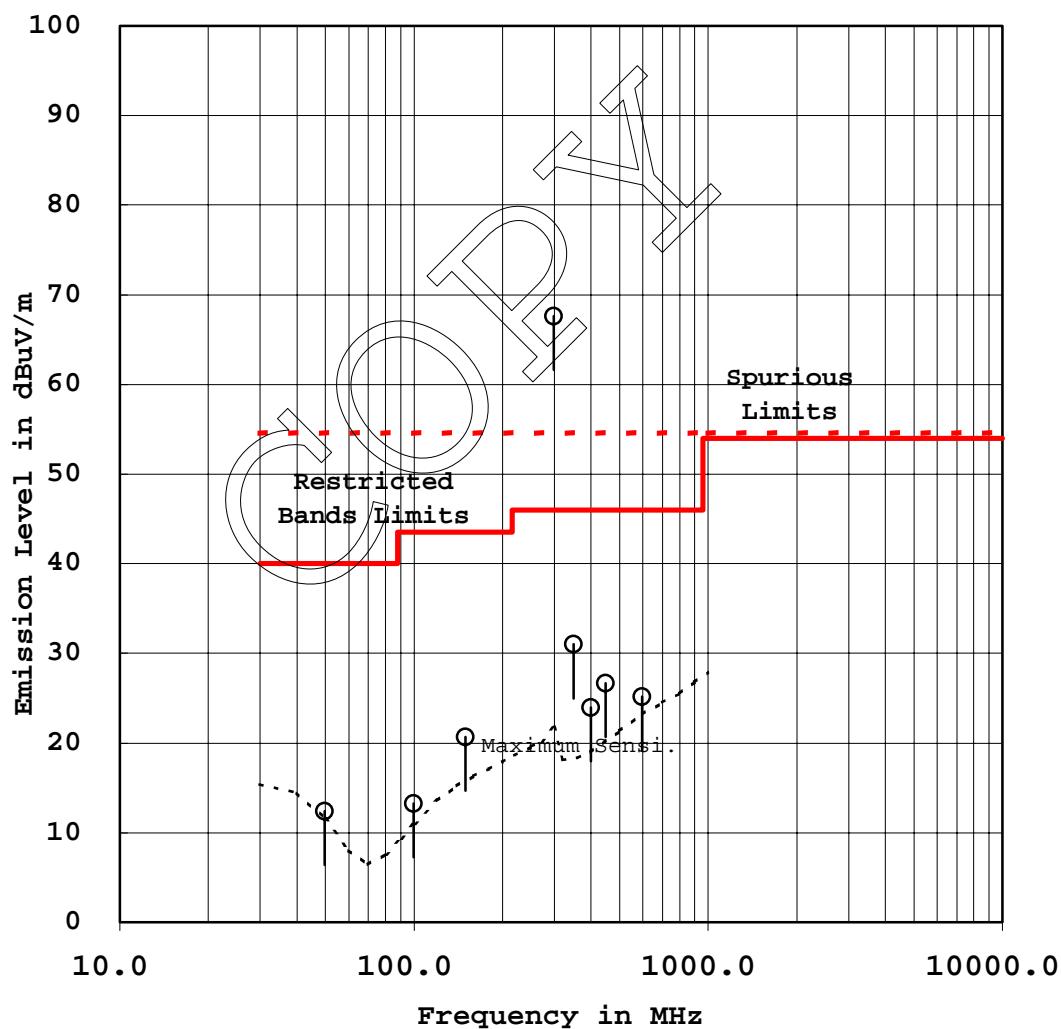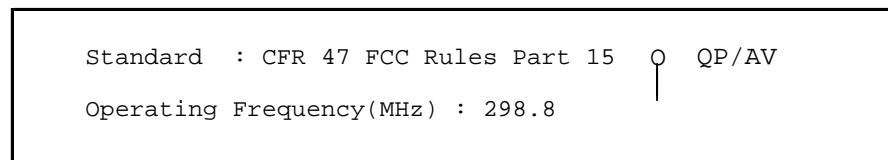

2.4 Occupied Bandwidth MeasurementDate : January 10, 2003Temp.: 24 °C Humi.: 30 %Measurements Results :Specified Limits : 0.25 % of the fundamental frequency
298.8 MHz x 0.0025 = 747 kHz

Refer to the attached graphs.

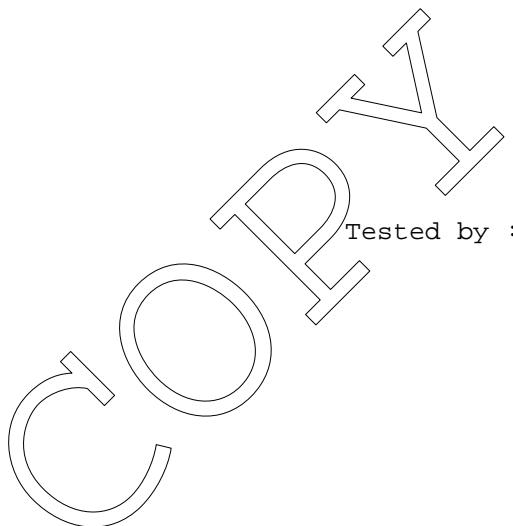*Shigeru Osawa*Shigeru Osawa
Testing Engineer

Emission Limitation**FCC ID : QULBSX3****Model : BX-3****Mode of EUT : Transmit**

REF 69.1dBuV CENTER 298.800MHz SPAN 3000kHz
RE8 BW 100.0kHz VBW 100.0kHz SWP 0.2sec

