

TEST REPORT

Ref. Report No.

03-341-011

This test report only responds to the tested sample and shall not be reproduced except

Name and address of the applicant

Human Techtronics Co., Ltd.
A-1717, Sam-Ho Company Bldg., 275-1,
Yangjae-dong, Seocho-gu, Seoul, 137-940 Korea

Standard / Test regulation

FCC Part 15, Subpart B

Test result

Pass

Incoming date : March 20, 2003

Test date : March 25, 2003

Test item(s)

Superregenerative Receiver
(WatchCatch
: Alarm System for missing child)

Model/type ref.

HT-R200

Manufacturer

Human Techtronics Co., Ltd.

Additional information

-Required Authorization : Certification
-FCC ID. : QWNHT-R200

Issue date : March 27, 2003

in full without written approval of the Korea Testing Laboratory.

Tested and reported by



Jeong-Min Kim, Senior Engineer

Reviewed by



Hee-Soo Kim, Telecommunication Team

Manager

**KOREA TESTING
LABORATORY**

TABLE OF CONTENTS

I. GENERAL INFORMATION.....	3
1. Grantee's Name and Mailing Address	
2. Manufacturer's Name and Mailing Address	
3. Equipment Descriptions	
4. Rules and Regulations	
5. Measuring Procedure	
6. Place of Measurement	
7. Date of Measurement	
□. GENERAL REQUIREMENTS OF THE EUT.....	4
1. Labeling Requirement (Section 15.19)	
2. Information to User (Sections 15.21)	
3. Special Accessories (Section 15.27)	
□. RADIATED EMISSION MEASUREMENT (Section 15.109).....	5
1. Test Procedure	
2. Photograph for the test configuration	
3. Sample Calculation	
4. Measurement Data	
5. Reference Data	
□. TEST EQUIPMENTS USED FOR MEASUREMENT.....	9

□. GENERAL INFORMATION

1. Grantee's Name and Mailing Address : Human Techtronics Co., Ltd.
A-1717, Sam-Ho Company Bldg., 275-1, Yangjae-dong,
Seocho-gu, Seoul, 137-940, Korea

2. Manufacturer's Name and Mailing Address : Human Techtronics Co., Ltd.
A-1717, Sam-Ho Company Bldg., 275-1, Yangjae-dong,
Seocho-gu, Seoul, 137-940, Korea

3. Equipment Descriptions

3.1 Tunning Frequency : 315.00 MHz
3.2 Detect Method : Superregenerative Detector
3.3 Power Supply : DC 1.5V(Battery)

4. Rules and Regulations : FCC Part 15, Subpart B

5. Measuring Procedure : ANSI C63.4-2001

6. Place of Measurement : Absorber-lined Room (KTL)

7. Date of Measurement

7.1 Conducted Emission : Not Applicable
7.2 Radiated Emission : March 25, 2003

□. GENERAL REQUIREMENTS OF THE EUT**1. Labeling Requirement (Section 15.19)**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

1.1 Location of Label : User's Guide Manual

1.2 How Applied : Printed

2. Information to User (Section 15.21)

The following or similar statements were provided in the manual for user instruction.

Please refer page 3 of the attached manual for details.

CAUTION : Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3. Special Accessories (Section 15.27)

3.1 Were the special Accessories provided? [] yes, [] no

3.2 If yes, details for the special accessories are as follows :

3.3 If yes, were the appropriate instructions provided on the first page of the text concerned with the installation of the device?

[] yes, [] no

3.4 Are these accessories provided of the type which can be readily obtained from multiple retail outlets ?

[] yes, [] no

And therefore does the manual specify what additional components or accessories are required to be used in order to comply with the Rules?

[] yes, [] no

□. RADIATED EMISSION MEASUREMENT (Section 15.109)**1. Test Procedure****1.1 Preliminary Testing for Reference**

Preliminary testing was performed in a KTL absorber-lined room to determine the emission characteristics of the EUT. The EUT was placed on the wooden table which has dimensions of 0.8 meters in height, 1 meter in length and 1.5 meters in width. Receiving antenna (Biconical antenna : 30 to 300MHz, Log-periodic antenna : 200 to 1000MHz or Horn Antenna : 1 to 18GHz) was placed at the distance of 1 meter from the EUT.

In order to cohere the individual components of the characteristic broadband emission from the receiver(EUT), a RF generator(CW signal) and a log-periodic antenna were used. The frequency and output level of the generator were adjusted for highest observed coherent receiver emissions on the spectrum analyzer with RF amplifier.

An attempt was made to maximize the emission level with the various configurations of the EUT. The effect of changing the position of the cable was observed to find the worst case configuration while rotating the table and varying antenna height and it's polarization.

Radiated and spurious emissions were checked from 30 MHz to 3000 MHz according to section 15.33.

1.2 Final Radiated Emission Test at an Absorber-Lined Room

The final measurement of radiated field strength was carried out in a KTL Absorber-Lined Room that was listed up at FCC according to the "Radiated Emissions Testing" procedure specified by ANSI C63.4.

Based on the test results in preliminary test, measurement was made in same test set up and configuration which produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an EMI receiver or spectrum analyzer(for above 1GHz) with a RF amplifier.

Turntable was rotated through 360 degrees and receiving antenna height was varied from 1 to 4 meters above the ground plane to read maximum emission level.

The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

2. Photograph of the test configuration



3. Sample Calculation

The emission level measured in decibels above one microvolt ($\text{dB } \square$) was converted into microvolt per meter (\square/m) as shown in following sample calculation.

For example :

Measured Value at	<u>316.4 MHz</u>	53.7 $\text{dB } \square$
+ Antenna Factor		14.0 dB/m
+ Cable Loss		3.3 dB
- Preamplifier		30.0 dB
- Distance Correction Factor *		0.0 dB
<hr/>		
= Radiated Emission		41.0 $\text{dB } \square/\text{m}$
		(= 112.2 \square/m)

* Extrapolated from the measured distance to the specified distance by an inverse linear distance extrapolation.

4. Measurement Data

- Detect Mode and Resolution Bandwidth :

Quasi-Peak (6dB Bandwidth: 120kHz for ranges below 1GHz, 1MHz for above 1GHz)

- Measurement Distance : 3 Meter

Frequency (MHz)	* D.M.	* A.P.	Measured Value (dB□)	* A.F. + C.L (dB)	* A.G. (dB)	* D.C.F. (dB)	Emission Level		Limit (□/m)	** Margin (dB)
							(dB□/m)	(□/m)		
310.9	Q	H	53.2	17.3	-30.0	-	40.5	105.9	200	- 5.5
312.3	Q	H	53.6	17.3	-30.0	-	40.9	110.9	200	- 5.1
313.6	Q	H	53.6	17.3	-30.0	-	40.9	110.9	200	- 5.1
316.4	Q	H	53.7	17.3	-30.0	-	41.0	112.2	200	- 5.0
-	-	-	-	-	-	-	-	-	-	-

Note

The observed spectrum analyzer noise floor level with RF preamplifier (30dB) was 35.0 dB□(below 1000 MHz) and 45.0 dB□(above 1000MHz). And all other emissions not reported on data were more than 25dB below the permitted level.

* D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average)

A.P. : Antenna Polarization (H : Horizontal, V : Vertical)

A.F. : Antenna Factor

C.L. : Cable Loss


A.G. : Amplifier Gain

D.C.F. : Distance Correction Factor

< : Less than

** Margin (dB) = Emission Level (dB) - Limit (dB)

5. Reference Data (Frequency spectrum data on radiated emission form the receiver.)

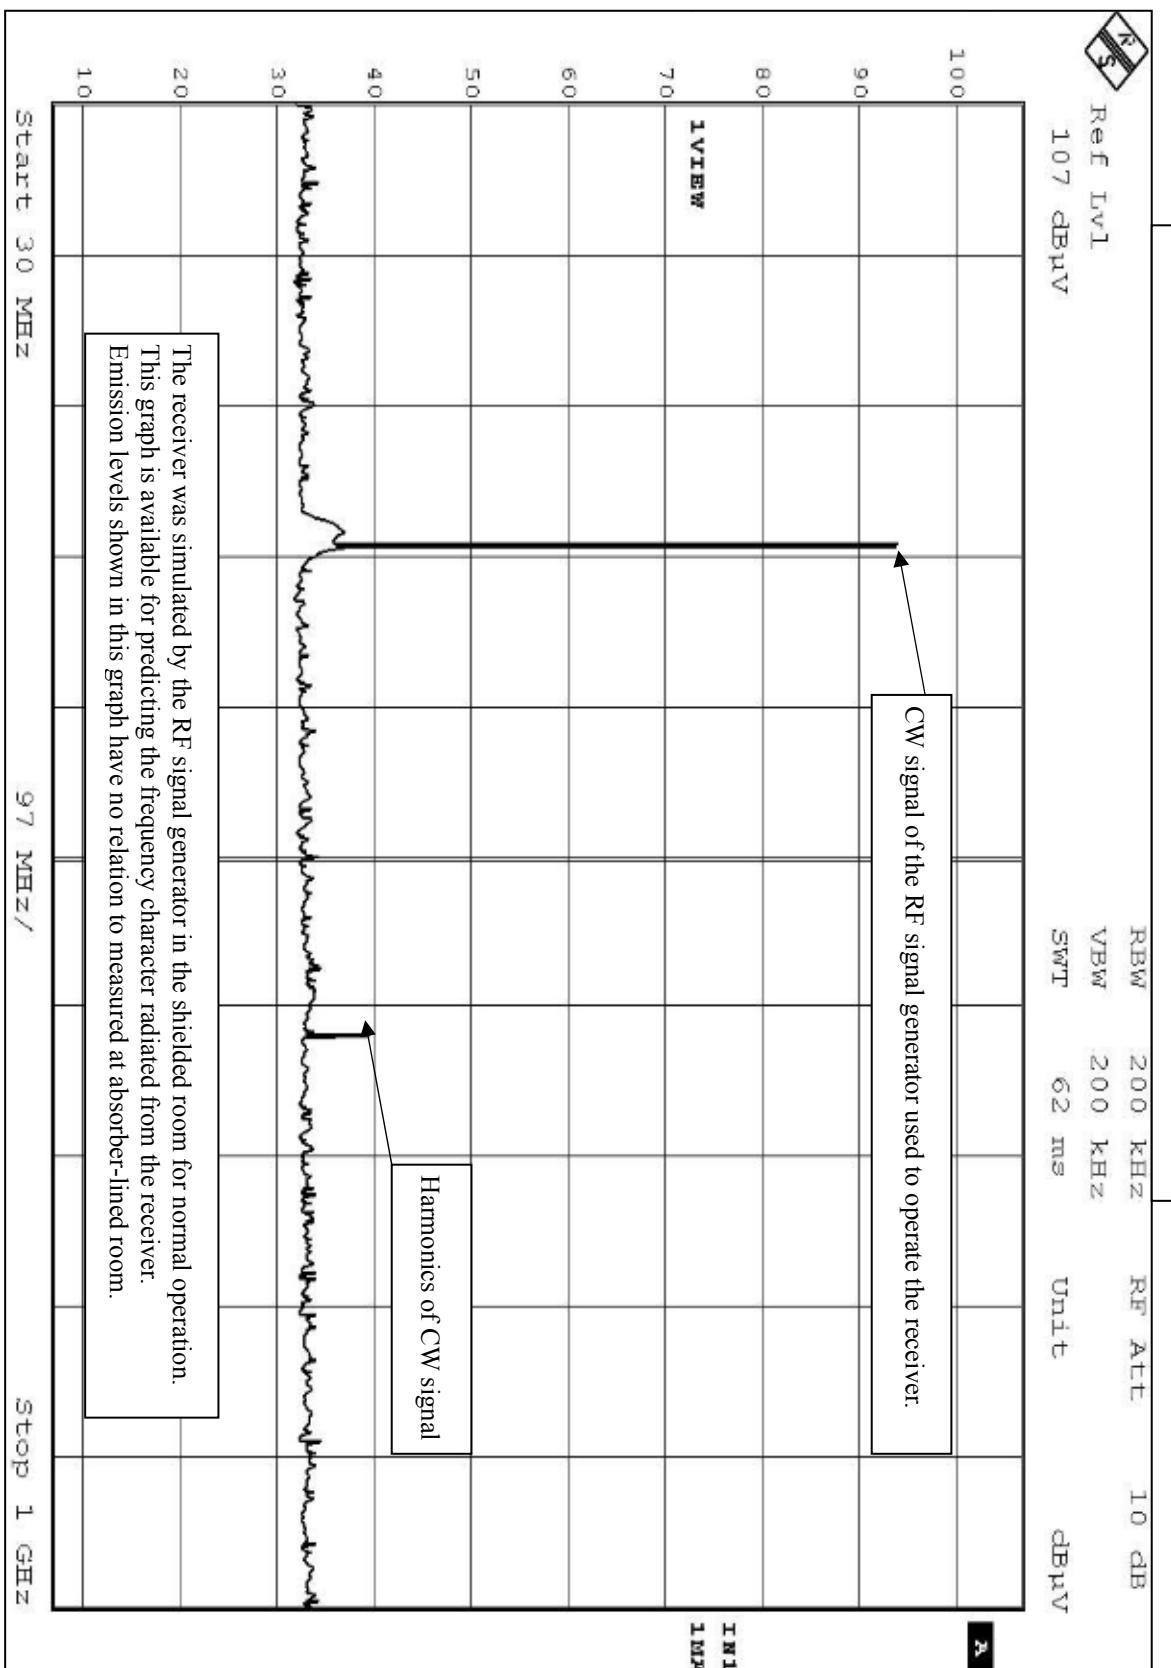

□. TEST EQUIPMENT USED FOR MEASUREMENTS

<u>Equipment</u>	<u>Model No.</u>	<u>Manufacturer</u>	<u>Serial No.</u>	<u>Effective Cal. Duration</u>
[x] EMI Receiver (20 MHz-1 GHz)	ESVS30	R & S	830516/002	06/13/02-06/13/03
[x] EMI Receiver (20 Hz-7 GHz)	ESI	R & S	835571/004	09/05/02-09/05/03
[x] Spectrum Analyzer (9 kHz-26.5 GHz)	8563A	H. P.	3222A02069	03/27/02-03/27/03
[x] Spectrum Analyzer (100 Hz-22 GHz)	8566B	H. P.	3014A07057	05/26/02-05/26/03
[x] Quasi-Peak Adapter (10 kHz-1 GHz)	85650A	H. P.	3107A01511	05/26/02-05/26/03
[x] RF-Preselector (20 Hz-2 GHz)	85685A	H. P.	3010A01181	05/26/02-05/26/03
[] Test Receiver (9 kHz-30 MHz)	ESH3	R & S	860905/001	06/13/02-06/13/03
[x] Pre-Amplifier (0.1-3000 MHz, 30 dB)	8347A	H. P.	2834A00543	05/26/02-05/26/03
[x] Pre-Amplifier (1-26.5 GHz, 35 dB)	8449B	H. P.	3008A00302	05/26/02-05/26/03
[] LISN(50 Ω, 50 μH) (10 kHz-100 MHz)	3825/2	EMCO	9010-1710	05/26/02-05/26/03
[x] Plotter	7470A	H. P.	3104A21292	-
[] Tuned Dipole Ant. (30 MHz-300 MHz)	VHA 9103	Schwarzbeck	-	*
[] Tuned Dipole Ant. (300 MHz-1 GHz)	UHA 9105	Schwarzbeck	-	*
[x] Biconical Ant. (30 MHz-300 MHz)	BBA 9106	Schwarzbeck	-	*
[x] Log Periodic Ant. (200 MHz-1 GHz)	3146	EMCO	-	*
[x] Horn Ant. (1 GHz-18 GHz)	3115	EMCO	-	*
[] Active Loop Ant. (9 kHz-30 MHz)	6502	EMCO	2532	*
[] DC Power Supply	6260B	H.P.	1145A04822	-
[x] Shielded Room (5.0 m x 4.5 m)	-	SIN-MYUNG	-	-

* Each set of antennas has been calibrated to ensure correlation with ANSI C63.5 standard. The calibration of antennas is traceable to Korea Standard Research Institute(KSRI).