

PARTIAL Test Report

23-1-0017601T026_TR1-R04

Number of pages:	26	Date of Report:	2024-Oct-30
Testing company:	cetecom advanced GmbH Untertuerkheimer Str. 6-10 66117 Saarbruecken GERMANY	Applicant:	VALEO Telematik und Akustik GmbH
Product:	Emergency call control unit		
Model:	MBECALL-NAR-01		
FCC ID:	QWY-MBECALL-NAR01	IC:	6588A-MBECALLNAR1
		PMN:	MBECALL-NAR-01
		HVIN:	MBECALL-NAR-01
		FVIN:	E120 R551
Testing has been carried out in accordance with:	FCC Regulations Title 47 CFR, Chapter I, Subchapter A Part 15, Subpart C Intentional Radiators § 15.209 Radiated emission limits; general requirements Title 47 CFR, Chapter I, Subchapter B Part 22, Subpart H Cellular Radiotelephone Service Part 24, Subpart E Paging and Radiotelephone Service ISED-Regulations Radio Standards Specification RSS-Gen, Issue 5 General Requirements for Compliance of Radio Apparatus RSS-132, Issue 4 Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz RSS-133, Issue 7 Personal Communications Service Equipment Operating in the Bands 1850-1915 MHz and 1930-1995 MHz		
Tested Technology:	GSM		
Test Results:	☒ The EUT complies with the requirements in respect of selected parameters subject to the test. The test results relate only to devices specified in this document The current version of Test Report 23-1-0017601T026_TR1-R04 replaces the test report 23-1-0017601T026_TR1-R03 dated 2024-Oct-11. The replaced test report is herewith invalid.		
Signatures:	B.Eng. Martin Nunier Supervisor Radio Services Authorization of test report Timo Franke Testing Manager Responsible of test report		

Table of Contents

Table of Annex	3
1 General information	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results	5
1.4 Summary of Test Methods	7
2 Administrative Data	8
2.1 Identification of the Testing Laboratory.....	8
2.2 General limits for environmental conditions.....	8
2.3 Test Laboratories sub-contracted.....	8
2.4 Organizational Items	8
2.5 Applicant's details	8
2.6 Manufacturer's details	8
2.7 Equipment under Test (EUT)	9
2.8 Untested Variant (VAR)	9
2.9 Auxiliary Equipment (AE).....	9
2.10 Connected cables (CAB).....	9
2.11 Software (SW).....	9
2.12 EUT set-ups.....	10
2.13 EUT operation modes	10
3 Equipment under test (EUT)	11
3.1 General Data of Main EUT as Declared by Applicant.....	11
3.2 Detailed Technical data of Main EUT as Declared by Applicant	11
3.3 Worst case identification.....	11
3.4 Modifications on Test sample	11
4 Measurements.....	12
4.1 Conducted RF output power	12
4.2 Radiated field strength emissions below 30 MHz	15
4.3 Radiated spurious emissions	19
4.4 Radiated Band Edge.....	21
4.5 Equipment lists.....	23
5 Results from external laboratory.....	25
6 Opinions and interpretations	25
7 List of abbreviations	25
8 Measurement Uncertainty valid for conducted/radiated measurements	26
9 Versions of test reports (change history)	27

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	23-1-0017601T026_TR1-A201-R03	21
Annex 2	Internal photographs of EUT	Provided by applicant	-
Annex 3	External photographs of EUT	23-1-0017601T026_TR1-A101-R03	11
Annex 4	Test set-up photographs	23-1-0017601T026_TR1-A103-R03	13
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2. cetecom advanced does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced.

The testing service provided by cetecom advanced has been rendered under the current "General Terms and Conditions for cetecom advanced".

cetecom advanced will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced test report include or imply any product or service warranties from cetecom advanced, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced.

All rights and remedies regarding vendor's products and services for which cetecom advanced has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at cetecom advanced.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

1.3 Summary of Test Results

Test case in GSM850 band	Reference Clause FCC ☑	Reference Clause ISED ☑	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5: §8.8	--	--	N/A
Conducted RF output power	§2.1046(a)	RSS-132, Issue 4: §5.4	12	--	PASSED
Radiated RF output power	§22.913(a)	RSS-132, Issue 4: §5.4	--	--	NP
Occupied Channel Bandwidth 99%	§22.917(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 5: §6.7	--	--	NP
26dB Emission bandwidth	§22.917(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 5: §6.7	--	--	NP
Radiated Band Edge	§2.1053(a), §2.1057(a)(1) §22.917(a)(b)	RSS-132, Issue 4: §5.5(i)(ii)	22	--	PASSED
Conducted RF Band Edge	§22.917(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-132, Issue 4: §5.5(i)(ii)	--	--	NP
Peak to Average ratio (PAPR)	§2.1046(a)	RSS-132, Issue 4: §5.4	--	--	NP
Radiated field strength emissions below 30 MHz	§15.205, §15.209	RSS-Gen, Issue 5: §8.9	18	--	PASSED
Spurious emissions at antenna terminals	§22.917(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-132, Issue 4: §5.5(i)(ii)	--	--	NP
Radiated spurious emissions	§2.1053(a), §2.1057(a)(1) §22.917(a)(b)	RSS-132, Issue 4: §5.5(i)(ii)	20	--	PASSED
Frequency stability, temperature variation	§22.355, §2.1055(a)(1) (d)	RSS-Gen, Issue 5: §6.11 RSS-132, Issue 4: §5.3	--	--	NP
Frequency stability, voltage variation	§22.355, §2.1055(a)(1) (d)	RSS-Gen, Issue 5: §6.11 RSS-132, Issue 4: §5.3	--	--	NP

Test case in GSM1900 band	Reference Clause FCC	Reference Clause ISED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen Issue 5: §8.8	--	--	N/A
Conducted RF output power	§2.1046(a)	RSS-133, Issue 7: §5.5	12	--	PASSED
Radiated RF output power	§24.232(b)	RSS-133, Issue 7: §5.5	--	--	NP
Occupied Channel Bandwidth 99%	§24.238(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 5: §6.7	--	--	NP
26dB Emission bandwidth	§24.238(b), §2.202(a), §2.1049(h)	RSS-Gen, Issue 5: §6.7	--	--	NP
Radiated Band Edge	§2.1053(a), §2.1057(a)(1) §24.238(a)(b)	RSS-133, Issue 7: §5.6	22	--	PASSED
Conducted RF Band Edge	§24.238(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-133, Issue 7: §5.6	--	--	NP
Peak to Average ratio (PAPR)	§2.1046(a)	RSS-133, Issue 7: §5.5	--	--	NP
Radiated field strength emissions below 30 MHz	§15.205, §15.209	RSS-Gen: Issue 5: §8.9	18	--	PASSED
Spurious emissions at antenna terminals	§24.238(a)(b)(c)(d) §2.1051, §2.1057(a)(1)	RSS-133, Issue 7: §5.6	--	--	NP
Radiated spurious emissions	§2.1053(a), §2.1057(a)(1) §24.238(a)(b)	RSS-133, Issue 7: §5.6	20	--	PASSED
Frequency stability, temperature variation	§24.235, §2.1055(a)(1) (d)	RSS-Gen, Issue 5: §6.11 RSS-133, Issue 7: §5.4	--	--	NP
Frequency stability, voltage variation	§24.235, §2.1055(a)(1) (d)	RSS-Gen, Issue 5: §6.11 RSS-133, Issue 7: §5.4	--	--	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

N/A

Test case does not apply to the test object.

NP

The test was not performed by the cetecom advanced laboratory.

Decision Rule: cetecom advanced GmbH follows [ILAC G8:2019 chapter 4.2.1 \(Simple Acceptance Rule\)](#).

Remarks:

- Please check the module report "RFBCKS-WTW-P23070373 issuey by Bureau Veritas Consumer Products Services (H.K.) Ltd. on 2023-09-28" for not performed measurements by the cetecom advanced laboratory.

1.4 Summary of Test Methods

Test case	Test method
AC-Power Lines Conducted Emissions	ANSI C63.4-2014, §7, ANSI C63.10-2013 §6.2
Conducted RF output power	ANSI C63.26:2015, §5.2, KDB 971168 D01 v03r01
Radiated RF output power	ANSI C63.26:2015, §5.2.7, KDB 971168 D01 v03r01
Occupied Channel Bandwidth 99%	ANSI C63.26:2015, §5.4.4, KDB 971168 D01 v03r01
26dB Emission bandwidth	ANSI C63.26:2015, §5.4.3, KDB 971168 D01 v03r01
Modulation characteristics	ANSI C63.26:2015, §5.3
Radiated Band Edge	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01
Conducted RF Band Edge	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Peak to Average ratio (PAPR)	ANSI C63.26:2015, §5.2.6 Result calculated with measured conducted RF-power value and stated/measured antenna gain for band of interest
Radiated field strength emissions below 30 MHz	ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1
Spurious emissions at antenna terminals	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Radiated spurious emissions	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01
Frequency stability, temperature variation	ANSI C63.26:2015, §5.6, KDB 971168 D01 v03r01
Frequency stability, voltage variation	ANSI C63.26:2015, §5.6, KDB 971168 D01 v03r01

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	cetecom advanced GmbH
Address:	Untertuerkheimer Str. 6-10 66117 Saarbruecken Germany
Responsible for testing laboratory:	Dipl.-Ing. (FH) Andreas Luckenbill M.Sc.
Accreditation scope:	DAkkS Webpage: FCC ISED
IC Lab company No. / CAB ID:	3462D / DE0001
Test location 1:	Im Teelbruch 116; 45219 Essen
Test location 2:	--

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:	--
---------------	----

2.4 Organizational Items

Responsible testing manager:	Timo Franke
Receipt of EUT:	2023-Sep-28
Date(s) of test:	2024-Jun-09 to 2024-Jul-22
Version of template:	24.0301

2.5 Applicant's details

Applicant's name:	VALEO Telematik und Akustik GmbH
Address:	Max-Planck-Str. 28-32 61381 Friedrichsdorf Hesse Germany
Contact Person:	Martin Fleckenstein
Contact Person's Email:	martin.fleckenstein@valeo.com

2.6 Manufacturer's details

Manufacturer's name:	VALEO Telematik und Akustik GmbH
Address:	Max-Planck-Str. 28-32 61381 Friedrichsdorf Deutschland

2.7 Equipment under Test (EUT)

EUT No. *)	Sample No.	Product	Model	Type	SN	HW	SW
EUT 1	23-1-00176S31_C01	Emergency call control unit	MBECALL-NAR-01	-	EB10NAFH24000000009	D2	E120 R551
EUT 2	23-1-00176S32_C01	Emergency call control unit	MBECALL-NAR-01	-	EB10NAFH24000000020	D2	E120 R551
EUT 3	23-1-00176S35_C01	Emergency call control unit	MBECALL-NAR-01	-	EB10NAFH24000000017	D2	E120 R551

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Untested Variant (VAR)

VAR No. *)	Sample No.	Product	Model	Type	SN	HW	SW
------------	------------	---------	-------	------	----	----	----

*) The listed additional untested model variant(s) (VAR) is/are not object of evaluation of compliance. For further information please see Annex 5: Declaration of applicant of model differences.

If the table above does not show any other line than the headline, no untested variants are available.

2.9 Auxiliary Equipment (AE)

AE No. *)	Sample No.	Auxiliary Equipment	Model	SN	HW	SW
AE 1	23-1-00176S18_C01	external GNSS antenna	ZB ANTENNE GNSS	343	A 174 905 00 02	n/a
AE 2	23-1-00176S38_C01	external cellular antenna	ZB ANTENNE TEL (Hutablagenantenne)	N/A	A 213 905 28 03	n/a

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report. If the table above does not show any other line than the headline, no AE was used during testing nor was taken into account for evaluation

2.10 Connected cables (CAB)

CAB No. *)	Sample No.	Cable Type	Connectors / Details	Length
CAB 1	23-1-00176S76_C01	Fakra cable	n/a	100 cm
CAB 2	23-1-00176S80_C01	Power cable	n/a	100 cm

*) CAB short description is used to simplify the identification of the connected cables in this test report. If the table above does not show any other line than the headline, no cable was used during testing nor was taken into account for evaluation

2.11 Software (SW)

SW No. *)	Sample No.	SW Name	Description	SW Status
-----------	------------	---------	-------------	-----------

*) SW short description is used to simplify the identification of the used software in this test report. If the table above does not show any other line than the headline, no SW was used during testing nor was taken into account for evaluation.

2.12 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
Set 1	EUT 1 (EUT 2/EUT 3) + AE 1 + AE 2 + CAB 1 + CAB 2	Used for radiated measurements with internal antenna. EUT 1, EUT 2 and EUT 3 are identical and were just switched to increase testing time
Set 2	EUT 1 (EUT 2/EUT 3) + AE 1 + CAB 1 + CAB 2	Used for radiated measurements with external antenna. EUT 1, EUT 2 and EUT 3 are identical and were just switched to increase testing time
Set 3	EUT 3 + CAB 2	Used for conducted measurements

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.13 EUT operation modes

EUT operating mode no. *)	Operating modes	Additional information
Op 1	GSM 850 Traffic	Frequency / channel range: UL: 824.20 to 848.80 MHz, DL: 869.20 to 993.80 MHz, Channel: UL: 128 to 251, DL: 128 to 251. A Communication link has been established between Radio Communication Tester CMU200 and EUT, GPRS modulation / 1 TX slot with max power of 33dBm
Op 2	GSM 1900 Traffic	Frequency / channel range: UL: 1850.20 to 1909.80 MHz, DL: 1930.20 to 1989.80 MHz, Channel: UL: 512 to 810, DL: 512 to 810. A Communication link has been established between Radio Communication Tester CMU200 and EUT, GPRS modulation / 1 TX slot with max power of 30dBm

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Firmware	☐ for normal use	☒ Special version for test execution	
Power supply	☐ AC Mains	-	
	☒ DC Mains	12 V DC	
	☐ Battery	-	
Operational conditions	T _{nom} = +21 °C	T _{min} = -40 °C	T _{max} = +85 °C
EUT sample type	Engineering Samples		
Weight	0.240 kg		
Size [LxWxH]	17.5 cm x 10.0 cm x 5.0 cm		
Interfaces/Ports	Fakra 1 GNSS, Fakra 2 Cell, MateNet 2x 100BaseT1, MQS 18 pin- System connector		
For further details refer Applicants Declaration & following technical documents			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

TX Frequency range	☒ GSM850	824 - 849 MHz (Uplink), 869-894 MHz (Downlink)
	☒ GSM1900	1850 - 1910 MHz (Uplink), 1930-1990 MHz (Downlink)
Number of channels	☒ GSM850	TCH range 128 - 251
	☒ GSM1900	TCH range 512 - 810
Type of modulation	GMSK	
Antenna Type	☒ Integrated	
	☐ External, no RF- connector	
	☒ External, separate RF-connector	
Antenna gain	GSM850: 4.7 dBi (external antenna)	
	GSM850: 7.5 dBi (internal / backup antenna)	
	GSM1900: 6 dBi (external antenna)	
	GSM1900: 8 dBi (internal / backup antenna)	
FCC label attached	No	
Test firmware / software and storage location	EUT	
For further details refer Applicants Declaration & following technical documents		
Description of Reference Document (supplied by applicant)	Version	Total Pages
MBeCallBox_Tune-up-information_V1.2	1.2	11

3.3 Worst case identification

GSM mode	Data rate
GSM850	GMSK 1 UL slot
GSM1900	GMSK 1 UL slot

3.4 Modifications on Test sample

Additions/deviations or exclusions	--
------------------------------------	----

4 Measurements


4.1 Conducted RF output power

4.1.1 Description of the general test setup and methodology, see below example:

Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5).

The measurements were performed with the integrated power measurement function of the communication test-unit. (5).

Schematic:

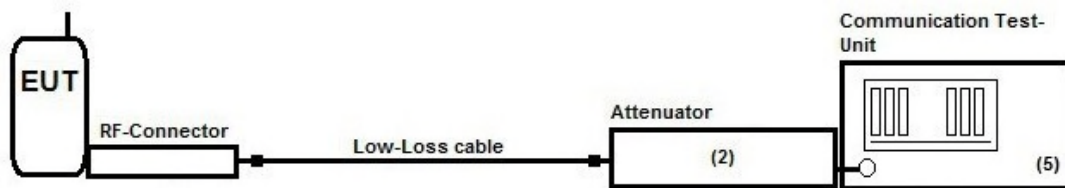

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 8)

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.

The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance

4.1.2 Measurement Location

Test site	120910 - Radio Laboratory 1 (TS 8997)
-----------	---------------------------------------

4.1.3 Limit

Frequency Range [MHz]	Limit [W]	Limit [dBm]
824 – 849	7 ERP	38.5
1850 – 1910	2 EIRP	33

4.1.4 Result internal antenna (calculation)

GPRS-Modulation 850MHz Band														
	ARFCN- Frequency (MHz)	Average power at Antenna Port (dBm)	Maximum declared Antenna Gain(dBi)	Path loss to external Antenna Port	Path loss to internal Antenna Port	EIRP in dBm	EIRP in Watt	ERP in dBm	ERP in Watt	FCC Limit(W), ERP	FCC Limit (dBm), ERP	ISED Limit(W), EIRP	ISED Limit (dBm), EIRP	Verdict
Channel 128	824.2	23.40	7.50	1.40	1.60	30.70	1.17490	28.55	0.71614	7.00	38.45	11.50	40.61	Passed
Channel 189	836.6	23.40	7.50	1.40	1.60	30.70	1.17490	28.55	0.71614	7.00	38.45	11.50	40.61	Passed
Channel 251	848.8	23.50	7.50	1.40	1.60	30.80	1.20226	28.65	0.73282	7.00	38.45	11.50	40.61	Passed
E-GPRS/EDGE Mode 850MHz Band														
Channel 128	824.2	24.20	7.50	1.40	1.60	31.50	1.41254	29.35	0.86099	7.00	38.45	11.50	40.61	Passed
Channel 189	836.6	24.10	7.50	1.40	1.60	31.40	1.38038	29.25	0.84140	7.00	38.45	11.50	40.61	Passed
Channel 251	848.8	24.00	7.50	1.40	1.60	31.30	1.34896	29.15	0.82224	7.00	38.45	11.50	40.61	Passed
GPRS-Modulation 1900MHz Band														
	ARFCN- Frequency (MHz)	Average power at Antenna Port (dBm)	Maximum declared Antenna Gain(dBi)	Path loss to external Antenna Port	Path loss to internal Antenna Port	EIRP in dBm	EIRP in Watt			FCC Limit(W), EIRP	FCC Limit (dBm), EIRP	ISED Limit(W), EIRP	ISED Limit (dBm), EIRP	Verdict
Channel 512	1850.2	24.70	8.00	2.00	2.30	32.40	1.73780	x	x	2.00	33.01	2.00	33.01	Passed
Channel 661	1880.2	25.20	8.00	2.00	2.30	32.90	1.94984	x	x	2.00	33.01	2.00	33.01	Passed
Channel 810	1909.8	25.00	8.00	2.00	2.30	32.70	1.86209	x	x	2.00	33.01	2.00	33.01	Passed
E-GPRS/EDGE Mode 1900MHz Band														
Channel 512	1850.2	23.00	8.00	2.00	2.30	30.70	1.17490	x	x	2.00	33.01	2.00	33.01	Passed
Channel 661	1880.2	23.30	8.00	2.00	2.30	31.00	1.25893	x	x	2.00	33.01	2.00	33.01	Passed
Channel 810	1909.8	23.10	8.00	2.00	2.30	30.80	1.20226	x	x	2.00	33.01	2.00	33.01	Passed
EIRP= Average Power at Antenna Port + Maximum declared Antenna Gain - Path loss to Antenna Connector - Path loss in Antenna Cable														
ERP = EIRP - 2.15														

4.1.5 Result external antenna

GPRS-Modulation 850MHz Band												
	ARFCN- Frequency (MHz)	Average power at Antenna Port (dBm)	Maximum declared Antenna Gain(dBi)	EIRP in dBm	EIRP in Watt	ERP in dBm	ERP in Watt	FCC Limit(W), ERP	FCC Limit (dBm), ERP	ISED Limit(W), EIRP	ISED Limit (dBm), EIRP	Verdict
Channel 128	824.2	23.40	4.70	28.10	0.64565	25.95	0.39355	7.00	38.45	11.50	40.61	Passed
Channel 189	836.6	23.40	4.70	28.10	0.64565	25.95	0.39355	7.00	38.45	11.50	40.61	Passed
Channel 251	848.8	23.50	4.70	28.20	0.66069	26.05	0.40272	7.00	38.45	11.50	40.61	Passed
CS1 1 slot												
E-GPRS/EDGE Mode 850MHz Band												
Channel 128	824.2	24.20	4.70	28.90	0.77625	26.75	0.47315	7.00	38.45	11.50	40.61	Passed
Channel 189	836.6	24.10	4.70	28.80	0.75858	26.65	0.46238	7.00	38.45	11.50	40.61	Passed
Channel 251	848.8	24.00	4.70	28.70	0.74131	26.55	0.45186	7.00	38.45	11.50	40.61	Passed
MCS5 1 slot												
GPRS-Modulation 1900MHz Band												
	ARFCN- Frequency (MHz)	Average power at Antenna Port (dBm)	Maximum declared Antenna Gain(dBi)	EIRP in dBm	EIRP in Watt			FCC Limit(W), EIRP	FCC Limit (dBm); EIRP	ISED Limit(W), EIRP	ISED Limit (dBm), EIRP	Verdict
Channel 512	1850.2	24.70	6.00	30.70	1.17490	x	x	2.00	33.01	2.00	33.01	Passed
Channel 661	1880.2	25.20	6.00	31.20	1.31826	x	x	2.00	33.01	2.00	33.01	Passed
Channel 810	1909.8	25.00	6.00	31.00	1.25893	x	x	2.00	33.01	2.00	33.01	Passed
CS1 1 slot												
E-GPRS/EDGE Mode 1900MHz Band												
Channel 512	1850.2	23.00	6.00	29.00	0.79433	x	x	2.00	33.01	2.00	33.01	Passed
Channel 661	1880.2	23.30	6.00	29.30	0.85114	x	x	2.00	33.01	2.00	33.01	Passed
Channel 810	1909.8	23.10	6.00	29.10	0.81283	x	x	2.00	33.01	2.00	33.01	Passed
MCS5 1 slot												
EIRP= Average Power at Antenna Port + Maximum declared Antenna Gain - Path loss to Antenna Connector - Path loss in Antenna Cable												
ERP = EIRP - 2.15												


4.2 Radiated field strength emissions below 30 MHz

4.2.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

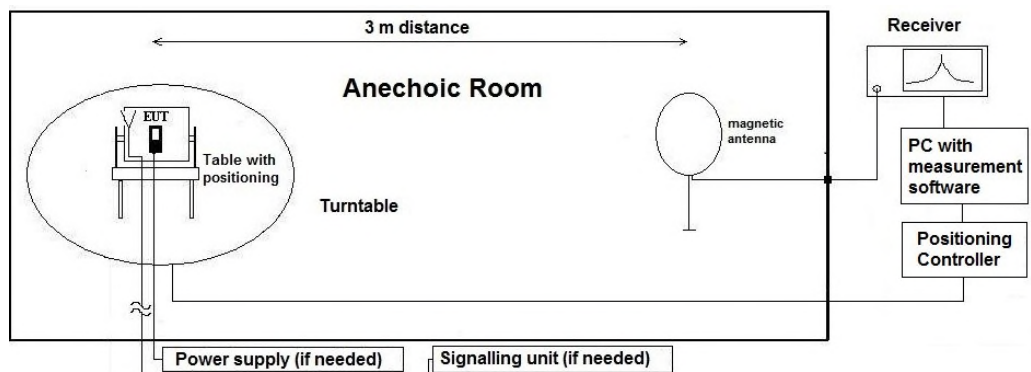

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 8)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.2.2 Sample calculation

Raw-Value [dBuV/m]	Antenna factor	Distance Correction [dB]	Cable Loss	Preamplifier	Resulting correction value [dB]	Final result [dBuV/m]	Remarks
19.83	18.9	-70.75	0.18	--	-51.67	-31.83	30 to 3 m correction used according ANSI C63.10-2013

Remark: This calculation is based on an example value at 458 kHz

4.2.3 Correction factors due to reduced meas. distance ($f < 30$ MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of $0.625 \times \text{Lambda}$. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < Dnear-field)	2nd Condition (Limit distance bigger dnear-field)	Distance Correction accord. Formula
kHz	9	33333.33	5305.17	300	fulfilled	not fulfilled	-80.00
	10	30000.00	4774.65		fulfilled	not fulfilled	-80.00
	20	15000.00	2387.33		fulfilled	not fulfilled	-80.00
	30	10000.00	1591.55		fulfilled	not fulfilled	-80.00
	40	7500.00	1193.66		fulfilled	not fulfilled	-80.00
	50	6000.00	954.93		fulfilled	not fulfilled	-80.00
	60	5000.00	795.78		fulfilled	not fulfilled	-80.00
	70	4285.71	682.09		fulfilled	not fulfilled	-80.00
	80	3750.00	596.83		fulfilled	not fulfilled	-80.00
	90	3333.33	530.52		fulfilled	not fulfilled	-80.00
	100	3000.00	477.47		fulfilled	not fulfilled	-80.00
	125	2400.00	381.97		fulfilled	not fulfilled	-80.00
	200	1500.00	238.73		fulfilled	fulfilled	-78.02
	300	1000.00	159.16		fulfilled	fulfilled	-74.49
	400	750.00	119.37		fulfilled	fulfilled	-72.00
	490	612.24	97.44		fulfilled	fulfilled	-70.23
	500	600.00	95.49	30	fulfilled	not fulfilled	-40.00
	600	500.00	79.58		fulfilled	not fulfilled	-40.00
	700	428.57	68.21		fulfilled	not fulfilled	-40.00
	800	375.00	59.68		fulfilled	not fulfilled	-40.00
	900	333.33	53.05		fulfilled	not fulfilled	-40.00
MHz	1.00	300.00	47.75		fulfilled	not fulfilled	-40.00
	1.59	188.50	30.00		fulfilled	not fulfilled	-40.00
	2.00	150.00	23.87		fulfilled	fulfilled	-38.02
	3.00	100.00	15.92		fulfilled	fulfilled	-34.49
	4.00	75.00	11.94		fulfilled	fulfilled	-32.00
	5.00	60.00	9.55		fulfilled	fulfilled	-30.06
	6.00	50.00	7.96		fulfilled	fulfilled	-28.47
	7.00	42.86	6.82		fulfilled	fulfilled	-27.13
	8.00	37.50	5.97		fulfilled	fulfilled	-25.97
	9.00	33.33	5.31		fulfilled	fulfilled	-24.95
	10.00	30.00	4.77		fulfilled	fulfilled	-24.04
	10.60	28.30	4.50		fulfilled	fulfilled	-23.53
	11.00	27.27	4.34		fulfilled	fulfilled	-23.21
	12.00	25.00	3.98		fulfilled	fulfilled	-22.45
	13.56	22.12	3.52		fulfilled	fulfilled	-21.39
	15.00	20.00	3.18		fulfilled	fulfilled	-20.51
	15.92	18.85	3.00		fulfilled	fulfilled	-20.00
	17.00	17.65	2.81		not fulfilled	fulfilled	-20.00
	18.00	16.67	2.65		not fulfilled	fulfilled	-20.00
	20.00	15.00	2.39		not fulfilled	fulfilled	-20.00
	21.00	14.29	2.27		not fulfilled	fulfilled	-20.00
	23.00	13.04	2.08		not fulfilled	fulfilled	-20.00
	25.00	12.00	1.91		not fulfilled	fulfilled	-20.00
	27.00	11.11	1.77		not fulfilled	fulfilled	-20.00
	29.00	10.34	1.65		not fulfilled	fulfilled	-20.00
	30.00	10.00	1.59		not fulfilled	fulfilled	-20.00

4.2.4 Measurement Location

Test site	120901 - SAC3 - Radiated Emission <1GHz
-----------	---

4.2.5 Limit

Radiated emissions limits, 3 meters					
Frequency Range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 - 30	30	29.5	30	Quasi peak	9

*Remark: In Canada same limits apply, just unit reference is different

4.2.6 Result

External antenna

Diagram	Band	Mode	Maximum Level [dB $\mu\text{V/m}$] Frequency Range 0.009 MHz – 30 MHz	Result
2.01a	850	Set Op 1	No peaks < 6 dB margin found	Passed
2.01b	850	Set Op 1	No peaks < 6 dB margin found	Passed
2.02a	1900	Set Op 2	No peaks < 6 dB margin found	Passed

Internal antenna

2.01a	850	Set Op 1	No peaks < 6 dB margin found	Passed
2.01b	850	Set Op 1	No peaks < 6 dB margin found	Passed
2.02a	1900	Set Op 2	No peaks < 6 dB margin found	Passed


Remark: for more information and graphical plot see annex 1 **23-1-0017601T026_TR1-A201-R03**

4.3 Radiated spurious emissions

4.3.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

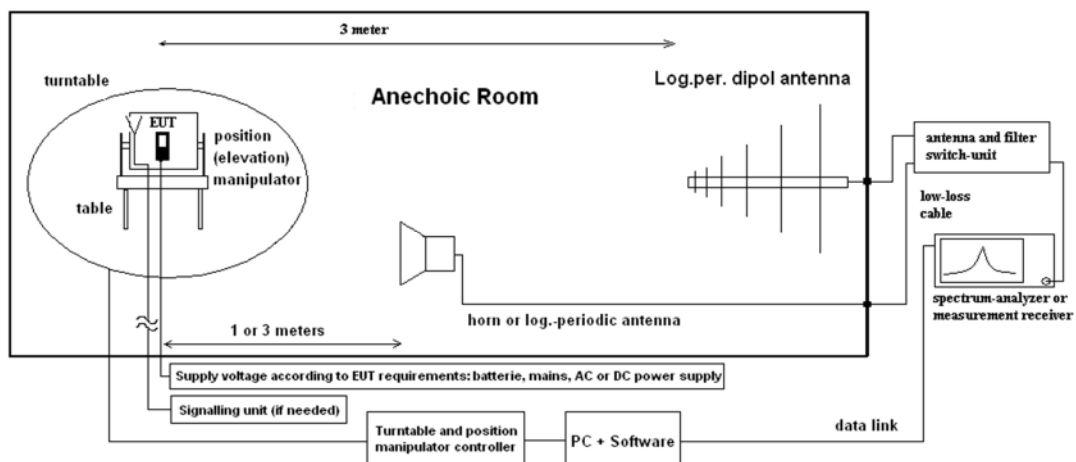

Testing method:

The measurement is made according to relevant reference clauses:

(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 8)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and it's characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

Formula:

$$P_{EIRP} = P_{MEAS} + C_L + FSL - G_{PreA} - G_{ANT} \quad (1)$$

P_{MEAS} = measured power at instrument

M = Margin

L_T = Limit

FSL = Free Space loss = Function(frequency, measurement distance)

$$M = L_T - P_{EIRP}$$

C_L = cable loss

G_{PreA} = Gain of pre-amplifier (if used)

G_{ANT} = Gain of antenna in [dBi]

All units are dB-units, positive margin means value is below limit.

4.3.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
-----------	------------------------------------

4.3.3 Limit

Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [MHz]
30 - 8500	-13	Peak	1 / 3
30 - 19100	-13	Peak	1 / 3

4.3.4 Result

External antenna

Diagram	Band	Mode	30 MHz to 1000 MHz	1 GHz to 2.8 GHz	2.8 GHz to 19.1 GHz	Result
8.01	GSM850	Set 2 Op 1	No peaks < 6 dB margin found	No peaks < 6 dB margin found	No peaks < 6 dB margin found	Passed
8.02	GSM1900	Set 2 Op 2	No peaks < 6 dB margin found	No peaks < 6 dB margin found	No peaks < 6 dB margin found	Passed
8.03	GSM1900	Set 2 Op 2	No peaks < 6 dB margin found	No peaks < 6 dB margin found	No peaks < 6 dB margin found	Passed

Internal antenna

Diagram	Band	Mode	30 MHz to 1000 MHz	1 GHz to 2.8 GHz	2.8 GHz to 19.1 GHz	Result
8.01	GSM850	Set 1 Op 1	No peaks < 6 dB margin found	No peaks < 6 dB margin found	No peaks < 6 dB margin found	Passed
8.02	GSM1900	Set 1 Op 2	No peaks < 6 dB margin found	No peaks < 6 dB margin found	No peaks < 6 dB margin found	Passed
8.03	GSM1900	Set 1 Op 2	No peaks < 6 dB margin found	No peaks < 6 dB margin found	No peaks < 6 dB margin found	Passed


Remark: for more information and graphical plot see annex 1 **23-1-0017601T026_TR1-A201-R03**

4.4 Radiated Band Edge

4.4.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT

Schematic:

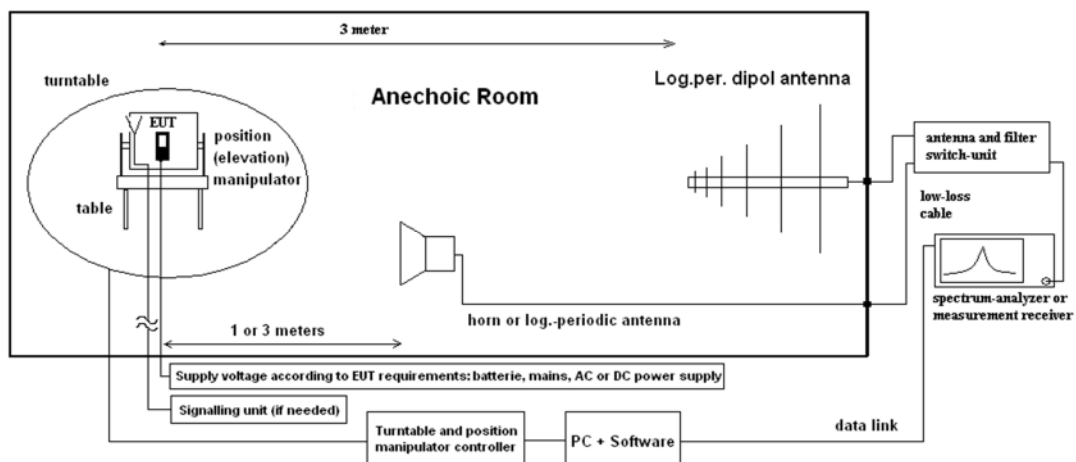

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 8)

See chapter Radiated Spurious Emission for Test method.

4.4.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
-----------	------------------------------------

4.4.3 Limit

Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [kHz]
Below 824 and above 849	-13	Peak	3 / 3
Below 1850 and above 1910	-13	Peak	3 / 3

4.4.4 Result

External antenna

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.01	GSM850	Set 2 Op 1	Low	-18.263	Passed
9.02	GSM850	Set 2 Op 1	High	-18.291	Passed
9.03	GSM1900	Set 2 Op 2	Low	-14.039	Passed
9.04	GSM1900	Set 2 Op 2	High	-17.882	Passed

Internal antenna

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.01	GSM850	Set 1 Op 1	Low	-13.545	Passed
9.02	GSM850	Set 1 Op 1	High	-14.247	Passed
9.03	GSM1900	Set 1 Op 2	Low	-14.492	Passed
9.04	GSM1900	Set 1 Op 2	High	-14.996	Passed

Remark: for more information and graphical plot see annex 1 **23-1-0017601T026_TR1-A201-R03**

4.5 Equipment lists

ID	Description	Manufacturer	SerNo	CheckType	Last Check	Interval	Next Check
	120901 - SAC3 - Radiated Emission <1GHz			calchk	cal: 2015-Jul-21	cal: 10Y	cal: 2025-Jul-21
20442	Semi Anechoic Chamber	ETS-Lindgren GmbH / Taufkirchen	without	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20482	filter matrix Filter matrix SAR 1	cetecom advanced GmbH / Essen	without	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20574	Biconilog Hybrid Antenna BTA-L	Frankonia GmbH / Heideck	980026L	cal	cal: 2022-Jun-15	cal: 36M	cal: 2025-Jun-15
20620	Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100362	cal	cal: 2024-May-15	cal: 12M	cal: 2025-May-15
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH / Memmingen	879824/13	cal	cal: 2022-Jul-04	cal: 36M	cal: 2025-Jul-04
	120904 - FAC1 - Radiated Emissions			chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20020	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	calchk	cal: 2021-Aug-17 chk: 2013-Apr-20	cal: 36M chk: 12M	cal: 2024-Aug-17
20066	Notch Filter WRCT 1900/2200-5/40-10EEK	Wainwright Instruments GmbH	5	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20121	Notch Filter WRCB 1879,5/1880,5EE	Wainwright Instruments GmbH	15	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20122	Notch Filter WRCB 1747/1748	Wainwright Instruments GmbH / Andechs	12	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20254	High Pass Filter 5HC 2600/12750-1.5KK	Trilithic	23042	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20290	Notch Filter WRCA 901,9/903,15S	Wainwright Instruments GmbH	3RR	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20291	High Pass Filter WHJ 2200-4EE	Wainwright Instruments GmbH	14	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH / Glotttetal	81650455	cal	cal: 2024-May-13	cal: 24M	cal: 2026-May-13
20448	Notch Filter WRCT 1850.0/2170.0-5/40-10SSK	Wainwright Instruments GmbH	5	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20449	Notch Filter WRCT 824.0/894.0-5/40-8SSK	Wainwright Instruments GmbH	1	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20489	Test Receiver ESU40	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100030	cal	cal: 2024-May-15	cal: 12M	cal: 2025-May-15
20512	Notch Filter WRCA 800/960-02/40-6EEK (GSM 850)	Wainwright Instruments GmbH	24	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20549	Log. Per. Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	calchk	cal: 2021-Aug-18	cal: 36M chk: 12M	cal: 2024-Aug-18
20558	Fully Anechoic Chamber 1	ETS-Lindgren GmbH / Taufkirchen	-	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20608	Ultrabroadband-Antenna HL562	Rohde & Schwarz Messgerätebau GmbH / Memmingen	830547/009	cal	cal: 2023-Jul-04	cal: 36M	cal: 2026-Jul-04
20611	Power Supply E3632A	Agilent Technologies Deutschland GmbH	KR 75305854	cpu			
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH / Memmingen	100302/026	cal	cal: 2023-May-25	cal: 24M	cal: 2025-May-25
20720	Measurement Software EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.xx	cnn	cal: - chk: -	cal: - chk: -	cal: - chk: -
20868	High Pass Filter AFH-07000	AtlanTecRF	16071300004	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20883	Open Switch and control Platform OSP-B200S2 Satellite	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101432	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20884	Open Switch and control Platform OSP320	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101391	chk	chk: 2023-Aug-22	chk: 12M	chk: 2024-Aug-22
20902	Radio Communication Tester CMU200	Rohde & Schwarz Messgerätebau GmbH / Memmingen	103083	cal	cal: 2023-May-24	cal: 12M	cal: 2025-May-24

Tools used in *P1M1*

4.5.1 Legend

Note / remarks	Interval of calibration & Verification
12M	12 months
24M	24 months
36M	36 months
10Y	10 Years

Abbreviation Check Type	Description
cnn	Calibration and verification not necessary
cal	Calibration

calchk	Calibration plus intermediate Verification
chk	Verification
cpu	Verification before usage

5 Results from external laboratory

None

-

6 Opinions and interpretations

None

-

7 List of abbreviations

None

-

8 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

Issue No.	Measurement type	Reference	Frequency range of measurement		Calculated Uncertainty based on confidence level of 95.54%	Remarks
			Start [MHz]	Stop [MHz]		
1	Magnetic Field Strength	EN ,FCC, JP, IC	0.009	30	4.86	Magnetic loop antenna, Pre-Amp on
2	RF-Output Power (EIRP) Unwanted emissions (EIRP) [dB]	EN, FCC, JP, IC	30	100	4.57	without Pre-Amp
			30	100	4.91	with Pre-Amp
			100	1000	4.02	without Pre-Amp
			100	1000	4.26	with Pre-Amp
			1000	18000	4.36	without Pre-Amp
			1000	18000	5.23	with Pre-Amp
			18000	33000	4.92	Schwarzbeck BBHA9170 (#20302) Antenna set-up non-waveguide antenna)
			33000	50000	4.17	Set-up for Q-Band (WR-22), non-wave guide antenna
			40000	60000	4.69	Set-up U-Band (WR-19), non-waveguide antenna
			50000	75000	4.06	External Mixer set-up V-Band (WR-15)
			75000	110000	4.17	External Mixer set-up W-Band (WR-6)
			90000	140000	5.49	External Mixer set-up F-Band (WR-8)
			140000	225000	6.22	External Mixer set-up G-Band (WR-5)
			225000	325000	7.04	External Mixer set-up (WR-3)
			325000	500000	8.84	External Mixer set-up (WR-2.2)
3	Radiated Blocking [dB]	EN	1000	18000	2.85	Typical set-up with microwave generator and antenna, value for 7 GHz calculated
			18000	33000	4.66	Typical set-up with microwave generator and antenna
			33000	50000	3.48	WR-22 set-up
			50000	75000	3.73	WR-15 set-up
			75000	110000	4.26	WR-6 set-up
4	Frequency Error / UWB+FMCW [kHz]	EN, FCC, JP, ISED	40000	77000	276.19	calculated for 77 GHz (FMCW) carrier
	Frequency Error / NFC [Hz]	EN, FCC, JP, ISED	6000	7000	33.92	calculated for 6.5 GHz UWB Ch.5
			11.00	14.00	20.76	calculated for 13.56 MHz NFC carrier
5	TS 8997 Conducted Parameters	FCC15/18 / ISED	30	6000	1.11	1. Power measurement with Fast-sampling-detector
			30	6000	1.20	2. Power measurement with Spectrum-Analyzer
			30	6000	1.20	3. Power Spectrum-Density measurement
			30	7500	1.20	4. Conducted Spurious emissions
			0.009	30	2.56	5. Conducted Spurious emissions
			2.4	2.48	1.95 ppm	6a. Bandwidth / 2-Marker Method for 2.4 GHz ISM
			5.18	5.825	7.180 ppm	6b. Bandwidth / 2-Marker Method for 5 GHz WLAN
			5.18	5.825	1.099 ppm	7. Frequency (Marker method) for 5 GHz WLAN
			30	6000	0.11561 µs	8. Medium-Utilization factor / Timing
			30	6000	1.85	9a. Blocking-Level of companion device
			30	6000	1.62	9b. Blocking Generator level
6	Conducted Emissions	EN, FCC	0.009	30	3.57	general EMI-measurements on AC/DC ports

9 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2024-Sep-17
R02	Correction of HVIN,PMN and FVIN	2024-Oct-02
R03	Correction of PMN and ISED-Regulations updated	2024-Oct-11
R04	Added chapter 4.1.4 with internal antenna results	2024-Oct-30

End of Test Report