

**Test Report No. 53S062852/EMC/05**  
dated 28 Nov 2006



**Note:** This report is issued subject to TÜV SÜD PSB Corporation's "Terms and Conditions Governing Technical Services". The terms and conditions governing the issue of this report are set out as attached within this report.

FORMAL REPORT ON TESTING IN ACCORDANCE WITH  
FCC Parts 15B & C : 2006  
OF A  
**SATELLITE BROADBAND COMMUNICATOR**  
[ Model : SABRE I ]  
[ FCC ID : QY9-SABRE1WE ]

**TEST FACILITY** TÜV SÜD PSB Corporation Pte Ltd,  
Telecoms & EMC, Testing Group,  
1 Science Park Drive, Singapore 118221

**FCC REG. NO.** 90937 (3m & 10m OATS)  
99142 (10m Anechoic Chamber)  
871638 (5m Anechoic Chamber)

IND. CANADA REG. NO. IC 4257 (3m and 10m Anechoic Chambers)

**PREPARED FOR** Mr Prabakar Kuttaniseeri  
Addvalue Communications Pte Ltd  
190 Changi Road  
#02-02 MDIS Building  
Singapore 419974

Tel : (65) 6342 5420 Fax : (65) 6342 5426

**QUOTATION NUMBER** 53Q0601508 & 56Q0601375

**JOB NUMBER** 53S062852 & 56S061092

**TEST PERIOD** 20 Oct 2006 – 04 Nov 2006 & 22 Nov 2006 - 25 Nov 2006

**PREPARED BY**

Paul

**APPROVED BY**

Quek Keng Huat  
Associate Engineer

---

Lim Cher Hwee  
Assistant Vice President



LA-2001-0212-A  
LA-2001-0213-F  
LA-2001-0214-E  
LA-2001-0215-B  
LA-2001-0216-G  
LA-2001-0217-G  
LA 2006 0255 C

The results reported herein have been performed in accordance with the laboratory's terms of accreditation under the Singapore Accreditation Council - Singapore Laboratory Accreditation Scheme. Tests/Calibrations marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our laboratory.

**Laboratory:**  
TÜV SÜD PSB Corporation Pte. Ltd.  
Testing Group  
No.1 Science Park Drive  
Singapore 118221

Phone : +65-6885 1333  
Fax : +65-6776 8670  
E-mail: testing@psbcorp.com  
www.psbcorp.com  
Co. Reg : 199002667R

Regional Head Office:  
TÜV SÜD Asia Pacific Pte. Ltd.  
3 Science Park Drive  
#04-01/05 The Franklin  
Singapore 118223

---

## TABLE OF CONTENTS

TEST SUMMARY

PRODUCT DESCRIPTION

SUPPORTING EQUIPMENT DESCRIPTION

EUT OPERATING CONDITIONS

CONDUCTED EMISSION TEST

RADIATED EMISSION TEST

CARRIER FREQUENCY SEPARATION TEST

SPECTRUM BANDWIDTH (20dB BANDWIDTH  
MEASUREMENT) TEST

NUMBER OF HOPPING FREQUENCIES TEST

AVERAGE FREQUENCY DWELL TIME TEST

MAXIMUM PEAK POWER TEST

RF CONDUCTED SPURIOUS EMISSIONS TEST

BAND EDGE COMPLIANCE (CONDUCTED) TEST

BAND EDGE COMPLIANCE (RADIATED) TEST

PEAK POWER SPECTRAL DENSITY TEST

MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST

DUTY CYCLE FACTOR COMPUTATION

ANNEX A - EUT PHOTOGRAPHS / DIAGRAMS

ANNEX B - FCC LABEL & POSITION

ANNEX C - USER MANUAL, TECHNICAL  
DESCRIPTION, BLOCK & CIRCUIT  
DIAGRAMS

## **TEST SUMMARY**

The product was tested in accordance with the customer's specifications.

### **Test Results Summary**

<b>Test Standard</b>	<b>Description</b>	<b>Pass / Fail</b>
FCC Part 15: 2006		
15.107(a), 15.207	Conducted Emissions	Pass
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)	Pass
15.247(a)(1)	Carrier Frequency Separation	Pass
	Spectrum Bandwidth (20dB Bandwidth Measurement)	Pass
15.247(a)(1)(iii)	Number of Hopping Frequencies	Pass
	Average Frequency Dwell Time	Pass
15.247(b)(1)	Maximum Peak Power	Pass
15.247(d)	RF Conducted Spurious Emissions	Pass
15.247(d)	Band Edge Compliance (Conducted)	Pass
15.247(d)	Band Edge Compliance (Radiated)	Pass
15.247(e)	Peak Power Spectral Density	Pass
1.1310	Maximum Permissible Exposure	Pass
15.35(c)	Duty Cycle Factor Computation	Refer to page 59 for details

---

## TEST SUMMARY

### Notes

1. Three channels as listed below, which respectively represent the lower, middle and upper channels of the Equipment Under Test (EUT) were chosen and tested. For each channel, the EUT was configured to operate in the test mode.

<u>Transmit Channel</u>	<u>Frequency (GHz)</u>
Channel 0	2.4020
Channel 39	2.4410
Channel 78	2.4800

2. All the measurements in section 15.247 were done based on conducted measurements.
3. The EUT is a Class B device when in non-transmitting state and meets the FCC Part15B Class B requirements.
4. All test measurement procedures are according to ANSI C63.4: 2003.

### Modifications

1. No modifications were made.

---

**PRODUCT DESCRIPTION**

Description : The Equipment Under Test (EUT) is a **Satellite Broadband Communicator**.

Manufacturer : Addvalue Communications Pte Ltd  
190 Changi Road  
#02-02 MDIS Building  
Singapore 419974

Model Number : Sabre I

FCC ID : QY9-SABRE1WE

Serial Number : Nil

Microprocessor : OMAP 5190, FPGA XC3S4000

Operating / Transmitting Frequency : Bluetooth  
2.402GHz - 2.480GHz

Satellite  
Uplink: 1.6265GHz - 1.6605GHz  
Downlink: 1.525GHz - 1.559GHz

GPS  
1.57542GHz

Clock / Oscillator Frequency : OMAP 5910  
30MHz, 60MHz, 120MHz

FPGA XC3S4000  
9.6768MHz, 24.192MHz, 38.192MHz

Modulation : Bluetooth  
Gaussian Frequency Shift Keying (GFSK)

Satellite  
Pi/4 QPSK (transmit)  
Pi/4 QPSK and 16-QAM (receive)

GPS  
BPSK

Port / Connectors : Refer to manufacturer's user manual / operating manual.

Rated Input Power : 100VAC - 240VAC 50/60Hz

Accessories : Coded Analogue Phone  
M/N: SB1/AH100 S/N: Nil

**SUPPORTING EQUIPMENT DESCRIPTION**

<b>Equipment Description (Including Brand Name)</b>	<b>Model, Serial &amp; FCC ID Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
Dell Notebook	M/N: PP10L S/N: 24746315248 FCC ID: DoC	Nil
Dell AC/DC Adapter	M/N: PA-1650-05D2 S/N: Nil FCC ID: Verification	0.5m unshielded DC power cable with ferrite loaded 2.00m unshielded AC power cable
Panasonic Telephone	M/N: KX-TS3MXR S/N: 2GAFC179179 FCC ID: Nil	1.0m unshielded telephone line
DVE AC/DC Adapter (EUT AC/DC Adapter)	M/N: DSA-0412S-14 242 S/N: Nil FCC ID: DoC	2.0m unshielded DC power cable with ferrite loaded 1.5m unshielded AC power cable

## EUT OPERATING CONDITIONS

FCC Part 15
<ol style="list-style-type: none"><li>1. Conducted Emissions</li><li>2. Radiated Emissions (Spurious Emissions inclusive Restricted Bands Requirement)</li><li>3. Spectrum Bandwidth (20dB Bandwidth Measurement)</li><li>4. Maximum Peak Power</li><li>5. RF Conducted Spurious Emissions</li><li>6. Peak Power Spectral Density</li><li>7. Maximum Permissible Exposure</li><li>8. Duty Cycle Factor Computation</li></ol>
<p>The EUT was exercised by operating in maximum continuous transmission with frequency hopping off, i.e transmitting at lower, middle and upper channels respectively at one time. The Bluetooth continuous transmission was simulated by activating the client's provided test program, "BlueTest" (Bluetooth).</p> <p>For conducted and radiated emissions, the following operations were activated as well:</p> <ol style="list-style-type: none"><li>a. The corded analogue phone was in communicating with the satellite broadband communicator during the Bluetooth transmission.</li><li>b. The satellite communicator was in transmission simultaneously with the Bluetooth transmission.</li><li>c. The continuous GPS reception.</li></ol>
FCC Part 15
<ol style="list-style-type: none"><li>1. Carrier Frequency Separation</li><li>2. Number of Hopping Frequencies</li><li>3. Average Frequency Dwell Time</li><li>4. Band Edge Compliance (Conducted)</li><li>5. Band Edge Compliance (Radiated)</li></ol>
<p>The EUT was exercised by operating in maximum continuous transmission with frequency hopping on. The Bluetooth continuous transmission was simulated by activating the client's provided test program, "BlueTest" (Bluetooth).</p>

### CONDUCTED EMISSION TEST

#### FCC Parts 15.107(a) and 15.207 Conducted Emission Limits

Frequency Range (MHz)	Limit Values (dB $\mu$ V)	
	Quasi-peak (QP)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\* Decreasing linearly with the logarithm of the frequency

#### FCC Parts 15.107(a) and 15.207 Conducted Emission Test Instrumentation

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver – ESI1	ESI40	100010	04 Aug 2007
R&S Pulse Limiter – PL2	ESH3-Z2	100347	15 Apr 2007
EMCO LISN – LISN3 (supporting)	3850/2	9903-1075	15 May 2007
Schaffner LISN – LISN7 (for EUT)	NNB42	00008	15 May 2007

## CONDUCTED EMISSION TEST

### FCC Parts 15.107(a) and 15.207 Conducted Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a  $50\Omega/50\mu\text{H}$  EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another LISN.

### FCC Parts 15.107(a) and 15.207 Conducted Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz. Both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line.

### Sample Calculation Example

At 20 MHz

Q-P limit (Class B) =  $1000 \mu\text{V} = 60.0 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB

Q-P reading obtained directly from EMI Receiver =  $40.0 \text{ dB}\mu\text{V}$   
(Calibrated for system losses)

Therefore, Q-P margin =  $40.0 - 60.0 = -20.0$

i.e. **20.0 dB below Q-P limit**

---

**CONDUCTED EMISSION TEST**



**Conducted Emissions Test Setup (Front View)**



**Conducted Emissions Test Setup (Rear View)**

## CONDUCTED EMISSION TEST

### FCC Parts 15.107(a) Conducted Emission Results

Operating Mode	GPS	Temperature	23°C
Test Input Power	110V 60Hz	Relative Humidity	58%
Line Under Test	AC Mains	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

Frequency (MHz)	Q-P Value (dB $\mu$ V)	Q-P Margin (dB)	AV Value (dB $\mu$ V)	AV Margin (dB)	Line
0.3812	28.8	-29.5	27.5	-20.8	Live
0.5077	27.9	-28.1	27.2	-18.8	Live
1.9534	30.2	-25.8	29.4	-16.6	Neutral
2.7882	28.2	-27.8	24.2	-21.8	Neutral
3.1658	28.6	-27.4	26.9	-19.1	Neutral
18.1488	41.3	-18.7	40.4	-9.6	Live

### Notes

1. All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
9kHz - 30MHz  
RBW: 10kHz VBW: 30kHz
4. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 2.4$ dB.

**CONDUCTED EMISSION TEST**

**FCC Parts 15.107(a) and 15.207 Conducted Emission Results**

Operating Mode	Bluetooth & Satellite	Temperature	23°C
Test Input Power	110V 60Hz	Relative Humidity	58%
Line Under Test	AC Mains	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

Frequency (MHz)	Q-P Value (dB $\mu$ V)	Q-P Margin (dB)	AV Value (dB $\mu$ V)	AV Margin (dB)	Line	Channel (BT / Sat)
0.1888	46.7	-17.4	33.4	-20.7	Neutral	78 / Upper
0.2506	40.1	-21.7	31.1	-20.7	Neutral	78 / Upper
1.5627	34.6	-21.5	34.4	-11.7	Live	78 / Upper
2.4367	38.7	-17.3	34.9	-11.1	Live	78 / Upper
2.9996	42.0	-14.0	32.3	-13.7	Live	78 / Upper
3.4362	34.7	-21.3	33.6	-12.4	Live	78 / Upper

Notes

1. All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. Both Bluetooth and satellite communications were exercised simultaneously as it was found to be the worst case operating condition (transmission mode).
3. The upper channel frequency of the satellite transmission is 1.66033GHz
4. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
5. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
9kHz - 30MHz  
RBW: 10kHz VBW: 30kHz
6. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 2.4$ dB.

**RADIATED EMISSION TEST**

**FCC Part 15.205 Restricted Bands**

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			

**FCC Parts 15.109(a) and 15.209 Radiated Emission Limits**

<b>Frequency Range (MHz)</b>	<b>Quasi-Peak Limit Values (dB<math>\mu</math>V/m) @ 3m</b>
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
Above 960	54.0*

\* Above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

**FCC Parts 15.109(a) and 15.209 Radiated Emission Test Instrumentation**

<b>Instrument</b>	<b>Model</b>	<b>S/No</b>	<b>Cal Due Date</b>
R&S Test Receiver (20Hz -26.5GHz) – ESMI1	ESMI	849182/003 848926/007	04 Jul 2007
Agilent Preamplifier (0.01-4GHz) – PA6	87405B	10003	12 Jan 2007
Schaffner Bilog Antenna –BL4	CBL6112B	2593	12 May 2007
EMCO Horn Antenna – H14	3115	0003-6087	19 May 2007
Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2007

## RADIATED EMISSION TEST

### FCC Parts 15.109(a) and 15.209 Radiated Emission Test Setup

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

### FCC Parts 15.109(a) and 15.209 Radiated Emission Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which attitude and equipment arrangement produces such emissions.
3. The test was carried out at the selected frequency points obtained from the prescan in step 2. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
4. A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point that above 1GHz, both Peak and Average measurements were carried out.
5. Steps 3 and 4 were repeated for the next frequency point, until all selected frequency points were measured.
6. The frequency range covered was from 30MHz to 10<sup>th</sup> harmonics of the EUT fundamental frequency, using the Bi-log antenna for frequencies from 30MHz up to 3GHz, and the Horn antenna above 3GHz.

### Sample Calculation Example

At 300 MHz

Q-P limit (Class B) = 200  $\mu$ V/m = 46.0 dB $\mu$ V/m

Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB $\mu$ V/m  
(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 40.0 - 46.0 = -6.0


i.e. **6 dB below Q-P limit**

---

**RADIATED EMISSION TEST**



**Radiated Emissions Test Setup (Front View)**

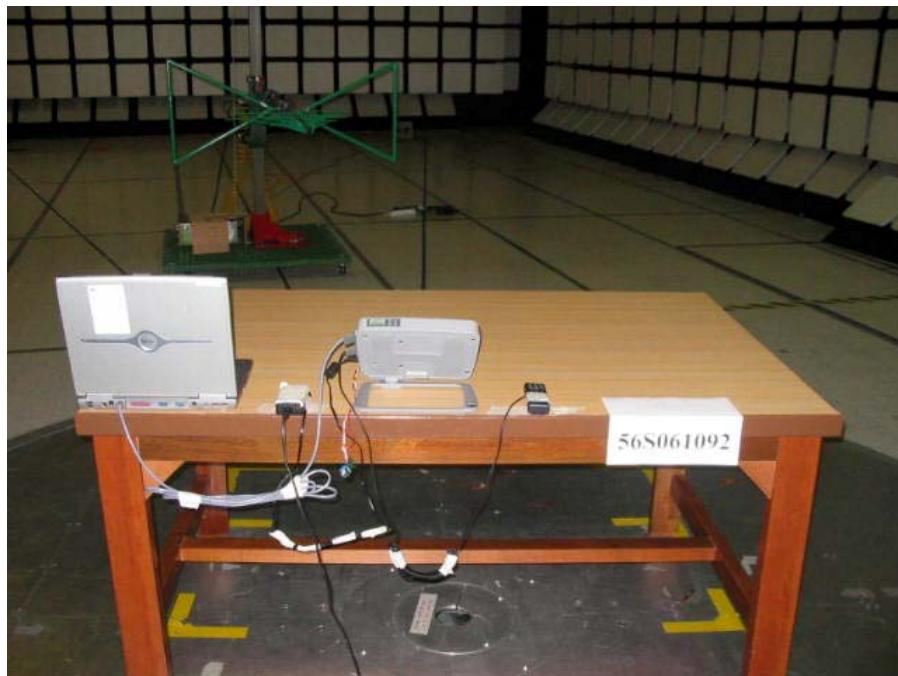

**Radiated Emissions Test Setup (Rear View)**

## RADIATED EMISSION TEST

### FCC Parts 15.109(a) Radiated Emission Results

Operating Mode	GPS	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	57%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Lucas Beh

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB $\mu$ V/m)	Q-P Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)
99.2330	27.0	-16.5	336	100	V
174.9611	38.0	-5.6	148	114	H
199.9894	31.4	-12.2	52	103	V
249.9676	38.5	-7.5	21	100	H
332.8000	34.9	-11.1	274	122	H
366.0730	31.6	-14.4	254	100	H

### Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "–ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
 RBW: 120kHz                    VBW: 1MHz  
>1GHz  
 RBW: 1MHz                    VBW: 1MHz
4. Radiated Emissions Measurement Uncertainty  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25.0GHz (QP only @ 3m & 10m) is  $\pm 4.3$ dB (for EUTs < 0.5m X 0.5m X 0.5m).

## RADIATED EMISSION TEST

### FCC Parts 15.109(a), 15.205 and 15.209 Radiated Emission Results

Operating Mode	Bluetooth & Satellite	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	57%
Test Distance	3m	Atmospheric Pressure	1030mbar
		Tested By	Lucas Beh

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dB $\mu$ V/m)	Q-P Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarisation (H/V)	Channel
33.2700	24.4	-15.6	143	100	V	0
66.1201	23.3	-16.7	79	100	V	0
99.9001	32.8	-10.7	147	100	V	0
124.4200	28.3	-15.2	161	100	V	0
166.4601	13.9	-29.6	115	100	V	0
951.1800	37.5	-8.5	359	100	V	0

Spurious Emissions above 1GHz

Frequency (GHz)	Peak Value (dB $\mu$ V/m)	Average Value (dB $\mu$ V/m) *See Note 3	Average Margin (dB) *See Note 4	Azimuth (Degree)	Height (cm)	Pol (H/V)	Channel
1.4160	43.3	-	-10.7	60	100	V	0
4.8041	49.7	-	-4.3	48	100	V	0
4.8823	46.5	-	-7.5	62	100	V	39
4.9604	48.4	-	-5.6	76	100	V	78
7.2058	52.9	-	-1.1	58	100	V	0
7.3231	51.2	-	-2.8	61	100	V	39
7.4400	51.0	-	-3.0	65	100	V	78
9.6082	53.0	-	-2.0	45	100	V	0
9.7641	50.6	-	-3.4	67	100	V	39
9.9200	50.1	-	-3.9	78	100	V	78

### Notes

1. All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. No inter-harmonic emissions were found when Bluetooth and Satellite were transmitted simultaneously.
3. As the measured peak shows compliance to the average limit, as such no average measurement was required.
4. The average margin indicates the margin of the measured peak value below the average limit.
5. “--” indicates no emissions were found and shows compliance to the limits.

---

**RADIATED EMISSION TEST**

6. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
7. EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings:  
30MHz - 1GHz  
RBW: 120kHz      VBW: 1MHz  
>1GHz  
RBW: 1MHz      VBW: 1MHz
8. The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33(a) for intentional radiators & Section 15.33(b) for unintentional radiators.
9. The channel in the table refers to the transmit channel of the EUT.
10. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 30MHz – 25GHz (QP only @ 3m & 10m) is  $\pm 4.3\text{dB}$  (for EUTs  $< 0.5\text{m} \times 0.5\text{m} \times 0.5\text{m}$ ).

## **CARRIER FREQUENCY SEPARATION TEST**

### **FCC Part 15.247(a)(1) Carrier Frequency Separation Limits**

The EUT shows compliance to the requirements of this section, which states the adjacent carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, the EUT may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW (21dBm).

### **FCC Part 15.247(a)(1) Carrier Frequency Separation Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007

### **FCC Part 15.247(a)(1) Carrier Frequency Separation Test Setup**


1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 100kHz.
5. All other supporting equipment were powered separately from another filtered mains.

### **FCC Part 15.247(a)(1) Carrier Frequency Separation Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.4000GHz and 2.4050GHz.
3. The spectrum analyser was set to max hold to capture the two adjacent transmitting frequencies within the span. The signal capturing was continuous until no further signals were detected.
4. The carrier frequency separation of the two adjacent transmitting / operating frequency was measured by finding the carrier frequency difference between the two adjacent channels.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.4385GHz to 2.4435GHz
  - b. 2.4400GHz to 2.4430GHz
  - c. 2.4780GHz to 2.4810GHz



## CARRIER FREQUENCY SEPARATION TEST

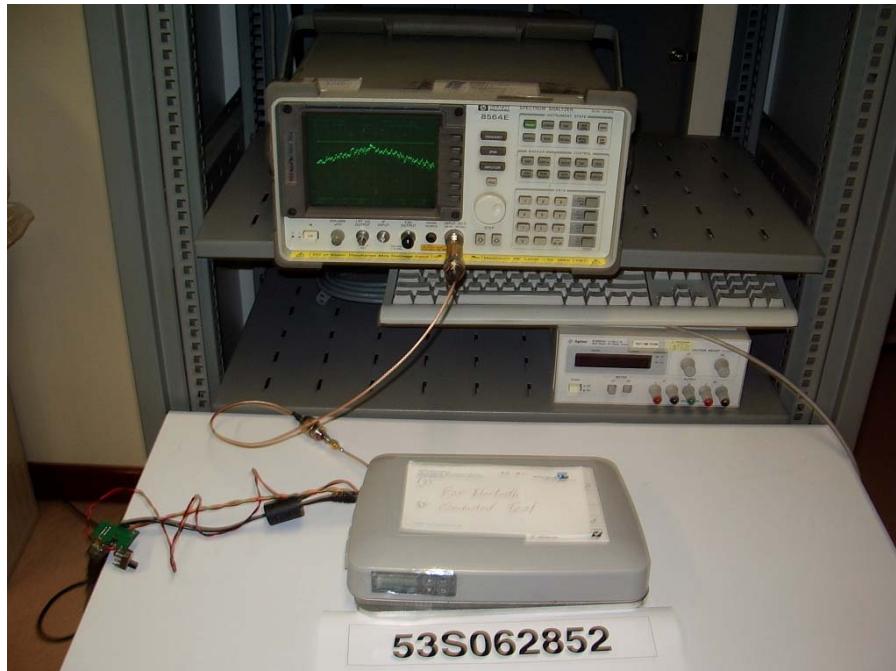

## Carrier Frequency Separation Test Setup

## FCC Part 15.247(a)(1) Carrier Frequency Separation Results


Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	59%
Attached Plots	1 - 3	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

Adjacent Channels	Channel Separation (MHz)
0 and 1 (2.402GHz and 2.403GHz)	1.000
38 and 39 (2.440GHz and 2.441Hz)	1.042
77 and 78 (2.479GHz and 2.480GHz)	1.025




## CARRIER FREQUENCY SEPARATION TEST

## Carrier Frequency Separation Plots

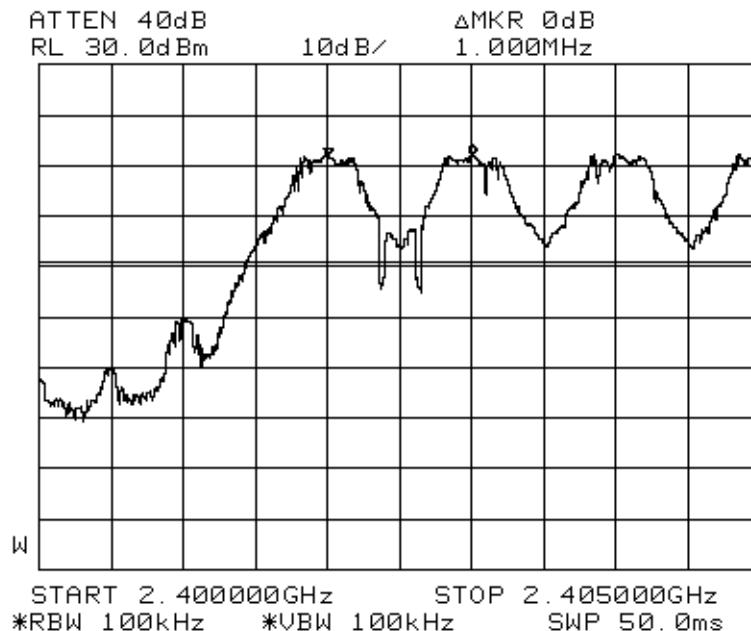


### Plot 1 - Channels 0 and 1 Separation

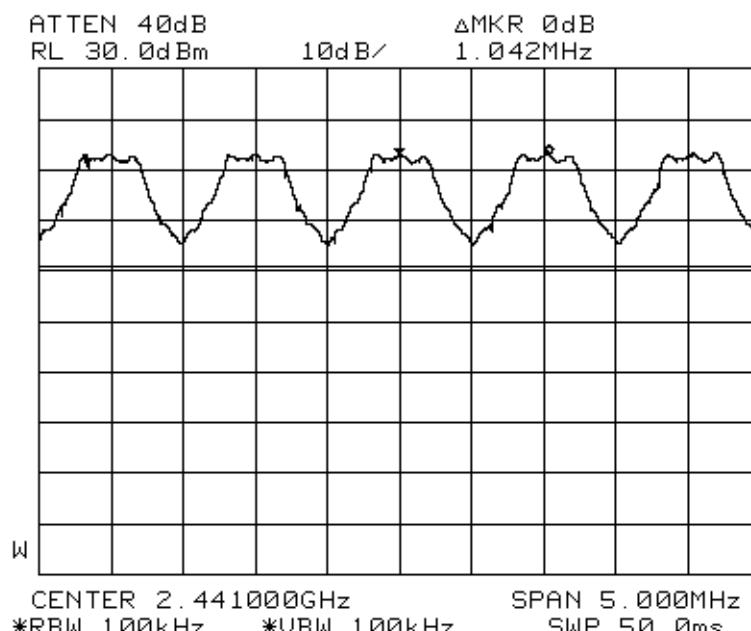

### Plot 2 – Channels 38 and 39 Separation

**CARRIER FREQUENCY SEPARATION TEST**

**Carrier Frequency Separation Plots**

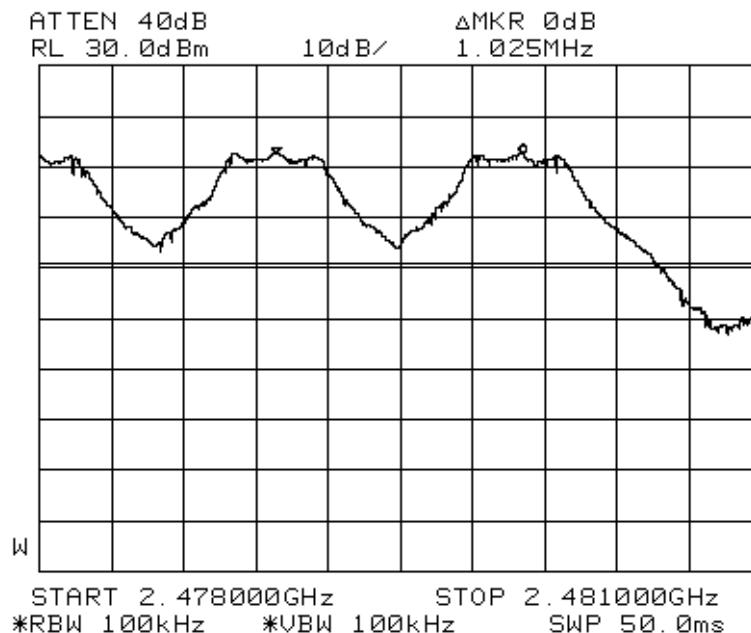

**Plot 3 - Channels 77 and 78 Separation**

### **SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

#### **FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Limits**

The EUT shows compliance to the requirements of this section, which states that the 20dB bandwidth of the hopping channel shall be the channel frequency separation by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

#### **FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007


#### **FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 10kHz and 30kHz
5. All other supporting equipment were powered separately from another filtered mains.

#### **FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 20dB bandwidth of the transmitting frequency.
3. The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
4. The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 20dB peak frequency at lower ( $f_L$ ) and upper ( $f_H$ ) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
5. The 20dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies,  $| f_H - f_L |$ .
6. The steps 2 to 5 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

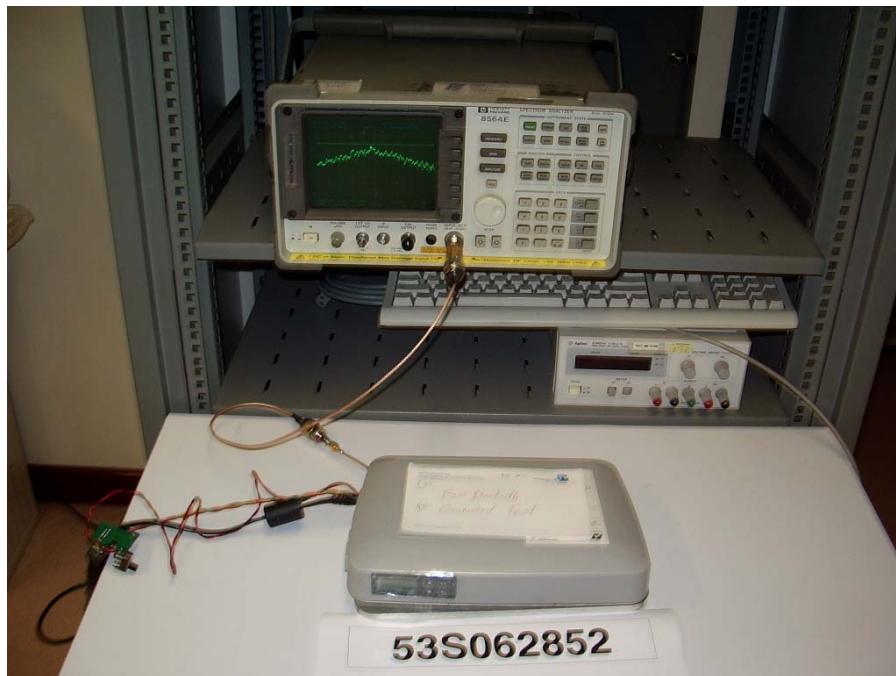

**Spectrum Bandwidth (20dB Bandwidth Measurement) Test Setup**


**FCC Part 15.247(a)(1) Spectrum Bandwidth (20dB Bandwidth Measurement) Results**

Operating Mode	Bluetooth	Temperature	24?°C
Test Input Power	110V 60Hz	Relative Humidity	59%
Attached Plots	4 - 6	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia


Channel	Channel Frequency (GHz)	20dB Bandwidth (MHz)
0	2.402	0.690
39	2.441	0.595
78	2.480	0.730

**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots**

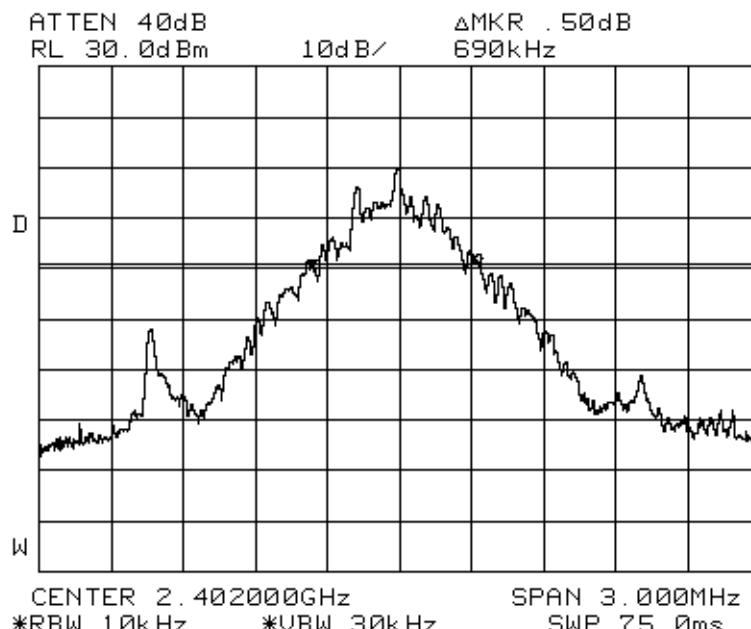


**Plot 4 – Channel 0**

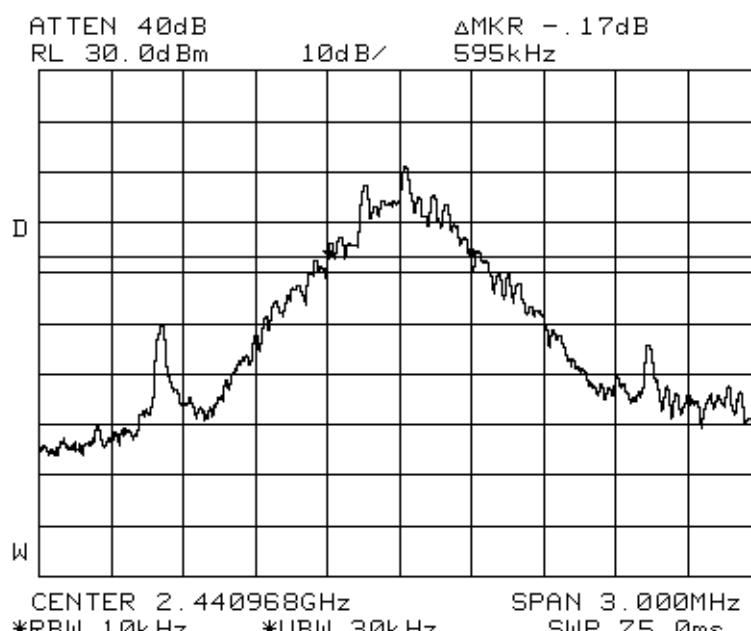

**Plot 5 – Channel 39**

**SPECTRUM BANDWIDTH (20dB BANDWIDTH MEASUREMENT) TEST**

**Spectrum Bandwidth (20dB Bandwidth Measurement) Plots**

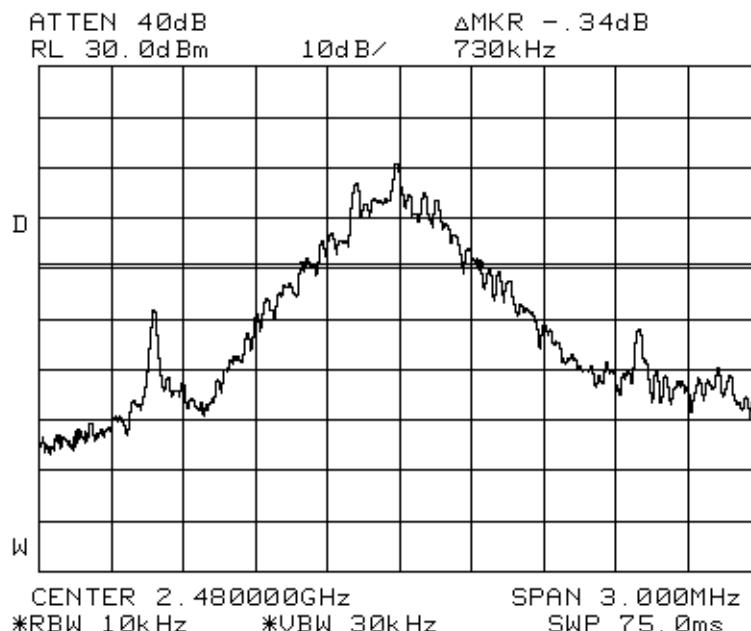

**Plot 6 – Channel 78**

## **NUMBER OF HOPPING FREQUENCIES TEST**

### **FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Limits**

The EUT shows compliance to the requirements of this section, which states the EUT shall use at least 15 channels.

### **FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007


### **FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 300kHz and 1MHz.
5. All other supporting equipment were powered separately from another filtered mains.

### **FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The start and stop frequencies of the spectrum analyser were set to 2.39700GHz and 2.42213GHz.
3. The spectrum analyser was set to max hold to capture all the transmitting frequencies within the span. The signal capturing was continuous until all the transmitting frequencies were captured and no further signals were detected.
4. The numbers of transmitting frequencies were counted and recorded.
5. The steps 2 to 4 were repeated with the following start and stop frequencies settings:
  - a. 2.42117GHz to 2.44100GHz
  - b. 2.44054GHz to 2.46100GHz
  - c. 2.46039GHz to 2.48350GHz
6. The total number of hopping frequencies is the sum of the number of the hopping frequencies found for each span.

**NUMBER OF HOPPING FREQUENCIES TEST**

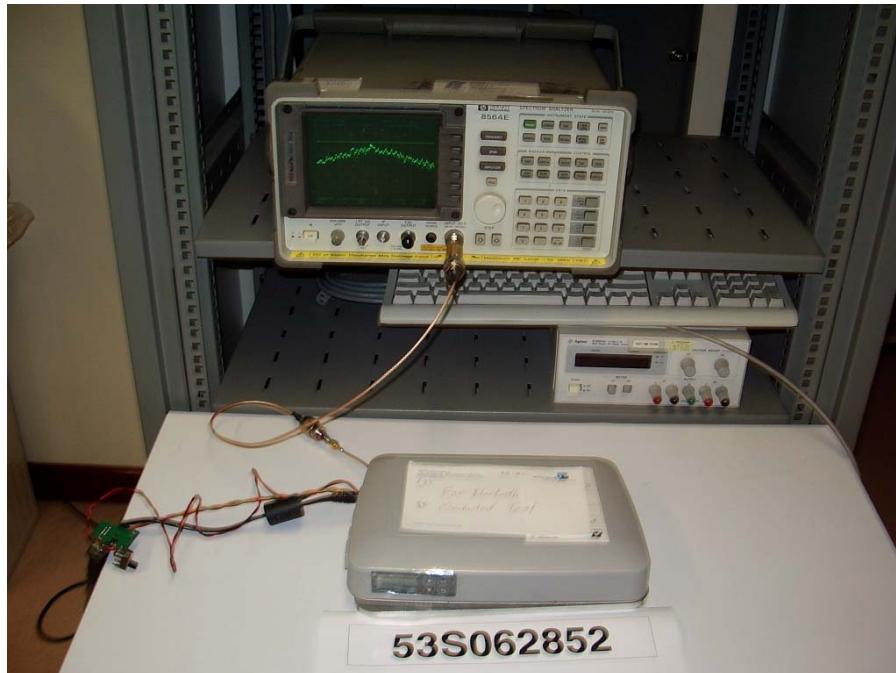

Number of Hopping Frequencies Test Setup

**FCC Part 15.247(a)(1)(iii) Number of Hopping Frequencies Results**


Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	59%
Attached Plots	7 - 10	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

The EUT was found to have 79 hopping frequencies. Please refer to the attached plots.




## NUMBER OF HOPPING FREQUENCIES TEST

## Number Of Hopping Frequencies Plots

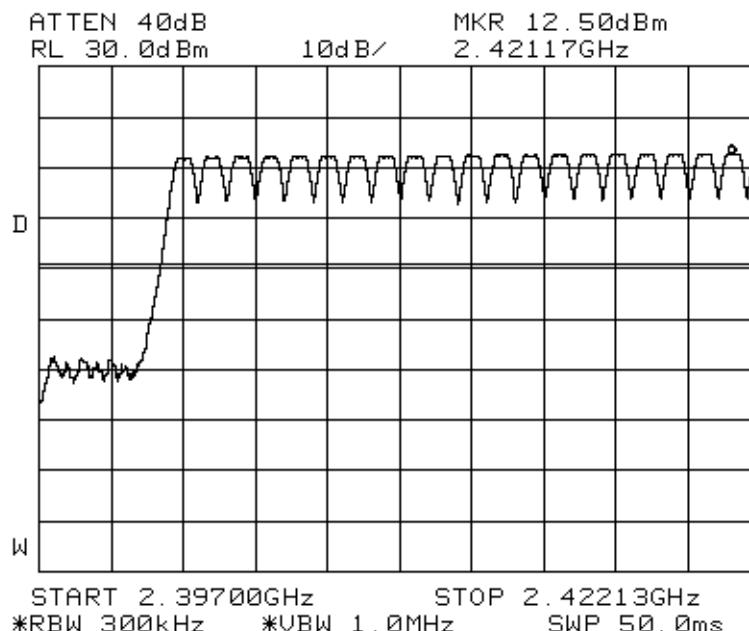

## Plot 7 - Channels 0 to 19

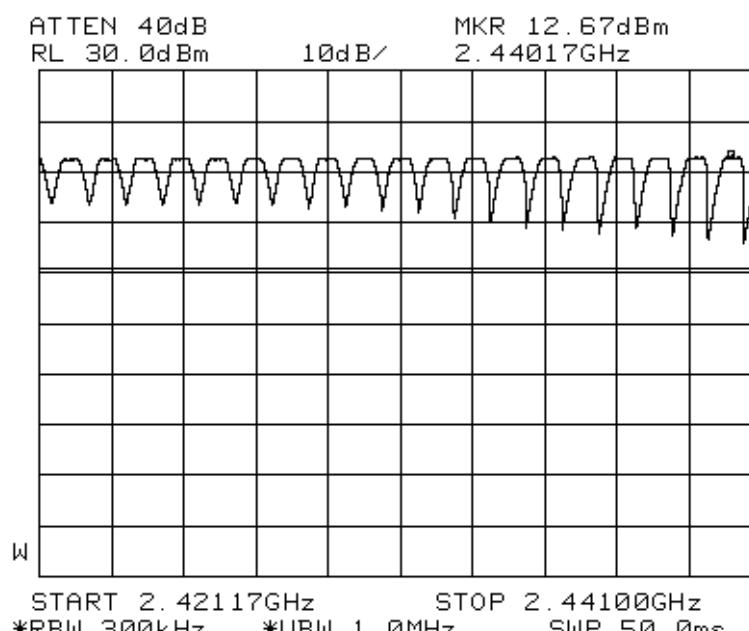


### Plot 8 - Channels 20 to 38




## NUMBER OF HOPPING FREQUENCIES TEST

## Number Of Hopping Frequencies Plots

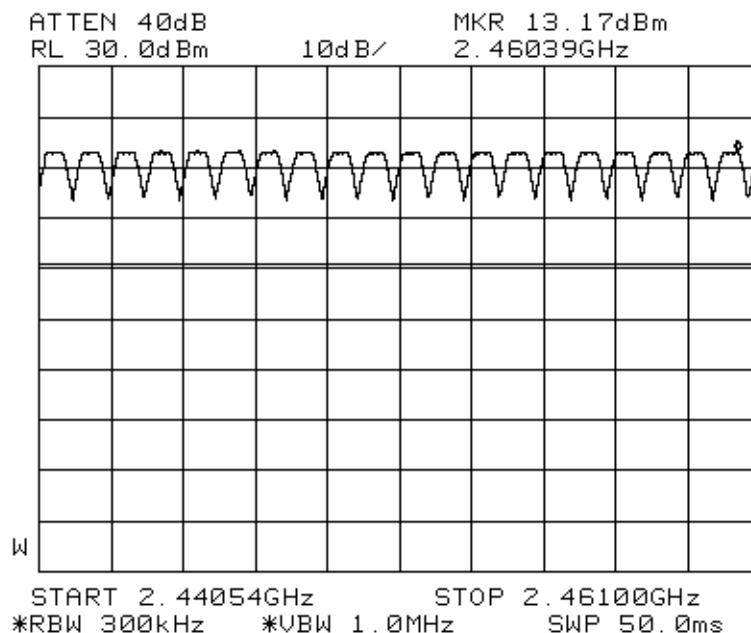

## Plot 9 - Channels 39 to 58

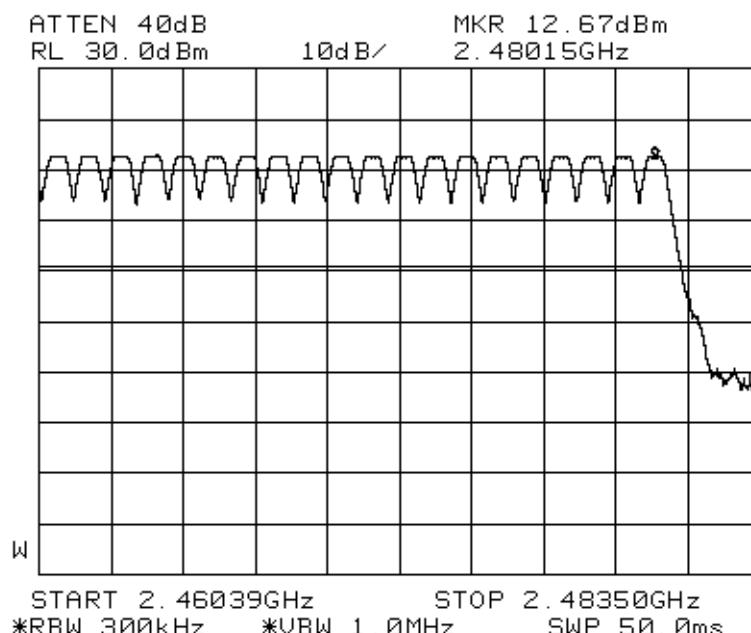

## Plot 10 - Channels 59 to 78

## **AVERAGE FREQUENCY DWELL TIME TEST**

### **FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Limits**

The EUT shows compliance to the requirements of this section, which states the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### **FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007

### **FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Setup**


1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 1MHz and 3MHz
5. All other supporting equipment were powered separately from another filtered mains.

### **FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The center frequency of the spectrum analyser was set to 2.402GHz with zero frequency span (spectrum analyser acts as an oscilloscope).
3. The sweep time of the spectrum analyser was adjusted until a stable signal can be seen on the spectrum analyser.
4. The duration (dwell time) of a packet was measured using the marker-delta function of the spectrum analyser. The average dwell time of the transmitting frequency was computed based on general expression as shown below:  
Average Frequency Dwell Time = [ measured time slot length x hopping rate / number of hopping channels] x [ 0.4 x number of hopping channels ]
5. The steps 2 to 4 were repeated with the center frequency of the spectrum analyser were set to 2.441GHz and 2.480GHz respectively.

---

**AVERAGE FREQUENCY DWELL TIME TEST**

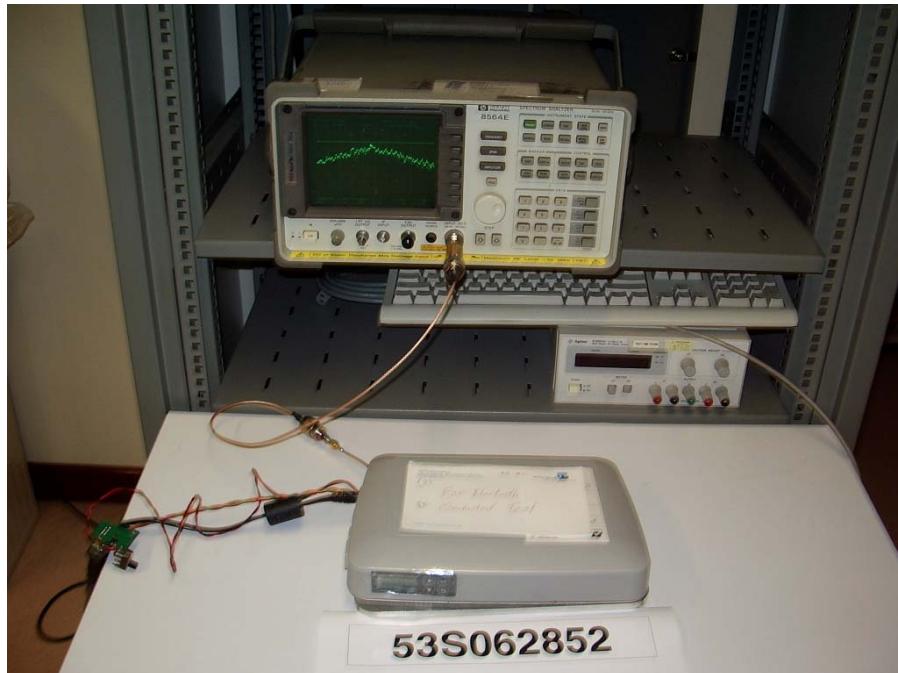

**Average Frequency Dwell Time Test Setup**

### AVERAGE FREQUENCY DWELL TIME TEST

#### FCC Part 15.247(a)(1)(iii) Average Frequency Dwell Time Results

Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	59%
Attached Plots	11 - 13	Atmospheric Pressure	1030mbar
Hopping Rate	1600 hops / s	Tested By	Johnsen Tia
Number of Hopping Channels	79 channels		

Channel	Channel Frequency (GHz)	Average Frequency Dwell Time (s)	Average Occupancy Limit (s)
0	2.402	0.201072	0.4
39	2.441	0.200000	0.4
78	2.480	0.200000	0.4


#### Notes

1. The EUT operates based on 1-slot transmission and 1-slot reception basis. As such, there are [  $1600 / (1 + 1)$  ] transmissions per second and the time occupancy per channel is [ measured time slot length / 2 ].
2. Average Frequency Dwell Time = [ measured time slot length / 2 x hopping rate / 2 / number of hopping channels] x [ 0.4 x number of hopping channels ]




## AVERAGE FREQUENCY DWELL TIME TEST

## Average Frequency Dwell Time Plots

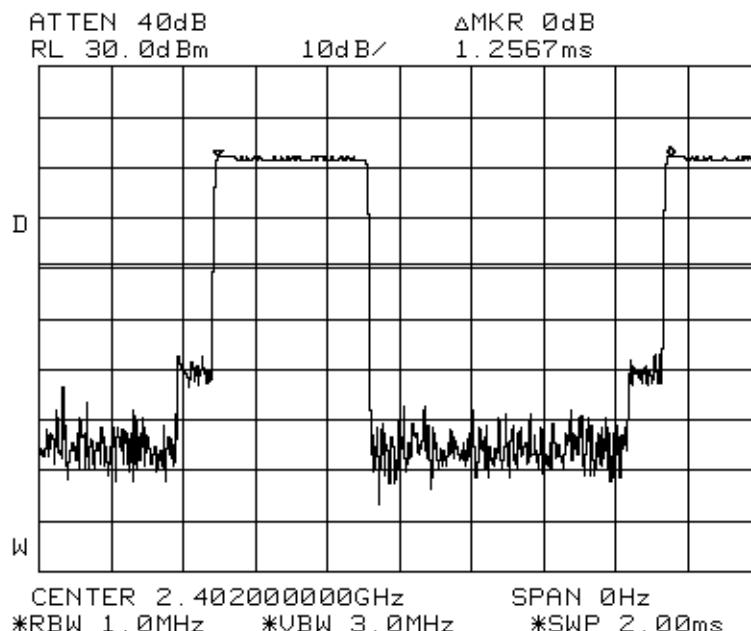


### Plot 11 – Channel 0

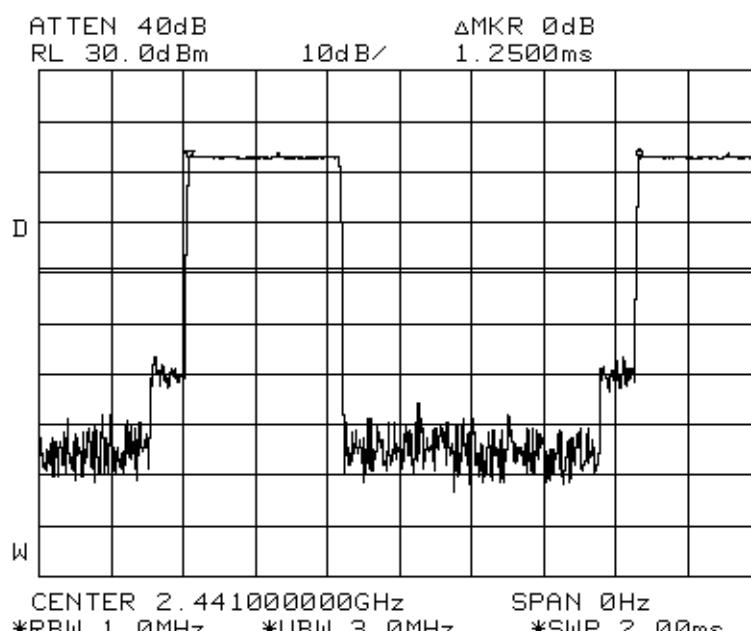

### Plot 12 – Channel 39

**AVERAGE FREQUENCY DWELL TIME TEST**

**Average Frequency Dwell Time Plots**

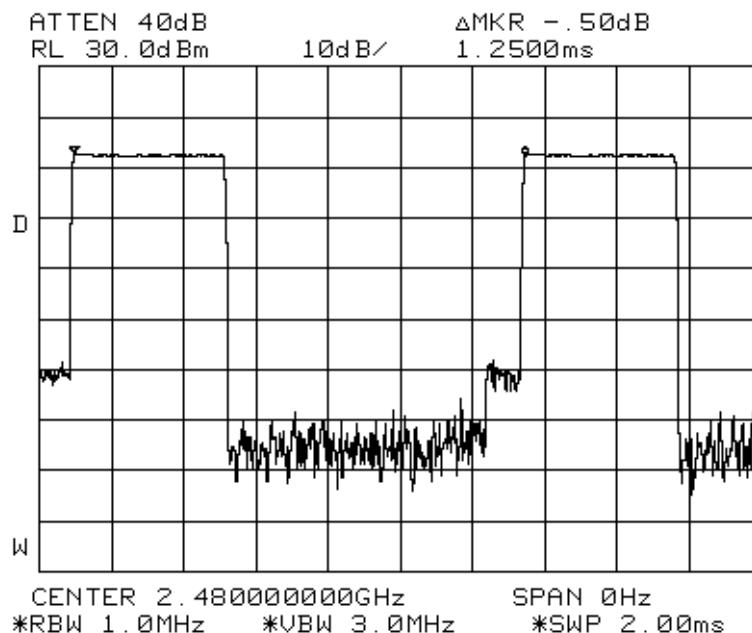

**Plot 13 – Channel 78**

---

## **MAXIMUM PEAK POWER TEST**

### **FCC Part 15.247(b)(1) Maximum Peak Power Limits**

The EUT shows compliance to the requirements of this section, which states the EUT employing at least 75 non-overlapping hopping channels shall not exceed 1W (30dBm). For the EUT employs other frequency hopping systems, the peak power shall not greater than 0.125W (21dBm).

### **FCC Part 15.247(b)(1) Maximum Peak Power Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
R&S Universal Communication Tester	CMU	837728/071	04 Mar 2007


### **FCC Part 15.247(b)(1) Maximum Peak Power Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the Universal Radio Communication Tester, which set into power analyser mode via a low-loss coaxial cable.
4. All other supporting equipment were powered separately from another filtered mains.

### **FCC Part 15.247(b)(1) Maximum Peak Power Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The maximum peak power of the transmitting frequency was detected and recorded.
3. The step 2 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**MAXIMUM PEAK POWER TEST**

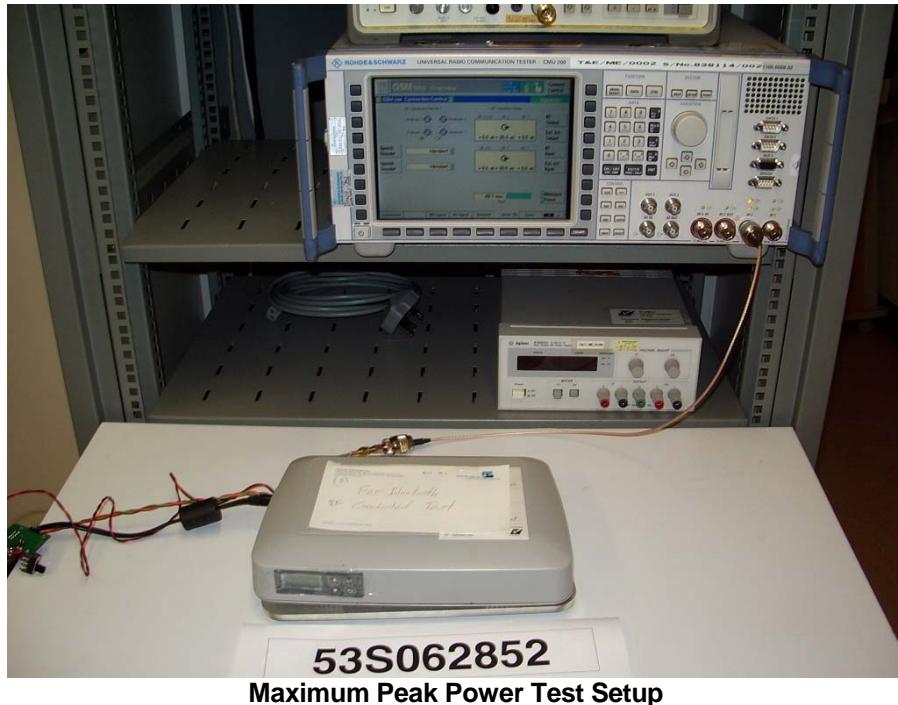

**FCC Part 15.247(b)(1) Maximum Peak Power Results**

Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	59%
		Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia

Channel	Channel Frequency (GHz)	Maximum Peak Power (W)	Limit (W)
0	2.402	0.0229	1.0
39	2.441	0.0239	1.0
78	2.480	0.0239	1.0

**Notes**

1. Power analyser of Universal Radio Communication Tester was used for power measurement with peak detection as mode of measurement. The power analyser mode supports a wideband power measurement ranging from 100kHz to 2700MHz.

## **RF CONDUCTED SPURIOUS EMISSIONS TEST**

### **FCC Part 15.247(d) RF Conducted Spurious Emissions Limits**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

### **FCC Part 15.247(d) RF Conducted Spurious Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007


### **FCC Part 15.247(d) RF Conducted Spurious Emissions Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz
5. All other supporting equipment were powered separately from another filtered mains.

### **FCC Part 15.247(d) RF Conducted Spurious Emissions Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with frequency span was set from 10GHz to 25GHz.
5. The steps 2 to 4 were repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel X (2.480GHz) respectively.

**RF CONDUCTED SPURIOUS EMISSIONS TEST**

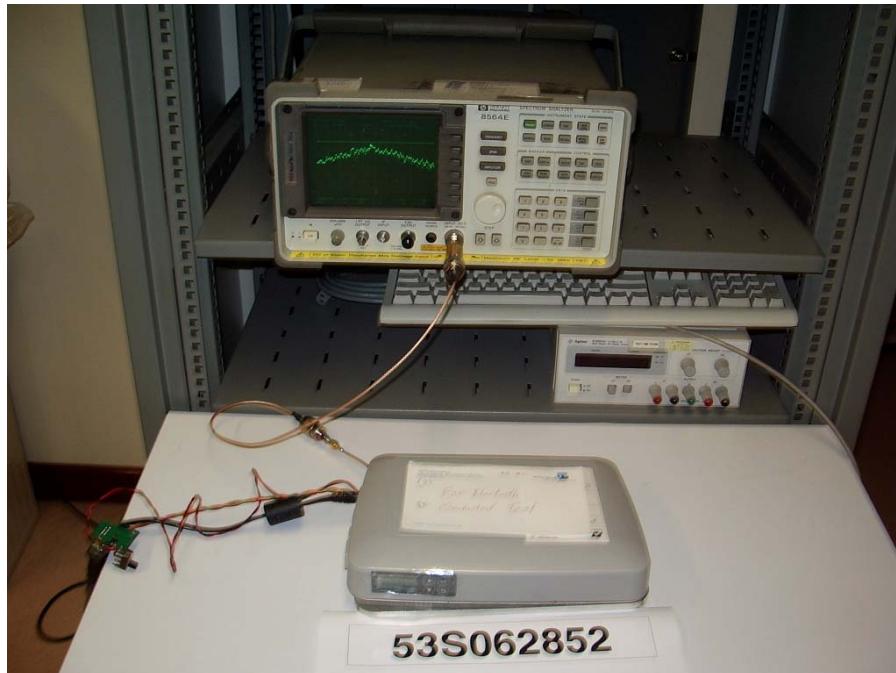

**RF Conducted Spurious Emissions Test Setup**


**FCC Part 15.247(d) RF Conducted Spurious Emissions Results**

Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	59%
Attached Plots	14 - 19	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia


All spurious signals found were below the specified limit. Please refer to the attached plots.

**RF CONDUCTED SPURIOUS EMISSIONS TEST**

**RF Conducted Spurious Emissions Plots**

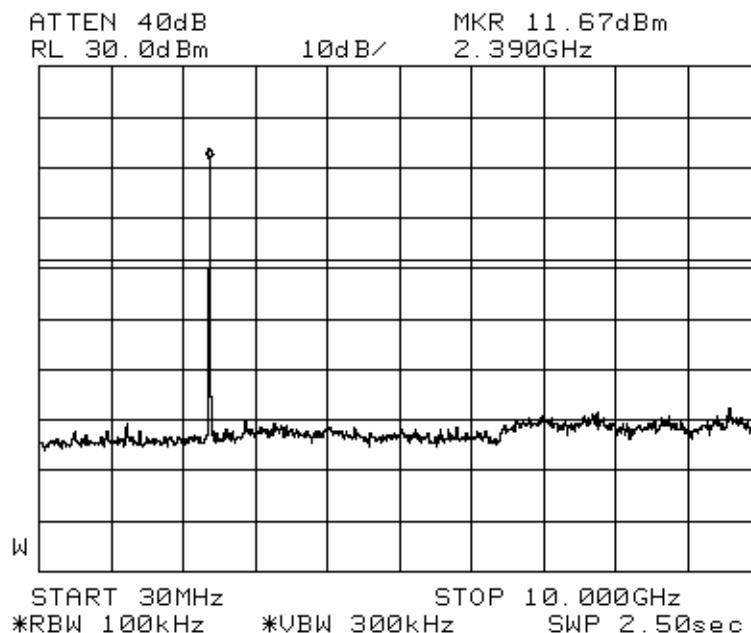


**Plot 14 – Channel 0**

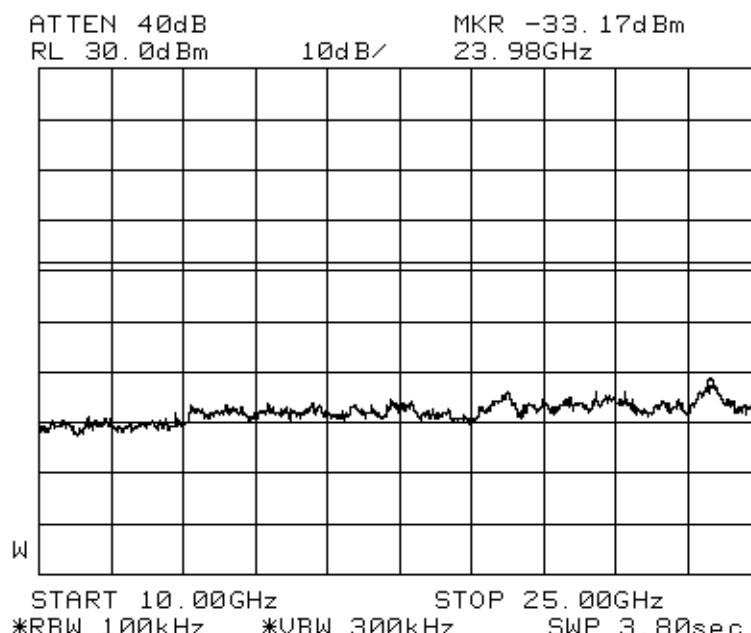


**Plot 15 – Channel 0**

**RF CONDUCTED SPURIOUS EMISSIONS TEST**

**RF Conducted Spurious Emissions Plots**

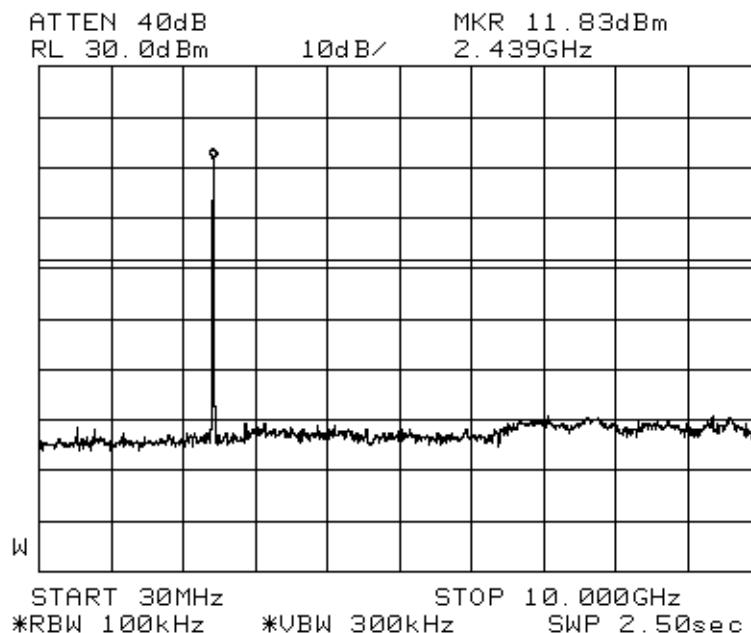


**Plot 16 – Channel 39**

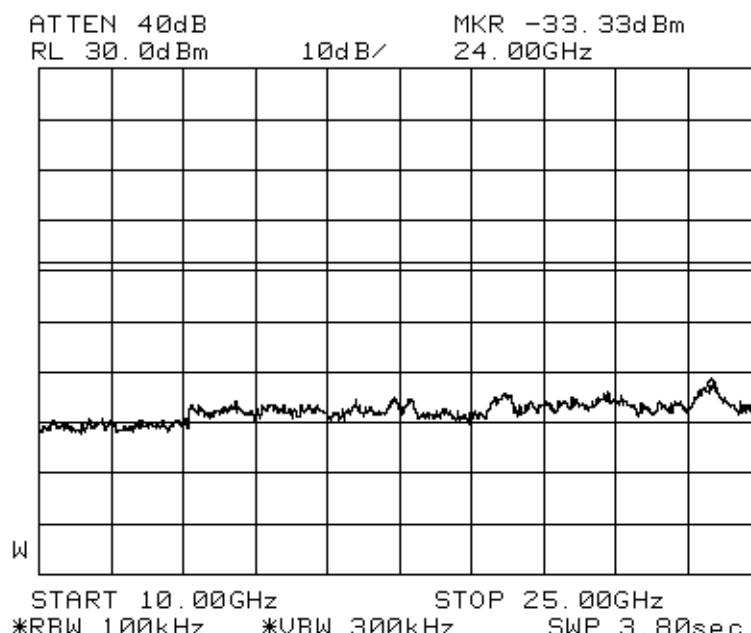


**Plot 17 – Channel 39**

**RF CONDUCTED SPURIOUS EMISSIONS TEST**

**RF Conducted Spurious Emissions Plots**

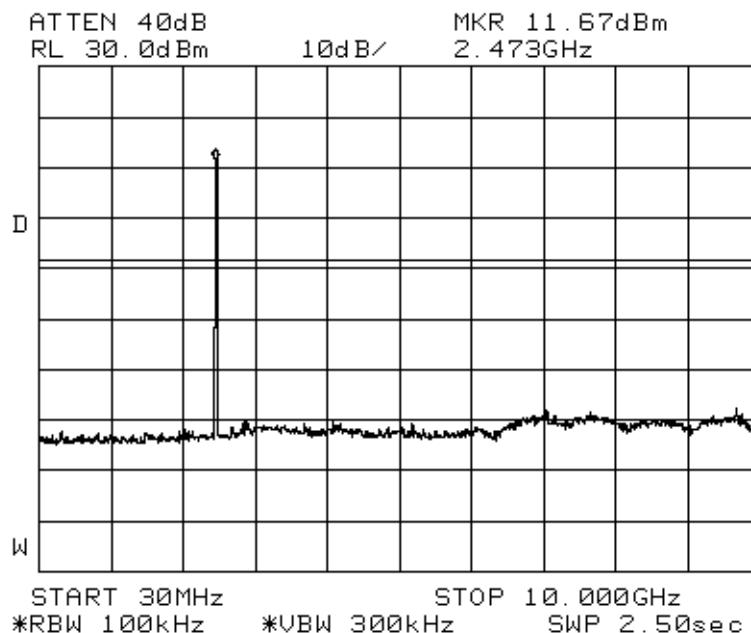

**Plot 18 – Channel 78**

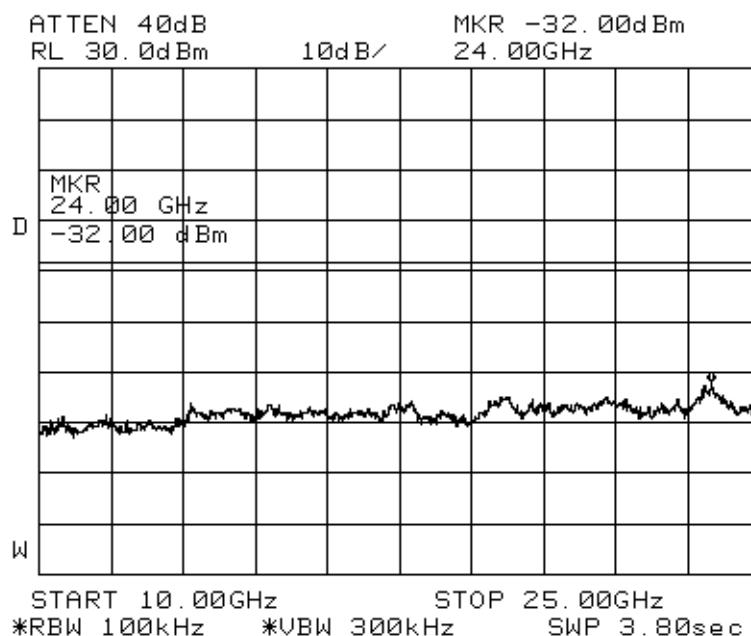

**Plot 19 – Channel 78**

### **BAND EDGE COMPLIANCE (CONDUCTED) TEST**

#### **FCC Part 15.247(d) Band Edge Compliance (Conducted) Limits**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

#### **FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007


#### **FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz
5. All other supporting equipment were powered separately from another filtered mains.

#### **FCC Part 15.247(d) Band Edge Compliance (Conducted) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

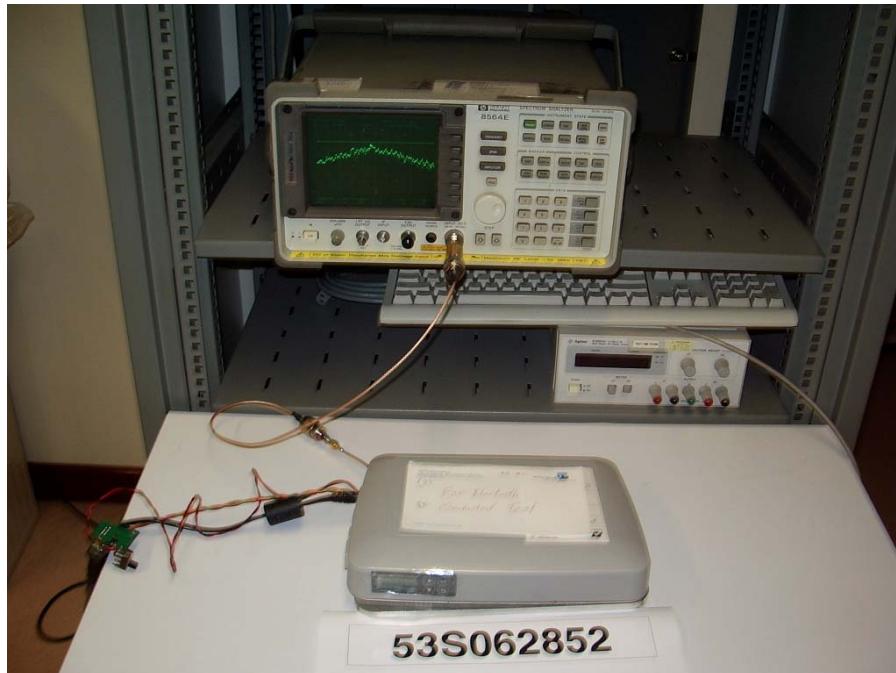

**Band Edge Compliance (Conducted) Test Setup**


**FCC Part 15.247(d) Band Edge Compliance (Conducted) Results**

Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	59%
Attached Plots	20 - 21	Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia


No significant signal was found and they were below the specified limit.

**BAND EDGE COMPLIANCE (CONDUCTED) TEST**

**Band Edge Compliance (Conducted) Plots**

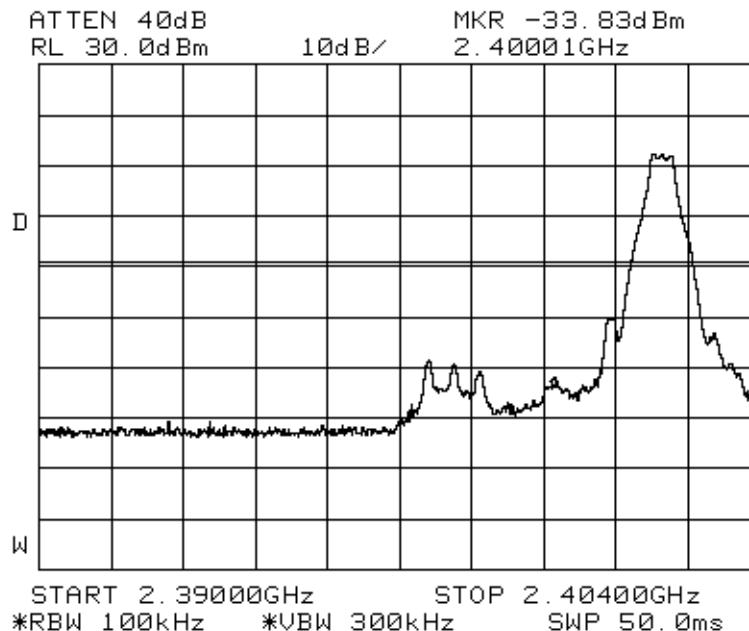

**Plot 20 – Lower Band Edge at 2.4000GHz**

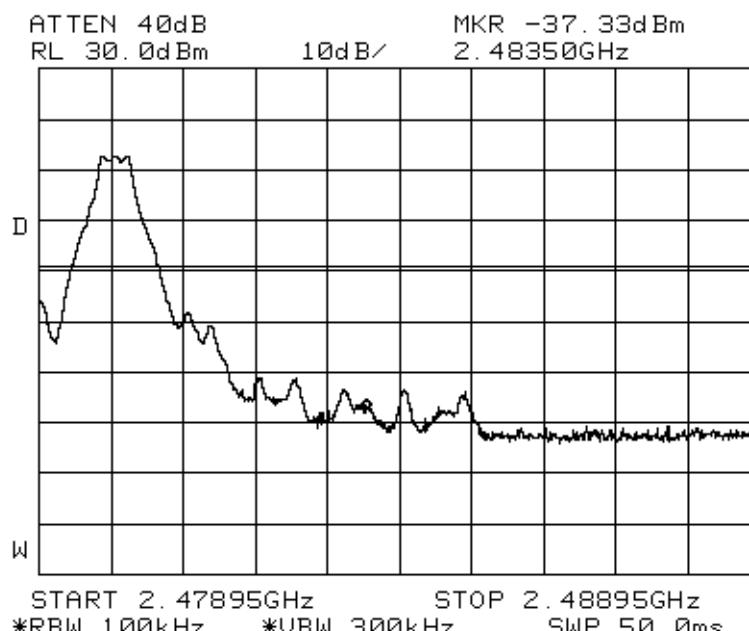

**Plot 21 – Upper Band Edge at 2.4835GHz**

---

**BAND EDGE COMPLIANCE (RADIATED) TEST**

**FCC Part 15.247(d) Band Edge Compliance (Radiated) Limits**

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

**FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
R&S Test Receiver (20Hz –26.5GHz) – ESMI1	ESMI	849182/003 848926/007	04 Jul 2007
Agilent Preamplifier (0.01-4GHz) – PA6	87405B	10003	12 Jan 2007
MITEQ Preamplifier (0.1-26.5GHz) – PA4	NSP2650-N	604879	07 Nov 2006
Schaffner Bilog Antenna –BL4	CBL6112B	2593	12 May 2007
EMCO Horn Antenna – H14	3115	0003-6087	19 May 2007
Bandstop Filter (2.4-2.5 GHz)	BRM50701	017	13 Aug 2007

---

## **BAND EDGE COMPLIANCE (RADIATED) TEST**

### **FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:
  - a. Peak Plot:  
RBW = VBW = 1MHz
  - b. Average Plot  
RBW = 1MHz, VBW = 10Hz
4. All other supporting equipment were powered separately from another filtered mains.

### **FCC Part 15.247(d) Band Edge Compliance (Radiated) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode with frequency hopping sequence on.
2. The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.
3. The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
4. The steps 2 to 3 were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.

**BAND EDGE COMPLIANCE (RADIATED) TEST**



**Band Edge Compliance (Radiated) Test Setup**



**FCC Part 15.247(d) Band Edge Compliance (Radiated) Results**

Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	57%
Attached Plots	22 - 27	Atmospheric Pressure	1030mbar
		Tested By	Lucas Beh

No significant signal was found and they were below the specified limit.



### BAND EDGE COMPLIANCE (RADIATED) TEST

#### Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge)

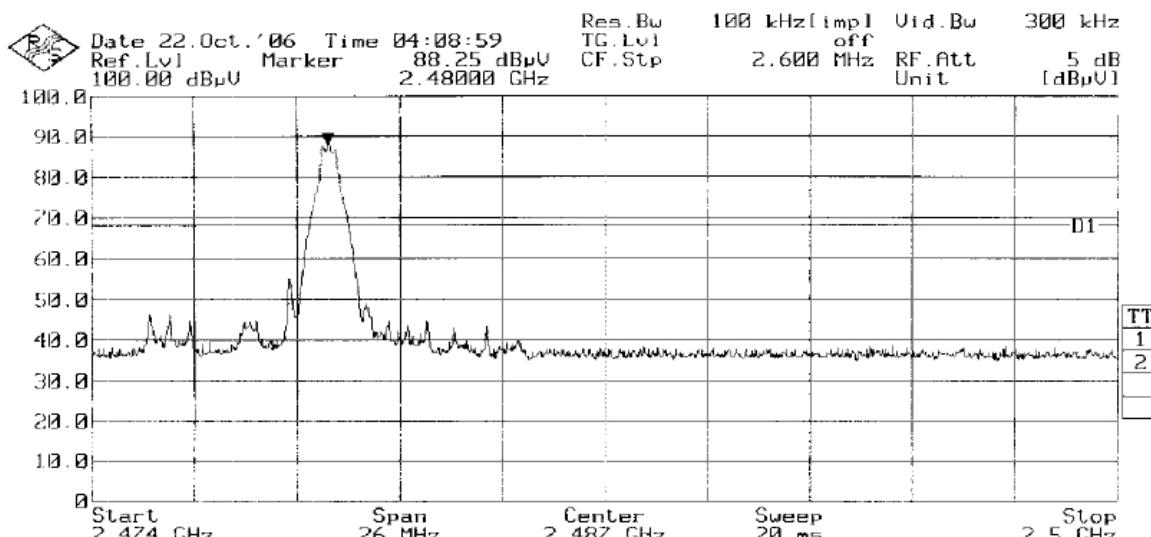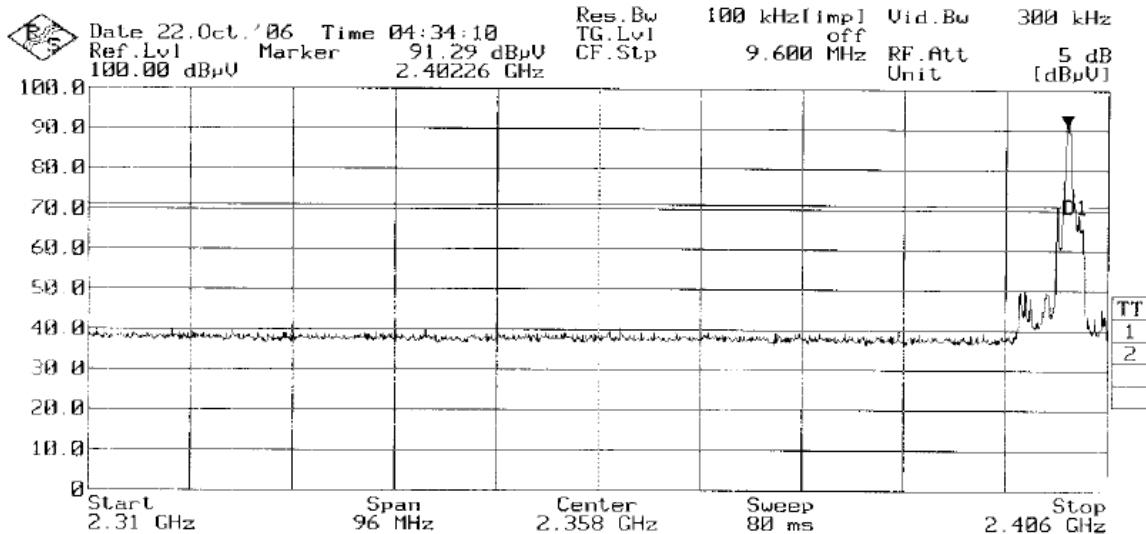


### BAND EDGE COMPLIANCE (RADIATED) TEST

#### Band Edge Compliance (Radiated) Plots (Restricted Band)

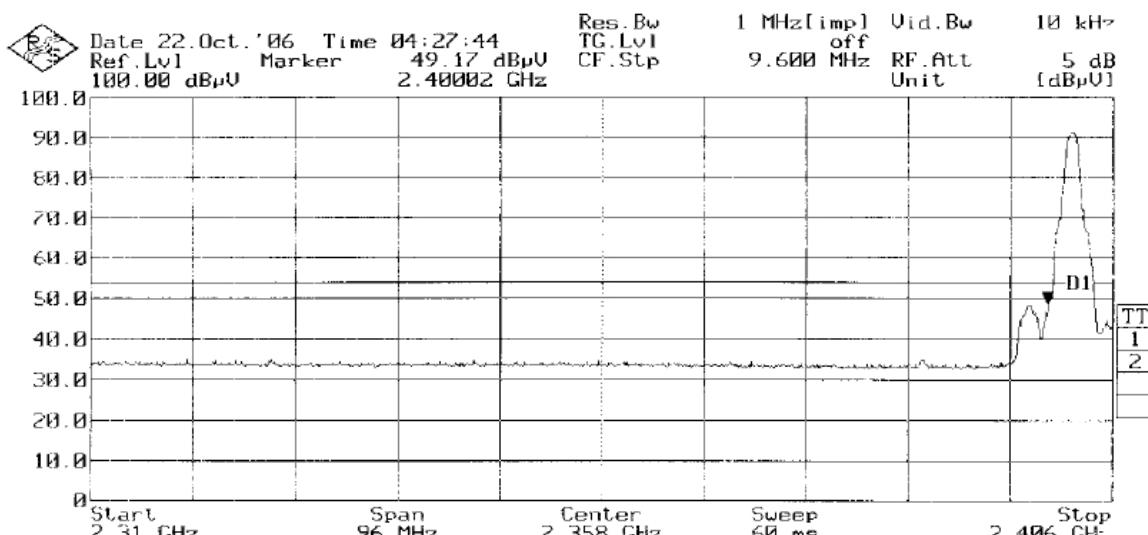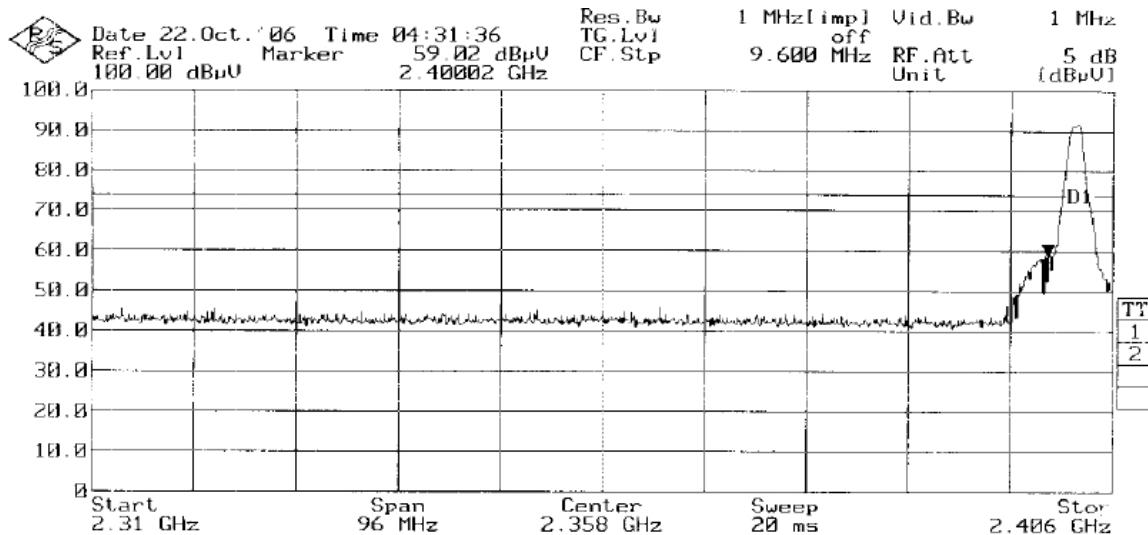


### BAND EDGE COMPLIANCE (RADIATED) TEST

#### Band Edge Compliance (Radiated) Plots (Restricted Band)

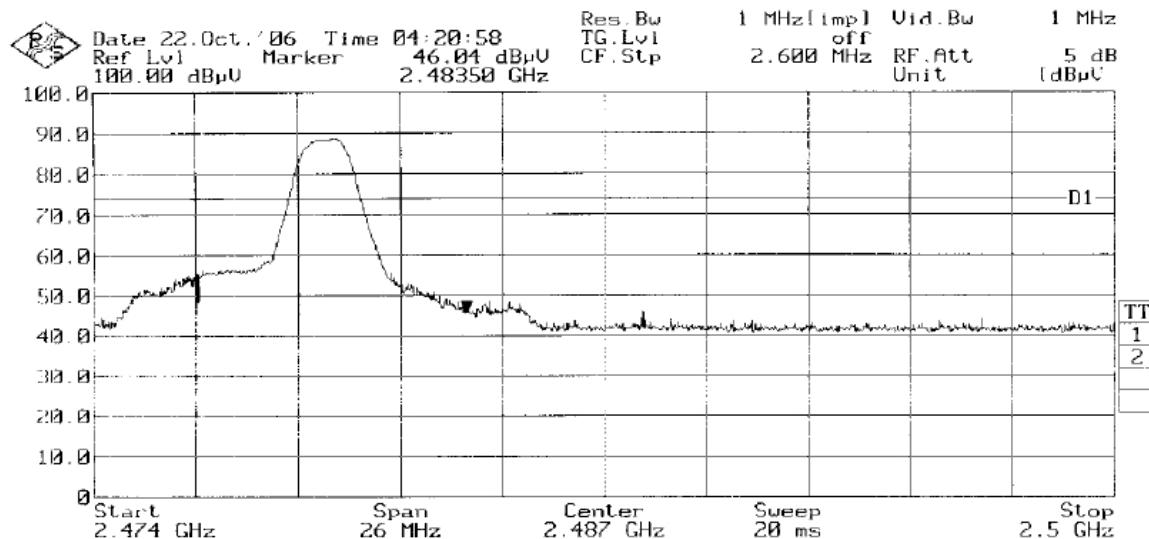

Plot 26 – Peak Plot at Upper Band Edge at 2.4835GHz

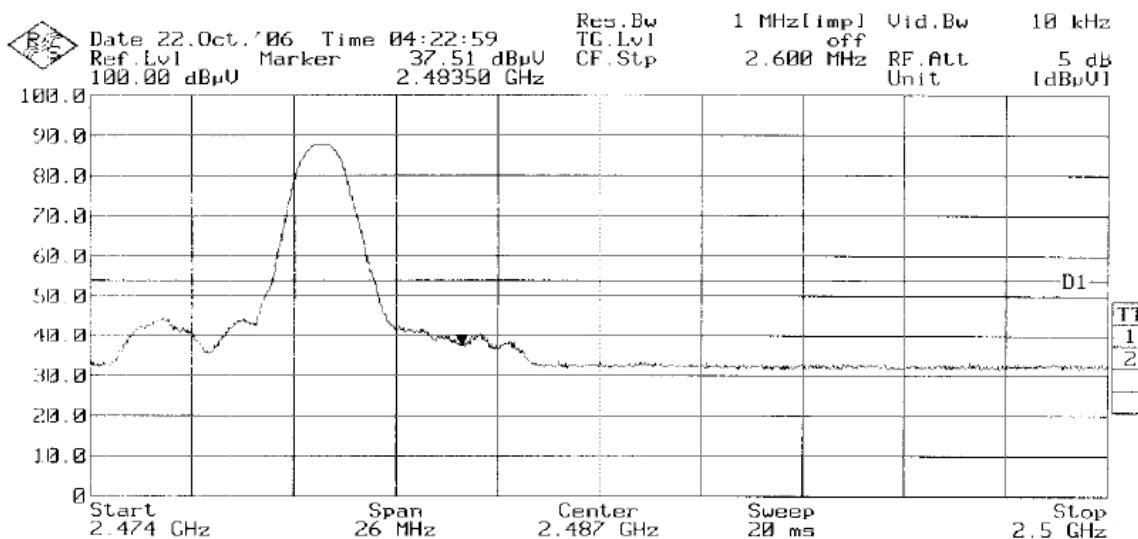

Plot 27 – Average Plot at Upper Band Edge at 2.4835GHz

---

## **PEAK POWER SPECTRAL DENSITY TEST**

### **FCC Part 15.247(e) Peak Power Spectral Density Limits**

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

### **FCC Part 15.247(e) Peak Power Spectral Density Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
HP Spectrum Analyzer	8564E	3846A01433	08 Apr 2007


### **FCC Part 15.247(e) Peak Power Spectral Density Test Setup**

1. The EUT and supporting equipment were set up as shown in the setup photo.
2. The power supply for the EUT was connected to a filtered mains.
3. The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
4. The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 3kHz and 10kHz.
5. All other supporting equipment were powered separately from another filtered mains.

### **FCC Part 15.247(e) Peak Power Spectral Density Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, non-hopping with transmitting frequency at Channel 0 (2.402GHz).
2. The sweep time of the spectrum analyser was set to the value of the ratio of the frequency span divided by the RBW.
3. The peak power density of the transmitting frequency was detected and recorded.
4. The step 3 was repeated with the transmitting frequency was set to Channel 39 (2.441GHz) and Channel 78 (2.480GHz) respectively.

**PEAK POWER SPECTRAL DENSITY TEST**

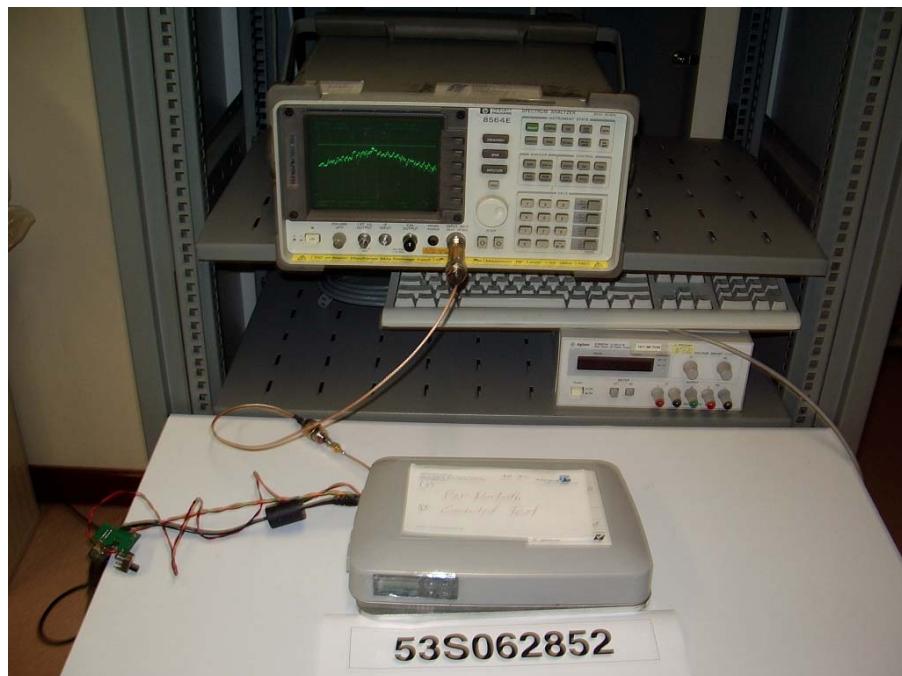

Peak Power Spectral Density Test Setup


**FCC Part 15.247(e) Peak Power Spectral Density Results**

Test Input Power	110V 60Hz	Temperature	24°C
Attached Plots	28 - 30	Relative Humidity	59%
		Atmospheric Pressure	1030mbar
		Tested By	Johnsen Tia


Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW)	Limit (mW)
0	2.402	1.7100	6.3
39	2.441	2.1528	6.3
78	2.480	2.0749	6.3

**PEAK POWER SPECTRAL DENSITY TEST**

**Peak Power Spectral Density Plots**

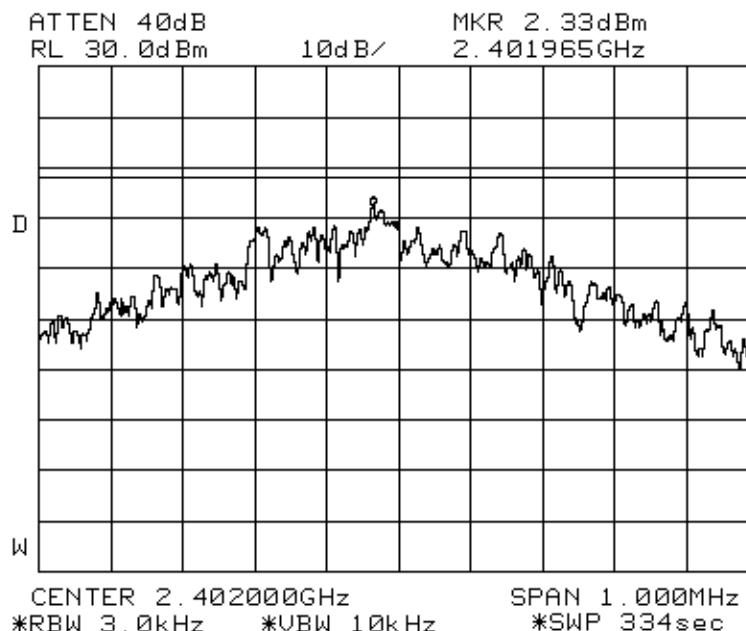


**Plot 28 – Channel 0**

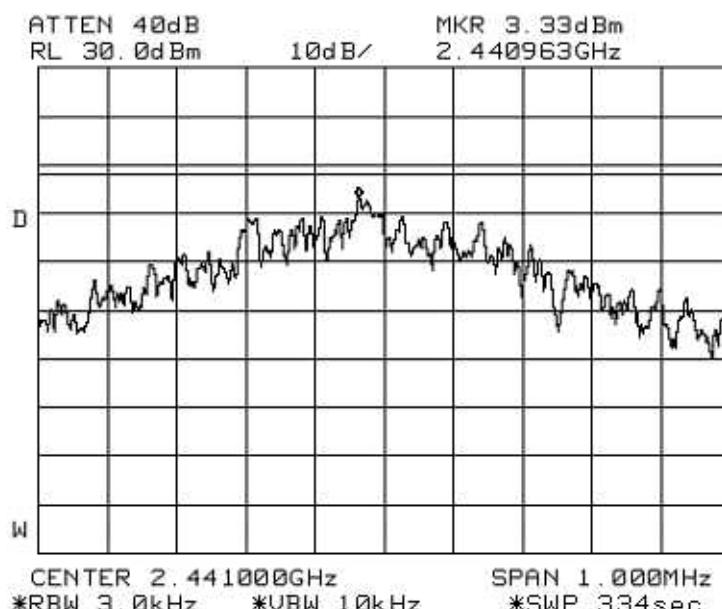

**Plot 29 – Channel 39**

**PEAK POWER SPECTRAL DENSITY TEST**

**Peak Power Spectral Density Plots**

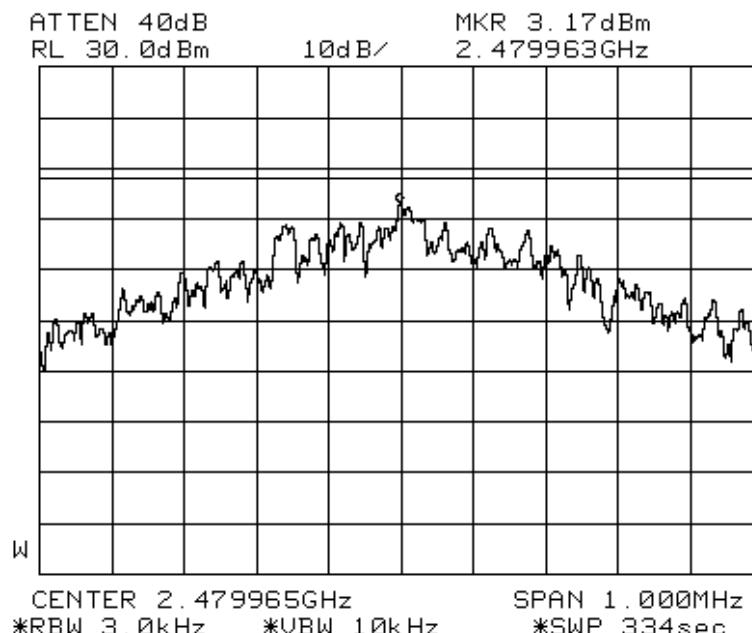

**Plot 30 – Channel 78**

**MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST**

**FCC Part 1.1310 Maximum Permissible Exposure (MPE) Limits**

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (min)
0.3 - 1.34	614	1.63	100 <small>Note 2</small>	30
1.34 - 30	824 / f	2.19 / f	180 / f <sup>2</sup> <small>Note 2</small>	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1. f = frequency in MHz				
2. Plane wave equivalent power density				

**FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Instrumentation**

Instrument	Model	S/No	Cal Due Date
PMM 8053 Portable Field Meter	8053	0220J10308	16 Apr 2007
PMM Electric and Magnetic Field Analyzer	EHP-50A	1311L10515	16 Apr 2007

**FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Setup**

1. The EUT and supporting equipment were set up as shown on the setup photo.
2. The relevant field probe was positioned at least 20cm away from the EUT and supporting equipment boundary.

**FCC Part 1.1310 Maximum Permissible Exposure (MPE) Test Method**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was first carried out at one of the positions / sides of the EUT.
3. Power density measurement (mW/cm<sup>2</sup>) was made using the field meter set to the required averaging time.
4. Steps 2 and 3 were repeated for the next position and its associate EUT operating mode, until all possible positions and modes were measured.

**Sample Calculation Example**

At 2400 MHz, limit = 1.0 mW/cm<sup>2</sup>

Power density reading obtained directly from field meter = 0.3 mW/cm<sup>2</sup> averaged over the required 30 minutes.

Therefore, margin = 0.3 – 1.0 = -0.7 mW/cm<sup>2</sup>      i.e. **0.7 mW/cm<sup>2</sup> below limit**

**MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST**



**Maximum Permissible Exposure (MPE) Test Setup**

**MAXIMUM PERMISSIBLE EXPOSURE (MPE) TEST**

**FCC Part 1.1310 Maximum Permissible Exposure (MPE) Results**

Operating Mode	Bluetooth	Temperature	24°C
Test Input Power	110V 60Hz	Relative Humidity	57%
Test Distance	20cm	Atmospheric Pressure	1030mbar
		Tested By	Lucas Beh


Channel	Channel Frequency (GHz)	Power Density Value (mW/cm <sup>2</sup> )	Margin (mW/cm <sup>2</sup> )	Averaging Time (min)	Limit (mW/cm <sup>2</sup> )
0	2.402	0.003	-0.997	30	1.0
39	2.441	0.002	-0.998	30	1.0
78	2.480	0.002	-0.998	30	1.0

Notes


1. All possible modes of operation were investigated. Only the worst case highest radiation levels were measured. Measurements were taken at the required averaging time. All other radiation levels were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2, in the range 0.1MHz – 3GHz is ±15% .

### DUTY CYCLE FACTOR COMPUTATION

#### FCC Part 15.35(c) Duty Cycle Correction Factor

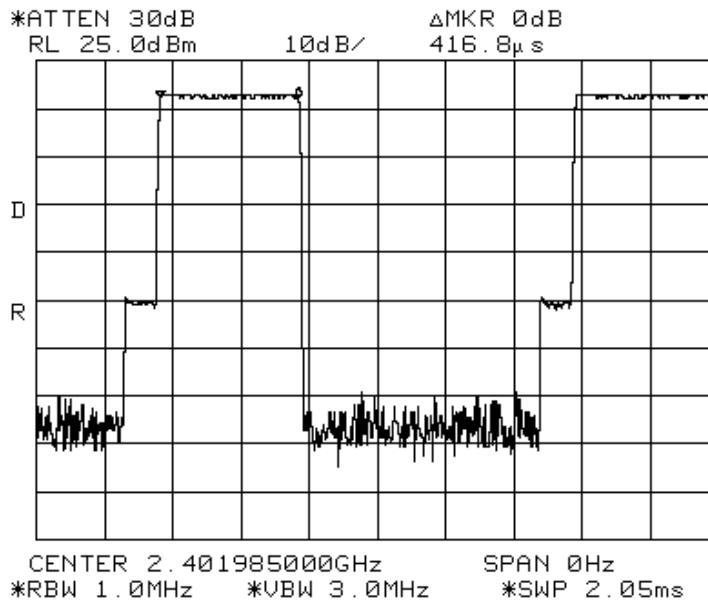

#### On Time

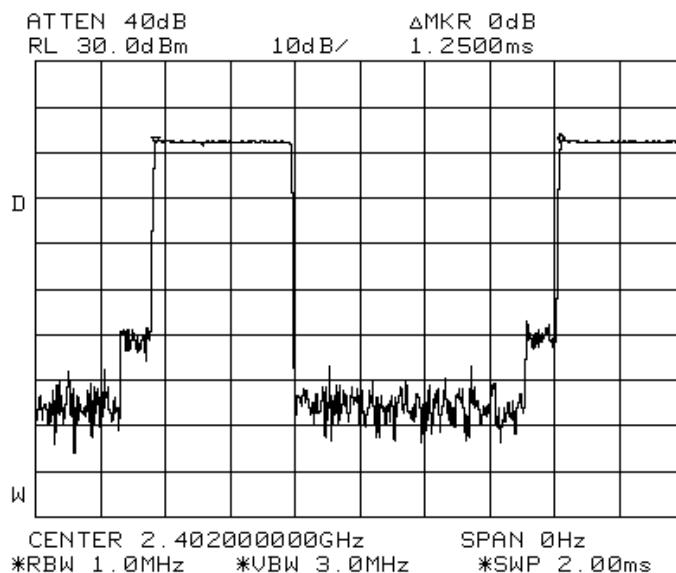

#### Period

Duty Cycle Factor (worst- case)      =  $20 \log [\text{Total On time} / \text{Period}]$   
=  $20 \log [(0.416 / 1.25 / 2)]$   
= **-3.54dB**

This Report is issued under the following conditions:

1. Results of the testing/calibration in the form of a report will be issued immediately after the service has been completed or terminated.
2. Unless otherwise requested, a report shall contain only technical results. Analysis and interpretation of the results and professional opinion and recommendations expressed thereupon, if required, shall be clearly indicated and additional fee paid for, by the Client.
3. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB Corporation approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB Corporation in any way "guarantees" the later performance of the product/equipment.
4. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB Corporation therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
5. Additional copies of the report are available to the Client at an additional fee. No third party can obtain a copy of this report through TÜV SÜD PSB Corporation, unless the Client has authorised TÜV SÜD PSB Corporation in writing to do so.
6. TÜV SÜD PSB Corporation may at its sole discretion add to or amend the conditions of the report at the time of issue of the report and such report and such additions or amendments shall be binding on the Client.
7. All copyright in the report shall remain with TÜV SÜD PSB Corporation and the Client shall, upon payment of TÜV SÜD PSB Corporation's fees for the carrying out of the tests/calibrations, be granted a license to use or publish the report to the third parties subject to the terms and conditions herein, provided always that TÜV SÜD PSB Corporation may at its absolute discretion be entitled to impose such conditions on the license as it sees fit.
8. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB Corporation has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
9. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB Corporation or to the report or results furnished by TÜV SÜD PSB Corporation in any advertisements or sales promotion.
10. Unless otherwise stated, the tests are carried out in TÜV SÜD PSB Corporation Pte Ltd, No.1 Science Park Drive Singapore 118221.

October 2006

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**ANNEX A**

**EUT PHOTOGRAPHS / DIAGRAMS**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**



**Front View**



**Rear View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**



**Top View**



**Bottom View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**




**Internal View 1**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

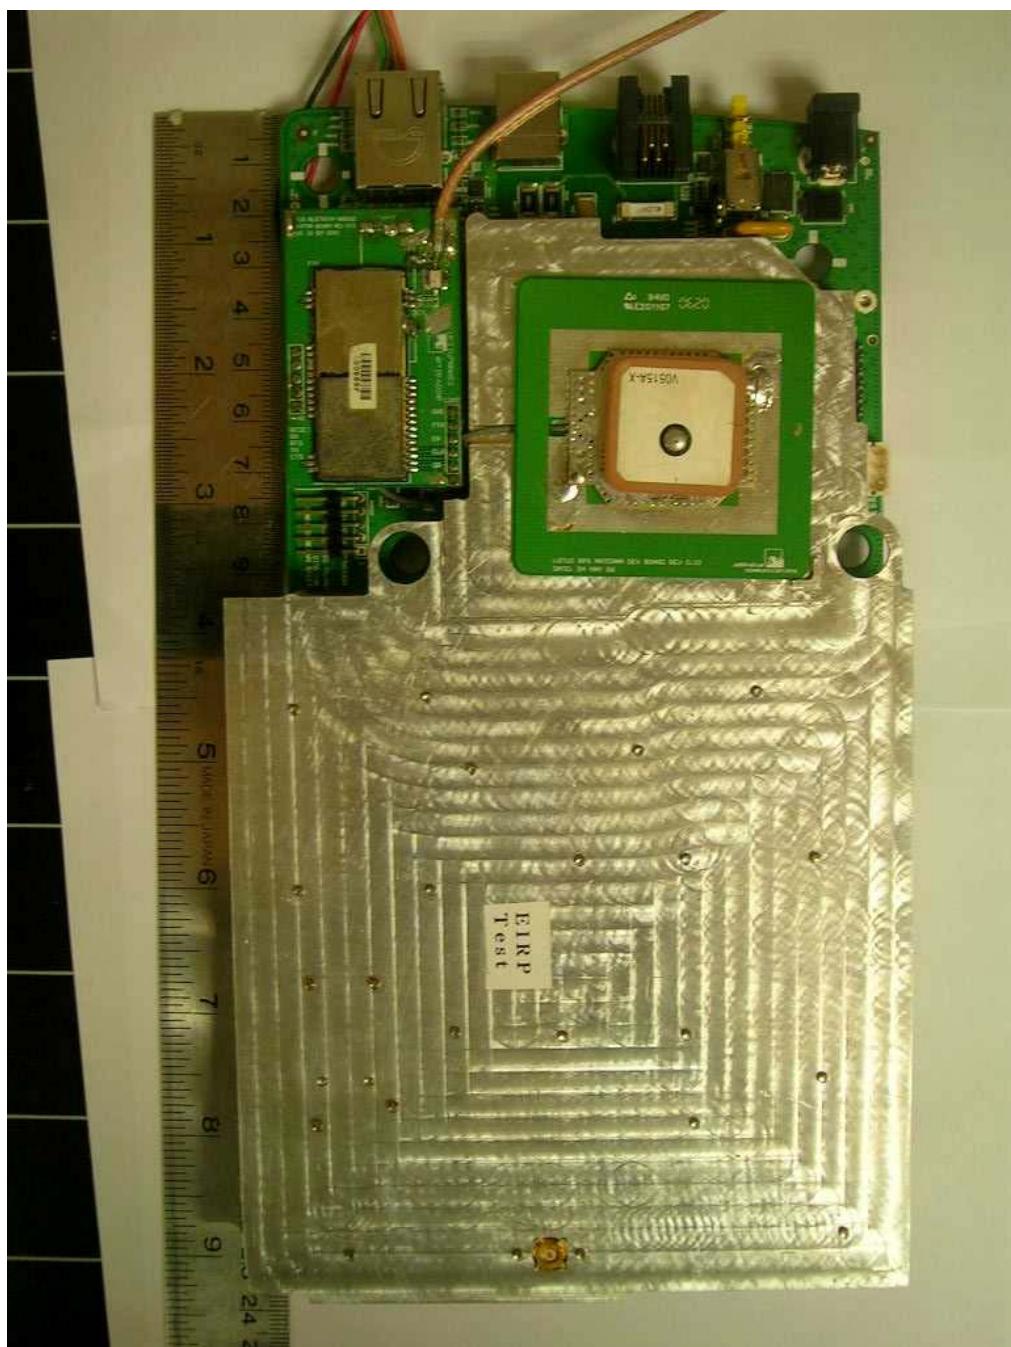


**Internal View 2**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

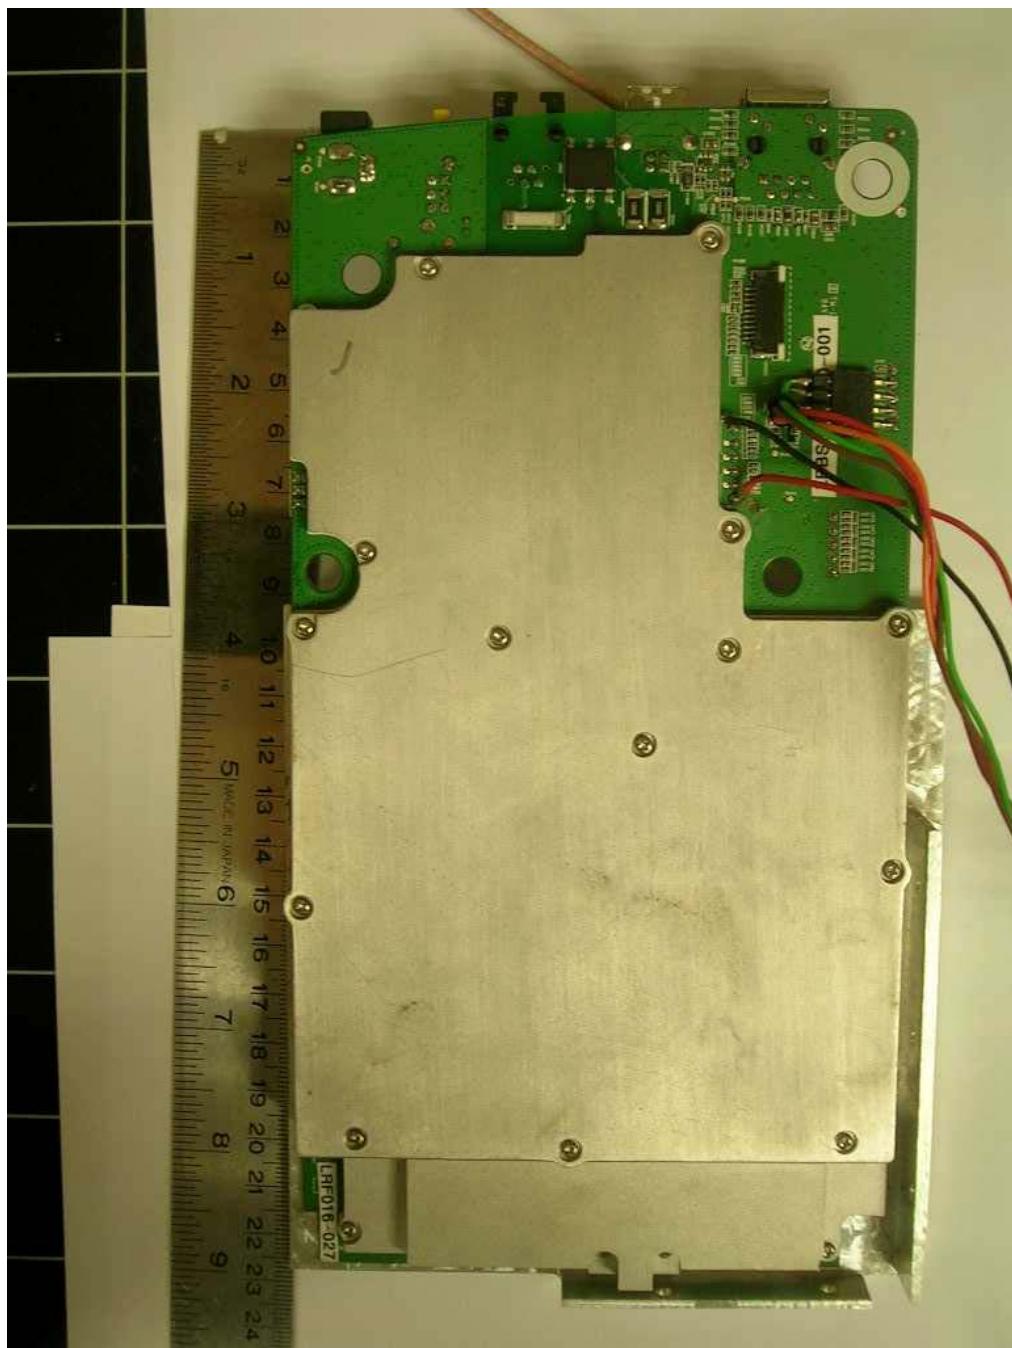

**Internal View 3**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**




Main-Board - Component Side

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**


**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

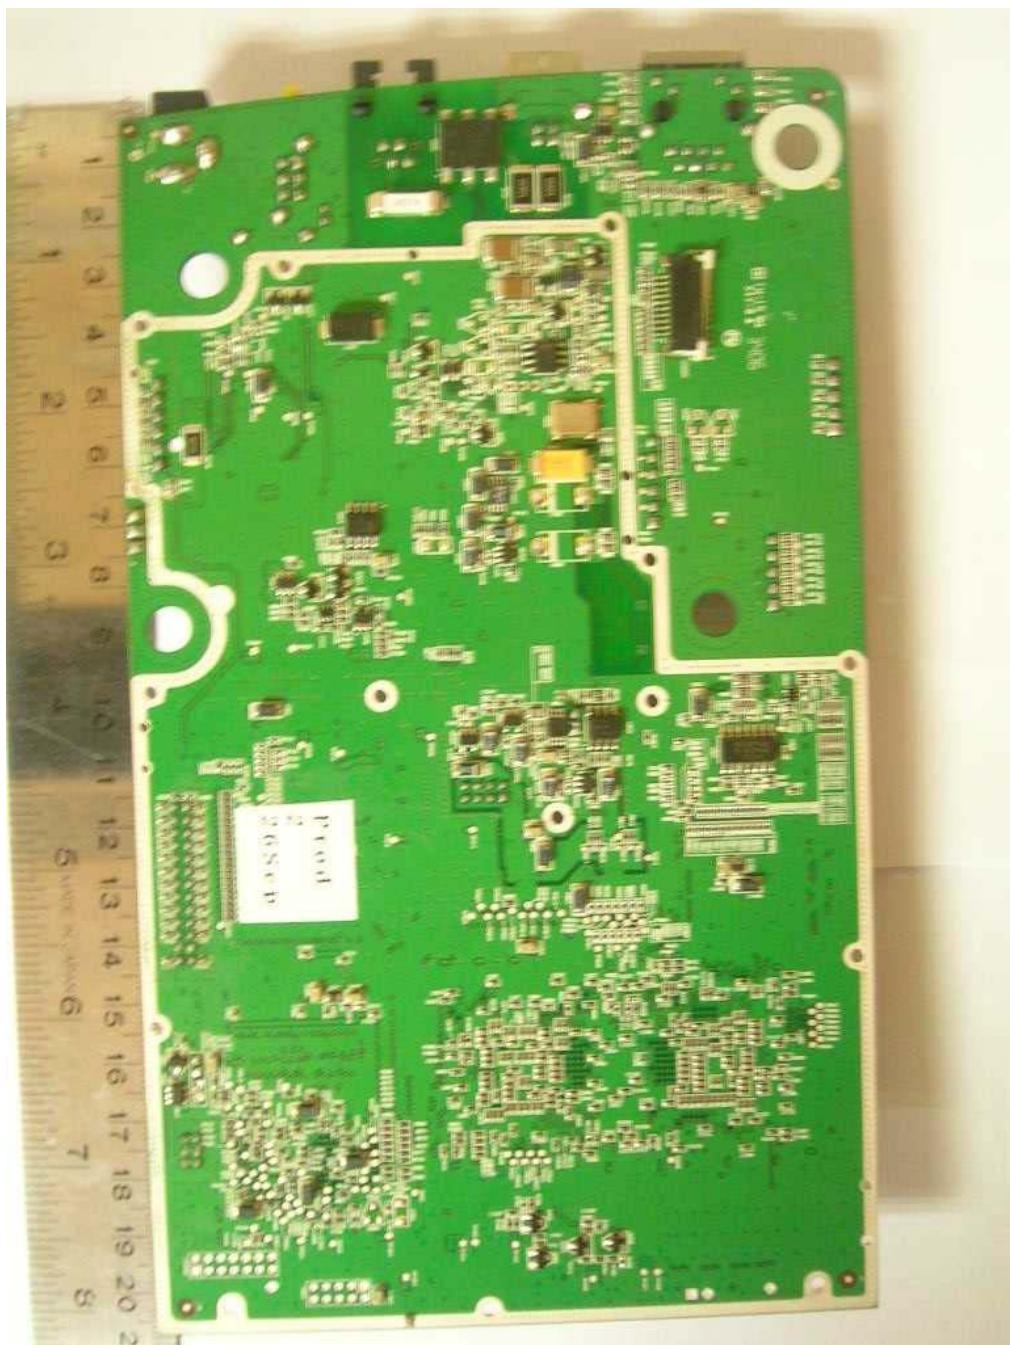

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

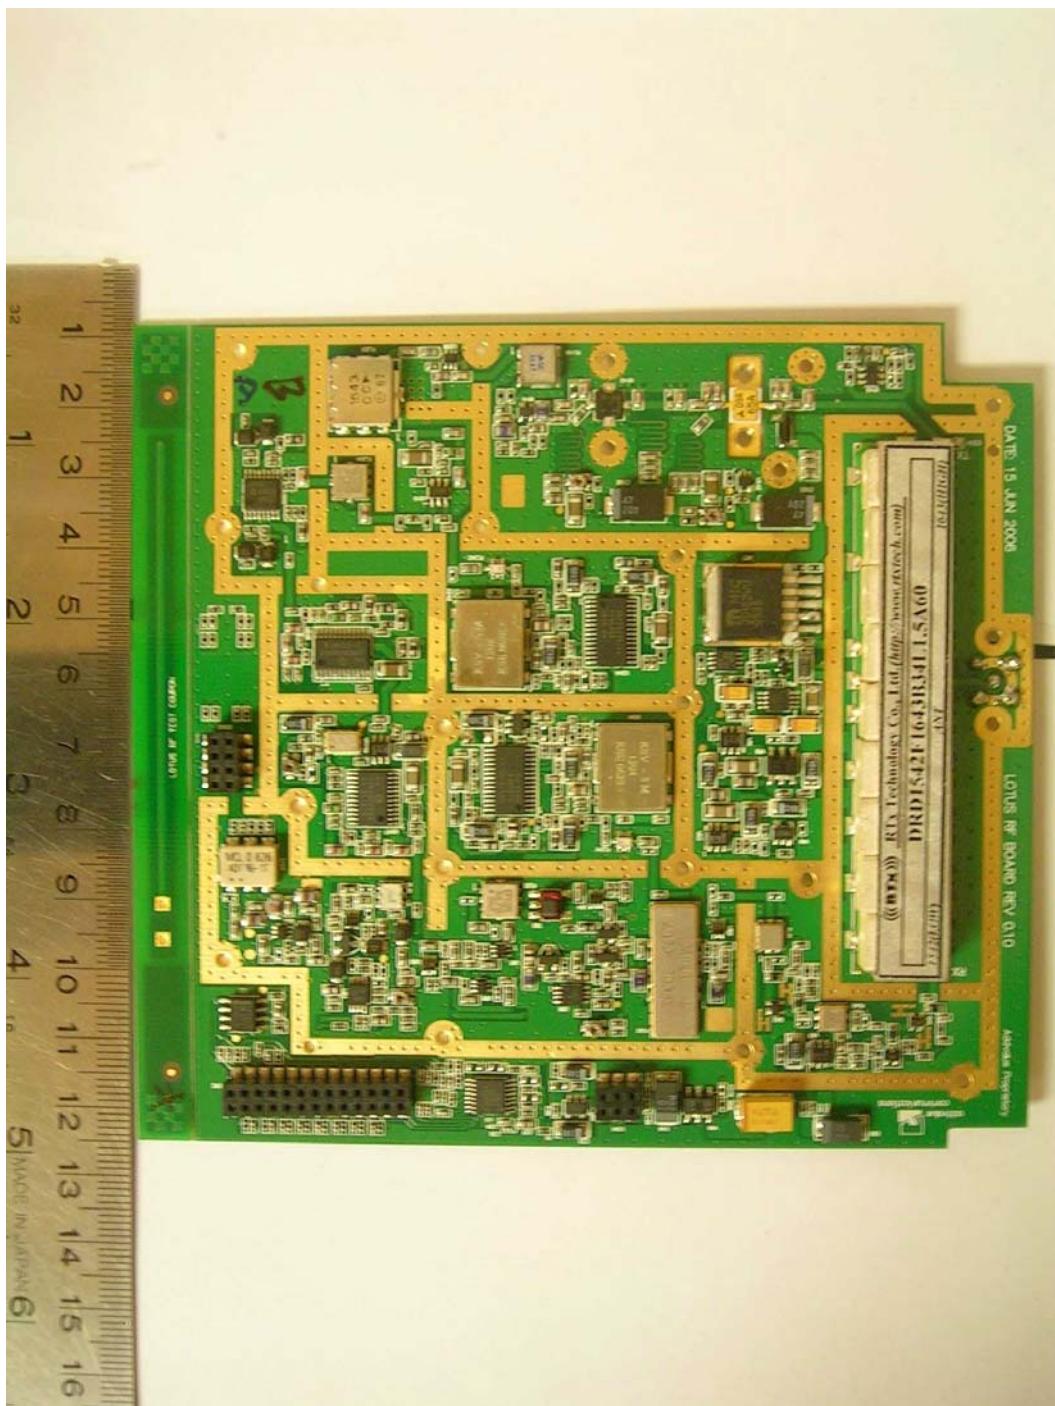


**RF Board – Component View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

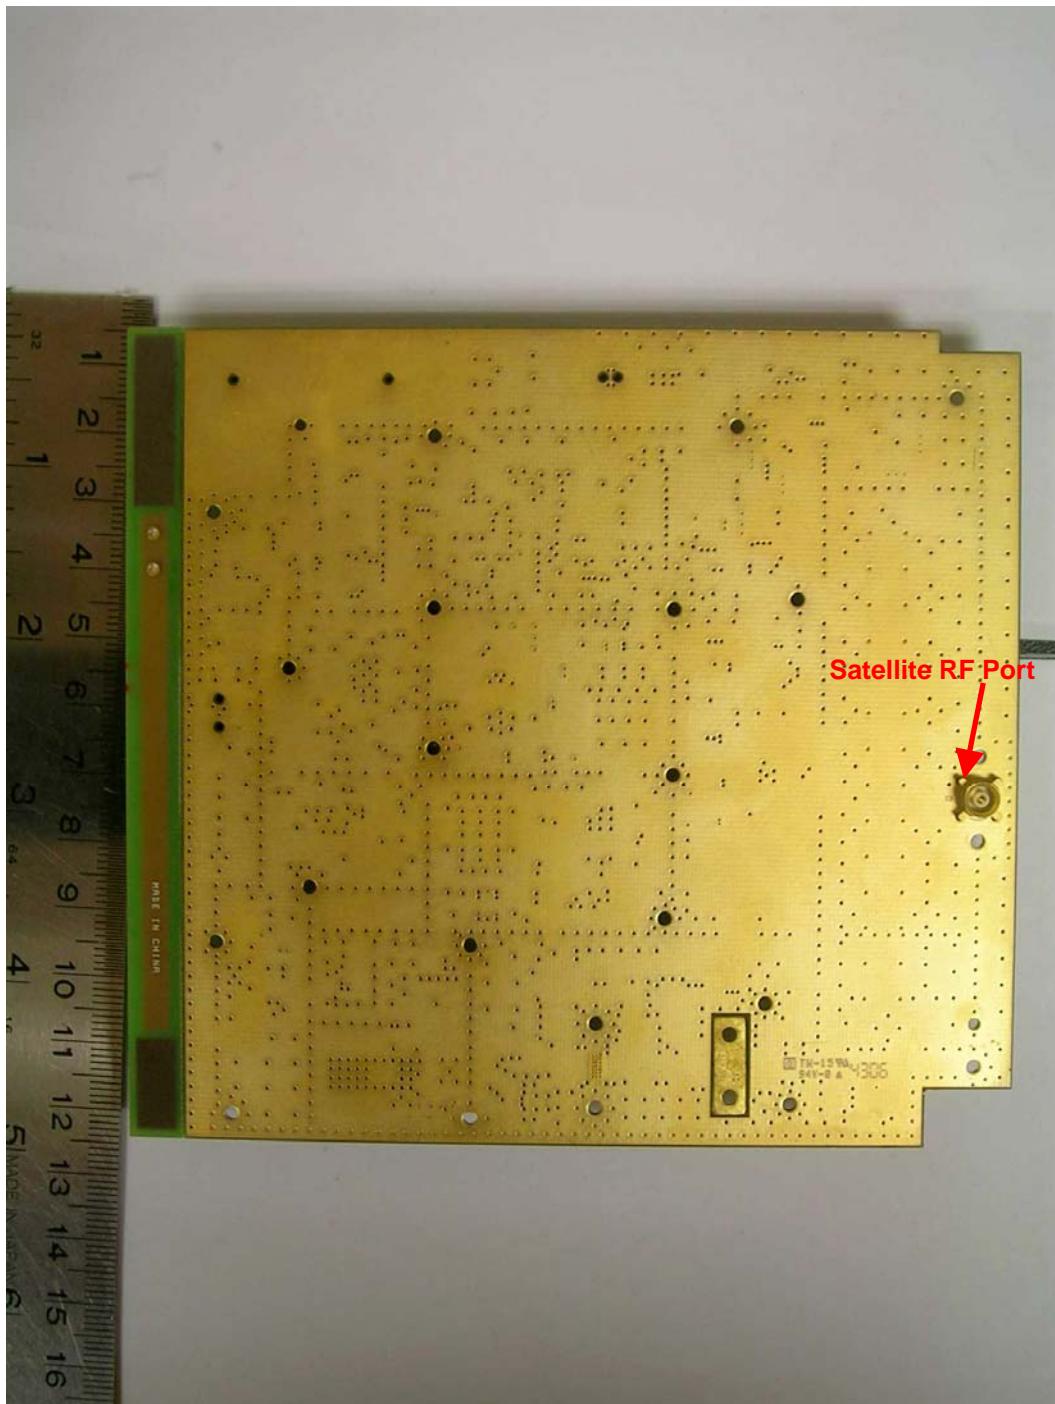


**RF Board – Trace View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

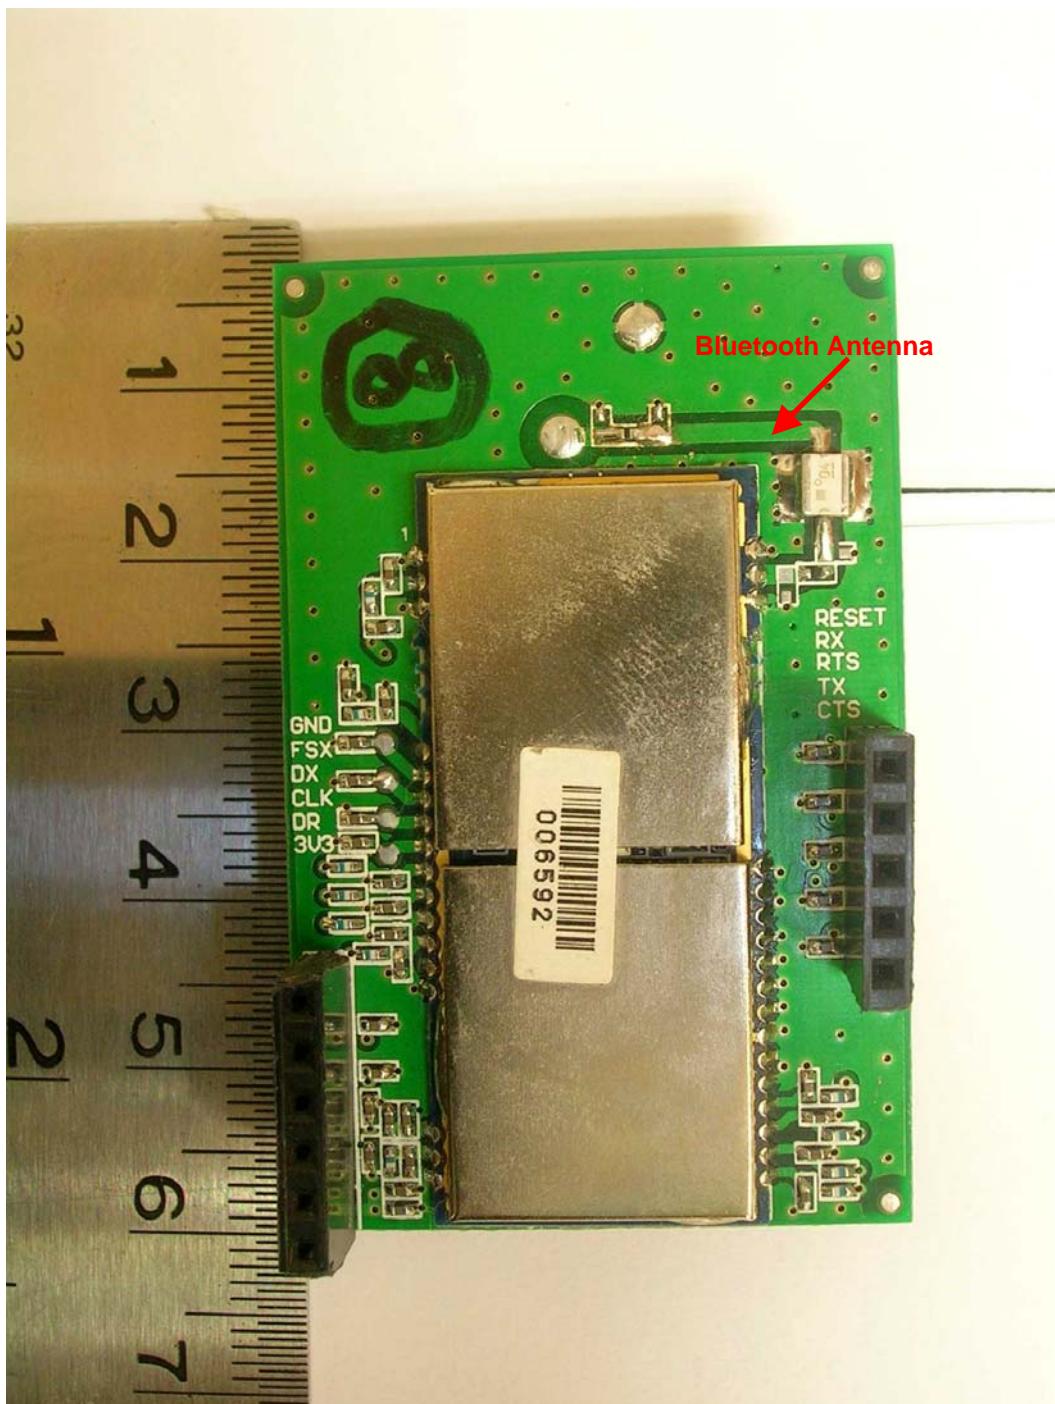


**Bluetooth Board – Component View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

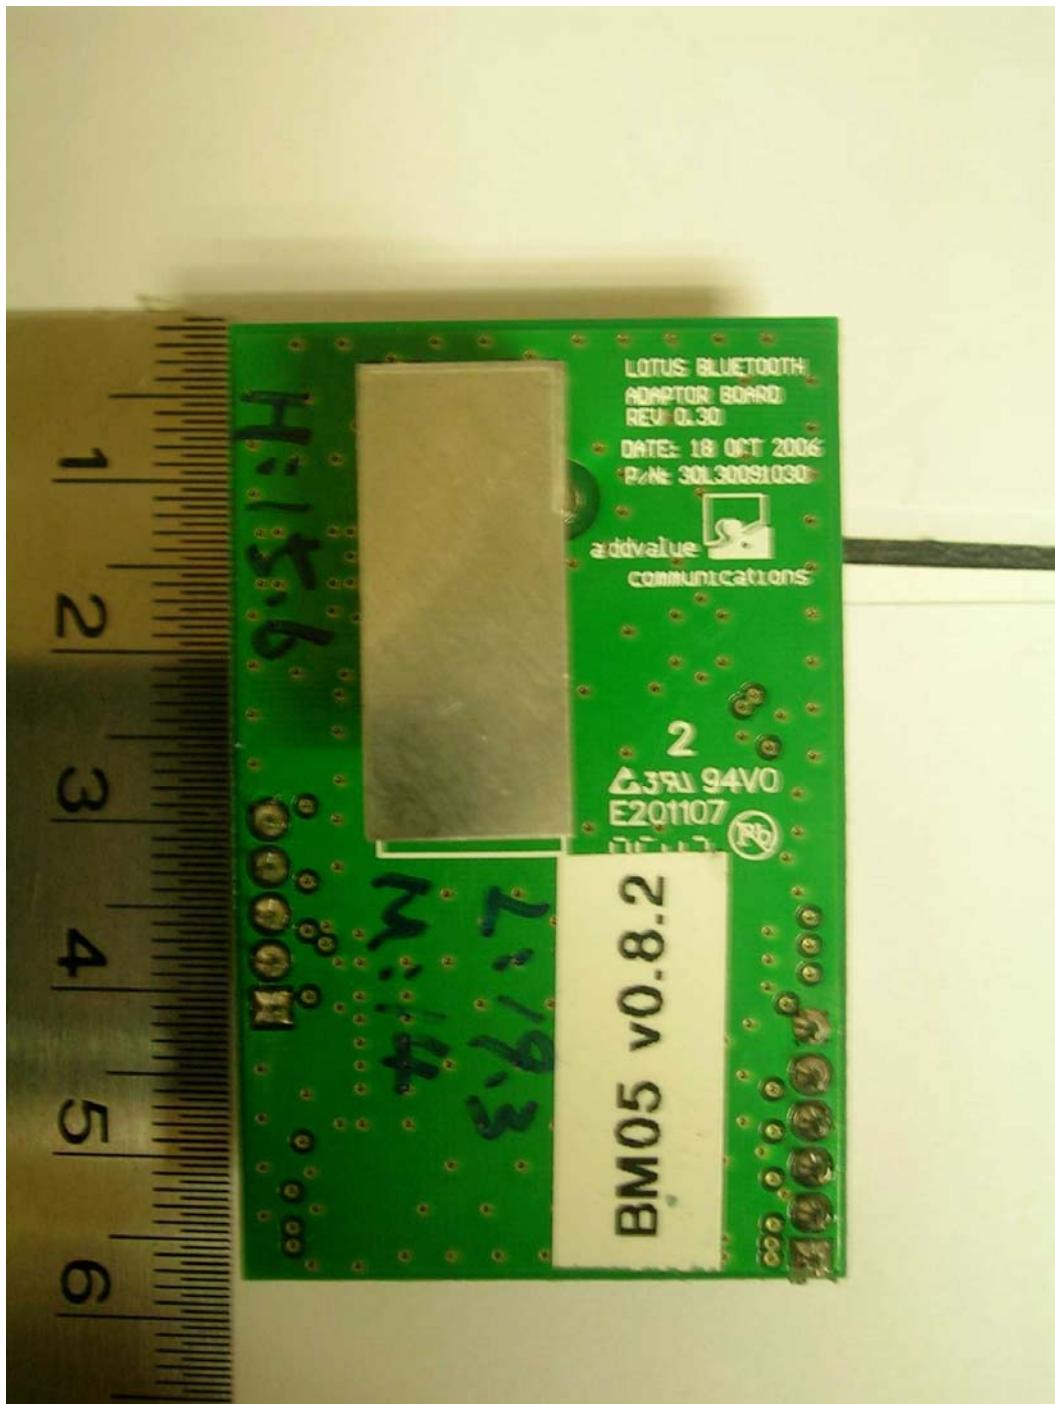

Bluetooth Board – Trace View

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**




**LCD Display Board – Component View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR**

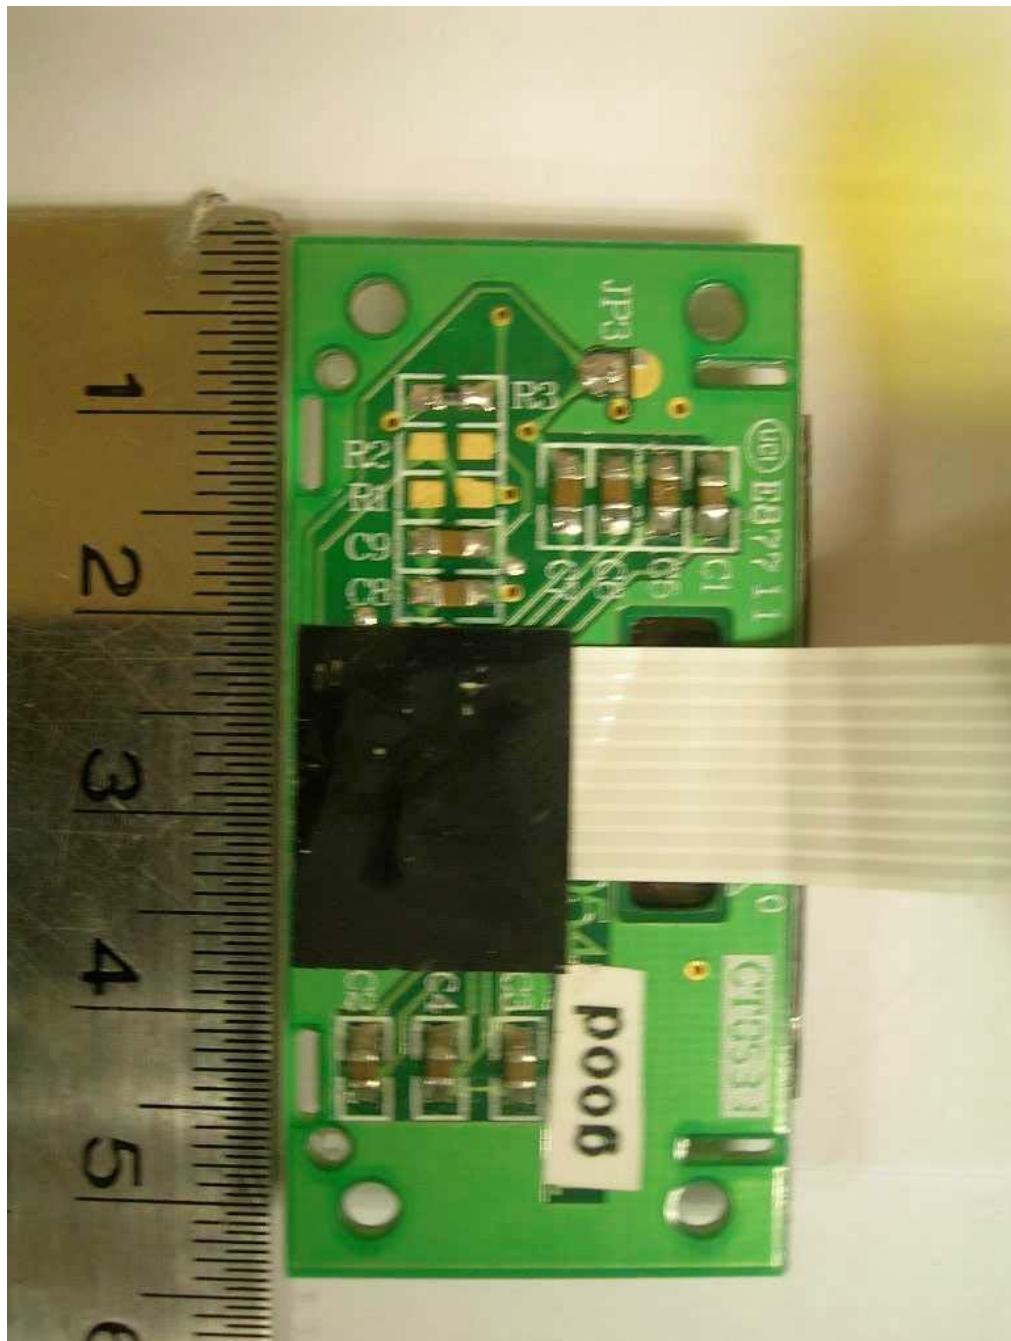

**LCD Display Board – Trace View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT ACCESSORIES - CORDED ANALOGUE PHONE**



Front View



Rear View

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT ACCESSORIES - CORDED ANALOGUE PHONE**



**Housing View 1**




**Housing View 2**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT ACCESSORIES - CORDED ANALOGUE PHONE**

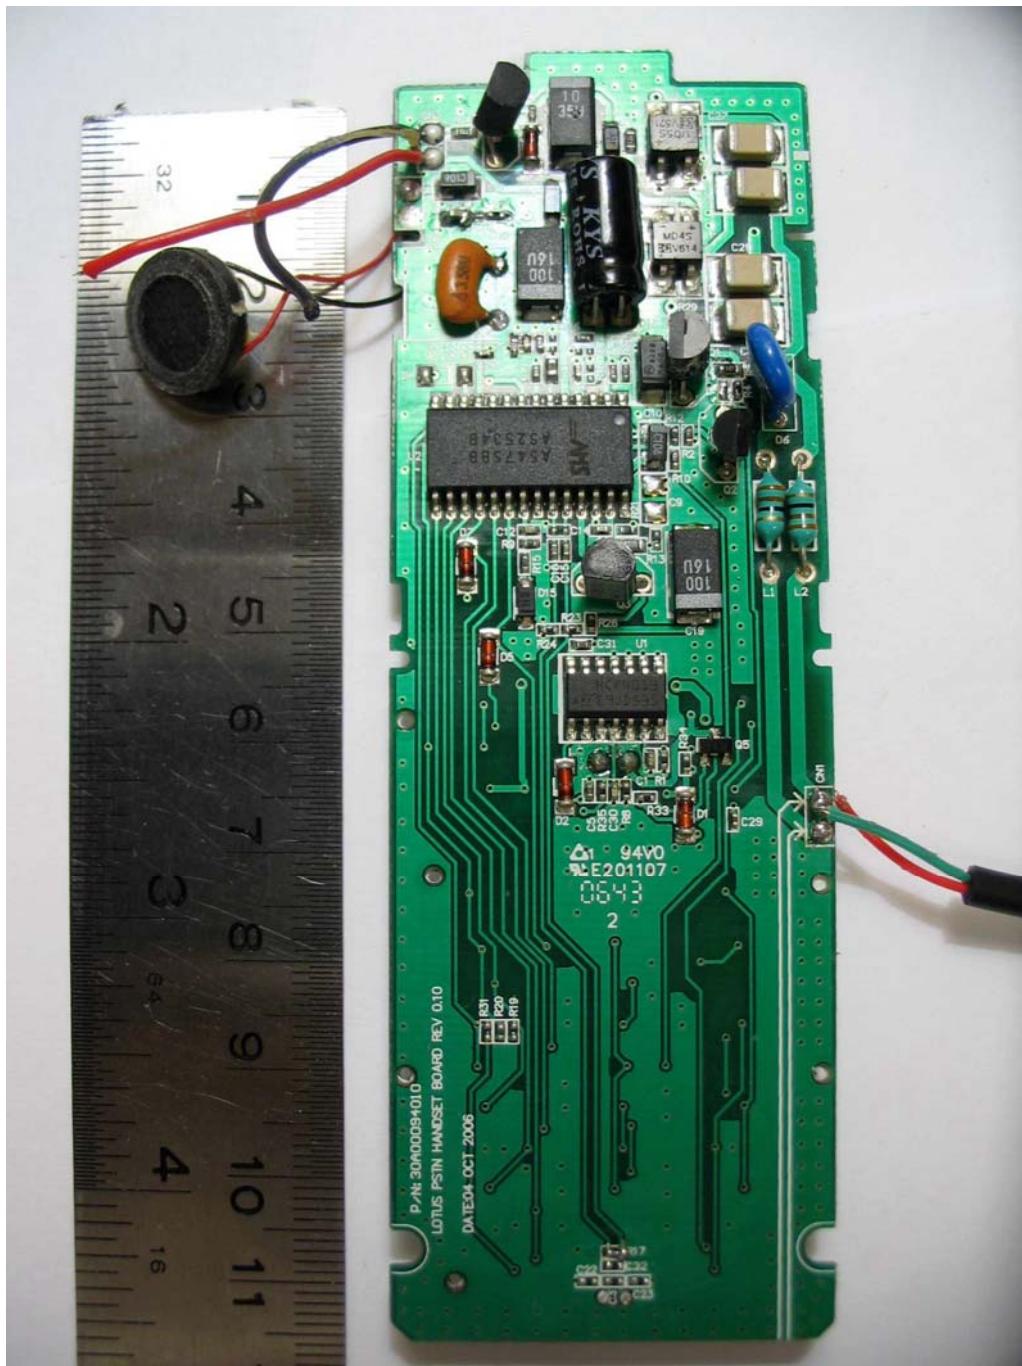


**Component View**

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT ACCESSORIES - CORDED ANALOGUE PHONE**

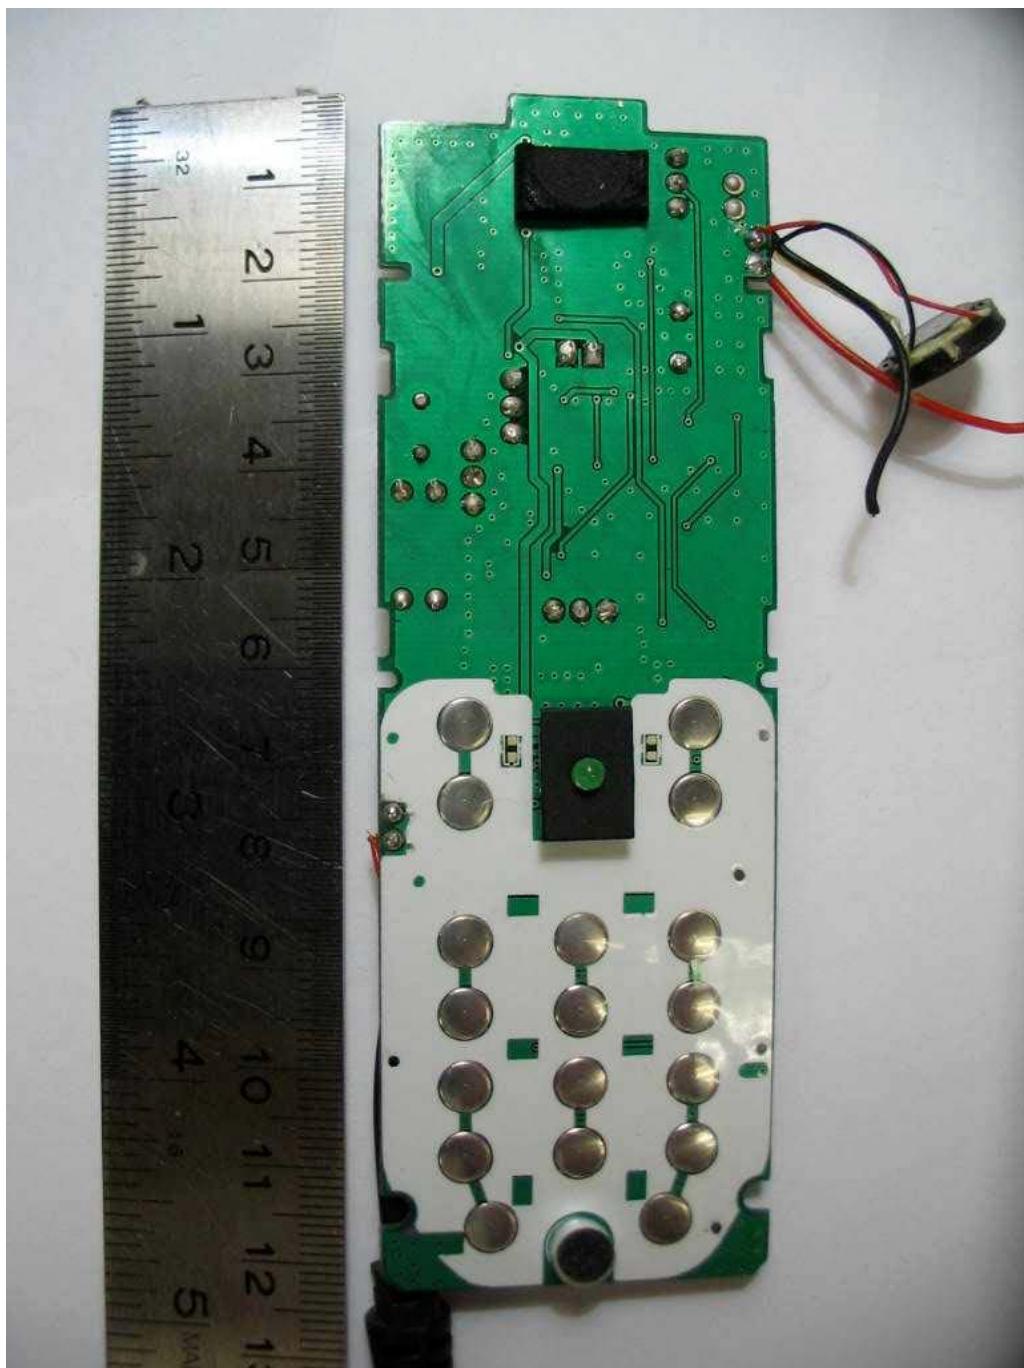

**EUT PHOTOGRAPHS / DIAGRAMS**

**ANNEX A**

**EUT PHOTOGRAPHS - SATELLITE BROADBAND COMMUNICATOR AC/DC ADAPTOR**



Front View



Rear View

**FCC LABEL & POSITION**

**ANNEX B**

**ANNEX B**

**FCC LABEL & POSITION**

## **FCC LABEL & POSITION**


## **ANNEX B**

### Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.




**FCC ID Sample Label**

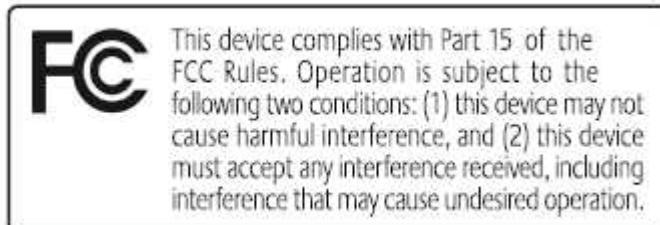

**FCC Statement Sample Label**

**FCC LABEL & POSITION**

**ANNEX B**

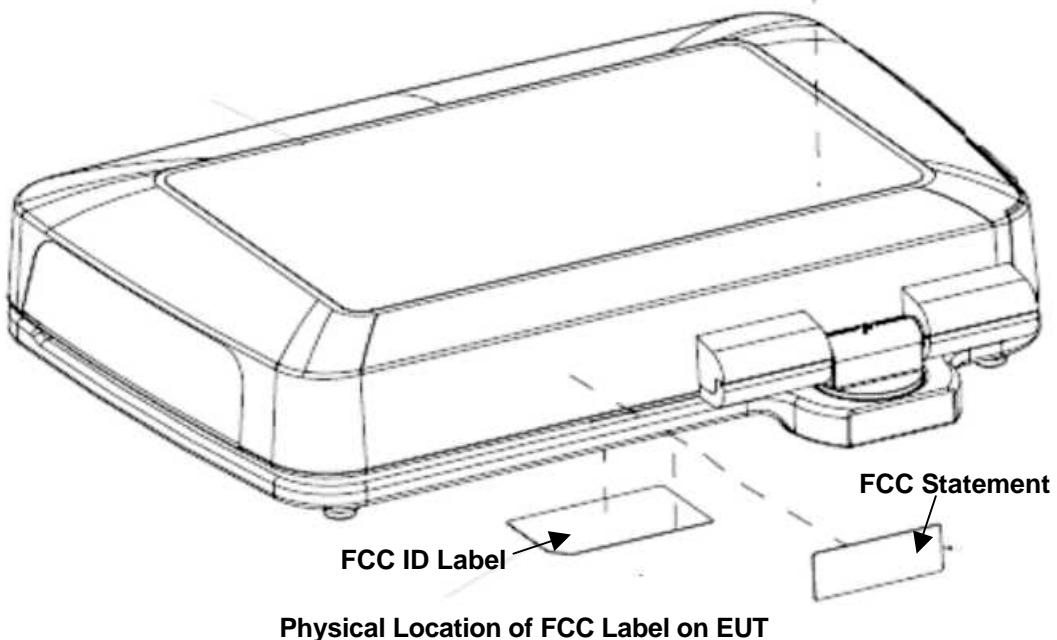

**USER MANUAL TECHINICAL DESCRIPTION BLOCK  
& CIRCUIT DIAGRAMS**

**ANNEX C**

**ANNEX C**

**USER MANUAL  
TECHNICAL DESCRIPTION  
BLOCK & CIRCUIT DIAGRAMS**

(Please refer to manufacturer for details)