

Variant FCC Test Report

(PART 27)

Report No.: RF180227C27F

FCC ID: QYLEM7511K

Test Model: K120

Received Date: Mar. 25, 2019

Test Date: May 25, 2019 ~ Jun. 04, 2019

Issued Date: Jun. 11, 2019

Applicant: Getac Technology Corporation.

Address: 5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 11568, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards.....	12
4 Test Types and Results	13
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results	15
4.2 Radiated Emission Measurement.....	17
4.2.1 Limits of Radiated Emission Measurement	17
4.2.2 Test Procedure	17
4.2.3 Deviation from Test Standard	17
4.2.4 Test Setup.....	18
4.2.5 Test Results	19
5 Pictures of Test Arrangements.....	31
Appendix – Information of the Testing Laboratories	32

Release Control Record

Issue No.	Description	Date Issued
RF180227C27F	Original Release	Jun. 11, 2019

1 Certificate of Conformity

Product: Tablet

Brand: Getac

Test Model: K120

Sample Status: Identical Prototype

Applicant: Getac Technology Corporation.

Test Date: May 25, 2019 ~ Jun. 04, 2019

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Rona Chen, **Date:** Jun. 11, 2019
Rona Chen / Specialist

Approved by : Dylan Chiou, **Date:** Jun. 11, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)(2)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049 27.53(m)(6)	Occupied Bandwidth	N/A	Refer to Note
--	Peak to Average Ratio	N/A	Refer to Note
2.1051 27.53(m)(4)(6)	Out-of-Band Emissions Measurements	N/A	Refer to Note
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -15.11 dB at 8010.00 MHz.

Note:

1. This report is a Class II change Partial report. Therefore, only test item of Equivalent Isotropic Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to SPORTON report no.: FG791919B for module (Brand: Sierra wireless Inc., Model: EM7511).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Horn Antenna SCHWARZBECK	BBHA 9170	148	Nov. 25, 2018	Nov. 24, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 19, 2018	Nov. 18, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 184045	980116	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6261786083	Dec. 11, 2018	Dec. 10, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.
 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.

3 General Information

3.1 General Description of EUT

Product	Tablet	
Brand	Getac	
Test Model	K120	
Status of EUT	Identical Prototype	
Power Supply Rating	11.1 Vdc / 14.4 Vdc (Battery) 19 Vdc (Adapter)	
Modulation Type	QPSK, 16QAM, 64QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 10+20 MHz)	2505.0 ~ 2550.6 MHz
	LTE Band 7 (Channel Bandwidth: 15+15 MHz)	2507.5 ~ 2547.5 MHz
	LTE Band 7 (Channel Bandwidth: 15+20 MHz)	2507.5 ~ 2545.4 MHz
	LTE Band 7 (Channel Bandwidth: 20+10 MHz)	2510.0 ~ 2545.6 MHz
	LTE Band 7 (Channel Bandwidth: 20+15 MHz)	2510.0 ~ 2542.9 MHz
	LTE Band 7 (Channel Bandwidth: 20+20 MHz)	2510.0 ~ 2540.2 MHz
	LTE Band 41 (Channel Bandwidth: 20+20 MHz)	2506.0 ~ 2660.2 MHz
	LTE Band 41 (Channel Bandwidth: 20+15 MHz)	2506.0 ~ 2662.9 MHz
	LTE Band 41 (Channel Bandwidth: 20+10 MHz)	2506.0 ~ 2665.6 MHz
	LTE Band 41 (Channel Bandwidth: 20+5 MHz)	2506.0 ~ 2668.3 MHz
	LTE Band 41 (Channel Bandwidth: 15+20 MHz)	2503.5 ~ 2665.4 MHz
	LTE Band 41 (Channel Bandwidth: 15+15 MHz)	2503.5 ~ 2667.5 MHz
	LTE Band 41 (Channel Bandwidth: 10+20 MHz)	2501.0 ~ 2670.6 MHz
	LTE Band 41 (Channel Bandwidth: 5+20 MHz)	2498.5 ~ 2675.8 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 20+20 MHz)	278.16 mW
	LTE Band 41 (Channel Bandwidth: 20+20 MHz)	122.55 mW
Antenna Type	PIFA Antenna with 3.72 dBi gain	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. This report is issued as a supplementary report to BV CPS report no. RF180227C27D-7. The difference compared with original report is adding CA mode. Therefore, only Equivalent Isotropic Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to SPORTON report no.: FG791919B for module (Brand: Sierra wireless Inc., Model: EM7511).


2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	Chicony	A12-065N2A	I/P: 100-240 Vac, 50-60 Hz, 1.7 A O/P: 19 Vdc, 3.42 A 1.75 m shielded cable with 1 core
Battery 1	Getac	BP3S1P2100S-01	11.1 Vdc, 2100 mAh
Battery 2	Getac	BP4S1P3450P-01	14.4 Vdc, 3450 mAh
WWAN Module 1	Sierra	EM7455	--
WWAN Module 2	Sierra	EM7511	--
WiFi & BT Module	Intel	8265NGW	--
RFID Module	NXP	PN-7462	--
Bar code Reader	HONEYWELL	N6603	--
Fingerprint	IMD	SF1155	--


3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

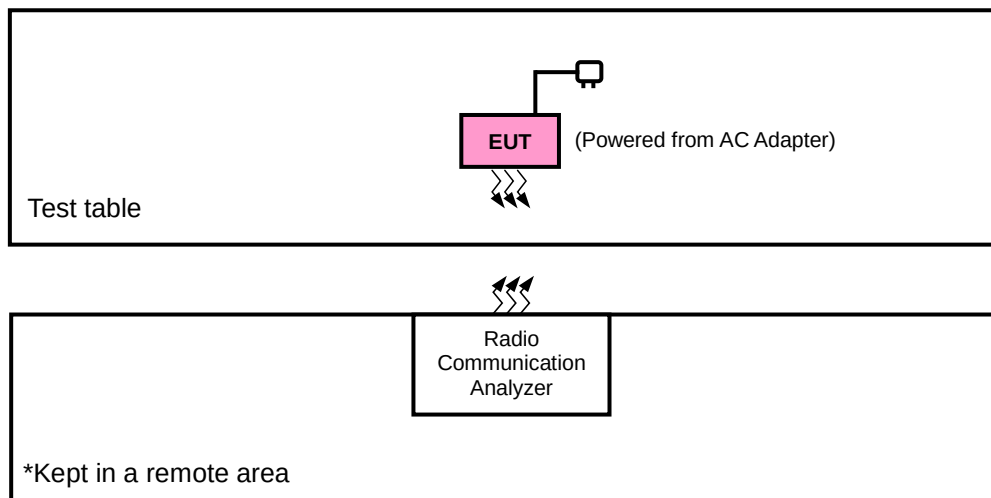

<E.I.R.P. Test>

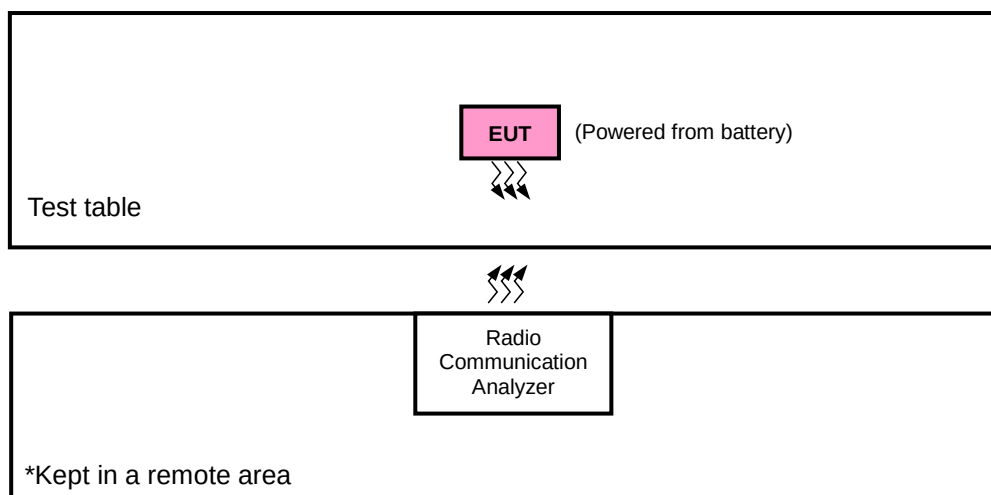

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 7	Y-plane	Y-axis
LTE Band 41	Y-plane	Y-axis

CA LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20850 to 21048	20850+21048	20+20 MHz	QPSK	1 RB / 99 RB Offset + 1 RB / 0 RB Offset
		21100 to 21298	21100+21298			
		21152 to 21350	21152 + 21350			
-	Radiated Emission Below 1GHz	20850 to 21048	20850+21048	20+20 MHz	QPSK	1 RB / 99 RB Offset + 1 RB / 0 RB Offset
		21100 to 21298	21100+21298			
		21152 to 21350	21152 + 21350			
-	Radiated Emission Above 1GHz	20850 to 21048	20850+21048	20+20 MHz	QPSK	1 RB / 99 RB Offset + 1 RB / 0 RB Offset
		21100 to 21298	21100+21298			
		21152 to 21350	21152 + 21350			

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

CA LTE Band 41

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39750 to 39948	39750 + 39948	20+20 MHz	QPSK	1 RB / 99 RB Offset + 1 RB / 0 RB Offset
		40620 to 40818	40620 + 40818			
		41292 to 41490	41292 + 41490			
-	Radiated Emission Below 1GHz	39750 to 39948	39750 + 39948	20+20 MHz	QPSK	1 RB / 99 RB Offset + 1 RB / 0 RB Offset
		40620 to 40818	40620 + 40818			
		41292 to 41490	41292 + 41490			
-	Radiated Emission Above 1GHz	39750 to 39948	39750 + 39948	20+20 MHz	QPSK	1 RB / 99 RB Offset + 1 RB / 0 RB Offset
		40620 to 40818	40620 + 40818			
		41292 to 41490	41292 + 41490			

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	11.1 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2 watts transmitter output power” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

EIRP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

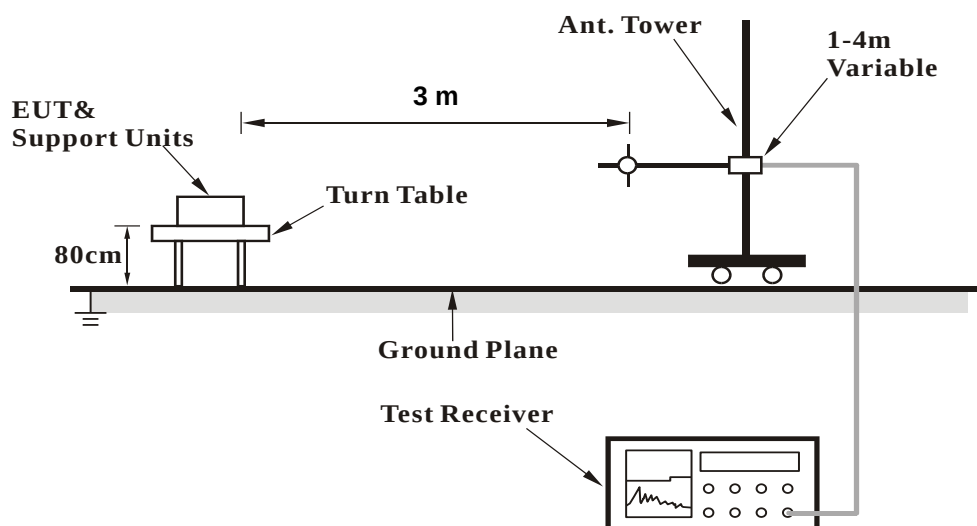


<Radiated Emission above 1 GHz>

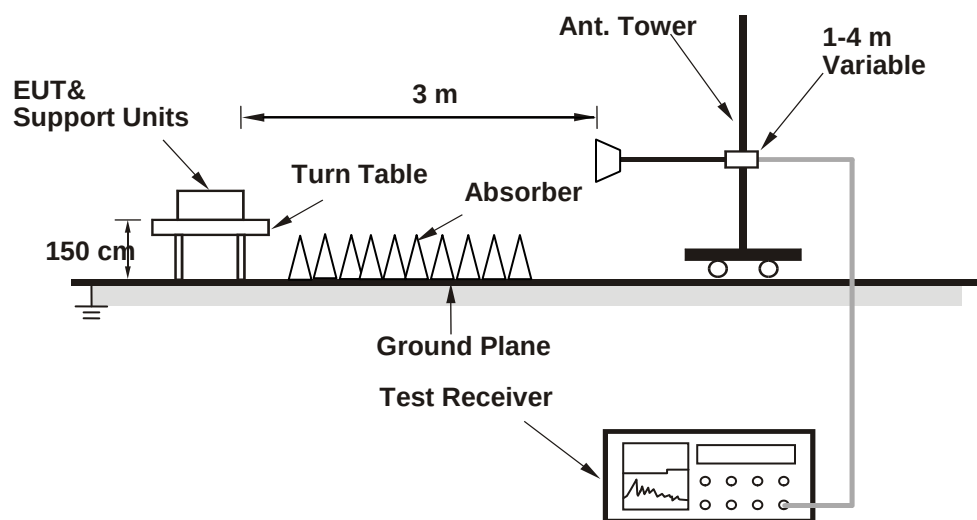

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

CA LTE Band 7															
PCC							SCC							Power	
Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Freq. (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Freq. (MHz)	Single Carrier Tx Power (dBm)	Tx Power with UL-CA Active (dBm)
7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	22.61	14.28
			1	99						1	0			22.37	22.31
7	20	QPSK	1	0	21100	2535	7	20	QPSK	1	99	21298	2554.8	22.74	14.34
			1	99						1	0			22.64	22.62
7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	22.73	14.41
			1	99						1	0			22.39	22.30

CA LTE Band 41															
PCC							SCC							Power	
Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Freq. (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Freq. (MHz)	Single Carrier Tx Power (dBm)	Tx Power with UL-CA Active (dBm)
41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	22.49	14.19
			1	99						1	0			22.48	22.45
41	20	QPSK	1	0	40185	2549.5	41	20	QPSK	1	99	40383	2569.3	22.32	14.32
			1	99						1	0			22.2	22.20
41	20	QPSK	1	0	40620	2593	41	20	QPSK	1	99	40818	2612.8	22.21	14.08
			1	99						1	0			22.19	22.16
41	20	QPSK	1	0	41055	2636.5	41	20	QPSK	1	99	41253	2656.3	22.24	14.06
			1	99						1	0			22.12	22.10
41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	22.98	14.08
			1	99						1	0			22.5	22.23

EIRP Power (dBm)

CA LTE Band 7							
Channel Bandwidth: 20 + 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20850+21048	2519.9	-19.22	43.66	24.44	278.16	H
	21100+21298	2544.9	-19.66	43.66	24.00	251.36	
	21350+21152	2550.1	-19.51	43.66	24.15	260.20	
	20850+21048	2519.9	-26.33	44.30	17.97	62.62	V
	21100+21298	2544.9	-26.41	44.30	17.89	61.48	
	21350+21152	2550.1	-26.36	44.30	17.94	62.19	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 20 + 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	39750+39948	2515.9	-22.99	43.66	20.67	116.76	H
	40620+40818	2602.9	-22.81	43.66	20.85	121.70	
	41292+41490	2670.1	-22.78	43.66	20.88	122.55	
	39750+39948	2515.9	-18.87	44.30	25.43	348.90	V
	40620+40818	2602.9	-18.75	44.30	25.55	358.67	
	41292+41490	2670.1	-18.54	44.30	25.76	376.44	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.

4.2.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}.$


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

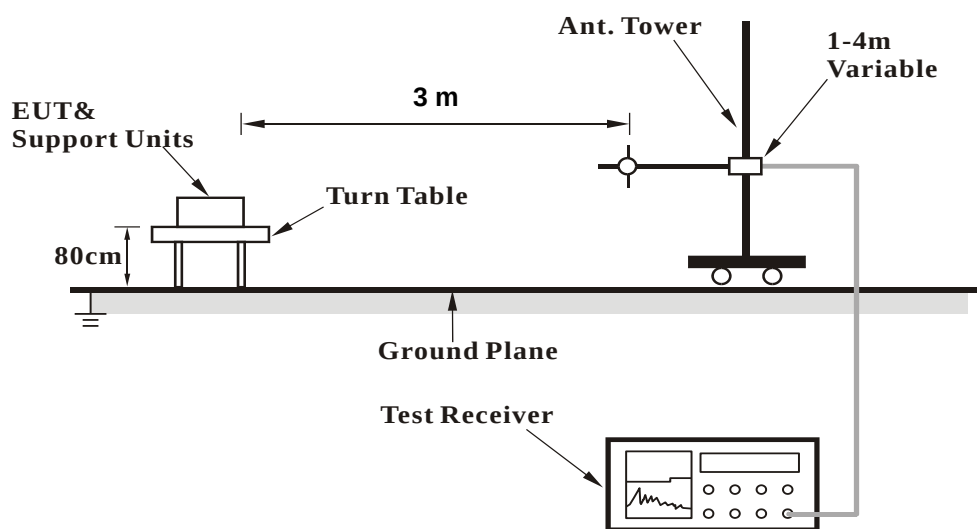

<Radiated Emission above 1 GHz>

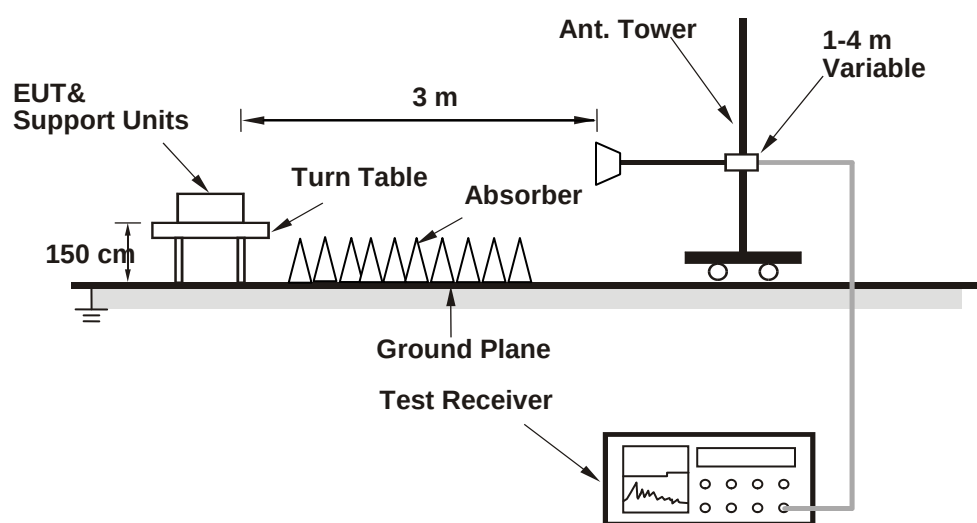

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

CA LTE Band 7

Channel Bandwidth: 20 + 20 MHz / QPSK


Ch 20850 + Ch 21048



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

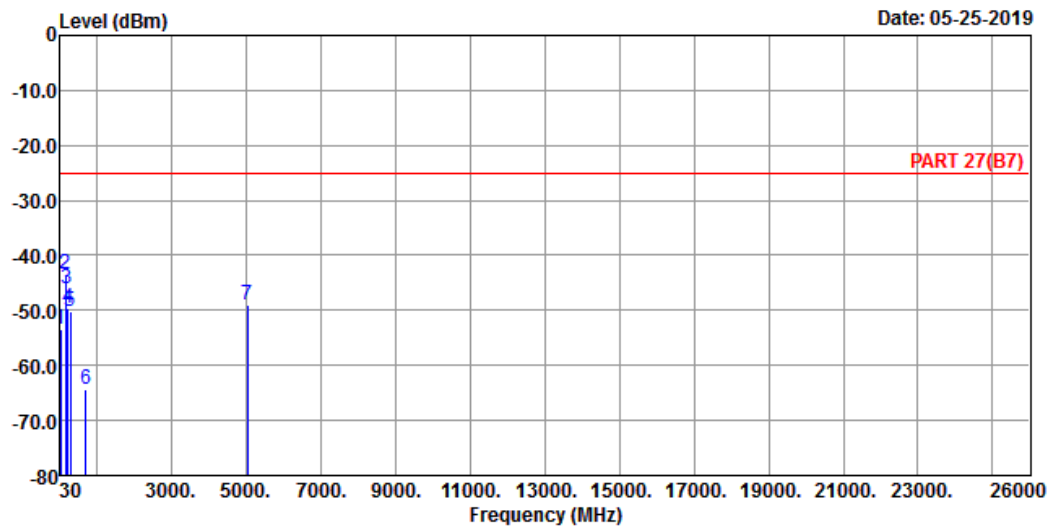

Site : 966 Chamber 5

Condition: PART 27(B7) HORIZONTAL

Remak : LTE Band 7 QPSK_40M Link_CH20850+21048

Tested by: Getaz Yang


	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	Factor	Limit Remark
					dB	dB
1	43.58	-53.32	-51.85	-25.00	-1.47	-28.32 Peak
2 pp	169.68	-43.36	-37.83	-25.00	-5.53	-18.36 Peak
3	197.81	-46.07	-38.24	-25.00	-7.83	-21.07 Peak
4	242.43	-49.66	-43.35	-25.00	-6.31	-24.66 Peak
5	290.93	-50.24	-43.41	-25.00	-6.83	-25.24 Peak
6	715.79	-64.43	-64.64	-25.00	0.21	-39.43 Peak
7	5040.00	-48.94	-46.77	-25.00	-2.17	-23.94 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

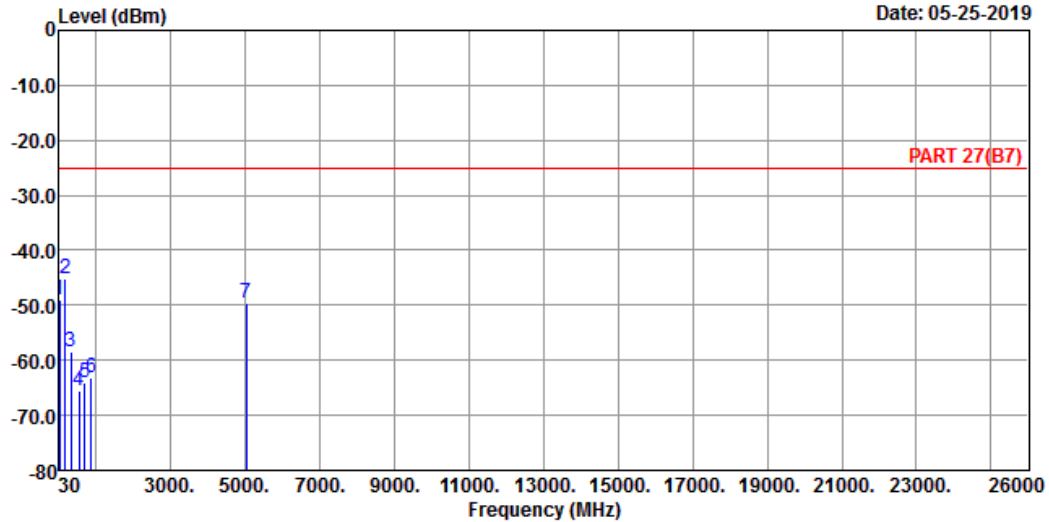

Site : 966 Chamber 5
Condition: PART 27(B7) VERTICAL
Remak : LTE Band 7 QPSK_40M Link_CH20850+21048
Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	42.61	-49.08	-48.14	-25.00	-0.94	-24.08	Peak
2 pp	196.84	-45.03	-37.29	-25.00	-7.74	-20.03	Peak
3	352.04	-58.54	-52.31	-25.00	-6.23	-33.54	Peak
4	554.77	-65.55	-62.90	-25.00	-2.65	-40.55	Peak
5	716.76	-64.05	-64.28	-25.00	0.23	-39.05	Peak
6	888.45	-63.14	-63.65	-25.00	0.51	-38.14	Peak
7	5040.00	-49.67	-47.50	-25.00	-2.17	-24.67	Peak


Ch 21100 + Ch 21298



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

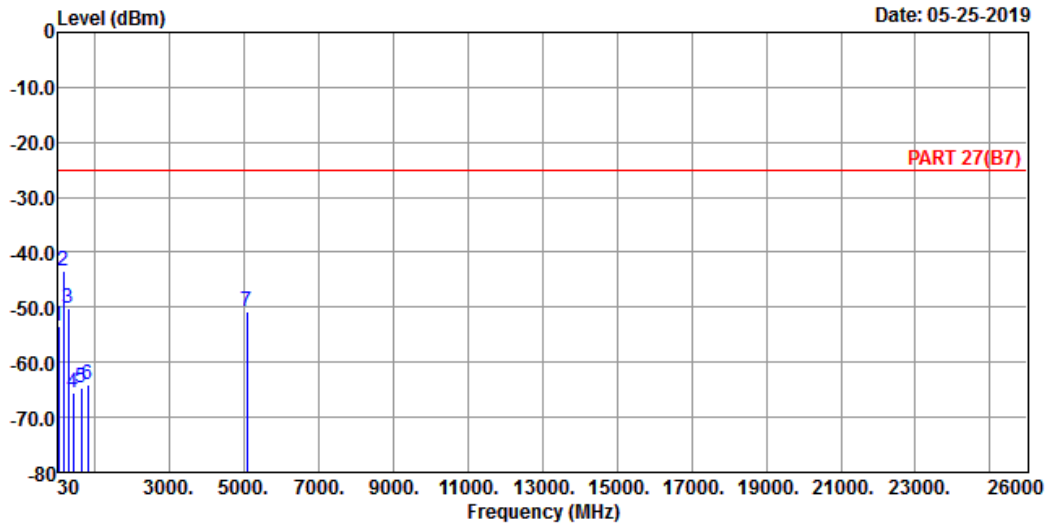

Site : 966 Chamber 5
Condition: PART 27(B7) HORIZONTAL
Remak : LTE Band 7 QPSK_40M Link_CH21100+21298
Tested by: Getaz Yang


	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-53.32	-51.85	-25.00	-1.47	-28.32	Peak
2 pp	169.68	-43.36	-37.83	-25.00	-5.53	-18.36	Peak
3	290.93	-50.24	-43.41	-25.00	-6.83	-25.24	Peak
4	430.61	-65.41	-59.71	-25.00	-5.70	-40.41	Peak
5	653.71	-64.79	-63.97	-25.00	-0.82	-39.79	Peak
6	825.40	-63.99	-64.50	-25.00	0.51	-38.99	Peak
7	5090.00	-50.73	-49.00	-25.00	-1.73	-25.73	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

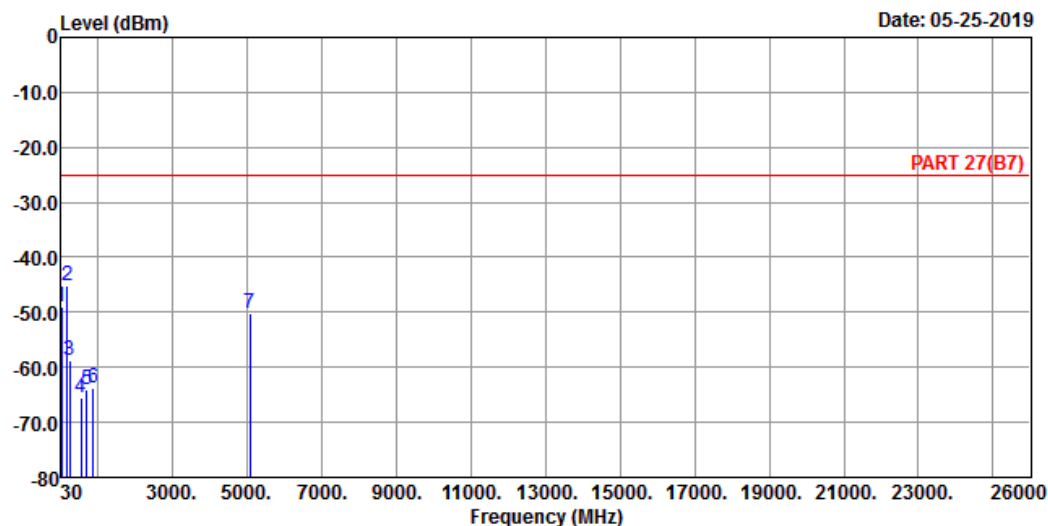

Site : 966 Chamber 5

Condition: PART 27(B7) VERTICAL

Remak : LTE Band 7 QPSK_40M Link_CH21100+21298

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	42.61	-49.08	-48.14	-25.00	-0.94	-24.08	Peak
2 pp	196.84	-45.03	-37.29	-25.00	-7.74	-20.03	Peak
3	264.74	-58.83	-52.54	-25.00	-6.29	-33.83	Peak
4	554.77	-65.55	-62.90	-25.00	-2.65	-40.55	Peak
5	716.76	-64.05	-64.28	-25.00	0.23	-39.05	Peak
6	887.48	-63.64	-64.14	-25.00	0.50	-38.64	Peak
7	5090.00	-50.24	-48.51	-25.00	-1.73	-25.24	Peak

Ch 21152 + Ch 21350




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 05-25-2019

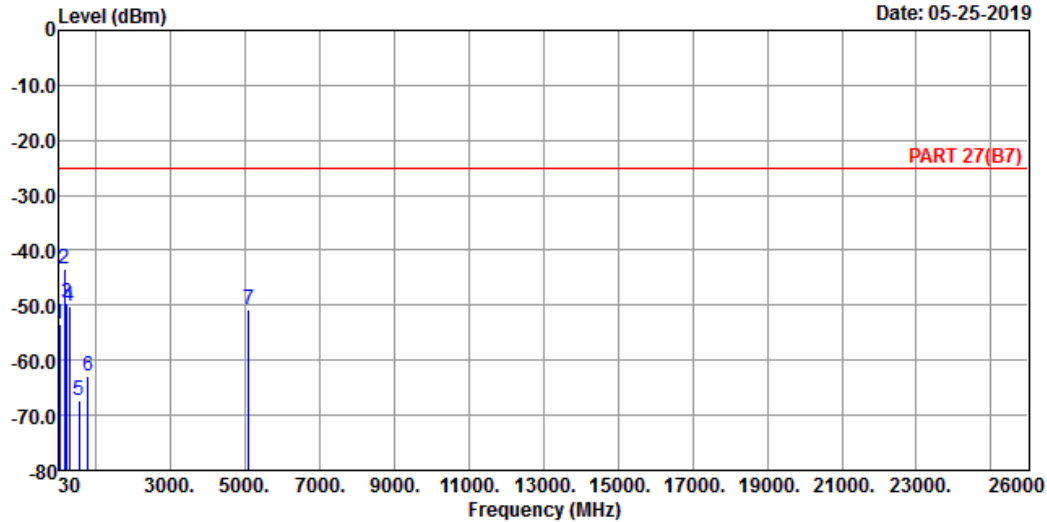

Site : 966 Chamber 5

Condition: PART 27(B7) HORIZONTAL

Remak : LTE Band 7 QPSK_40M Link_CH21152+21350

Tested by: Getaz Yang


	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-53.32	-51.85	-25.00	-1.47	-28.32	Peak
2 pp	169.68	-43.36	-37.83	-25.00	-5.53	-18.36	Peak
3	242.43	-49.66	-43.35	-25.00	-6.31	-24.66	Peak
4	290.93	-50.24	-43.41	-25.00	-6.83	-25.24	Peak
5	547.98	-67.41	-64.49	-25.00	-2.92	-42.41	Peak
6	794.36	-62.89	-63.64	-25.00	0.75	-37.89	Peak
7	5100.00	-50.72	-49.14	-25.00	-1.58	-25.72	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

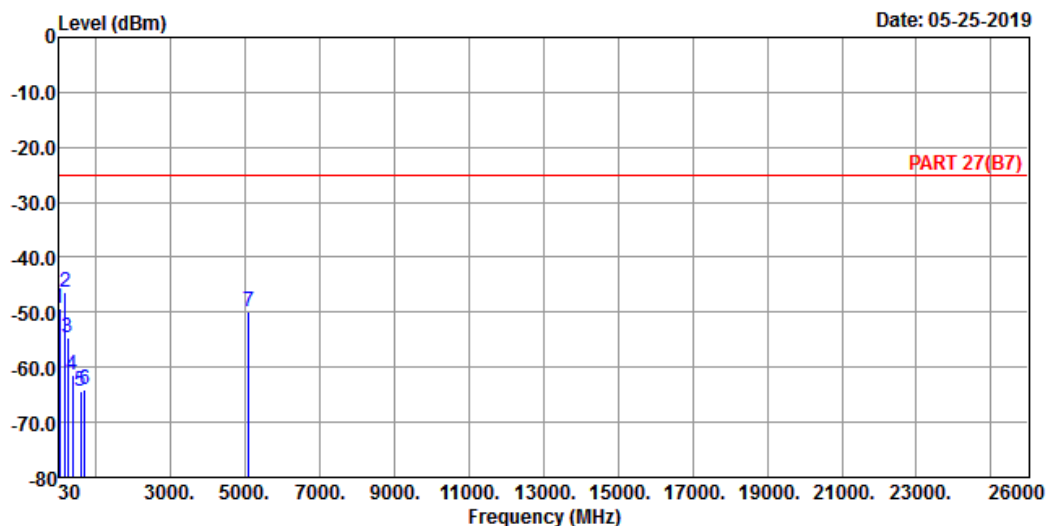

Site : 966 Chamber 5

Condition: PART 27(B7) VERTICAL

Remak : LTE Band 7 QPSK_40M Link_CH21152+21350

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-49.20	-47.73	-25.00	-1.47	-24.20	Peak
2 pp	178.41	-46.48	-39.42	-25.00	-7.06	-21.48	Peak
3	253.10	-54.58	-48.53	-25.00	-6.05	-29.58	Peak
4	381.14	-61.49	-55.43	-25.00	-6.06	-36.49	Peak
5	600.36	-64.46	-63.71	-25.00	-0.75	-39.46	Peak
6	716.76	-64.05	-64.28	-25.00	0.23	-39.05	Peak
7	5100.00	-50.03	-48.45	-25.00	-1.58	-25.03	Peak

LTE Band 41

Channel Bandwidth: 20 + 20 MHz / QPSK


Ch 39750 + Ch 39948



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

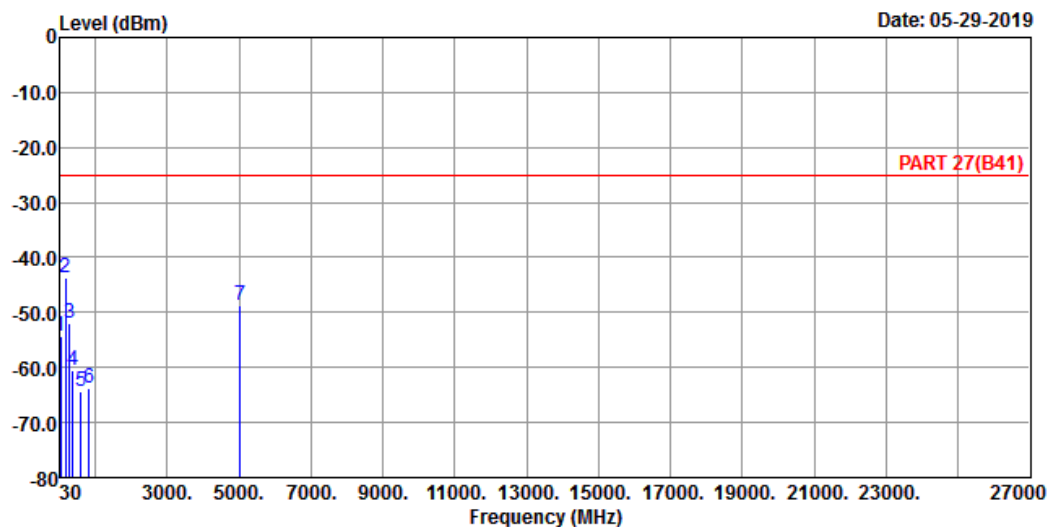

Site : 966 Chamber 5

Condition: PART 27(B41) HORIZONTAL

Remak : LTE Band 41 QPSK_40M Link_CH39750+39948

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Over		
	MHz	dBm	dBm	dBm	Factor	Limit	Remark
1	43.58	-54.36	-52.89	-25.00	-1.47	-29.36	Peak
2 pp	169.68	-43.65	-38.12	-25.00	-5.53	-18.65	Peak
3	294.81	-51.86	-44.95	-25.00	-6.91	-26.86	Peak
4	369.50	-60.52	-54.40	-25.00	-6.12	-35.52	Peak
5	599.39	-64.36	-63.57	-25.00	-0.79	-39.36	Peak
6	833.16	-63.68	-64.12	-25.00	0.44	-38.68	Peak
7	5031.72	-48.65	-46.33	-25.00	-2.32	-23.65	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 05-29-2019

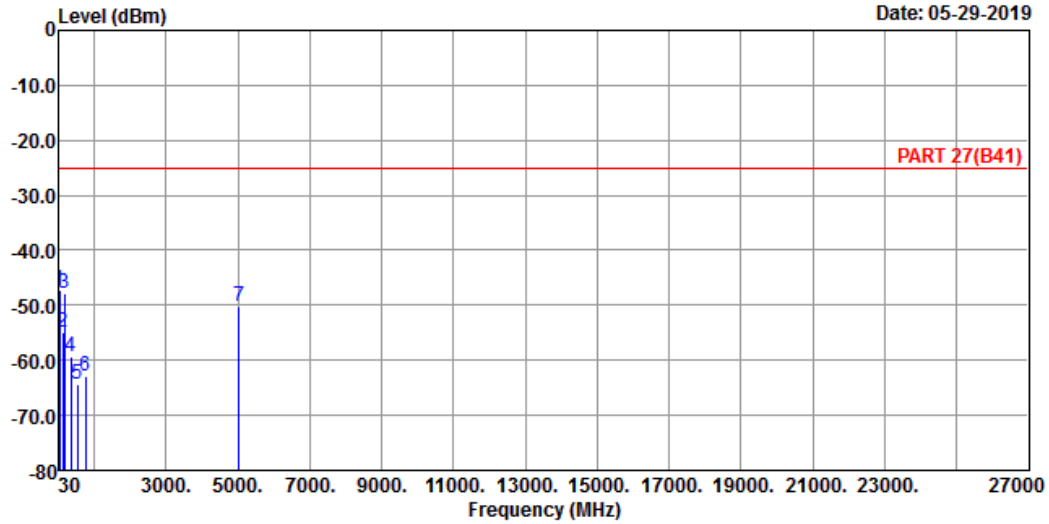

Site : 966 Chamber 5

Condition: PART 27(B41) VERTICAL

Remak : LTE Band 41 QPSK_40M Link_CH39750+39948

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	42.61	-47.29	-46.35	-25.00	-0.94	-22.29	Peak
2	121.18	-55.02	-45.29	-25.00	-9.73	-30.02	Peak
3	178.41	-47.79	-40.73	-25.00	-7.06	-22.79	Peak
4	349.13	-59.34	-53.09	-25.00	-6.25	-34.34	Peak
5	532.46	-64.36	-60.89	-25.00	-3.47	-39.36	Peak
6	754.59	-62.94	-63.81	-25.00	0.87	-37.94	Peak
7	5031.72	-50.11	-47.79	-25.00	-2.32	-25.11	Peak

Ch 40620 + Ch 40818




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 05-29-2019

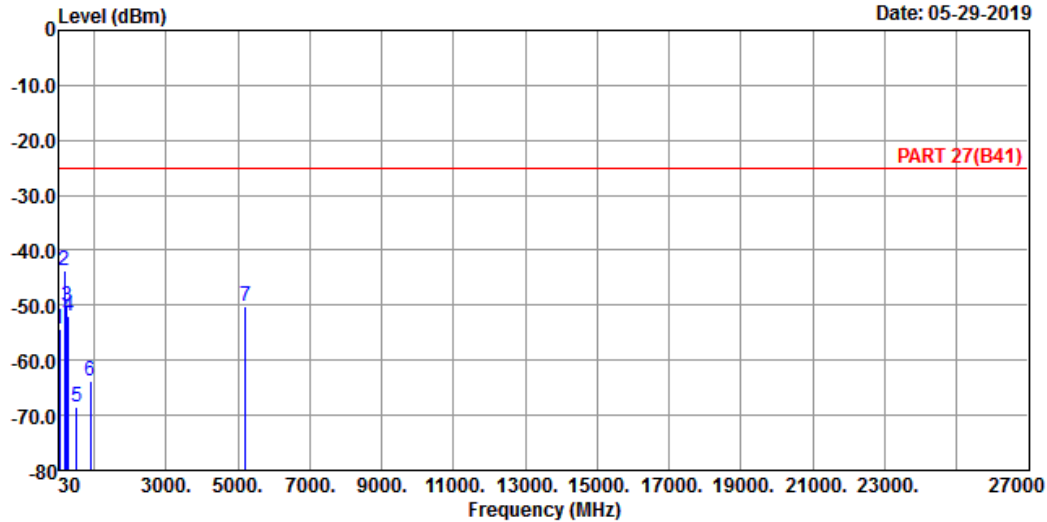

Site : 966 Chamber 5

Condition: PART 27(B41) HORIZONTAL

Remak : LTE Band 41 QPSK_40M Link_CH40620+40818

Tested by: Getaz Yang


	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-54.36	-52.89	-25.00	-1.47	-29.36	Peak
2 pp	169.68	-43.65	-38.12	-25.00	-5.53	-18.65	Peak
3	238.55	-50.08	-43.62	-25.00	-6.46	-25.08	Peak
4	294.81	-51.86	-44.95	-25.00	-6.91	-26.86	Peak
5	520.82	-68.62	-64.73	-25.00	-3.89	-43.62	Peak
6	884.57	-63.83	-64.32	-25.00	0.49	-38.83	Peak
7	5205.70	-50.18	-48.00	-25.00	-2.18	-25.18	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

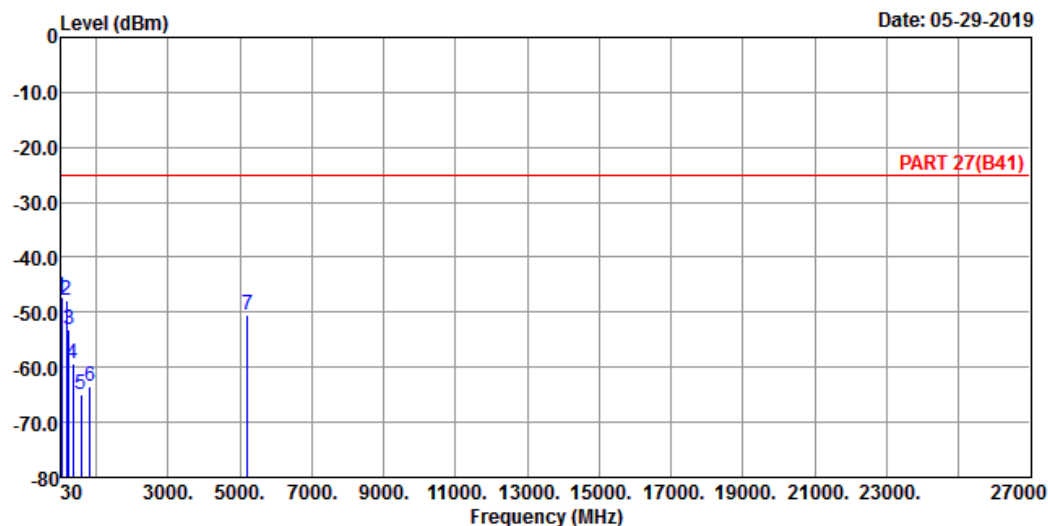

Site : 966 Chamber 5

Condition: PART 27(B41) VERTICAL

Remak : LTE Band 41 QPSK_40M Link_CH40620+40818

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	42.61	-47.29	-46.35	-25.00	-0.94	-22.29	Peak
2	178.41	-47.79	-40.73	-25.00	-7.06	-22.79	Peak
3	247.28	-53.15	-47.04	-25.00	-6.11	-28.15	Peak
4	349.13	-59.34	-53.09	-25.00	-6.25	-34.34	Peak
5	577.08	-65.03	-63.31	-25.00	-1.72	-40.03	Peak
6	831.22	-63.58	-64.04	-25.00	0.46	-38.58	Peak
7	5205.70	-50.43	-48.25	-25.00	-2.18	-25.43	Peak

Ch 41292 + Ch 41490




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 05-29-2019

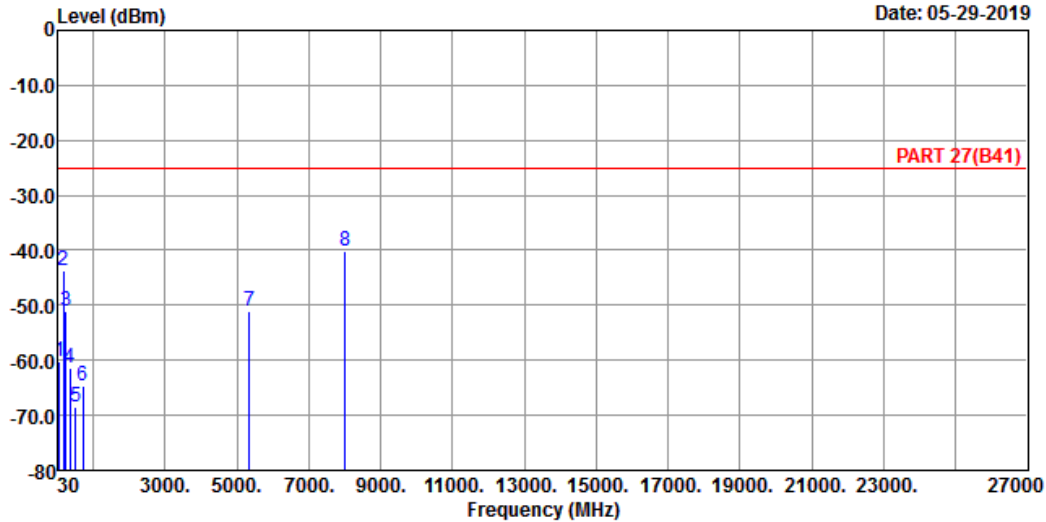

Site : 966 Chamber 5

Condition: PART 27(B41) HORIZONTAL

Remak : LTE Band 41 QPSK_40M Link_CH41292+41490

Tested by: Getaz Yang


	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	53.28	-60.08	-54.27	-25.00	-5.81	-35.08	Peak
2	169.68	-43.65	-38.12	-25.00	-5.53	-18.65	Peak
3	246.31	-51.17	-45.02	-25.00	-6.15	-26.17	Peak
4	345.25	-61.43	-55.12	-25.00	-6.31	-36.43	Peak
5	520.82	-68.62	-64.73	-25.00	-3.89	-43.62	Peak
6	706.09	-64.50	-64.52	-25.00	0.02	-39.50	Peak
7	5340.00	-50.96	-48.33	-25.00	-2.63	-25.96	Peak
8 pp	8010.00	-40.11	-45.57	-25.00	5.46	-15.11	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

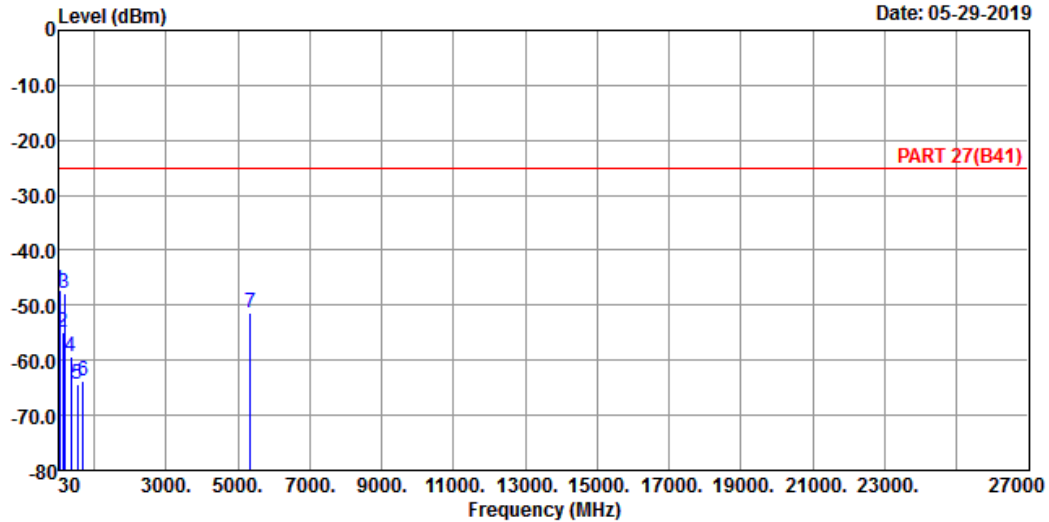

Site : 966 Chamber 5

Condition: PART 27(B41) VERTICAL

Remak : LTE Band 41 QPSK_40M Link_CH41292+41490

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	42.61	-47.29	-46.35	-25.00	-0.94	-22.29	Peak
2	121.18	-55.02	-45.29	-25.00	-9.73	-30.02	Peak
3	178.41	-47.79	-40.73	-25.00	-7.06	-22.79	Peak
4	349.13	-59.34	-53.09	-25.00	-6.25	-34.34	Peak
5	532.46	-64.36	-60.89	-25.00	-3.47	-39.36	Peak
6	696.39	-63.72	-63.56	-25.00	-0.16	-38.72	Peak
7	5340.00	-51.27	-48.64	-25.00	-2.63	-26.27	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---