
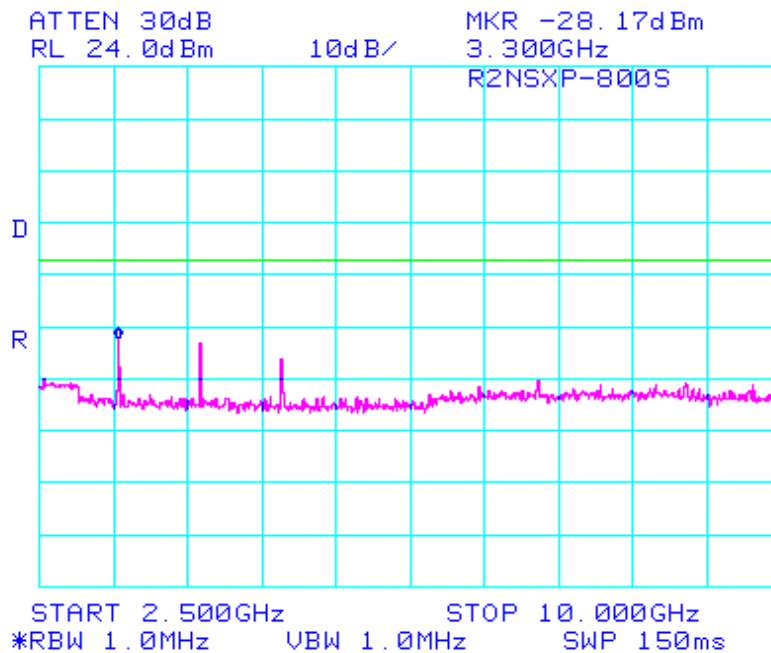




Spectrum Analyzer Presentation

Conducted Spurious CDMA Ch. 1013

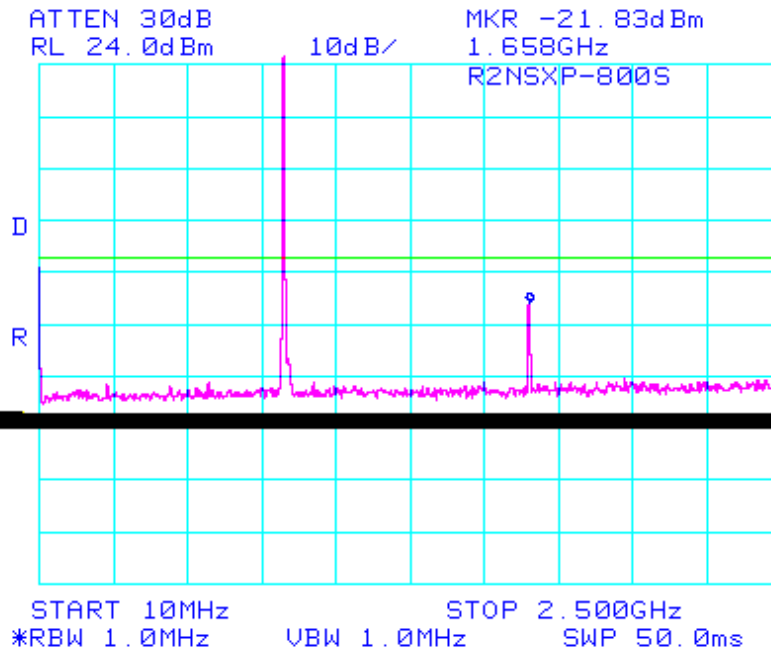



Spectrum Analyzer Presentation

Conducted Spurious CDMA Ch. 0384

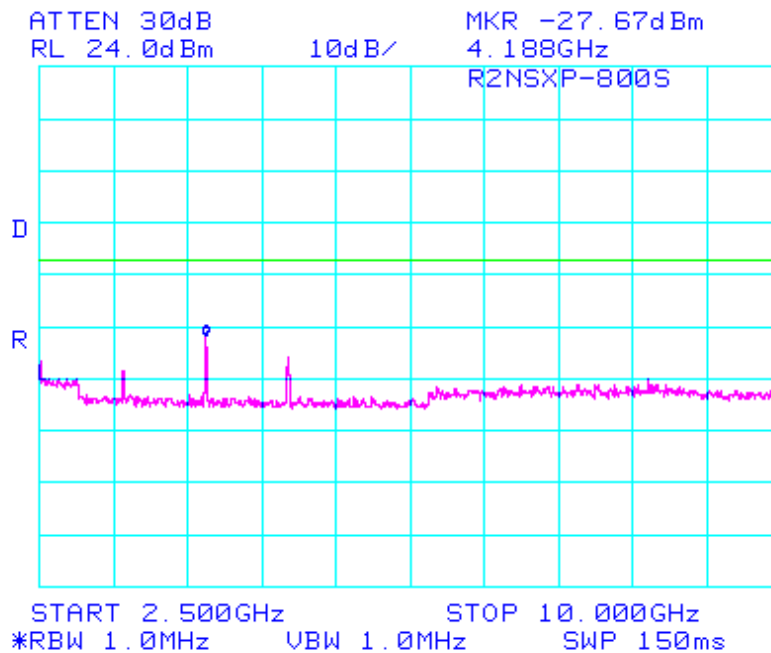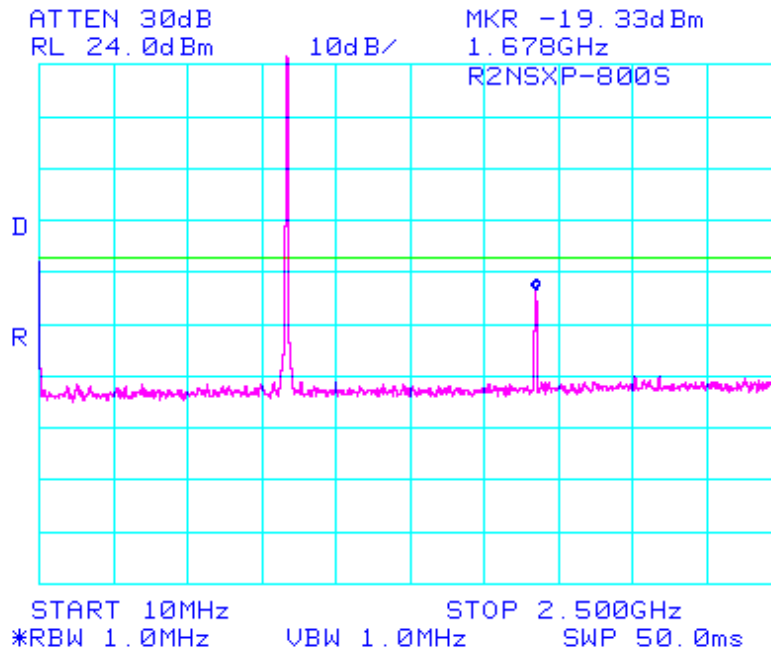


Spectrum Analyzer Presentation

Conducted Spurious CDMA Ch. 0777

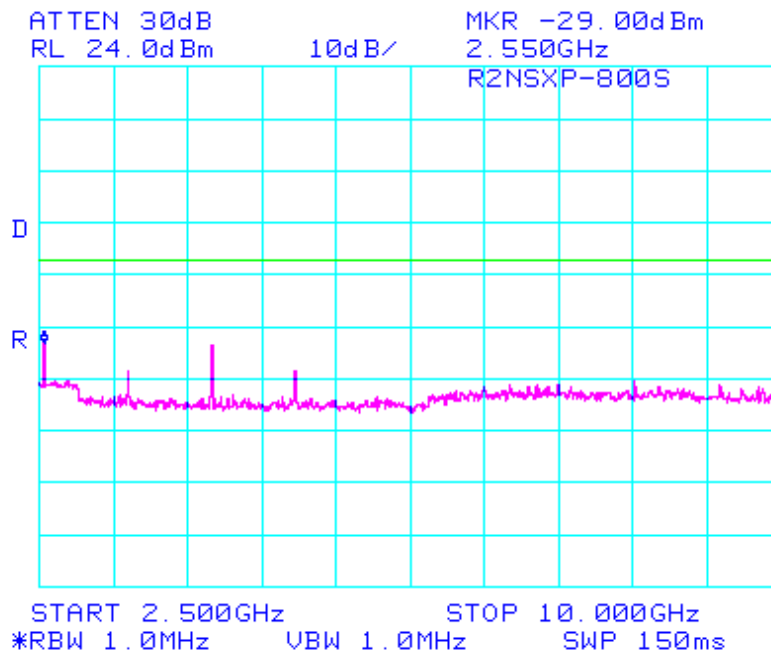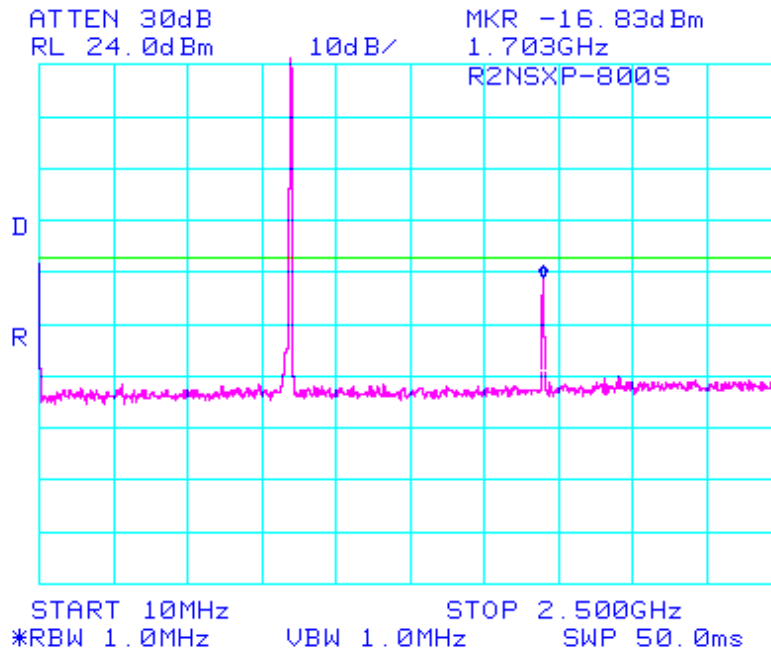


Spectrum Analyzer Presentation

Power Out. CDMA Ch. 1013

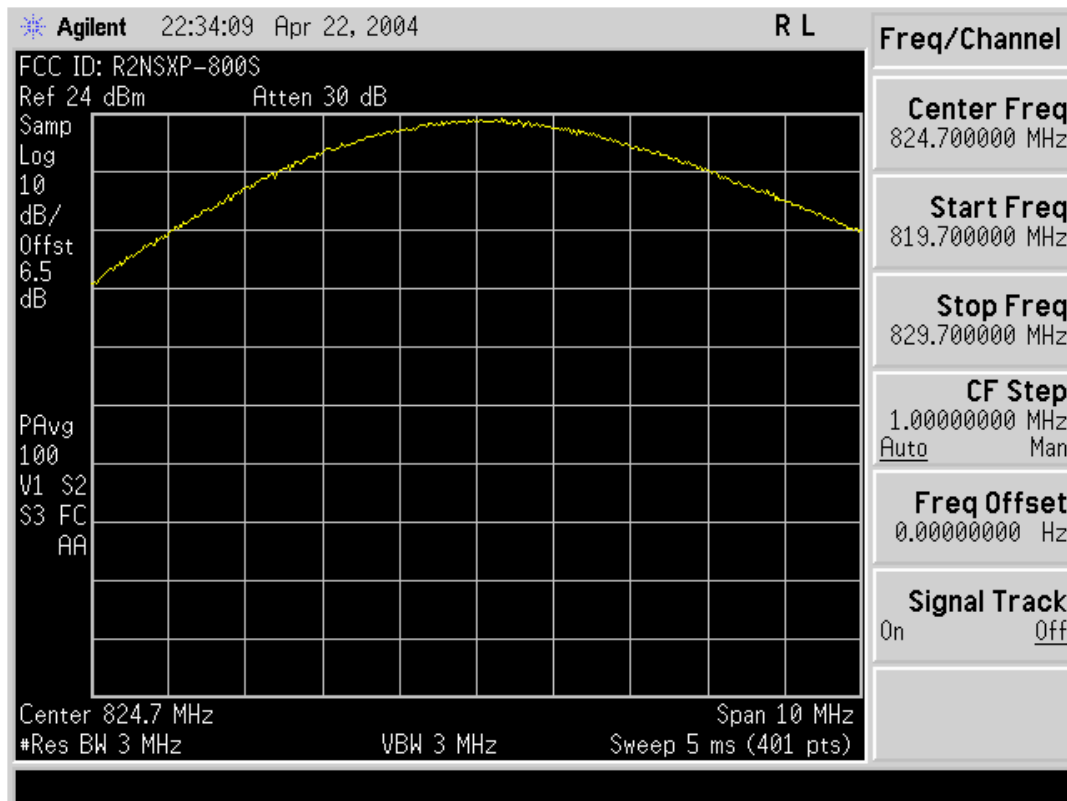


Power Out. CDMA Ch. 0777

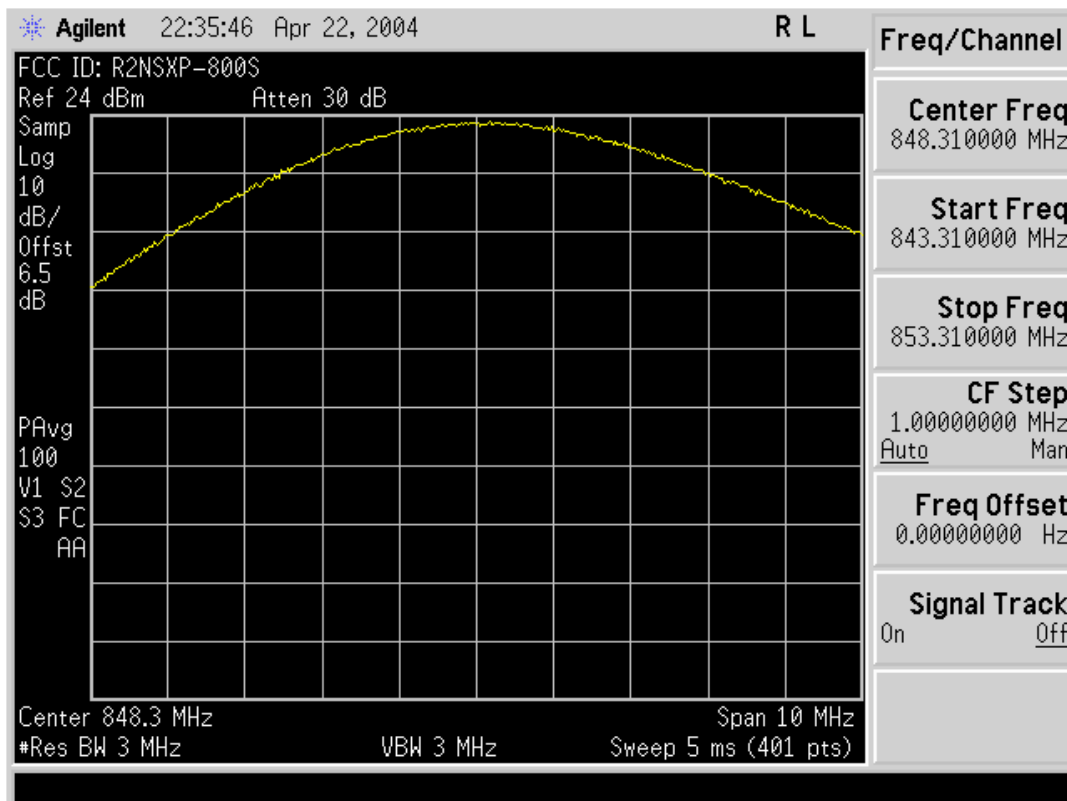


FCC ID: R2NSXP-800S

Spectrum Analyzer Presentation

Power Out. CDMA Ch. 0384

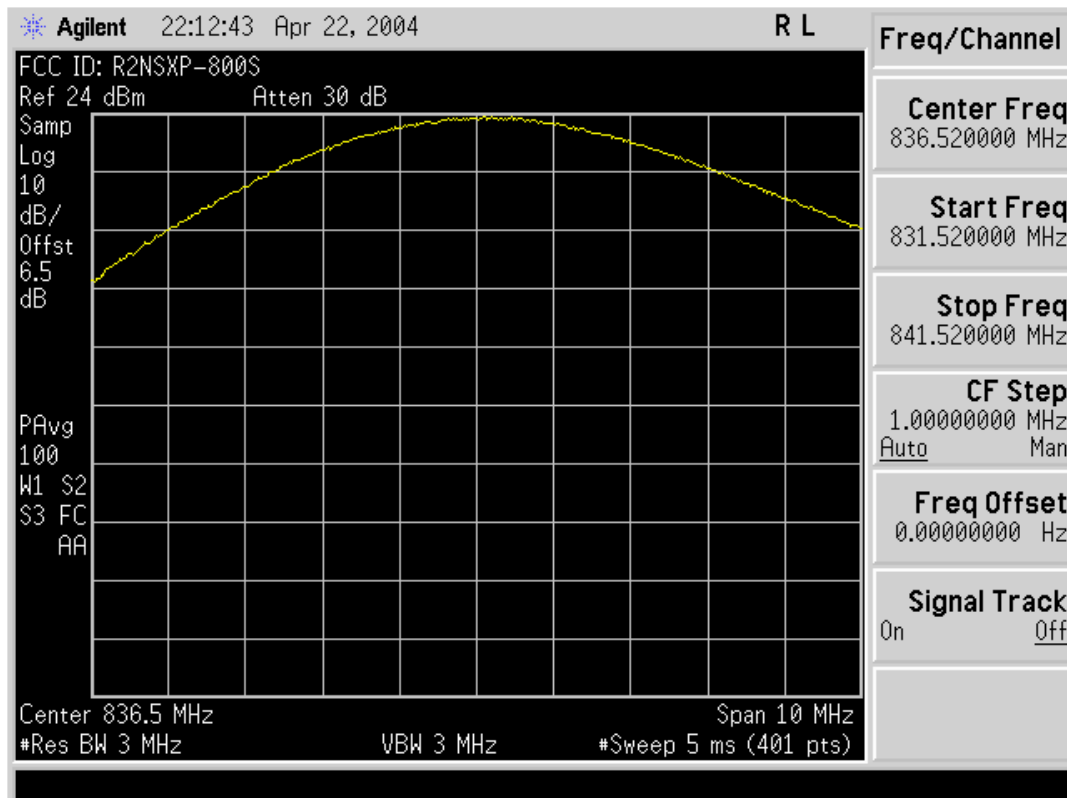


Channel Power. CDMA Ch. 0384

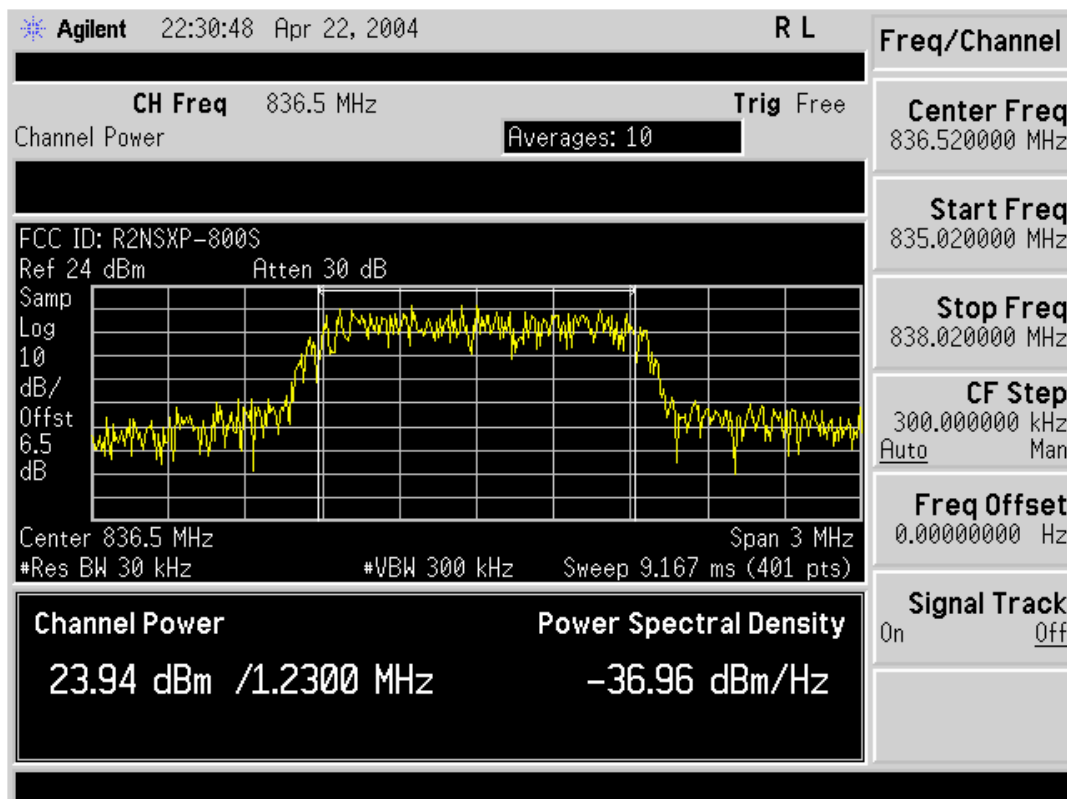


Spectrum Analyzer Presentation

Occupied Bandwidth. CDMA Ch. 0384

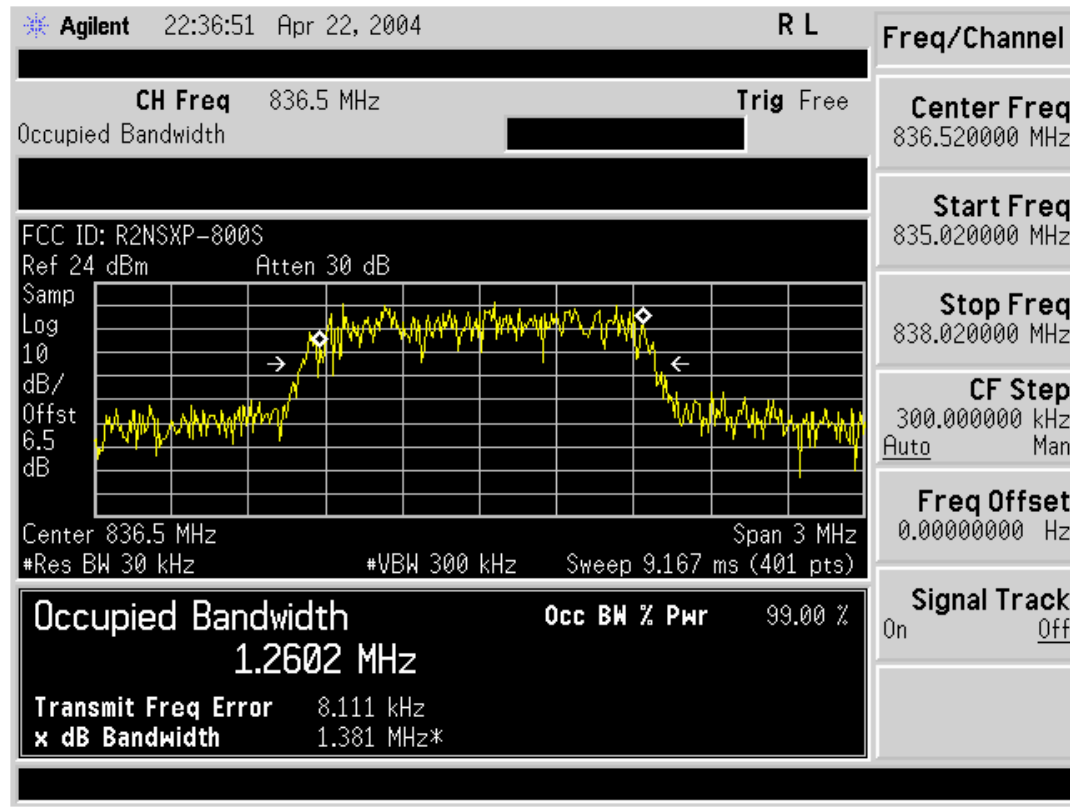


Spectrum Analyzer Presentation

Band Edge. CDMA Ch. 1013

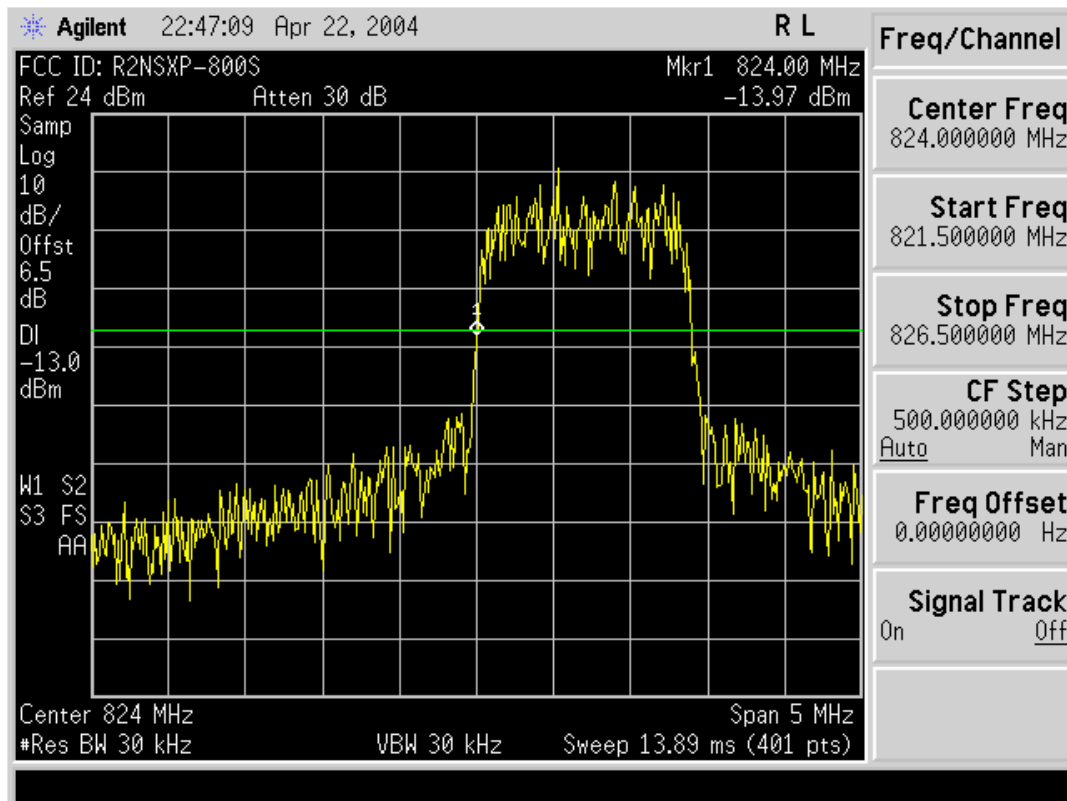


Band Edge. CDMA Ch. 0777

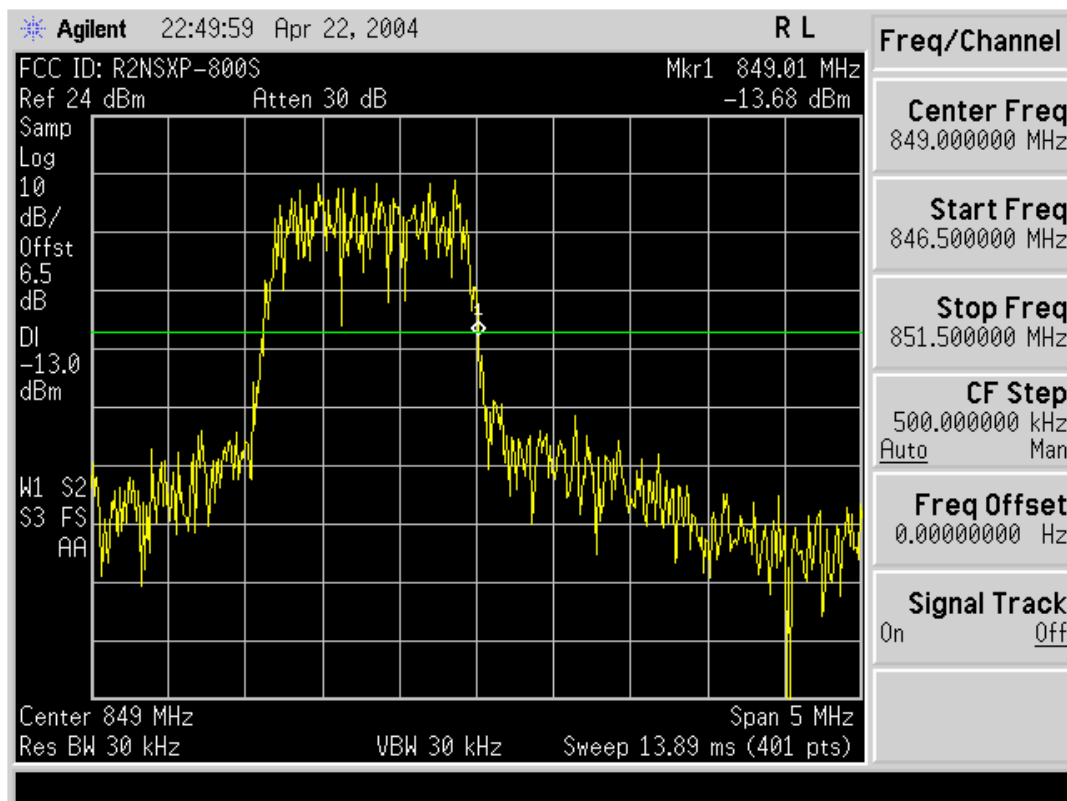


FCC ID: R2NSXP-800S

Spectrum Analyzer Presentation

Band Edge - Block a. CDMA Ch. 0310

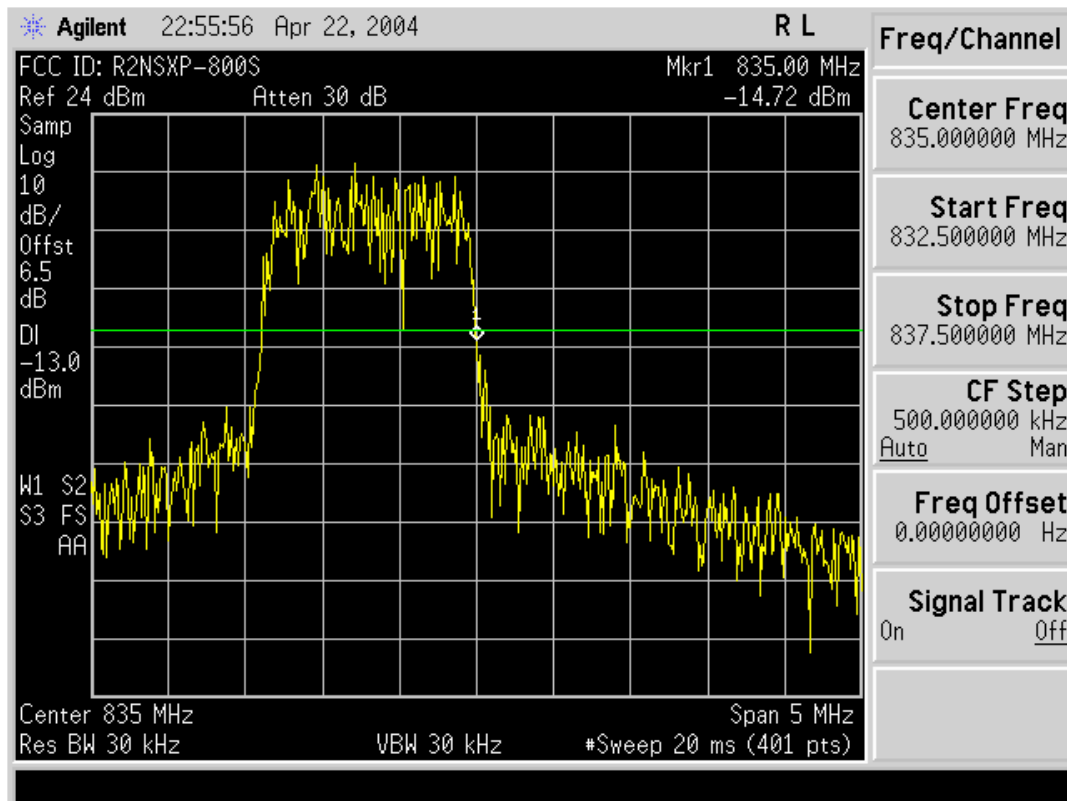


Band Edge - Block b. CDMA Ch. 0357

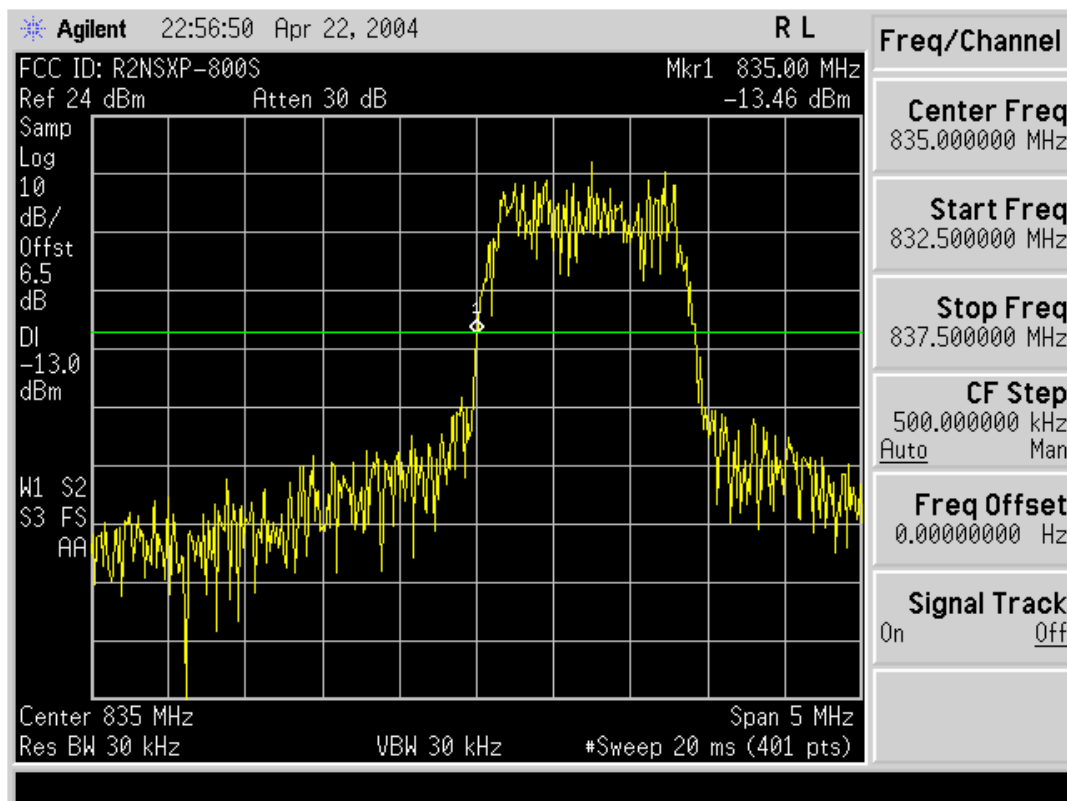


FCC ID: R2NSXP-800S

Spectrum Analyzer Presentation

Band Edge - Block a. CDMA Ch. 0643.

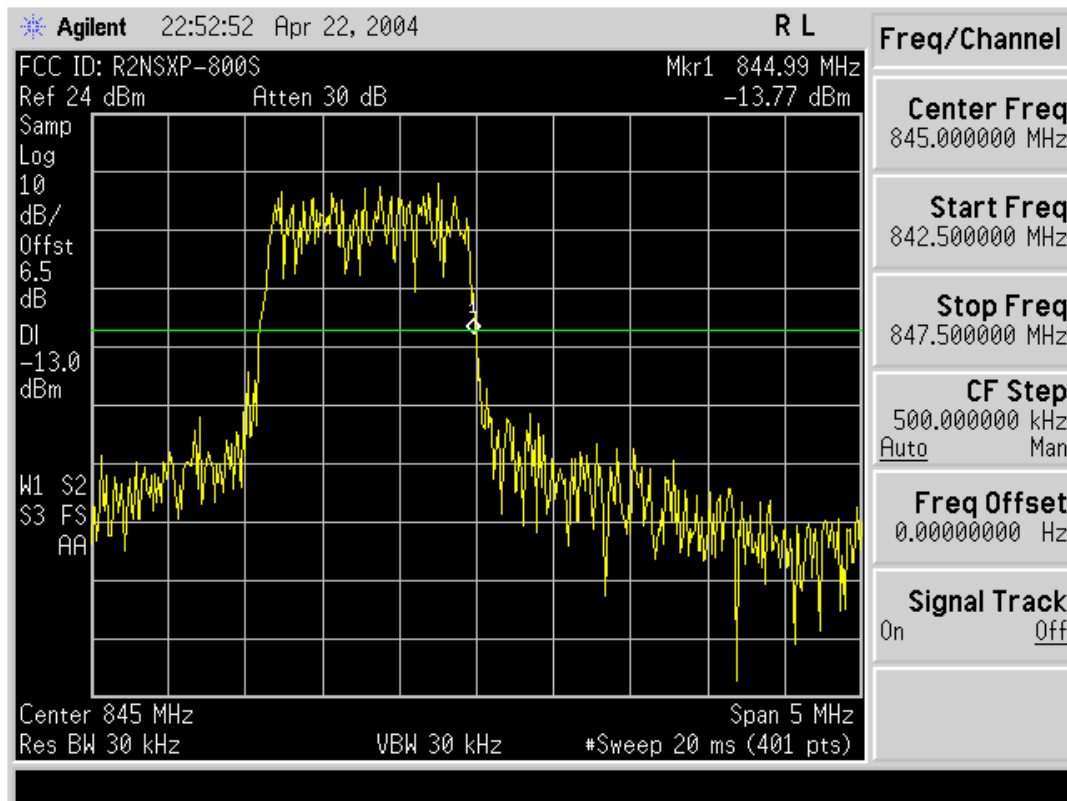


Band Edge - Block b. CDMA Ch. 0690

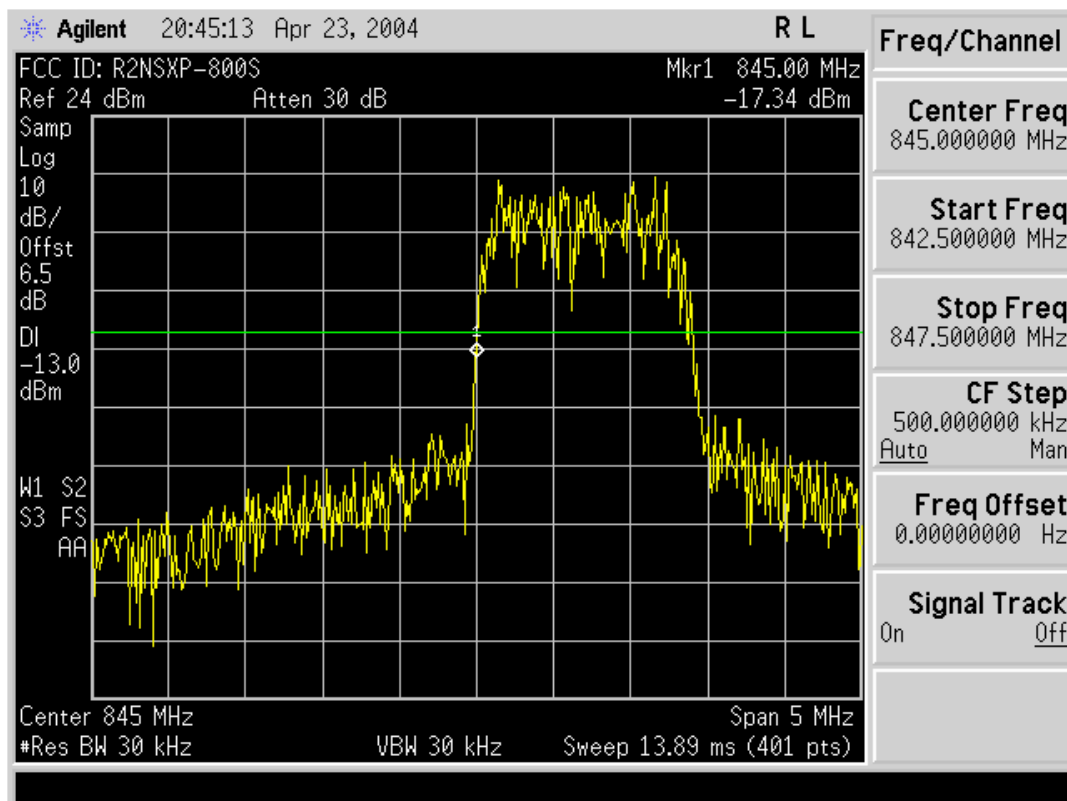


Spectrum Analyzer Presentation

Band Edge - Block a. CDMA Ch. 0693

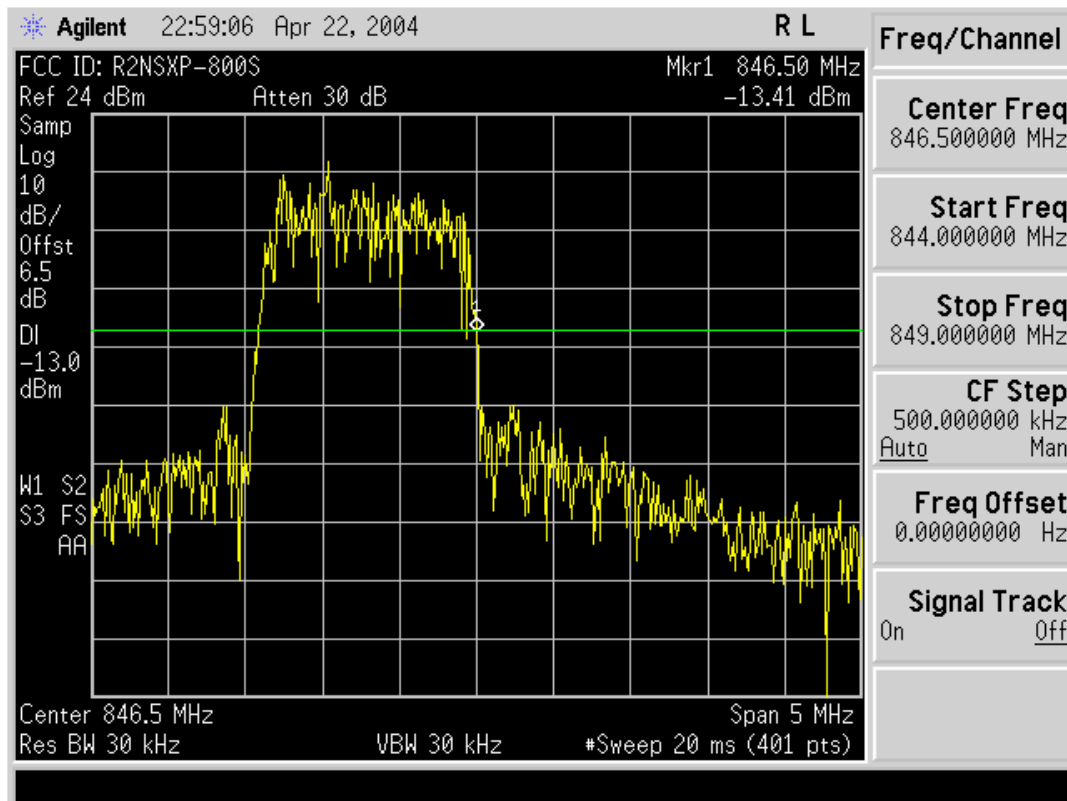


Band Edge - Block b. CDMA Ch. 0740

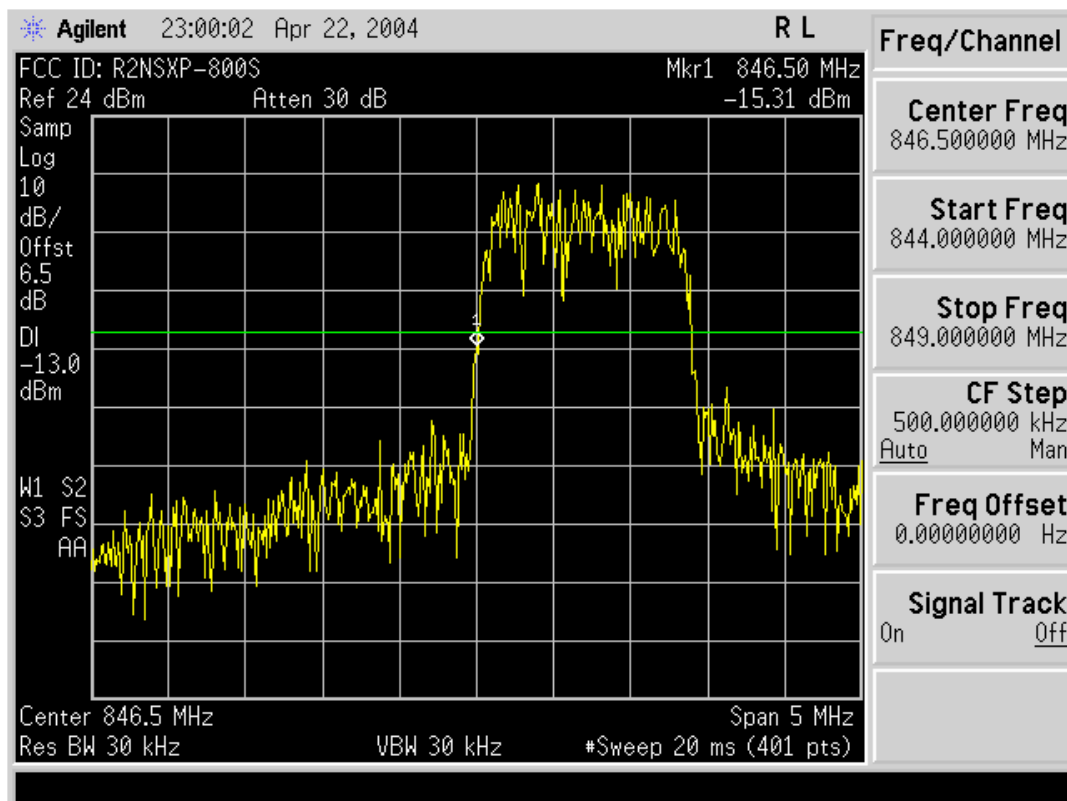



FCC ID: R2NSXP-800S

Spectrum Analyzer Presentation

FCC ID: R2NSXP-800S
Manufacturer: SUNG IL TELECOM CO., LTD.
CDMA 1x WLL Phone
Channel: 869.0 ~ 894.0 MHz
Test Mode: CDMA Receiving Band

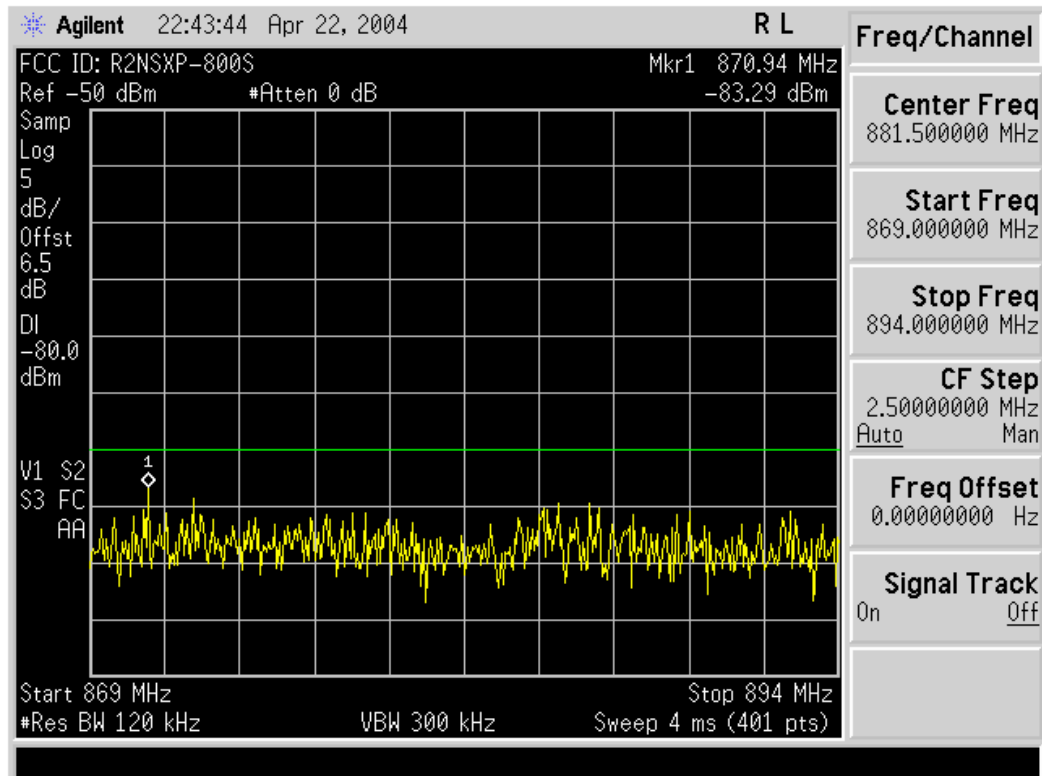

FCC ID: R2NSXP-800S

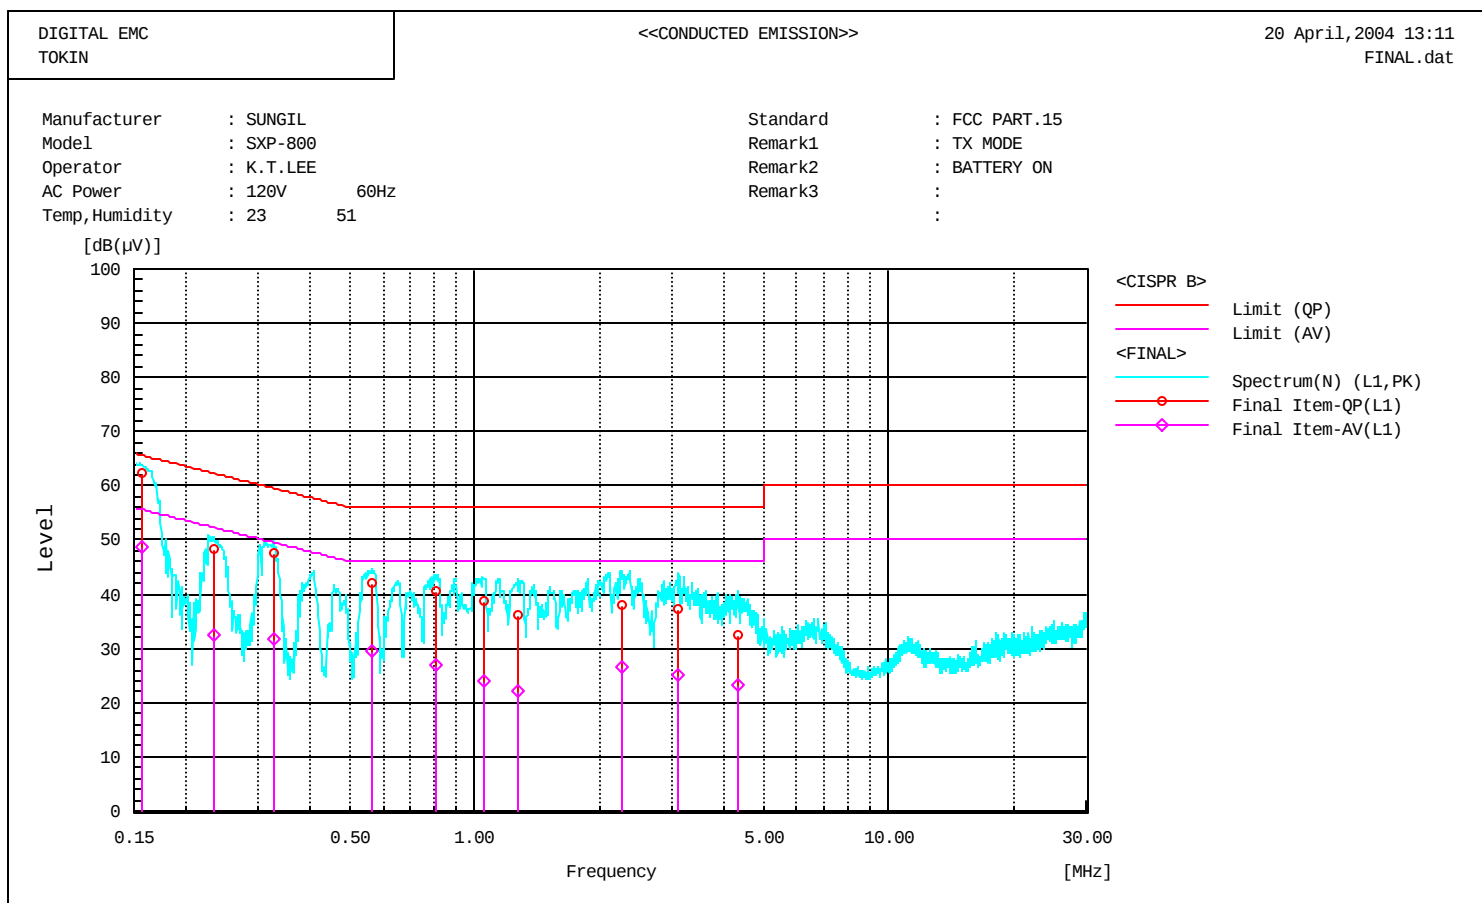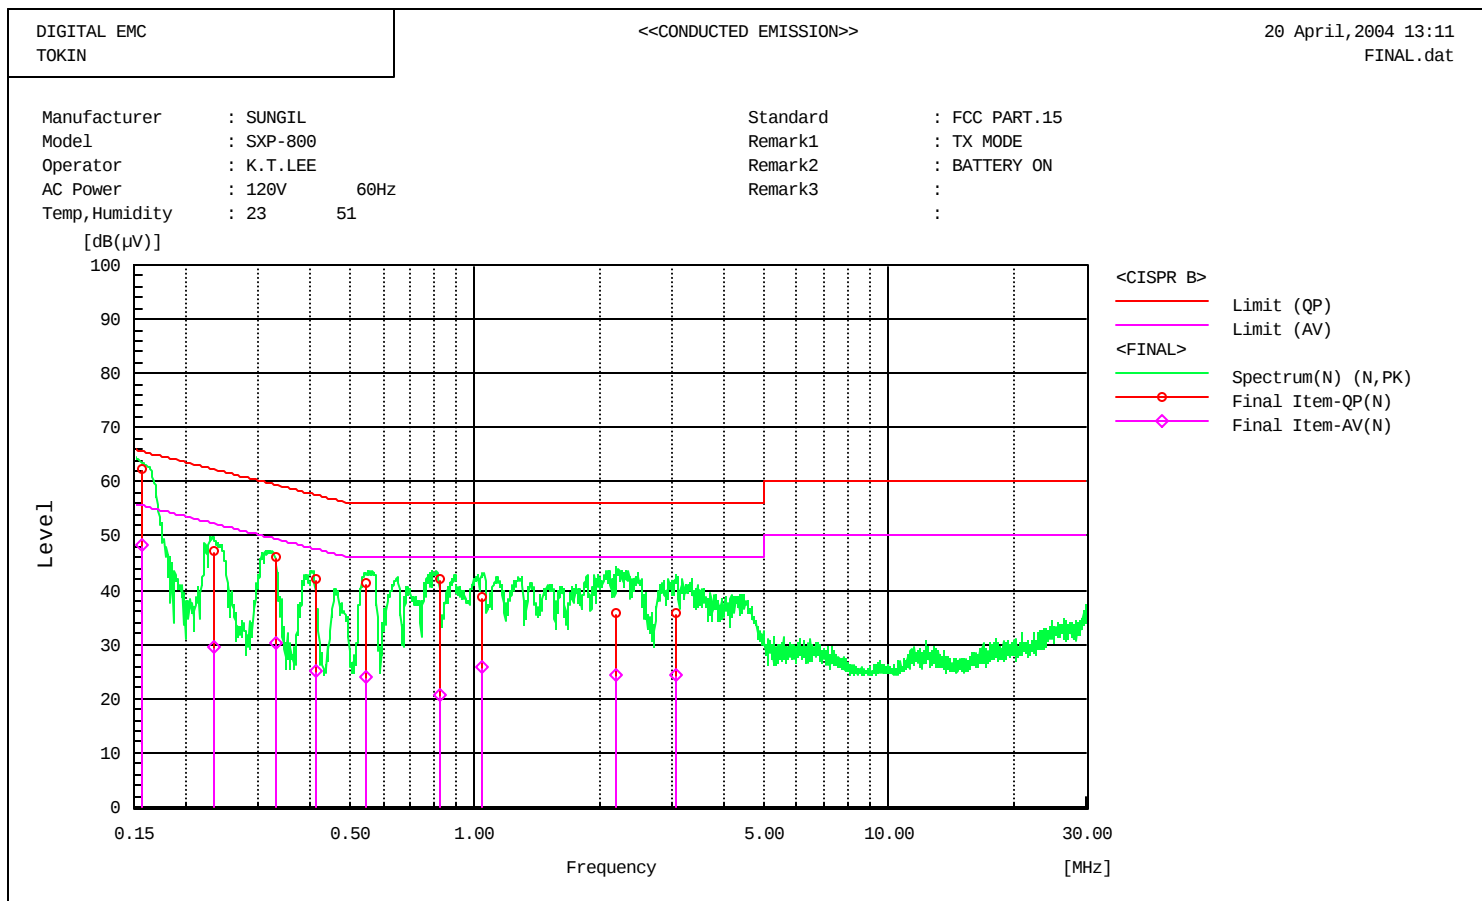

***** DIGITAL EMC *****
 <<CONDUCTED EMISSION>>

20 April, 2004 13:11
 FINAL.dat

Standard : FCC PART.15
 Manufacturer : SUNGIL
 Model : SXP-800
 Operator : K.T.LEE
 AC Power : 120V 60Hz
 Temp, Humidity : 23 51
 Remark1 : TX MODE
 Remark2 : BATTERY ON
 Remark3 :
 :



 Final Result

--- N Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.156	60.5	46.6	1.7	62.2	48.3	65.7	55.7	3.5	7.4	
2	0.234	46.2	28.5	1.0	47.2	29.5	62.3	52.3	15.1	22.8	
3	0.329	45.3	29.7	0.7	46.0	30.4	59.5	49.5	13.5	19.1	
4	0.411	41.7	24.6	0.4	42.1	25.0	57.6	47.6	15.5	22.6	
5	0.545	41.0	23.8	0.3	41.3	24.1	56.0	46.0	14.7	21.9	
6	0.820	41.6	20.2	0.3	41.9	20.5	56.0	46.0	14.1	25.5	
7	1.044	38.6	25.5	0.2	38.8	25.7	56.0	46.0	17.2	20.3	
8	2.191	35.6	24.1	0.2	35.8	24.3	56.0	46.0	20.2	21.7	
9	3.047	35.4	23.8	0.4	35.8	24.2	56.0	46.0	20.2	21.8	

--- L1 Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.156	60.6	47.0	1.7	62.3	48.7	65.7	55.7	3.4	7.0	
2	0.234	47.4	31.3	1.0	48.4	32.3	62.3	52.3	13.9	20.0	
3	0.327	47.0	31.2	0.7	47.7	31.9	59.5	49.5	11.8	17.6	
4	0.565	41.6	29.3	0.3	41.9	29.6	56.0	46.0	14.1	16.4	
5	0.807	40.4	26.7	0.3	40.7	27.0	56.0	46.0	15.3	19.0	
6	1.053	38.5	23.7	0.3	38.8	24.0	56.0	46.0	17.2	22.0	
7	2.264	37.8	26.4	0.3	38.1	26.7	56.0	46.0	17.9	19.3	
8	3.110	36.6	24.6	0.5	37.1	25.1	56.0	46.0	18.9	20.9	
9	1.268	35.8	21.9	0.3	36.1	22.2	56.0	46.0	19.9	23.8	
10	4.328	31.8	22.7	0.6	32.4	23.3	56.0	46.0	23.6	22.7	

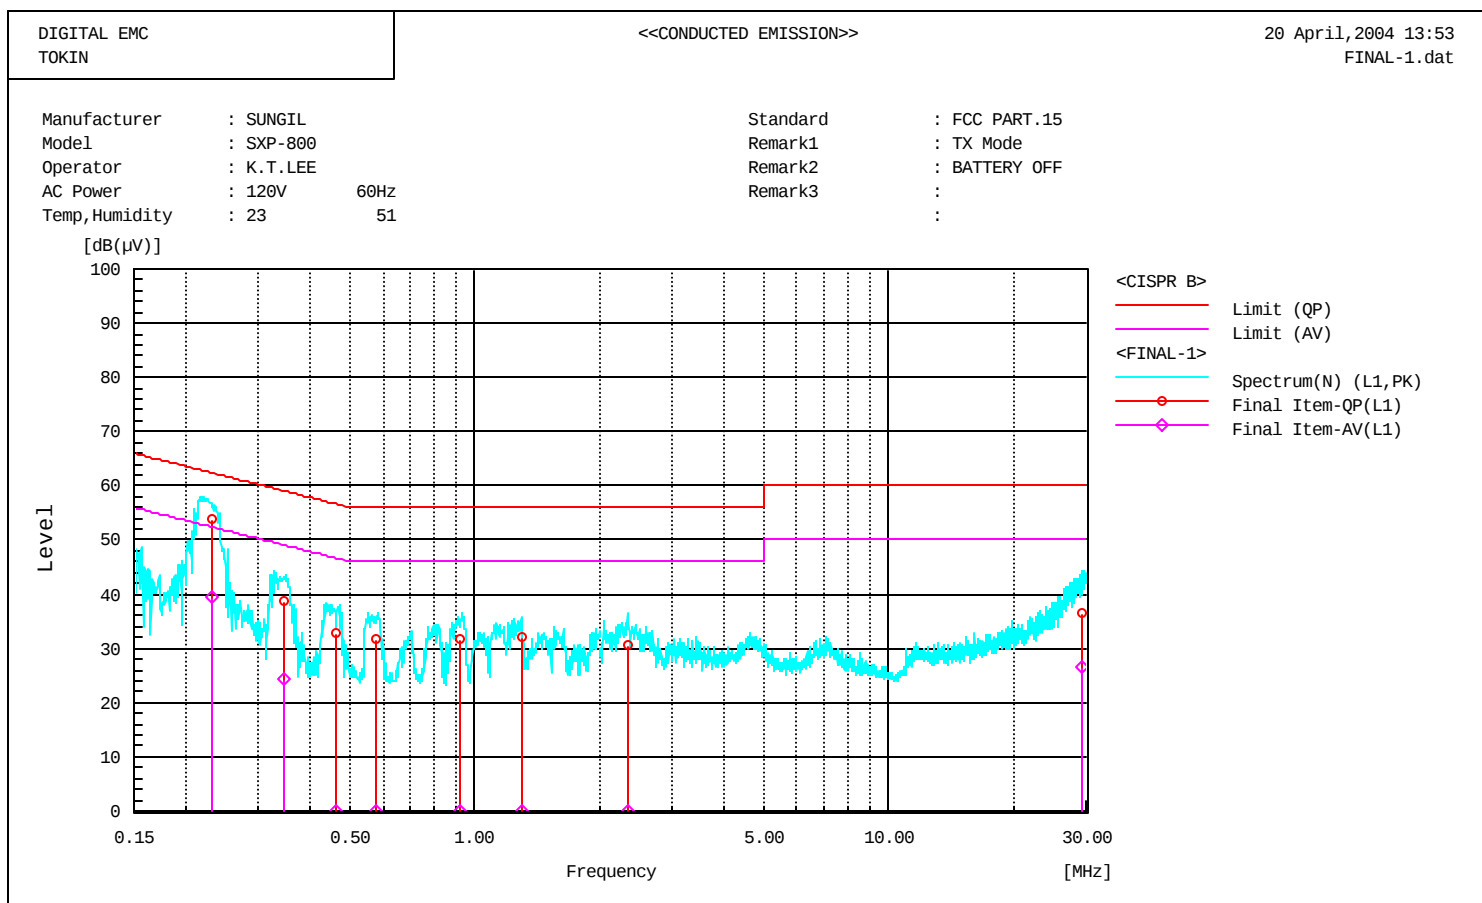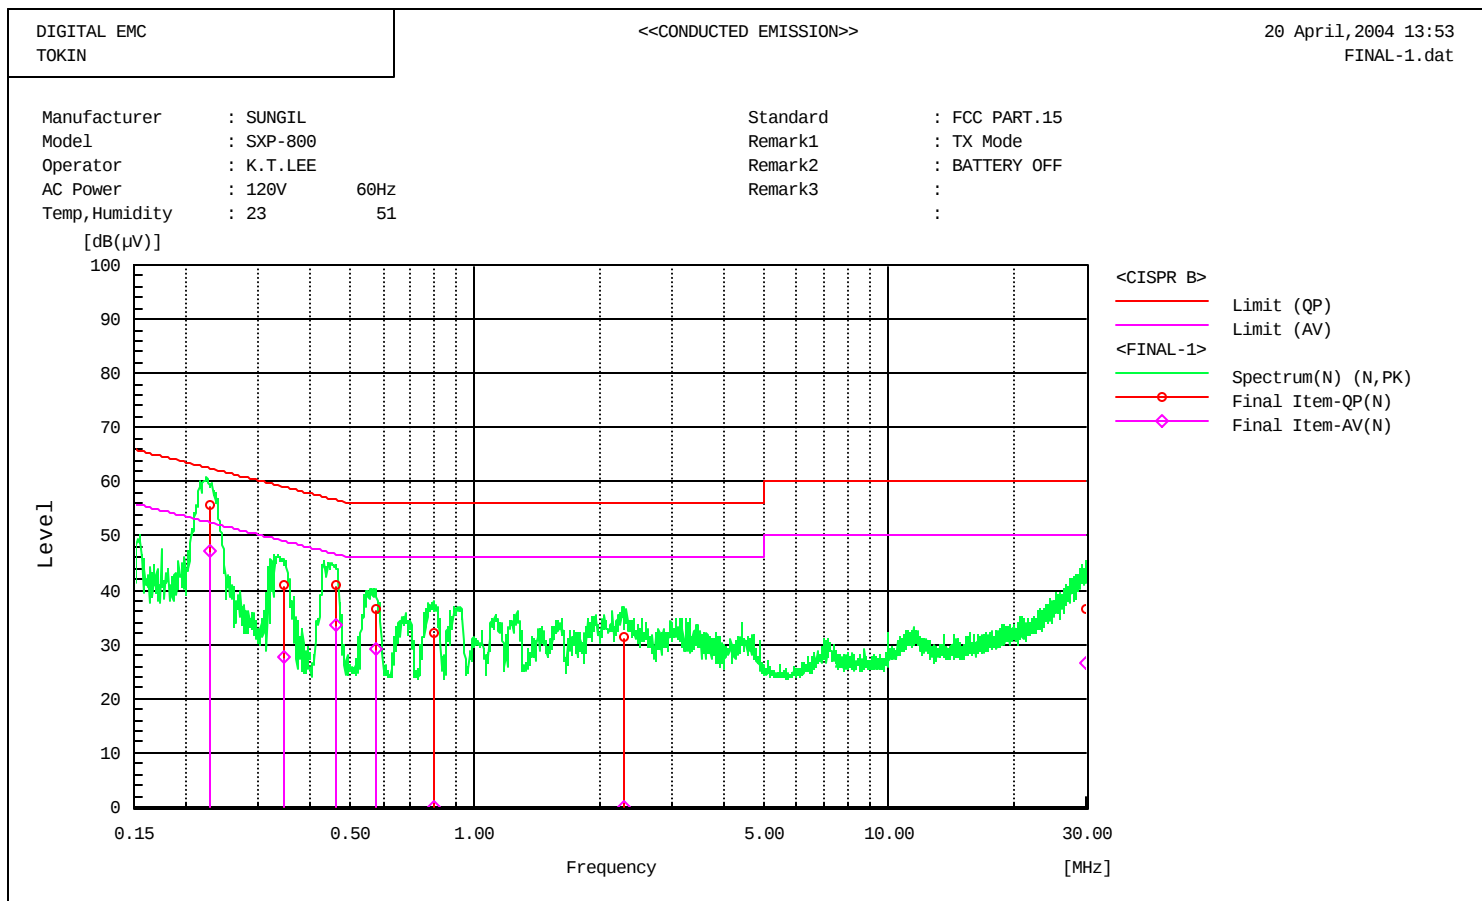

***** DIGITAL EMC *****
 <<CONDUCTED EMISSION>>

20 April,2004 13:53
 FINAL-1.dat

Standard : FCC PART.15
 Manufacturer : SUNGIL
 Model : SXP-800
 Operator : K.T.LEE
 AC Power : 120V 60Hz
 Temp, Humidity : 23 51
 Remark1 : TX Mode
 Remark2 : BATTERY OFF
 Remark3 :
 :



 Final Result

--- N Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.230	54.8	46.2	1.0	55.8	47.2	62.5	52.5	6.7	5.3	
2	0.345	40.2	27.1	0.6	40.8	27.7	59.1	49.1	18.3	21.4	
3	0.461	40.6	33.4	0.3	40.9	33.7	56.7	46.7	15.8	13.0	
4	0.579	36.4	28.9	0.3	36.7	29.2	56.0	46.0	19.3	16.8	
5	0.794	31.9	0.0	0.3	32.2	0.0	56.0	46.0	23.8	0.0	
6	2.285	31.2	0.0	0.3	31.5	0.0	56.0	46.0	24.5	0.0	
7	29.926	35.4	25.6	1.1	36.5	26.7	60.0	50.0	23.5	23.3	

--- L1 Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.231	53.0	38.3	1.0	54.0	39.3	62.4	52.4	8.4	13.1	
2	0.344	38.2	23.7	0.7	38.9	24.4	59.1	49.1	20.2	24.7	
3	0.462	32.6	0.0	0.3	32.9	0.0	56.7	46.7	23.8	0.0	
4	0.576	31.4	0.0	0.3	31.7	0.0	56.0	46.0	24.3	0.0	
5	0.924	31.4	0.0	0.3	31.7	0.0	56.0	46.0	24.3	0.0	
6	29.471	35.4	25.3	1.2	36.6	26.5	60.0	50.0	23.4	23.5	
7	1.293	31.8	0.0	0.3	32.1	0.0	56.0	46.0	23.9	0.0	
8	2.335	30.4	0.0	0.3	30.7	0.0	56.0	46.0	25.3	0.0	

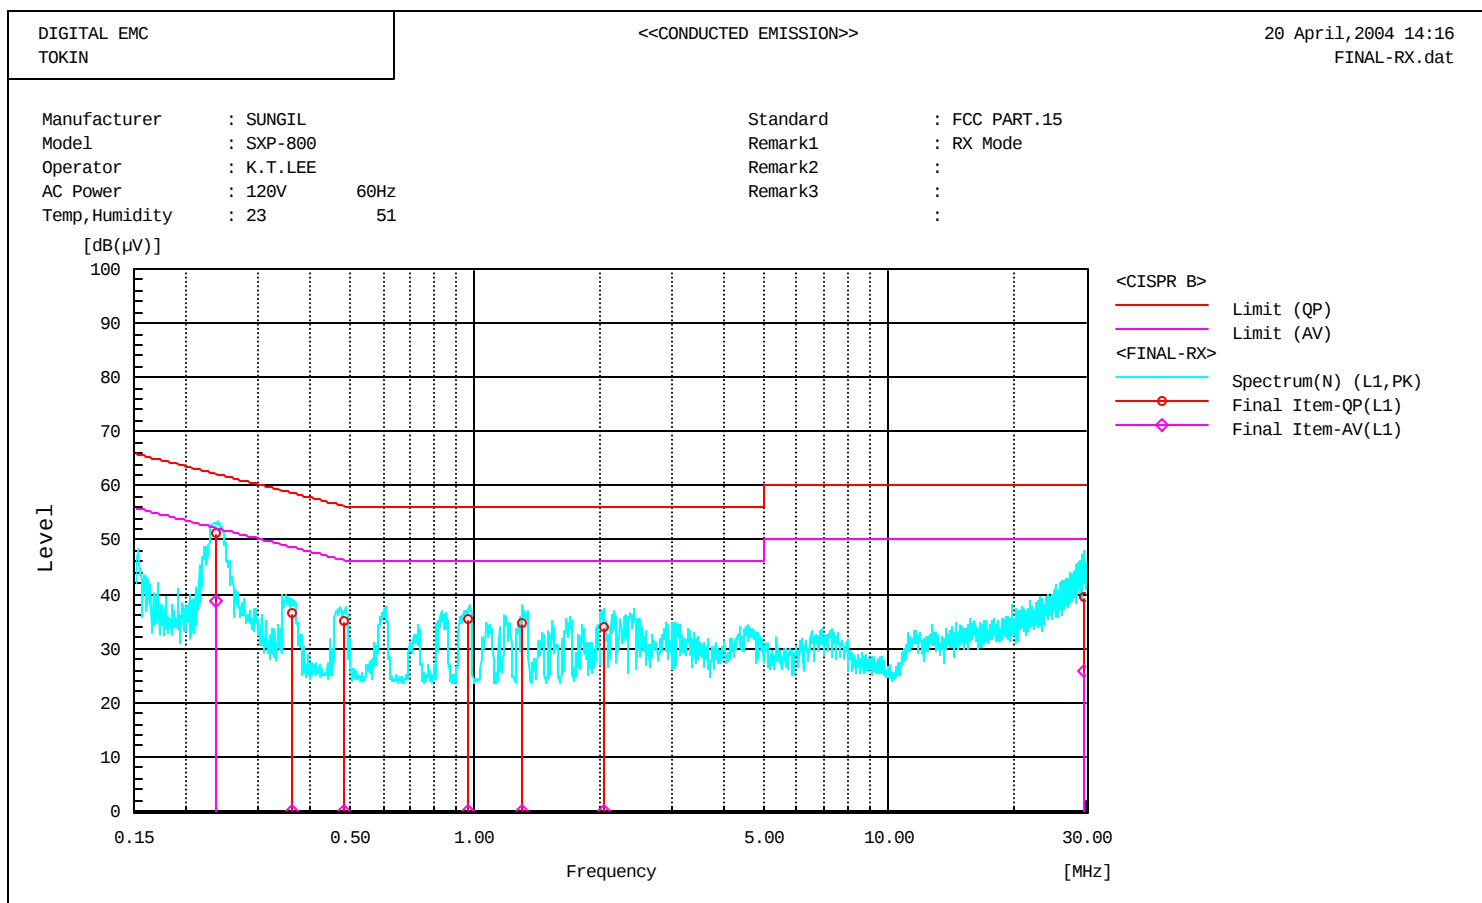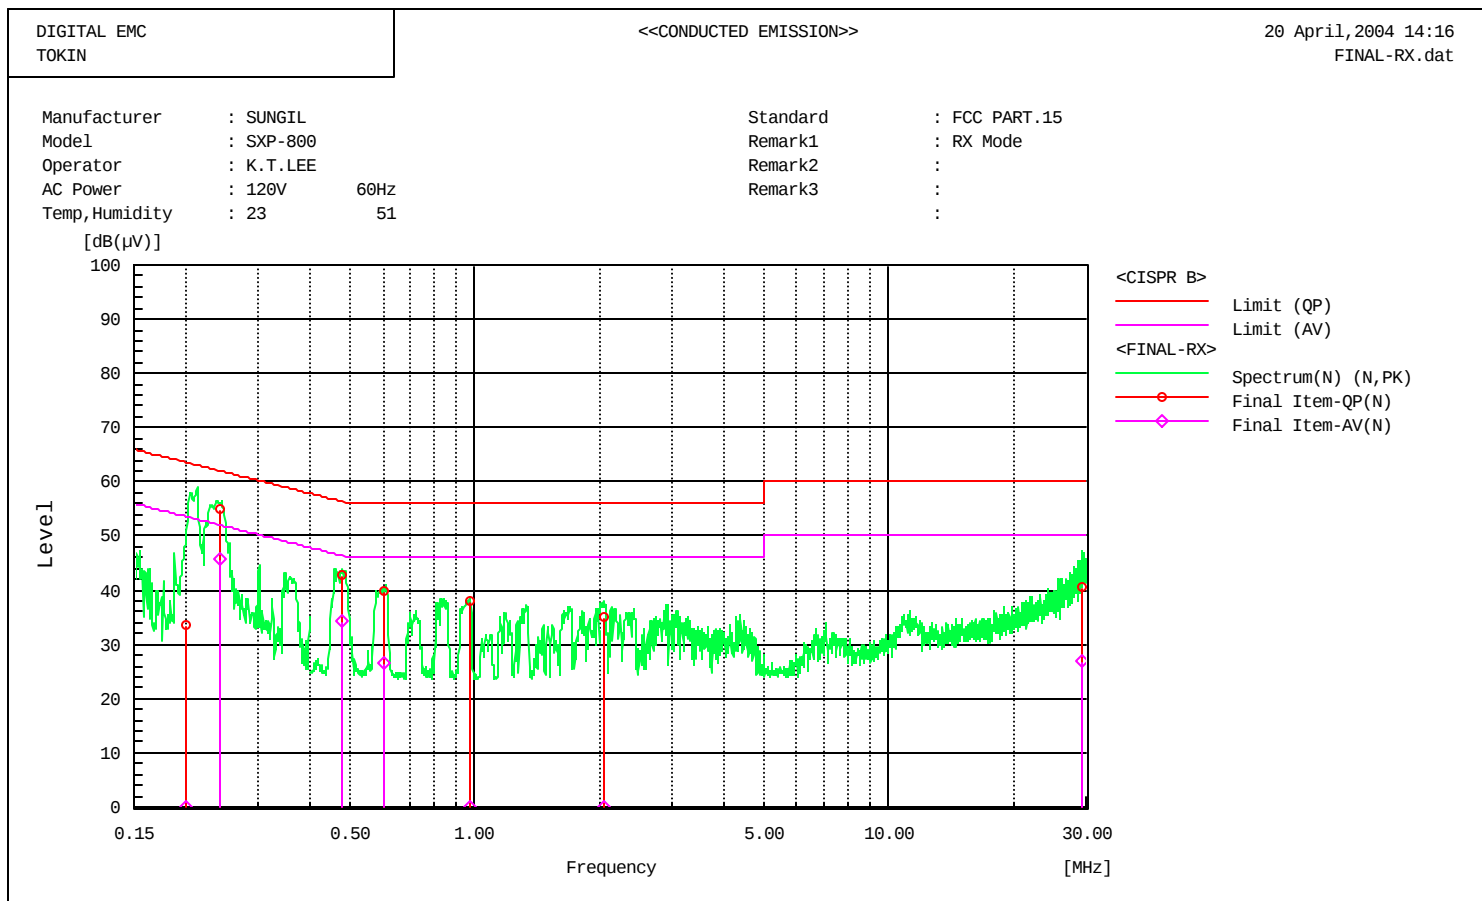

***** DIGITAL EMC *****
 <<CONDUCTED EMISSION>>

20 April,2004 14:16
 FINAL-RX.dat

Standard : FCC PART.15
 Manufacturer : SUNGIL
 Model : SXP-800
 Operator : K.T.LEE
 AC Power : 120V 60Hz
 Temp, Humidity : 23 51
 Remark1 : RX Mode
 Remark2 :
 Remark3 :
 :

Final Result

--- N Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.243	54.2	45.0	0.9	55.1	45.9	62.0	52.0	6.9	6.1	
2	0.200	32.2	0.0	1.2	33.4	0.0	63.6	53.6	30.2	0.0	
3	0.475	42.4	34.2	0.3	42.7	34.5	56.4	46.4	13.7	11.9	
4	0.605	39.4	26.1	0.3	39.7	26.4	56.0	46.0	16.3	19.6	
5	0.971	37.8	0.0	0.2	38.0	0.0	56.0	46.0	18.0	0.0	
6	2.050	34.9	0.0	0.2	35.1	0.0	56.0	46.0	20.9	0.0	
7	29.371	39.5	25.9	1.1	40.6	27.0	60.0	50.0	19.4	23.0	

--- L1 Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	2.055	33.7	0.0	0.2	33.9	0.0	56.0	46.0	22.1	0.0	
2	1.307	34.5	0.0	0.3	34.8	0.0	56.0	46.0	21.2	0.0	
3	0.967	35.1	0.0	0.3	35.4	0.0	56.0	46.0	20.6	0.0	
4	0.236	50.2	37.7	1.0	51.2	38.7	62.2	52.2	11.0	13.5	
5	29.738	38.2	24.6	1.2	39.4	25.8	60.0	50.0	20.6	24.2	
6	0.363	35.9	0.0	0.6	36.5	0.0	58.7	48.7	22.2	0.0	
7	0.484	34.9	0.0	0.3	35.2	0.0	56.3	46.3	21.1	0.0	