

FCC Test Report (BT-EDR)

Report No.: RF170513E01-2

FCC ID: R68XPICO200

Test Model: xPico 250

Series Model: xPico 240

Received Date: May 13, 2017

Test Date: Sep. 09 to 16, 2017

Issued Date: Oct. 02, 2017

Applicant: Lantronix, Inc.

Address: 7535 Irvine Center Drive, Suite 100 Irvine, California 92618

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Description of Support Units	12
3.3.1 Configuration of System under Test	12
3.4 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results (Mode 1).....	19
4.1.8 Test Results (Mode 2).....	26
4.2 Conducted Emission Measurement	33
4.2.1 Limits of Conducted Emission Measurement	33
4.2.2 Test Instruments	33
4.2.3 Test Procedures.....	34
4.2.4 Deviation From Test Standard	34
4.2.5 Test Setup.....	34
4.2.6 EUT Operating Condition	34
4.2.7 Test Results	35
4.3 Number of Hopping Frequency Used.....	37
4.3.1 Limits of Hopping Frequency Used Measurement	37
4.3.2 Test Setup.....	37
4.3.3 Test Instruments	37
4.3.4 Test Procedure	37
4.3.5 Deviation from Test Standard	37
4.3.6 Test Results	38
4.4 Dwell Time on Each Channel	39
4.4.1 Limits of Dwell Time on Each Channel Measurement.....	39
4.4.2 Test Setup.....	39
4.4.3 Test Instruments	39
4.4.4 Test Procedures.....	39
4.4.5 Deviation from Test Standard	39
4.4.6 Test Results	40
4.5 Channel Bandwidth	44
4.5.1 Limits of Channel Bandwidth Measurement.....	44
4.5.2 Test Setup.....	44
4.5.3 Test Instruments	44
4.5.4 Test Procedure	44
4.5.5 Deviation from Test Standard	44
4.5.6 EUT Operating Condition	44
4.5.7 Test Results	45
4.6 Hopping Channel Separation	46

4.6.1	Limits of Hopping Channel Separation Measurement.....	46
4.6.2	Test Setup.....	46
4.6.3	Test Instruments	46
4.6.4	Test Procedure	46
4.6.5	Deviation from Test Standard	46
4.6.6	Test Results	47
4.7	Maximum Output Power.....	48
4.7.1	Limits of Maximum Output Power Measurement	48
4.7.2	Test Setup.....	48
4.7.3	Test Instruments	48
4.7.4	Test Procedure	48
4.7.5	Deviation from Test Standard	48
4.7.6	EUT Operating Condition	48
4.7.7	Test Results	49
4.8	Conducted Out of Band Emission Measurement.....	50
4.8.1	Limits of Conducted Out of Band Emission Measurement.....	50
4.8.2	Test Instruments	50
4.8.3	Test Procedure	50
4.8.4	Deviation from Test Standard	50
4.8.5	EUT Operating Condition	50
4.8.6	Test Results	50
5	Pictures of Test Arrangements.....	53
	Appendix – Information on the Testing Laboratories	54

Release Control Record

Issue No.	Description	Date Issued
RF170513E01-2	Original release.	Oct. 02, 2017

1 Certificate of Conformity

Product: xPico® 200 Series Wi-Fi® IoT Gateway module

Brand: Lantronix

Test Model: xPico 250

Series Model: xPico 240

Sample Status: ENGINEERING SAMPLE

Applicant: Lantronix, Inc.

Test Date: Sep. 09 to 16, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Oct. 02, 2017
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Oct. 02, 2017
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.02dB at 0.37566MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -4.3dB at 2378.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connectors are RSMA and i-pex (MHF) not a standard connector.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.16 dB
	6GHz ~ 18GHz	4.91 dB
	18GHz ~ 40GHz	5.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	xPico® 200 Series Wi-Fi® IoT Gateway module
Brand	Lantronix
Test Model	xPico 250
Series Model	xPico 240
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	Up to 3Mbps
Operating Frequency	2.402GHz ~ 2.480GHz
Number of Channel	79
Output Power	1.125mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. There are WLAN, BT technology used for the EUT.
2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	Bluetooth
2	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. All models are listed as below.

Product	Brand	Model	Difference	Antenna
xPico® 200 Series Wi-Fi® IoT Gateway module	Lantronix	xPico 250	SKU A: SIP with two UFL connectors Wi-Fi Chip and Bluetooth chip	Dipole Antenna (long) Dipole Antenna (short) PCB Antenna
		xPico 240	SKU B: same as SKU A, no BT function.	Dipole Antenna (long) Dipole Antenna (short) PCB Antenna
			SKU C: same SKU B except the two UFLs are replaced by a single on-module stamped metal antenna. Circuit board is the same. BOM population option for UFL or on-module antenna circuit is the difference.	On-board Antenna

From the above models, model: **xPico 250** was selected as representative model for the test and its data was recorded in this report.

4. The antennas provided to the EUT, please refer to the following table:

Ant Set.	Brand	Model	Antenna Gain (dBi)	Frequency rang (GHz)	Antenna type	Connector type	*Cable Length	*Cable Loss(dB)	excluding cable loss Antenna Gain(dBi)
1	Taoglas	GW.71.5153	2.8	2.4~2.4835	Dipole	R-SMA	45mm	1	3.8
			3.8	5.15~5.85				1.7	5.5
	Taoglas	GW.71.5153	2.8	2.4~2.4835			45mm	1	3.8
			3.8	5.15~5.85				1.7	5.5
2	NA	WSS002	1	2.4~2.4835	Dipole	R-SMA	45mm	1	2
			0.3	5.15~5.85				1.7	2
	NA	WSS002	1	2.4~2.5			45mm	1	2
			0.3	5.15~5.25				1.7	2
3	ethertronics	1000668	2.5	2.4~2.4835	PCB	i-pex(MHF)	50mm	NA	NA
			5	5.15~5.85					
	ethertronics	1000668	2.5	2.4~2.4835					
			5	5.15~5.85					
4	ProAnt	PRO-OB-536	0.02	2.4~2.4835	Metal	NA	NA	NA	NA
			3.31	5.15~5.85					

Note: From the above antennas, Ant Set 1, 3 were selected as representative antenna for the test.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
1	√	√	-	√	Ant Set 1
2	√	√	√	-	Ant Set 3

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

- The EUT's antenna (PCB) had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0	FHSS	GFSK	DH5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5
0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE $\geq$ 1G	25deg. C, 70%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	26deg. C, 71%RH	120Vac, 60Hz	Andy Ho
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	27deg. C, 64%RH	120Vac, 60Hz	Anderson Chen

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Test Tool	Lantronix	NA	NA	NA	Supplied by client
B.	Adapter	TOP	W050010GPX1 L1	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

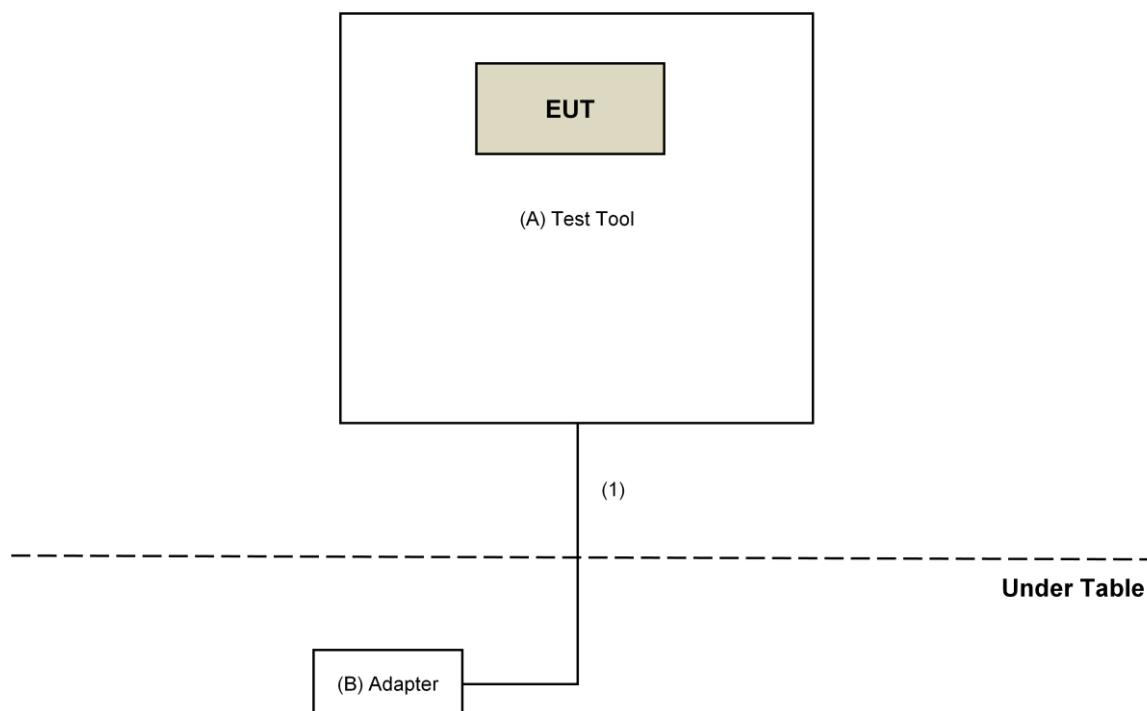

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).
The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 05, 2016	Oct. 04, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150321	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSv40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. Loop antenna was used for all emissions below 30 MHz.
5. The FCC Designation Number is TW2022.
6. The CANADA Site Registration No. is 20331-2
7. Tested Date: Sep. 09 to 14, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

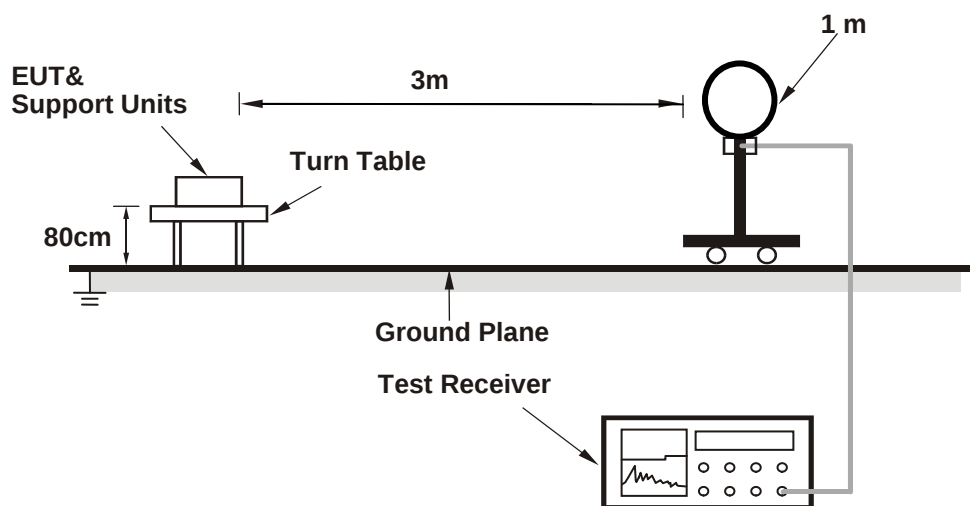

For Radiated emission 30MHz to 1GHz

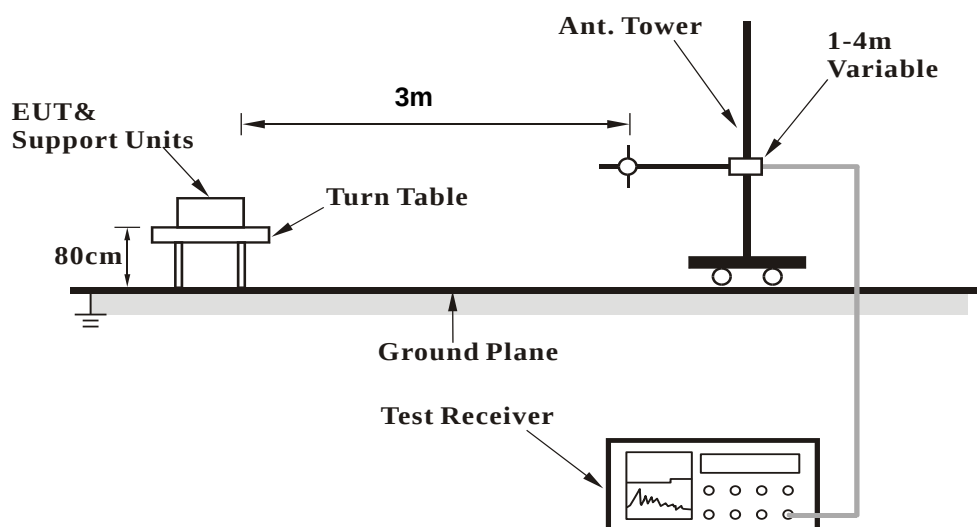

For Radiated emission above 1GHz

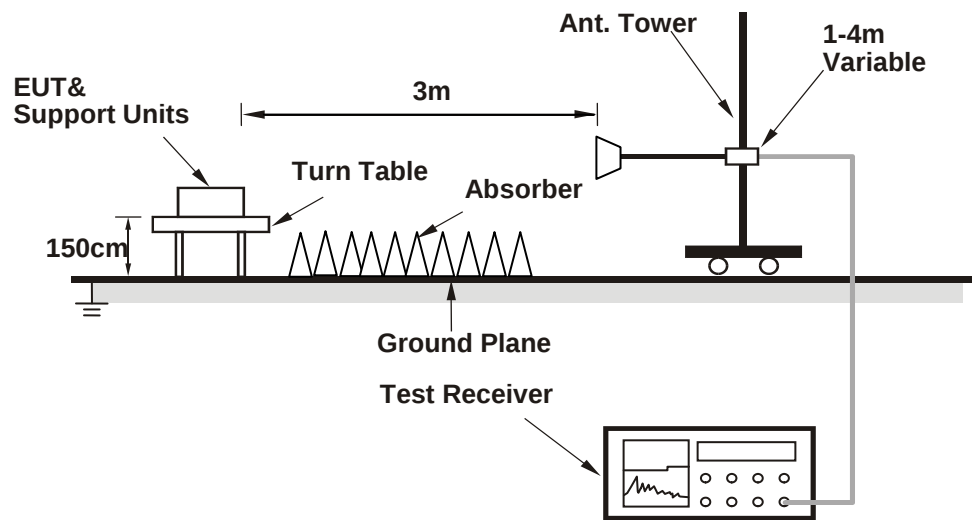

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (wl43909B0.exe) has been activated to set the EUT on specific status.

4.1.7 Test Results (Mode 1)

Above 1GHz Data:

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.0 PK	74.0	-18.0	2.70 H	84	57.3	-1.3
2	2390.00	42.8 AV	54.0	-11.2	2.70 H	84	44.1	-1.3
3	*2402.00	92.5 PK			2.70 H	84	93.6	-1.1
4	*2402.00	62.4 AV			2.70 H	84	63.5	-1.1
5	4804.00	36.4 PK	74.0	-37.6	1.53 H	298	33.2	3.2
6	4804.00	6.3 AV	54.0	-47.7	1.53 H	298	3.1	3.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	1.20 V	112	58.3	-1.3
2	2390.00	46.9 AV	54.0	-7.1	1.20 V	112	48.2	-1.3
3	*2402.00	97.3 PK			1.20 V	112	98.4	-1.1
4	*2402.00	67.2 AV			1.20 V	112	68.3	-1.1
5	4804.00	40.2 PK	74.0	-33.8	1.98 V	211	37.0	3.2
6	4804.00	10.1 AV	54.0	-43.9	1.98 V	211	6.9	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	90.7 PK			1.07 H	80	91.9	-1.2
2	*2441.00	60.6 AV			1.07 H	80	61.8	-1.2
3	4882.00	36.8 PK	74.0	-37.2	1.57 H	304	33.4	3.4
4	4882.00	6.7 AV	54.0	-47.3	1.57 H	304	3.3	3.4
5	7323.00	44.7 PK	74.0	-29.3	1.82 H	315	34.9	9.8
6	7323.00	14.6 AV	54.0	-39.4	1.82 H	315	4.8	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	96.2 PK			1.49 V	129	97.4	-1.2
2	*2441.00	66.1 AV			1.49 V	129	67.3	-1.2
3	4882.00	40.1 PK	74.0	-33.9	2.03 V	219	36.7	3.4
4	4882.00	10.0 AV	54.0	-44.0	2.03 V	219	6.6	3.4
5	7323.00	46.2 PK	74.0	-27.8	2.57 V	274	36.4	9.8
6	7323.00	16.1 AV	54.0	-37.9	2.57 V	274	6.3	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	89.9 PK			1.05 H	73	90.9	-1.0
2	*2480.00	59.8 AV			1.05 H	73	60.8	-1.0
3	2483.50	55.6 PK	74.0	-18.4	1.05 H	73	56.6	-1.0
4	2483.50	25.5 AV	54.0	-28.5	1.05 H	73	26.5	-1.0
5	4960.00	37.0 PK	74.0	-37.0	1.61 H	298	33.4	3.6
6	4960.00	6.9 AV	54.0	-47.1	1.61 H	298	3.3	3.6
7	7440.00	44.8 PK	74.0	-29.2	1.81 H	310	34.7	10.1
8	7440.00	14.7 AV	54.0	-39.3	1.81 H	310	4.6	10.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.3 PK			1.50 V	135	96.3	-1.0
2	*2480.00	65.2 AV			1.50 V	135	66.2	-1.0
3	2483.50	65.9 PK	74.0	-8.1	1.50 V	135	66.9	-1.0
4	2483.50	35.8 AV	54.0	-18.2	1.50 V	135	36.8	-1.0
5	4960.00	39.7 PK	74.0	-34.3	2.01 V	227	36.1	3.6
6	4960.00	9.6 AV	54.0	-44.4	2.01 V	227	6.0	3.6
7	7440.00	46.5 PK	74.0	-27.5	2.55 V	279	36.4	10.1
8	7440.00	16.4 AV	54.0	-37.6	2.55 V	279	6.3	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	2.66 H	76	57.7	-1.3
2	2390.00	43.1 AV	54.0	-10.9	2.66 H	76	44.4	-1.3
3	*2402.00	91.8 PK			2.66 H	76	92.9	-1.1
4	*2402.00	61.7 AV			2.66 H	76	62.8	-1.1
5	4804.00	35.7 PK	74.0	-38.3	1.48 H	298	32.5	3.2
6	4804.00	5.6 AV	54.0	-48.4	1.48 H	298	2.4	3.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.26 V	104	58.7	-1.3
2	2390.00	47.1 AV	54.0	-6.9	1.26 V	104	48.4	-1.3
3	*2402.00	97.5 PK			1.26 V	104	98.6	-1.1
4	*2402.00	67.4 AV			1.26 V	104	68.5	-1.1
5	4804.00	39.7 PK	74.0	-34.3	2.01 V	217	36.5	3.2
6	4804.00	9.6 AV	54.0	-44.4	2.01 V	217	6.4	3.2

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	90.1 PK			1.02 H	57	91.3	-1.2
2	*2441.00	60.0 AV			1.02 H	57	61.2	-1.2
3	4882.00	36.6 PK	74.0	-37.4	1.51 H	293	33.2	3.4
4	4882.00	6.5 AV	54.0	-47.5	1.51 H	293	3.1	3.4
5	7323.00	45.3 PK	74.0	-28.7	1.83 H	307	35.5	9.8
6	7323.00	15.2 AV	54.0	-38.8	1.83 H	307	5.4	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	95.8 PK			1.56 V	138	97.0	-1.2
2	*2441.00	65.7 AV			1.56 V	138	66.9	-1.2
3	4882.00	39.6 PK	74.0	-34.4	2.03 V	206	36.2	3.4
4	4882.00	9.5 AV	54.0	-44.5	2.03 V	206	6.1	3.4
5	7323.00	46.4 PK	74.0	-27.6	2.54 V	267	36.6	9.8
6	7323.00	16.3 AV	54.0	-37.7	2.54 V	267	6.5	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	89.5 PK			1.05 H	64	90.5	-1.0
2	*2480.00	59.4 AV			1.05 H	64	60.4	-1.0
3	2483.50	55.8 PK	74.0	-18.2	1.05 H	64	56.8	-1.0
4	2483.50	25.7 AV	54.0	-28.3	1.05 H	64	26.7	-1.0
5	4960.00	37.0 PK	74.0	-37.0	1.55 H	283	33.4	3.6
6	4960.00	6.9 AV	54.0	-47.1	1.55 H	283	3.3	3.6
7	7440.00	45.0 PK	74.0	-29.0	1.84 H	308	34.9	10.1
8	7440.00	14.9 AV	54.0	-39.1	1.84 H	308	4.8	10.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	94.9 PK			1.51 V	146	95.9	-1.0
2	*2480.00	64.8 AV			1.51 V	146	65.8	-1.0
3	2483.50	66.0 PK	74.0	-8.0	1.51 V	146	67.0	-1.0
4	2483.50	35.9 AV	54.0	-18.1	1.51 V	146	36.9	-1.0
5	4960.00	39.3 PK	74.0	-34.7	2.01 V	219	35.7	3.6
6	4960.00	9.2 AV	54.0	-44.8	2.01 V	219	5.6	3.6
7	7440.00	46.3 PK	74.0	-27.7	2.54 V	278	36.2	10.1
8	7440.00	16.2 AV	54.0	-37.8	2.54 V	278	6.1	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. The average value of fundamental and harmonic frequency is: Average = Peak value + $20 \log(\text{Duty cycle})$

Below 1GHz Data:

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	149.99	28.6 QP	43.5	-14.9	1.54 H	231	36.8	-8.2
2	300.00	33.8 QP	46.0	-12.2	2.00 H	144	41.4	-7.6
3	350.00	37.7 QP	46.0	-8.3	1.28 H	321	44.3	-6.6
4	450.01	37.2 QP	46.0	-8.8	1.19 H	46	40.8	-3.6
5	500.01	36.5 QP	46.0	-9.5	1.62 H	229	39.3	-2.8
6	600.00	32.7 QP	46.0	-13.3	1.63 H	293	33.1	-0.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	50.01	31.4 QP	40.0	-8.6	1.25 V	228	39.5	-8.1
2	149.96	29.6 QP	43.5	-13.9	1.50 V	311	37.8	-8.2
3	350.00	38.5 QP	46.0	-7.5	1.62 V	171	45.1	-6.6
4	400.01	34.3 QP	46.0	-11.7	1.42 V	301	39.5	-5.2
5	500.01	35.7 QP	46.0	-10.3	1.50 V	287	38.5	-2.8
6	901.62	35.1 QP	46.0	-10.9	1.12 V	226	31.1	4.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.8 Test Results (Mode 2)

Above 1GHz Data:

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2378.00	53.7 PK	74.0	-20.3	1.70 H	323	55.1	-1.4
2	2378.00	49.7 AV	54.0	-4.3	1.70 H	323	51.1	-1.4
3	*2402.00	98.9 PK			1.05 H	323	100.0	-1.1
4	*2402.00	68.8 AV			1.05 H	323	69.9	-1.1
5	4804.00	37.3 PK	74.0	-36.7	1.04 H	245	34.1	3.2
6	4804.00	7.2 AV	54.0	-46.8	1.04 H	245	4.0	3.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2378.00	50.0 PK	74.0	-24.0	1.00 V	302	51.4	-1.4
2	2378.00	43.6 AV	54.0	-10.4	1.00 V	302	45.0	-1.4
3	*2402.00	92.3 PK			1.00 V	302	93.4	-1.1
4	*2402.00	62.2 AV			1.00 V	302	63.3	-1.1
5	4804.00	37.1 PK	74.0	-36.9	4.00 V	212	33.9	3.2
6	4804.00	7.0 AV	54.0	-47.0	4.00 V	212	3.8	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	99.6 PK			1.05 H	350	100.8	-1.2
2	*2441.00	69.5 AV			1.05 H	350	70.7	-1.2
3	4882.00	37.5 PK	74.0	-36.5	1.00 H	233	34.1	3.4
4	4882.00	7.4 AV	54.0	-46.6	1.00 H	233	4.0	3.4
5	7323.00	43.4 PK	74.0	-30.6	1.00 H	200	33.6	9.8
6	7323.00	13.3 AV	54.0	-40.7	1.00 H	200	3.5	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	92.8 PK			1.00 V	306	94.0	-1.2
2	*2441.00	62.7 AV			1.00 V	306	63.9	-1.2
3	4882.00	37.2 PK	74.0	-36.8	4.00 V	200	33.8	3.4
4	4882.00	7.1 AV	54.0	-46.9	4.00 V	200	3.7	3.4
5	7323.00	47.6 PK	74.0	-26.4	4.00 V	186	37.8	9.8
6	7323.00	17.5 AV	54.0	-36.5	4.00 V	186	7.7	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.5 PK			1.00 H	350	99.5	-1.0
2	*2480.00	68.4 AV			1.00 H	350	69.4	-1.0
3	2483.50	47.8 PK	74.0	-26.2	1.00 H	350	48.8	-1.0
4	2483.50	17.7 AV	54.0	-36.3	1.00 H	350	18.7	-1.0
5	4960.00	37.4 PK	74.0	-36.6	1.04 H	237	33.8	3.6
6	4960.00	7.3 AV	54.0	-46.7	1.04 H	237	3.7	3.6
7	7440.00	43.4 PK	74.0	-30.6	1.09 H	202	33.3	10.1
8	7440.00	13.3 AV	54.0	-40.7	1.09 H	202	3.2	10.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.9 PK			1.04 V	290	92.9	-1.0
2	*2480.00	61.8 AV			1.04 V	290	62.8	-1.0
3	2483.50	45.5 PK	74.0	-28.5	1.04 V	290	46.5	-1.0
4	2483.50	15.4 AV	54.0	-38.6	1.04 V	290	16.4	-1.0
5	4960.00	36.4 PK	74.0	-37.6	4.00 V	195	32.8	3.6
6	4960.00	6.3 AV	54.0	-47.7	4.00 V	195	2.7	3.6
7	7440.00	47.9 PK	74.0	-26.1	4.00 V	172	37.8	10.1
8	7440.00	17.8 AV	54.0	-36.2	4.00 V	172	7.7	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.7 PK	74.0	-20.3	1.05 H	348	55.0	-1.3
2	2390.00	49.6 AV	54.0	-4.4	1.05 H	348	50.9	-1.3
3	*2402.00	98.8 PK			1.05 H	348	99.9	-1.1
4	*2402.00	68.7 AV			1.05 H	348	69.8	-1.1
5	4804.00	37.7 PK	74.0	-36.3	1.06 H	245	34.5	3.2
6	4804.00	7.6 AV	54.0	-46.4	1.06 H	245	4.4	3.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.3 PK	74.0	-23.7	1.09 V	281	51.6	-1.3
2	2390.00	43.4 AV	54.0	-10.6	1.09 V	281	44.7	-1.3
3	*2402.00	91.7 PK			1.09 V	281	92.8	-1.1
4	*2402.00	61.6 AV			1.09 V	281	62.7	-1.1
5	4804.00	37.0 PK	74.0	-37.0	3.95 V	195	33.8	3.2
6	4804.00	6.9 AV	54.0	-47.1	3.95 V	195	3.7	3.2

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
- The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	99.6 PK			1.00 H	324	100.8	-1.2
2	*2441.00	69.5 AV			1.00 H	324	70.7	-1.2
3	4882.00	37.8 PK	74.0	-36.2	1.09 H	252	34.4	3.4
4	4882.00	7.7 AV	54.0	-46.3	1.09 H	252	4.3	3.4
5	7323.00	44.1 PK	74.0	-29.9	1.14 H	213	34.3	9.8
6	7323.00	14.0 AV	54.0	-40.0	1.14 H	213	4.2	9.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	92.6 PK			1.03 V	275	93.8	-1.2
2	*2441.00	62.5 AV			1.03 V	275	63.7	-1.2
3	4882.00	37.0 PK	74.0	-37.0	4.00 V	189	33.6	3.4
4	4882.00	6.9 AV	54.0	-47.1	4.00 V	189	3.5	3.4
5	7323.00	47.6 PK	74.0	-26.4	3.98 V	158	37.8	9.8
6	7323.00	17.5 AV	54.0	-36.5	3.98 V	158	7.7	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.1 PK			1.00 H	339	99.1	-1.0
2	*2480.00	68.0 AV			1.00 H	339	69.0	-1.0
3	2483.50	53.6 PK	74.0	-20.4	1.00 H	339	54.6	-1.0
4	2483.50	23.5 AV	54.0	-30.5	1.00 H	339	24.5	-1.0
5	4960.00	37.5 PK	74.0	-36.5	1.05 H	237	33.9	3.6
6	4960.00	7.4 AV	54.0	-46.6	1.05 H	237	3.8	3.6
7	7440.00	43.4 PK	74.0	-30.6	1.14 H	207	33.3	10.1
8	7440.00	13.3 AV	54.0	-40.7	1.14 H	207	3.2	10.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.9 PK			1.07 V	276	92.9	-1.0
2	*2480.00	61.8 AV			1.07 V	276	62.8	-1.0
3	2483.50	50.2 PK	74.0	-23.8	1.07 V	276	51.2	-1.0
4	2483.50	20.1 AV	54.0	-33.9	1.07 V	276	21.1	-1.0
5	4960.00	36.9 PK	74.0	-37.1	4.00 V	180	33.3	3.6
6	4960.00	6.8 AV	54.0	-47.2	4.00 V	180	3.2	3.6
7	7440.00	47.2 PK	74.0	-26.8	4.00 V	174	37.1	10.1
8	7440.00	17.1 AV	54.0	-36.9	4.00 V	174	7.0	10.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle)

Below 1GHz Data:

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.70	22.8 QP	40.0	-17.2	2.00 H	17	32.1	-9.3
2	150.01	27.1 QP	43.5	-16.4	2.00 H	94	35.3	-8.2
3	250.00	33.8 QP	46.0	-12.2	1.00 H	314	43.3	-9.5
4	350.00	39.2 QP	46.0	-6.8	1.00 H	123	45.7	-6.5
5	500.01	37.0 QP	46.0	-9.0	2.00 H	100	39.8	-2.8
6	896.04	35.3 QP	46.0	-10.7	1.50 H	184	31.5	3.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.53	27.9 QP	40.0	-12.1	1.00 V	104	37.4	-9.5
2	150.01	26.9 QP	43.5	-16.6	1.00 V	91	35.1	-8.2
3	250.00	31.9 QP	46.0	-14.1	2.50 V	360	41.4	-9.5
4	350.00	37.8 QP	46.0	-8.2	1.50 V	275	44.3	-6.5
5	500.01	34.8 QP	46.0	-11.2	2.00 V	191	37.6	-2.8
6	900.70	37.5 QP	46.0	-8.5	1.00 V	236	33.6	3.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 29, 2016	Sep. 28, 2017
RF Cable	5D-FB	COCCAB-001	Sep. 30, 2016	Sep. 29, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: Sep. 16, 2017

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation From Test Standard

No deviation.

4.2.5 Test Setup

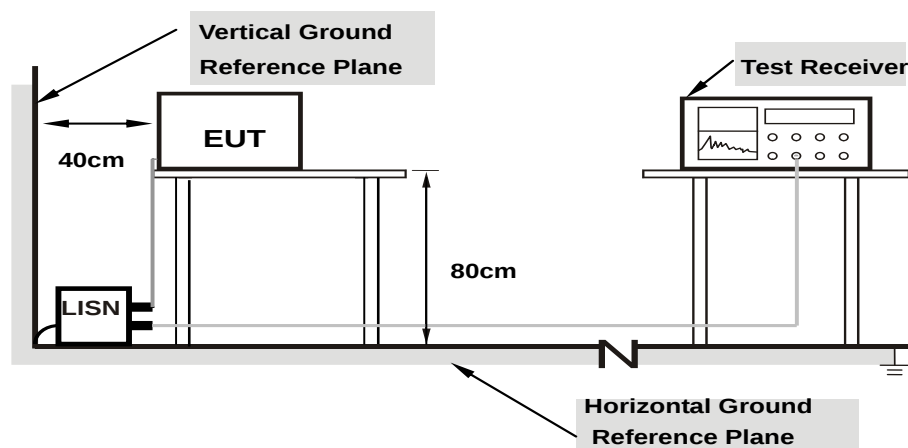

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.08	22.56	13.74	32.64	23.82	65.79	55.79	-33.15	-31.97
2	0.37566	10.11	31.69	30.24	41.80	40.35	58.37	48.37	-16.57	-8.02
3	0.46641	10.12	19.74	16.75	29.86	26.87	56.58	46.58	-26.72	-19.71
4	4.12891	10.38	17.60	11.33	27.98	21.71	56.00	46.00	-28.02	-24.29
5	9.34766	10.74	17.92	8.72	28.66	19.46	60.00	50.00	-31.34	-30.54
6	28.21094	11.72	13.88	4.95	25.60	16.67	60.00	50.00	-34.40	-33.33

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

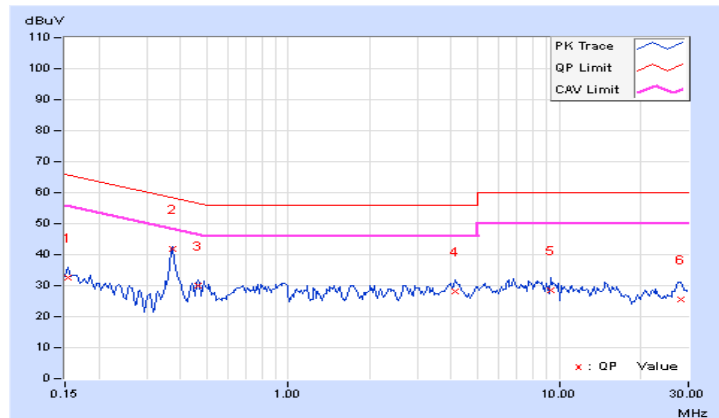


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.07	22.11	8.11	32.18	18.18	65.79	55.79	-33.61	-37.61
2	0.37266	10.11	22.95	15.87	33.06	25.98	58.44	48.44	-25.38	-22.46
3	0.98984	10.12	14.14	5.75	24.26	15.87	56.00	46.00	-31.74	-30.13
4	1.78906	10.19	15.49	3.67	25.68	13.86	56.00	46.00	-30.32	-32.14
5	6.50391	10.45	11.04	4.45	21.49	14.90	60.00	50.00	-38.51	-35.10
6	27.36328	11.28	18.75	6.92	30.03	18.20	60.00	50.00	-29.97	-31.80

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

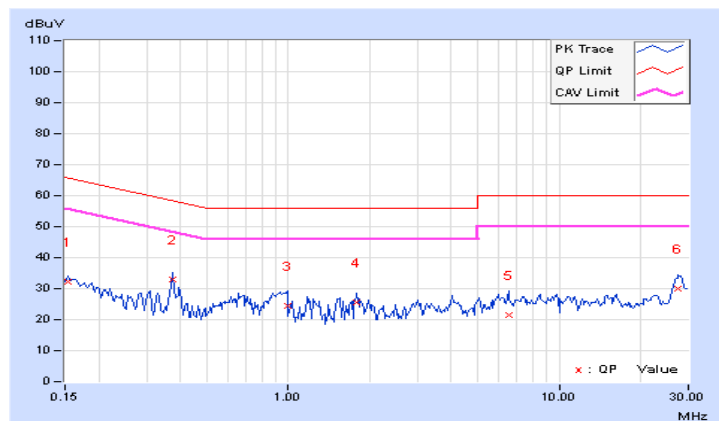


4.3 Number of Hopping Frequency Used

4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

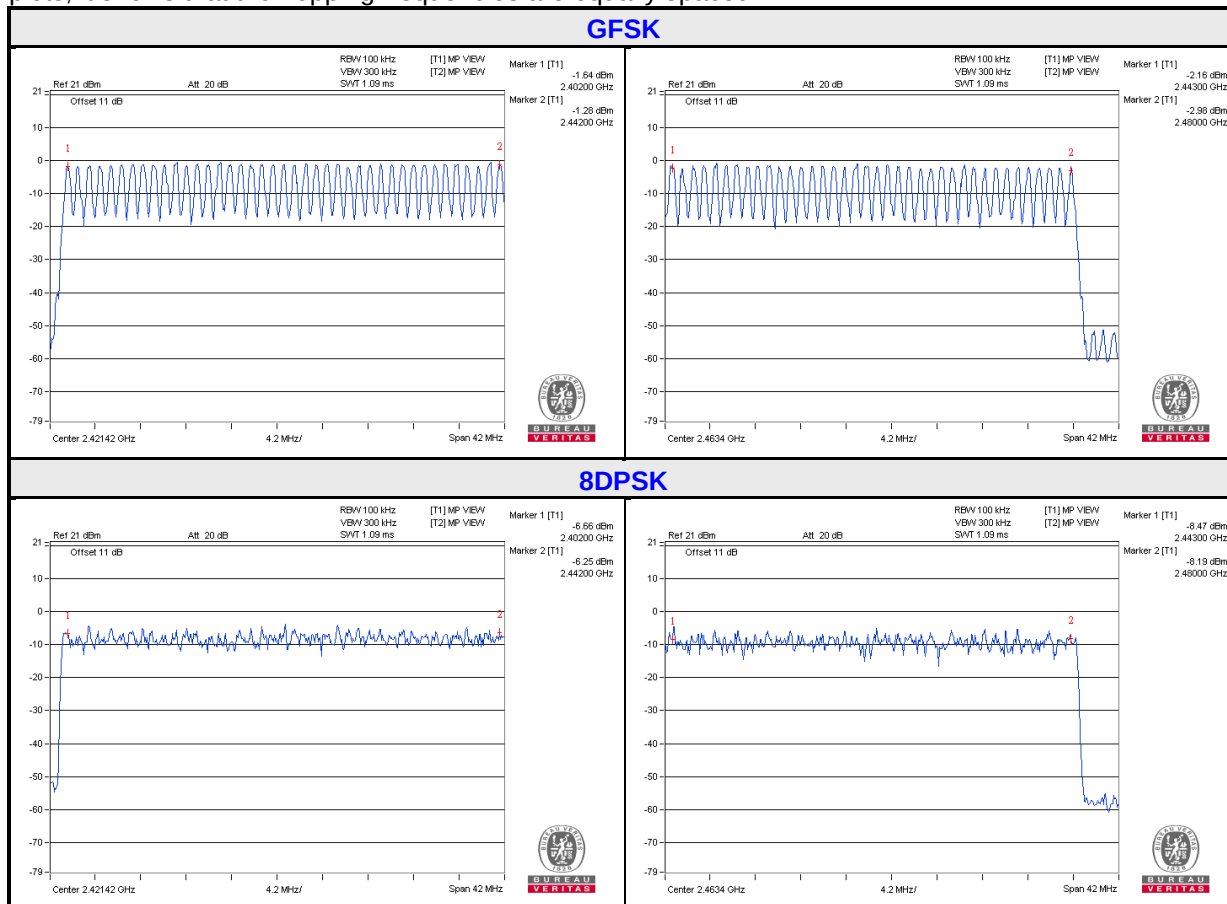


4.4 Dwell Time on Each Channel

4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.4.5 Deviation from Test Standard

No deviation.


4.4.6 Test Results

GFSK


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316 times	0.42	132.72	400
DH3	27 (times / 5 sec) * 6.32 = 170.64 times	1.69	288.38	400
DH5	16 (times / 5 sec) * 6.32 = 101.12 times	2.944	297.7	400

NOTE: Test plots of the transmitting time slot are shown on next page.


DH1

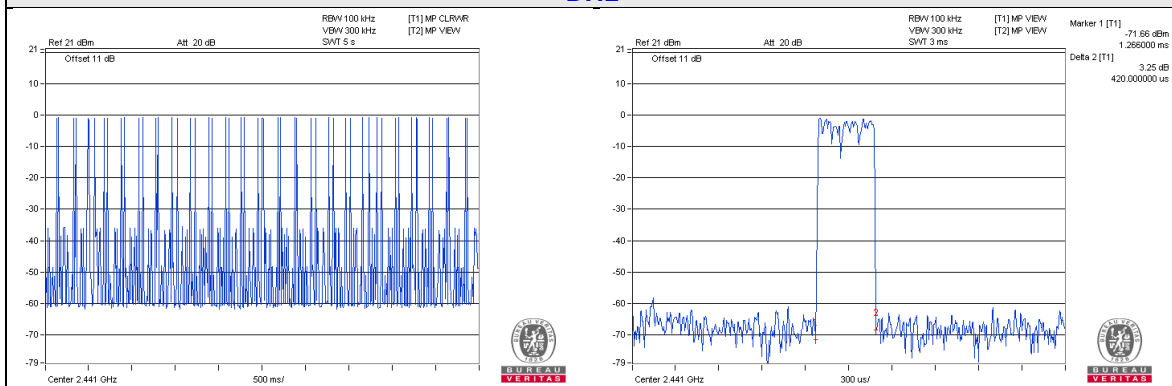

DH3

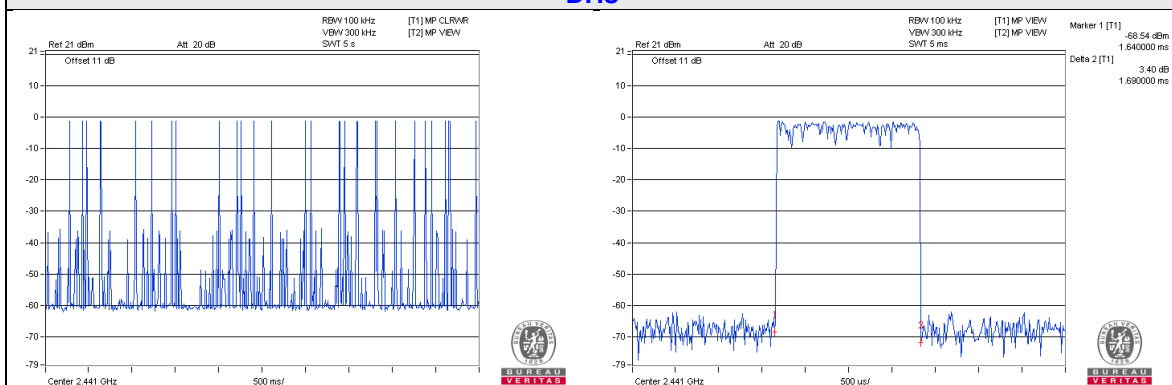

DH5

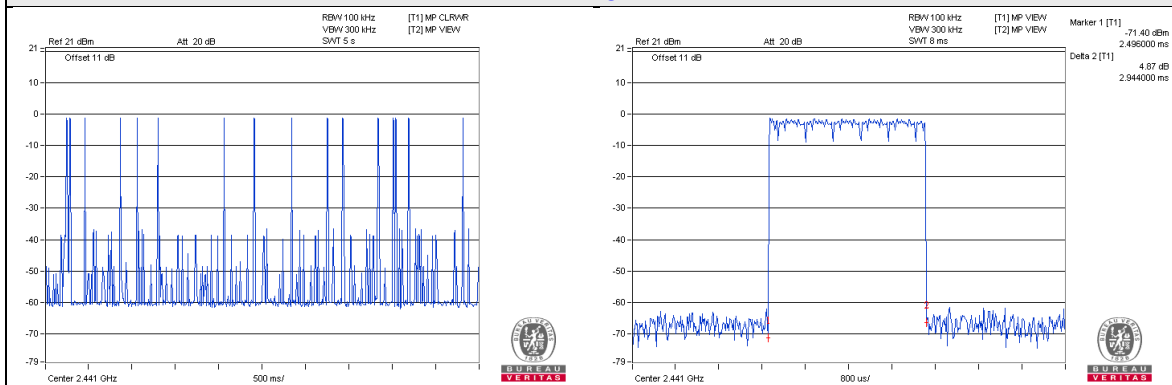


8DPSK


Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.438	138.41	400
3DH3	25 (times / 5 sec) * 6.32 = 518 times	1.72	271.76	400
3DH5	17 (times / 5 sec) * 6.32 = 107.44 times	3.024	324.9	400

NOTE: Test plots of the transmitting time slot are shown on next page.


3DH1

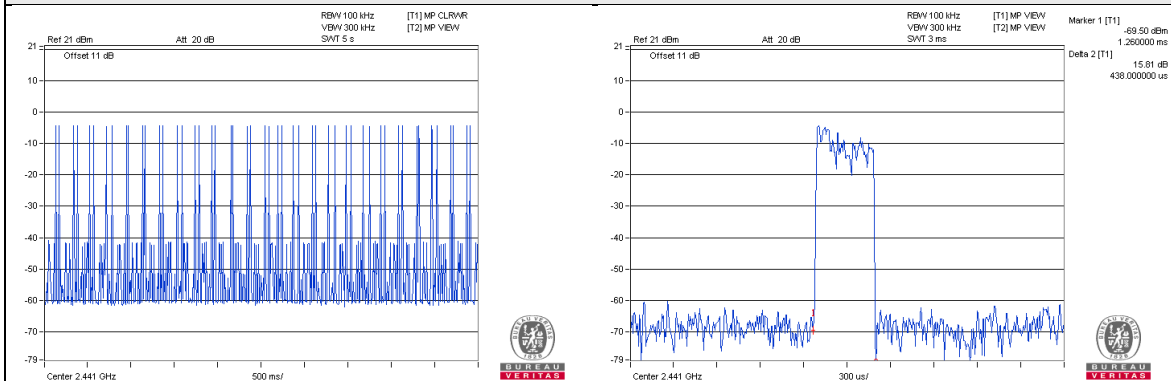

3DH3

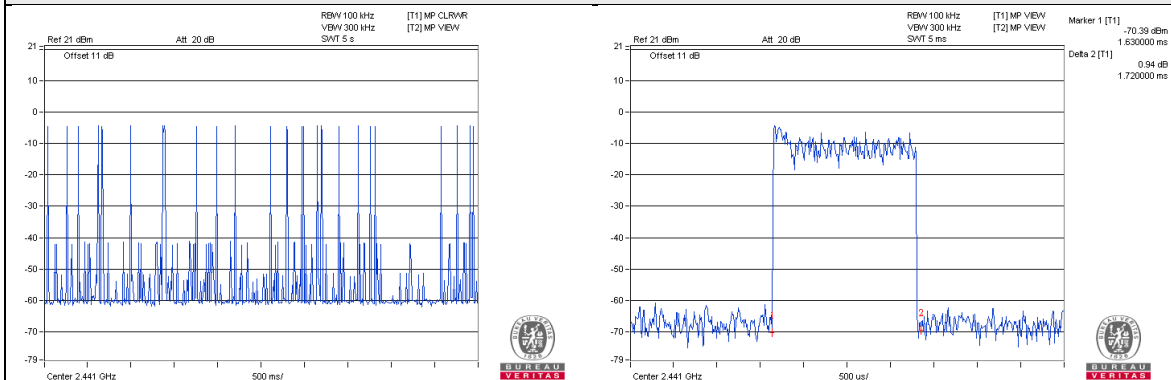

3DH5

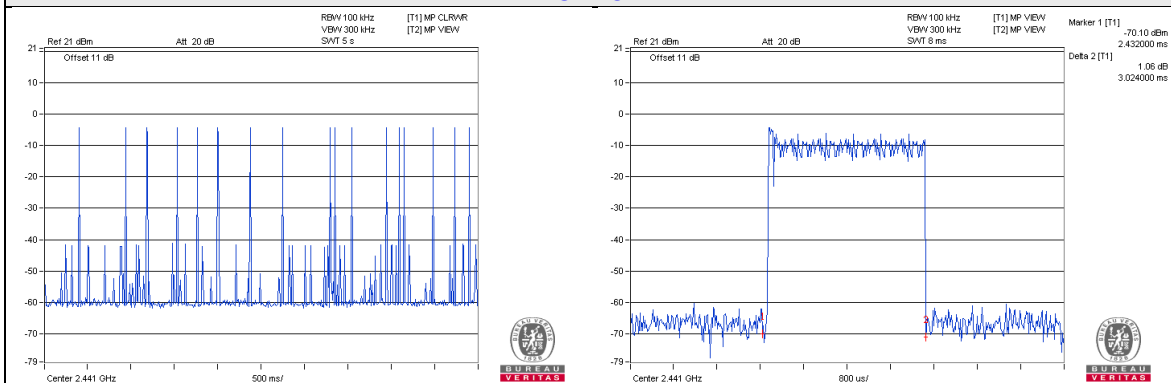


4.5 Channel Bandwidth

4.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.96	1.33
39	2441	0.97	1.33
78	2480	0.97	1.33

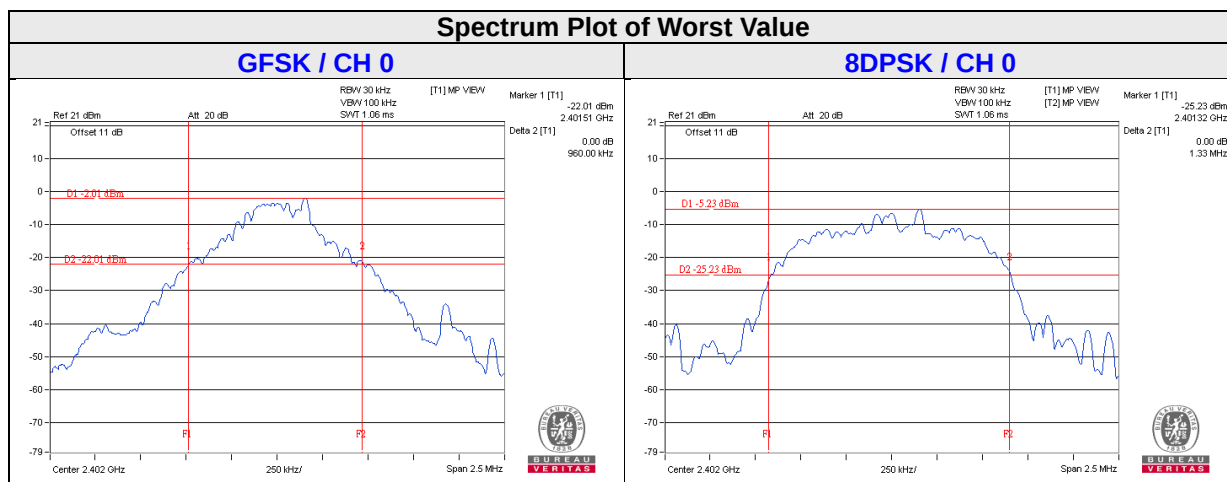


4.6 Hopping Channel Separation

4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

Measurement Procedure REF

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


4.6.5 Deviation from Test Standard

No deviation.

4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.96	1.33	0.64	0.89	Pass
39	2441	1.00	1.00	0.97	1.33	0.65	0.89	Pass
78	2480	1.00	1.00	0.97	1.33	0.65	0.89	Pass

NOTE: The minimum limit is two-third 20dB bandwidth.

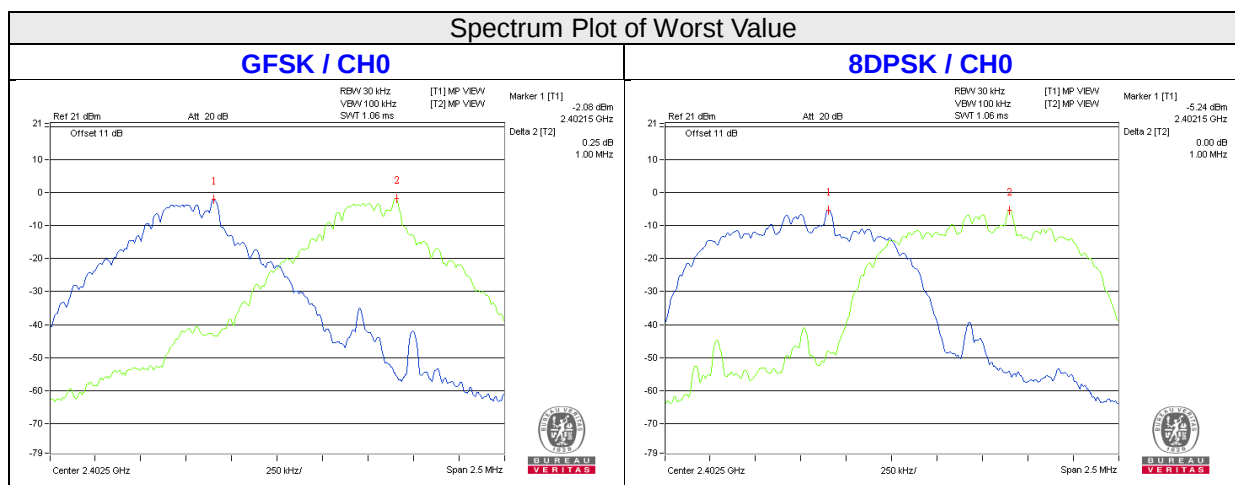


4.7 Maximum Output Power

4.7.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125mW.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

4.7.5 Deviation from Test Standard


No deviation.

4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

Channel	Frequency (MHZ)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	1.125	0.8492	0.51	-0.71	125	Pass
39	2441	1.089	0.6855	0.37	-1.64	125	Pass
78	2480	0.9441	0.6531	-0.25	-1.85	125	Pass

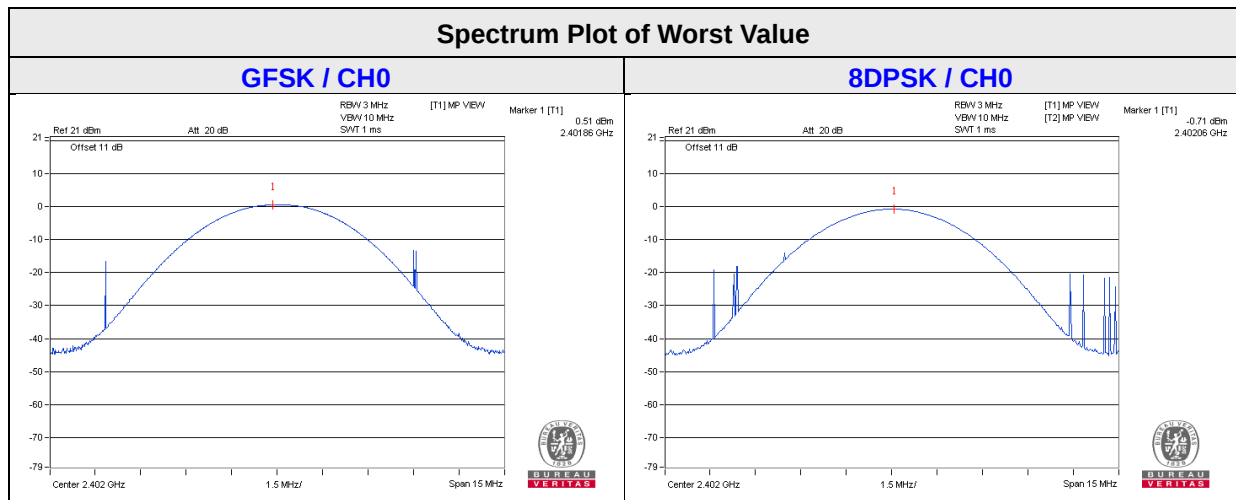

4.8 Conducted Out of Band Emission Measurement

4.8.1 Limits of Conducted Out of Band Emission Measurement

Below –20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.8.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 Deviation from Test Standard

No deviation.


4.8.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 Test Results



The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


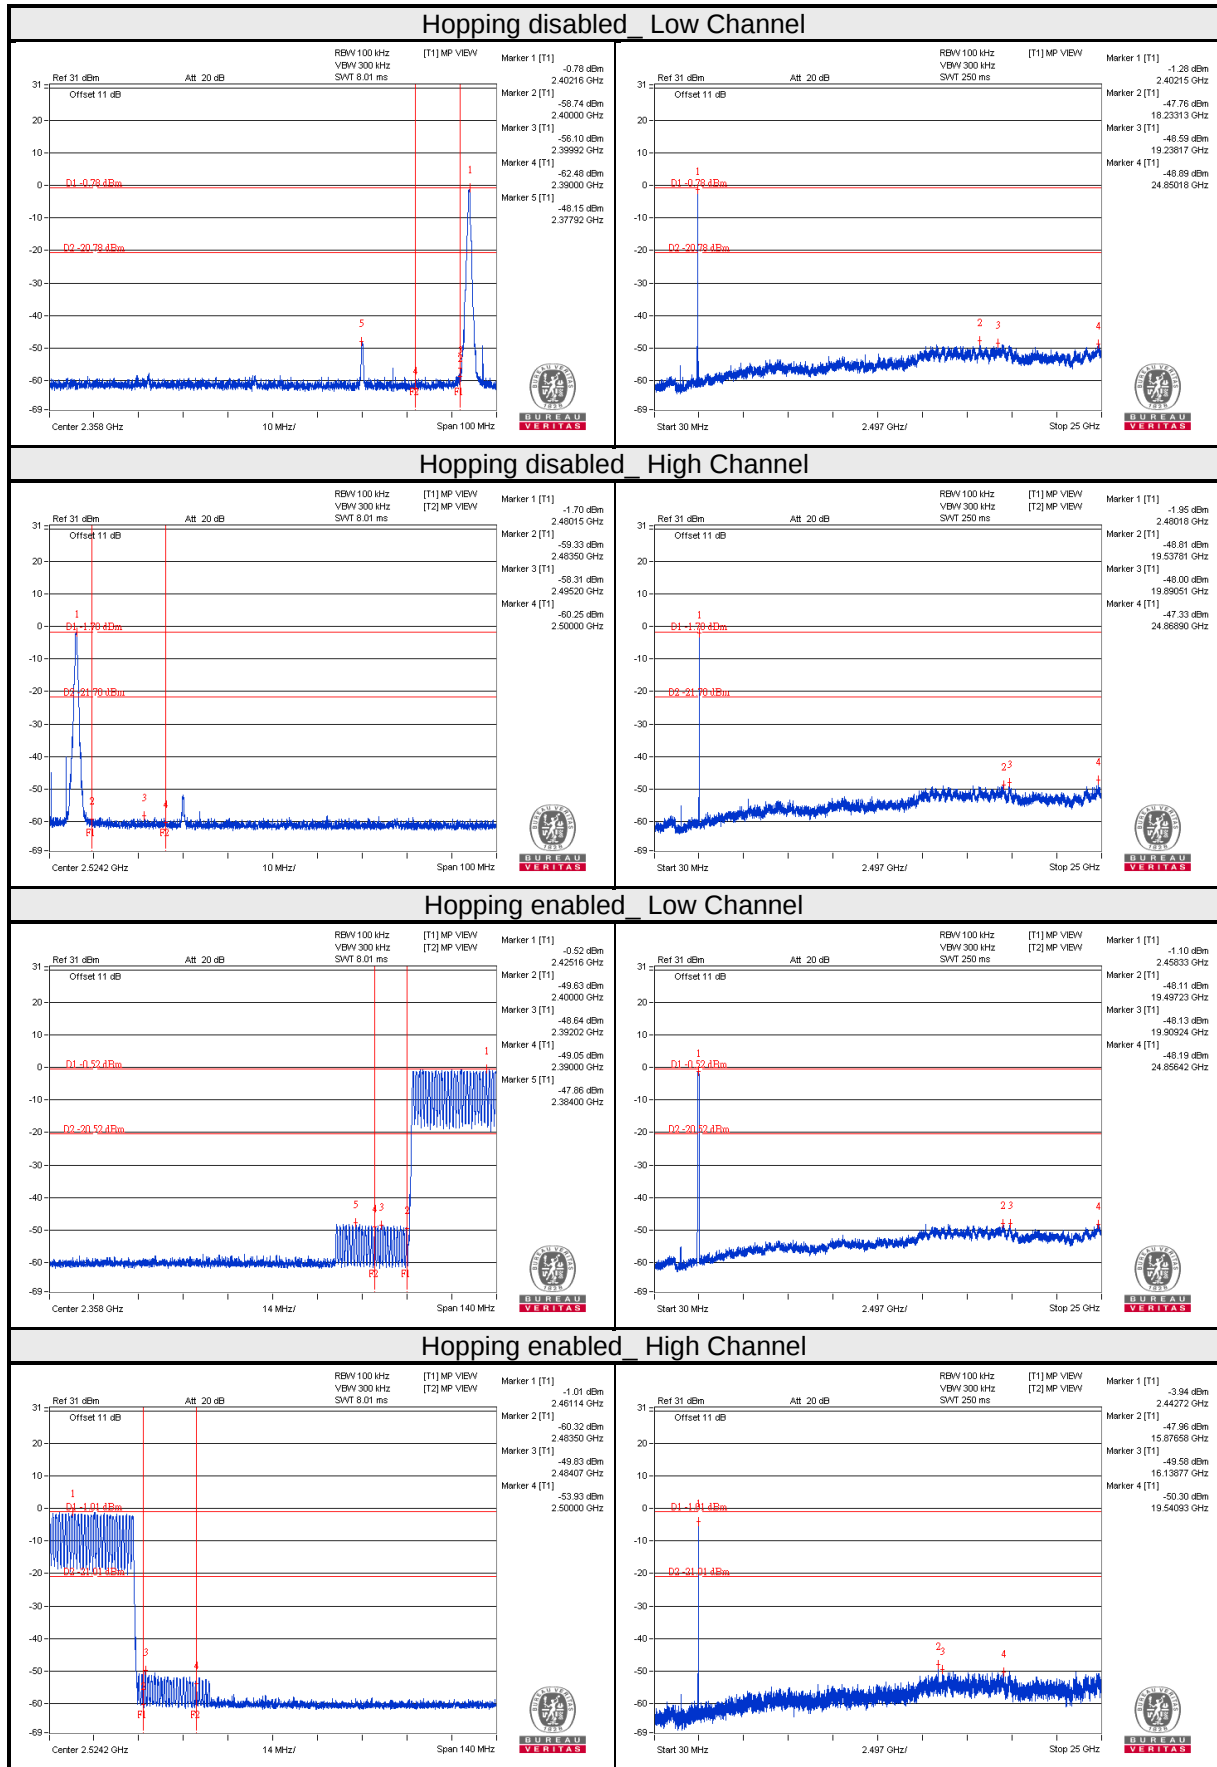


8DPSK



Hopping disabled Low Channel

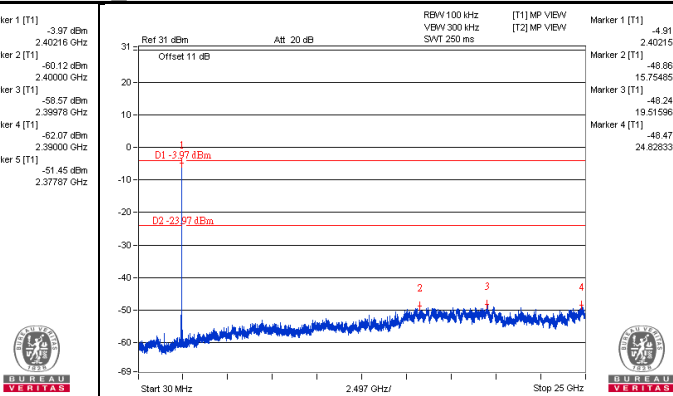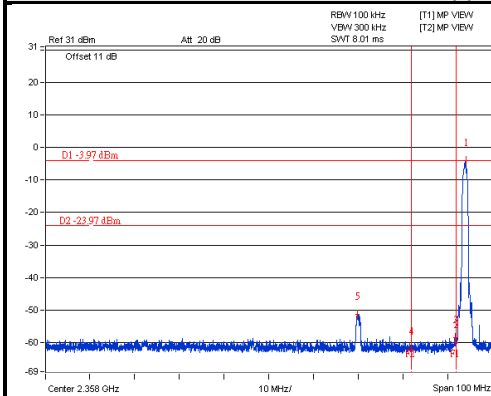



Hopping disabled High Channel

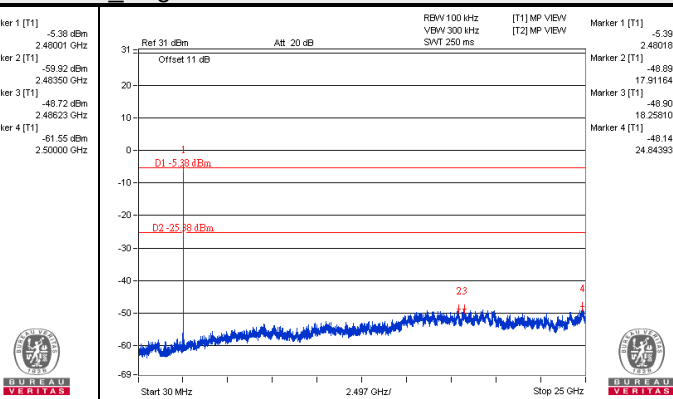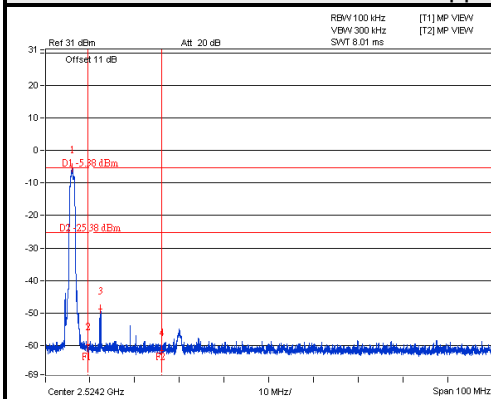

Hopping enabled Low Channel

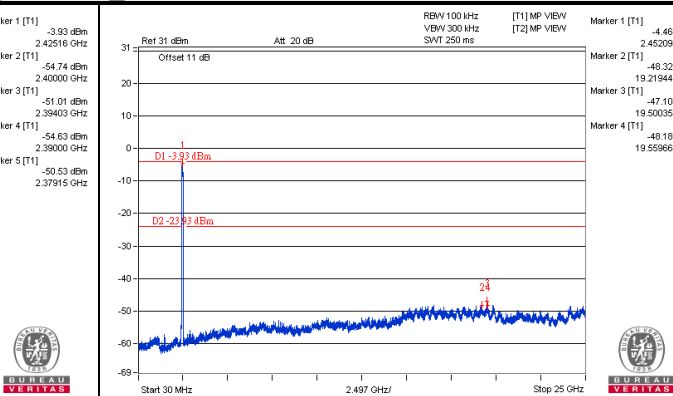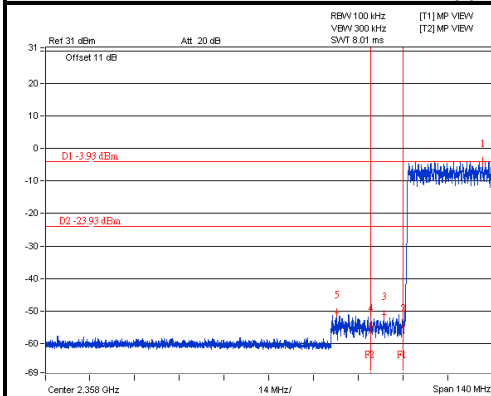

Hopping enabled High Channel

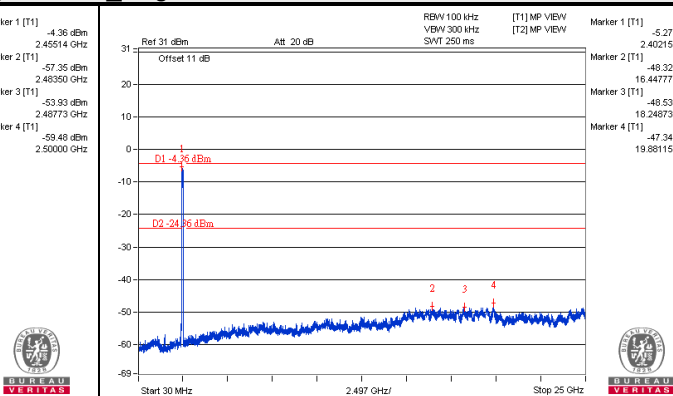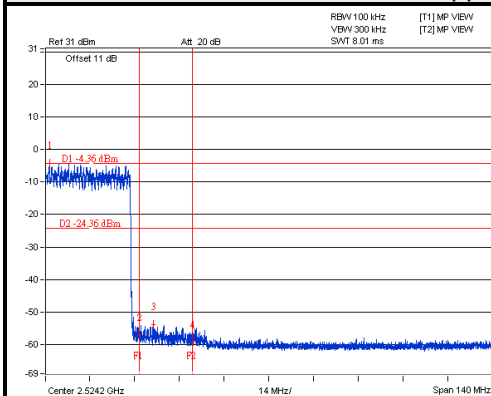

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---