

## FCC TEST REPORT

For

M2micro (Changshu) Co., Ltd.

M2micro Center Control Unit

Model No.: MCC6000-CD01, MCC6000-DD01

Prepared for : M2micro (Changshu) Co., Ltd.  
Address : No.1bldg, Science Technology Park, Sihai Road, Economic  
Development Zone, Changshu, Jiangsu 215503, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an  
District, Shenzhen, Guangdong, China

Date of receipt of test sample : January 11, 2013  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : November 11, 2012 – February 25, 2013  
Date of Report : February 25, 2013

**FCC TEST REPORT****FCC CFR 47 PART 15 C(15.231)****Report Reference No. .... : LCS121101008QF**

Date of Issue ..... : February 25, 2013

**Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address ..... : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards ☒  
Partial application of Harmonised standards ☐  
Other standard testing method ☐**Applicant's Name..... : M2micro (Changshu) Co., Ltd.**Address ..... : No.1bldg, Science Technology Park, Sihai Road, Economic  
Development Zone, Changshu, Jiangsu 215503, China**Test Specification**

Standard ..... : FCC CFR 47 PART 15 Subpart C, ANSI C63.4-2003

Test Report Form No. .... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.**


This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description. .... : M2micro Center Control Unit**

Trade Mark ..... : M2Micro

Manufacturer..... : M2micro (Changshu) Co., Ltd.

Model/ Type reference..... : MCC6000-CD01

Ratings ..... : Input: AC 110-240V, 50/60Hz  
Output: DC 9V, 3AResult ..... : **Positive****Compiled by:**

Ada Liang / File administrators

**Supervised by:**

Vito Cao/ Technique principal

**Approved by:**

Gavin Liang/ Manager

# FCC TEST REPORT

**Test Report No. : LCS121101008QF**February 25, 2013

Date of issue

Type / Model..... : MCC6000-CD01

EUT..... : M2micro Center Control Unit

**Applicant..... : M2micro (Changshu) Co., Ltd.**Address..... : No.1bldg, Science Technology Park, Sihai Road, Economic  
Development Zone, Changshu, Jiangsu 215503, China

Telephone..... : /

Fax..... : /

**Manufacturer..... : M2micro (Changshu) Co., Ltd.**Address..... : No.1bldg, Science Technology Park, Sihai Road, Economic  
Development Zone, Changshu, Jiangsu 215503, China

Telephone..... : /

Fax..... : /

**Factory..... : M2micro (Changshu) Co., Ltd.**Address..... : No.1bldg, Science Technology Park, Sihai Road, Economic  
Development Zone, Changshu, Jiangsu 215503, China

Telephone..... : /

Fax..... : /

**Test Result:****Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	5
1.2. OBJECTIVE .....	6
1.3. ENVIRONMENTAL CONDITIONS .....	6
1.4. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	6
1.5. EXTERNAL I/O PORT .....	6
1.6. EUT OPERATION .....	6
1.7. ANTENNA SYSTEM .....	6
1.8. DESCRIPTION OF TEST FACILITY .....	7
1.9. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	7
<b>2. TEST METHODOLOGY .....</b>	<b>8</b>
2.1. EUT CONFIGURATION .....	8
2.2. EUT EXERCISE .....	8
2.3. GENERAL TEST PROCEDURES .....	8
2.4. INSTRUMENT CALIBRATION .....	8
2.5. TEST MODE .....	8
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
3.1. JUSTIFICATION .....	9
3.2. EUT EXERCISE SOFTWARE .....	9
3.3. SPECIAL ACCESSORIES .....	9
3.4. BLOCK DIAGRAM/SCHEMATICS .....	9
3.5. EQUIPMENT MODIFICATIONS .....	9
3.6. TEST SETUP .....	9
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>5. TEST ITEMS AND RESULTS .....</b>	<b>11</b>
5.1. RELEASE TIME MEASUREMENT .....	11
5.3. 20dB BANDWIDTH EMISSIONS .....	20
5.5. POWER LINE CONDUCTED EMISSIONS .....	23
5.6. ANTENNA REQUIREMENT .....	25
<b>6. LIST OF MEASURING EQUIPMENTS .....</b>	<b>26</b>
<b>7. MANUFACTURER/ APPROVAL HOLDER DECLARATION .....</b>	<b>27</b>

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	: M2micro Center Control Unit
Model Number	: MCC6000-CD01
Power Supply	: Input: AC 110-240V, 50/60Hz Output: DC 9V, 3A
Frequency Range	: 433.92MHz
Number of Channels	: 1
Modulation Type	: FSK
Antenna Type and Gain	: External Antenna, 2.0dBi
Tx/Rx Frequency Range	: GSM/GPRS 850: 824.2~848.8MHz/869.2~893.8MHz PCS/GPRS 1900: 1850.2~1909.8MHz/1930.2~1989.8MHz
Number of Channels	: GSM/GPRS 850: 128 / 190 / 251 PCS/GPRS 1900: 512 / 661 / 810
Modulation Type	: GMSK
Antenna Type and Gain	: GSM 850 Integral Antenna, 3.0dBi PCS 1900 Integral Antenna, 3.0dBi

## 1.2. Objective

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators and Industry Canada RSS-210 for Low Power, License-Exempt Radio Communication Devices. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules and Industry Canada Radio Standards Procedure RSP-100.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

## 1.3. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

## 1.4. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
M2micro (Changshu) Co., Ltd.	Adapter	RHD-093000	01	Verification

## 1.5. External I/O Port

I/O Port	Description	Quantity	Cable
--	--	--	--

## 1.6. EUT Operation

The EUT was placed in a RF test mode for testing of the transmitter and in normal mode of operation for testing the digital circuitry and receiver. In both modes the carrier current device within the EUT was operational.

## 1.7. Antenna System

This EUT used a external antenna which is permanently attached. The max. gain is 2.0dBi.

## 1.8. Description of Test Facility

### Site Description

#### EMC Lab.

: Accredited by CNAS, June 04, 2010

The Certificate Registration Number. is L4595.

Accredited by FCC, July 14, 2011

The Certificate Registration Number. is 899208.

Accredited by Industry Canada, May. 02, 2011

The Certificate Registration Number. is 9642A-1

## 1.9. Statement of The Measurement Uncertainty

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	$\pm 3.10\text{dB}$	(1)
		30MHz~200MHz	$\pm 2.96\text{dB}$	(1)
		200MHz~1000MHz	$\pm 3.10\text{dB}$	(1)
		1GHz~26.5GH	$\pm 4.20\text{dB}$	(1)
Conduction Uncertainty	:	150kHz~30MHz	$\pm 1.63\text{dB}$	(1)
Power disturbance	:	30MHz~300MHz	$\pm 1.60\text{dB}$	(1)

1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the normal operating mode. The TX frequency that was fixed which was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.231 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

### 2.4. Instrument Calibration

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

### 2.5. Test Mode

The EUT has been tested under engineering mode.

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported (FSK mode).

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmit condition.

#### 3.2. EUT Exercise Software

N/A

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document.

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Rules	Description of test	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band	Compliant
§15.209	General Requirement	Compliant
§15.231 (e)	Radiated Emissions	Compliant
§15.231 (c)	20dB Bandwidth Testing	Compliant
§15.231 (e)	Release Time Measurement	Compliant
§15.231	Duty cycle Factor	Compliant
§15.207	Conducted Emissions	Compliant

## 5. TEST ITEMS AND RESULTS

### 5.1. Release Time Measurement

FCC 15.231 (e)

#### 5.1.1. Limit


Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.


#### 5.1.2. Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

#### 5.1.3. Test Results

Frequency (MHz)	Release Time (s)	Silent Time (s)	Conclusion
433.92	0.525	25.43	PASS

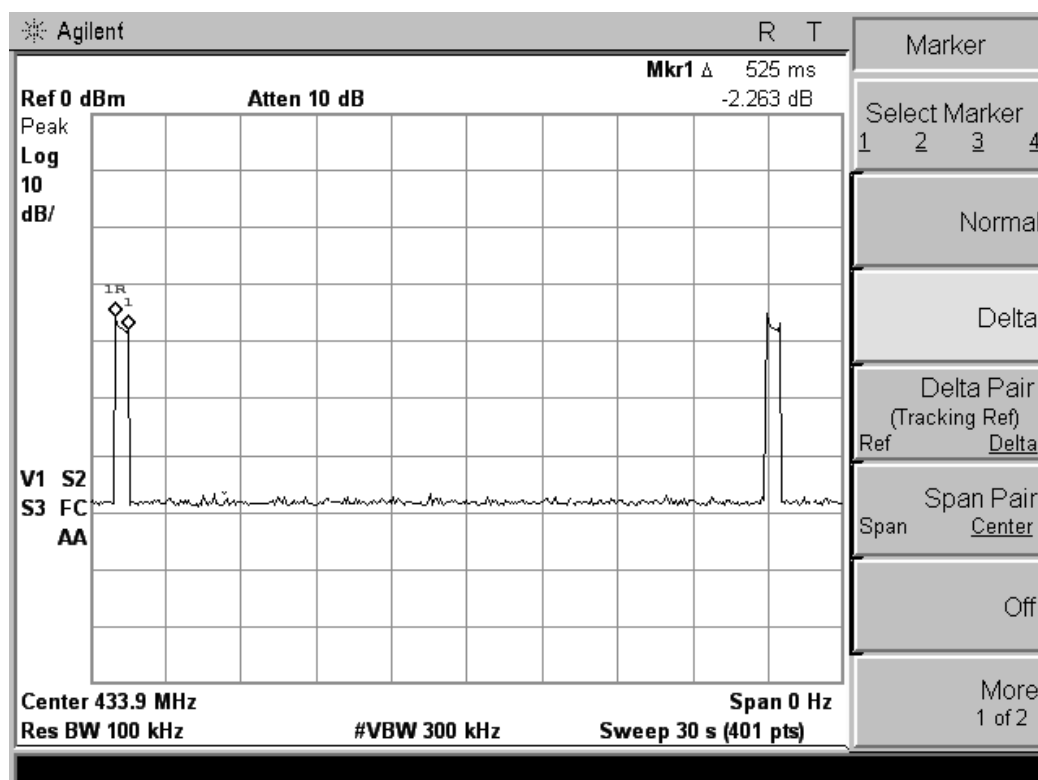

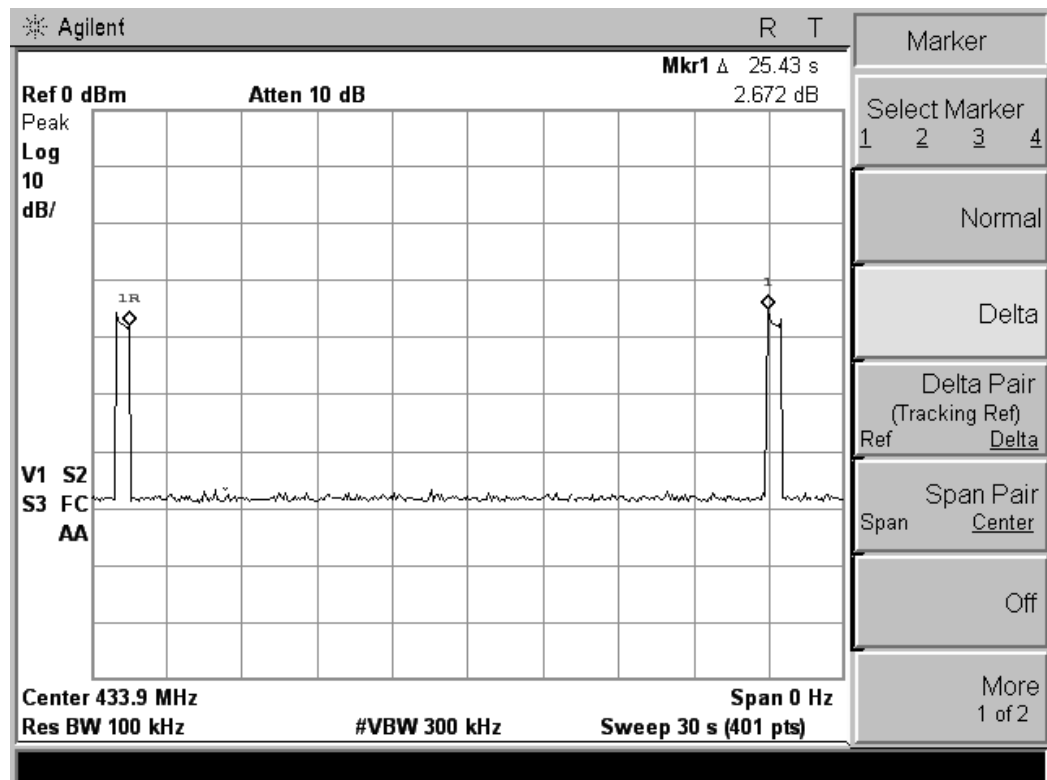

## 5.2. Transmitter Field Strength of Emissions

### 5.2.1. Limit

#### FCC §15.231 (e)

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (microvolt/meter)	Field Strength of spurious emissions (microvolt/meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500**	50 to 150**
174-260	1,500	150
260-470	1,500 to 5,000	150 to 500
Above 470	5,000	500

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $22.72727(F) - 2454.545$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $16.6667(F) - 2833.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

#### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 5.2.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 5.2.4. Test Setup Layout

For radiated emissions below 30MHz

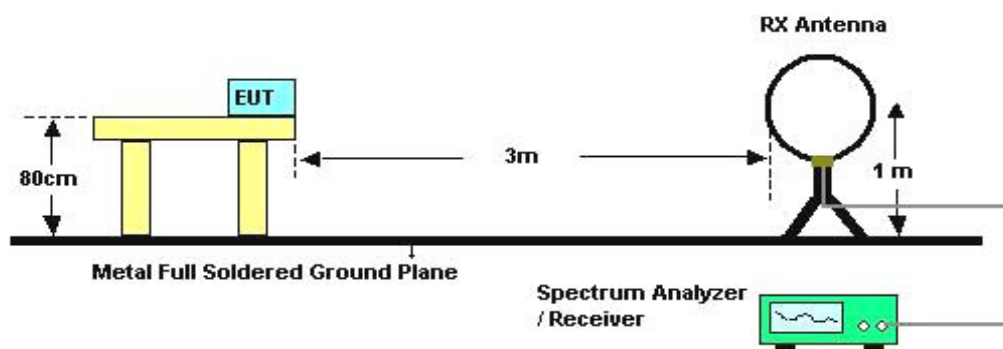

For radiated emissions above 30MHz

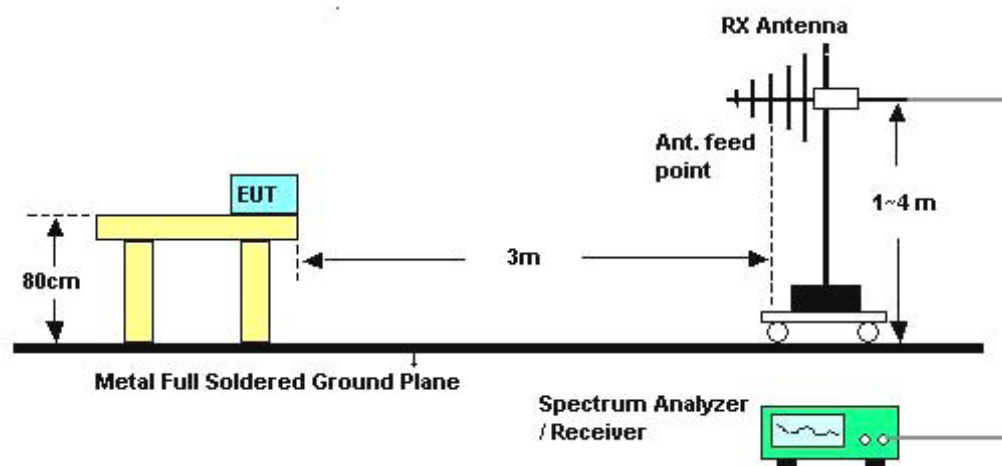

#### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.2.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	Automatically

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 5.2.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25℃	Humidity	60%
Test Engineer	Leo	Configurations	Fundamental Emissions

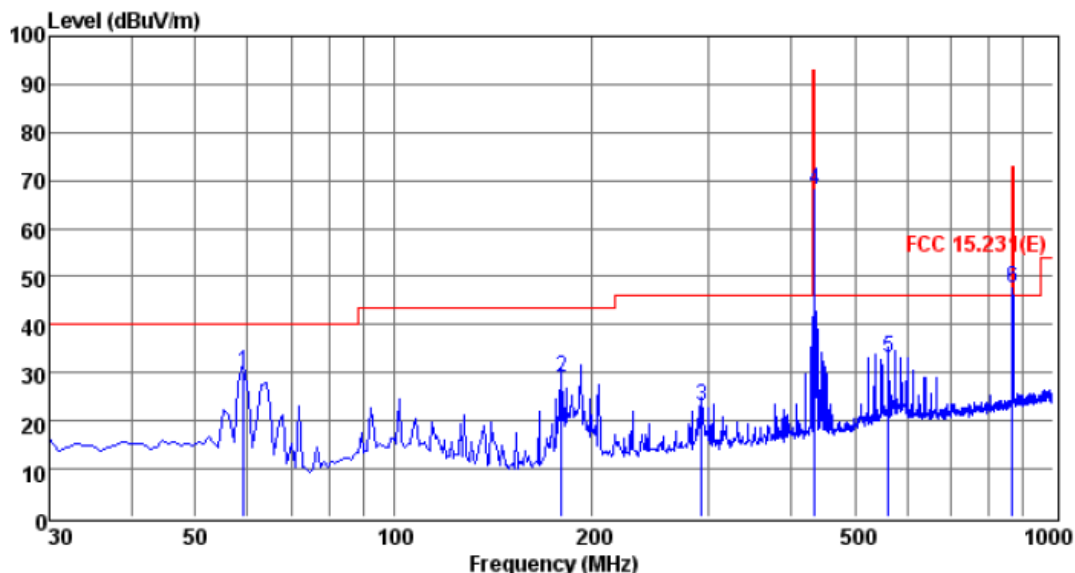

Env. /Ins: 24℃/56%  
 EUT: M2micro Center Control Unit  
 M/N: MCC6000-CD01  
 Power Rating: AC 120V/60Hz  
 Test Mode: On  
 Operator: ANDY  
 Memo:  
 pol: VERTICAL

	Freq	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	59.10	46.91	0.49	12.75	30.15	30.00	40.00	-10.00	QP
2	179.38	48.82	0.89	9.64	30.20	29.15	43.50	-14.35	QP
3	292.87	39.06	1.08	12.92	30.15	22.91	46.00	-23.09	QP
4	433.92	81.43	1.18	15.54	30.08	68.07	92.86	-24.79	Peak
5	562.53	44.10	1.43	17.75	30.02	33.26	46.00	-12.74	QP
6	868.08	54.97	1.87	20.76	30.12	47.48	72.86	-25.38	Peak


Note: 1. All readings are Quasi-peak values.

2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.

3. The emission levels that are 20dB below the official limit are not reported.

## Fundamental and Harmonics Average Result

Freq(MHz)	Peak Level (dBμV/m)	AV Factor(dBμV/m) (see Section 5.4)	Average Level (dBμV/m)	Limit(dBμV/m) (average)	Conclusion
433.92	68.07	-5.80	62.27	72.86	PASS
868.08	47.48	-5.80	41.68	52.86	PASS

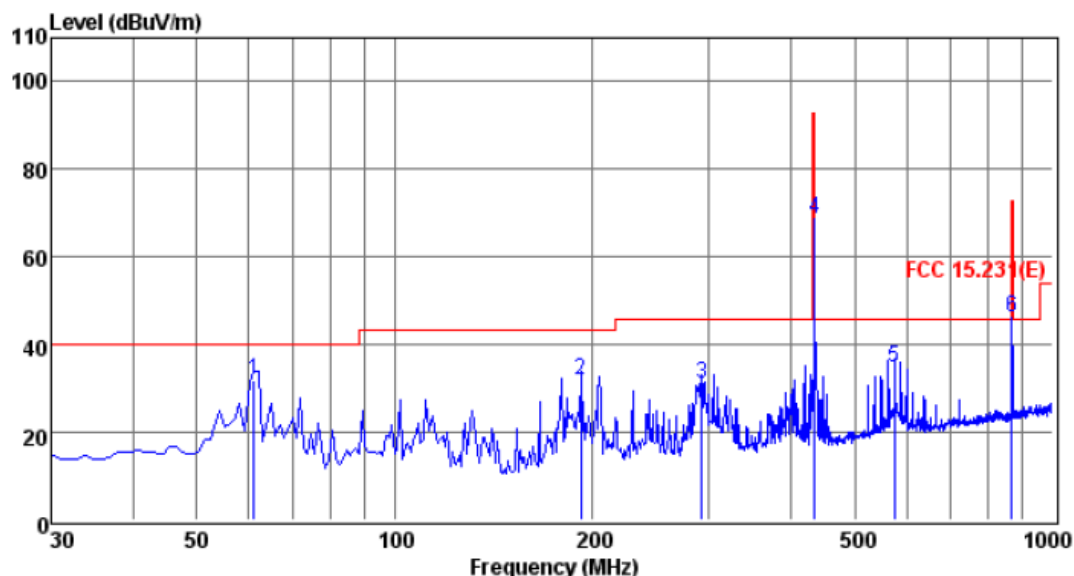

Env. /Ins: 24°C/56%  
 EUT: M2micro Center Control Unit  
 M/N: MCC6000-CD01  
 Power Rating: AC 120V/60Hz  
 Test Mode: On  
 Operator: ANDY  
 Memo:  
 pol: HORIZONTAL

	Freq	Reading	CabLos	AntFac	PreFac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dB	dBuV/m	dBuV/m	dB	
1	61.04	49.43	0.49	12.28	30.16	32.04	40.00	-7.96	QP
2	191.99	50.71	0.76	10.56	30.20	31.83	43.50	-11.67	QP
3	292.87	47.32	1.08	12.92	30.15	31.17	46.00	-14.83	QP
4	433.92	82.23	1.18	15.54	30.08	68.87	92.86	-23.99	Peak
5	575.14	45.42	1.49	17.99	30.01	34.89	46.00	-11.11	QP
6	868.08	53.67	1.87	20.76	30.12	46.18	72.86	-26.68	Peak

Note: 1. All readings are Quasi-peak values.

2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.

3. The emission levels that are 20dB below the official limit are not reported.


#### Fundamental and Harmonics Average Result

Freq(MHz)	Peak Level (dBμV/m)	AV Factor(dBμV/m) (see Section 5.4)	Average Level (dBμV/m)	Limit(dBμV/m) (average)	Conclusion
433.92	68.87	-5.80	63.07	72.86	PASS
868.08	46.18	-5.80	40.38	52.86	PASS


## 5.1.8. Results of Radiated Emissions (Above 1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	Harmonics Emissions/ Spurious Emission

Antenna Polarity: Vertical

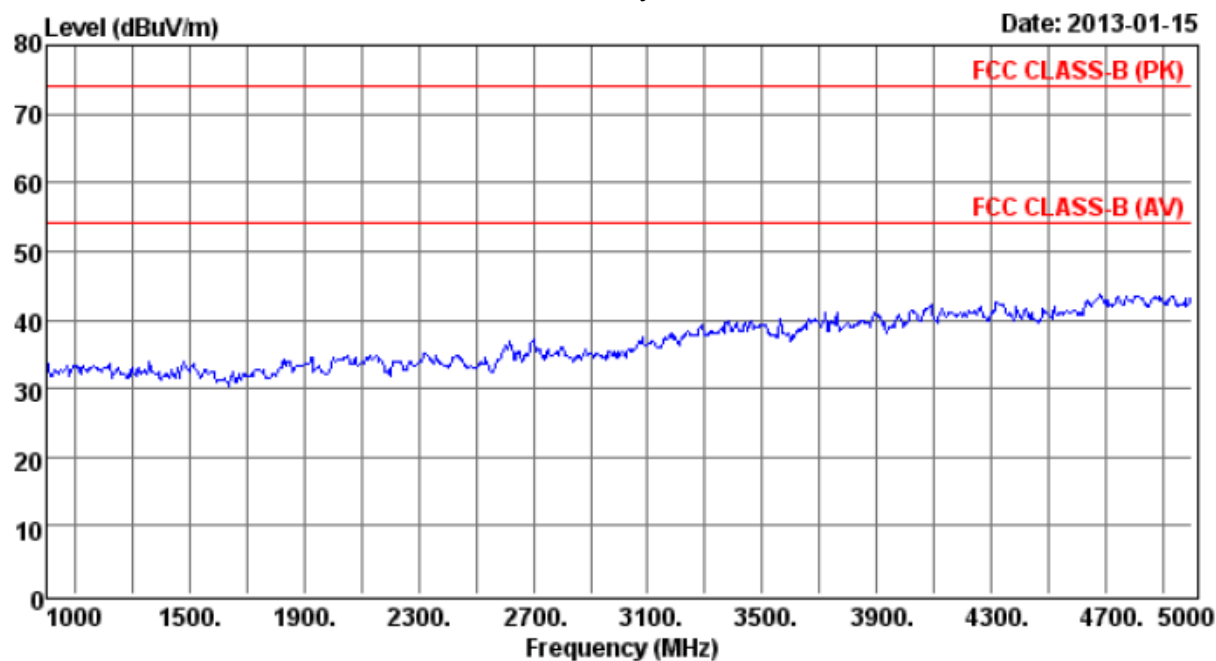

Antenna Polarity: Horizontal

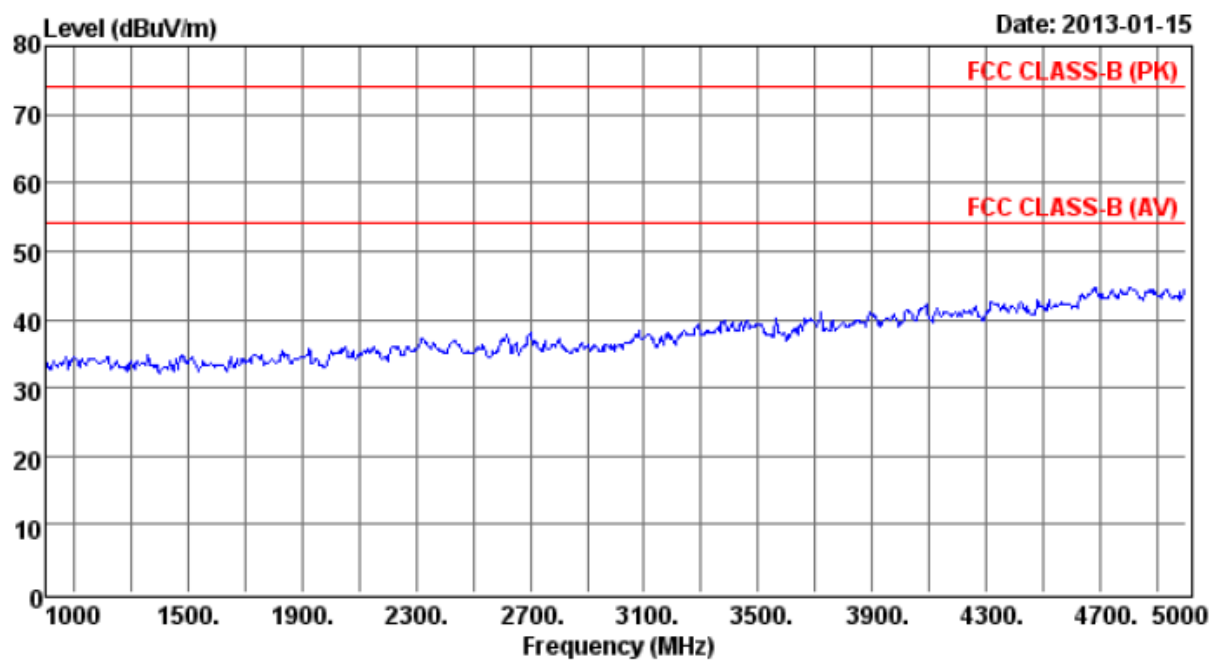

### 5.3. 20dB Bandwidth Emissions

FCC 15.231 (c)

#### 5.3.1. Limit


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

#### 5.3.2. Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

#### 5.3.3. Test Data

Center Frequency of operation MHz	Maximum allowed bandwidth kHz	Measured 20dB bandwidth kHz	Result
433.92	1084.8	98.986	PASS
<b>Maximum allowed bandwidth:</b>	<input checked="" type="checkbox"/> 0.25% of the centre operating frequency <input type="checkbox"/> 0.5% of the centre operating frequency		
<b>RBW:</b>	<input checked="" type="checkbox"/> 10kHz <input type="checkbox"/> 100kHz <input type="checkbox"/> other kHz		
<b>VBW:</b>	<input checked="" type="checkbox"/> 30kHz <input type="checkbox"/> 300kHz <input type="checkbox"/> other kHz		

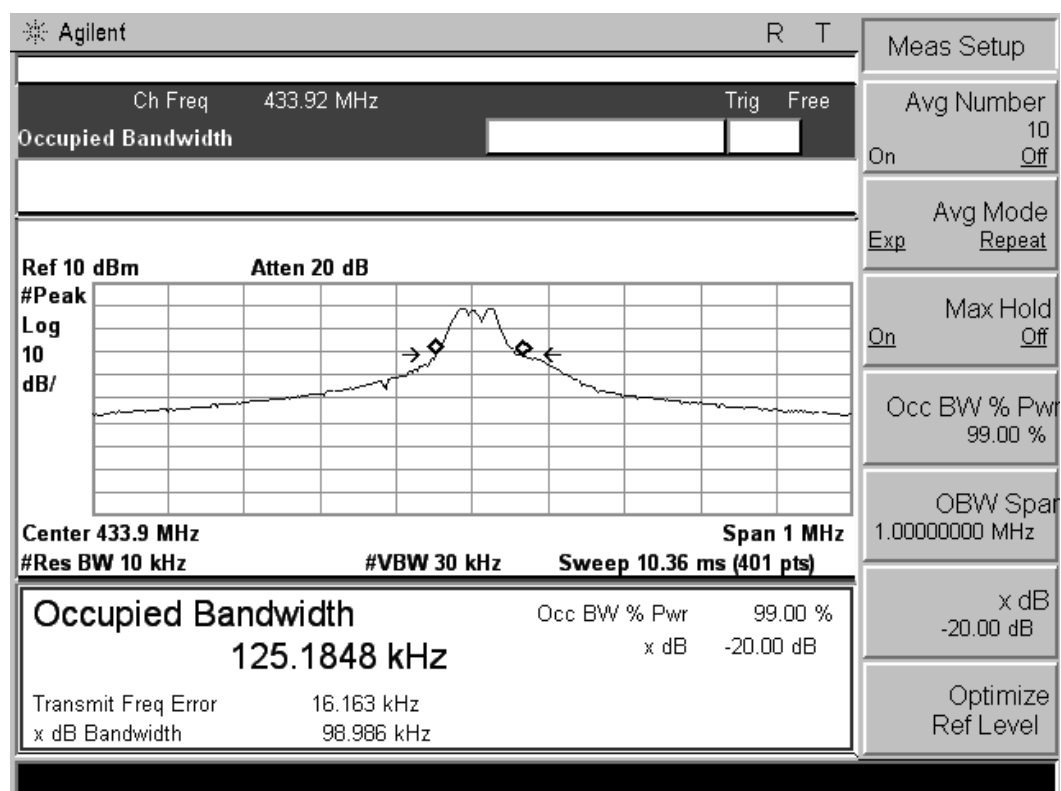

## 5.4. Duty cycle

### 5.4.1. Limit

No dedicated limit specified in the Rules.

### 5.4.2. Test Procedure

5.4.2.1. Place the EUT on the table and set it in transmitting mode.

5.4.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.4.2.3. Set centre frequency of spectrum analyzer=operating frequency.

5.4.2.4. Set the spectrum analyzer as RBW=100KHz, VBW=100KHz, Span=0Hz, Adjust Sweep=100ms.

5.4.2.5. Repeat above procedures until all frequency measured was complete.


### 5.4.3. Test Data

Refer to section 5.1.3


Release Time = 0.525s > 0.1s

So, the calculate of duty cycle factor should use only 100ms


**Test Plot 1**

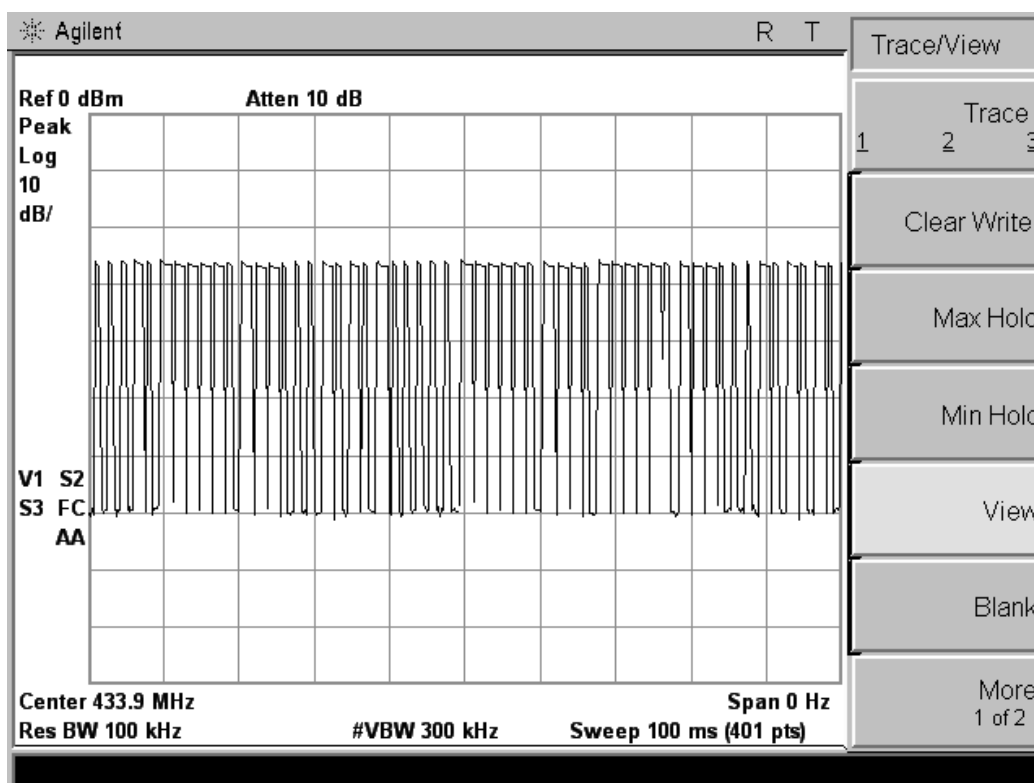

## Test Plot 2

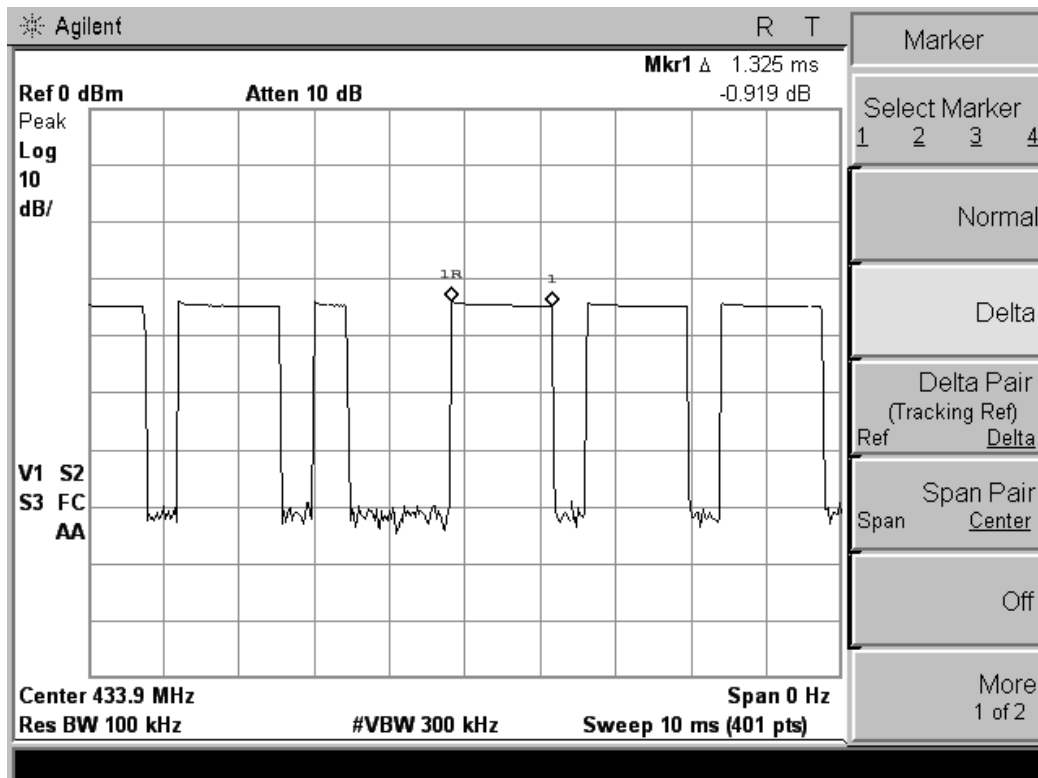

## Test Plot 3

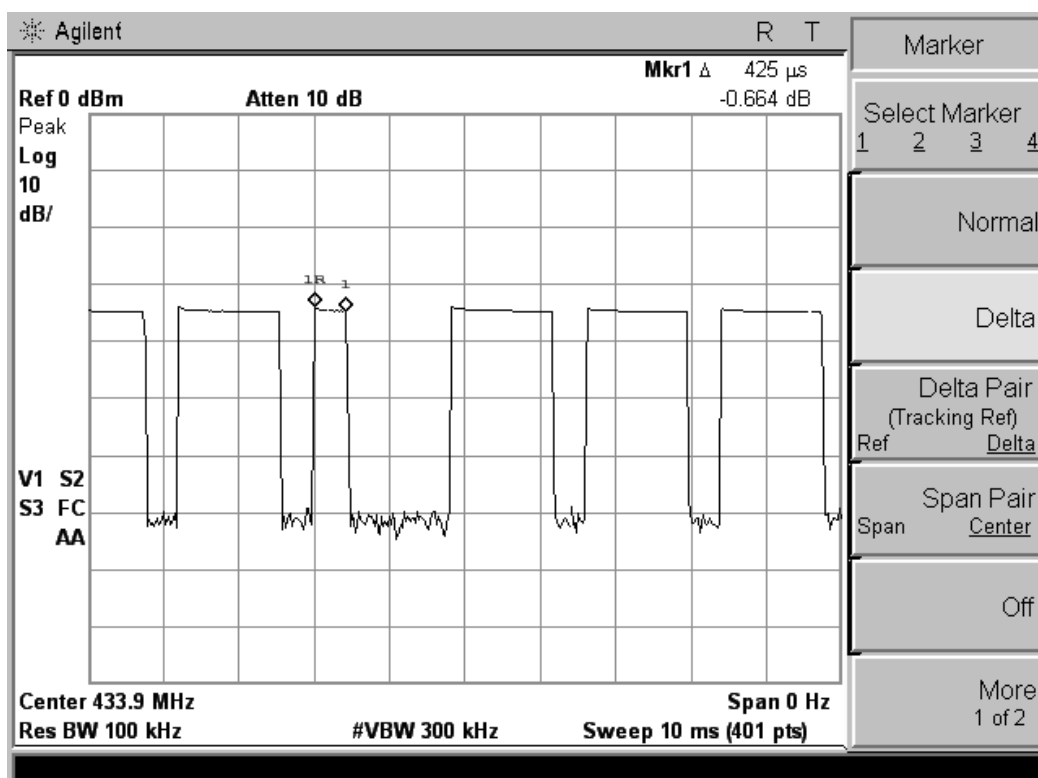

$$\text{Duty cycle} = (1.325\text{ms} \times 31 + 0.425\text{ms} \times 24) / 100\text{ms} = 0.51275$$

$$\text{So Average factor} = 20 \times \log(\text{Duty cycle}) = 20 \times \log(0.51275) = -5.80$$

\*\*\*Note: The signal bandwidth was measured and less than 100kHz RBW so PDCF factor is not required to correct the fundamental signal peak result.


## 5.5. Power line conducted emissions

### 5.5.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


### 5.5.2 Block Diagram of Test Setup

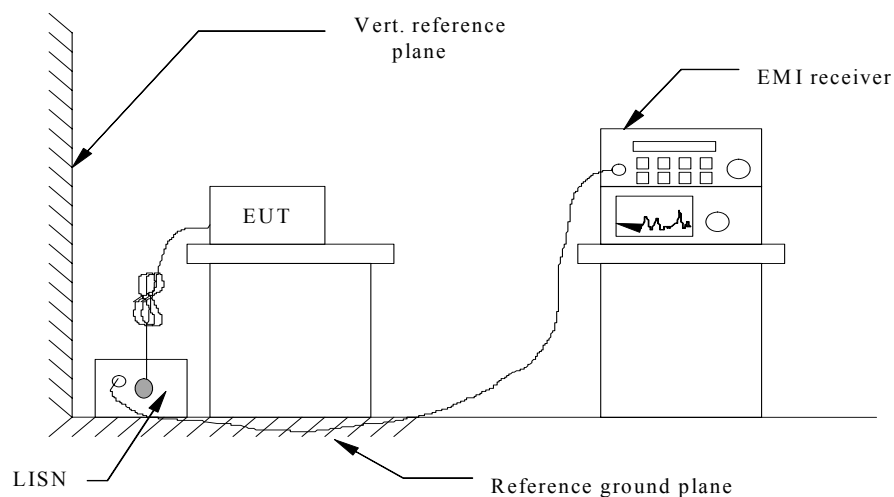

### 5.5.3 Test Results

PASS.


The test data please refer to following page.

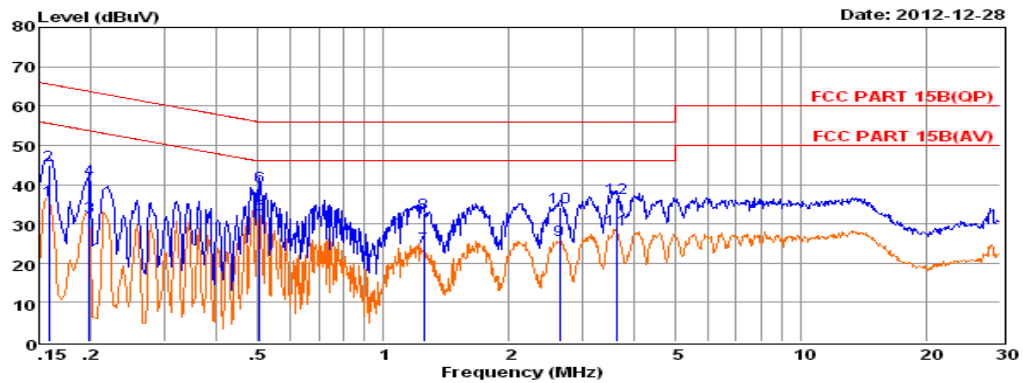

Env. Ins: 24\*/56%  
 EUT: M2micro Center Control Unit  
 M/N: MCC6000-CD01  
 Power Rating: AC 120V/60Hz  
 Test Mode: On  
 Operator: Andy  
 Memo:  
 Pol: LINE

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.16	26.52	9.58	0.02	36.12	55.56	-19.44	Average
2	0.16	35.17	9.58	0.02	44.77	65.56	-20.79	QP
3	0.20	22.30	9.63	0.02	31.95	53.71	-21.76	Average
4	0.20	31.59	9.63	0.02	41.24	63.71	-22.47	QP
5	0.50	22.72	9.62	0.04	32.38	46.00	-13.62	Average
6	0.50	29.88	9.62	0.04	39.54	56.00	-16.46	QP
7	1.25	14.33	9.63	0.05	24.01	46.00	-21.99	Average
8	1.25	23.16	9.63	0.05	32.84	56.00	-23.16	QP
9	2.65	16.14	9.64	0.05	25.83	46.00	-20.17	Average
10	2.65	24.42	9.64	0.05	34.11	56.00	-21.89	QP
11	3.62	18.71	9.65	0.06	28.42	46.00	-17.58	Average
12	3.62	26.78	9.65	0.06	36.49	56.00	-19.51	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.  
 2. The emission levels that are 20dB below the official limit are not reported.

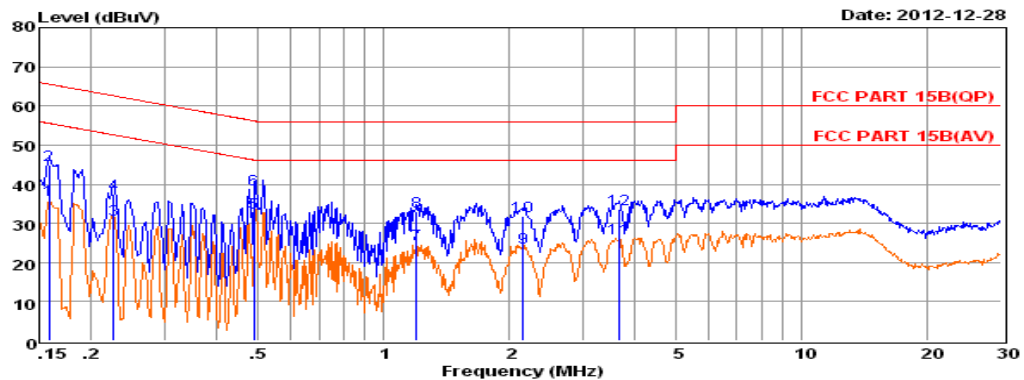

Env. Ins: 24\*/56%  
 EUT: M2micro Center Control Unit  
 M/N: MCC6000-CD01  
 Power Rating: AC 120V/60Hz  
 Test Mode: On  
 Operator: Andy  
 Memo:  
 Pol: NEUTRAL

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.16	26.36	9.68	0.02	36.06	55.56	-19.50	Average
2	0.16	35.25	9.68	0.02	44.95	65.56	-20.61	QP
3	0.23	21.32	9.59	0.03	30.94	52.61	-21.67	Average
4	0.23	27.87	9.59	0.03	37.49	62.61	-25.12	QP
5	0.49	23.07	9.62	0.04	32.73	46.19	-13.46	Average
6	0.49	29.12	9.62	0.04	38.78	56.19	-17.41	QP
7	1.20	14.96	9.63	0.05	24.64	46.00	-21.36	Average
8	1.20	23.19	9.63	0.05	32.87	56.00	-23.13	QP
9	2.16	14.05	9.63	0.05	23.73	46.00	-22.27	Average
10	2.16	22.17	9.63	0.05	31.85	56.00	-24.15	QP
11	3.66	16.49	9.65	0.06	26.20	46.00	-19.80	Average
12	3.66	23.92	9.65	0.06	33.63	56.00	-22.37	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5.6. Antenna Requirement

FCC 15.203

### 5.6.1. Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This EUT used a external antenna which is permanently attached. The max. gain is 2.0dBi.

### 5.6.2. Result

Compliant.

## 6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	July 15, 2012	July 14, 2013
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18, 2012	June 17, 2013
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18, 2012	June 17, 2013
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18, 2012	June 17, 2013
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	July 15, 2012	July 14, 2013
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18, 2012	June 17, 2013
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	July 15, 2012	July 14, 2013
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 15, 2012	July 14, 2013
Amplifier	MITEQ	AMF-6F-26040 0	9121372	26.5GHz-40GHz	July 15, 2012	July 14, 2013
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	June 18, 2012	June 17, 2013
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2012	June 17, 2013
By-log Antenna	SCHAFFNER	CBL 6112D	22237	30MHz-1GHz	June 18, 2012	June 17, 2013
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 18, 2012	June 17, 2013
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 18, 2012	June 17, 2013
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2012	June 17, 2013
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2012	June 17, 2013
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 15, 2012	July 14, 2013
Power Meter	R&S	NRVS	100444	DC-40GHz	July 15, 2012	July 14, 2013
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	July 15, 2012	July 14, 2013
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	July 15, 2012	July 14, 2013
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	June 18, 2012	June 17, 2013
DC power Source	GW	GPC-6030D	C671845	DC 1V-60V	June 18, 2012	June 17, 2013
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2012	June 17, 2013
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2012	June 17, 2013
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	June 18, 2012	June 17, 2013
Vector signal Generator	R&S	SMU200A	102098	100kHz~6GHz	June 18, 2012	June 17, 2013
Signal Generator	R&S	SMR40	10016	10MHz~40GHz	June 18, 2012	June 17, 2013
Oscilloscope	Tektonix	TDS380	B016197	400MHz/2GRS	June 18, 2012	June 17, 2013

## 7. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

MCC6000-DD01	--	--	--
--------------	----	----	----

Belong to the tested device:

Product description : M2micro Remote Unit

Model name : MCC6000-CD01

*Remark: PCB board, structure and internal of these model(s) are the same,  
So no additional models were tested.*

-----THE END OF REPORT-----