



TEST REPORT

No. 2011TAR207

for

TCT Mobile Limited

HSDPA/UMTS dual band / GSM four bands mobile phone

Model Name: one touch 908S

FCC ID: RAD170

with

Hardware Version: PIO

Software Version: V61S

Issued Date: 2011-05-31

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633 , Fax:+86(0)10-62304633 Email:welcom@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. EUT SET-UPS.....	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS.....	11

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: May 6, 2011
Testing End Date: May 8, 2011


1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@jrdcom.com
Telephone: 0086-21-61460890
Fax: 0086 21 61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086 21 61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSDPA/UMTS dual band / GSM four bands mobile phone
Model Name	one touch 908S
FCC ID	RAD170
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	012636000020781	PIO	V61S

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Travel Adapter	/
AE3	Travel Adapter	/
AE4	Travel Adapter	/
AE5	USB Cable	/
AE6	USB Cable	/

AE1

Model	CAB31P0000C1
Manufacturer	BYD
Capacitance	1300mAh
Nominal Voltage	3.7V

AE2

Model	CBA3001AG0C1
Manufacturer	BYD
Length of line	163.5cm(including the length of USB cable)

AE3

Model	CBA3001AG0C2
Manufacturer	Tenpao
Length of DC line	120cm

AE4

Model	CBA3000AG0C1
Manufacturer	Tenpao
Length of DC line	120cm

AE5

Model	CDA3122001C1
-------	--------------

Manufacturer	TCT
Length of cable	150cm

AE6

Model	CDA3122001C2
Manufacturer	TCT
Length of cable	147cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+AE2+ AE5/AE6	--
Set.2	EUT1+ AE1+AE3+ AE5/AE6	--
Set.3	EUT1+ AE1+AE4+ AE5/AE6	--
Set.4	EUT1+ AE1+ AE5/AE6	USB mode

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2012-03-12
2	Test Receiver	ESCI	100766	R&S	2011-12-06
3	Test Receiver	ESI40	831564/002	R&S	2012-02-11
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2012-02-10
5	Signal Generator	SMB100A	102063	R&S	2012-03-05
6	LISN	ESH2-Z5	R&S	829991/012	2012-04-17
7	Universal Radio Communication Tester	CMU200	100680	R&S	2011-09-05
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2012-2-18
9	PC	OPTIPLEX 755	3908243625	DELL	N/A
10	Monitor	E178FPc	CN-OWR979-6 4180-7AJ-D2M S	DELL	N/A
11	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
12	Keyboard	L100	CN0RH659658 907ATOI40	DELL	N/A
13	Mouse	VR-301	692722550019 8	XINGYU	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Set.1 Charging mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dBuV)	Polarity
3543.086	51.54	-19.5	33.4	37.64	HORIZONTAL
3661.323	51.32	-19.7	33.4	37.62	VERTICAL
3979.960	51.30	-19.4	33.4	37.30	HORIZONTAL
3713.427	51.05	-19.5	33.4	37.15	VERTICAL
3503.006	51.03	-19.7	33.4	37.33	VERTICAL
3553.106	50.91	-19.5	33.4	37.01	HORIZONTAL

Set.2 Charging mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{mea} (dBuV)	Polarity
3501.002	51.49	-19.7	33.4	37.79	VERTICAL
3579.158	51.28	-19.6	33.4	37.48	VERTICAL
3517.034	50.90	-19.6	33.4	37.10	HORIZONTAL
3583.166	50.89	-19.6	33.4	37.09	HORIZONTAL
3709.419	50.83	-19.4	33.4	36.83	HORIZONTAL
3637.275	50.81	-19.8	33.4	37.21	VERTICAL

Set.3 Charging mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{mea} (dBuV)	Polarity
3521.042	51.35	-19.6	33.4	37.55	HORIZONTAL
3873.747	51.12	-19.6	33.4	37.32	HORIZONTAL
3553.106	51.08	-19.5	33.4	37.18	HORIZONTAL
3663.327	50.81	-19.7	33.4	37.11	HORIZONTAL
3699.399	50.76	-19.5	33.4	36.86	VERTICAL
3705.411	50.70	-19.4	33.4	36.70	HORIZONTAL

USB mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{mea} (dBuV)	Polarity
3663.327	51.75	-19.7	33.4	38.05	VERTICAL
3565.130	51.35	-19.5	33.4	37.45	VERTICAL
3517.034	51.17	-19.6	33.4	37.37	VERTICAL
3737.475	51.12	-19.7	33.4	37.42	VERTICAL
3593.186	51.06	-19.6	33.4	37.26	VERTICAL
3739.479	51.04	-19.7	33.4	37.34	VERTICAL

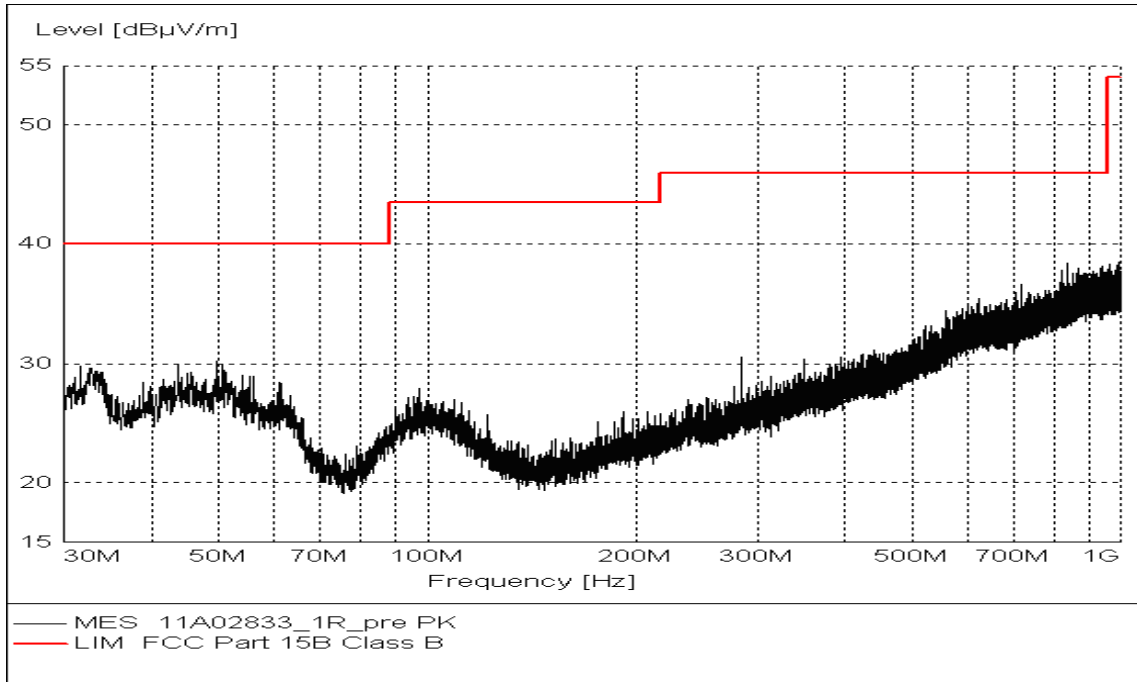


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.1, Charging mode)

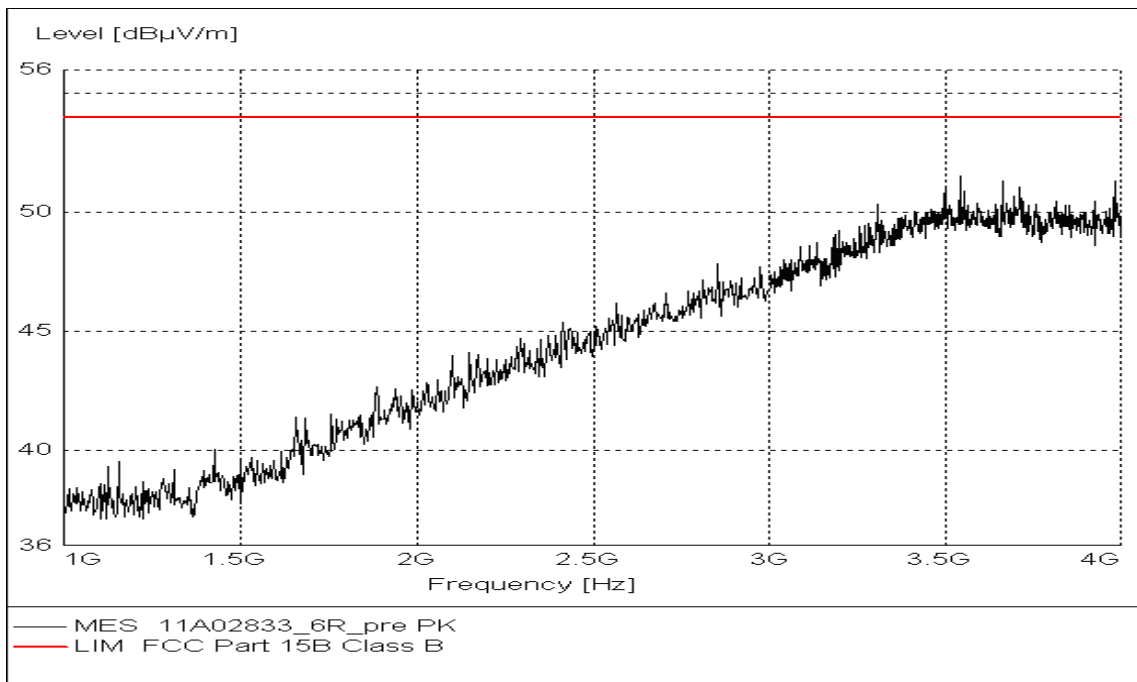


Figure A.2 Radiated Emission from 1GHz to 4GHz (Set.1, Charging mode)

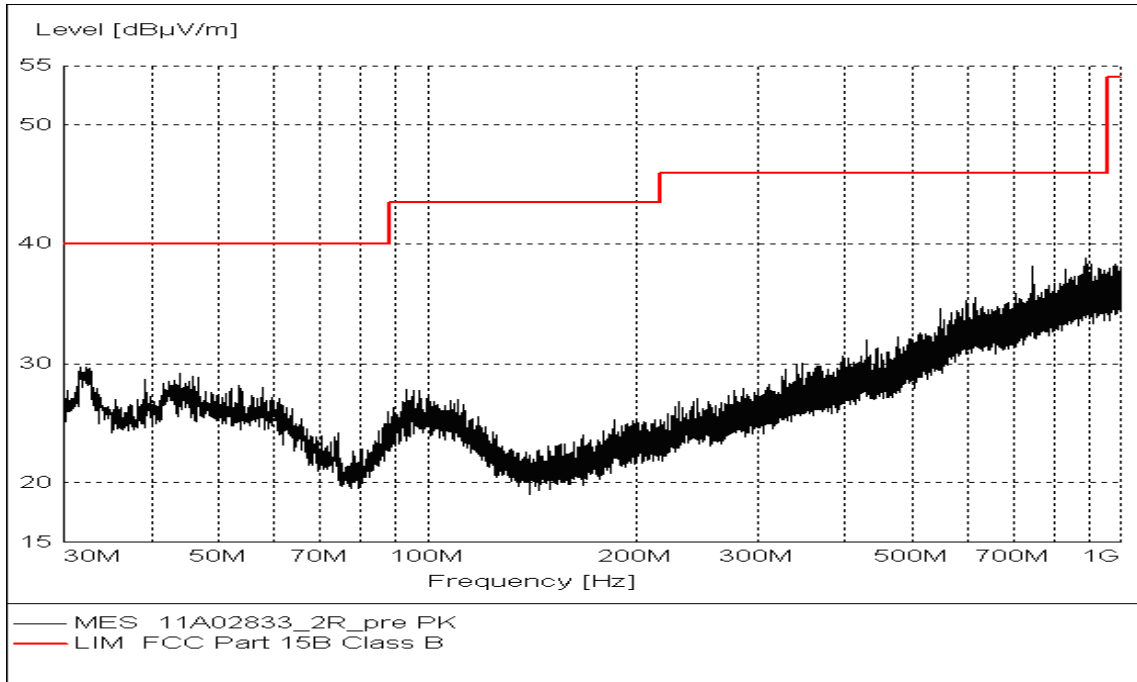


Figure A.3 Radiated Emission from 30MHz to 1GHz (Set.2, Charging mode)

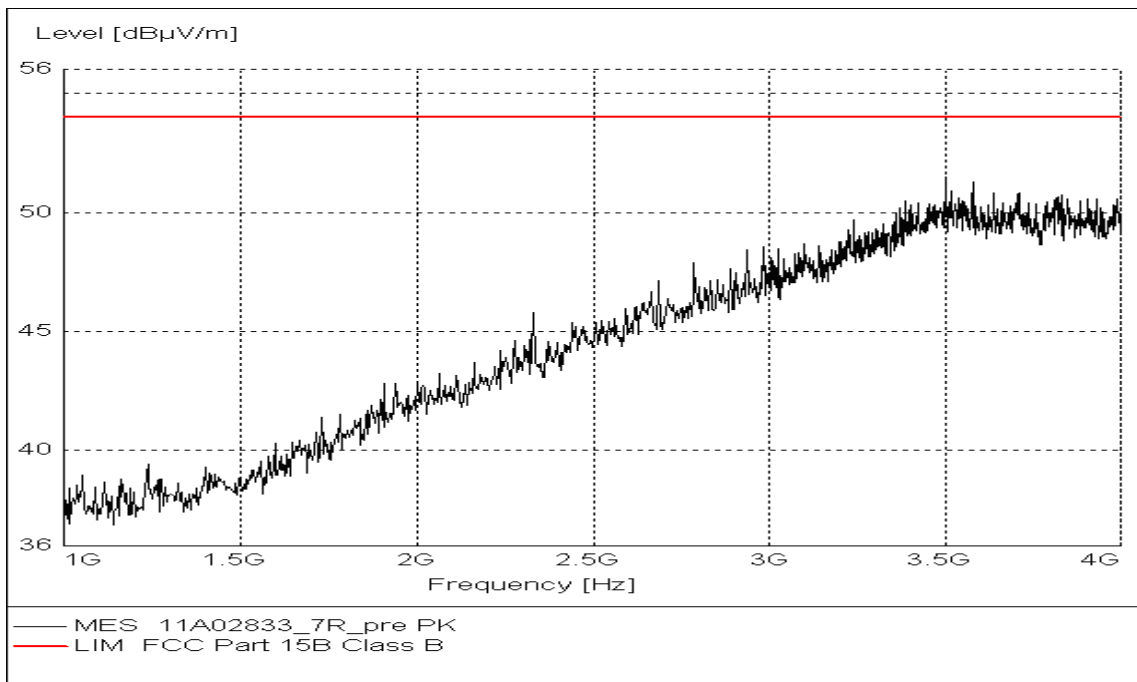


Figure A.4 Radiated Emission from 1GHz to 4GHz (Set.2, Charging mode)

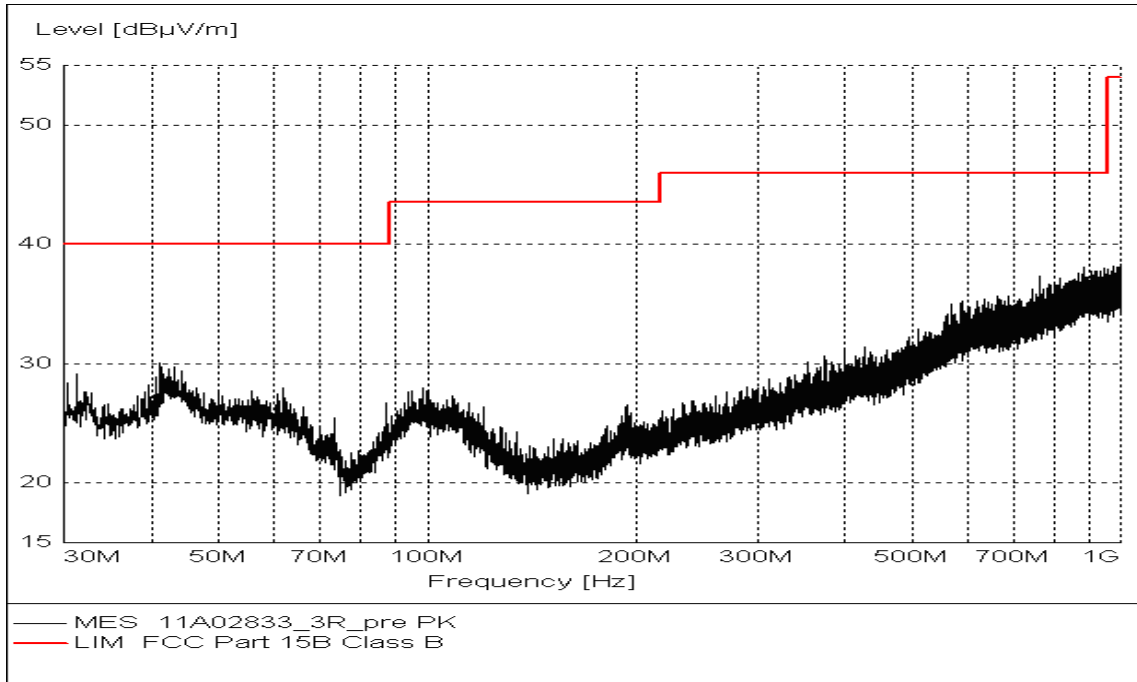


Figure A.5 Radiated Emission from 30MHz to 1GHz (Set.3, Charging mode)

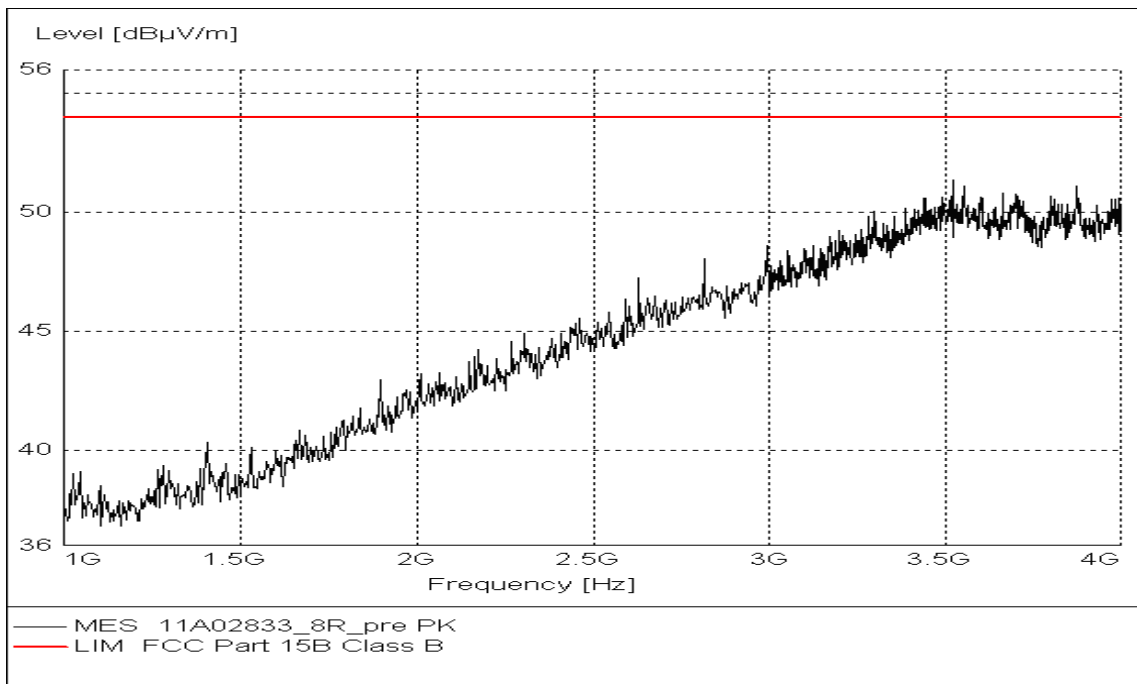


Figure A.6 Radiated Emission from 1GHz to 4GHz (Set.3, Charging mode)

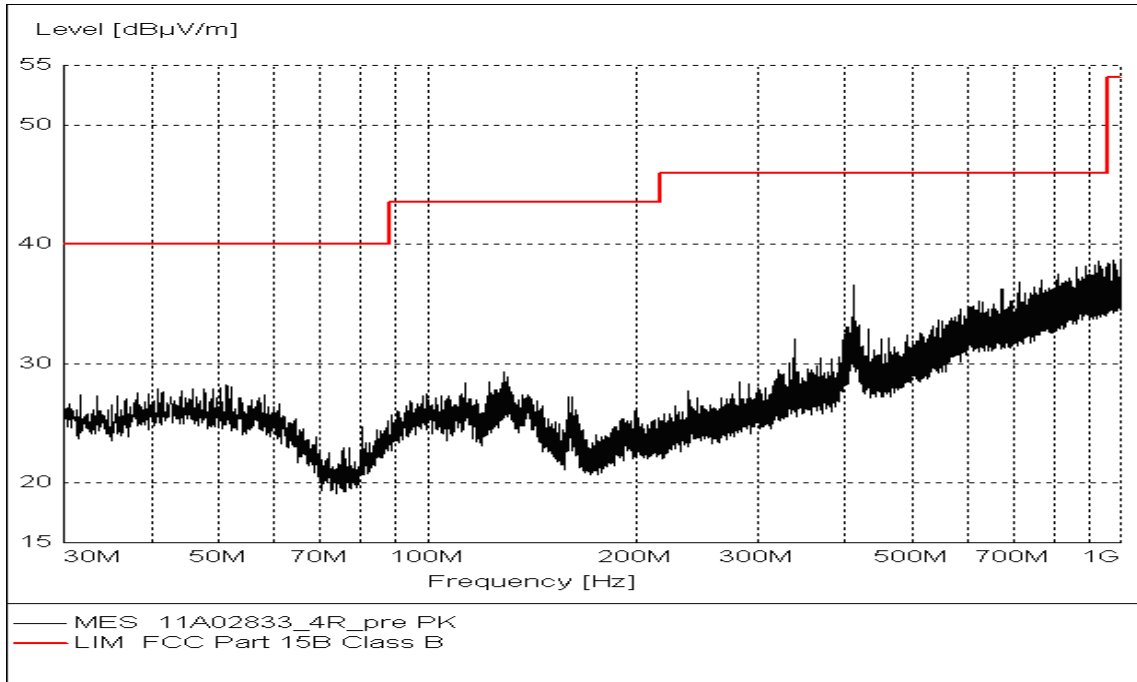


Figure A.7 Radiated Emission from 30MHz to 1GHz (Set.4, USB mode)

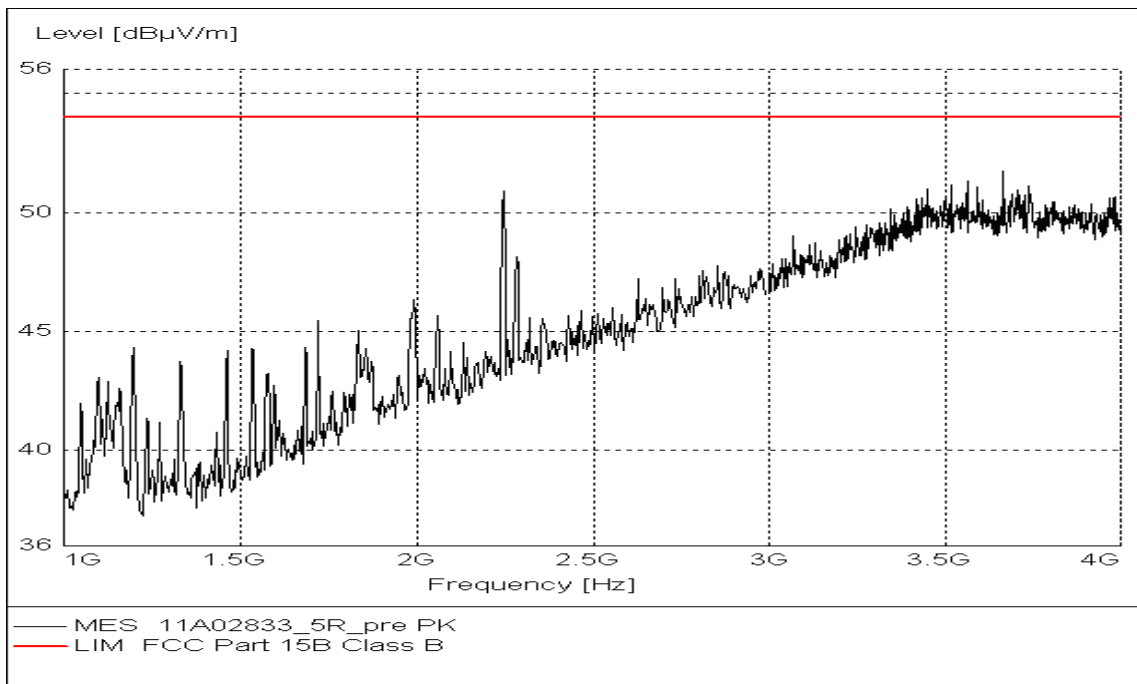


Figure A.8 Radiated Emission from 1GHz to 4GHz (Set.4, USB mode)

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

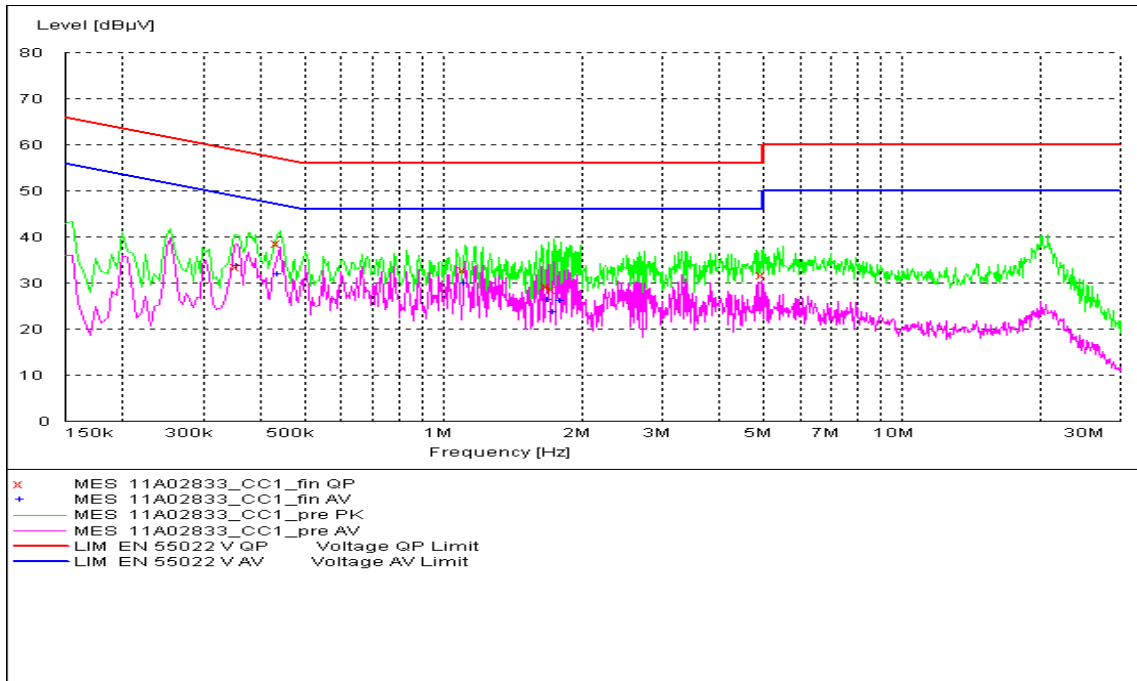


Figure A.9 Conducted Emission (Set.1, Charging mode)

MEASUREMENT RESULT: "11A02833_CC1_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.355000	33.40	10.1	59	25.4	N	GND
0.440000	38.60	10.1	57	18.5	L1	GND
1.120000	32.80	10.1	56	23.2	L1	GND
1.695000	29.20	10.1	56	26.8	N	GND
1.750000	28.50	10.1	56	27.5	L1	GND
4.982179	31.80	10.2	56	24.2	L1	GND

MEASUREMENT RESULT: "11A02833_CC1_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.355000	33.70	10.1	49	15.1	L1	GND
0.440000	32.00	10.1	47	15.0	N	GND
1.120000	30.00	10.1	46	16.0	L1	GND
1.695000	26.50	10.1	46	19.5	L1	GND
1.750000	23.80	10.1	46	22.2	L1	GND
1.800000	26.20	10.1	46	19.8	L1	GND

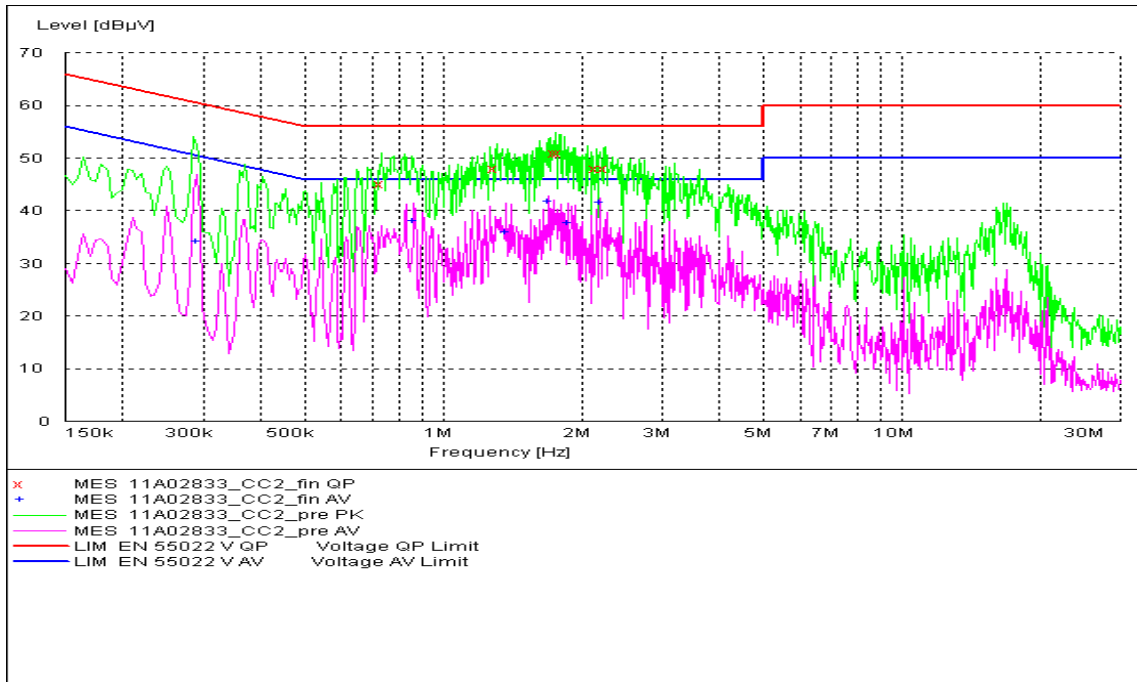


Figure A.10 Conducted Emission (Set.2, Charging mode)

MEASUREMENT RESULT: "11A02833_CC2_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.735000	45.10	10.1	56	10.9	L1	GND
1.305000	48.00	10.1	56	8.0	L1	GND
1.760000	50.80	10.1	56	5.2	L1	GND
1.795000	50.90	10.1	56	5.1	L1	GND
2.166142	47.90	10.1	56	8.1	L1	GND
2.254320	47.90	10.1	56	8.1	L1	GND

MEASUREMENT RESULT: "11A02833_CC2_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.290000	34.20	10.1	51	16.4	L1	GND
0.865000	38.00	10.1	46	8.0	L1	GND
1.370000	35.90	10.1	46	10.1	L1	GND
1.695000	41.80	10.1	46	4.2	L1	GND
1.880000	37.60	10.1	46	8.4	L1	GND
2.198797	41.60	10.1	46	4.4	L1	GND

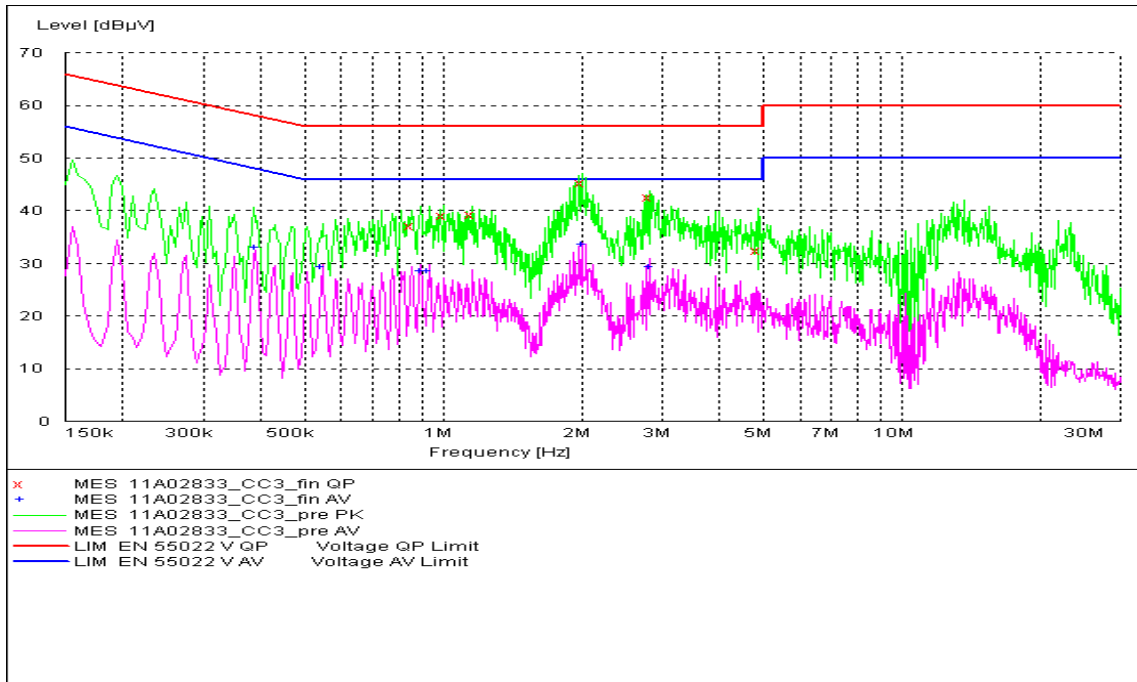


Figure A.11 Conducted Emission (Set.3, Charging mode)

MEASUREMENT RESULT: "11A02833_CC3_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.855000	37.10	10.1	56	18.9	L1	GND
1.005000	39.00	10.1	56	17.0	L1	GND
1.160000	39.30	10.1	56	16.7	L1	GND
2.010000	45.30	10.1	56	10.7	L1	GND
2.821553	42.50	10.1	56	13.5	L1	GND
4.883768	32.50	10.2	56	23.5	L1	GND

MEASUREMENT RESULT: "11A02833_CC3_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.390000	33.10	10.1	48	14.9	N	GND
0.545000	29.20	10.1	46	16.8	L1	GND
0.895000	28.60	10.1	46	17.4	L1	GND
0.930000	28.50	10.1	46	17.5	L1	GND
2.010000	33.50	10.1	46	12.5	L1	GND
2.821553	29.30	10.1	46	16.7	L1	GND

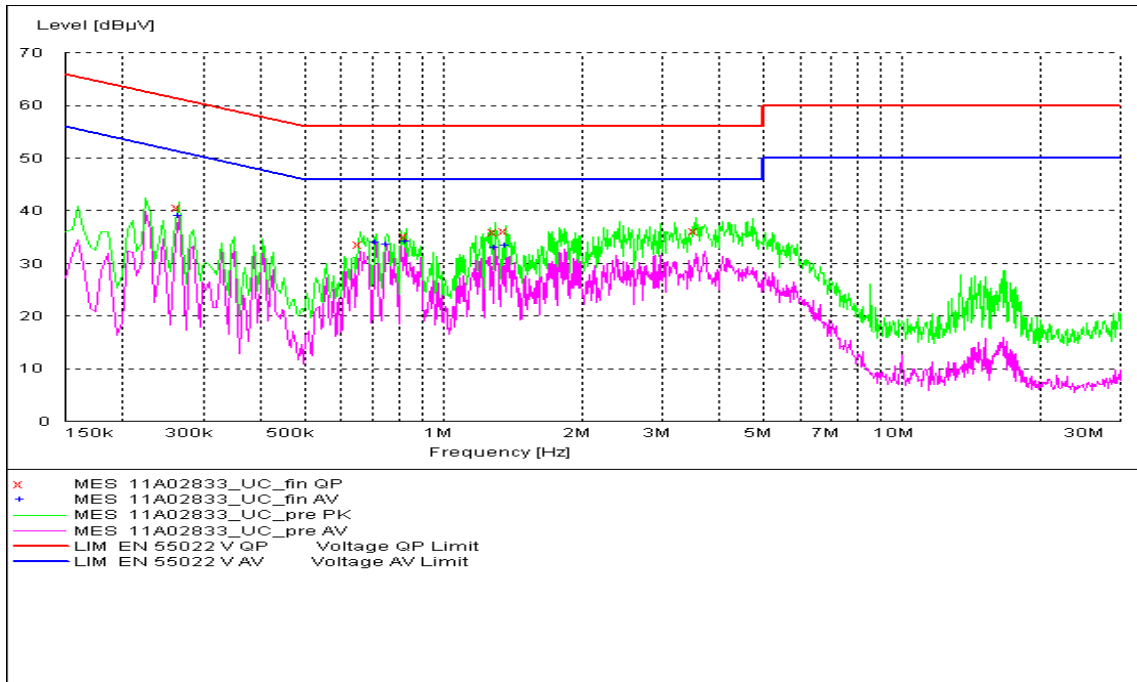


Figure A.12 Conducted Emission (Set.4, USB mode)

MEASUREMENT RESULT: "11A02833_UC_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.265000	40.60	10.1	61	20.7	L1	GND
0.660000	33.60	10.1	56	22.4	L1	GND
0.830000	35.20	10.1	56	20.8	L1	GND
1.300000	35.90	10.1	56	20.1	L1	GND
1.375000	36.10	10.1	56	19.9	L1	GND
3.566918	36.20	10.1	56	19.8	L1	GND

MEASUREMENT RESULT: "11A02833_UC_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.265000	39.00	10.1	51	12.3	L1	GND
0.715000	34.00	10.1	46	12.0	L1	GND
0.755000	33.50	10.1	46	12.5	L1	GND
0.830000	34.20	10.1	46	11.8	L1	GND
1.300000	33.10	10.1	46	12.9	L1	GND
1.375000	33.40	10.1	46	12.6	L1	GND

END OF REPORT