



TEST REPORT

Report No.: SRTC2012-H024-E0033

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Product Model: ONE TOUCH 902S

Applicant: TCT Mobile Limited

Manufacturer: TCT Mobile Limited

Specification: FCC Part15B (Verification)

(October 1, 2009 edition)

FCC ID: RAD244

IC: 9238A-0010

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory	3
1.3 Applicant's details	3
1.4 Manufacturer's details	3
1.5 Application details	4
1.6 Reference specification	4
1.7 Information of EUT	4
1.7.1 General information	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details	5
2. Test information	8
2.1 Summary of the test results	8
2.2 Test result	9
2.2.1 Conducted Emissions-FCC Part15.107	9
2.2.2 Radiated Emissions-FCC Part15.109	18
2.3. List of test equipments	29
Appendix	30

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Grantee Code: RAD
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@jrdcom.com

1.4 Manufacturer's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@jrdcom.com

1.5 Application details

Date of reception of test sample: 9th April 2012

Date of test: 9th April 2012 to 19th April 2012

1.6 Reference specification

FCC Part 15B October 1, 2009 (Verification)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	RAD244
IC	9238A-0010
Frequency range	GSM850/WCDMA Band V: Tx:824~849MHz Rx:869~894MHz PCS1900: Tx:1850~1910MHz Rx:1930~1990MHz WCDMA Band IV: Tx:1710~1755MHz Rx:2110~2155MHz
Rated output power	GSM850:33.0dBm PCS1900:30.0dBm WCDMA:24.0dBm
E.R.P. & E.I.R.P.	E.R.P.: 31.30dBm E.I.R.P.: 30.93dBm
Modulation type	GSM/GPRS:GMSK EDGE: GMSK(Uplink direction) 8PSK(Downlink direction) WCDMA:QPSK
Emission Designator	GSM/GPRS/EDGE:300KGXW WCDMA:4M50F9W
Duplex mode	FDD
Equipment Class	Class B
Duplex spacing	GSM850/WCDMA Band V:45MHz PCS1900:80MHz WCDMA Band IV:400MHz
Antenna type	Fixed Internal
Power Supply	Battery or charger
Rated Power Supply Voltage	3.7V
Extreme Temperature	Lowest: -30°C Highest: +50°C
Extreme Voltage	Minimum: 3.5V Maximum: 4.2V
HW Version	PIO01
SW Version	SW134

1.7.2 EUT details

Product Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	ONE TOUCH 902S	013023000020427

1.7.3 Auxiliary equipment details

AE (Auxiliary Equipment) 1#: Battery

Equipment	Battery
Manufacturer	SHENZHEN BAK BATTERY CO., LTD
Model Number	CAB31L0000C2
Capacity	1000mAh
Rated Voltage	3.7V

AE (Auxiliary Equipment) 2#: Charger

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	CBA3002AG0C1
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

AE (Auxiliary Equipment) 3#: Charger

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	CBA3001AG0C1
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

AE (Auxiliary Equipment) 4#: Charger

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	CBA3001AG0C2
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

AE (Auxiliary Equipment) 5#: Charger

Equipment	Charger
Manufacturer	Ten Pao International Ltd.
Model Number	CBA3000AG0C1
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

AE (Auxiliary Equipment) 6#: Headset

Equipment	Headset
Manufacturer	Shen Zhen Ju Wei Electronic Co., LTD
Model Number	CCB3160A11C1

AE (Auxiliary Equipment) 7#: Headset

Equipment	Headset
Manufacturer	SUPERFINE ELECTRONIC CO., LTD
Model Number	CCB3160A11C4

AE (Auxiliary Equipment) 8#: Headset

Equipment	Headset
Manufacturer	Shen Zhen Ju Wei Electronic Co., LTD
Model Number	CCB3160A15C1

AE (Auxiliary Equipment) 9#: Headset

Equipment	Headset
Manufacturer	SUPERFINE ELECTRONIC CO., LTD
Model Number	CCB3160A15C4

AE (Auxiliary Equipment) 10#: Data Cable

Equipment	Data Cable
Manufacturer	Shen Zhen Ju Wei Electronic Co., LTD
Model Number	CDA3122002C1

AE (Auxiliary Equipment) 11#: Data Cable

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd
Model Number	CDA3122002C2

AE (Auxiliary Equipment) 12#: Data Cable

Equipment	Data Cable
Manufacturer	Shen Zhen Ju Wei Electronic Co., LTD
Model Number	CDA3122005C1

AE (Auxiliary Equipment) 13#: Data Cable

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd
Model Number	CDA3122005C2

Note:

All the auxiliary equipments have been labeled with number in order to identify the test sample.


As the information described above, there are four different models of charger manufactured by two different companies, four different models of data cable manufactured by two different companies, and four different models of headset manufactured by two different companies.

The relevant tests have been performed in order to verify in which combination case (EUT exercised by only one model of charger, one model of data cable, and one model of headset) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the charger CBA3000AG0C1, the data cable CDA3122005C2 and the headset CCB3160A15C1.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Conducted emissions	15.107	Pass
2	Radiated emissions	15.109	Pass

This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab 	Checked by: Mr. Wang Junfeng Deputy director of the test lab 
Tested by: Mr. Dong Qifeng Test engineer 	Issued date: 2012.06.29

2.2 Test result

2.2.1 Conducted Emissions-FCC Part15.107

Ambient condition:

Temperature	Relative humidity	Pressure
17.9°C	36.4%	100.1kPa

Test Setup:

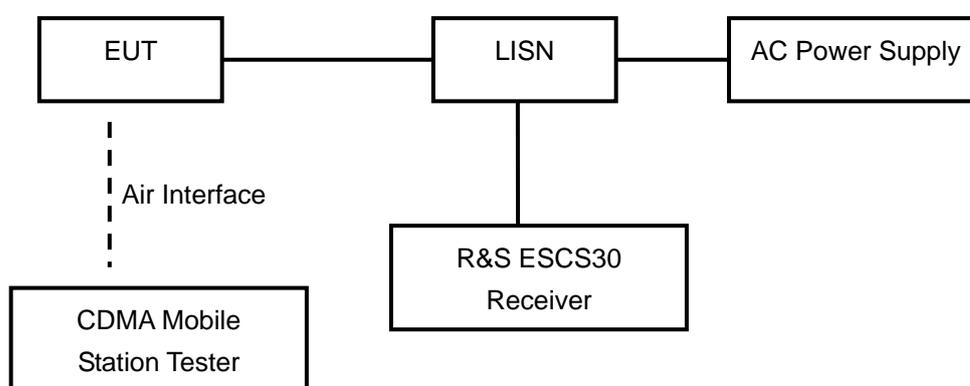


Figure 1

Test Procedure:

The EUT is placed on a non-metallic table 0.4m above the horizontal metal reference ground plane. The EUT is connected with LISN via the charger. The LISN is connected to the reference ground. The accessories of the EUT are connected with the EUT such as headset etc.

The test set-up and the test methods are performed according to ANSI C63.4:2009.

Then start the test software ES-K1. Sweep the whole frequency band through the range from 150 KHz to 30 MHz. The measurement should be done for both L line and N line. During pre-test, the receiver uses both peak detector and average detector. And the final test, the receiver uses both average detector and Quasi-peak detector.

The data of cable loss has been calibrated in full testing frequency range before the testing.


Limit:

Frequency of Emission(MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15~0.5	66 to 56*	56 to 46*
0.5~5	56	46
5~30	60	50

Note: * Decreases with the logarithm of the frequency


Test result:

Noise Level of The Measuring Instrument

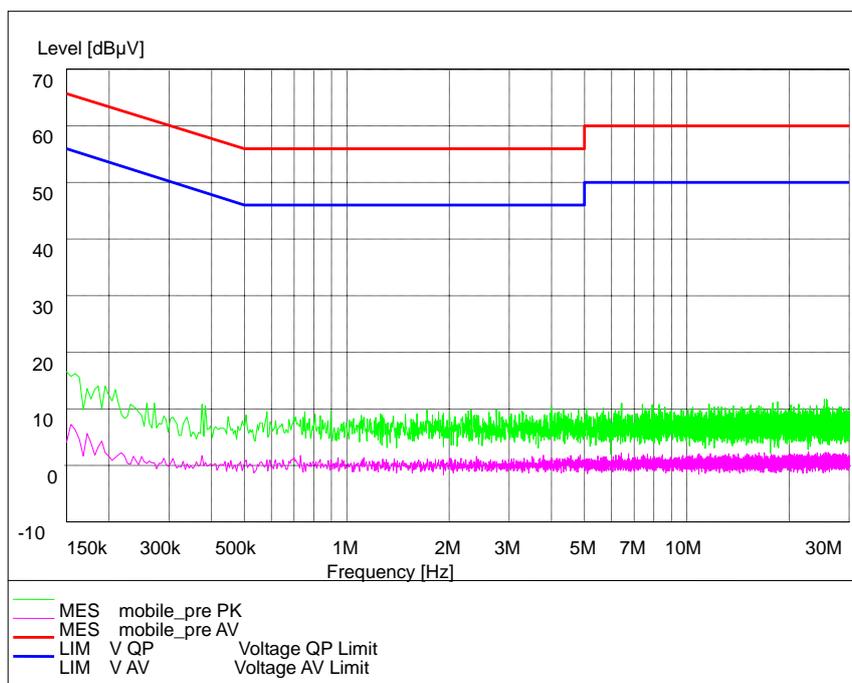

L and N Line

GSM850 AE1#+AE5#+AE8#+AE13#

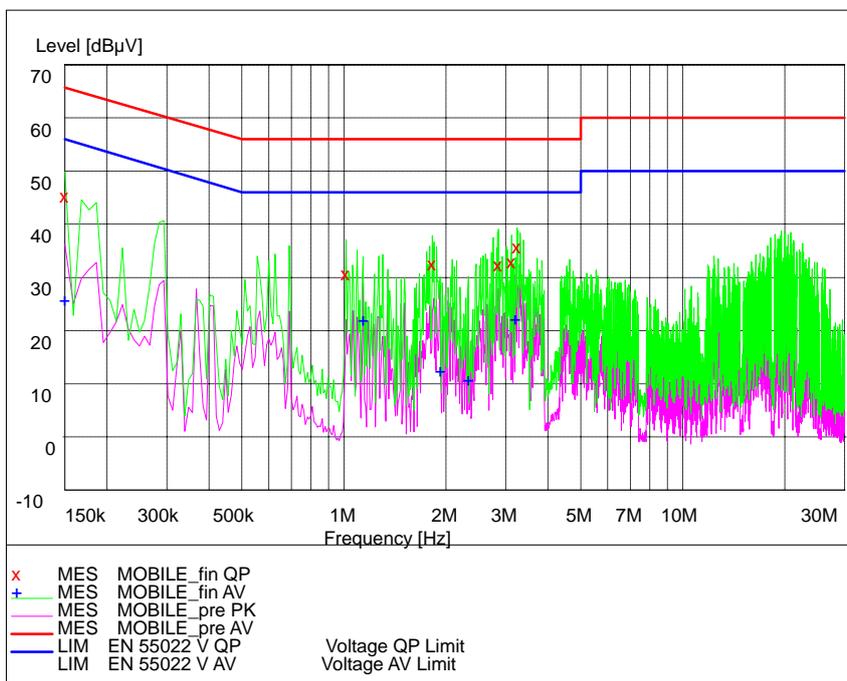

L and N Line


MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	28.00	20.1	56	28.0	L	GND
1.140000	24.20	20.2	46	21.8	L	GND
1.923000	14.70	20.2	46	31.3	N	GND
2.328000	13.10	20.3	46	32.9	L	GND
3.210000	24.50	20.3	46	21.5	L	GND

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	47.40	20.1	66	18.4	L	GND
1.014000	32.80	20.2	56	23.2	L	GND
1.824000	34.80	20.2	56	21.2	N	GND
2.859000	34.50	20.3	56	21.5	L	GND
3.120000	35.10	20.3	56	20.9	L	GND
3.246000	38.00	20.3	56	18.0	L	GND

PCS1900 AE1#+AE5#+AE8#+AE13#

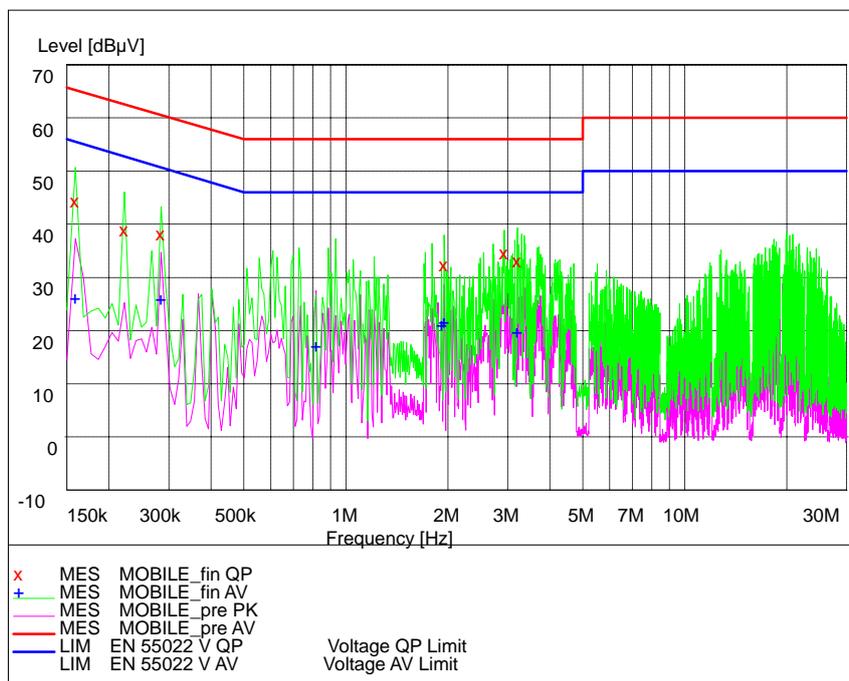

L and N Line


MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.159000	28.50	20.1	56	27.0	L	GND
0.285000	28.20	20.2	51	22.5	L	GND
0.816000	19.30	20.3	46	26.7	L	GND
1.914000	23.40	20.2	46	22.6	N	GND
1.950000	23.90	20.2	46	22.1	L	GND
3.201000	22.00	20.3	46	24.0	L	GND

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.159000	46.50	20.1	65	18.8	L	GND
0.222000	41.10	20.2	63	21.5	L	GND
0.285000	40.30	20.2	61	20.3	L	GND
1.950000	34.60	20.2	56	21.4	N	GND
2.931000	36.90	20.3	56	19.1	L	GND
3.210000	35.30	20.3	56	20.7	L	GND

WCDMA BAND IV AE1#+AE5#+AE8#+AE13#

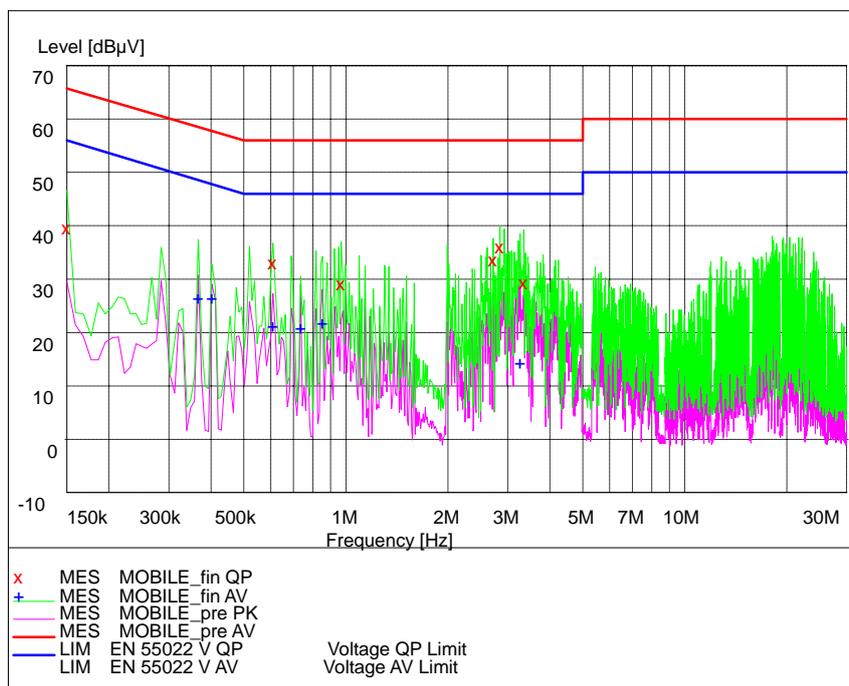

L and N Line


MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.366000	28.60	20.2	49	20.0	L	GND
0.402000	28.60	20.2	48	19.2	L	GND
0.609000	23.40	20.3	46	22.6	L	GND
0.735000	23.10	20.3	46	22.9	L	GND
0.852000	23.90	20.3	46	22.1	L	GND
3.264000	16.60	20.3	46	29.4	L	GND

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.150000	41.90	20.1	66	23.8	L	GND
0.609000	35.30	20.3	56	20.7	L	GND
0.969000	31.30	20.2	56	24.7	L	GND
2.715000	35.90	20.3	56	20.1	L	GND
2.850000	38.30	20.3	56	17.7	L	GND
3.354000	31.60	20.3	56	24.4	L	GND

WCDMA BAND V AE1#+AE5#+AE8#+AE13#

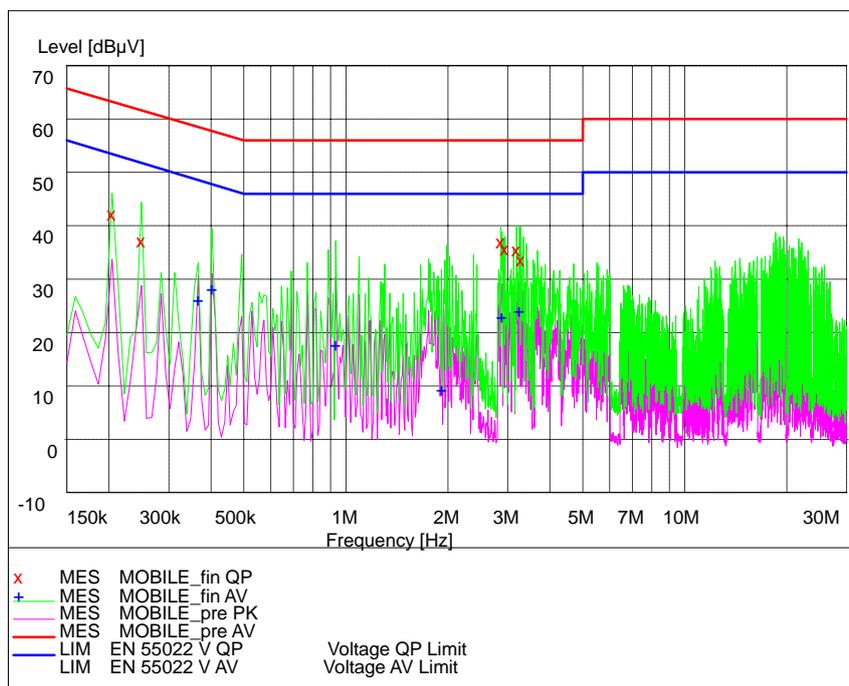

L and N Line


MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.366000	28.30	20.2	49	20.2	L	GND
0.402000	30.40	20.2	48	17.4	L	GND
0.933000	20.00	20.3	46	26.0	L	GND
1.914000	11.60	20.2	46	34.4	N	GND
2.877000	25.20	20.3	46	20.8	L	GND
3.246000	26.20	20.3	46	19.8	L	GND

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.204000	44.30	20.2	63	18.9	L	GND
0.249000	39.30	20.2	62	22.3	L	GND
2.868000	39.20	20.3	56	16.8	L	GND
2.949000	37.90	20.3	56	18.1	L	GND
3.192000	37.70	20.3	56	18.3	L	GND
3.282000	35.90	20.3	56	20.1	L	GND

FM Radio AE1#+AE5#+AE8#+AE13#

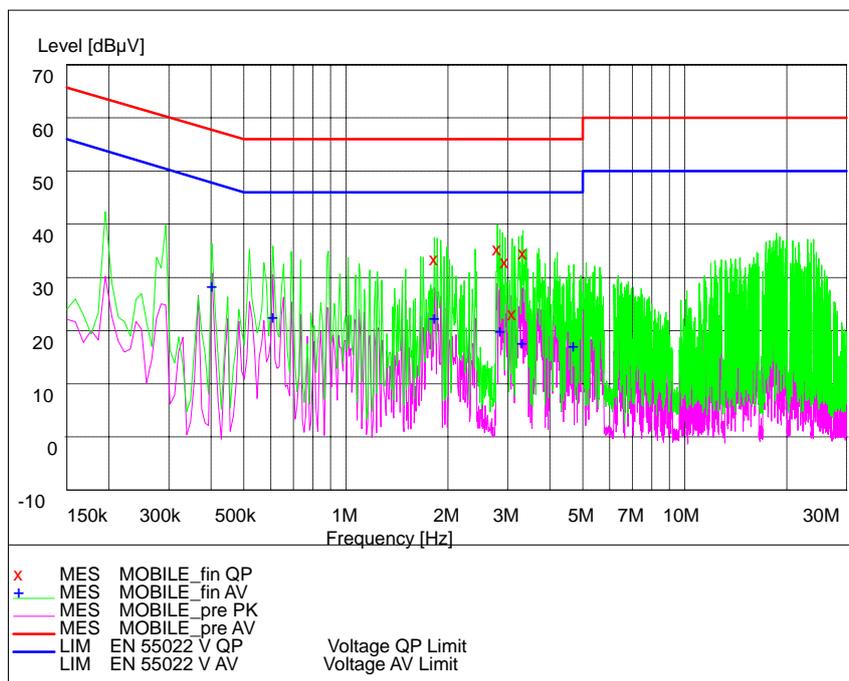

L and N Line


MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.402000	30.70	20.2	48	17.1	L	GND
0.609000	24.90	20.3	46	21.1	L	GND
1.824000	24.60	20.2	46	21.4	N	GND
2.850000	22.20	20.3	46	23.8	L	GND
3.309000	20.00	20.3	46	26.0	L	GND
4.686000	19.40	20.4	46	26.6	L	GND

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
1.824000	35.70	20.2	56	20.3	N	GND
2.796000	37.60	20.3	56	18.4	L	GND
2.949000	35.10	20.3	56	20.9	L	GND
3.093000	25.40	20.3	56	30.6	L	GND
3.327000	36.90	20.3	56	19.1	L	GND

MP3/MP4 AE1#+AE5#+AE8#+AE13#

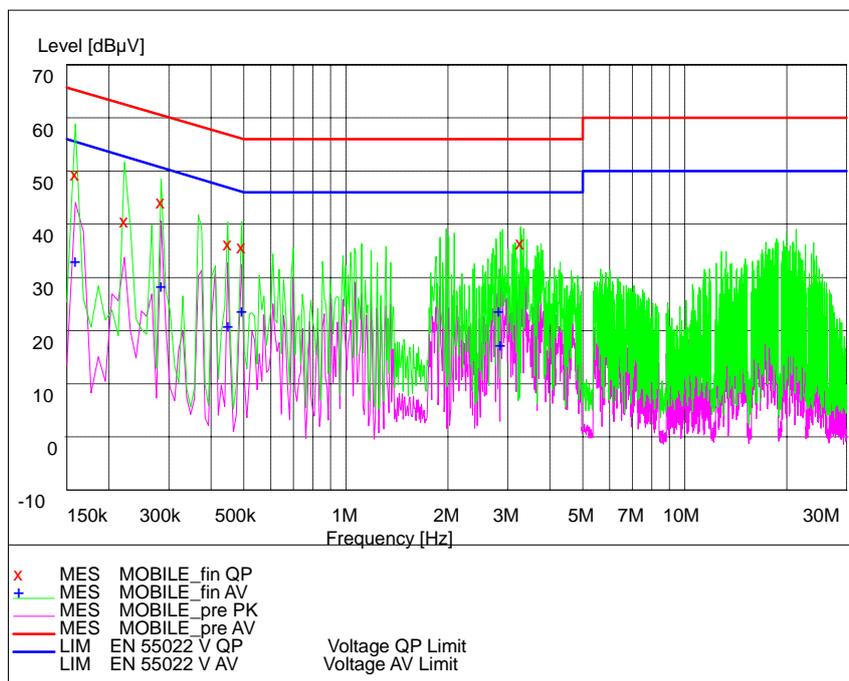

L and N Line


MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.159000	35.30	20.1	56	20.2	L	GND
0.285000	30.60	20.2	51	20.0	L	GND
0.447000	23.10	20.3	47	23.8	L	GND
0.492000	26.00	20.3	46	20.1	L	GND
2.823000	26.00	20.3	46	20.0	L	GND
2.859000	19.50	20.3	46	26.5	L	GND

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.159000	51.70	20.1	65	13.5	L	GND
0.222000	42.80	20.2	63	19.8	L	GND
0.285000	46.40	20.2	61	14.2	L	GND
0.447000	38.40	20.3	57	18.5	L	GND
0.492000	37.90	20.3	56	18.2	L	GND
3.273000	38.70	20.3	56	17.3	L	GND

Camera AE1#+AE5#+AE8#+AE13#

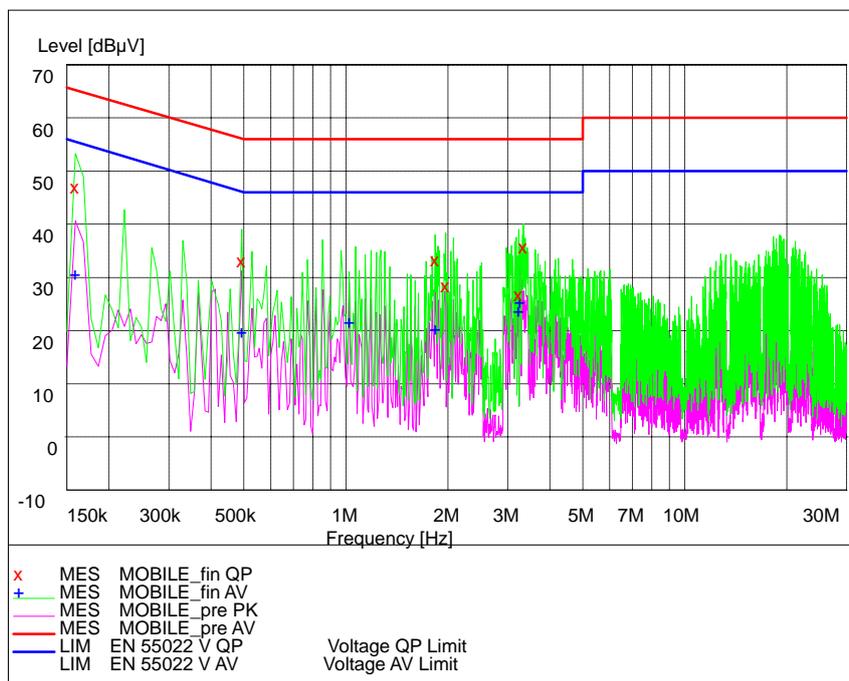

L and N Line

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.159000	33.00	20.1	56	22.6	L	GND
0.492000	22.00	20.3	46	24.1	L	GND
1.023000	24.00	20.2	46	22.0	L	GND
1.833000	22.50	20.2	46	23.5	N	GND
3.228000	26.00	20.3	46	20.0	L	GND
3.255000	27.70	20.3	46	18.3	L	GND

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.159000	49.20	20.1	65	16.1	L	GND
0.492000	35.40	20.3	56	20.8	L	GND
1.833000	35.50	20.2	56	20.5	N	GND
1.968000	30.70	20.3	56	25.3	N	GND
3.237000	28.90	20.3	56	27.1	L	GND
3.336000	37.90	20.3	56	18.1	L	GND

2.2.2 Radiated Emissions-FCC Part15.109

Ambient condition:

Temperature	Relative humidity	Pressure
18.2°C	36.7%	99.7kPa

Test Setup:

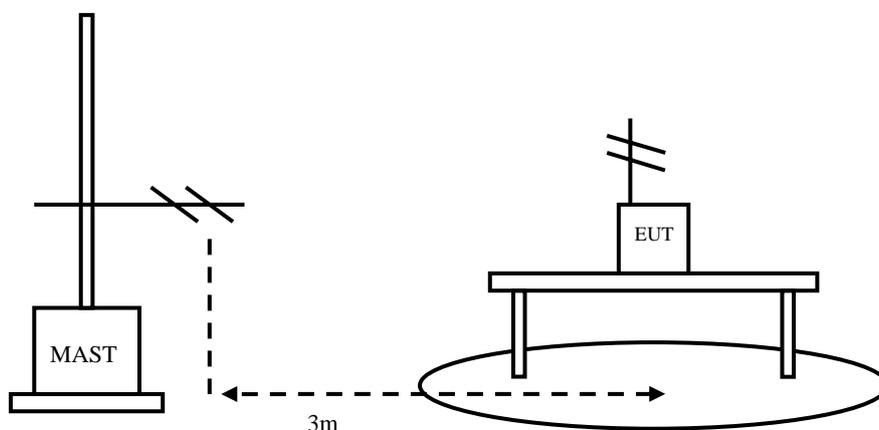


Figure 2

Test Procedure:

The EUT should be placed on a non-metallic table 80cm above the ground plane. The receive antennas shall be moved from 1 to 4 meters. The distance between EUT and receive antenna should be 3 meters.

The EUT should work in idle mode. The accessories of the EUT are connected with the EUT such as headset etc. The test set-up and the test methods are performed according to ANSI C63.4:2009.

Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna HL562.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The EUT is laid in two modes as follow: 1. put the EUT in horizontal direction; 2. put the EUT in vertical direction.

The data of cable loss and antenna factor have been calibrated in full testing frequency range before the testing.

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Limit:

Frequency of Emission(MHz)	Limits	
	Detector	Unit (dB μ V/m)
30~88	Quasi-peak	40
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46
960~1000	Quasi-peak	54
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54
	Peak	74

Test result:

GSM850 Mode

Frequency(MHz)	Result(dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity
33.91	30.39	15.5	14.89	Vertical
36.73	30.64	15.7	14.94	Vertical
52.02	20.91	8.1	12.81	Vertical
70.63	24.21	7.1	17.11	Vertical
526.05	30.91	18.0	12.91	Vertical
952.67	32.83	24.0	8.83	Horizontal

PCS1900 Mode

Frequency(MHz)	Result(dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity
33.93	20.56	15.6	4.96	Vertical
41.22	28.05	14.9	13.15	Vertical
43.19	27.57	13.5	14.07	Vertical
70.12	20.28	6.8	13.48	Vertical
85.83	29.42	8.0	21.42	Vertical
87.37	28.89	8.1	20.79	Vertical
833.67	27.65	22.9	4.75	Horizontal
950.90	30.31	24.4	5.91	Horizontal

WCDMA Band IV Mode

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity
35.61	22.05	15.5	6.55	Vertical
40.38	28.69	15.5	13.19	Horizontal
42.76	28.43	13.8	14.63	Vertical
85.69	28.90	8.0	20.90	Vertical
86.39	28.77	8.1	20.67	Vertical
788.57	27.57	22.2	5.37	Horizontal

WCDMA Band V Mode

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity
35.05	30.08	15.5	14.58	Vertical
48.80	32.20	9.7	22.5	Vertical
50.90	32.15	8.5	23.65	Vertical
53.85	30.19	7.4	22.79	Vertical
797.54	26.34	22.3	4.04	Vertical
950.24	29.21	24.4	4.81	Horizontal
2113.43	44.81	31.7	13.11	Horizontal

FM Radio Mode


Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity
35.61	20.51	15.5	5.01	Vertical
40.38	27.43	15.5	11.93	Vertical
43.19	27.72	13.5	14.22	Horizontal
71.10	20.44	6.9	13.54	Horizontal
85.55	29.39	8.0	21.39	Vertical
86.53	29.00	8.1	20.90	Vertical
815.63	27.86	22.8	5.06	Horizontal

MP3/MP4 Mode

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity
35.61	21.28	15.5	5.78	Vertical
40.80	27.7	15.2	12.50	Vertical
43.46	27.69	13.3	14.39	Vertical
85.55	28.94	8.0	20.94	Horizontal
86.53	28.77	8.1	20.67	Vertical
820.6	27.37	22.9	4.47	Vertical
949.89	30.15	24.4	5.75	Vertical


Camera Mode

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity
35.47	21.08	15.5	5.58	Vertical
40.80	29.08	15.2	13.88	Vertical
43.46	28.95	13.3	15.65	Vertical
71.10	20.53	6.9	13.63	Vertical
85.83	28.82	8.0	20.82	Vertical
86.81	29.22	8.1	21.12	Vertical
832.66	27.57	22.9	4.67	Vertical

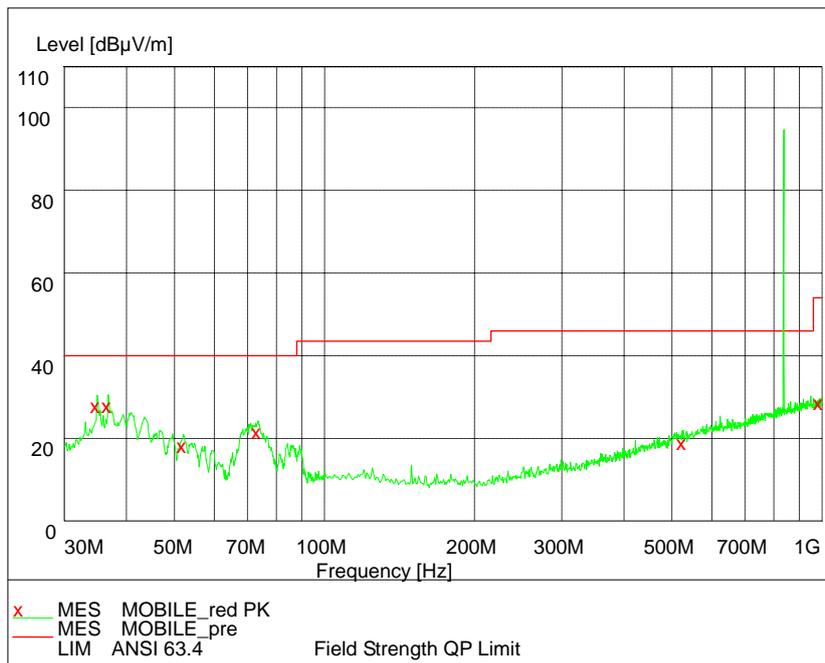


GSM850(30MHz – 1GHz)


Note: The signal beyond the limit is the base station simulator carrier.

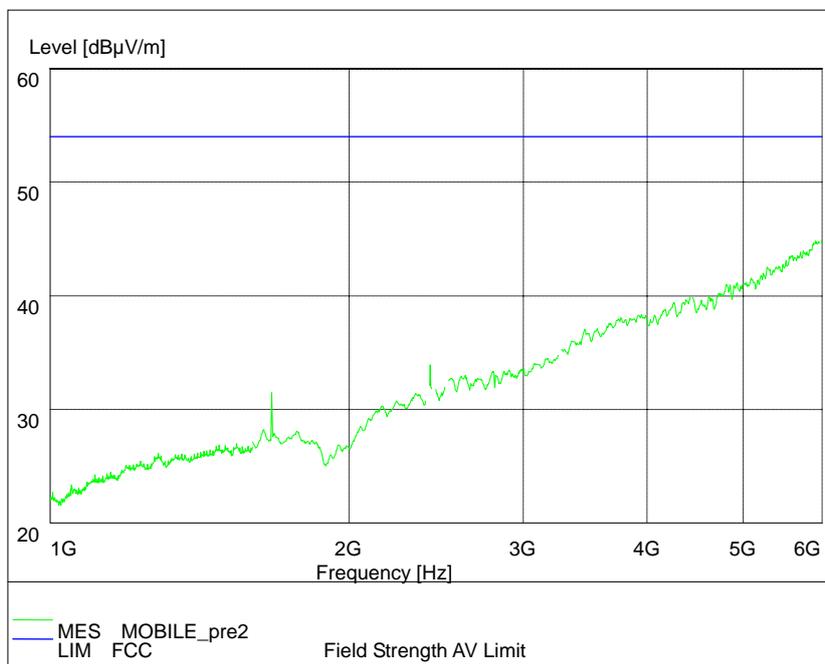

GSM850(1GHz – 6GHz)

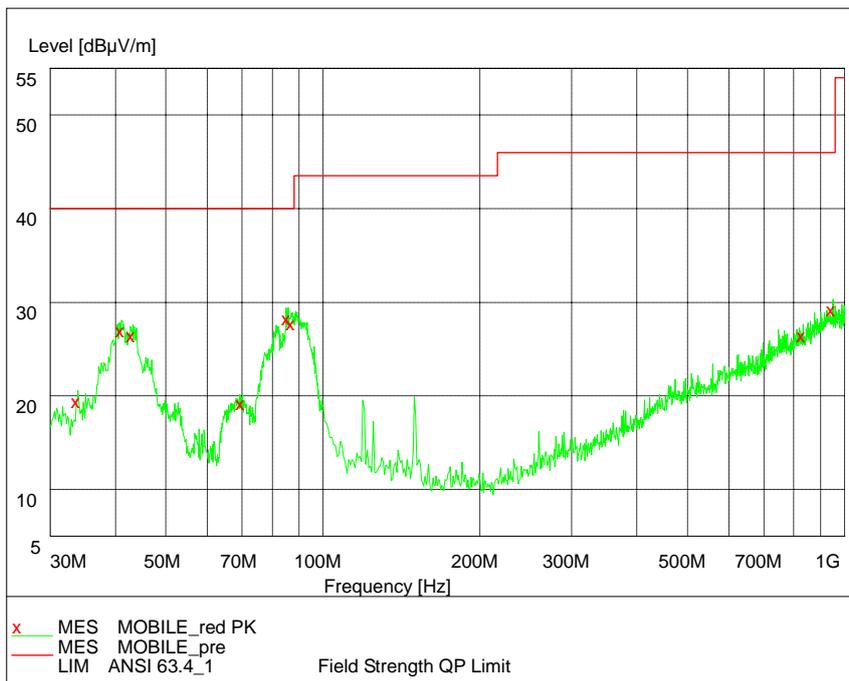


PCS1900(30MHz – 1GHz)

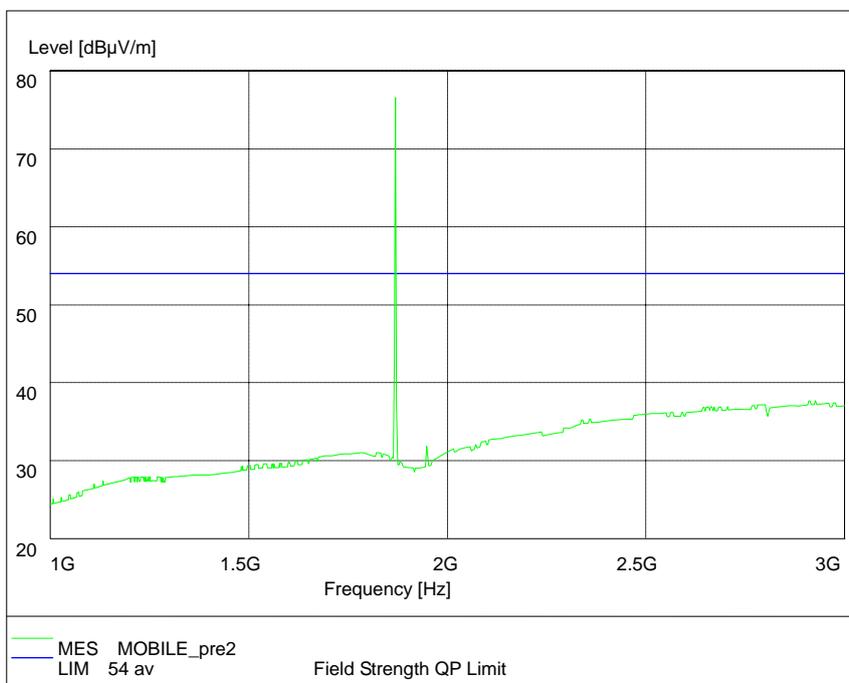


PCS1900(1GHz – 3GHz)


Note: The signals beyond the limit are the base station and simulator carrier.

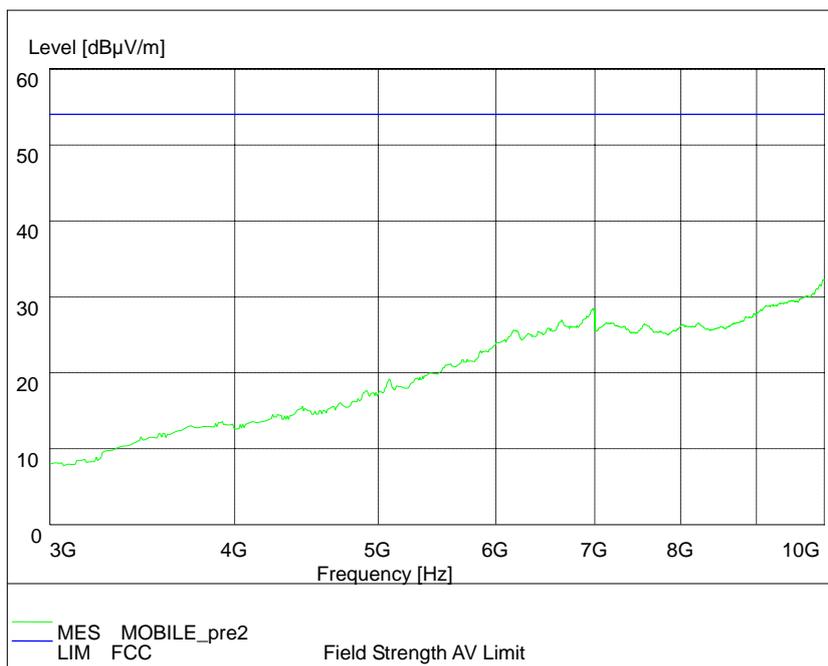

PCS1900(3GHz – 10GHz)

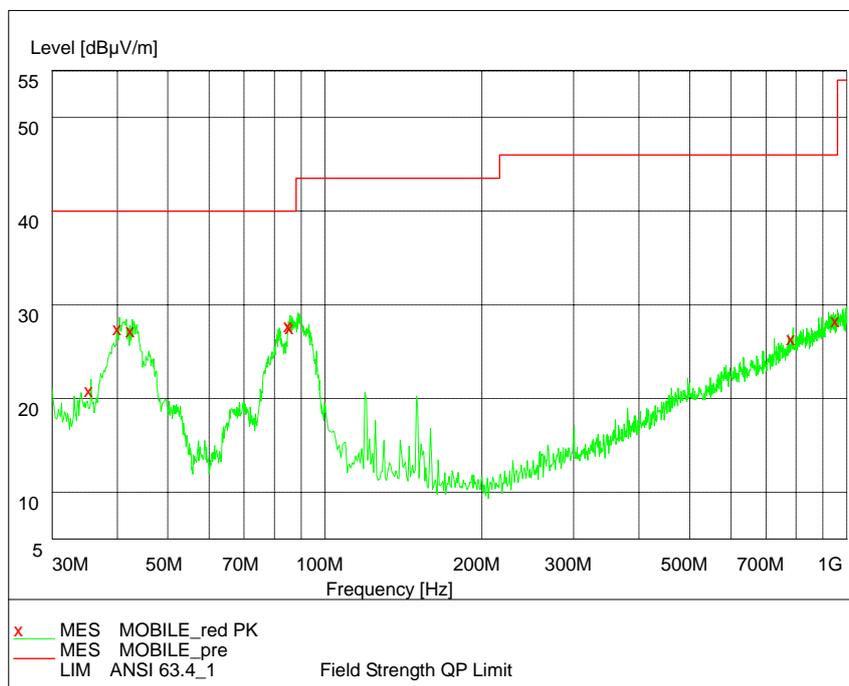


WCDMA BAND IV(30MHz – 1GHz)

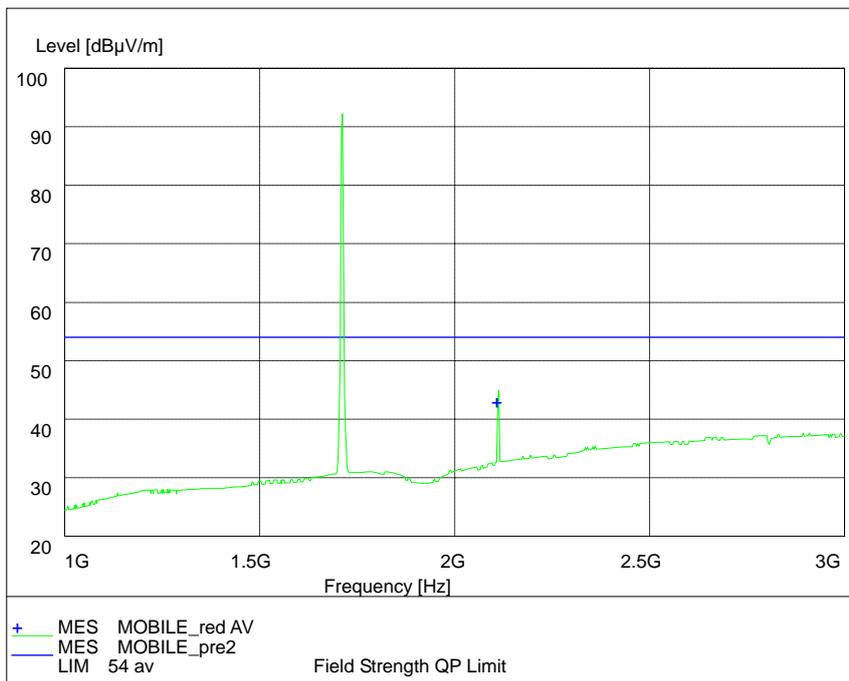


WCDMA BAND IV(1GHz – 3GHz)

Note: The signals beyond the limit are the base station and simulator carrier.

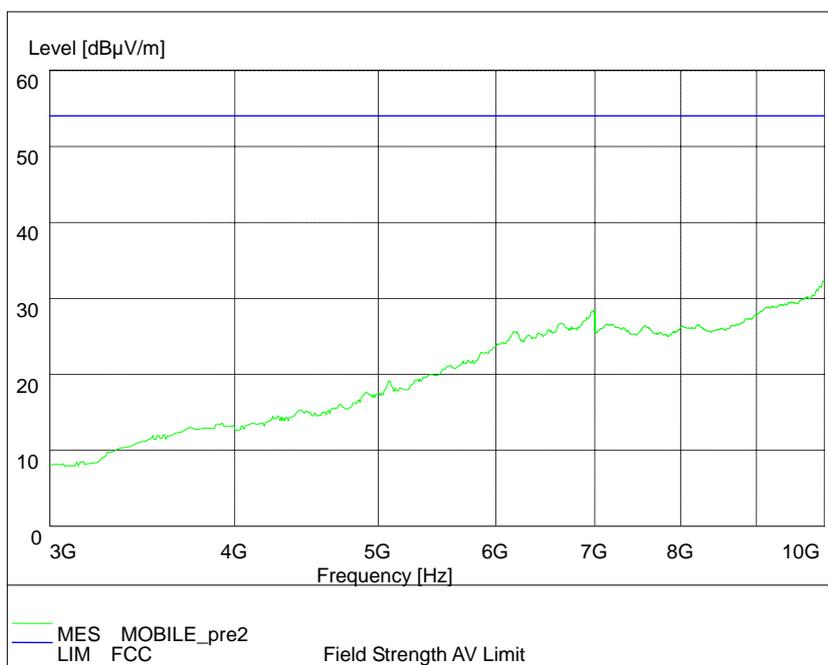


WCDMA BAND IV(3GHz – 10GHz)

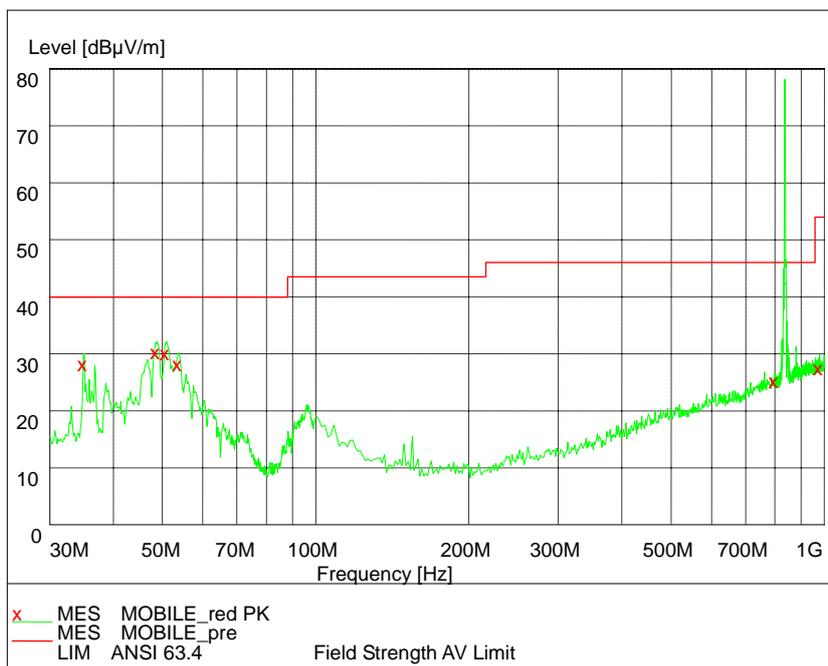


WCDMA BAND V(30MHz – 1GHz)


Note: The signal beyond the limit is the base station simulator carrier.

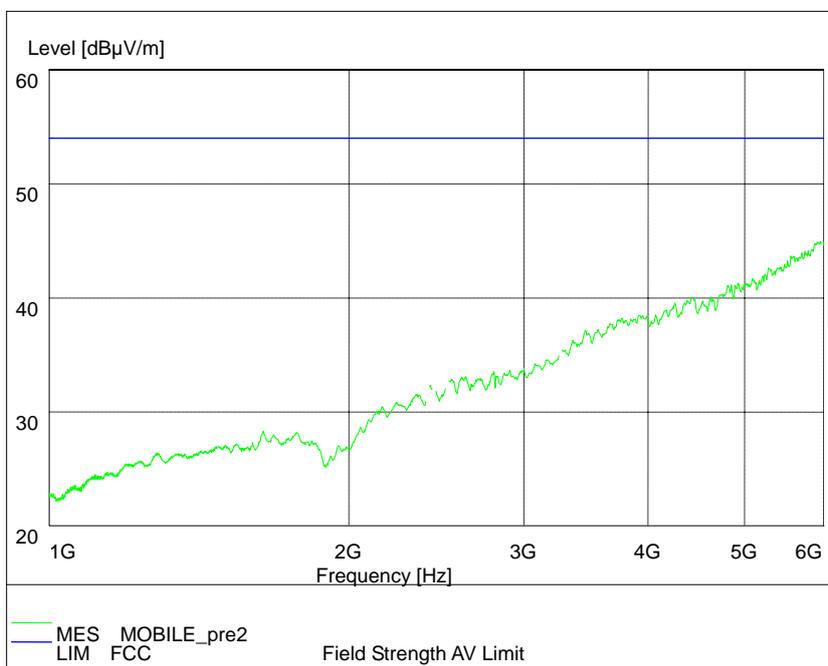


WCDMA BAND V(1GHz – 6GHz)

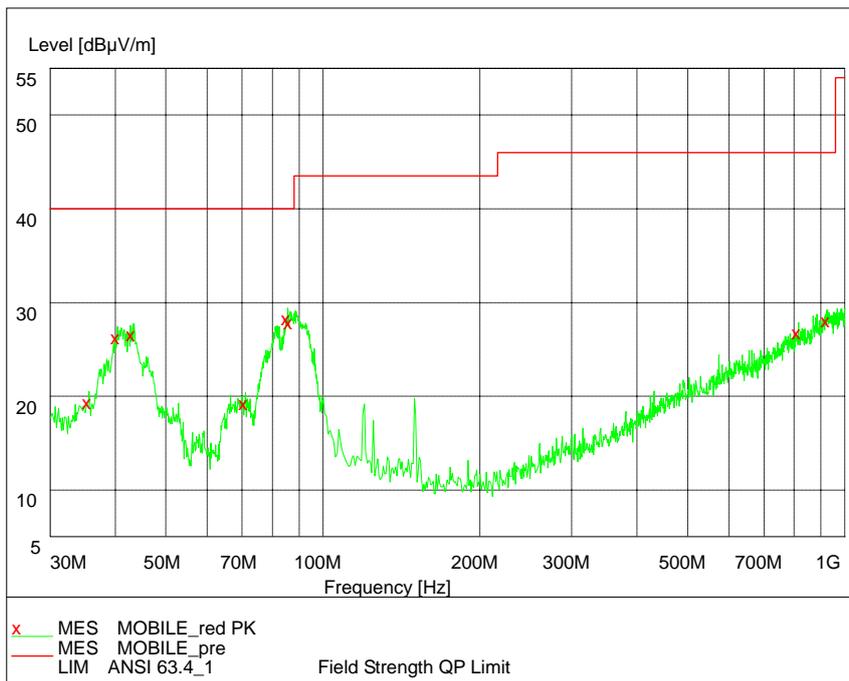


FM Radio (30MHz – 1GHz)

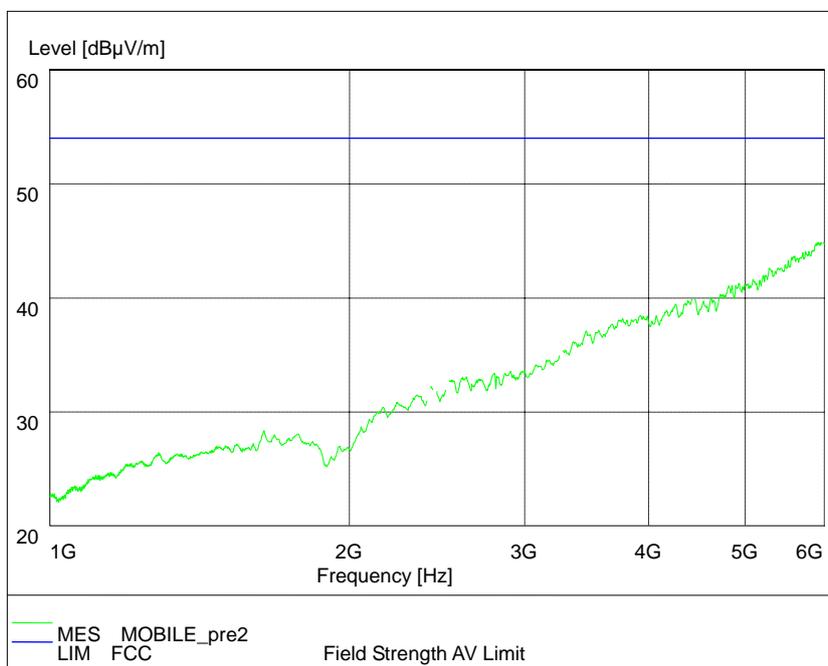


FM Radio (1GHz – 6GHz)

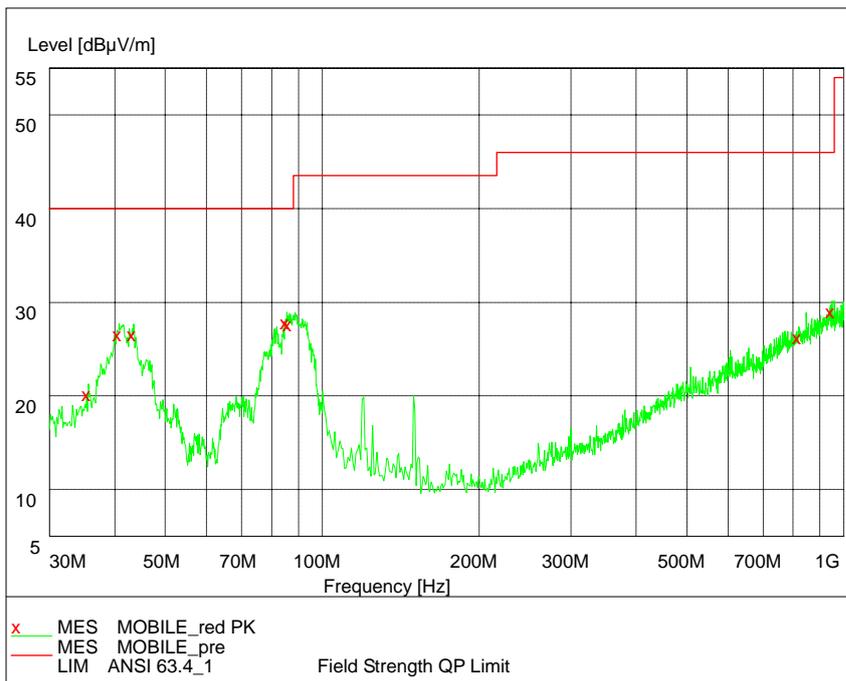


MP3/MP4 (30MHz – 1GHz)

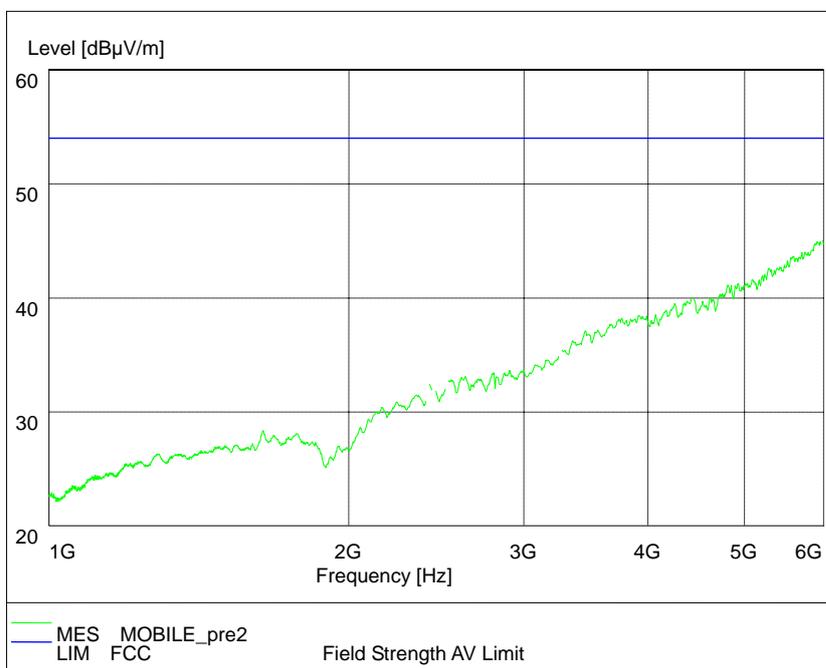

MP3/MP4 (1GHz – 6GHz)

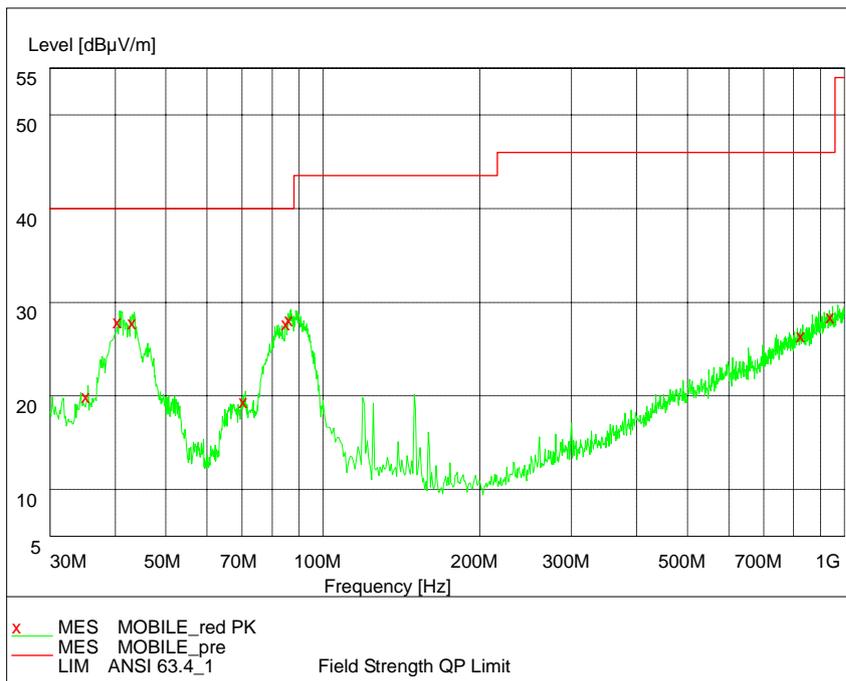

Camera (30MHz – 1GHz)

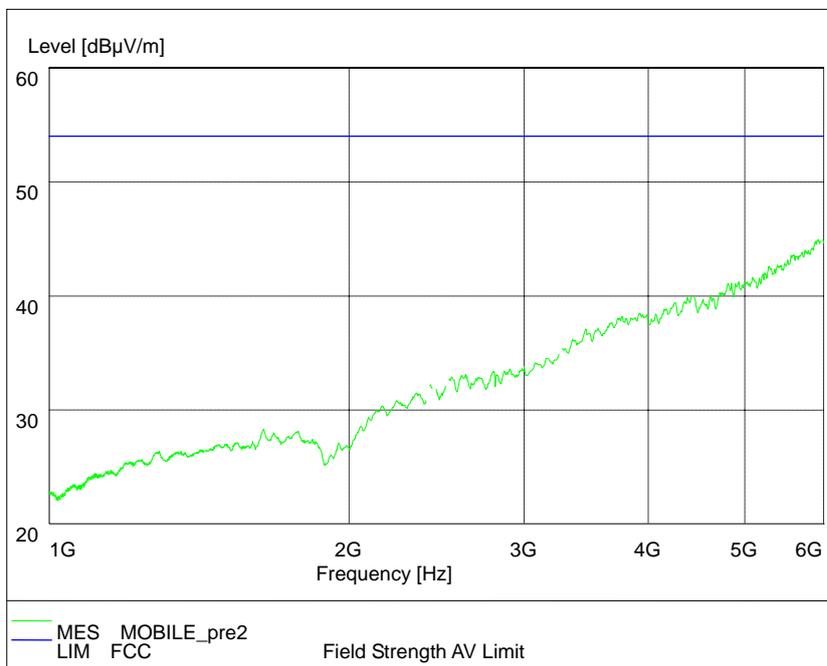

Camera (1GHz – 6GHz)

2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date
1	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	-----	19 th Aug. 2012
2	ESI 40 EMI test receiver	R&S	100015	19 th Aug. 2012
3	E5515C(8960) Mobile Station Tester	Agilent	GB44050904	19 th Aug. 2012
4	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	19 th Aug. 2012
5	ESCS30 EMI test receiver	R&S	100029	19 th Aug. 2012
6	HL562 Ultra log test antenna	R&S	100016	19 th Aug. 2012
7	ESH3-Z2 Pulse limiter	R&S	10002	19 th Aug. 2012
8	ESH3-Z5 Attenuator	R&S	100020	19 th Aug. 2012
9	ESH2Z11 LISN	R&S	50FH-020-10	19 th Aug. 2012
10	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	19 th Aug. 2012
11	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	19 th Aug. 2012
12	PS2000 Turn Table	FRANKONIA	-----	19 th Aug. 2012
13	MA260 Antenna Master	FRANKONIA	-----	19 th Aug. 2012
14	ES-K1EMI test software	R&S	-----	19 th Aug. 2012
15	HL562 Receive antenna	R&S	100167	19 th Aug. 2012

Appendix