



# TEST REPORT

No. 2012TAR443

for

**TCT Mobile Limited**

**UMTS Triband / GSM Quadband mobile phone**

**Model Name: ONE TOUCH 768T**

**FCC ID: RAD287**

**IC: 9238A-0012**

with

**Hardware Version: PIO01**

**Software Version: swC22**

**Issued Date: Sep 28, 2012**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

**DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02**

**FCC 2.948 Listed: No.733176**

**IC O.A.T.S listed: No.6629B**

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China,100191.

Tel:+86(0)10-62304633-2604, Fax:+86(0)10-62304793, Email:welcome@emcite.com, web: [www.emcite.com](http://www.emcite.com)

## **CONTENTS**

|                                                                         |           |
|-------------------------------------------------------------------------|-----------|
| <b>1. TEST LABORATORY .....</b>                                         | <b>3</b>  |
| 1.1. TESTING LOCATION .....                                             | 3         |
| 1.2. TESTING ENVIRONMENT .....                                          | 3         |
| 1.3. PROJECT DATA .....                                                 | 3         |
| 1.4. SIGNATURE .....                                                    | 3         |
| <b>2. CLIENT INFORMATION .....</b>                                      | <b>4</b>  |
| 2.1. APPLICANT INFORMATION .....                                        | 4         |
| 2.2. MANUFACTURER INFORMATION .....                                     | 4         |
| <b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>5</b>  |
| 3.1. ABOUT EUT .....                                                    | 5         |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....          | 5         |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....           | 5         |
| 3.4. GENERAL DESCRIPTION .....                                          | 6         |
| <b>4. REFERENCE DOCUMENTS .....</b>                                     | <b>7</b>  |
| 4.1. REFERENCE DOCUMENTS FOR TESTING .....                              | 7         |
| <b>5. LABORATORY ENVIRONMENT .....</b>                                  | <b>8</b>  |
| <b>6. SUMMARY OF TEST RESULTS .....</b>                                 | <b>9</b>  |
| <b>7. TEST EQUIPMENTS UTILIZED .....</b>                                | <b>11</b> |
| <b>ANNEX A: MEASUREMENT RESULTS.....</b>                                | <b>12</b> |
| A.1 OUTPUT POWER.....                                                   | 12        |
| A.2 EMISSION LIMIT.....                                                 | 18        |
| A.3 CONDUCTED EMISSION .....                                            | 30        |
| A.4 FREQUENCY STABILITY .....                                           | 37        |
| A.5 OCCUPIED BANDWIDTH .....                                            | 40        |
| A.6 EMISSION BANDWIDTH .....                                            | 52        |
| A.7 BAND EDGE COMPLIANCE .....                                          | 58        |
| A.8 CONDUCTED SPURIOUS EMISSION .....                                   | 61        |
| A.9 RECEIVER RADIATION EMISSION .....                                   | 95        |

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai  
Dian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304793


### **1.2. Testing Environment**

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### **1.3. Project data**


Testing Start Date: Aug 21, 2012  
Testing End Date: Sep 27, 2012

### **1.4. Signature**




---

**Zi Xiaogang**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Country: China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Country: China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

|                         |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| Description             | UMTS Triband / GSM Quadband mobile phone                            |
| Model Name              | ONE TOUCH 768T                                                      |
| FCC ID                  | RAD287                                                              |
| IC                      | 9238A-0012                                                          |
| Frequency               | GSM 850MHz; PCS 1900MHz; WCDMA Band II; WCDMA Band V; WCDMA BAND IV |
| Antenna                 | Internal                                                            |
| Power supply            | Battery or Charger (AC Adaptor)                                     |
| Output power            | 26.70dBm maximum EIRP measured for WCDMA Band II                    |
| Extreme vol. Limits     | 3.5VDC to 4.2VDC (nominal 3.8VDC)                                   |
| Extreme temp. Tolerance | -30°C to +50°C                                                      |

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### 3.2. Internal Identification of EUT used during the test

| EUT ID* | IMEI            | HW Version | SW Version |
|---------|-----------------|------------|------------|
| N07     | 013303000051519 | PIO01      | swC22      |
| N08     | 013303000050545 | PIO01      | swC22      |

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

| AE ID* | Description    |             |
|--------|----------------|-------------|
| AE1    | Battery        | B097155EA0A |
| AE2    | Battery        | B152153A1AA |
| AE3    | Battery        | B152153A1CA |
| AE4    | Travel charger | /           |
| AE5    | Travel charger | /           |

AE1, AE2, AE3

|                 |              |
|-----------------|--------------|
| Model           | CAB3120000C1 |
| Manufacturer    | BYD          |
| Capacitance     | 850mAh       |
| Nominal voltage | 3.8V         |

AE4

|              |              |
|--------------|--------------|
| Model        | CBA3002AG0C1 |
| Manufacturer | BYD          |

|                 |              |
|-----------------|--------------|
| Length of cable | 121cm        |
| AE5             |              |
| Model           | CBA3002AG0C3 |
| Manufacturer    | BYD          |
| Length of cable | 127cm        |

\*AE ID: is used to identify the test sample in the lab internally..

### **3.4. General Description**

The Equipment Under Test (EUT) is a model of UMTS Triband / GSM Quadband mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference      | Title                                                                                                                                | Version                 |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| FCC Part 24    | PERSONAL COMMUNICATIONS SERVICES                                                                                                     | V 10.1.09               |
| FCC Part 22    | PUBLIC MOBILE SERVICES                                                                                                               | V 10.1.09               |
| FCC Part 27    | MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES                                                                                       | V 10.1.09               |
| ANSI/TIA-603-C | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                  | 2004                    |
| ANSI C63.4     | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | 2003                    |
| RSS-Gen        | RSS-Gen — General Requirements and Information for the Certification of Radiocommunication Equipment                                 | Issue 3, December 2010  |
| RSS-132        | Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz                                    | Issue 2, September 2005 |
| RSS-133        | 2 GHz Personal Communications Services                                                                                               | Issue 5, February 2009  |
| KDB971168 D01  | Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems  | 2011                    |

## 5. LABORATORY ENVIRONMENT

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

|                          |                            |
|--------------------------|----------------------------|
| Temperature              | Min. = 15 °C, Max. = 35 °C |
| Relative humidity        | Min. = 20 %, Max. = 80 %   |
| Shielding effectiveness  | > 110 dB                   |
| Electrical insulation    | > 2 MΩ                     |
| Ground system resistance | < 0.5 Ω                    |

**Fully-anechoic chamber 2** (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Temperature                                     | Min. = 15 °C, Max. = 30 °C              |
| Relative humidity                               | Min. = 35 %, Max. = 60 %                |
| Shielding effectiveness                         | > 110 dB                                |
| Electrical insulation                           | > 2 MΩ                                  |
| Ground system resistance                        | < 1 Ω                                   |
| Site voltage standing-wave ratio ( $S_{VSWR}$ ) | Between 0 and 6 dB, from 1GHz to 18GHz  |
| Uniformity of field strength                    | Between 0 and 6 dB, from 80 to 4000 MHz |

**Semi-anechoic chamber 2 / Fully-anechoic chamber 3** (10 meters X 6.7 meters X 6.15 meters) did not exceed following limits along the EMC testing:

|                                                 |                                         |
|-------------------------------------------------|-----------------------------------------|
| Temperature                                     | Min. = 15 °C, Max. = 30 °C              |
| Relative humidity                               | Min. = 35 %, Max. = 60 %                |
| Shielding effectiveness                         | > 100 dB                                |
| Electrical insulation                           | > 2 MΩ                                  |
| Ground system resistance                        | < 0.5 Ω                                 |
| Normalised site attenuation (NSA)               | < ±3.5 dB, 3 m distance                 |
| Site voltage standing-wave ratio ( $S_{VSWR}$ ) | Between 0 and 6 dB, from 1GHz to 18GHz  |
| Uniformity of field strength                    | Between 0 and 6 dB, from 80 to 3000 MHz |

## 6. SUMMARY OF TEST RESULTS

### WCDMA Band II

| Items | Test Name                   | Clause in FCC rules | Clause in IC rules RSS-Gen and RSS- 133 | Section in this report | Verdict |
|-------|-----------------------------|---------------------|-----------------------------------------|------------------------|---------|
| 1     | Output Power                | 24.232(c)           | 6.4                                     | A.1                    | P       |
| 2     | Emission Limit              | 24.238, 2.1051      | 6.5                                     | A.2                    | P       |
| 3     | CONDUCTED EMISSION          | 15.107/15.207       |                                         | A.3                    | P       |
| 4     | Frequency Stability         | 24.235, 2.1055      | 6.3                                     | A.4                    | P       |
| 5     | Occupied Bandwidth          | 2.1049(h)(i)        | 4.1/4.6.1                               | A.5                    | P       |
| 6     | Emission Bandwidth          | 24.238(b)           | 4.6.1                                   | A.6                    | P       |
| 7     | Band Edge Compliance        | 24.238(b)           | 6.5                                     | A.7                    | P       |
| 8     | Conducted Spurious Emission | 24.238, 2.1057      | 6.5                                     | A.8                    | P       |

### WCDMA Band V

| Items | Test Name                   | Clause in FCC rules   | Clause in IC rules RSS-Gen and RSS-132 | Section in this report | Verdict |
|-------|-----------------------------|-----------------------|----------------------------------------|------------------------|---------|
| 1     | Output Power                | §2.1046(a), 22.913(a) | 4.4                                    | A.1                    | P       |
| 2     | Emission Limit              | 22.917, 2.1051        | 4.5                                    | A.2                    | P       |
| 3     | CONDUCTED EMISSION          | 15.107/15.207         |                                        | A.3                    | P       |
| 4     | Frequency Stability         | 22.235, 2.1055        | 4.3                                    | A.4                    | P       |
| 5     | Occupied Bandwidth          | 2.1049(h)(i)          | 4.1/4.6.1                              | A.5                    | P       |
| 6     | Emission Bandwidth          | 22.917(b)             | 4.6.1                                  | A.6                    | P       |
| 7     | Band Edge Compliance        | 22.917(b)             | 4.5                                    | A.7                    | P       |
| 8     | Conducted Spurious Emission | 22.917, 2.1057        | 4.5                                    | A.8                    | P       |

### WCDMA Band IV

| Items | Test Name           | Clause in FCC rules | Clause in IC rules RSS-Gen and RSS-132 | Section in this report | Verdict |
|-------|---------------------|---------------------|----------------------------------------|------------------------|---------|
| 1     | Output Power        | 27.50(d)(2)         | 5.4                                    | A.1                    | P       |
| 2     | Emission Limit      | 27.53(h)            | 5.5                                    | A.2                    | P       |
| 3     | CONDUCTED EMISSION  | 15.107/15.207       |                                        | A.3                    | P       |
| 4     | Frequency Stability | 27.54               | 5.3                                    | A.4                    | P       |
| 5     | Occupied Bandwidth  | 2.1049(h)(i)        | 4.1/4.6.1                              | A.5                    | P       |
| 6     | Emission Bandwidth  | 27.53(g)            | 4.6.1                                  | A.6                    | P       |

|   |                             |                 |     |     |   |
|---|-----------------------------|-----------------|-----|-----|---|
| 7 | Band Edge Compliance        | 27.53(g)        | 5.5 | A.7 | P |
| 8 | Conducted Spurious Emission | 2.1057/27.53(g) | 5.5 | A.8 | P |

**Receiver Radiated Emission**

| Items | Test Name                   | Clause in FCC rules | Clause in IC rules |         | Section in this report | Verdict |
|-------|-----------------------------|---------------------|--------------------|---------|------------------------|---------|
|       |                             |                     | RSS-132            | RSS-133 |                        |         |
| 1     | Receiver Radiated Emissions | 15.109<br>2.1053    | 4.6                | 6.6     | A.9                    | P       |

## 7. Test Equipments Utilized

| NO. | NAME                                    | TYPE      | SERIES<br>NUMBER | PRODUCER     | CAL DUE<br>DATE |
|-----|-----------------------------------------|-----------|------------------|--------------|-----------------|
| 1   | Test Receiver                           | ESCI      | 100344           | R&S          | 2013-03-28      |
| 2   | Test Receiver                           | ESU26     | 100376           | R&S          | 2012-11-08      |
| 3   | BiLog Antenna                           | VULB 9163 | 514              | Schwarzbeck  | 2014-11-10      |
| 4   | BiLog Antenna                           | 3117      | 00139065         | ETS-Lindgren | 2014-07-31      |
| 5   | Signal Generator                        | SMB100A   | 102063           | R&S          | 2013-04-05      |
| 6   | LISN                                    | ESH2-Z5   | 829991/012       | R&S          | 2013-04-16      |
| 7   | Universal Radio<br>Communication Tester | CMU200    | 102228           | R&S          | 2013-07-06      |
| 8   | Universal Radio<br>Communication Tester | E5515C    | MY48361083       | Agilent      | 2013-03-16      |
| 9   | Spectrum Analyzer                       | E4440A    | MY48250642       | Agilent      | 2013-03-04      |
| 10  | EMI Antenna                             | 9117      | 177              | Schwarzbeck  | 2013-06-28      |
| 11  | EMI Antenna                             | VULB 9163 | 482              | Schwarzbeck  | 2014-02-17      |
| 12  | EMI Antenna                             | 3117      | 00119024         | ETS-Lindgren | 2014-02-02      |
| 13  | EMI Antenna                             | 3117      | 00058889         | ETS-Lindgren | 2014-02-02      |
| 14  | Signal Generator                        | N5183A    | MY49060052       | Agilent      | 2013-03-19      |
| 15  | Climatic chamber                        | PL-2G     | 343074           | ESPEC        | 2013-05-12      |
| 16  | Spectrum Analyzer                       | FSU26     | 200030           | R&S          | 2013-06-19      |

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (RMS) These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II;826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V and 1712.4MHz, 1740MHz, and 1752.6MHz for WCDMA Band IV(bottom, middle and top of operational frequency range).

#### **Limit**

##### **A.1.2.2 Test Condition**

| RBW   | VBW   | Sweep Time | Span  |
|-------|-------|------------|-------|
| 10MHz | 10MHz | 800ms      | 50MHz |

#### **WCDMA Band II**

##### **Measurement result**

| WCDMA<br>(Band II) | CH   | Frequency(MHz) | output power(dBm) |
|--------------------|------|----------------|-------------------|
|                    | 9262 | 1852.4         | 22.44             |
|                    | 9400 | 1880.0         | 22.36             |
|                    | 9538 | 1907.6         | 22.31             |

#### **WCDMA Band V**

##### **Measurement result**

| WCDMA<br>(Band V) | CH   | Frequency(MHz) | output power(dBm) |
|-------------------|------|----------------|-------------------|
|                   | 4132 | 826.4          | 23.06             |
|                   | 4183 | 836.6          | 23.07             |
|                   | 4233 | 846.6          | 22.92             |

**WCDMA Band IV**

**Measurement result**

| WCDMA<br>(Band IV) | CH   | Frequency(MHz) | output power(dBm) |
|--------------------|------|----------------|-------------------|
|                    | 1312 | 1712.4         | 22.26             |
|                    | 1450 | 1740.0         | <b>22.35</b>      |
|                    | 1513 | 1752.6         | 22.16             |

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts." Rule Part 27.50(d)(2) specifies, "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to a peak EIRP of 1 watt."


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

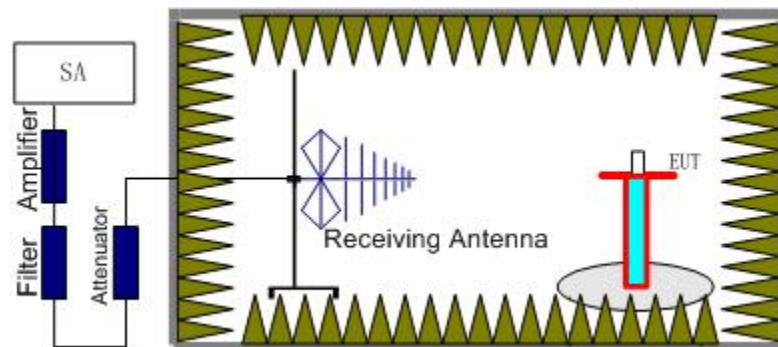

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

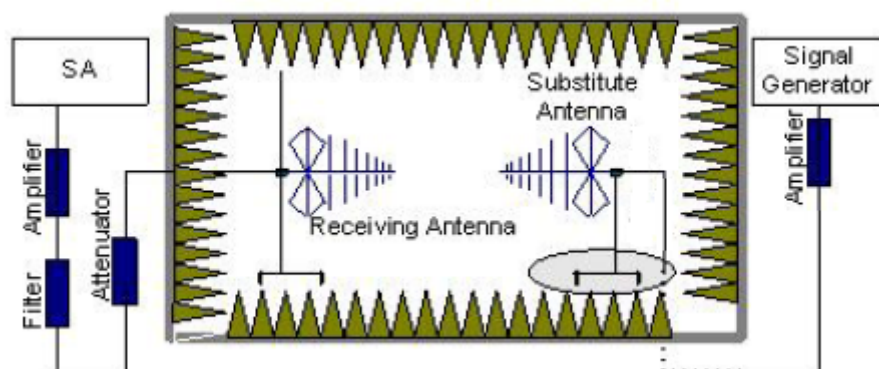

In the chamber, an substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.  
The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### WCDMA Band II-EIRP

#### Limits

|               |                       |
|---------------|-----------------------|
|               | Burst Peak EIRP (dBm) |
| WCDMA Band II | 33dBm (2W)            |

#### Measurement result

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub><br>Antenna<br>Gain(dB) | EIRP(dBm) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------------|-----------|--------------|
| 1852.40        | -21.83                 | 6.02                 | -50.00               | -4.55                                 | 26.70     | V            |
| 1880.00        | -21.95                 | 7.05                 | -50.00               | -4.43                                 | 25.43     | V            |
| 1907.60        | -19.17                 | 8.90                 | -50.00               | -4.31                                 | 26.24     | V            |

Frequency: 1852.40MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-21.83dBm)- P<sub>cl</sub>(6.02dB)- P<sub>Ag</sub>(-50.00dB) - G<sub>a</sub> (-4.55dB) =26.70dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

### WCDMA Band V-ERP

#### Limits

|              |                      |
|--------------|----------------------|
|              | Burst Peak ERP (dBm) |
| WCDMA Band V | 38.45dBm (7W)        |

#### Measurement result

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub><br>Antenna<br>Gain(dB) | Correction<br>(dBm) | ERP(dBm) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------------|---------------------|----------|--------------|
| 826.40         | -32.96                 | 2.25                 | -53.00               | 0.85                                  | 2.15                | 14.79    | V            |
| 836.60         | -32.98                 | 2.26                 | -53.00               | 0.90                                  | 2.15                | 14.71    | V            |
| 846.60         | -33.54                 | 2.26                 | -53.00               | 0.94                                  | 2.15                | 14.11    | V            |

Frequency: 826.40MHz

Peak ERP(dBm)= P<sub>Mea</sub>(-32.96dBm)- P<sub>cl</sub>(2.25dB)- P<sub>Ag</sub>(-53.00dB)-G<sub>a</sub> (0.85dB)-2.15dBm=14.79dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

# WCDMA Band IV-EIRP

## Limits

|               |                       |
|---------------|-----------------------|
|               | Burst Peak EIRP (dBm) |
| WCDMA Band IV | 30dBm (2W)            |

## Measurement result

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | P <sub>Ag</sub> (dB) | G <sub>a</sub><br>Antenna<br>Gain(dB) | EIRP(dBm) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------------|-----------|--------------|
| 1712.40        | -27.76                 | 3.66                 | -50.00               | -5.17                                 | 23.75     | V            |
| 1740.00        | -25.47                 | 4.36                 | -50.00               | -5.04                                 | 25.21     | V            |
| 1752.60        | -25.63                 | 3.85                 | -50.00               | -4.99                                 | 25.51     | V            |

Frequency: 1752.60MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-25.63dBm)- P<sub>cl</sub>(3.85dB)- P<sub>Ag</sub>(-50.00dB) - G<sub>a</sub> (-4.99dB) =25.51dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

## A.2 EMISSION LIMIT


### A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917 and Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

**The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

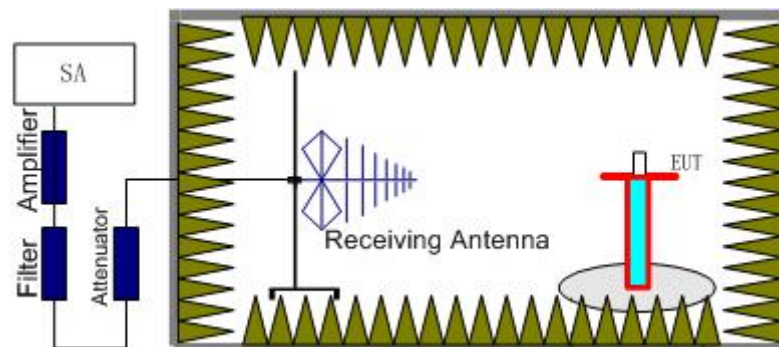

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

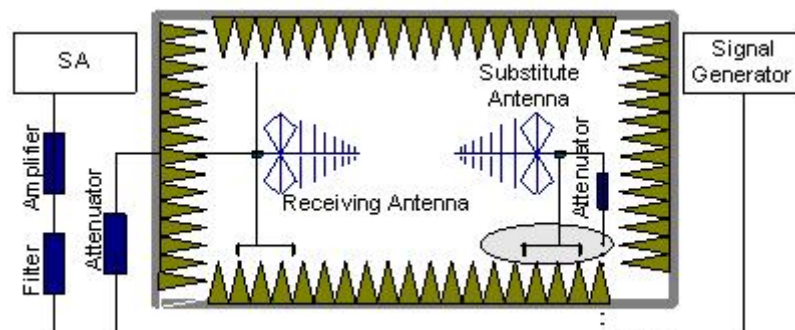

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### **A.2.2 Measurement Limit**

Part 24.238 , Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


.

### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) , WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1740MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.


**WCDMA BAND II Mode Channel 9262/1852.4MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|--------------|
| 3702.41        | -45.06                 | 5.32      | -8.14        | -42.24         | -13.00      | H            |
| 5418.87        | -69.26                 | 8.08      | -9.95        | -67.39         | -13.00      | V            |
| 7806.10        | -67.96                 | 7.54      | -11.71       | -63.79         | -13.00      | V            |
| 9089.13        | -68.20                 | 8.04      | -12.60       | -63.64         | -13.00      | V            |
| 11714.11       | -64.77                 | 9.53      | -12.44       | -61.86         | -13.00      | V            |
| 16316.60       | -54.62                 | 11.36     | -12.62       | -53.36         | -13.00      | H            |

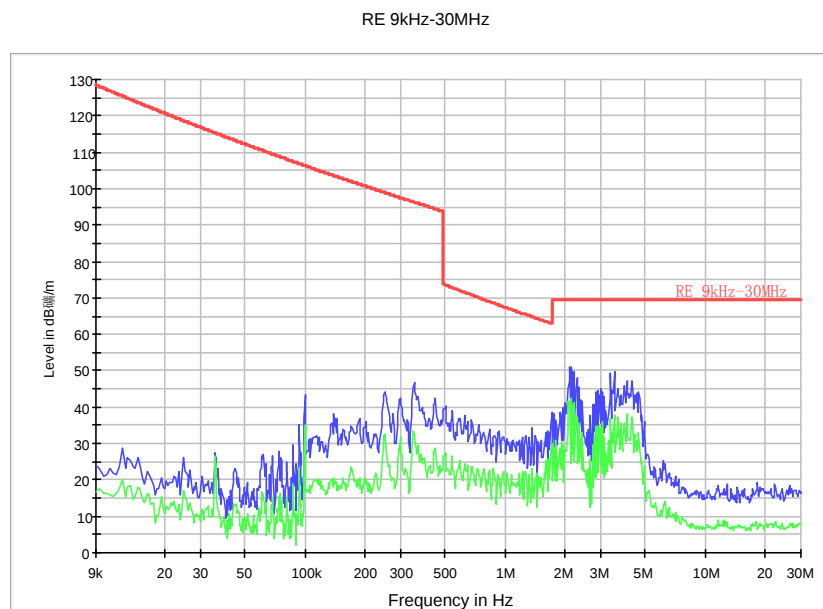**WCDMA Band II Channel 9262/1852.4MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic**  
**Mode: 9 kHz – 30 MHz**

**WCDMA BAND II Mode Channel 9400/1880MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|--------------|
| 3762.47        | -47.68                 | 5.91      | -8.21        | -45.38         | -13.00      | H            |
| 5290.48        | -69.48                 | 7.52      | -9.87        | -67.13         | -13.00      | V            |
| 7814.29        | -68.56                 | 7.59      | -11.71       | -64.44         | -13.00      | H            |
| 11235.57       | -63.91                 | 9.13      | -12.40       | -60.64         | -13.00      | H            |
| 13532.18       | -66.59                 | 10.86     | -13.81       | -63.64         | -13.00      | V            |
| 17720.14       | -58.27                 | 11.87     | -13.43       | -56.71         | -13.00      | V            |

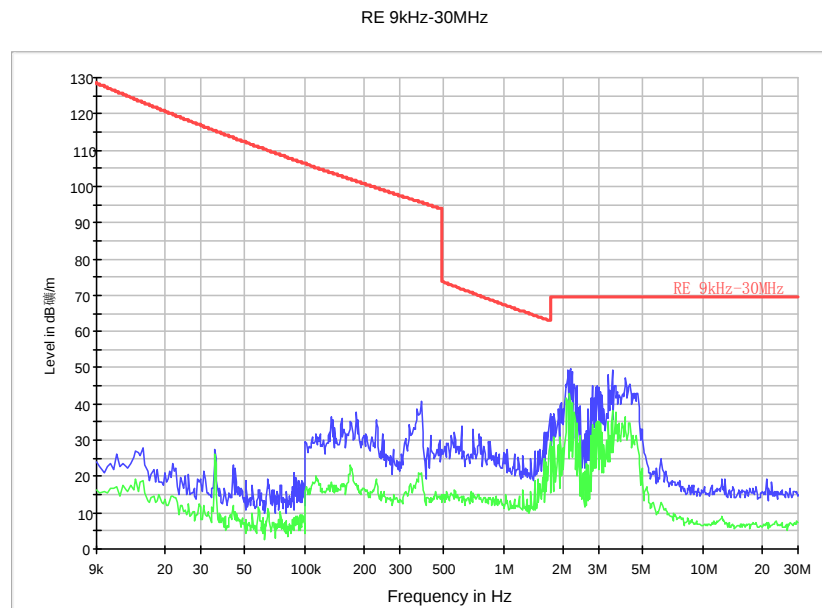**WCDMA Band II Channel 9400/1880MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic**  
**Mode: 9 kHz – 30 MHz**




#### WCDMA BAND II Mode Channel 9538/1907.6MHz

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|--------------|
| 3812.73        | -56.09                 | 5.68      | -8.28        | -53.49         | -13.00      | H            |
| 5237.48        | -69.48                 | 7.53      | -9.84        | -67.17         | -13.00      | V            |
| 6965.29        | -64.26                 | 7.83      | -11.07       | -61.02         | -13.00      | V            |
| 10214.38       | -63.99                 | 8.59      | -12.44       | -60.14         | -13.00      | H            |
| 12975.44       | -63.77                 | 10.03     | -13.27       | -60.53         | -13.00      | H            |
| 16872.39       | -55.90                 | 11.66     | -12.40       | -55.16         | -13.00      | V            |


#### WCDMA Band II Channel 9538/1907.6MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9 kHz – 30 MHz

RE 9kHz-30MHz

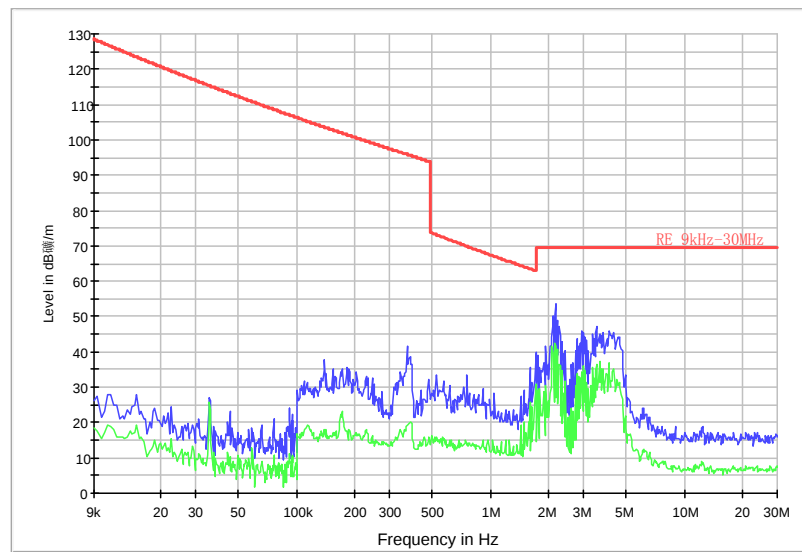


**WCDMA BAND V Mode Channel 4132/826.4MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Correction (dBm) | Peak ERP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|------------------|---------------|-------------|--------------|
| 1651.04        | -55.75                 | 3.56      | -5.44        | 2.15             | -56.02        | -13.00      | V            |
| 2113.43        | -59.58                 | 4.33      | -4.24        | 2.15             | -61.82        | -13.00      | H            |
| 3408.23        | -88.03                 | 5.02      | -7.68        | 2.15             | -87.52        | -13.00      | V            |
| 5076.07        | -69.43                 | 7.43      | -9.75        | 2.15             | -69.26        | -13.00      | V            |
| 7055.57        | -69.08                 | 8.28      | -11.13       | 2.15             | -68.38        | -13.00      | H            |
| 8496.78        | -65.16                 | 7.89      | -12.20       | 2.15             | -63.00        | -13.00      | H            |

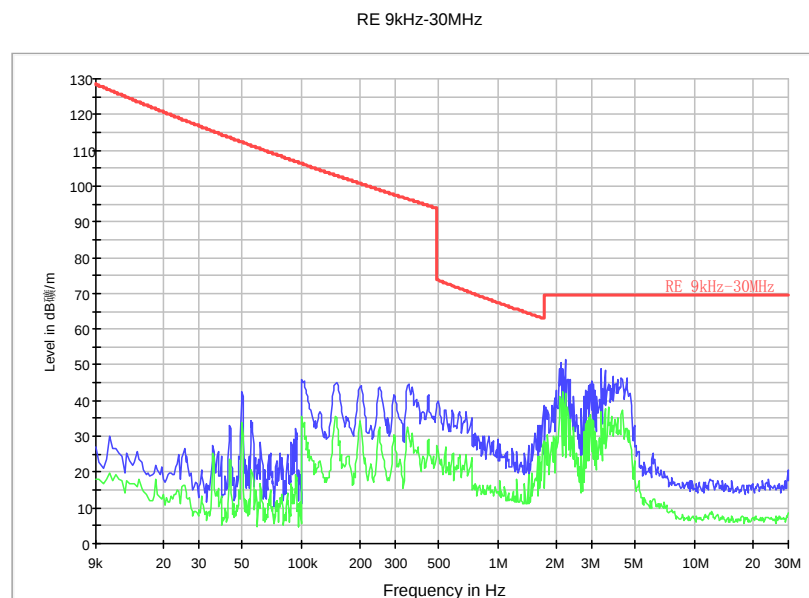**WCDMA Band V Channel 4132/826.4MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic**  
**Mode: 9 kHz – 30 MHz**

**WCDMA BAND V Mode Channel 4183/836.6MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Correction (dBm) | Peak ERP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|------------------|---------------|-------------|--------------|
| 1610.64        | -66.16                 | 3.53      | -5.61        | 2.15             | -66.23        | -13.00      | H            |
| 2471.78        | -53.80                 | 4.15      | -5.32        | 2.15             | -54.78        | -13.00      | V            |
| 3343.50        | -73.53                 | 5.48      | -7.52        | 2.15             | -73.64        | -13.00      | V            |
| 5095.31        | -68.22                 | 7.54      | -9.76        | 2.15             | -68.15        | -13.00      | V            |
| 6395.10        | -67.69                 | 8.27      | -10.52       | 2.15             | -67.59        | -13.00      | H            |
| 8227.84        | -66.05                 | 7.64      | -12.04       | 2.15             | -63.80        | -13.00      | H            |

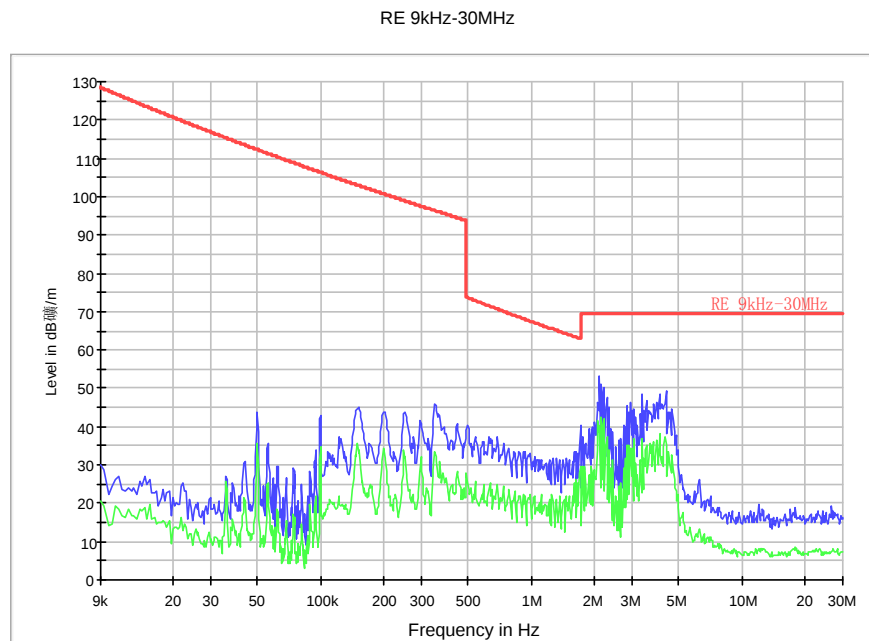**WCDMA Band V Channel 4183/836.6MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic**  
**Mode: 9 kHz – 30 MHz**




#### WCDMA BAND V Mode Channel 4233/846.6MHz

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Correction (dBm) | Peak ERP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|------------------|---------------|-------------|--------------|
| 1690.66        | -55.07                 | 3.60      | -5.26        | 2.15             | -55.56        | -13.00      | V            |
| 3048.27        | -69.48                 | 5.12      | -6.82        | 2.15             | -69.93        | -13.00      | V            |
| 4322.65        | -72.56                 | 6.11      | -8.69        | 2.15             | -72.13        | -13.00      | H            |
| 5200.80        | -67.36                 | 7.66      | -9.82        | 2.15             | -67.35        | -13.00      | H            |
| 6195.06        | -65.62                 | 10.43     | -10.36       | 2.15             | -67.84        | -13.00      | V            |
| 7146.69        | -66.59                 | 8.77      | -11.19       | 2.15             | -66.32        | -13.00      | H            |

#### WCDMA Band V Channel 4233/846.6MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9 kHz – 30 MHz

RE 9kHz-30MHz

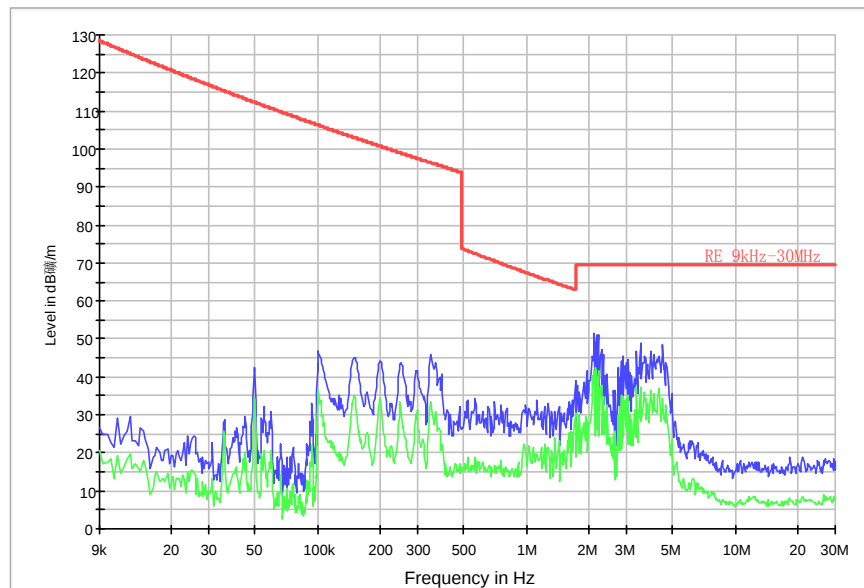


**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|--------------|
| 3426.25        | -52.45                 | 4.95      | -7.72        | -49.68         | -13.00      | H            |
| 5133.47        | -66.82                 | 6.97      | -9.78        | -64.01         | -13.00      | V            |
| 6886.11        | -68.94                 | 7.64      | -10.99       | -65.59         | -13.00      | V            |
| 8618.56        | -65.13                 | 7.93      | -12.29       | -60.77         | -13.00      | V            |
| 10340.22       | -66.63                 | 8.65      | -12.47       | -62.81         | -13.00      | H            |
| 12513.36       | -65.78                 | 9.72      | -12.72       | -62.78         | -13.00      | V            |


**WCDMA Band IV Channel 1312/1712.4MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9 kHz – 30 MHz**

RE 9kHz-30MHz

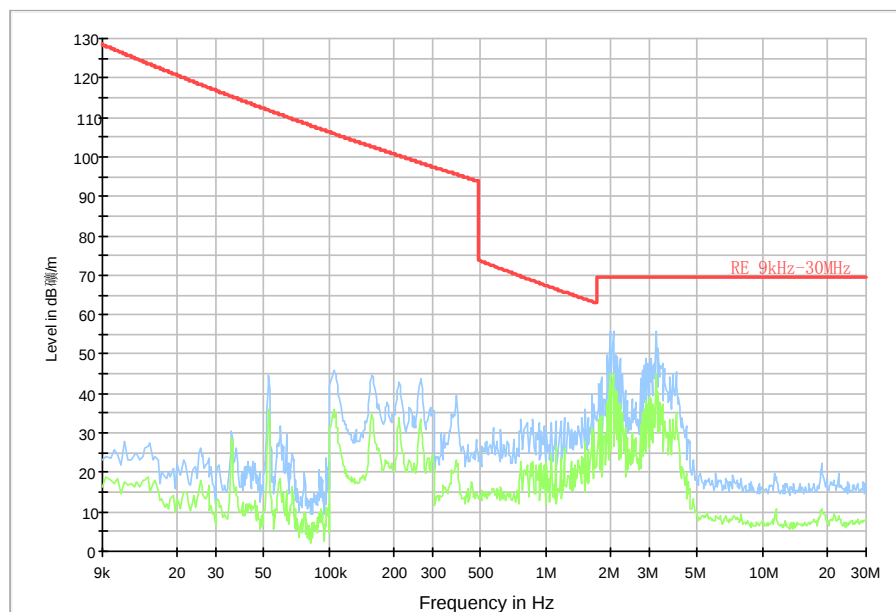
**WCDMA BAND IV Mode Channel 1450/1740MHz**

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|--------------|
| 3477.72        | -57.67                 | 5.31      | -7.85        | -55.13         | -13.00      | H            |
| 6441.55        | -67.86                 | 7.95      | -10.55       | -65.26         | -13.00      | V            |
| 8618.87        | -65.93                 | 7.92      | -12.30       | -61.55         | -13.00      | H            |
| 10137.49       | -64.14                 | 8.50      | -12.43       | -60.21         | -13.00      | V            |
| 13064.02       | -66.58                 | 10.20     | -13.36       | -63.42         | -13.00      | V            |
| 17790.91       | -59.94                 | 11.90     | -13.47       | -58.37         | -13.00      | V            |

**WCDMA Band IV Channel 1450/1740MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9 kHz – 30 MHz**

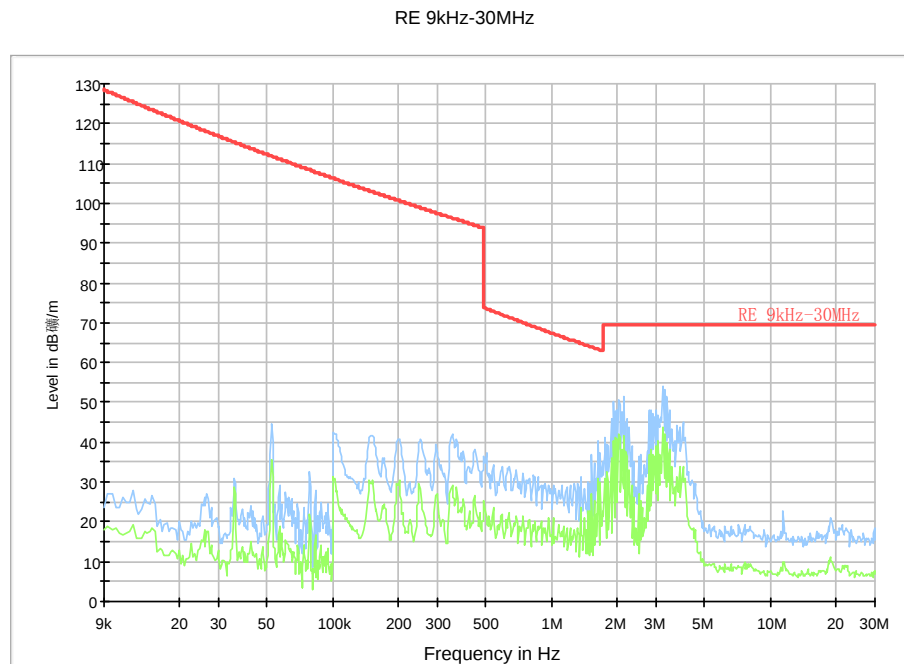


#### WCDMA BAND IV Mode Channel 1513/1752.6MHz

| Frequency(MHz) | P <sub>Mea</sub> (dBm) | Path Loss | Antenna Gain | Peak EIRP(dBm) | Limit (dBm) | Polarization |
|----------------|------------------------|-----------|--------------|----------------|-------------|--------------|
| 3507.04        | -59.28                 | 5.17      | -7.91        | -56.54         | -13.00      | H            |
| 4971.69        | -71.00                 | 7.19      | -9.65        | -68.54         | -13.00      | H            |
| 6778.30        | -66.57                 | 7.58      | -10.88       | -63.27         | -13.00      | V            |
| 8597.65        | -67.14                 | 8.02      | -12.28       | -62.88         | -13.00      | V            |
| 10332.98       | -65.06                 | 8.64      | -12.47       | -61.23         | -13.00      | V            |
| 12449.59       | -61.44                 | 9.62      | -12.68       | -58.38         | -13.00      | H            |

#### WCDMA Band IV Channel 1513/1752.6MHz RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9 kHz – 30 MHz

RE 9kHz-30MHz

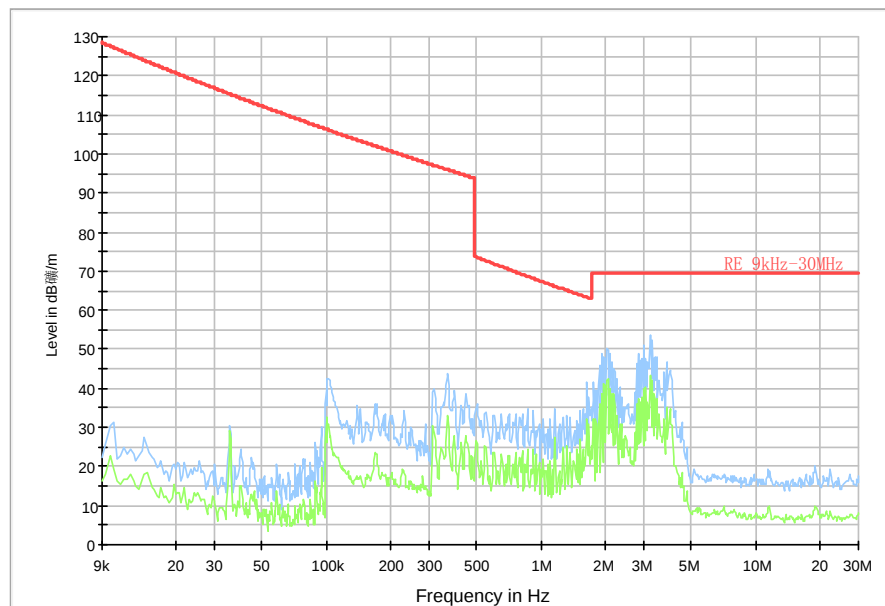

### **A.3 CONDUCTED EMISSION**


The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.

#### **A.3.1 Limit**

| Frequency of Emission (MHz)                 | Conducted Limit (dB $\mu$ V) |           |
|---------------------------------------------|------------------------------|-----------|
|                                             | Quasi -Peak                  | Average   |
| 0.15 – 0.5                                  | 66 to 56*                    | 56 to 46* |
| 0.5 – 5                                     | 56                           | 46        |
| 5 – 30                                      | 60                           | 50        |
| * Decreases with logarithm of the frequency |                              |           |

### A.3.2 Measurement result

#### WCDMA Band II-AE4

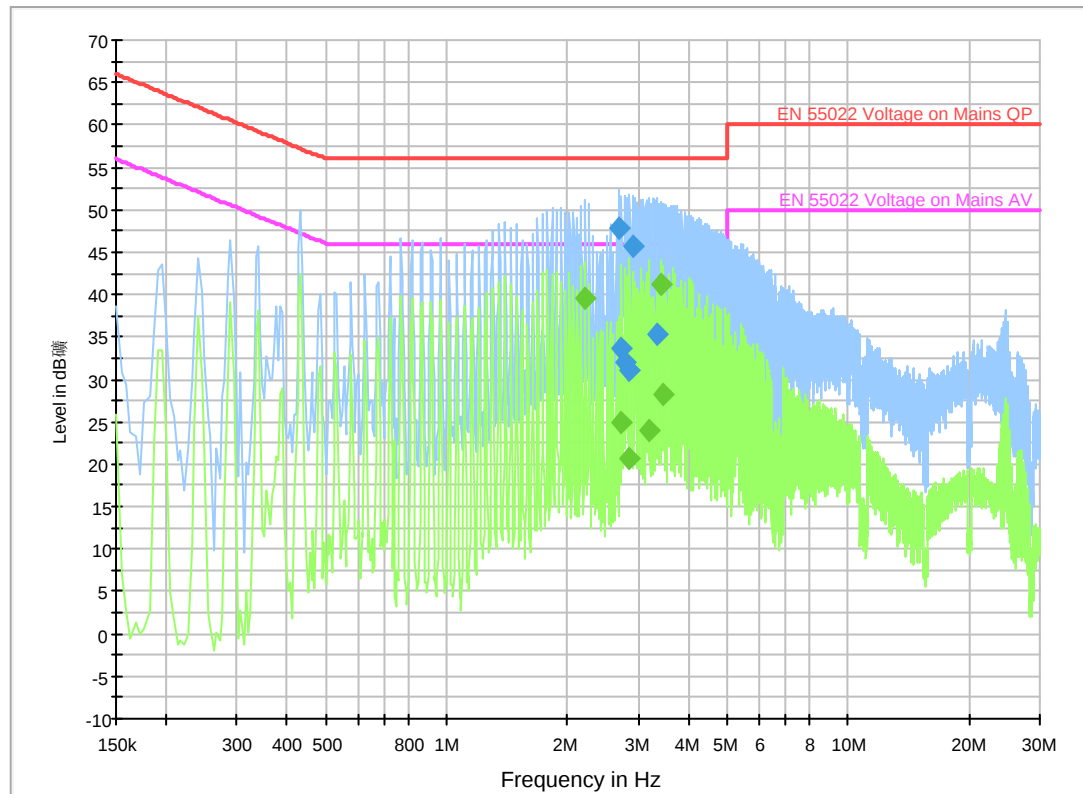


#### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 2.688000        | 47.7             | GND | L1   | 10.0       | 8.3         | 56.0         |
| 2.728500        | 33.6             | GND | L1   | 10.0       | 22.4        | 56.0         |
| 2.769000        | 32.0             | GND | L1   | 10.0       | 24.0        | 56.0         |
| 2.859000        | 31.0             | GND | L1   | 10.0       | 25.0        | 56.0         |
| 2.904000        | 45.7             | GND | L1   | 10.0       | 10.3        | 56.0         |
| 3.331500        | 35.3             | GND | L1   | 10.0       | 20.7        | 56.0         |

#### Final Result 2

| Frequency (MHz) | CAverage (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-----------------|-----|------|------------|-------------|--------------|
| 2.215500        | 39.5            | GND | L1   | 10.0       | 6.5         | 46.0         |
| 2.728500        | 24.8            | GND | L1   | 10.0       | 21.2        | 46.0         |
| 2.859000        | 20.8            | GND | L1   | 10.0       | 25.2        | 46.0         |
| 3.187500        | 24.0            | GND | L1   | 10.0       | 22.0        | 46.0         |
| 3.421500        | 41.3            | GND | L1   | 10.0       | 4.7         | 46.0         |
| 3.471000        | 28.3            | GND | L1   | 10.0       | 17.7        | 46.0         |

## WCDMA Band V-AE4

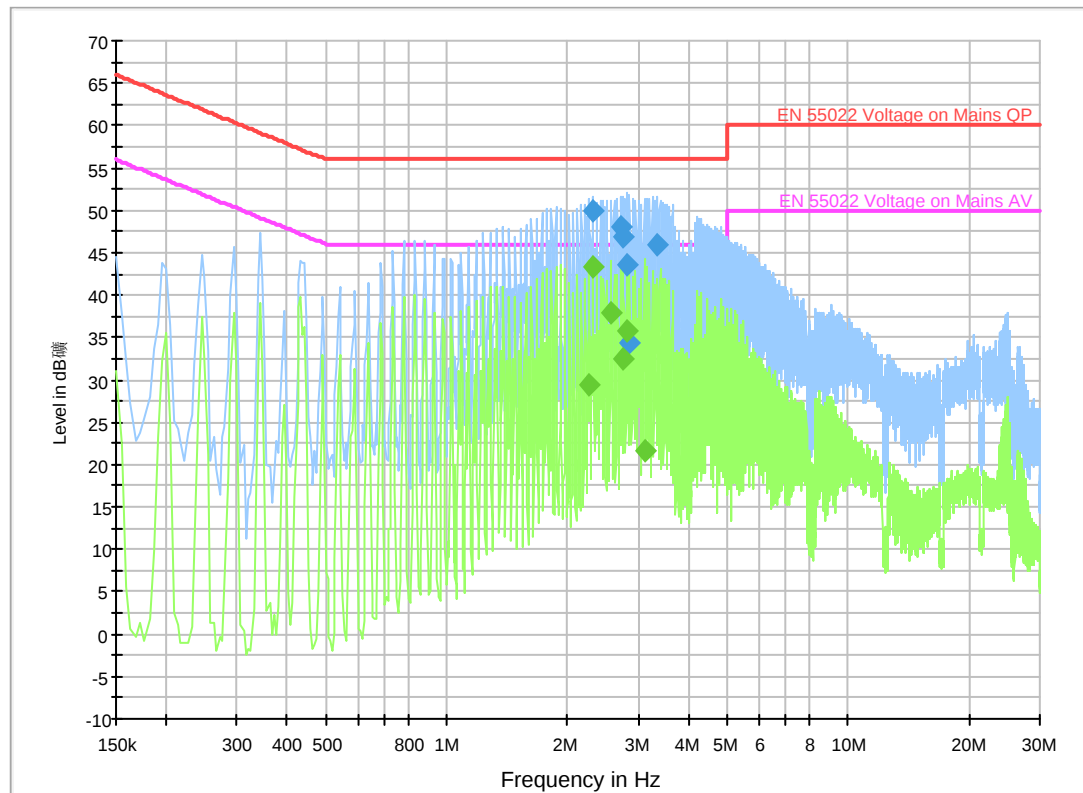


### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 2.314500        | 49.9             | GND | L1   | 10.0       | 6.1         | 56.0         |
| 2.706000        | 48.1             | GND | L1   | 10.0       | 7.9         | 56.0         |
| 2.755500        | 46.8             | GND | L1   | 10.0       | 9.2         | 56.0         |
| 2.805000        | 43.5             | GND | L1   | 10.0       | 12.5        | 56.0         |
| 2.859000        | 34.5             | GND | L1   | 10.0       | 21.5        | 56.0         |
| 3.349500        | 45.9             | GND | L1   | 10.0       | 10.1        | 56.0         |

### Final Result 2

| Frequency (MHz) | CAverage (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-----------------|-----|------|------------|-------------|--------------|
| 2.265000        | 29.5            | GND | L1   | 10.0       | 16.5        | 46.0         |
| 2.314500        | 43.3            | GND | L1   | 10.0       | 2.7         | 46.0         |
| 2.562000        | 37.8            | GND | L1   | 10.0       | 8.2         | 46.0         |
| 2.755500        | 32.4            | GND | L1   | 10.0       | 13.6        | 46.0         |
| 2.805000        | 35.9            | GND | L1   | 10.0       | 10.1        | 46.0         |
| 3.102000        | 21.6            | GND | L1   | 10.0       | 24.4        | 46.0         |

# WCDMA Band IV-AE4

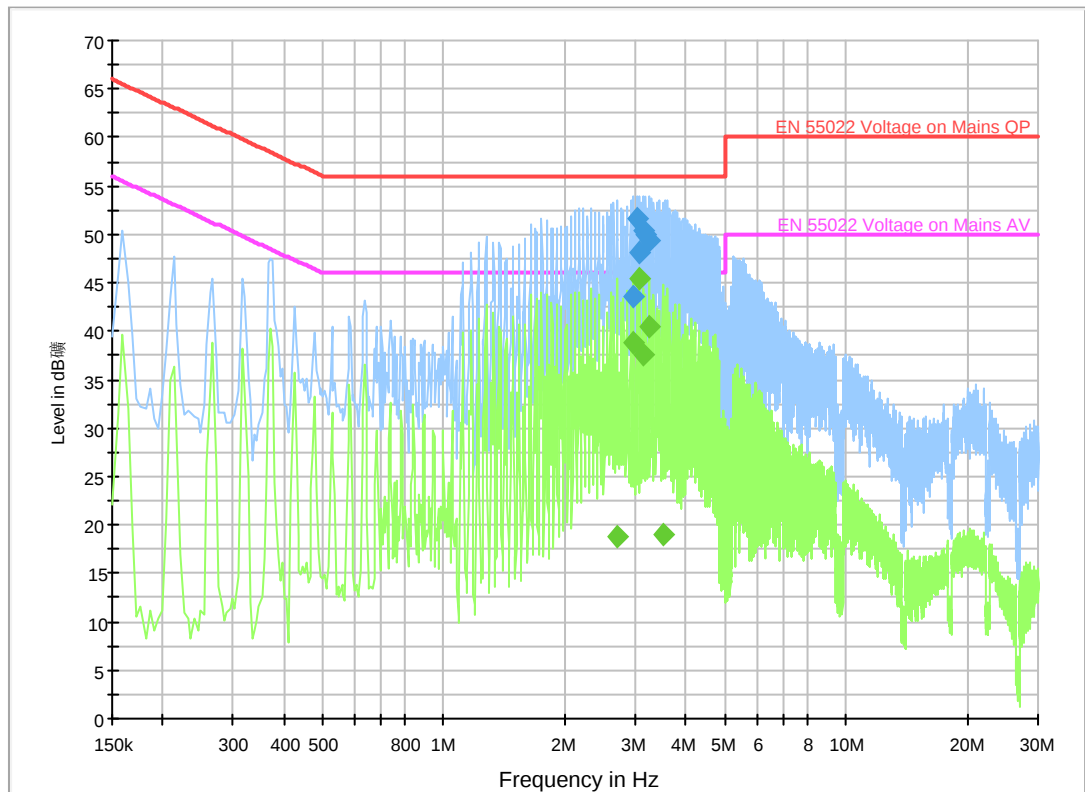


## Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 2.967000        | 43.7             | GND | L1   | 10.0       | 12.3        | 56.0         |
| 3.021000        | 51.7             | GND | L1   | 10.0       | 4.3         | 56.0         |
| 3.070500        | 48.2             | GND | L1   | 10.0       | 7.8         | 56.0         |
| 3.129000        | 50.3             | GND | L1   | 10.0       | 5.7         | 56.0         |
| 3.178500        | 49.9             | GND | L1   | 10.0       | 6.1         | 56.0         |
| 3.232500        | 49.3             | GND | L1   | 10.0       | 6.7         | 56.0         |

## Final Result 2

| Frequency (MHz) | CAverage (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-----------------|-----|------|------------|-------------|--------------|
| 2.701500        | 18.8            | GND | L1   | 10.0       | 27.2        | 46.0         |
| 2.967000        | 38.8            | GND | L1   | 10.0       | 7.2         | 46.0         |
| 3.070500        | 45.3            | GND | L1   | 10.0       | 0.7         | 46.0         |
| 3.129000        | 37.6            | GND | L1   | 10.0       | 8.4         | 46.0         |
| 3.232500        | 40.6            | GND | L1   | 10.0       | 5.4         | 46.0         |
| 3.498000        | 19.0            | GND | L1   | 10.0       | 27.0        | 46.0         |

## WCDMA Band II-AE5

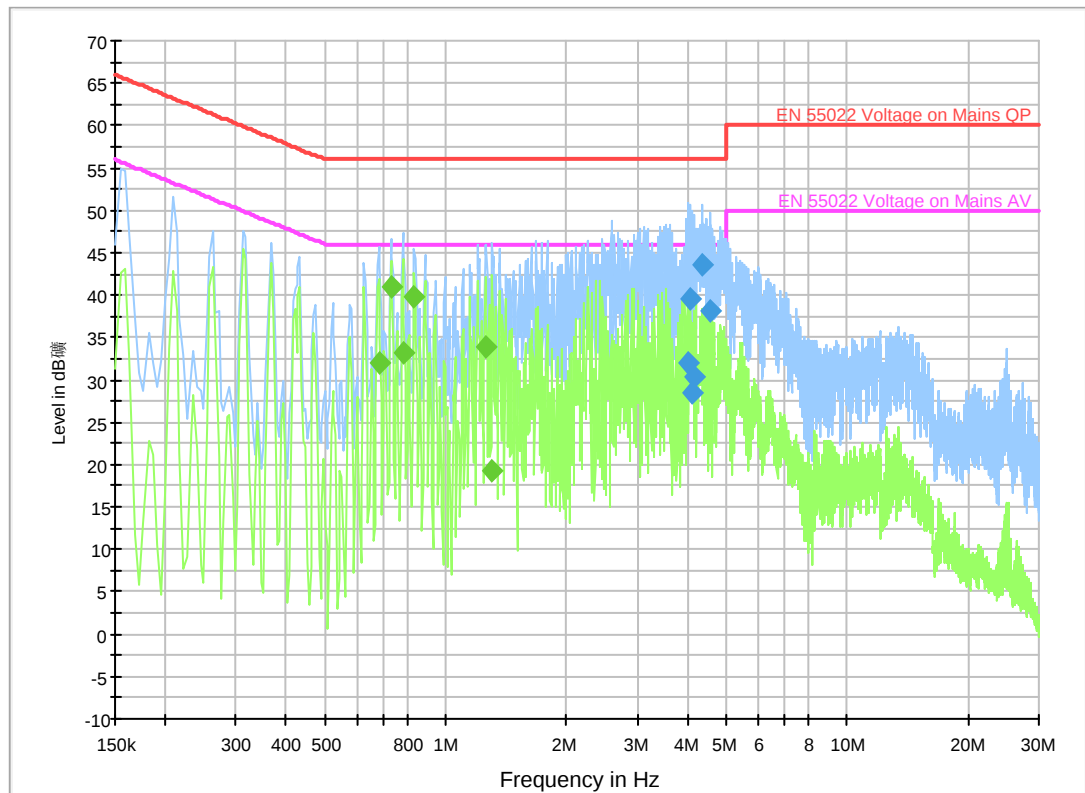


### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 4.015500        | 32.1             | GND | N    | 10.0       | 23.9        | 56.0         |
| 4.069500        | 39.5             | GND | N    | 10.0       | 16.5        | 56.0         |
| 4.119000        | 28.6             | GND | N    | 10.0       | 27.4        | 56.0         |
| 4.173000        | 30.3             | GND | N    | 10.0       | 25.7        | 56.0         |
| 4.371000        | 43.6             | GND | L1   | 10.0       | 12.4        | 56.0         |
| 4.537500        | 38.2             | GND | N    | 10.0       | 17.8        | 56.0         |

### Final Result 2

| Frequency (MHz) | CAverage (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-----------------|-----|------|------------|-------------|--------------|
| 0.681000        | 31.9            | GND | N    | 10.0       | 14.1        | 46.0         |
| 0.730500        | 40.9            | GND | N    | 10.0       | 5.1         | 46.0         |
| 0.784500        | 33.1            | GND | N    | 10.0       | 12.9        | 46.0         |
| 0.834000        | 39.7            | GND | N    | 10.0       | 6.3         | 46.0         |
| 1.252500        | 33.9            | GND | N    | 10.0       | 12.1        | 46.0         |
| 1.306500        | 19.2            | GND | N    | 10.0       | 26.8        | 46.0         |

## MP3

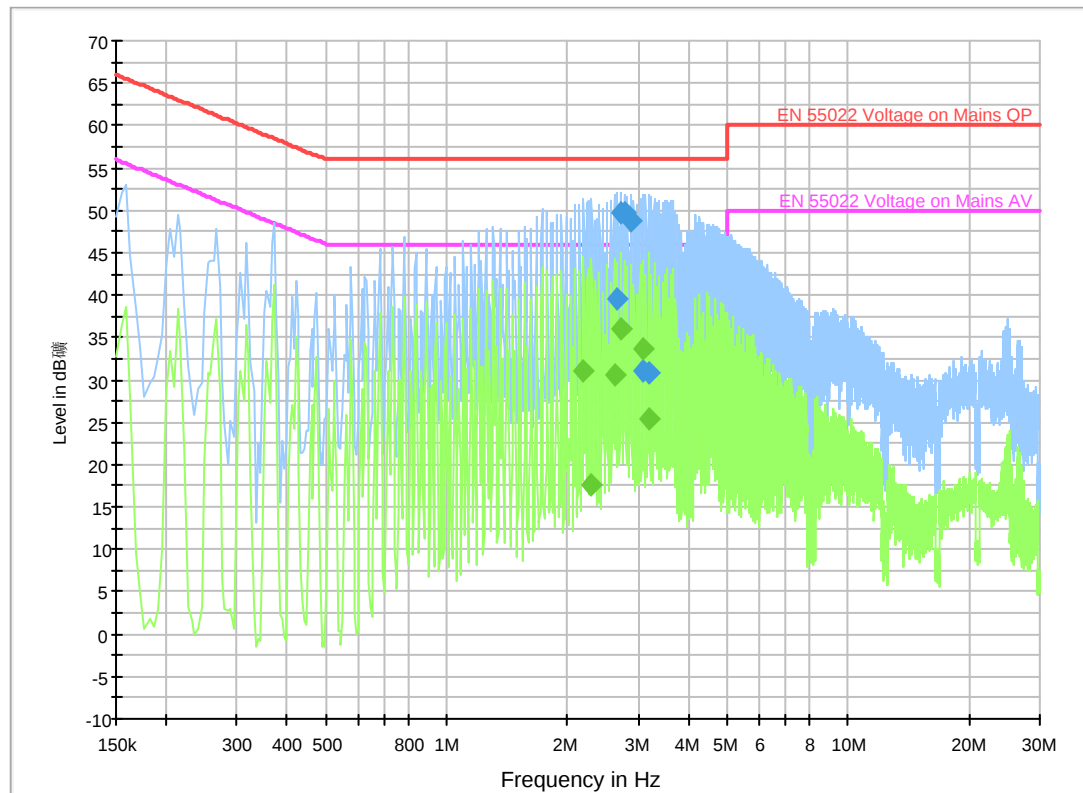


## Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 2.661000        | 39.6             | GND | L1   | 10.0       | 16.4        | 56.0         |
| 2.715000        | 49.6             | GND | L1   | 10.0       | 6.4         | 56.0         |
| 2.764500        | 49.7             | GND | L1   | 10.0       | 6.3         | 56.0         |
| 2.868000        | 48.7             | GND | L1   | 10.0       | 7.3         | 56.0         |
| 3.079500        | 31.0             | GND | L1   | 10.0       | 25.0        | 56.0         |
| 3.183000        | 30.8             | GND | L1   | 10.0       | 25.2        | 56.0         |

## Final Result 2

| Frequency (MHz) | CAverage (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-----------------|-----|------|------------|-------------|--------------|
| 2.193000        | 31.2            | GND | L1   | 10.0       | 14.8        | 46.0         |
| 2.296500        | 17.7            | GND | L1   | 10.0       | 28.3        | 46.0         |
| 2.611500        | 30.6            | GND | L1   | 10.0       | 15.4        | 46.0         |
| 2.715000        | 36.1            | GND | L1   | 10.0       | 9.9         | 46.0         |
| 3.079500        | 33.7            | GND | L1   | 10.0       | 12.3        | 46.0         |
| 3.183000        | 25.4            | GND | L1   | 10.0       | 20.6        | 46.0         |

## Camera

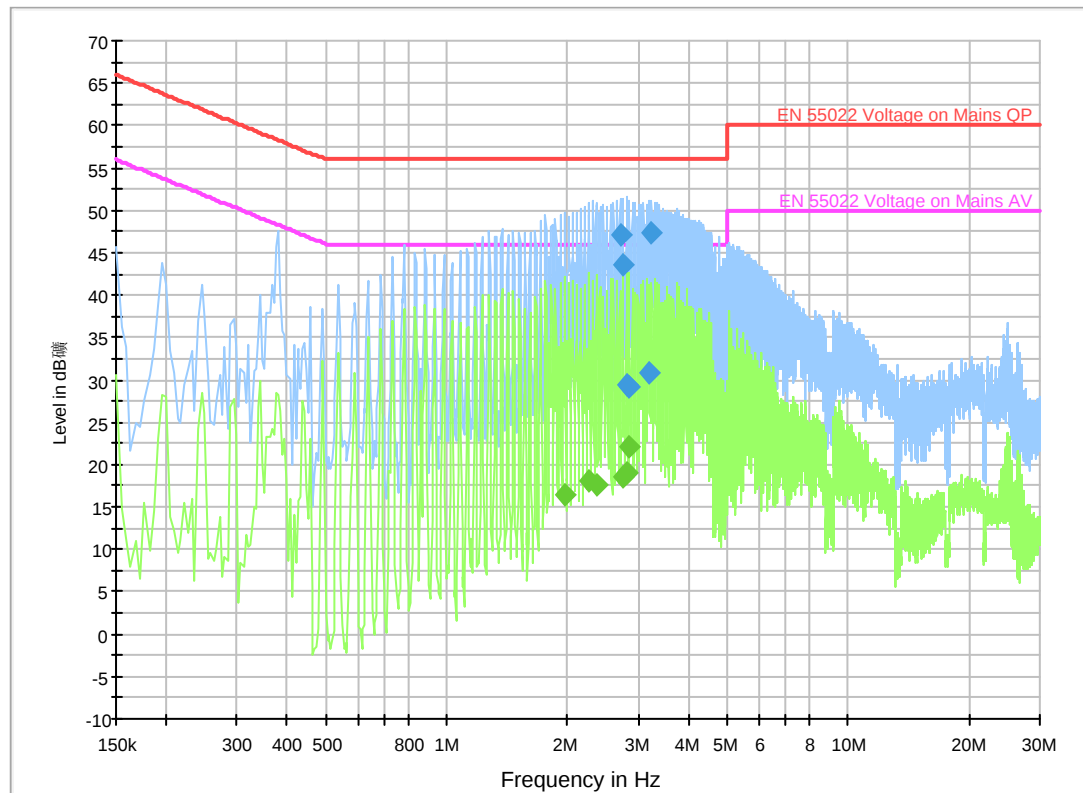

## Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 2.710500        | 47.1             | GND | L1   | 10.0       | 8.9         | 56.0         |
| 2.751000        | 43.5             | GND | L1   | 10.0       | 12.5        | 56.0         |
| 2.800500        | 29.5             | GND | L1   | 10.0       | 26.5        | 56.0         |
| 2.850000        | 29.3             | GND | L1   | 10.0       | 26.7        | 56.0         |
| 3.196500        | 30.7             | GND | L1   | 10.0       | 25.3        | 56.0         |
| 3.241500        | 47.3             | GND | L1   | 10.0       | 8.7         | 56.0         |

## Final Result 2

| Frequency (MHz) | CAverage (dBμV) | PE  | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-----------------|-----|------|------------|-------------|--------------|
| 1.968000        | 16.3            | GND | L1   | 10.0       | 29.7        | 46.0         |
| 2.260500        | 18.0            | GND | L1   | 10.0       | 28.0        | 46.0         |
| 2.359500        | 17.6            | GND | L1   | 10.0       | 28.4        | 46.0         |
| 2.751000        | 18.5            | GND | L1   | 10.0       | 27.5        | 46.0         |
| 2.800500        | 19.0            | GND | L1   | 10.0       | 27.0        | 46.0         |
| 2.850000        | 22.1            | GND | L1   | 10.0       | 23.9        | 46.0         |

## **A.4 FREQUENCY STABILITY**

### **A.4.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II, WCDMA Band V, and WCDMA BAND IV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.4.2 Measurement Limit**

#### **A.4.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **A.4.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

#### A.4.3 Measurement results

##### WCDMA Band II

##### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.5        | -9                  | 0.005                |
| 3.8        | -7                  | 0.004                |
| 4.2        | -10                 | 0.005                |

##### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | -11                 | 0.006                |
| -20             | -9                  | 0.005                |
| -10             | -9                  | 0.005                |
| 0               | -8                  | 0.004                |
| 10              | -7                  | 0.004                |
| 20              | -7                  | 0.004                |
| 30              | -7                  | 0.004                |
| 40              | -8                  | 0.004                |
| 50              | -10                 | 0.005                |

##### WCDMA Band V

##### Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.5        | -6                  | 0.007                |
| 3.8        | -3                  | 0.004                |
| 4.2        | -5                  | 0.006                |

##### Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | -9                  | 0.010                |
| -20             | -7                  | 0.008                |
| -10             | -6                  | 0.007                |
| 0               | -4                  | 0.005                |
| 10              | -4                  | 0.005                |
| 20              | -3                  | 0.004                |
| 30              | -3                  | 0.004                |
| 40              | -5                  | 0.006                |
| 50              | -5                  | 0.006                |

**WCDMA Band IV**
**Frequency Error vs Voltage**

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.5        | -8                  | 0.005                |
| 3.8        | -5                  | 0.003                |
| 4.2        | -7                  | 0.004                |

**Frequency Error vs Temperature**

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -30             | -10                 | 0.006                |
| -20             | -8                  | 0.005                |
| -10             | -6                  | 0.003                |
| 0               | -6                  | 0.003                |
| 10              | -6                  | 0.003                |
| 20              | -5                  | 0.003                |
| 30              | -5                  | 0.003                |
| 40              | -7                  | 0.004                |
| 50              | -9                  | 0.005                |

## A.5 OCCUPIED BANDWIDTH

### A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II, WCDMA Band V and WCDMA Band IV. The table below lists the measured 99% OBW. Spectrum analyzer plots are included on the following pages.

#### WCDMA Band II(99% OBW)

| Frequency(MHz) | Occupied Bandwidth (99%OBW)( MHz) |
|----------------|-----------------------------------|
| 1852.4         | 4.167                             |
| 1880.0         | 4.167                             |
| 1907.6         | 4.167                             |


#### WCDMA Band II

##### Channel 9262-Occupied Bandwidth (99% OBW)

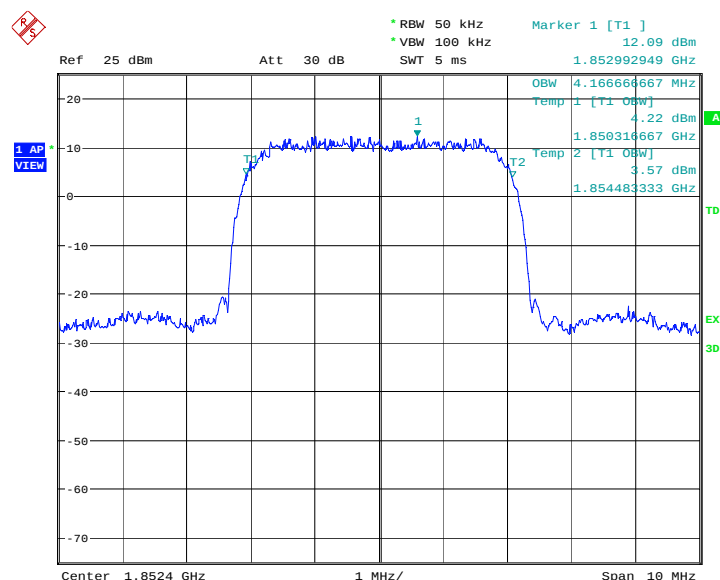


Date: 21.AUG.2012 11:27:53

### Channel 9400-Occupied Bandwidth (99% OBW)

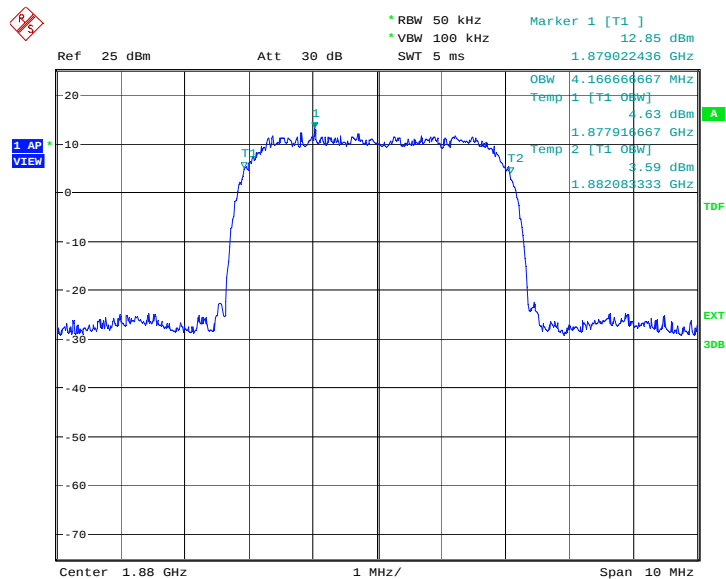

Date: 21.AUG.2012 11:28:28

### Channel 9538-Occupied Bandwidth (99% OBW)

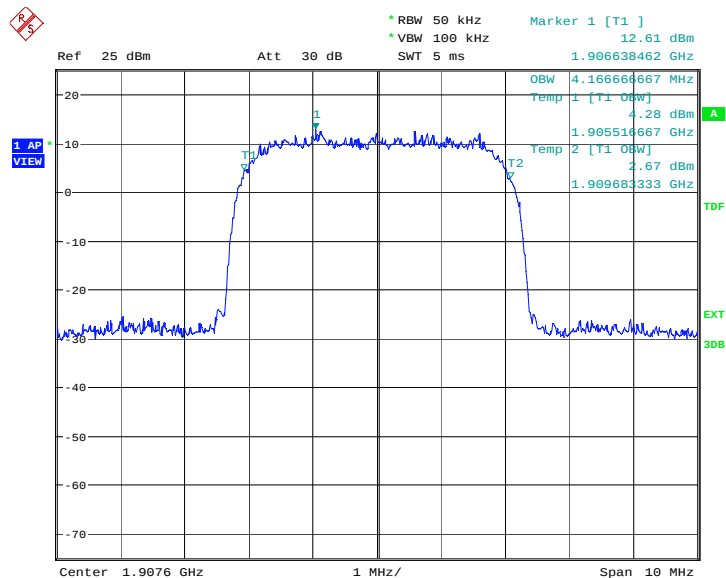


Date: 21.AUG.2012 11:29:02

### WCDMA Band II(99% OBW)-IC

| Frequency(MHz) | Occupied Bandwidth (99% OBW)( MHz) |
|----------------|------------------------------------|
| 1852.4         | 4.167                              |
| 1880.0         | 4.167                              |
| 1907.6         | 4.167                              |


### WCDMA Band II

#### Channel 9262-Occupied Bandwidth (99% OBW)

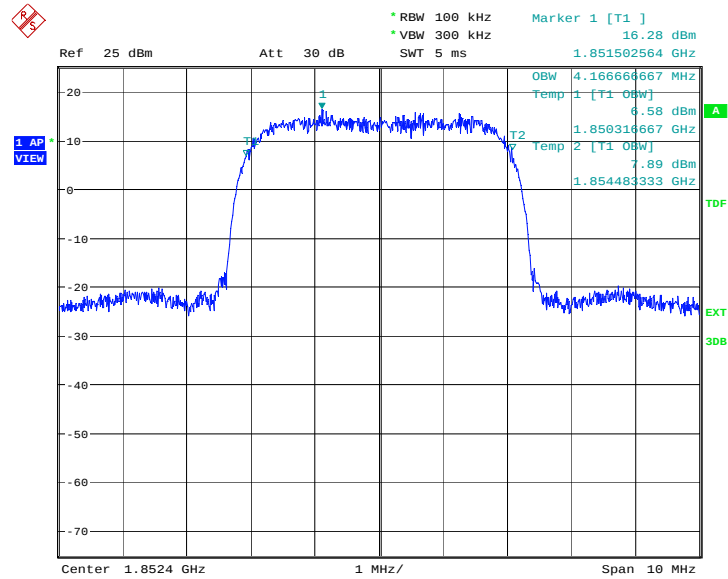


Date: 21.AUG.2012 11:31:46

### Channel 9400-Occupied Bandwidth (99% OBW)

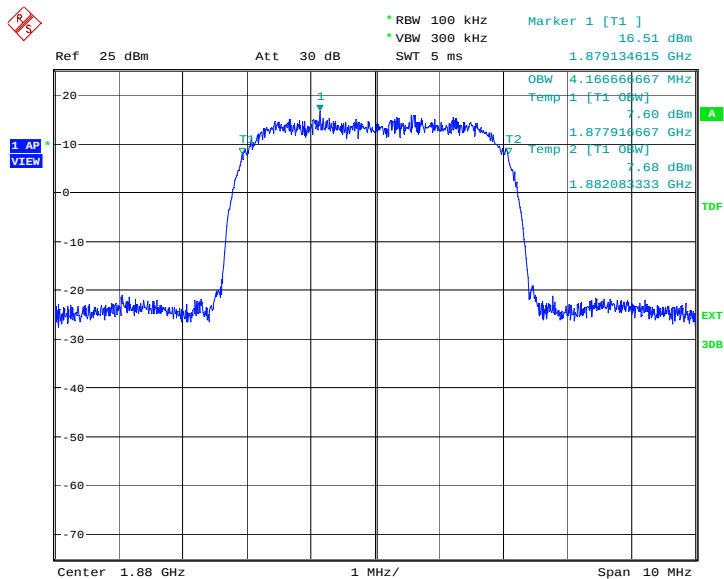

Date: 21.AUG.2012 11:32:20

### Channel 9538-Occupied Bandwidth (99% OBW)

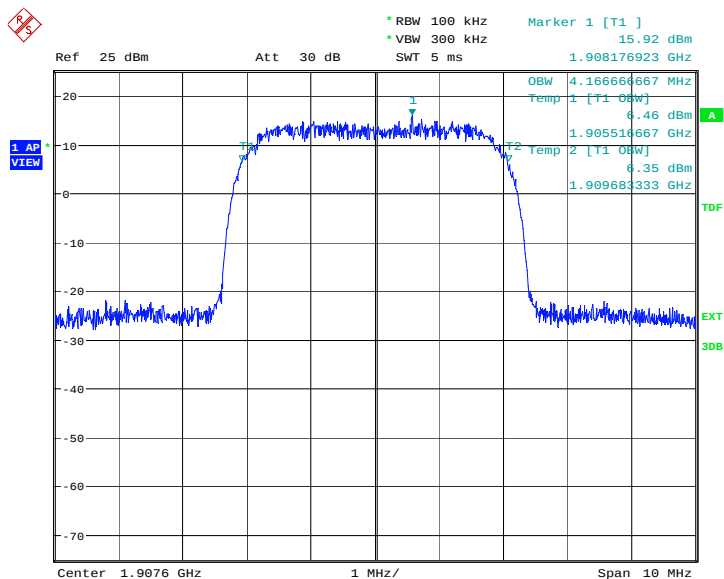


Date: 21.AUG.2012 11:32:55

### WCDMA Band V(99% OBW)

| Frequency(MHz) | Occupied Bandwidth (99% OBW)( MHz) |
|----------------|------------------------------------|
| 826.4          | 4.183                              |
| 836.6          | 4.167                              |
| 846.6          | 4.167                              |


### WCDMA Band V

#### Channel 4132-Occupied Bandwidth (99% OBW)

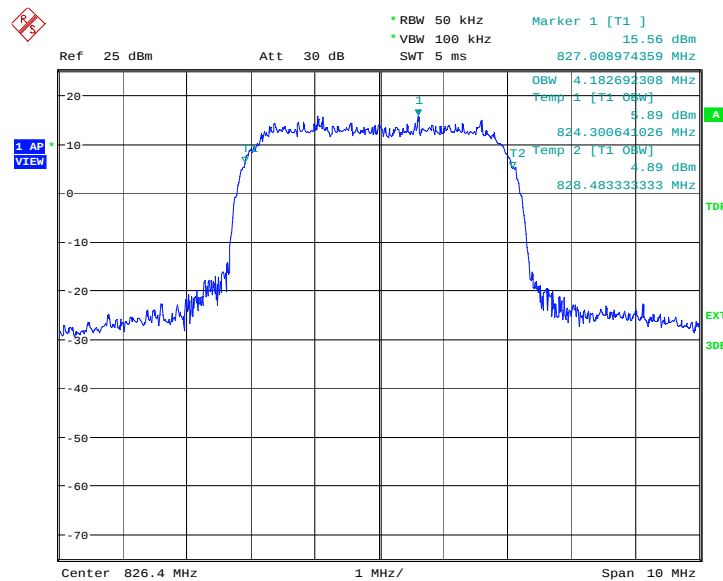


Date: 21.AUG.2012 11:46:28

#### Channel 4183-Occupied Bandwidth (99% OBW)

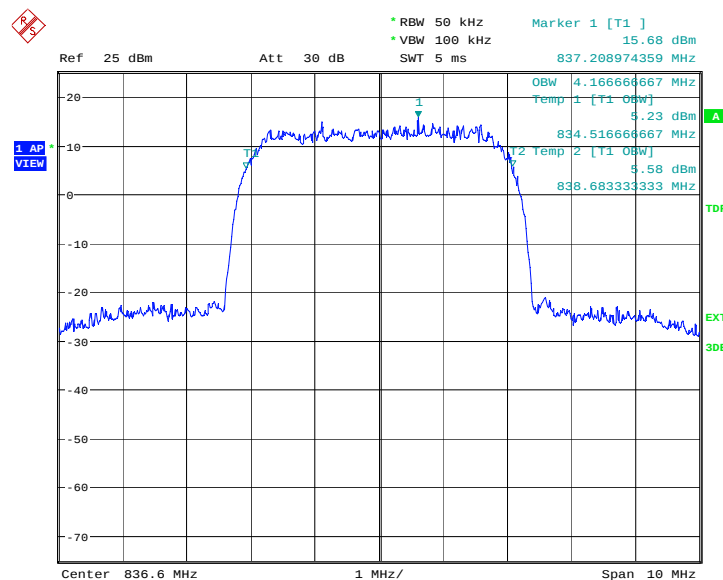

Date: 21.AUG.2012 11:47:03

### Channel 4233-Occupied Bandwidth (99% OBW)

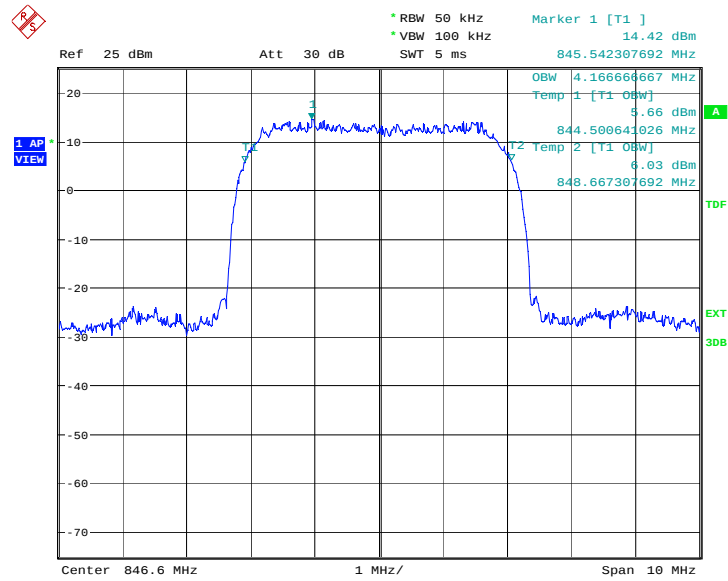


Date: 21.AUG.2012 11:47:37

### WCDMA Band V(99% OBW)-IC

| Frequency(MHz) | Occupied Bandwidth (99% OBW)( MHz) |
|----------------|------------------------------------|
| 826.4          | 4.167                              |
| 836.6          | 4.183                              |
| 846.6          | 4.167                              |


### WCDMA Band V

#### Channel 4132-Occupied Bandwidth (99% OBW)

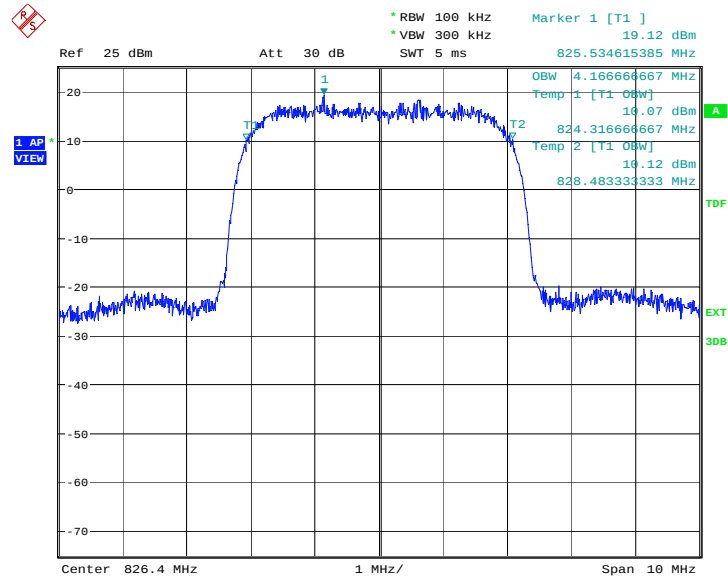


Date: 21.AUG.2012 11:50:21

### Channel 4183-Occupied Bandwidth (99% OBW)

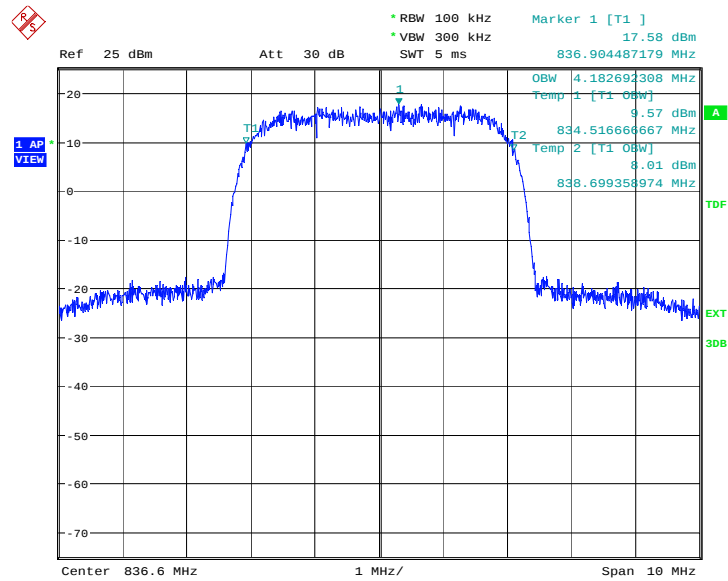

Date: 21.AUG.2012 11:50:55

### Channel 4233-Occupied Bandwidth (99% OBW)

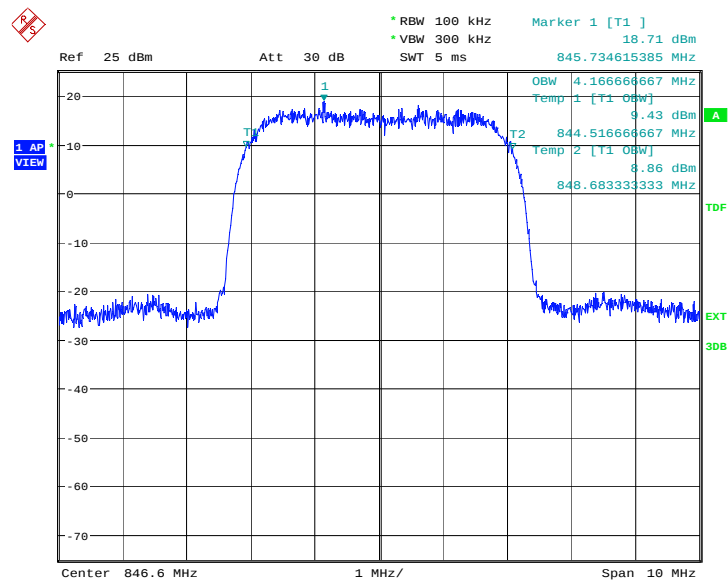


Date: 21.AUG.2012 11:51:30

### WCDMA Band IV(99% OBW)

| Frequency(MHz) | Occupied Bandwidth (99% OBW)( MHz) |
|----------------|------------------------------------|
| 1712.4         | 4.167                              |
| 1740.0         | 4.183                              |
| 1752.6         | 4.167                              |


### WCDMA Band IV

#### Channel 1312-Occupied Bandwidth (99% OBW)

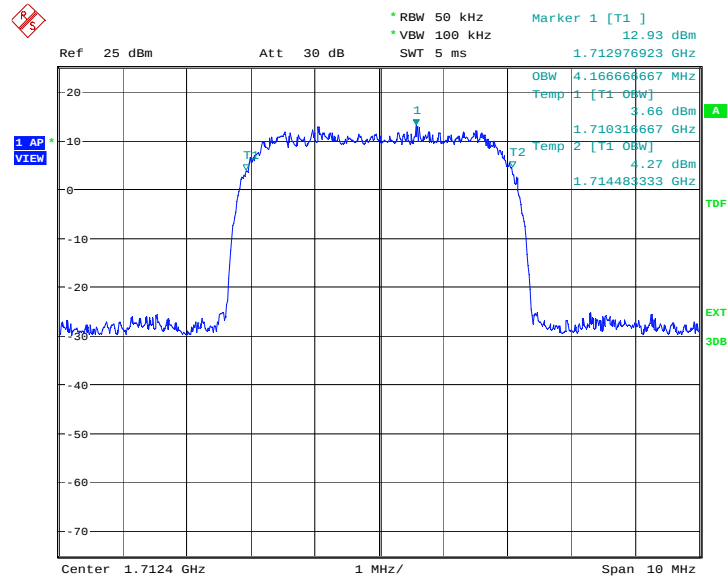


Date: 28.AUG.2012 01:20:05

### Channel 1450-Occupied Bandwidth (99% OBW)

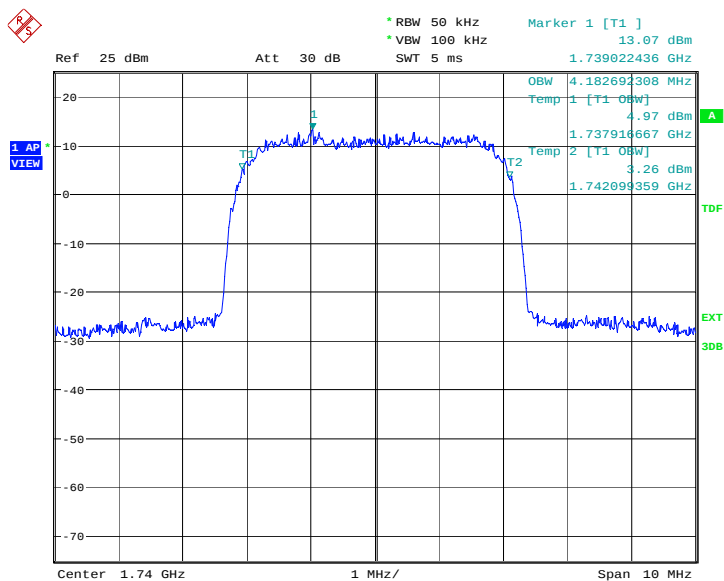

Date: 28.AUG.2012 01:20:40

### Channel 1513-Occupied Bandwidth (99% OBW)

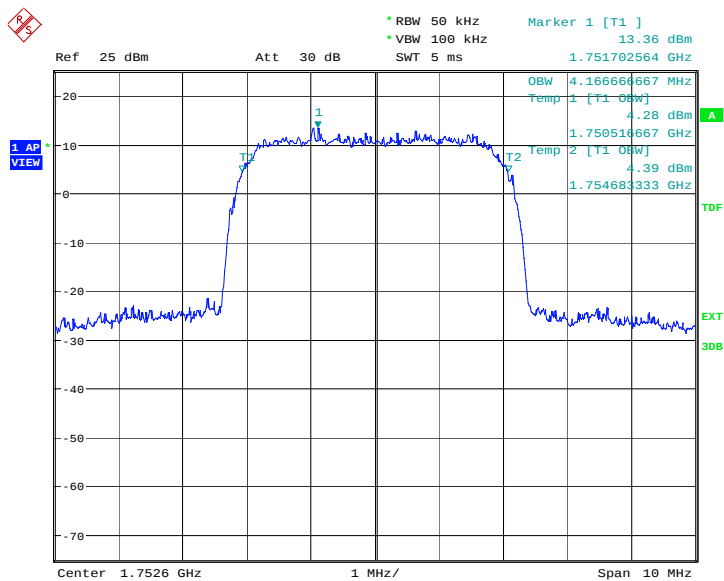


Date: 28.AUG.2012 01:21:14

### WCDMA Band IV(99% OBW)-IC


| Frequency(MHz) | Occupied Bandwidth (99% OBW)( MHz) |
|----------------|------------------------------------|
| 1712.4         | 4.167                              |
| 1740           | 4.183                              |
| 1752.6         | 4.167                              |

### Channel 1312-Occupied Bandwidth (99% OBW)

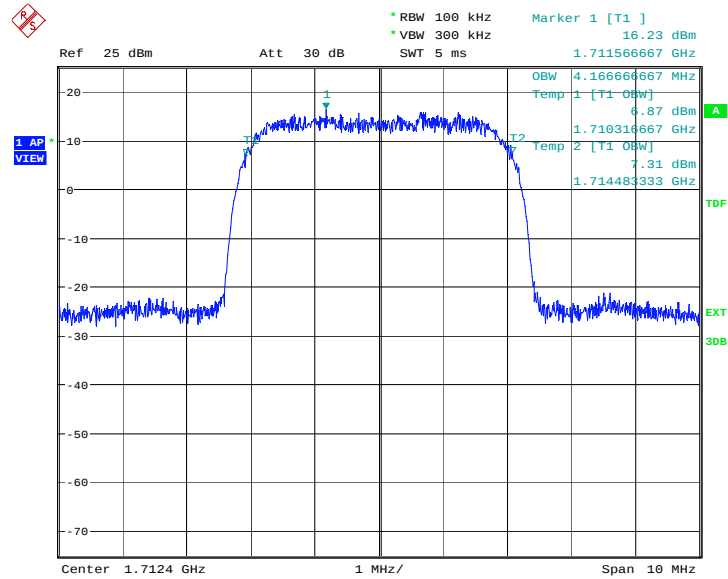


Date: 28.AUG.2012 01:23:59

### Channel 1450-Occupied Bandwidth (99% OBW)

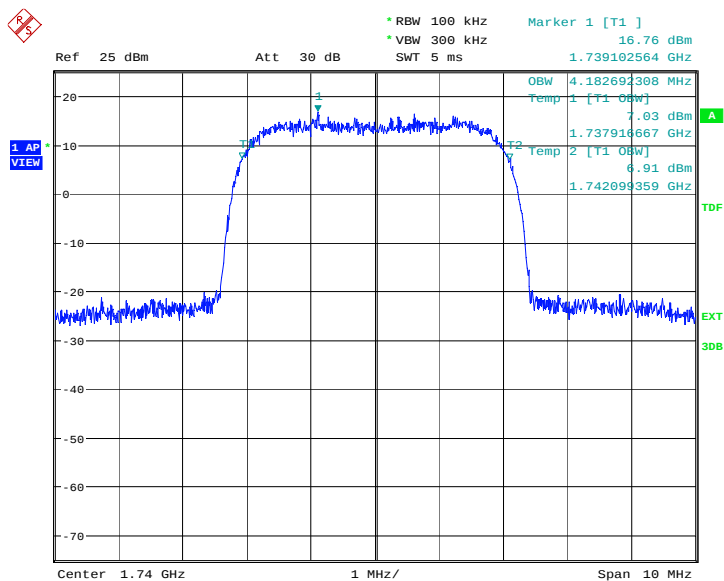

Date: 28.AUG.2012 01:24:33

### Channel 1513-Occupied Bandwidth (99% OBW)

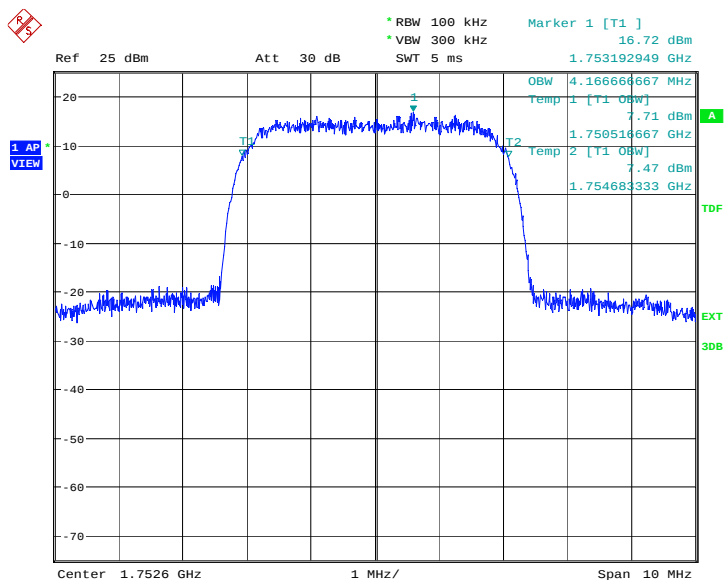

Date: 28.AUG.2012 01:25:08

## A.6 EMISSION BANDWIDTH

### A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II, WCDMA Band V and WCDMA Band IV. Table below lists the measured 100% OBW. Spectrum analyzer plots are included on the following pages.

#### WCDMA Band II(100% OBW)

| Frequency(MHz) | Occupied Bandwidth (100% OBW)( MHz) |
|----------------|-------------------------------------|
| 1852.4         | 4.487                               |
| 1880.0         | 4.487                               |
| 1907.6         | 4.487                               |


#### WCDMA Band II

##### Channel 9262-Occupied Bandwidth (100% OBW)

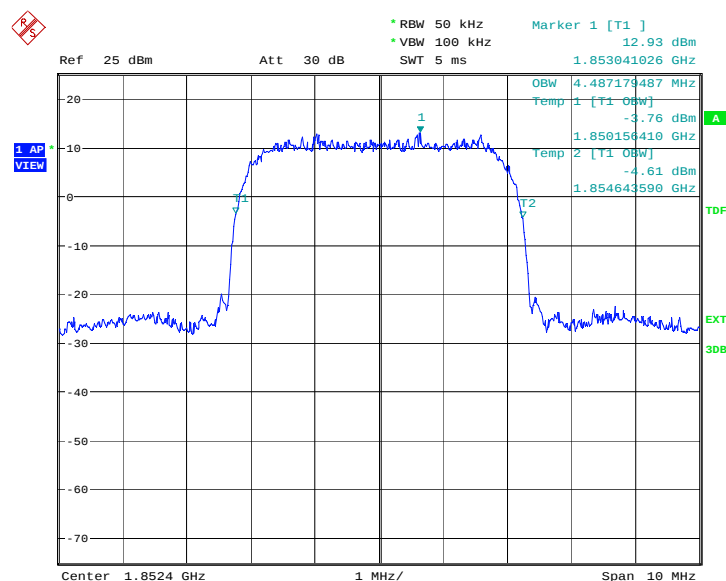


Date: 21.AUG.2012 11:29:38

### Channel 9400-Occupied Bandwidth (100% OBW)

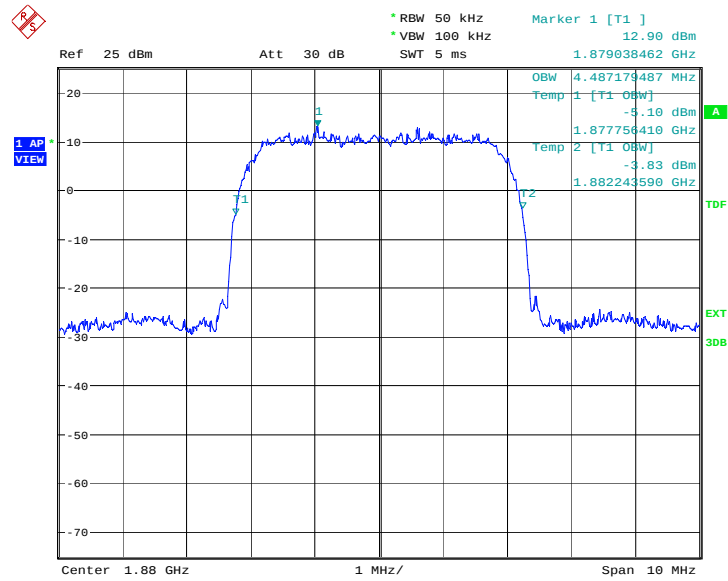

Date: 21.AUG.2012 11:30:13

### Channel 9538-Occupied Bandwidth (100% OBW)

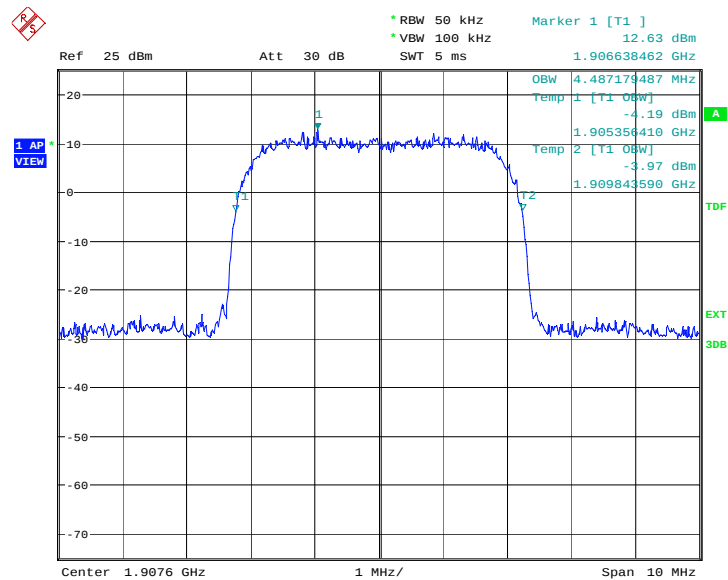


Date: 21.AUG.2012 11:30:47

### WCDMA Band V(100% OBW)

| Frequency(MHz) | Occupied Bandwidth (100% OBW)( MHz) |
|----------------|-------------------------------------|
| 826.40         | 4.503                               |
| 836.60         | 4.503                               |
| 846.60         | 4.487                               |


### WCDMA Band V

#### Channel 4132-Occupied Bandwidth (100% OBW)

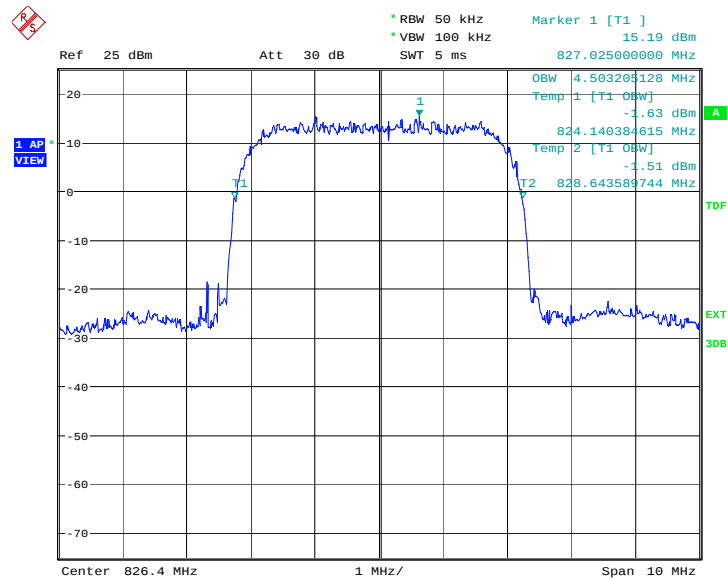


Date: 21.AUG.2012 11:48:13

### Channel 4183-Occupied Bandwidth (100% OBW)

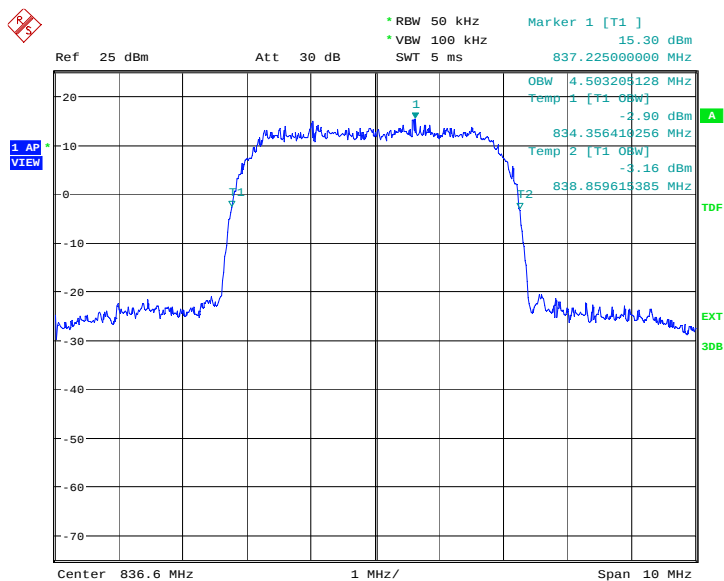

Date: 21.AUG.2012 11:48:48

### Channel 4233-Occupied Bandwidth (100% OBW)

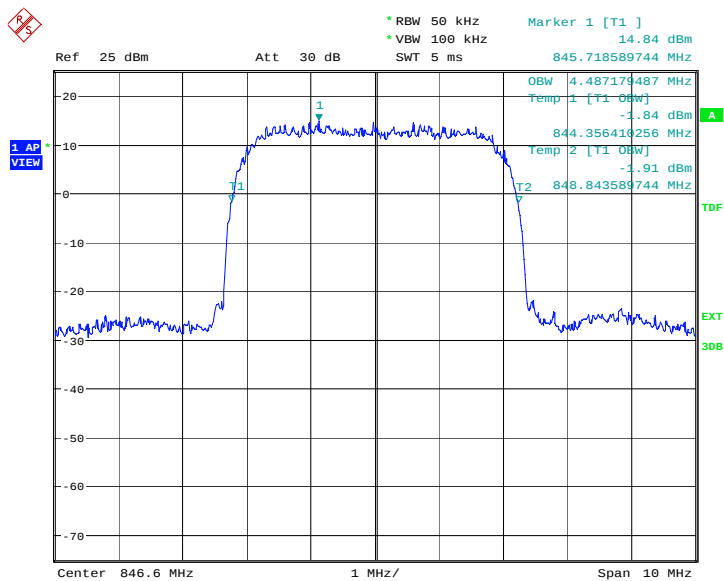


Date: 21.AUG.2012 11:49:22

### WCDMA Band IV(100% OBW)

| Frequency(MHz) | Occupied Bandwidth (100% OBW)( MHz) |
|----------------|-------------------------------------|
| 1712.4         | 4.503                               |
| 1740.0         | 4.487                               |
| 1752.6         | 4.503                               |


### WCDMA Band IV

#### Channel 1312-Occupied Bandwidth (100% OBW)

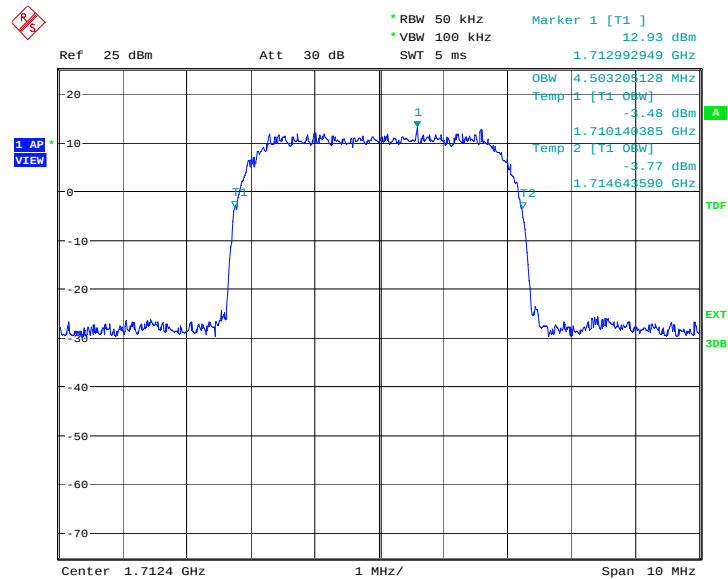


Date: 28.AUG.2012 01:21:51

### Channel 1450-Occupied Bandwidth (100% OBW)

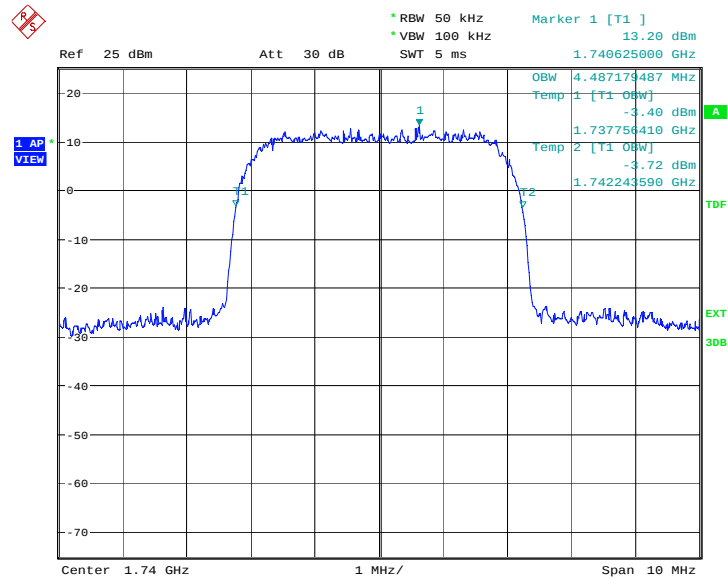


Date: 28.AUG.2012 01:22:25

### Channel 1513-Occupied Bandwidth (100% OBW)

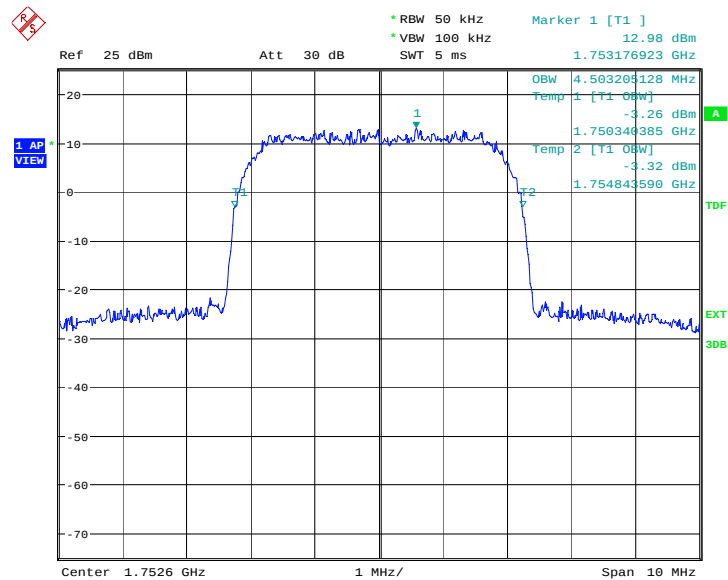

Date: 28.AUG.2012 01:23:00


## LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262



Date: 21.AUG.2012 11:31:10


## WCDMA Band V

### LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

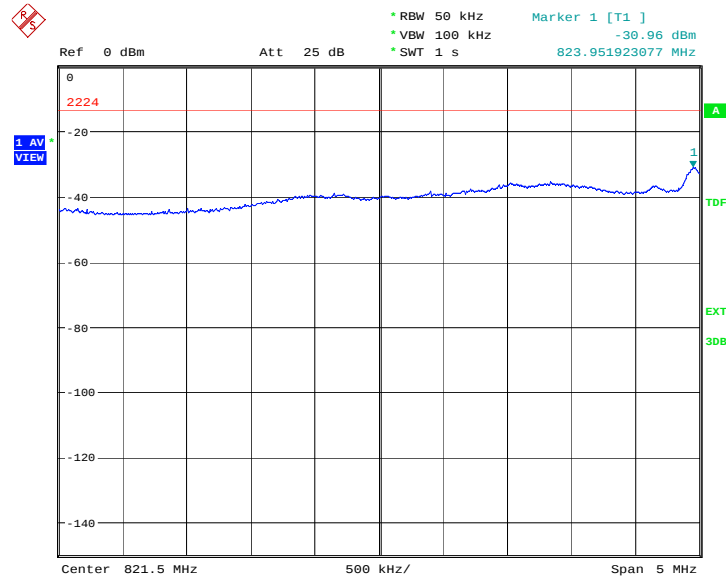


Date: 21.AUG.2012 11:49:34

### HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

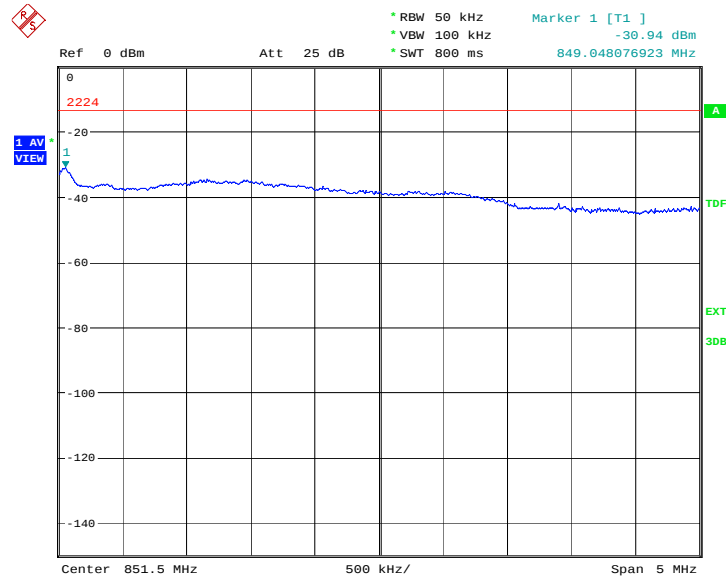

Date: 21.AUG.2012 11:49:45

### LOW BAND EDGE BLOCK-A (WCDMA Band IV)-Channel 1312



Date: 28.AUG.2012 01:23:22

## **A.8 CONDUCTED SPURIOUS EMISSION**

### **A.8.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz. For the equipment of WCDMA Band IV, this equates to a frequency range of 30 MHz to 17.55 GHz, data taken from 30 MHz to 20 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:  
The trace mode is set to MaxHold to get the highest signal at each frequency;  
Wait 25 seconds;  
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **WCDMA Band II Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 9262    | 1852.40         |
| 9400    | 1880.00         |
| 9538    | 1907.60         |

#### **WCDMA Band V Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 4132    | 826.40          |
| 4183    | 836.60          |
| 4233    | 846.60          |

#### **WCDMA Band IV Transmitter**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 1312    | 1712.40         |
| 1450    | 1740.00         |
| 1513    | 1752.60         |

### **A.8.2 Measurement Limit**

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43


+ 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

## A.8.3 Measurement result

### WCDMA Band II

#### A.8.3.1 Channel 9262: 30MHz –1GHz

Spurious emission limit –13dBm.

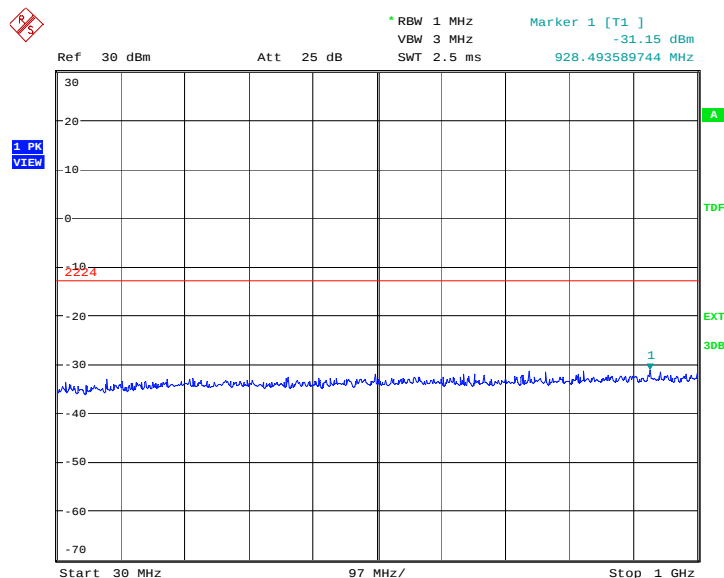


Date: 21.AUG.2012 11:33:26

#### A.8.3.2 Channel 9262: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

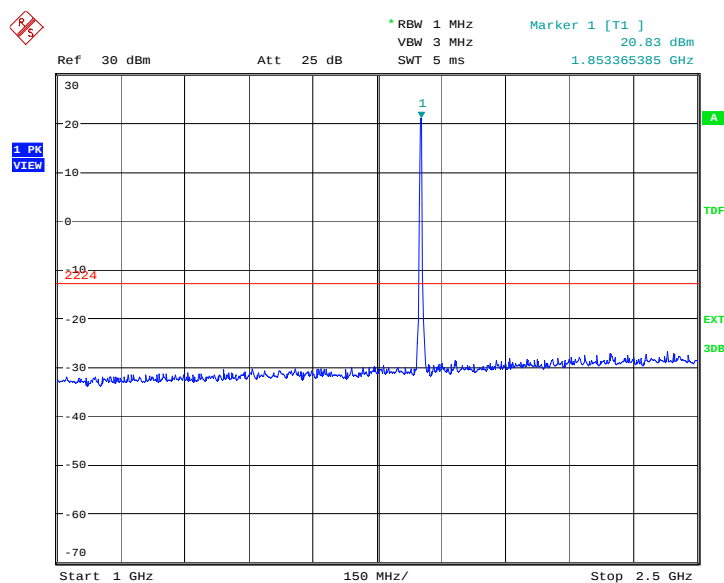

Date: 21.AUG.2012 11:33:54

### A.8.3.3 Channel 9262: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

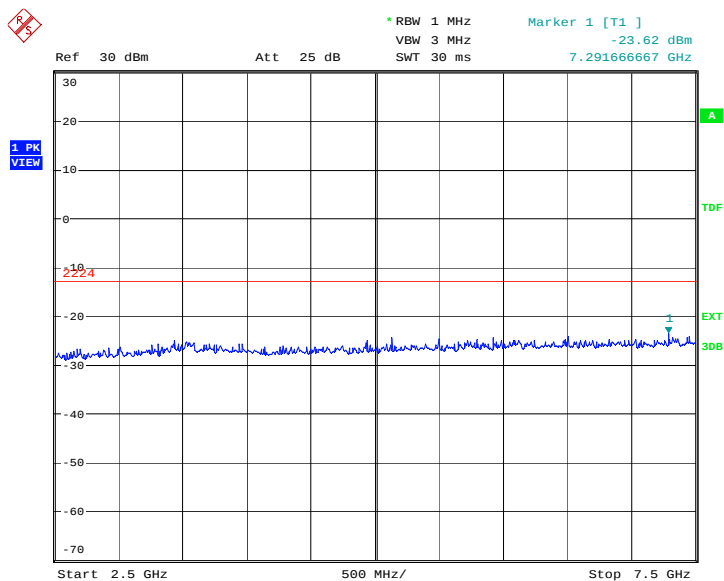

Date: 21.AUG.2012 11:34:23

### A.8.3.4 Channel 9262: 7.5GHz –10GHz


Spurious emission limit –13dBm.

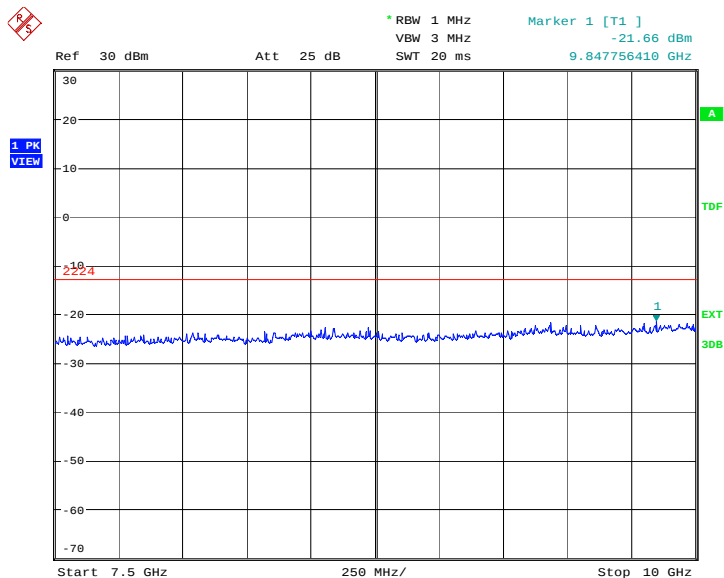

Date: 21.AUG.2012 11:34:51

### A.8.3.5 Channel 9262: 10GHz –15GHz


Spurious emission limit –13dBm.

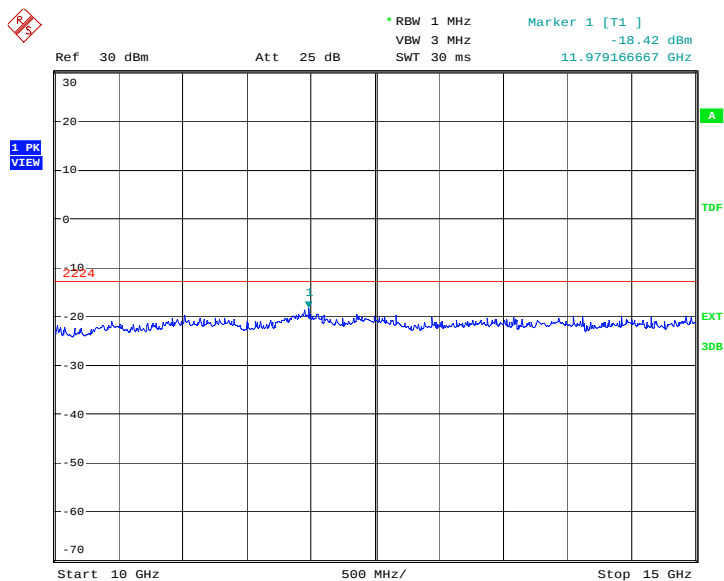

Date: 21.AUG.2012 11:35:19

### A.8.3.6 Channel 9262: 15GHz –20GHz


Spurious emission limit –13dBm.

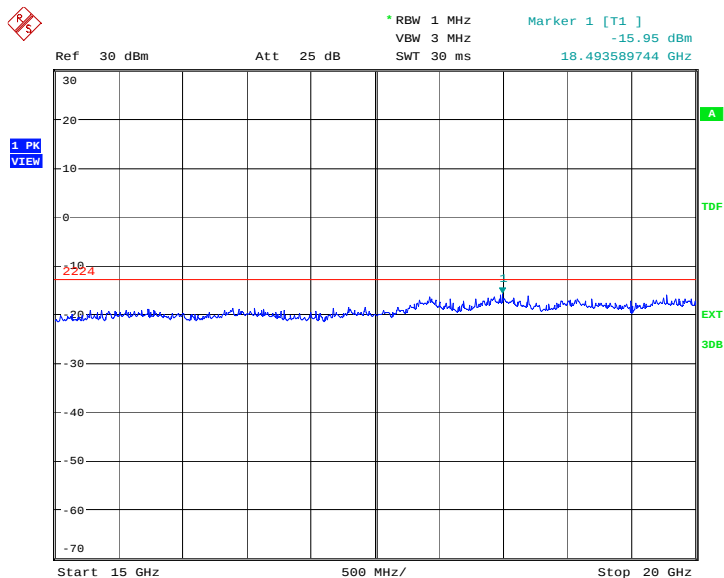

Date: 21.AUG.2012 11:35:47

### A.8.3.7 Channel 9400: 30MHz –1GHz

Spurious emission limit –13dBm.

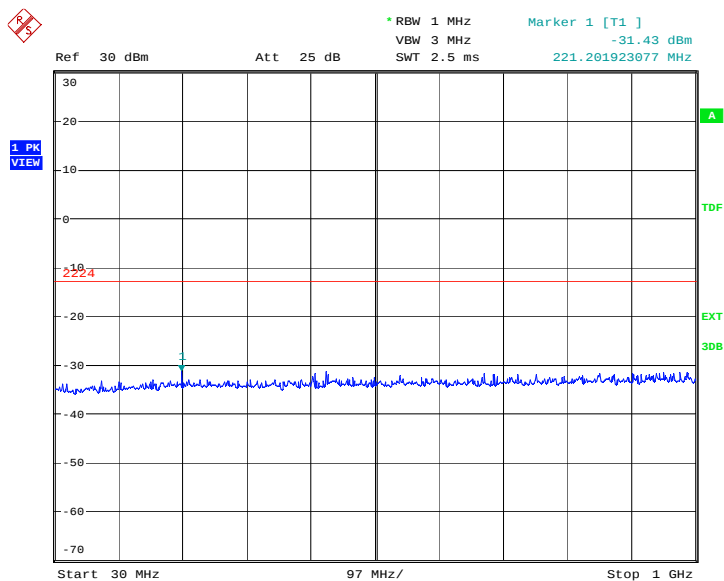


Date: 21.AUG.2012 11:36:18

### A.8.3.8 Channel 9400: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

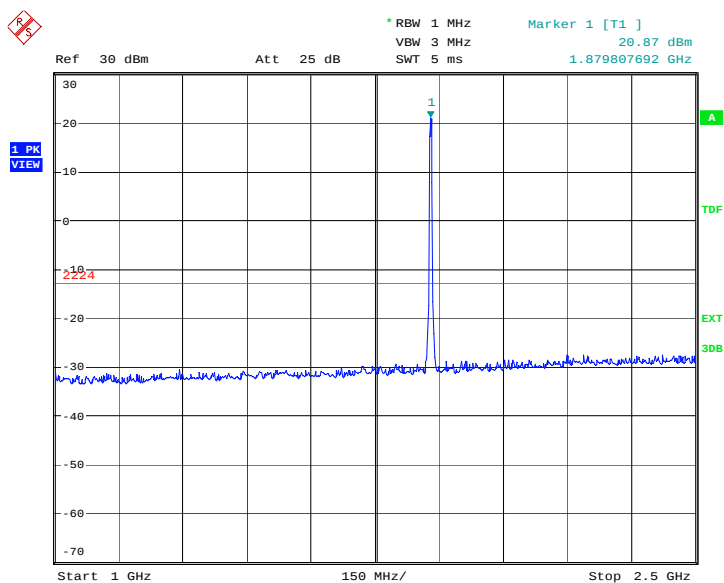

Date: 21.AUG.2012 11:36:47

### A.8.3.9 Channel 9400: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

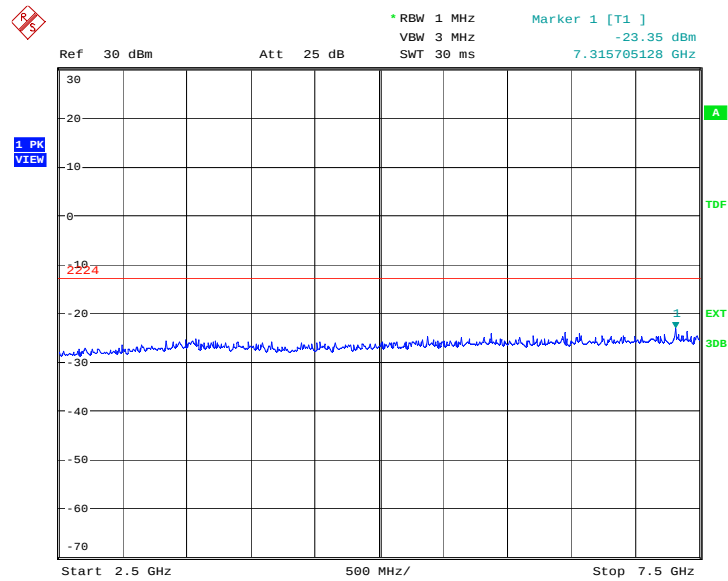

Date: 21.AUG.2012 11:37:15

### A.8.3.10 Channel 9400: 7.5GHz –10GHz


Spurious emission limit –13dBm.

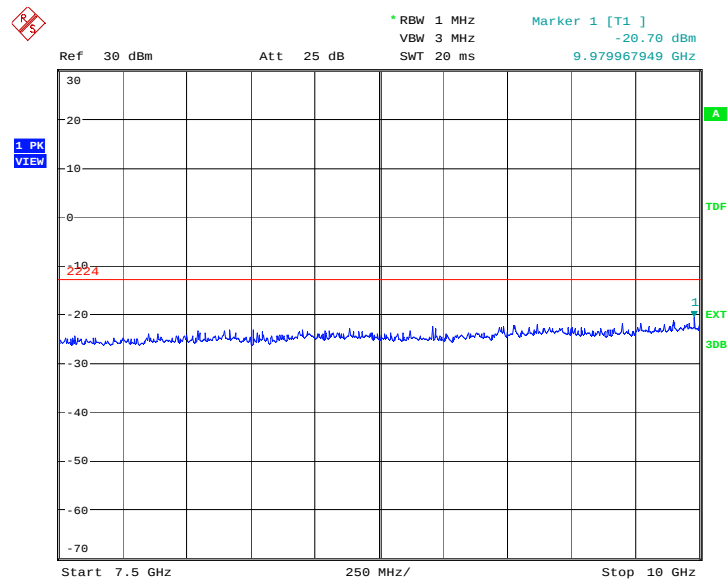

Date: 21.AUG.2012 11:37:43

### A.8.3.11 Channel 9400: 10GHz –15GHz


Spurious emission limit –13dBm.

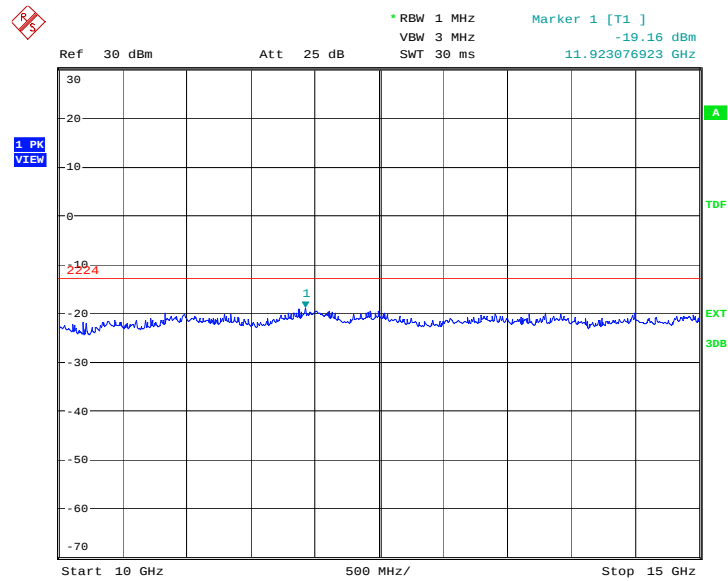

Date: 21.AUG.2012 11:38:11

### A.8.3.12 Channel 9400: 15GHz –20GHz


Spurious emission limit –13dBm.

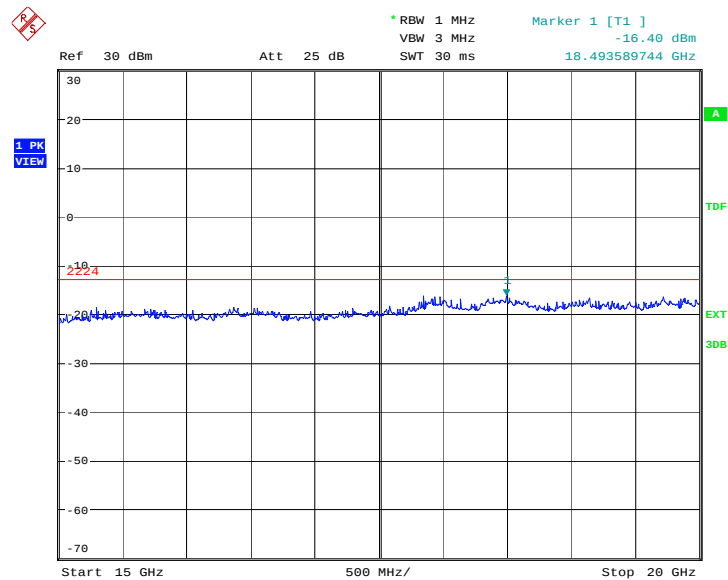

Date: 21.AUG.2012 11:38:40

### A.8.3.13 Channel 9538: 30MHz –1GHz

Spurious emission limit –13dBm.

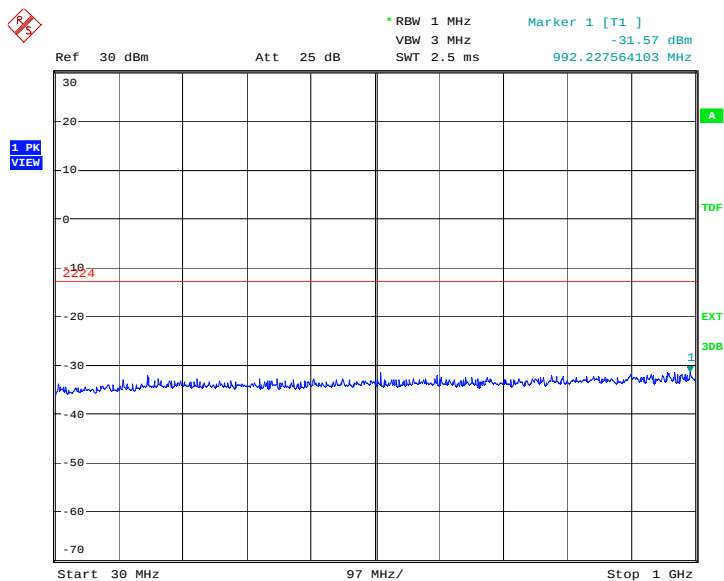


Date: 21.AUG.2012 11:39:11

### A.8.3.14 Channel 9538: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

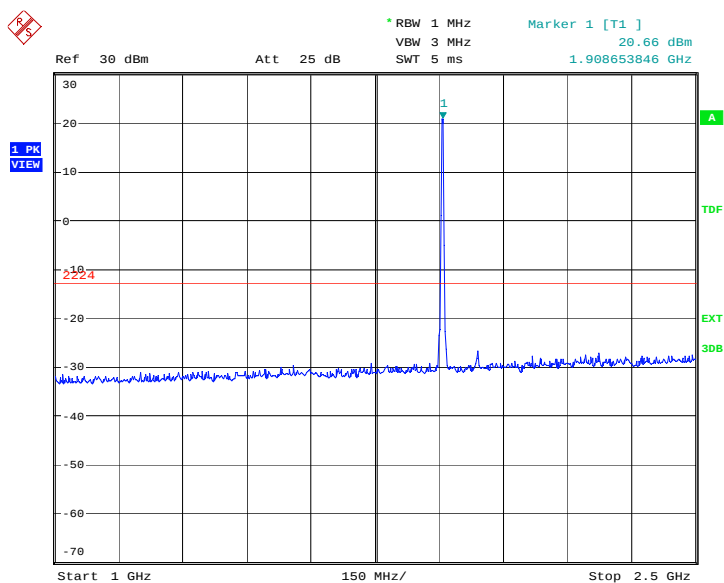

Date: 21.AUG.2012 11:39:39

### A.8.3.15 Channel 9538: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

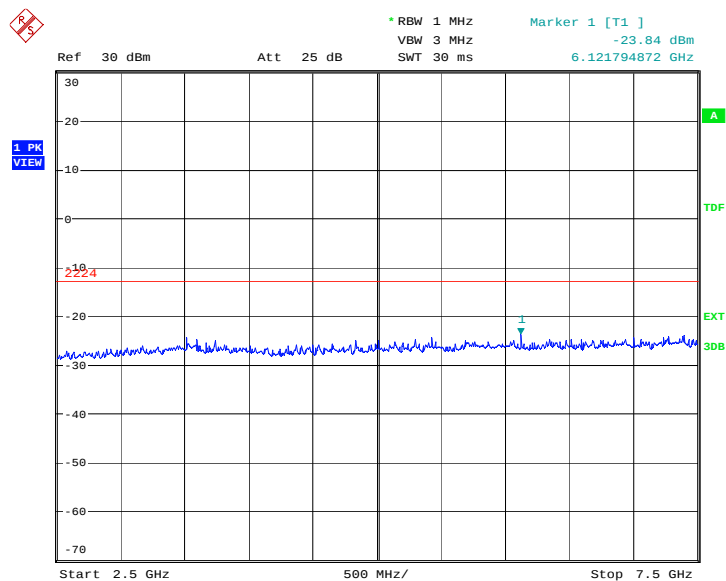

Date: 21.AUG.2012 11:40:07

### A.8.3.16 Channel 9538: 7.5GHz –10GHz


Spurious emission limit –13dBm.

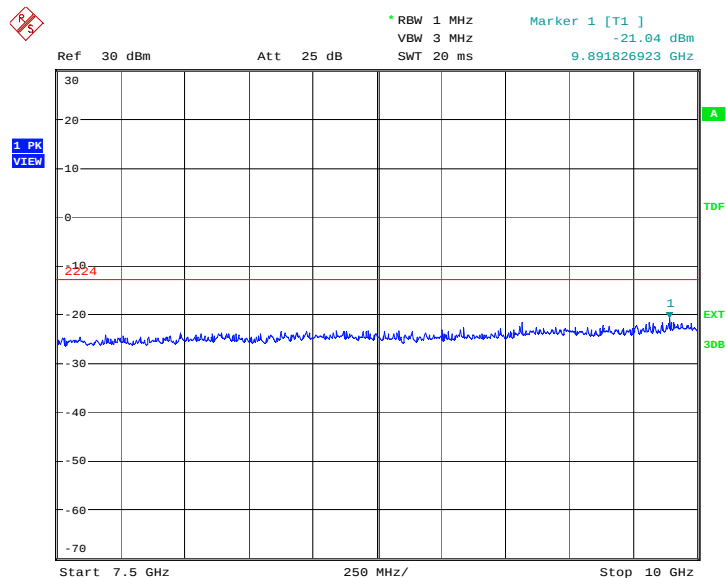

Date: 21.AUG.2012 11:40:35

### A.8.3.17 Channel 9538: 10GHz –15GHz


Spurious emission limit –13dBm.

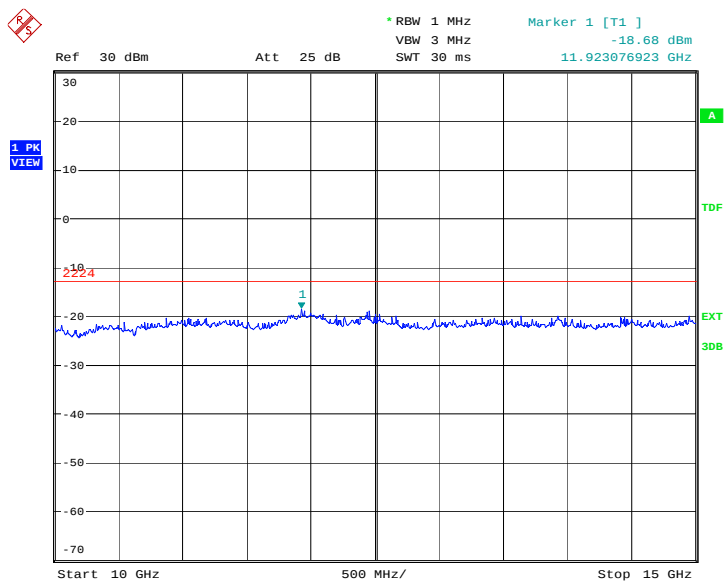

Date: 21.AUG.2012 11:41:03

### A.8.3.18 Channel 9538: 15GHz –20GHz


Spurious emission limit –13dBm.

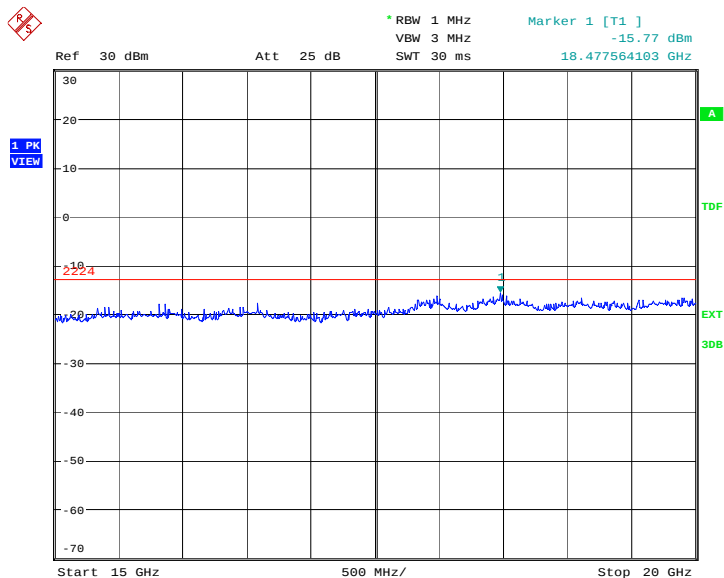

Date: 21.AUG.2012 11:41:32

### A.8.3.19 Idle mode: 30MHz –1GHz


Spurious emission limit –13dBm.

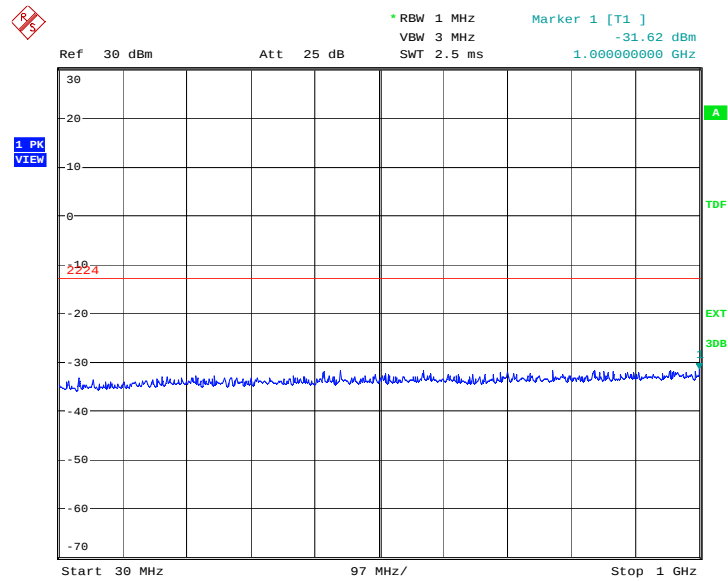

Date: 21.AUG.2012 11:42:01

### A.8.3.20 Idle mode: 1GHz –2.5GHz


Spurious emission limit –13dBm.

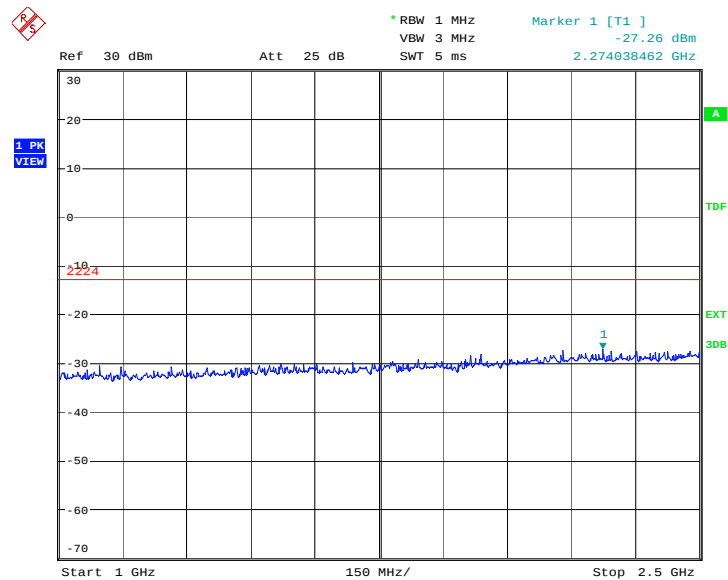

Date: 21.AUG.2012 11:42:29

### A.8.3.21 Idle mode: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

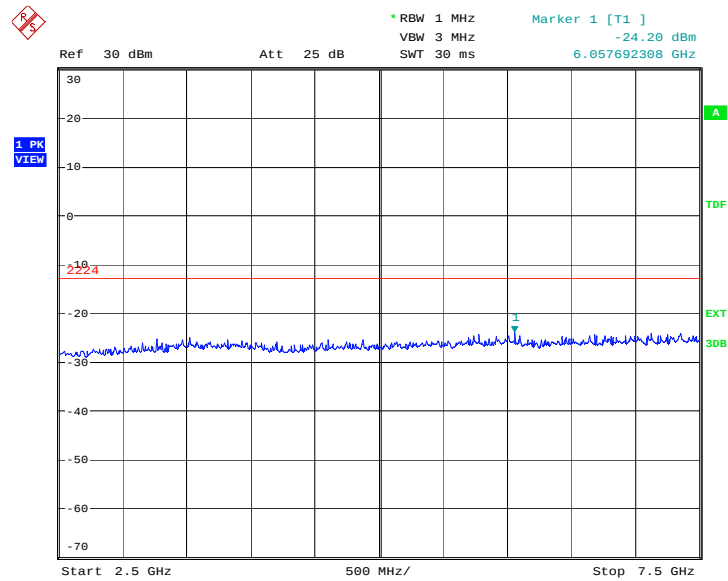

Date: 21.AUG.2012 11:42:57

### A.8.3.22 Idle mode: 7.5GHz –10GHz


Spurious emission limit –13dBm.

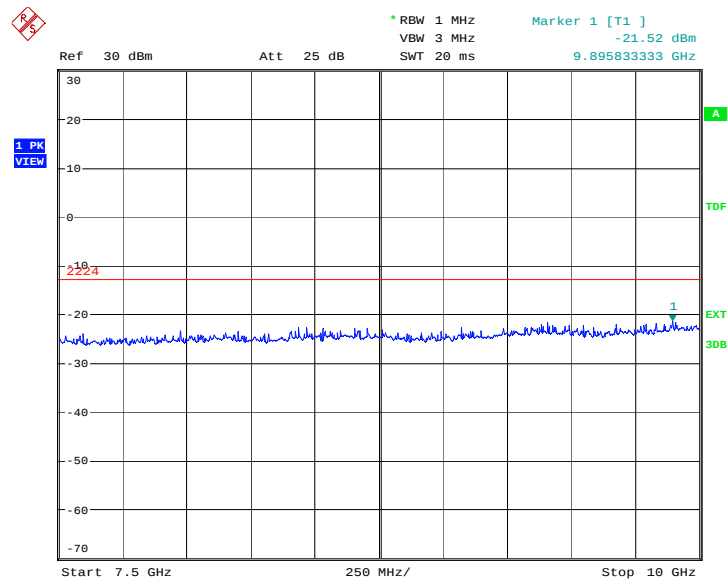

Date: 21.AUG.2012 11:43:25

### A.8.3.23 Idle mode: 10GHz –15GHz


Spurious emission limit –13dBm.

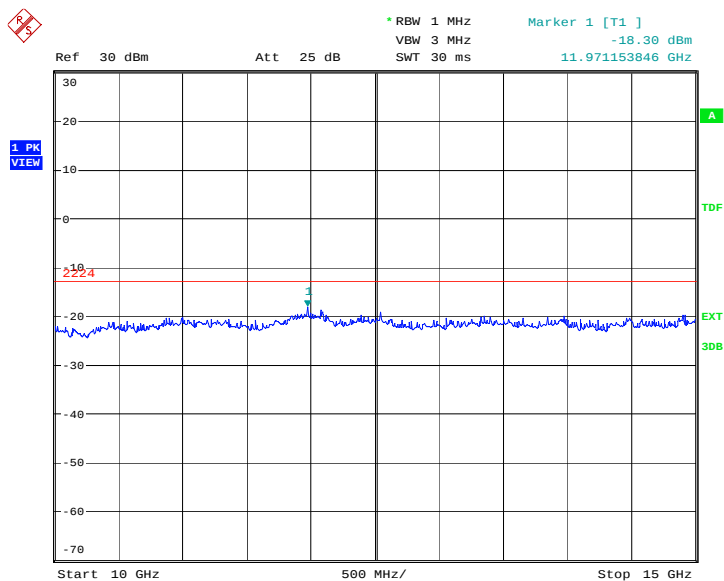

Date: 21.AUG.2012 11:43:54

### A.8.3.24 Idle mode: 15GHz –20GHz

Spurious emission limit –13dBm.

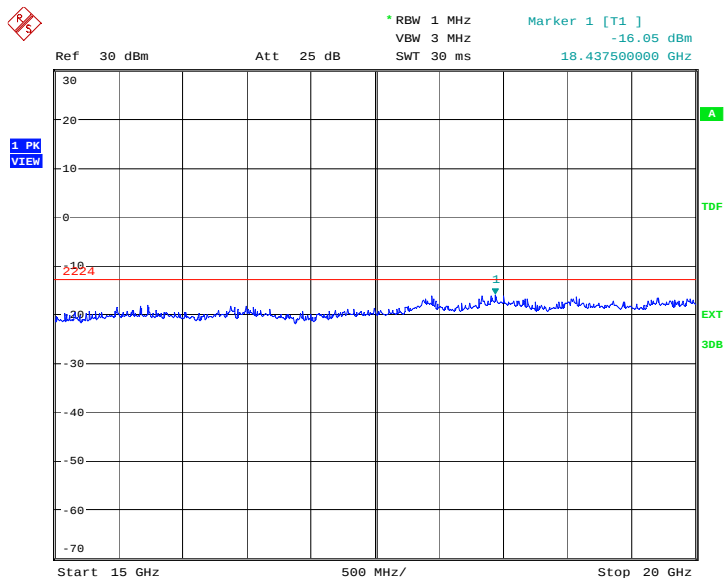


Date: 21.AUG.2012 11:44:22

## WCDMA Band V

### A.8.3.25 Channel 4132: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

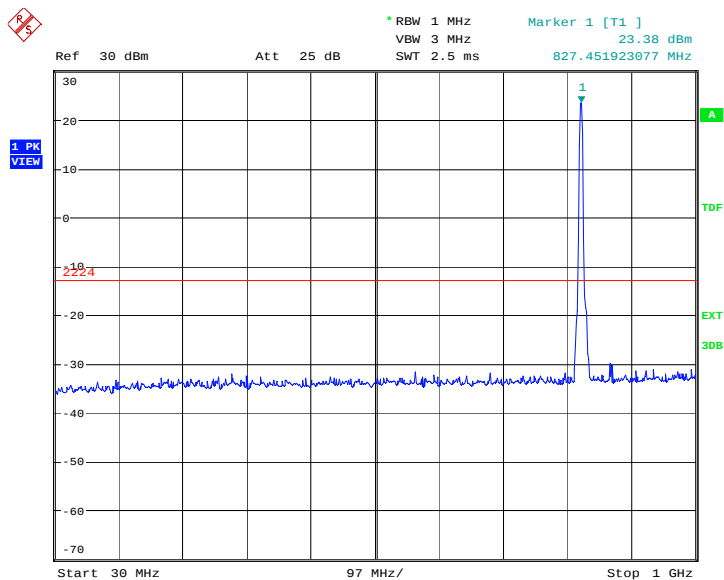

Date: 21.AUG.2012 11:52:01

### A.8.3.26 Channel 4132: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

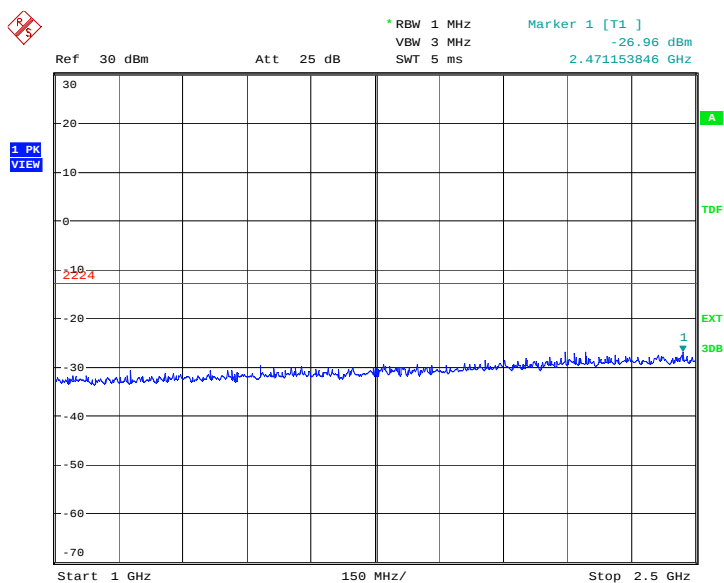


Date: 21.AUG.2012 11:52:29

### A.8.3.27 Channel 4132: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

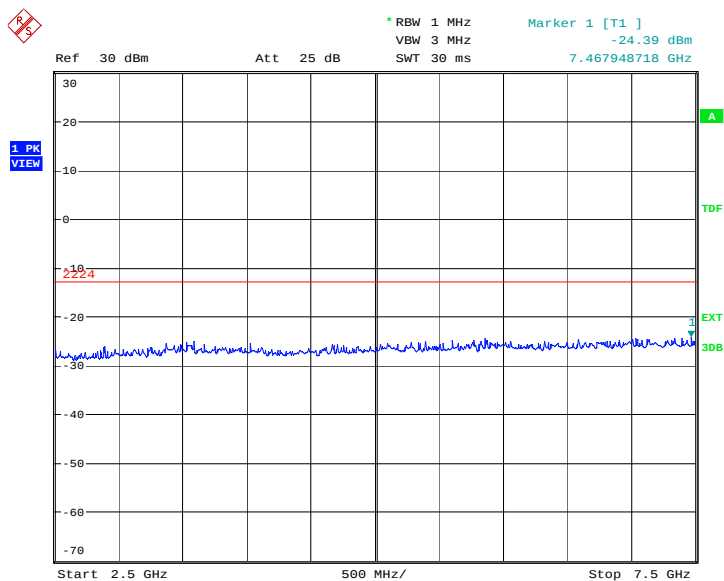

Date: 21.AUG.2012 11:52:57

### A.8.3.28 Channel 4132: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

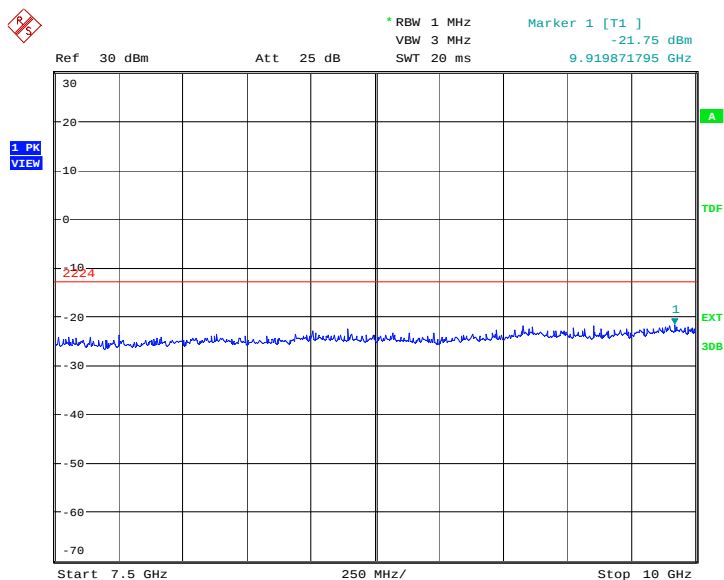


Date: 21.AUG.2012 11:53:25

### A.8.3.29 Channel 4183: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

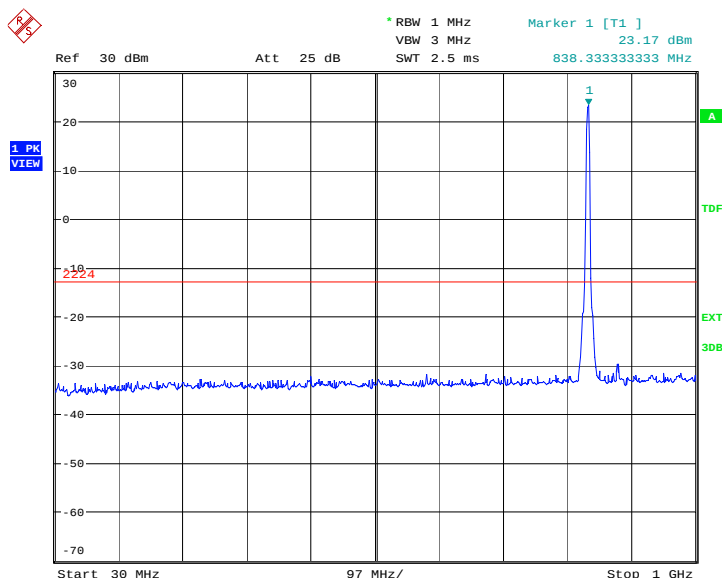

Date: 21.AUG.2012 11:53:57

### A.8.3.30 Channel 4183: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

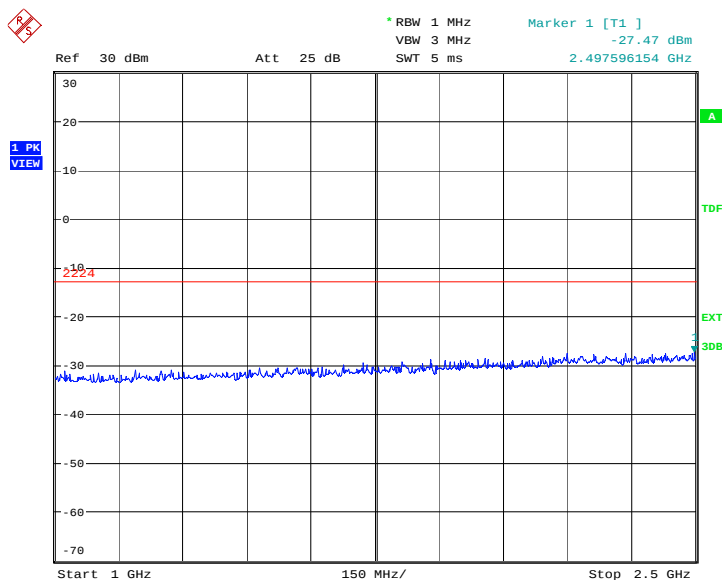


Date: 21.AUG.2012 11:54:25

### A.8.3.31 Channel 4183: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

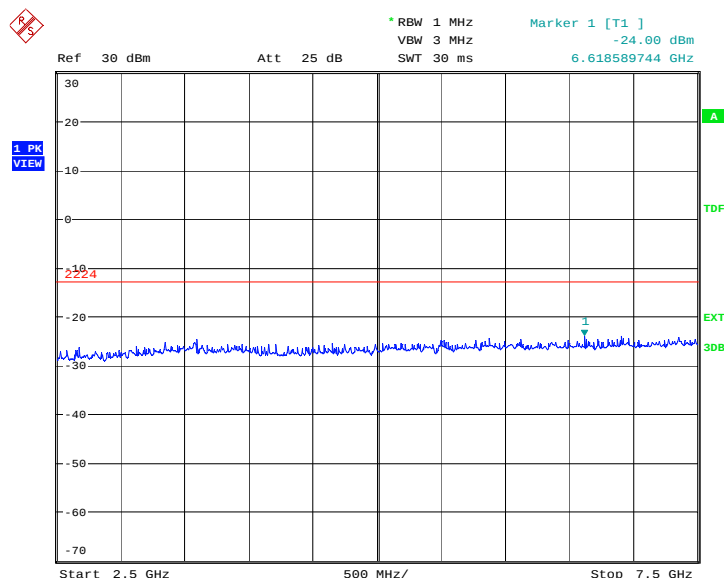

Date: 21.AUG.2012 11:54:53

### A.8.3.32 Channel 4183: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

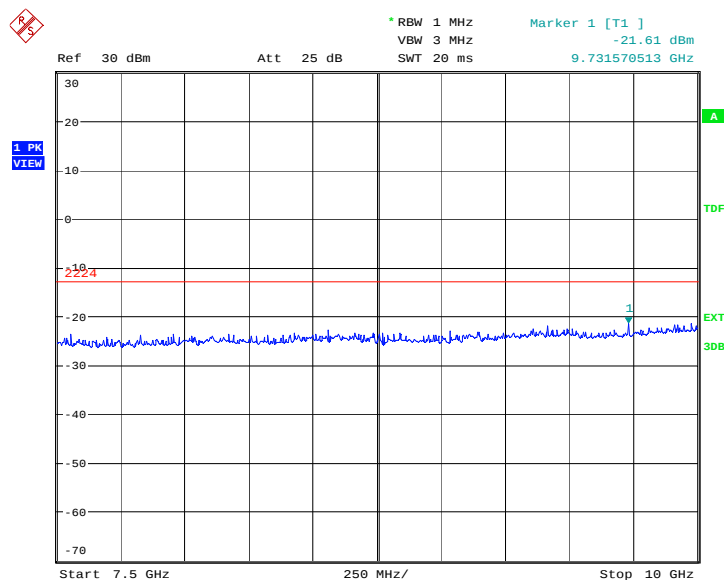


Date: 21.AUG.2012 11:55:21

### A.8.3.33 Channel 4233: 30MHz –1GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

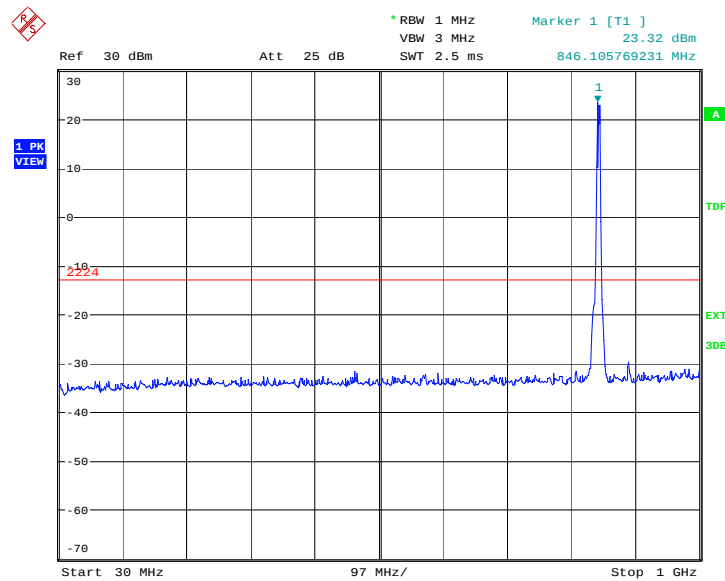

Date: 21.AUG.2012 11:55:52

### A.8.3.34 Channel 4233: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

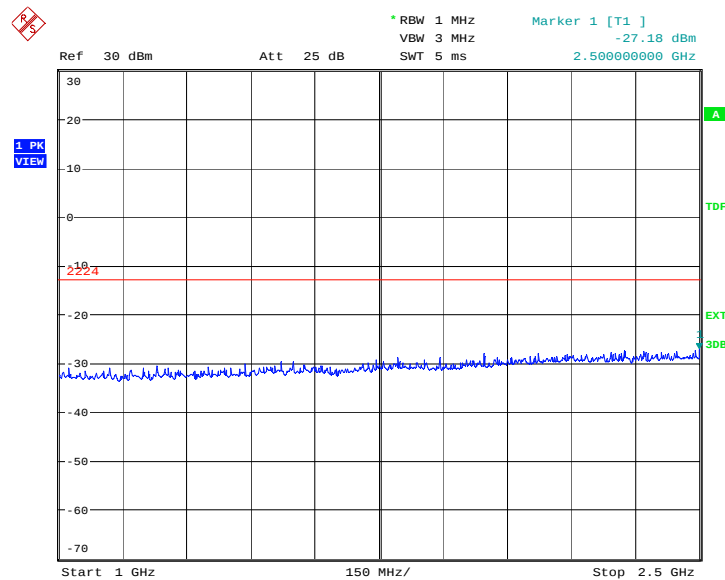


Date: 21.AUG.2012 11:56:21

### A.8.3.35 Channel 4233: 2.5GHz – 7.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

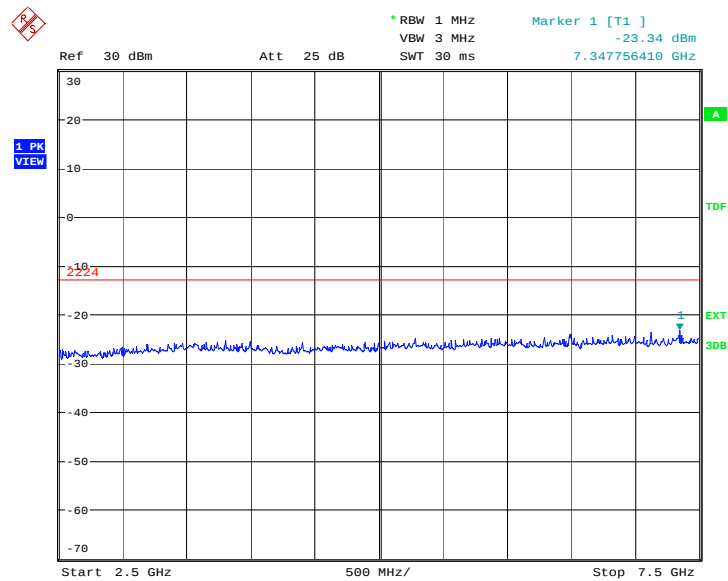

Date: 21.AUG.2012 11:56:49

### A.8.3.36 Channel 4233: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

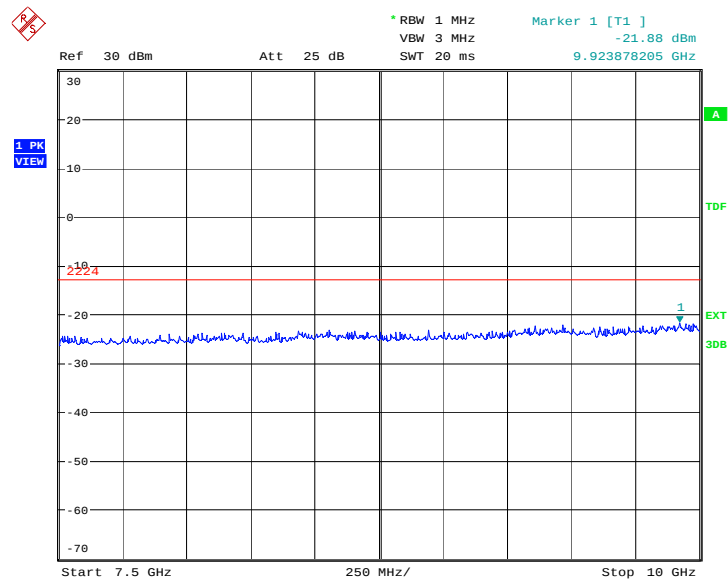

Date: 21.AUG.2012 11:57:17

### A.8.3.37 Idle mode: 30MHz – 1GHz


Spurious emission limit -13dBm.

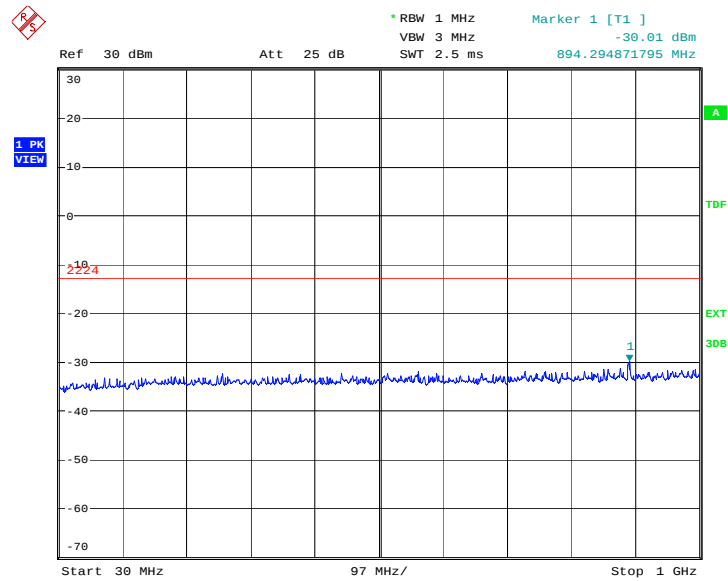

Date: 21.AUG.2012 11:57:46

### A.8.3.38 Idle mode: 1GHz – 2.5GHz


Spurious emission limit -13dBm.

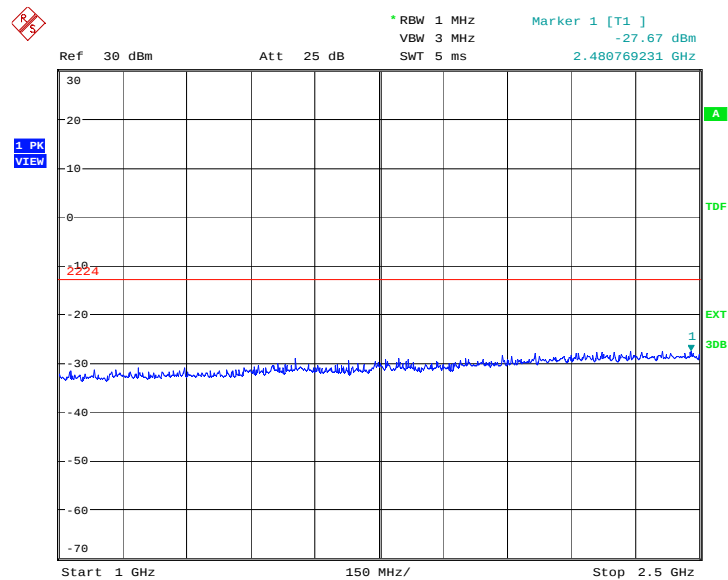

Date: 21.AUG.2012 11:58:14

### A.8.3.39 Idle mode: 2.5GHz – 7.5GHz


Spurious emission limit -13dBm.

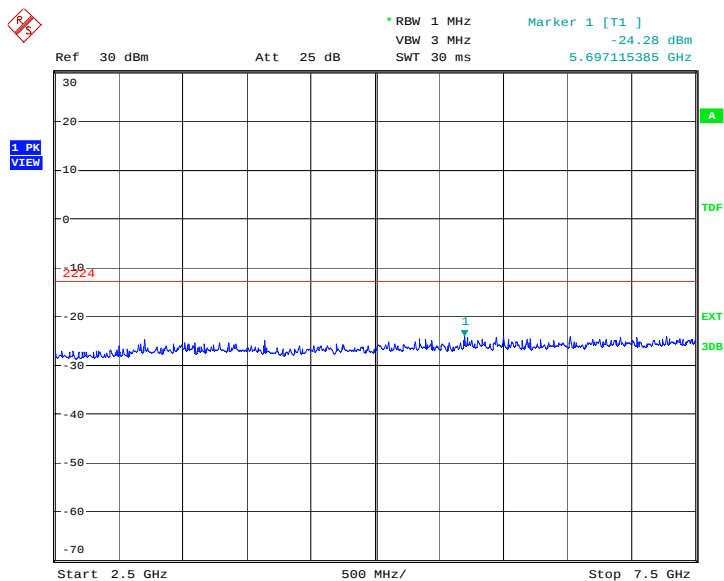

Date: 21.AUG.2012 11:58:42

### A.8.3.40 Idle mode: 7.5GHz – 10GHz

Spurious emission limit -13dBm.

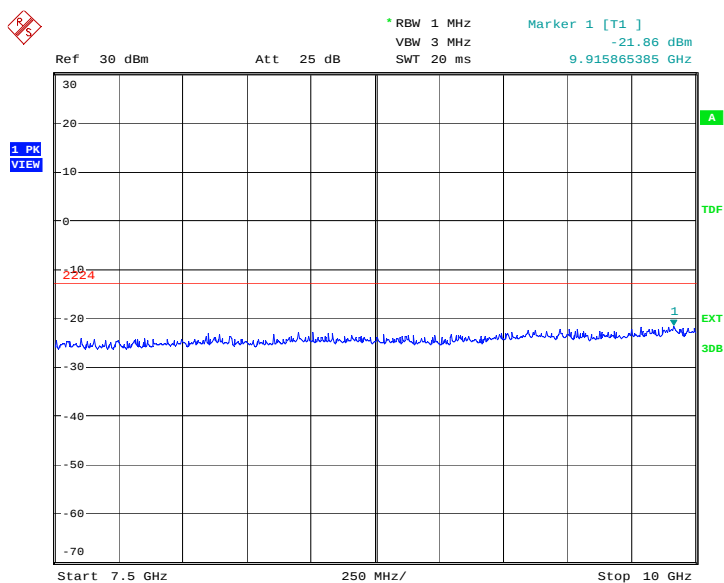


Date: 21.AUG.2012 11:59:11

## WCDMA Band IV

### A. 8.3.41 Channel 1312: 30MHz –1GHz

Spurious emission limit –13dBm.

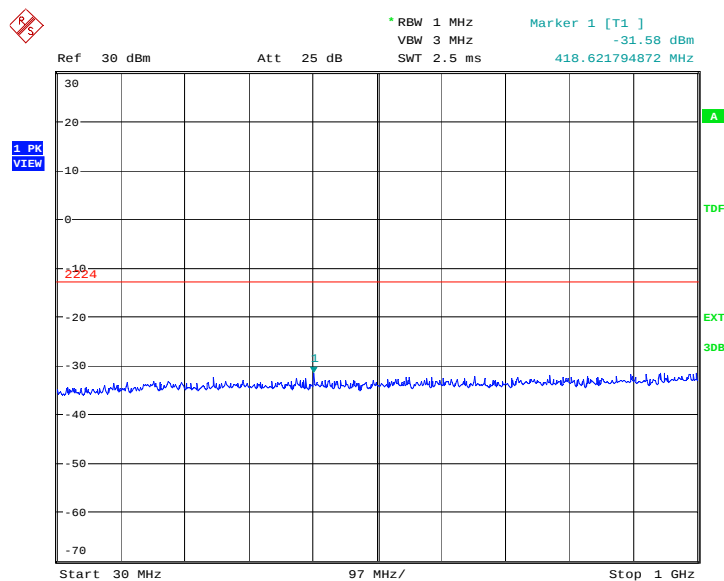


Date: 28.AUG.2012 01:25:39

### A. 8.3.42 Channel 1312: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

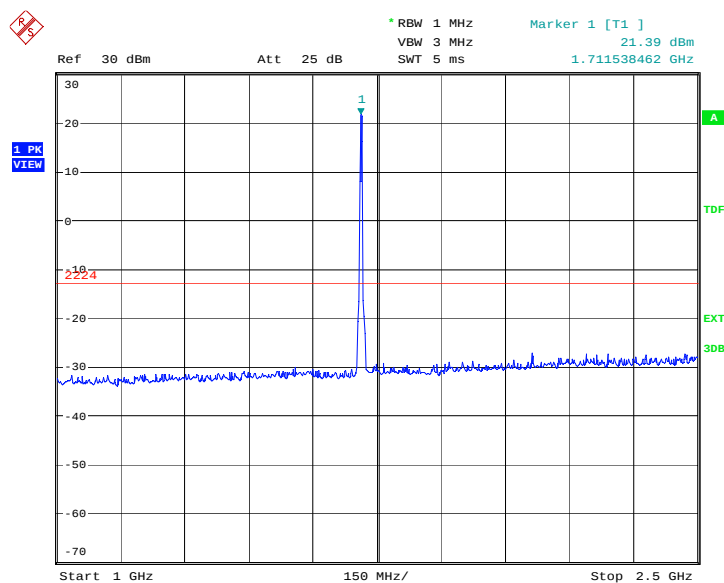

Date: 28.AUG.2012 01:26:08

### A. 8.3.43 Channel 1312: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

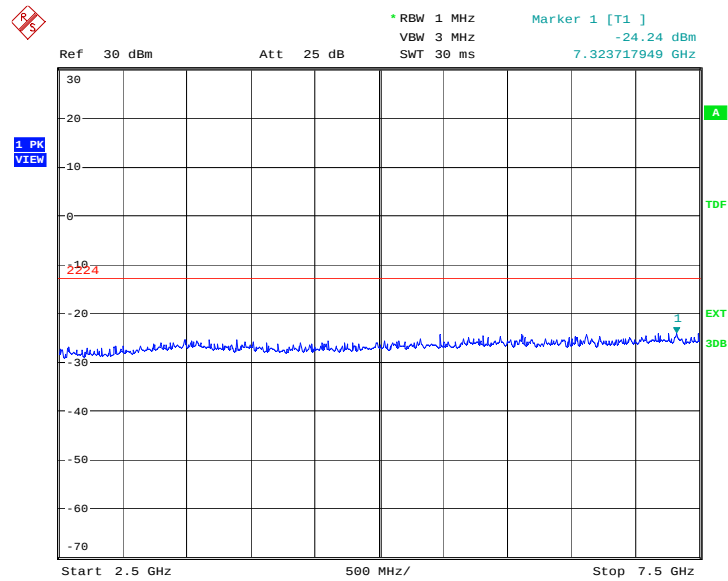

Date: 28.AUG.2012 01:26:36

### A. 8.3.44 Channel 1312: 7.5GHz –10GHz


Spurious emission limit –13dBm.

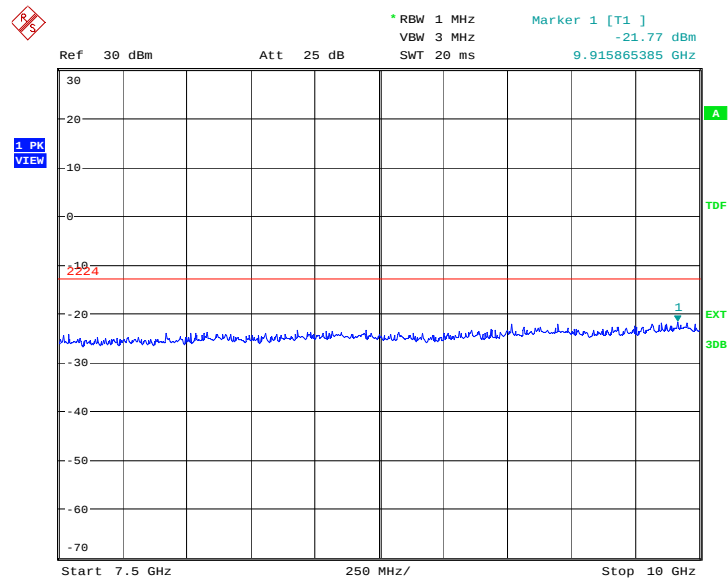

Date: 28.AUG.2012 01:27:04

### A. 8.3.45 Channel 1312: 10GHz –15GHz


Spurious emission limit –13dBm.

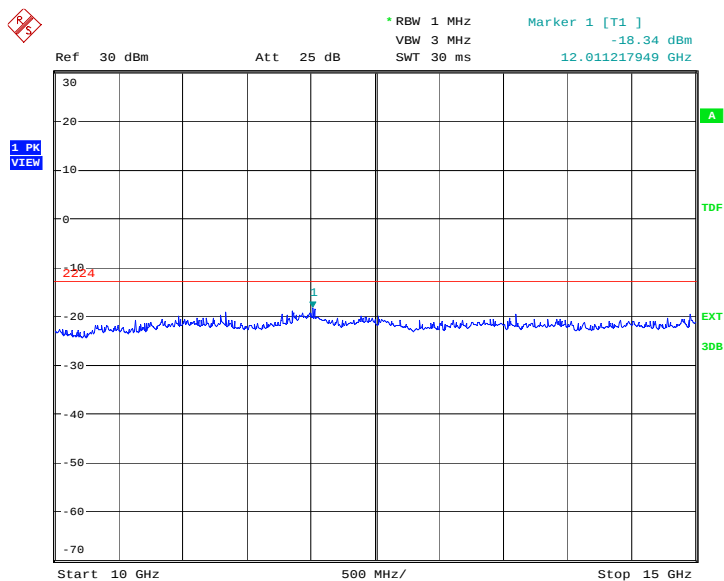

Date: 28.AUG.2012 01:27:33

### A. 8.3.46 Channel 1312: 15GHz –20GHz


Spurious emission limit –13dBm.

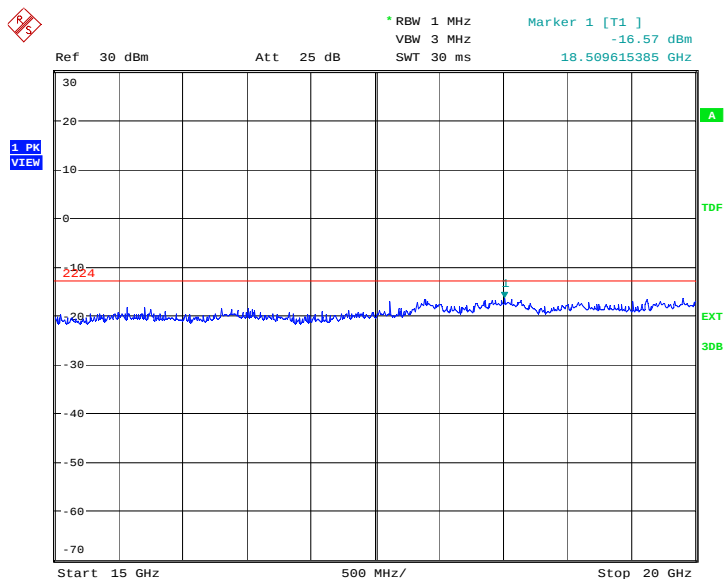

Date: 28.AUG.2012 01:28:01

### A. 8.3.47 Channel 1450: 30MHz –1GHz

Spurious emission limit –13dBm.

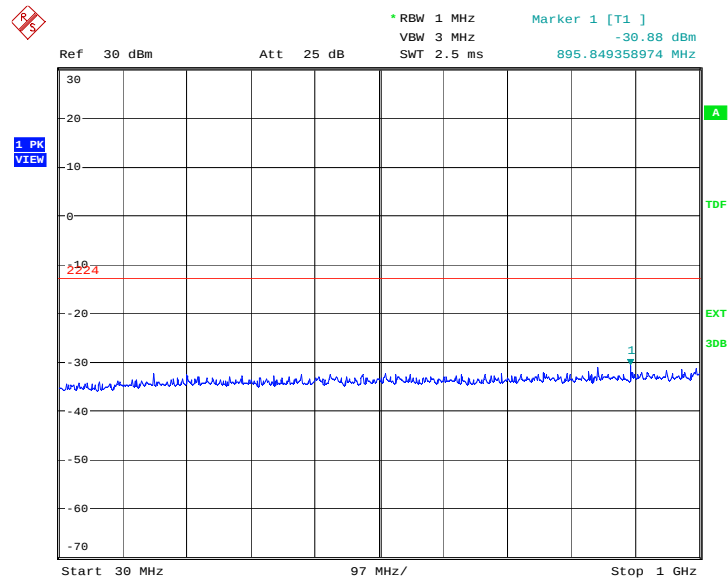


Date: 28.AUG.2012 01:28:33

### A. 8.3.48 Channel 1450: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

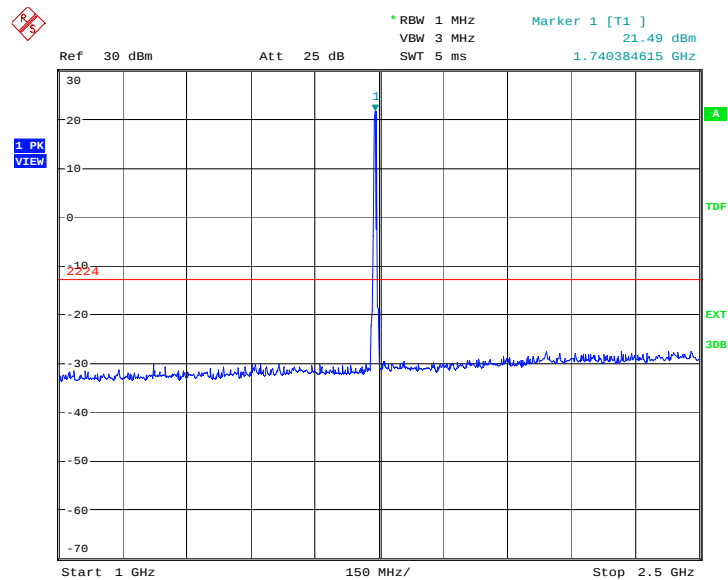

Date: 28.AUG.2012 01:29:01

### A. 8.3.49 Channel 1450: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

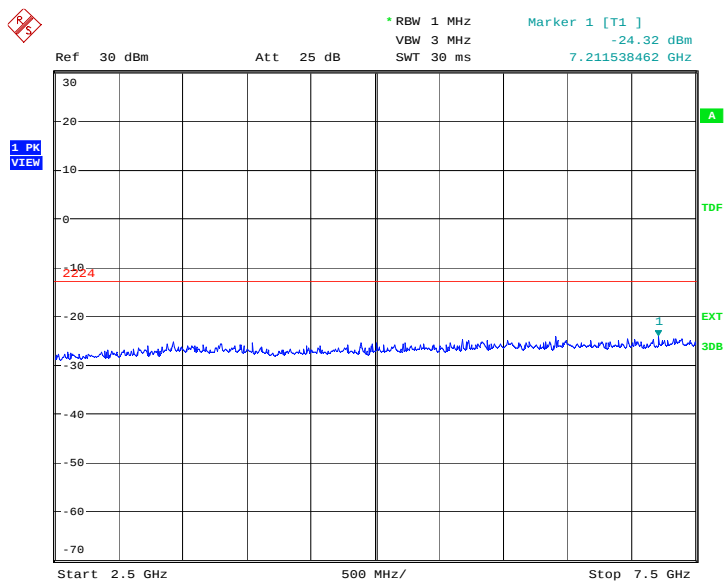

Date: 28.AUG.2012 01:29:30

### A. 8.3.50 Channel 1450: 7.5GHz –10GHz


Spurious emission limit –13dBm.

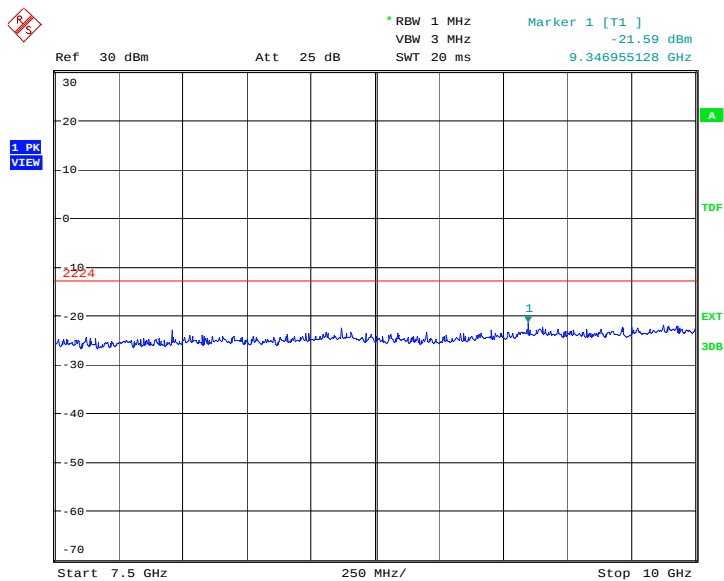

Date: 28.AUG.2012 01:29:58

### A. 8.3.51 Channel 1450: 10GHz –15GHz


Spurious emission limit –13dBm.

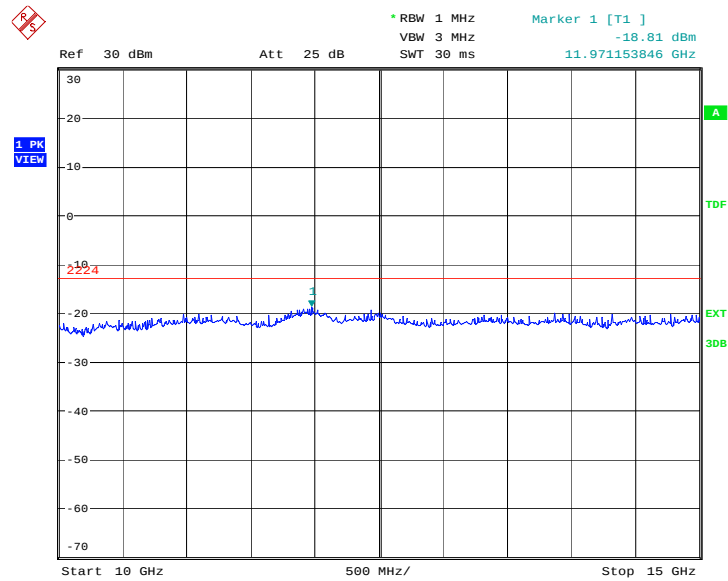

Date: 28.AUG.2012 01:30:27

### A. 8.3.52 Channel 1450: 15GHz –20GHz


Spurious emission limit –13dBm.

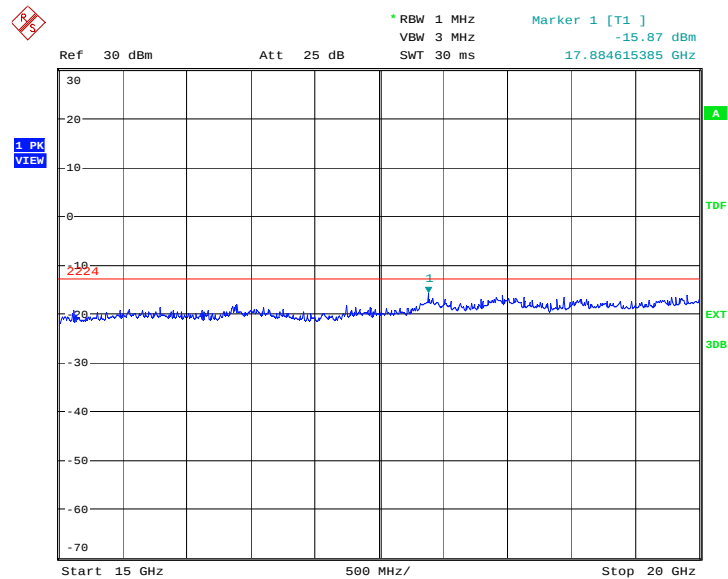

Date: 28.AUG.2012 01:30:55

### A. 8.3.53 Channel 1513: 30MHz –1GHz

Spurious emission limit –13dBm.

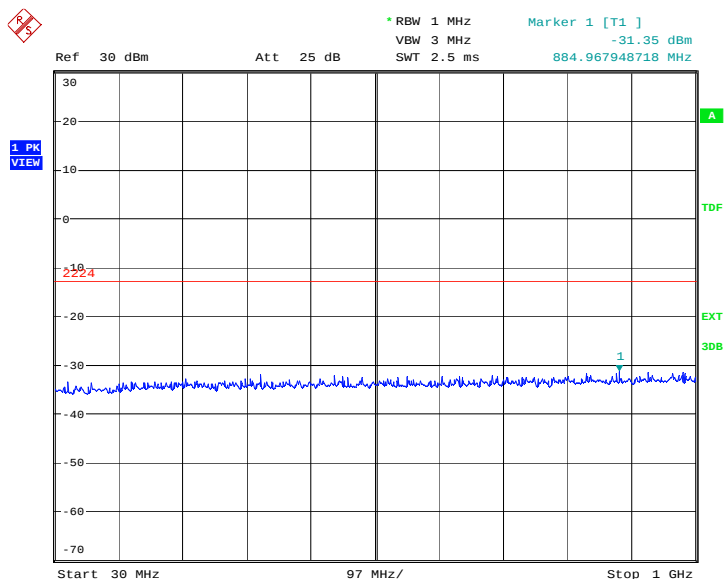


Date: 28.AUG.2012 01:31:27

### A. 8.3.54 Channel 1513: 1GHz –2.5GHz

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

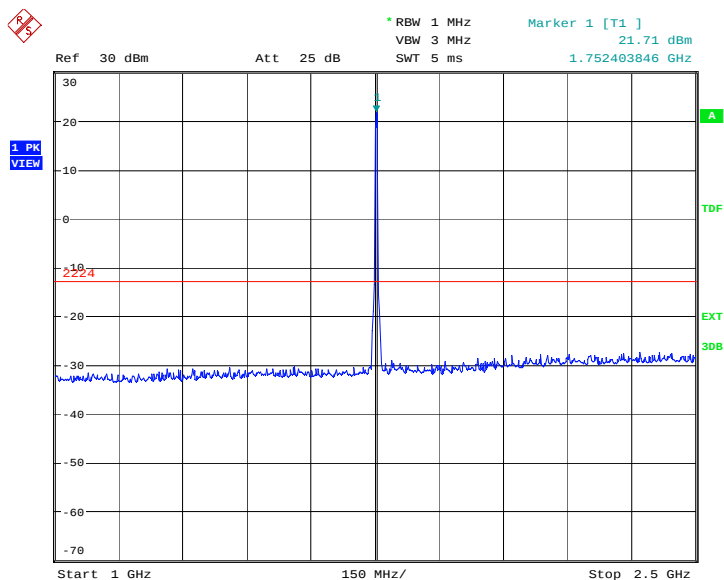

Date: 28.AUG.2012 01:31:55

### A. 8.3.55 Channel 1513: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

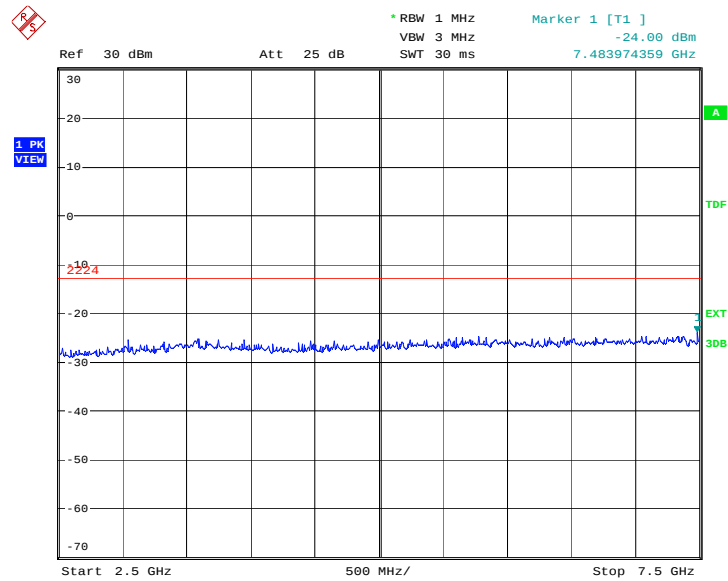

Date: 28.AUG.2012 01:32:23

### A. 8.3.56 Channel 1513: 7.5GHz –10GHz


Spurious emission limit –13dBm.

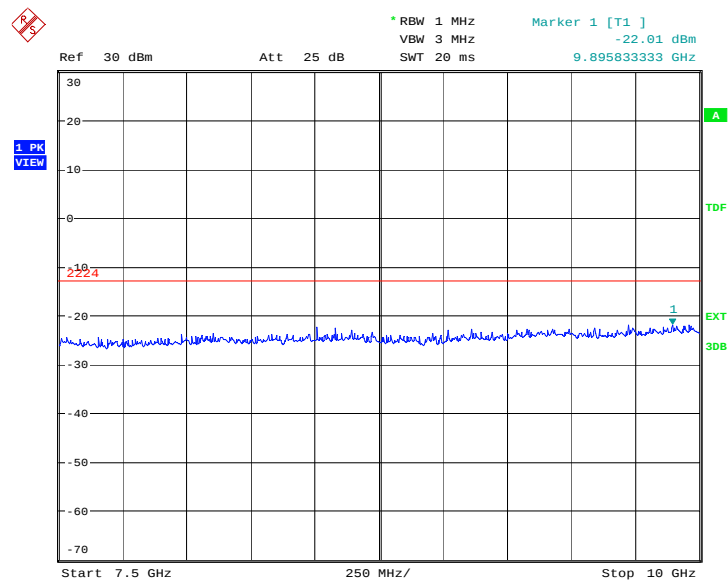

Date: 28.AUG.2012 01:32:52

### A. 8.3.57 Channel 1513: 10GHz –15GHz


Spurious emission limit –13dBm.

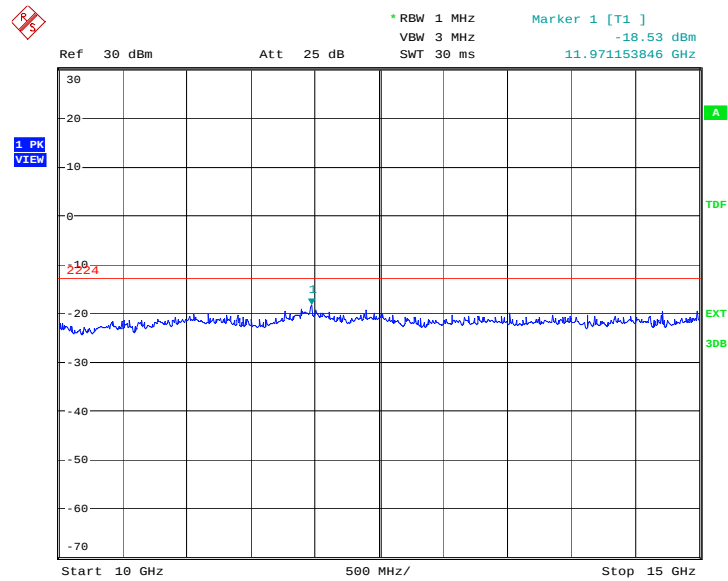

Date: 28.AUG.2012 01:33:20

### A. 8.3.58 Channel 1513: 15GHz –20GHz


Spurious emission limit –13dBm.

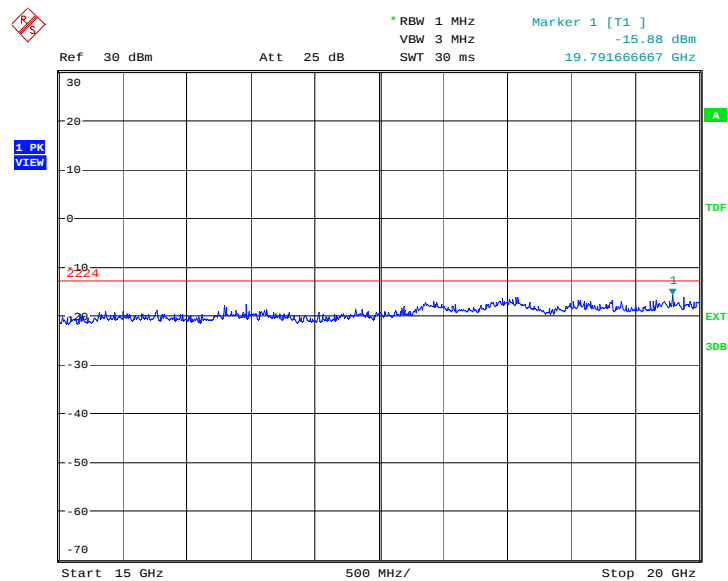

Date: 28.AUG.2012 01:33:48

### A. 8.3.59 Idle mode: 30MHz –1GHz


Spurious emission limit –13dBm.

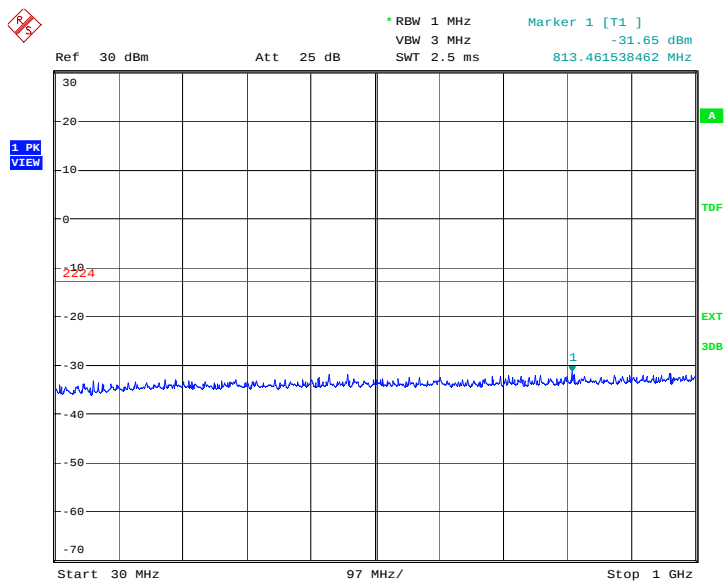

Date: 28.AUG.2012 01:34:18

### A.8.3.60 Idle mode: 1GHz –2.5GHz


Spurious emission limit –13dBm.

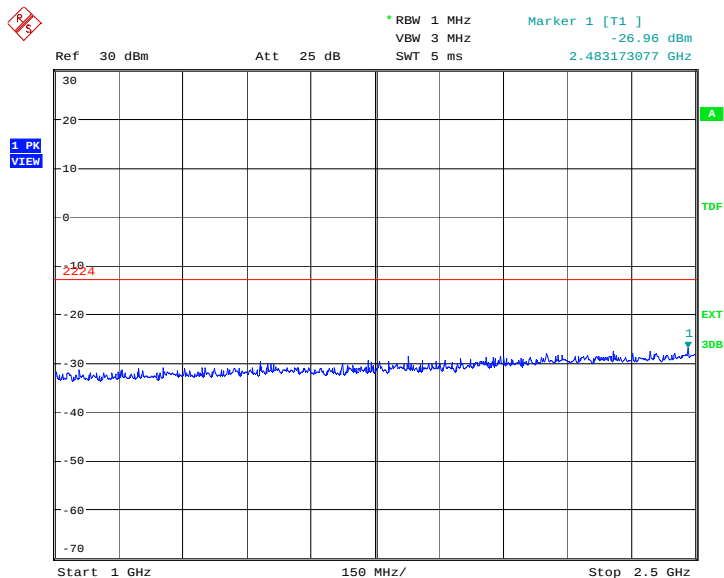

Date: 28.AUG.2012 01:34:46

### A.8.3.61 Idle mode: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

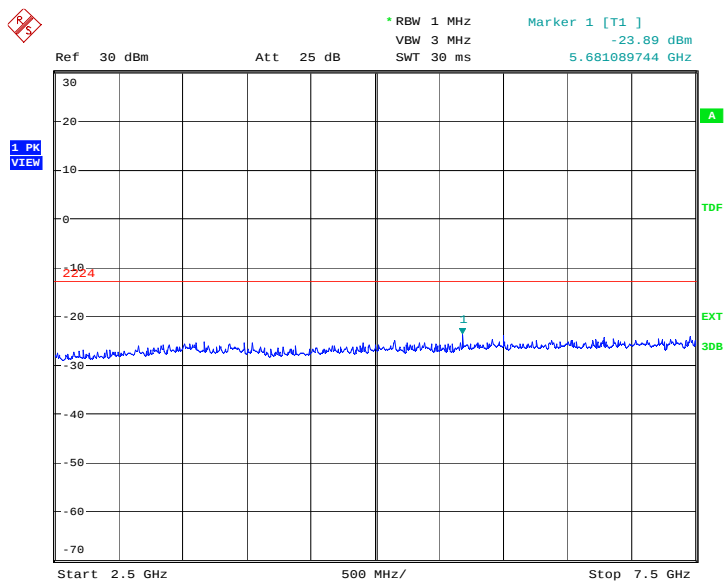

Date: 28.AUG.2012 01:35:14

### A.8.3.62 Idle mode: 7.5GHz –10GHz


Spurious emission limit –13dBm.

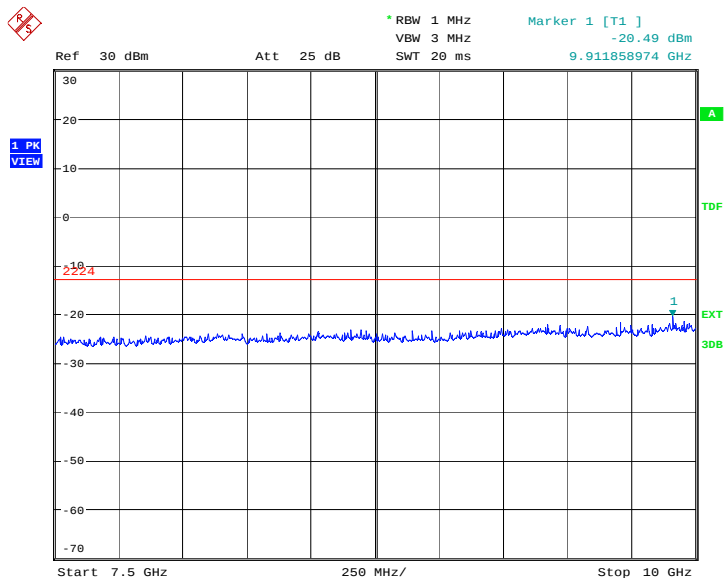

Date: 28.AUG.2012 01:35:42

### A.8.3.63 Idle mode: 10GHz –15GHz


Spurious emission limit –13dBm.

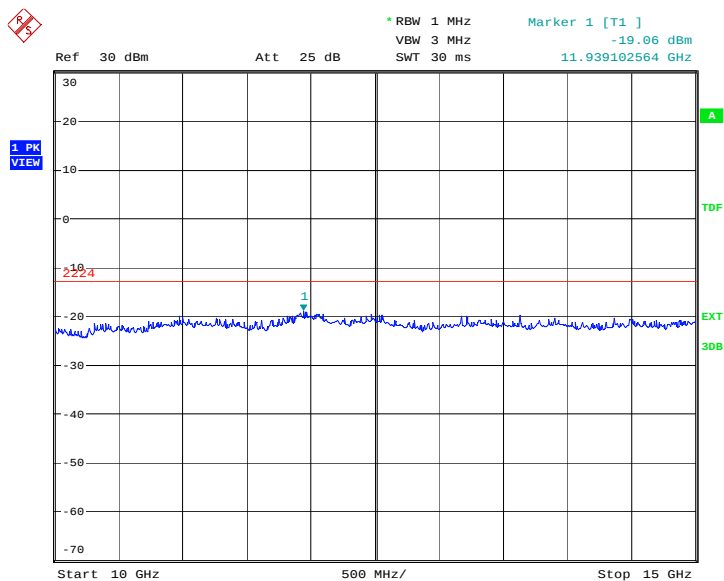

Date: 28.AUG.2012 01:36:11

### A.8.3.64 Idle mode: 15GHz –20GHz

Spurious emission limit –13dBm.

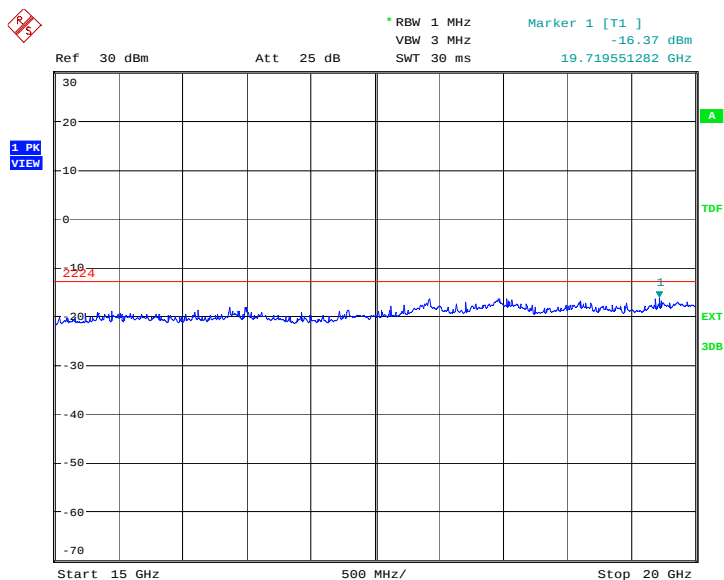

Date: 28.AUG.2012 01:36:39

## **A.9 RECEIVER RADIATION EMISSION**

### **Reference**

FCC: CFR Part 15.109, 2.1053

IC: RSS 132, Issue 2, Section 4.6. RSS 133, Issue 5, Section 6.6

### **A.9.1 Method of Measurement**


The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

### **A.9.2 Method of Measurement**

| Frequency of Emission (MHz) | Limit (dB $\mu$ V/m) | Measurement Distance (m) |
|-----------------------------|----------------------|--------------------------|
| 30-88                       | 30                   | 10                       |
| 88-216                      | 33.5                 | 10                       |
| 216-960                     | 36                   | 10                       |
| 960-1000                    | 44                   | 10                       |
| >1000                       | 54                   | 3                        |


### **A. 9.3 Measurement results**

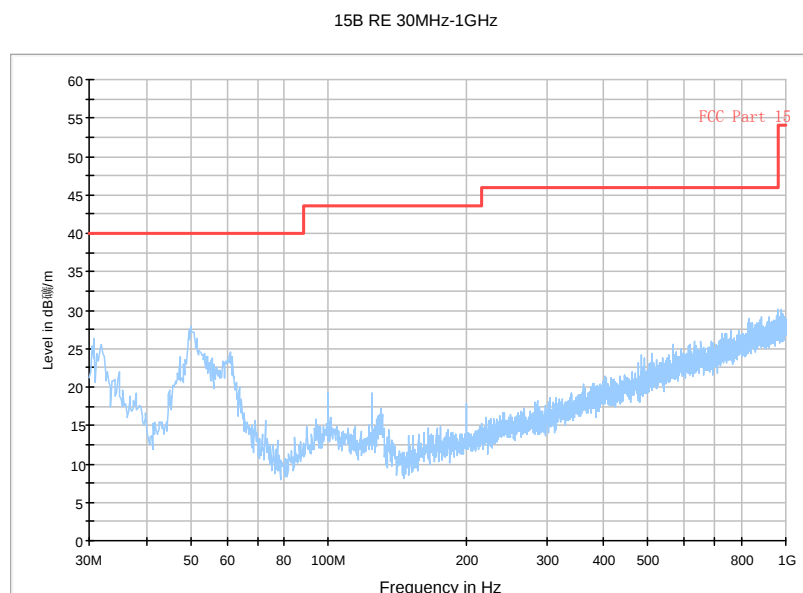

IF bandwidth: 120 kHz

**Idle Mode: 30MHz-1GHz**


15B RE - 1GHz-3GHz

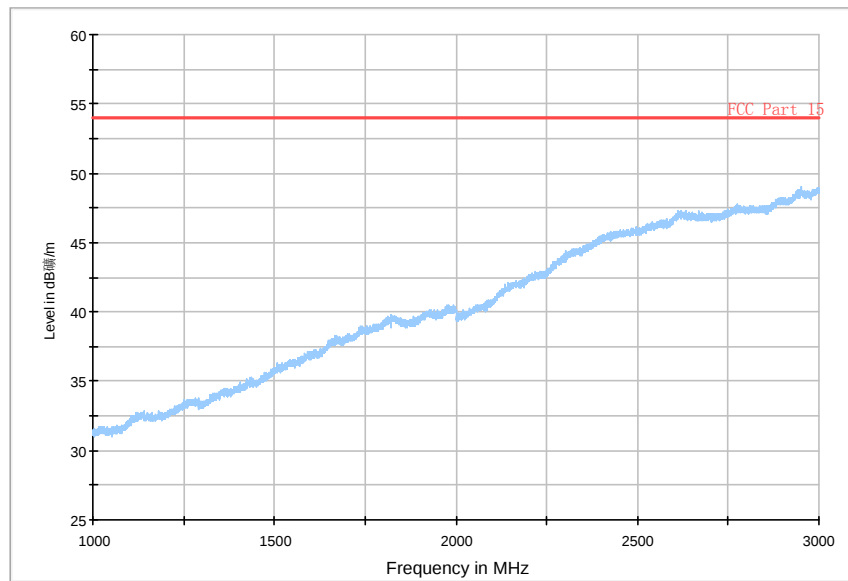

RBW / VBW 1 MHz

Idle Mode: 1GHz-3GHz

RE - 3GHz-18GHz

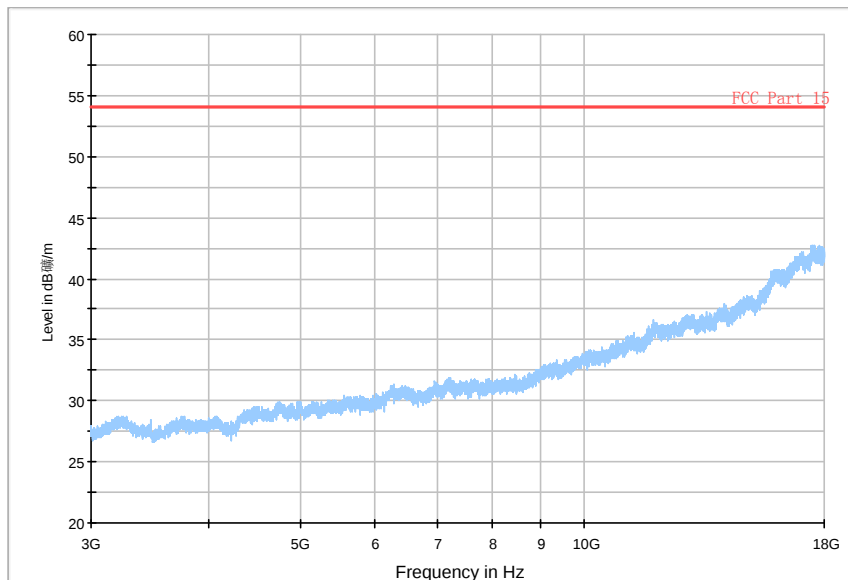

RBW / VBW 1 MHz

Idle Mode: 3GHz-18GHz

\*\*\*END OF REPORT\*\*\*