

850 Body Right Side Low

Date: 2012-11-26

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used: $f = 825$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 54.364$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

Right Side Low/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.695 mW/g

Right Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.396 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.871 mW/g

SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 0.684 mW/g

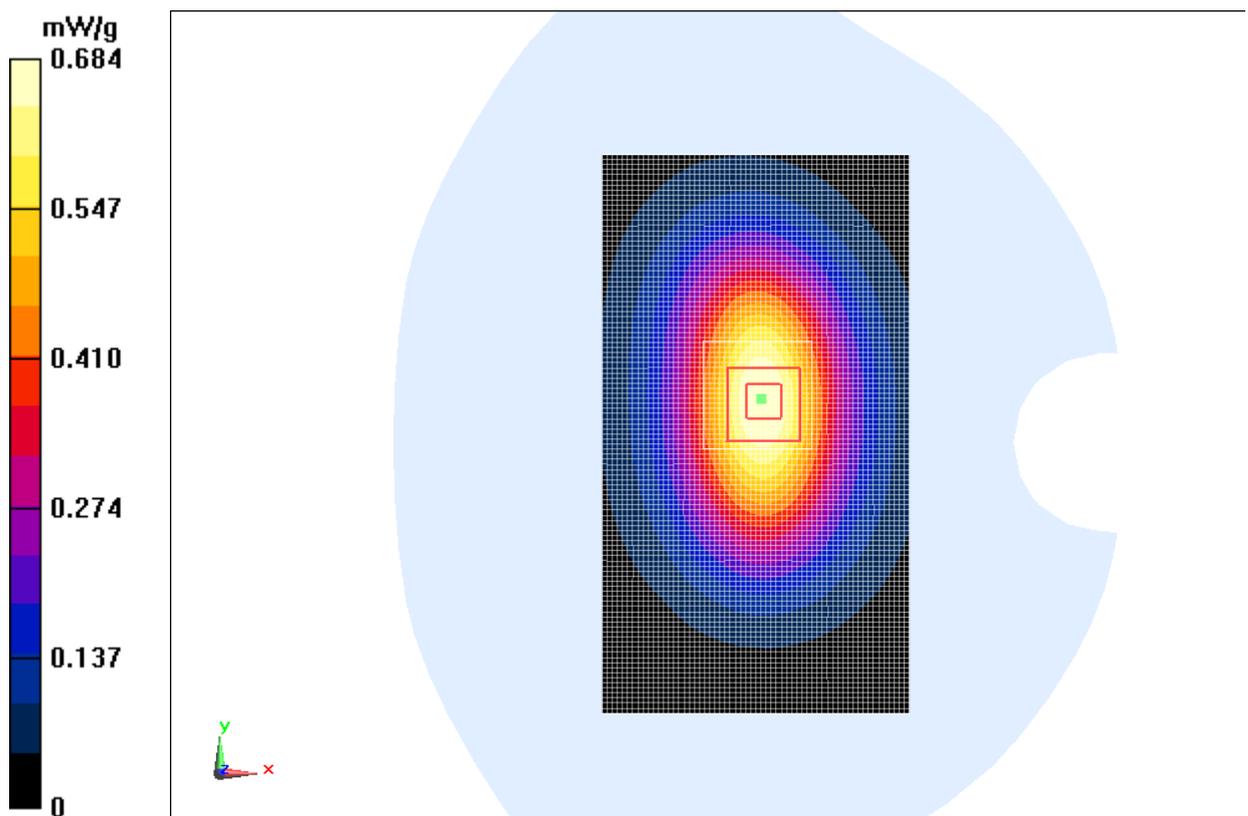


Fig. 18 850 MHz CH128

850 Body Bottom Side Low

Date: 2012-11-26

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used: $f = 825$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 54.364$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

Bottom Side Low/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0802 mW/g

Bottom Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.234 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.117 mW/g

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.0797 mW/g

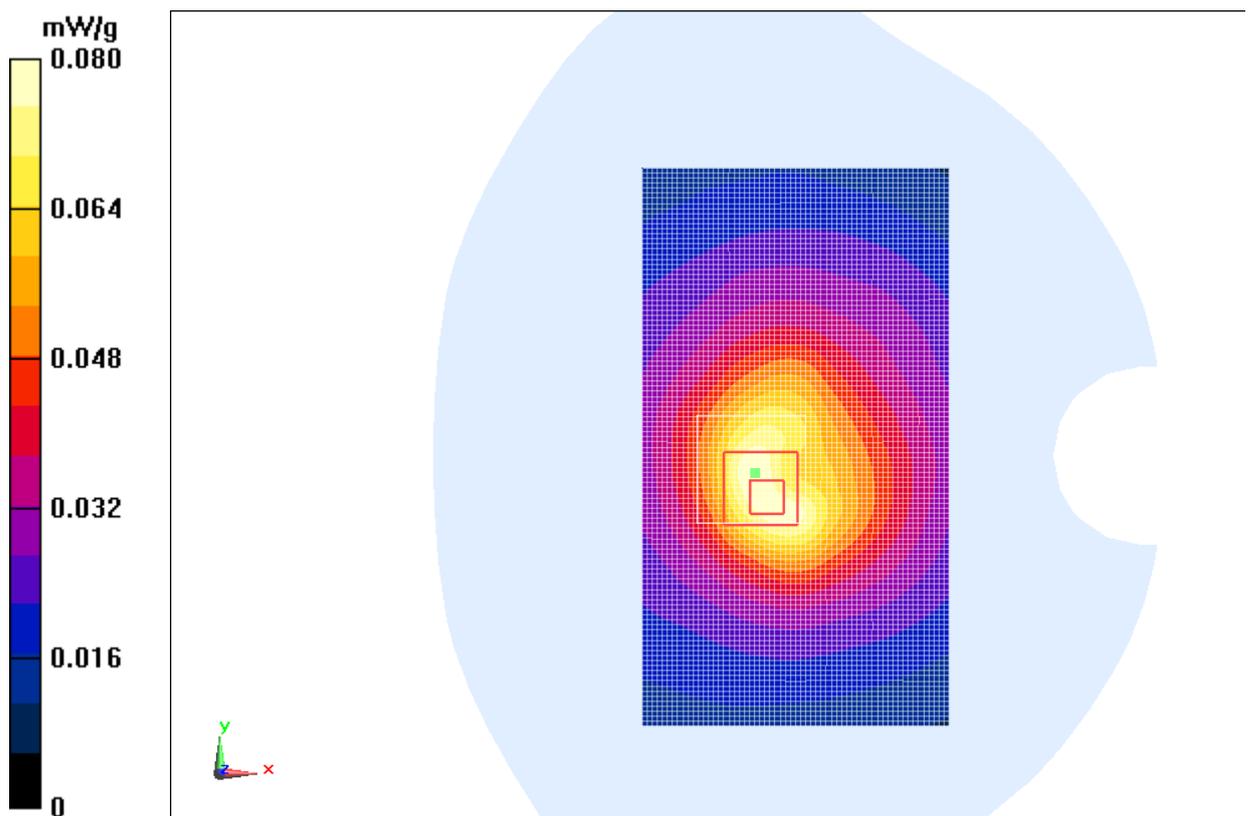


Fig. 19 850 MHz CH128

850 Body Toward Ground High with EGPRS

Date: 2012-11-26

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.007$ mho/m; $\epsilon_r = 54.121$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 22.0°C

Communication System: GSM 850 EGPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

Toward Ground High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.12 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.752 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.362 mW/g

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.783 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

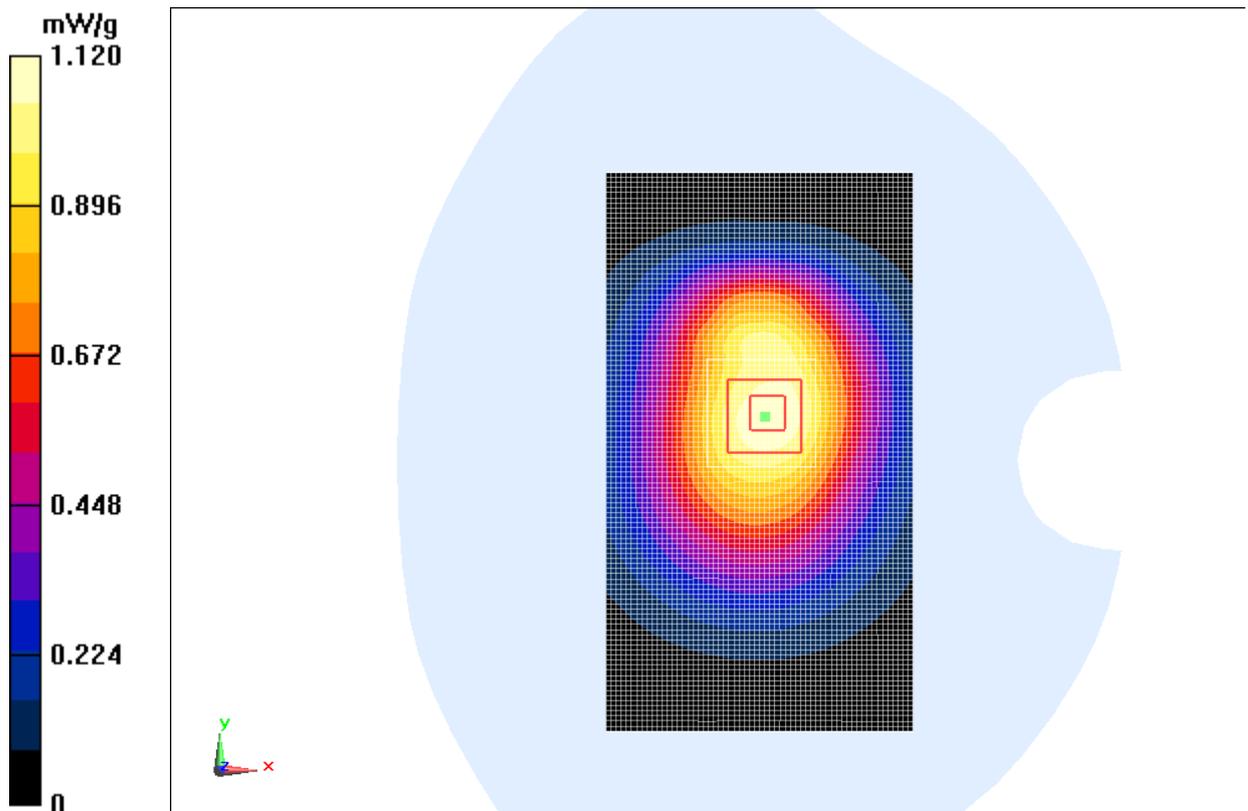


Fig. 20 850 MHz CH251

850 Body Toward Ground High with Headset CCB3160A11C2

Date: 2012-11-26

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.007$ mho/m; $\epsilon_r = 54.121$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

Toward Ground High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.756 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.492 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.946 mW/g

SAR(1 g) = 0.714 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 0.758 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.492 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.961 mW/g

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.467 mW/g

Maximum value of SAR (measured) = 0.747 mW/g

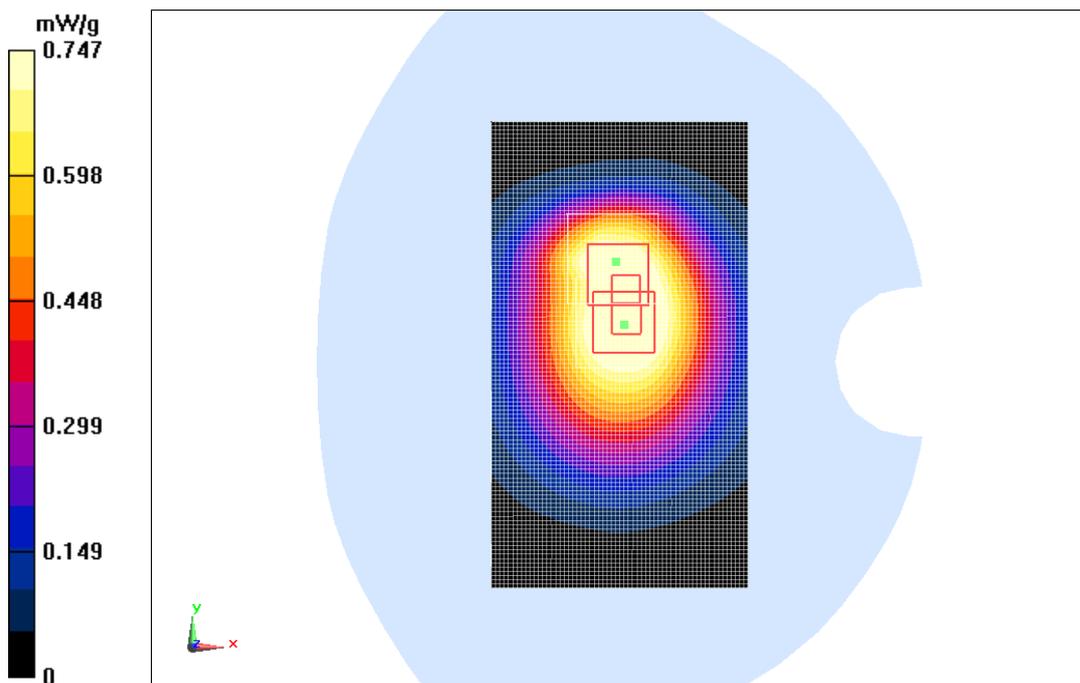


Fig. 21 850 MHz CH251

850 Body Toward Ground High with Headset CCB3160A11C4

Date: 2012-11-26

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.007$ mho/m; $\epsilon_r = 54.121$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 22.0°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

Toward Ground High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.713 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.114 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.841 mW/g

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 0.700 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.114 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.771 mW/g

SAR(1 g) = 0.557 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.634 mW/g

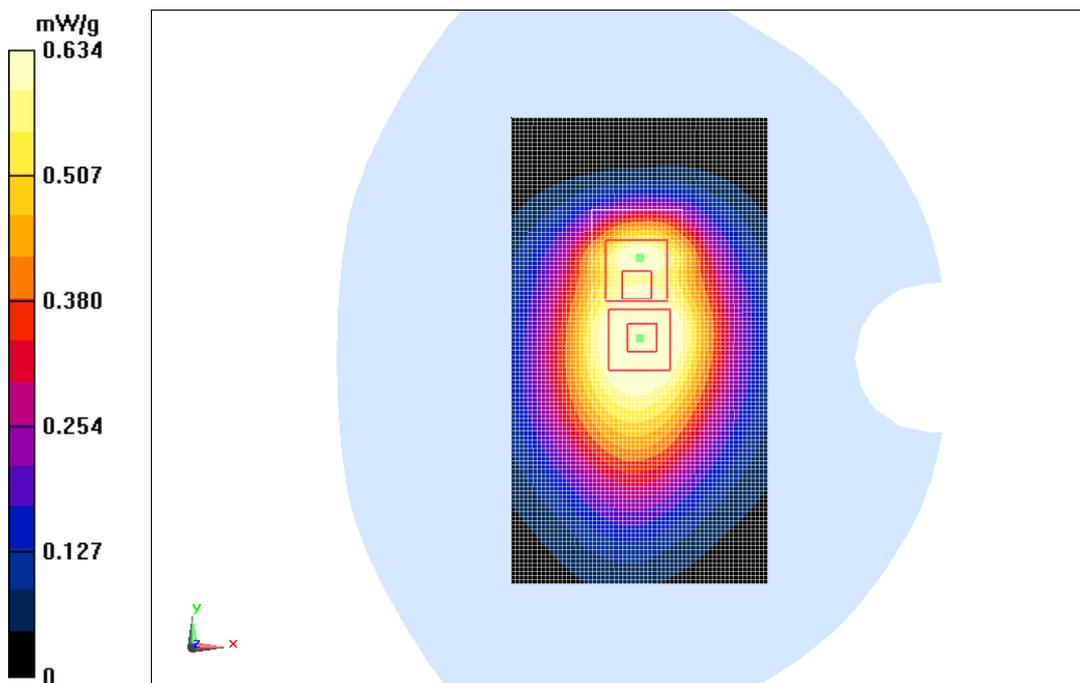


Fig. 22 850 MHz CH251

850 Body Toward Ground High with battery CAB3120000C1

Date: 2012-11-26

Electronics: DAE4 Sn771

Medium: Body 835 MHz

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.007$ mho/m; $\epsilon_r = 54.121$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.4°C Liquid Temperature: 22.0°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.14, 6.14, 6.14)

Toward Ground High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.10 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.658 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.343 mW/g

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.777 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

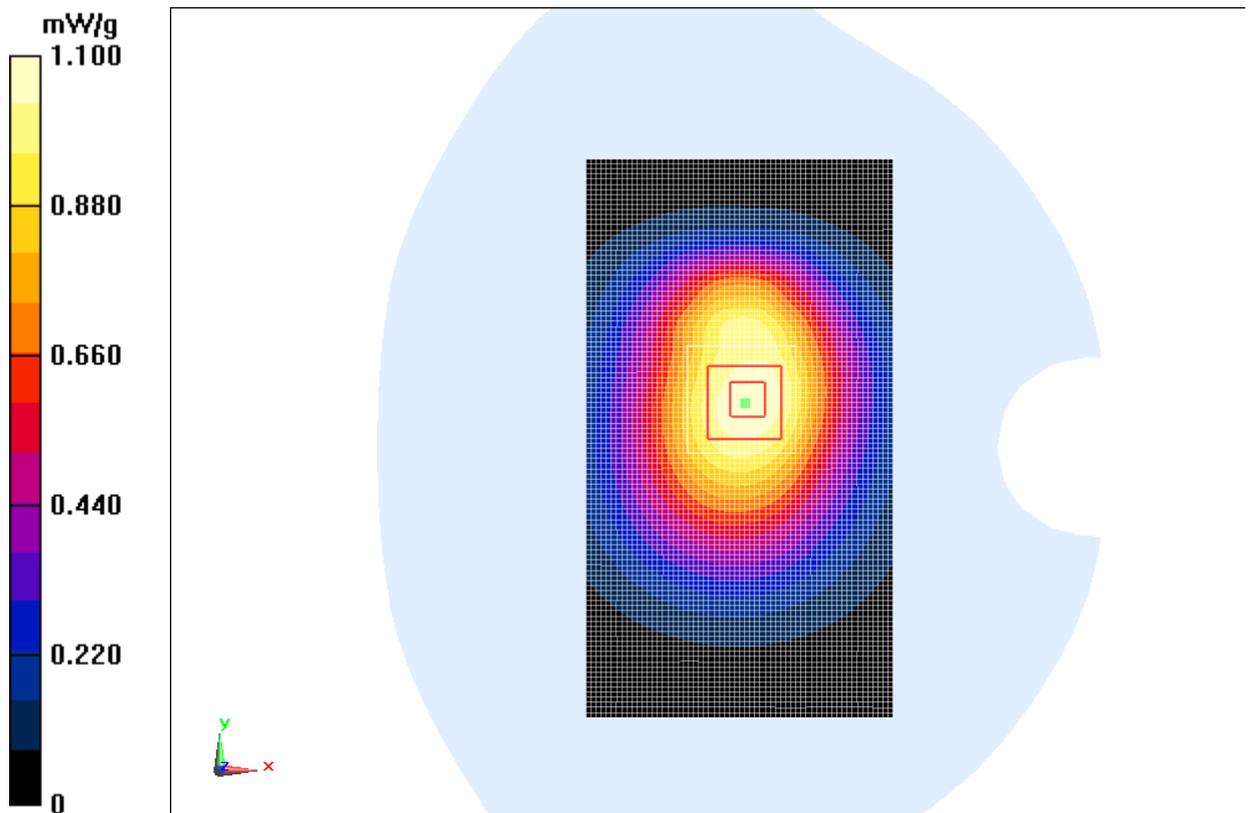


Fig. 23 850 MHz CH251

1900 Left Cheek High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.696$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.460 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.676 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.628 mW/g

SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.461 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.676 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.602 mW/g

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.441 mW/g

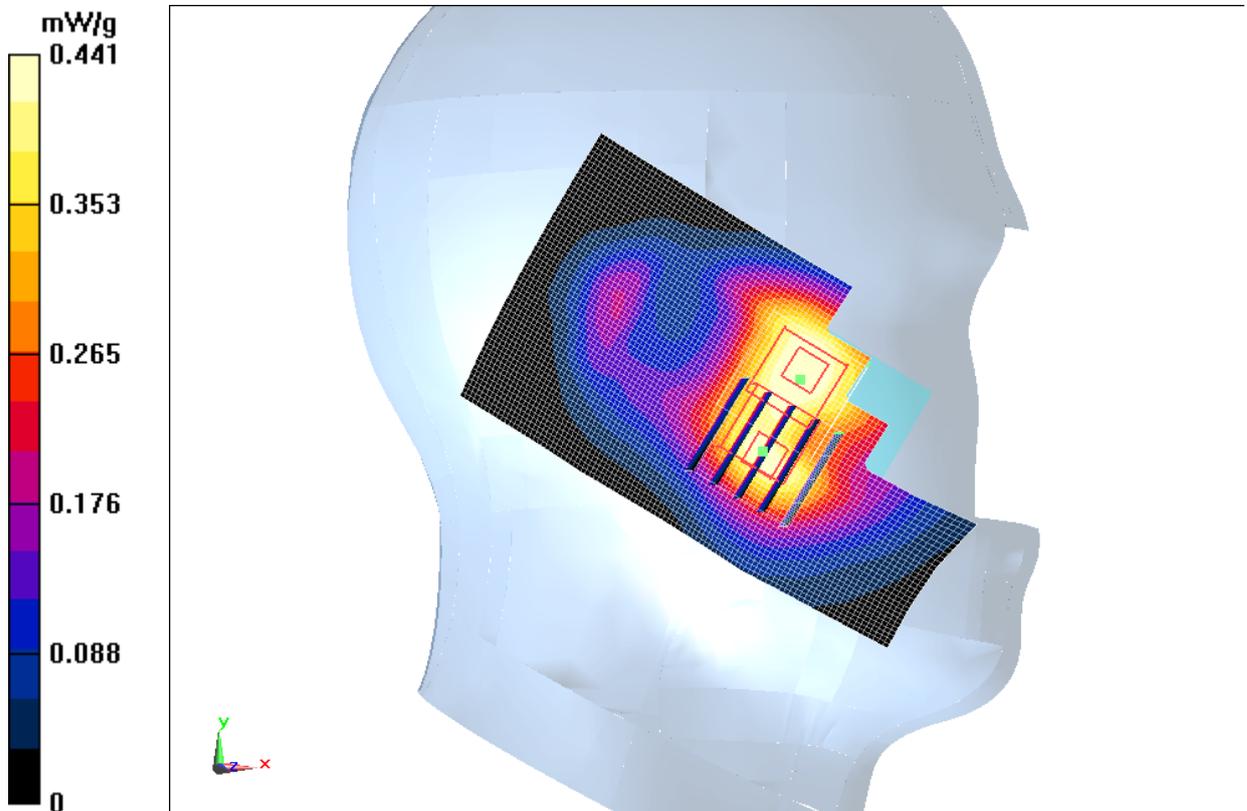


Fig. 24 1900 MHz CH810

1900 Left Cheek Middle

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head GSM1900

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ mho/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.474 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.857 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.655 mW/g

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.286 mW/g

Maximum value of SAR (measured) = 0.476 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.857 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.634 mW/g

SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.285 mW/g

Maximum value of SAR (measured) = 0.460 mW/g

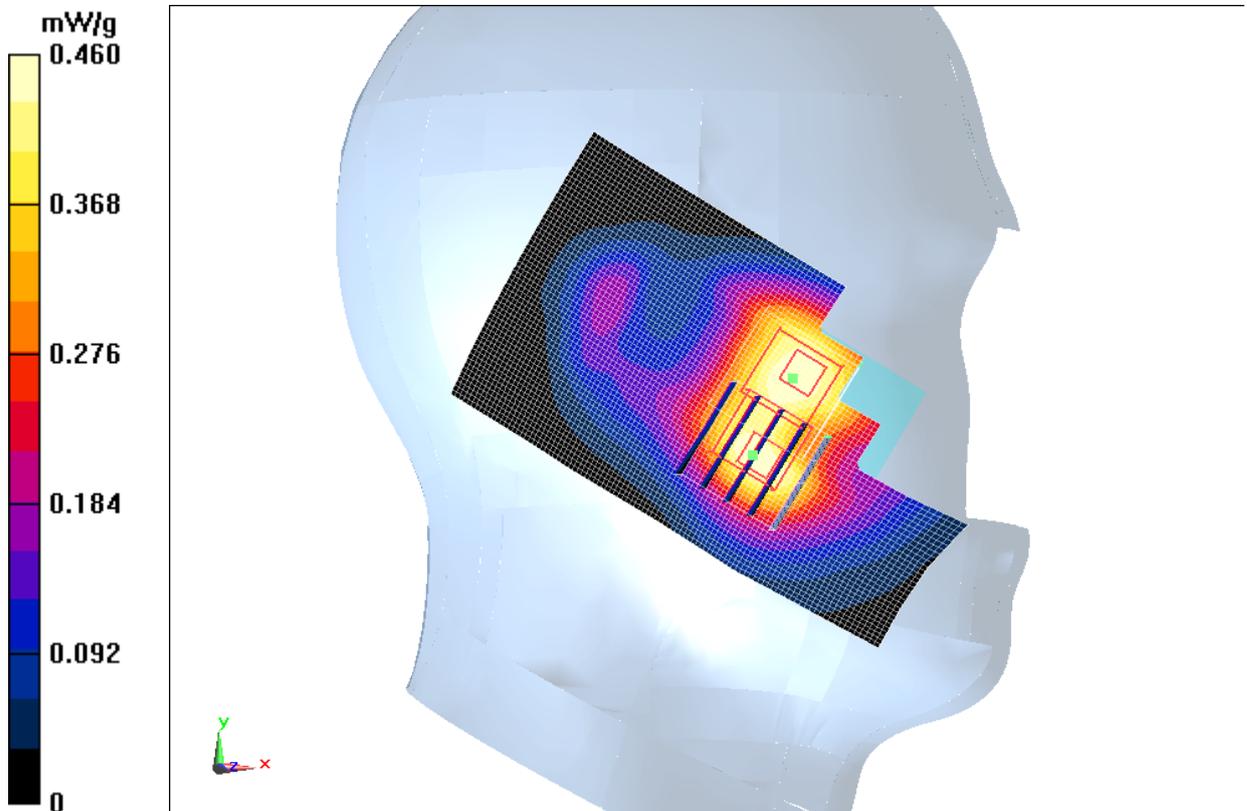


Fig. 25 1900 MHz CH661

1900 Left Cheek Low

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.342$ mho/m; $\epsilon_r = 40.901$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek Low/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.485 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.384 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.678 mW/g

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.491 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.384 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.620 mW/g

SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

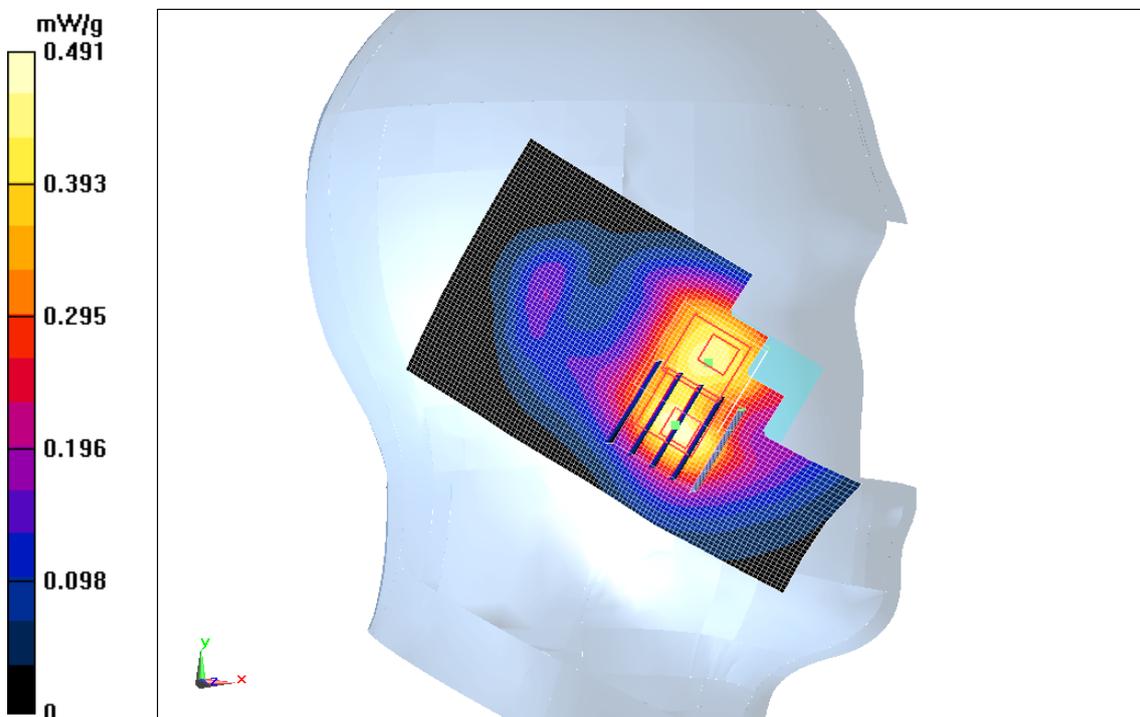


Fig. 26 1900 MHz CH512

1900 Left Tilt High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.696$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Tilt High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.309 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.992 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.413 mW/g

SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.141 mW/g

Maximum value of SAR (measured) = 0.276 mW/g

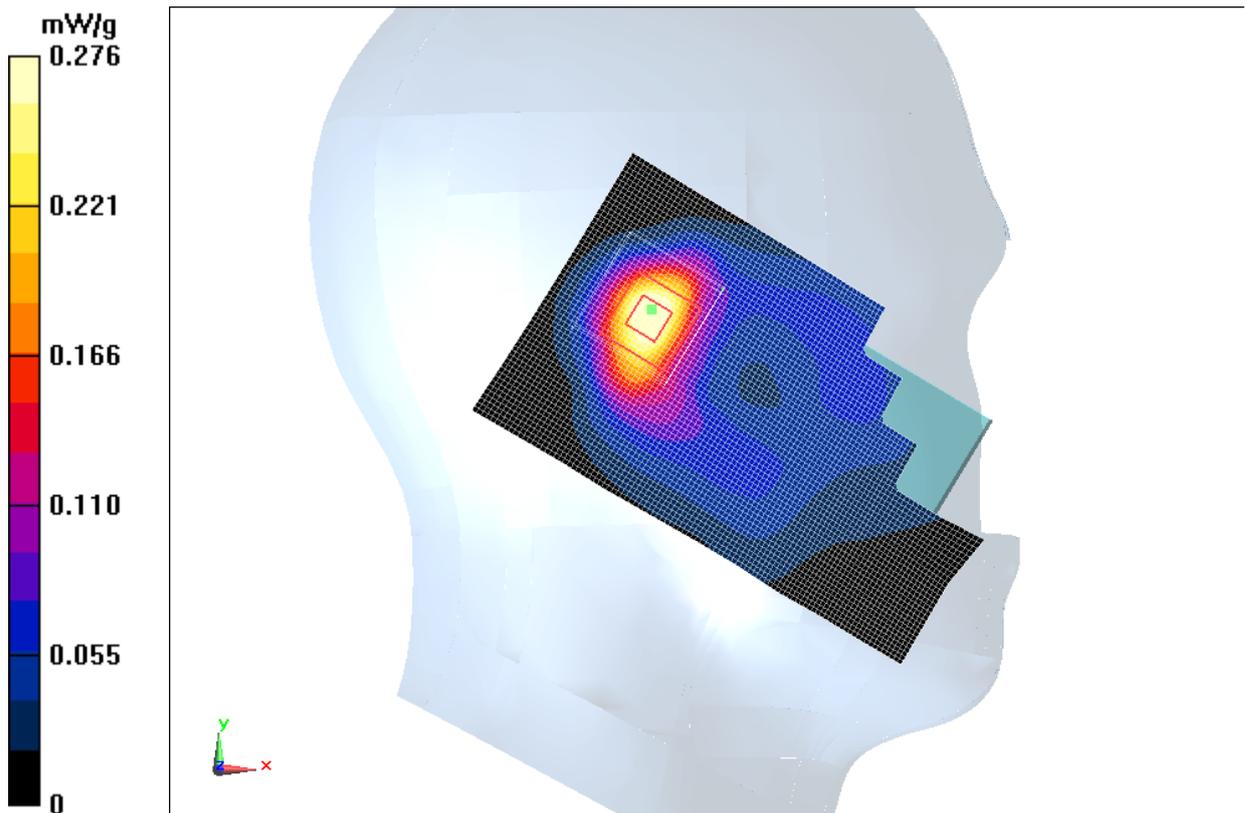


Fig. 27 1900 MHz CH810

1900 Left Tilt Middle

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ mho/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Tilt Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.353 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.157 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.483 mW/g

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.324 mW/g

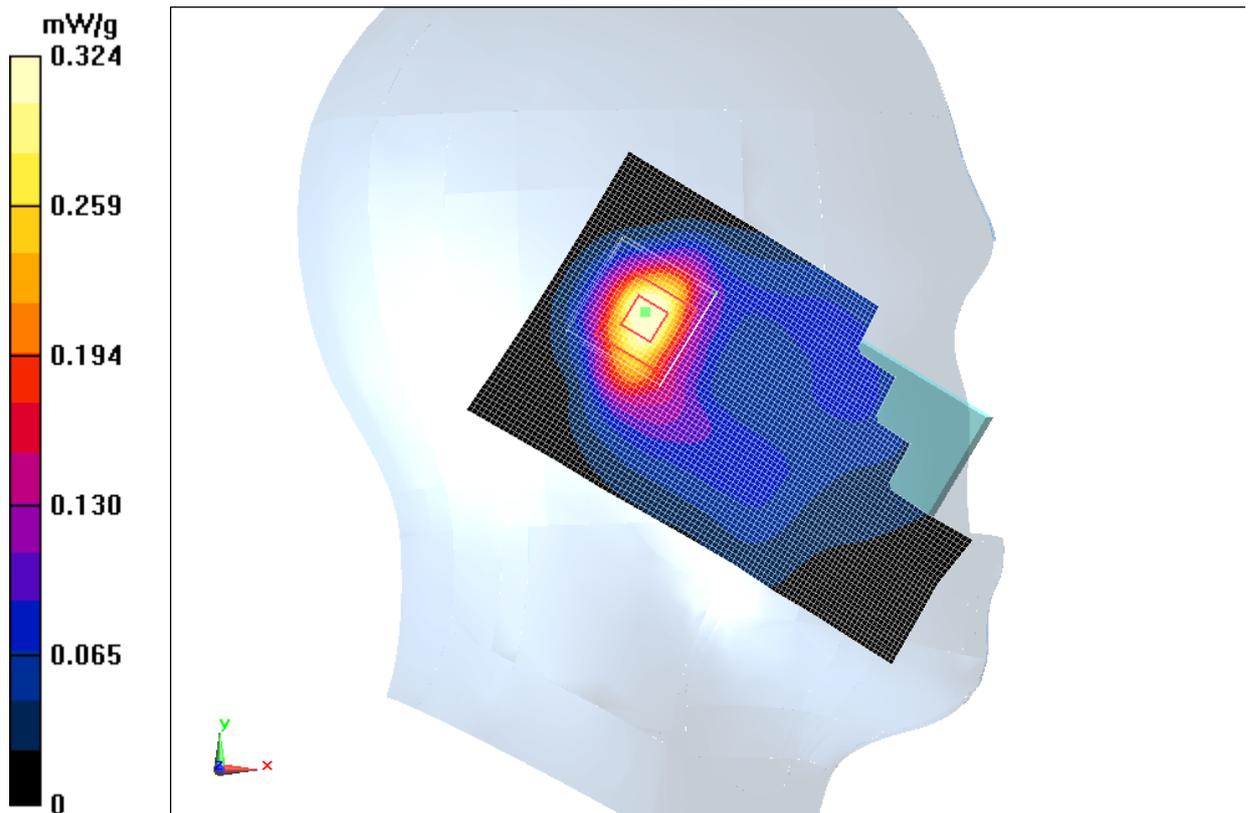


Fig. 28 1900 MHz CH661

1900 Left Tilt Low

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.342$ mho/m; $\epsilon_r = 40.901$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Tilt Low/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.323 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.661 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.438 mW/g

SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

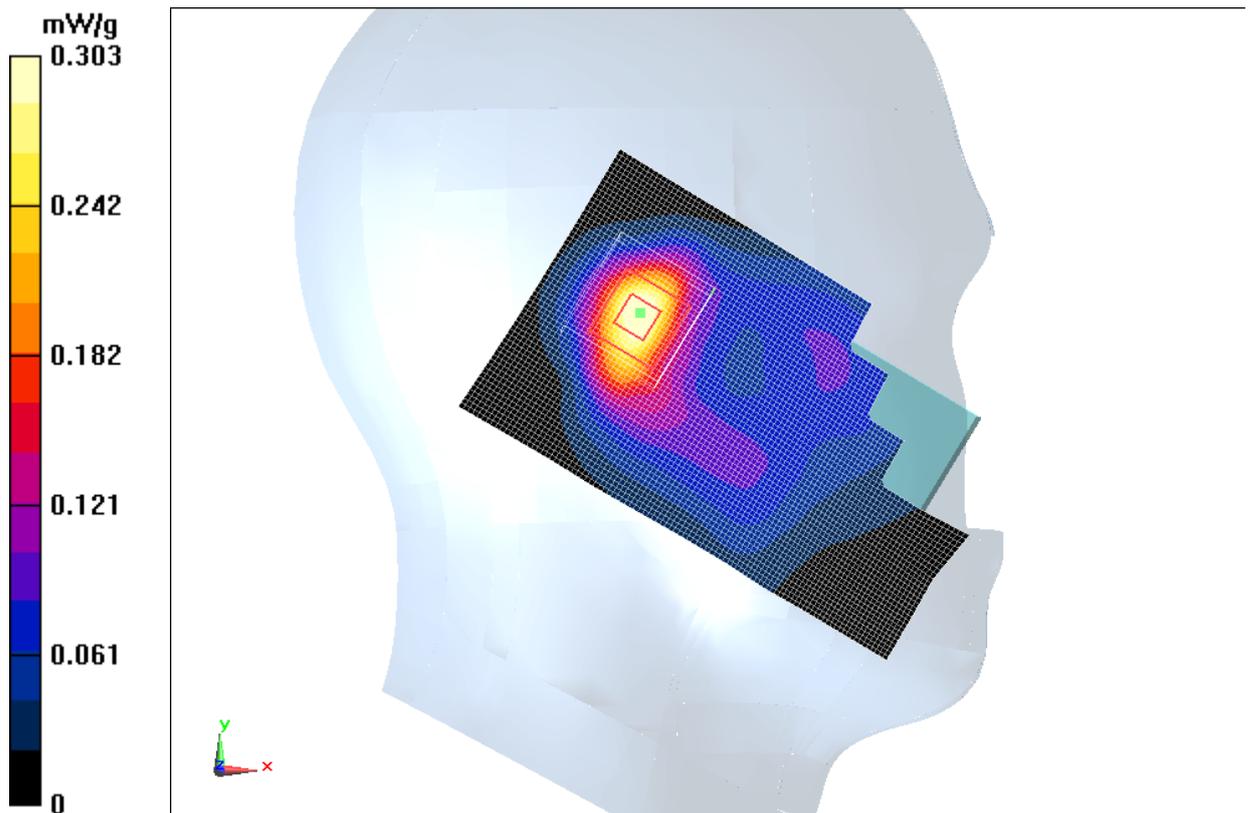


Fig. 29 1900 MHz CH512

1900 Right Cheek High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.696$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.713 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.325 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.912 mW/g

SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 0.671 mW/g

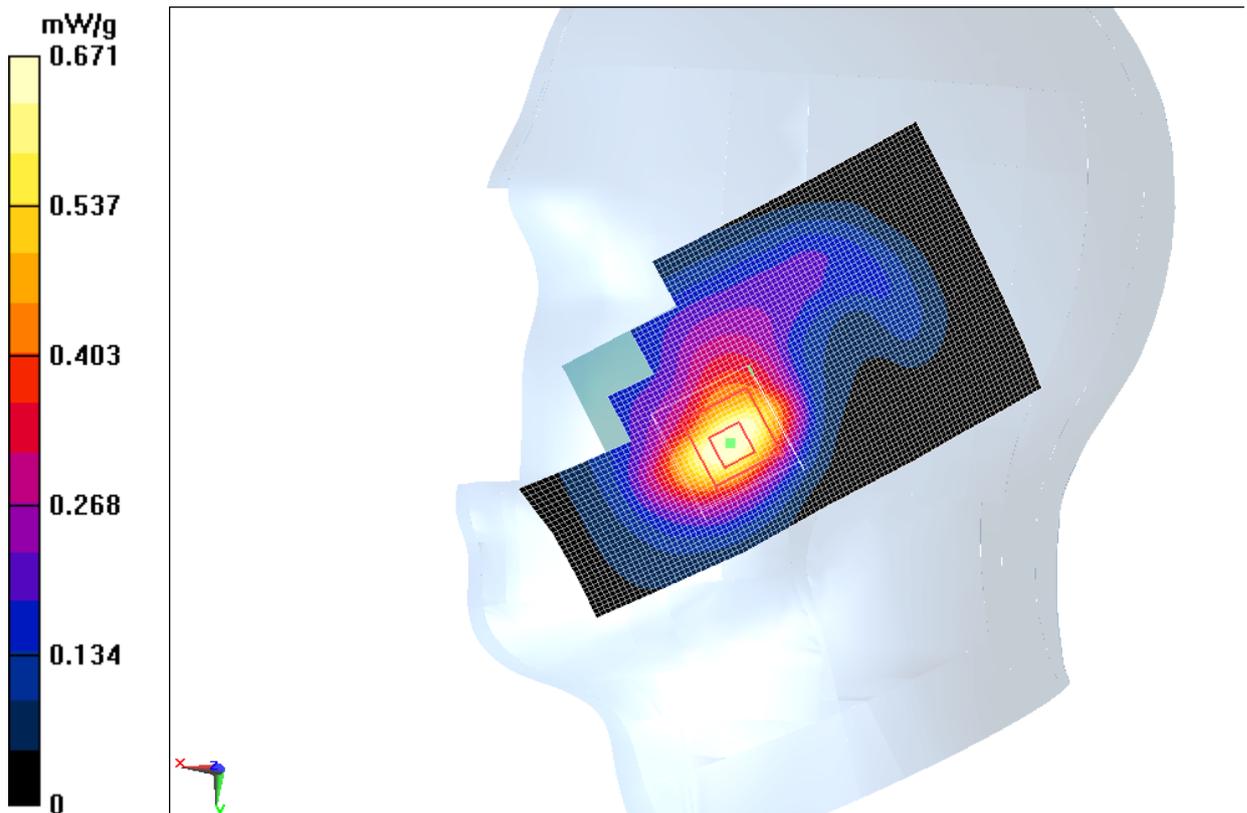


Fig. 30 1900 MHz CH810

1900 Right Cheek Middle

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ mho/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.862 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.812 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.137 mW/g

SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.452 mW/g

Maximum value of SAR (measured) = 0.829 mW/g

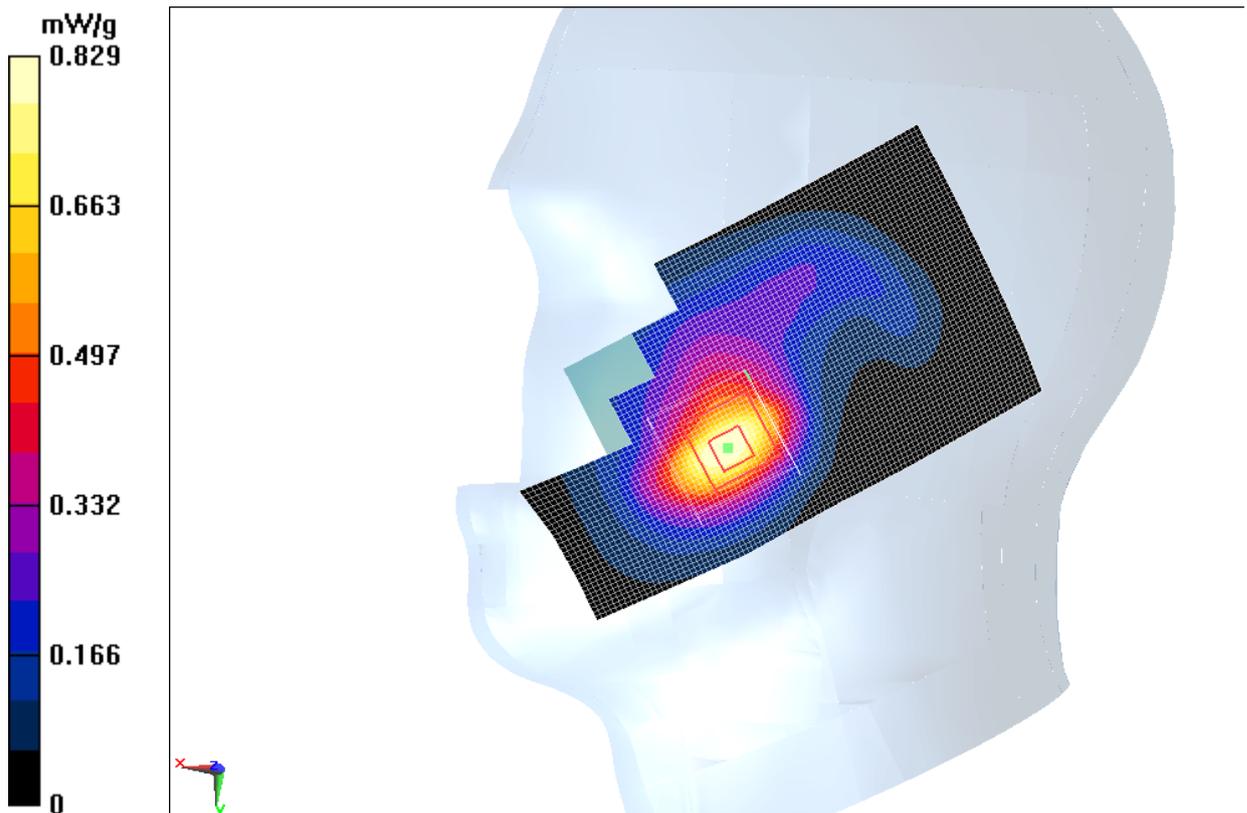


Fig. 31 1900 MHz CH661

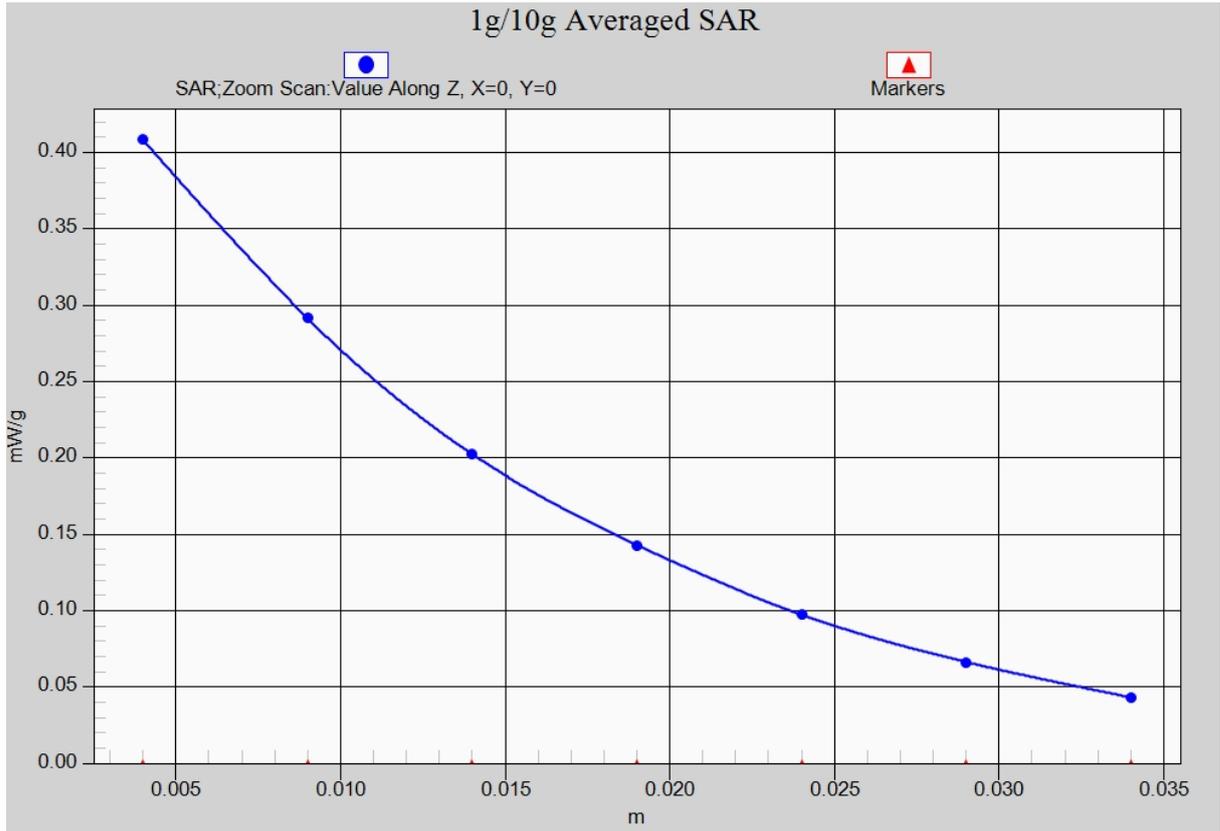


Fig. 31-1 Z-Scan at power reference point (1900 MHz CH661)

1900 Right Cheek Low

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.342$ mho/m; $\epsilon_r = 40.901$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek Low/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.825 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.166 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.075 mW/g

SAR(1 g) = 0.722 mW/g; SAR(10 g) = 0.431 mW/g

Maximum value of SAR (measured) = 0.792 mW/g

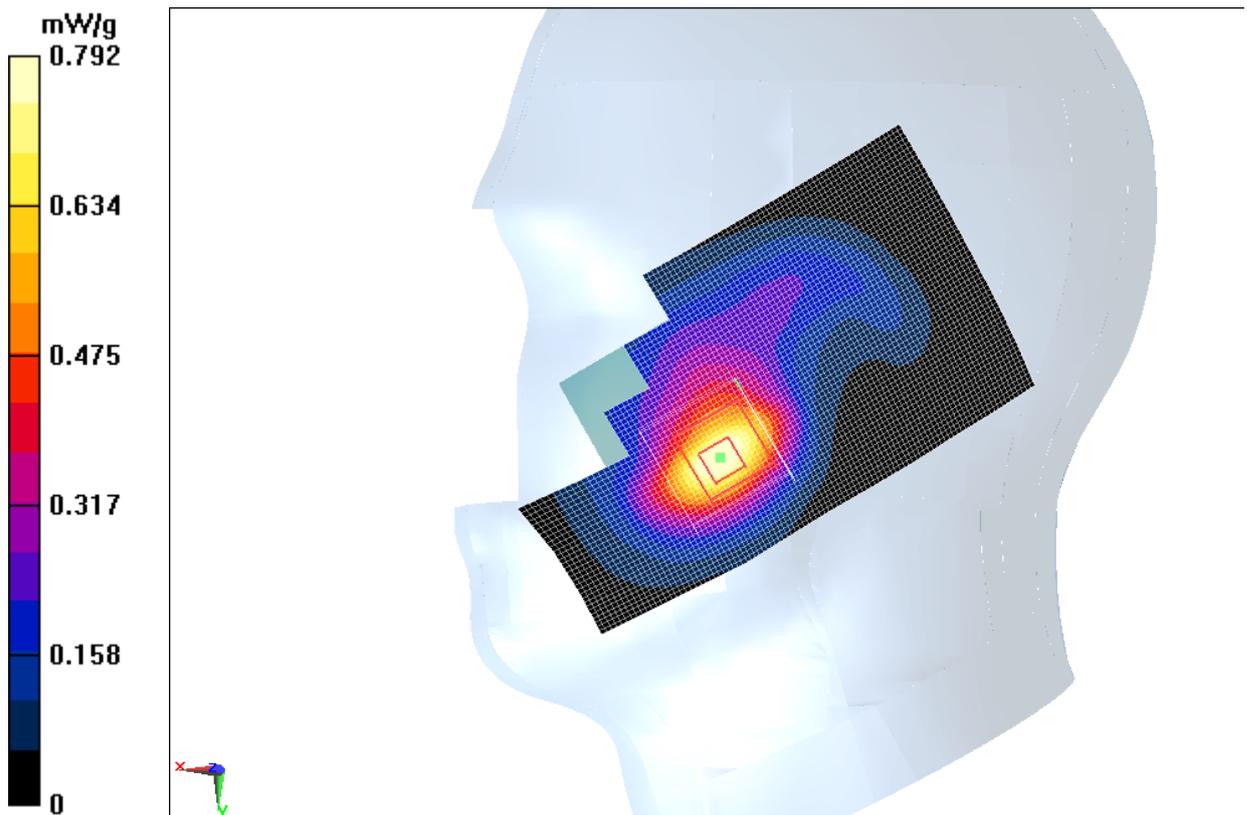


Fig. 32 1900 MHz CH512

1900 Right Tilt High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.696$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Tilt High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.265 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.921 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.360 mW/g

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.129 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

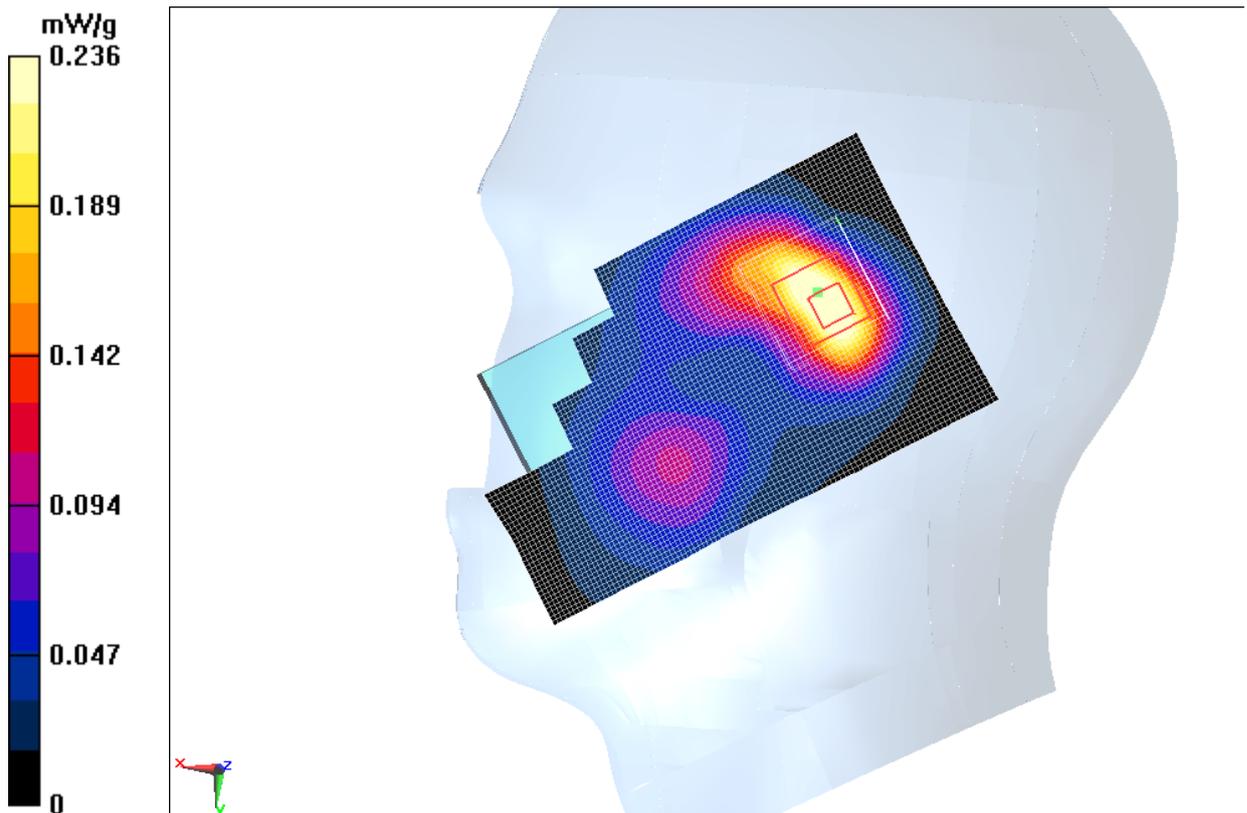


Fig. 33 1900 MHz CH810

1900 Right Tilt Middle

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ mho/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Tilt Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.292 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.622 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.394 mW/g

SAR(1 g) = 0.248 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.256 mW/g

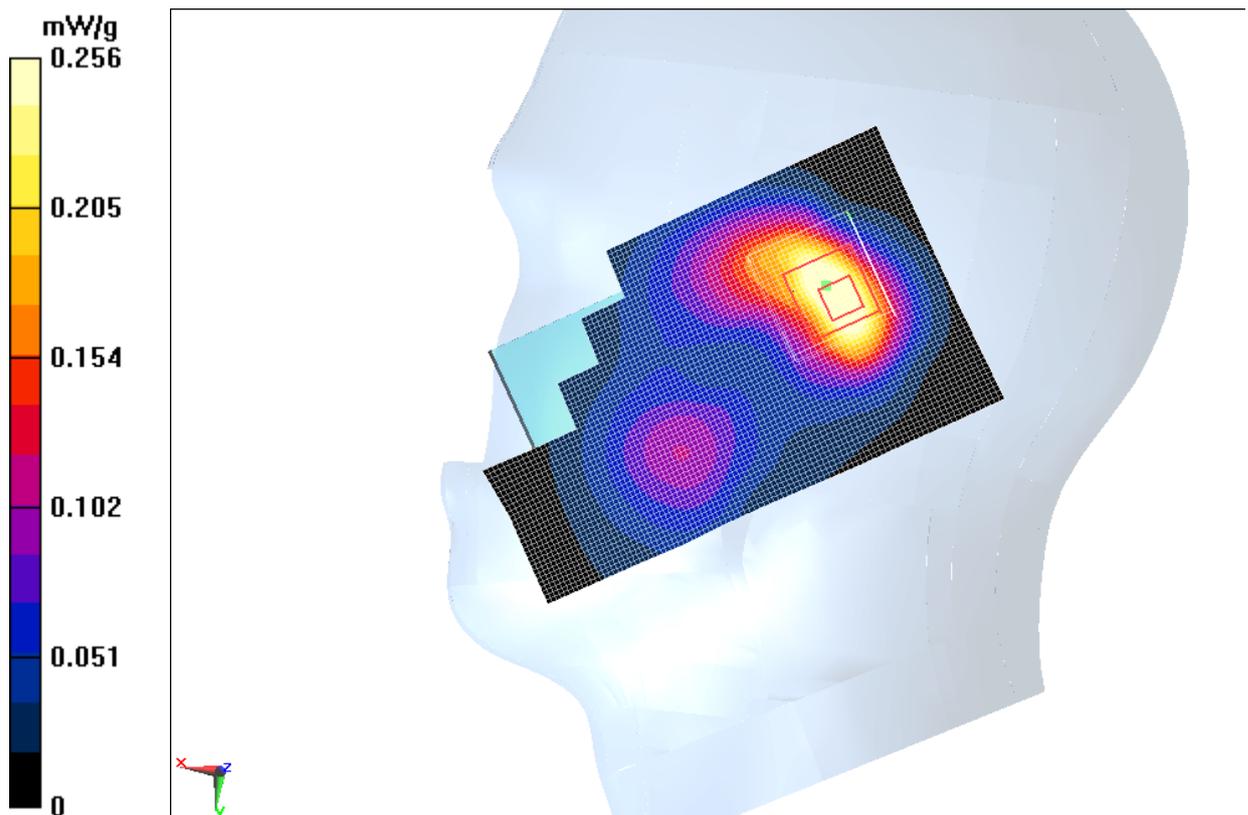


Fig.34 1900 MHz CH661

1900 Right Tilt Low

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.342$ mho/m; $\epsilon_r = 40.901$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Tilt Low/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.260 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.879 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.350 mW/g

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.234 mW/g

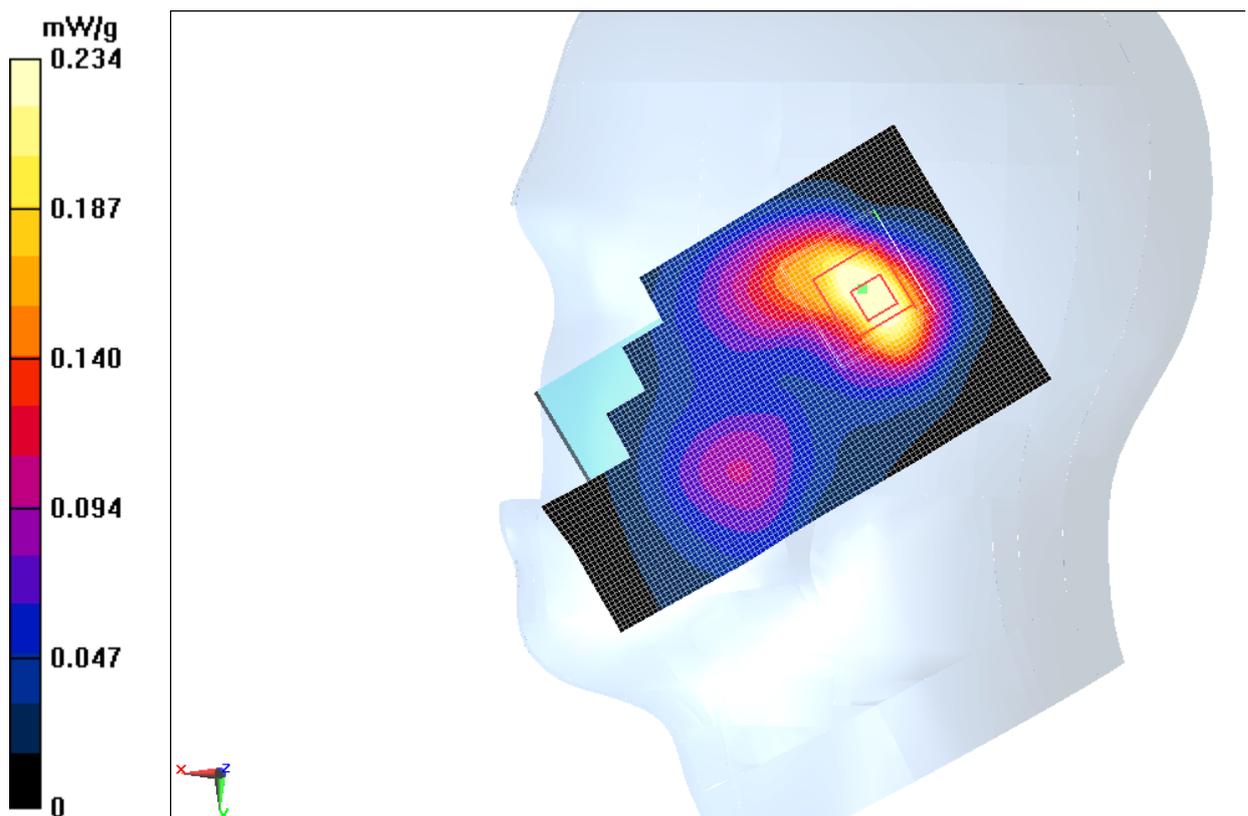


Fig. 35 1900 MHz CH512

1900 Right Cheek Middle with battery CAB3120000C1

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ mho/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.19, 5.19, 5.19)

Cheek Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.835 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.907 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.096 mW/g

SAR(1 g) = 0.731 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 0.798 mW/g

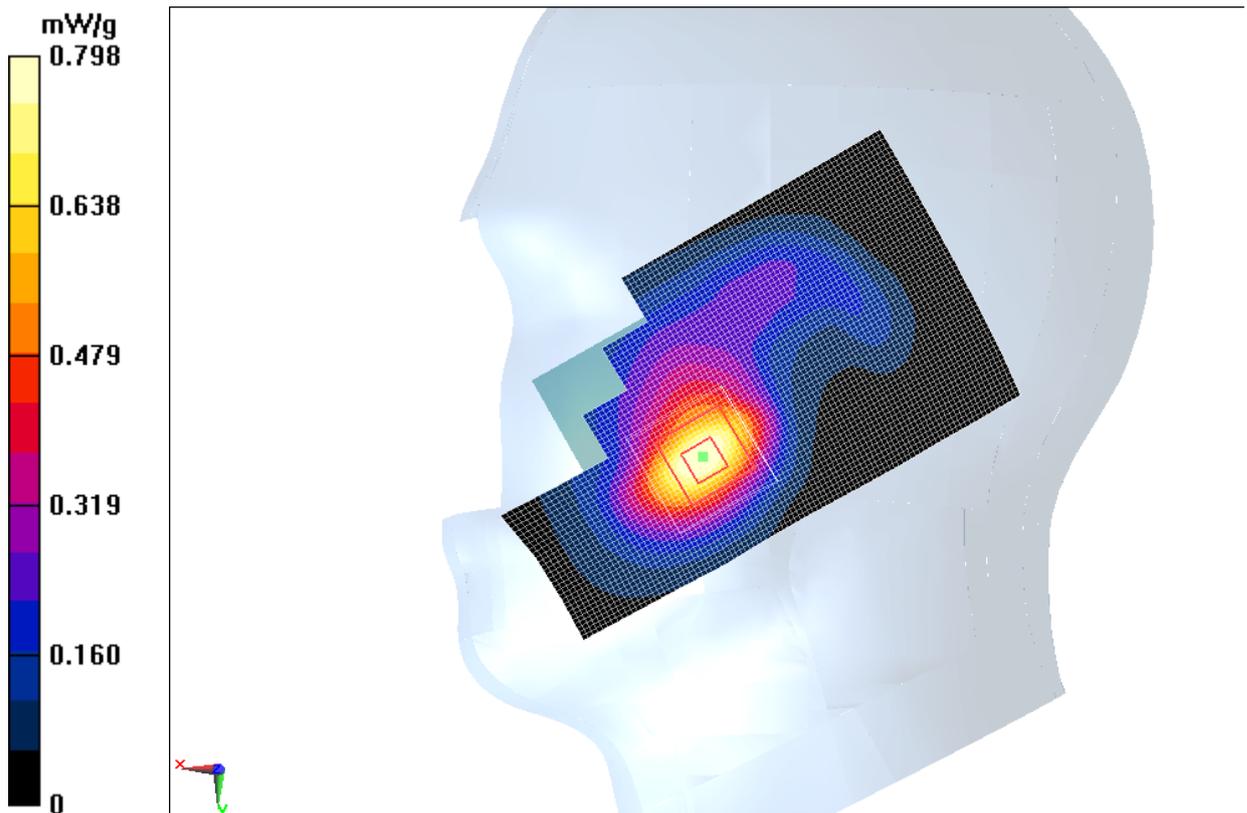


Fig. 36 1900 MHz CH661

1900 Body Toward Phantom High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.351$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Phantom High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.838 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.006 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.208 mW/g

SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.466 mW/g

Maximum value of SAR (measured) = 0.828 mW/g

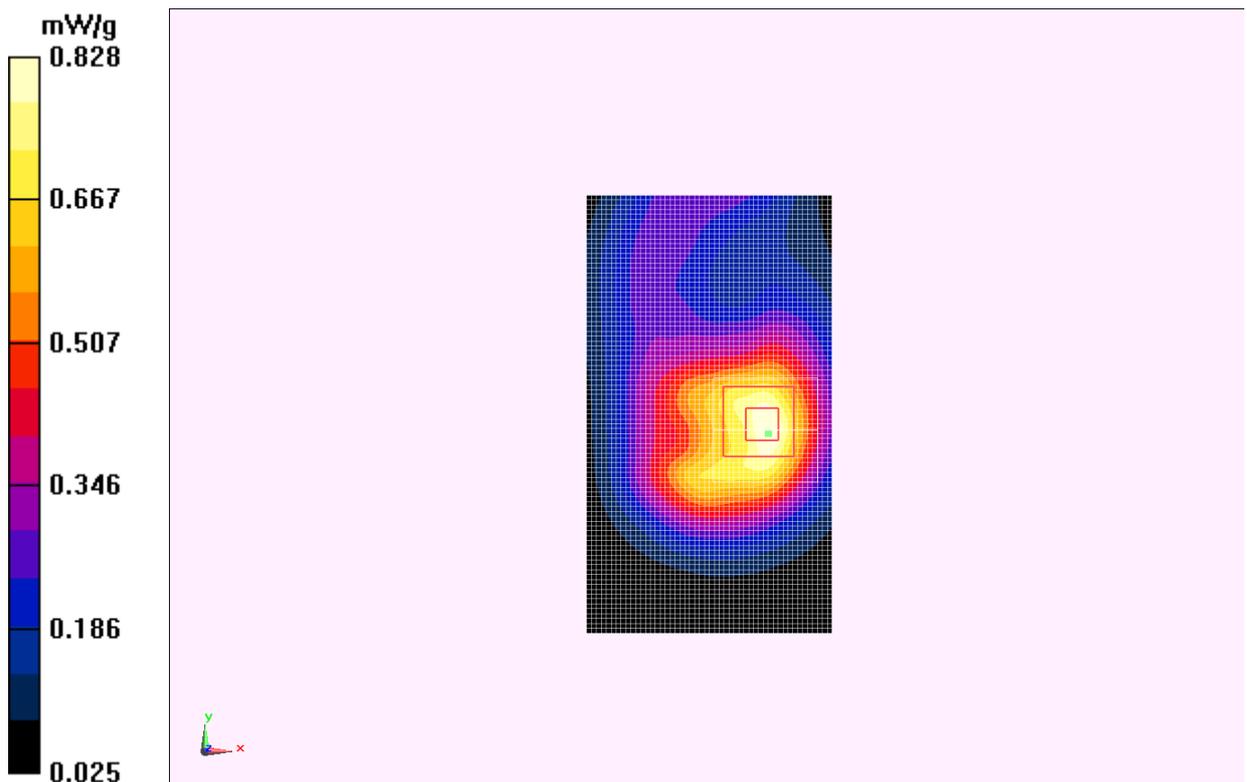


Fig. 37 1900 MHz CH810

1900 Body Toward Ground High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.351$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.43 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.261 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.731 mW/g

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.625 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

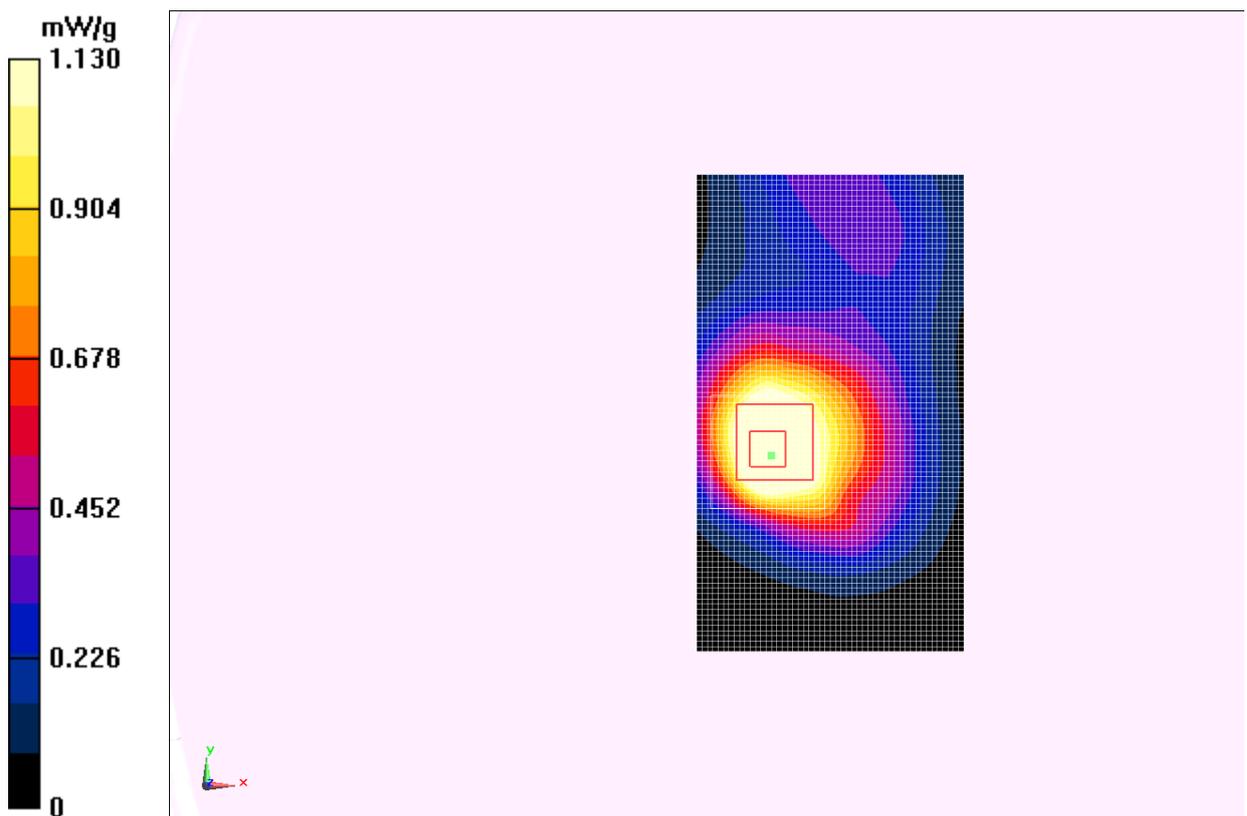


Fig. 38 1900 MHz CH810

1900 Body Toward Ground Middle

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.473$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.25 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.178 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.806 mW/g

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.658 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

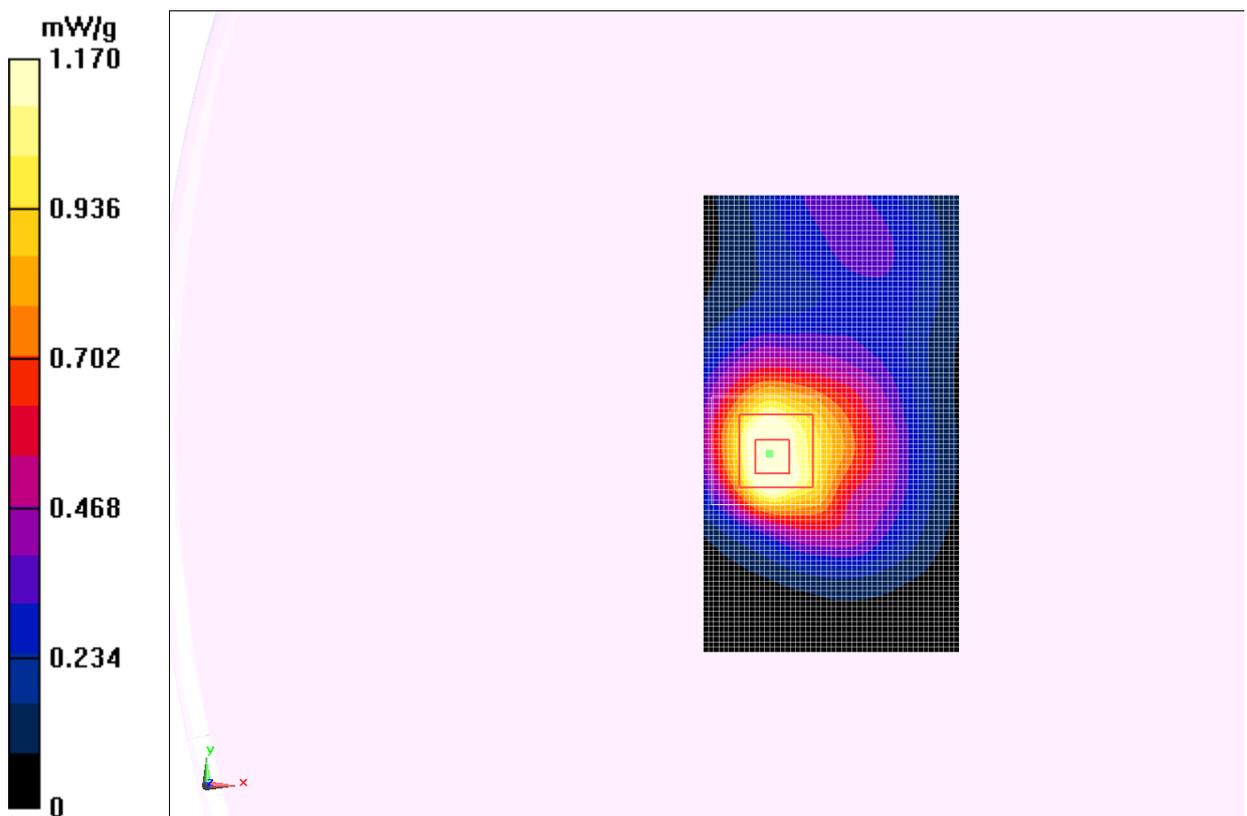


Fig. 39 1900 MHz CH661

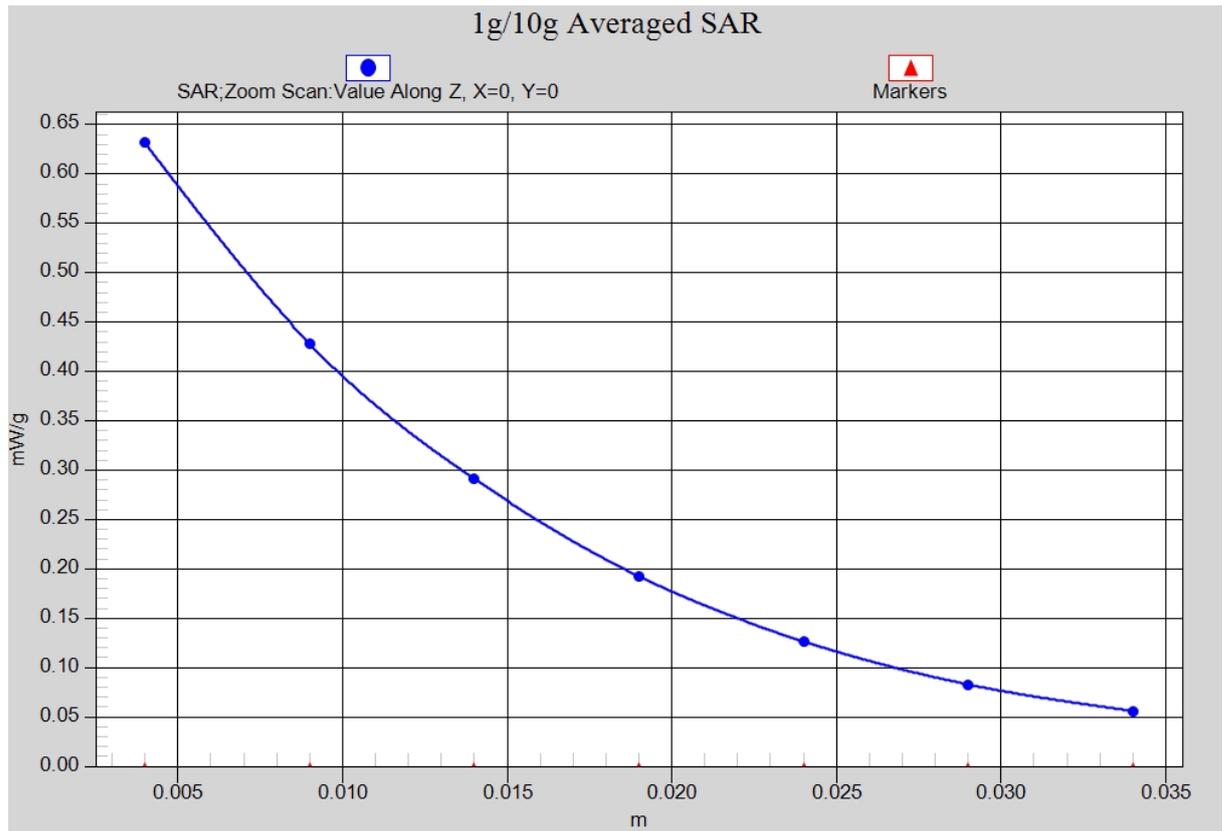


Fig. 39-1 Z-Scan at power reference point (1900 MHz CH661)

1900 Body Toward Ground Low

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.447$ mho/m; $\epsilon_r = 52.608$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.21 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.046 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.769 mW/g

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.646 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

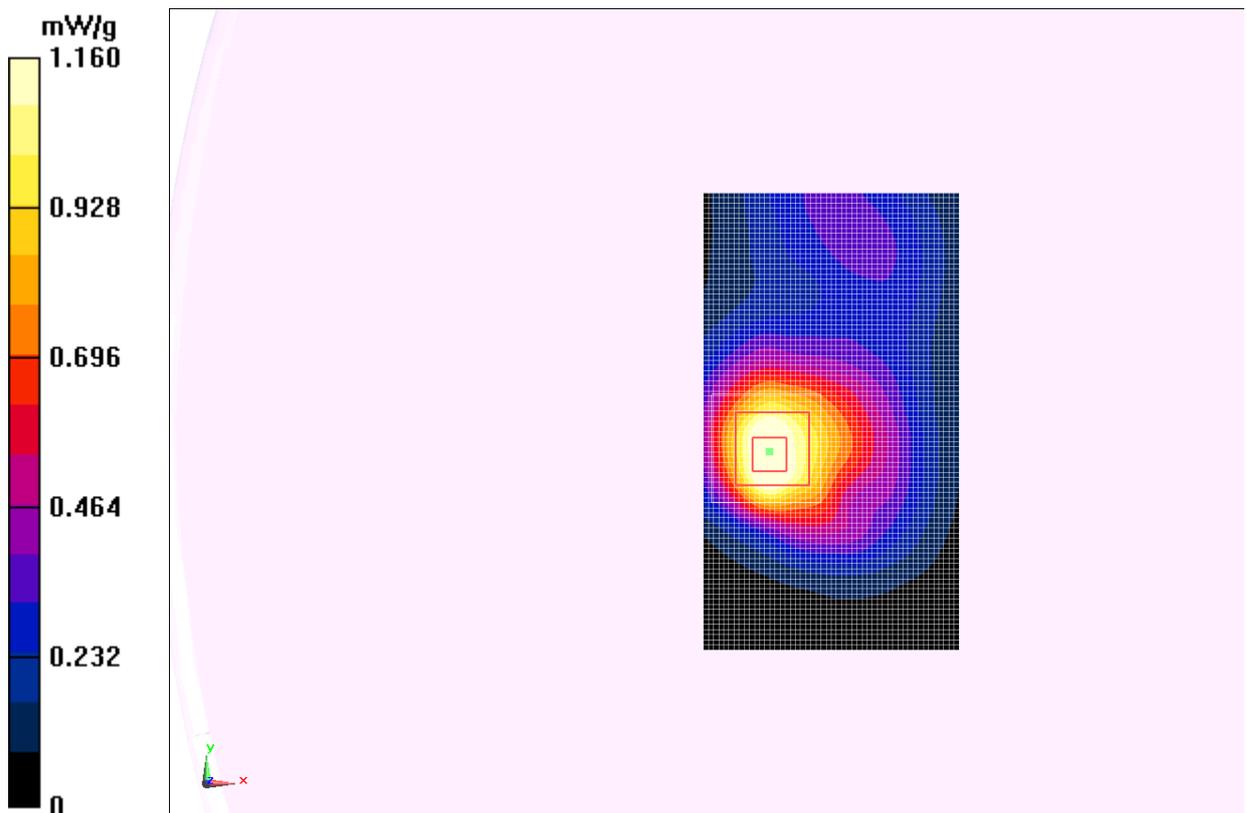


Fig. 40 1900 MHz CH512

1900 Body Left Side High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.351$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Left Side High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.224 mW/g

Left Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.961 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.313 mW/g

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.218 mW/g

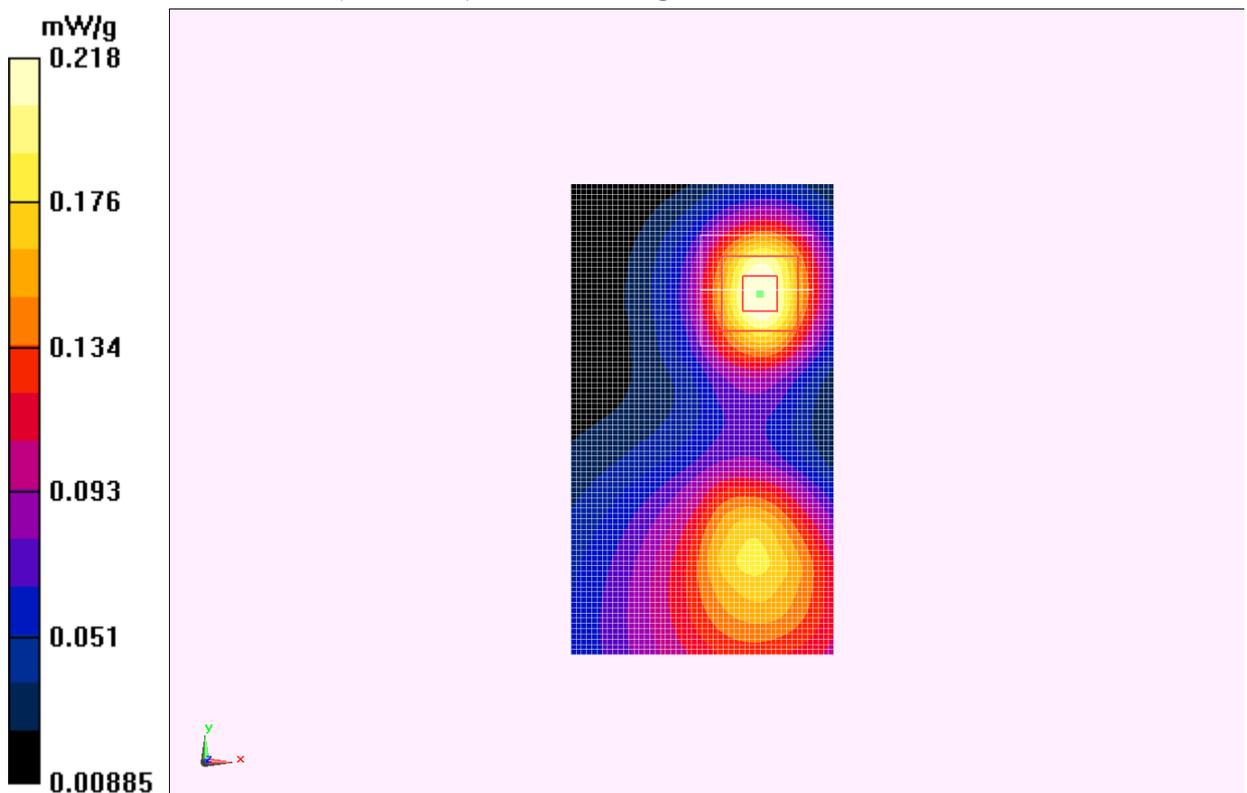


Fig. 41 1900 MHz CH810

1900 Body Right Side High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.351$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Right Side High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.248 mW/g

Right Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.607 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.380 mW/g

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.257 mW/g

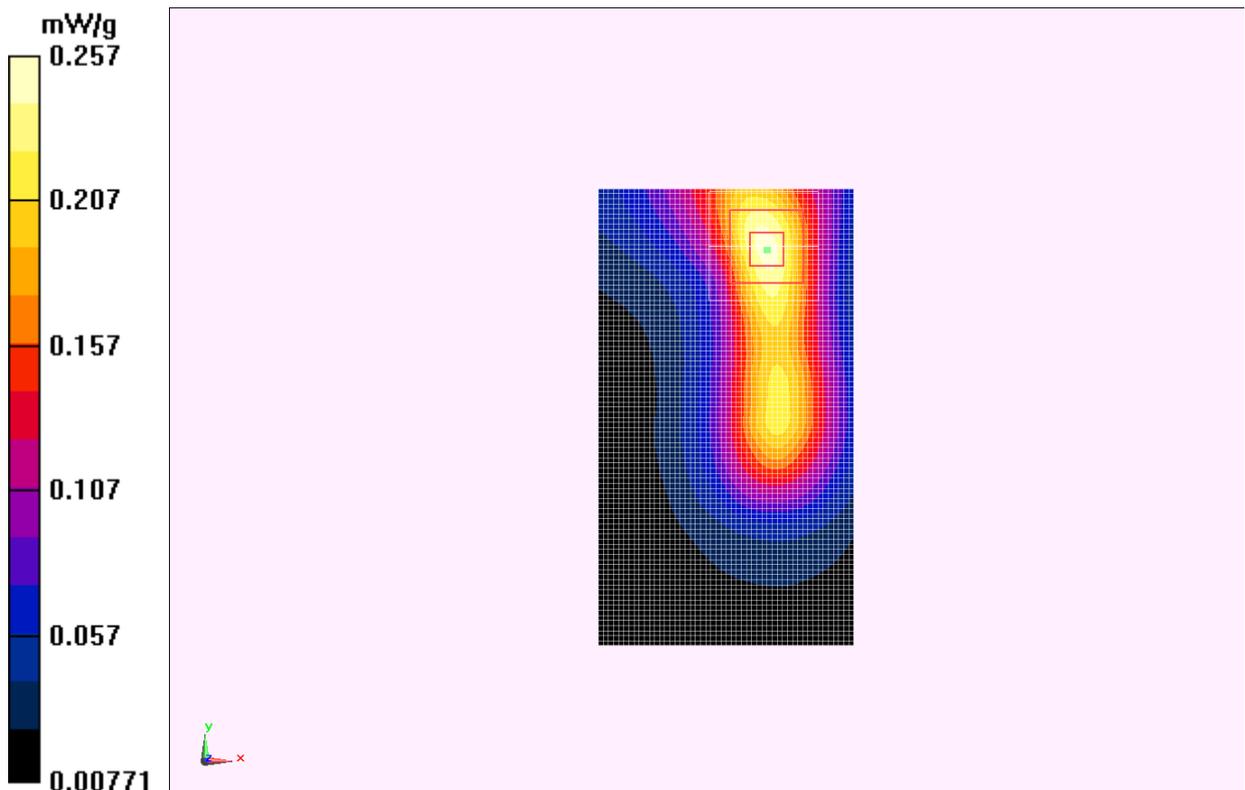


Fig. 42 1900 MHz CH810

1900 Body Bottom Side High

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.351$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Bottom Side High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.10 mW/g

Bottom Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.257 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.742 mW/g

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.569 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

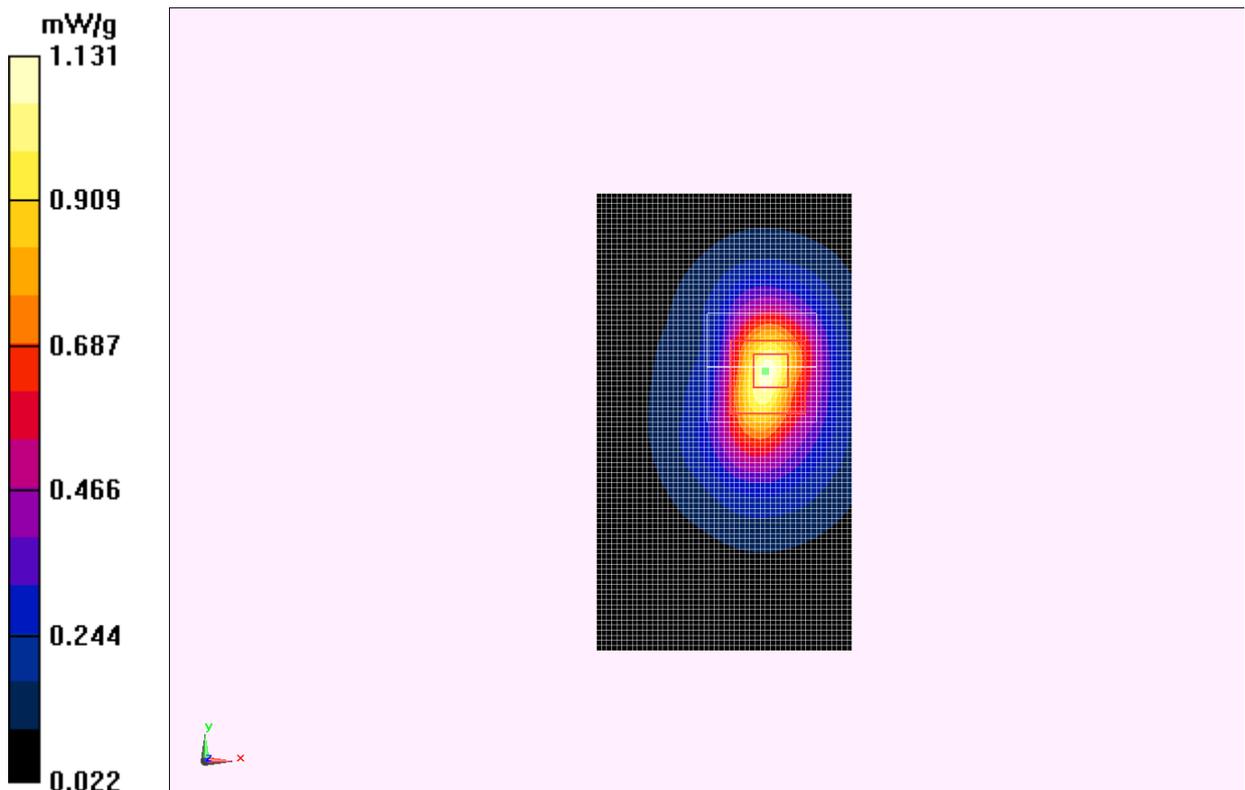


Fig. 43 1900 MHz CH810

1900 Body Bottom Side Middle

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.473$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Bottom Side Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.974 mW/g

Bottom Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.092 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.442 mW/g

SAR(1 g) = 0.878 mW/g; SAR(10 g) = 0.491 mW/g

Maximum value of SAR (measured) = 0.983 mW/g

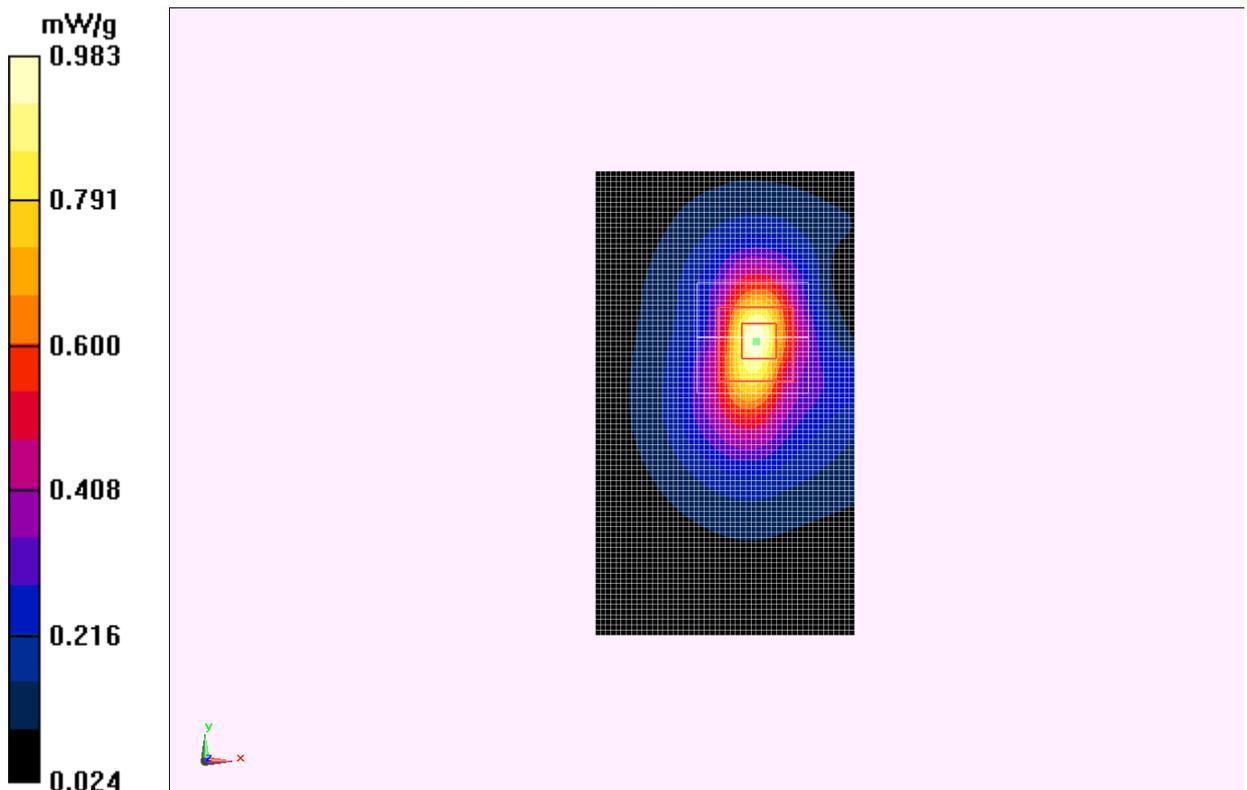


Fig. 44 1900 MHz CH661

1900 Body Bottom Side Low

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.447$ mho/m; $\epsilon_r = 52.608$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Bottom Side Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.984 mW/g

Bottom Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.083 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.448 mW/g

SAR(1 g) = 0.896 mW/g; SAR(10 g) = 0.509 mW/g

Maximum value of SAR (measured) = 0.988 mW/g

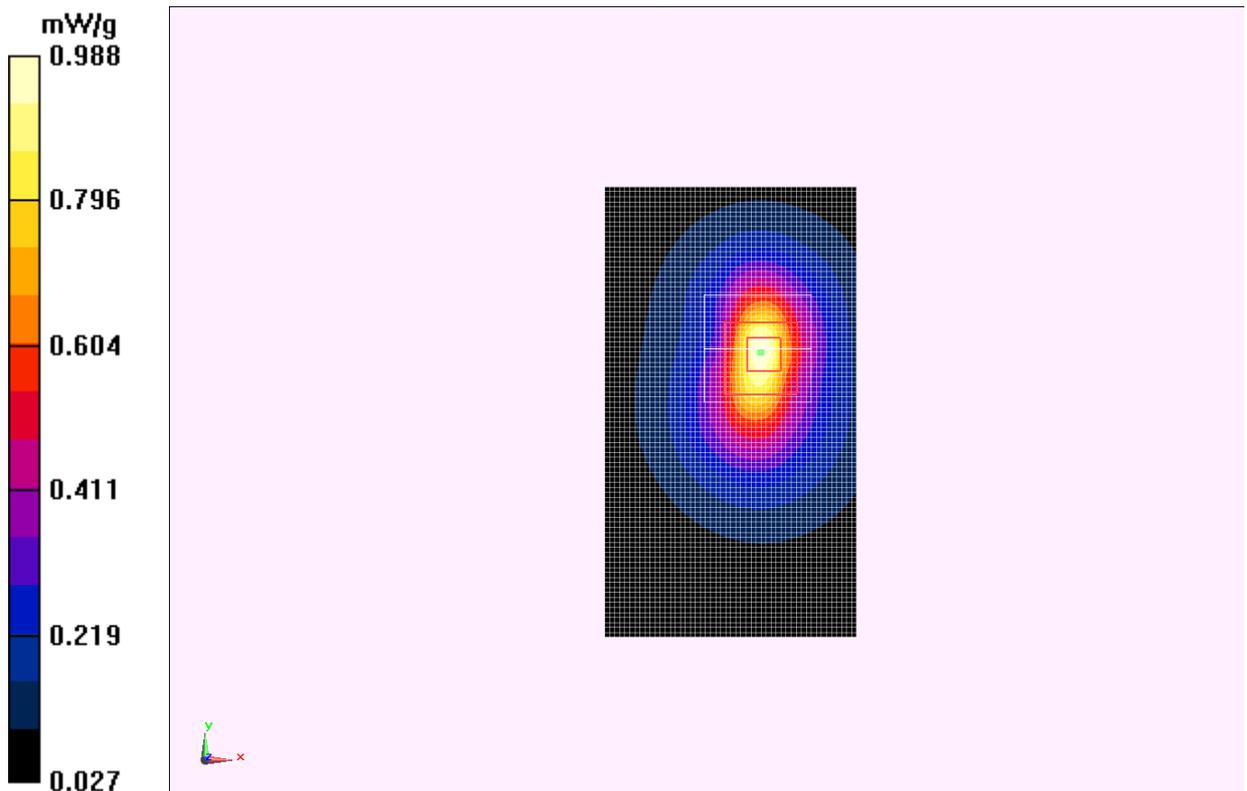


Fig. 45 1900 MHz CH512

1900 Body Toward Ground High with EGPRS

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.351$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz EGPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.067 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.669 mW/g

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.610 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

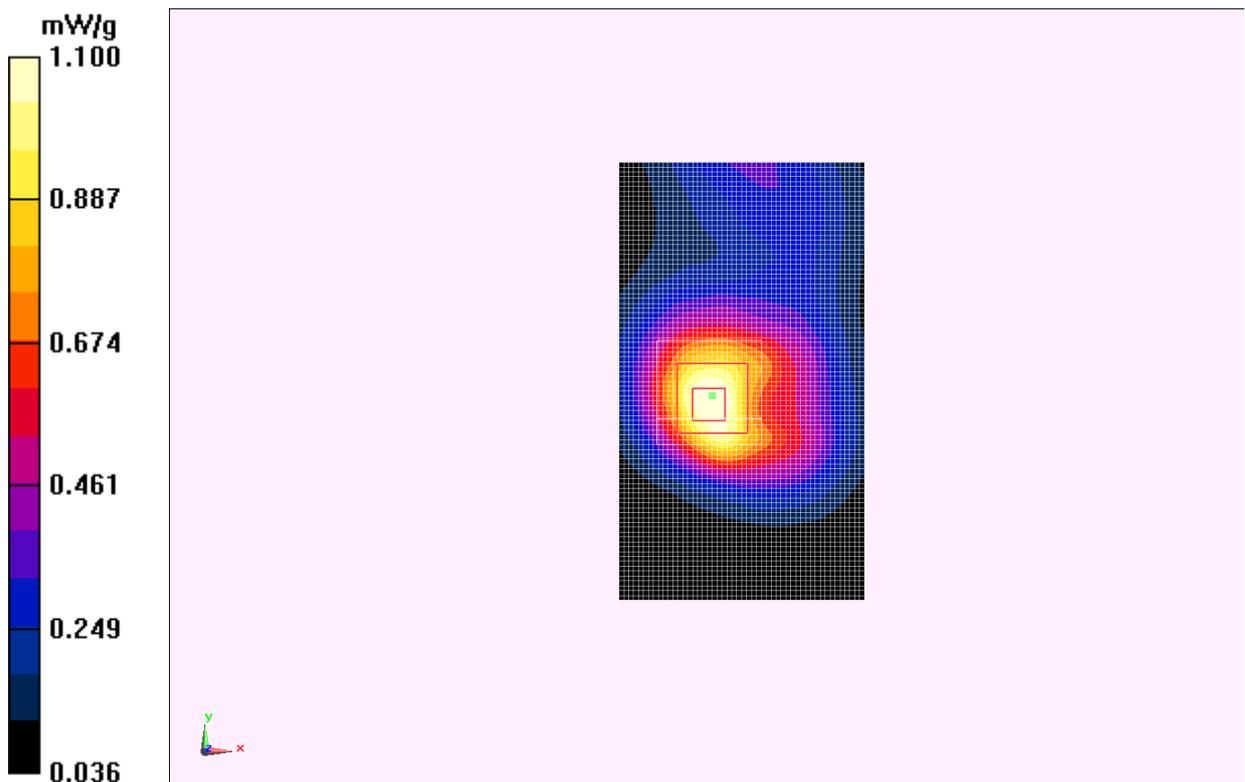


Fig. 46 1900 MHz CH810

1900 Body Toward Ground Middle with EGPRS

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.473$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz EGPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.084 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.726 mW/g

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.642 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

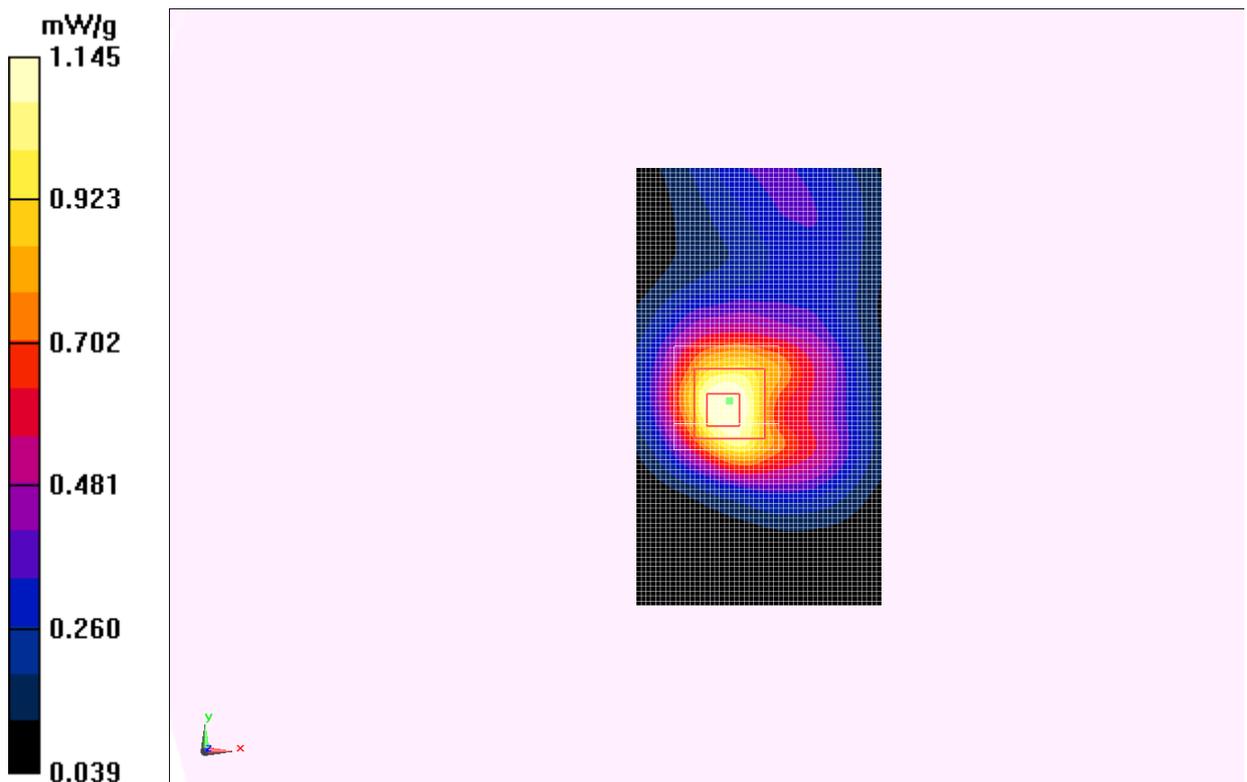


Fig. 47 1900 MHz CH661

1900 Body Toward Ground Low with EGPRS

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.447$ mho/m; $\epsilon_r = 52.608$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz EGPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.17 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.182 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.715 mW/g

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.645 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

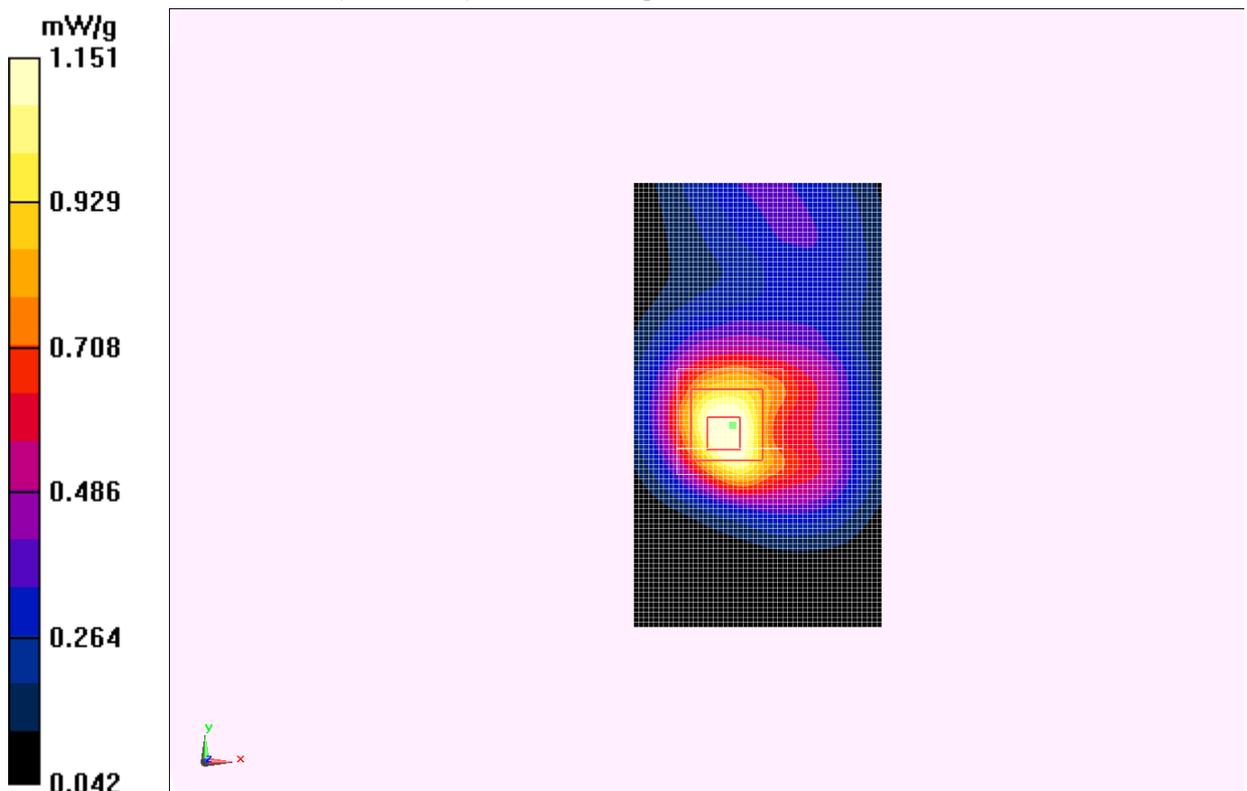


Fig. 48 1900 MHz CH512

1900 Body Toward Ground Middle with Headset CCB3160A11C2

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.473$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.845 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.613 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.181 mW/g

SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.789 mW/g

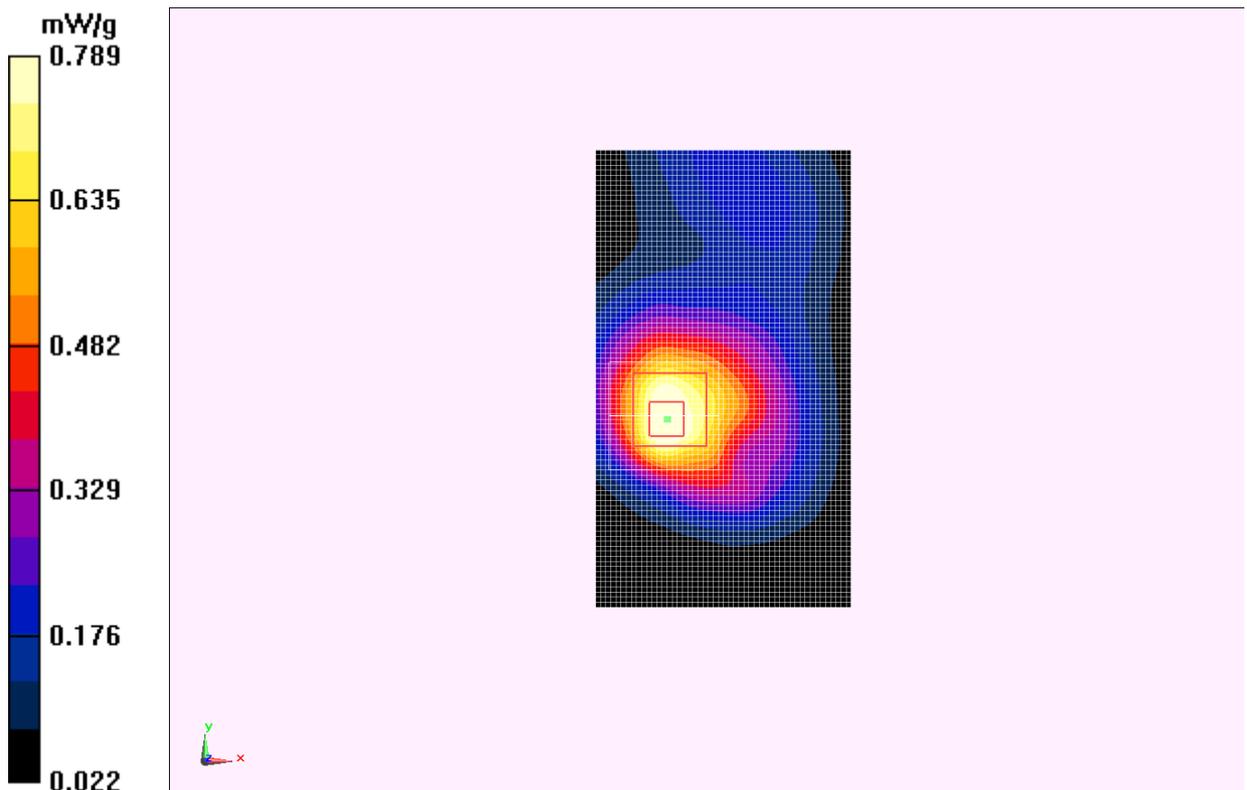


Fig. 49 1900 MHz CH661

1900 Body Toward Ground Middle with Headset CCB3160A11C4

Date: 2012-11-23

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.473$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.64, 4.64, 4.64)

Toward Ground Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.697 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.792 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.964 mW/g

SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.648 mW/g

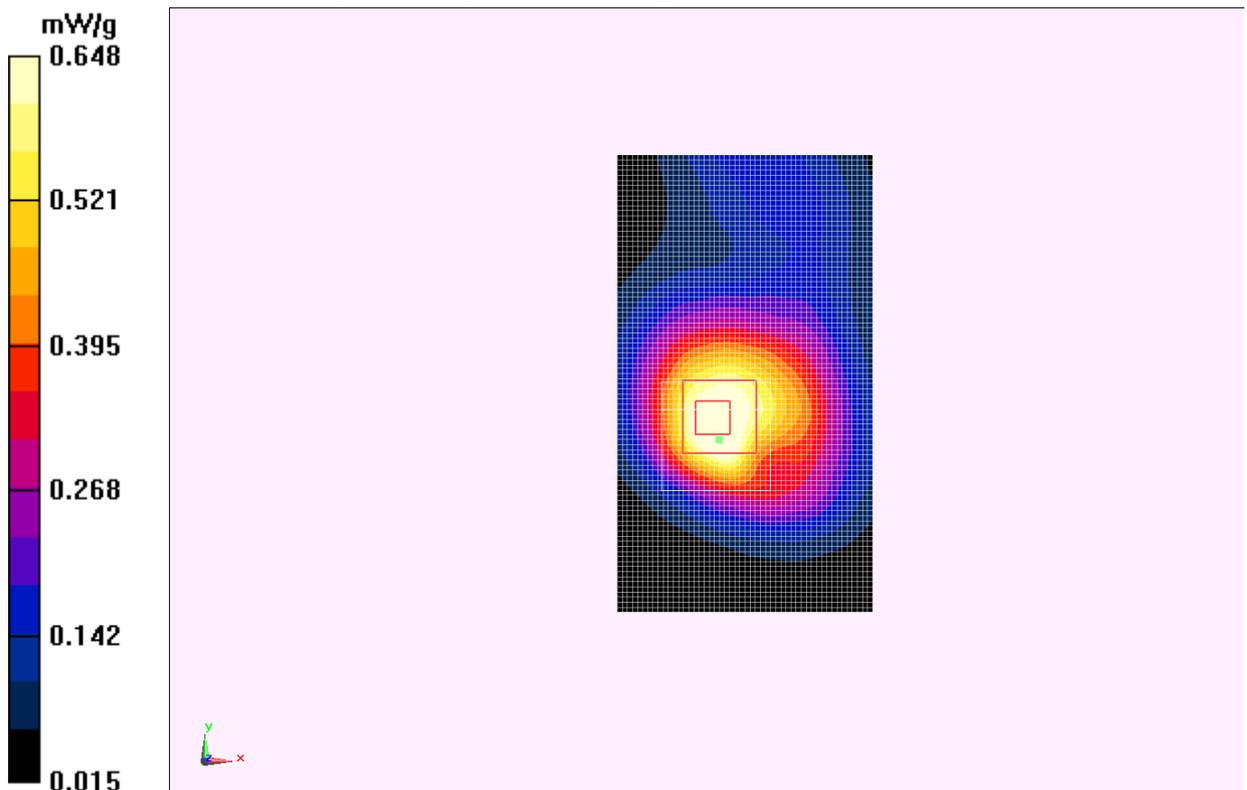


Fig. 50 1900 MHz CH661

Wifi Left Cheek High

Date: 2012-11-22

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.841$ mho/m; $\epsilon_r = 39.438$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: WLan 2450 Frequency: 2462 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.49, 4.49, 4.49)

Cheek High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.257 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.509 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.490 mW/g

SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

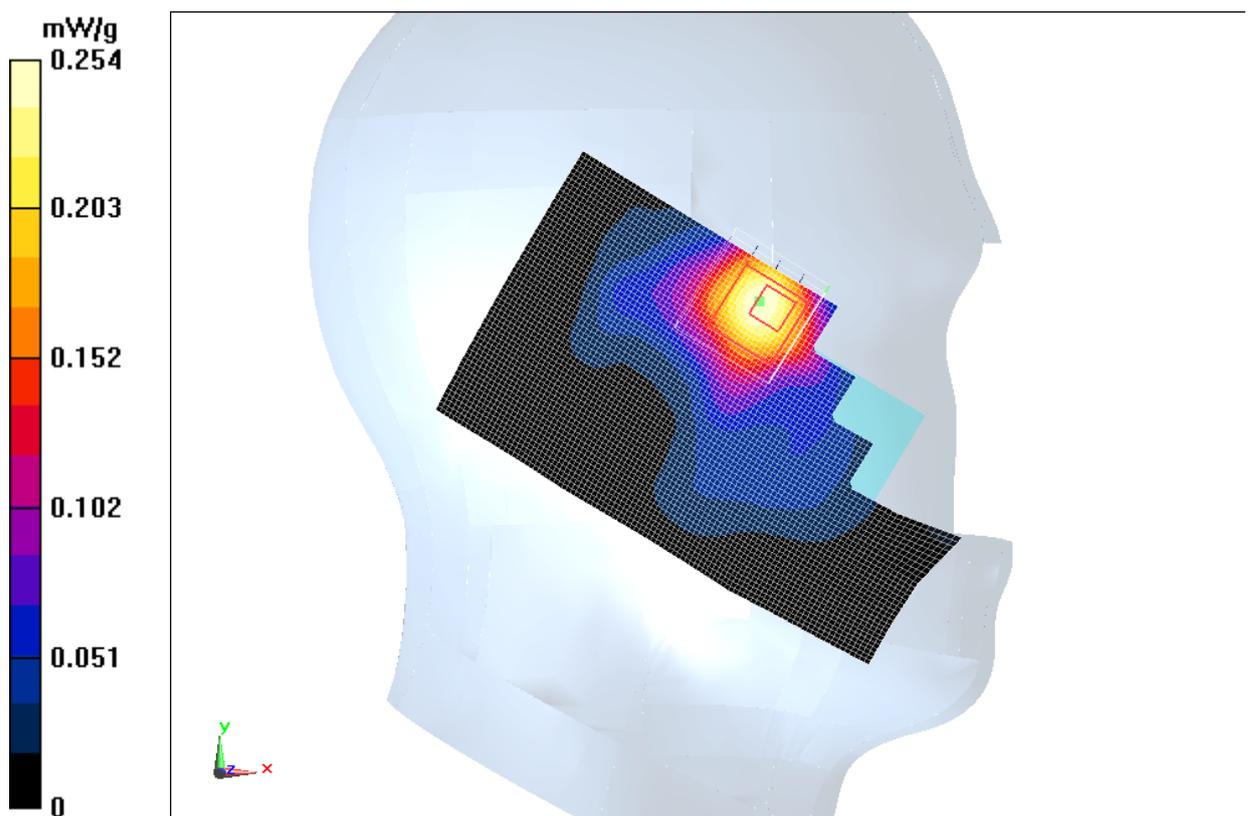


Fig. 51 2450 MHz CH11

Wifi Left Tilt High

Date: 2012-11-22

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.841$ mho/m; $\epsilon_r = 39.438$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: WLAN 2450 Frequency: 2462 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.49, 4.49, 4.49)

Tilt High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.193 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.023 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.298 mW/g

SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.023 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.252 mW/g

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.153 mW/g

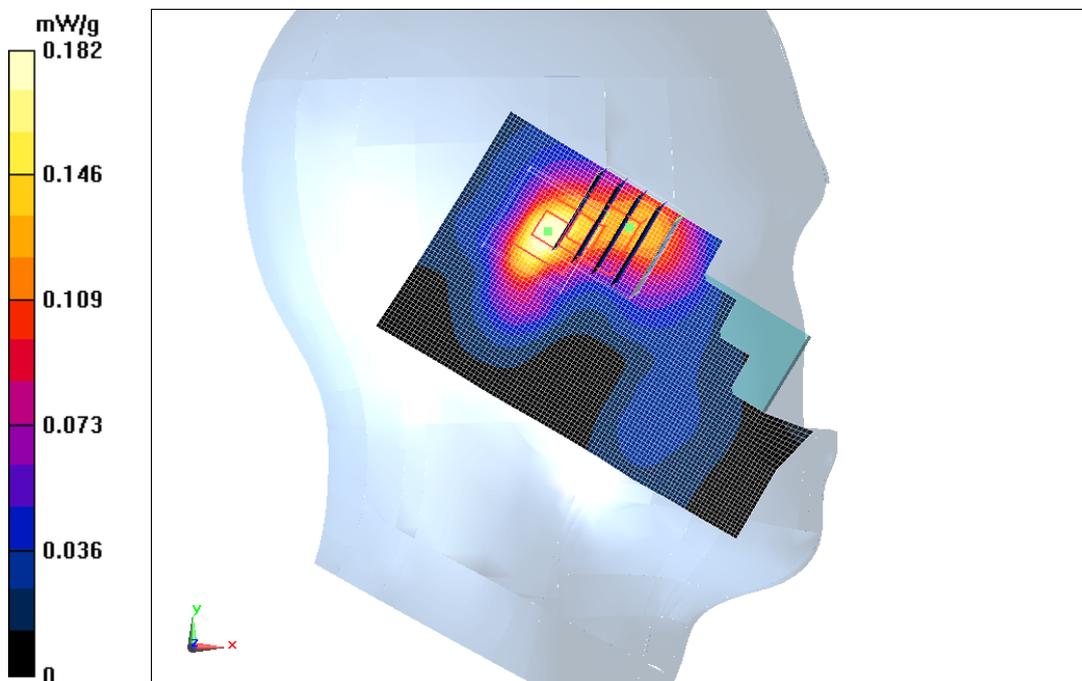


Fig. 52 2450 MHz CH11

Wifi Right Cheek High

Date: 2012-11-22

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.841$ mho/m; $\epsilon_r = 39.438$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: WLAN 2450 Frequency: 2462 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.49, 4.49, 4.49)

Cheek High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.742 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.777 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.445 mW/g

SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.749 mW/g

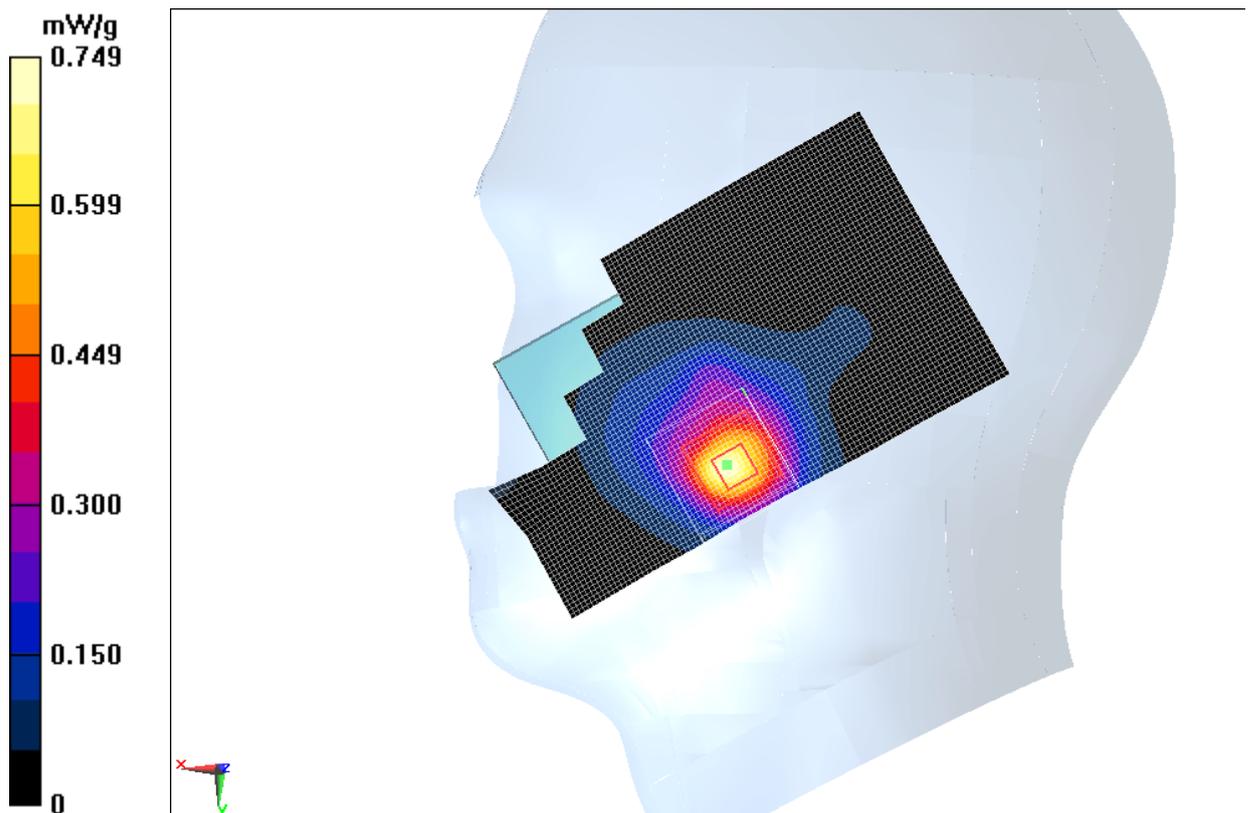


Fig. 53 2450 MHz CH11

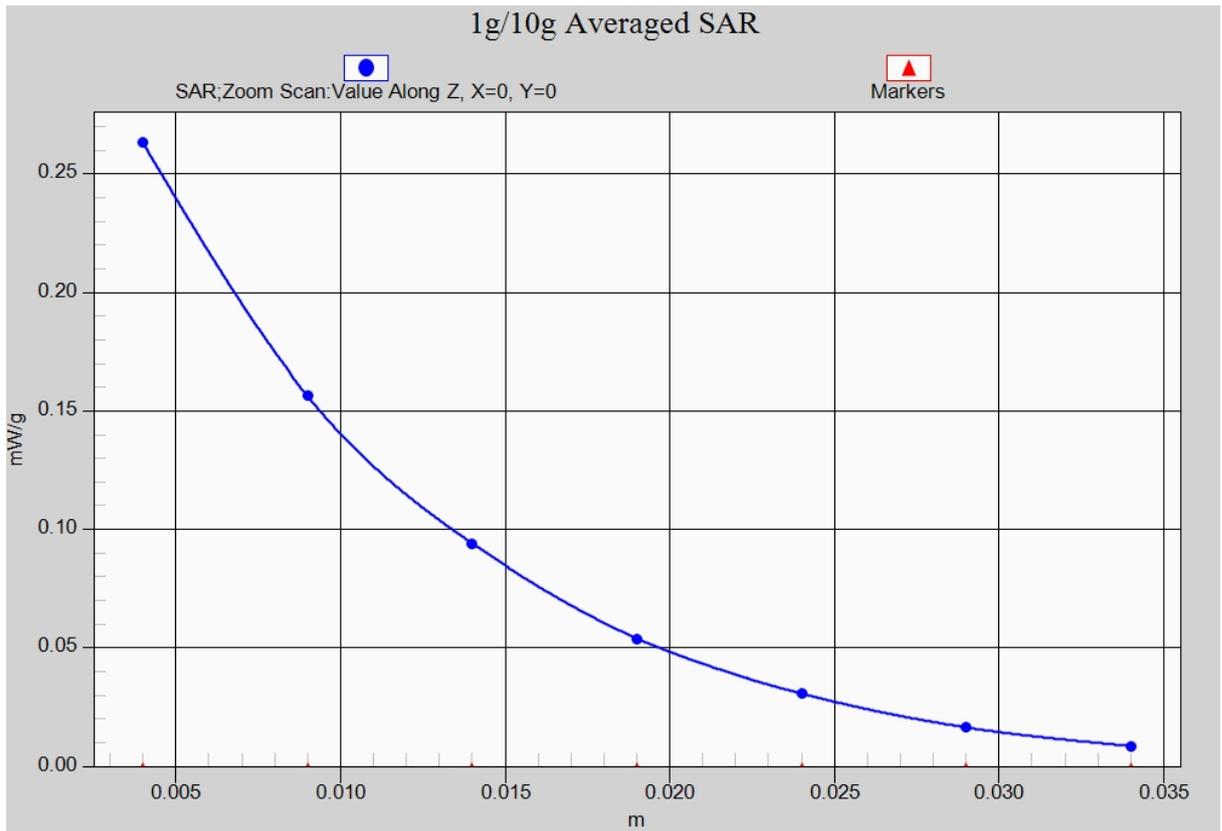


Fig. 53-1 Z-Scan at power reference point (2450 MHz CH11)

Wifi Right Tilt High

Date: 2012-11-22

Electronics: DAE4 Sn771

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.841$ mho/m; $\epsilon_r = 39.438$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: WLAN 2450 Frequency: 2462 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.49, 4.49, 4.49)

Tilt High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.103 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.821 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.172 mW/g

SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.821 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.154 mW/g

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.0907 mW/g

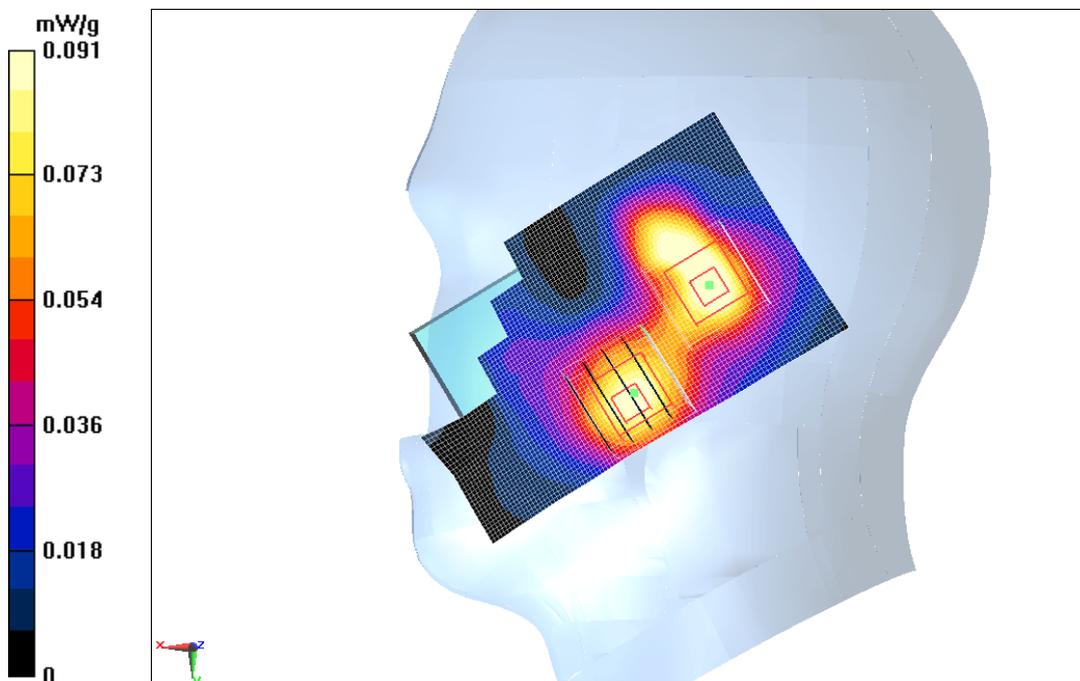


Fig. 54 2450 MHz CH11

Wifi Body Toward Phantom High

Date: 2012-11-22

Electronics: DAE4 Sn771

Medium: 2450 Body

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.973$ mho/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: WLAN 2450 Frequency: 2462 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.15, 4.15, 4.15)

Toward Phantom High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0533 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.671 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.079 mW/g

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.0497 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.671 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.059 mW/g

SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.0400 mW/g

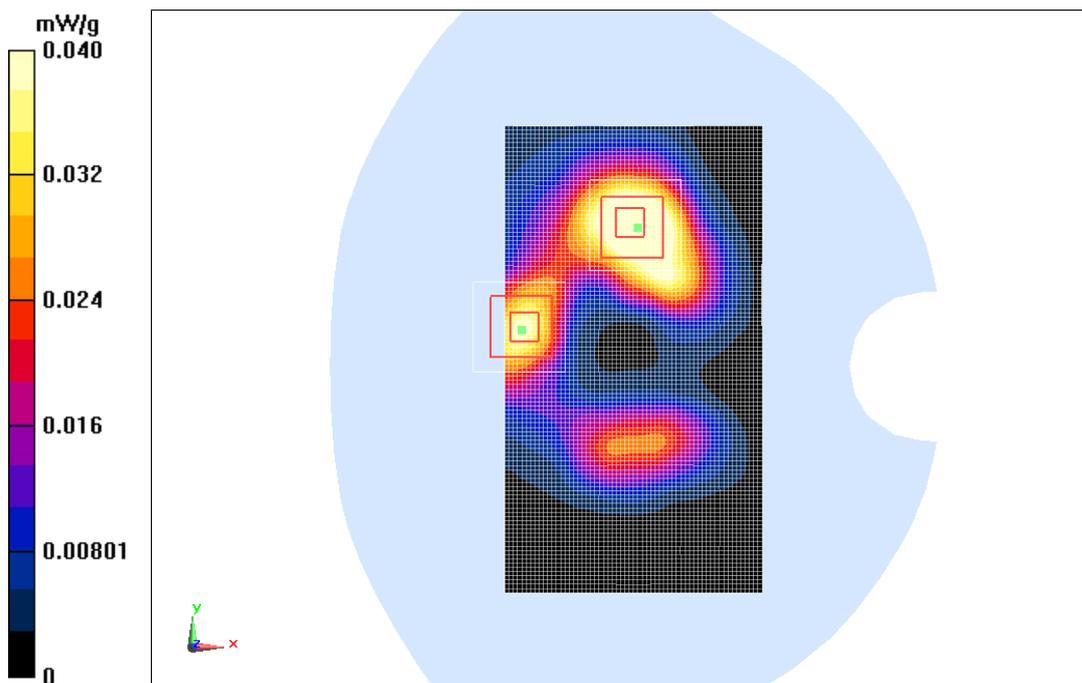


Fig. 55 2450 MHz CH11

Wifi Body Toward Ground High

Date: 2012-11-22

Electronics: DAE4 Sn771

Medium: 2450 Body

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.973$ mho/m; $\epsilon_r = 52.02$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: WLAN 2450 Frequency: 2462 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.15, 4.15, 4.15)

Toward Ground High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.530 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.964 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.005 mW/g

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 0.496 mW/g

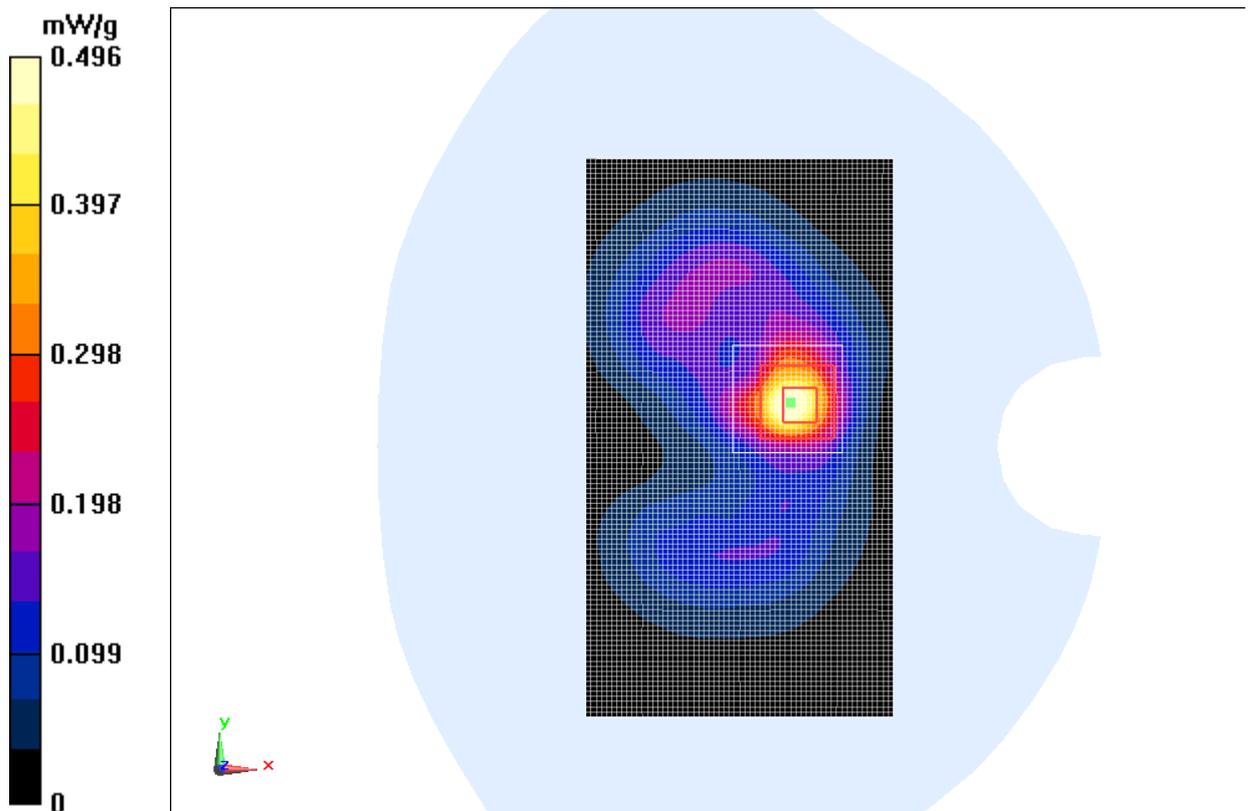


Fig. 56 2450 MHz CH11