



Report No.: SZ12120200S01



SAR TEST REPORT

Issued to

TCT Mobile Limited

For

Module

Model Name : ONE TOUCH M70
 Trade Name : ALCATEL
 Brand Name : ALCATEL
 FCC ID : RAD312
 Standard : FCC Oet65 Supplement C Jun.2001
 47CFR 2.1093
 ANSI C95.1-1999
 IEEE 1528-2003
 MAX SAR : Body: 1.176 W/kg
 Test date : 2013-1-29
 Issue date : 2013-1-29



Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Zhu Zhan
 Zhu Zhan
 Date 2013.1.29

Approved by Wu Xuewen
 Wu Xuewen
 Date 2013.01.29

Review by Samuel Peng
 Samuel Peng
 Date 2013.1.29



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his GPRSer Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

DIRECTORY	2
TESTING LABORATORY	4
1.1. Identification of the Responsible Testing Laboratory.....	4
1.2. Identification of the Responsible Testing Location.....	4
1.3. Accreditation Certificate.....	4
1.4. List of Test Equipments.....	4
2. TECHNICAL INFORMATION	5
2.1. Identification of Applicant.....	5
2.2. Identification of Manufacturer.....	5
2.3. Equipment Under Test (EUT).....	5
2.3.1. Photographs of the EUT.....	5
2.3.2. Identification of all used EUT.....	5
2.4. Applied Reference Documents.....	6
2.5. Device Category and SAR Limits.....	6
2.6. Test Environment/Conditions.....	7
3. SPECIFIC ABSORPTION RATE (SAR)	8
3.1. Introduction.....	8
3.2. SAR Definition.....	8
4. SAR MEASUREMENT SETUP	9
4.1. The Measurement System.....	9
4.2. Probe.....	9
4.3. Probe Calibration Process.....	11
4.3.1 Dosimetric Assessment Procedure.....	11
4.3.2 Free Space Assessment Procedure.....	11
4.3.2 Temperature Assessment Procedure.....	11
4.4. Phantom.....	12
4.5. Device Holder.....	12
5. TISSUE SIMULATING LIQUIDS	13
6. UNCERTAINTY ASSESSMENT	15
6.1. UNCERTAINTY EVALUATION FOR EUT SAR TEST.....	15
6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK.....	16
7. SAR MEASUREMENT EVALUATION	18

7.1. System Setup.....	18
7.2. Validation Results.....	19
8. OPERATIONAL CONDITIONS DURING TEST.....	20
8.1. Body-worn Configurations.....	20
8.2. Measurement procedure.....	20
8.3. Description of interpolation/extrapolation scheme.....	21
9.Measurement Of Conducted Peak Output Power.....	22
10. TEST RESULTS LIST.....	25
ANNEX A EUT SETUP PHOTOS.....	30
ANNEX B GRAPH TEST RESULTS.....	33

Change History		
Issue	Date	Reason for change
1.0	Jan. 22, 2013	First edition
2.0	Jan. 29, 2013	Second edition

Testing Laboratory

1.1. Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co., Ltd.
 Department: Morlab Laboratory
 Address: FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District
 Responsible Test Lab Manager: Mr. Shu Luan
 Telephone: +86 755 36698529
 Facsimile: +86 755 36698525

1.2. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd.
 Morlab Laboratory
 Address: FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District SAR&HAC Lab
 FCC Registration Number 695796

1.3. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Aglient (8960, SN:10752)	2012-9-26	1year
3	Network Analyzer	Agilent(E5071B ,SN:MY42404762)	2012-9-26	1year
4	Voltmeter	Keithley (2000, SN:1000572)	2012-9-24	1year
5	Signal Generator	Rohde&Schwarz (SMP_02)	2012-9-24	1year
6	Power Amplifier	PRANA (Ap32 SV125AZ)	2012-9-24	1year
7	Power Meter	Agilent (E4416A, SN:MY45102093)	2012-5-07	1year
8	Power Sensor	Agilent (N8482A, SN:MY41091706)	2012-5-07	1year
9	Directional coupler	Giga-tronics(SN:1829112)	2012-9-24	1year
10	Probe	Satimo (SN:SN_3708_EP80)	2012-10-04	1year
11	Power Meter	KRITHLEY (2000 MULTIMETER)	2012-9-24	1year
12	Dielectric Probe Kit	Agilent (85033E)	2012-9-24	1year
13	Phantom	Satimo (SN:SN_36_08_SAM62)	2012-9-24	1year
14	Liquid	Satimo(Last Calibration: 2013-1-16)	N/A	N/A
15	Dipole 835MHz	Satimo (SN 36/08 DIPC 99)	2012-10-05	1year
16	Dipole 1900MHz	Satimo (SN 36/08 DIPF 102)	2012-10-05	1year
17	Dipole 2450MHz	Satimo (SN 36/08 DIPJ 103)	2012-10-05	1year

2. Technical Information

Note: the following data is based on the information by the applicant.

2.1. Identification of Applicant

Company Name: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203

2.2. Identification of Manufacturer

Company Name: TCL COMMUNICATION TECHNOLOGY HOLDINGS LIMITED.
Address: 70 Huifeng 4rd, ZhongKai Hi-tech Development District, Huizhou, Guangdong 516006 P.R.China

2.3. Equipment Under Test (EUT)

Host platform

Model Name: ONE TOUCH T70
Trade Name: ALCATEL
Brand Name: ALCATEL
FCC ID: RAD310
Frequency Bands: Bluetooth ; Wifi802.11B/G/N
Modulation Mode: WIFI802.11B: DSSS; WIFI802.11G: OFDM
WIFI 802.11N: OFDM; BT: GFSK/ $\pi/4$ -DQPSK /8-DPSK/
Antenna type: Fixed Internal Antenna
Development Stage: Identical prototype
Battery Model: one touch UC15EU
Battery specification: 3.7V, 4150mAh

Module

Model Name: ONE TOUCH M70
Trade Name: ALCATEL
Brand Name: ALCATEL
FCC ID: RAD312
Frequency Bands: GSM 850MHz / PCS 1900MHz;
WCDMA 850MHz/ 1900MHz; (Band II, V)
Modulation Mode: GSM/GPRS: GMSK; EDGE:8PSK;
WCDMA/HSDPA/HSUPA/HSPA+: QPSK;
3GPP Version Release 7
Antenna type: Fixed Internal Antenna
Development Stage: Identical prototype

2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

2.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	N/A	N/A

2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
3	ANSI C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
4	IEEE 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
5	KDB 616217 D03	SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers
6	KDB 447498 D01	General RF Exposure Guidance v05
7	KDB 248227 D01	SAR Measurement Procedures for 802.11a/b/g Transmitters
8	KDB 648474 D1	SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
9	KDB 941225 D1	SAR Measurement Procedures for 3G Devices
10	KDB 865664 D1	SAR Measurement 100 MHz to 6 GHz v01
11	KDB 865664 D2	SAR Reporting v01

2.5. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.6. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz /PCS 1900MHz; WCDMA 850MHz/WCDMA 1900MHz; 802.11B(2.4GHz);
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) PCS 1900 MHz Maximum output power(level 0) WCDMA 850MHz Maximum output power(All up bits) WCDMA 1900MHz Maximum output power(All up bits) 802.11B Maximum output power(2.4GHz)

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz, or to 9262, 9400 and 9538 respectively in the case of WCDMA 1900, or to 4132, 4182 and 4233 respectively in the case of WCDMA 850MHz, or to 1, 6, 11 respectively in the case of 802.11B (2.4GHz). The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Setup

4.1. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2. Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

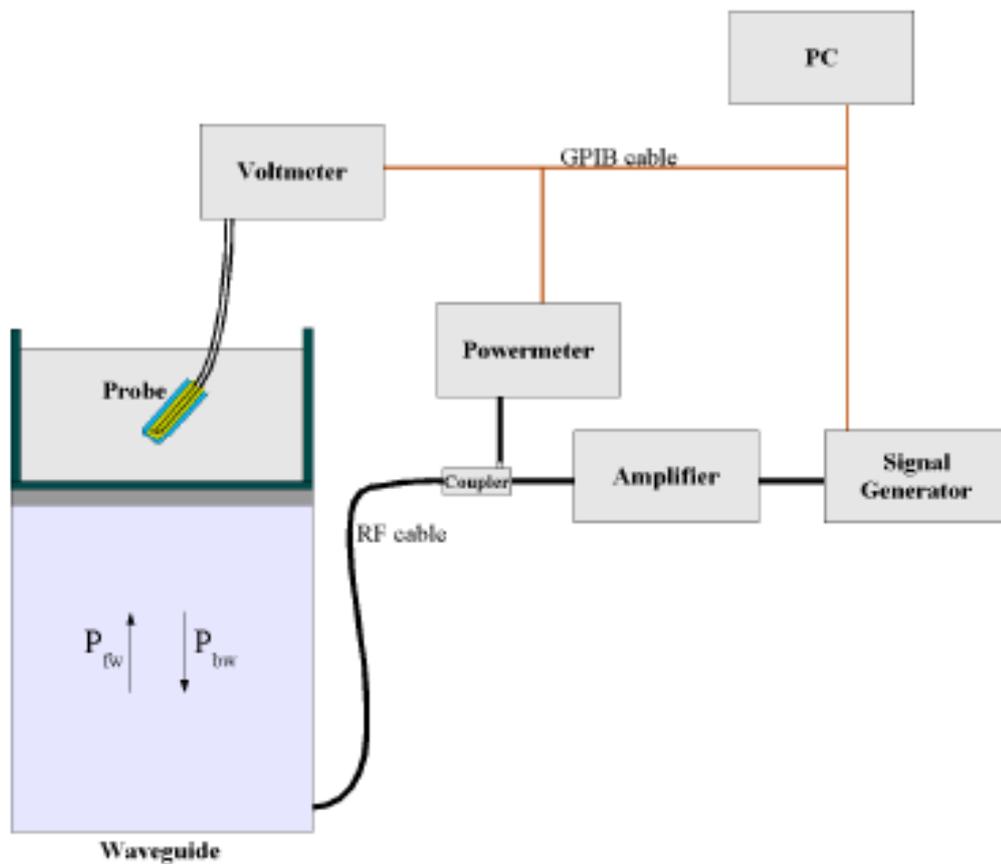

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) c^{(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N) / V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N) / DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3. Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

4.3.2 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

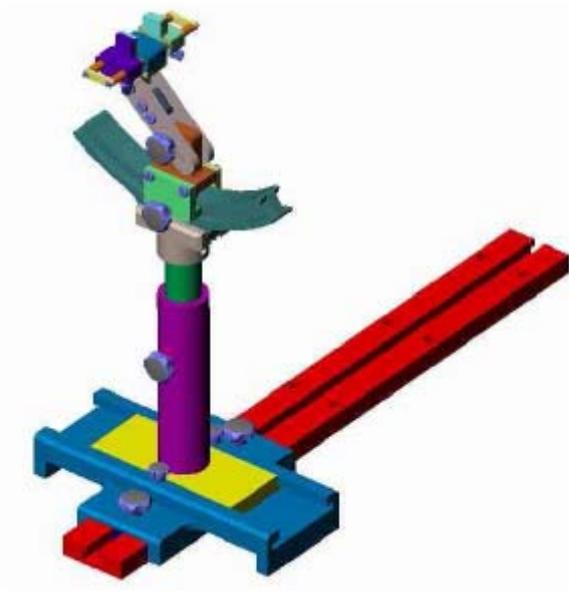

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. Tissue Simulating Liquids

Simulant liquids used for testing at frequencies of 835MHz, 1900MHz and 2450MHz, are made mainly of sugar, salt and water solutions may be left in the phantoms. Approximately 20litres are needed for an upright head compared to about 25 litres for a horizontal bath phantom. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surFront is or from the flat phantom to the liquid top surFront is 15cm.

Following are the recipes for head and body tissue simulating liquid for frequency band 835 MHz , 1900 MHz and 2450MHz .

Ingredients (% by weight)	Frequency Band	Frequency Band	Frequency Band
	835MHz	1900MHz	2450MHz
Tissue Type	Body	Body	Body
Water	52.4	40.4	73.2
Salt(NaCl)	1.4	0.5	0.04
Sugar	45.0	58.0	0.0
HEC	1.0	1.0	0.0
Bactericide	0.1	0.1	0.0
Triton X-100	0.0	0.0	0.0
DGBE	0.0	0.0	0.0
Acticide SPX	0.0	0.0	26.7
Dielectric Constant	56.1	54.0	52.5
Conductivity (S/m)	0.95	1.45	1.97

Table 2: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.			
Frequency	Description	Permittivity ϵ	Conductivity σ (S/m)
835 MHz	Reference result per OET65 $\pm 5\%$ window	55.2 52.44 to 57.96	0.97 0.9215 to 1.0185
	Reference result per probe calibration $\pm 5\%$ window	56.1 53.295 to 58.905	0.95 0.905 to 0.998
	Validation value (Jan. 16)	55.126980	0.953109
1900MHz	Reference result per OET65 $\pm 5\%$ window	53.3 50.635 to 55.965	1.52 1.444 to 1.596
	Reference result per probe calibration $\pm 5\%$ window	54 51.3 to 56.7	1.45 1.378 to 1.523
	Validation value (Jan. 16)	53.325061	1.513480

2450 MHz	Reference result per OET65 ±5% window	52.7 50.635 to 55.965	1.95 1.853 to 2.048
	Reference result per probe calibration ±5% window	52.5 49.875 to 55.125	1.78 1.691 to 1.869
	Validation value (Jan. 10)	53.147625	1.854861

Note: 1. The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

2. For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the phone holder.

3. Per KDB 450824 D01, tissue used during test are within 5% tolerances of probe calibration report, and also within 5% of the target dielectric parameters for OET65.

"when the actual tissue dielectric parameters are recorded for the probe calibration, the differences for ϵ and σ between probe calibration and routine measurements should each be $\leq 5\%$ while satisfying the required $\pm 5\%$ tolerances in target dielectric parameters." (KDB 450824 D01)

6. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1. UNCERTAINTY EVALUATION FOR EUT SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test sample Related									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	N-1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞

from target value									
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	∞
Input power and SAR drift	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞

measurement									
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.24	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	2.83	M
Combined Standard Uncertainty			RSS				8.83	8.37	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16.7	3

7. SAR Measurement Evaluation


7.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz, 1900 MHz and 2450 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surFront with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

Equipments:

name	Type and specification
Signal generator	Rohde&Schwarz (SMP_02)
Directional coupler	Giga-tronics(SN:1829112)
Amplifier	PRANA (Ap32 SV125AZ)
Reference dipole	835MHz:SN 36/08 DIPC 99 1900MHz:SN 36/08 DIPF 102 2450MHz:SN 36/08 DIPJ 103

System Verification Setup Block Diagram

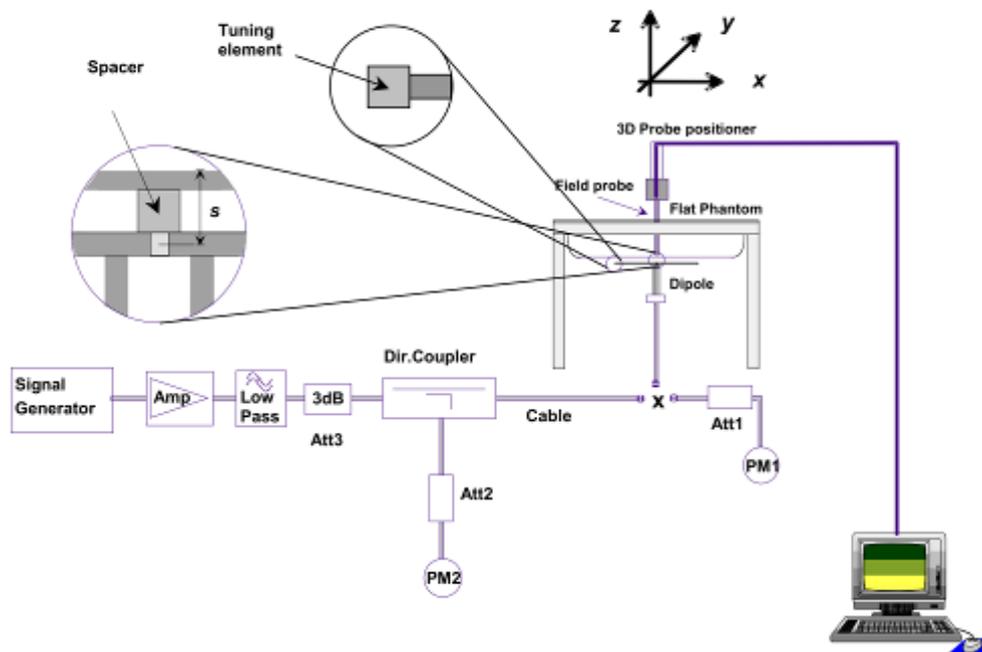

7.2. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Frequency	835MHz(B)	1900MHz(B)	2450MHz(B)
Target value (1g)	9.880 W/Kg	40.320 W/Kg	50.450 W/Kg
Test value (1g 250 mW input)	2.380 W/Kg (Jan. 16)	9.953 W/Kg (Jan. 16)	12.861 W/Kg (Jan. 10)
Normalized value (1g)	9.520W/Kg	39.812 W/Kg	51.816 W/Kg

Note: System checks the specific test data please see page 83~88.

8. Operational Conditions During Test

The EUT antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The EUT is set to transmit at its highest output peak power level.


Remark: Please refer to Appendix B for the test setup photos.

8.1. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm(taking into account of the IEEE 1528 and the place of the antenna)

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

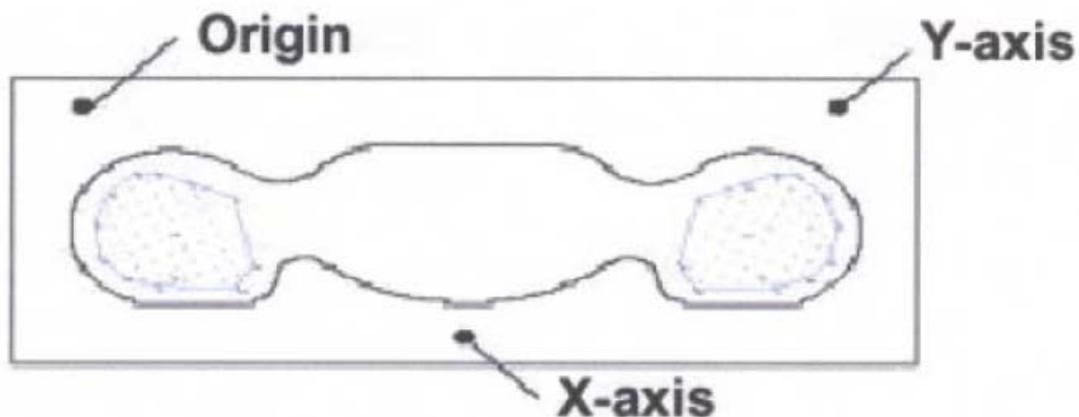

SAR Measurement Points in Area Scan

8.2. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.

- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9.Measurement Of Conducted Peak Output Power.

1. WCDMA Model Test Verdict:

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	21.41	21.21	21.25	21.55	22.10	22.49
HSDPA	1	21.38	21.19	21.22	21.53	22.07	22.47
	2	21.38	21.17	21.21	21.51	22.05	22.43
	3	20.85	20.67	20.75	21.02	21.58	21.95
	4	20.87	20.68	20.73	21.04	21.55	21.97
HSUPA	1	21.37	21.19	21.21	21.53	22.05	22.47
	2	19.33	19.17	19.23	19.51	20.07	20.45
	3	20.38	20.18	20.22	20.52	21.06	21.47
	4	19.32	19.18	19.22	19.49	20.07	20.47
	5	21.36	21.18	21.21	21.53	22.05	22.46
HSPA+	1	21.37	21.18	21.22	21.51	22.07	22.45

2. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	34.63	31.75	29.28	28.24
	190	836.6	34.64	31.85	29.35	28.08
	251	848.8	34.81	31.43	29.47	28.34
PCS 1900	512	1850.2	31.37	28.60	26.60	25.45
	661	1880.0	30.42	28.47	26.20	25.11
	810	1909.8	29.22	27.95	26.25	25.16

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	25.63	25.73	25.02	25.23
	190	836.6	25.64	25.83	25.09	25.07
	251	848.8	25.81	25.41	25.21	25.33
PCS 1900	512	1850.2	22.37	22.58	22.34	22.44
	661	1880.0	21.42	22.45	21.94	22.10
	810	1909.8	20.22	21.93	21.99	22.15

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB

3. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	34.51	30.62	29.00	28.17
	190	836.6	34.82	30.92	29.18	28.20
	251	848.8	34.77	31.27	29.04	27.82
PCS 1900	512	1850.2	31.56	28.50	26.32	24.72
	661	1880.0	30.19	28.38	26.01	25.03
	810	1909.8	29.16	28.04	26.13	24.87

EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	25.51	24.60	24.74	25.16
	190	836.6	25.82	24.90	24.92	25.19
	251	848.8	25.77	25.25	24.78	24.81
PCS 1900	512	1850.2	22.56	22.48	22.06	21.71
	661	1880.0	21.19	22.36	21.75	22.02
	810	1909.8	20.16	22.02	21.87	21.86

4. Wifi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11B (DSSS)	802.11G (OFDM)	802.11N20 (OFDM)
WiFi	1	2412	12.61	12.67	12.69
	6	2437	12.89	13.04	13.03
	11	2462	13.20	12.87	12.87

Band	Channel	Frequency (MHz)	Output Power(dBm)
			802.11N40 (OFDM)
WiFi	3	2422	12.41
	6	2437	12.84
	9	2452	12.72

5. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\Pi/4$ -DQPSK	8-DPSK
BT	0	2402	5.955	4.335	4.317
	39	2441	5.579	4.141	4.162
	78	2480	5.015	3.608	3.598

Note: The WiFi & BT specifications are from the Host device, and its detailed information is as below:

Model Name : ONE TOUCH T70
 Brand Name : ALCATEL
 FCC ID : RAD310

10. Test Results List

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom	Mode	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (5mm)	GPRS	Front upward	190	0.633	1.035	0.655
		Back upward	128	0.910	1.059	0.964
			190	0.928	1.035	0.960
		251	1.032	1.140	1.176	
		Edge A	190	0.353	1.035	0.365
	Edge C	190	0.363	1.035	0.376	
	EDGE	Back upward	190	0.769	1.042	0.801

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom	Mode	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (5mm)	GPRS	Front upward	512	0.432	1.096	0.473
		Back upward		0.690		0.756
		Edge A		0.155		0.170
		Edge C		0.496		0.544
	EDGE	Back upward	512	0.576	1.107	0.638

GPRS/EDGE test Scenario(Based on the Max. Time-based Average Power)

Band	Required test channel	Slots	Power level	Duty Cycle
GPRS850	190	2	5	1:4
EDGE850	190	1	5	1:8
GPRS1900	512	2	0	1:4
EDGE1900	512	1	0	1:8

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom	Mode	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (5mm)	12.2kbps RMC	Front upward	4132	0.205	1.146	0.235
		Back upward		0.597		0.684
		Edge A		0.342		0.392
		Edge C		0.499		0.572

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom	Mode	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (5mm)	12.2kbps RMC	Front upward	9538	0.565	1.125	0.636
		Back upward		0.346		0.389
		Edge A		0.193		0.217
		Edge C		0.250		0.281

Summary of Measurement Results (WLAN 802.11 Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom	Mode	Device Test Positions	Channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (5mm)	B (DSSS)	Front upward	11	0.270	1.072	0.289
		Back upward		0.299		0.321
		Edge A		0.163		0.175
		Edge B		0.124		0.133

Note:

- When the 1-g SAR for the mid-band channel or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v05)
 - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
 - ≤ 0.6 W/kg and, 100 MHz < transmission bandwidth ≤ 200 MHz
 - ≤ 0.4 W/kg and transmission band > 200 MHz
- The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB higher than that measured without

HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

3.This module supports 3GPP release 7+ using QPSK only without E-EDGE and HSPA+ using 16QAM or higher order modulation in the uplink.

4.During 802.11b(2.4GHz) testing, engineering testing software installed on the EUT can provide continuous transmitting RF signal.The RF signal utilized in SAR measurement has almost 100% duty cycle, and its crest factor is 1.

5. Tablet SAR Assessment


Assessment				Test distance: 0mm		
Antennas	Back	Front	Edge A	Edge B	Edge C	Edge D
WCDMA/GSM	Yes	Yes	Yes	No	Yes	No
WLAN&BT	Yes	Yes	Yes	Yes	No	No

6. Scaling Factor calculation

Band	Tune-up power tolerance (dBm)	SAR test channel Power (dBm)	Scaling Factor
GPRS 850	PCL = 5, PWR =31.5+-0.5(2 slots)	31.75	1.059
		31.85	1.035
		31.43	1.140
EDGE 850	PCL = 5, PWR =34.5+-0.5(1 slots)	34.82	1.042
GPRS 1900	PCL = 5, PWR =28.5+-0.5(2 slots)	28.60	1.096
EDGE 1900	PCL = 5, PWR =31.5+-0.5(1 slots)	31.56	1.107
WCDMA 850	Max output power =21(+1/-2)	21.41	1.146
WCDMA 1900	Max output power =22(+1/-2)	22.49	1.125
802.11B	Max output power =13 +-0.5	13.20	1.072

11. Multiple Transmitters Evaluation

Edge&Antenna Location

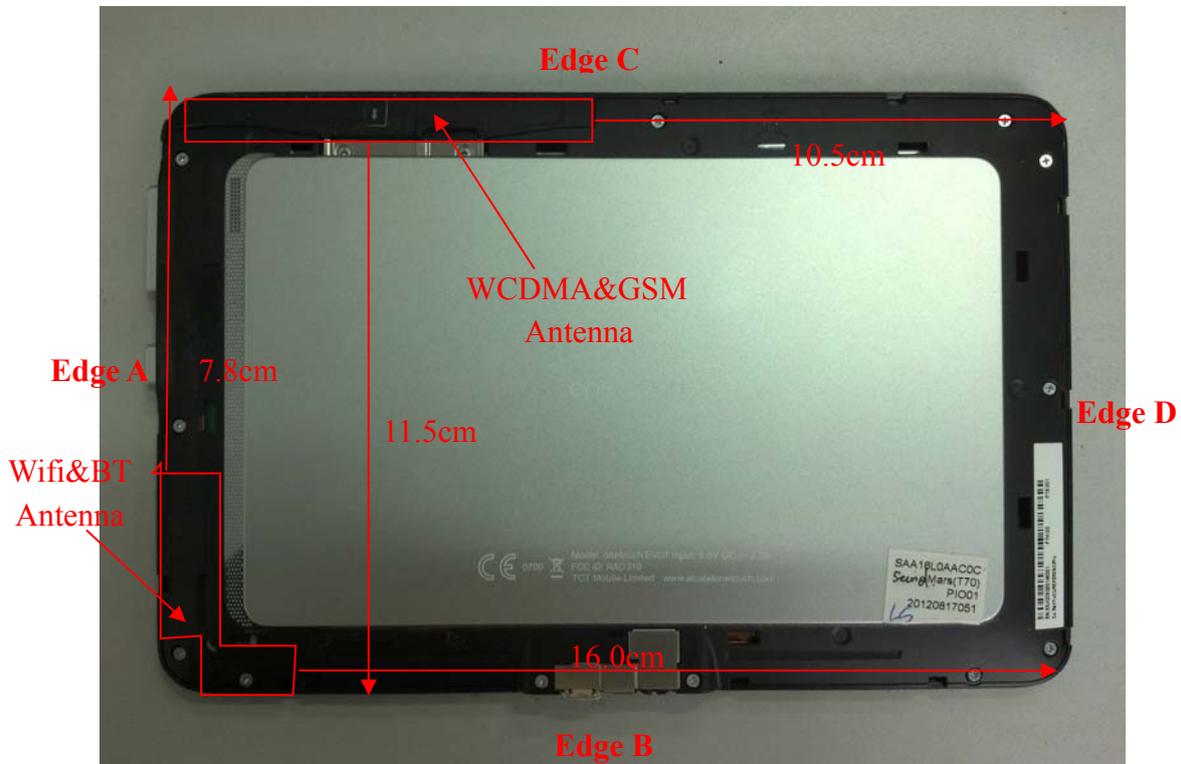

TEST distance: 5mm

Band	SAR Test Exclusion Threshold(mW) Per KDB 447498 D01v05	Highest power(mW) Per tune up
WIFI(2.4G)	10	22.387
BT	10	4.467

According to the chart above, WIFI2.4G are required for Stand-alone SAR test, BT is not required. The SAR test for 802.11b is required, 802.11g/HT20/HT40 is not required, for the maximum average output power is less than 1/4 dB higher than measured on the corresponding 802.11b channels. As per KDB 248227

Simultaneous SAR

Description of Simultaneous Transmit Capabilities			
No.	Transmitter Combinations	Scenario Supported?	Supported for Mobile Hotspot?
1	GSM(Data)+WiFi (BT)	Yes	Yes
2	WCDMA(Data)+WiFi (BT)	Yes	Yes

Note:

1. The tablet doesn't support voice mode.
2. Simultaneous Transmission SAR evaluation is not required for BT and WiFi, because they share

the same antenna and can't transmission simultaneously.

3. For Scenario No.1, 2, WCDMA and WiFi is tested separately, the WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB higher than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

4. The BT stand-alone SAR is not required, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

(Max power=4.467 mW(per tune up) ; min. test separation distance=5mm; $f=2.4\text{GHz}$)

BT estimated SAR = 0.185 W/Kg (1g)

4. Applicable Multiple Scenario Evaluation

Test Position	WCDMA&GSM SAR _{Max} (W/Kg)	Bluetooth SAR(W/Kg)	WiFi SAR _{Max} (W/Kg)	\sum 1-g SAR _{Max} (W/Kg)	
				BT&Main Ant	WiFi&Main Ant
Body SAR	1.176	0.185	0.321	1.361	1.497


Simultaneous Transmission SAR evaluation is not required for Wifi and WCDMA&GSM, because the sum of 1g SAR_{Max} is **1.497W/Kg** < 1.6W/Kg for Wifi and WCDMA&GSM.

Simultaneous Transmission SAR evaluation is not required for BT and WCDMA&GSM, because the sum of 1g SAR_{Max} is **1.361W/Kg** < 1.6W/Kg for BT and WCDMA&GSM.


(According to KDB 447498D01v05, the sum of the highest reported SAR of each antenna does not exceed the limit, simultaneous transmission SAR evaluation is not required for all test positions.)

Annex A EUT Setup Photos

1. Face upward

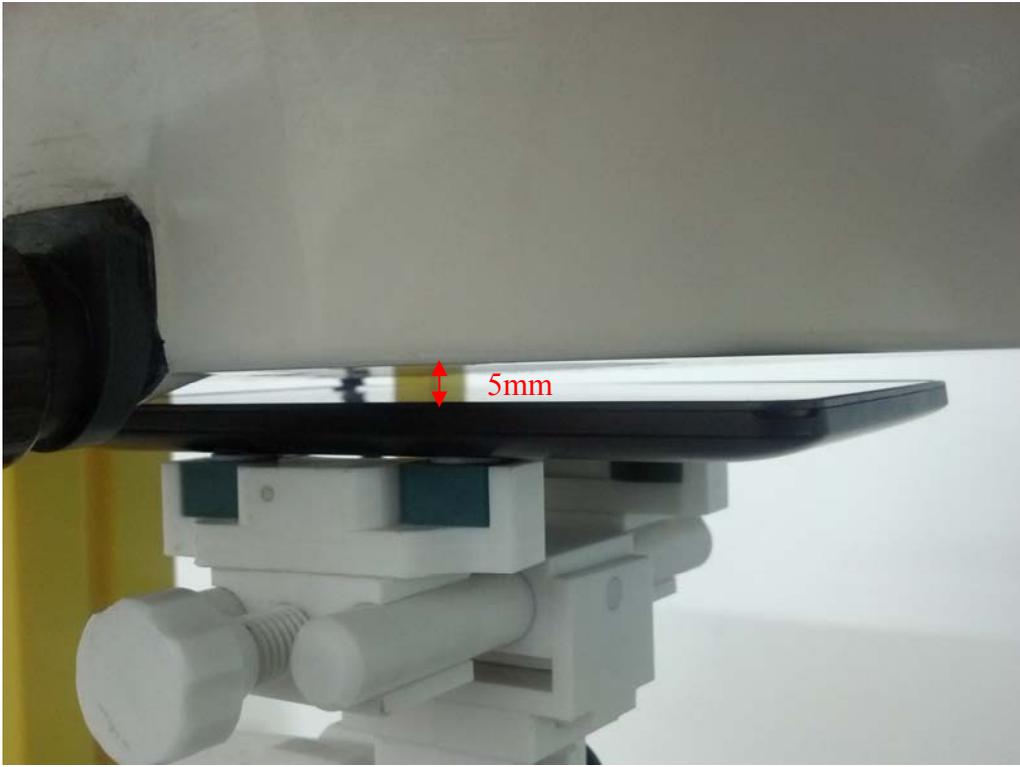

2. Back upward

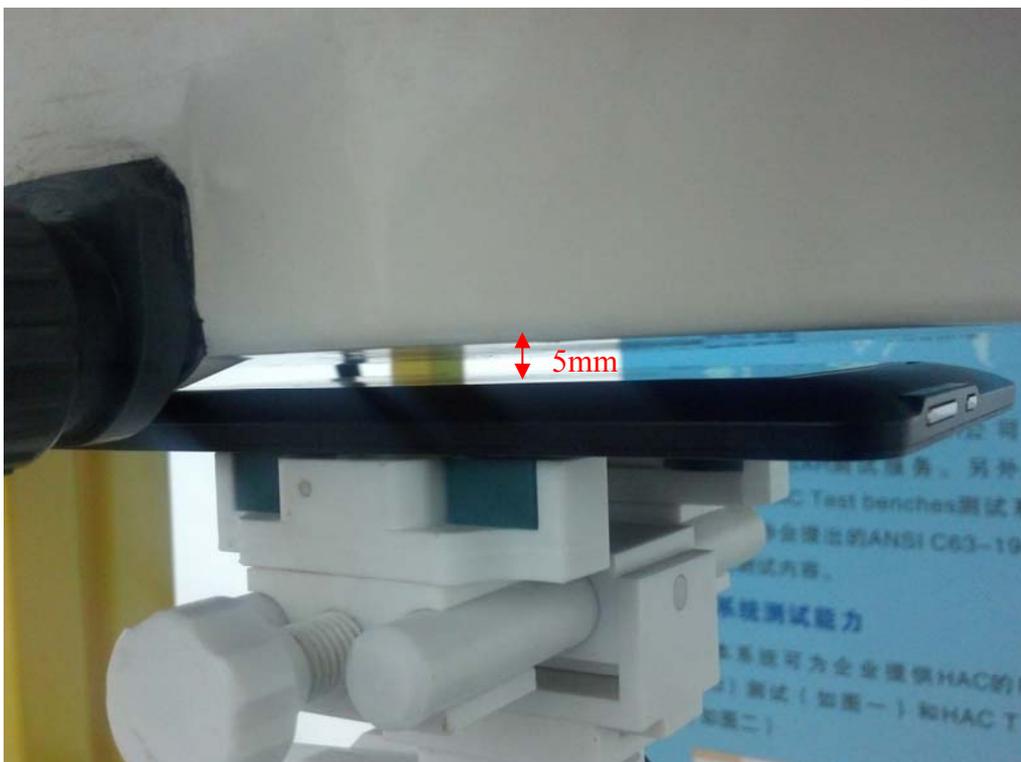

3. Edge A



4. Edge B



5. Edge C



Liquid Level Photo



Liquid depth :15.5cm

Annex B Graph Test Results

<u>BAND</u>	<u>PARAMETERS</u>
<u>GSM</u> <u>850</u>	<p><u>Measurement 1:</u> Flat Plane with Body device position on Middle channel in GPRS mode (Face upward)</p> <p><u>Measurement 2:</u> Flat Plane with Body device position on Low channel in GPRS mode (Back upward)</p> <p><u>Measurement 3:</u> Flat Plane with Body device position on Middle channel in GPRS mode (Back upward)</p> <p><u>Measurement 4:</u> Flat Plane with Body device position on High channel in GPRS mode (Back upward)</p> <p><u>Measurement 5:</u> Flat Plane with Body device position on Middle channel in GPRS mode (Edge A)</p> <p><u>Measurement 6:</u> Flat Plane with Body device position on Middle channel in GPRS mode (Edge C)</p> <p><u>Measurement 7:</u> Flat Plane with Body device position on Middle channel in EDGE mode (Back upward)</p>
<u>GSM</u> <u>1900</u>	<p><u>Measurement 8:</u> Flat Plane with Body device position on Low channel in GPRS mode (Face upward)</p> <p><u>Measurement 9:</u> Flat Plane with Body device position on Low channel in GPRS mode (Back upward)</p> <p><u>Measurement 10:</u> Flat Plane with Body device position on Low channel in GPRS mode (Edge A)</p> <p><u>Measurement 11:</u> Flat Plane with Body device position on Low channel in GPRS mode (Edge C)</p> <p><u>Measurement 12:</u> Flat Plane with Body device position on Low channel in EDGE mode (Back upward)</p>
<u>WCDMA</u> <u>850</u>	<p><u>Measurement 13:</u> Flat Plane with Body device position on Low channel in WCDMA mode (Face upward)</p> <p><u>Measurement 14:</u> Flat Plane with Body device position on Low channel in WCDMA mode (Back upward)</p> <p><u>Measurement 15:</u> Flat Plane with Body device position on Low channel in WCDMA mode (Edge A)</p> <p><u>Measurement 16:</u> Flat Plane with Body device position on Low channel in WCDMA mode (Edge C)</p>
<u>WCDMA</u> <u>1900</u>	<p><u>Measurement 17:</u> Flat Plane with Body device position on High channel in WCDMA mode (Face upward)</p> <p><u>Measurement 18:</u> Flat Plane with Body device position on High channel in WCDMA mode (Back upward)</p> <p><u>Measurement 19:</u> Flat Plane with Body device position on High channel in WCDMA mode (Edge A)</p> <p><u>Measurement 20:</u> Flat Plane with Body device position on High channel in WCDMA mode (Edge C)</p>

WIFI
802.11B

Measurement 21: Flat Plane with Body device position on High channel in DSSS mode (Face upward)

Measurement 22: Flat Plane with Body device position on High channel in DSSS mode (Back upward)

Measurement 23: Flat Plane with Body device position on High channel in DSSS mode (Edge A)

Measurement 24: Flat Plane with Body device position on High channel in DSSS mode (Edge B)

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 11 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results


Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift(%)	-1.200000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.3°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:4

SURFACE SAR

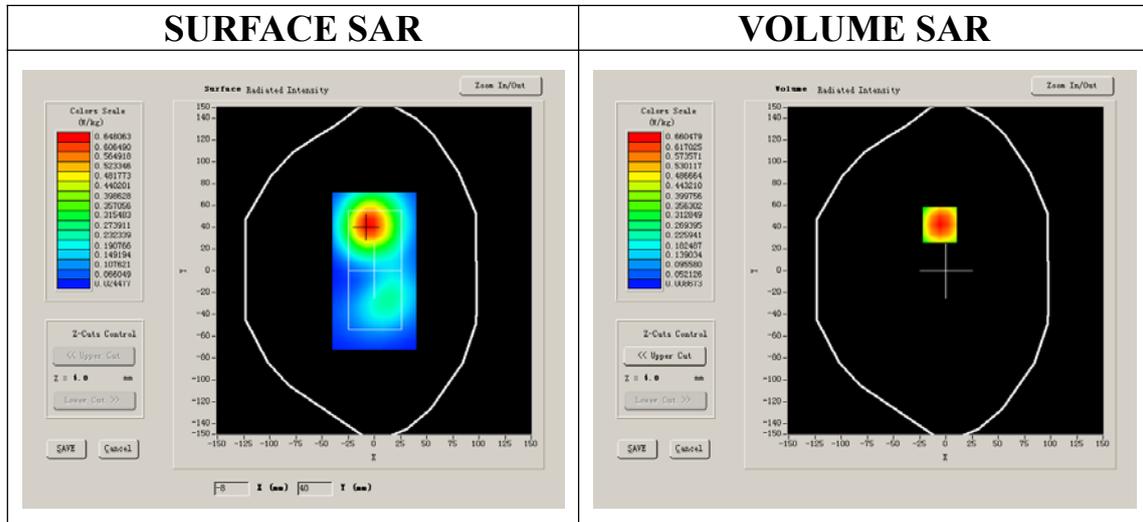

VOLUME SAR

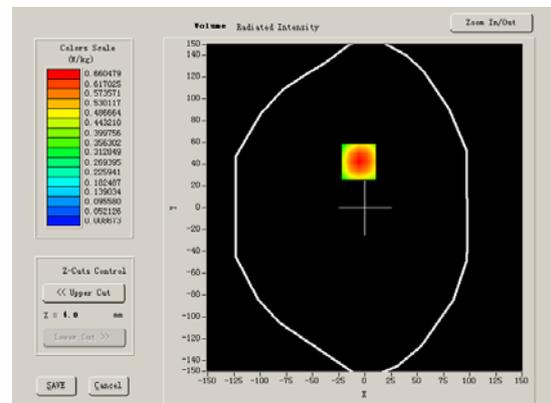


Maximum location: X=-6.00, Y=42.00

SAR 10g (W/Kg)	0.332185
SAR 1g (W/Kg)	0.632882


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6605	0.3346	0.1691	0.0855	0.0481	0.0247


SAR, Z Axis Scan (X = -6, Y = 42)

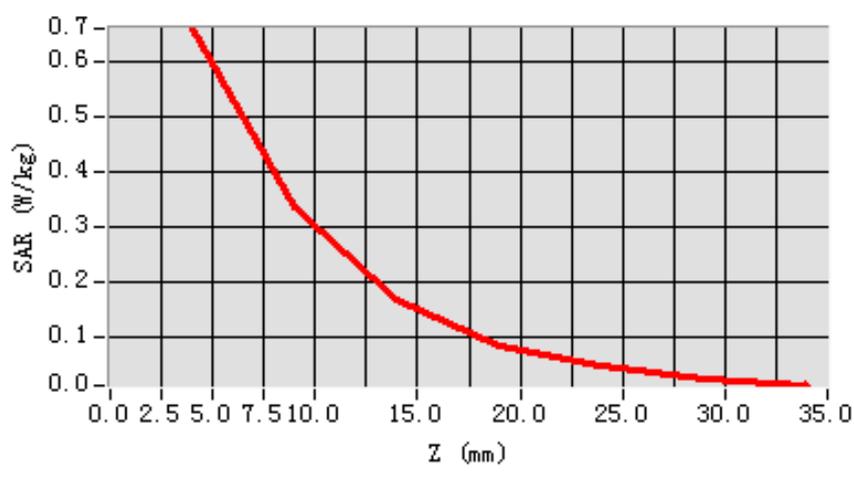

3D scen shot

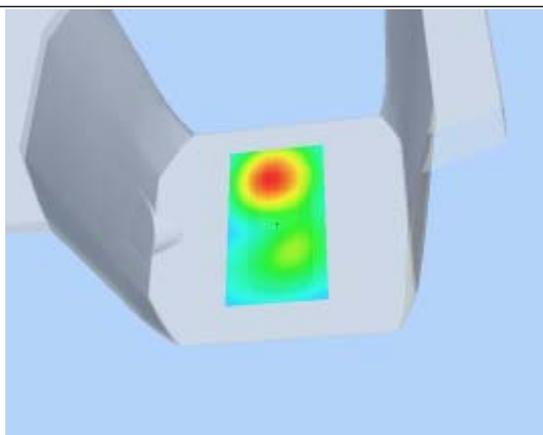

Hot spot position

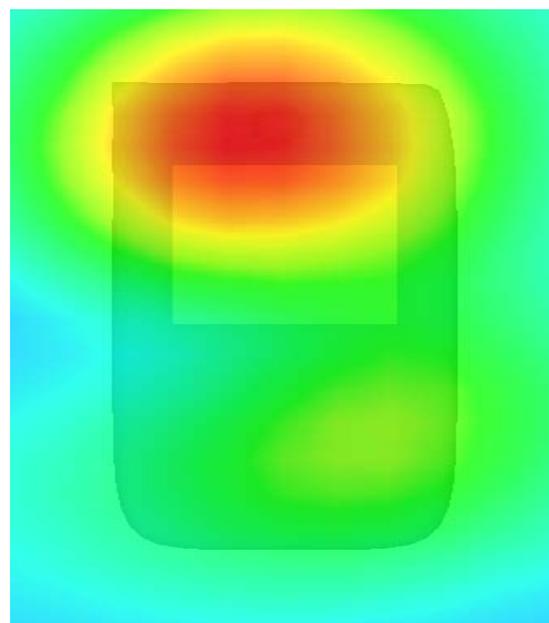

MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 11 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift(%)	-1.350000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.3°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:4

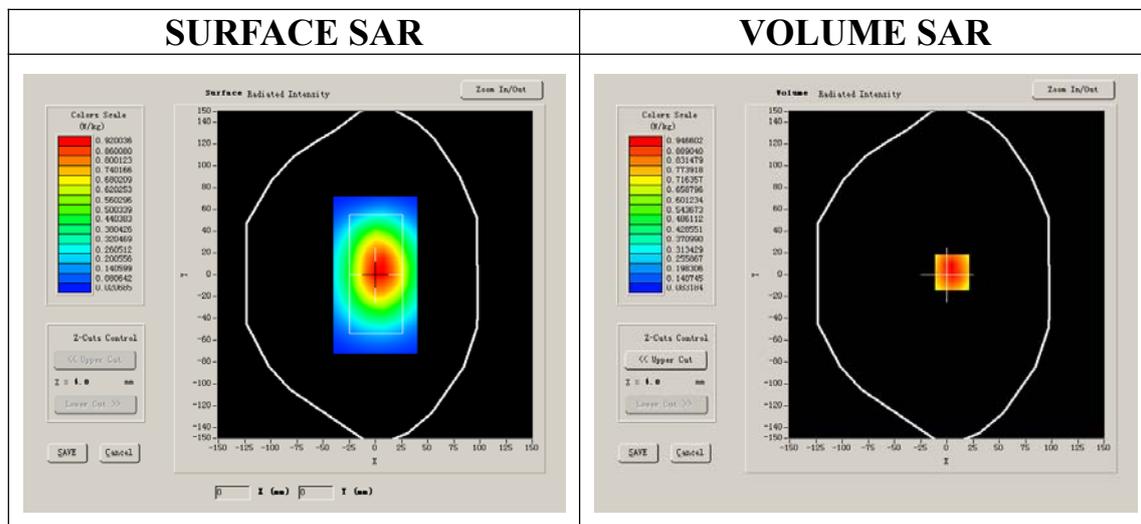


Maximum location: X=5.00, Y=2.00

SAR 10g (W/Kg)	0.615094
SAR 1g (W/Kg)	0.910314


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9428	0.6652	0.4622	0.3293	0.2325	0.1621


SAR, Z Axis Scan (X = 5, Y = 2)

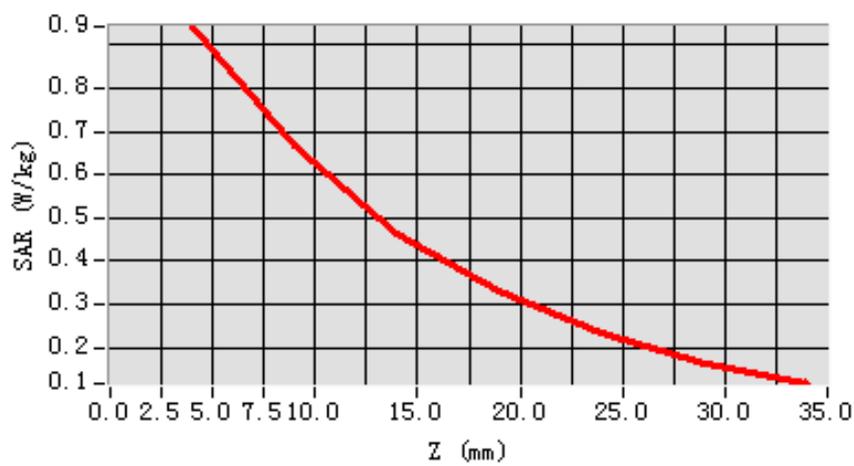

3D scen shot

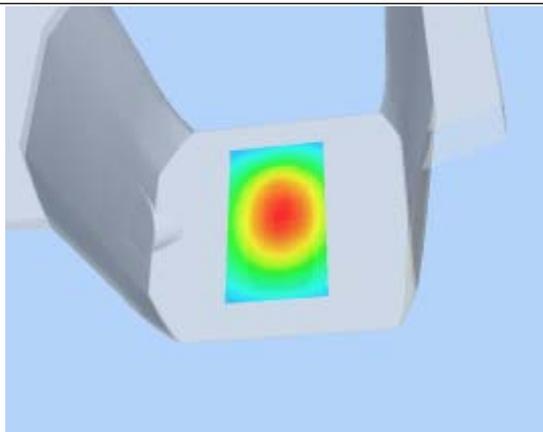

Hot spot position

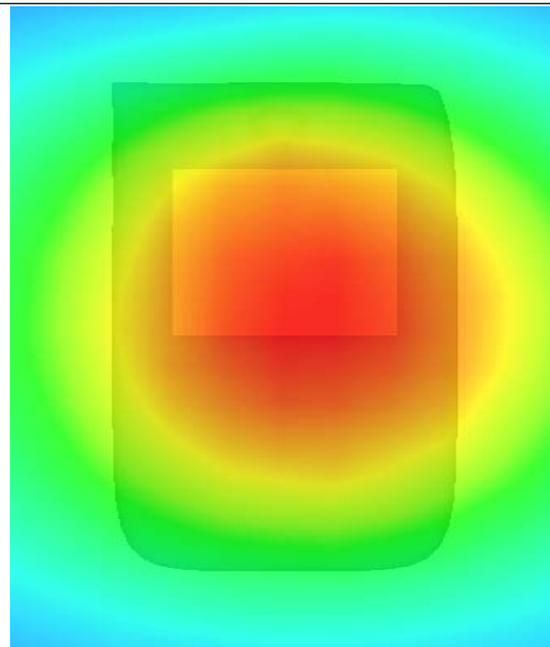

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 11 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift(%)	-1.200000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.3°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:4

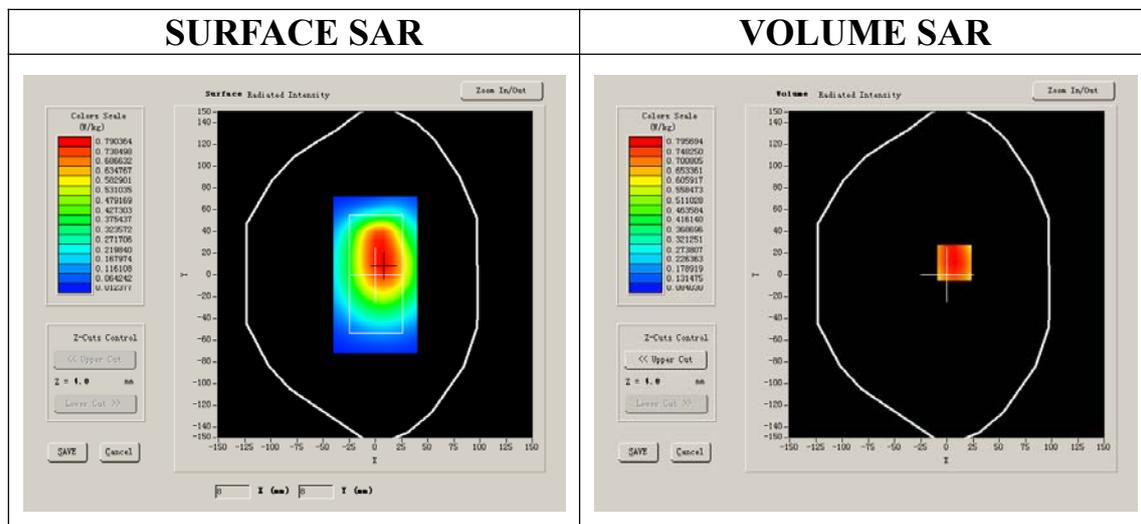


Maximum location: X=7.00, Y=11.00

SAR 10g (W/Kg)	0.665345
SAR 1g (W/Kg)	0.928191


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9592	0.7106	0.5268	0.3883	0.2850	0.2082


SAR, Z Axis Scan (X = 7, Y = 11)

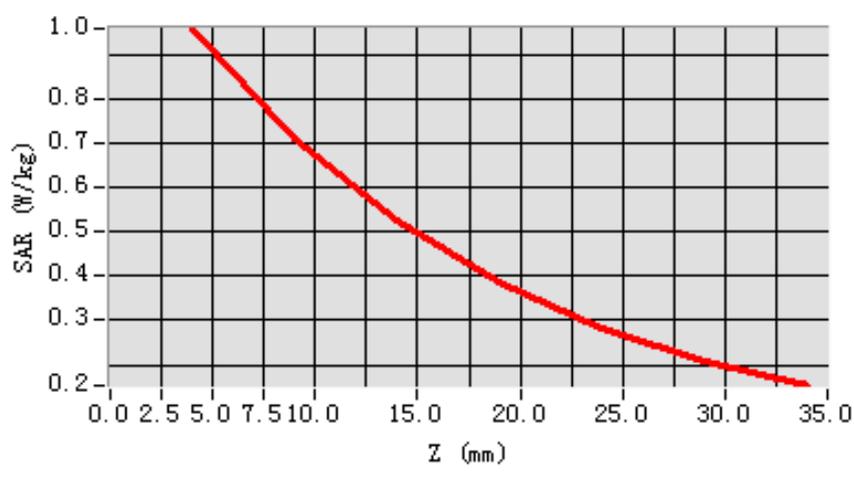

3D scen shot

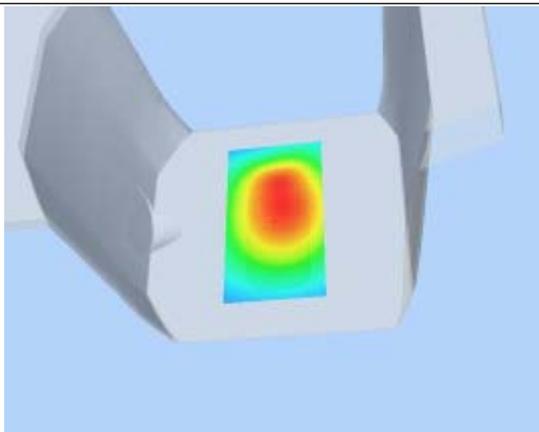

Hot spot position

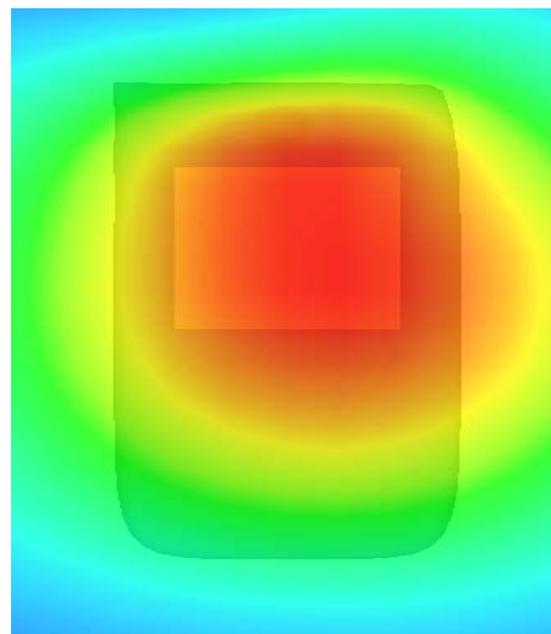

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 11 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results


Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift(%)	-1.170000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.3°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:4

SURFACE SAR

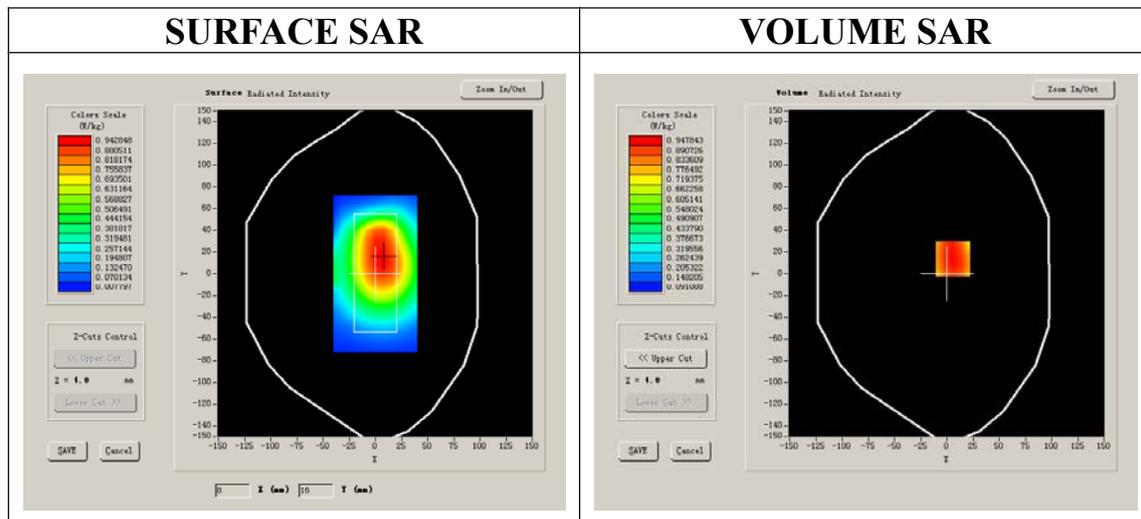

VOLUME SAR

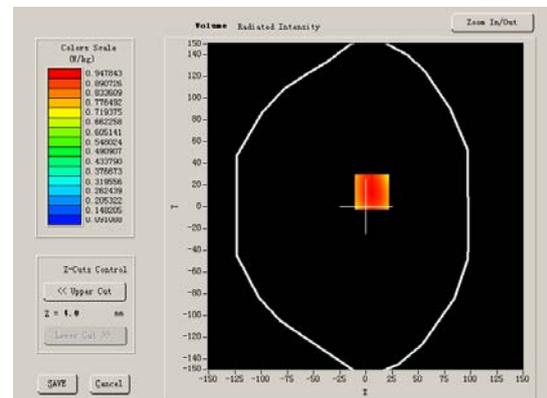


Maximum location: X=6.00, Y=14.00

SAR 10g (W/Kg)	0.787447
SAR 1g (W/Kg)	1.031786


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0975	0.8492	0.6175	0.4562	0.3298	0.2387


SAR, Z Axis Scan (X = 6, Y = 14)

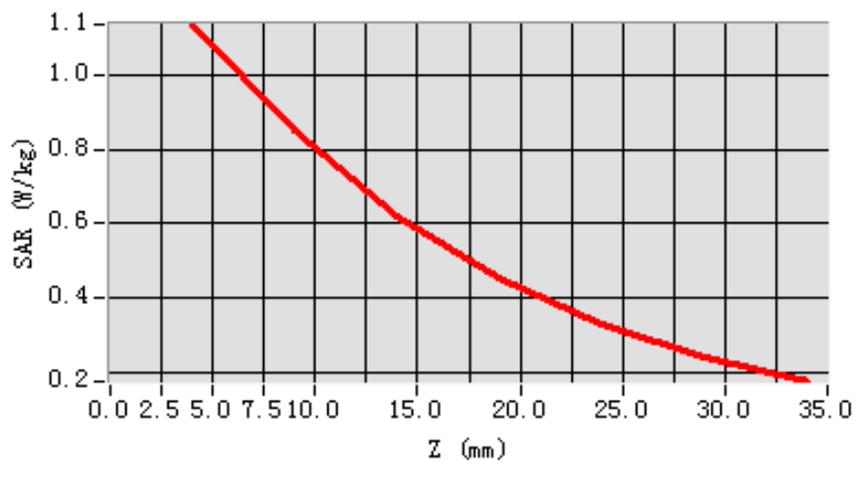

3D scene shot

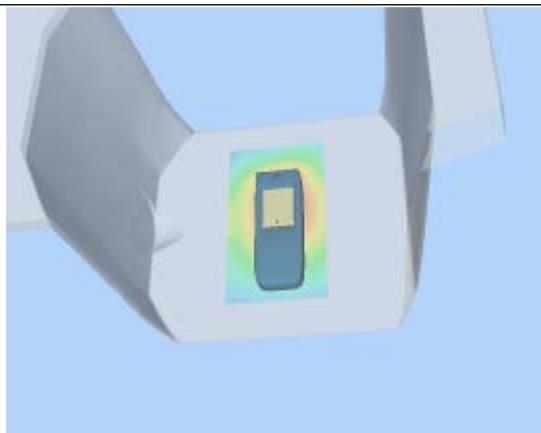

Hot spot position

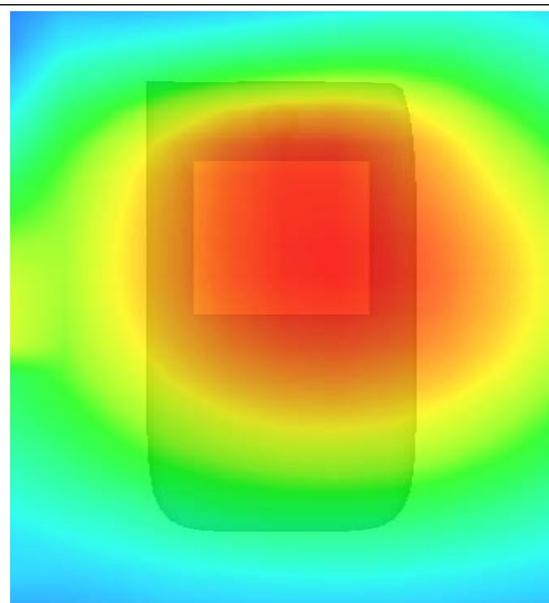

MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results


Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift(%)	-1.270000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.3°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:4

SURFACE SAR

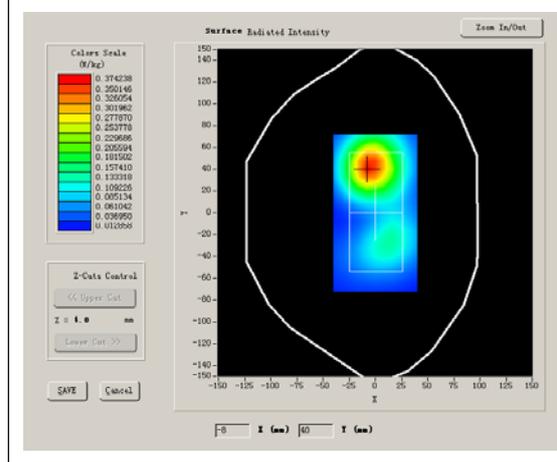

VOLUME SAR

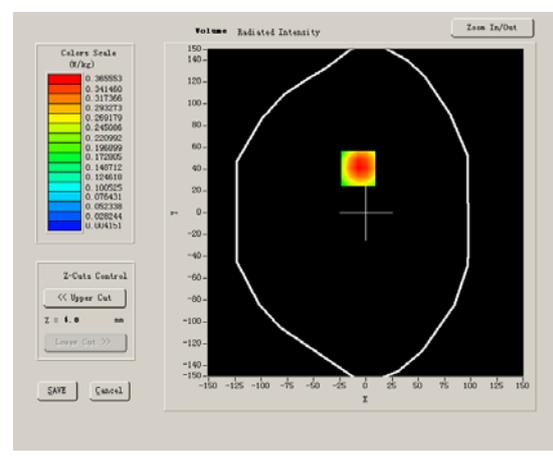


Maximum location: X=-7.00, Y=41.00

SAR 10g (W/Kg)	0.191867
SAR 1g (W/Kg)	0.353434


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3656	0.1876	0.0953	0.0507	0.0248	0.0137


SAR, Z Axis Scan (X = -7, Y = 41)

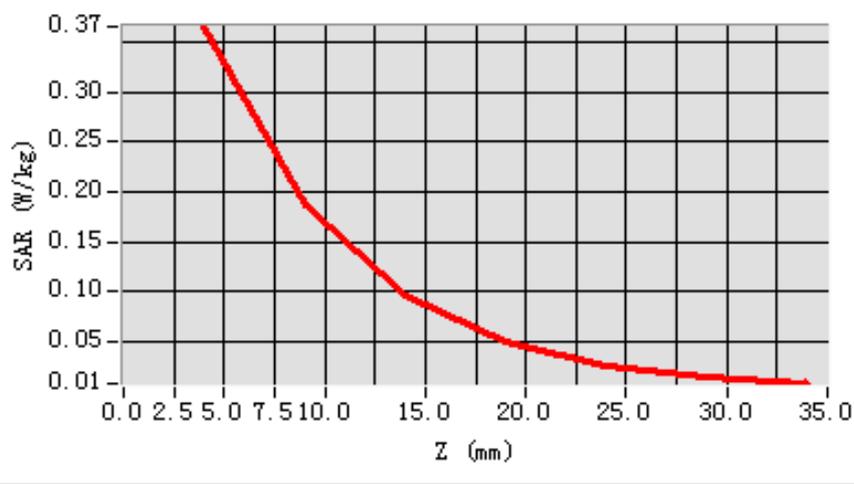

3D scen shot

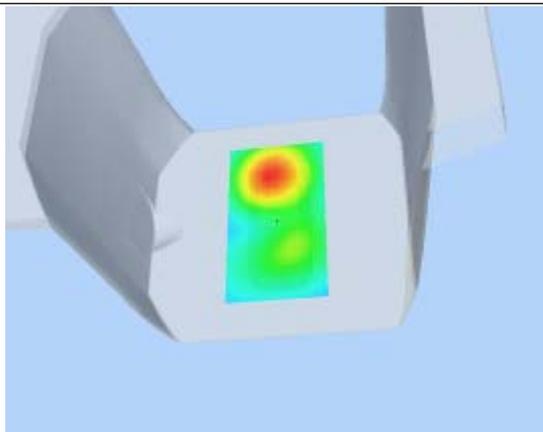

Hot spot position

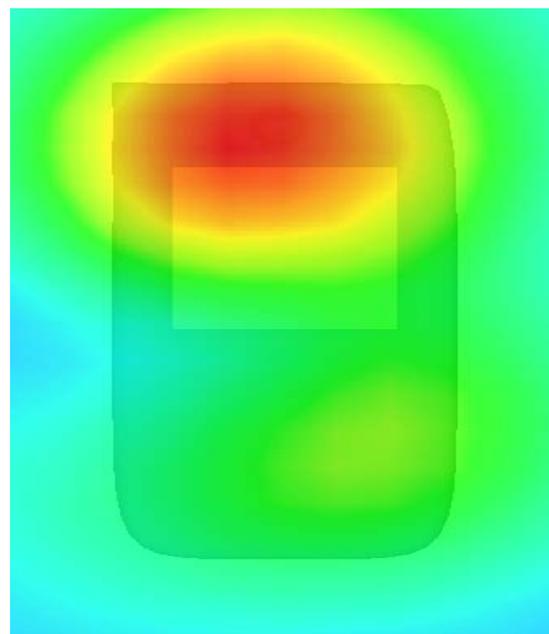

MEASUREMENT 6

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift(%)	-1.320000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.3°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:4

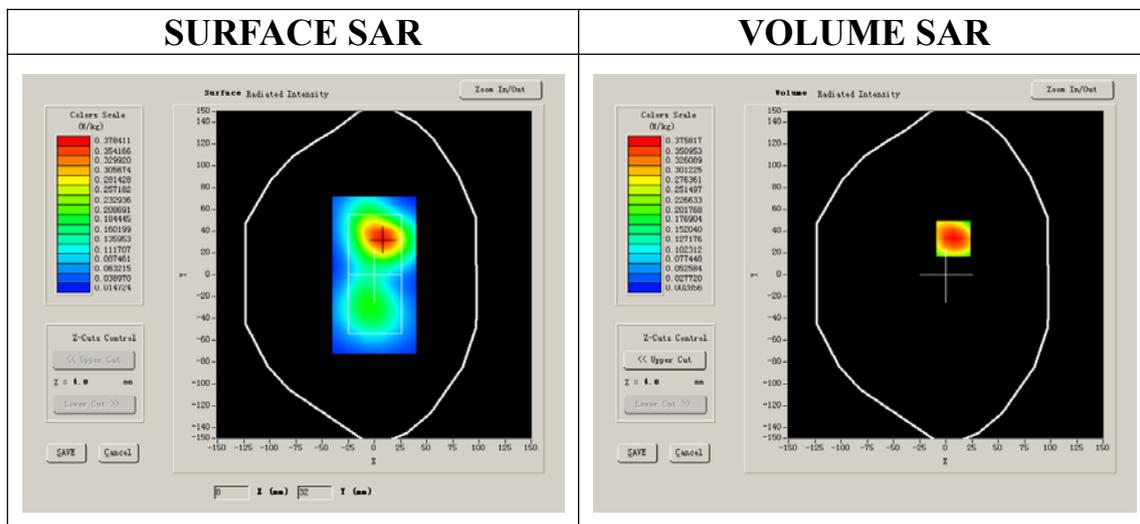


Maximum location: X=7.00, Y=33.00

SAR 10g (W/Kg)	0.190789
SAR 1g (W/Kg)	0.363332


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3758	0.1867	0.0927	0.0468	0.0241	0.0134


SAR, Z Axis Scan (X = 7, Y = 33)

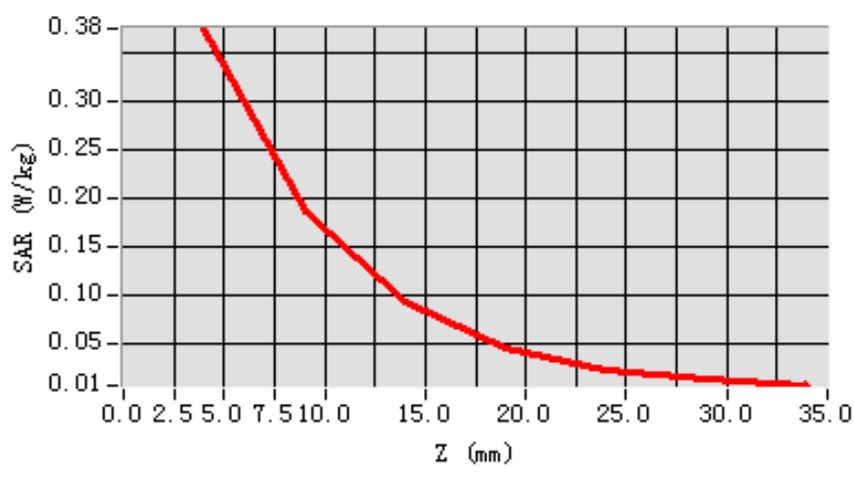

3D scen shot

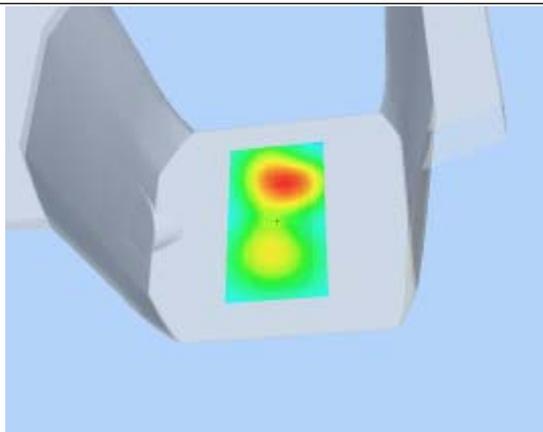

Hot spot position

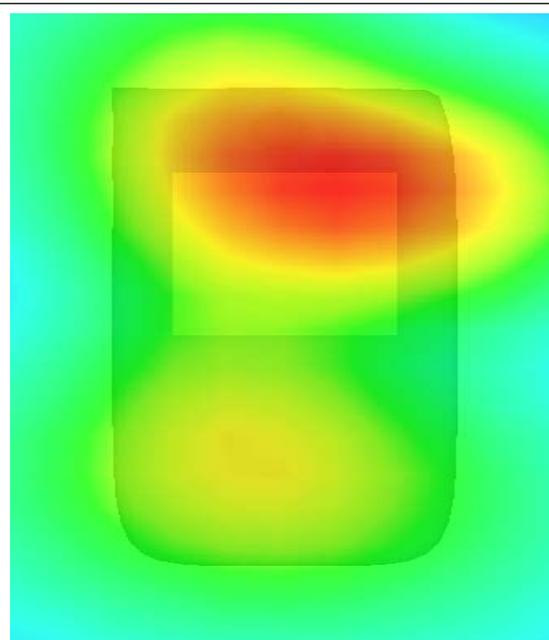

MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	EDGE

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift(%)	-1.210000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.3°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:8

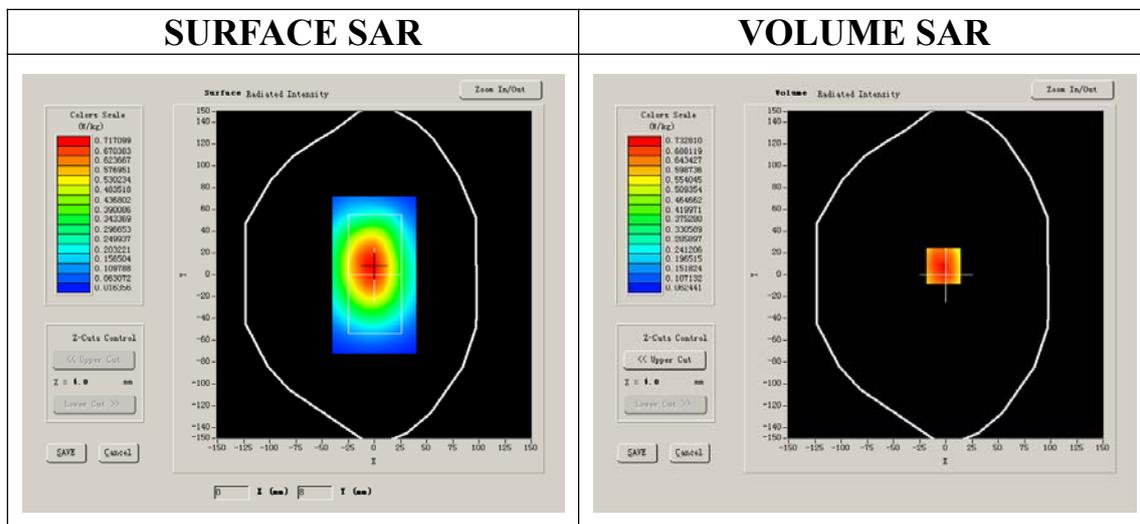


Maximum location: X=-2.00, Y=8.00

SAR 10g (W/Kg)	0.523495
SAR 1g (W/Kg)	0.769467


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8045	0.5569	0.3981	0.2717	0.1930	0.1357


SAR, Z Axis Scan (X = -2, Y = 8)

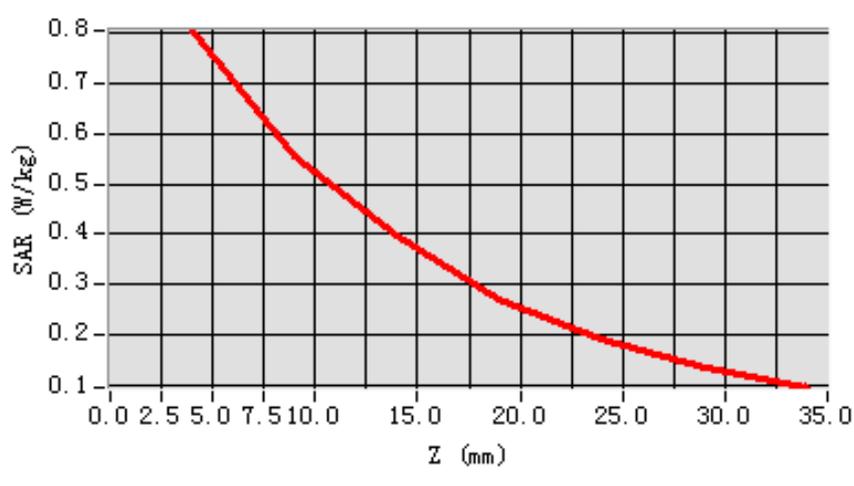

3D scen shot

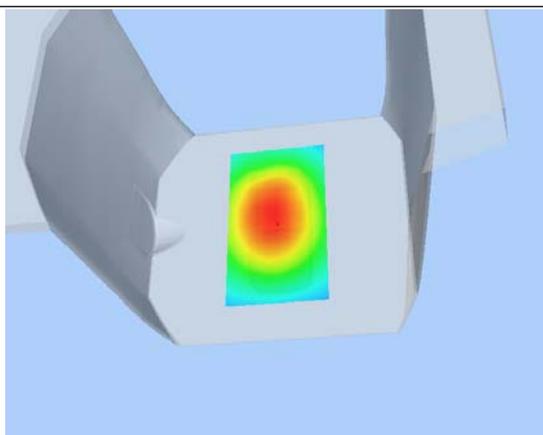

Hot spot position

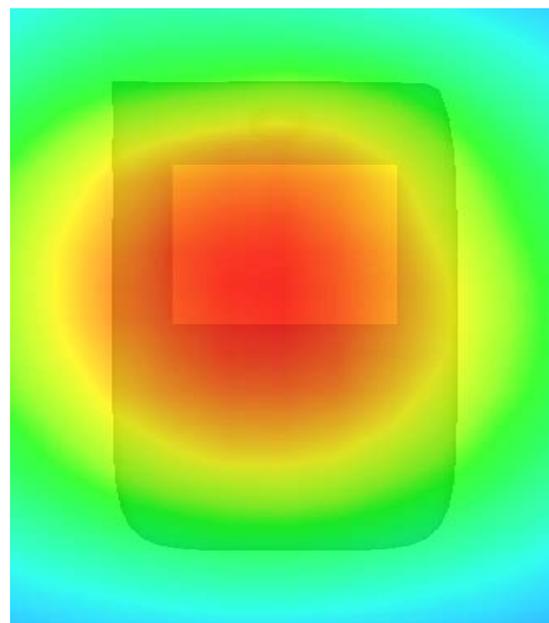

MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift(%)	-1.210000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:4

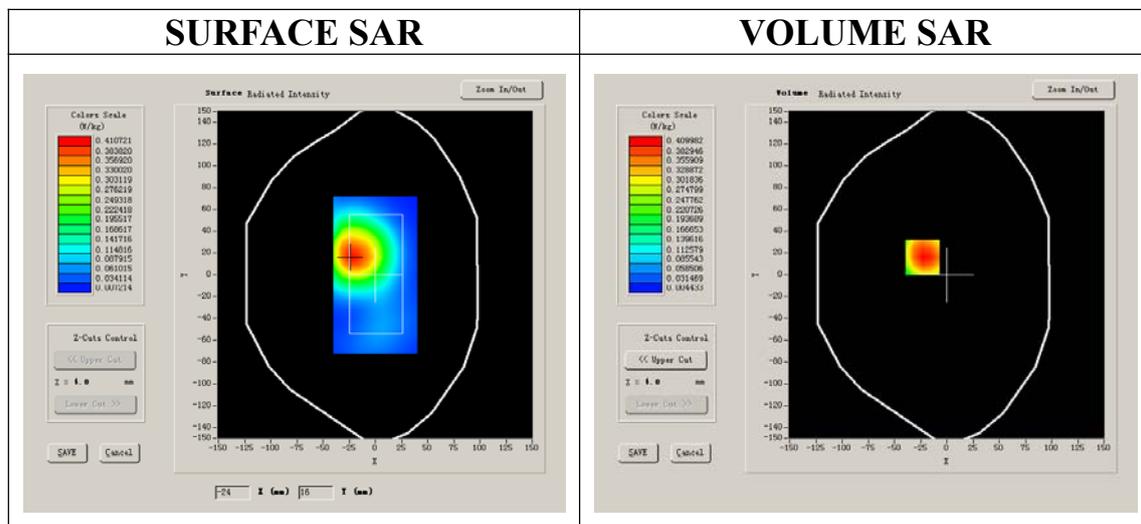


Maximum location: X=-23.00, Y=16.00

SAR 10g (W/Kg)	0.232733
SAR 1g (W/Kg)	0.431952


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4464	0.2171	0.1060	0.0540	0.0268	0.0146


SAR, Z Axis Scan (X = -23, Y = 16)

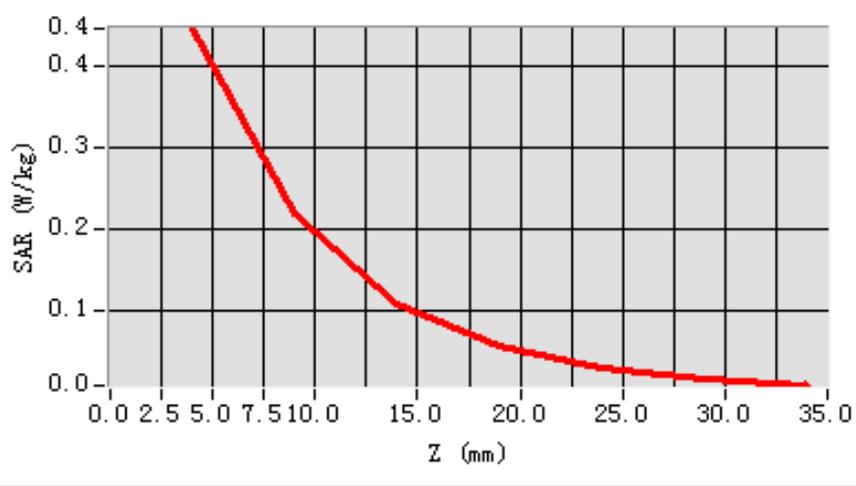

3D scen shot

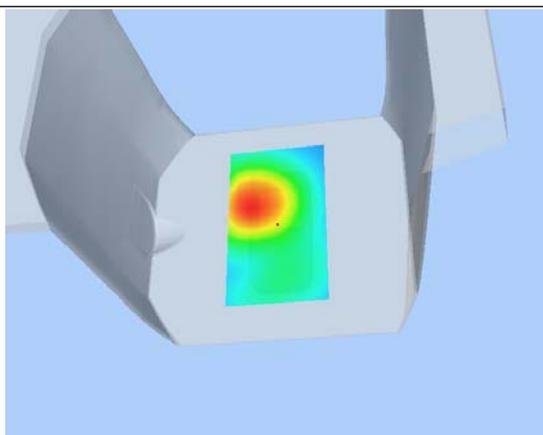

Hot spot position

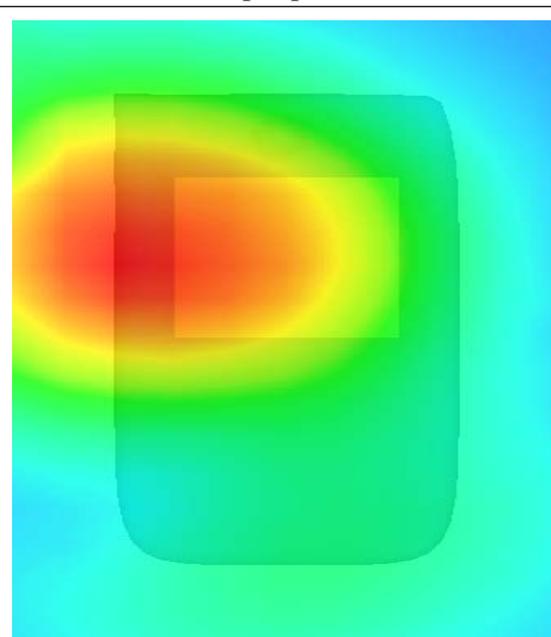

MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift(%)	-1.430000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:4

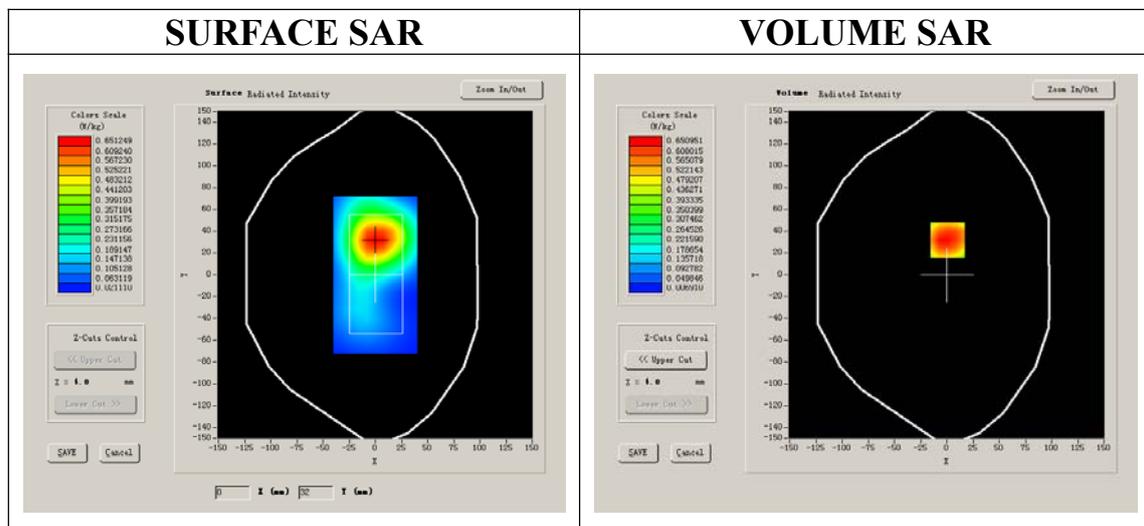


Maximum location: X=1.00, Y=32.00

SAR 10g (W/Kg)	0.376305
SAR 1g (W/Kg)	0.690373


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7088	0.3616	0.1812	0.0922	0.0464	0.0242


SAR, Z Axis Scan (X = 1, Y = 32)

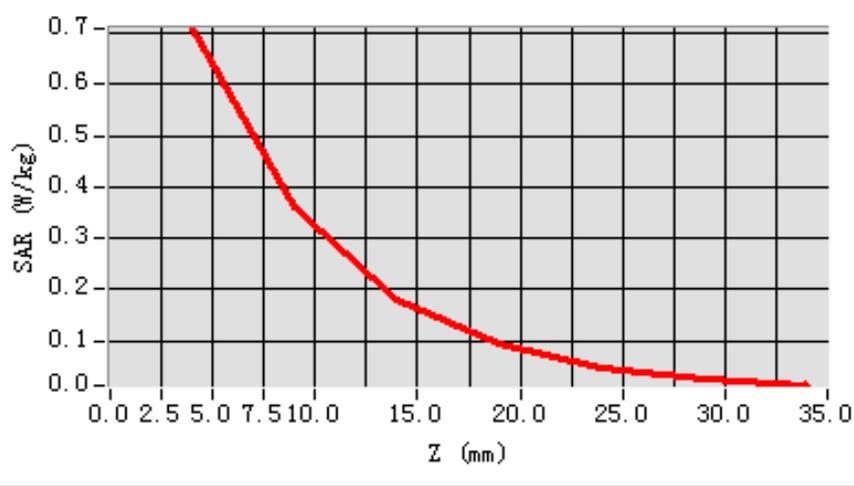

3D scen shot

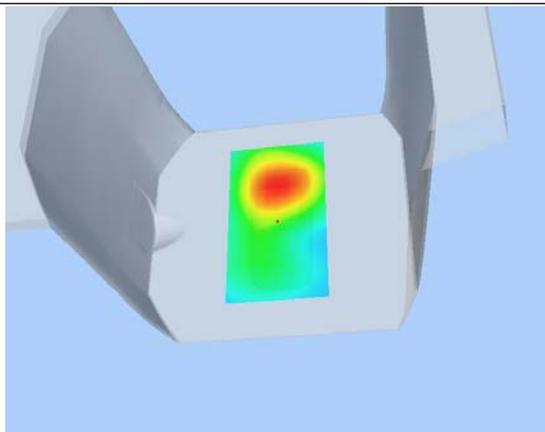

Hot spot position

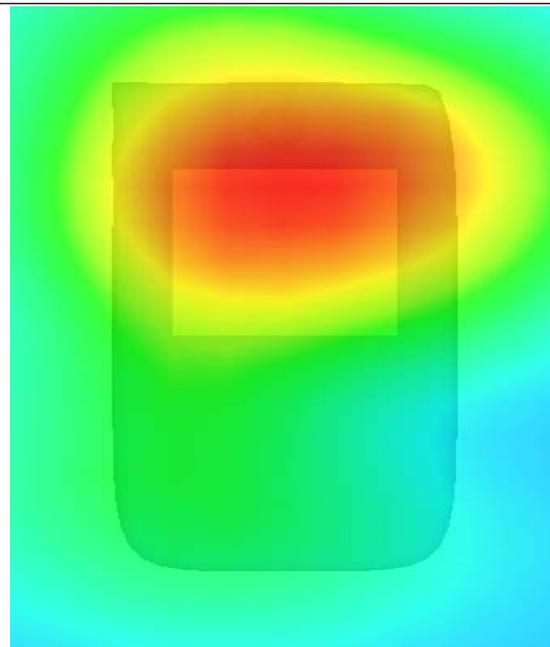

MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 9 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results

Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift(%)	-0.930000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:4

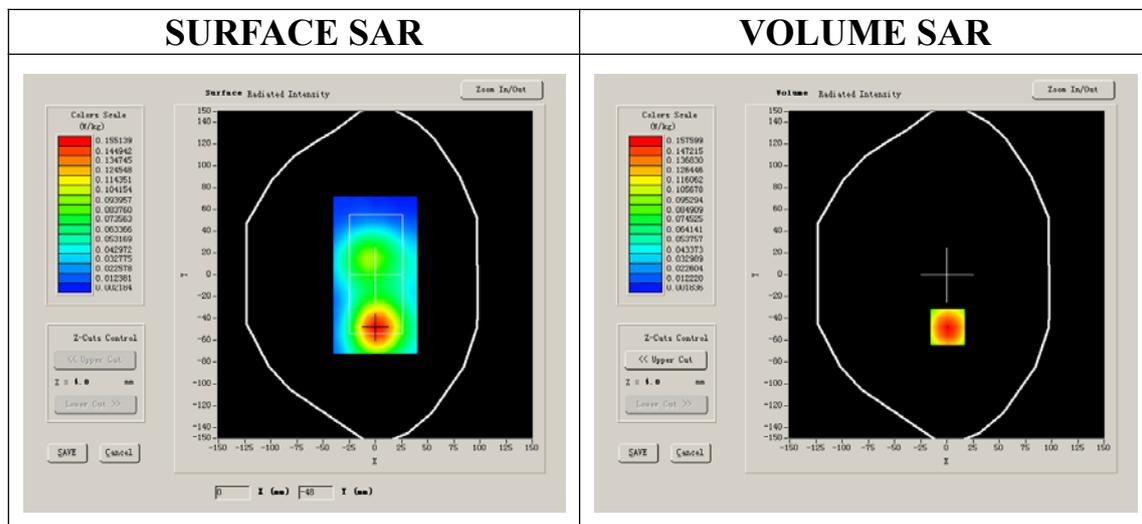


Maximum location: X=1.00, Y=-48.00

SAR 10g (W/Kg)	0.084342
SAR 1g (W/Kg)	0.155475


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1613	0.0798	0.0412	0.0215	0.0112	0.0067


SAR, Z Axis Scan (X = 1, Y = -48)

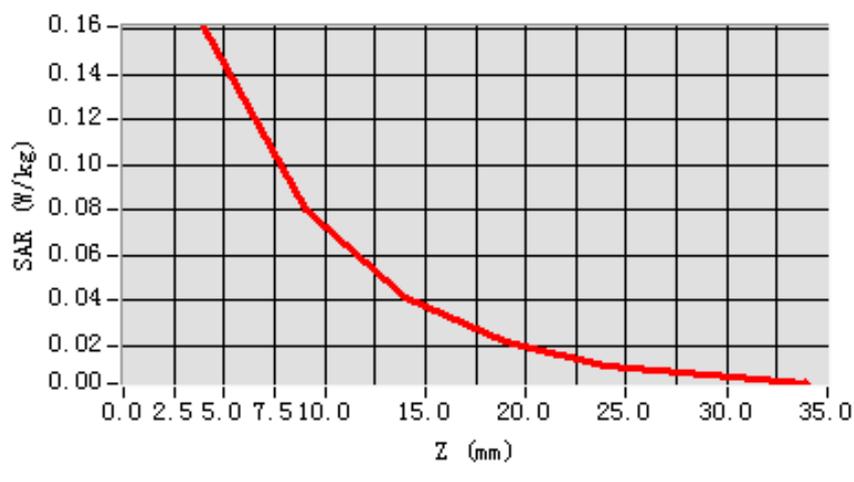

3D scen shot

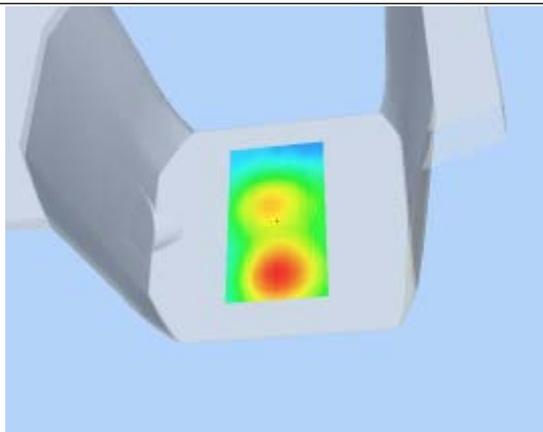

Hot spot position

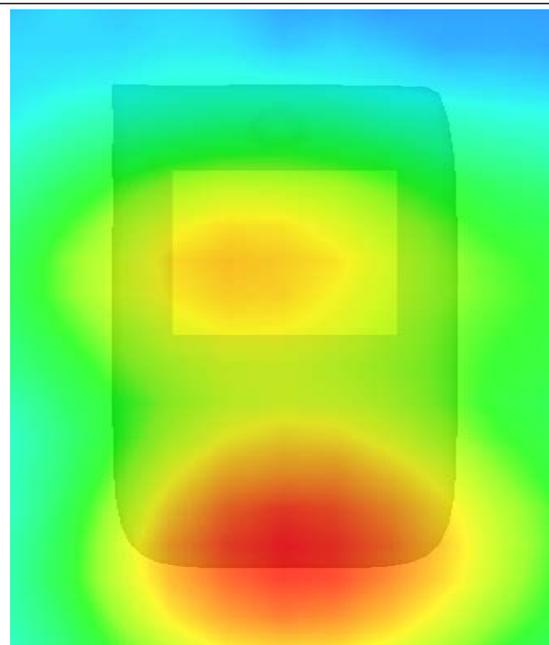

MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	GPRS

B. SAR Measurement Results


Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift(%)	-1.480000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:4

SURFACE SAR

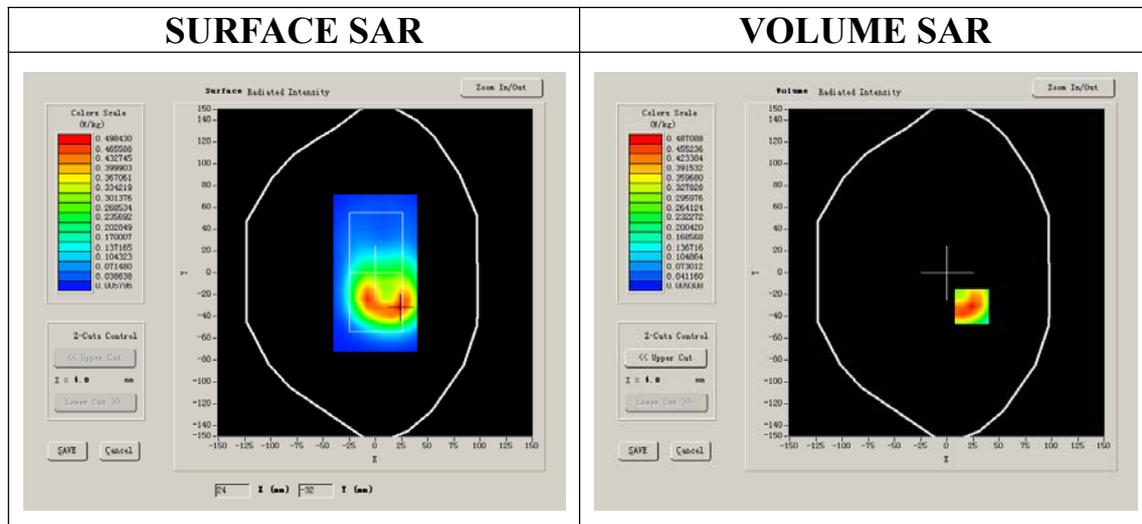

VOLUME SAR

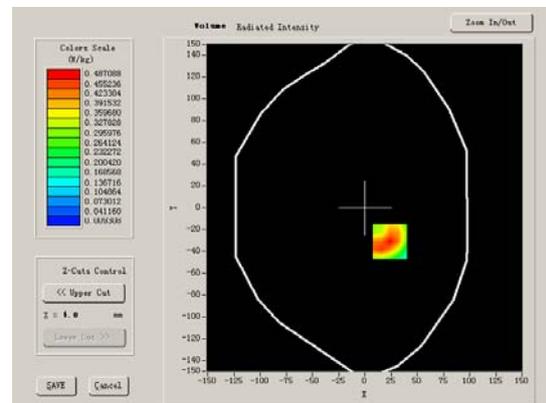


Maximum location: X=24.00, Y=-31.00

SAR 10g (W/Kg)	0.282804
SAR 1g (W/Kg)	0.496054


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5304	0.3074	0.1763	0.1017	0.0611	0.0366


SAR, Z Axis Scan (X = 24, Y = -31)

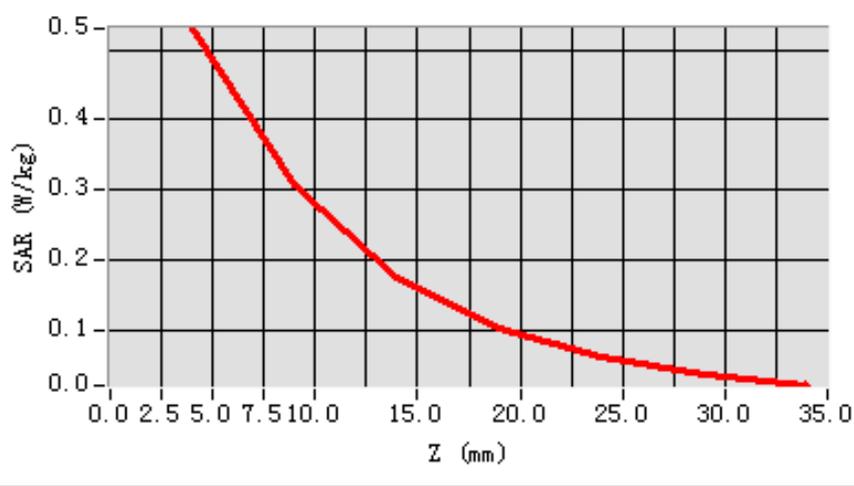

3D scen shot

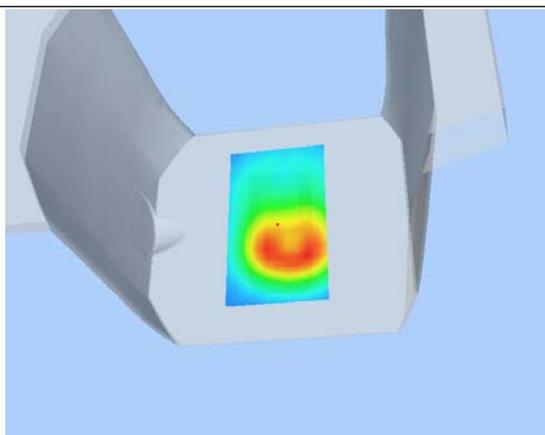

Hot spot position

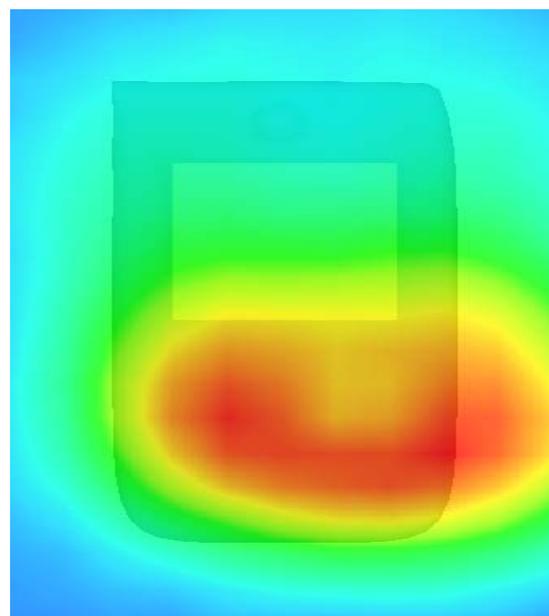

MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 9 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Low
Signal	EDGE

B. SAR Measurement Results


Lower Band SAR (Channel 512):

Frequency (MHz)	1850.200000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift(%)	-2.130000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:8

SURFACE SAR

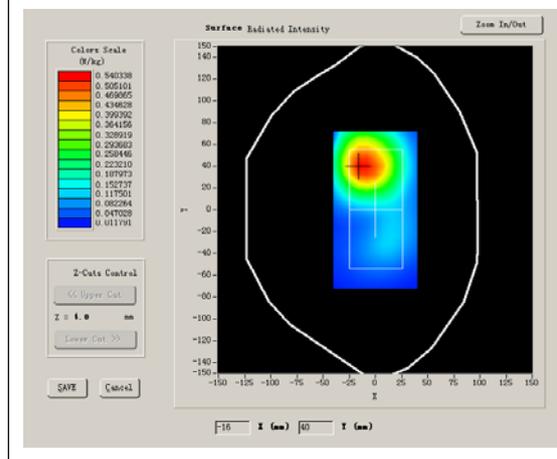

VOLUME SAR

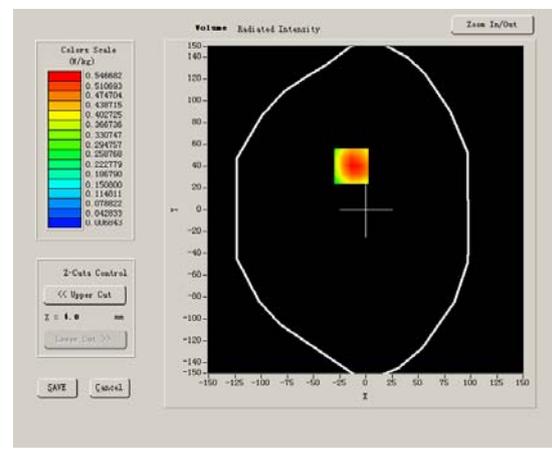


Maximum location: X=-14.00, Y=40.00

SAR 10g (W/Kg)	0.310013
SAR 1g (W/Kg)	0.576097


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5953	0.2883	0.1446	0.0742	0.0354	0.0194


SAR, Z Axis Scan (X = -14, Y = 40)

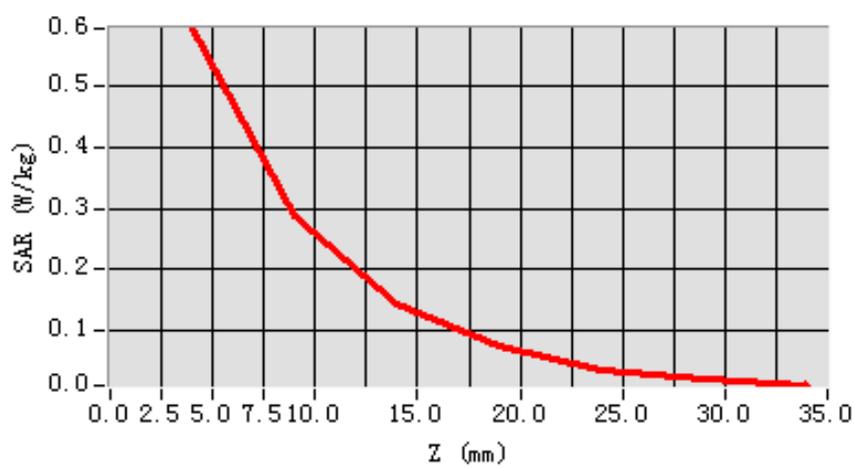

3D scen shot

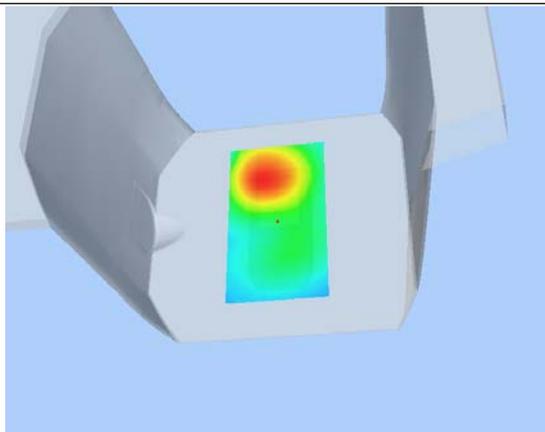

Hot spot position

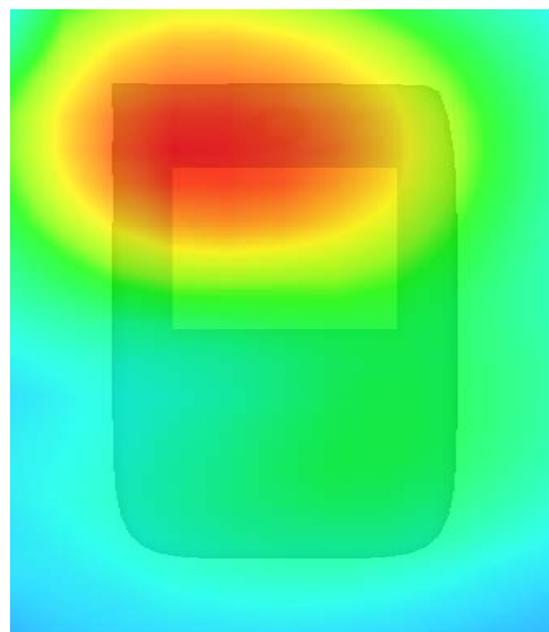

MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 15 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift (%)	-0.030000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR

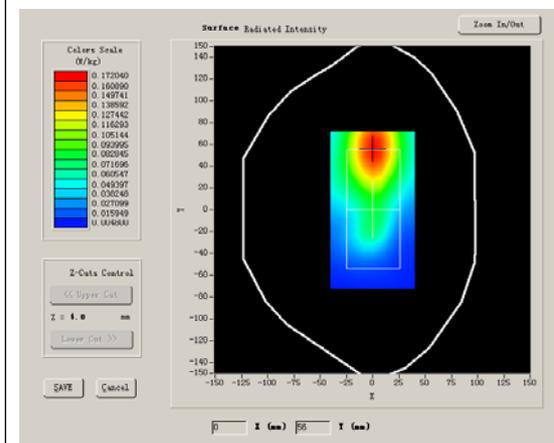

VOLUME SAR

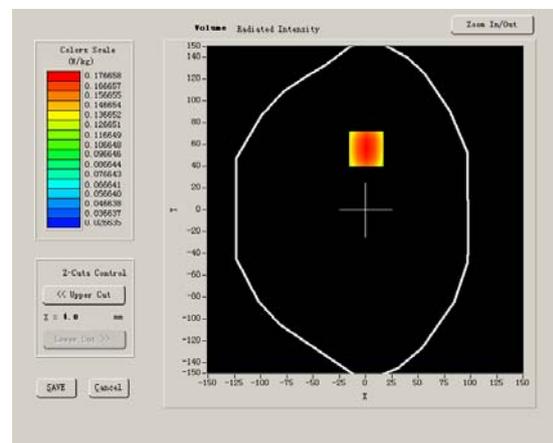


Maximum location: X=1.00, Y=56.00

SAR 10g (W/Kg)	0.147096
SAR 1g (W/Kg)	0.205117


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2120	0.1551	0.1197	0.0889	0.0676	0.0526

SAR, Z Axis Scan (X = 1, Y = 56)

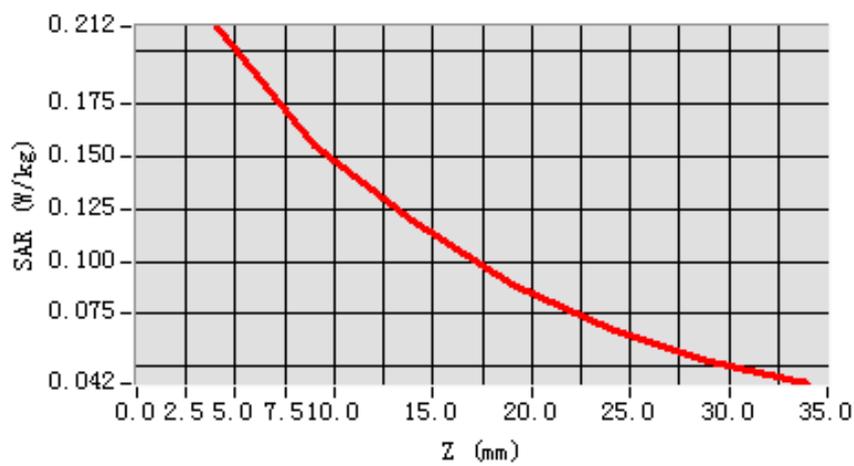

3D scen shot

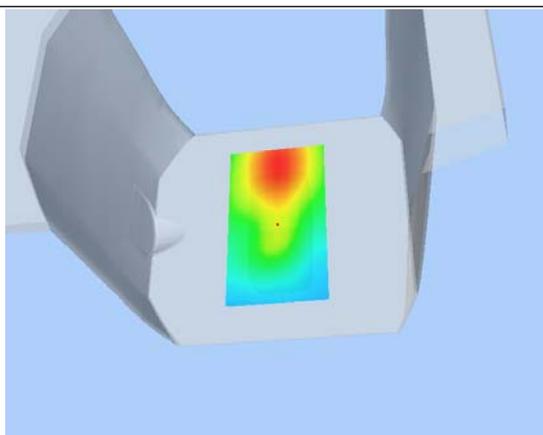

Hot spot position



MEASUREMENT 14

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 16 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift (%)	-1.390000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR

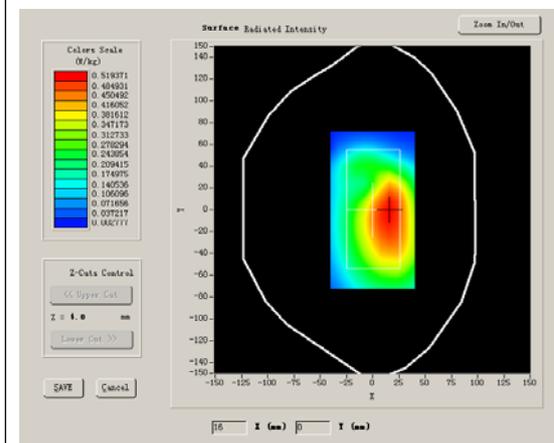

VOLUME SAR

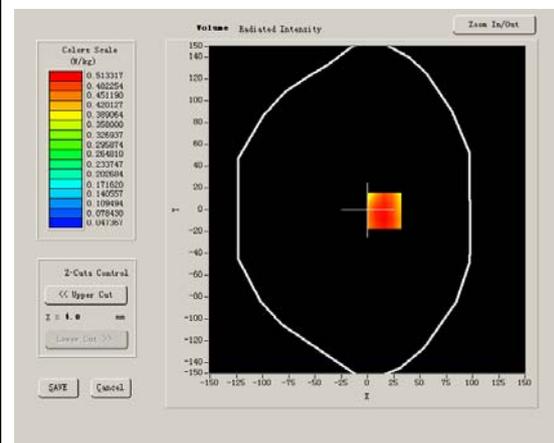


Maximum location: X=16.00, Y=-1.00

SAR 10g (W/Kg)	0.461398
SAR 1g (W/Kg)	0.596865


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6093	0.4968	0.3944	0.3087	0.2397	0.1839


SAR, Z Axis Scan (X = 16, Y = -1)

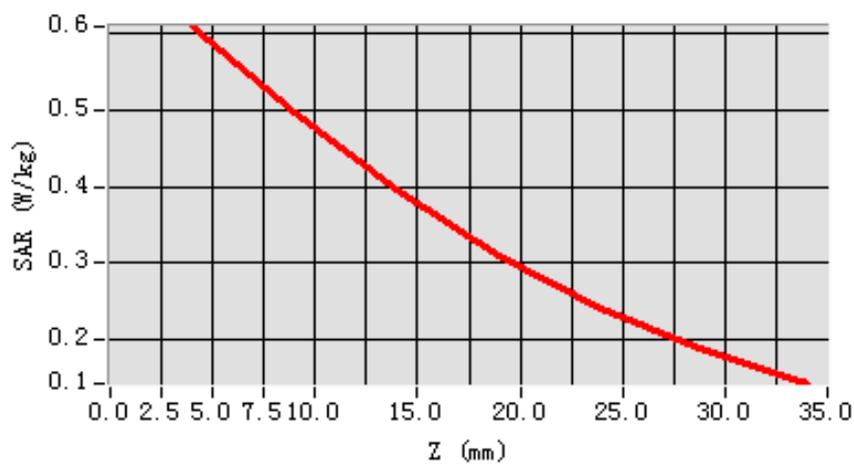

3D scen shot

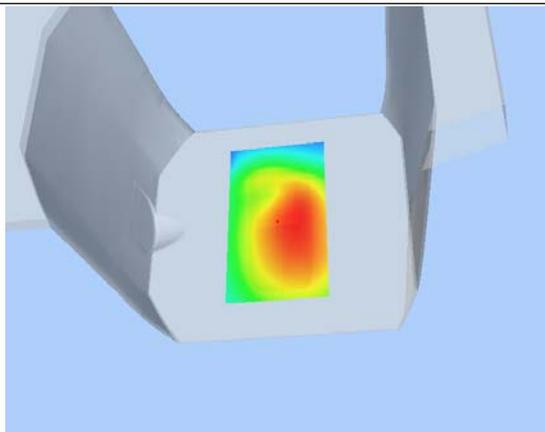

Hot spot position

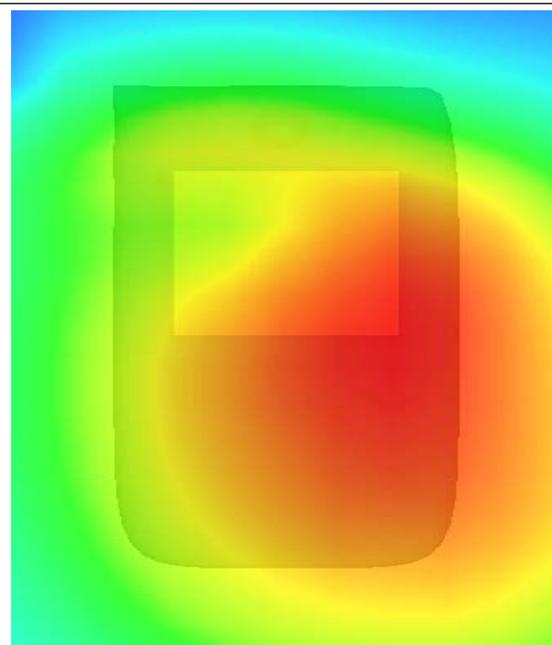

MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 16 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift (%)	-2.190000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR

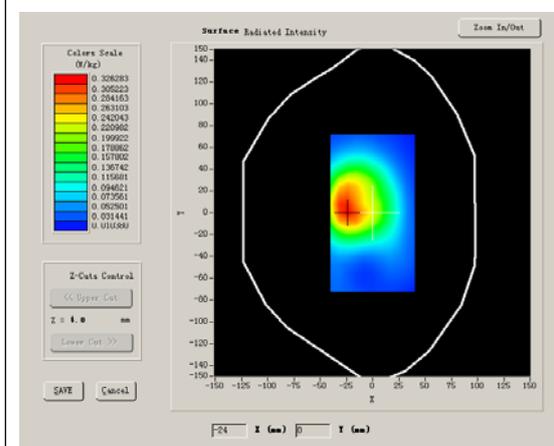

VOLUME SAR

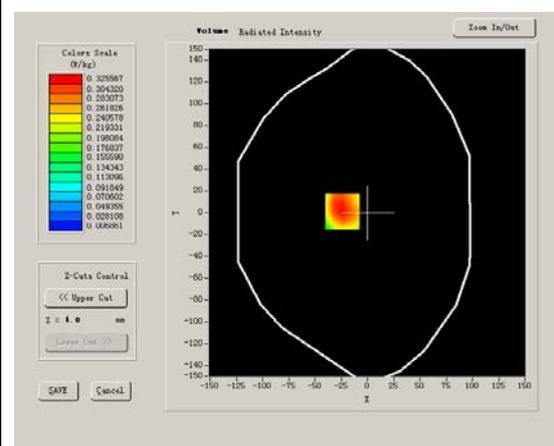


Maximum location: X=-24.00, Y=1.00

SAR 10g (W/Kg)	0.196807
SAR 1g (W/Kg)	0.341787


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3545	0.1972	0.1119	0.0643	0.0357	0.0209


SAR, Z Axis Scan (X = -24, Y = 1)

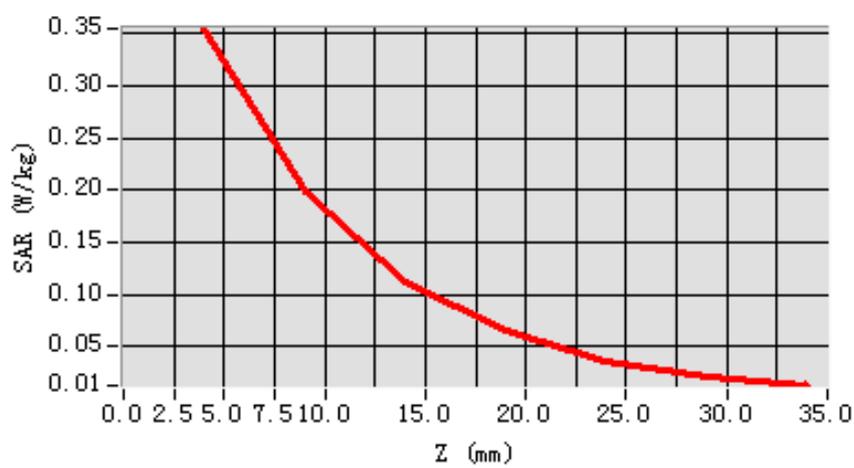

3D scen shot

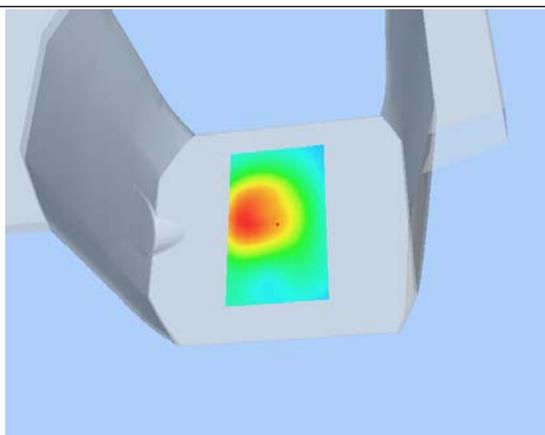

Hot spot position

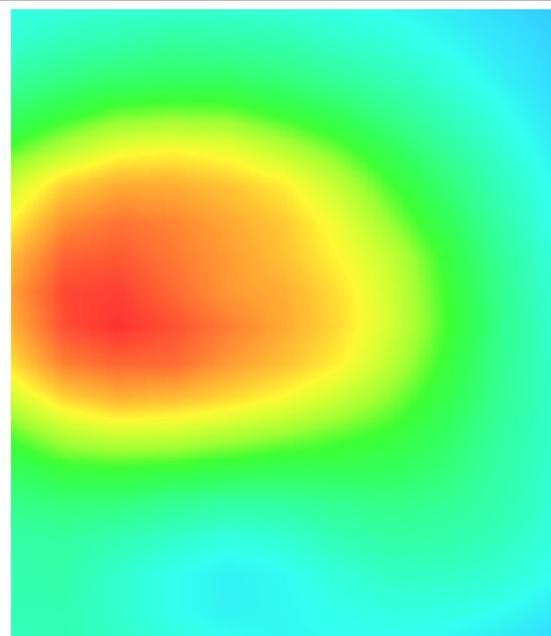

MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 16 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift (%)	-1.390000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

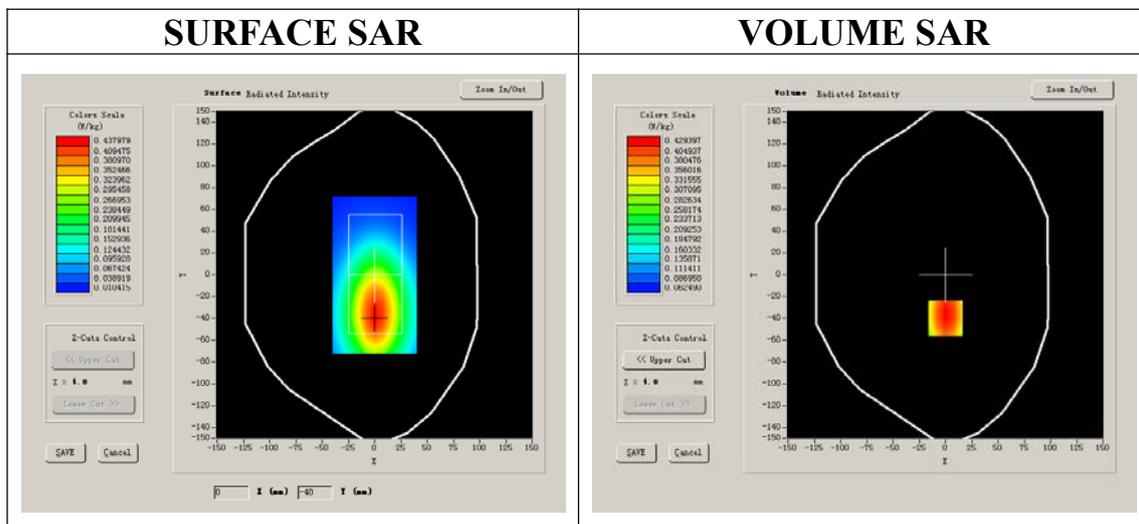


Maximum location: X=0.00, Y=-40.00

SAR 10g (W/Kg)	0.360228
SAR 1g (W/Kg)	0.499383


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5150	0.3822	0.2900	0.2222	0.1705	0.1329


SAR, Z Axis Scan (X = 0, Y = -40)

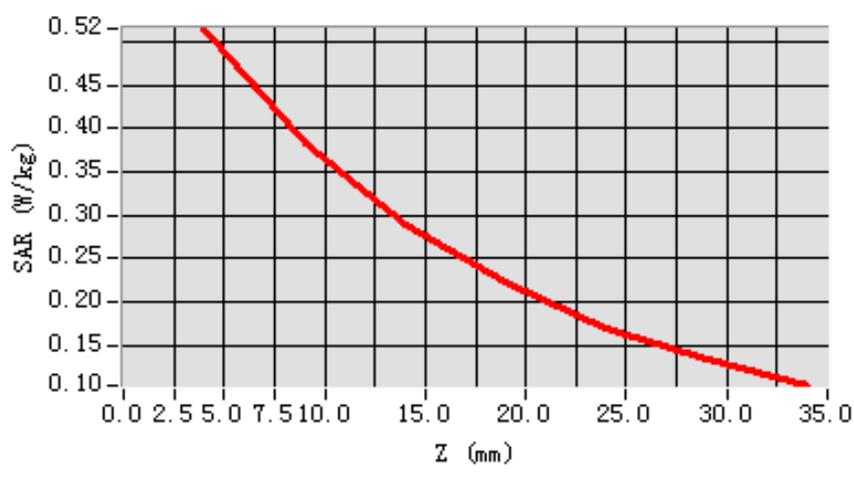

3D scen shot

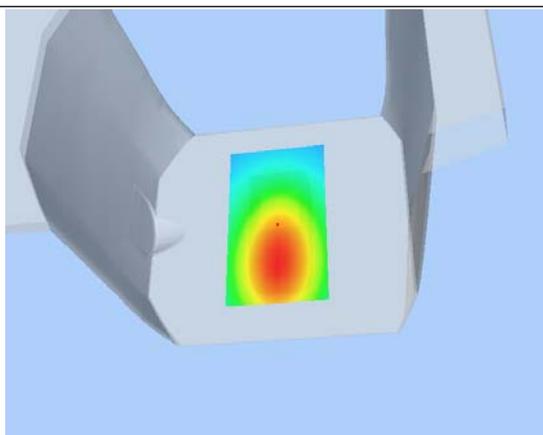

Hot spot position

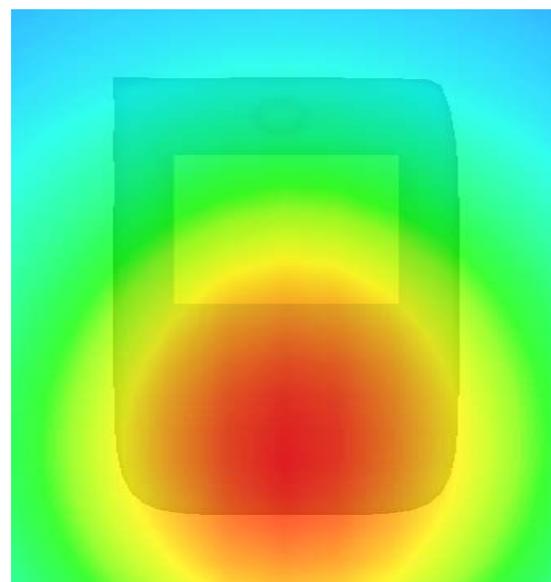

MEASUREMENT 17

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift (%)	0.060000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

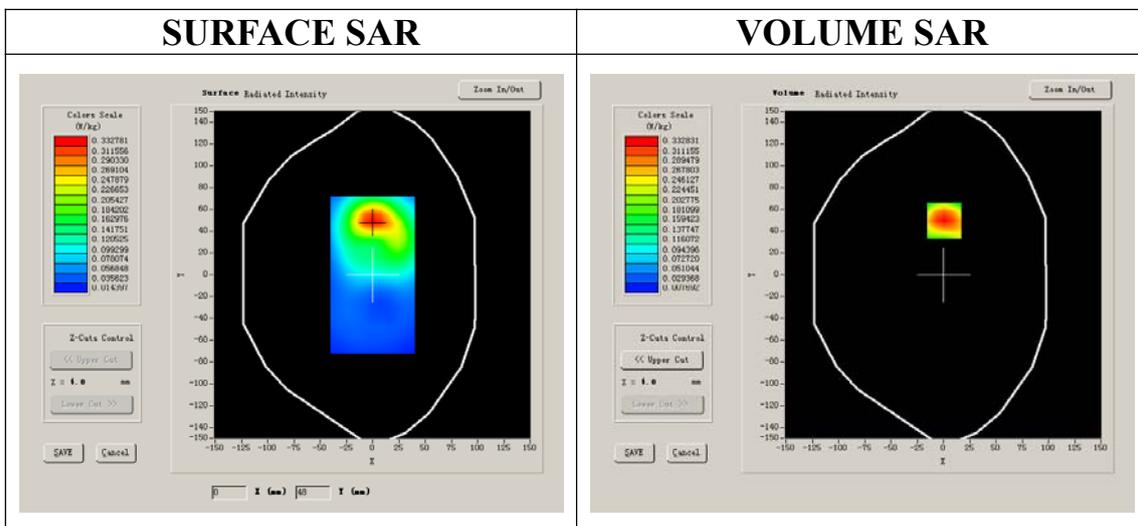


Maximum location: X=1.00, Y=50.00

SAR 10g (W/Kg)	0.197625
SAR 1g (W/Kg)	0.346172


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3624	0.2107	0.1220	0.0711	0.0413	0.0232


SAR, Z Axis Scan (X = 1, Y = 50)

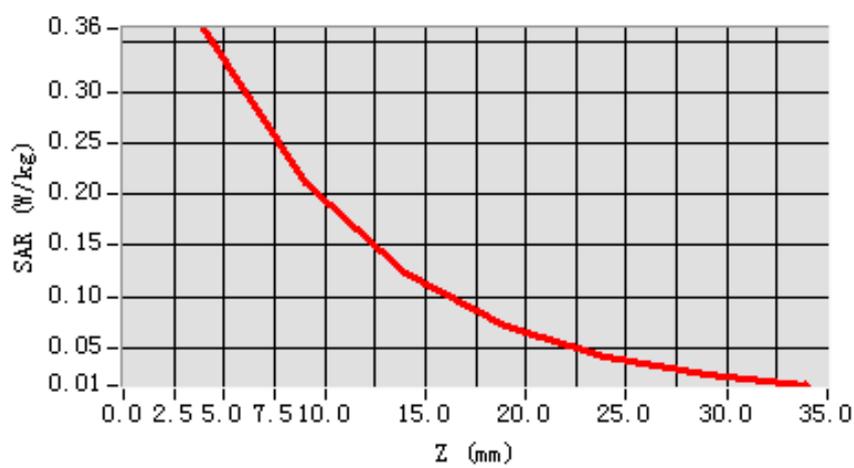

3D scen shot

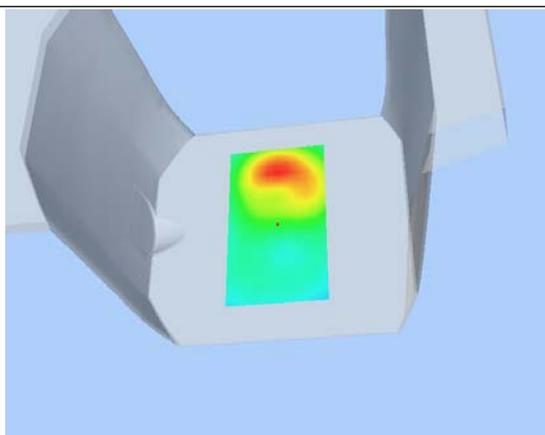

Hot spot position

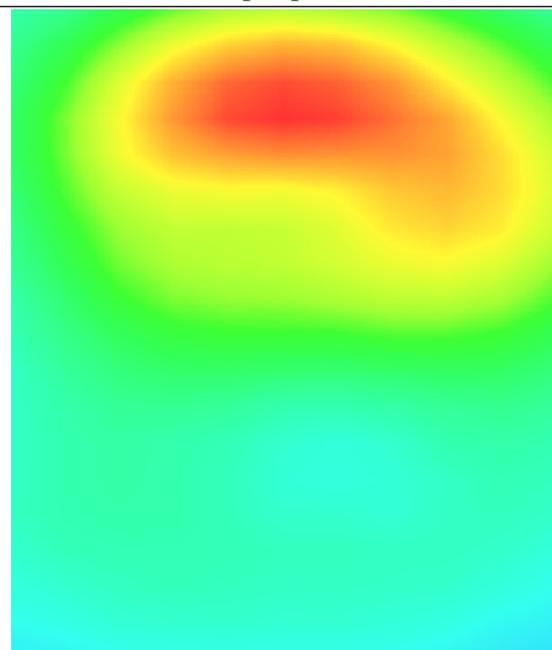

MEASUREMENT 18

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results


Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift (%)	0.080000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

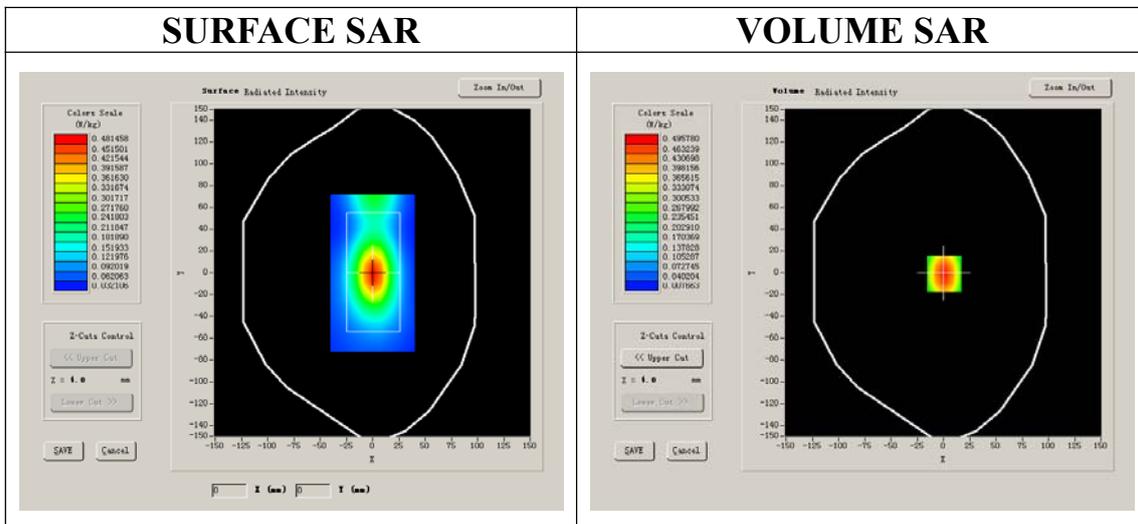

VOLUME SAR

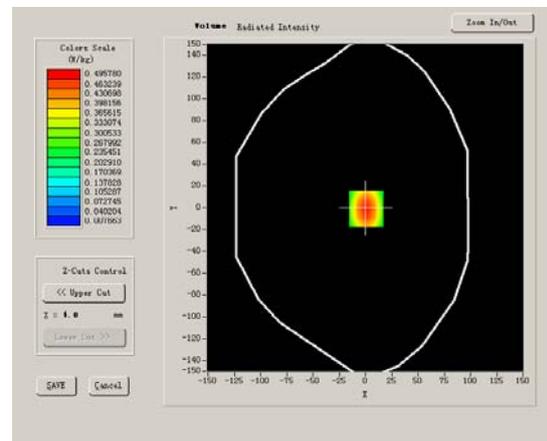


Maximum location: X=1.00, Y=-1.00

SAR 10g (W/Kg)	0.307508
SAR 1g (W/Kg)	0.565005


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5950	0.3130	0.1646	0.0868	0.0485	0.0261


SAR, Z Axis Scan (X = 1, Y = -1)

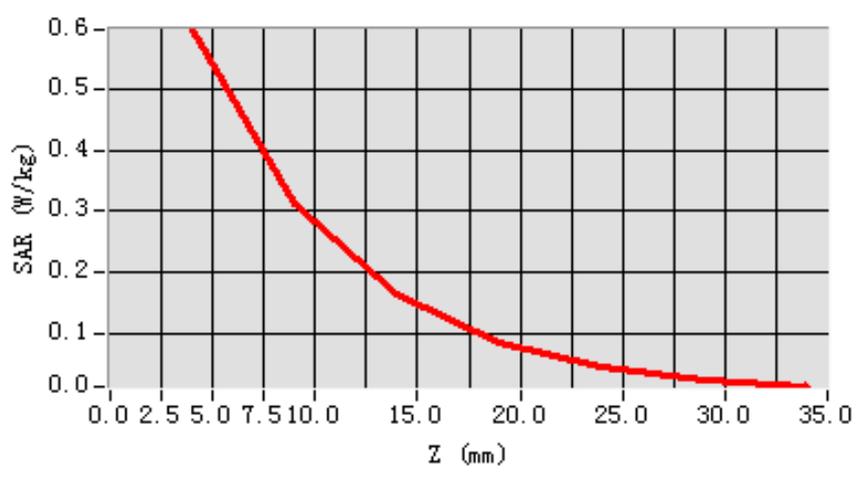

3D scene shot

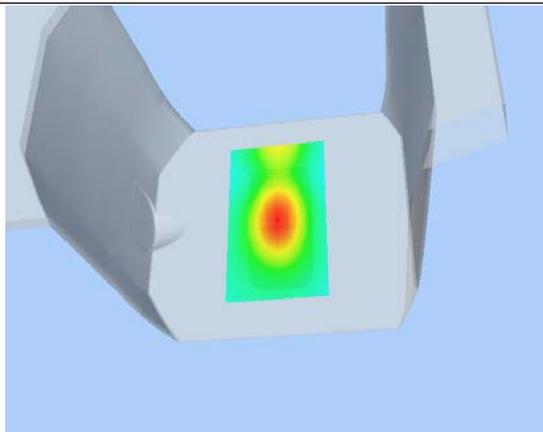

Hot spot position

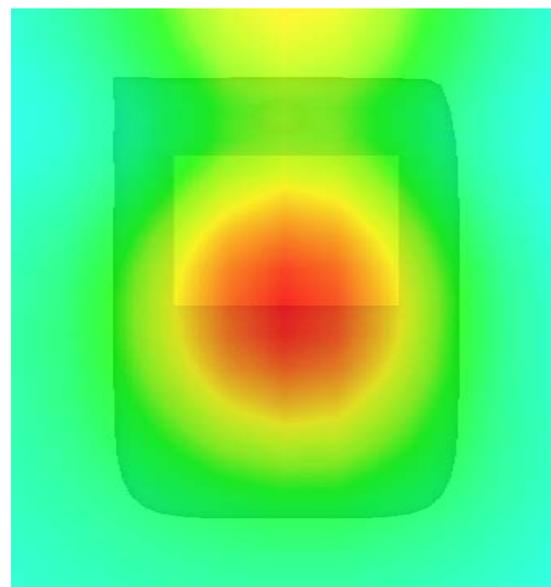

MEASUREMENT 19

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results


Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift (%)	-0.320000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

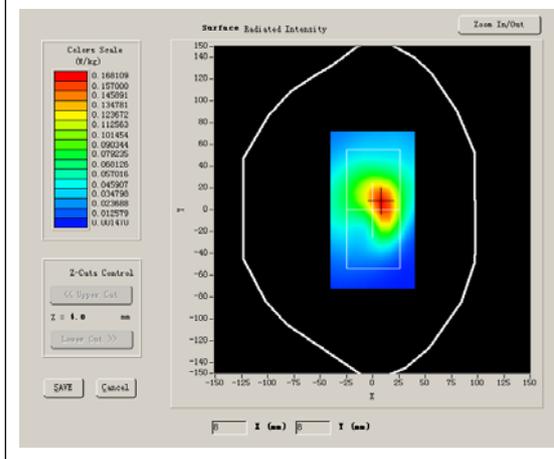

VOLUME SAR

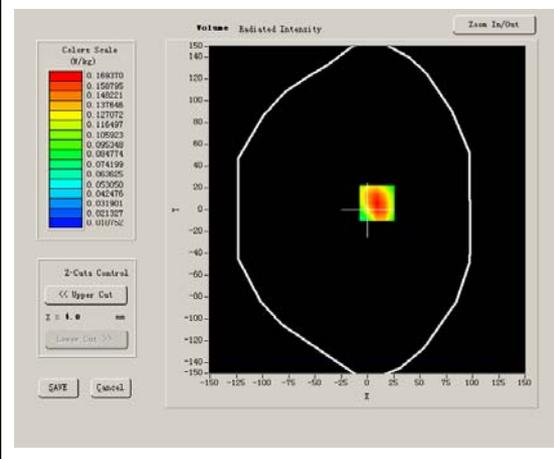


Maximum location: X=9.00, Y=6.00

SAR 10g (W/Kg)	0.122510
SAR 1g (W/Kg)	0.193265


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2033	0.1328	0.0897	0.0619	0.0434	0.0313


SAR, Z Axis Scan (X = 9, Y = 6)

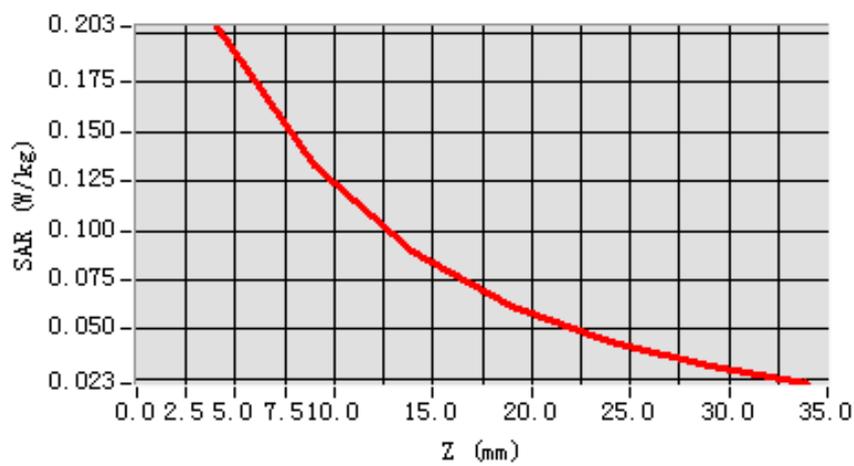

3D scen shot

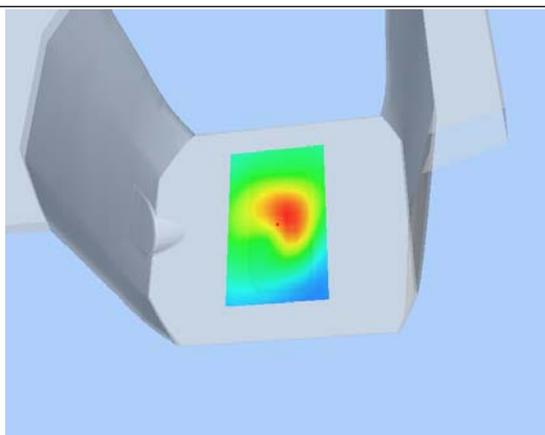

Hot spot position

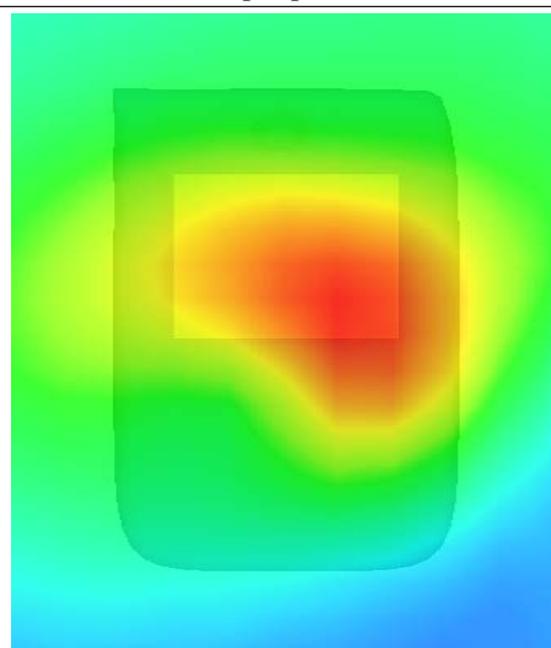

MEASUREMENT 20

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 9 minutes 14 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results


Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.325061
Relative permittivity	1.513480
Conductivity (S/m)	1.508114
Power drift (%)	-0.710000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

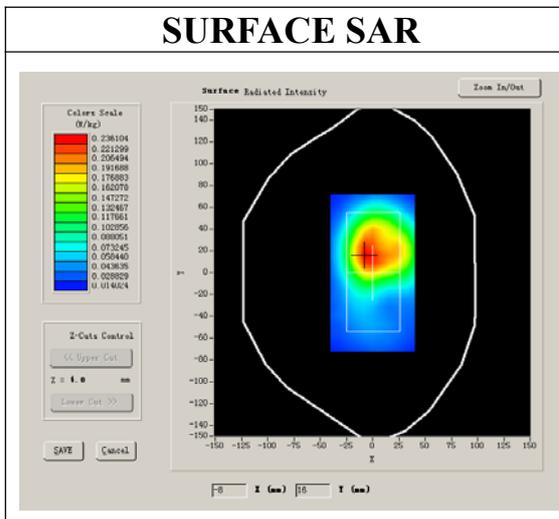

VOLUME SAR

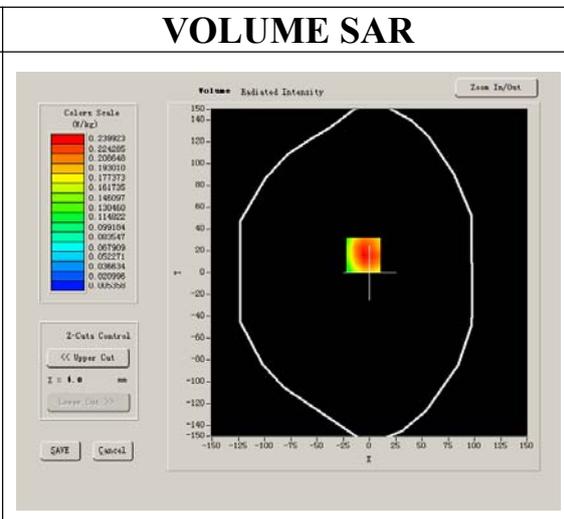


Maximum location: X=-6.00, Y=16.00

SAR 10g (W/Kg)	0.144572
SAR 1g (W/Kg)	0.250241


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2613	0.1478	0.0825	0.0479	0.0263	0.0164


SAR, Z Axis Scan (X = -6, Y = 16)

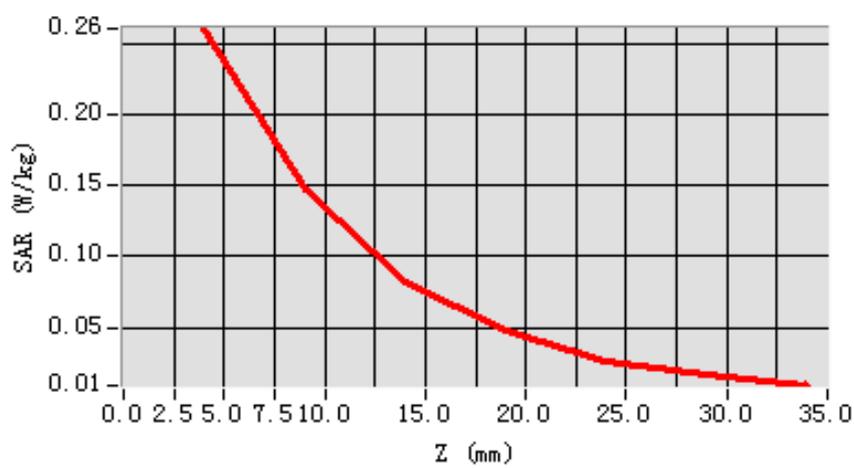

3D scen shot

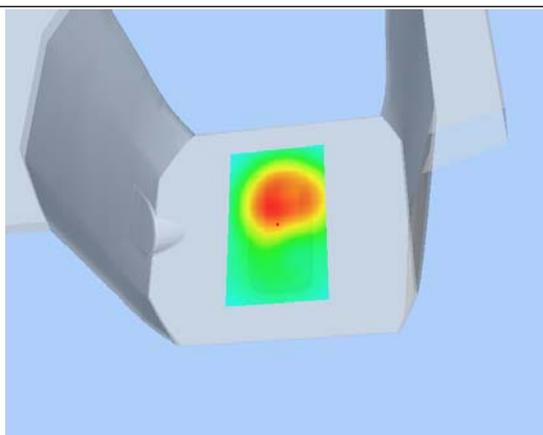

Hot spot position

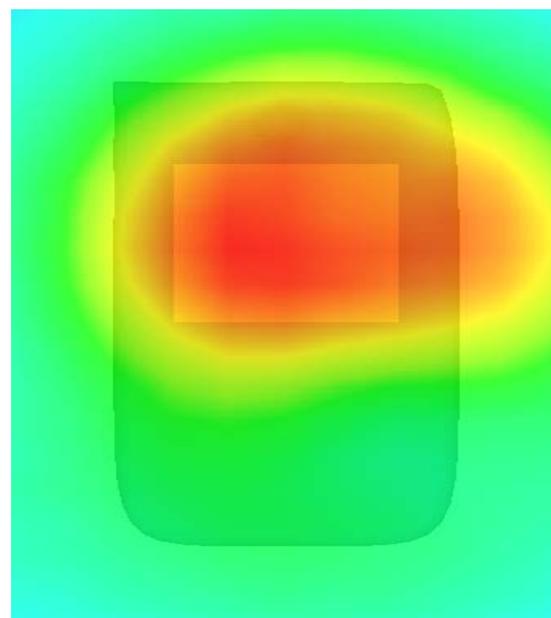

MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.10

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	802.11B
Channels	High
Signal	Duty Cycle: 1.00

B. SAR Measurement Results


Higher band SAR (channel 11):

Frequency (MHz)	2462.000000
Relative permittivity (real part)	53.147625
Relative permittivity	12.991650
Conductivity (S/m)	1.854861
Power drift (%)	-0.720000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

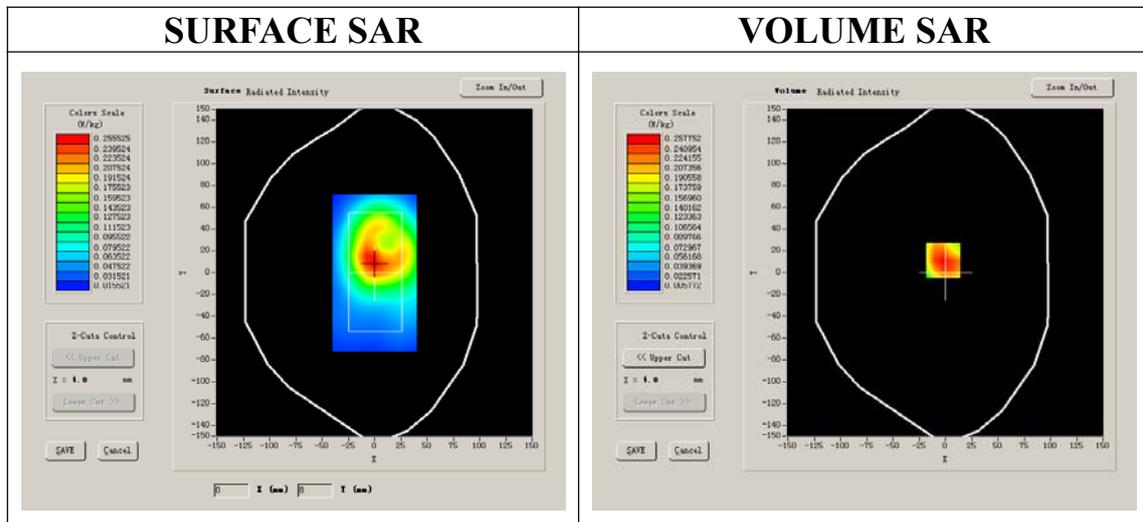

VOLUME SAR

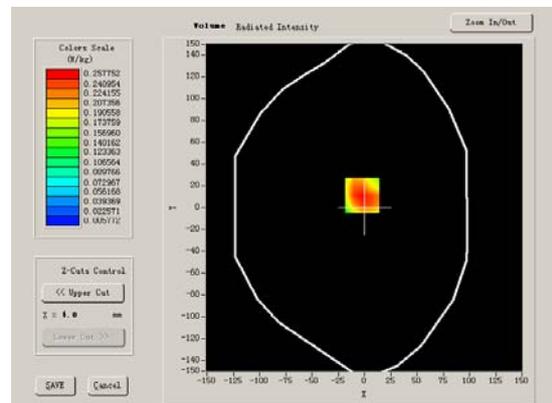


Maximum location: X=-2.00, Y=11.00

SAR 10g (W/Kg)	0.154465
SAR 1g (W/Kg)	0.269980


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2807	0.1562	0.0883	0.0495	0.0281	0.0164


SAR, Z Axis Scan (X = -2, Y = 11)

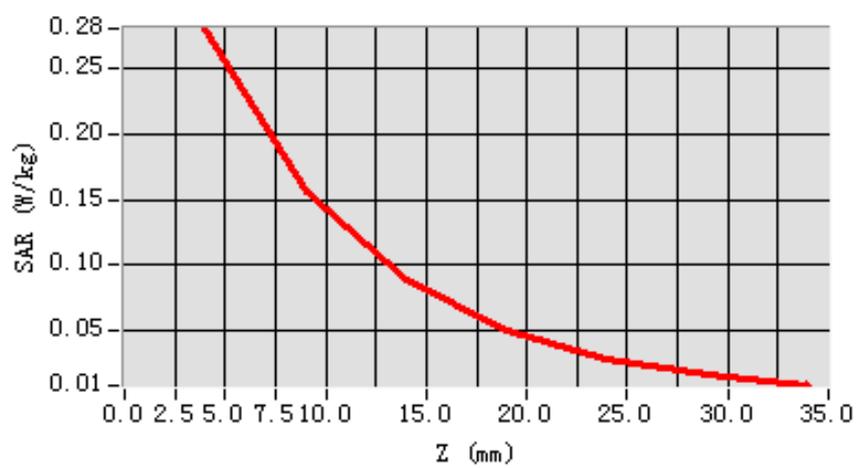

3D scen shot

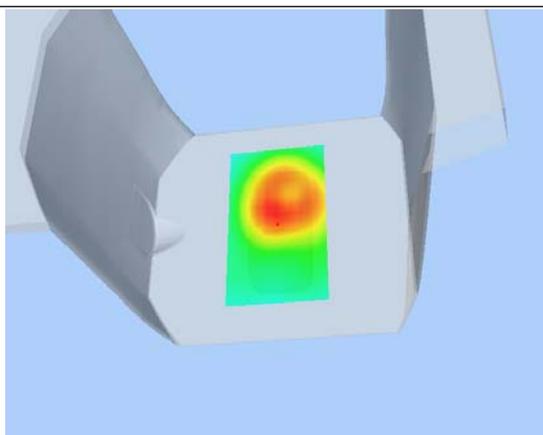

Hot spot position

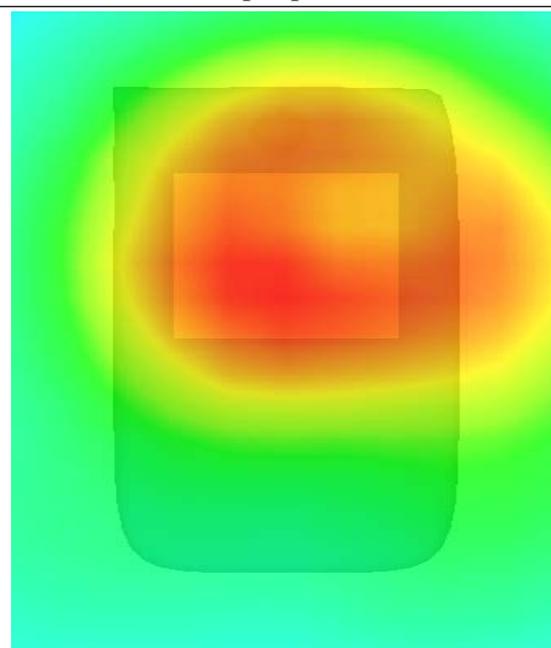

MEASUREMENT 22

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.10

Measurement duration: 9 minutes 4 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	802.11B
Channels	High
Signal	Duty Cycle: 1.00

B. SAR Measurement Results


Higher band SAR (channel 11):

Frequency (MHz)	2462.000000
Relative permittivity (real part)	53.147625
Relative permittivity	12.991650
Conductivity (S/m)	1.854861
Power drift (%)	-1.210000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

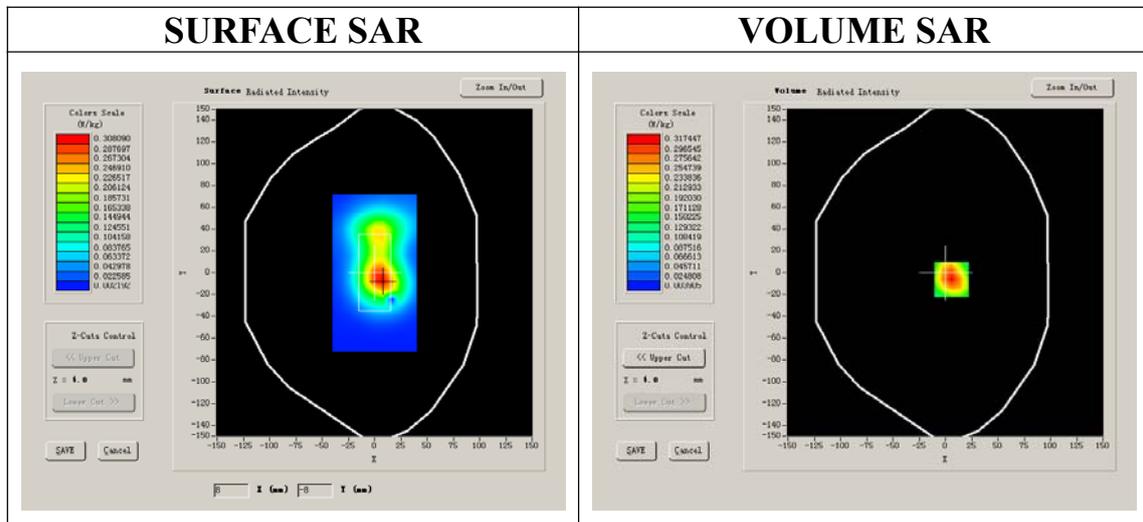

VOLUME SAR

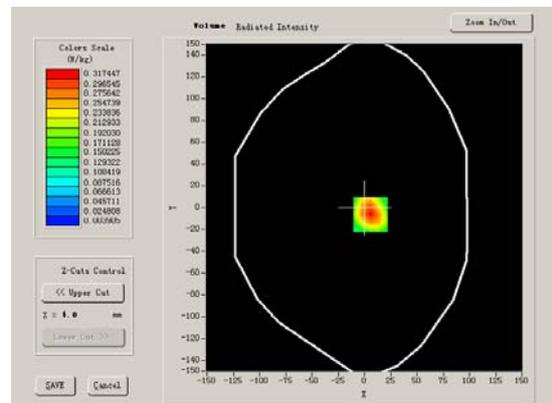


Maximum location: X=6.00, Y=-6.00

SAR 10g (W/Kg)	0.162051
SAR 1g (W/Kg)	0.299202


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3174	0.1664	0.0931	0.0496	0.0252	0.0154


SAR, Z Axis Scan (X = 6, Y = -6)

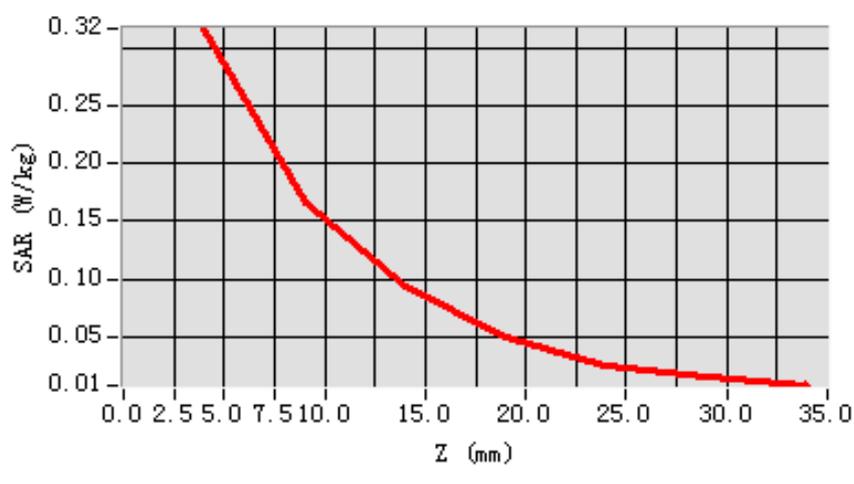

3D scen shot

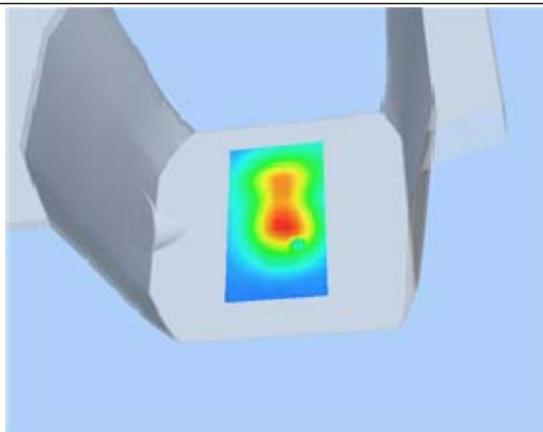

Hot spot position

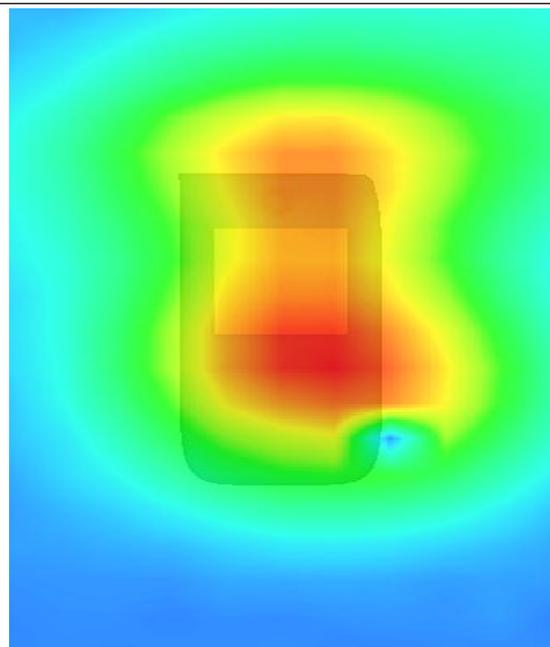

MEASUREMENT 23

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.10

Measurement duration: 9 minutes 4 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	802.11B
Channels	High
Signal	Duty Cycle: 1.00

B. SAR Measurement Results


Higher band SAR (channel 11):

Frequency (MHz)	2462.000000
Relative permittivity (real part)	53.147625
Relative permittivity	12.991650
Conductivity (S/m)	1.854861
Power drift (%)	-0.620000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

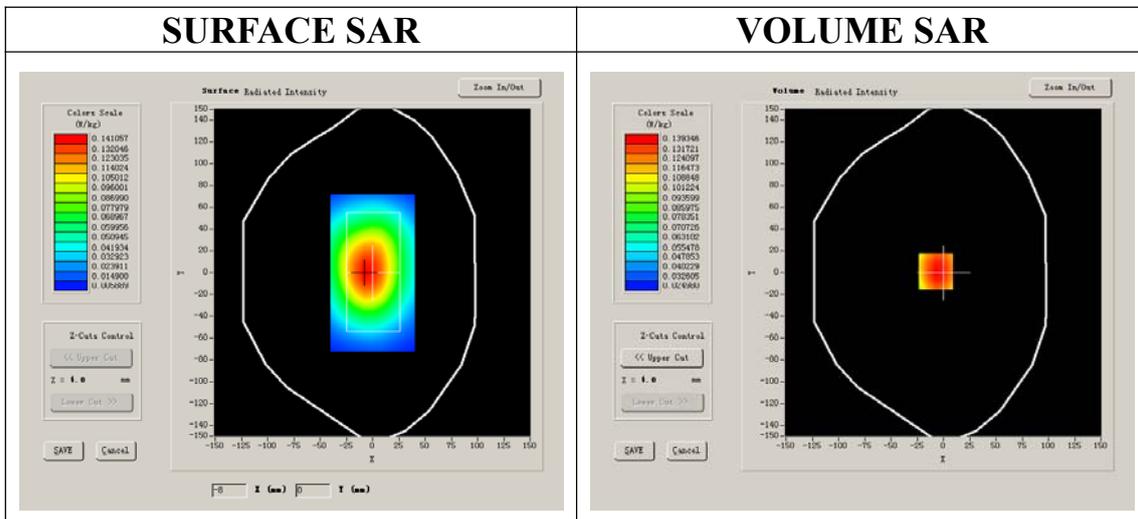

VOLUME SAR

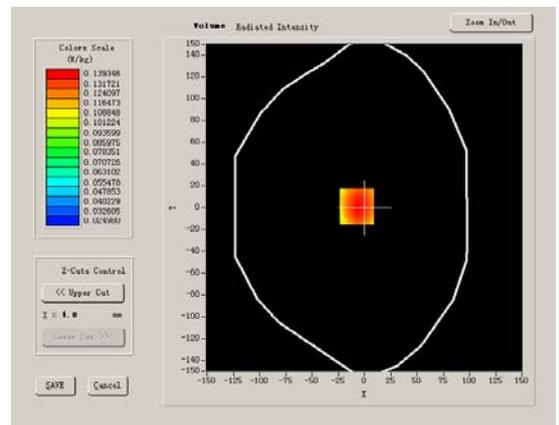


Maximum location: X=-7.00, Y=1.00

SAR 10g (W/Kg)	0.123824
SAR 1g (W/Kg)	0.162860


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1672	0.1331	0.1048	0.0840	0.0674	0.0531


SAR, Z Axis Scan (X = -7, Y = 1)

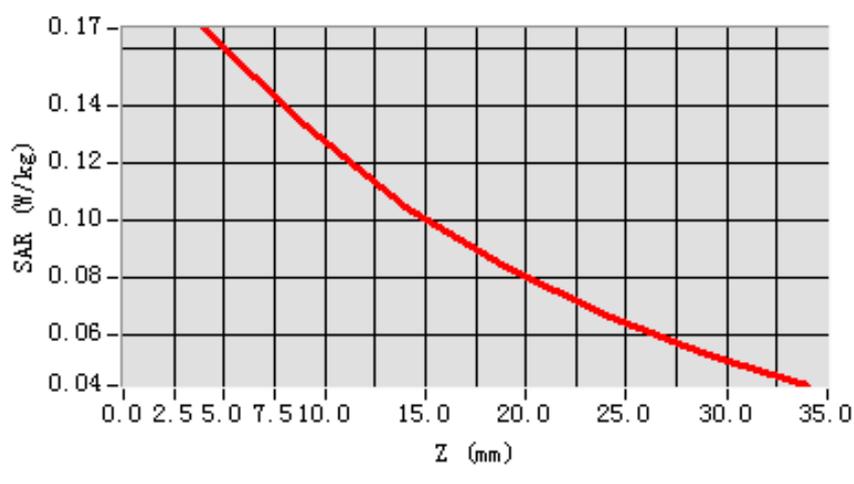

3D scen shot

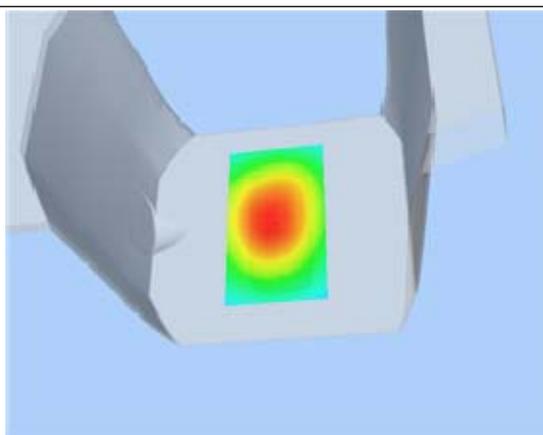

Hot spot position

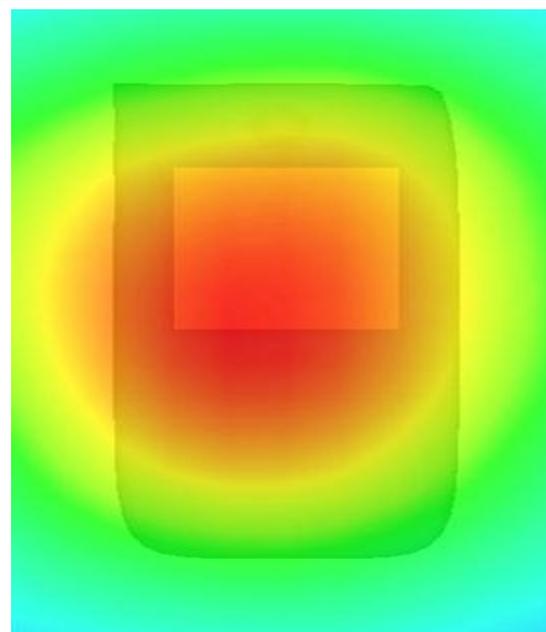

MEASUREMENT 24

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.10

Measurement duration: 9 minutes 4 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	802.11B
Channels	High
Signal	Duty Cycle: 1.00

B. SAR Measurement Results


Higher band SAR (channel 11):

Frequency (MHz)	2462.000000
Relative permittivity (real part)	53.147625
Relative permittivity	12.991650
Conductivity (S/m)	1.854861
Power drift (%)	-0.950000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.3°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

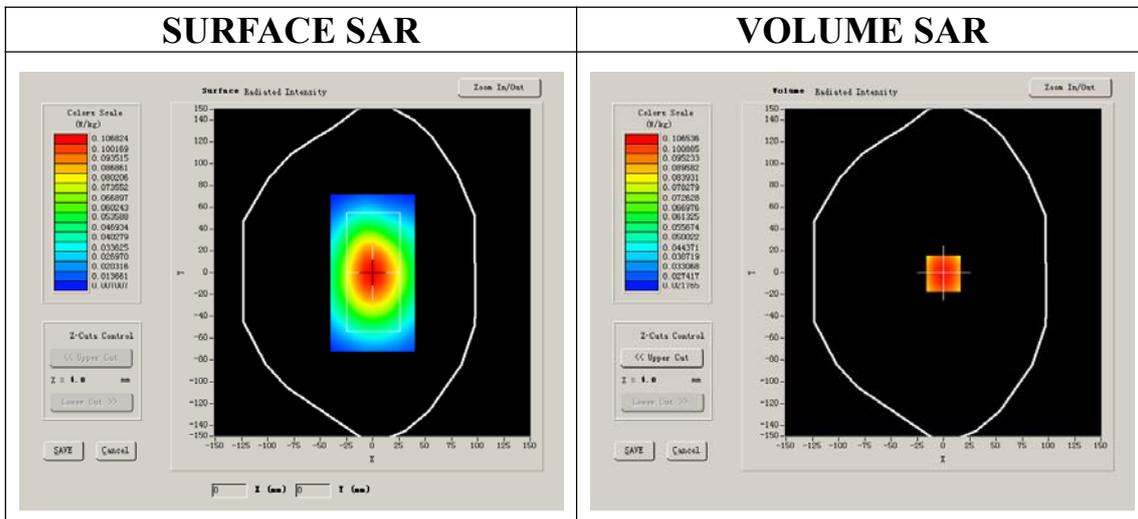

VOLUME SAR

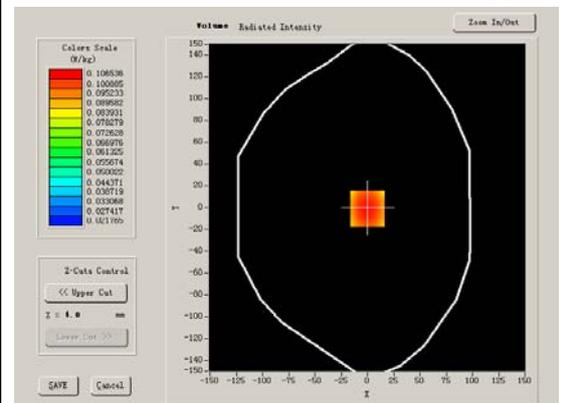


Maximum location: X=0.00, Y=-1.00

SAR 10g (W/Kg)	0.096234
SAR 1g (W/Kg)	0.124151


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1279	0.1039	0.0832	0.0674	0.0545	0.0437


SAR, Z Axis Scan (X = 0, Y = -1)

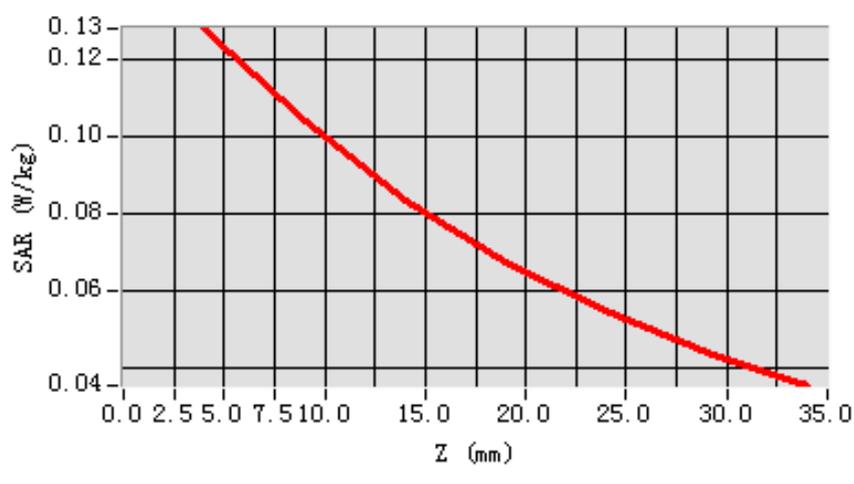

3D scen shot

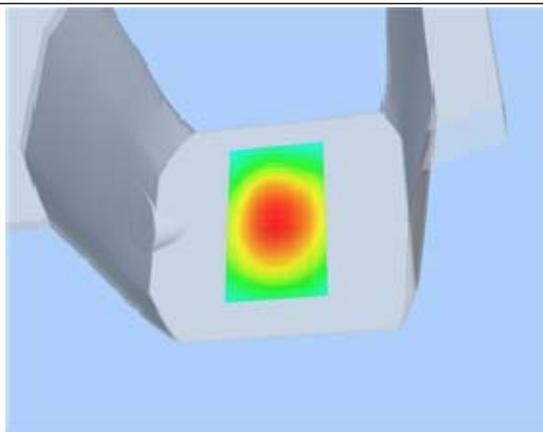

Hot spot position

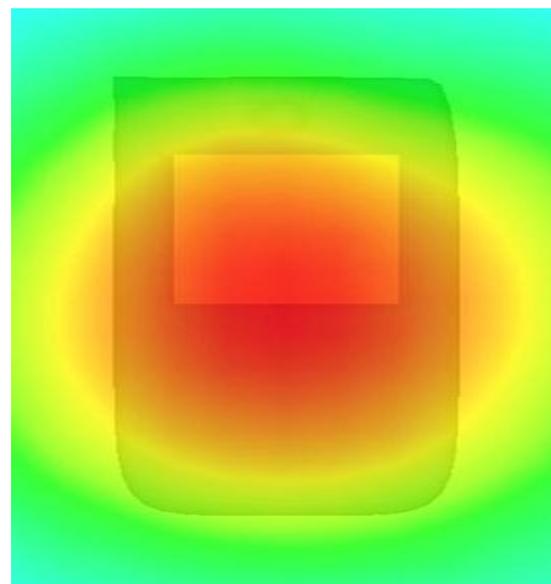

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.126980
Conductivity (S/m)	0.953109
Power drift (%)	-0.170000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

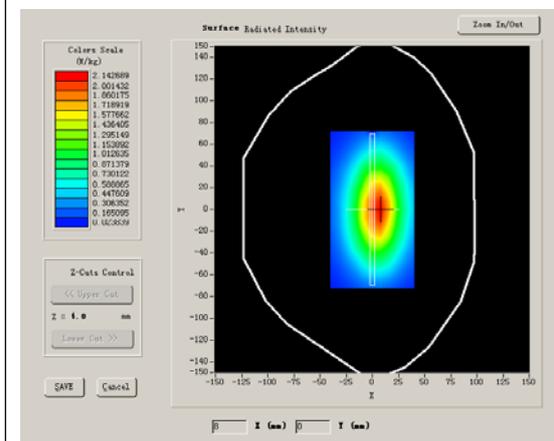

VOLUME SAR

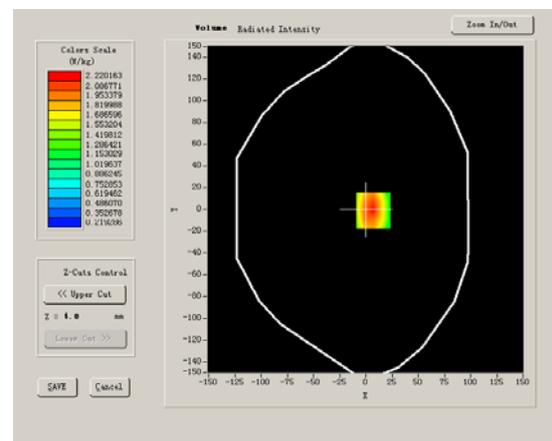


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.497122
SAR 1g (W/Kg)	2.379818


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143


SAR, Z Axis Scan (X = 7, Y = -1)

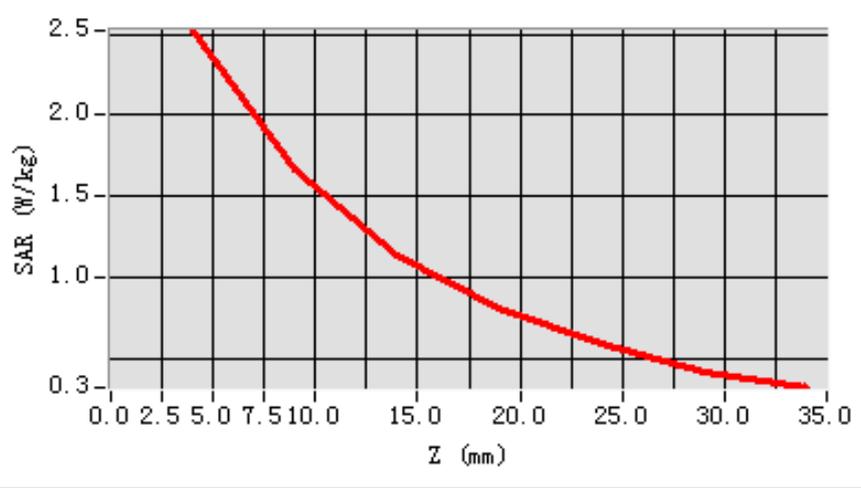

3D scen shot

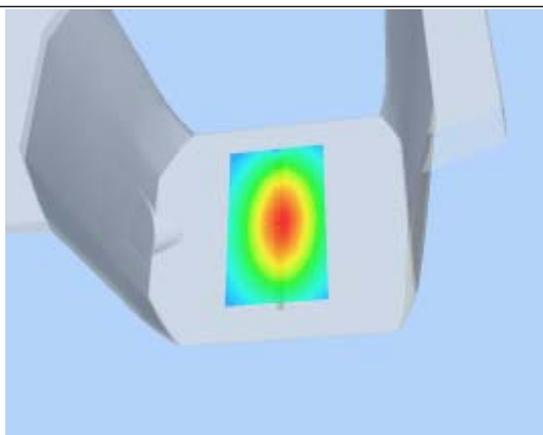

Hot spot position

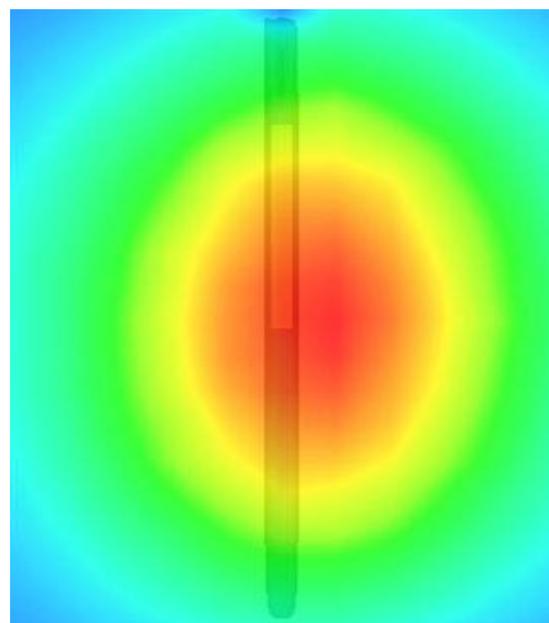

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.1.16

Measurement duration: 13 minutes 26 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.325061
Conductivity (S/m)	1.513480
Power drift (%)	-0.030000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

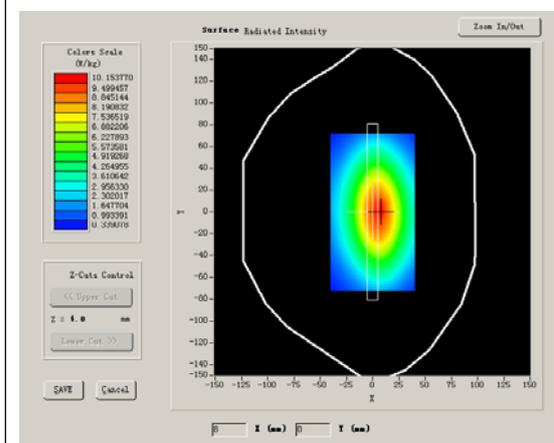

VOLUME SAR

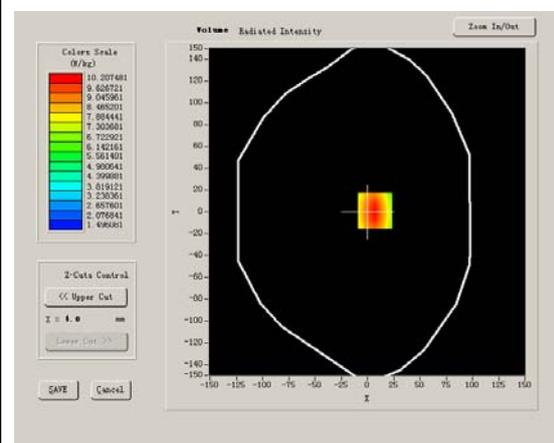


Maximum location: X=7.00, Y=1.00

SAR 10g (W/Kg)	6.628519
SAR 1g (W/Kg)	9.953173


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2075	7.3996	5.4654	4.1101	3.1286	2.4128


SAR, Z Axis Scan (X = 7, Y = 1)

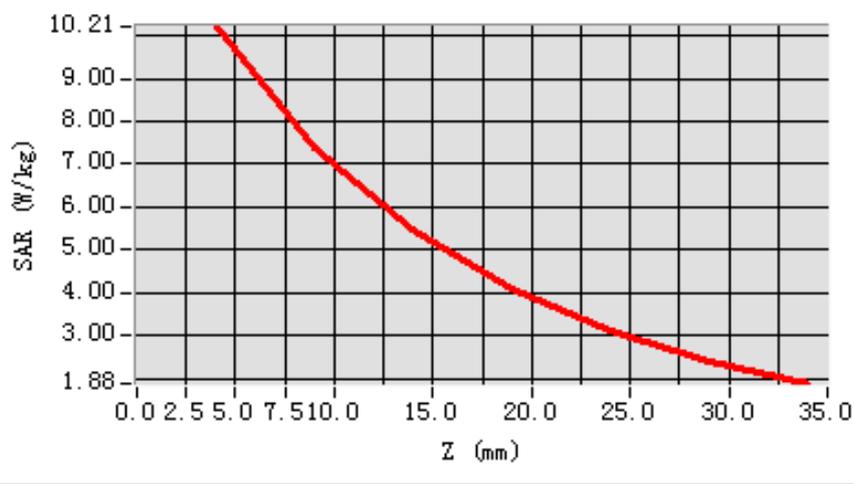

3D scene shot

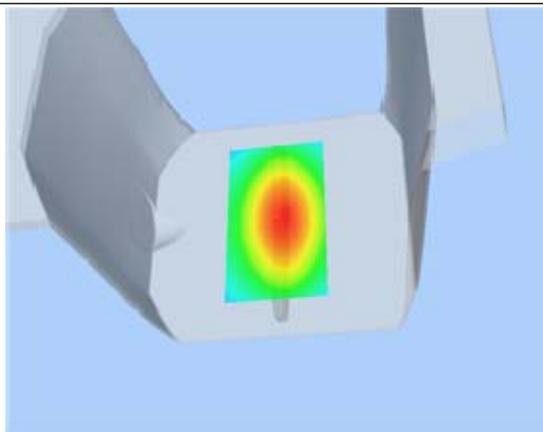

Hot spot position

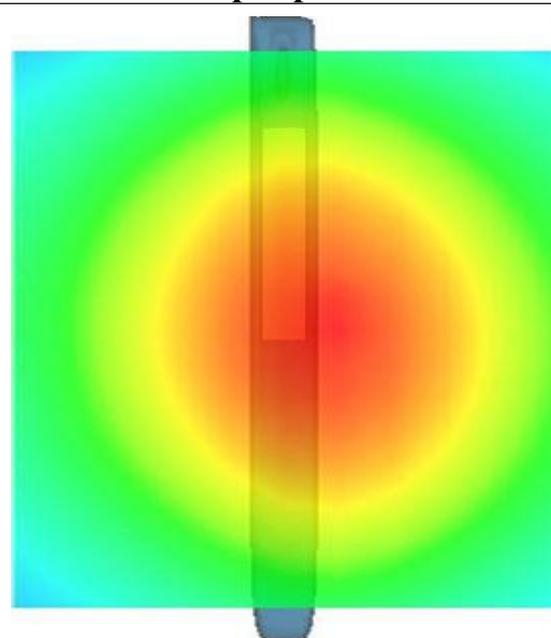

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.1.10

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	53.147625
Conductivity (S/m)	1.854861
Power Drift (%)	-1.080000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

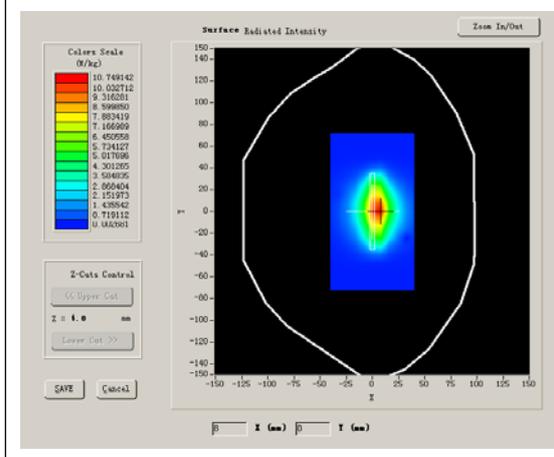

VOLUME SAR

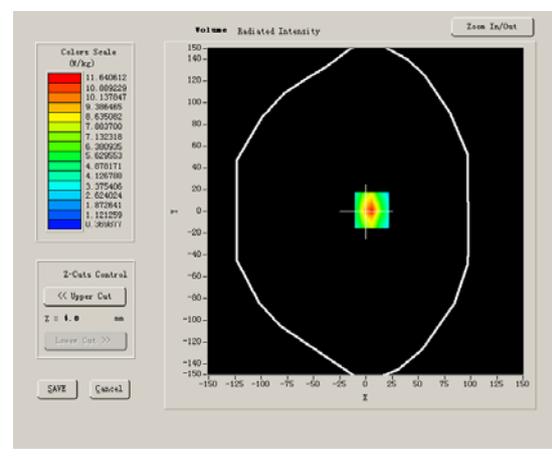


Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	6.156774
SAR 1g (W/Kg)	12.861319


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.1279	6.8312	3.5991	1.3473

SAR, Z Axis Scan (X = -1, Y = -50)

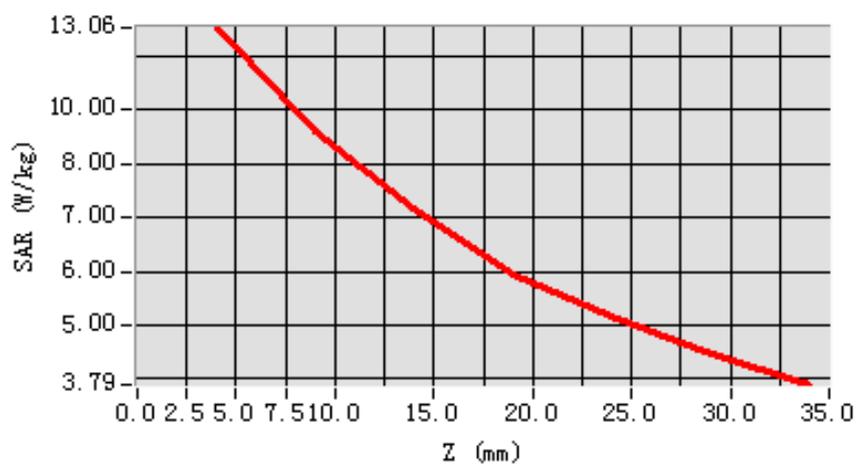

3D scen shot

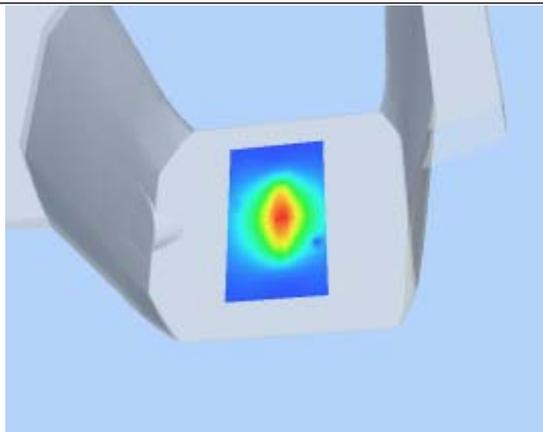

Hot spot position

