

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Appendix A

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Picture 12.2 Power Thresholds

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
			dBm	mW	
Bluetooth	2.441	19	8.84	7.66	Yes
2.4GHz WLAN 802.11 b	2.45	19	13.81	24.04	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Right hand, Touch cheek	0.27	0.05	0.32
Highest reported SAR value for Body	Rear	1.16	0.04	1.20

Table 13.2: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	Right hand, Touch cheek	0.27	0.17	0.44
Highest reported SAR value for Body	Rear	1.16	0.17	1.33

BT* - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Mode/Band	F (GHz)	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
			dBm	mW	
Bluetooth	2.441	10	9	7.94	0.17

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;
where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850/1900	1:4
WCDMA850/1900 &WiFi	1:1

14.1 The evaluation of multi-batteries

We'll perform the head measurement in all bands with the primary battery depending on the evaluation of multi-batteries and retest on highest value point with other batteries. Then, repeat the measurement in the Body test.

Table 14.2: The evaluation of multi-batteries for Head Test

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
846.6	4233	WCDMA850	Left	Touch	CAC2000005C2	0.257	-0.14
846.6	4233	WCDMA850	Left	Touch	CAC2000009C1	0.100	0.12

Note: According to the values in the above table, the battery, CAC2000005C2, is the primary battery. We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.3: The evaluation of multi-batteries for Body Test

Frequency		Mode/Band	Test Position	Spacing (mm)	Battery Type	SAR(1g)	Power Drift(dB)
MHz	Ch.					(W/kg)	
1852.4	9262	WCDMA1900	Ground	10	CAC2000005C2	1.04	-0.06
1852.4	9262	WCDMA1900	Ground	10	CAC2000009C1	0.771	-0.19

Note: According to the values in the above table, the battery, CAC2000005C2, is the primary battery. We'll perform the Body measurement with this battery and retest on highest value point with others.

14.2 SAR results for Fast SAR

Table 14.4: SAR Values (GSM 850 MHz Band - Head) – CAC2000005C2

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
		Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C									
848.8	251	Left	Touch	/	32.81	33.8	0.125	0.16	0.181	0.23	0.08
836.6	190	Left	Touch	/	32.79	33.8	0.147	0.19	0.193	0.24	0.14
824.2	128	Left	Touch	/	32.77	33.8	0.120	0.15	0.175	0.22	0.11
848.8	251	Left	Tilt	/	32.81	33.8	0.079	0.10	0.113	0.14	-0.06
836.6	190	Left	Tilt	/	32.79	33.8	0.081	0.10	0.116	0.15	0.04
824.2	128	Left	Tilt	/	32.77	33.8	0.076	0.10	0.109	0.14	0.15
848.8	251	Right	Touch	/	32.81	33.8	0.127	0.16	0.184	0.23	0.14
836.6	190	Right	Touch	Fig.1	32.79	33.8	0.148	0.19	0.195	0.25	0.10
824.2	128	Right	Touch	/	32.77	33.8	0.120	0.15	0.174	0.22	-0.12
848.8	251	Right	Tilt	/	32.81	33.8	0.087	0.11	0.126	0.16	0.03
836.6	190	Right	Tilt	/	32.79	33.8	0.093	0.12	0.133	0.17	0.06
824.2	128	Right	Tilt	/	32.77	33.8	0.088	0.11	0.127	0.16	0.07

Table 14.5: SAR Values (GSM 850 MHz Band - Body) – CAC2000005C2

Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
		Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C									
836.6	190	GPRS (2)	Front	/	30.91	32	0.271	0.35	0.348	0.45	-0.10
848.8	251	GPRS (2)	Rear	/	30.98	32	0.458	0.58	0.590	0.75	0.04
836.6	190	GPRS (2)	Rear	/	30.91	32	0.473	0.61	0.623	0.80	0.14
824.2	128	GPRS (2)	Rear	Fig.2	30.90	32	0.504	0.65	0.644	0.83	-0.16
836.6	190	GPRS (2)	Left	/	30.91	32	0.374	0.48	0.540	0.69	-0.03
836.6	190	GPRS (2)	Right	/	30.91	32	0.364	0.47	0.520	0.67	0.10
836.6	190	GPRS (2)	Bottom	/	30.91	32	0.151	0.19	0.237	0.30	-0.11
824.2	128	EGPRS (2)	Rear	/	30.91	32	0.488	0.63	0.626	0.80	-0.05
824.2	128	Speech	Rear Headset1	/	32.77	33.8	0.263	0.33	0.344	0.44	0.07
824.2	128	Speech	Rear Headset2	/	32.77	33.8	0.294	0.37	0.384	0.49	-0.19

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3001A15C1, the Headset2 is CCB3001A15C2.

Table 14.6: SAR Values (GSM 1900 MHz Band - Head) – CAC2000005C2

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
Ambient Temperature: 22.7 °C Liquid Temperature: 22.2 °C											
1909.8	810	Left	Touch	/	30.00	31	0.042	0.05	0.067	0.08	0.18
1880	661	Left	Touch	/	29.89	31	0.031	0.04	0.052	0.07	0.14
1850.2	512	Left	Touch	/	29.87	31	0.029	0.04	0.049	0.06	0.07
1909.8	810	Left	Tilt	/	30.00	31	0.033	0.04	0.061	0.08	0.18
1880	661	Left	Tilt	/	29.89	31	0.028	0.04	0.050	0.06	0.18
1850.2	512	Left	Tilt	/	29.87	31	0.023	0.03	0.041	0.05	0.18
1909.8	810	Right	Touch	Fig.3	30.00	31	0.064	0.08	0.108	0.14	0.15
1880	661	Right	Touch	/	29.89	31	0.056	0.07	0.099	0.13	0.19
1850.2	512	Right	Touch	/	29.87	31	0.055	0.07	0.097	0.13	0.16
1909.8	810	Right	Tilt	/	30.00	31	0.034	0.04	0.063	0.08	0.12
1880	661	Right	Tilt	/	29.89	31	0.030	0.04	0.054	0.07	0.17
1850.2	512	Right	Tilt	/	29.87	31	0.026	0.03	0.048	0.06	0.19

Table 14.7: SAR Values (GSM 1900 MHz Band - Body) – CAC2000005C2

Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
Ambient Temperature: 22.7 °C Liquid Temperature: 22.2 °C											
1880	661	GPRS (2)	Front	/	27.84	29	0.287	0.37	0.494	0.65	-0.16
1909.8	810	GPRS (2)	Rear	Fig.4	27.97	29	0.365	0.46	0.636	0.81	0.12
1880	661	GPRS (2)	Rear	/	27.84	29	0.311	0.41	0.533	0.70	0.02
1850.2	512	GPRS (2)	Rear	/	27.81	29	0.305	0.40	0.511	0.67	0.18
1880	661	GPRS (2)	Left	/	27.84	29	0.037	0.05	0.057	0.07	0.10
1880	661	GPRS (2)	Right	/	27.84	29	0.073	0.10	0.128	0.17	0.12
1880	661	GPRS (2)	Bottom	/	27.84	29	0.223	0.29	0.390	0.51	0.04
1909.8	810	EGPRS (2)	Rear	/	27.99	29	0.347	0.44	0.608	0.77	-0.02
1909.8	810	Speech	Rear Headset1	/	30.00	31	0.300	0.38	0.526	0.66	0.13
1909.8	810	Speech	Rear Headset2	/	30.00	31	0.279	0.35	0.493	0.62	0.18

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3001A15C1, the Headset2 is CCB3001A15C2.

Table 14.8: SAR Values (WCDMA 850 MHz Band - Head) – CAC2000005C2

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C											
846.6	4233	Left	Touch	Fig.5	23.21	23.5	0.192	0.21	0.257	0.27	-0.14
836.4	4182	Left	Touch	/	23.01	23.5	0.147	0.16	0.215	0.24	0.10
826.4	4132	Left	Touch	/	23.27	23.5	0.125	0.13	0.182	0.19	0.16
846.6	4233	Left	Tilt	/	23.21	23.5	0.117	0.13	0.168	0.18	0.07
836.4	4182	Left	Tilt	/	23.01	23.5	0.101	0.11	0.145	0.16	0.11
826.4	4132	Left	Tilt	/	23.27	23.5	0.081	0.09	0.116	0.12	0.09
846.6	4233	Right	Touch	/	23.21	23.5	0.191	0.20	0.253	0.27	0.11
836.4	4182	Right	Touch	/	23.01	23.5	0.147	0.16	0.214	0.24	0.17
826.4	4132	Right	Touch	/	23.27	23.5	0.135	0.14	0.197	0.21	0.12
846.6	4233	Right	Tilt	/	23.21	23.5	0.124	0.13	0.177	0.19	0.13
836.4	4182	Right	Tilt	/	23.01	23.5	0.112	0.13	0.160	0.18	0.10
826.4	4132	Right	Tilt	/	23.27	23.5	0.099	0.10	0.142	0.15	0.13

Table 14.9: SAR Values (WCDMA 850 MHz Band - Body) – CAC2000005C2

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C										
836.4	4182	Front	/	23.01	23.5	0.214	0.24	0.273	0.31	0.07
846.6	4233	Rear	/	23.21	23.5	0.317	0.34	0.407	0.44	-0.05
836.4	4182	Rear	/	23.01	23.5	0.386	0.43	0.497	0.56	-0.01
826.4	4132	Rear	Fig.6	23.27	23.5	0.399	0.42	0.510	0.54	0.02
836.4	4182	Left	/	23.01	23.5	0.203	0.23	0.291	0.33	0.14
836.4	4182	Right	/	23.01	23.5	0.220	0.25	0.314	0.35	0.03
836.4	4182	Bottom	/	23.01	23.5	0.121	0.14	0.188	0.21	-0.07
826.4	4132	Rear Headset1	/	23.27	23.5	0.356	0.38	0.462	0.49	0.04
826.4	4132	Rear Headset2	/	23.27	23.5	0.354	0.37	0.465	0.49	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3001A15C1, the Headset2 is CCB3001A15C2.

Table 14.10: SAR Values (WCDMA 1900 MHz Band - Head) – CAC2000005C2

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
Ambient Temperature: 22.7°C		Liquid Temperature: 22.2°C									
1907.6	9538	Left	Touch	/	22.83	23.3	0.103	0.11	0.177	0.20	0.17
1880	9400	Left	Touch	/	23.26	23.5	0.131	0.14	0.211	0.22	0.15
1852.4	9262	Left	Touch	/	22.54	23.0	0.115	0.13	0.195	0.22	0.15
1907.6	9538	Left	Tilt	/	22.83	23.3	0.063	0.07	0.116	0.13	0.13
1880	9400	Left	Tilt	/	23.26	23.5	0.073	0.08	0.135	0.14	0.13
1852.4	9262	Left	Tilt	/	22.54	23.0	0.065	0.07	0.117	0.13	0.14
1907.6	9538	Right	Touch	/	22.83	23.3	0.101	0.11	0.177	0.20	-0.18
1880	9400	Right	Touch	Fig.7	23.26	23.5	0.136	0.14	0.229	0.24	0.12
1852.4	9262	Right	Touch	/	22.54	23.0	0.116	0.13	0.202	0.22	0.15
1907.6	9538	Right	Tilt	/	22.83	23.3	0.053	0.06	0.099	0.11	0.14
1880	9400	Right	Tilt	/	23.26	23.5	0.067	0.07	0.123	0.13	0.13
1852.4	9262	Right	Tilt	/	22.54	23.0	0.053	0.06	0.097	0.11	0.13

Table 14.11: SAR Values (WCDMA 1900 MHz Band - Body) – CAC2000005C2

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
Ambient Temperature: 22.7°C		Liquid Temperature: 22.2°C								
1880	9400	Front	/	23.26	23.5	0.458	0.48	0.799	0.84	-0.17
1907.6	9538	Rear	/	22.83	23.3	0.563	0.63	0.988	1.10	-0.08
1880	9400	Rear	/	23.26	23.5	0.488	0.52	0.852	0.90	0.07
1852.4	9262	Rear	Fig.8	22.54	23.0	0.611	0.68	1.04	1.16	-0.06
1880	9400	Left	/	23.26	23.5	0.075	0.08	0.119	0.13	0.13
1880	9400	Right	/	23.26	23.5	0.135	0.14	0.244	0.26	0.09
1880	9400	Bottom	/	23.26	23.5	0.410	0.43	0.728	0.77	0.08
1907.6	9538	Rear Headset1	/	22.83	23.3	0.481	0.54	0.843	0.94	0.05
1880	9400	Rear Headset1	/	23.26	23.5	0.547	0.58	0.948	1.00	-0.18
1852.4	9262	Rear Headset1	/	22.54	23.0	0.544	0.60	0.916	1.02	0.02
1907.6	9538	Rear Headset2	/	22.83	23.3	0.433	0.48	0.749	0.83	0.04
1880	9400	Rear Headset2	/	23.26	23.5	0.447	0.47	0.749	0.79	-0.03
1852.4	9262	Rear Headset2	/	22.54	23.0	0.499	0.55	0.842	0.94	-0.16

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The Headset1 is CCB3001A15C1, the Headset2 is CCB3001A15C2.

Table 14.12: SAR Values (Wi-Fi 802.11b - Head) – CAC2000005C2

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
Ambient Temperature: 22.6 °C Liquid Temperature: 22.1 °C											
2437	6	Left	Touch	/	13.78	14.5	0.00509	0.01	0.012	0.01	0.04
2437	6	Left	Tilt	/	13.78	14.5	0.00321	0.00	0.00955	0.01	0.18
2437	6	Right	Touch	Fig.9	13.78	14.5	0.020	0.02	0.039	0.05	0.16
2437	6	Right	Tilt	/	13.78	14.5	0.011	0.01	0.026	0.03	0.12

Table 14.13: SAR Values (Wi-Fi 802.11b - Body) – CAC2000005C2

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
Ambient Temperature: 22.6 °C Liquid Temperature: 22.1 °C										
2437	6	Front	/	13.78	14.5	0.00315	0.00	0.00717	0.01	0.14
2437	6	Rear	Fig.10	13.78	14.5	0.015	0.02	0.030	0.04	0.17
2437	6	Left	/	13.78	14.5	0.00627	0.01	0.011	0.01	-0.10
2437	6	Top	/	13.78	14.5	0.000648	0.00	0.00378	0.00	0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.14: SAR Values (WCDMA 850 MHz Band - Head) – CAC2000009C1

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
Ambient Temperature: 22.7 °C Liquid Temperature: 22.2 °C											
846.6	4233	Left	Touch	/	23.21	23.5	0.069	0.07	0.100	0.11	0.12

Table 14.15: SAR Values (WCDMA 1900 MHz Band - Body) – CAC2000009C1

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
Ambient Temperature: 22.7 °C Liquid Temperature: 22.2 °C										
1852.4	9262	Rear	/	22.54	23.0	0.465	0.52	0.771	0.86	-0.19

Note1: The distance between the EUT and the phantom bottom is 10mm.

14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.16: SAR Values (GSM 850 MHz Band - Head) – CAC2000005C2

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	Right	Touch	Fig.1	32.79	33.8	0.148	0.19	0.195	0.25	0.10

Table 14.17: SAR Values (GSM 850 MHz Band - Body) – CAC2000005C2

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
824.2	128	GPRS (2)	Rear	Fig.2	30.90	32	0.504	0.65	0.644	0.83	-0.16

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.18: SAR Values (GSM 1900 MHz Band - Head) – CAC2000005C2

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1909.8	810	Right	Touch	Fig.3	30.00	31	0.064	0.08	0.108	0.14	0.15

Table 14.19: SAR Values (GSM 1900 MHz Band - Body) – CAC2000005C2

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1909.8	810	GPRS (2)	Rear	Fig.4	27.97	29	0.365	0.46	0.636	0.81	0.12

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.20: SAR Values (WCDMA 850 MHz Band - Head) – CAC2000005C2

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
846.6	4233	Left	Touch	Fig.5	23.21	23.5	0.192	0.21	0.257	0.27	-0.14

Table 14.21: SAR Values (WCDMA 850 MHz Band - Body) – CAC2000005C2

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C											
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
826.4	4132	Rear	Fig.6	23.27	23.5	0.399	0.42	0.510	0.54	0.02	

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.22: SAR Values (WCDMA 1900 MHz Band - Head) – CAC2000005C2

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
		Ambient Temperature: 22.7°C					Liquid Temperature: 22.2°C					
1880	9400	Right	Touch	Fig.7	23.26	23.5	0.136	0.14	0.229	0.24	0.12	

Table 14.23: SAR Values (WCDMA 1900 MHz Band - Body) – CAC2000005C2

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
		Ambient Temperature: 22.7°C					Liquid Temperature: 22.2°C				
1852.4	9262	Rear	Fig.8	22.54	23.0	0.611	0.68	1.04	1.16	-0.06	

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.24: SAR Values (Wi-Fi 802.11b - Head) – CAC2000005C2

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
		Ambient Temperature: 22.6°C					Liquid Temperature: 22.1°C					
2437	6	Right	Touch	Fig.9	13.78	14.5	0.020	0.02	0.039	0.05	0.16	

Table 14.25: SAR Values (Wi-Fi 802.11b - Body) – CAC2000005C2

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
		Ambient Temperature: 22.6°C					Liquid Temperature: 22.1°C				
2437	6	Rear	Fig.10	13.78	14.5	0.015	0.02	0.030	0.04	0.17	

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.26: SAR Values (WCDMA 850 MHz Band - Head) – CAC2000009C1

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
		Ambient Temperature: 22.7°C					Liquid Temperature: 22.2°C					
846.6	4233	Left	Touch	/	23.21	23.5	0.069	0.07	0.100	0.11	0.12	

Table 14.27: SAR Values (WCDMA 1900 MHz Band - Body) – CAC2000009C1

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
		Ambient Temperature: 22.7°C					Liquid Temperature: 22.2°C				
1852.4	9262	Rear	/	22.54	23.0	0.465	0.52	0.771	0.86	-0.19	

Note1: The distance between the EUT and the phantom bottom is 10mm.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body WCDMA 1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1852.4	9262	Rear	10	1.04	0.996	1.04	/

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$							9.25	9.12	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$							18.5	18.2	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43

20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.8	10.7	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.6	21.4	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										

18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.1	9.95	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.2	19.9	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.5	N	1	1	1	6.5	6.5	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										
15	Test sample	A	3.3	N	1	1	1	3.3	3.3	71

	positioning									
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.3	13.2	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						26.6	26.4	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	February 15, 2013	One year
02	Power meter	NRVD	102083	September 11, 2012	One year
03	Power sensor	NRV-Z5	100542		
04	Signal Generator	E4438C	MY49070393	November 13, 2012	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY48363198	July 11, 2012	One year
07	E-field Probe	SPEAG EX3DV4	3846	December 20, 2012	One year
08	DAE	SPEAG DAE4	771	November 20, 2012	One year
09	Dipole Validation Kit	SPEAG D835V2	443	May 03, 2012	Three years
10	Dipole Validation Kit	SPEAG D1900V2	541	May 09, 2012	Three years
11	Dipole Validation Kit	SPEAG D2450V2	853	May 02, 2012	Three years

END OF REPORT BODY

ANNEX A Graph Results

850 Right Cheek Middle

Date: 2013-7-3

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 42.157$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3846 ConvF(9.18, 9.18, 9.18)

Cheek Middle/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.207 W/kg

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.902 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

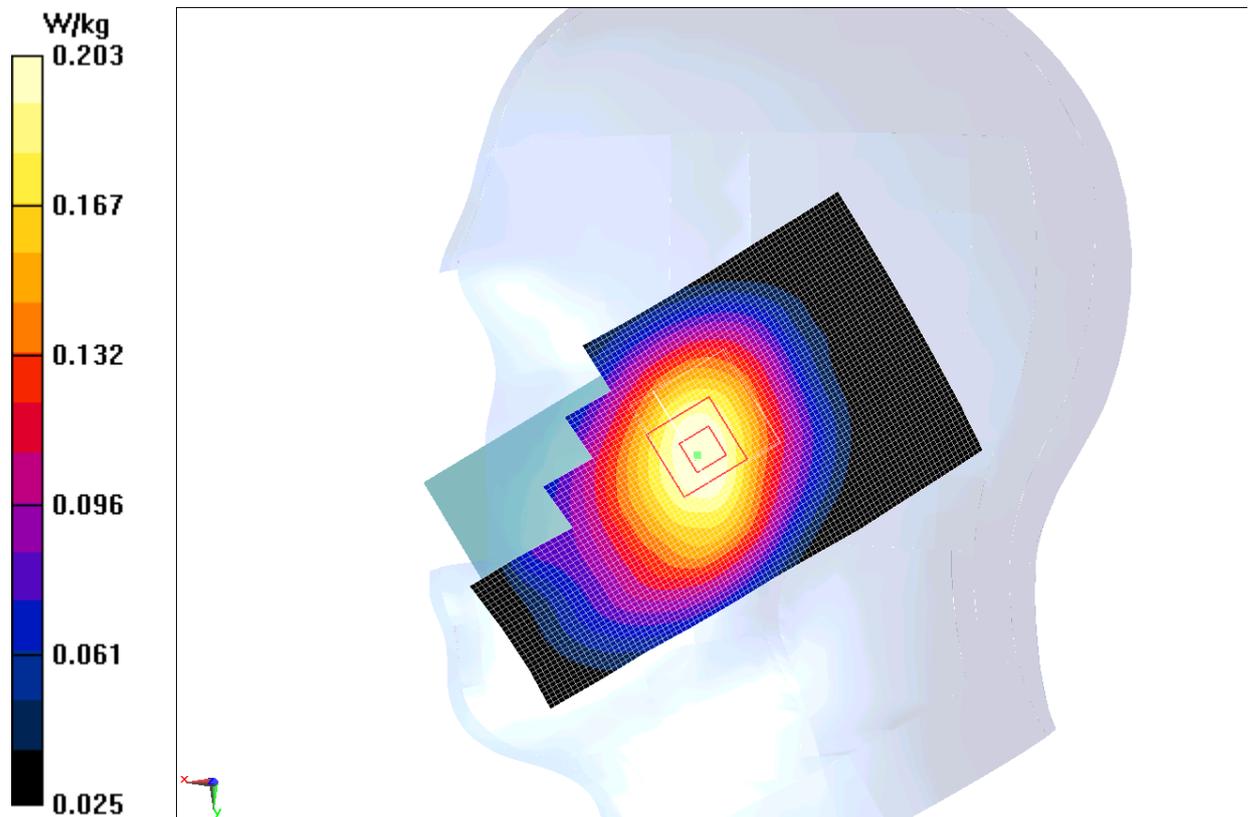


Fig.1 850MHz CH190

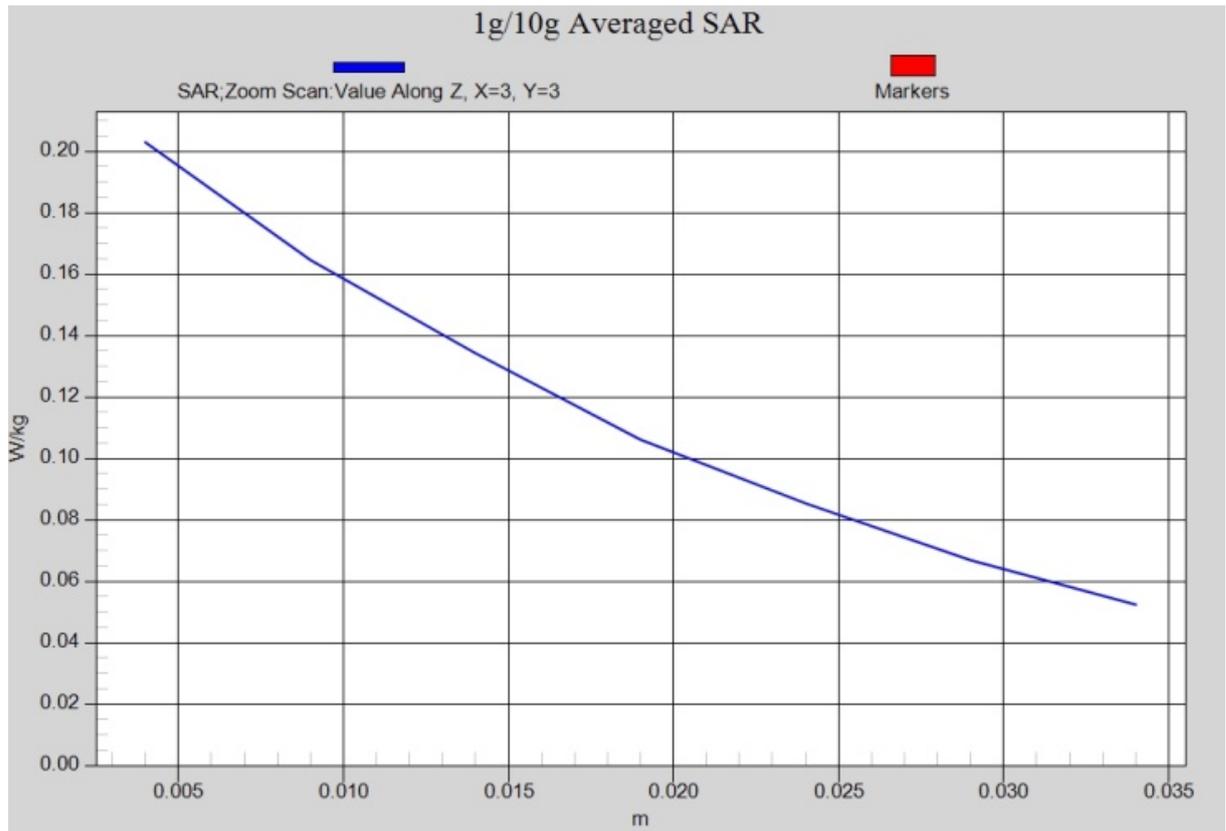


Fig. 1-1 Z-Scan at power reference point (850 MHz CH190)

850 Body Rear Low

Date: 2013-7-3

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used: $f = 825$ MHz; $\sigma = 0.953$ mho/m; $\epsilon_r = 54.481$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: EX3DV4 - SN3846 ConvF(9.04, 9.04, 9.04)

Rear Low/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.695 W/kg

Rear Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.404 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 0.669 W/kg

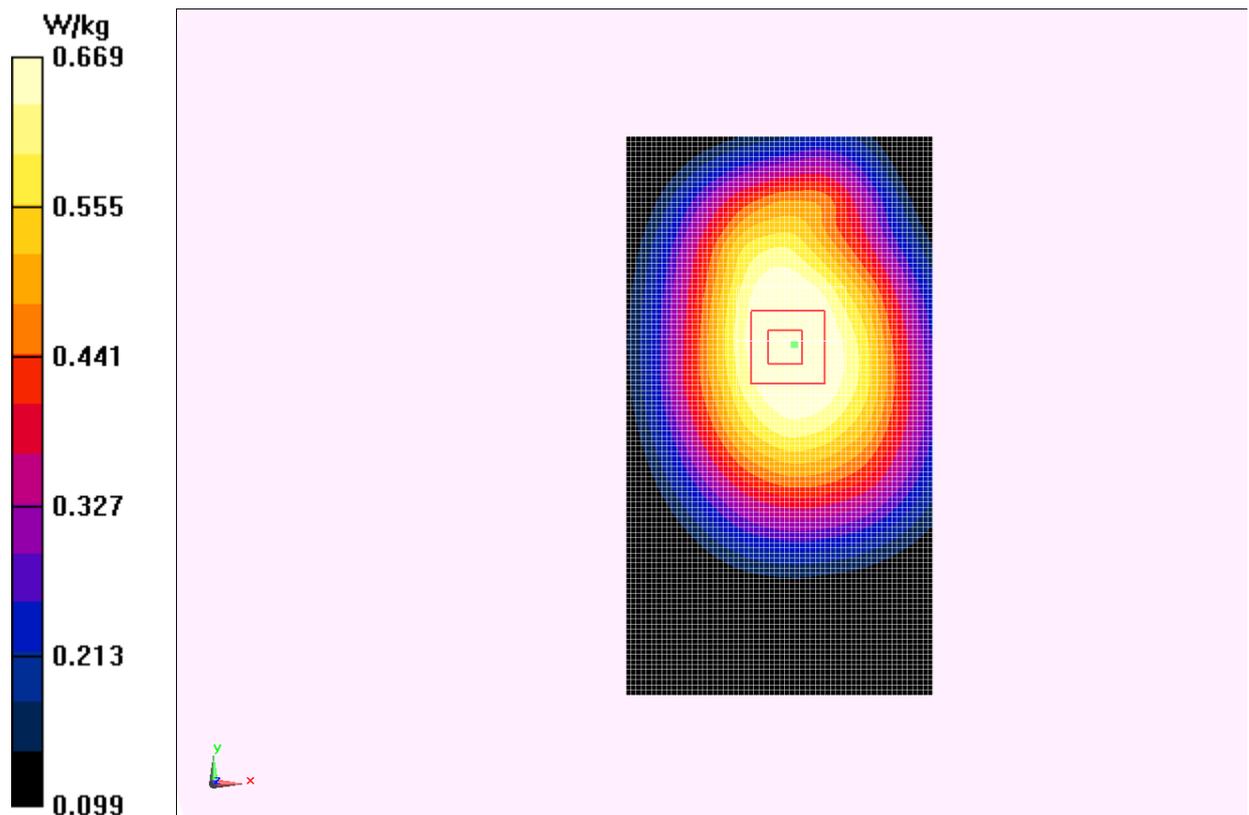


Fig.2 850 MHz CH128

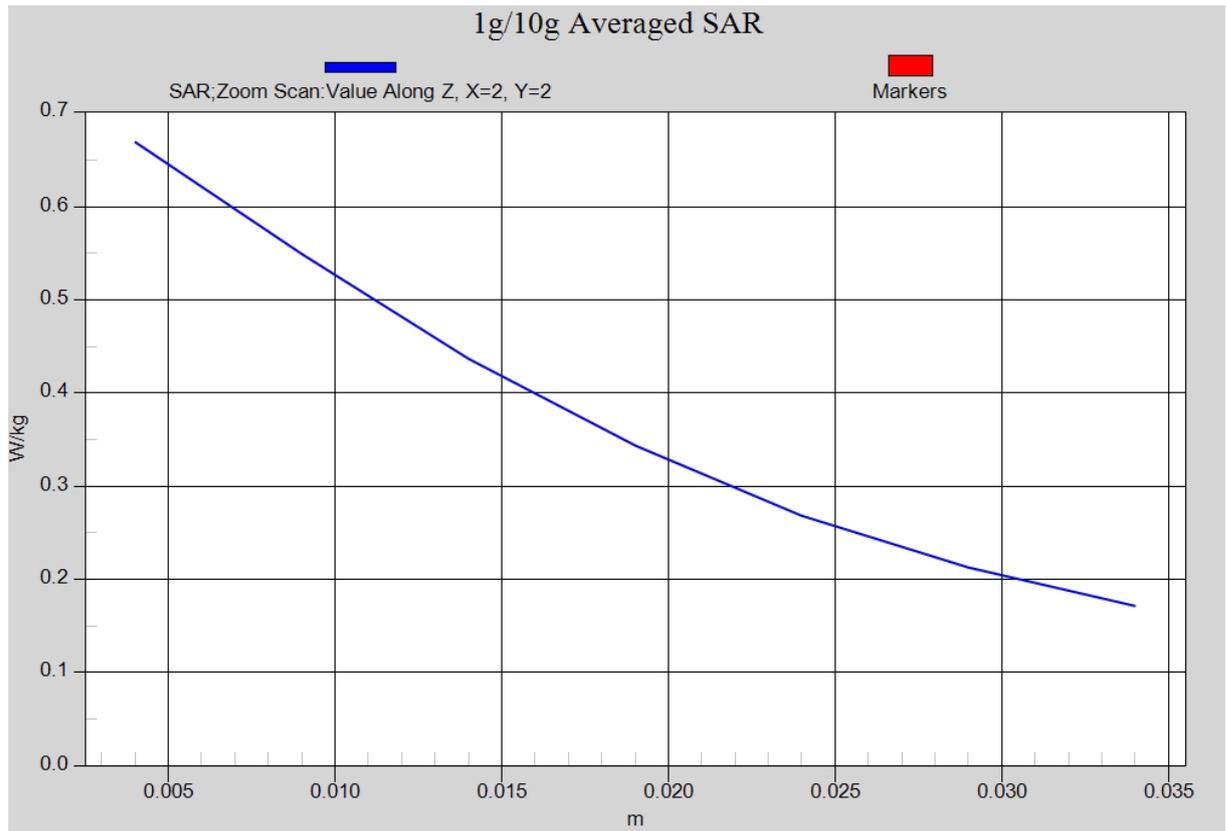


Fig. 2-1 Z-Scan at power reference point (850 MHz CH128)

1900 Right Cheek High

Date: 2013-7-4

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.816$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 - SN3846 ConvF(8.01, 8.01, 8.01)

Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.117 W/kg

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.620 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

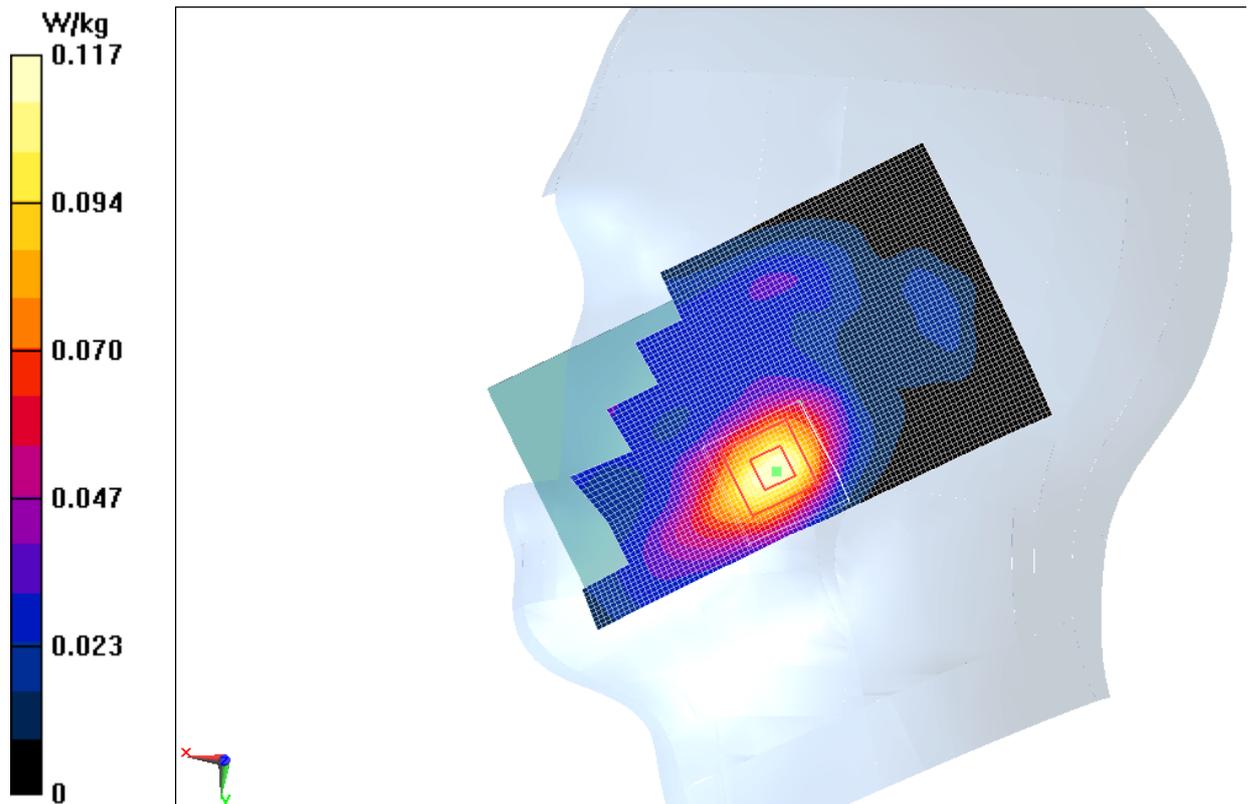


Fig.3 1900 MHz CH810

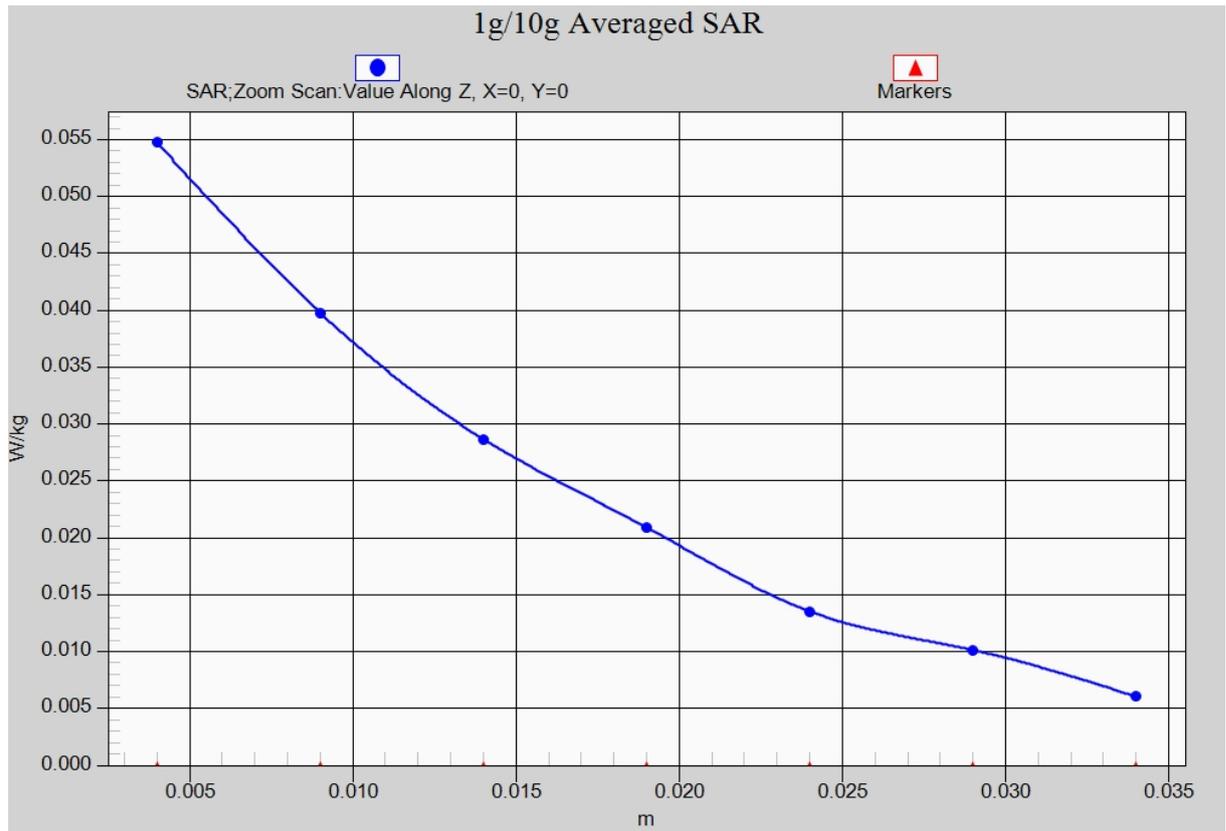


Fig. 3-1 Z-Scan at power reference point (1900 MHz CH810)

1900 Body Rear High

Date: 2013-7-4

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.551$ mho/m; $\epsilon_r = 51.726$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: EX3DV4 - SN3846 ConvF(7.37, 7.37, 7.37)

Rear High/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.721 W/kg

Rear High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.292 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 0.718 W/kg

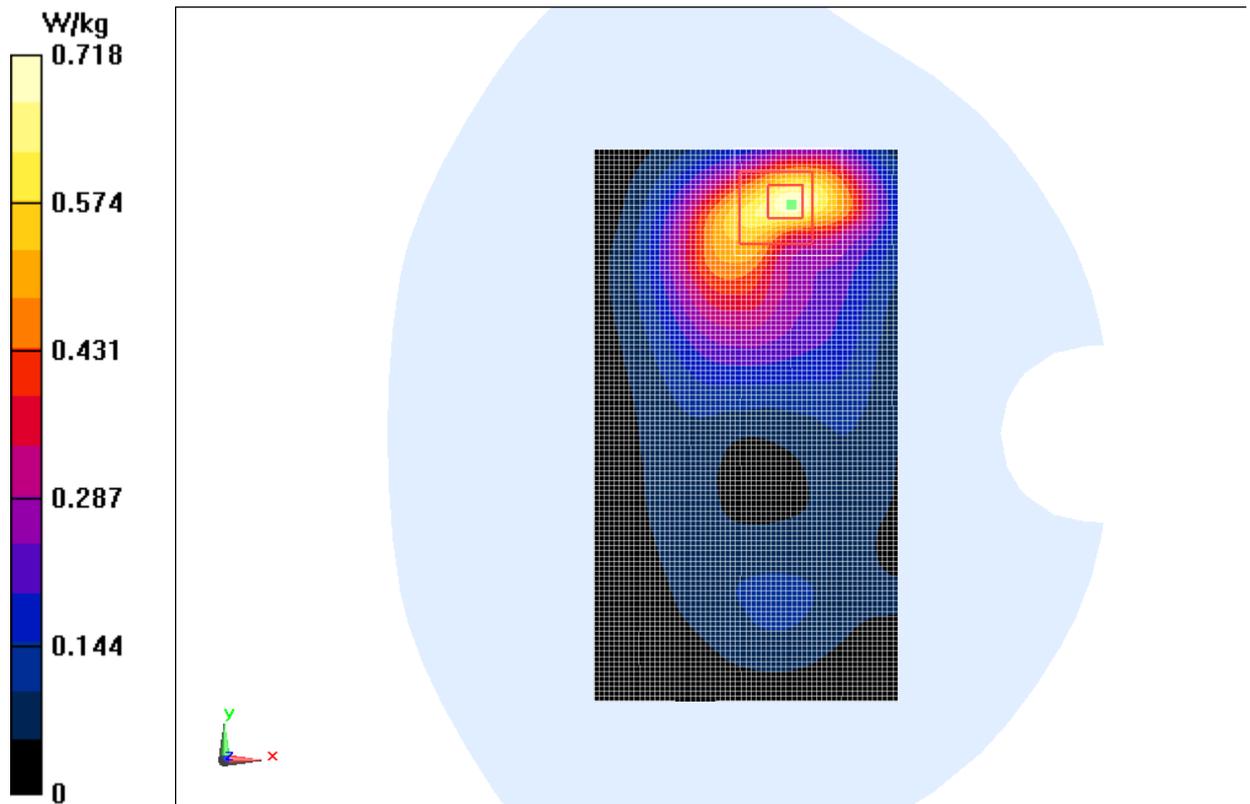


Fig.4 1900 MHz CH810

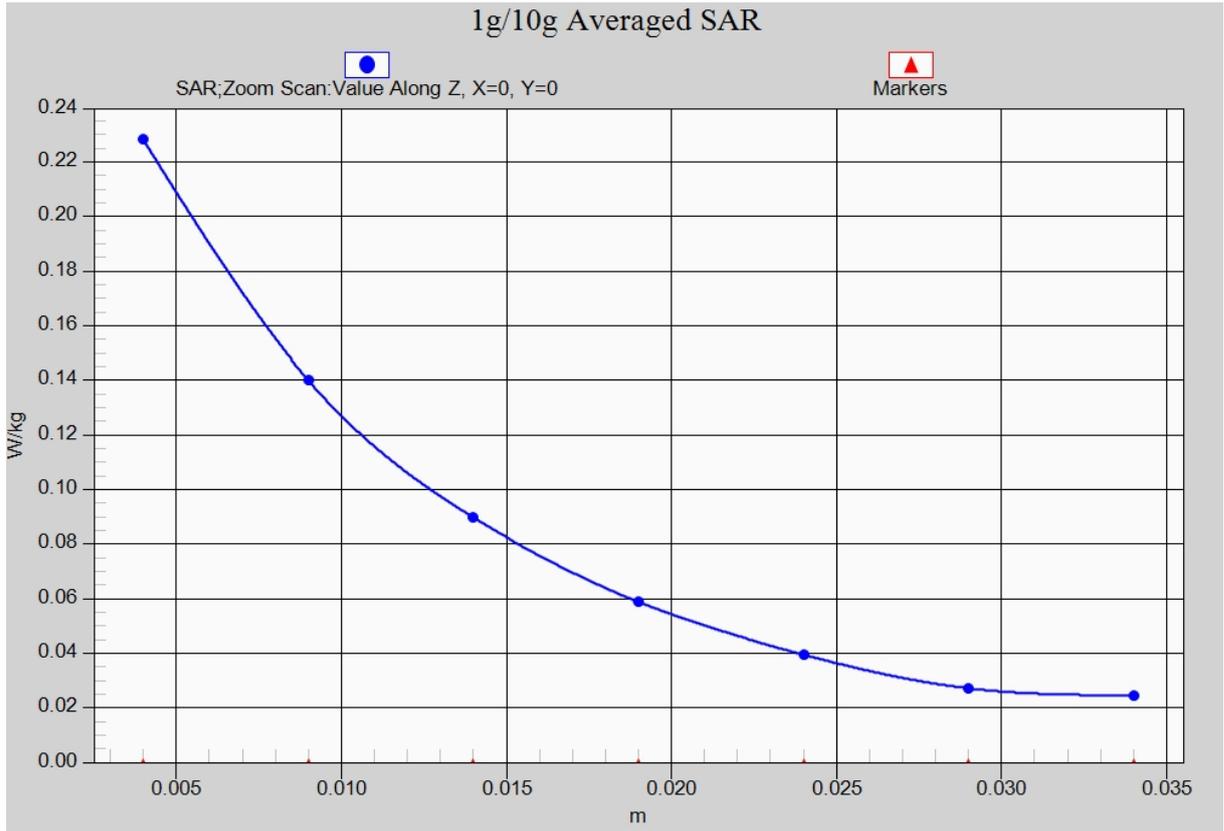


Fig.4-1 Z-Scan at power reference point (1900 MHz CH810)

WCDMA 850 Left Cheek High

Date: 2013-7-3

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.923$ mho/m; $\epsilon_r = 42.02$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(9.18, 9.18, 9.18)

Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.267 W/kg

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.602 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

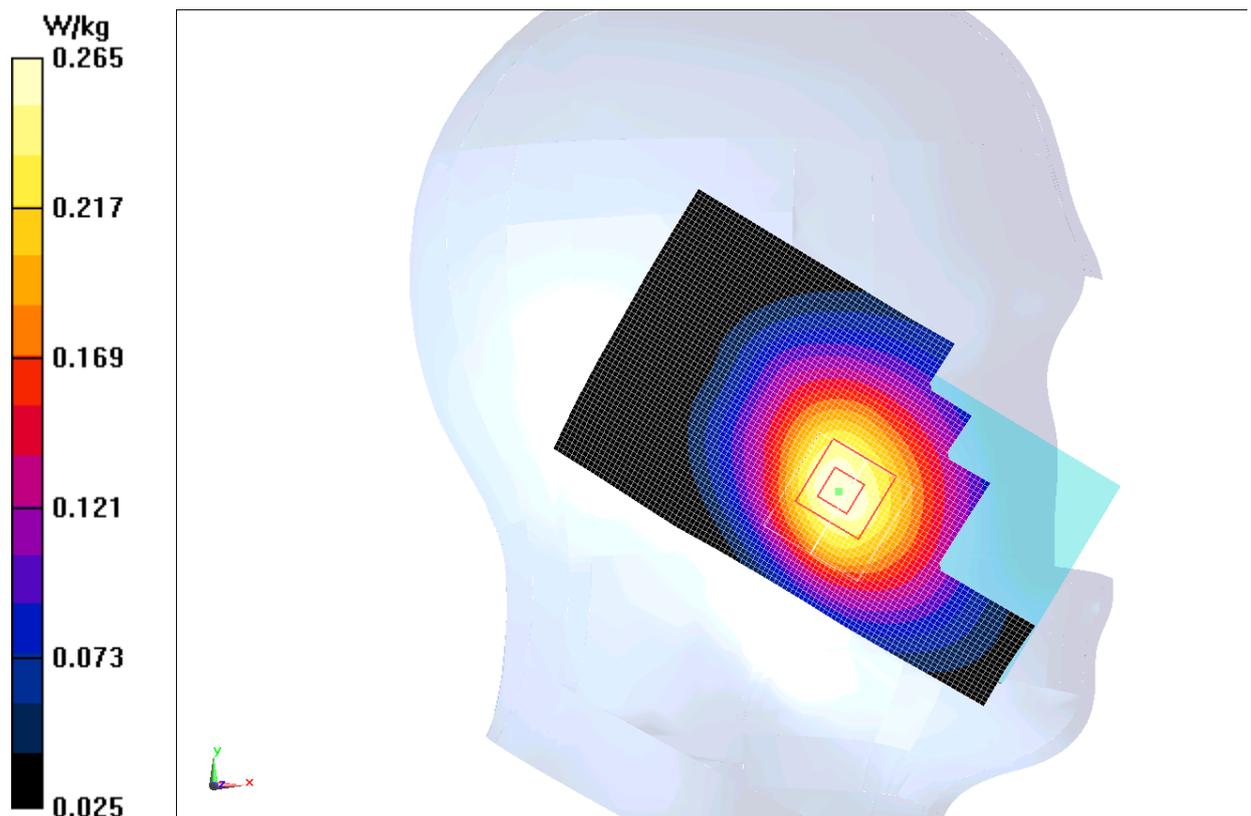


Fig.5 WCDMA 850 CH4233

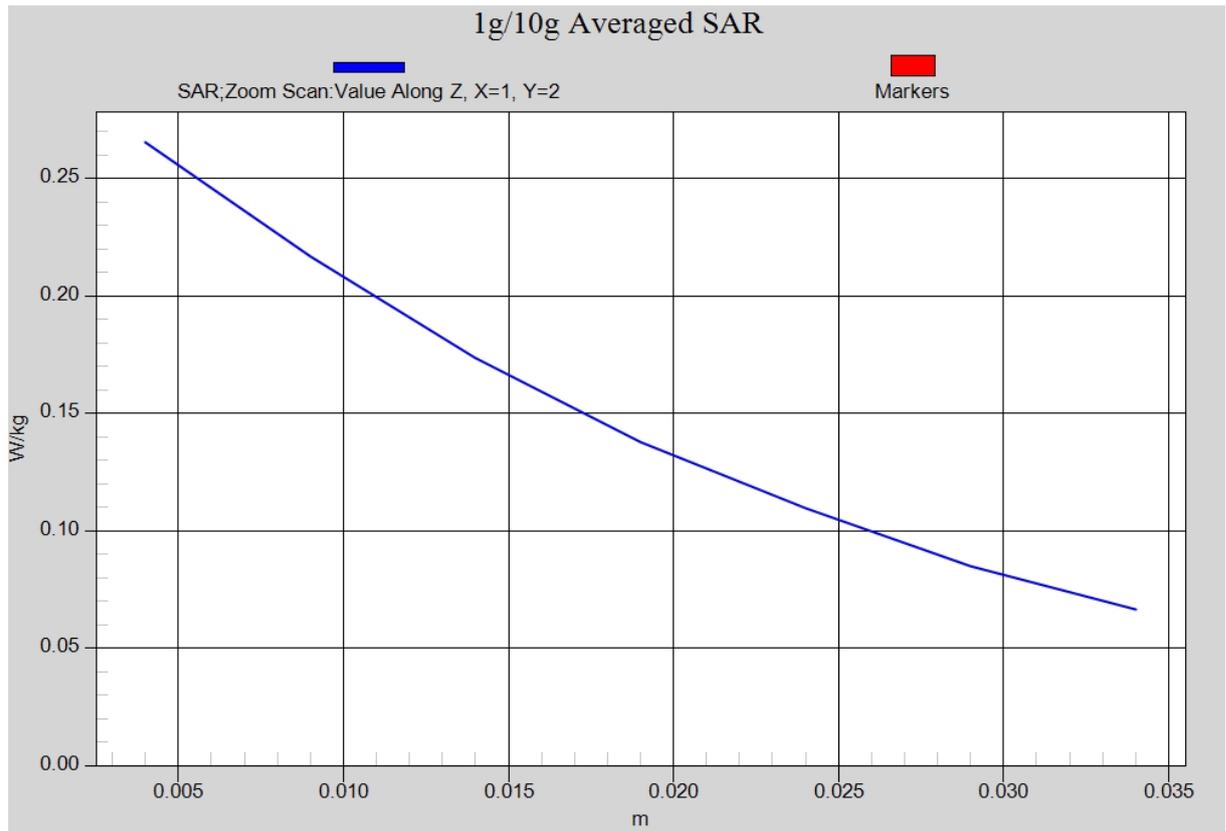


Fig. 5-1 Z-Scan at power reference point (WCDMA 850 CH4233)

WCDMA 850 Body Rear Low

Date: 2013-7-3

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.466$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(9.04, 9.04, 9.04)

Rear Low/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.529 W/kg

Rear Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.333 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.399 W/kg

Maximum value of SAR (measured) = 0.530 W/kg

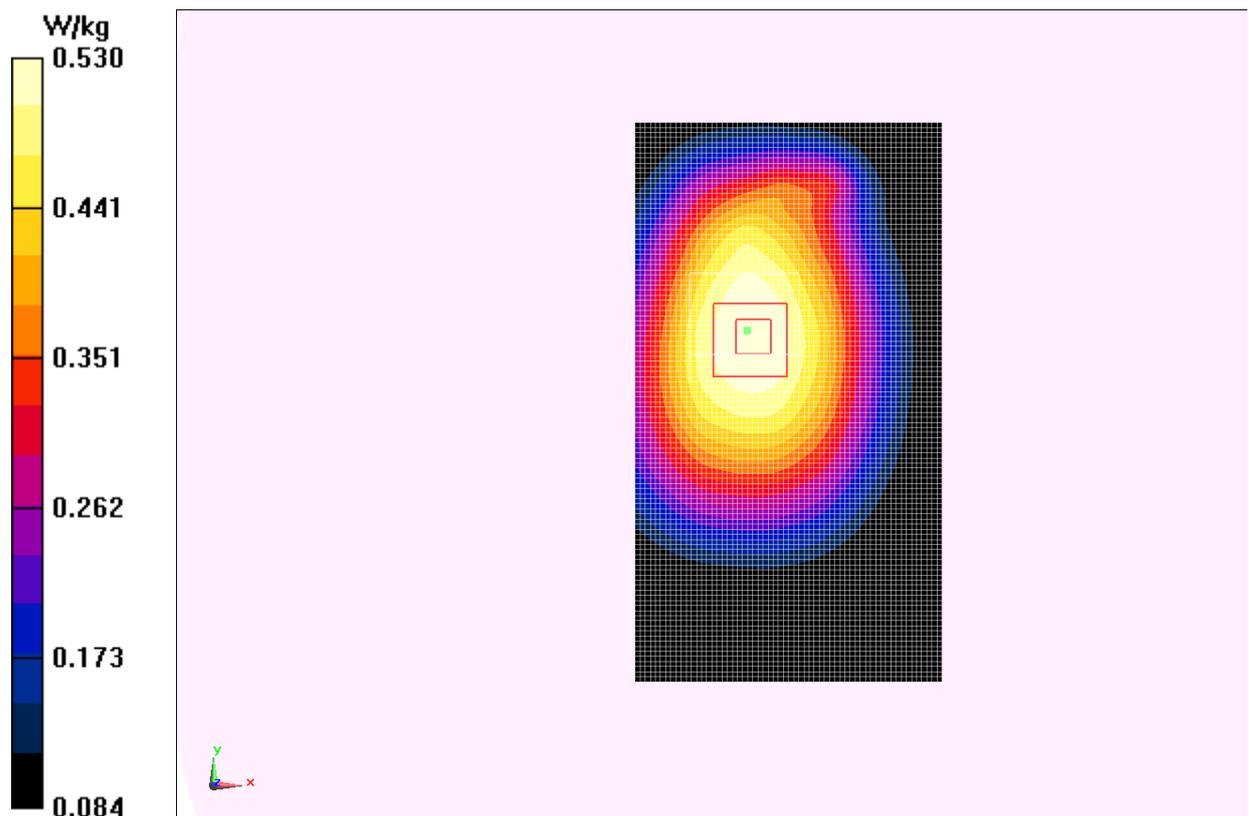


Fig.6 WCDMA 850 CH4132

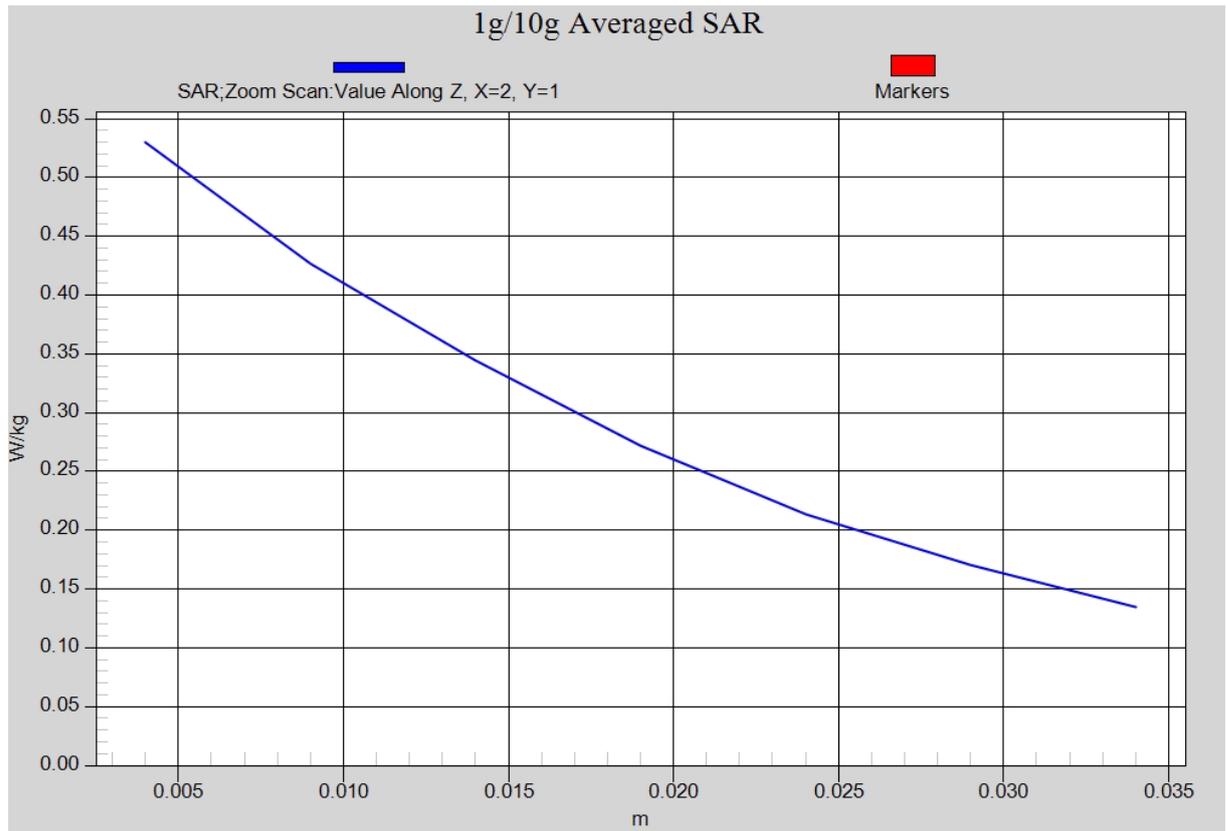


Fig. 6-1 Z-Scan at power reference point (WCDMA850 CH4132)

WCDMA 1900 Right Cheek Middle

Date: 2013-7-4

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ mho/m; $\epsilon_r = 38.868$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.7°C Liquid Temperature: 22.2°C

Communication System: WCDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN3846 ConvF(8.01, 8.01, 8.01)

Cheek Middle/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.246 W/kg

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.026 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

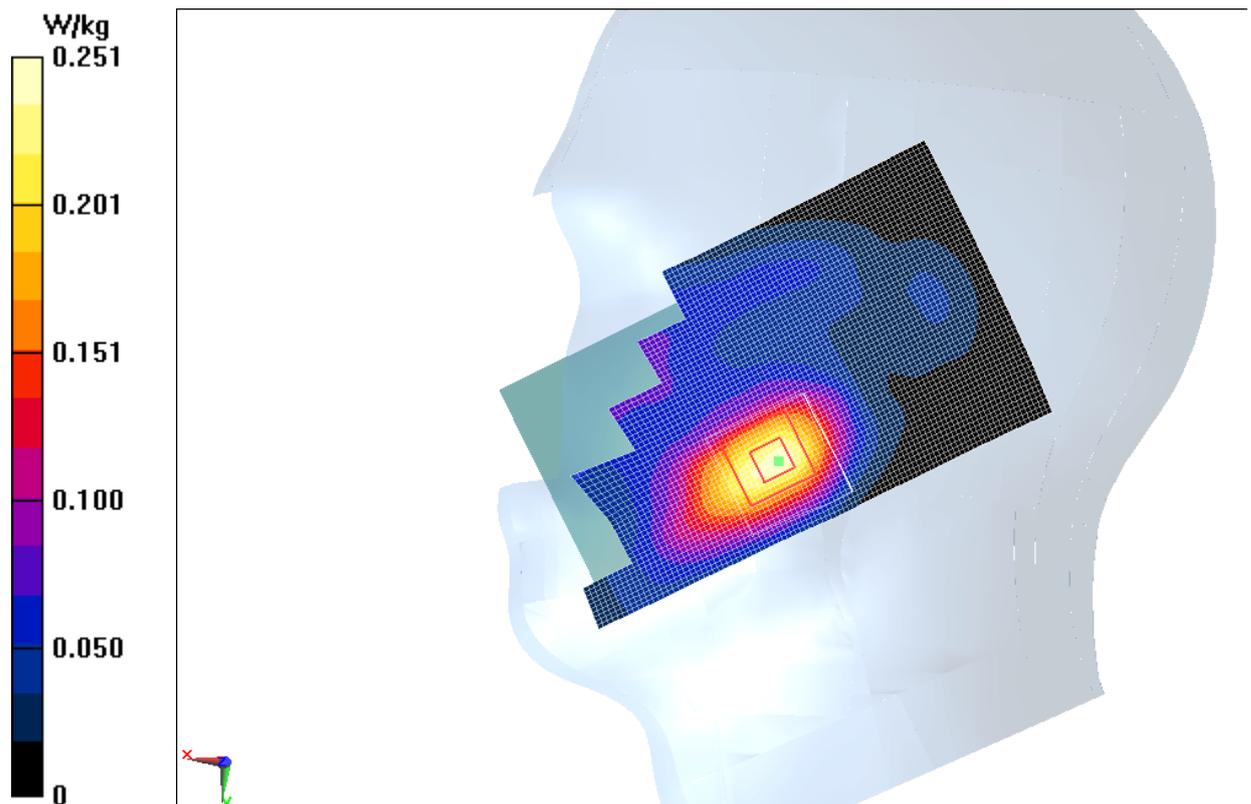


Fig.7 WCDMA1900 CH9400

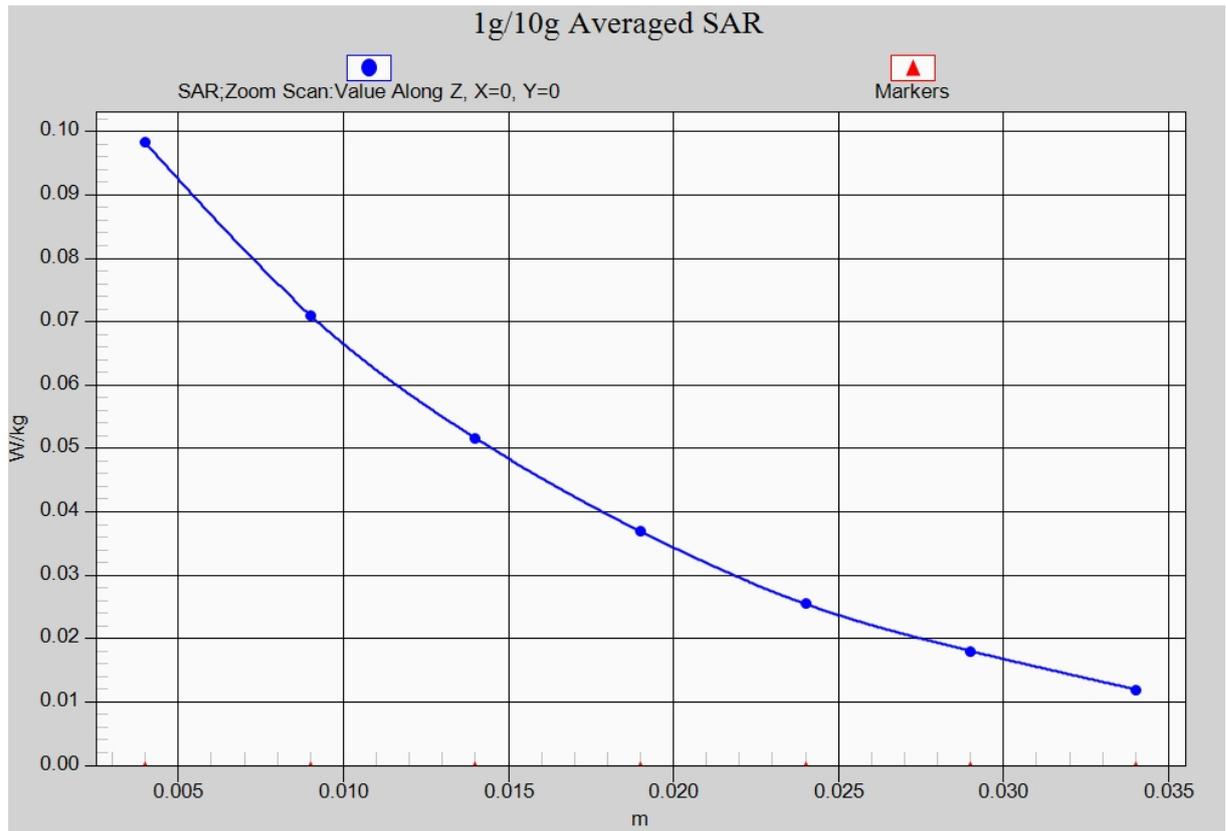


Fig. 7-1 Z-Scan at power reference point (WCDMA1900 CH9400)