



FCC PART 15C TEST REPORT No. I14Z47754-SRD04

for

TCT Mobile Limited

GSM Quad-band / UMTS Quad-band / LTE 6 bands mobile phone

Model Name: 8030B


FCC ID: RAD492

with

Hardware Version: BAB33S001DCX

Software Version: vE1Z

Issued Date: 2014-11-05

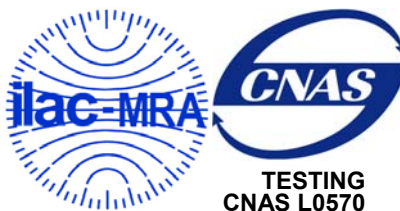

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:cttl_terminals@catr.cn, website:www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I14Z47754-SRD04	Rev.0	1st edition	2014-11-05

CONTENTS

1. TEST LABORATORY	4
1.1. TESTINGLOCATION.....	4
1.1. TESTINGENVIRONMENT	5
1.2. PROJECT DATA.....	5
1.3. SIGNATURE	5
2. CLIENTINFORMATION.....	16
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT	7
3.3. INTERNAL IDENTIFICATION OF AE.....	7
3.4. NORMAL ACCESSORY SETTING	7
3.5. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. TEST RESULTS.....	9
5.1. SUMMARY OF TEST RESULTS	9
5.2. STATEMENTS.....	9
1. TEST FACILITIES UTILIZED.....	10
ANNEX A: DETAILED TEST RESULTS	11
A.1. MEASUREMENT METHOD	11
A.2. PEAK OUTPUT POWER – CONDUCTED.....	12
A.3. FREQUENCY BAND EDGES – CONDUCTED	13
A.4. CONDUCTED EMISSION.....	20
A.5. RADIATED EMISSION.....	45
A.6. TIME OF OCCUPANCY (DWELL TIME).....	64
A.7. 20dB BANDWIDTH.....	74
A.8. CARRIER FREQUENCY SEPARATION.....	80
A.9. NUMBER OF HOPPING CHANNELS	83
A.10. AC POWERLINE CONDUCTED EMISSION	87
ANNEX B: ACCREDITATION CERTIFICATE	90



1. Test Laboratory

1.1. Testing Location

Location 1:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China100191


1.2. Testing Environment

Normal Temperature: 15-35℃
Extreme Temperature: -20/+55℃
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: 2014-09-22
Testing End Date: 2014-10-29


1.4. Signature



Xu Zhongfei
(Prepared this test report)



Li Zhibin
(Reviewed this test report)



Lv Songdong
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-51798260
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China.
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-51798260
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM Quad-band / UMTS Quad-band / LTE 6 bands mobile phone
Model Name	8030B
FCC ID	RAD492
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Number of Channels	79
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	014107000900123	BAB33S001DCX	vE1Z
EUT2	014107000900420	BAB33S001DCX	vE1Z

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description
AE1	Battery /
AE1	
Model	CAC3100002C2
Manufacturer	SCUD
Capacitance	3100mAh
Nominal voltage	3.8V

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of GSM Quad-band / UMTS Quad-band / LTE 6 bands mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	June,2014
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	June,2013
FCC Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations	June,2014

5. Test Results

5.1. Summary of Test Results

Abbreviations used in this clause:

P Pass, The EUT complies with the essential requirements in the standard.

F Fail, The EUT does not comply with the essential requirements in the standard

NA Not Applicable, The test was not applicable

NP Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	P
Frequency Band Edges	15.247 (d)	P
Conducted Emission	15.247 (d)	P
Radiated Emission	15.247, 15.205, 15.209	P
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	P
20dB Bandwidth	15.247 (a)(1)	NA
Carrier Frequency Separation	15.247 (a)(1)	P
Number of hopping channels	15.247 (a)(b)(iii)	P
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	1 year	2015-01-06
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	1 year	2015-02-09

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2015-11-05
2	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	3 years	2015-07-13
3	EMI Antenna	3117	00119021	ETS-Lindgren	3 years	2015-04-19
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2015-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	3 years	2015-06-30
6	Bluetooth Tester	CBT	100153	Rohde & Schwarz	1 year	2015-09-15
7	LISN	ESH2-Z5	829991/01 2	Rohde & Schwarz	1 year	2015-04-14
8	Loop Antenna	HFH2-Z2	829324/00 7	Rohde & Schwarz	3 years	2014-12-12
9	Pre-amplifier(18GHz)	SCU18	1005277	Rohde & Schwarz	/	/
10	Pre-amplifier(26.5 GHz)	SCU26	1006788	Rohde & Schwarz	/	/

Anechoic chamber

Fully anechoic chamber by Frankonia German.


ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

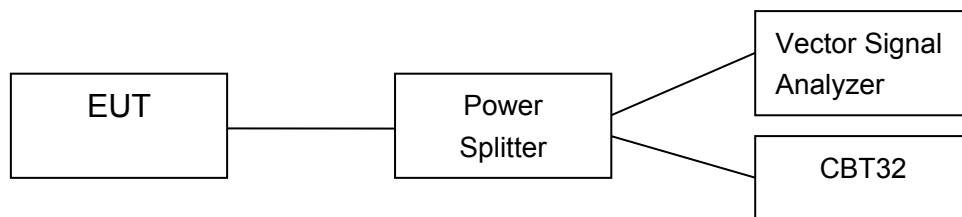

A.1.2. Radiated Emission Measurements


The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

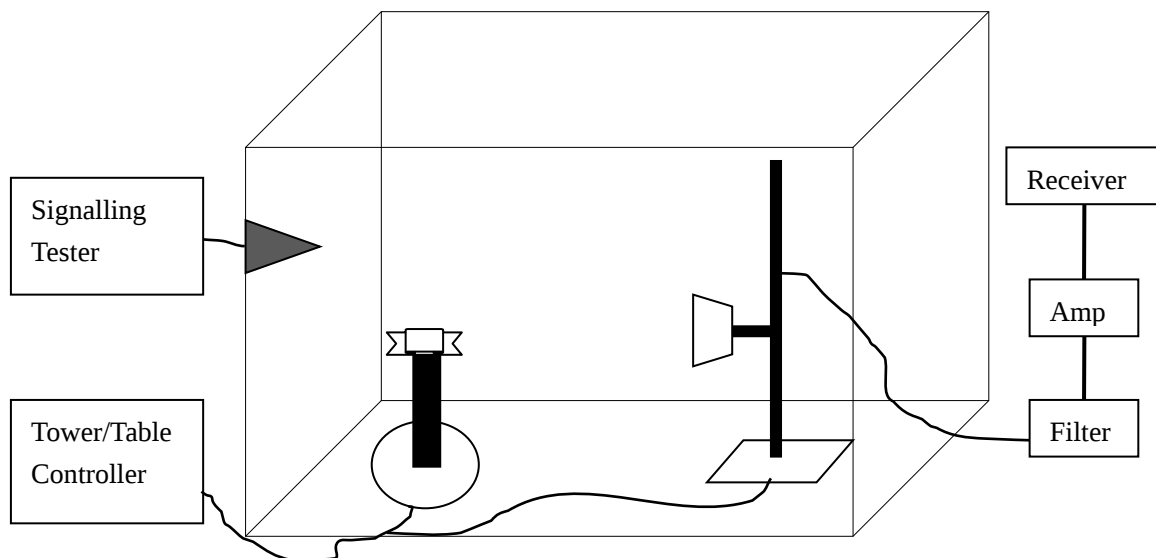

A.2. Peak Output Power – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

e) A plot of the test results and setup description shall be included in the test report.

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)	< 30

Measurement Results:

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	6.36	7.74	6.24	P

For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	6.25	7.66	6.22	P

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	6.00	7.44	5.99	P

Conclusion: PASS

A.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time: 5ms
- Detector: Peak
- Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-58.19	P
	Hopping ON	Fig.2	-58.11	P
78	Hopping OFF	Fig.3	-65.11	P
	Hopping ON	Fig.4	-64.80	P

For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-56.99	P
	Hopping ON	Fig.6	-58.07	P
78	Hopping OFF	Fig.7	-62.69	P
	Hopping ON	Fig.8	-60.02	P


For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-57.28	P
	Hopping ON	Fig.10	-54.29	P

78	Hopping OFF	Fig.11	-59.20	P
	Hopping ON	Fig.12	-58.00	P


Conclusion: PASS

Test graphs as below

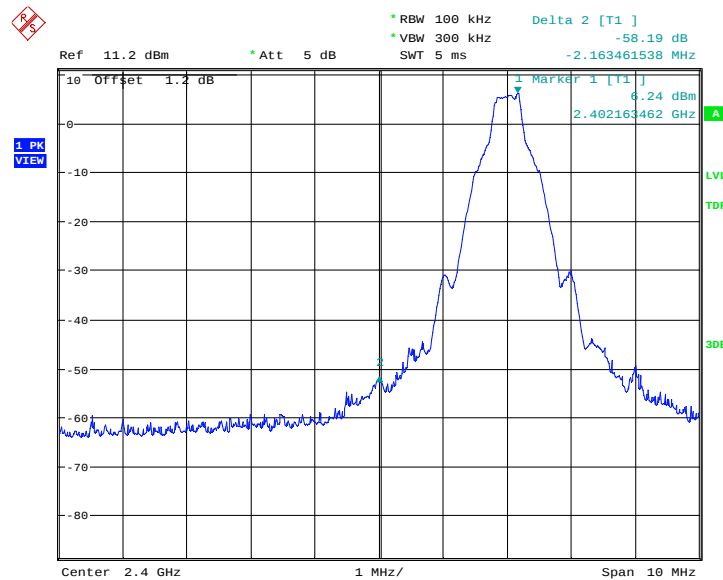


Date: 26.SEP.2014 15:58:45

Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

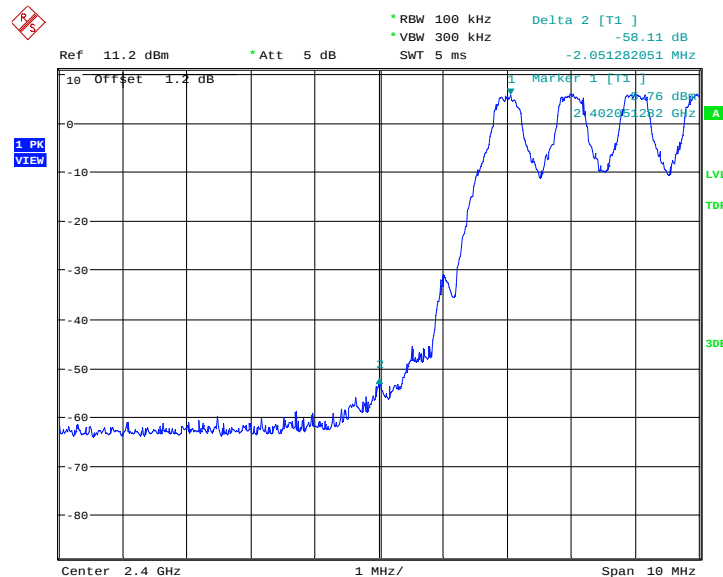


Date: 26.SEP.2014 16:01:05

Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

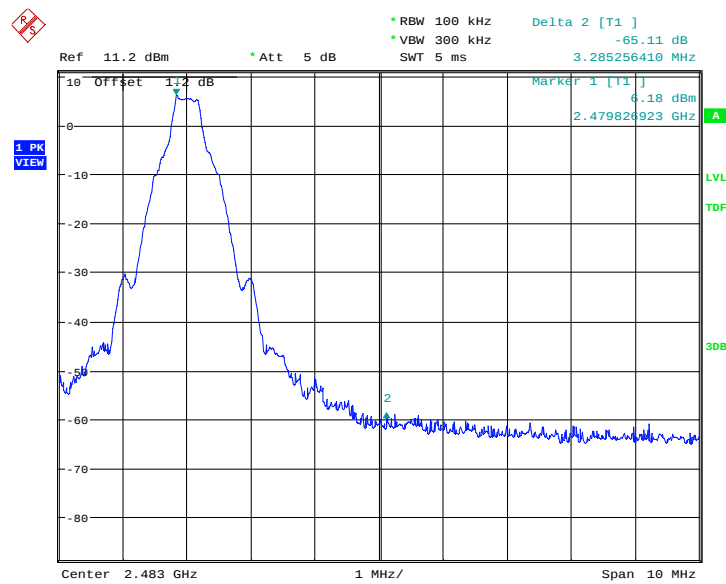


Date: 26.SEP.2014 15:59:02

Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

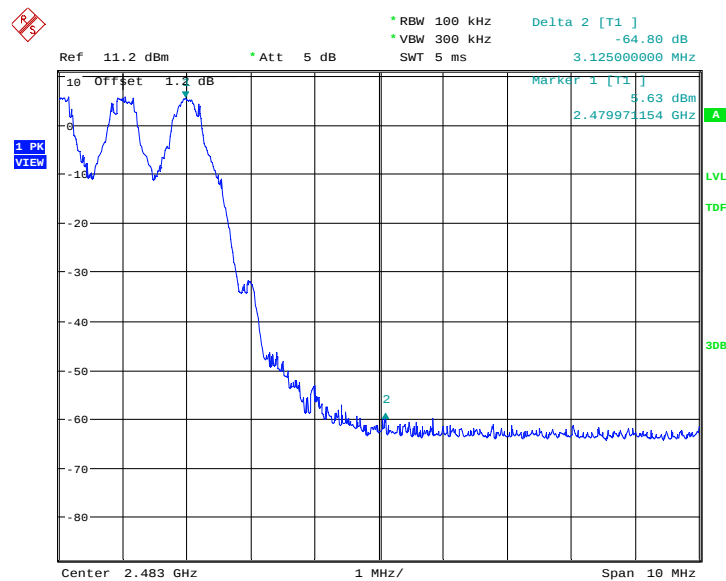


Date: 26.SEP.2014 16:03:07

Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

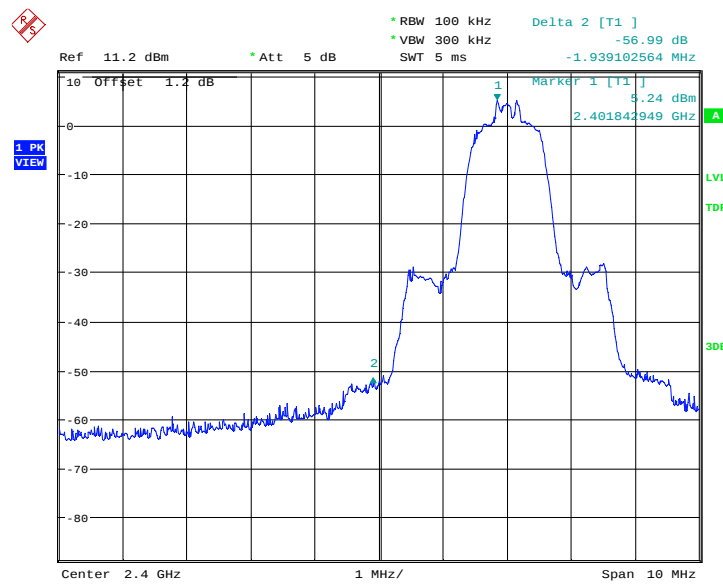


Date: 26.SEP.2014 16:20:09

Fig.5. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off

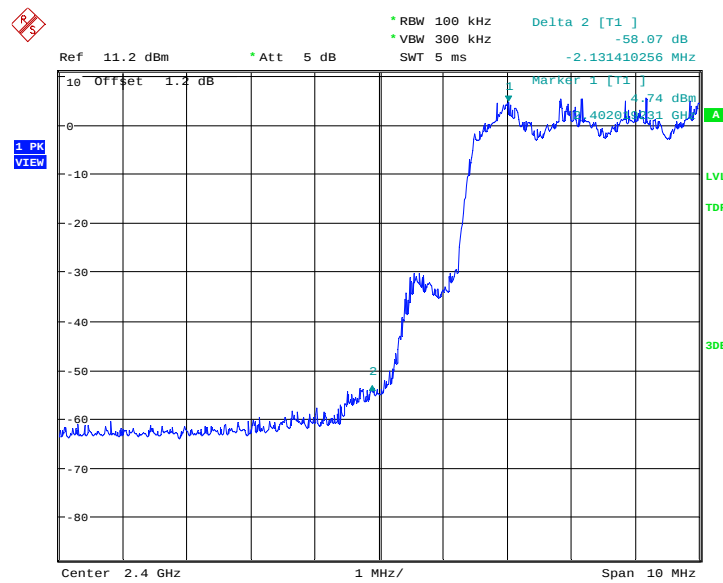


Date: 26.SEP.2014 16:22:29

Fig.6. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping On

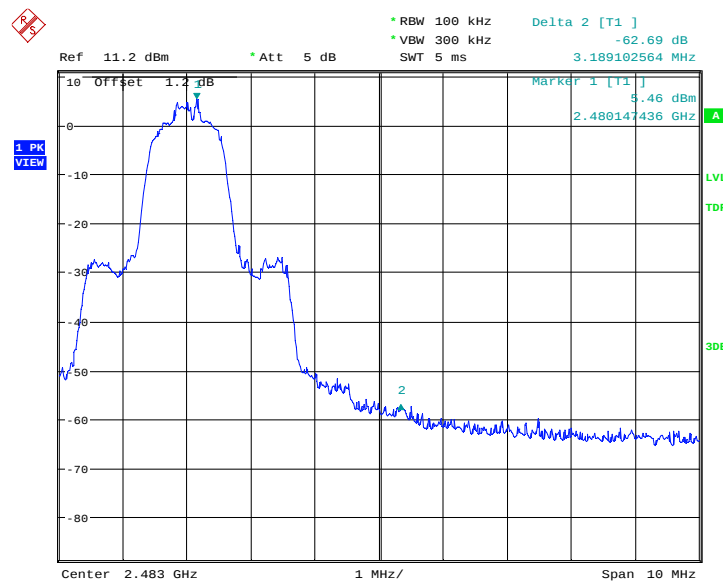


Date: 26.SEP.2014 16:20:27

Fig.7. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off

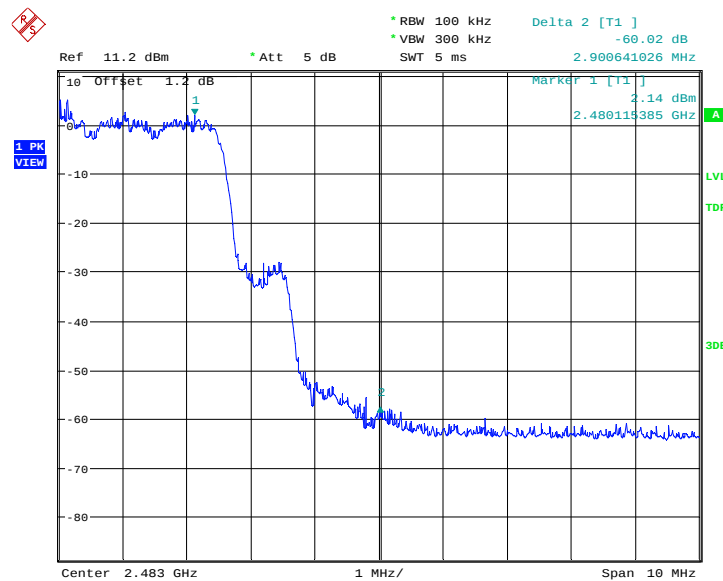


Date: 26.SEP.2014 16:24:32

Fig.8. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping On

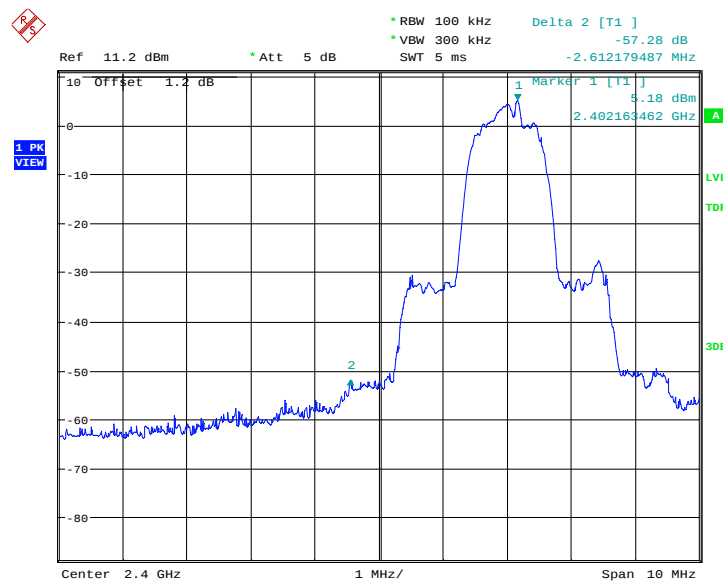


Date: 26.SEP.2014 16:41:33

Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

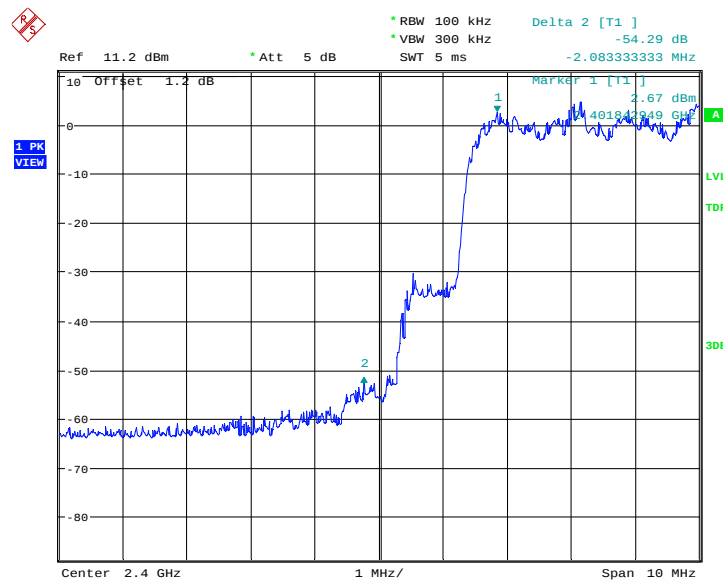


Date: 26.SEP.2014 16:43:53

Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

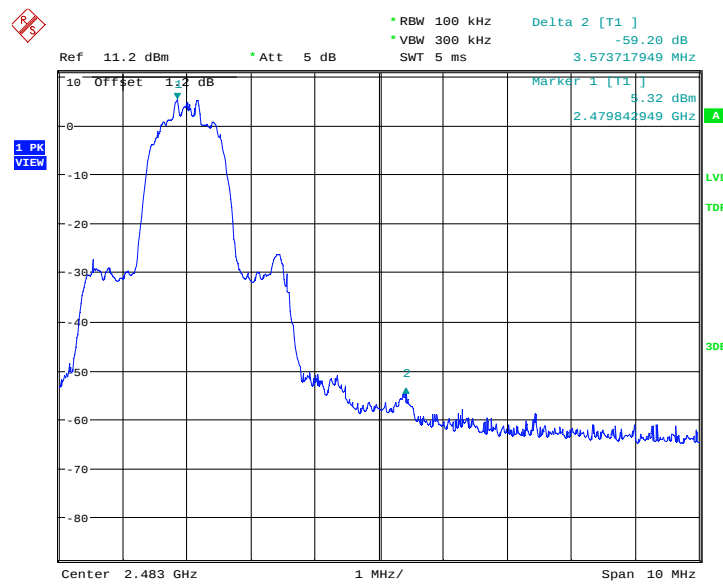

Date: 26.SEP.2014 16:41:51

Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

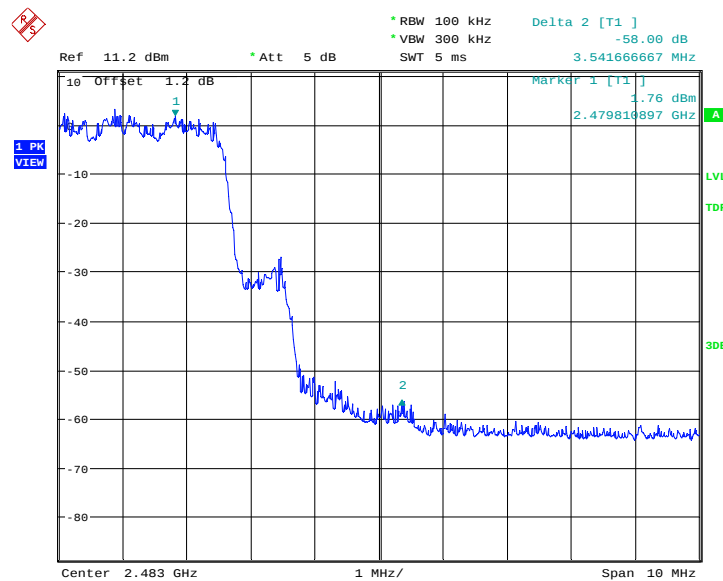

Date: 26.SEP.2014 16:45:55

Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

A.4. Conducted Emission

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	P

2402 MHz	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P
	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P


For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P

Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P


Conclusion: PASS

Test graphs as below

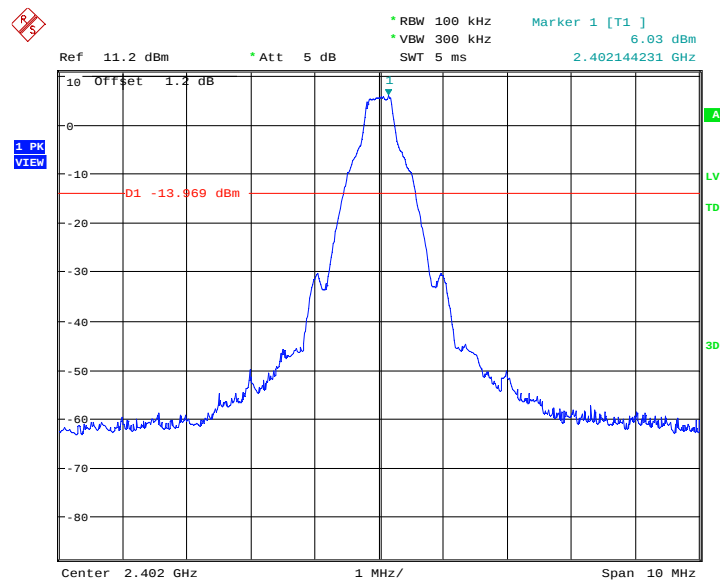


Date: 26.SEP.2014 16:03:26

Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

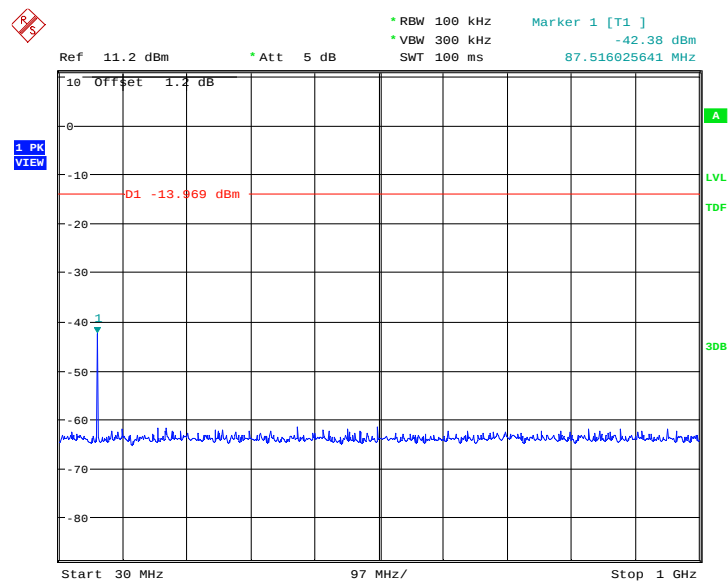


Date: 26.SEP.2014 16:03:43

Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

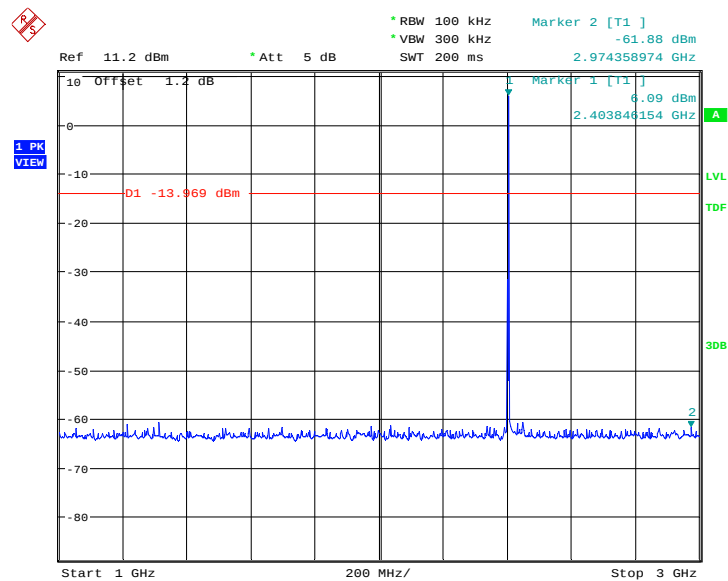


Date: 26.SEP.2014 16:04:15

Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

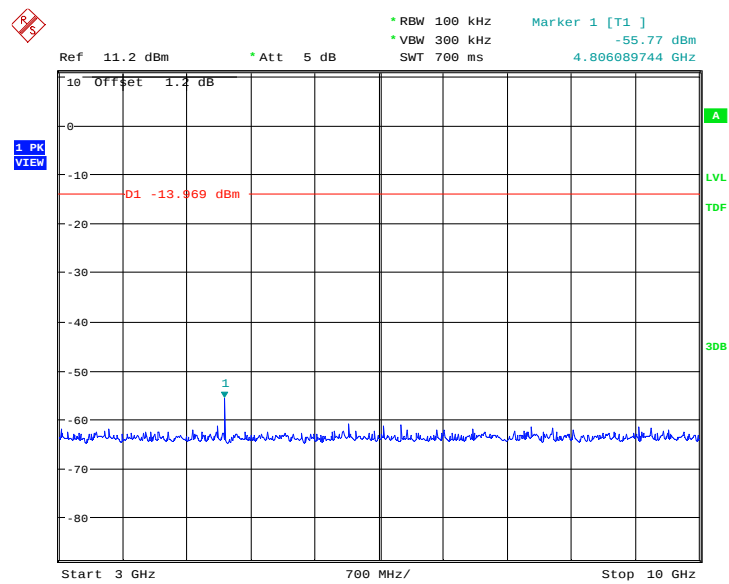


Date: 26.SEP.2014 16:04:31

Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

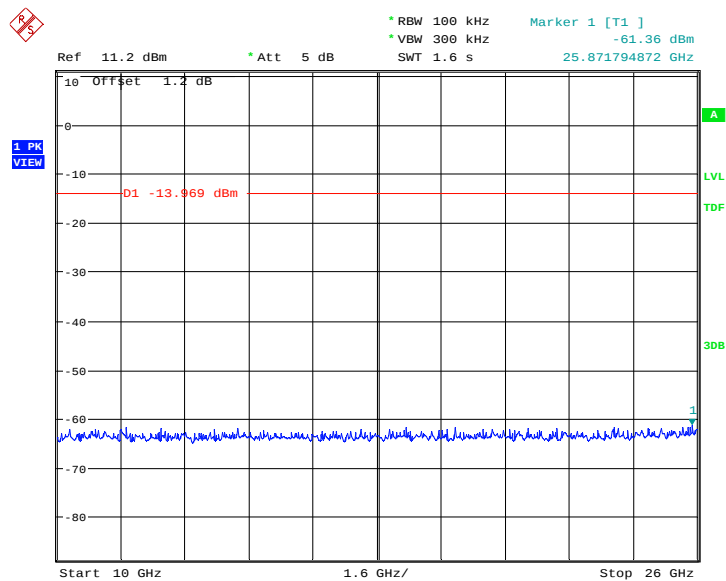


Date: 26.SEP.2014 16:04:48

Fig.17. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz

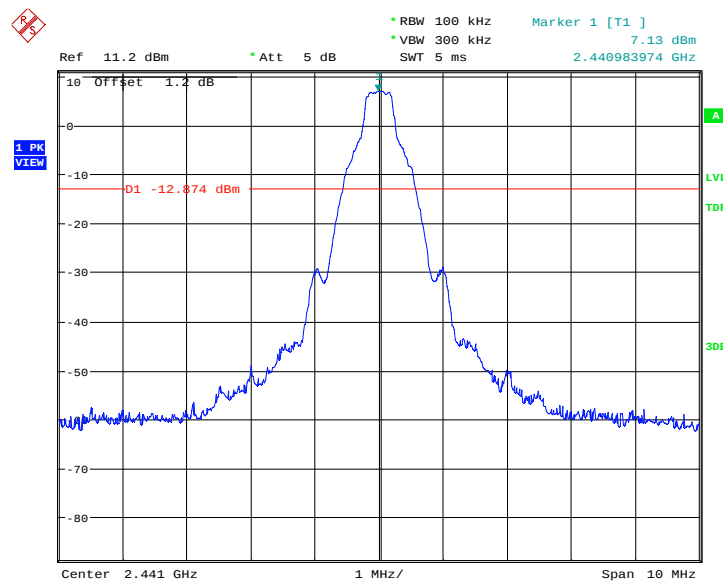


Date: 26.SEP.2014 16:05:04

Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

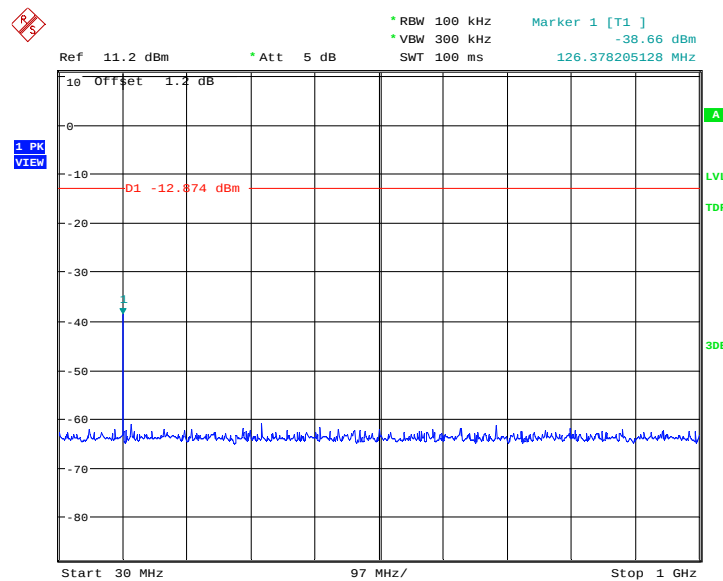


Date: 26.SEP.2014 16:05:21

Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

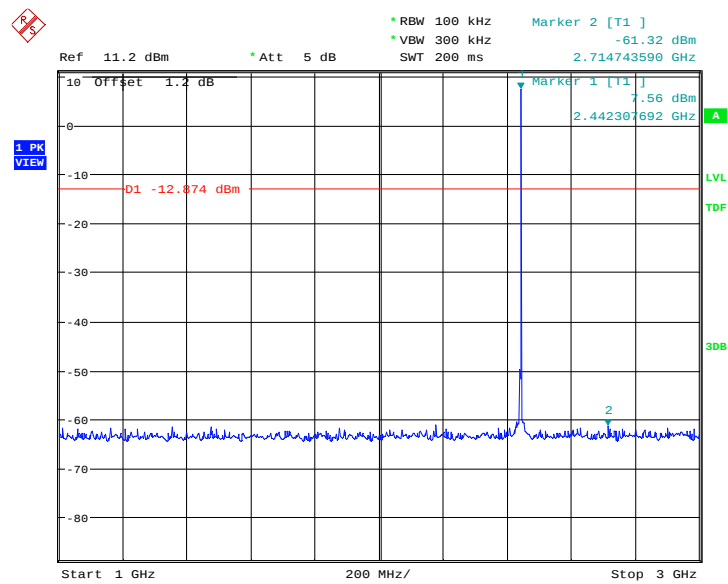


Date: 26.SEP.2014 16:05:53

Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

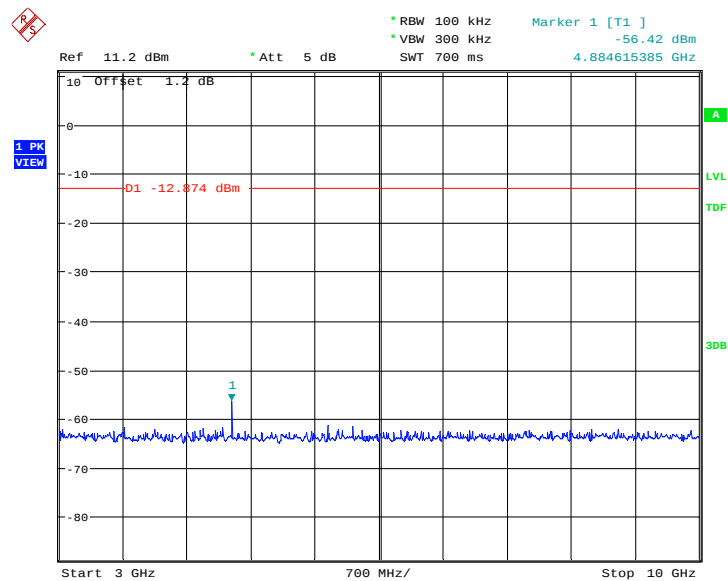


Date: 26.SEP.2014 16:06:09

Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

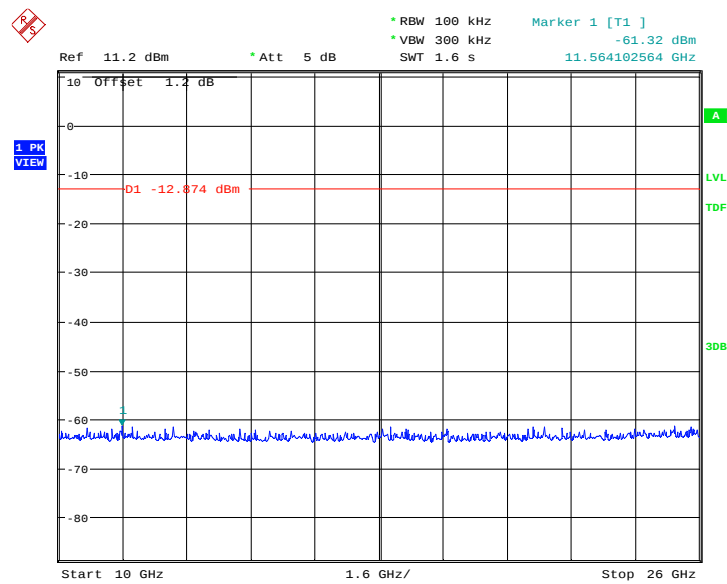


Date: 26.SEP.2014 16:06:26

Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

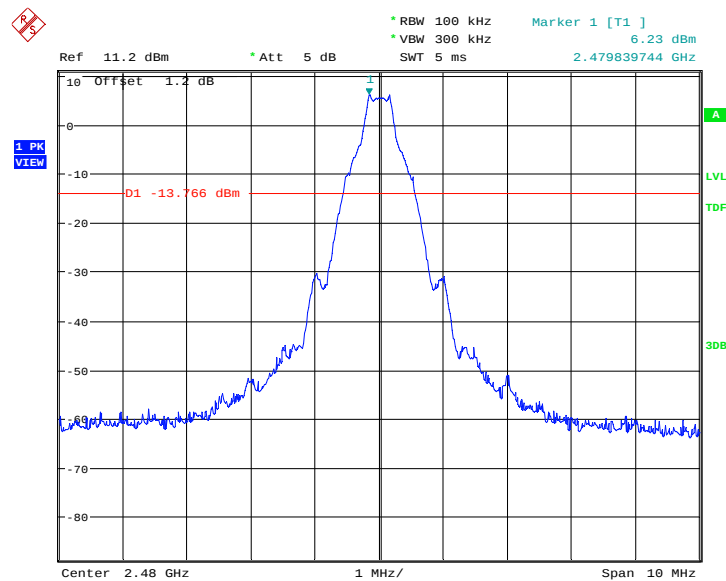


Date: 26.SEP.2014 16:06:42

Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

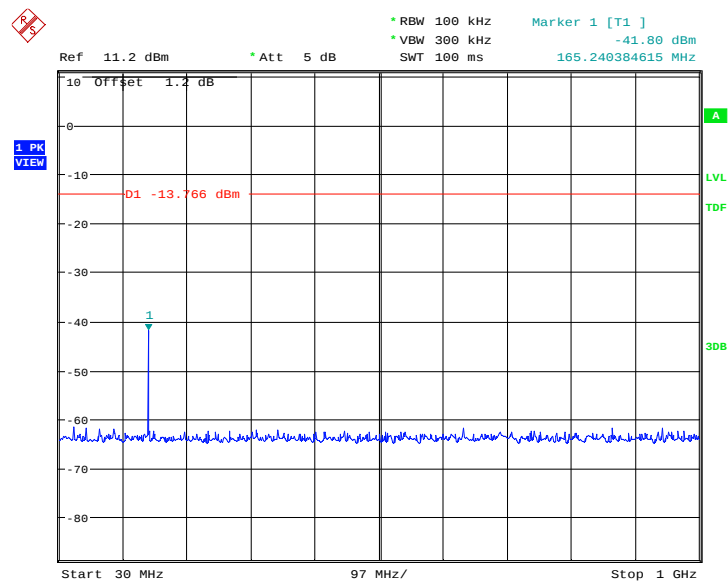


Date: 26.SEP.2014 16:06:59

Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

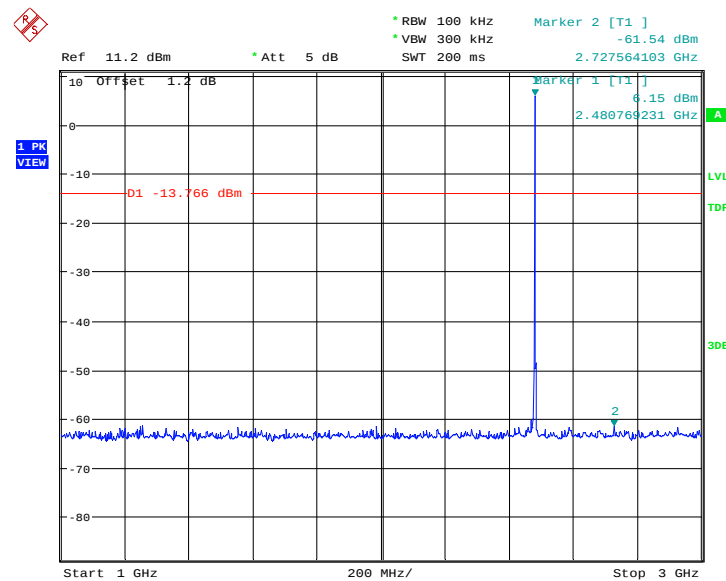


Date: 26.SEP.2014 16:07:30

Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

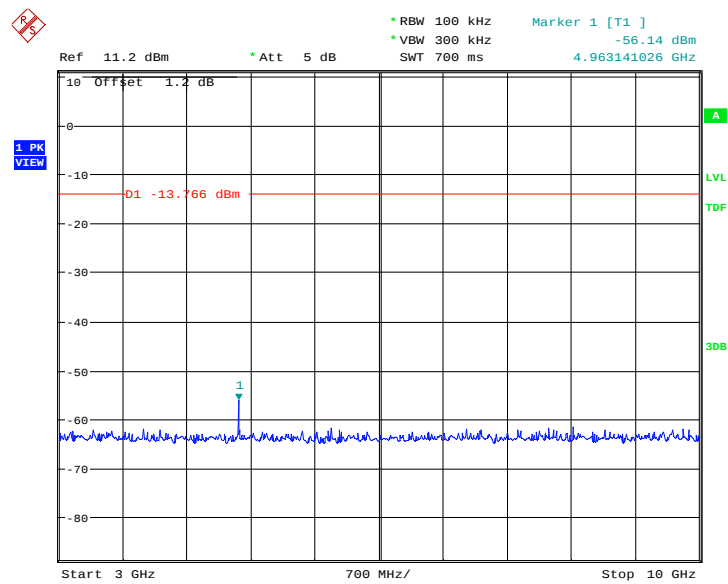


Date: 26.SEP.2014 16:07:47

Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

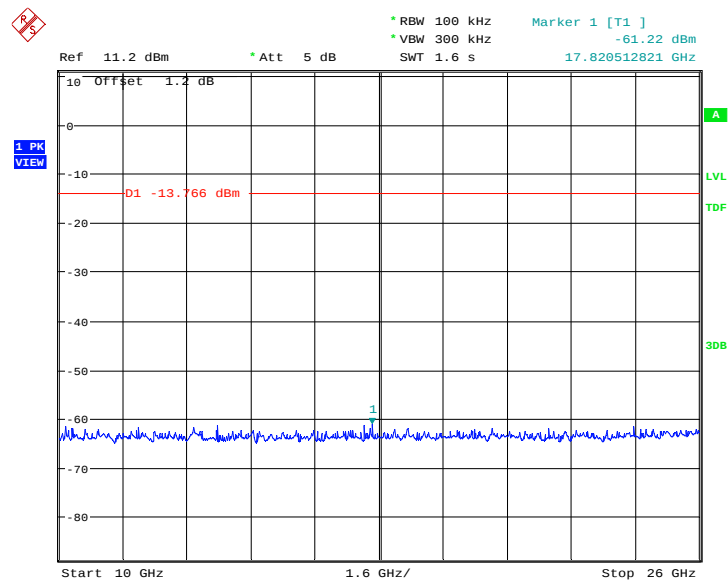


Date: 26.SEP.2014 16:08:04

Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

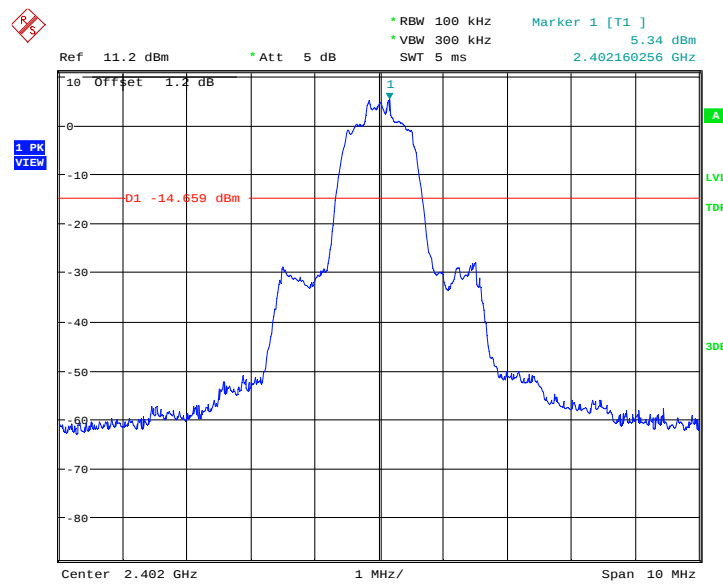


Date: 26.SEP.2014 16:24:51

Fig.28. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,2402MHz

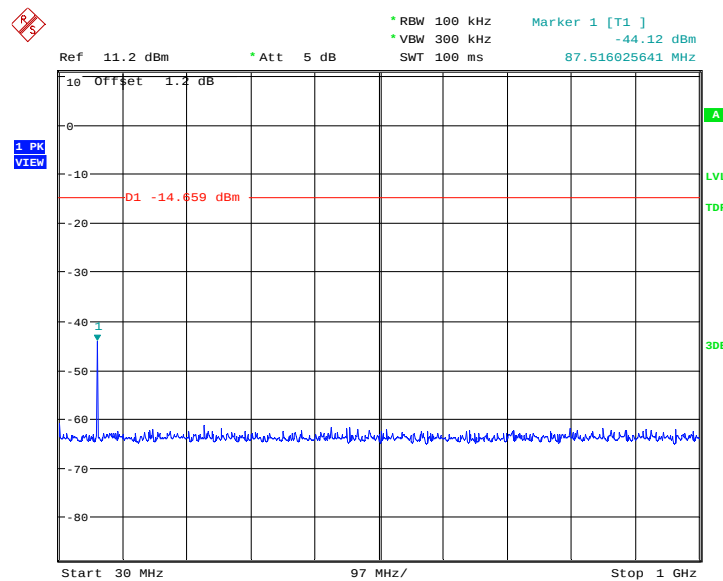


Date: 26.SEP.2014 16:25:07

Fig.29. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz

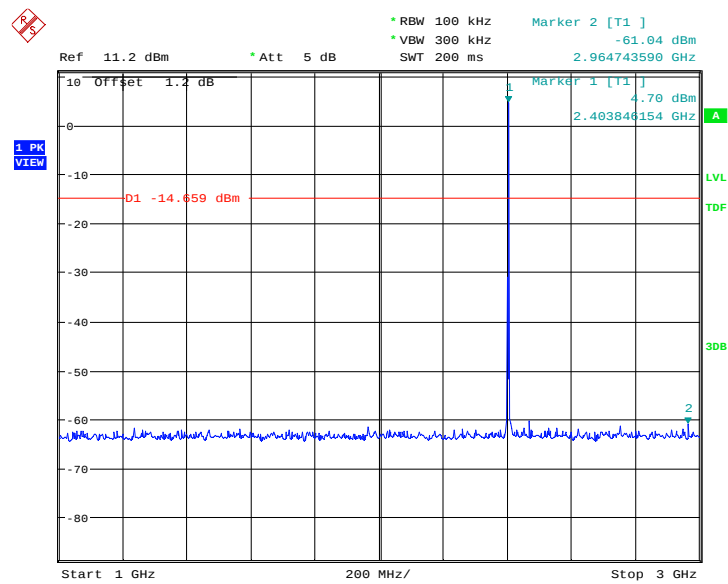


Date: 26.SEP.2014 16:25:39

Fig.30. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

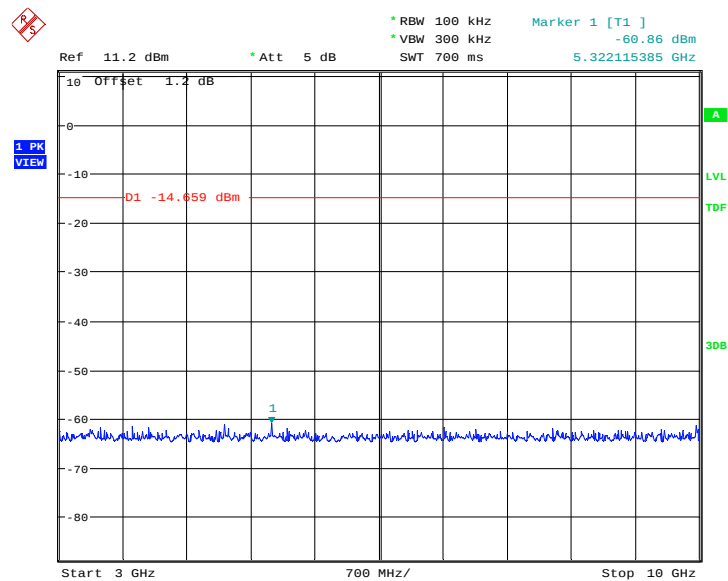


Date: 26.SEP.2014 16:25:56

Fig.31. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 3GHz - 10GHz

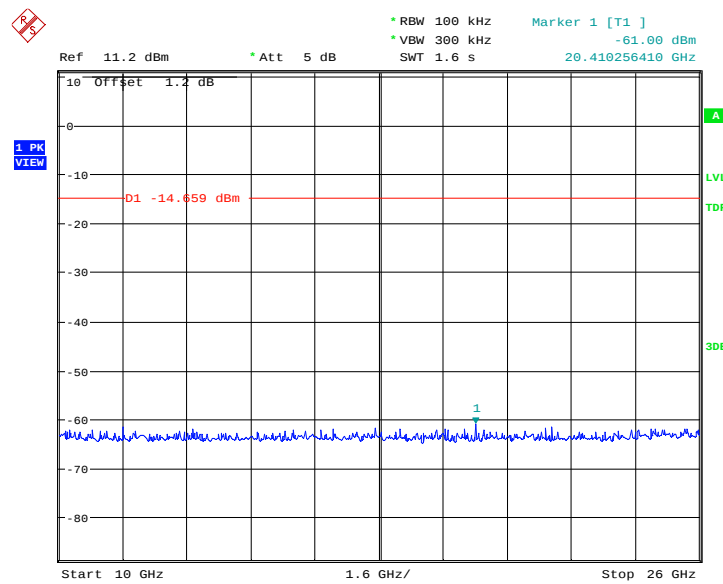


Date: 26.SEP.2014 16:26:12

Fig.32. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 10GHz - 26GHz

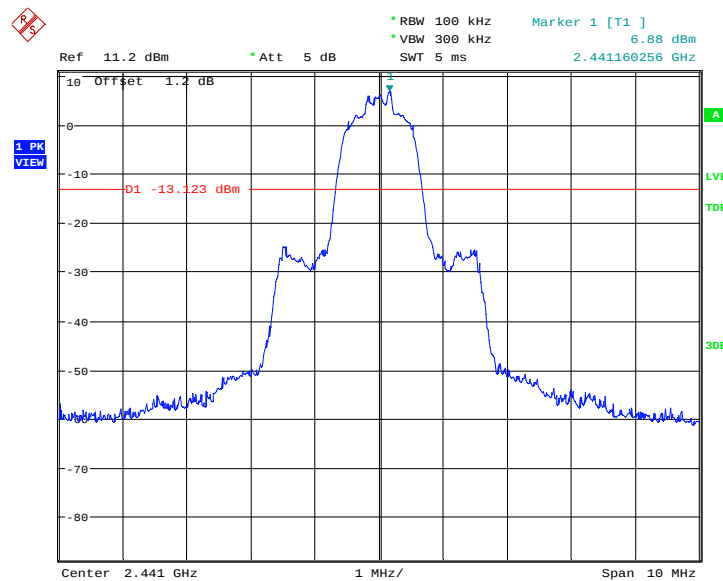


Date: 26.SEP.2014 16:26:29

Fig.33. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz

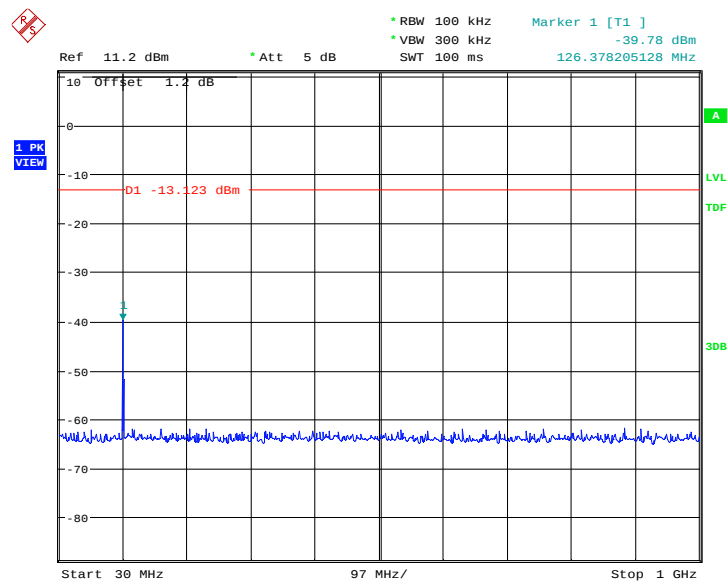


Date: 26.SEP.2014 16:26:45

Fig.34. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

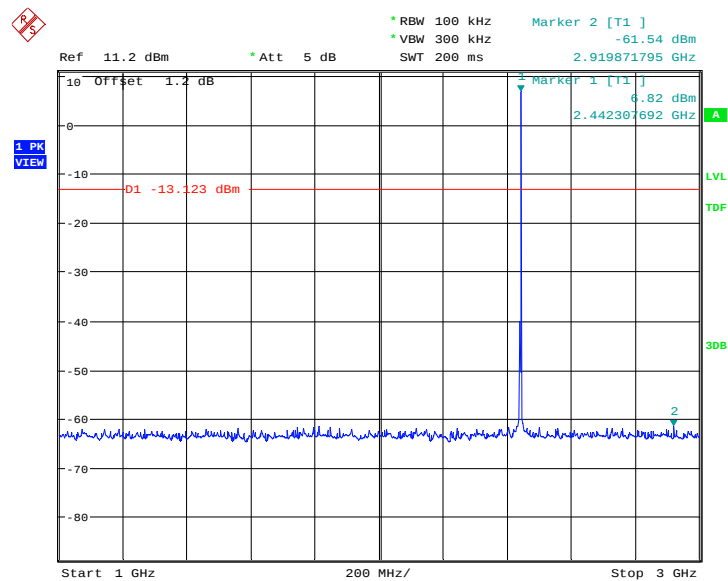


Date: 26.SEP.2014 16:27:17

Fig.35. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz

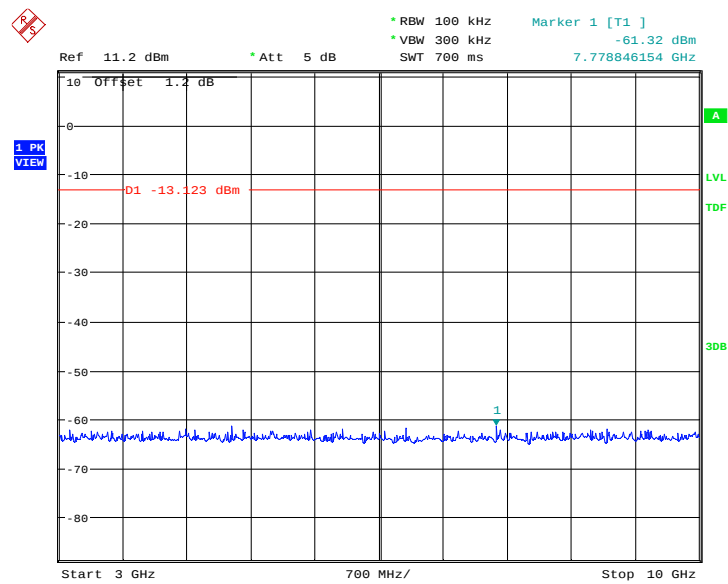


Date: 26.SEP.2014 16:27:34

Fig.36. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 3GHz - 10GHz

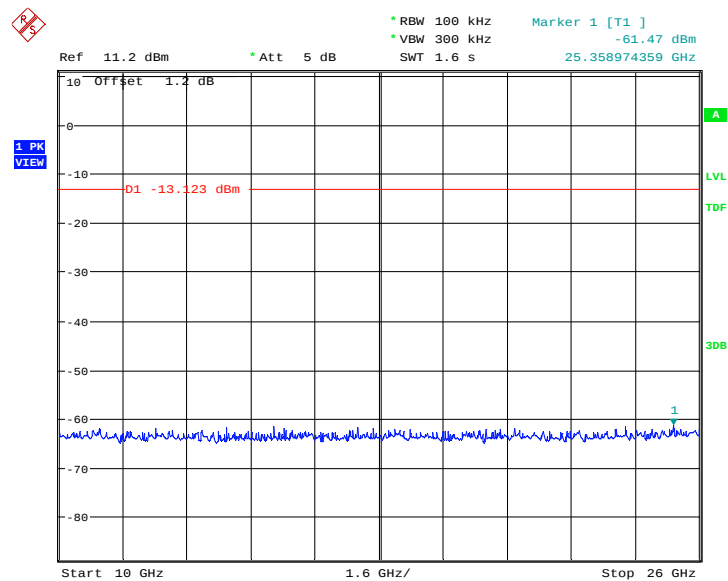


Date: 26.SEP.2014 16:27:50

Fig.37. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 10GHz – 26GHz

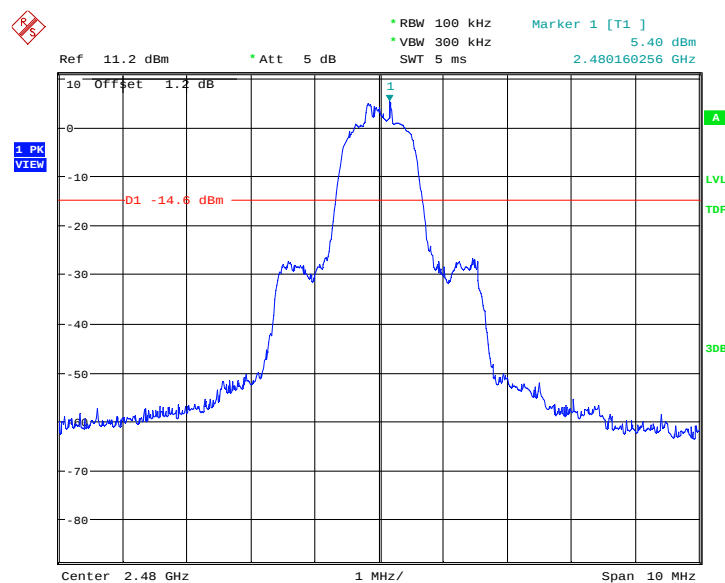


Date: 26.SEP.2014 16:28:07

Fig.38. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

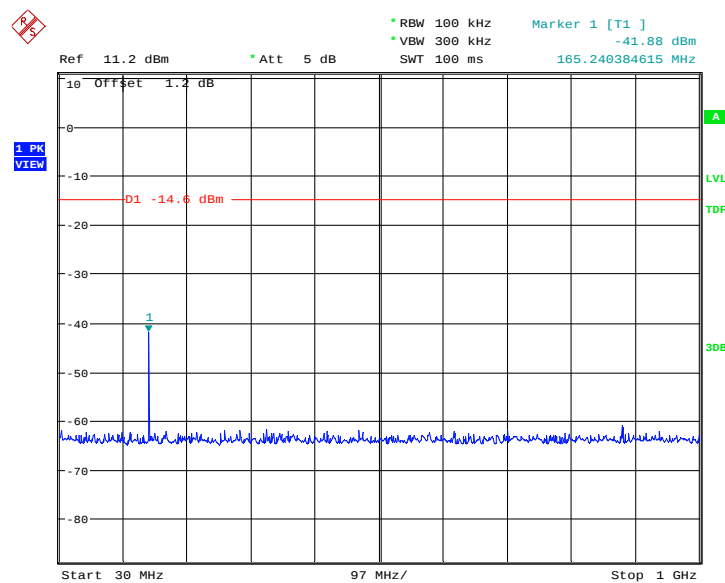


Date: 26.SEP.2014 16:28:23

Fig.39. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 30MHz - 1GHz

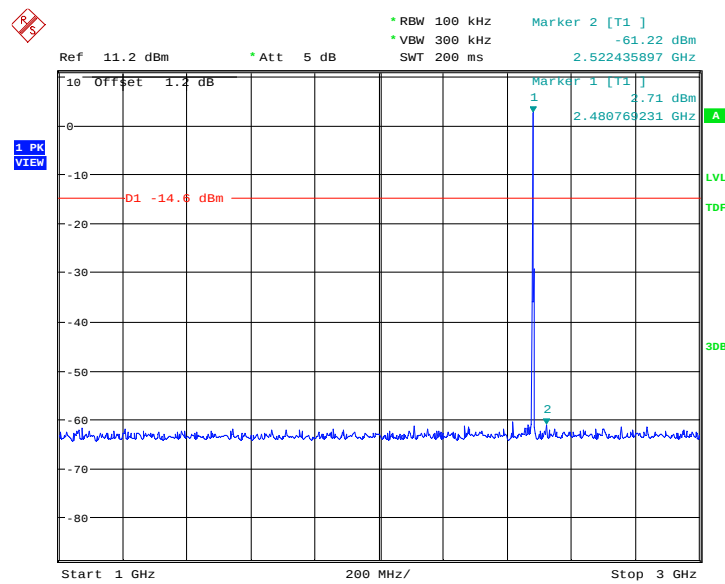


Date: 26.SEP.2014 16:28:55

Fig.40. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

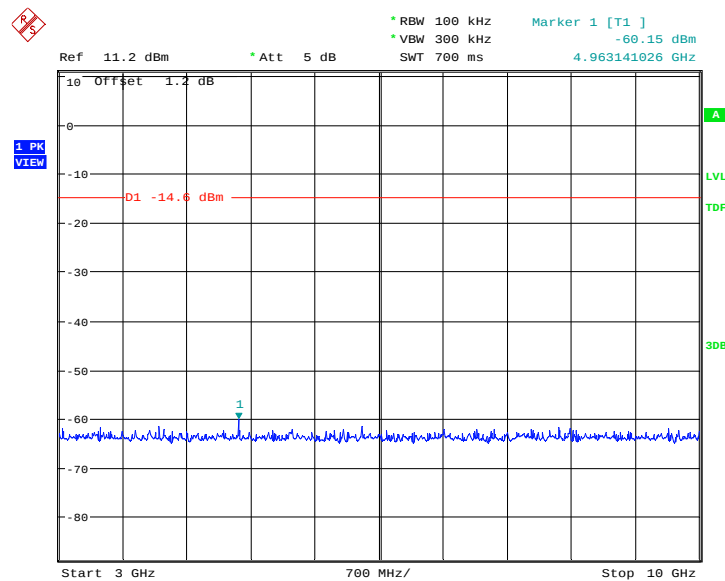


Date: 26.SEP.2014 16:29:12

Fig.41. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 3GHz - 10GHz

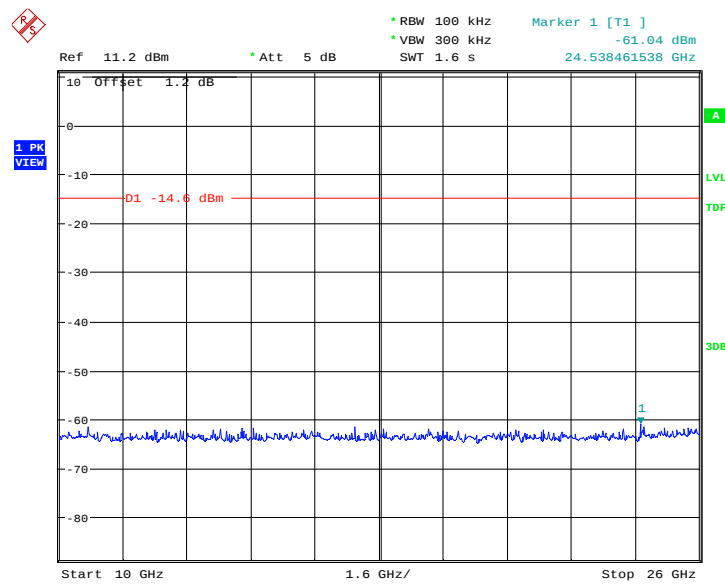


Date: 26.SEP.2014 16:29:28

Fig.42. Fig.30 Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 10GHz - 26GHz

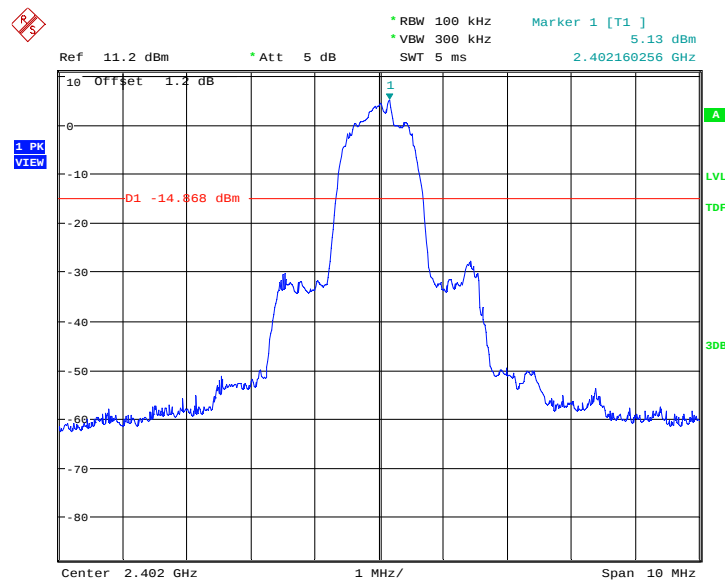


Date: 26.SEP.2014 16:46:14

Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz

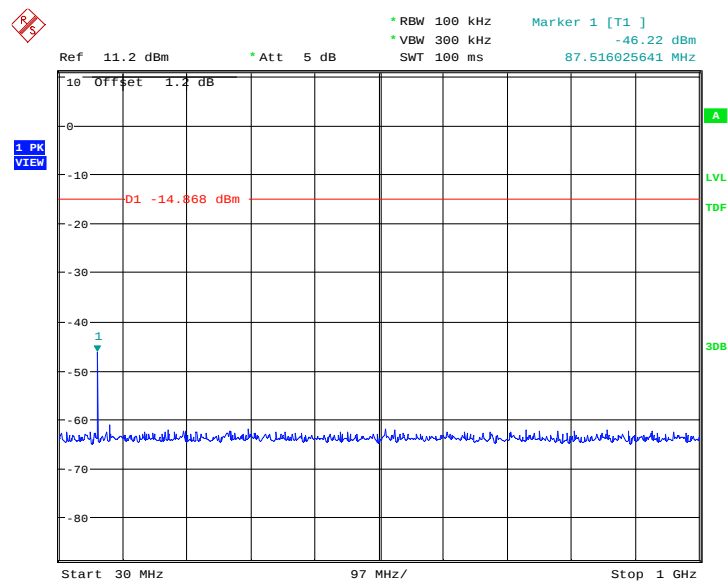


Date: 26.SEP.2014 16:46:31

Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

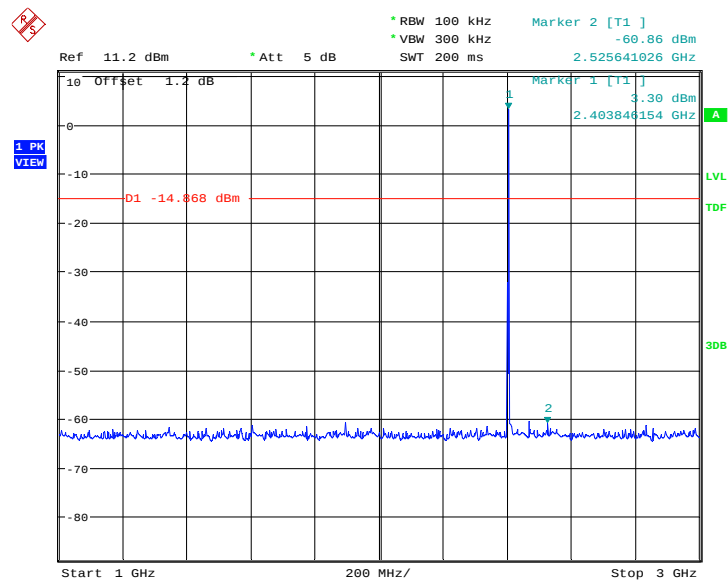


Date: 26.SEP.2014 16:47:02

Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

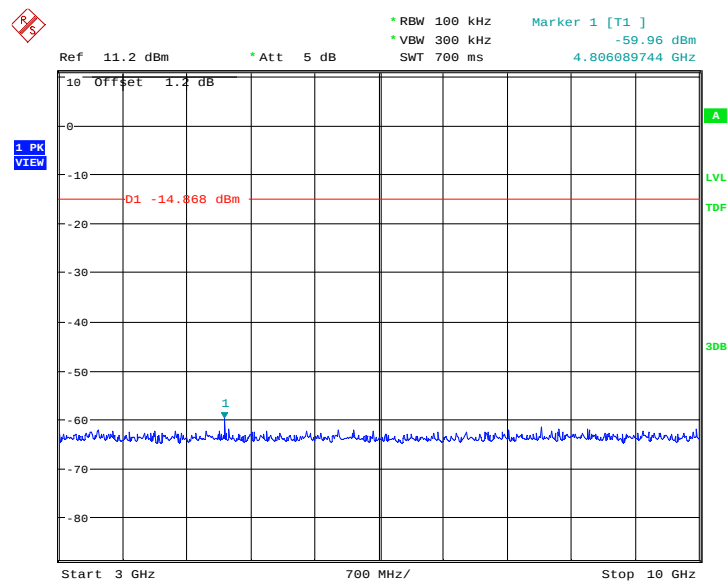


Date: 26.SEP.2014 16:47:19

Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

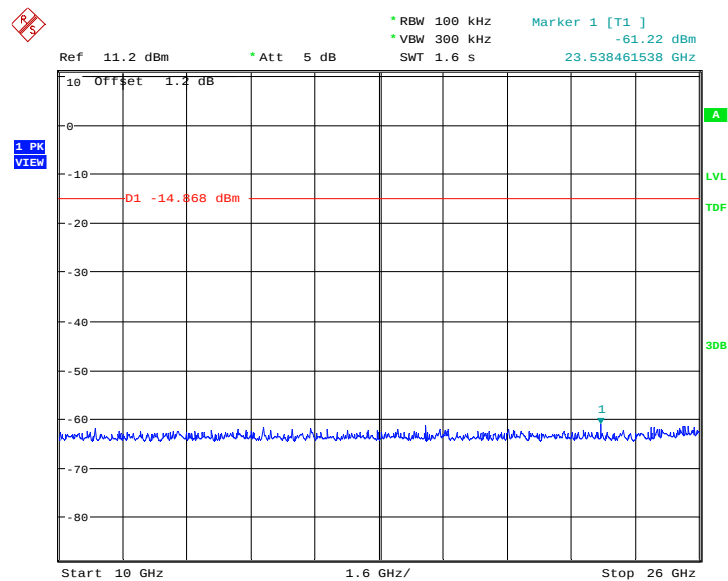

Date: 26.SEP.2014 16:47:35

Fig.47. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz



Ref 11.2 dBm Att 5 dB RBW 100 kHz VBW 300 kHz SWT 100 ms Marker 1 [T1] -40.55 dBm 126.378205128 MHz

Offset 1.2 dB


1 PK VIEW

D1 -13.335 dBm

Start 30 MHz 97 MHz/ Stop 1 GHz


Date: 26.SEP.2014 16:48:09

Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

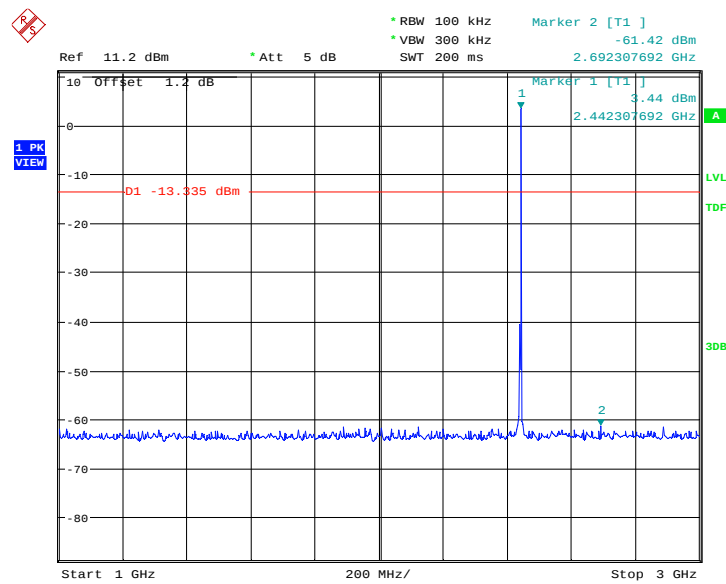


Date: 26.SEP.2014 16:48:40

Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

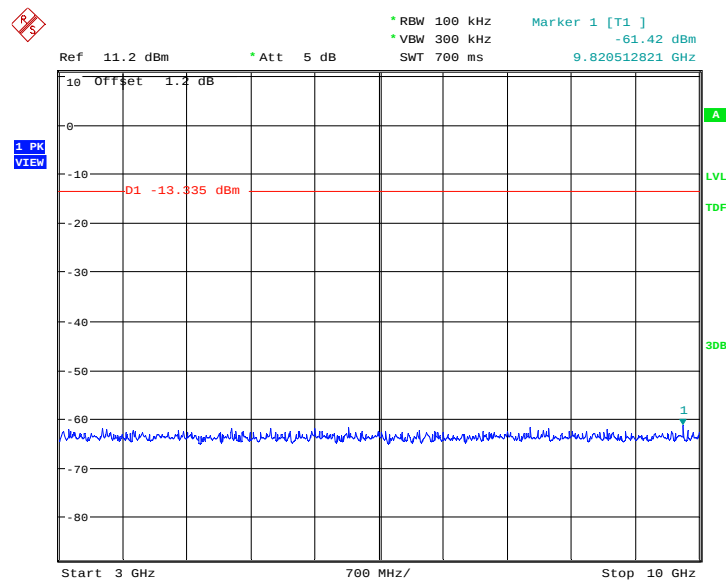


Date: 26.SEP.2014 16:48:57

Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

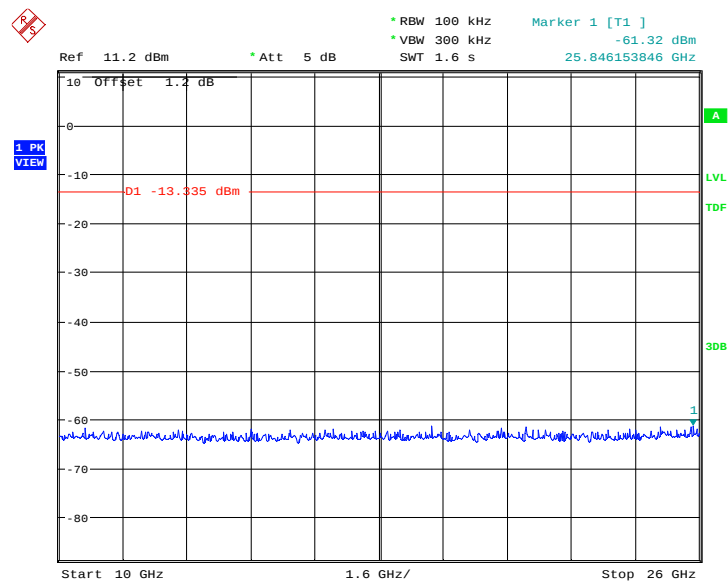


Date: 26.SEP.2014 16:49:13

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

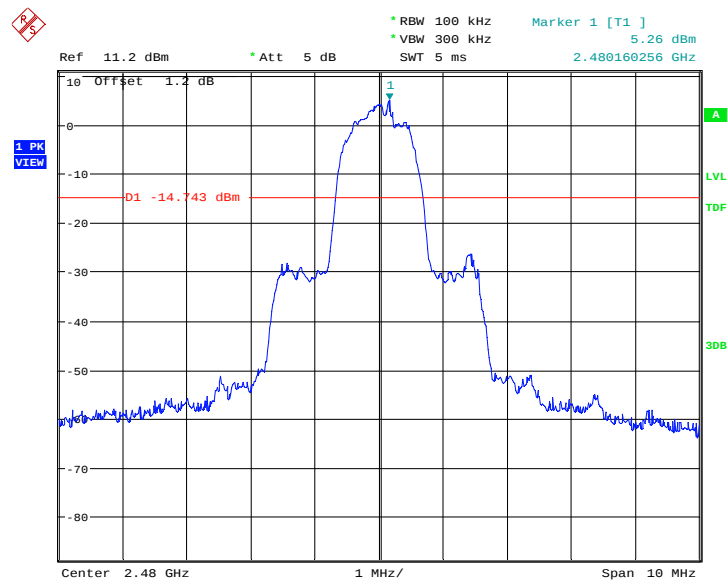


Date: 26.SEP.2014 16:49:30

Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

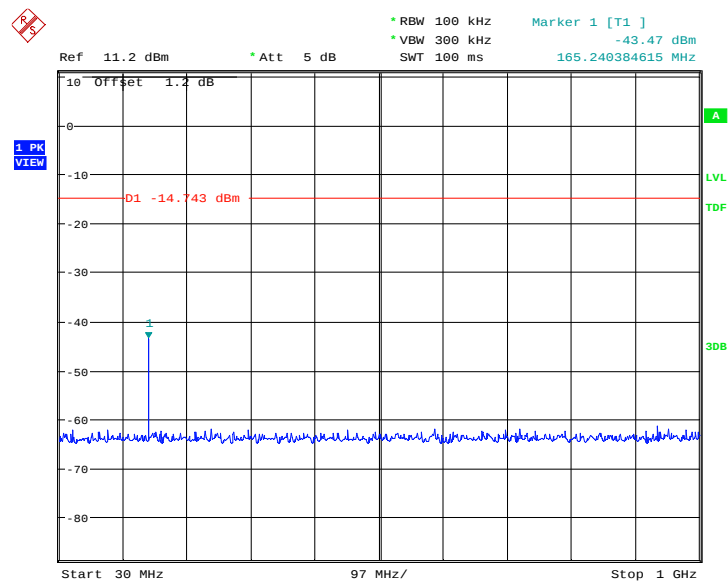


Date: 26.SEP.2014 16:49:46

Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

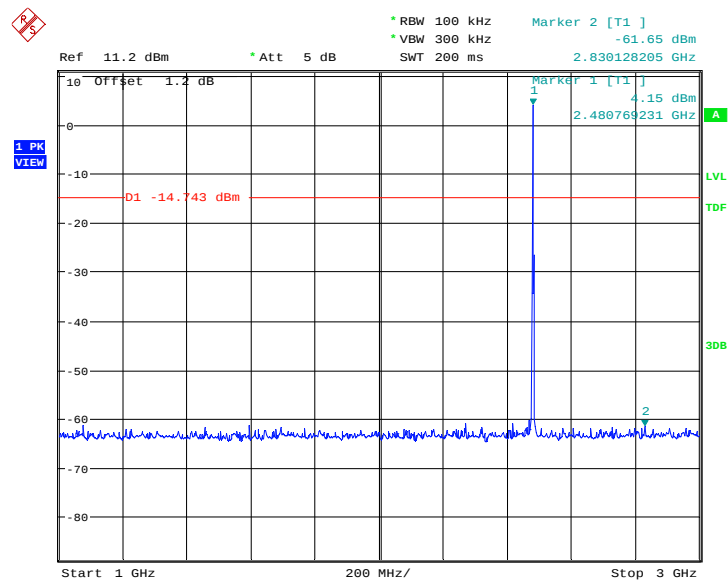


Date: 26.SEP.2014 16:50:18

Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

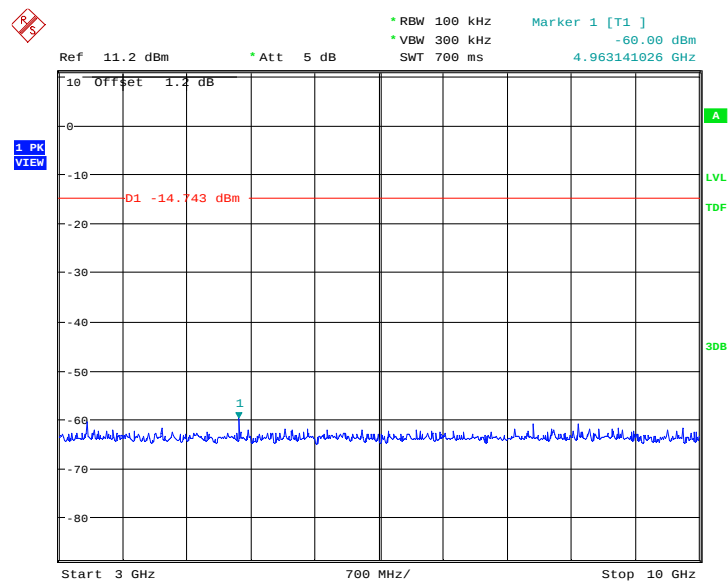

Date: 26.SEP.2014 16:50:35

Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

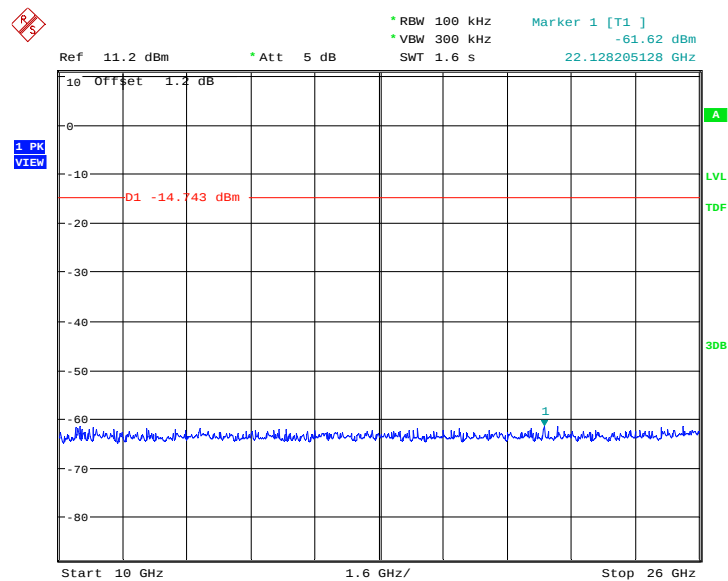

Date: 26.SEP.2014 16:50:51

Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

A.5. Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.10

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

Result= $P_{Mea} + ARPL$

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.58	P
	3 GHz ~ 18 GHz	Fig.59	P
Ch 39 2441 MHz	9 kHz ~ 30 MHz	Fig.60	P
	30 MHz ~ 1 GHz	Fig.61	P
	1 GHz ~ 3 GHz	Fig.62	P
	3 GHz ~ 18 GHz	Fig.63	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.64	P
	3 GHz ~ 18 GHz	Fig.65	P
Power	2.38GHz~2.4GHz---L	Fig.66	P

Power	2.45GHz~2.5GHz---H	Fig.67	P
For all channels	18 GHz ~ 26 GHz	Fig.68	P

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.69	P
	3 GHz ~ 18 GHz	Fig.70	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.71	P
	1 GHz ~ 3 GHz	Fig.72	P
	3 GHz ~ 18 GHz	Fig.73	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.74	P
	3 GHz ~ 18 GHz	Fig.75	P
Power	2.38GHz~2.4GHz---L	Fig.76	P
Power	2.45GHz~2.5GHz---H	Fig.77	P
For all channels	18 GHz ~ 26 GHz	Fig.78	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.79	P
	3 GHz ~ 18 GHz	Fig.80	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.81	P
	1 GHz ~ 3 GHz	Fig.82	P
	3 GHz ~ 18 GHz	Fig.83	P
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.84	P
	3 GHz ~ 18 GHz	Fig.85	P
Power	2.38GHz~2.4GHz---L	Fig.86	P
Power	2.45GHz~2.5GHz---H	Fig.87	P
For all channels	18 GHz ~ 26 GHz	Fig.88	P

GFSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	PMea(dBuv/m)	Polarization
2390.000	33.3	-11.1	44.400	H
17998.500	43.9	27.9	16.000	H
17995.500	43.8	27.9	15.900	V
17997.000	43.7	27.9	15.800	V
18000.000	43.6	-1.1	44.666	V
17992.500	43.6	27.9	15.700	V

GFSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17995.500	43.8	27.9	15.900	H
17994.000	43.8	27.9	15.900	V
17997.000	43.7	27.9	15.800	V
17998.500	43.6	27.9	15.700	V
17989.500	43.6	27.9	15.700	H

17991.000	43.6	27.9	15.700	H
-----------	------	------	--------	---

GFSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.500	44.1	-11.2	55.300	H
18000.000	43.8	-1.1	44.866	V
17997.000	43.8	27.9	15.900	V
17995.500	43.8	27.9	15.900	H
17992.500	43.7	27.9	15.800	H
17989.500	43.6	27.9	15.700	V

 $\pi/4$ DQPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2389.900	33.3	-11.1	44.400	H
17992.500	43.6	27.9	15.700	V
18000.000	43.5	-1.1	44.566	H
17986.500	43.4	27.9	15.500	V
17995.500	43.3	27.9	15.400	H
17991.000	43.3	27.9	15.400	V

 $\pi/4$ DQPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17995.500	43.7	27.9	15.800	V
17997.000	43.7	27.9	15.800	V
17992.500	43.7	27.9	15.800	V
17994.000	43.5	27.9	15.600	H
18000.000	43.5	-1.1	44.566	V
17998.500	43.5	27.9	15.600	V

 $\pi/4$ DQPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.500	42.6	-11.2	53.800	V
17998.500	43.8	27.9	15.900	H
17995.500	43.6	27.9	15.700	V
18000.000	43.5	-1.1	44.566	V
17992.500	43.5	27.9	15.600	V
17997.000	43.4	27.9	15.500	H

8DPSK Ch 0 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2390.000	33.3	-11.1	44.400	V
17998.500	43.7	27.9	15.800	H
17989.500	43.6	27.9	15.700	V
17995.500	43.5	27.9	15.600	V
18000.000	43.5	-1.1	44.566	H

17992.500	43.4	27.9	15.500	V
-----------	------	------	--------	---

8DPSK Ch 39 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
17992.500	43.7	27.9	15.800	H
17998.500	43.6	27.9	15.700	H
17989.500	43.5	27.9	15.600	V
17994.000	43.4	27.9	15.500	V
17986.500	43.3	27.9	15.400	H
17991.000	43.3	27.9	15.400	V

8DPSK Ch 78 - Average

Frequency(MHz)	Result(dBuv/m)	ARPL (dB)	Pmea(dBuv/m)	Polarization
2483.500	42.2	-11.2	53.400	H
17995.500	44.0	27.9	16.100	V
17992.500	43.6	27.9	15.700	V
17998.500	43.5	27.9	15.600	V
17988.000	43.5	27.9	15.600	V
17994.000	43.4	27.9	15.500	H

Conclusion: PASS

Test graphs as below:

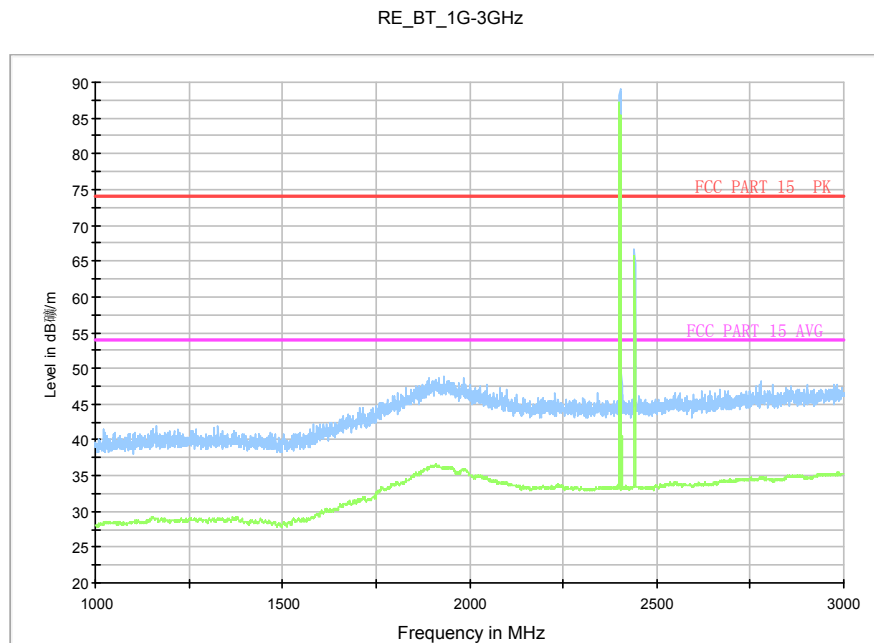


Fig.58. Radiated emission: GFSK, Channel 0, 1 GHz - 3 GHz

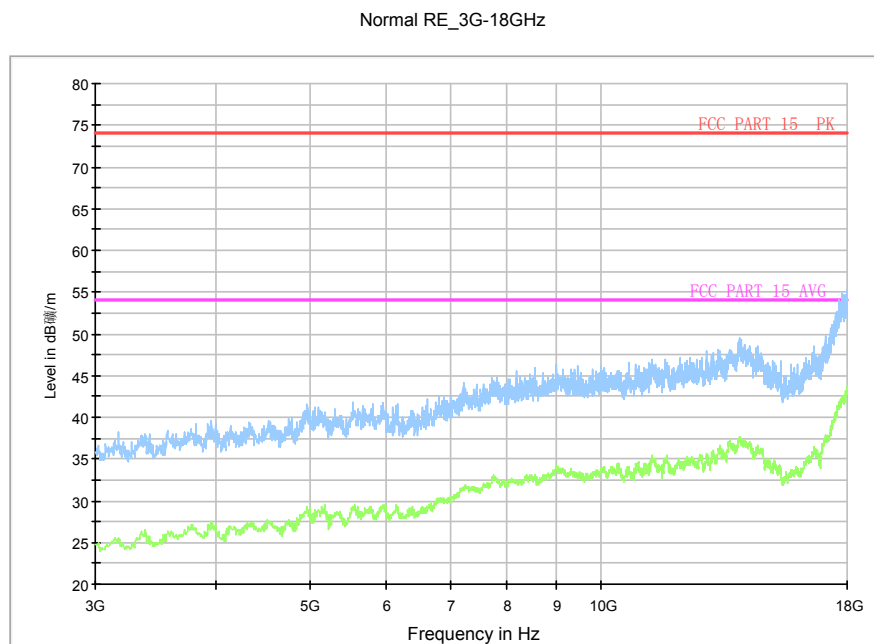


Fig.59. Radiated emission: GFSK, Channel 0, 3 GHz - 18 GHz

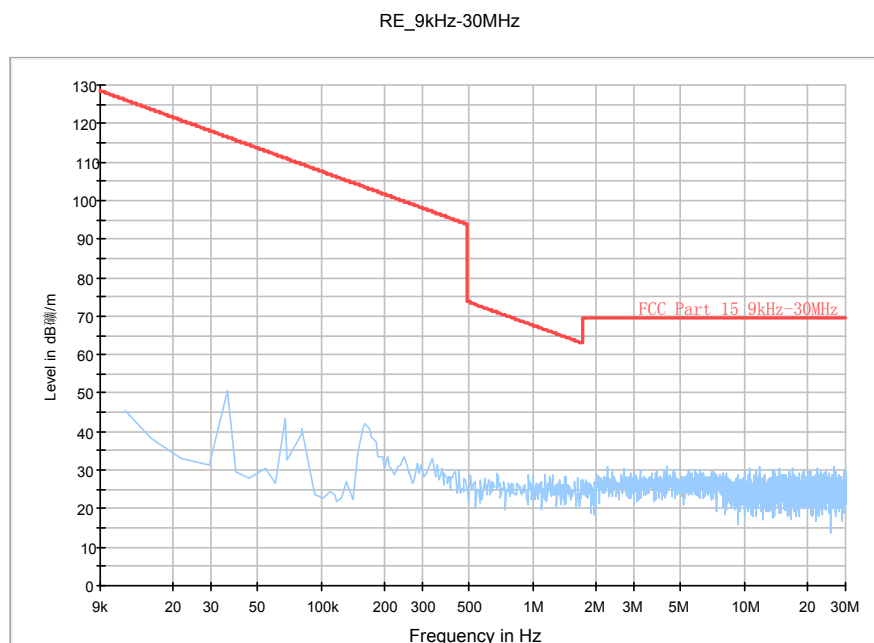


Fig.60. Radiated emission: GFSK, Channel 39, 9 kHz - 30 MHz

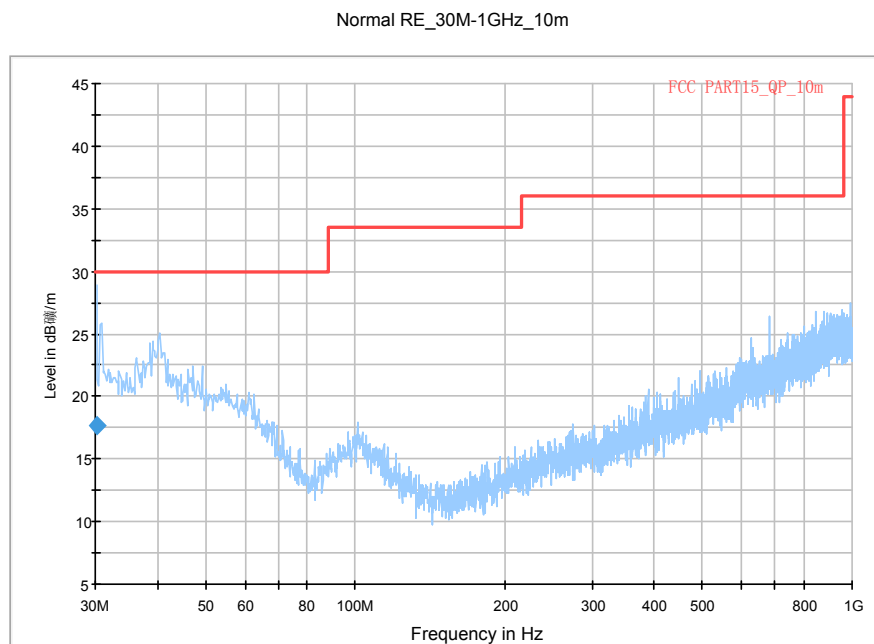


Fig.61. Radiated emission: GFSK, Channel 39, 30 MHz - 1 GHz

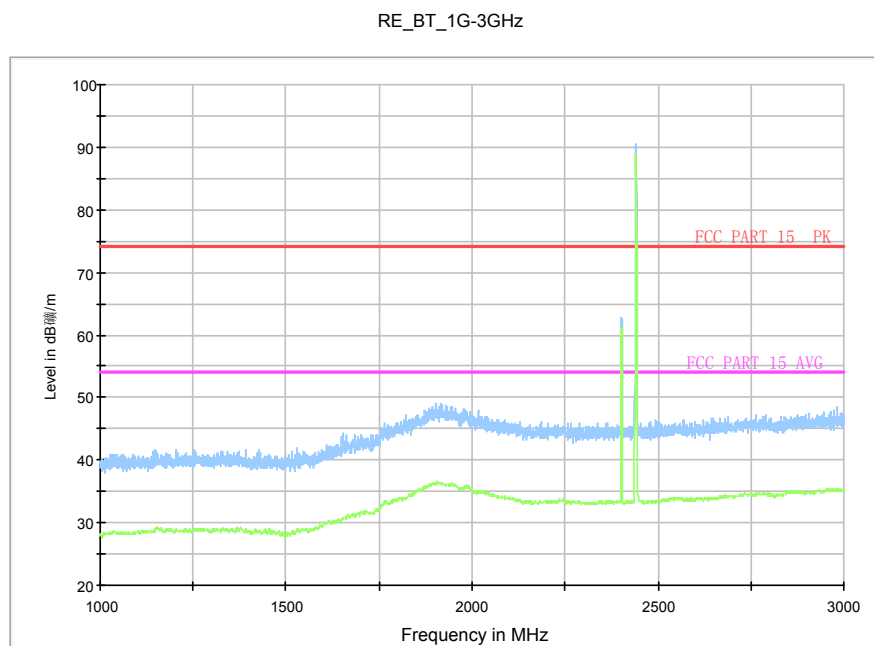


Fig.62. Radiated emission: GFSK, Channel 39, 1 GHz - 3 GHz

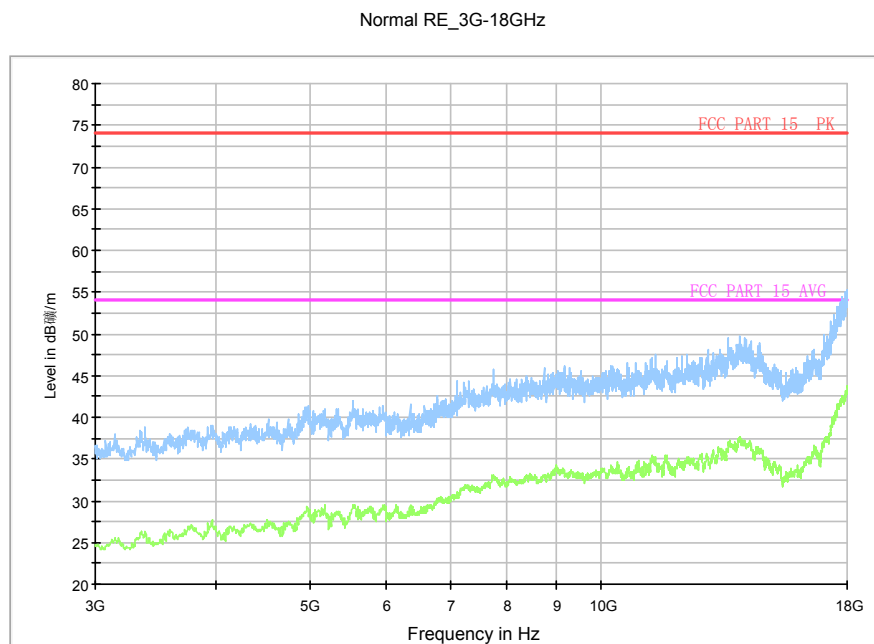


Fig.63. Radiated emission: GFSK, Channel 39, 3 GHz - 18 GHz

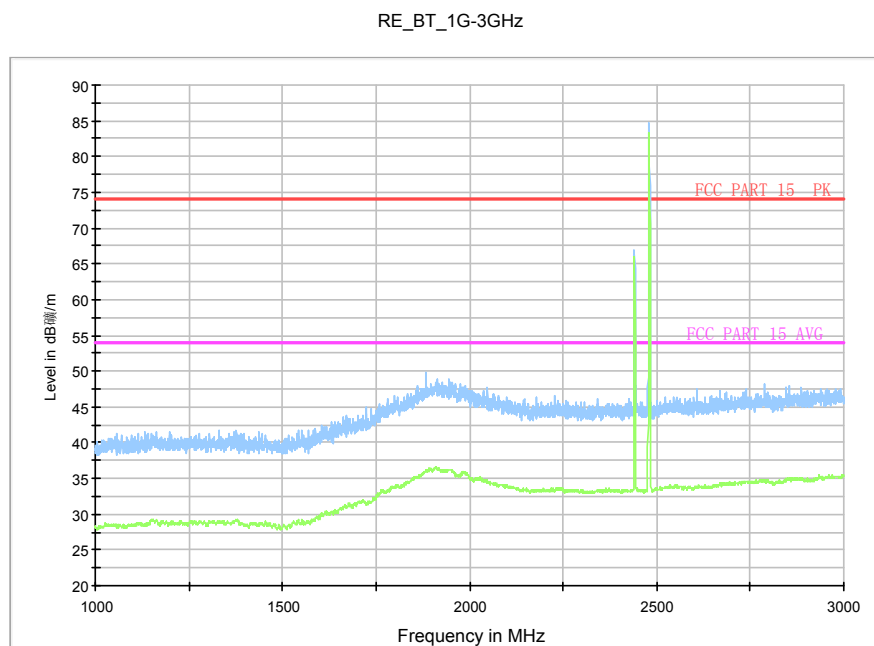


Fig.64. Radiated emission: GFSK, Channel 78, 1 GHz - 3 GHz

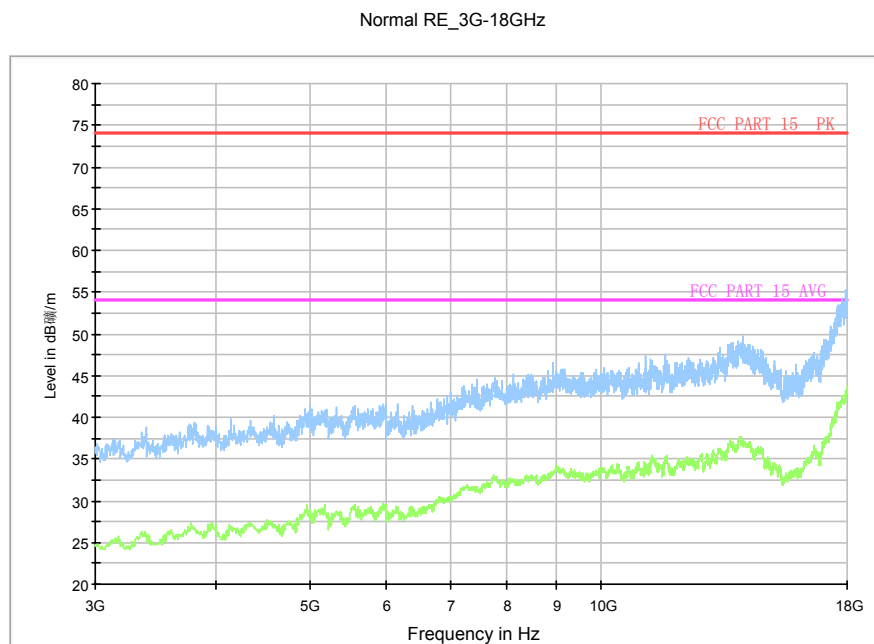


Fig.65. Radiated emission: GFSK, Channel 78, 3 GHz - 18 GHz

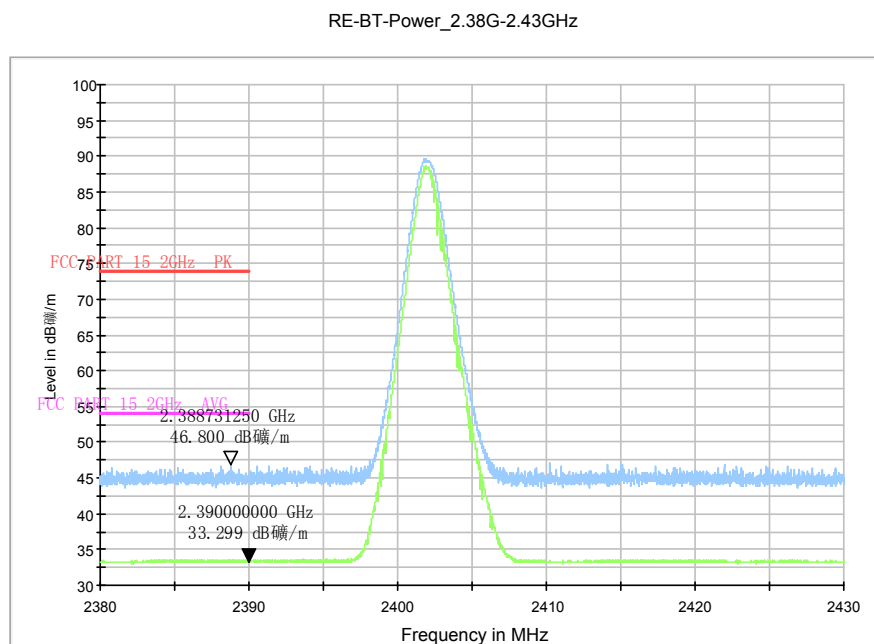


Fig.66. Radiated emission (Power): GFSK, low channel

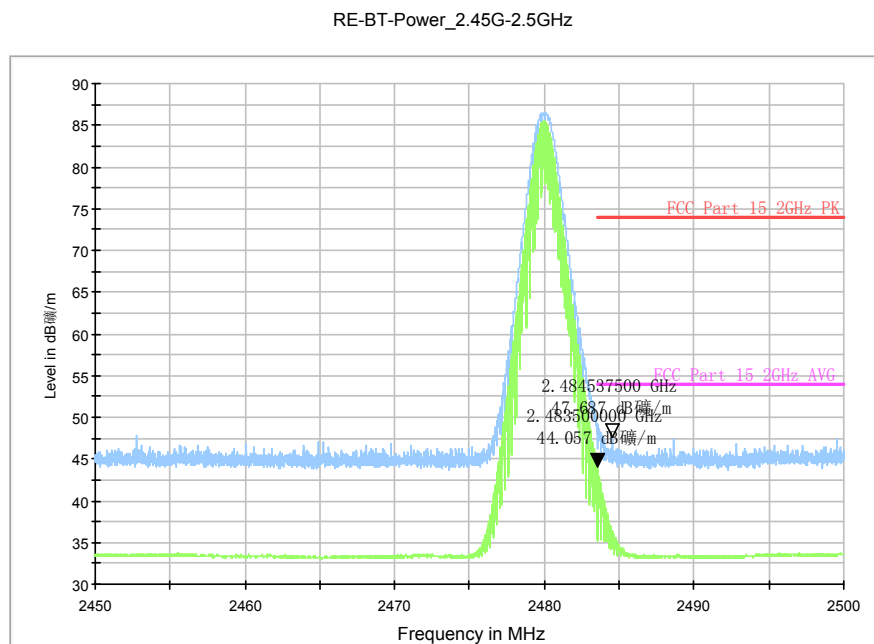


Fig.67. Radiated emission (Power) GFSK, high channel

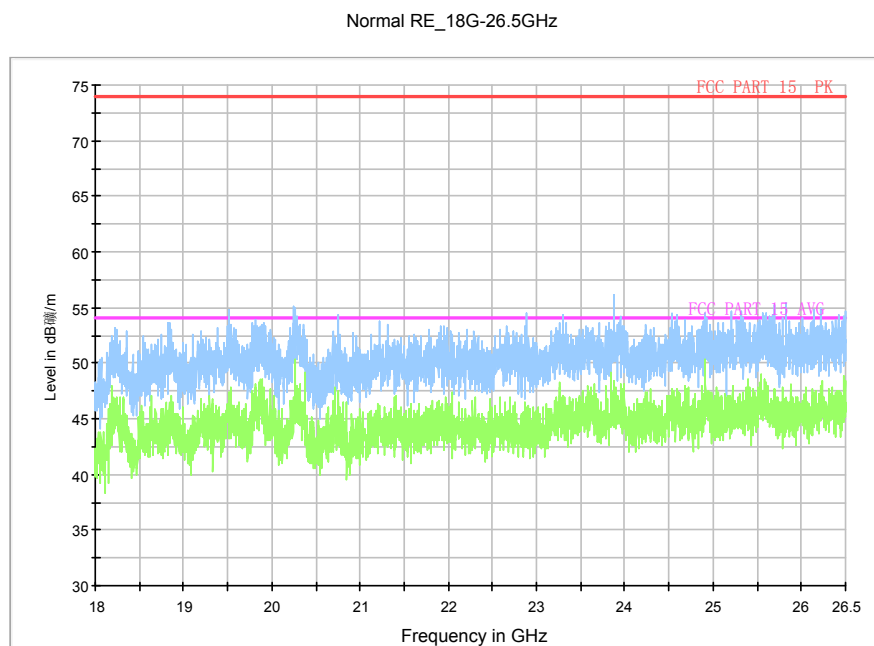


Fig.68. Radiated emission: GFSK, 18 GHz - 26 GHz

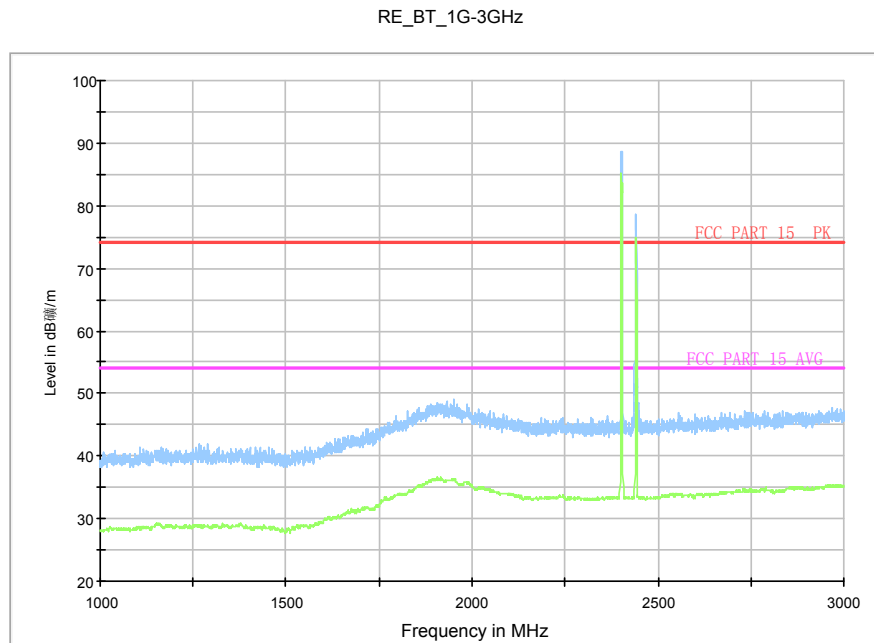


Fig.69. Radiated emission: $\pi/4$ DQPSK, Channel 0, 1 GHz - 3 GHz

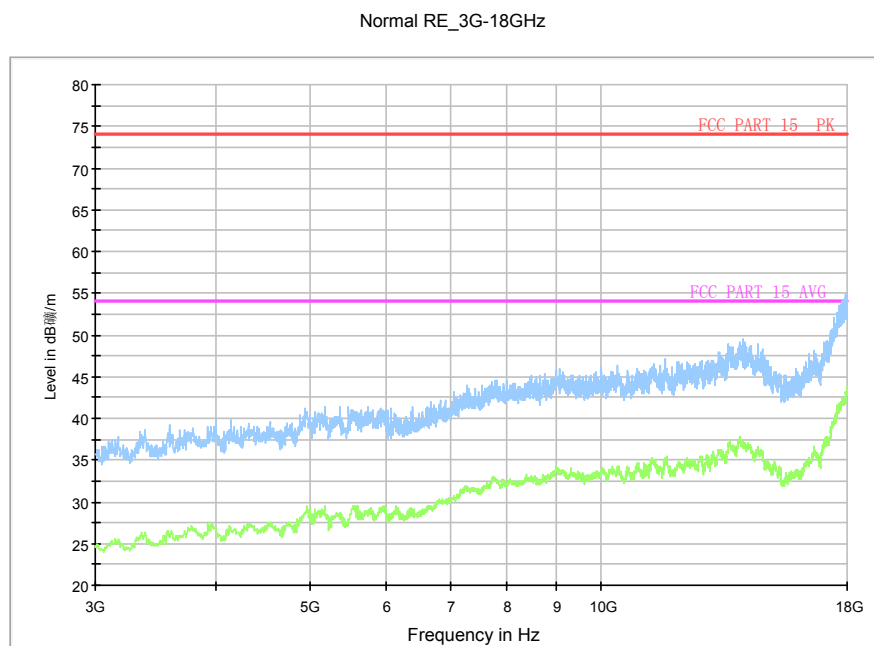


Fig.70. Radiated emission: $\pi/4$ DQPSK, Channel 0, 3 GHz - 18 GHz

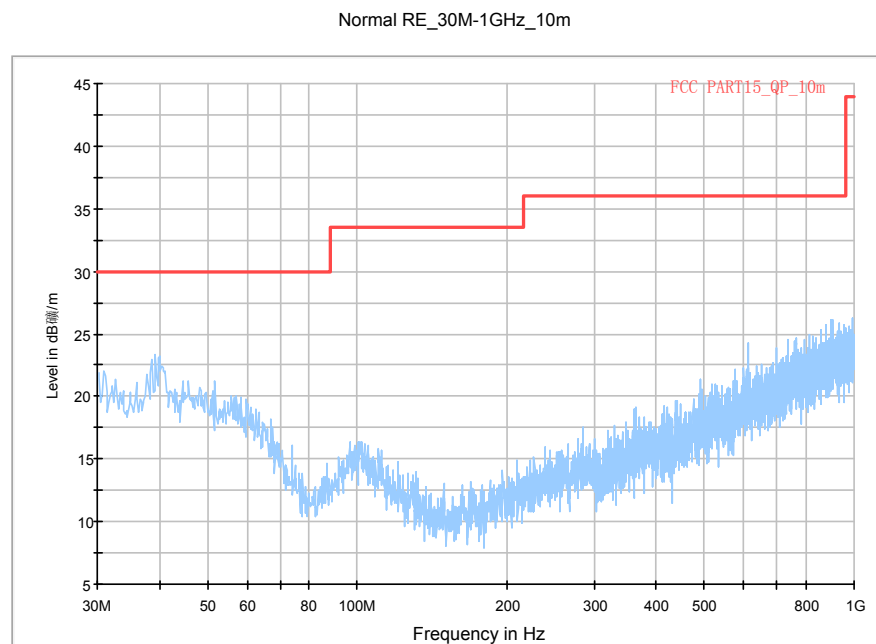


Fig.71. Radiated emission: $\pi/4$ DQPSK, Channel 39, 30 MHz - 1 GHz

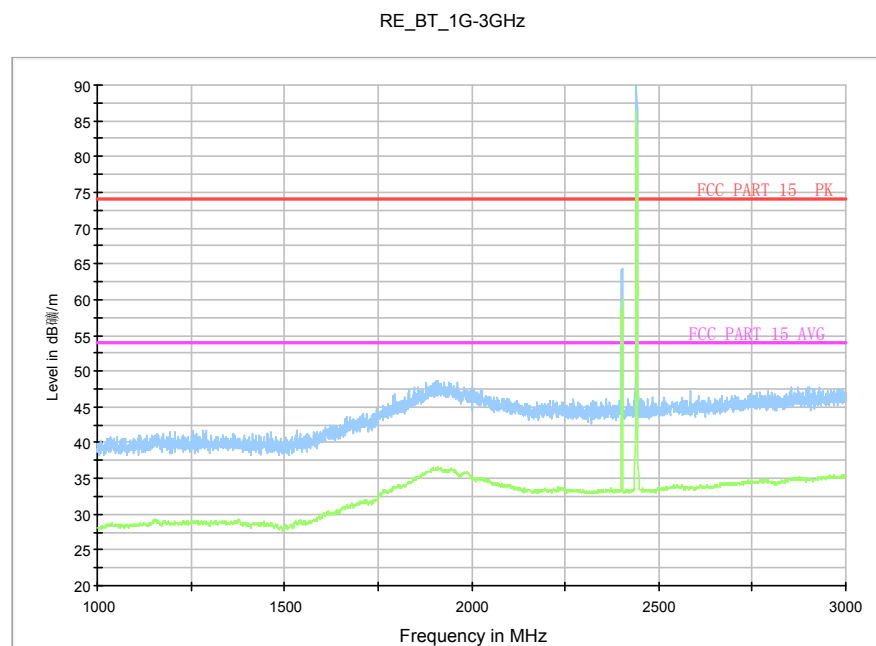


Fig.72. Radiated emission: $\pi/4$ DQPSK, Channel 39, 1 GHz - 3 GHz

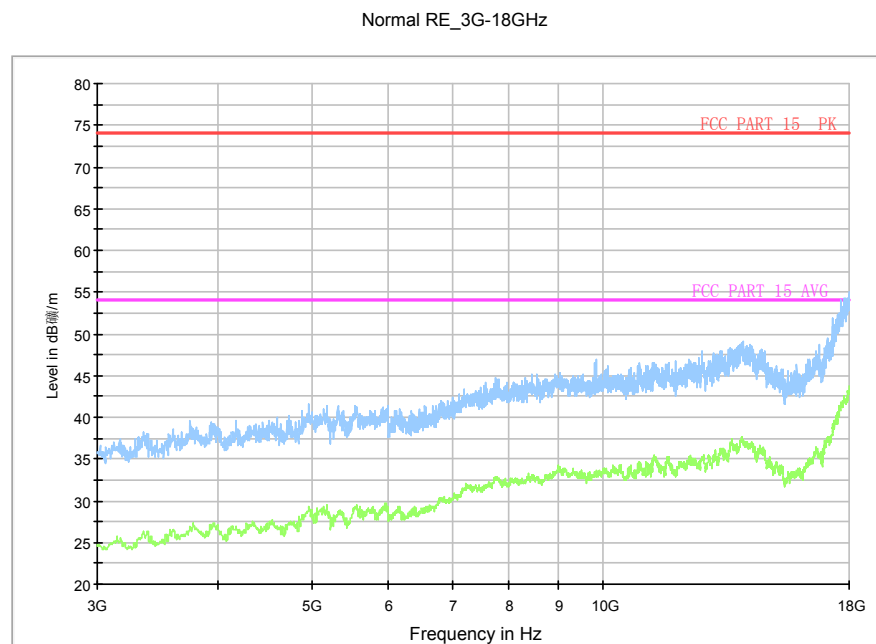


Fig.73. Radiated emission: $\pi/4$ DQPSK, Channel 39, 3 GHz - 18 GHz

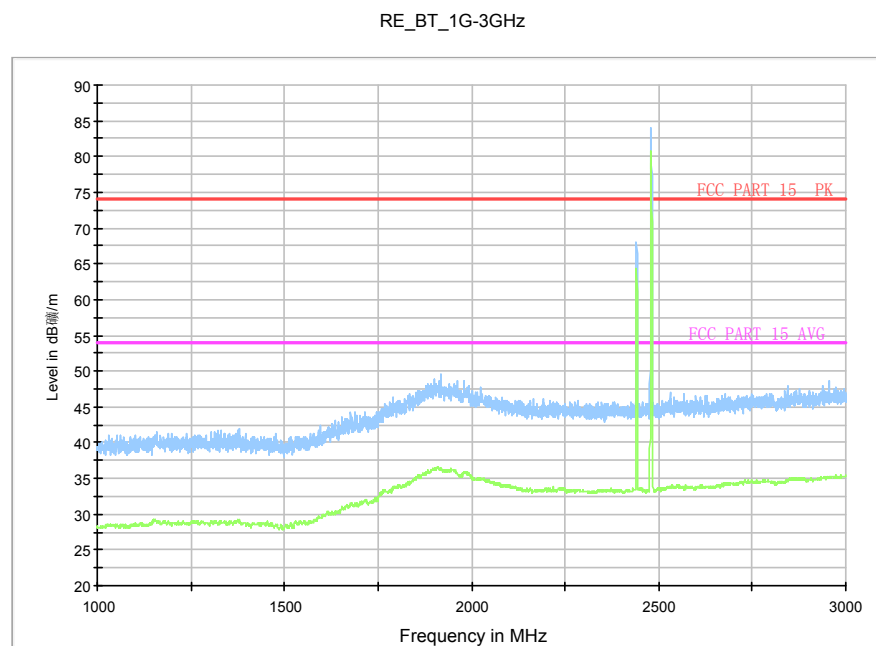


Fig.74. Radiated emission: $\pi/4$ DQPSK, Channel 78, 1 GHz - 3 GHz

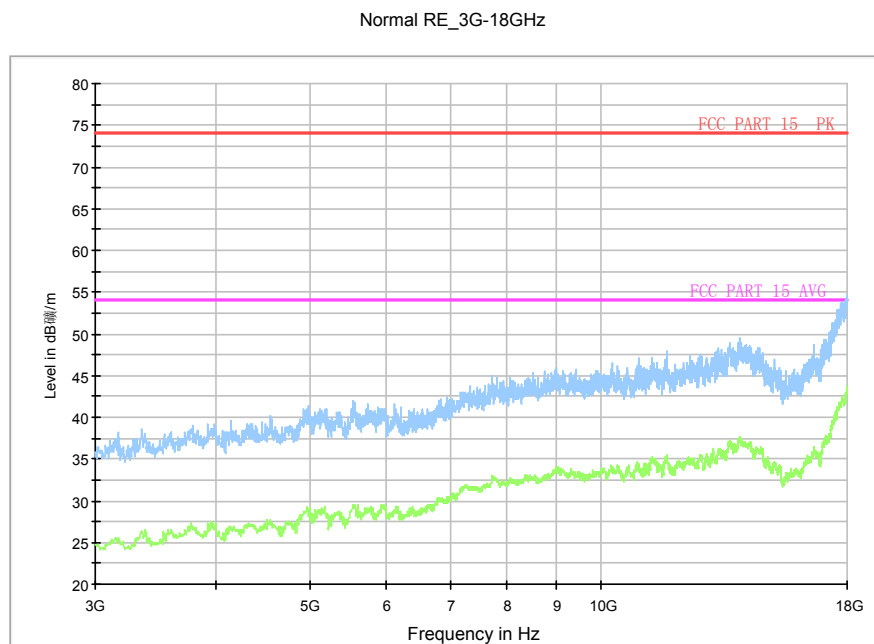


Fig.75. Radiated emission: $\pi/4$ DQPSK, Channel 78, 3 GHz - 18 GHz

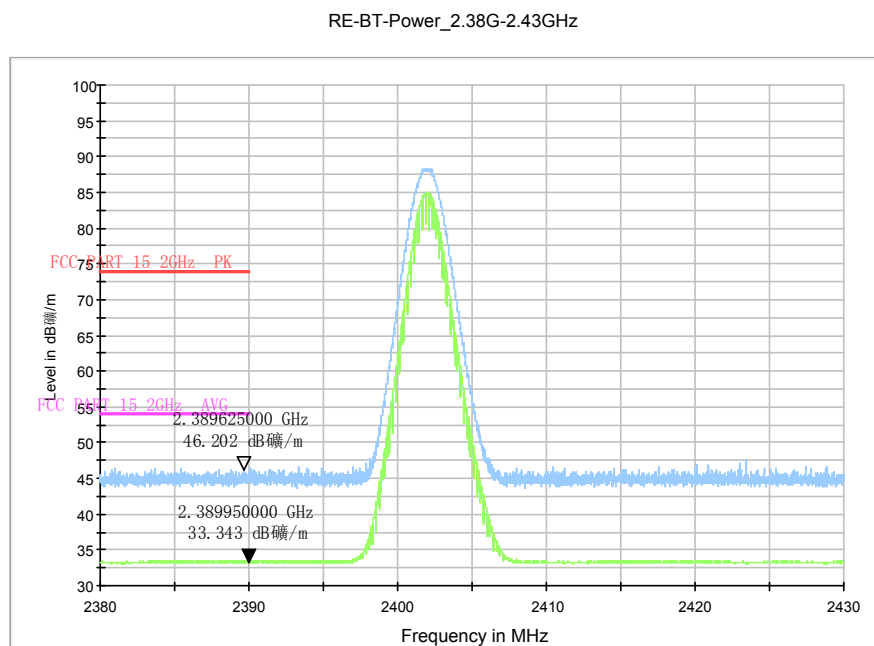


Fig.76. Radiated emission (Power): $\pi/4$ DQPSK, low channel

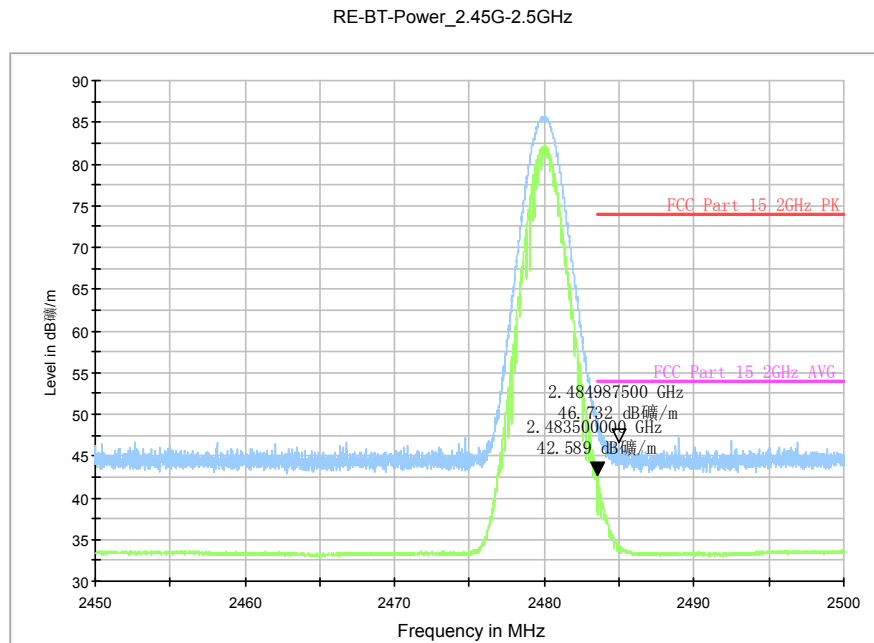


Fig.77. Radiated emission (Power): $\pi/4$ DQPSK, high channel

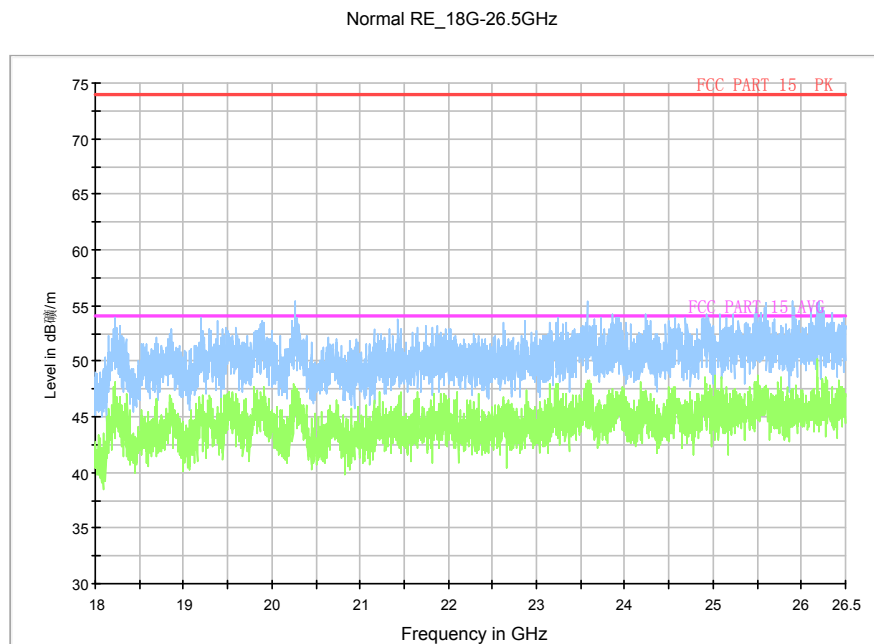


Fig.78. Radiated emission: $\pi/4$ DQPSK, 18 GHz - 26 GHz

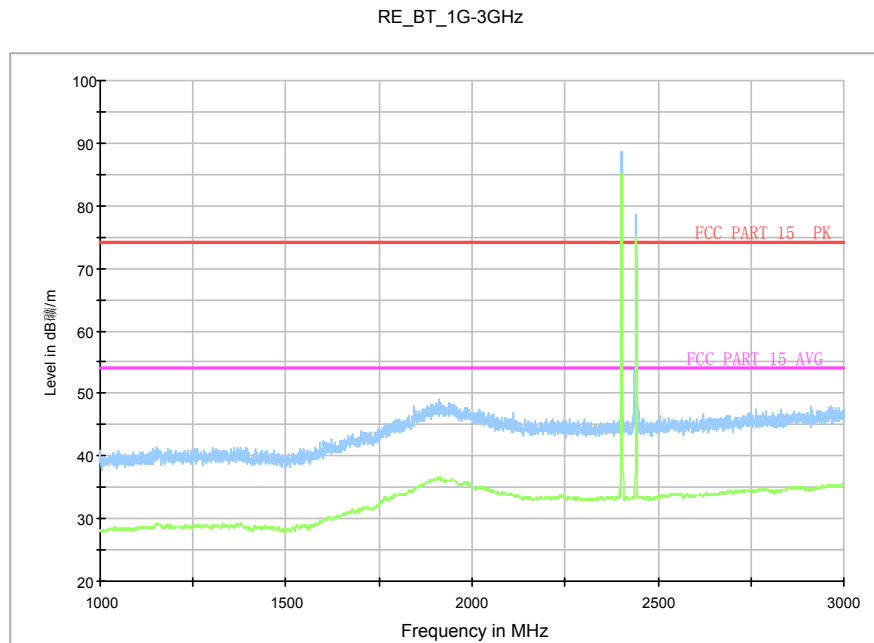


Fig.79. Radiated emission: 8DPSK, Channel 0, 1 GHz - 3 GHz

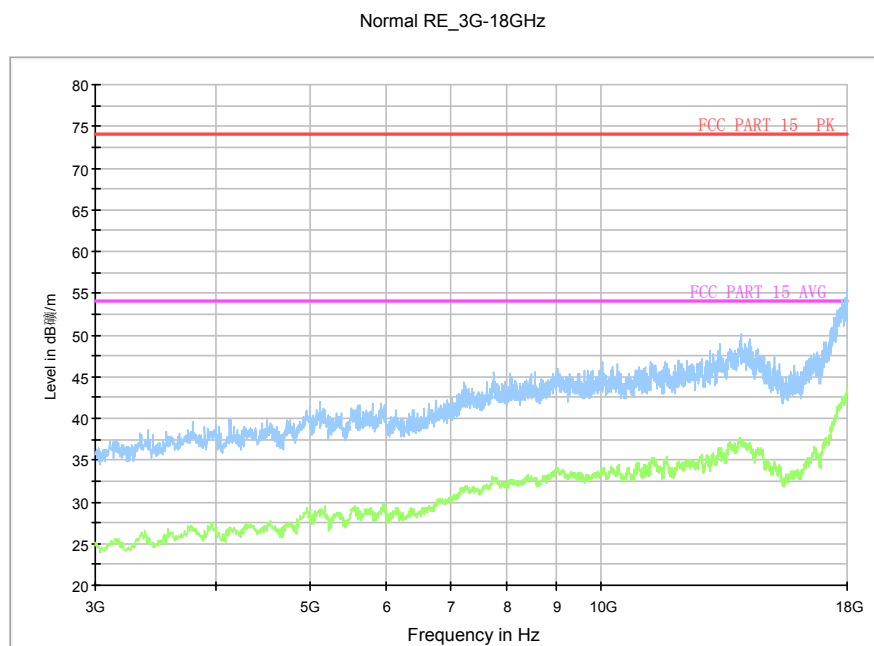


Fig.80. Radiated emission: 8DPSK, Channel 0, 3 GHz - 18 GHz

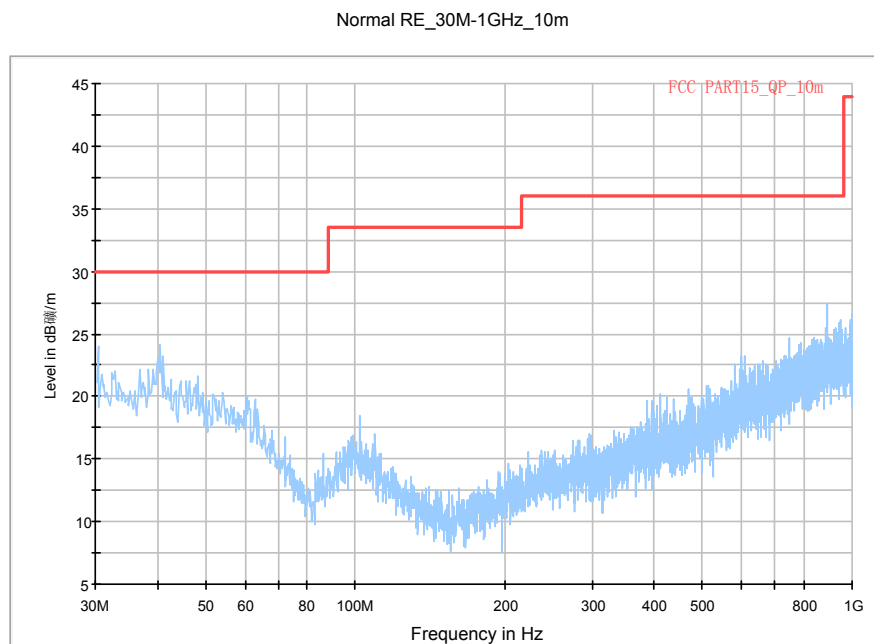


Fig.81. Radiated emission: 8DPSK, Channel 39, 30 MHz - 1 GHz

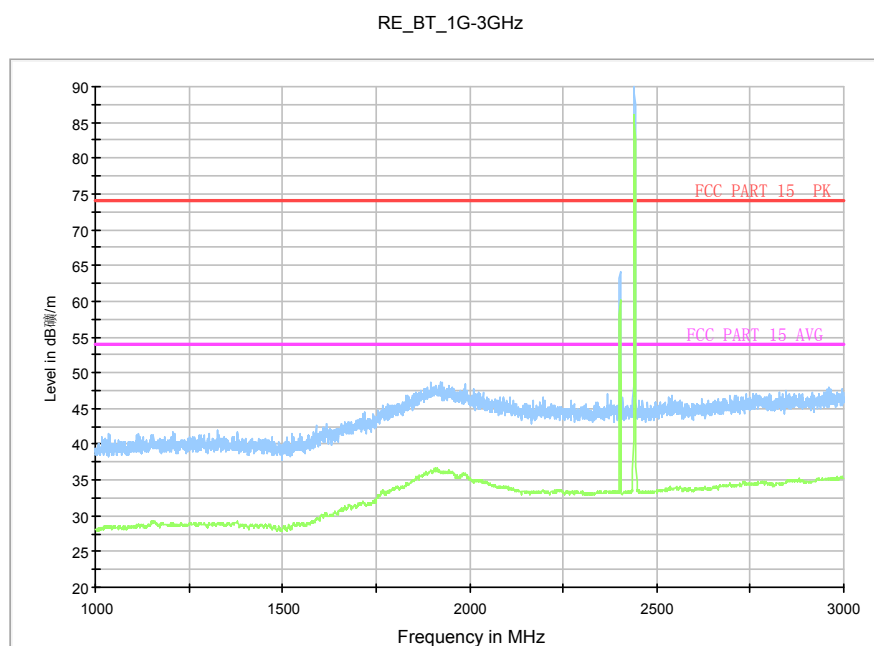


Fig.82. Radiated emission: 8DPSK, Channel 39, 1 GHz - 3 GHz

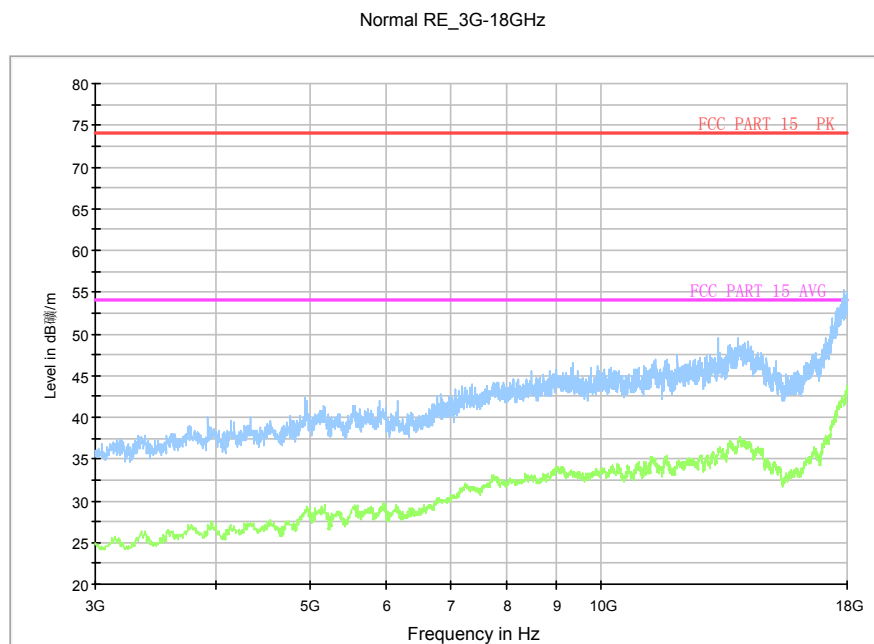


Fig.83. Radiated emission: 8DPSK, Channel 39, 3 GHz - 18 GHz

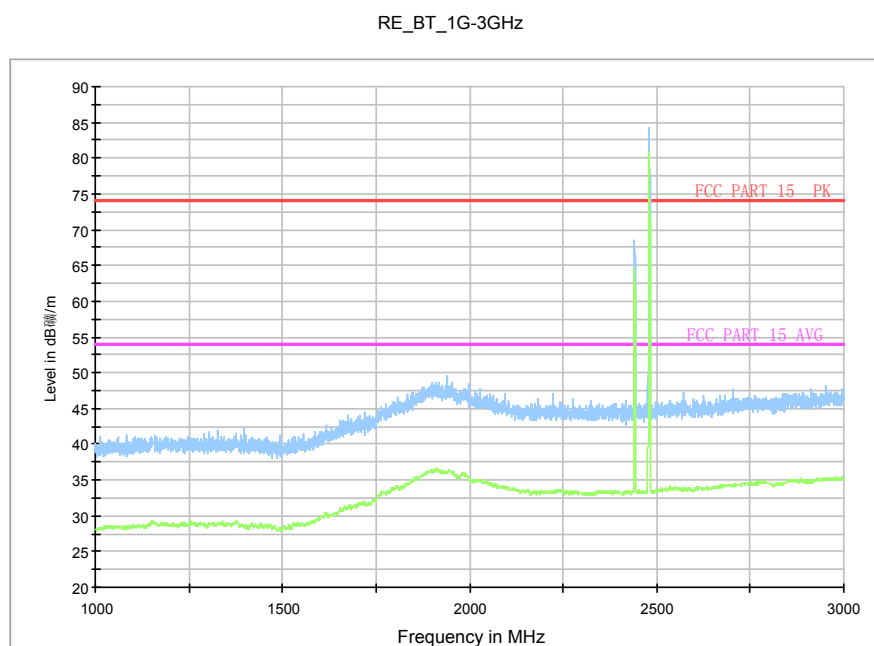


Fig.84. Radiated emission: 8DPSK, Channel 78, 1 GHz - 3 GHz

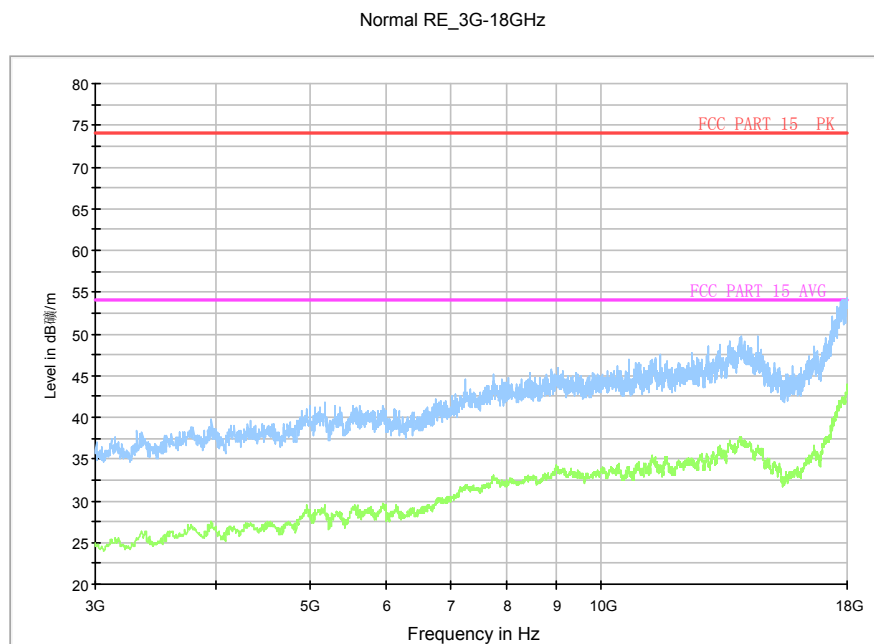


Fig.85. Radiated emission: 8DPSK, Channel 78, 3 GHz - 18 GHz

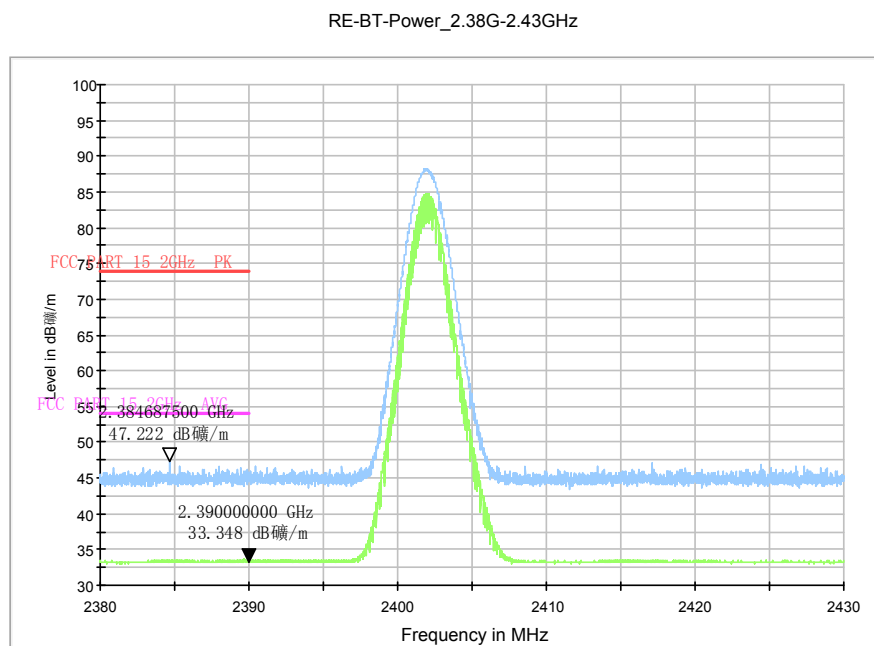


Fig.86. Radiated emission (Power): 8DPSK, low channel

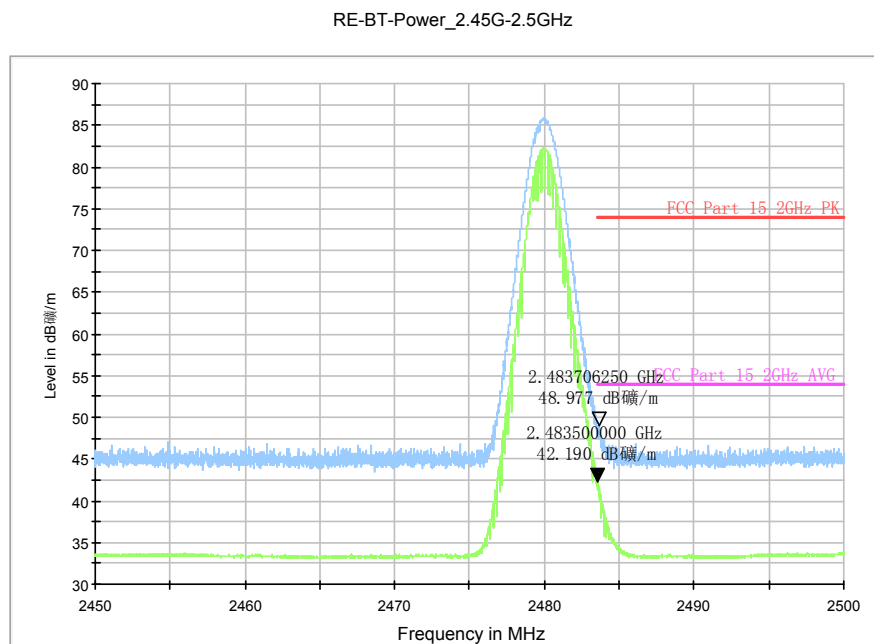


Fig.87. Radiated emission (Power): 8DPSK, high channel

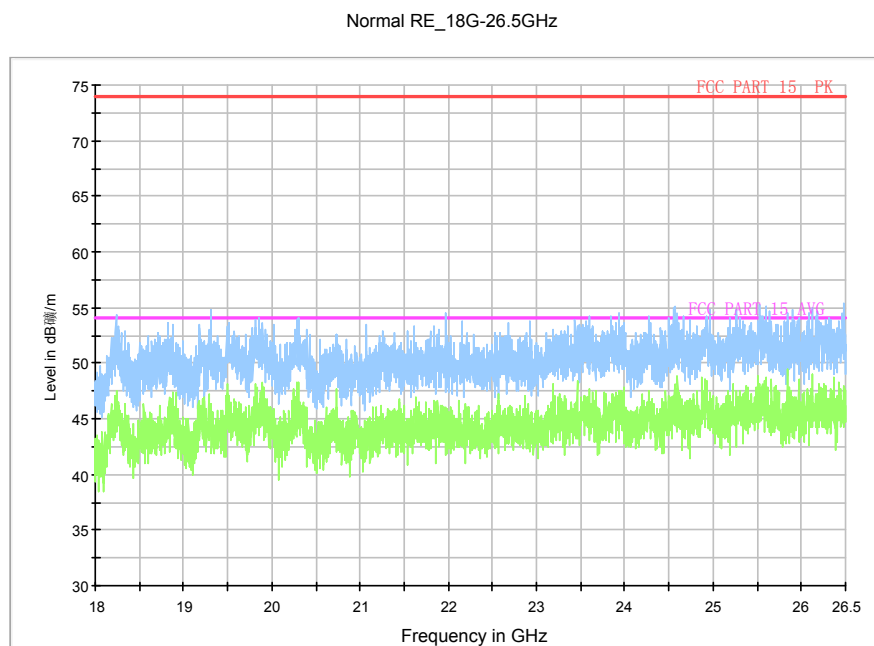


Fig.88. Radiated emission: 8DPSK, 18 GHz - 26 GHz

A.6. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW $\geq$ RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.89	104.01	P
		Fig.90		
	DH3	Fig.91	175.33	P
		Fig.92		
	DH5	Fig.93	208.56	P
		Fig.94		

For $\pi/4$ DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.95	107.00	P
		Fig.96		
	DH3	Fig.97	178.70	P
		Fig.98		
	DH5	Fig.99	191.27	P
		Fig.100		


For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.101	109.06	P
		Fig.102		
	DH3	Fig.103	177.21	P

	DH5	Fig.104	229.37	P
		Fig.105		
		Fig.106		


Conclusion: PASS

Test graphs as below:

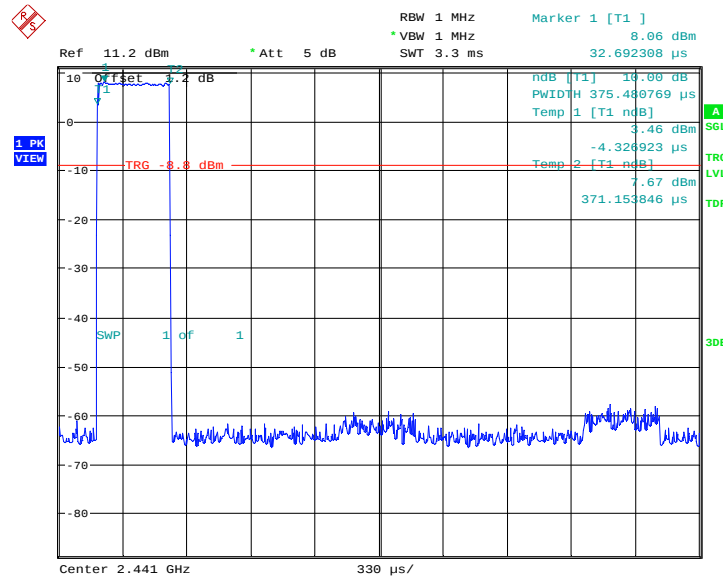


Date: 26.SEP.2014 17:06:26

Fig.89. Time of occupancy (Dwell Time): Channel 39, Packet DH1

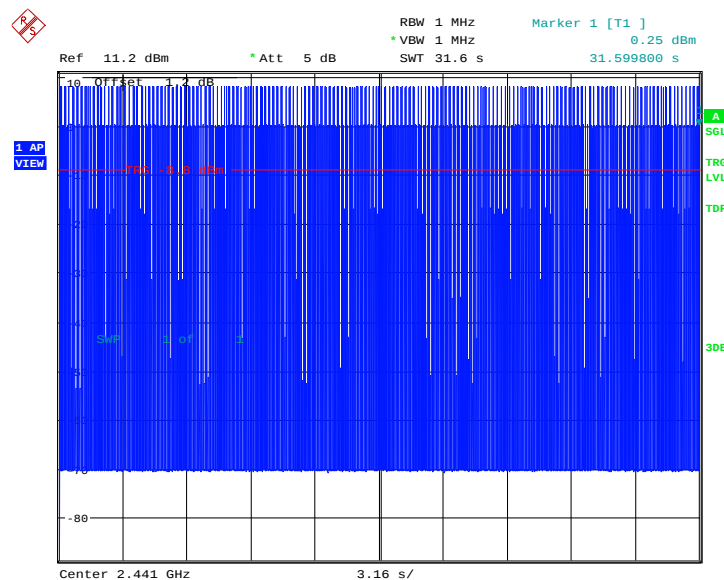


Date: 26.SEP.2014 17:06:15

Fig.90. Number of Transmissions Measurement:Channel 39,Packet DH1

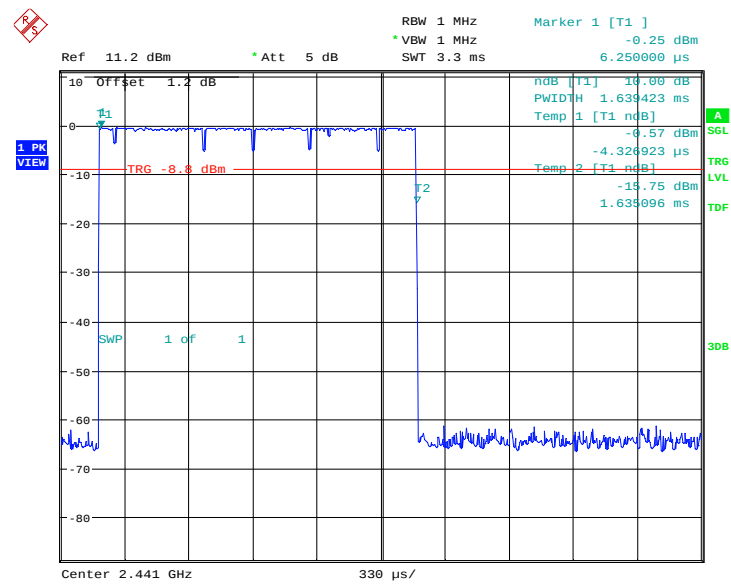


Date: 26.SEP.2014 17:07:46

Fig.91. Time of occupancy (Dwell Time): Channel 39, Packet DH3

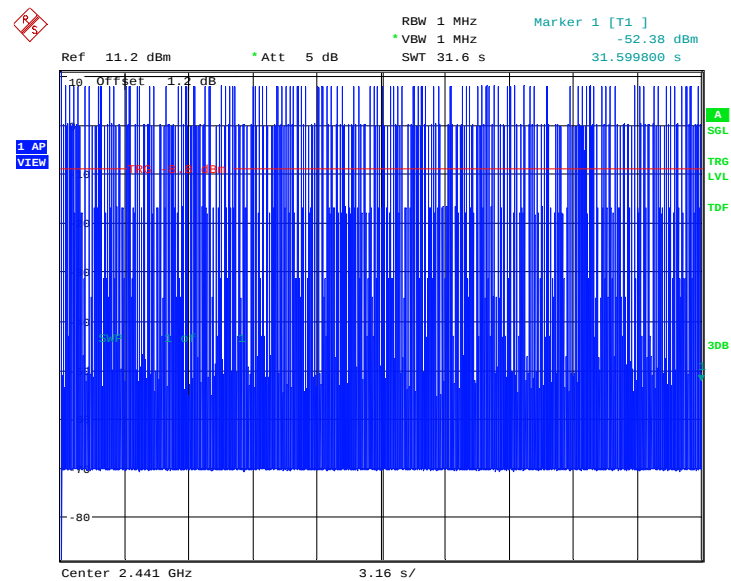

Date: 26.SEP.2014 17:07:34

Fig.92. Number of Transmissions Measurement:Channel 39,Packet DH3




The screenshot displays the Rohde & Schwarz Spectrum Analyzer (SA) interface. The main plot area shows a spectral plot with a red horizontal line at -50.97 dBm and a blue trace showing signal activity. The plot is titled "Offset 1.2 dB" and "T1". The y-axis is labeled "dBm" and ranges from -80 to 10. The x-axis is labeled "Center 2.441 GHz" and "3.16 s/". The plot shows a dense blue trace with a red horizontal line at -50.97 dBm. The plot is titled "Offset 1.2 dB" and "T1". The y-axis is labeled "dBm" and ranges from -80 to 10. The x-axis is labeled "Center 2.441 GHz" and "3.16 s/".

Key parameters and settings visible in the interface include:

- RBW:** 1 MHz
- VBW:** 1 MHz
- SWT:** 31.6 s
- Ref:** 11.2 dBm
- Att:** 5 dB
- Marker 1 [T1]:** -50.97 dBm
- Offset:** 1.2 dB
- Center:** 2.441 GHz
- Scale:** 3.16 s/
- Y-axis:** dBm (range -80 to 10)
- X-axis:** Center 2.441 GHz, Scale 3.16 s/
- Buttons:** 1 AP, View
- Legend:** A SGL, TR6 LVL, TDF, 3DB


Date: 26.SEP.2014 17:08:48

©Copyright. All rights reserved by CTTL.

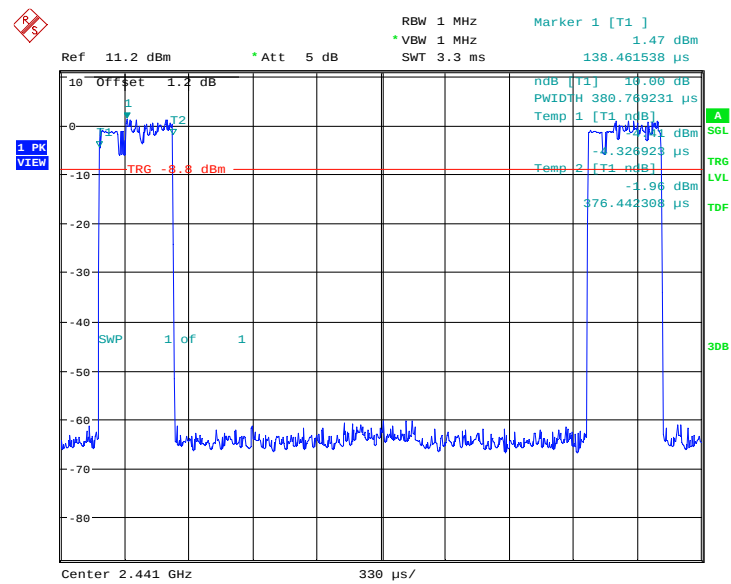


Date: 26.SEP.2014 16:30:52

Fig.95. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

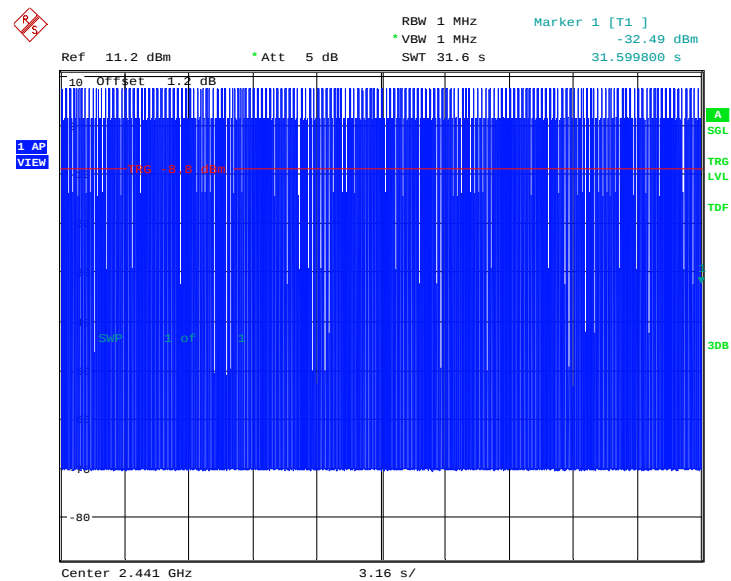


Date: 26.SEP.2014 16:30:40

Fig.96. Number of Transmissions Measurement:Channel 39,Packet 2-DH1

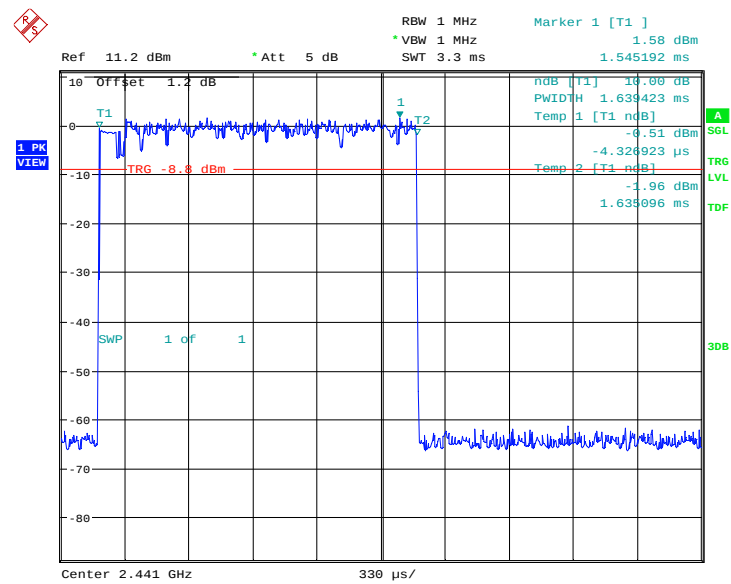


Date: 26.SEP.2014 16:32:11

Fig.97. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

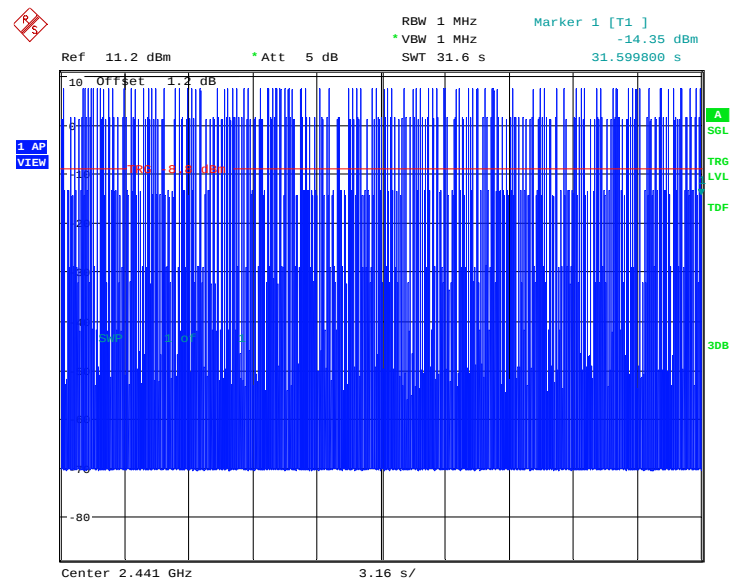


Date: 26.SEP.2014 16:31:59

Fig.98. Number of Transmissions Measurement:Channel 39,Packet 2-DH3

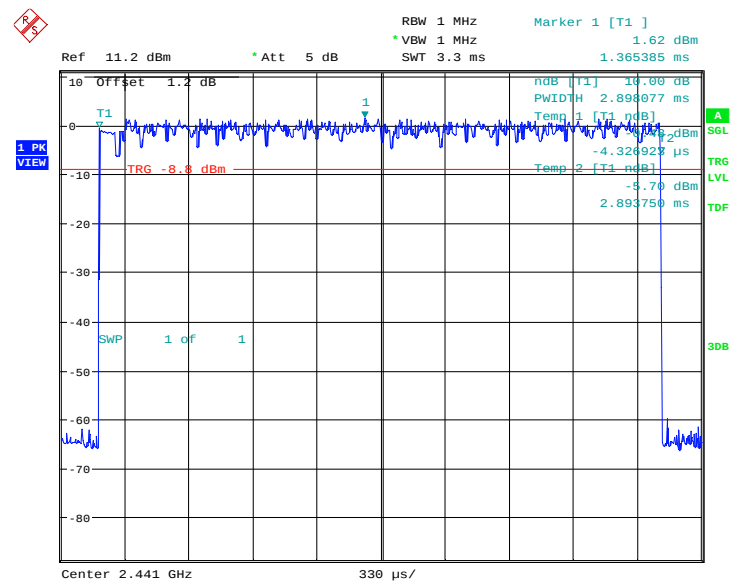


Date: 26.SEP.2014 16:33:25

Fig.99. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

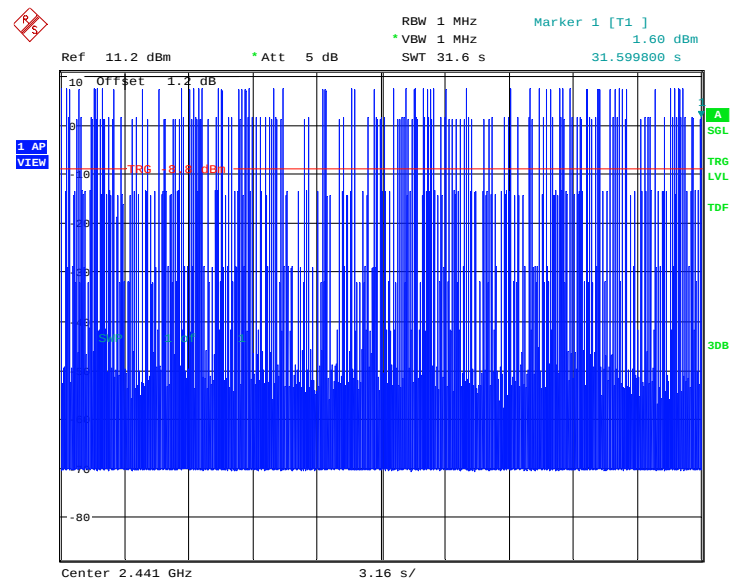


Date: 26.SEP.2014 16:33:13

Fig.100. Number of Transmissions Measurement:Channel 39,Packet 2-DH5

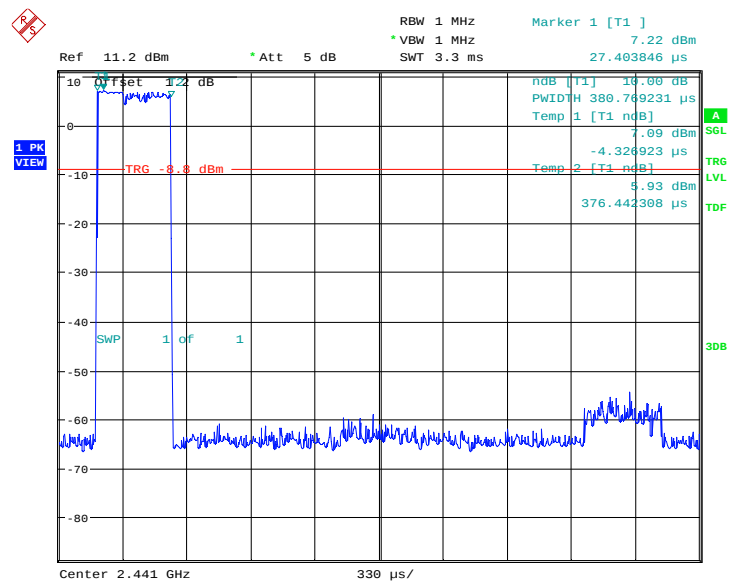


Date: 26.SEP.2014 17:10:23

Fig.101. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

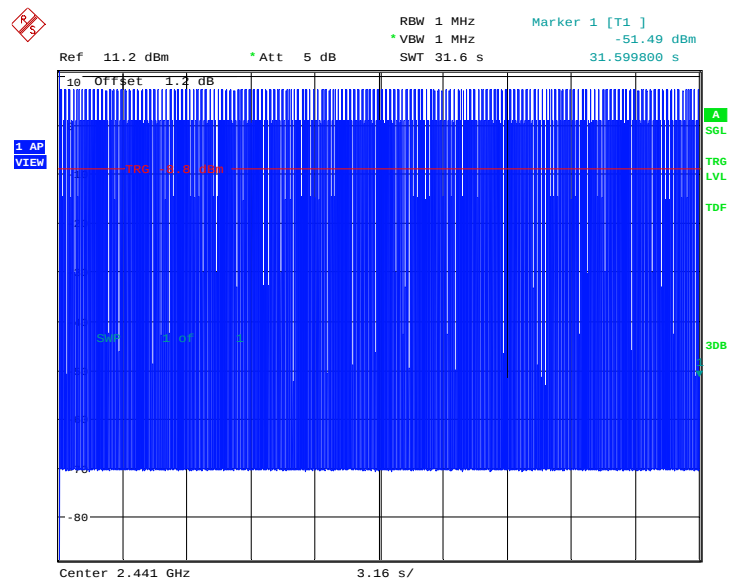


Date: 26.SEP.2014 17:10:12

Fig.102. Number of Transmissions Measurement:Channel 39,Packet 3-DH1

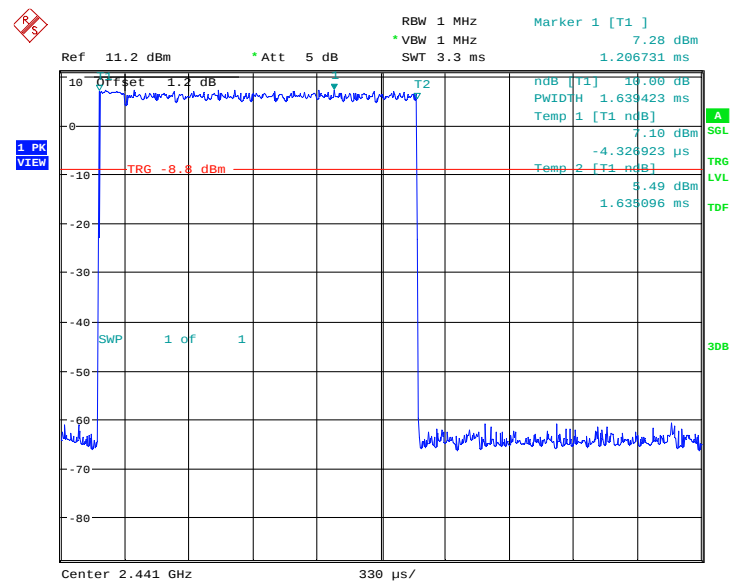


Date: 26.SEP.2014 17:11:40

Fig.103. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

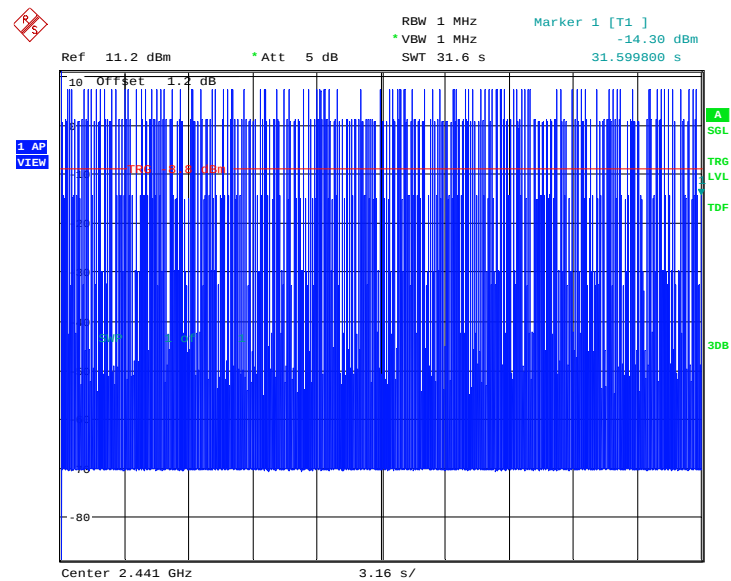

Date: 26.SEP.2014 17:11:28

Fig.104. Number of Transmissions Measurement: Channel 39, Packet 3-DH3



The screenshot shows the Keysight E67 Series Spectrum Analyzer interface. At the top left, there is a red diamond icon with a white 'A' and a blue '1 AP View' button. The main display area shows a spectrum plot with a blue signal trace. The plot has a grid with major lines every 10 dB and minor lines every 2 dB. The y-axis is labeled from -10 to -80. The x-axis is labeled from 2.441 GHz to 3.16 s/. The plot shows a noisy signal with a peak level around -10 dB. A red horizontal line is drawn across the plot at approximately -10 dB, labeled 'TRF -8.8 dBm'. A green horizontal line is drawn across the plot at approximately -54.55 dB, labeled 'Marker 1 [T1]'. The plot also shows a green signal trace labeled 'SGL' and a green signal trace labeled 'TDF'. The plot is labeled 'Offset 1.2 dB' and 'Att 5 dB'. The plot also shows 'RBW 1 MHz', 'VBW 1 MHz', and 'SWT 31.6 s'. The plot is labeled 'Ref 11.2 dBm' and '31.599800 s'.

Ref 11.2 dBm * Att 5 dB RBW 1 MHz Marker 1 [T1] -54.55 dBm
 VBW 1 MHz SWT 31.6 s 31.599800 s

Offset 1.2 dB

1 AP View

TRF -8.8 dBm

SGL

TDF

Center 2.441 GHz 3.16 s/

Date: 26.SEP.2014 17:12:43

Fig.106. Number of Transmissions Measurement:Channel 39,Packet 3-DH5

A.7. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 20kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.107	826.92	NA
39	Fig.108	870.19	NA
78	Fig.109	870.19	NA

For $\pi/4$ DQPSK


Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.110	1274.04	NA
39	Fig.111	1259.62	NA
78	Fig.112	1269.23	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.113	1269.23	NA
39	Fig.114	1259.62	NA
78	Fig.115	1278.85	NA


Conclusion: NA

Test graphs as below:

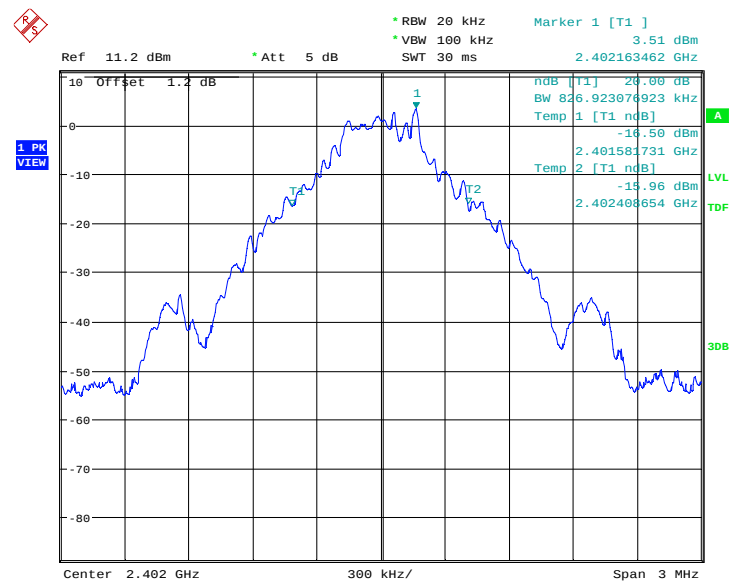


Date: 26.SEP.2014 16:12:35

Fig.107. 20dB Bandwidth: GFSK, Channel 0

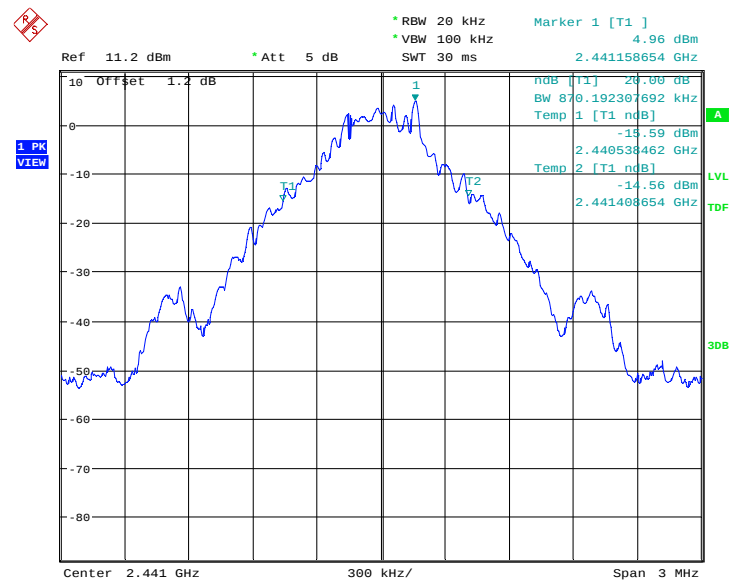


Date: 26.SEP.2014 16:13:07

Fig.108. 20dB Bandwidth: GFSK, Channel 39

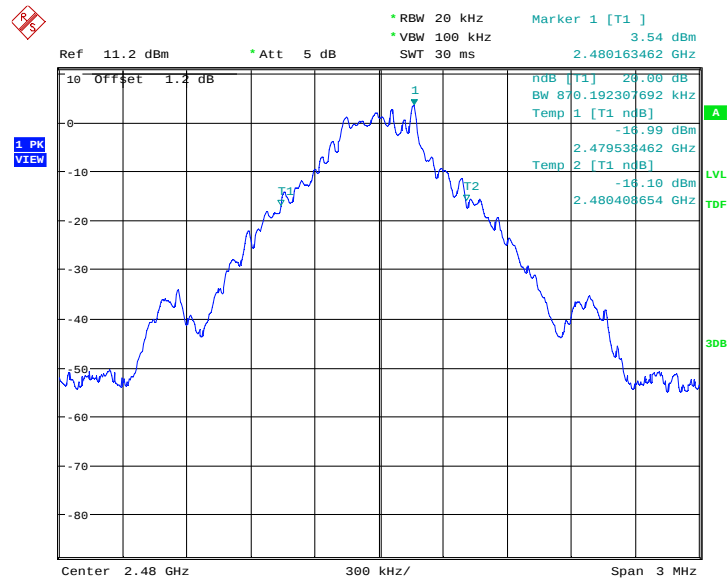


Date: 26.SEP.2014 16:13:39

Fig.109. 20dB Bandwidth: GFSK, Channel 78

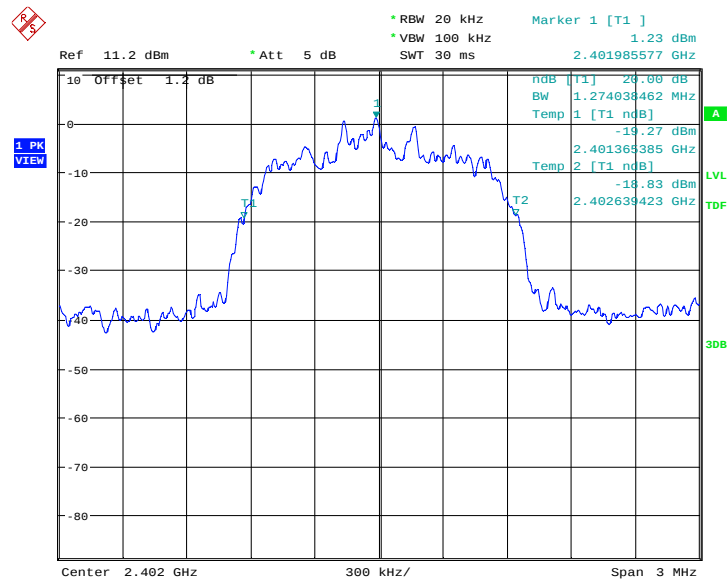


Date: 26.SEP.2014 16:33:59

Fig.110. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

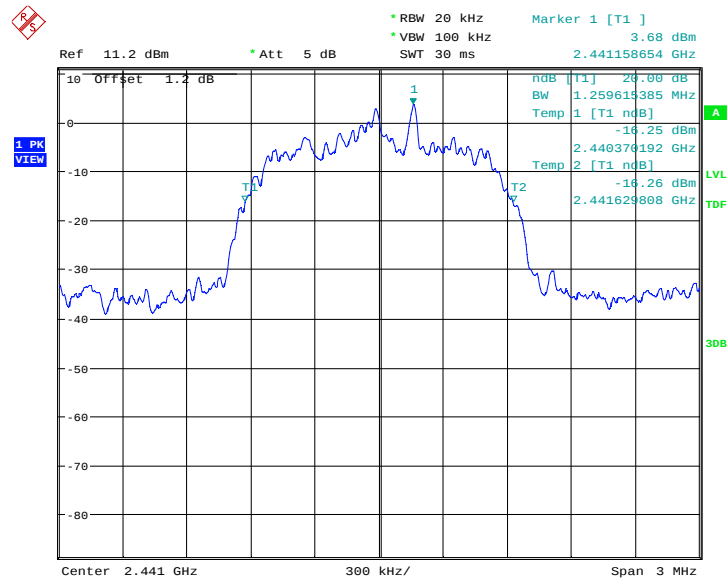


Date: 26.SEP.2014 16:34:31

Fig.111. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

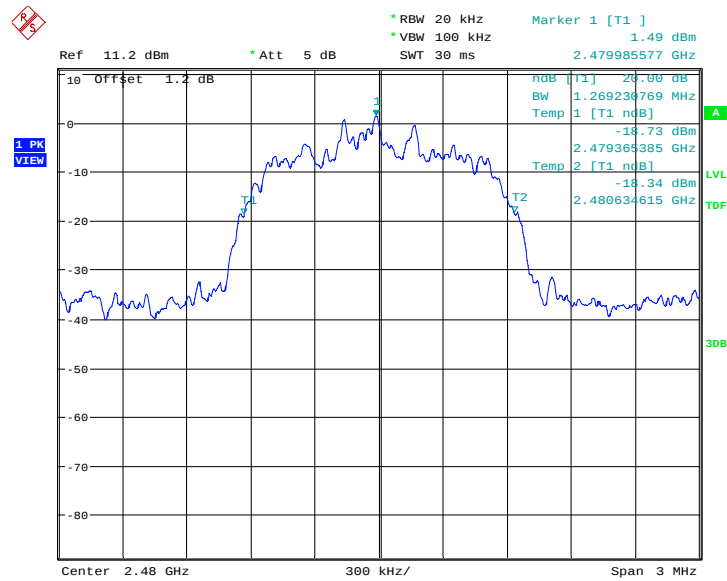


Date: 26.SEP.2014 16:35:03

Fig.112. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

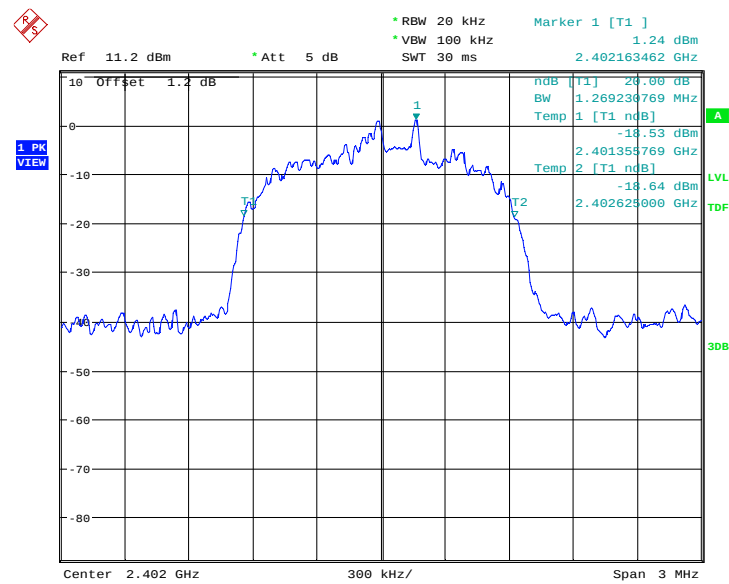


Date: 26.SEP.2014 16:55:25

Fig.113. 20dB Bandwidth: 8DPSK, Channel 0

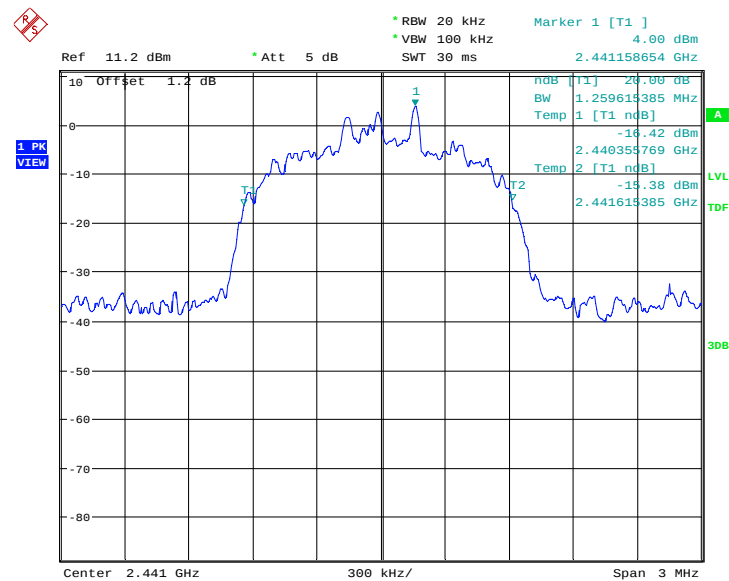

Date: 26.SEP.2014 16:55:57

Fig.114. 20dB Bandwidth: 8DPSK, Channel 39

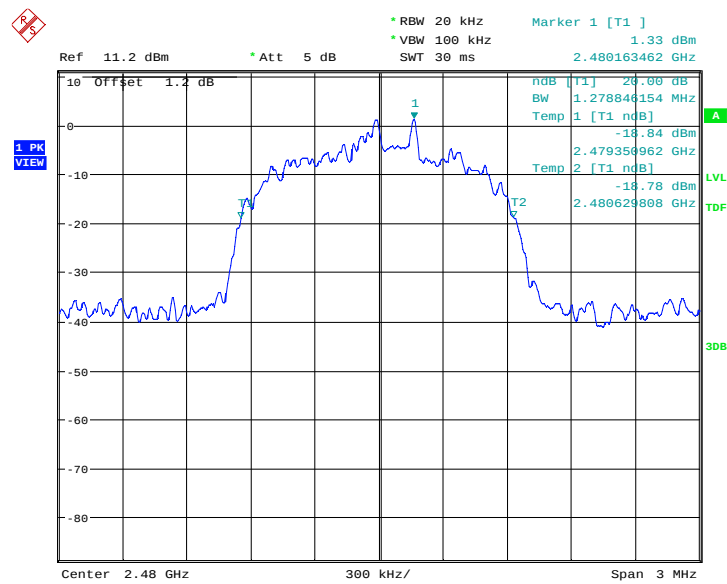

Date: 26.SEP.2014 16:56:29

Fig.115. 20dB Bandwidth: 8DPSK, Channel 78

A.8. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=1MHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.116	831.73	P

For $\pi/4$ DQPSK


Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.117	855.77	P

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.118	1004.81	P


Conclusion: PASS

Test graphs as below:

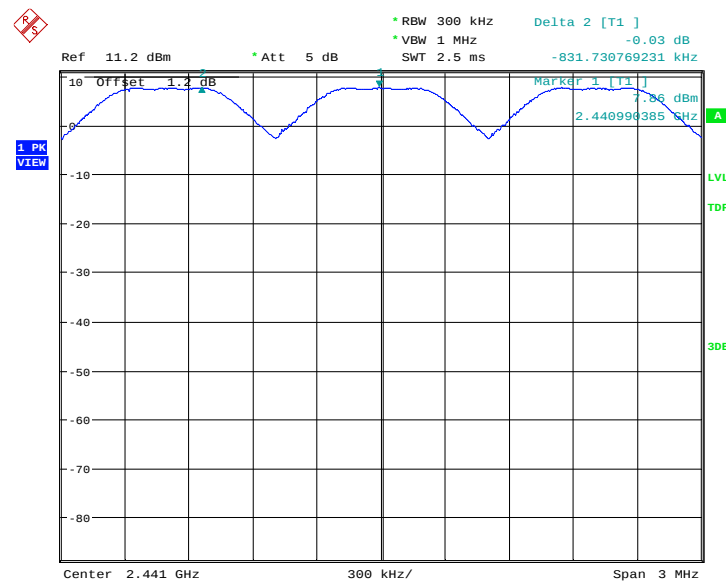


Date: 26.SEP.2014 16:15:43

Fig.116. Carrier frequency separation measurement: GFSK, Channel 39

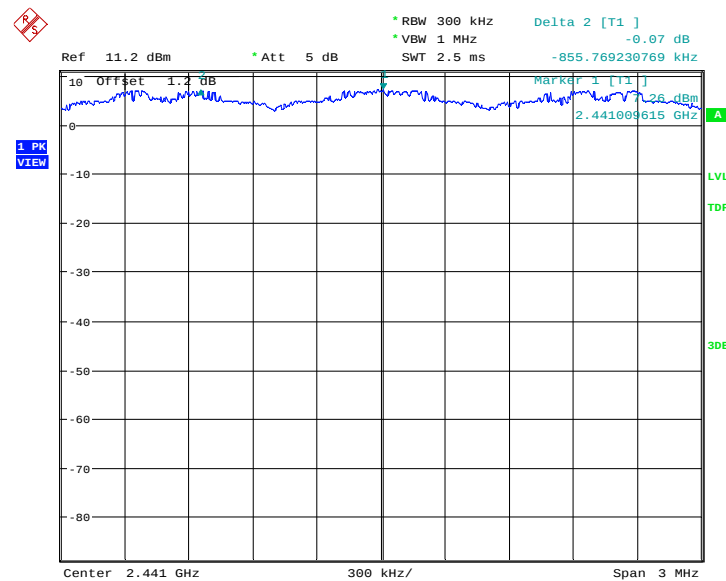

Date: 26.SEP.2014 16:37:08

Fig.117. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

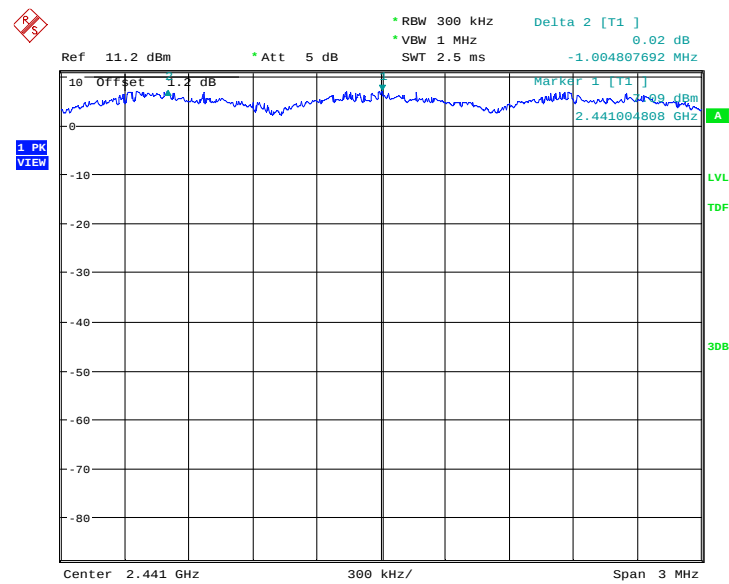

Date: 26.SEP.2014 16:58:34

Fig.118. Carrier frequency separation measurement: 8DPSK, Channel 39

A.9. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.119	79	P
40~78	Fig.120		

For $\pi/4$ DQPSK


Channel	Number of hopping channels		Conclusion
0~39	Fig.121	79	P
40~78	Fig.122		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.123	79	P
40~78	Fig.124		


Conclusion: PASS

Test graphs as below:

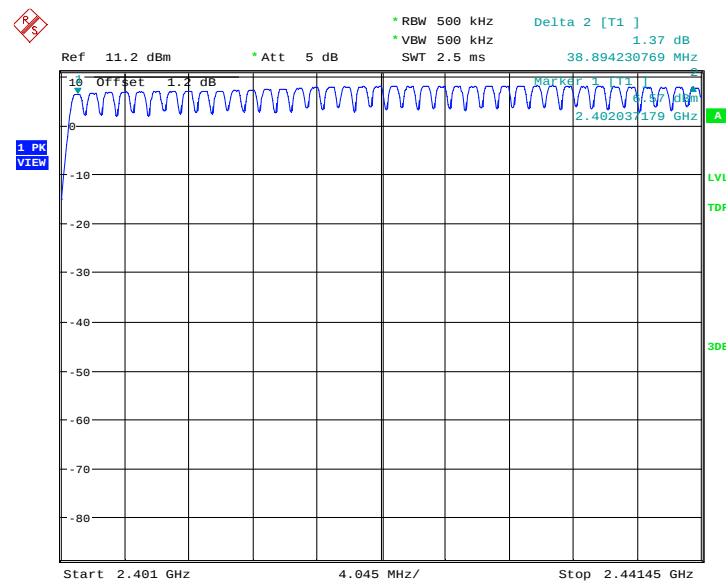


Date: 26.SEP.2014 16:17:47

Fig.119. Number of hopping frequencies: GFSK, Channel 0 - 39

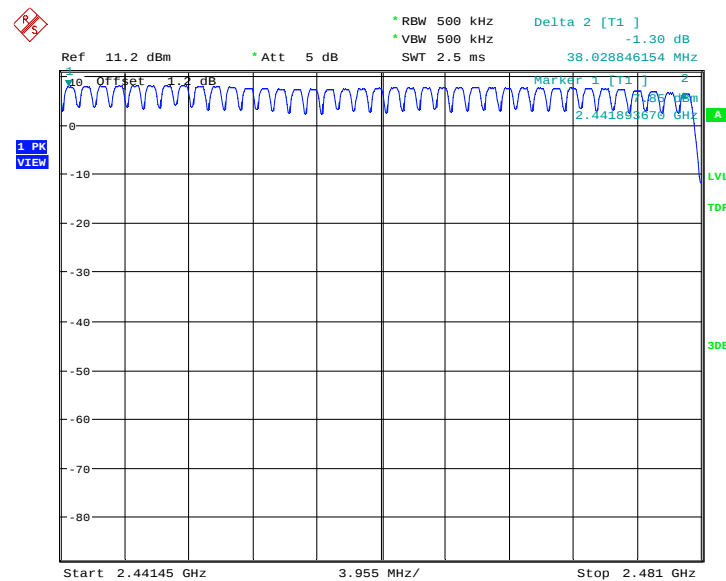


Date: 26.SEP.2014 16:19:50

Fig.120. Number of hopping frequencies: GFSK, Channel 40 - 78

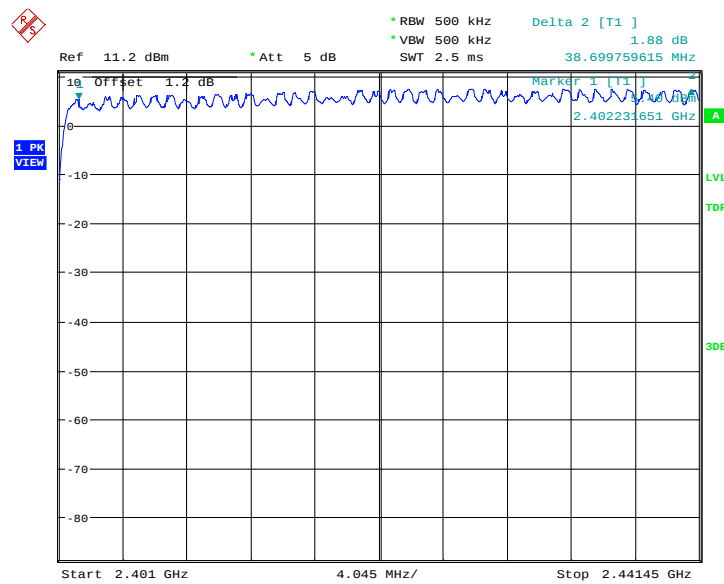


Date: 26.SEP.2014 16:39:12

Fig.121. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

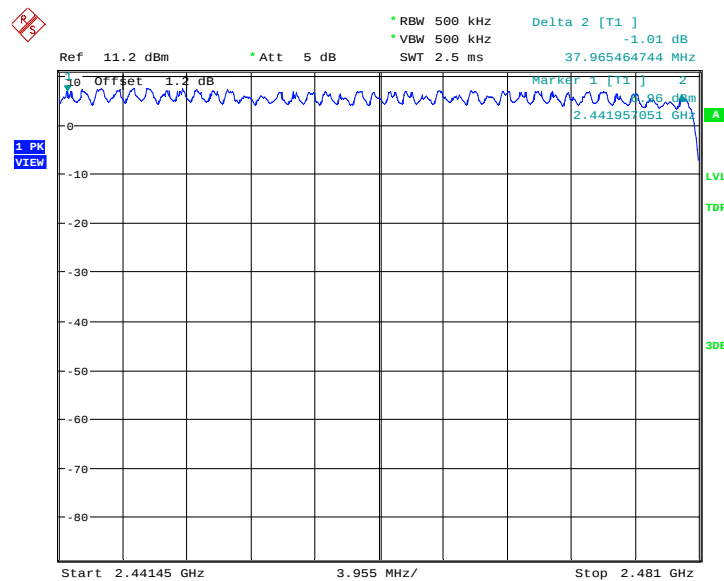


Date: 26.SEP.2014 16:41:14

Fig.122. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

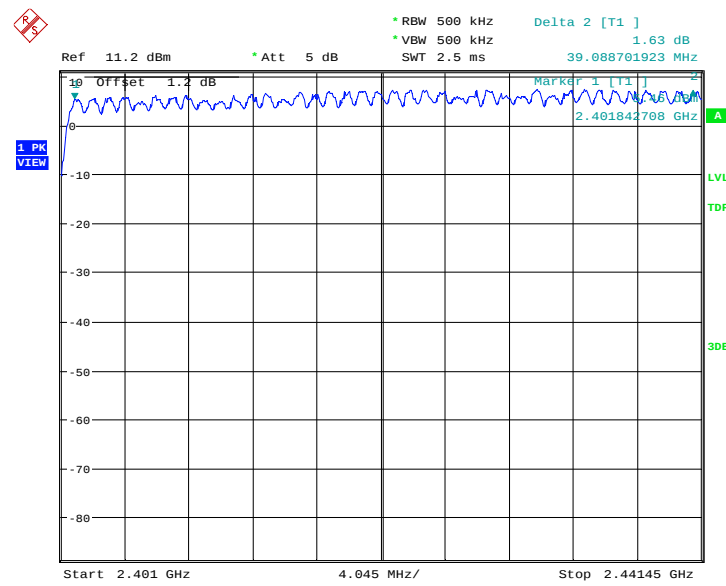

Date: 26.SEP.2014 17:00:38

Fig.123. Number of hopping frequencies: 8DPSK, Channel 0 - 39

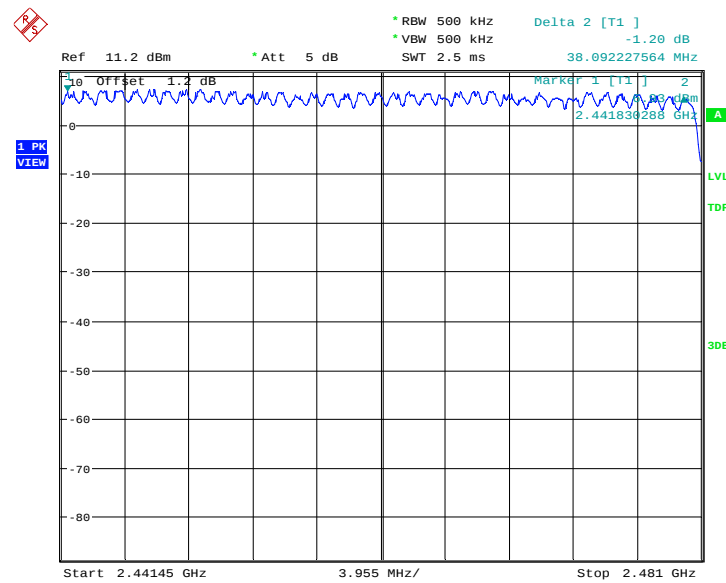

Date: 26.SEP.2014 17:02:41

Fig.124. Number of hopping frequencies: 8DPSK, Channel 40 - 78

A.10. AC Powerline Conducted Emission**Test Condition**

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:**Bluetooth (Quasi-peak Limit)**

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10

Conclusion: PASS

Test graphs as below:

Traffic:

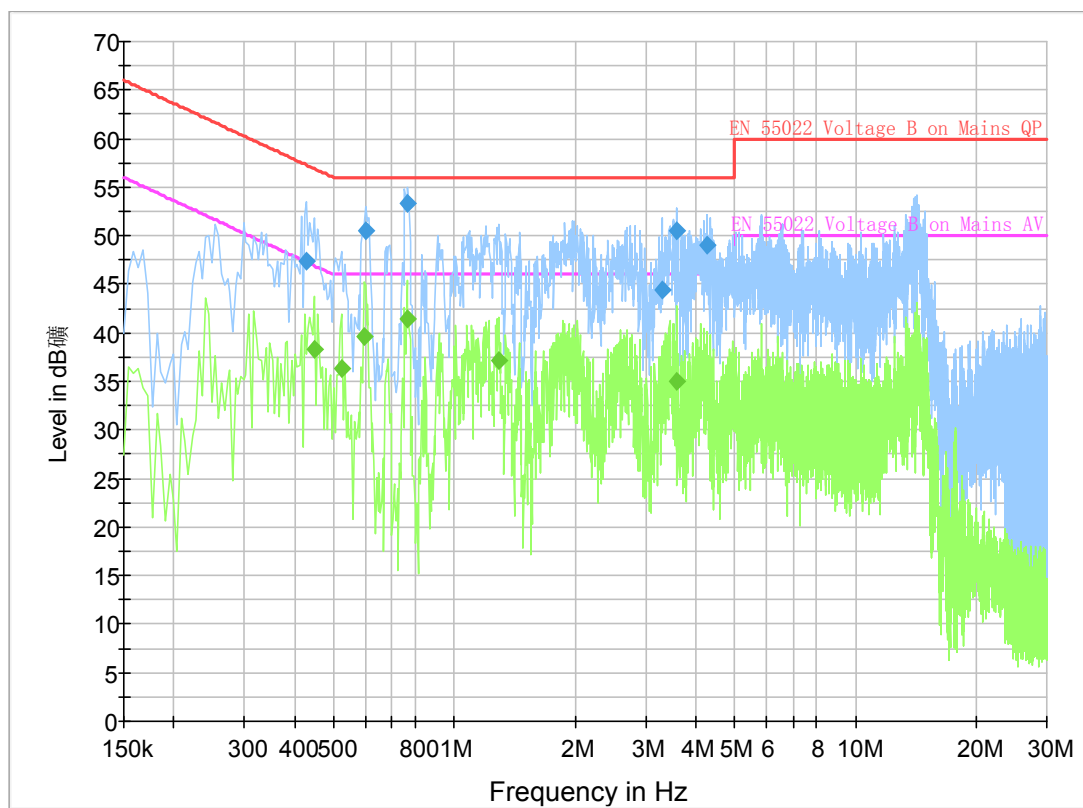


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429000	47.4	2000.0	9.000	On	N	20.0	9.9	57.3	
0.600000	50.5	2000.0	9.000	On	N	20.0	5.5	56.0	
0.766500	53.3	2000.0	9.000	On	L1	19.9	2.7	56.0	
3.300000	44.3	2000.0	9.000	On	N	19.7	11.7	56.0	
3.592500	50.5	2000.0	9.000	On	L1	19.7	5.5	56.0	
4.276500	49.0	2000.0	9.000	On	L1	19.7	7.0	56.0	

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.447000	38.3	2000.0	9.000	On	N	20.0	8.6	46.9	
0.523500	36.4	2000.0	9.000	On	N	20.1	9.6	46.0	
0.595500	39.6	2000.0	9.000	On	L1	20.0	6.4	46.0	
0.762000	41.5	2000.0	9.000	On	L1	19.9	4.5	46.0	
1.288500	37.2	2000.0	9.000	On	L1	19.9	8.8	46.0	
3.592500	35.0	2000.0	9.000	On	N	19.7	11.0	46.0	

Idle:

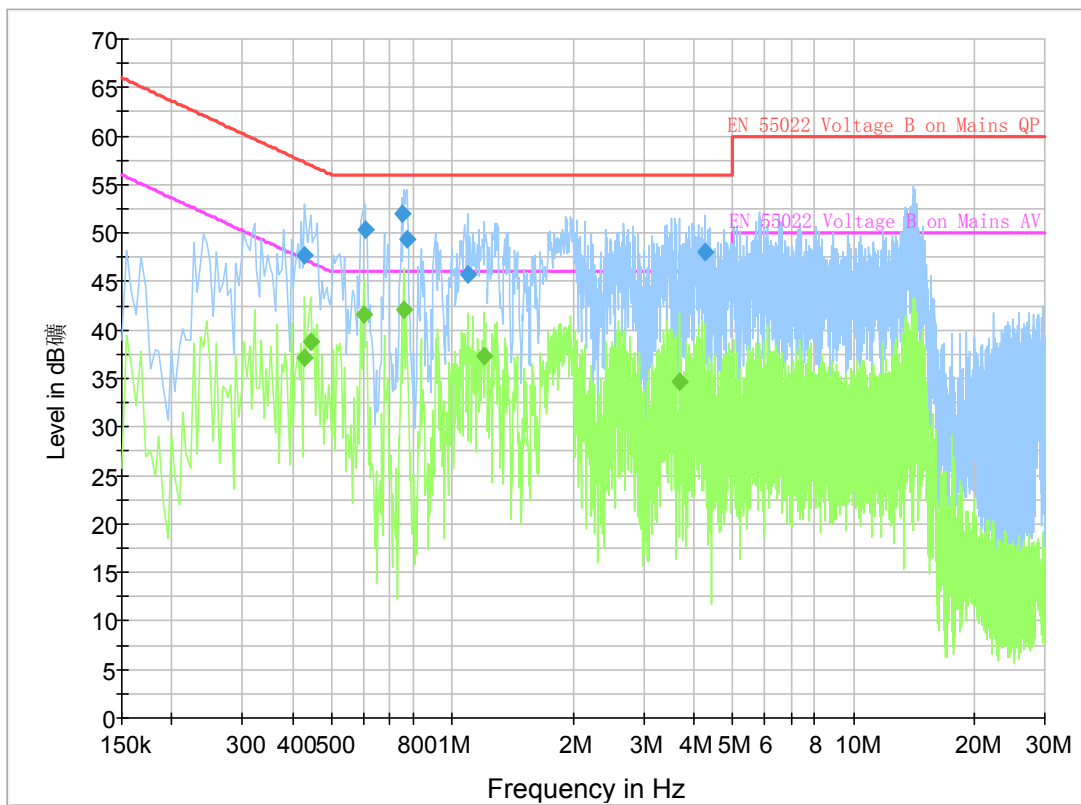

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429000	47.7	2000.0	9.000	On	N	20.0	9.6	57.3	
0.604500	50.3	2000.0	9.000	On	N	20.0	5.7	56.0	
0.748500	52.0	2000.0	9.000	On	N	19.9	4.0	56.0	
0.771000	49.4	2000.0	9.000	On	L1	19.9	6.6	56.0	
1.090500	45.8	2000.0	9.000	On	L1	19.8	10.2	56.0	
4.272000	48.1	2000.0	9.000	On	N	19.6	7.9	56.0	

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.429000	37.1	2000.0	9.000	On	N	20.0	10.1	47.3	
0.442500	38.9	2000.0	9.000	On	L1	20.0	8.1	47.0	
0.600000	41.6	2000.0	9.000	On	N	20.0	4.4	46.0	
0.757500	42.1	2000.0	9.000	On	L1	19.9	3.9	46.0	
1.198500	37.3	2000.0	9.000	On	L1	19.8	8.7	46.0	
3.673500	34.7	2000.0	9.000	On	N	19.7	11.3	46.0	

ANNEX B: Accreditation Certificate

 
China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(Registration No. CNAS L0570)
Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT <u>No.52, Huayuan North Road, Haidian District, Beijing, China</u>
<i>is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing and calibration.</i> <i>The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.</i>
Date of Issue: 2014-06-20 Date of Expiry: 2017-06-19 Date of Initial Accreditation: 1998-07-03 Date of Update: 2014-06-20
 Signed on behalf of China National Accreditation Service for Conformity Assessment
China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).
No.CNAS AL 2 0010044

END OF REPORT