
TEST REPORT

Report No.: SRTC2014-H024-E0052

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Marketing Name: ONE TOUCH 7040E

Product Model: Yaris-5

Applicant: TCT Mobile Limited

Manufacturer: TCT Mobile Limited

Specification: FCC Part 15, Subpart C (October 9, 2012 edition)

FCC ID: RAD520

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory	3
1.3 Applicant's details	3
1.4 Manufacturer's details	3
1.5 Application details	4
1.6 Reference specification	4
1.7 Information of EUT	4
1.7.1 General information	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details	5
2. Test information	7
2.1 Summary of the test results	7
2.2 Test result	8
2.2.1 Occupied Bandwidth	8
2.2.2 Peak Power Output	14
2.2.3 Spurious RF Conducted Emissions	21
2.2.4 Spurious Radiated Emissions	40
2.2.5 Band Edge Compliance	49
2.2.6 Dwell Time	68
2.2.7 Channel Separation	75
2.2.8 Number of Hopping Frequencies	77
2.2.9 AC Power line Conducted Emission	79
2.3. Measurement Uncertainty	81
2.4. List of test equipment	82
Appendix	83

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang
High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Grantee Code: RAD
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@tcl.com

1.4 Manufacturer's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang
High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@tcl.com

1.5 Application details

Date of reception of test sample: 9th September 2013

Date of test: 9th September 2013 to 25th July 2014

1.6 Reference specification

FCC Part 15, Subpart C (October 9, 2012 edition)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	RAD520
Frequency Range	2.4GHz~2.4835GHz
Number of Channel	79
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Duplex Mode	TDD
Channel Spacing	1MHz
Data Rate	1Mbps, 2 Mbps, 3 Mbps
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
Rated Power Supply Voltage	3.8V
HW Version	BAB33A000EC1
SW Version	AQU

1.7.2 EUT details

Product Name	Marketing Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	ONE TOUCH 7040E	Yaris-5	863603020000078

1.7.3 Auxiliary equipment details

Equipment	Charger
Manufacturer	Ten Pao Industrial Co., Ltd.
Model Number	S005UU0500100
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	TUUS050100-A00
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	BYD COMPANY LIMITED
Model Number	TLi020F1
Capacity	2000mAh
Rated Voltage	4.35V d.c.

Equipment	Battery
Manufacturer	BYD COMPANY LIMITED
Model Number	TLi019B1
Capacity	1900mAh
Rated Voltage	4.35V d.c.

Equipment	Battery
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Model Number	TLi019B2
Capacity	1900mAh
Rated Voltage	4.35V d.c.

Equipment	Data Cable
Manufacturer	Shenzhen Juwei Electronics Co., Ltd.
Model Number	CDA3122002C1

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd.
Model Number	CDA3122002C2

Equipment	Data Cable
Manufacturer	Shenzhen Juwei Electronics Co., Ltd.
Model Number	CDA3122005C1



Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd.
Model Number	CDA3122005C2

Note: As the information described above, there are two different models of charger manufactured by two different companies, three different models of battery manufactured by two different companies and four different models of data cable manufactured by two different companies. The relevant tests have been performed in order to verify in which combination case (EUT exercised by only one model of charger, one model of battery and one model of data cable) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the charger S005UU0500100, the battery TLi020F1 and the data cable CDA3122002C1.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Occupied Bandwidth	15.247(a)(1)	Pass
2	Peak Power Output	15.247(b)(1)	Pass
3	Spurious RF Conducted Emissions	15.247(d)	Pass
4	Spurious Radiated Emissions	15.247(d)/15.35(b)/15.209	Pass
5	Band Edge Compliance	15.247(d)	Pass
6	Dwell Time	15.247(a)(1)(iii)	Pass
7	Channel Separation	15.247(a)(1)	Pass
8	Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass
9	AC Power line Conducted Emission	15.207	Pass

This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab 	Checked by: Mr. Wang Junfeng Deputy director of the test lab 
Tested by: Mr. Jiang Shuo Test engineer 	Issued date: 2014.07.29

2.2 Test result

2.2.1 Occupied Bandwidth

2.2.1.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.1.2 Test Description


The measurement is made according to ANSI C63.10-2009 Section 6.9.1.

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 10 kHz.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

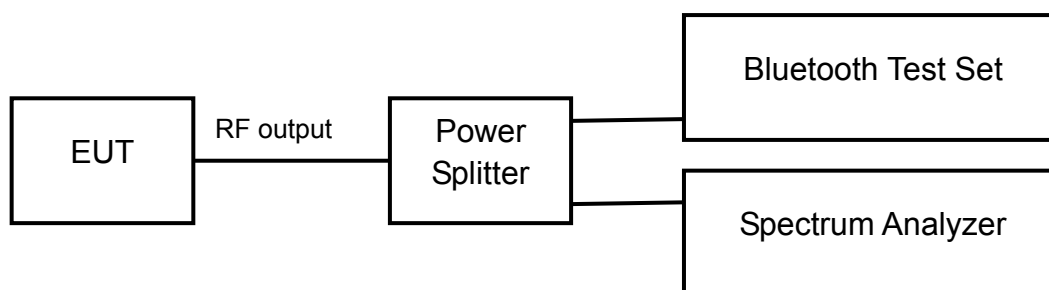

2.2.1.3 Test limit

FCC Part15.247(a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

2.2.1.4 Test result

Modulation type: GFSK


Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	758.3
2441	39	758.3
2480	78	758.3

Modulation type: $\pi/4$ DQPSK

Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	1189.6
2441	39	1189.6
2480	78	1206.9

Modulation type: 8DPSK


Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	1267.7
2441	39	1264.8
2480	78	1264.8

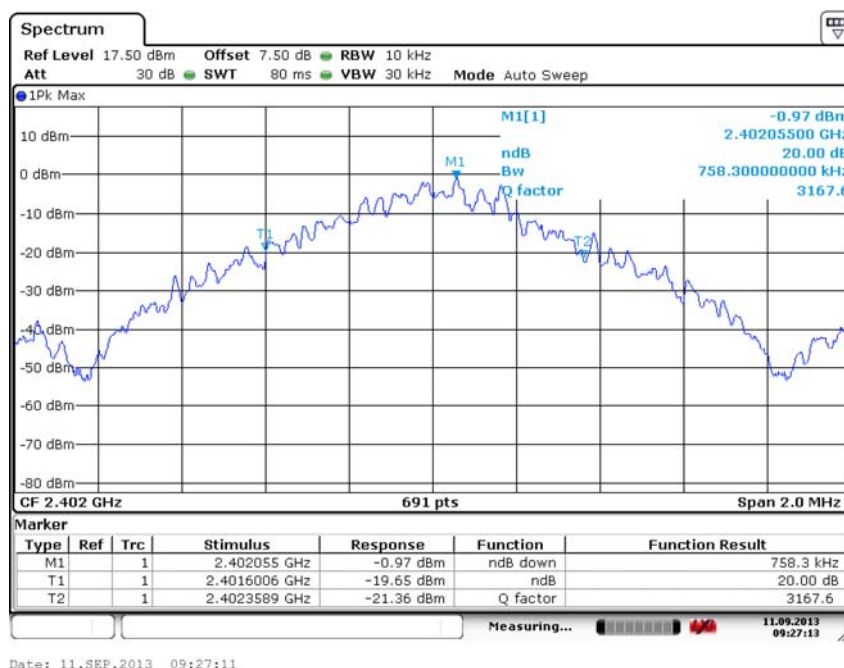

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: GFSK

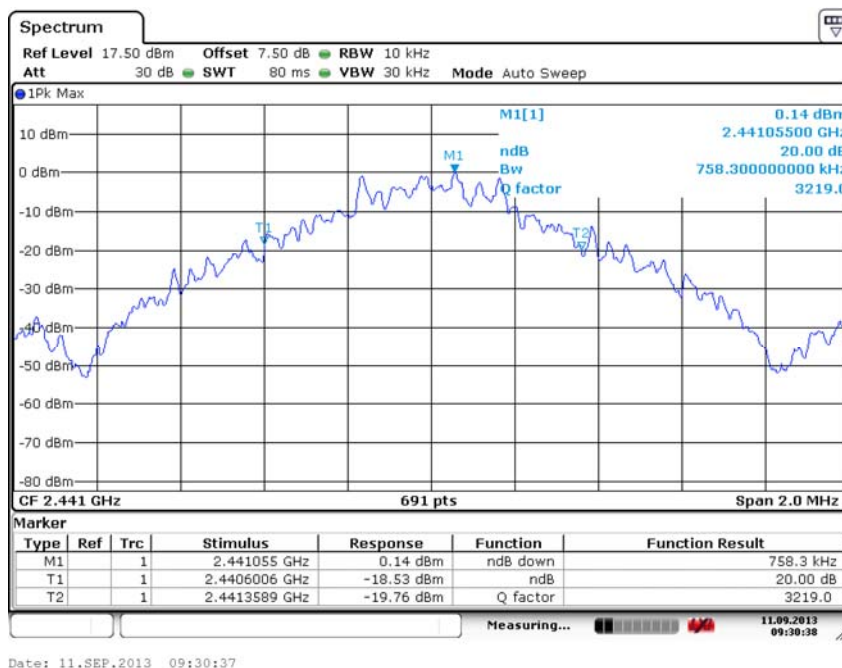

Carrier frequency (MHz): 2441

Channel No.:39


Modulation type: GFSK

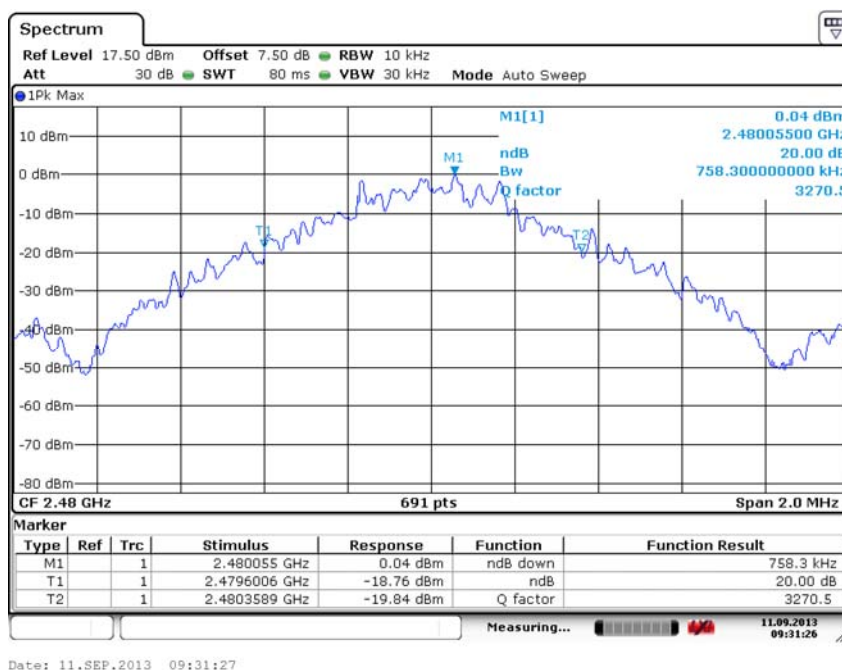

Carrier frequency (MHz): 2480

Channel No.:78


Modulation type: GFSK

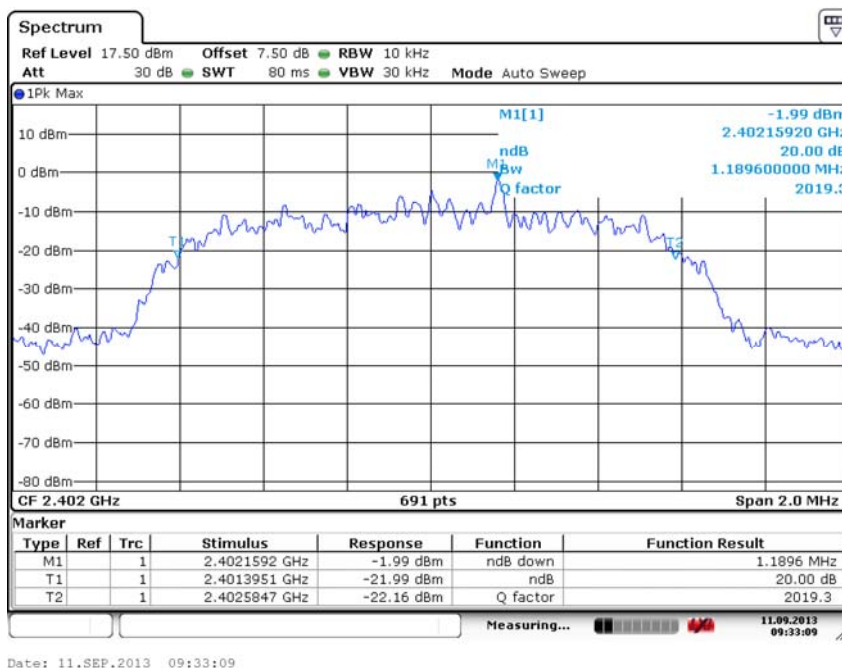

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: $\pi/4$ DQPSK

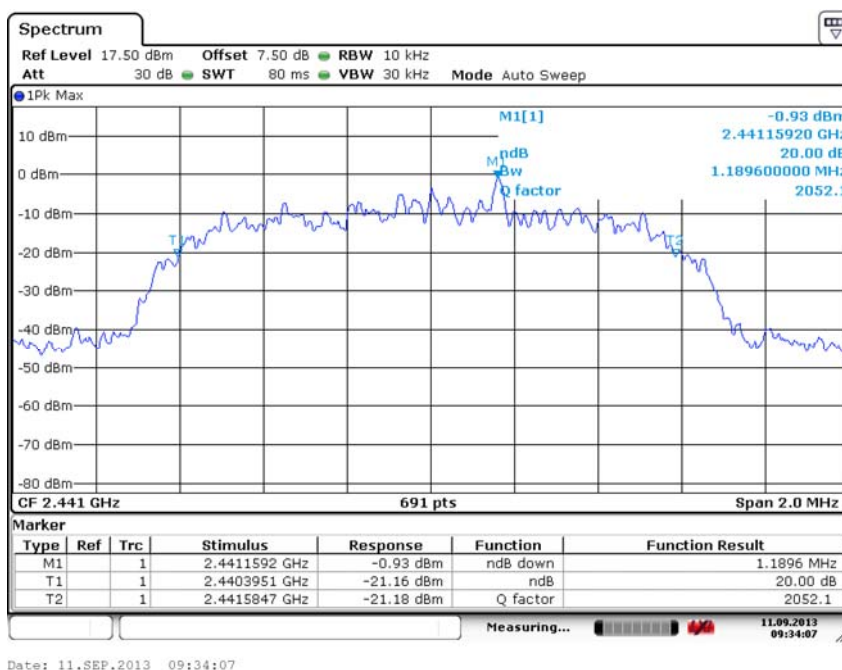

Carrier frequency (MHz): 2441

Channel No.:39


Modulation type: $\pi/4$ DQPSK

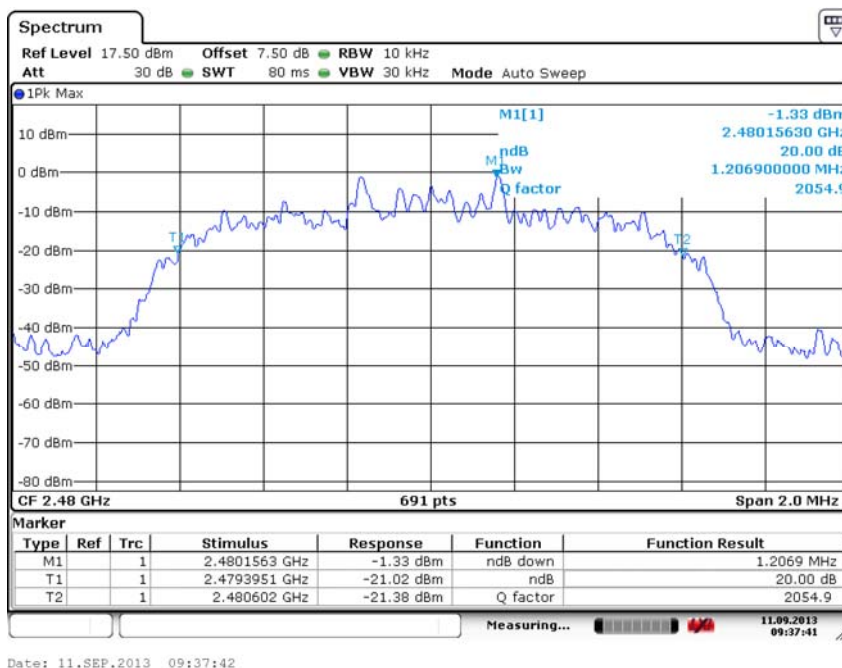

Carrier frequency (MHz): 2480

Channel No.:78


Modulation type: $\pi/4$ DQPSK

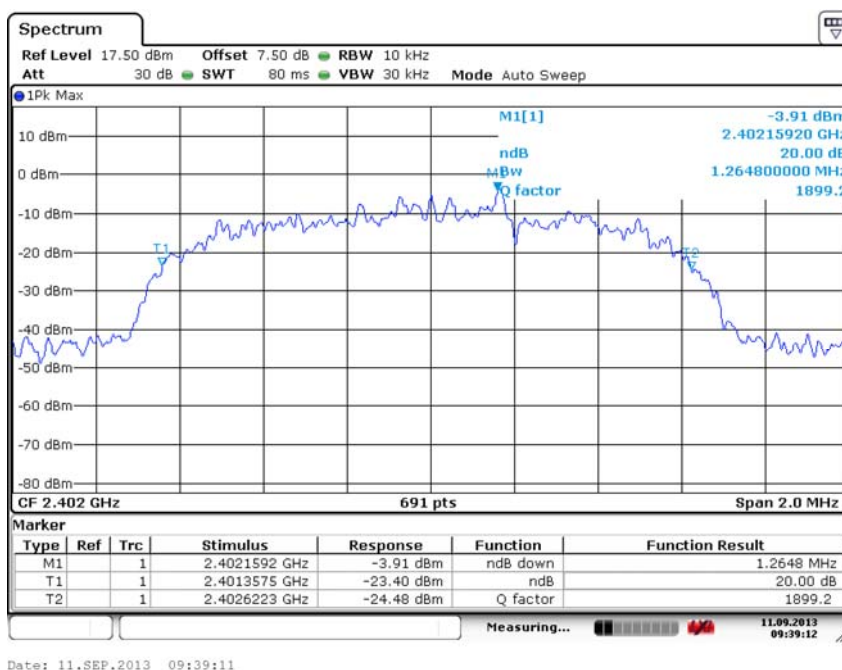

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: 8DPSK

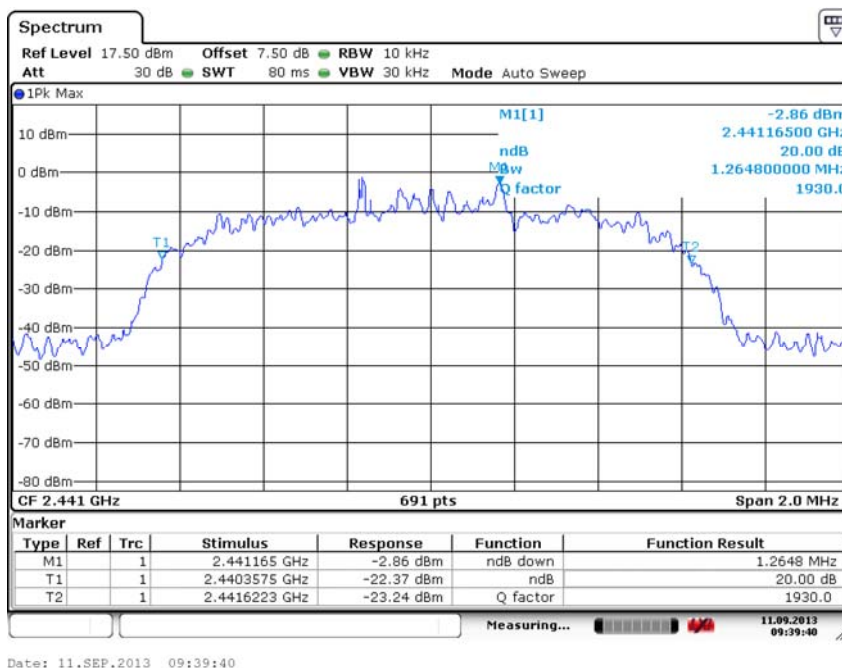

Carrier frequency (MHz): 2441

Channel No.:39

Modulation type: 8DPSK

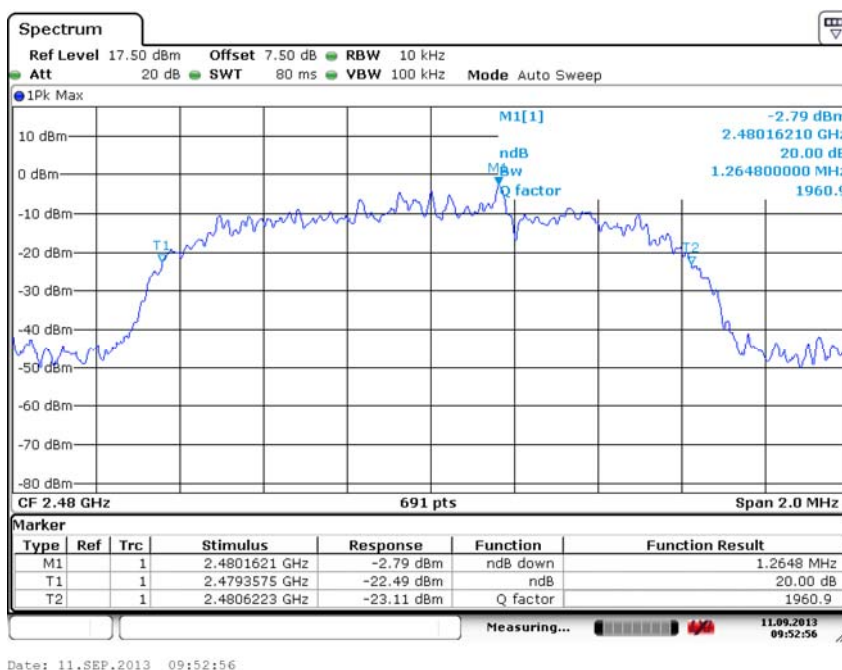

Carrier frequency (MHz): 2480

Channel No.:78

Modulation type: 8DPSK

2.2.2 Peak Power Output

2.2.2.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.2.2 Test Description


The measurement is made according to ANSI C63.10-2009 Section 6.10.1. The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The resolution bandwidth for measuring the output power was 2 MHz.

The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

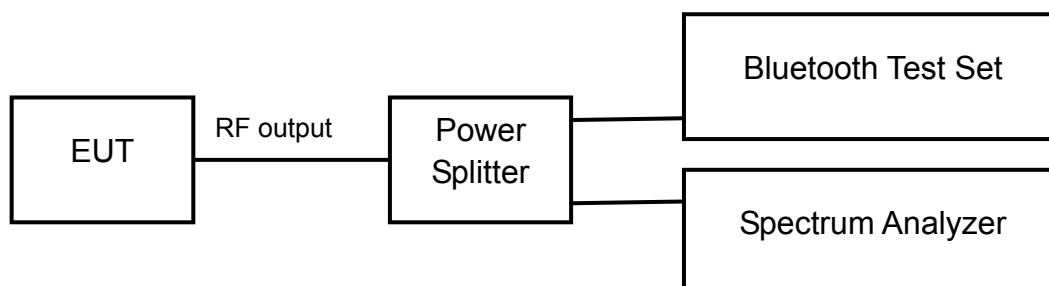

2.2.2.3 Test limit

FCC Part15.247(b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	30dBm	30dBm	30dBm


2.2.2.4 Test Condition

Hopping Mode	Modulation type	RBW	VBW	Span	Sweep time
Hopping OFF	GFSK	2MHz	3MHz	8MHz	1ms
Hopping OFF	$\pi/4$ DQPSK	2MHz	3MHz	8MHz	1ms
Hopping OFF	8DPSK	2MHz	3MHz	8MHz	1ms


2.2.2.5 Test result

Modulation type	Average Power Output (mW)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	3.12	3.81	3.78
$\pi/4$ DQPSK	2.44	3.16	3.07
8DPSK	2.44	3.82	3.07


Modulation type	Peak Power Output (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	4.94	5.99	5.94
$\pi/4$ DQPSK	4.70	5.81	5.95
8DPSK	4.81	5.93	5.85

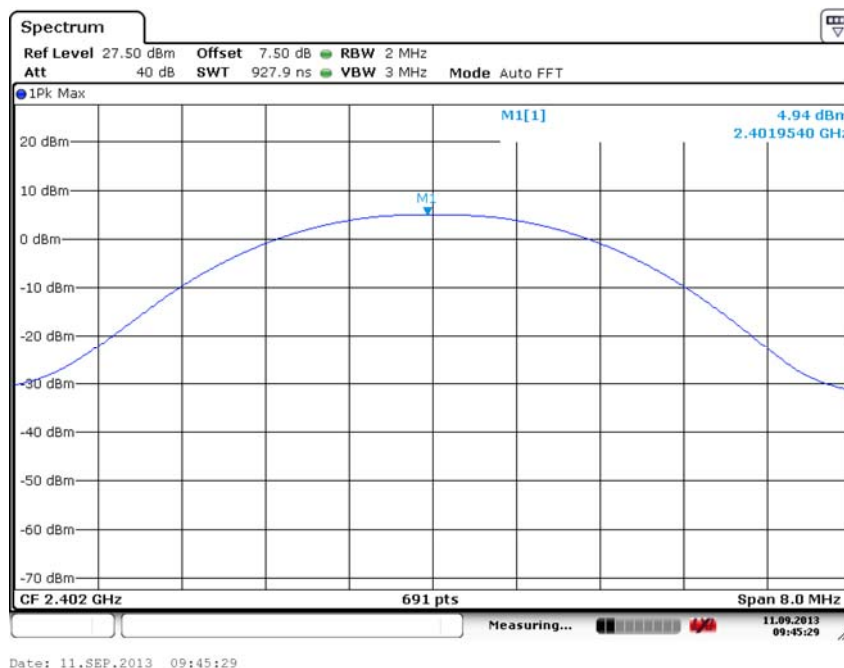


Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: GFSK

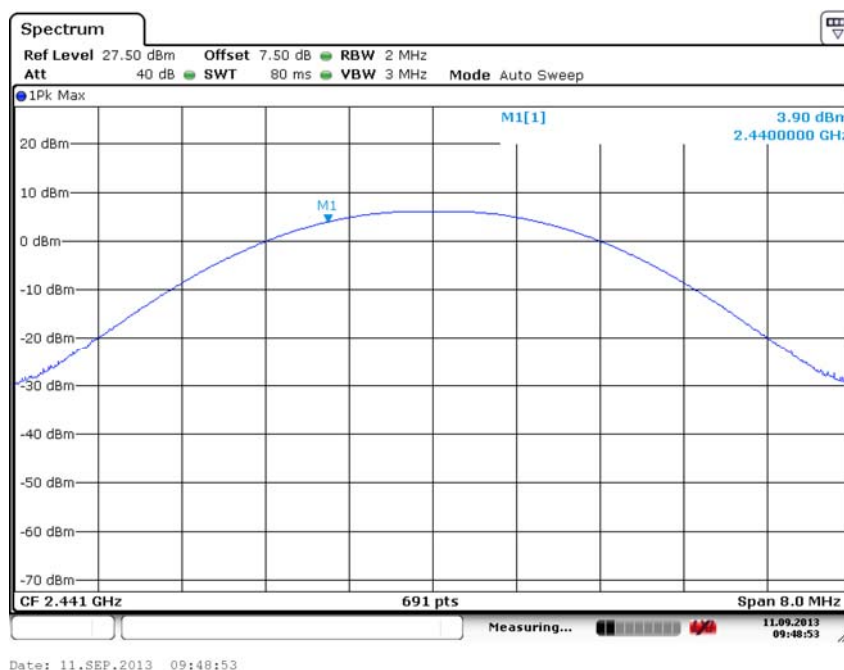


Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: GFSK

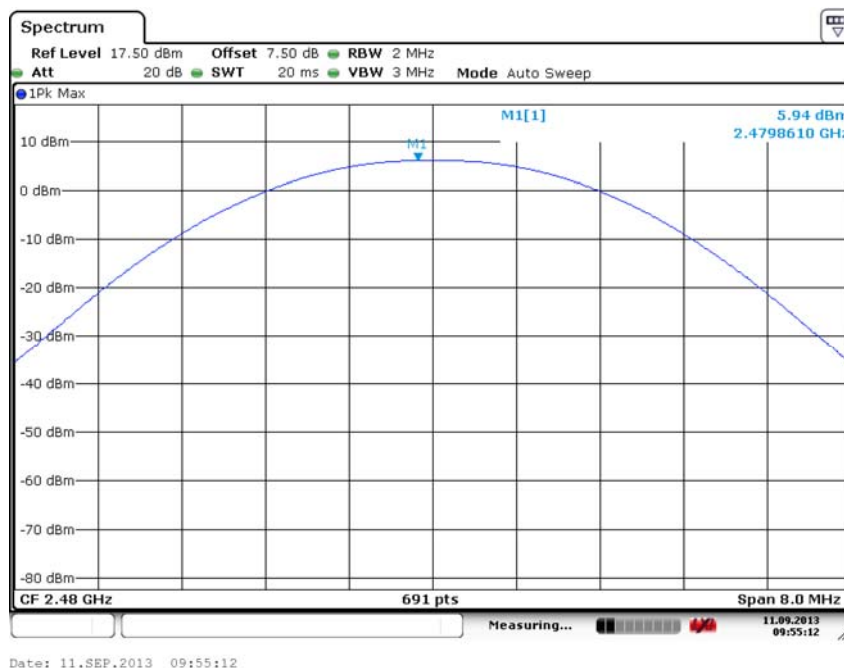


Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: GFSK

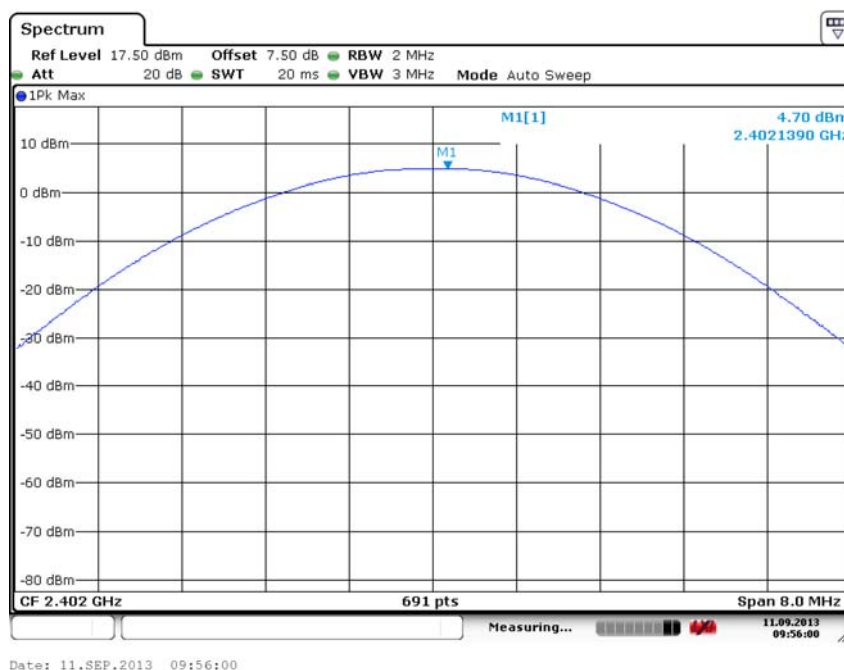


Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: $\pi/4$ DQPSK

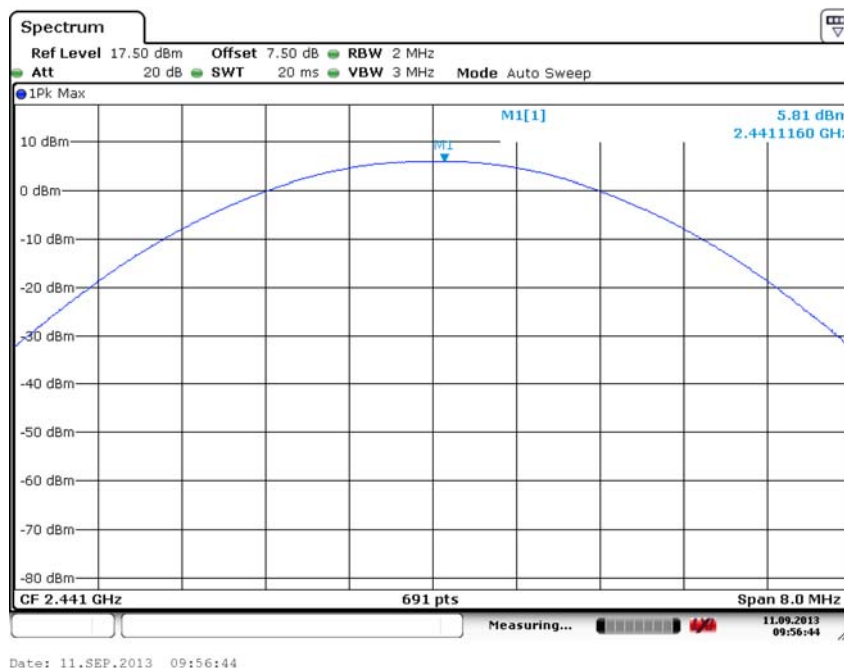


Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: $\pi/4$ DQPSK

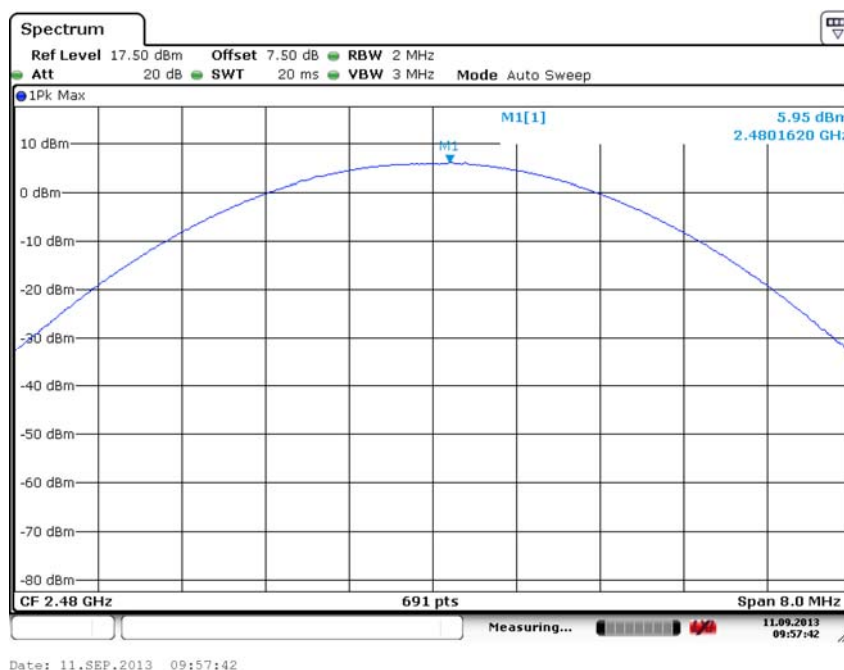


Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: $\pi/4$ DQPSK

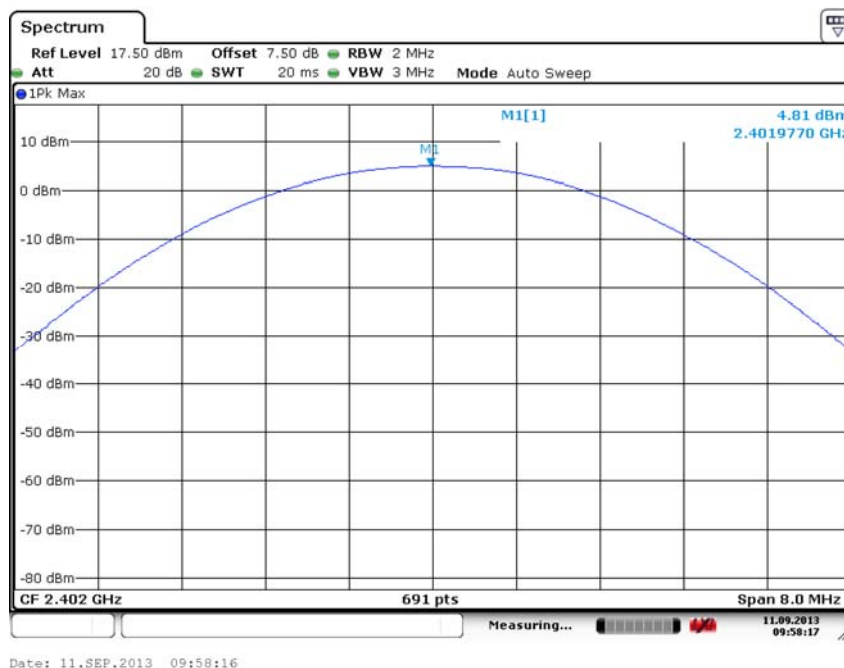

Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: 8DPSK

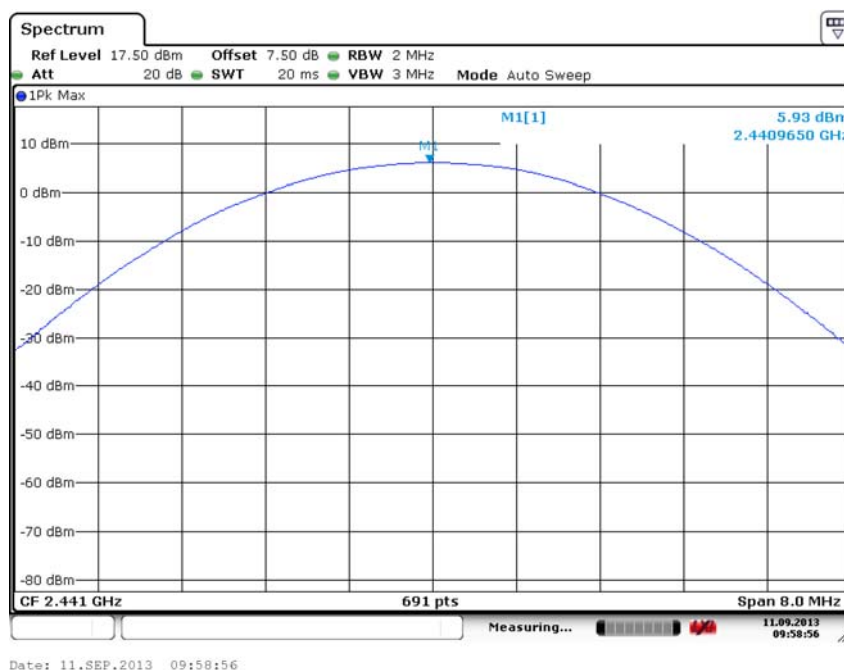

Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: 8DPSK

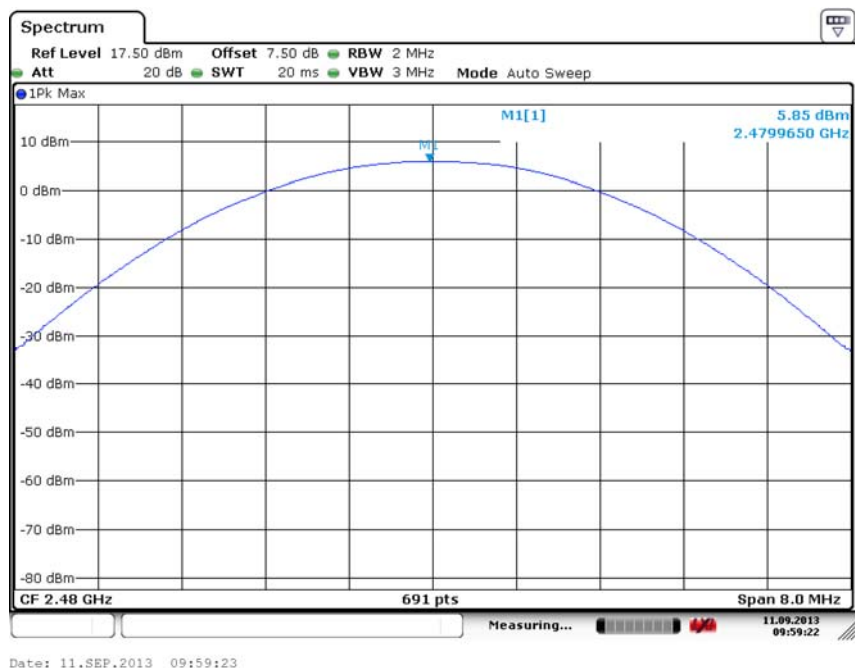

Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: 8DPSK

2.2.3 Spurious RF Conducted Emissions

2.2.3.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.3.2 Test Description

The measurement is made according to ANSI C63.10-2009 Section 6.7.


The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 ~25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance” (cf. chapter 4.5). This value is used to calculate the 20 dBc limit.

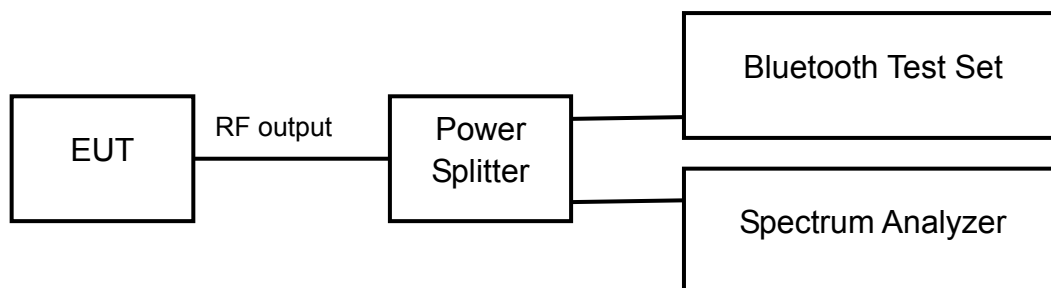

2.2.3.3 Test limit

FCC Part15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

2.2.3.4 Test result

Carrier frequency (MHz): 2402

Channel No.:0

Modulation type: GFSK

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-65.72	2.56	-17.44
1GHz~12.75GHz	-37.62	2.56	-17.44
12.75GHz~25GHz	-56.49	2.56	-17.44

Carrier frequency (MHz): 2441

Channel No.:39

Modulation type: GFSK

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-65.31	5.03	-14.97
1GHz~12.75GHz	-38.94	5.03	-14.97
12.75GHz~25GHz	-56.54	5.03	-14.97



Carrier frequency (MHz): 2480


Channel No.:78

Modulation type: GFSK


Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-65.29	5.80	-14.20
1GHz~12.75GHz	-38.67	5.80	-14.20
12.75GHz~25GHz	-56.65	5.80	-14.20



Note: The Reference value see 2.2.5 Band Edge Compliance

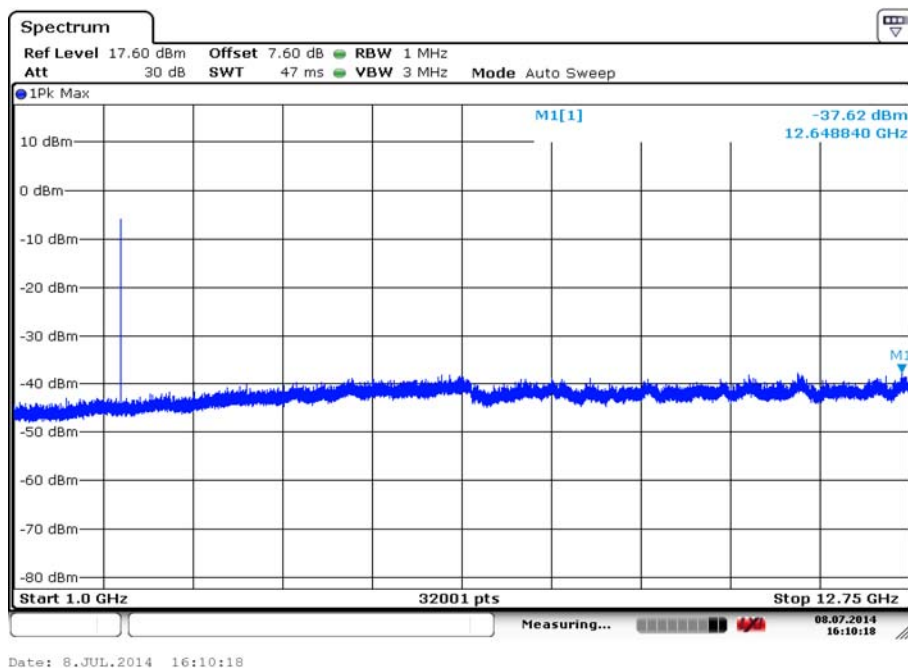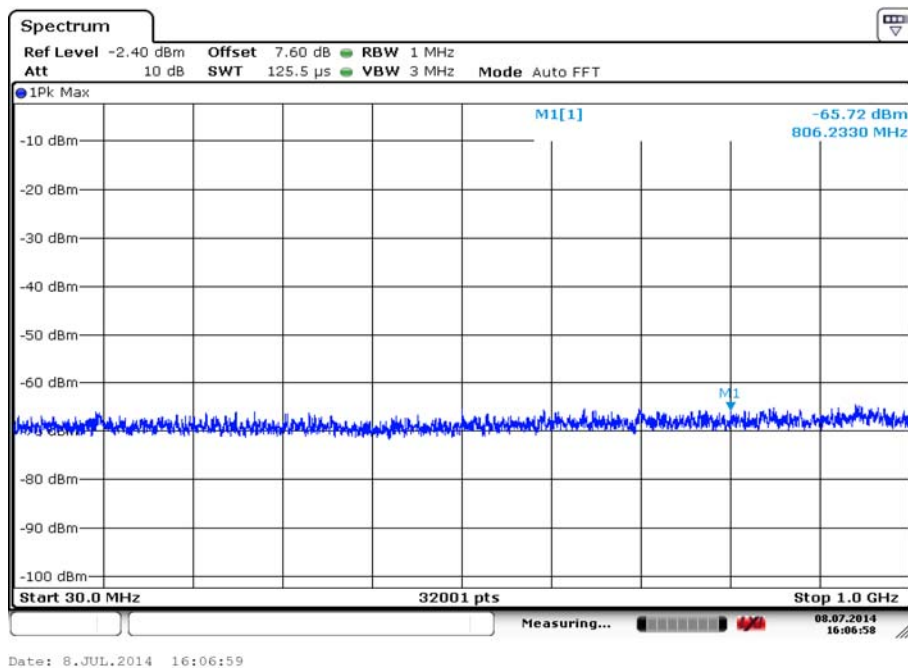


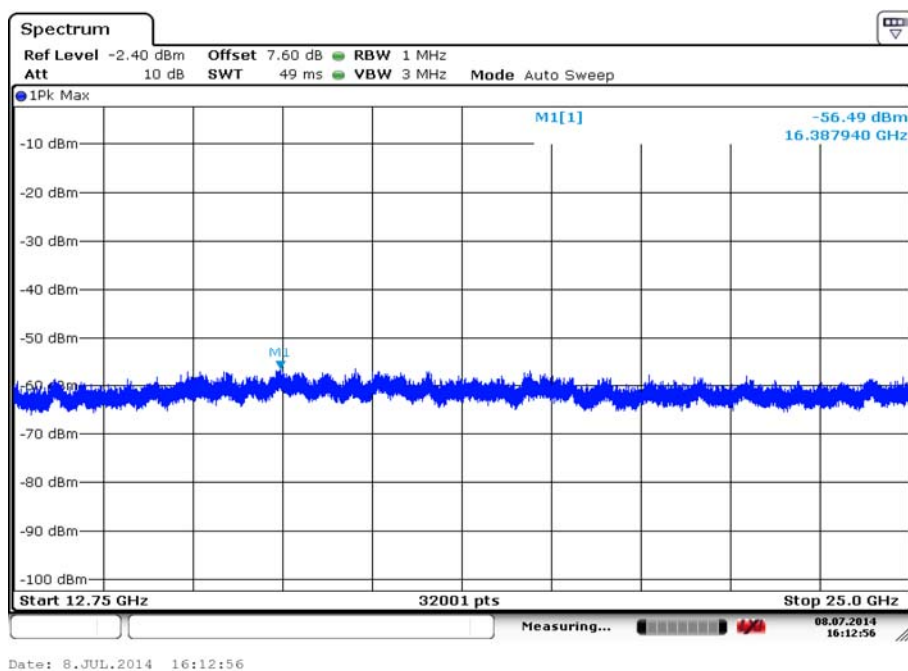



Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: GFSK

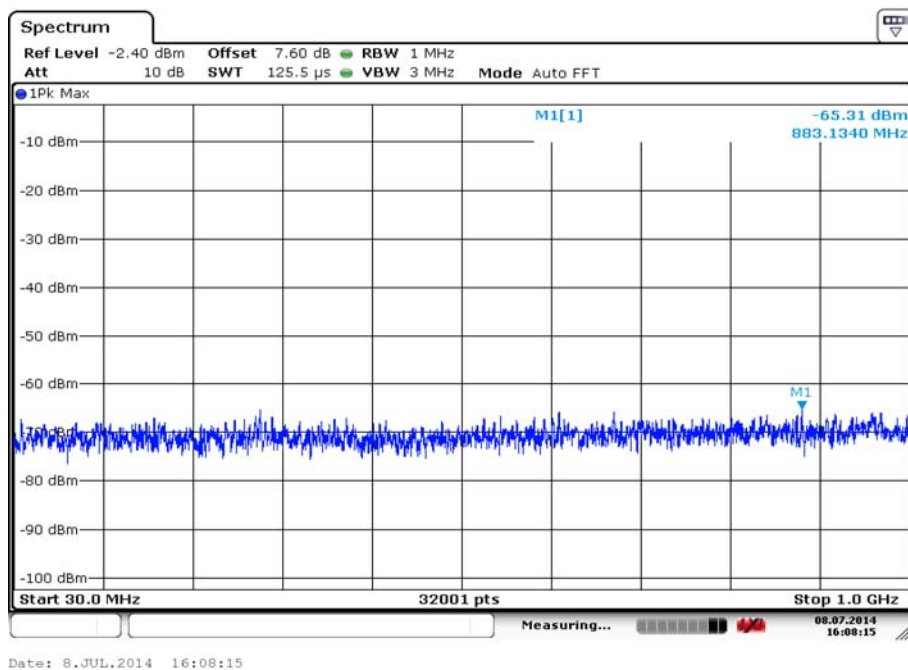

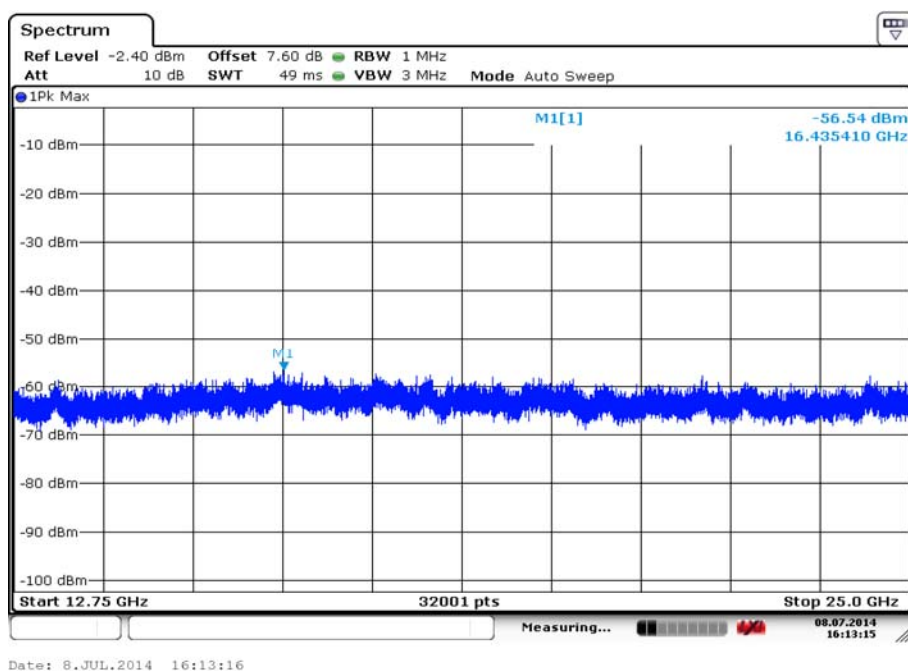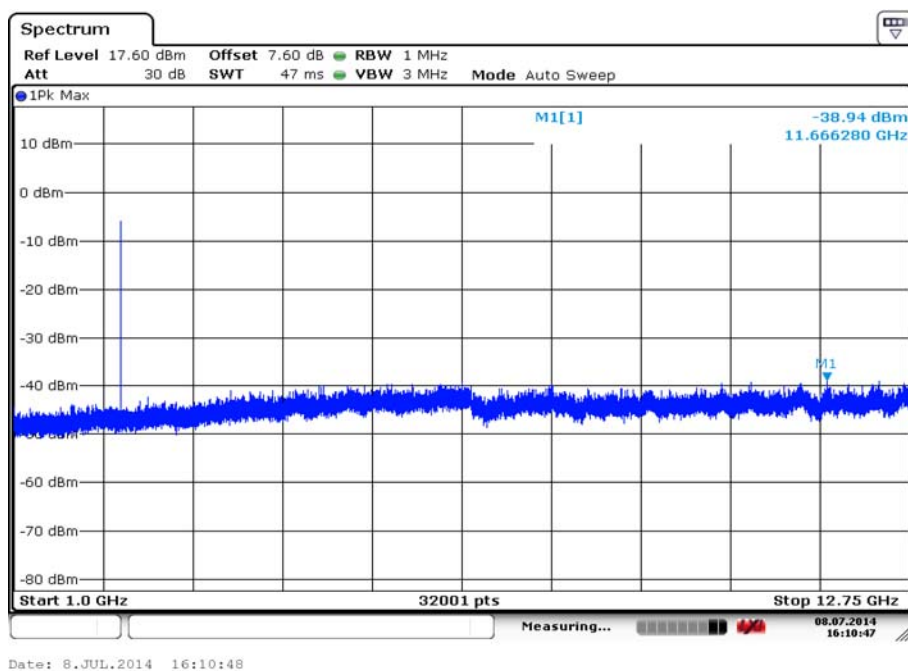

Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: GFSK

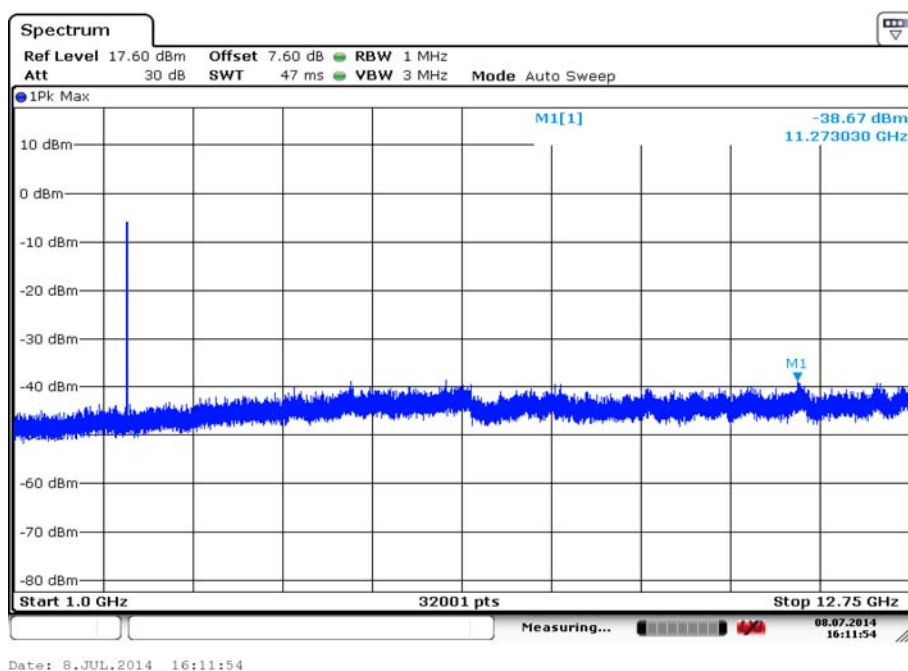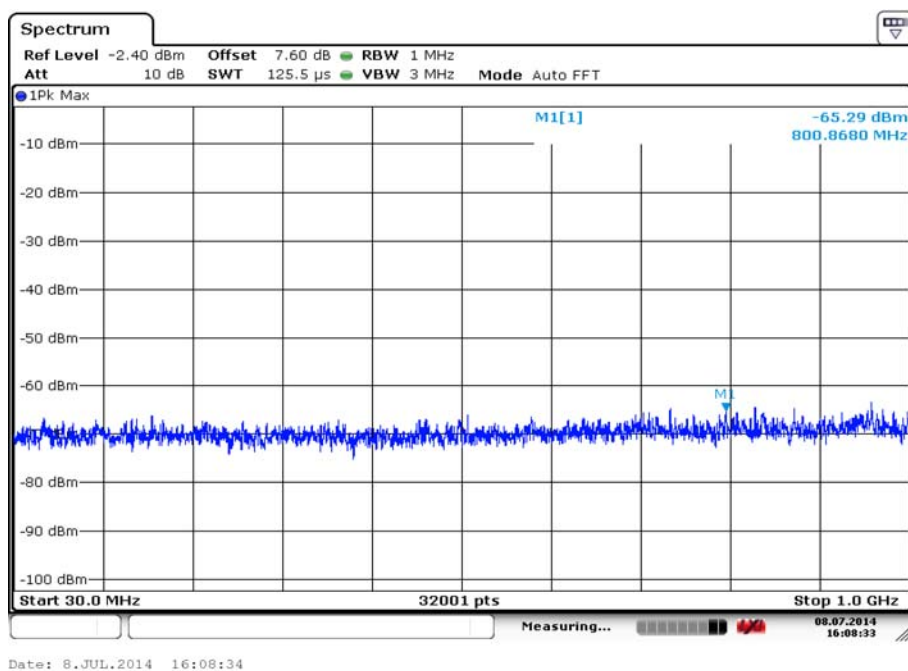

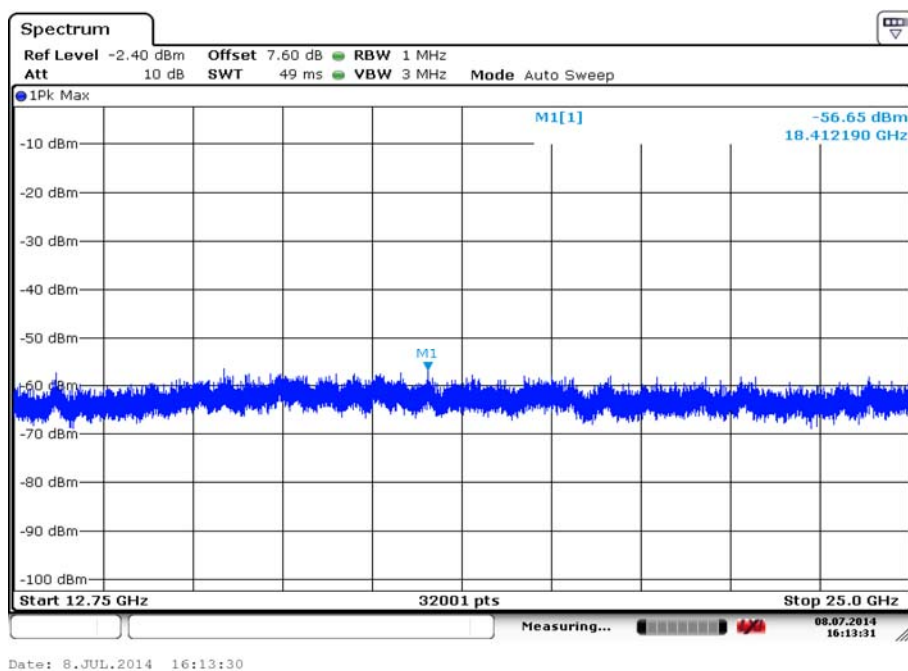

Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: GFSK

Carrier frequency (MHz): 2402

Channel No.:0

Modulation type: $\pi/4$ DQPSK

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-64.07	2.35	-17.65
1GHz~12.75GHz	-38.97	2.35	-17.65
12.75GHz~25GHz	-56.42	2.35	-17.65

Carrier frequency (MHz): 2441

Channel No.:39

Modulation type: $\pi/4$ DQPSK

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-65.79	4.94	-15.06
1GHz~12.75GHz	-39.43	4.94	-15.06
12.75GHz~25GHz	-56.98	4.94	-15.06



Carrier frequency (MHz): 2480


Channel No.:78

Modulation type: $\pi/4$ DQPSK


Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-64.86	4.90	-15.10
1GHz~12.75GHz	-38.05	4.90	-15.10
12.75GHz~25GHz	-56.14	4.90	-15.10



Note: The Reference value see 2.2.5 Band edge compliance

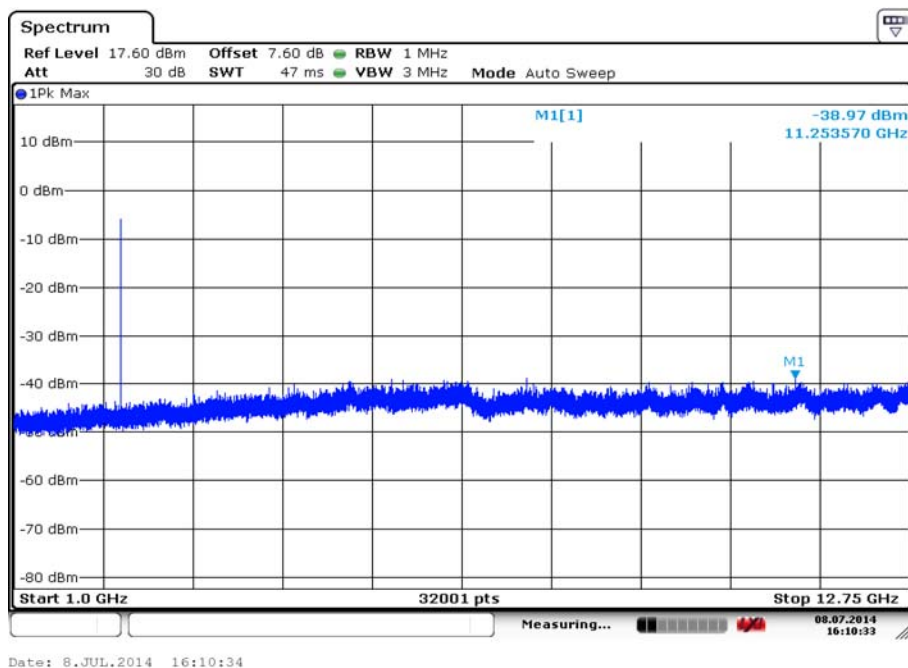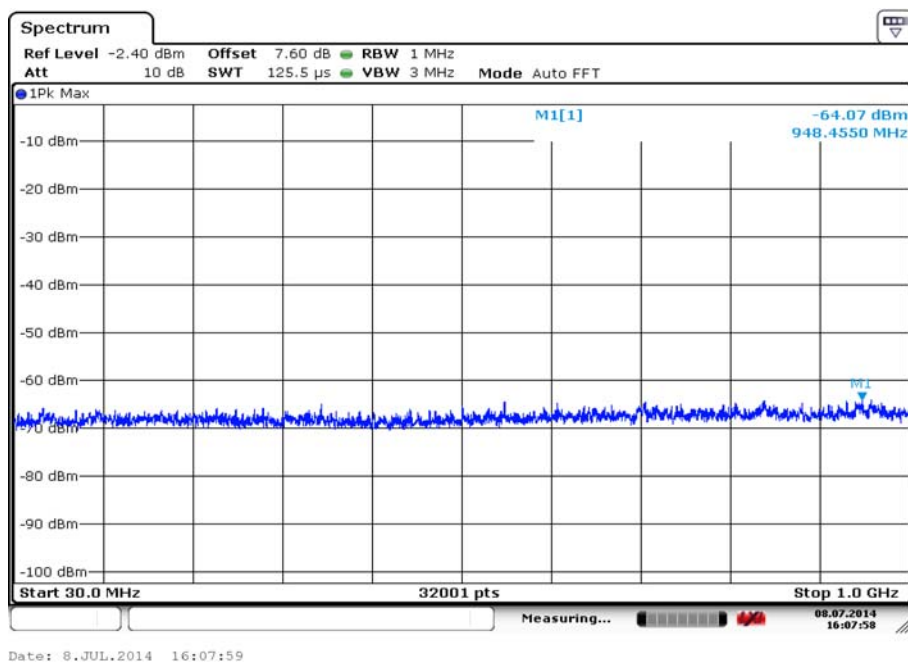


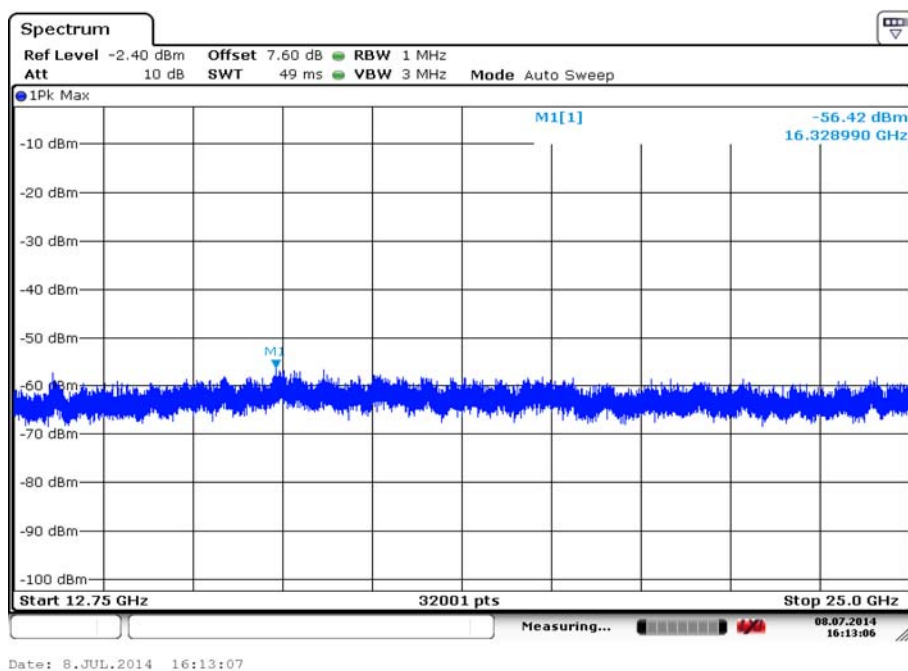



Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: $\pi/4$ DQPSK

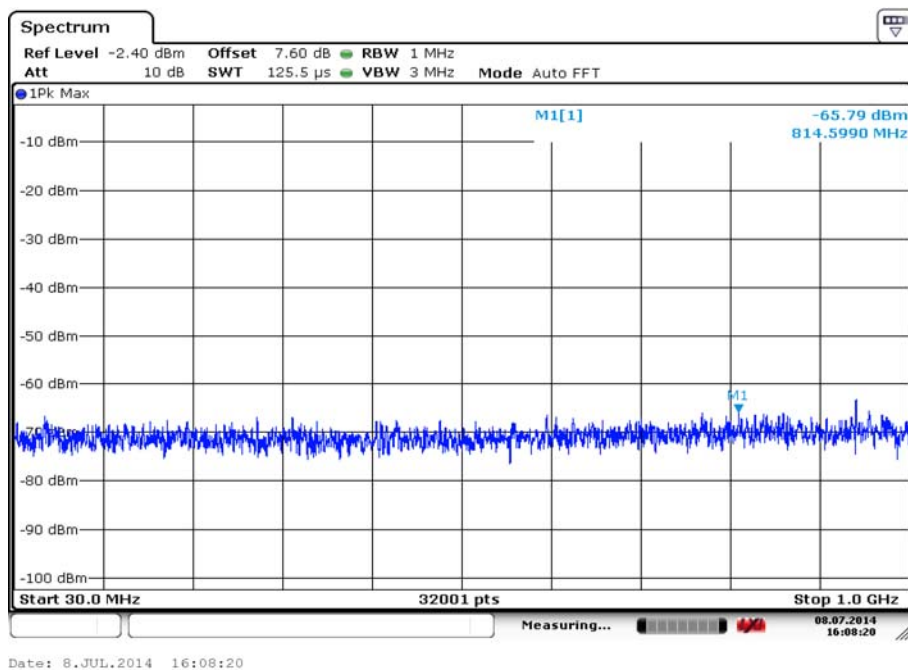

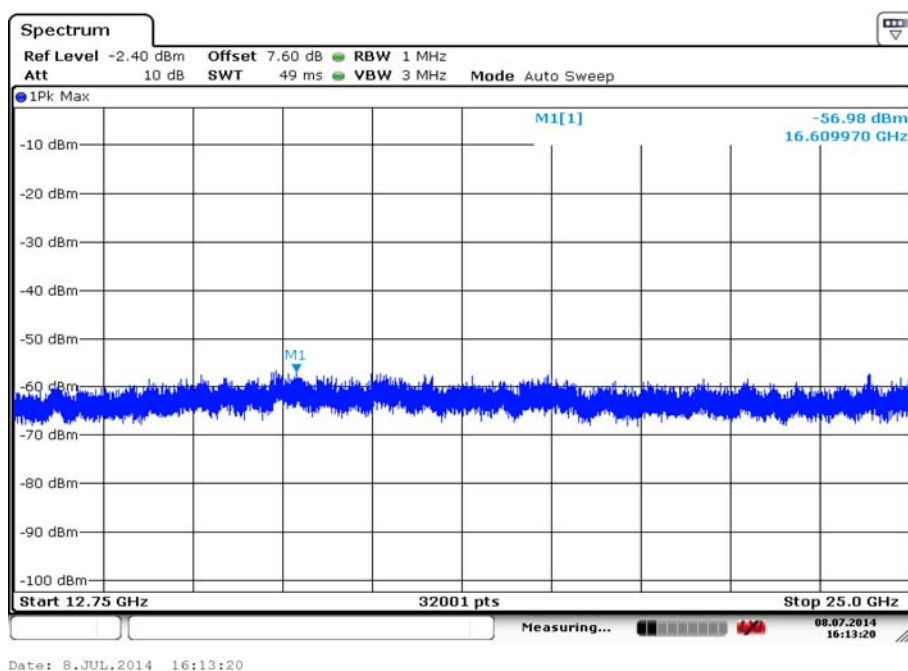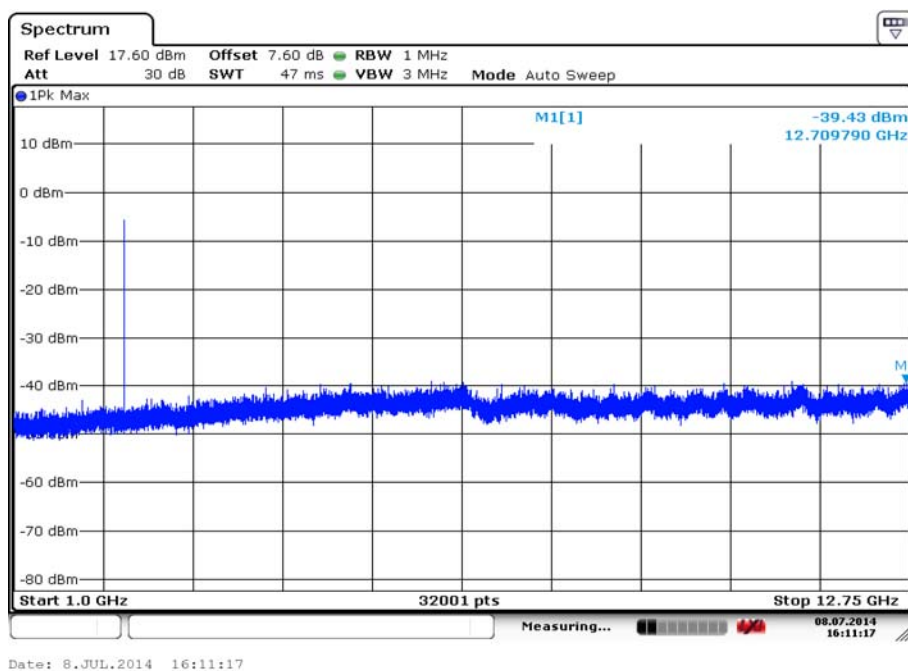

Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: $\pi/4$ DQPSK

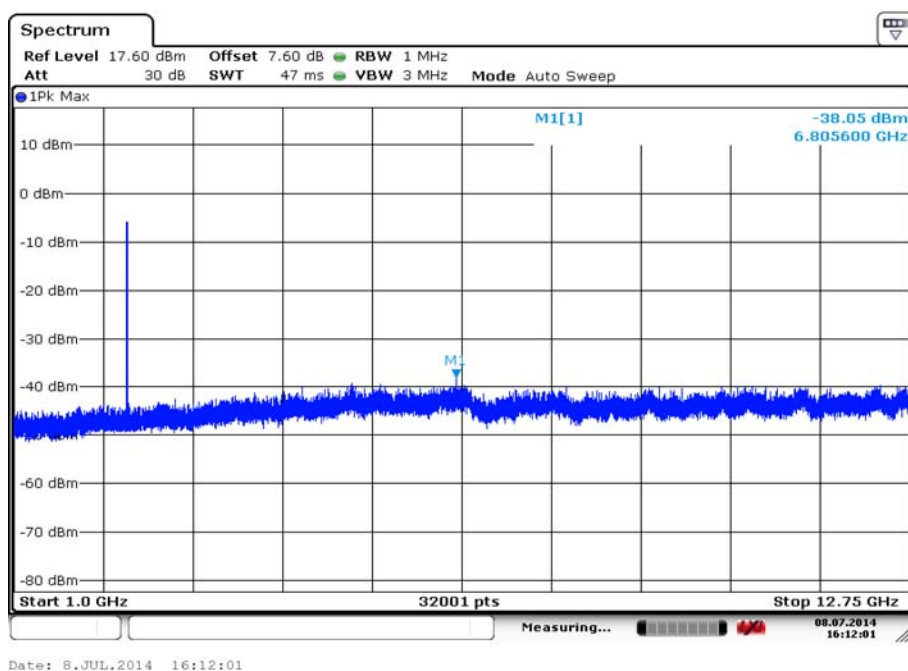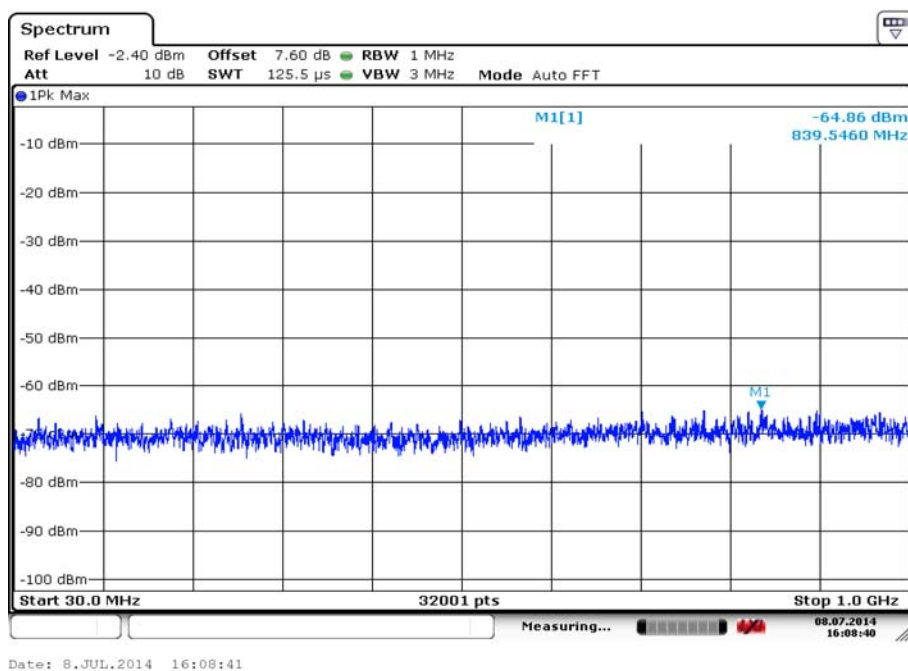

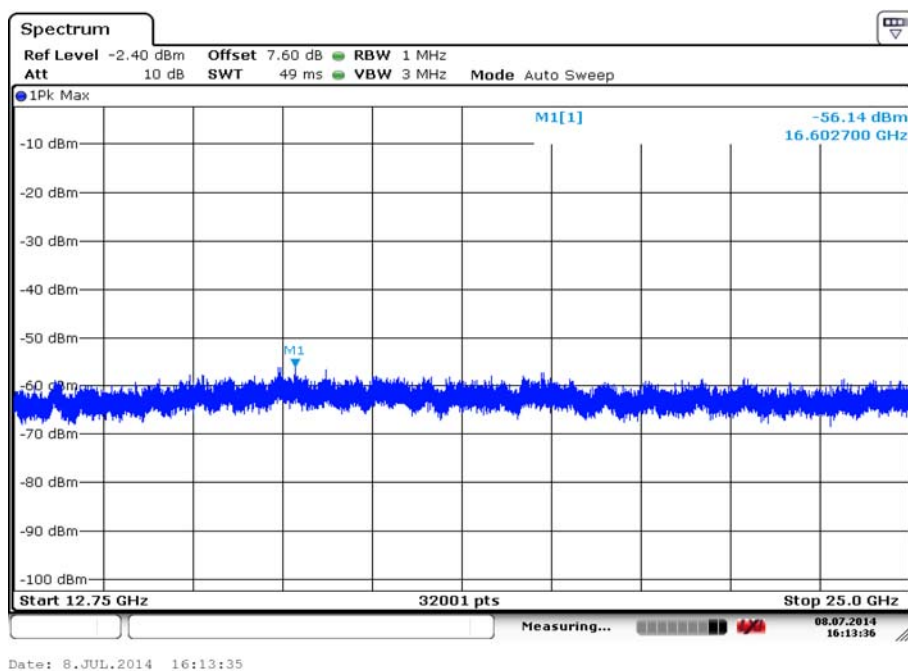

Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: $\pi/4$ DQPSK

Carrier frequency (MHz): 2402

Channel No.:0

Modulation type: 8DPSK

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-66.22	2.38	-17.62
1GHz~12.75GHz	-39.20	2.38	-17.62
12.75GHz~25GHz	-55.97	2.38	-17.62

Carrier frequency (MHz): 2441

Channel No.:39

Modulation type: 8DPSK

Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-64.64	4.95	-15.05
1GHz~12.75GHz	-38.82	4.95	-15.05
12.75GHz~25GHz	-57.51	4.95	-15.05



Carrier frequency (MHz): 2480


Channel No.:78

Modulation type: 8DPSK


Frequency	Corrected measurement value (dBm)	Reference value (dBm)	Limit (dBm)
30MHz~1GHz	-64.79	4.92	-15.08
1GHz~12.75GHz	-38.94	4.92	-15.08
12.75GHz~25GHz	-57.11	4.92	-15.08



Note: The Reference value see 2.2.5 Band edge compliance

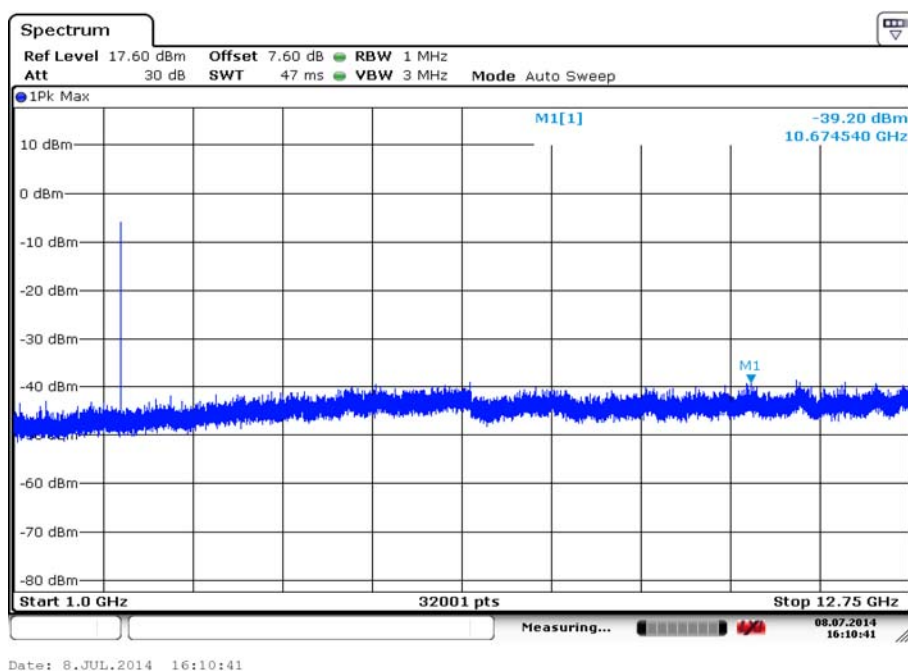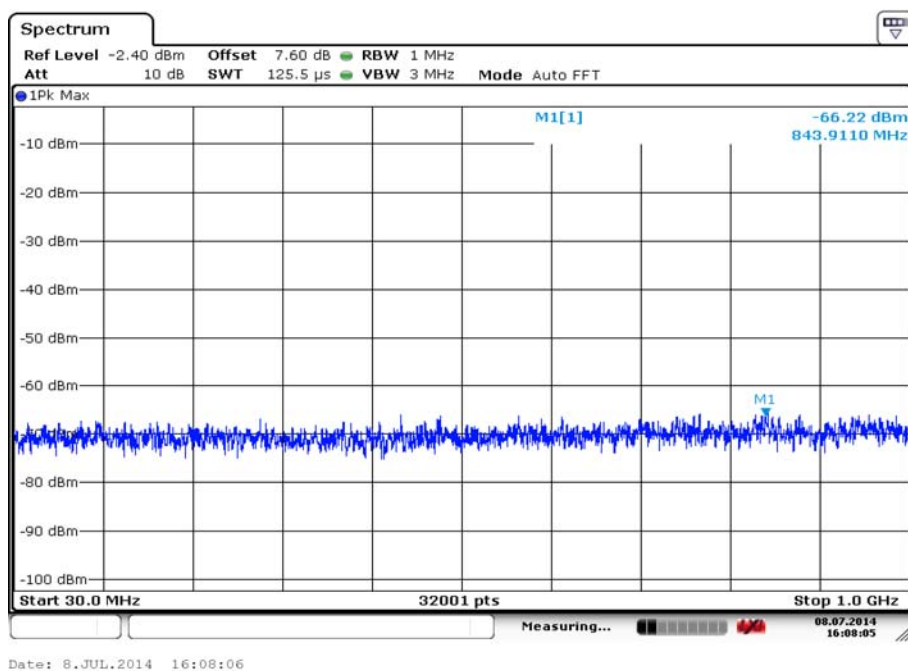


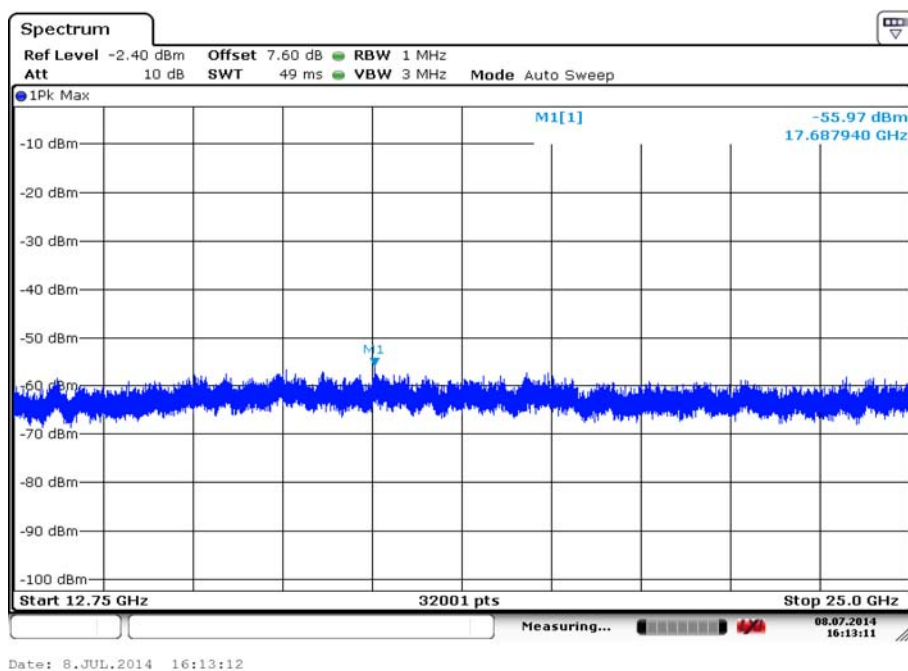



Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: 8DPSK

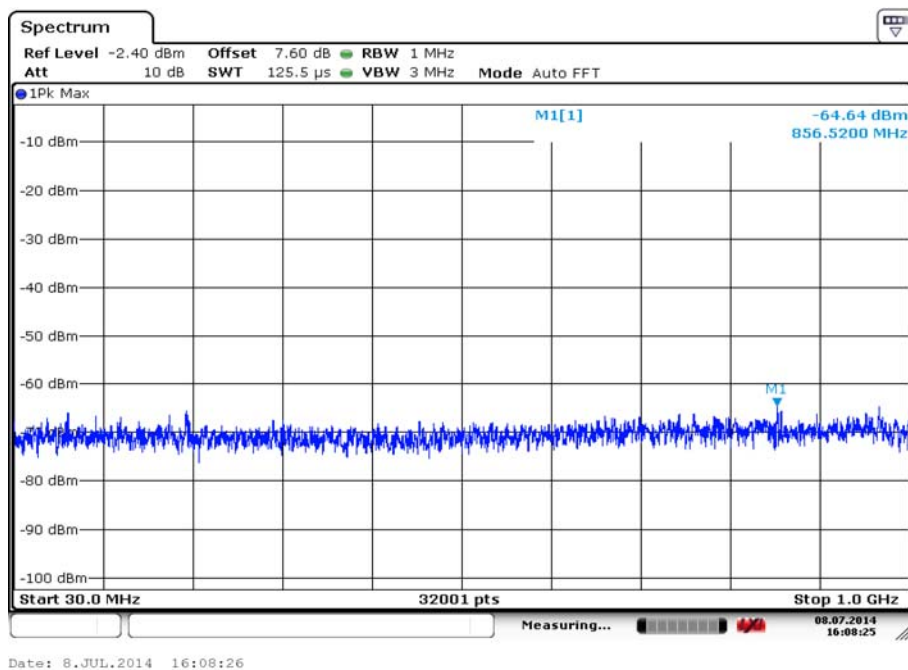

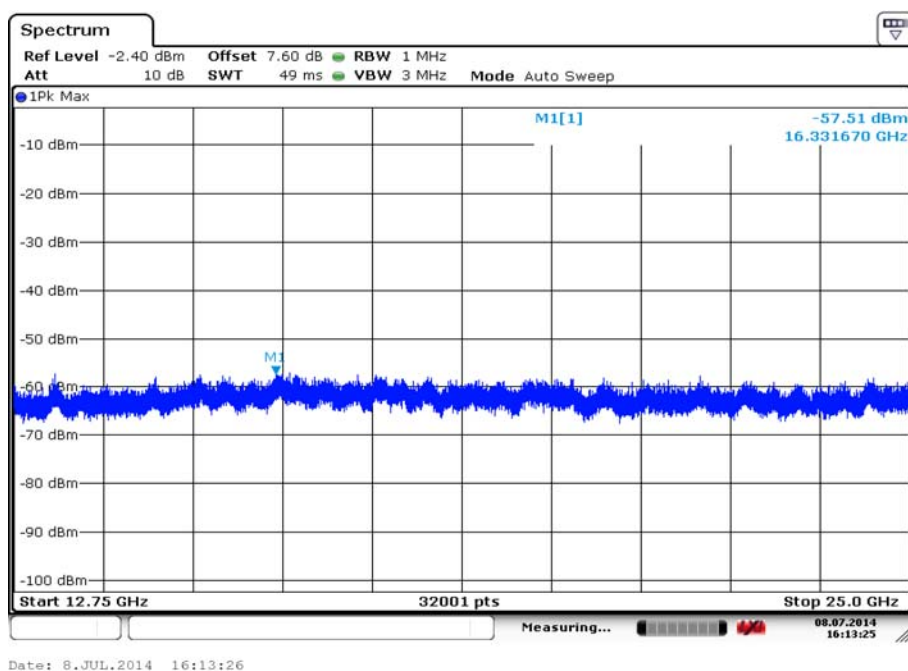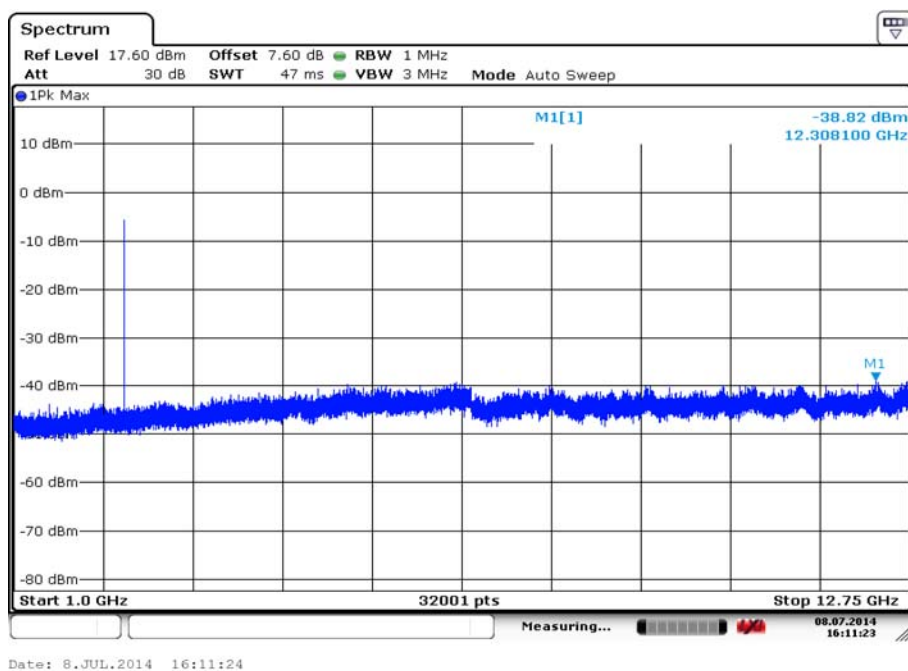

Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: 8DPSK

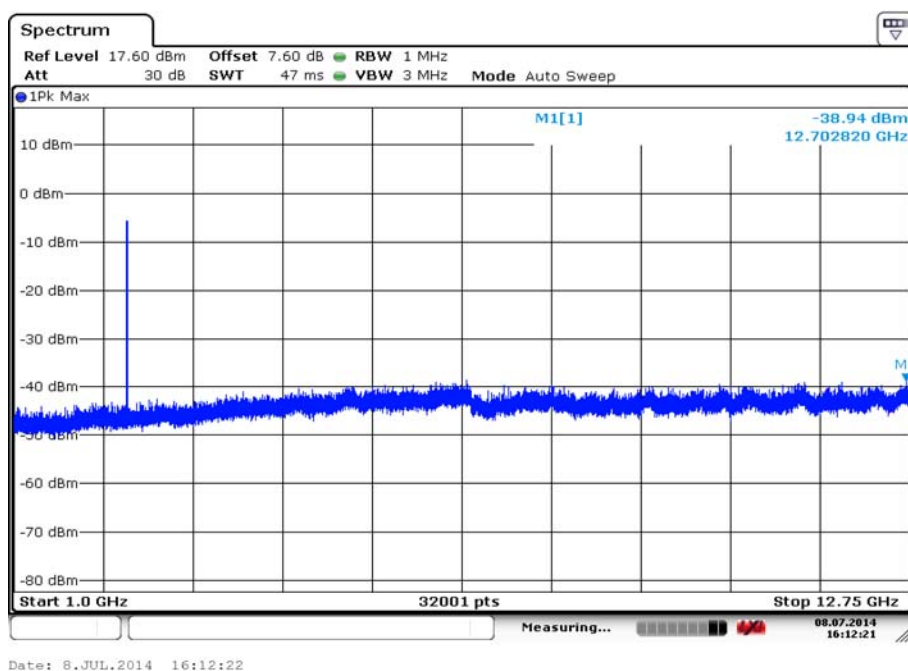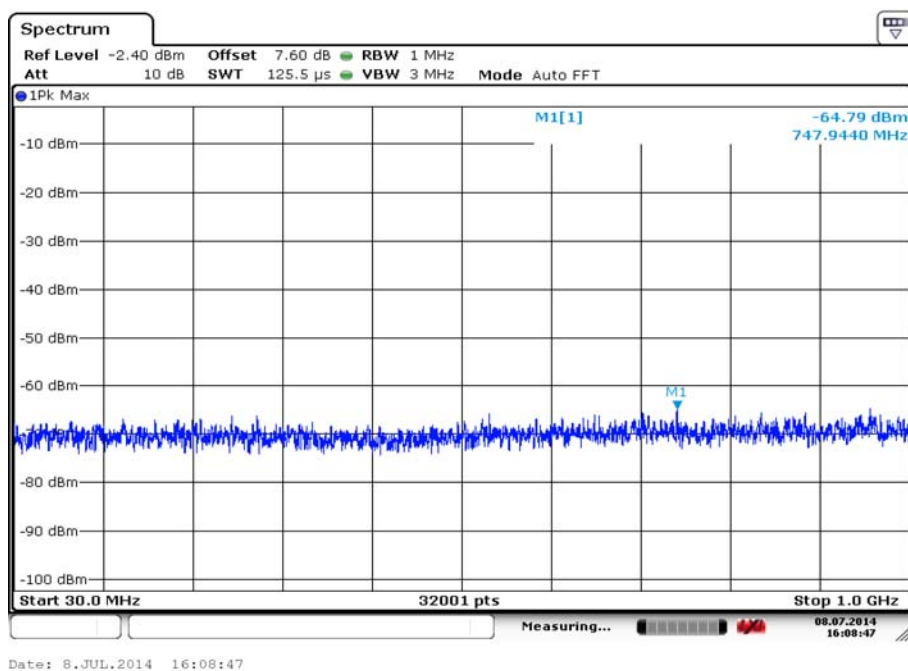

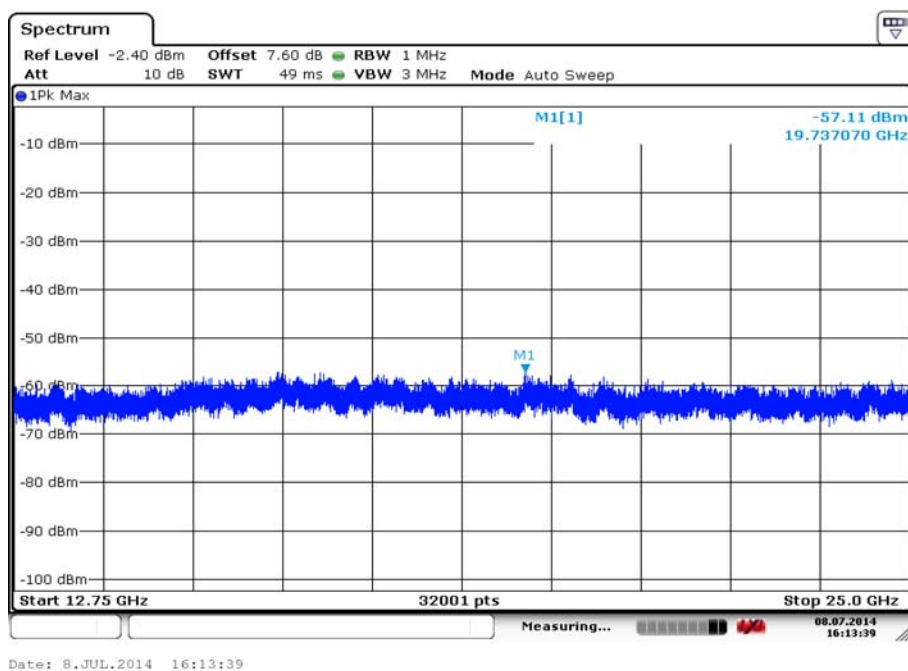

Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: 8DPSK

2.2.4 Spurious Radiated Emissions

2.2.4.1 Ambient condition

Temperature	Relative humidity	Pressure
24.3°C	36.2%	100.2kPa

2.2.4.2 Test Description


The measurement is made according to ANSI C63.10-2009 Section 6.3 - 6.6. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration.

Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz or above, using receive log period antenna HL562 or Ridge horn antenna HF906.

During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees. The measurements shall be repeated with orthogonal polarization of the test antenna. The results (reference to 2.2.4.4) shall be showed the worst case of the three orthogonal axes.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

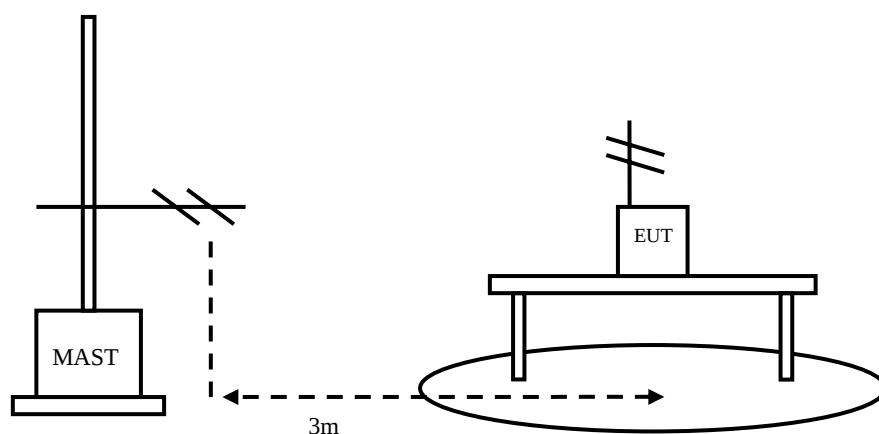

2.2.4.3 Test limit

FCC Part15.247(d):

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part15.209:

Radiated Emission Limits

Frequency of Emission(MHz)	Limits	
	Detector	Unit (dB μ V/m)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

FCC Part15.35(b):

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

2.2.4.4 Test result

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result= $P_{mea} + A_{Rpl}$

The worst case attitude: The mobile lay down.

For GFSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
30.12	18.4	15.3	3.10	Vertical	40.0
40.62	24.2	15.5	8.70	Vertical	40.0
85.32	18.2	8.3	9.90	Vertical	40.0
550.04	18.0	19.2	-1.20	Vertical	43.5
733.28	21.7	22.6	-0.90	Vertical	46.0
897.80	25.2	25.4	-0.20	Vertical	46.0

For $\pi/4$ DQPSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
40.62	23.6	15.5	8.10	Vertical	40.0
85.02	17.4	8.2	9.20	Vertical	40.0
101.74	13.8	9.3	4.50	Vertical	43.5
300.40	11.7	12.4	-0.70	Vertical	46.0
555.44	18.2	19.3	-1.10	Horizontal	46.0
929.78	25.2	25.4	-0.20	Vertical	46.0


For 8DPSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
30.12	18.4	15.3	3.10	Vertical	40.0
40.62	23.4	15.5	7.90	Vertical	40.0
87.84	17.0	8.4	8.60	Vertical	40.0
101.74	13.8	9.3	4.50	Vertical	43.5
558.14	18.3	19.4	-1.10	Horizontal	46.0
922.88	25.2	25.5	-0.30	Vertical	46.0

Carrier frequency (MHz): 2441


Channel No.:39

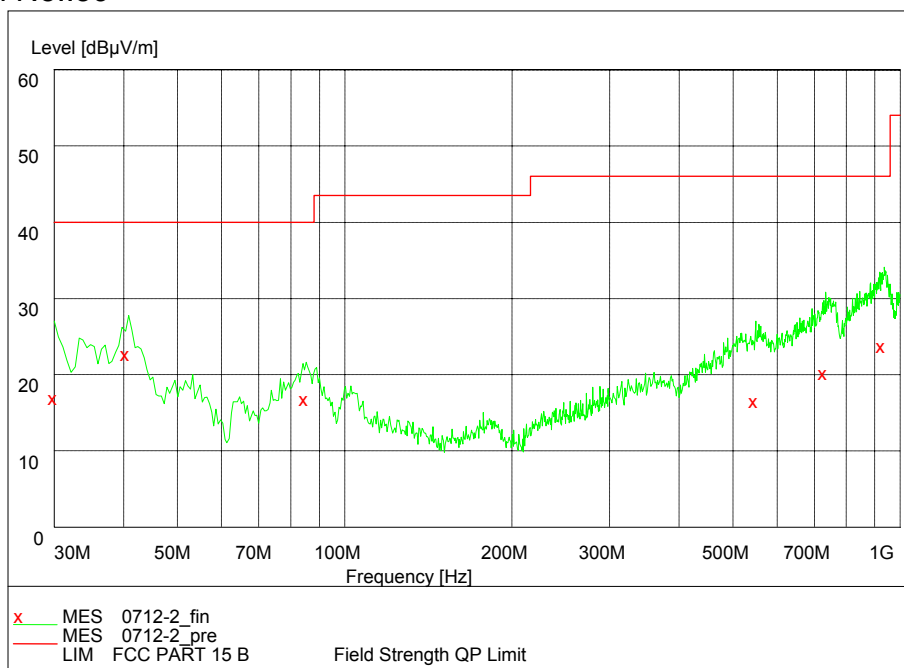

Frequency Range: 30MHz-1000MHz

Detector: QP mode


Modulation type: GFSK

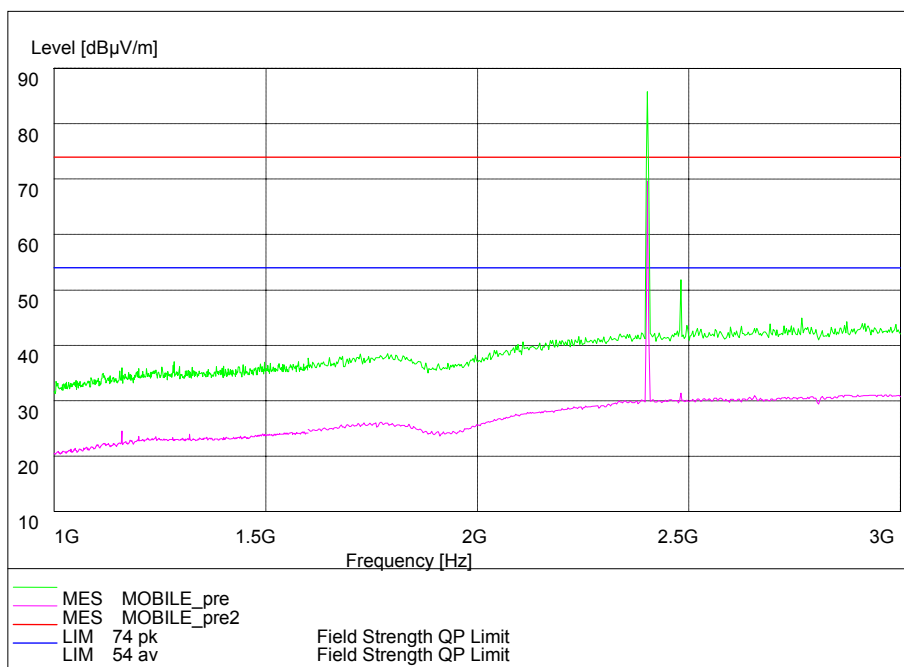

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: GFSK

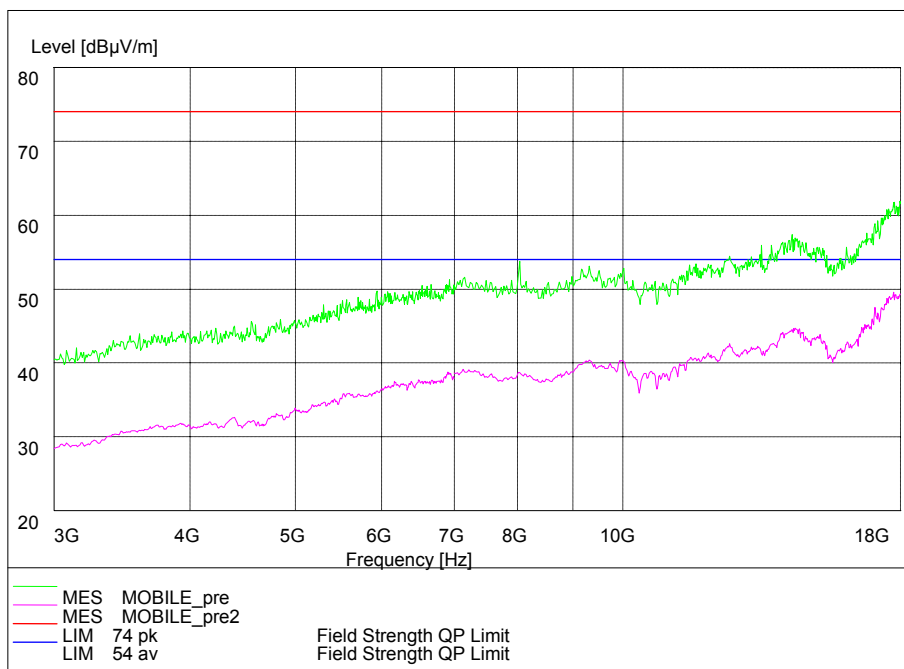

Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode


Modulation type: GFSK

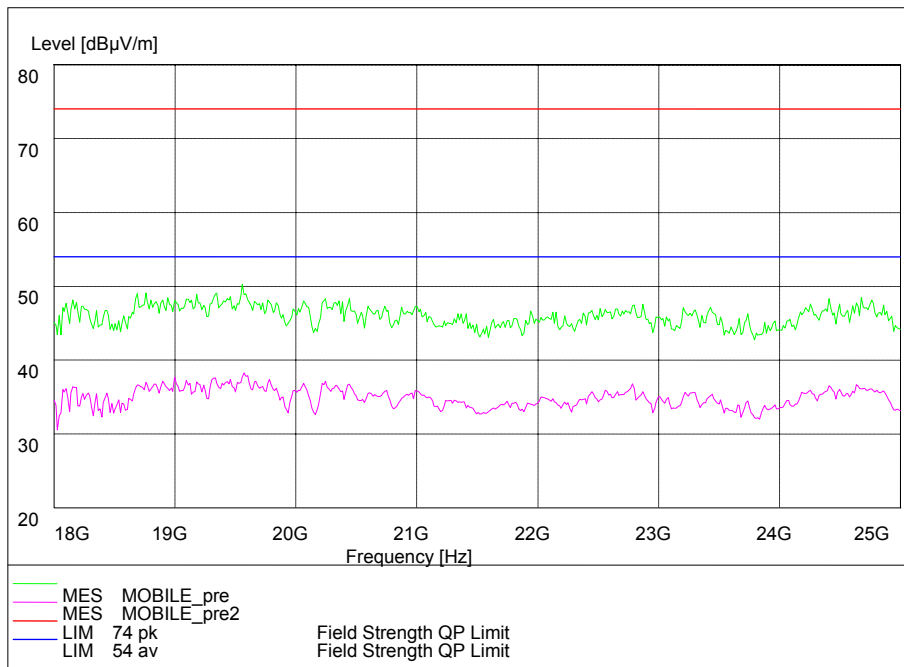

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode


Modulation type: GFSK

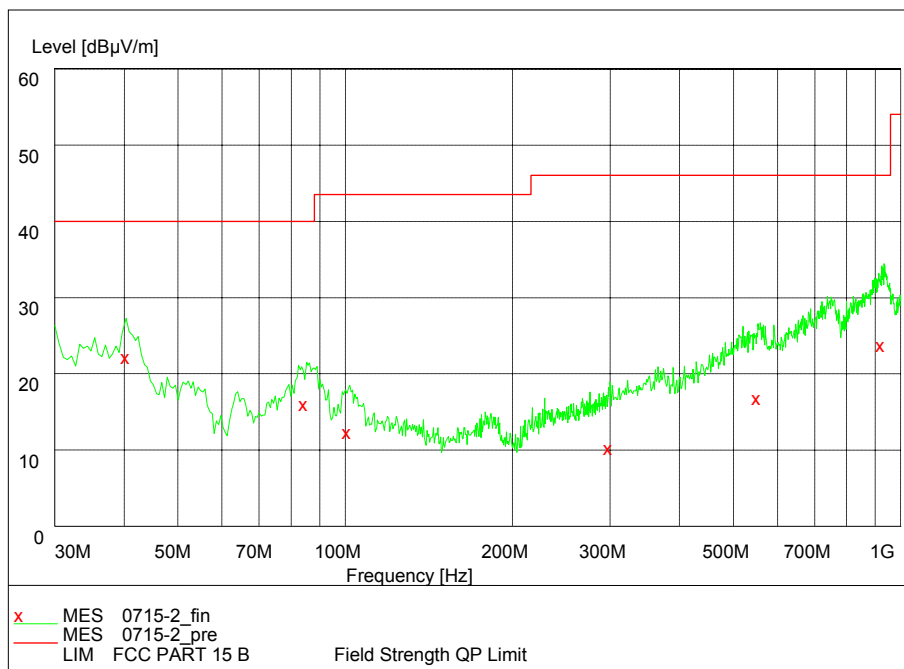

Frequency Range: 30MHz-1000 MHz

Detector: QP mode


Modulation type: $\pi/4$ DQPSK

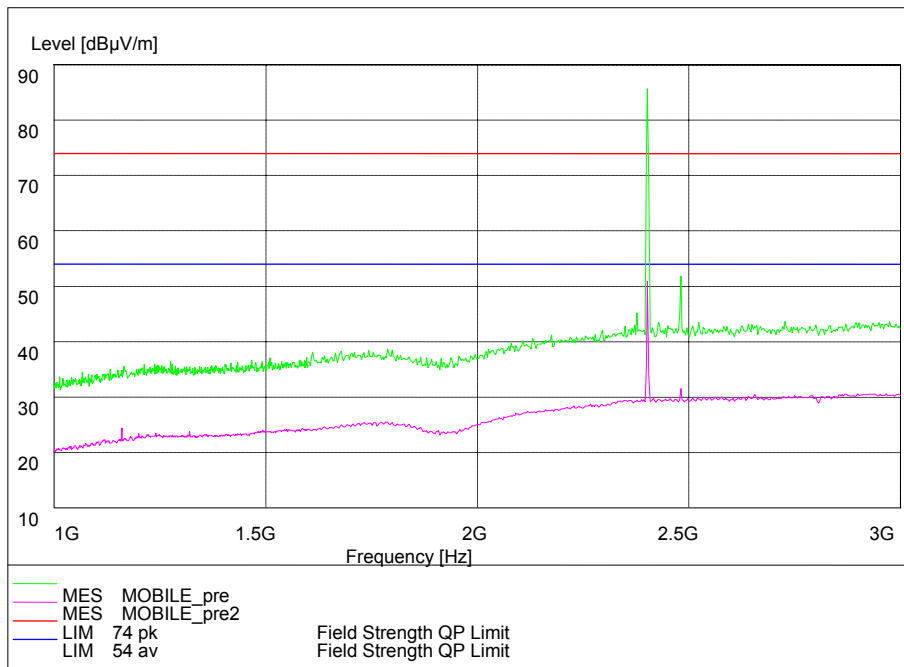

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: $\pi/4$ DQPSK

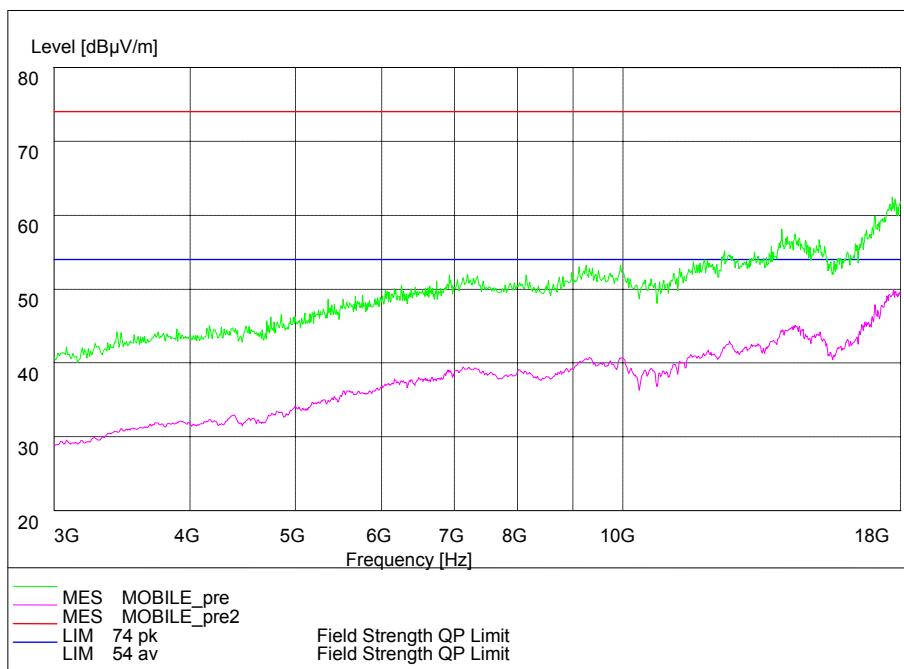

Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode


Modulation type: $\pi/4$ DQPSK

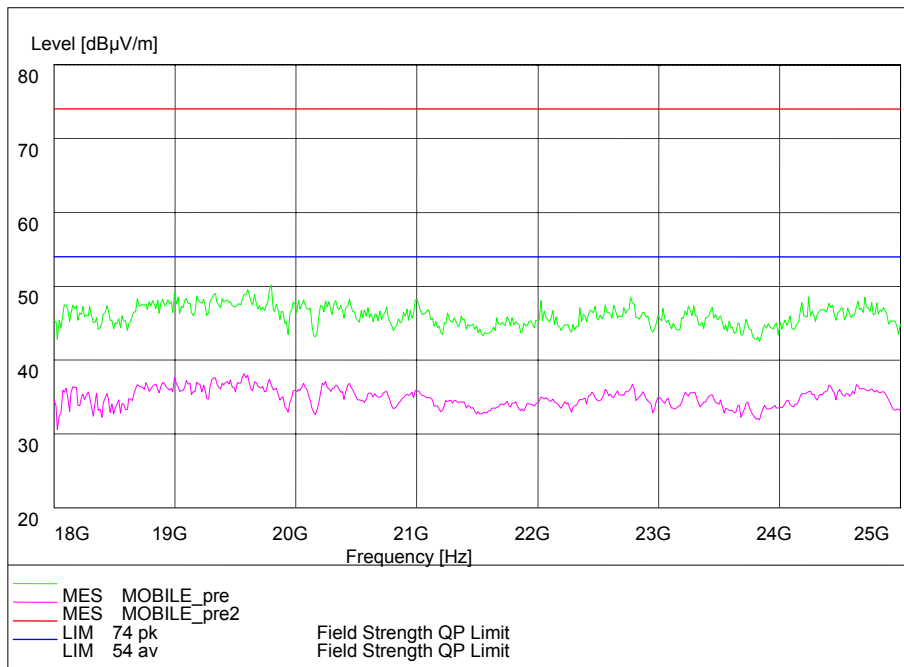

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode


Modulation type: $\pi/4$ DQPSK

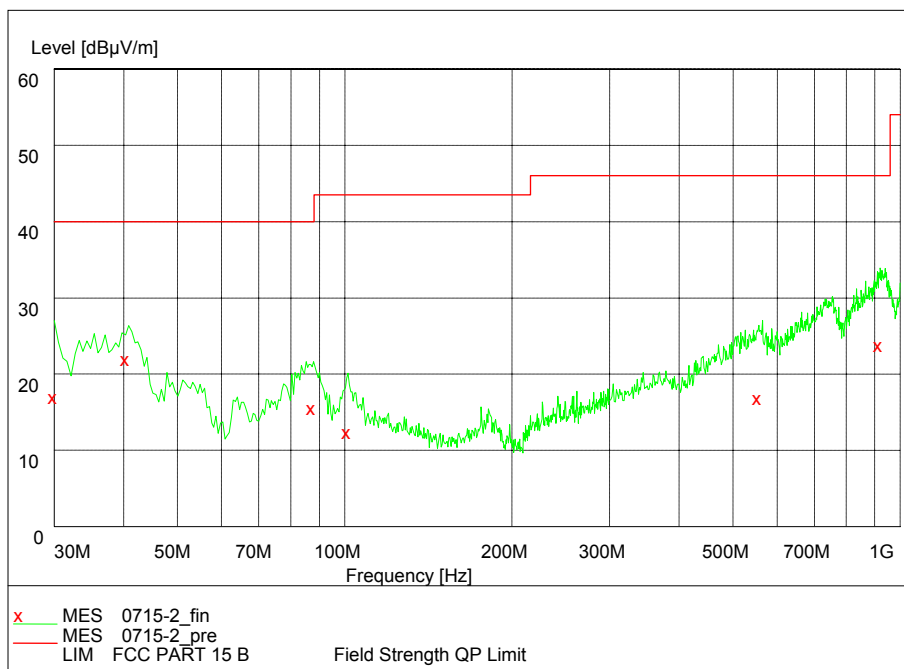

Frequency Range: 30MHz-1000 MHz

Detector: QP mode


Modulation type: 8DPSK

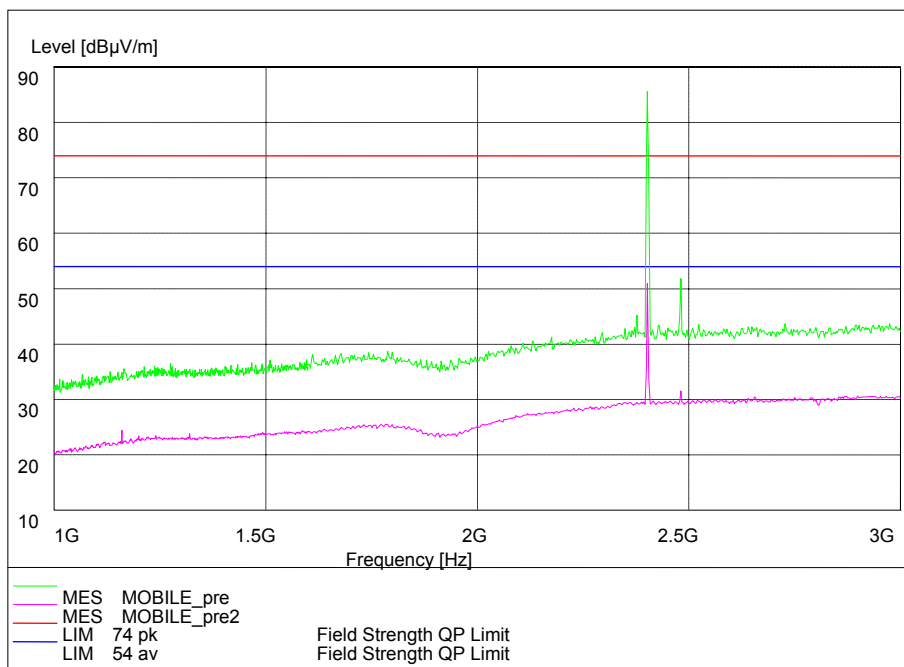

Frequency Range: 1GHz-3GHz

Detector: Av mode and PK mode


Modulation type: 8DPSK

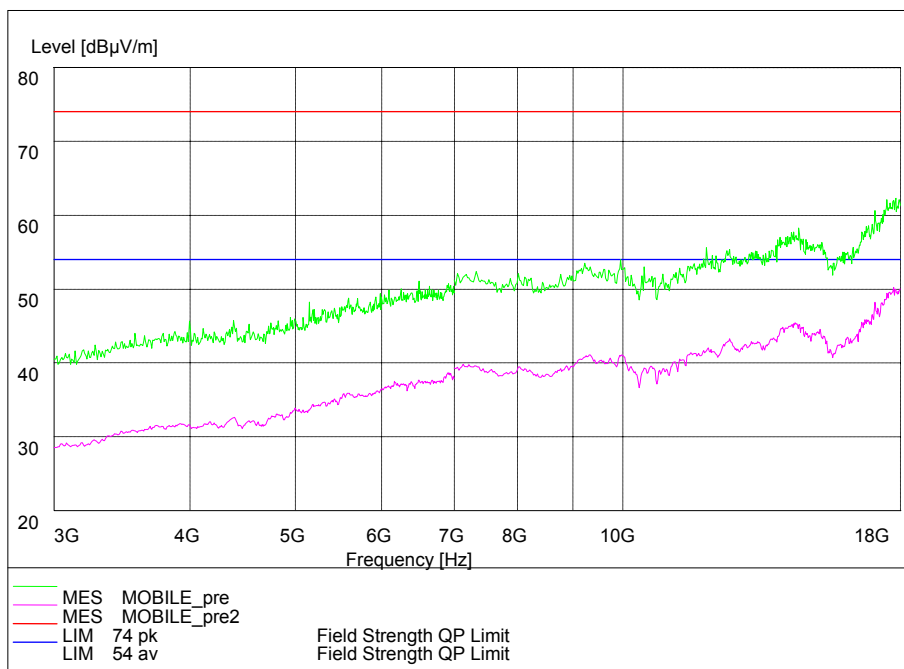

Frequency Range: 3GHz-18GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK

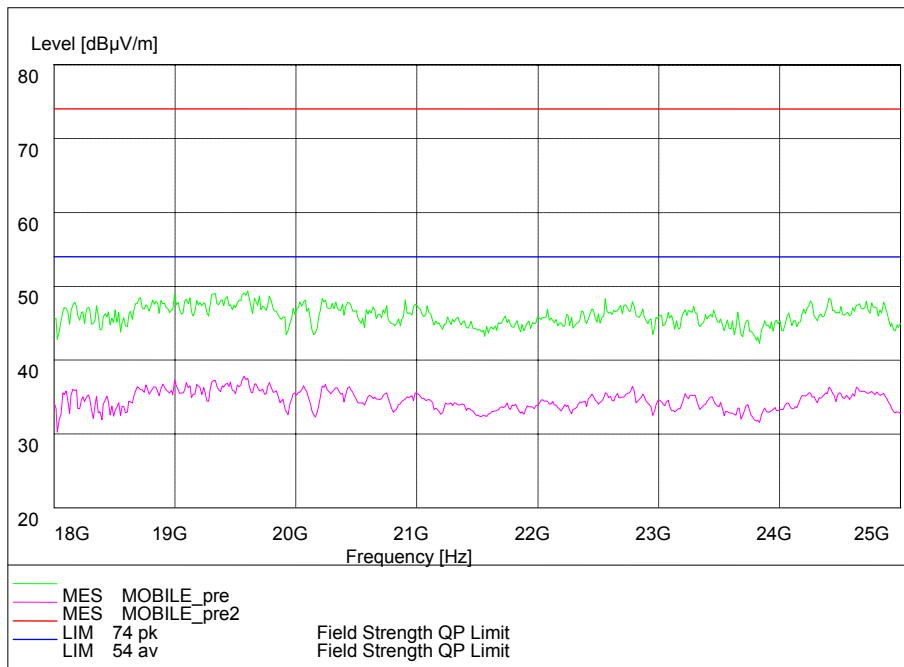

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK

2.2.5 Band Edge Compliance

2.2.5.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.5.2 Test Description

The measurement is made according to ANSI C63.10-2009 Section 6.9.2.

2.2.5.2.1 RF Conducted Measurement

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2390 MHz.


Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480MHz). The higher band edge is 2483.5 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

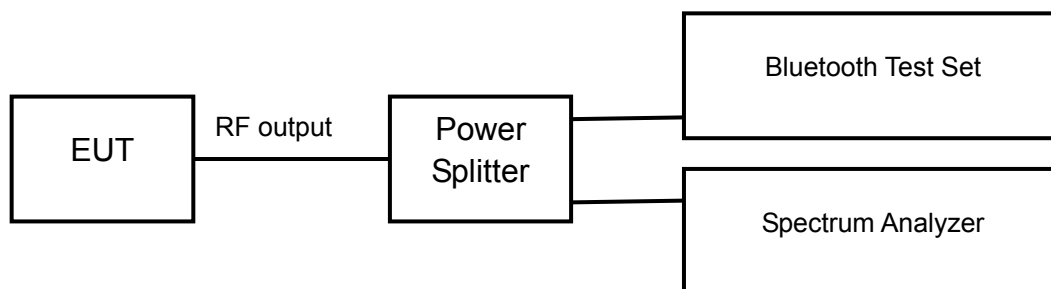


2.2.5.2.2 RF Radiated Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration.

During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

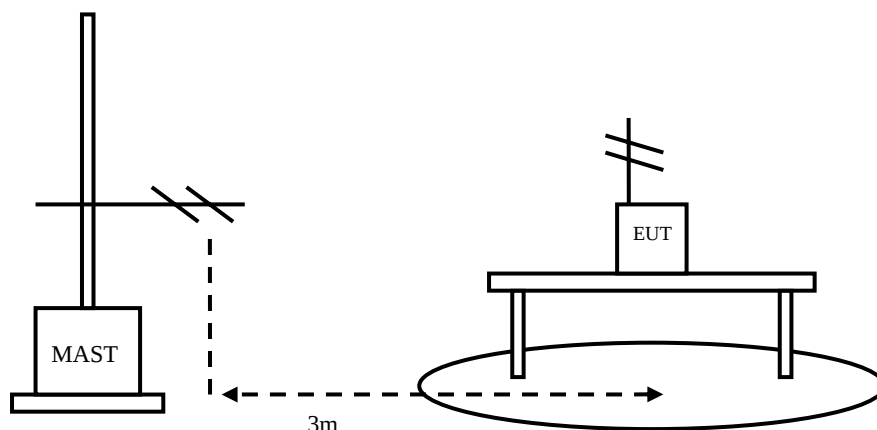

2.2.5.3 Test limit

FCC Part15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

2.2.5.4 Test result

2.2.5.4.1 RF Conducted Measurement

Carrier frequency (MHz): 2402

Channel No.:0

Modulation type: GFSK


Frequency MHz	Hopping Mode	Measured value dBm	Reference value dBm	Limit dBm
2400	Hopping OFF	-52.62	2.56	-17.44
2400	Hopping ON	-52.62	2.56	-17.44

Carrier frequency (MHz): 2480

Channel No.:78

Modulation type: GFSK


Frequency MHz	Hopping Mode	Measured value dBm	Reference value dBm	Limit dBm
2483.5	Hopping OFF	-55.84	5.80	-14.20
2483.5	Hopping ON	-58.32	4.60	-15.40

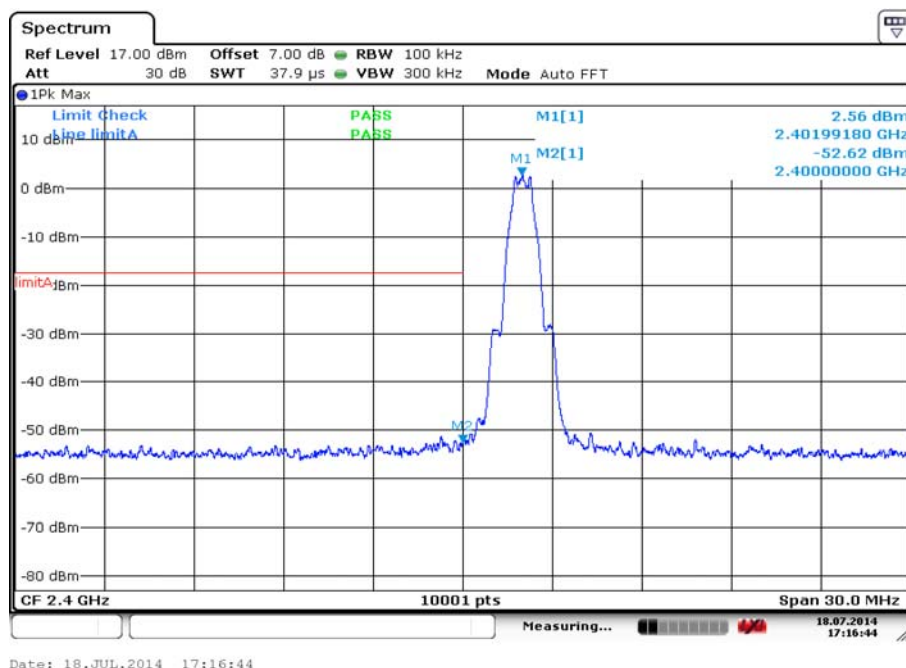


Carrier frequency (MHz): 2402

Channel No.:0, Hopping OFF


Modulation type: GFSK

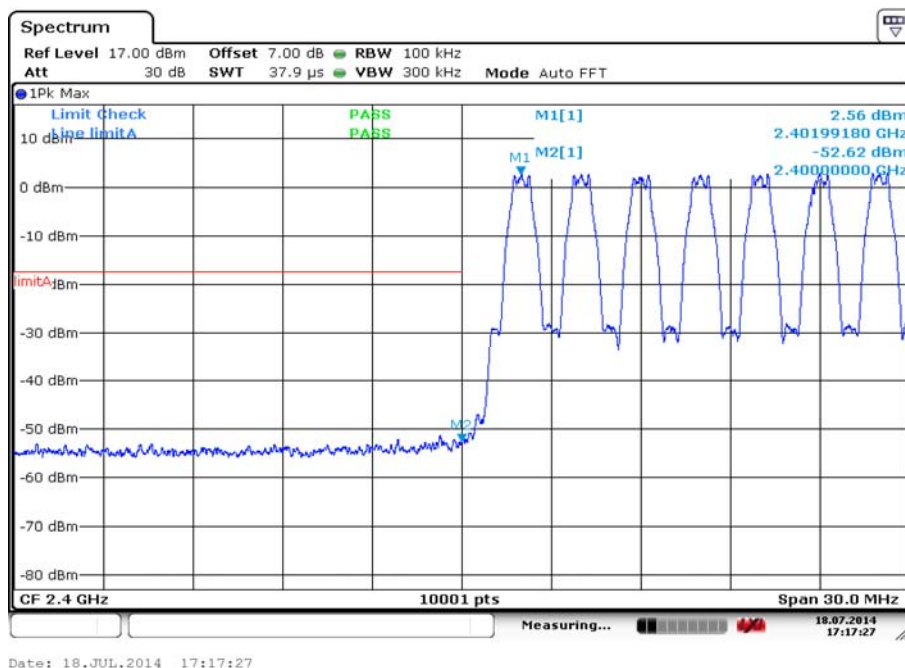


Carrier frequency (MHz): 2402
Channel No.:0, Hopping ON
Modulation type: GFSK

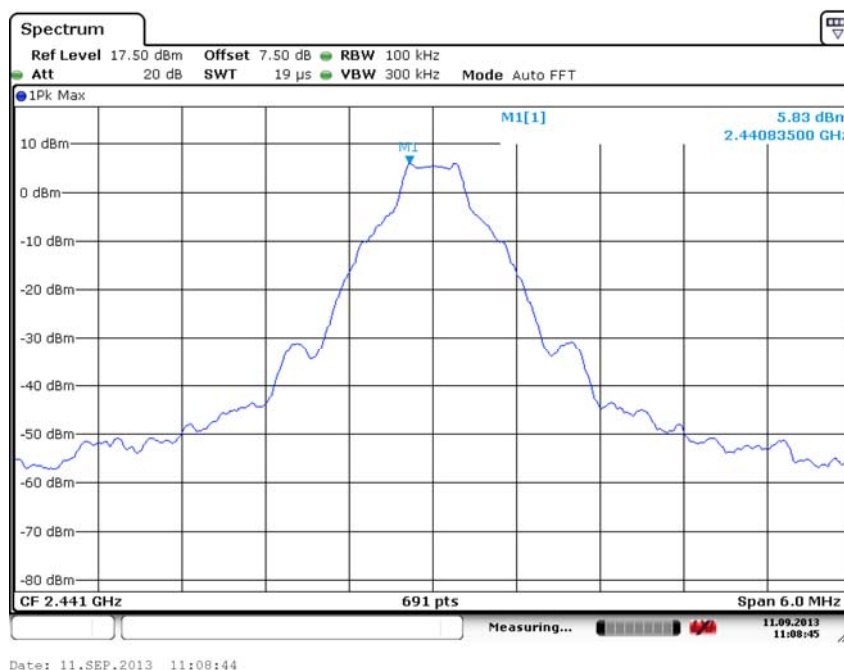


Carrier frequency (MHz): 2441
Channel No.:39, Hopping OFF
Modulation type: GFSK

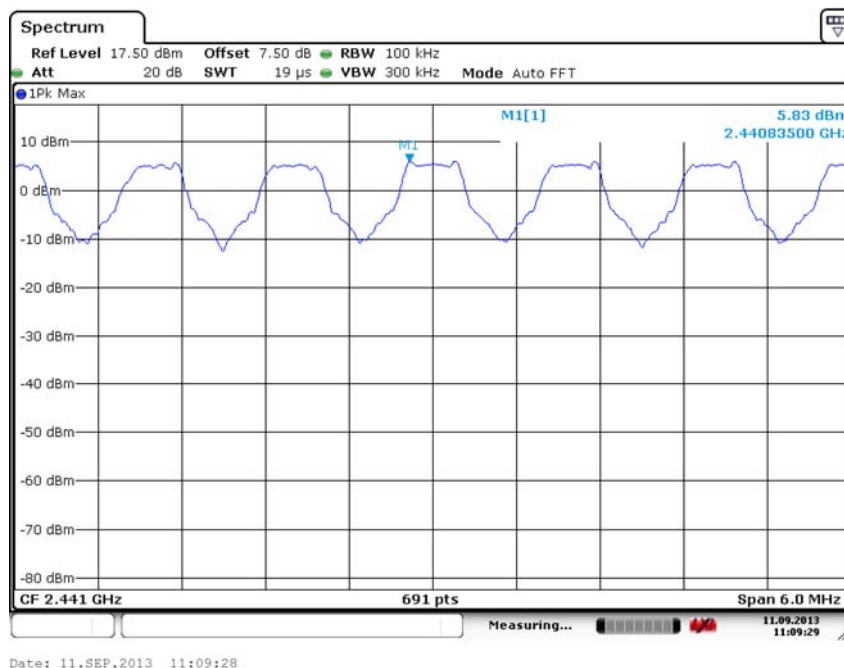

Carrier frequency (MHz): 2441
Channel No.:39, Hopping ON
Modulation type: GFSK

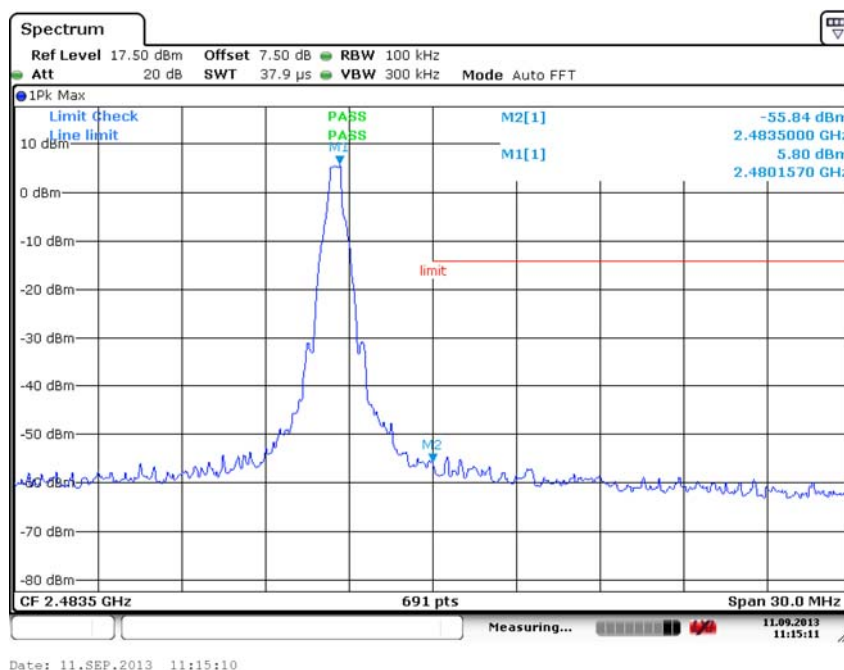

Carrier frequency (MHz): 2480
Channel No.:78, Hopping OFF
Modulation type: GFSK

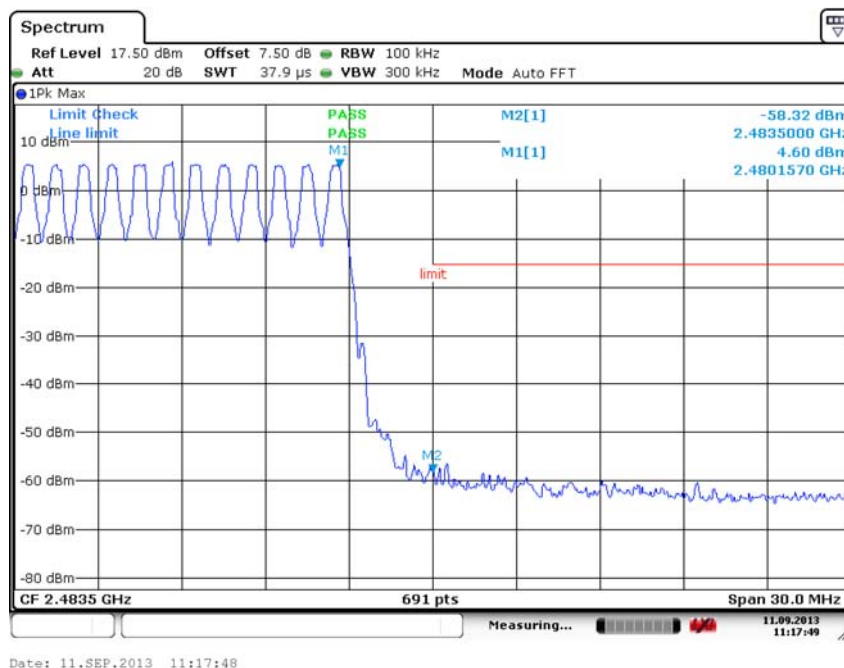


Carrier frequency (MHz): 2480
Channel No.:78, Hopping ON
Modulation type: GFSK

Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: $\pi/4$ DQPSK


Frequency MHz	Hopping Mode	Measured value dBm	Reference value dBm	Limit dBm
2400	Hopping OFF	-53.57	2.35	-17.65
2400	Hopping ON	-53.57	2.35	-17.65

Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: $\pi/4$ DQPSK


Frequency MHz	Hopping Mode	Measured value dBm	Reference value dBm	Limit dBm
2483.5	Hopping OFF	-56.25	4.90	-15.10
2483.5	Hopping ON	-56.58	4.91	-15.09

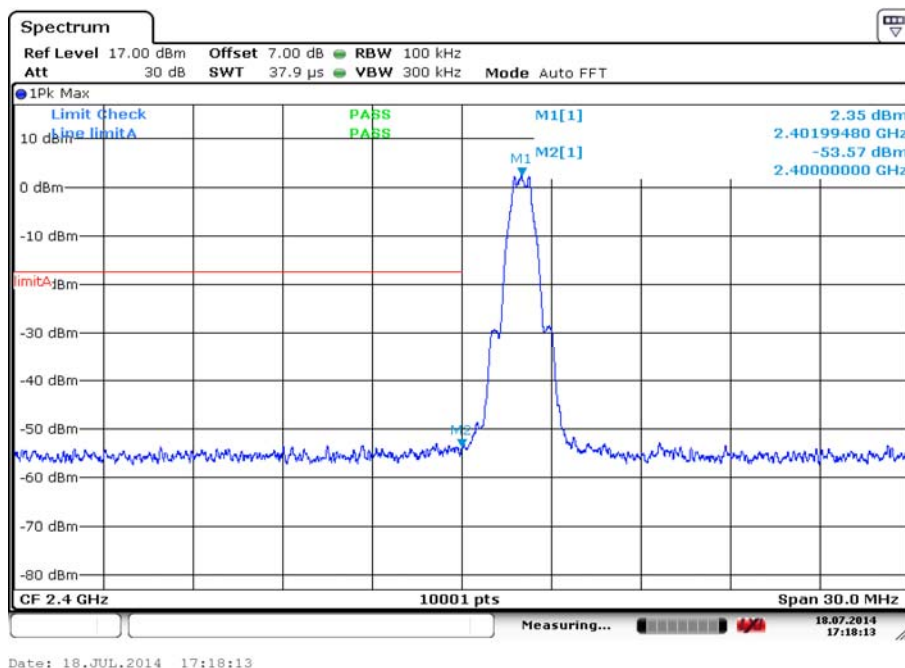


Carrier frequency (MHz): 2402
Channel No.:0, Hopping OFF
Modulation type: $\pi/4$ DQPSK

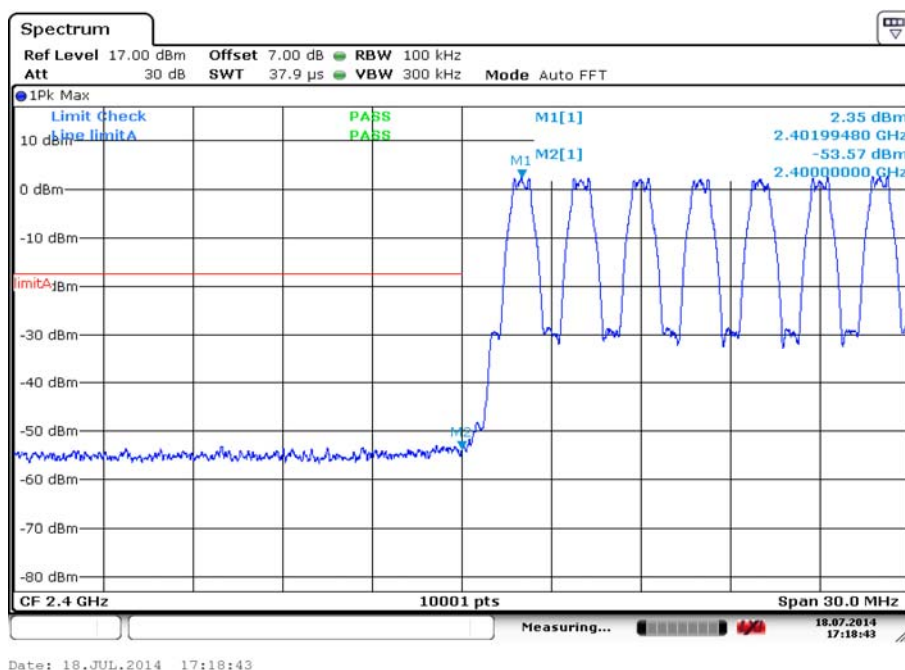


Carrier frequency (MHz): 2402
Channel No.:0, Hopping ON
Modulation type: $\pi/4$ DQPSK

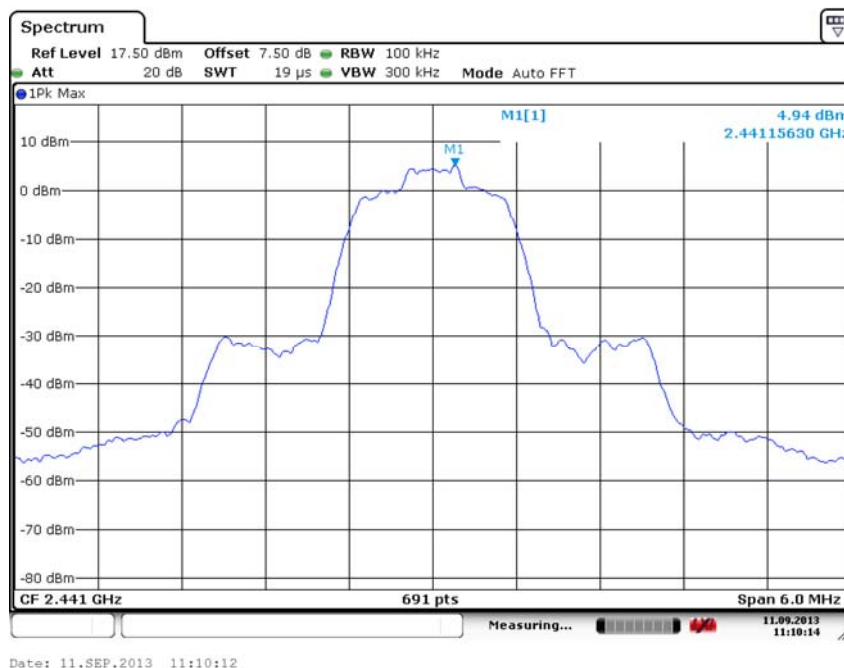


Carrier frequency (MHz): 2441
Channel No.:39, Hopping OFF
Modulation type: $\pi/4$ DQPSK

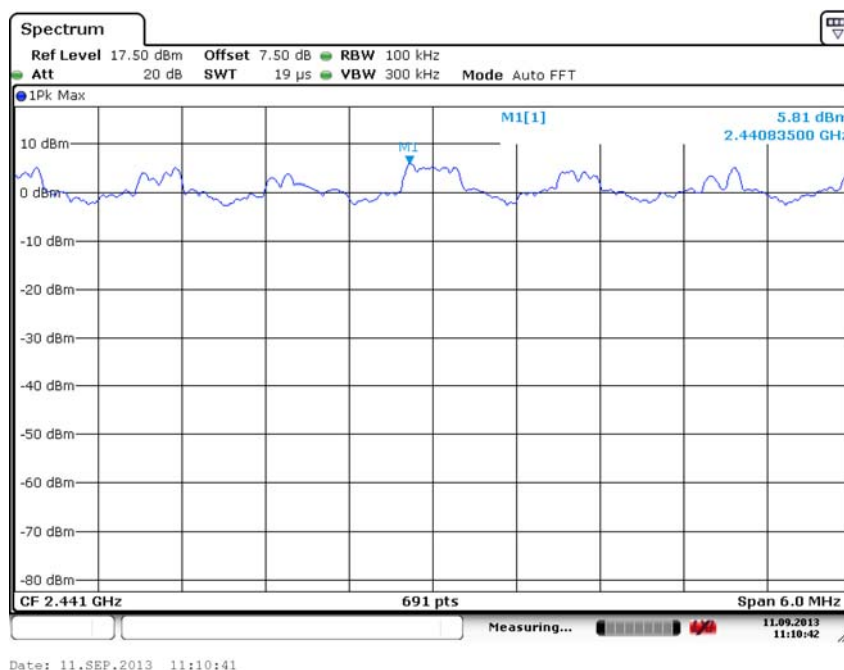

Carrier frequency (MHz): 2441
Channel No.:39, Hopping ON
Modulation type: $\pi/4$ DQPSK

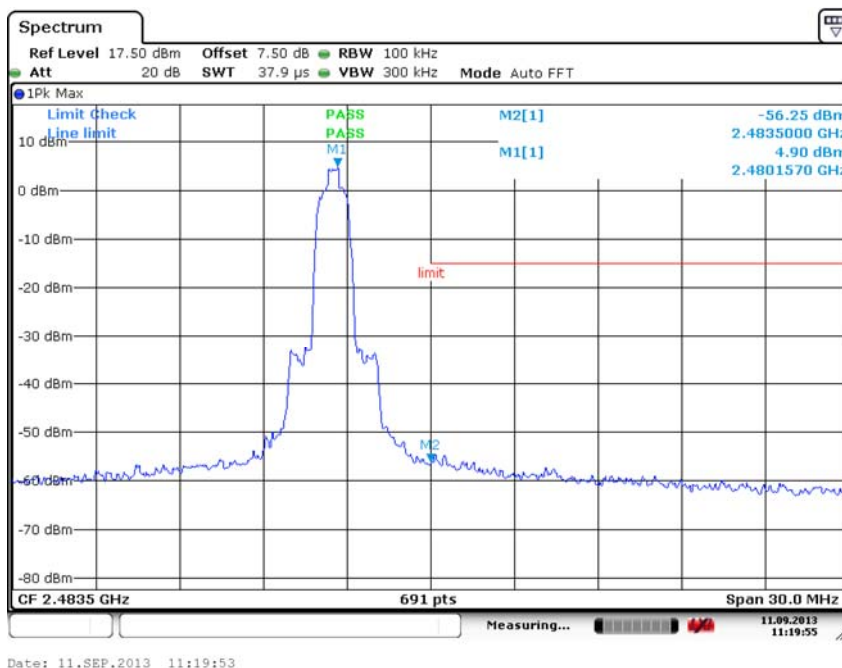

Carrier frequency (MHz): 2480
Channel No.:78, Hopping OFF
Modulation type: $\pi/4$ DQPSK

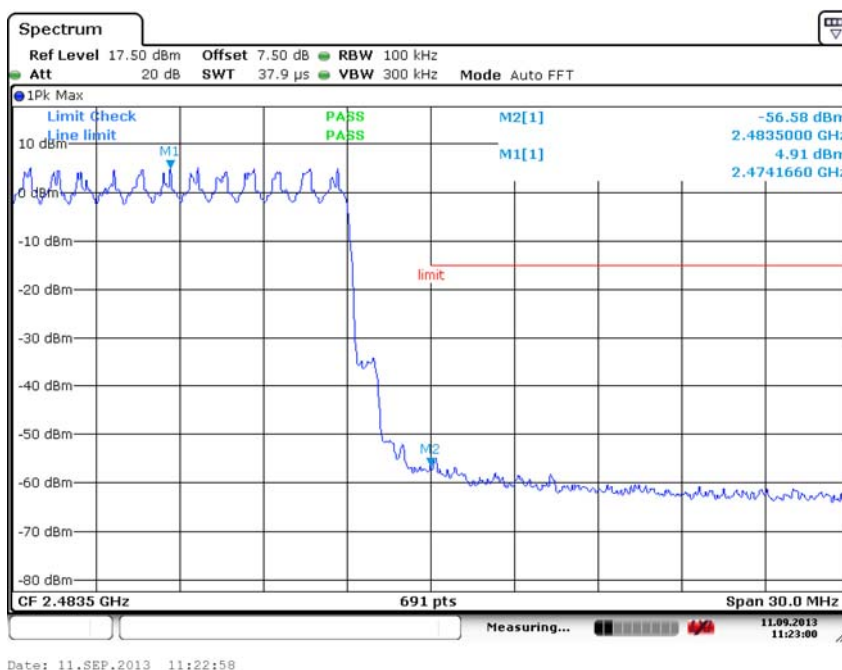

Carrier frequency (MHz): 2480
Channel No.:78, Hopping ON
Modulation type: $\pi/4$ DQPSK

Carrier frequency (MHz): 2402

Channel No.:0

Modulation type: 8DPSK


Frequency MHz	Hopping Mode	Measured value dBm	Reference value dBm	Limit dBm
2400	Hopping OFF	-53.41	2.38	-17.62
2400	Hopping ON	-53.41	2.38	-17.62

Carrier frequency (MHz): 2480

Channel No.:78

Modulation type: 8DPSK


Frequency MHz	Hopping Mode	Measured value dBm	Reference value dBm	Limit dBm
2483.5	Hopping OFF	-54.93	4.92	-15.08
2483.5	Hopping ON	-54.93	5.84	-14.16

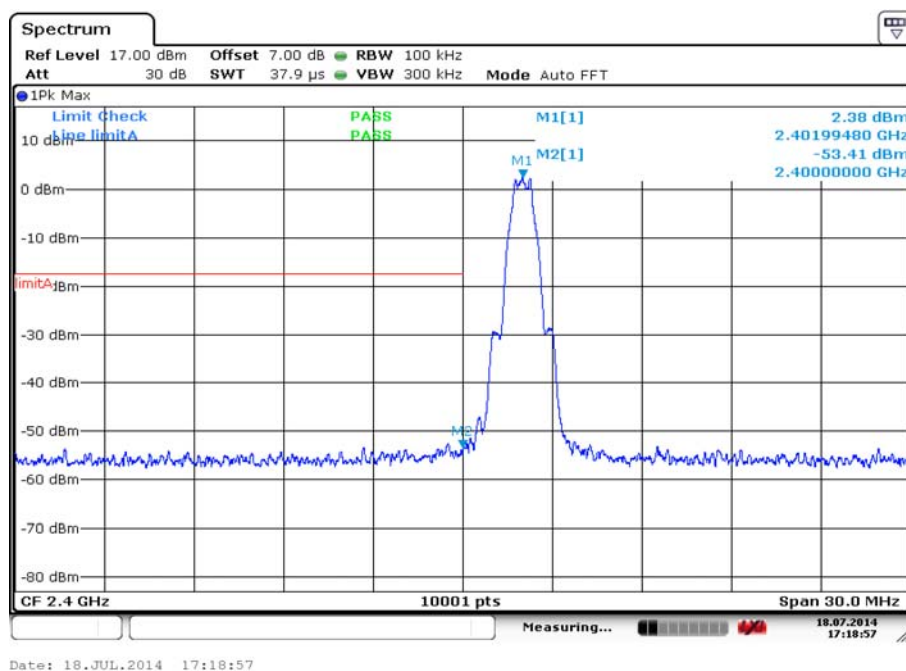


Carrier frequency (MHz): 2402

Channel No.:0, Hopping OFF


Modulation type: 8DPSK

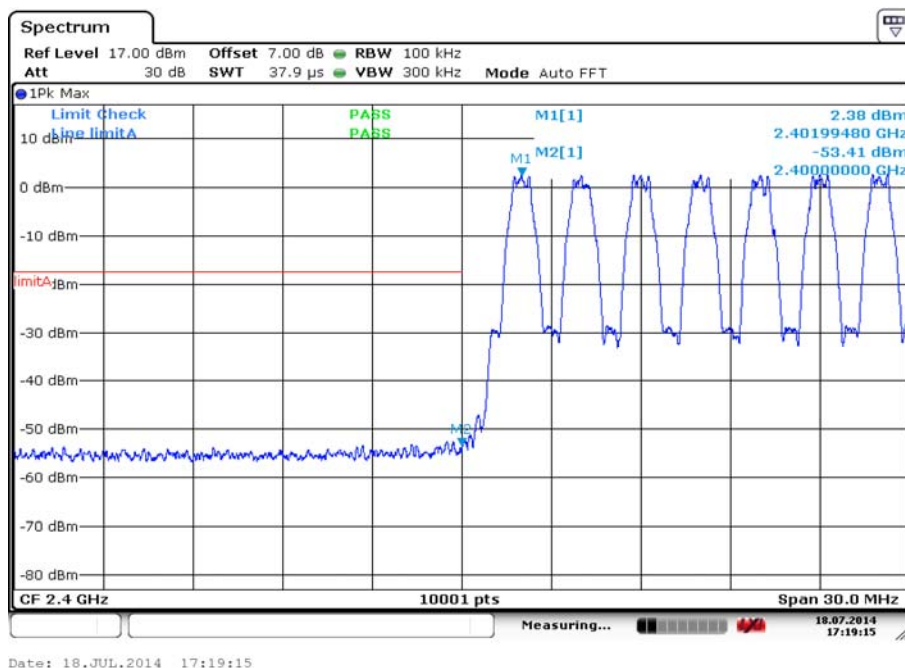


Carrier frequency (MHz): 2402
Channel No.:0, Hopping ON
Modulation type: 8DPSK

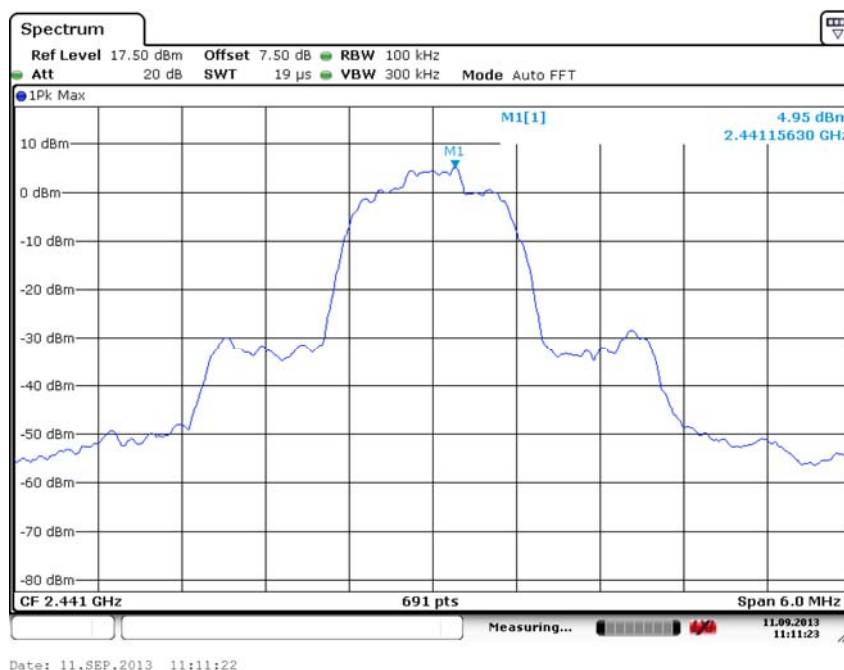


Carrier frequency (MHz): 2441
Channel No.:39, Hopping OFF
Modulation type: 8DPSK

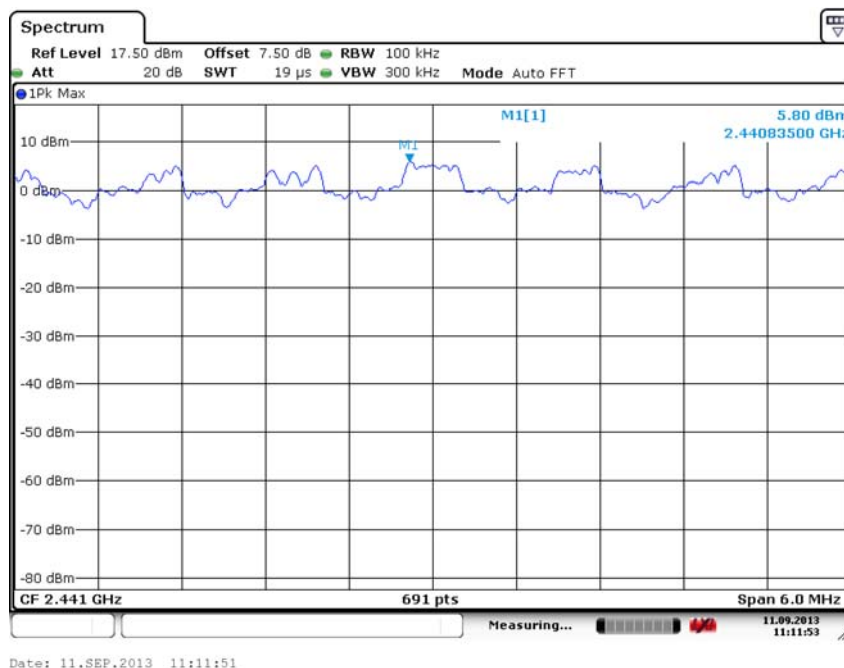

Carrier frequency (MHz): 2441
Channel No.:39, Hopping ON
Modulation type: 8DPSK

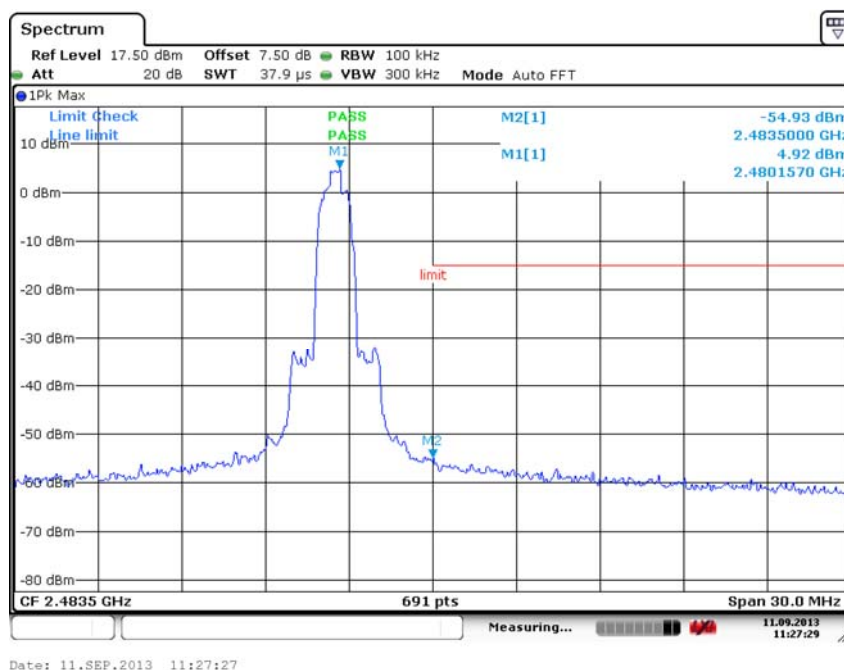

Carrier frequency (MHz): 2480
Channel No.:78, Hopping OFF
Modulation type: 8DPSK

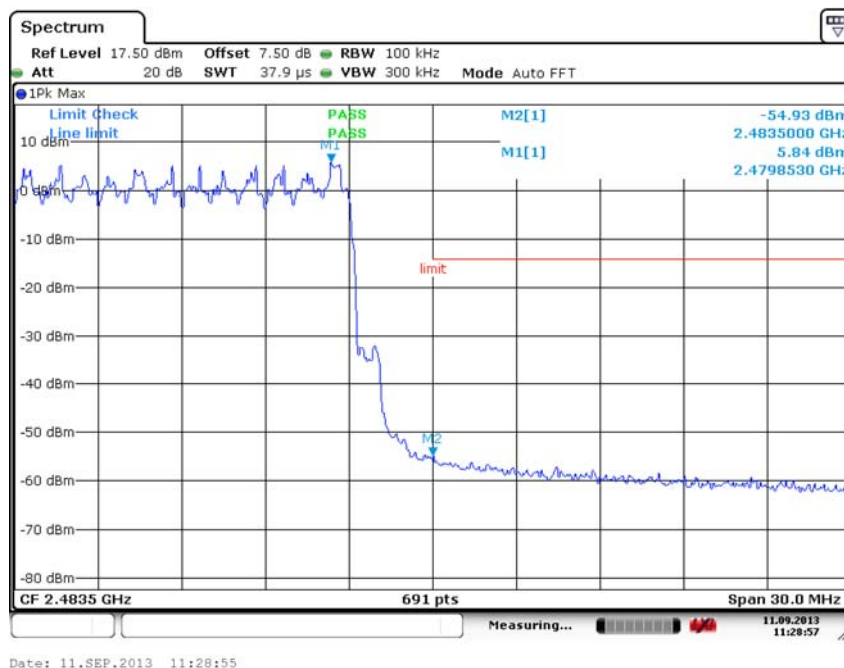

Carrier frequency (MHz): 2480
Channel No.:78, Hopping ON
Modulation type: 8DPSK

2.2.5.4.2 Radiated Measurement

The worst case attitude: The mobile lay down.

Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: GFSK
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	98.38	64.38	N/A	N/A	8.90	25.10
2	2390	55.95	21.95	-18.05	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	97.03	63.03	N/A	N/A	8.90	25.10
2	2390	54.69	20.69	-19.31	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.50	57.50	N/A	N/A	8.90	25.10
2	2390	41.61	7.61	-12.39	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.28	57.28	N/A	N/A	8.90	25.10
2	2390	41.27	7.27	-12.73	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	94.79	60.79	N/A	N/A	8.90	25.10
2	2483.5	55.09	21.09	-18.91	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	94.25	60.25	N/A	N/A	8.90	25.10
2	2483.5	55.69	21.69	-18.31	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	85.90	51.90	N/A	N/A	8.90	25.10
2	2483.5	41.37	7.37	-12.63	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	87.05	53.05	N/A	N/A	8.90	25.10
2	2483.5	42.47	8.47	-11.53	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	100.04	66.04	N/A	N/A	8.90	25.10
2	2390	56.01	22.01	-17.99	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	96.52	62.52	N/A	N/A	8.90	25.10
2	2390	56.95	22.95	-17.05	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	94.31	60.31	N/A	N/A	8.90	25.10
2	2390	41.35	7.35	-12.65	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	92.87	58.87	N/A	N/A	8.90	25.10
2	2390	41.11	7.11	-12.89	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	97.74	63.74	N/A	N/A	8.90	25.10
2	2483.5	42.09	8.09	-11.91	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.62	61.62	N/A	N/A	8.90	25.10
2	2483.5	56.86	22.86	-17.14	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.72	58.72	N/A	N/A	8.90	25.10
2	2483.5	42.93	8.93	-11.07	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.15	61.15	N/A	N/A	8.90	25.10
2	2483.5	42.09	8.09	-11.91	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	99.74	65.74	N/A	N/A	8.90	25.10
2	2390	55.54	21.54	-18.46	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	95.79	61.79	N/A	N/A	8.90	25.10
2	2390	56.01	22.01	-17.99	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	92.84	58.84	N/A	N/A	8.90	25.10
2	2390	41.37	7.37	-12.63	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.56	57.56	N/A	N/A	8.90	25.10
2	2390	42.32	8.32	-9.79	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	100.38	66.38	N/A	N/A	8.90	25.10
2	2483.5	54.64	20.64	-19.36	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	99.26	65.26	N/A	N/A	8.90	25.10
2	2483.5	57.10	23.10	-16.90	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.53	58.53	N/A	N/A	8.90	25.10
2	2483.5	42.62	8.62	-11.38	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	93.11	59.11	N/A	N/A	8.90	25.10
2	2483.5	42.58	8.58	-10.65	54.00	8.90	25.10

2.2.6 Dwell Time

2.2.6.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.6.2 Test Description

The measurement is made according to Public notice DA 00-705 and ANSI C63.4-2009.

The Equipment Under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.


The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets.

The dwell time is calculated by:

Dwell time = time slot length * hop rate * 31.6/ number of hopping channels

with:

- hop rate=1600/2 * 1/s for DH1 packets =800
- hop rate=1600/4 * 1/s for DH3 packets =400
- hop rate=1600/6 * 1/s for DH5 packets =266.67
- number of hopping channels=79
- 31.6 s=0.4 seconds multiplied by the number of hopping channels=0.4s * 79

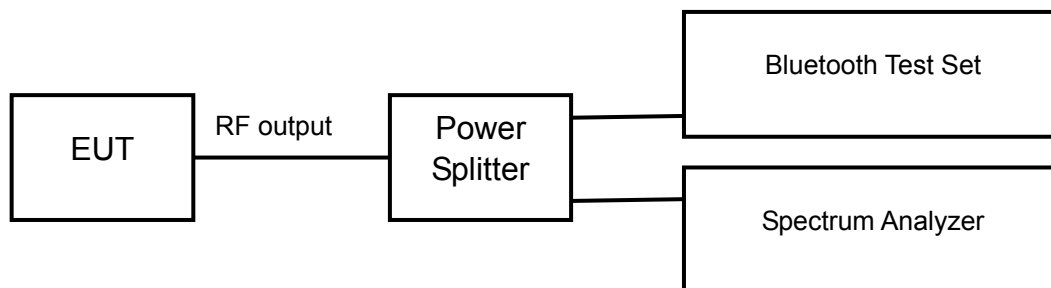

2.2.6.3 Test limit

FCC Part15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

2.2.6.4 Test result

Modulation type: GFSK


Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3696	time slot length *31.6 *1600/2 /79	118.272
DH3	1.6232	time slot length * 31.6 *1600/4 /79	259.712
DH5	2.8696	time slot length * 31.6 *1600/6 /79	306.091

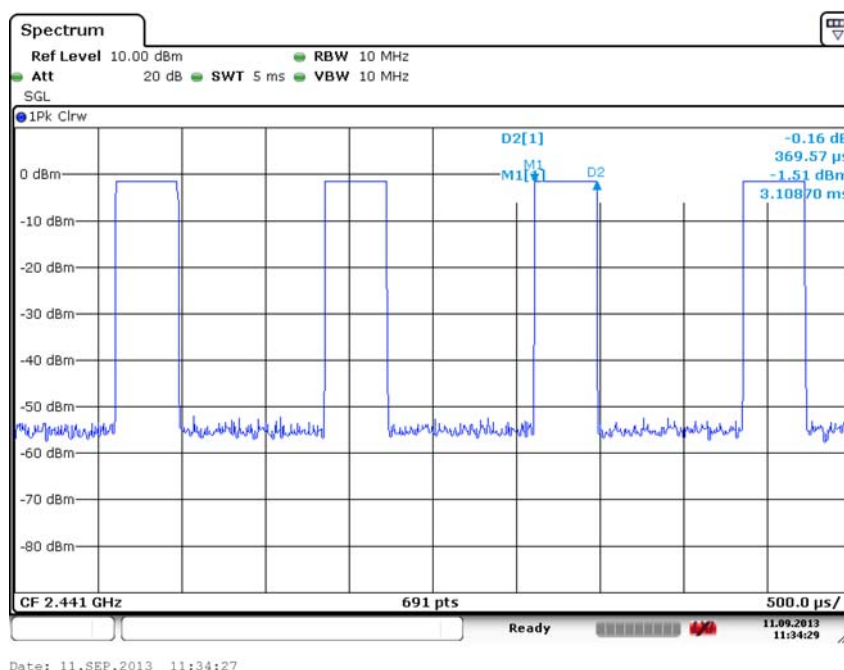


Carrier frequency (MHz): 2441

Packet type: DH1

Modulation type: GFSK

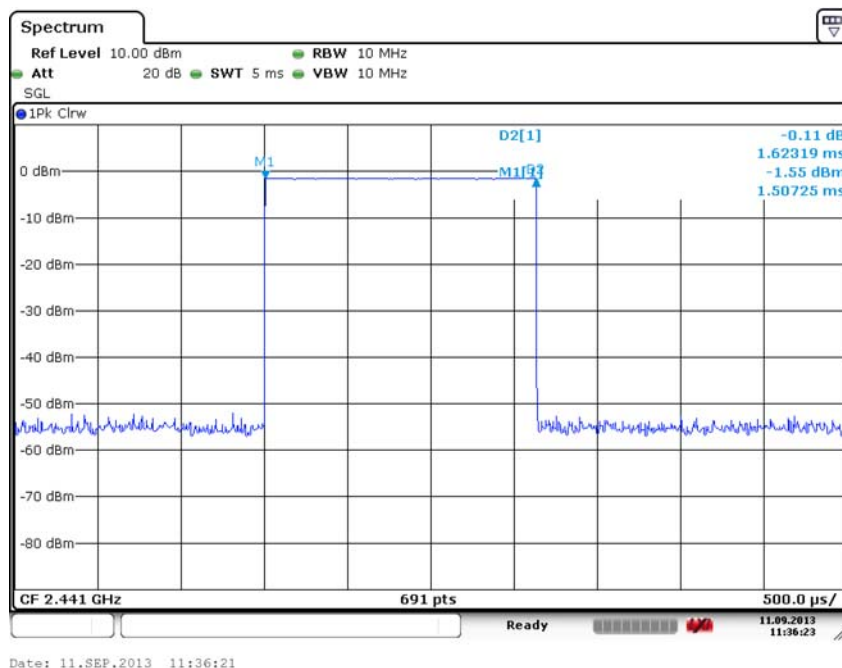


Carrier frequency (MHz): 2441
Packet type: DH3
Modulation type: GFSK

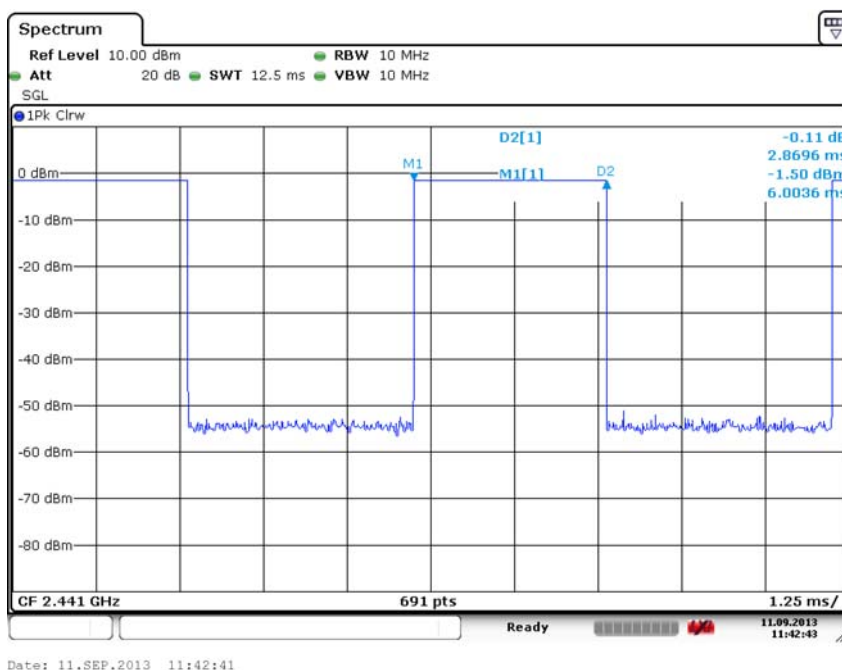

Carrier frequency (MHz): 2441
Packet type: DH5
Modulation type: GFSK

Modulation type: $\pi/4$ DQPSK


Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3764	time slot length *31.6 *1600/2 /79	120.448
DH3	1.6286	time slot length * 31.6 *1600/4 /79	260.576
DH5	2.8764	time slot length * 31.6 *1600/6 /79	306.816

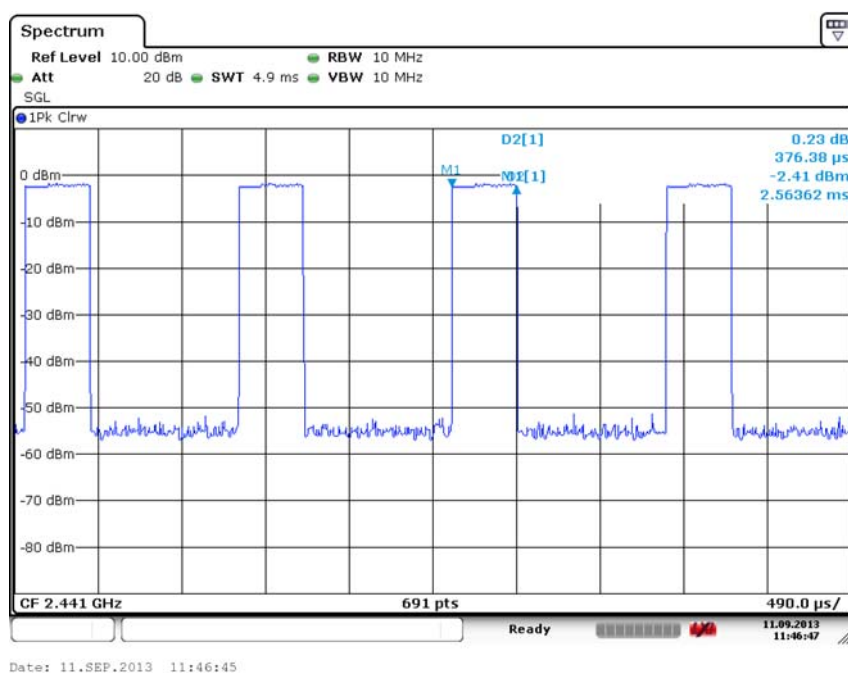


Carrier frequency (MHz): 2441

Packet type: DH1

Modulation type: $\pi/4$ DQPSK

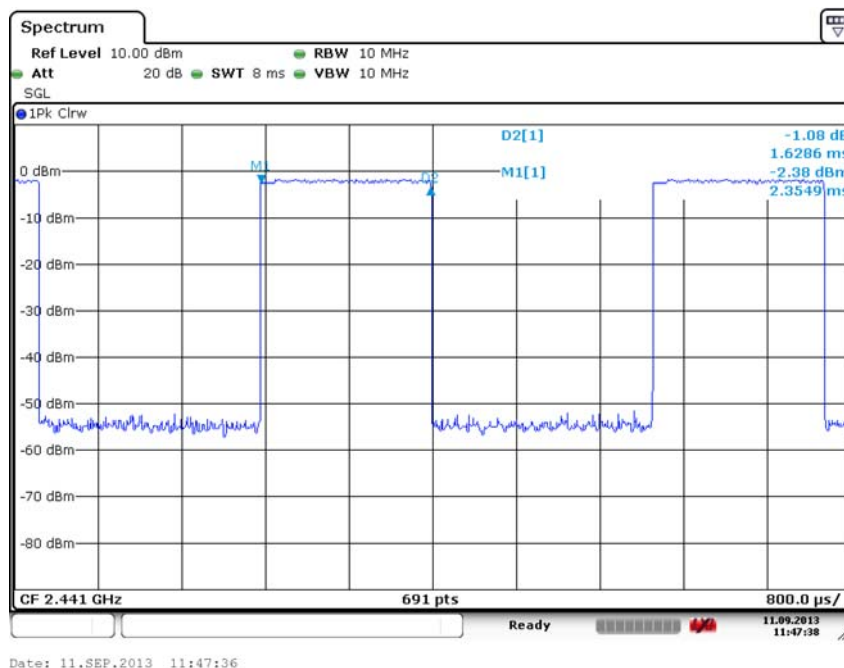


Carrier frequency (MHz): 2441
Packet type: DH3
Modulation type: $\pi/4$ DQPSK

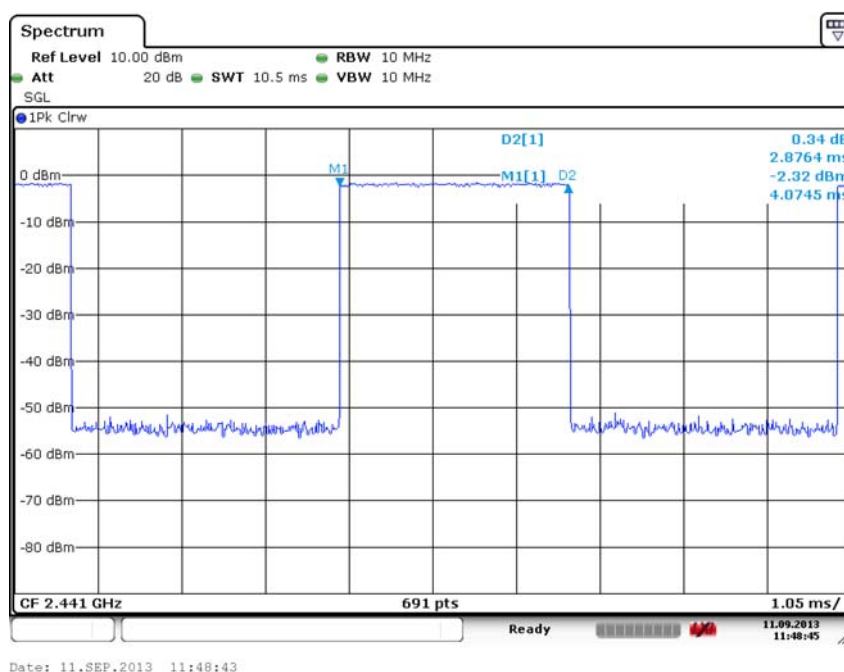

Carrier frequency (MHz): 2441
Packet type: DH5
Modulation type: $\pi/4$ DQPSK

Modulation type: 8DPSK


Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3675	time slot length *31.6 *1600/2 /79	117.600
DH3	1.6429	time slot length * 31.6 *1600/4 /79	262.864
DH5	2.8864	time slot length * 31.6 *1600/6 /79	307.883

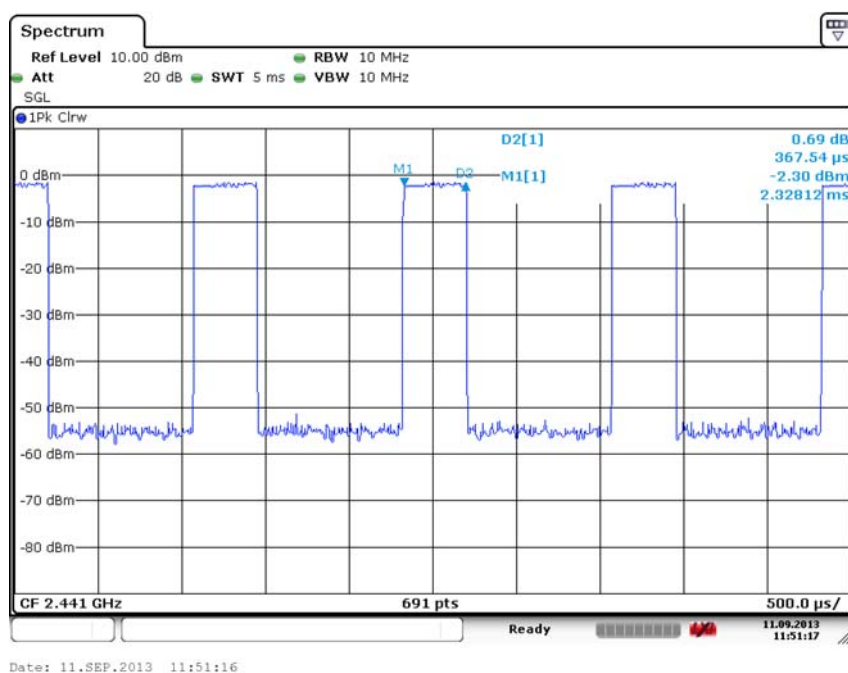


Carrier frequency (MHz): 2441

Packet type:DH1

Modulation type: 8DPSK

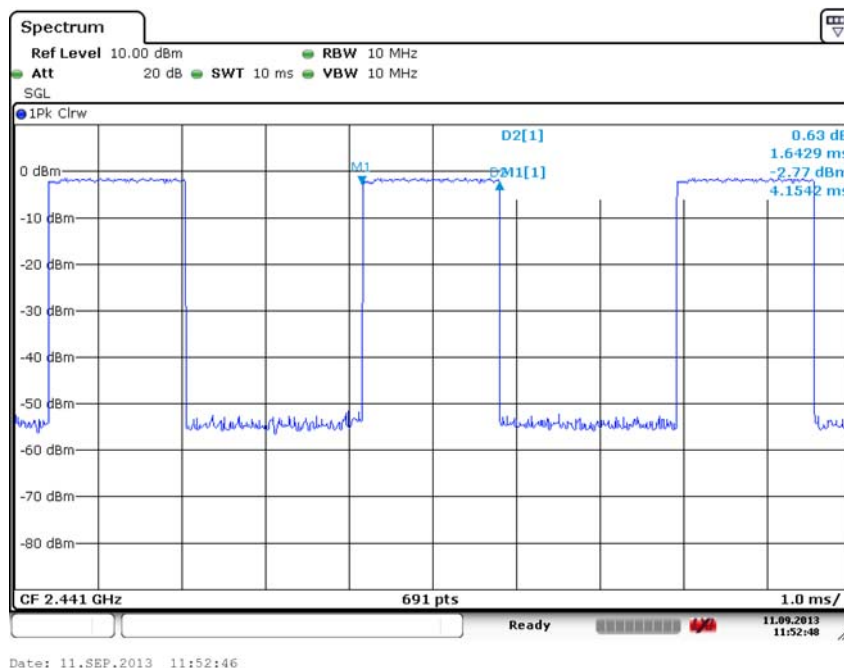

Carrier frequency (MHz): 2441
Packet type:DH3
Modulation type: 8DPSK

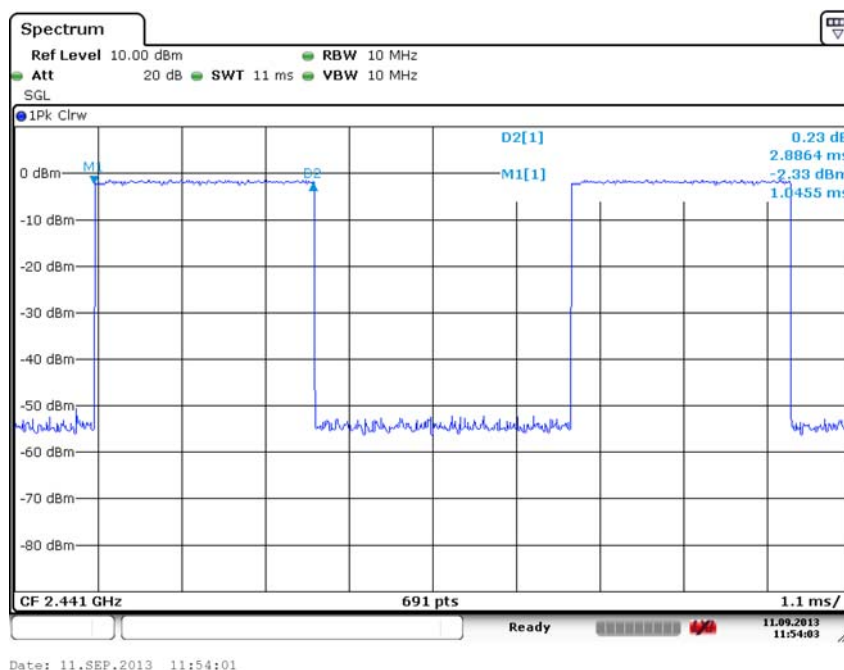

Carrier frequency (MHz): 2441
Packet type:DH5
Modulation type: 8DPSK

2.2.7 Channel Separation

2.2.7.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.7.2 Test Description


The measurement is made according to Public notice DA 00-705 and ANSI C63.4-2009.

The Equipment Under Test (EUT) was set up in a shielded room to perform the channel separation measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

Analyzer settings:

- Detector: Peak-Max hold
- Span: 3 MHz
- Centre Frequency: 2441 MHz
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 1 MHz
- Sweep Time: Coupled

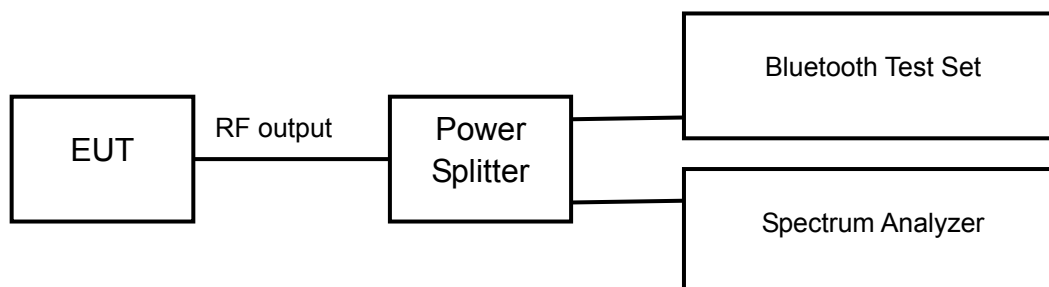


2.2.7.3 Test limit

FCC Part15.247(a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

2.2.7.4 Test result

Op-mode	Channel separation MHz
Hopping mode	1

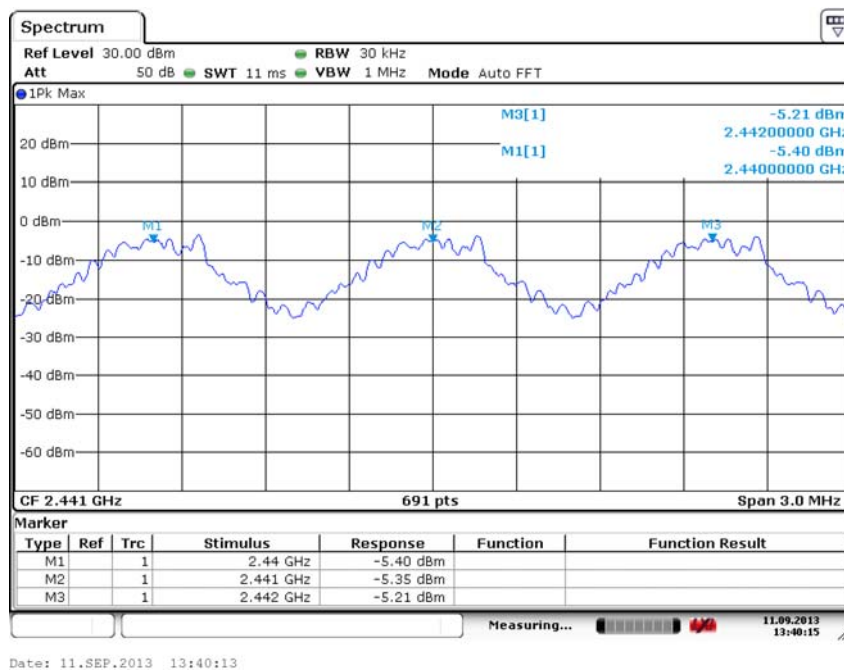

Op-mode: Hopping mode

2.2.8 Number of Hopping Frequencies

2.2.8.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.8.2 Test Description


The measurement is made according to Public notice DA 00-705 and ANSI C63.4-2009.

The Equipment Under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Start frequency: 2400 MHz
- Stop frequency: 2483.5 MHz
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 1 MHz
- Sweep Time: Coupled

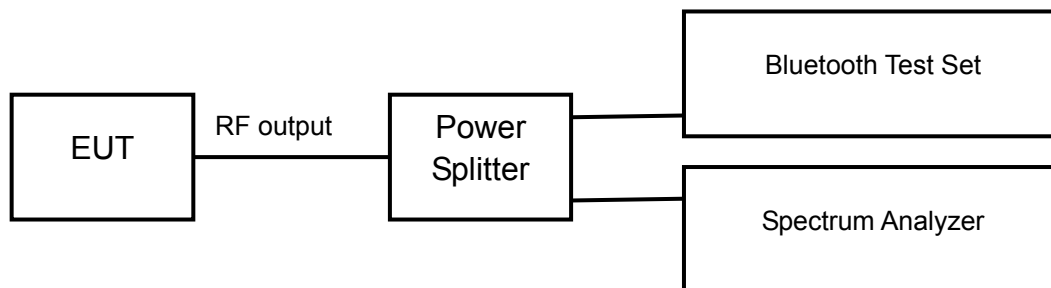


2.2.8.3 Test limit

FCC Part15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

2.2.8.4 Test result

Op-mode	Result
Hopping mode	79

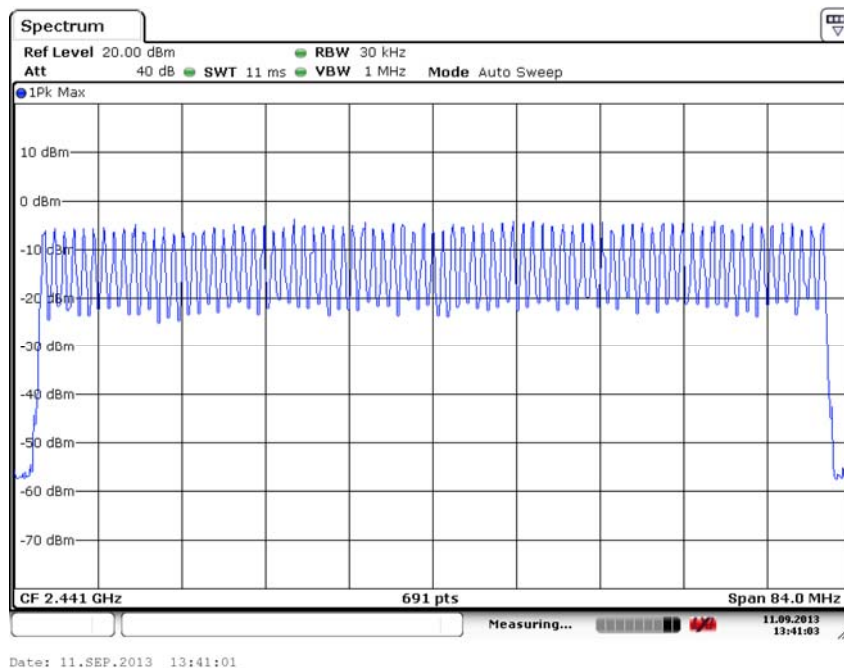

Op-mode: Hopping mode

2.2.9 AC Power line Conducted Emission

2.2.9.1 Ambient condition

Temperature	Relative humidity	Pressure
20°C	35%	101.4kPa

2.2.9.2 Test limit

FCC Part15.207


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.4-2009

2.2.9.3 Test result

Noise Level of the Measuring Instrument

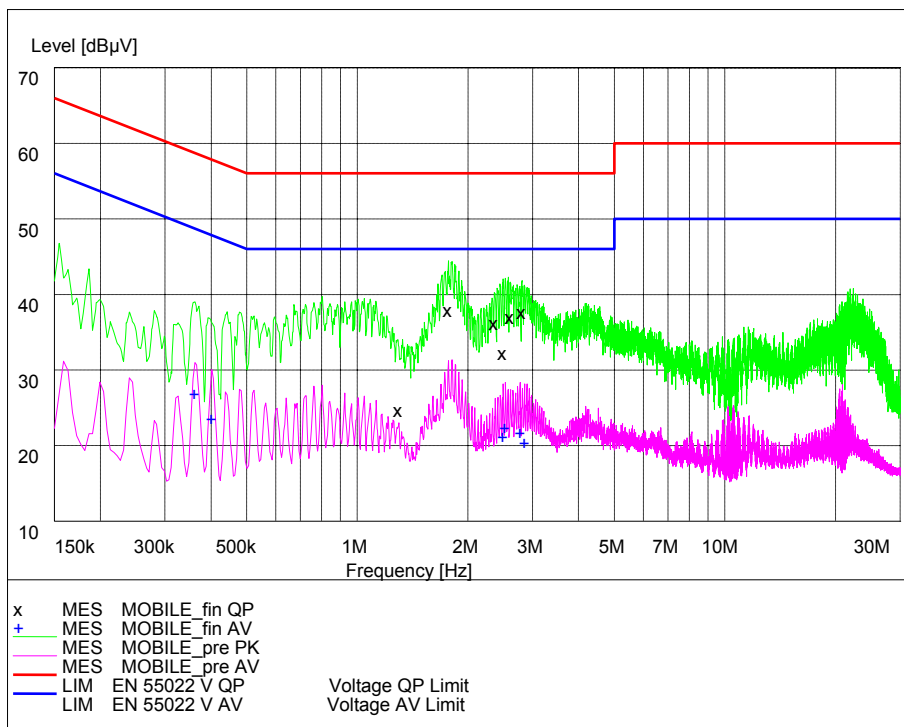

L+N Line

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.362000	28.30	20.2	49	20.4	N	---
0.564000	24.90	20.2	48	22.9	N	---
2.455000	22.50	20.3	46	23.5	L1	---
2.531000	23.80	20.3	46	22.2	L1	---
2.773000	23.10	20.3	46	22.9	L1	---
2.854000	21.80	20.3	46	24.2	L1	---

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
1.770000	39.40	20.2	56	16.6	L1	---
2.360000	37.70	20.3	56	18.3	L1	---
2.495000	33.70	20.3	56	22.3	L1	---
2.575000	33.00	20.3	56	23.0	L1	---
2.607000	38.40	20.3	56	17.6	L1	---
2.805000	39.10	20.3	56	16.9	L1	---

2.3. Measurement Uncertainty

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

2.4. List of test equipment

No.	Name/ Model	Manufacturer	S/N	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2014.8
2.	Signal Generator MG3700A	Anritsu	6200677084	2014.8
3.	Bluetooth Test Set MT8852B	Anritsu	1142010	2015.2
4.	Cable 104EA	SUCOFLEX	9272/4EA	2014.8
5.	Cable 104EA	SUCOFLEX	9266/4EA	2014.8
6.	Power Splitter 11850C	Agilent	026057	2014.8
7.	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	-----	-----
8.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	-----
9.	Turn table Diameter:1m	HD	-----	-----
10.	Turn table Diameter:5m	HD	-----	-----
11.	Antenna master FAC(MA4.0)	MATURO	-----	-----
12.	Antenna master SAC(MA4.0)	MATURO	-----	-----
13.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	-----
14.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2014.8
15.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	2014.8
16.	HL562 Ultra log antenna	R&S	100016	2014.8
17.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2014.8
18.	ESI 40 EMI test receiver	R&S	100015	2014.8
19.	Radio tester	CMU 200	114667	2014.8
20.	ESCS30 EMI test receiver	R&S	100029	2014.8
21.	HL562 Receive antenna	R&S	100167	2014.8
22.	ESH3-Z5 LISN	R&S	100020	2014.8

Appendix

Appendix1 Test Setup