
TEST REPORT

Report No.: SRTC2014-H024-E0060

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Marketing Name: ONE TOUCH 7042A

Product Model: Yaris-5

Applicant: TCT Mobile Limited

Manufacturer: TCT Mobile Limited

Specification: FCC Part 15, Subpart C (October 9, 2012 edition)

FCC ID: RAD525

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory	3
1.3 Applicant's details	3
1.4 Manufacturer's details	3
1.5 Application details	4
1.6 Reference specification	4
1.7 Information of EUT	4
1.7.1 General information	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details	5
2. Test information	7
2.1 Summary of the test results	7
2.2 Test result	8
2.2.1 Occupied Bandwidth	8
2.2.2 Channel Separation	14
2.2.3 Peak Power Output	16
2.2.4 Dwell Time	22
2.2.5 Number of Hopping Frequencies	30
2.2.6 Conducted out of band emission measurement	32
2.2.7 Spurious Radiated Emissions	36
2.2.8 AC Power line Conducted Emission	52
2.3. Measurement Uncertainty	55
2.4. List of test equipment	56
Appendix	57

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang
High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Grantee Code: RAD
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@tcl.com

1.4 Manufacturer's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang
High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@tcl.com

1.5 Application details

Date of reception of test sample: 9th September 2013

Date of test: 9th September 2013 to 1th September 2014

1.6 Reference specification

FCC Part 15, Subpart C (October 9, 2012 edition)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	RAD525
Frequency Range	2.4GHz~2.4835GHz
Number of Channel	79
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Duplex Mode	TDD
Channel Spacing	1MHz
Data Rate	1Mbps, 2 Mbps, 3 Mbps
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
Rated Power Supply Voltage	3.8V
HW Version	SBA33A10001E
SW Version	vAQW

1.7.2 EUT details

Product Name	Marketing Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	ONE TOUCH 7042A	Yaris-5	865867020000051

1.7.3 Auxiliary equipment details

Equipment	Charger
Manufacturer	Ten Pao Industrial Co., Ltd.
Model Number	S005UU0500100
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	TUUS050100-A00
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	BYD COMPANY LIMITED
Model Number	TLi020F1
Capacity	2000mAh
Rated Voltage	4.35V d.c.

Equipment	Battery
Manufacturer	BYD COMPANY LIMITED
Model Number	TLi019B1
Capacity	1900mAh
Rated Voltage	4.35V d.c.

Equipment	Battery
Manufacturer	SCUD (FUJIAN) Electronics Co., Ltd.
Model Number	TLi019B2
Capacity	1900mAh
Rated Voltage	4.35V d.c.

Equipment	Data Cable
Manufacturer	Shenzhen Juwei Electronics Co., Ltd.
Model Number	CDA3122002C1

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd.
Model Number	CDA3122002C2

Equipment	Data Cable
Manufacturer	Shenzhen Juwei Electronics Co., Ltd.
Model Number	CDA3122005C1



Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd.
Model Number	CDA3122005C2

Note: As the information described above, there are two different models of charger manufactured by two different companies, three different models of battery manufactured by two different companies and four different models of data cable manufactured by two different companies. The relevant tests have been performed in order to verify in which combination case (EUT exercised by only one model of charger, one model of battery and one model of data cable) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the charger S005UU0500100, the battery TLi020F1 and the data cable CDA3122002C1.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Occupied Bandwidth	15.247(a)(1)	Pass
2	Channel Separation	15.247(a)(1)	Pass
3	Peak Power Output	15.247(b)(1)	Pass
4	Dwell Time	15.247(a)(1)(iii)	Pass
5	Number of Hopping Frequencies	15.247(a)(1)(iii)	Pass
6	Conducted out of band emission measurement	15.247(d)	Pass
7	Spurious Radiated Emissions	15.247(d)/15.35(b)/15.209	Pass
8	AC Power line Conducted Emission	15.207	Pass

This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab 	Checked by: Mr. Wang Junfeng Deputy director of the test lab 
Tested by: Mr. Li Bin Test engineer 	Issued date: 2014.08.18

2.2 Test result

2.2.1 Occupied Bandwidth

2.2.1.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.1.2 Test Description

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss which connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

2.2.1.3 Test limit


FCC Part15.247 (a)(1)

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shell be a minimum limit for the hopping channel separation.

2.2.1.4 Test settings

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 30dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

2.2.1.5 Test Setup

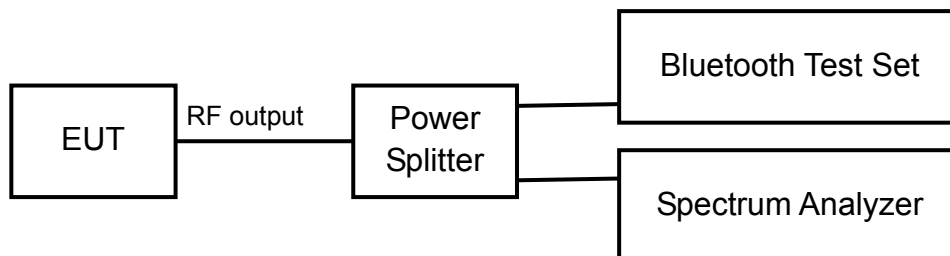

2.2.1.6 Test result

Modulation type: GFSK


Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	839.4
2441	39	819.1
2480	78	819.1

Modulation type: $\pi/4$ DQPSK

Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	1.2243
2441	39	1.2301
2480	78	1.2301

Modulation type: 8DPSK


Carrier frequency (MHz)	Channel No.	20 dB bandwidth(kHz)
2402	0	1.2610
2441	39	1.2619
2480	78	1.2619

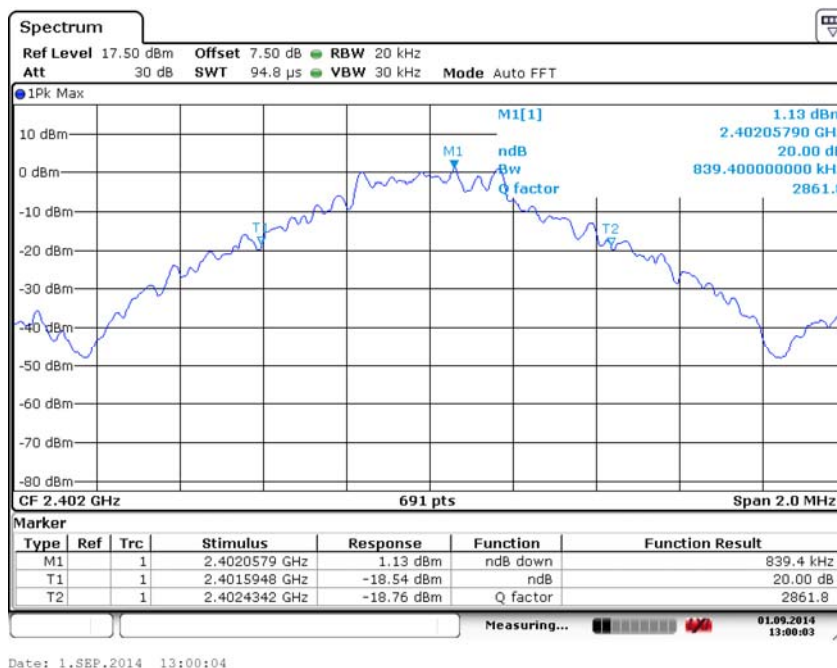

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: GFSK

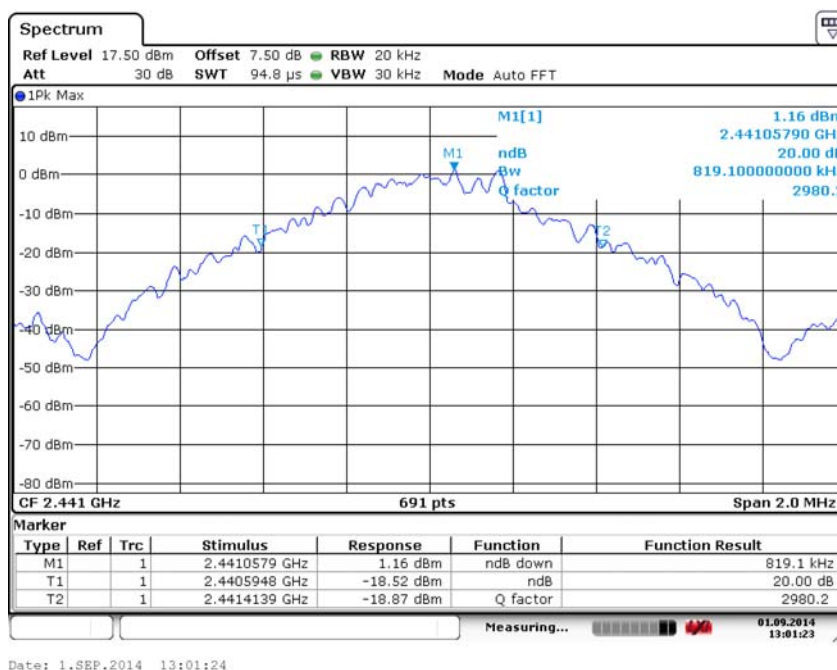

Carrier frequency (MHz): 2441

Channel No.:39


Modulation type: GFSK

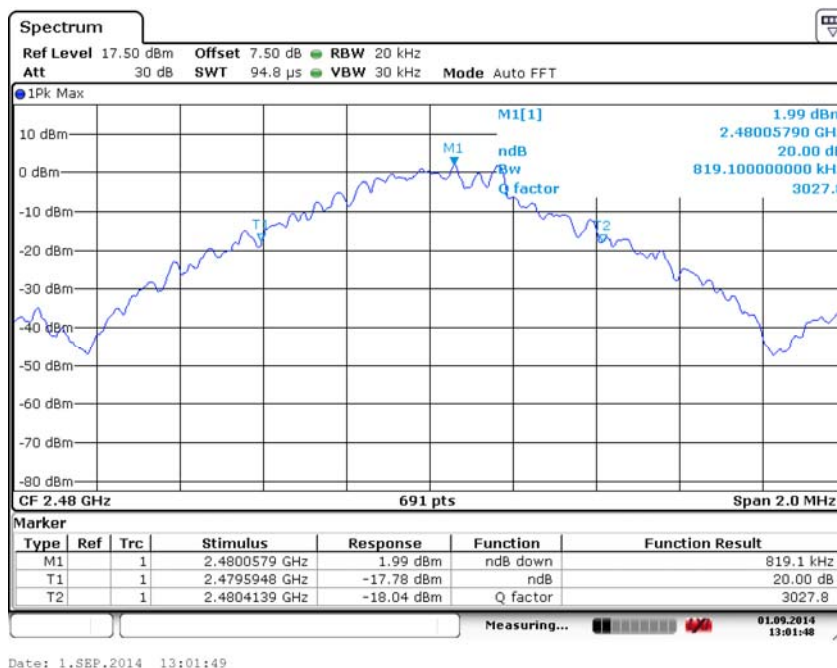

Carrier frequency (MHz): 2480

Channel No.:78


Modulation type: GFSK

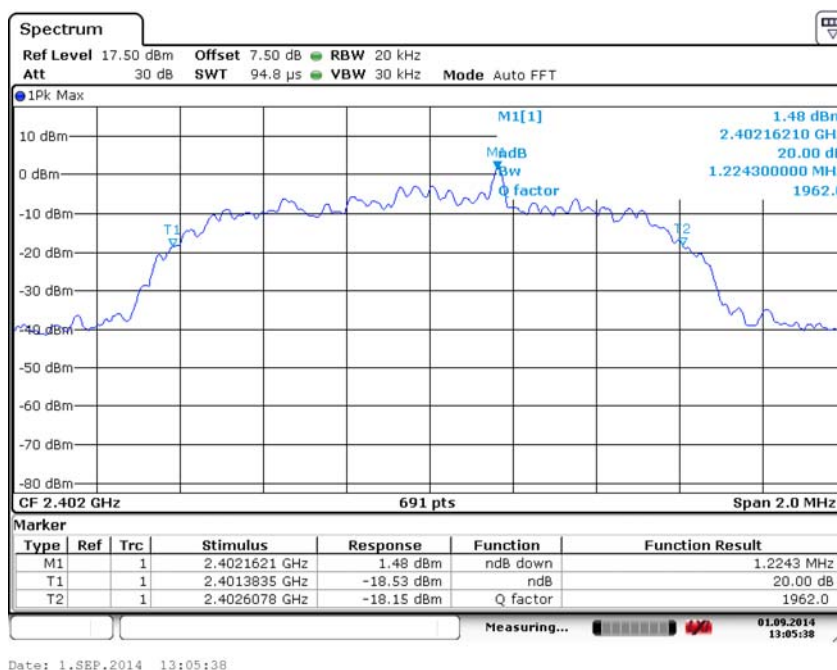

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: $\pi/4$ DQPSK

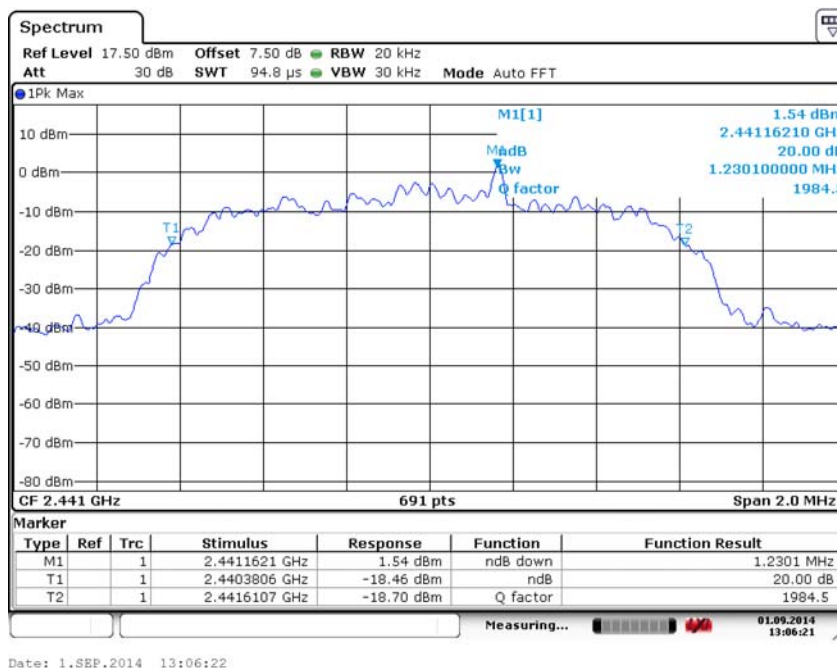

Carrier frequency (MHz): 2441

Channel No.:39


Modulation type: $\pi/4$ DQPSK

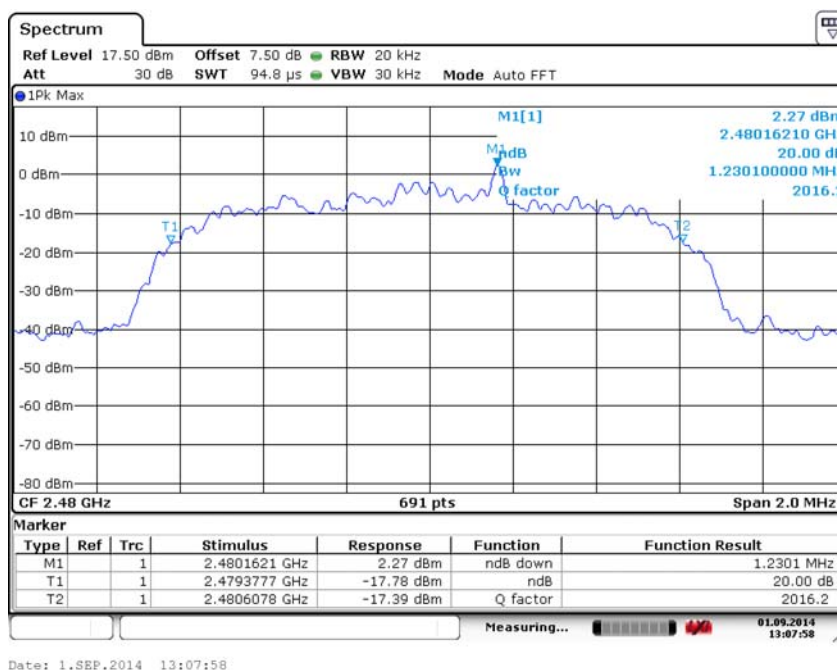

Carrier frequency (MHz): 2480

Channel No.:78


Modulation type: $\pi/4$ DQPSK

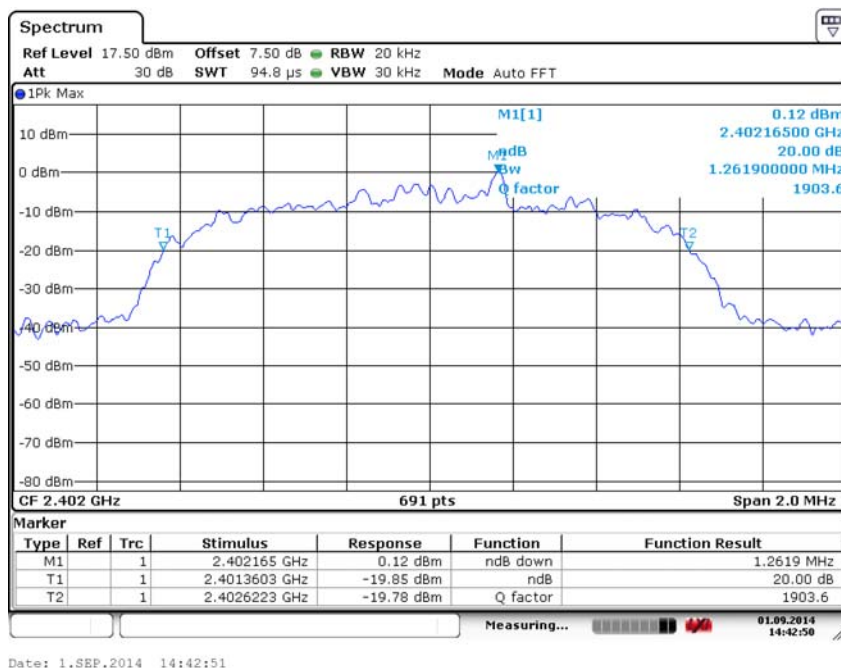

Carrier frequency (MHz): 2402

Channel No.:0


Modulation type: 8DPSK

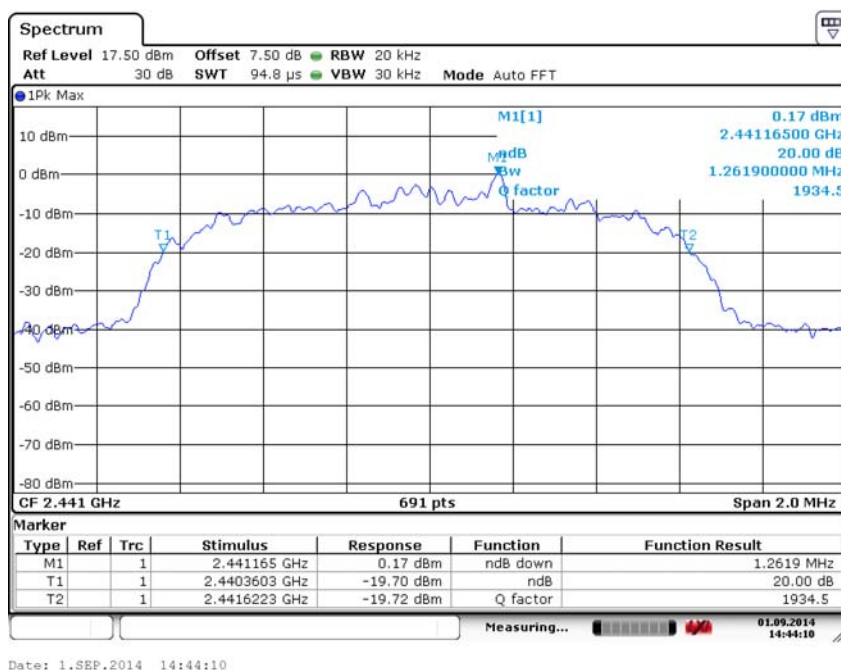

Carrier frequency (MHz): 2441

Channel No.:39

Modulation type: 8DPSK

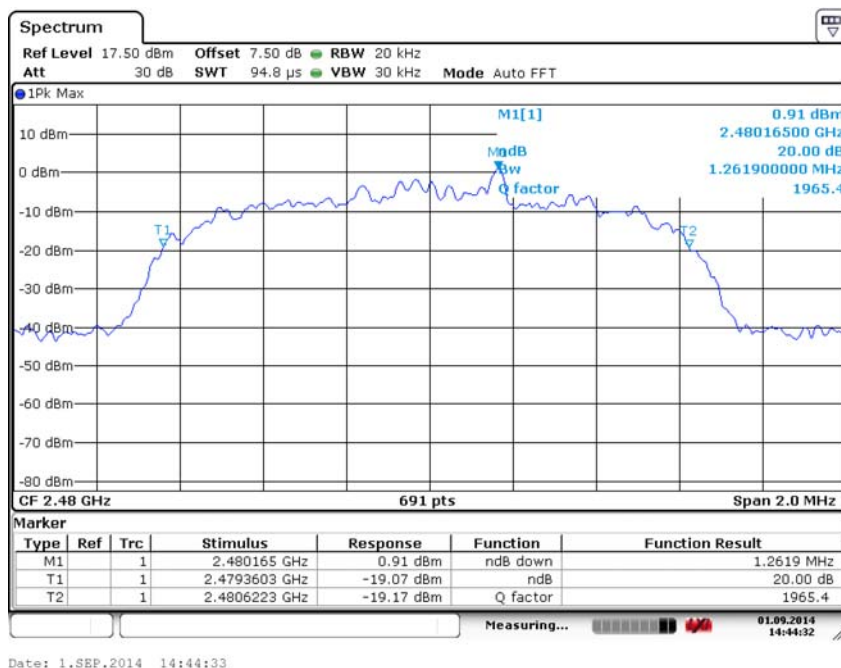

Carrier frequency (MHz): 2480

Channel No.:78

Modulation type: 8DPSK

2.2.2 Channel Separation

2.2.2.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.2.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the channel separation measurements. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

2.2.2.3 Test limit


FCC Part15.247 (a)(1)

Measurement is made with EUT operating in hopping mode. **The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.**

2.2.2.4 Test Settings


- Detector: Peak-Max hold
- Span: 3 MHz
- Centre Frequency: 2441 MHz
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 1 MHz
- Sweep Time: Coupled

2.2.2.5 Test Setup

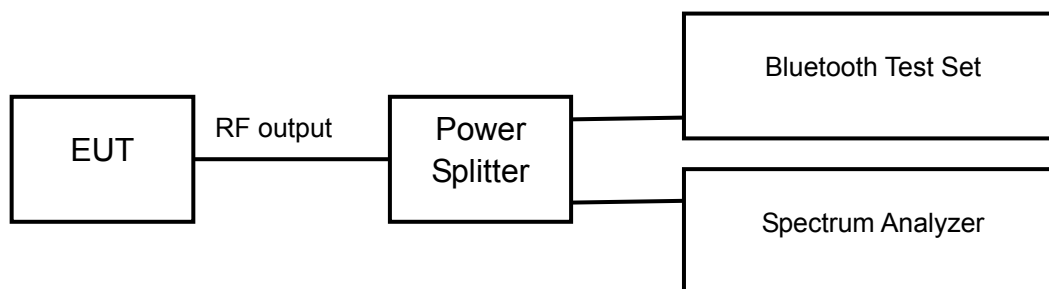

2.2.2.6 Test result

Op-mode	Channel separation MHz
Hopping mode	1

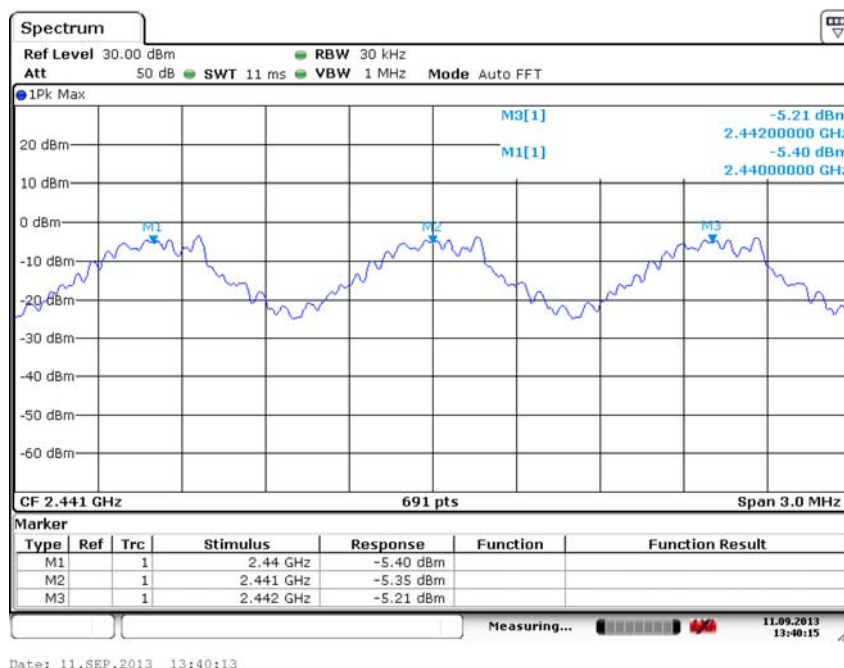

Op-mode: Hopping mode

2.2.3 Peak Power Output

2.2.3.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.3.2 Test Description

Measurement is made while the EUT is operating in non-hopping transmission mode. The powers shown below were measured using a spectrum analyzer with a Bluetooth signaling test set used only to maintain a Bluetooth link with the EUT.

2.2.3.3 Test limit

FCC Part15.247(b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW) →

Modulation type	GFSK	$\pi/4$ DQPSK	8DPSK
Maximum Output Power	30dBm	30dBm	30dBm

2.2.3.4 Test Settings

Hopping Mode	Modulation type	RBW	VBW	Span	Sweep time
Hopping OFF	GFSK	2MHz	3MHz	8MHz	1ms
Hopping OFF	$\pi/4$ DQPSK	2MHz	3MHz	8MHz	1ms
Hopping OFF	8DPSK	2MHz	3MHz	8MHz	1ms

2.2.3.5 Test Setup

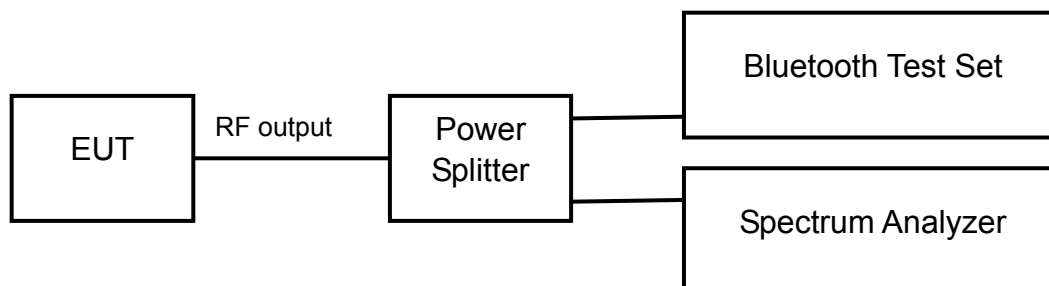


2.2.3.6 Test result


Modulation type	Average Power Output (mW)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	3.12	3.81	3.78
$\pi/4$ DQPSK	2.44	3.16	3.07
8DPSK	2.44	3.82	3.07

Average power data is provided to determine the need for Bluetooth SAR testing according to KDB 447498 D01 v05r01.


Modulation type	Peak Power Output (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	4.94	5.99	5.94
$\pi/4$ DQPSK	4.70	5.81	5.95
8DPSK	4.81	5.93	5.85

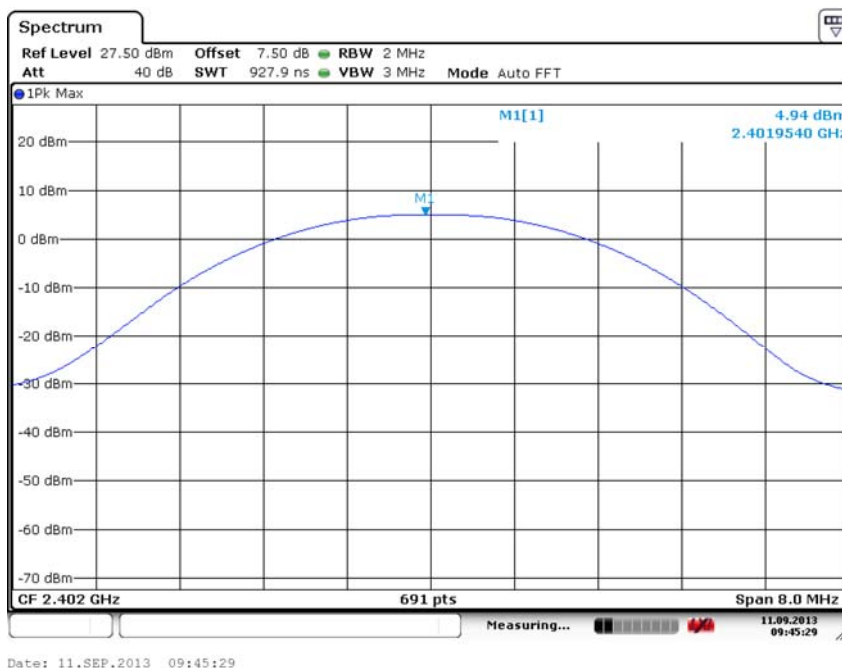


Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: GFSK

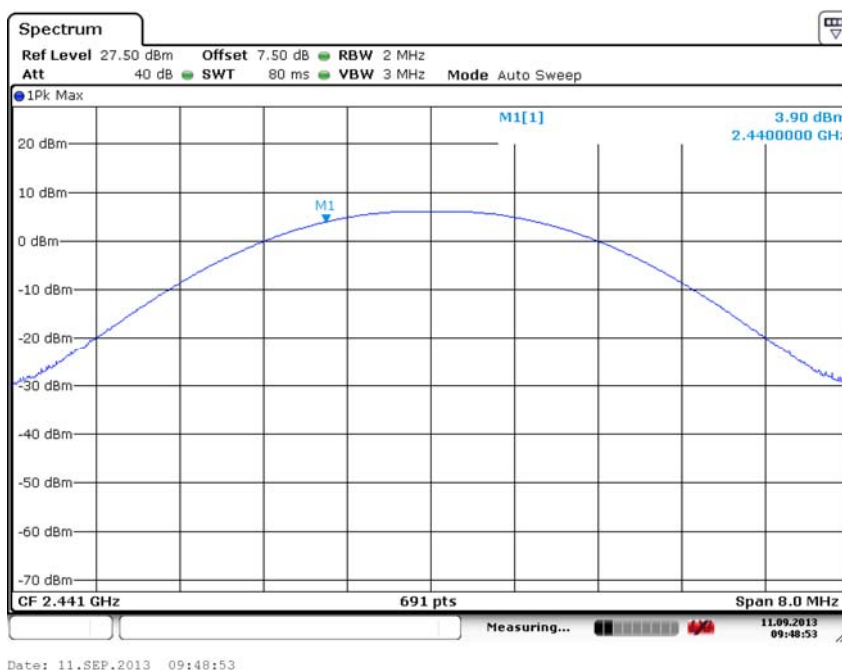


Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: GFSK

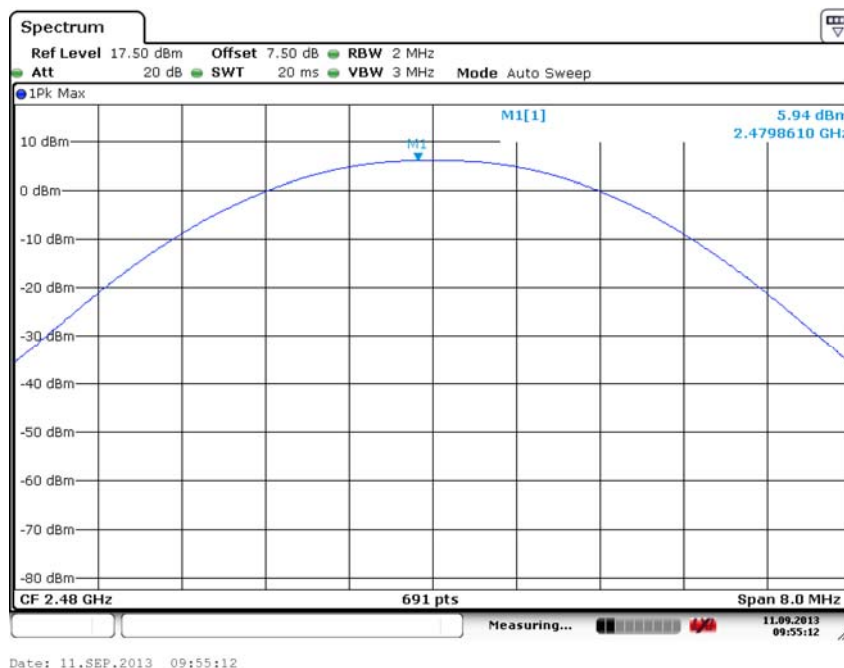


Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: GFSK

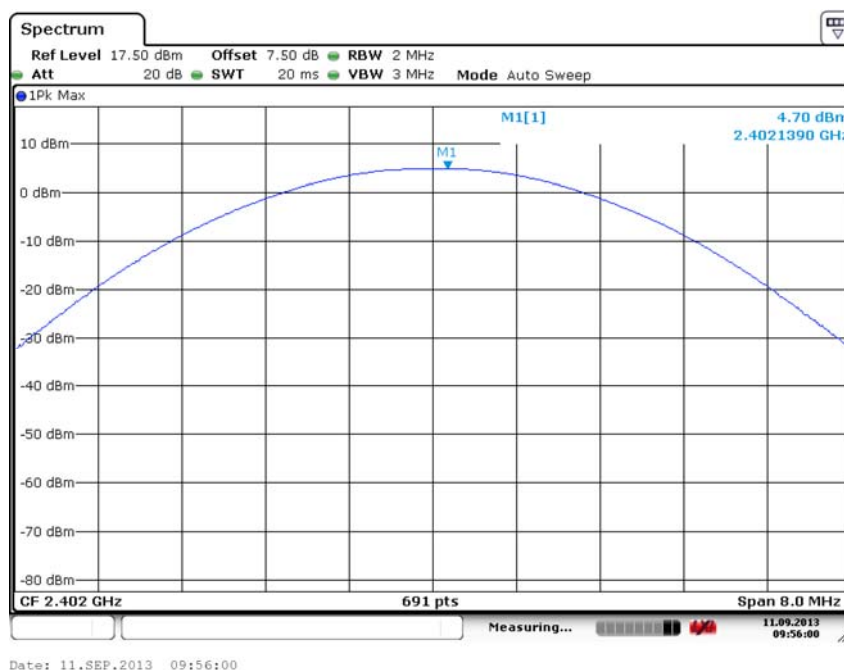


Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: $\pi/4$ DQPSK

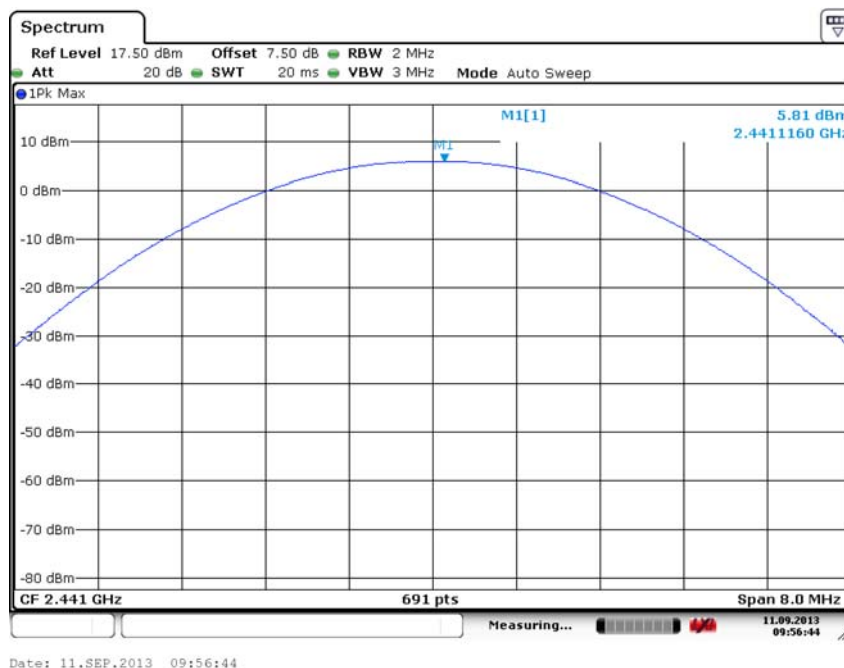


Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: $\pi/4$ DQPSK

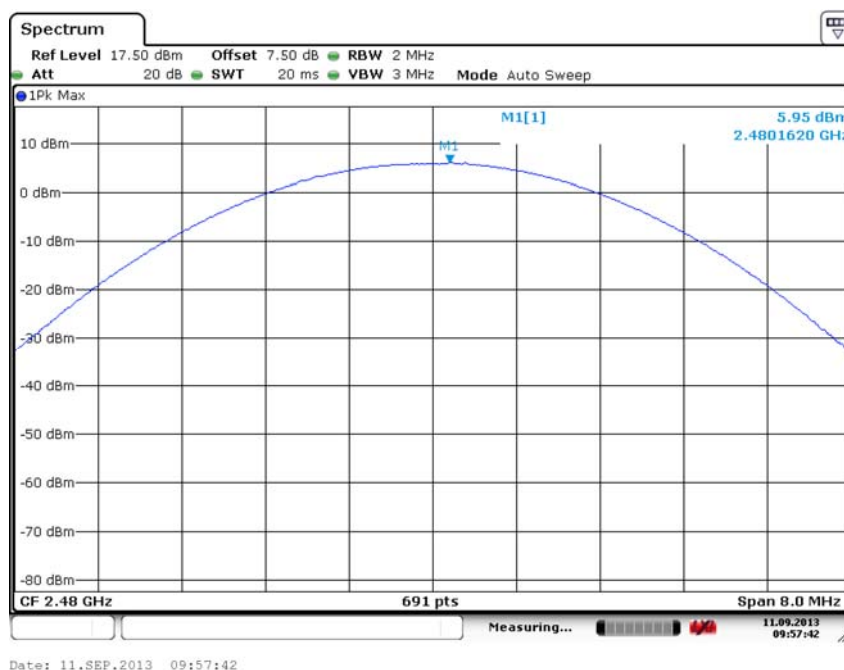


Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: $\pi/4$ DQPSK

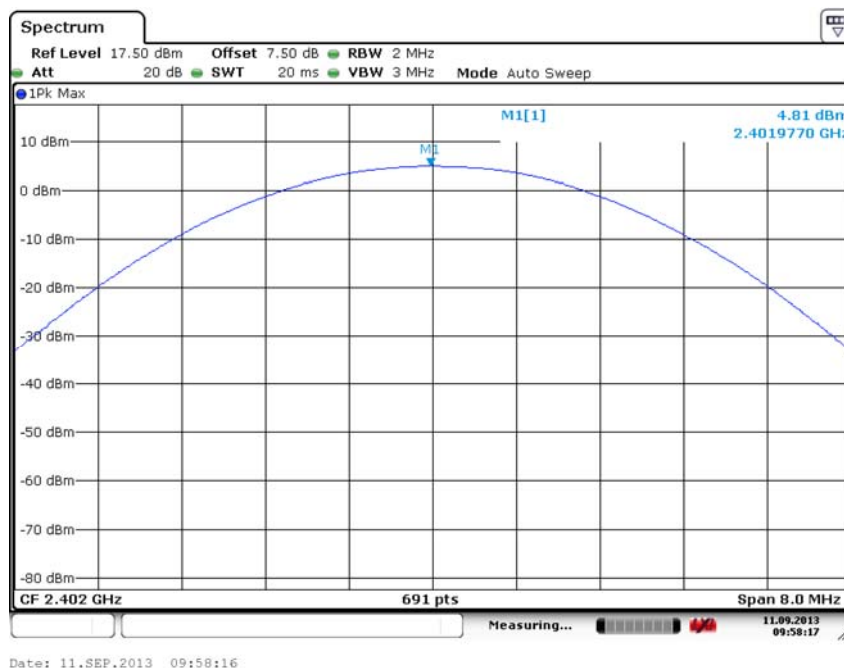

Carrier frequency (MHz): 2402
Channel No.:0
Modulation type: 8DPSK

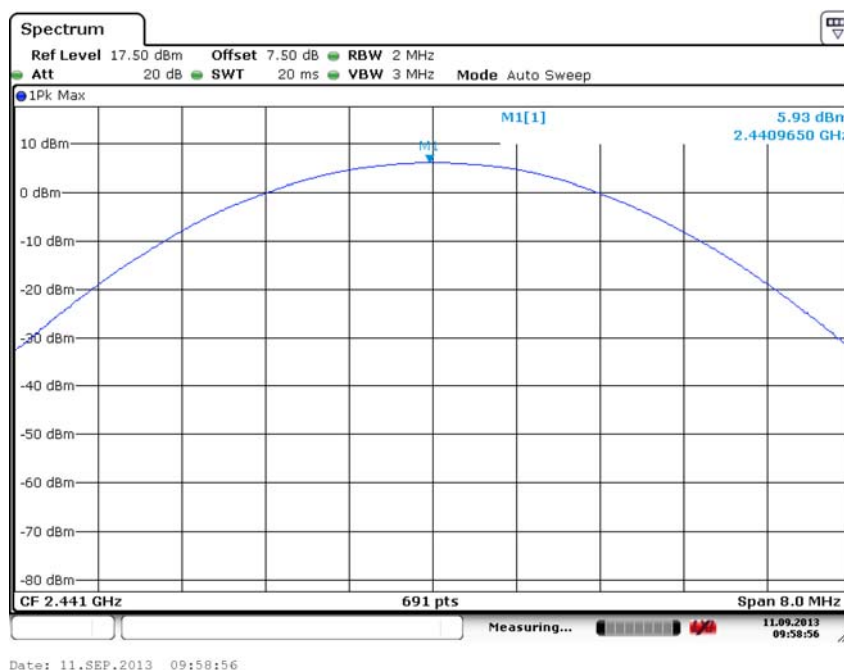

Carrier frequency (MHz): 2441
Channel No.:39
Modulation type: 8DPSK

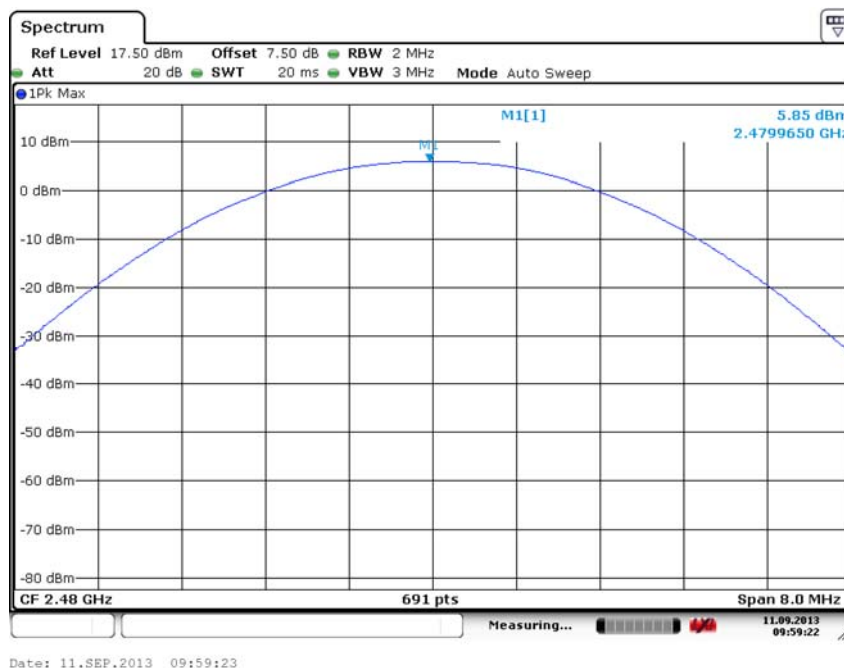

Carrier frequency (MHz): 2480
Channel No.:78
Modulation type: 8DPSK

2.2.4 Dwell Time

2.2.4.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.4.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the dwell time measurements.

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

The time slot length is measured of three different packet types which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 31.6/ number of hopping channels

with:

- hop rate= $1600/2 * 1/s$ for DH1 packets =800
- hop rate= $1600/4 * 1/s$ for DH3 packets =400
- hop rate= $1600/6 * 1/s$ for DH5 packets =266.67
- number of hopping channels=79
- $31.6 s = 0.4$ seconds multiplied by the number of hopping channels= $0.4s * 79$

2.2.4.3 Test limit


FCC Part15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

2.2.4.4 Test Test Settings

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.


2.2.4.5 Test Setup

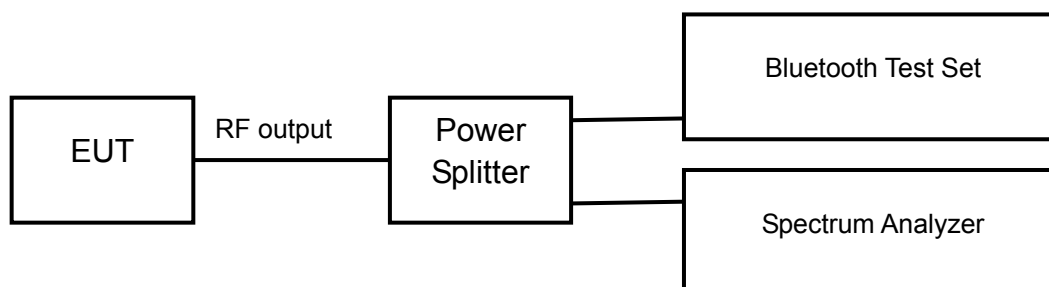

2.2.4.6 Test result

Modulation type: GFSK


Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3696	time slot length *31.6 *1600/2 /79	118.272
DH3	1.6232	time slot length * 31.6 *1600/4 /79	259.712
DH5	2.8696	time slot length * 31.6 *1600/6 /79	306.091

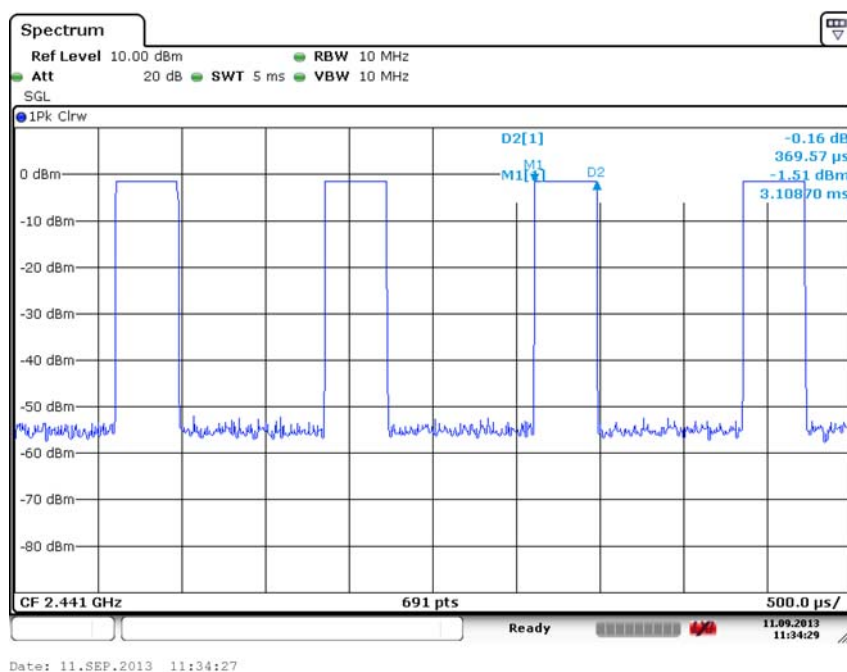


Carrier frequency (MHz): 2441

Packet type: DH1

Modulation type: GFSK

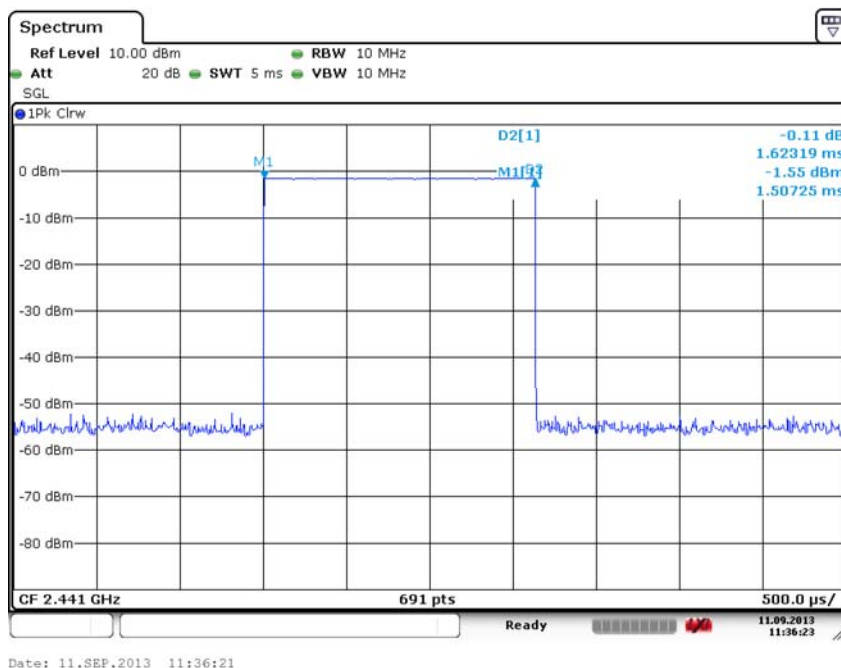


Carrier frequency (MHz): 2441
Packet type: DH3
Modulation type: GFSK

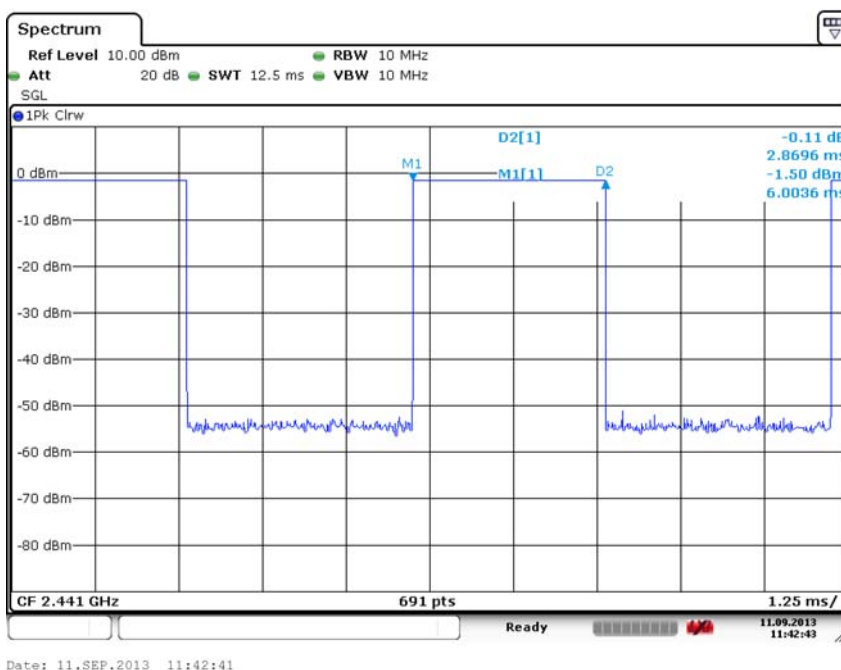

Carrier frequency (MHz): 2441
Packet type: DH5
Modulation type: GFSK

Modulation type: $\pi/4$ DQPSK


Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3764	time slot length *31.6 *1600/2 /79	120.448
DH3	1.6286	time slot length * 31.6 *1600/4 /79	260.576
DH5	2.8764	time slot length * 31.6 *1600/6 /79	306.816

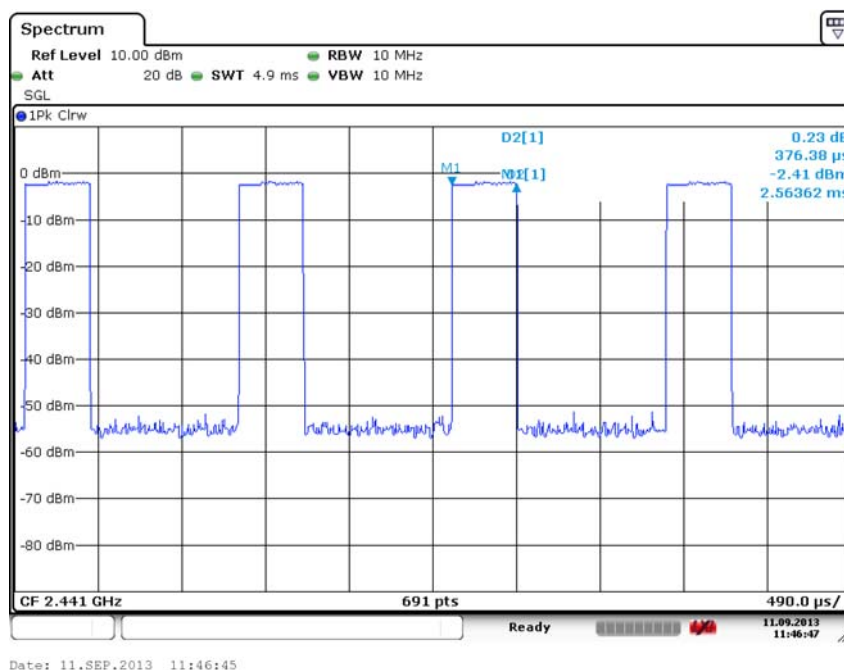


Carrier frequency (MHz): 2441

Packet type: DH1

Modulation type: $\pi/4$ DQPSK

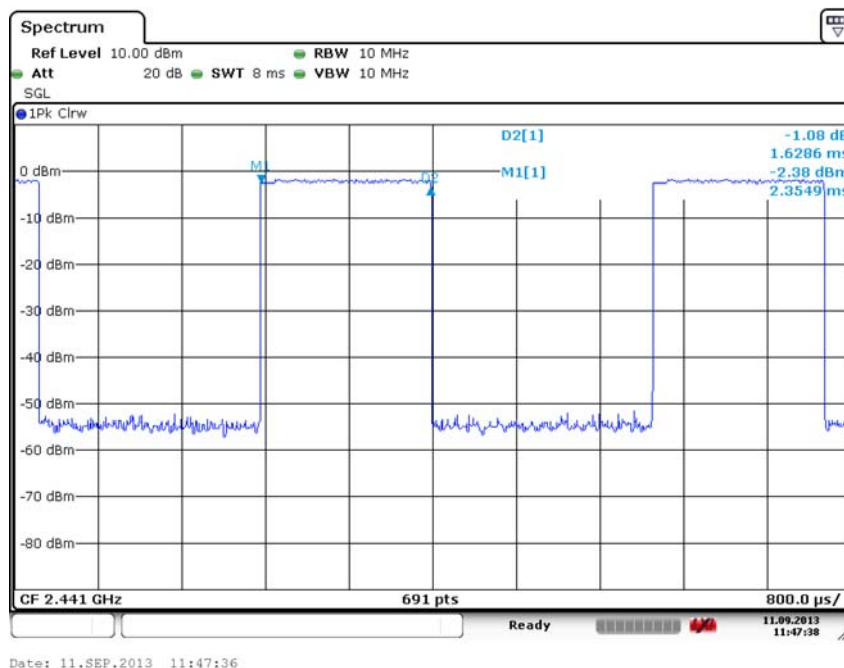


Carrier frequency (MHz): 2441
Packet type: DH3
Modulation type: $\pi/4$ DQPSK

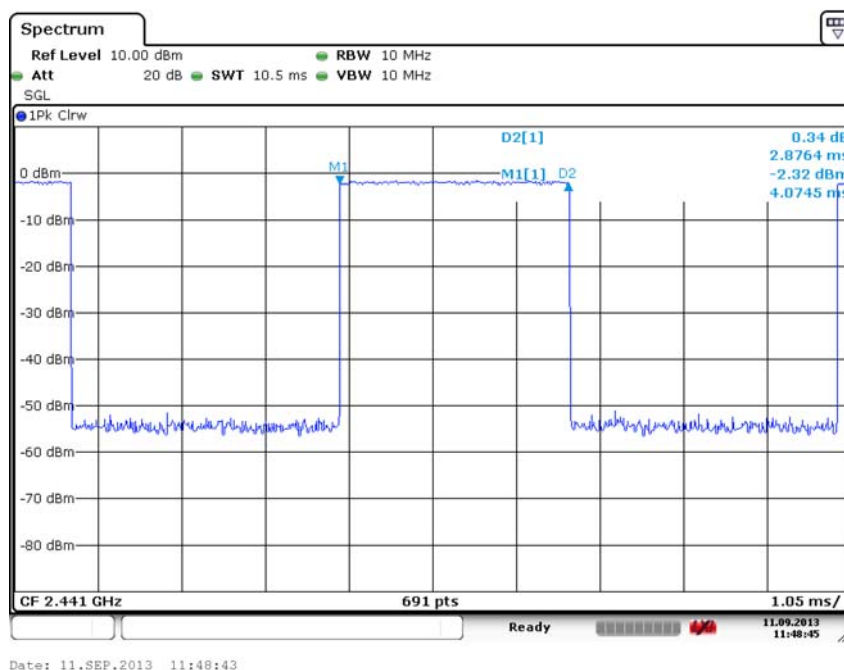

Carrier frequency (MHz): 2441
Packet type: DH5
Modulation type: $\pi/4$ DQPSK

Modulation type: 8DPSK



Packet type	Time slot length ms	Dwell time	Dwell time ms
DH1	0.3675	time slot length *31.6 *1600/2 /79	117.600
DH3	1.6429	time slot length * 31.6 *1600/4 /79	262.864
DH5	2.8864	time slot length * 31.6 *1600/6 /79	307.883

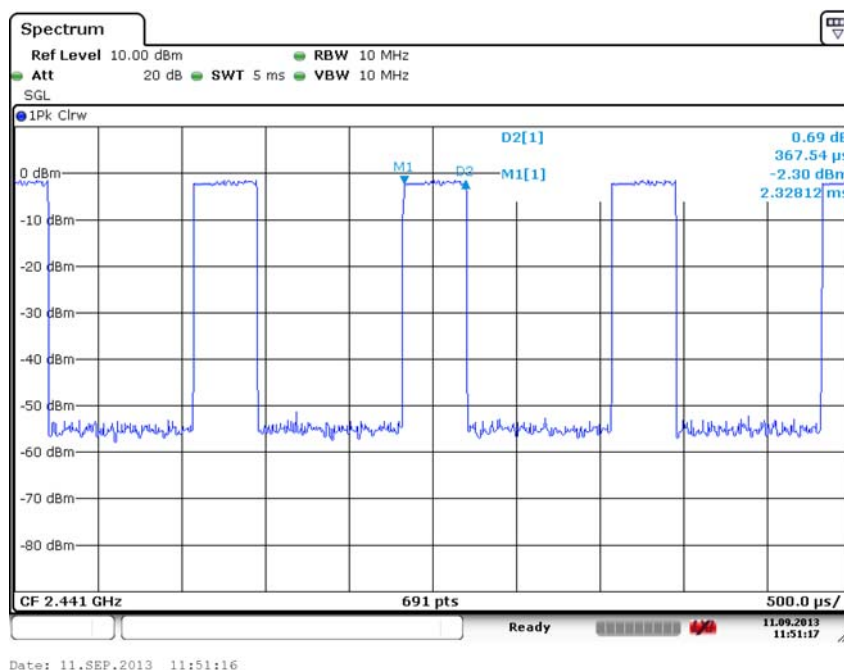

Carrier frequency (MHz): 2441

Packet type:DH1

Modulation type: 8DPSK

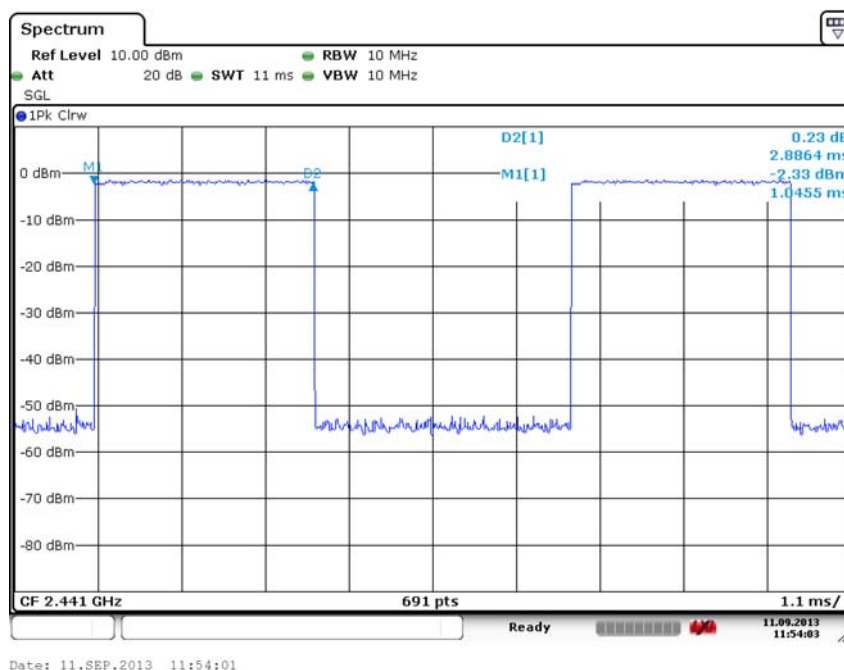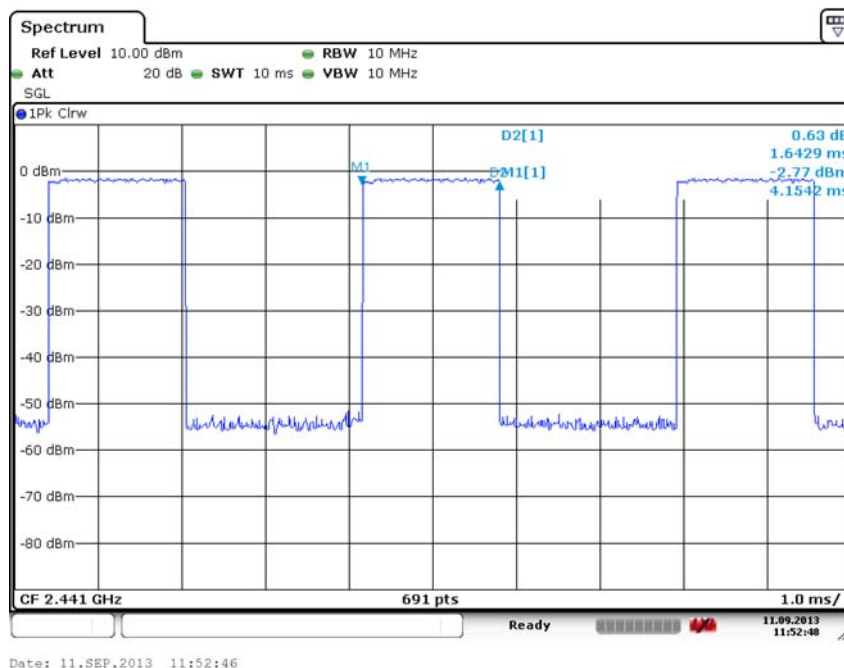

2.2.5 Number of Hopping Frequencies

2.2.5.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.5.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the number of hopping frequencies measurement. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

2.2.5.3 Test limit


FCC Part15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

2.2.5.4 Test Settings


- a) Detector: Peak-Maxhold
- b) Start frequency: 2400 MHz
- c) Stop frequency: 2483.5 MHz
- d) Resolution Bandwidth (RBW): 30 kHz
- e) Video Bandwidth (VBW): 1 MHz
- f) Sweep Time: Coupled

2.2.5.5 Test Setup

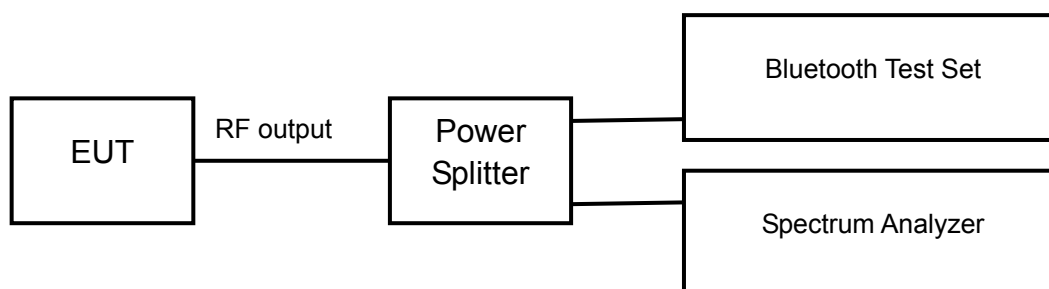

2.2.5.6 Test result

Op-mode	Result
Hopping mode	79

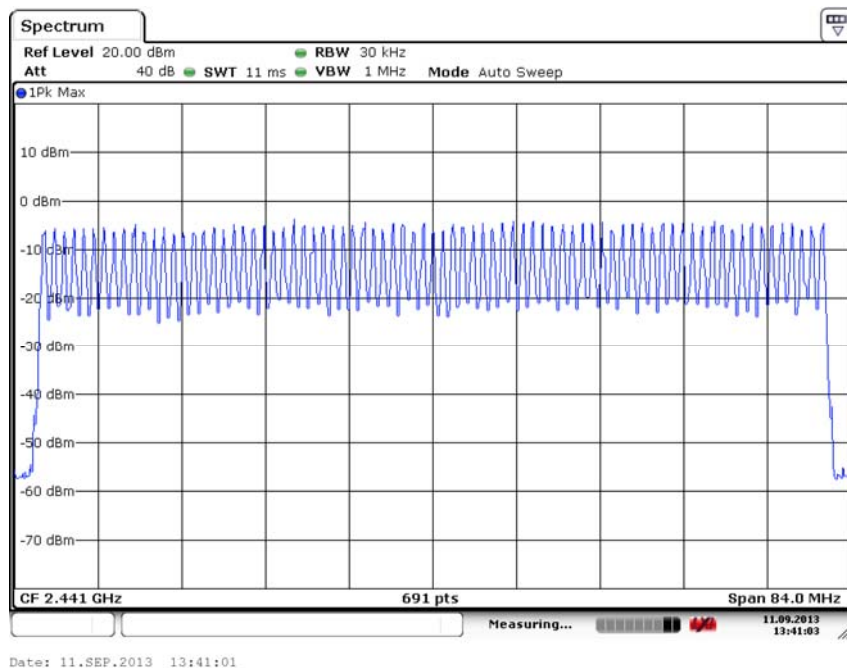

Op-mode: Hopping mode

2.2.6 Conducted out of band emission measurement

2.2.6.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.6.2 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements. The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss.

2.2.6.3 Test limit


FCC Part15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

2.2.6.4 Test Settings

- Set RBW = 100 kHz.
- Set VBW = 300 kHz.
- Set span to encompass the spectrum to be examined
- Detector = peak.
- Trace Mode = max hold.
- Sweep = auto couple. Detector: Peak-Maxhold
- Frequency range: 30 ~25000 MHz

2.2.6.5 Test Setup

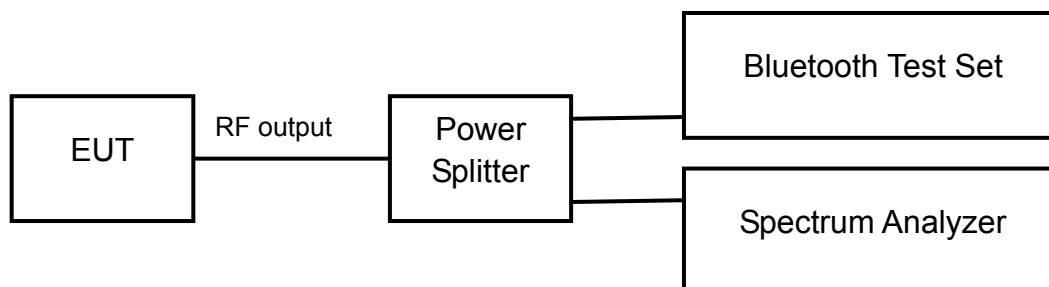


2.2.6.6 Test result


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


CH0 (Hopping off)

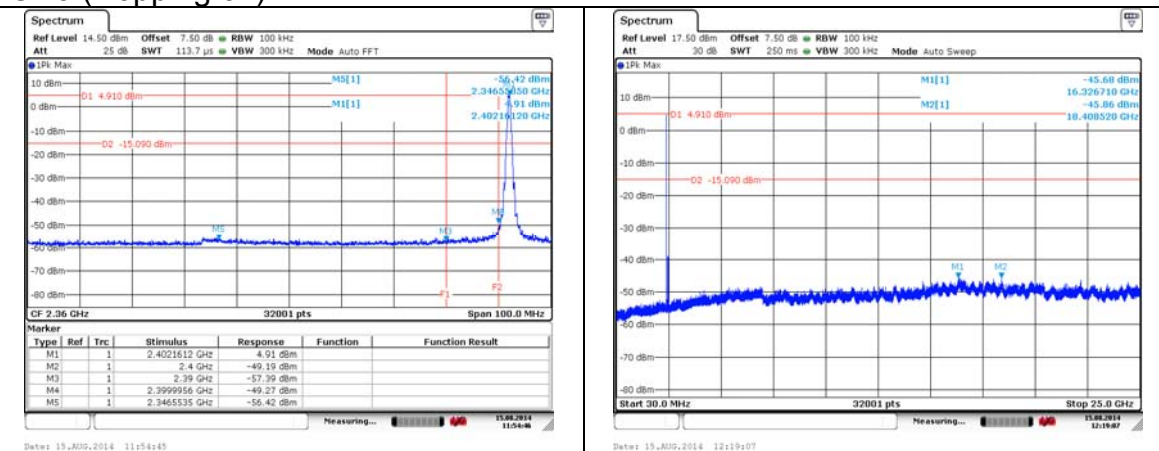

CH78(Hopping off)


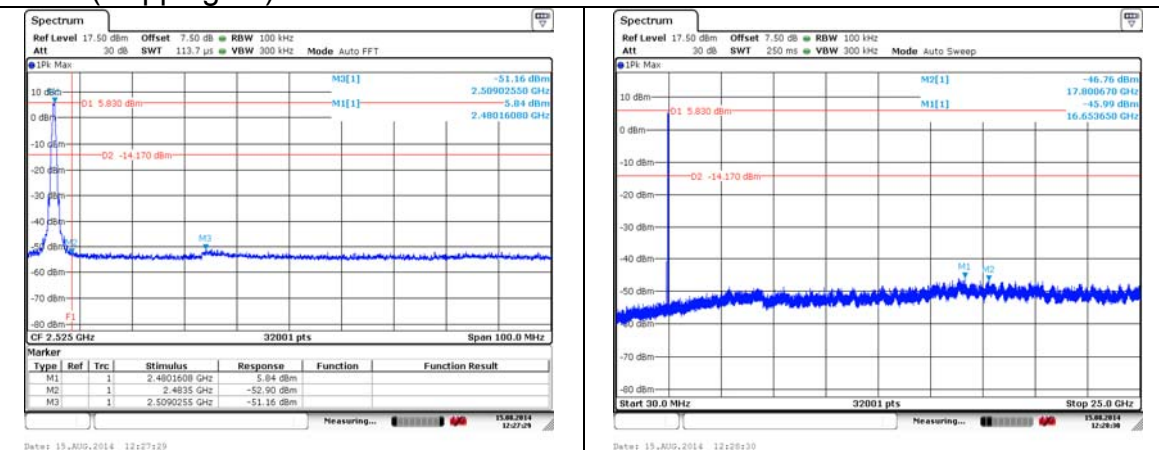


CH0 (Hopping on)


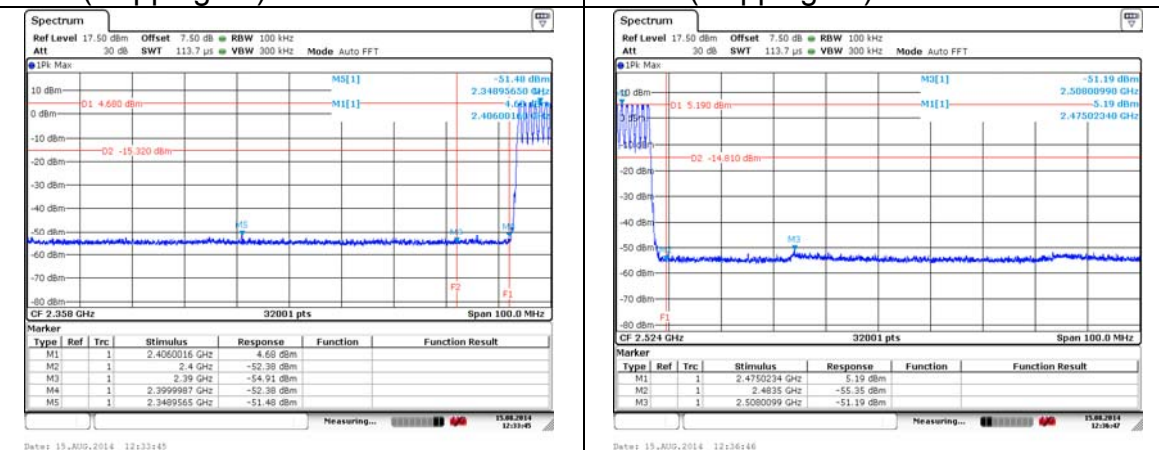


$\pi/4$ DQPSK


CH0 (Hopping off)

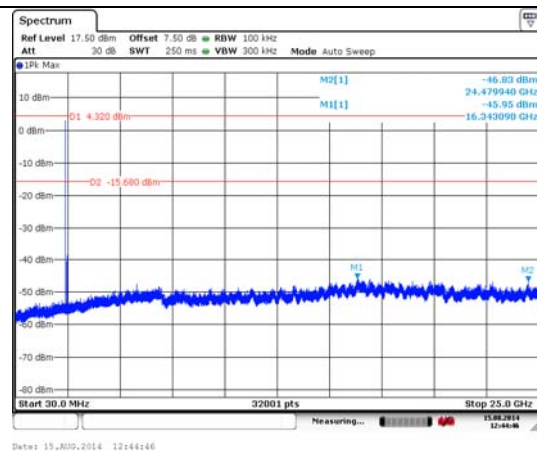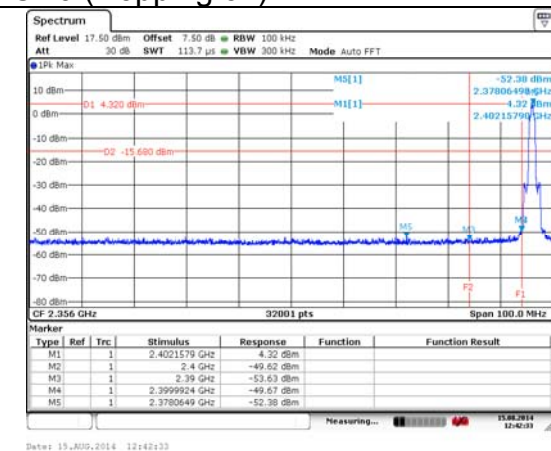


CH78 (Hopping off)

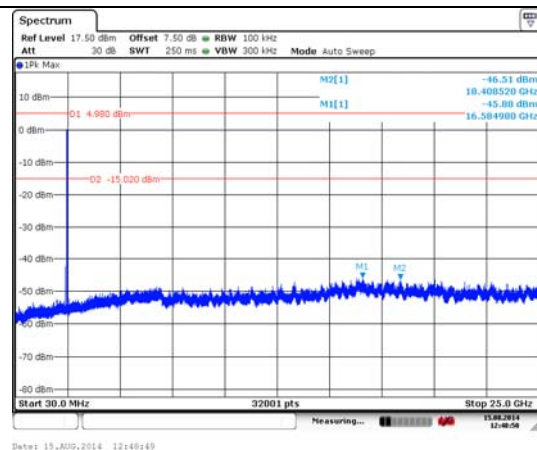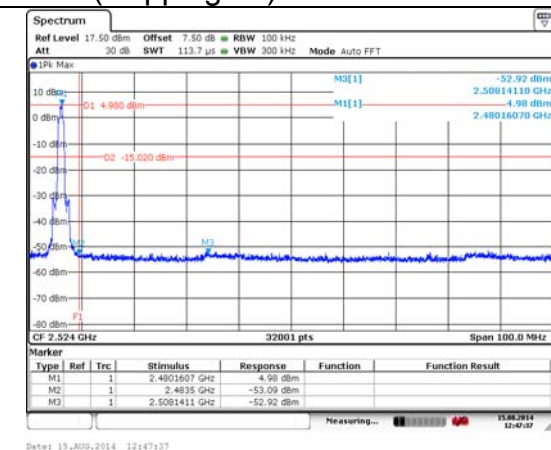

CH0 (Hopping on)

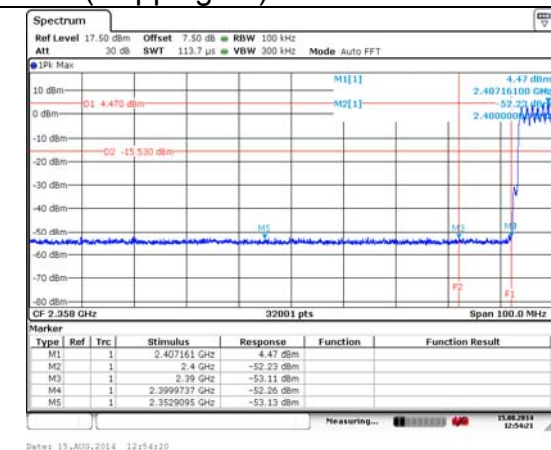


CH78 (Hopping on)

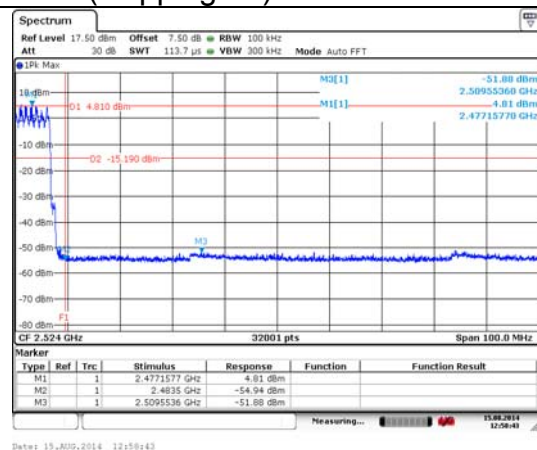


8DPSK


CH0 (Hopping off)

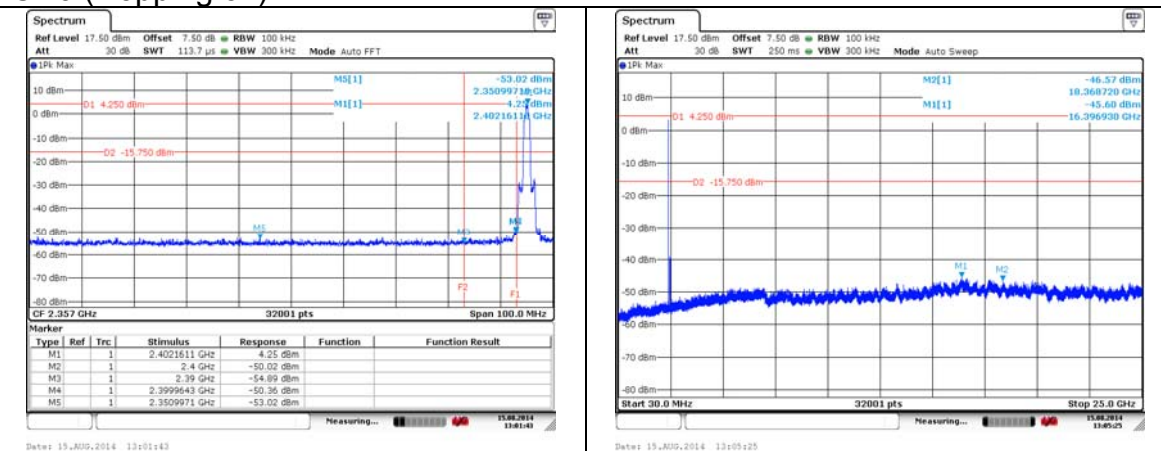


CH78(Hopping off)

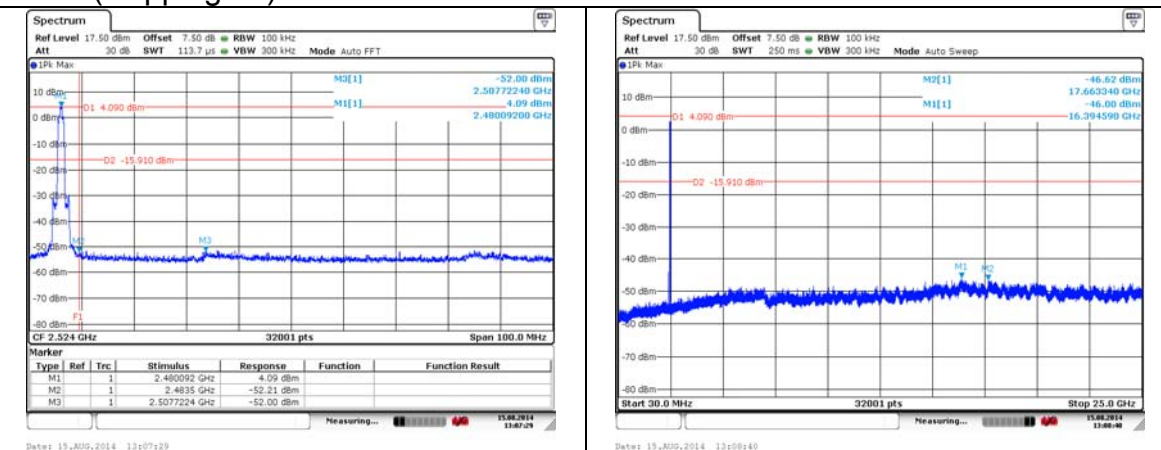

CH0 (Hopping on)

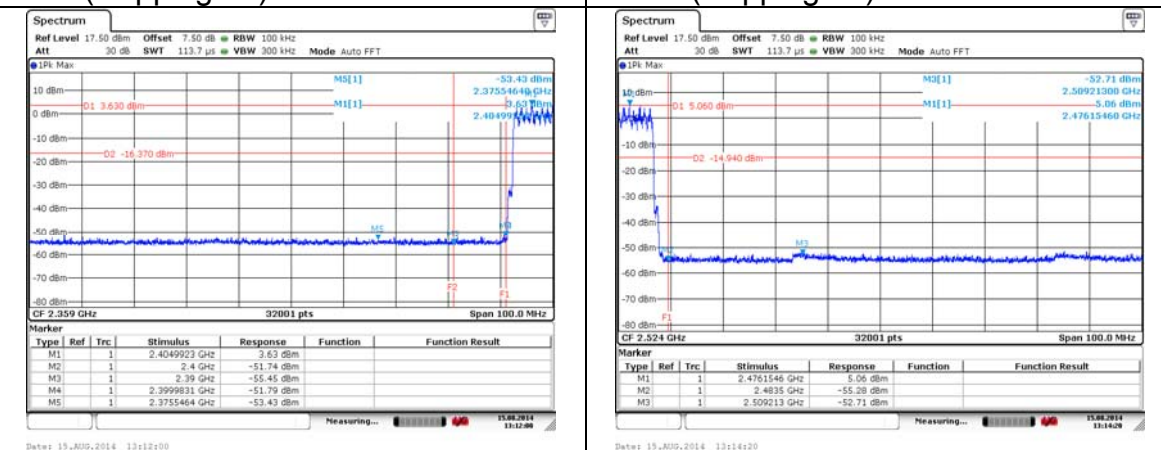

CH78 (Hopping on)

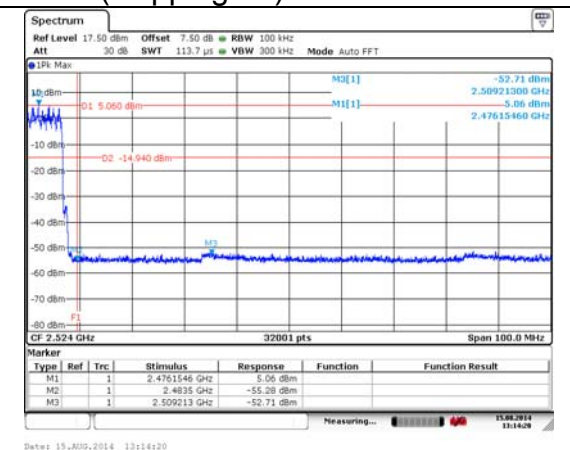

2.2.7 Spurious Radiated Emissions

2.2.7.1 Ambient condition

Temperature	Relative humidity	Pressure
24.3°C	36.2%	100.2kPa

2.2.7.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

2.2.7.3 Test limit

FCC Part15.247(d):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). ***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209.***

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

FCC Part15.35(b):

there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency of Emission(MHz)	Limits	
	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

2.2.7.3 Test Settings


The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

2.2.7.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below

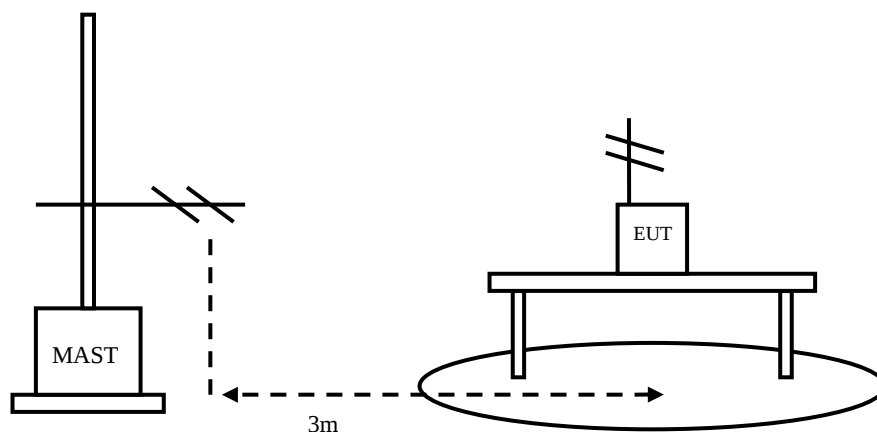

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz or above, using receive log period antenna HL562 or Ridge horn antenna HF906. During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees. The measurements shall be repeated with orthogonal polarization of the test antenna. The results shall be showed the worst case of the three orthogonal axes.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

2.2.7.4 Test result

The worst case attitude: The mobile lay down.

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	98.38	64.38	N/A	N/A	8.90	25.10
2	2390	55.95	21.95	-18.05	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	97.03	63.03	N/A	N/A	8.90	25.10
2	2390	54.69	20.69	-19.31	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.50	57.50	N/A	N/A	8.90	25.10
2	2390	41.61	7.61	-12.39	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.28	57.28	N/A	N/A	8.90	25.10
2	2390	41.27	7.27	-12.73	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	94.79	60.79	N/A	N/A	8.90	25.10
2	2483.5	55.09	21.09	-18.91	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	94.25	60.25	N/A	N/A	8.90	25.10
2	2483.5	55.69	21.69	-18.31	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	85.90	51.90	N/A	N/A	8.90	25.10
2	2483.5	41.37	7.37	-12.63	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: GFSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	87.05	53.05	N/A	N/A	8.90	25.10
2	2483.5	42.47	8.47	-11.53	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	100.04	66.04	N/A	N/A	8.90	25.10
2	2390	56.01	22.01	-17.99	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	96.52	62.52	N/A	N/A	8.90	25.10
2	2390	56.95	22.95	-17.05	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	94.31	60.31	N/A	N/A	8.90	25.10
2	2390	41.35	7.35	-12.65	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	92.87	58.87	N/A	N/A	8.90	25.10
2	2390	41.11	7.11	-12.89	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	97.74	63.74	N/A	N/A	8.90	25.10
2	2483.5	42.09	8.09	-11.91	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.62	61.62	N/A	N/A	8.90	25.10
2	2483.5	56.86	22.86	-17.14	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.72	58.72	N/A	N/A	8.90	25.10
2	2483.5	42.93	8.93	-11.07	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: $\pi/4$ DQPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	95.15	61.15	N/A	N/A	8.90	25.10
2	2483.5	42.09	8.09	-11.91	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	99.74	65.74	N/A	N/A	8.90	25.10
2	2390	55.54	21.54	-18.46	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	95.79	61.79	N/A	N/A	8.90	25.10
2	2390	56.01	22.01	-17.99	74.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	92.84	58.84	N/A	N/A	8.90	25.10
2	2390	41.37	7.37	-12.63	54.00	8.90	25.10

Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2402	91.56	57.56	N/A	N/A	8.90	25.10
2	2390	42.32	8.32	-9.79	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	100.38	66.38	N/A	N/A	8.90	25.10
2	2483.5	54.64	20.64	-19.36	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	99.26	65.26	N/A	N/A	8.90	25.10
2	2483.5	57.10	23.10	-16.90	74.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	92.53	58.53	N/A	N/A	8.90	25.10
2	2483.5	42.62	8.62	-11.38	54.00	8.90	25.10

Carrier frequency (MHz): 2480

Channel No.:78

Test Mode: 8DPSK

Polarity: Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2480	93.11	59.11	N/A	N/A	8.90	25.10
2	2483.5	42.58	8.58	-10.65	54.00	8.90	25.10

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

For GFSK

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
44.609218	29.00	12.6	16.4	Vertical	40.0
85.731463	24.30	8.3	16.	Vertical	40.0
97.635271	19.80	9.1	10.7	Vertical	43.5
177.715431	13.10	8.4	4.7	Vertical	43.5
556.713427	18.30	19.3	-1	Horizontal	46.0
931.262525	25.20	25.4	-0.2	Horizontal	46.0

For $\pi/4$ DQPSK


Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A_{Rpl} (dB)	P_{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
45.150301	29.20	12.3	16.9	Vertical	40.0
86.272545	22.80	8.3	14.5	Vertical	40.0
96.553106	20.20	9.0	11.2	Vertical	43.5
179.879760	13.70	8.5	5.2	Vertical	43.5
513.226453	17.80	18.6	-0.8	Horizontal	46.0
922.845691	25.30	25.5	-0.2	Vertical	46.0


For 8DPSK
Channel No.:39

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
45.150301	29.00	12.3	16.7	Vertical	40.0
87.354709	23.70	8.4	15.3	Vertical	40.0
96.553106	20.40	9.0	11.4	Vertical	43.5
176.092184	12.10	8.3	3.8	Vertical	43.5
553.907816	18.20	19.3	-1.1	Vertical	46.0
908.817635	24.90	25.0	-0.1	Horizontal	46.0


Carrier frequency (MHz): 2441
Channel No.:39

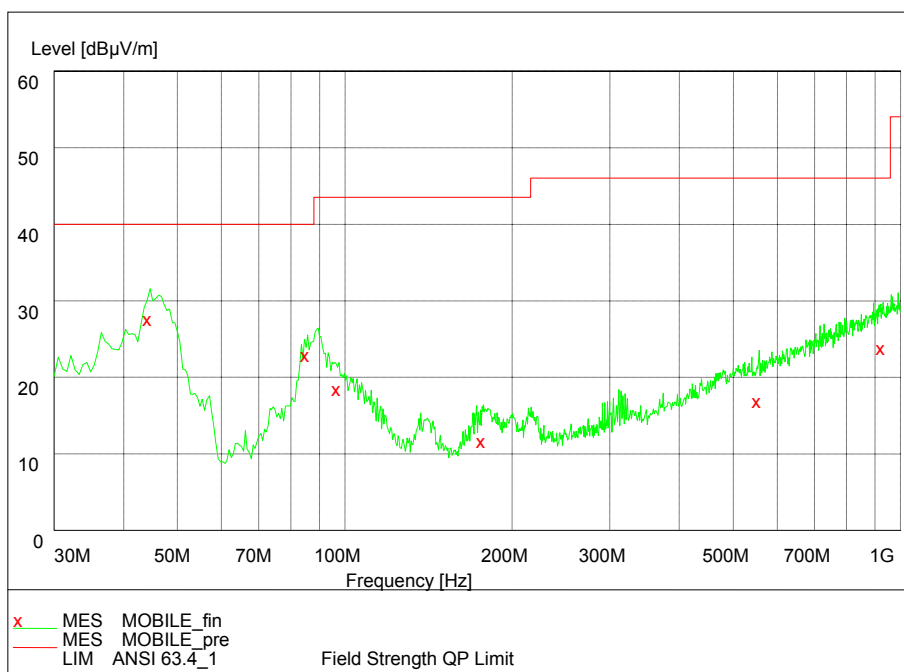


Frequency Range: 30MHz-1000MHz
Detector: QP mode
Modulation type: GFSK

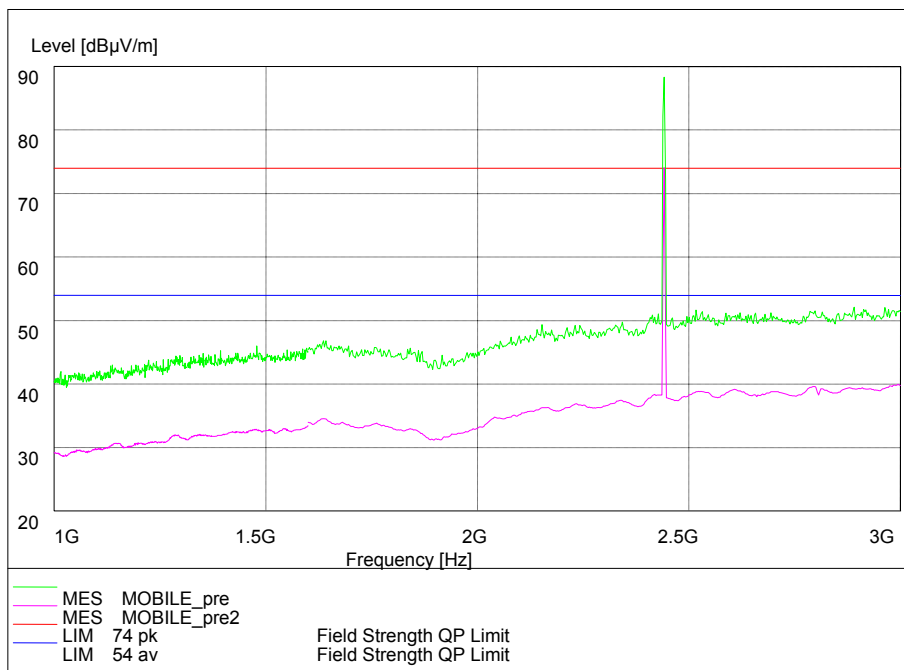

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK

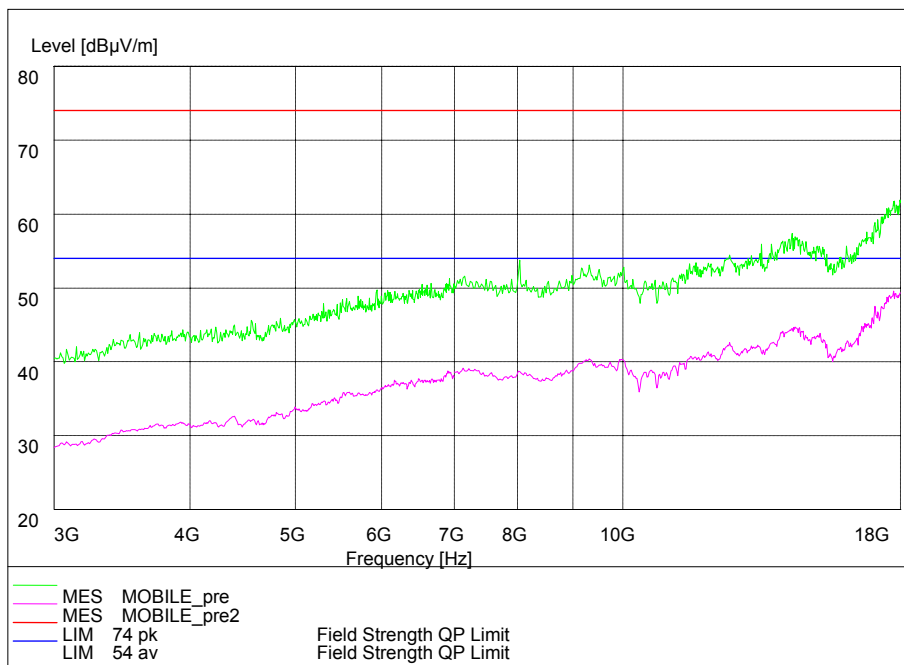


Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK

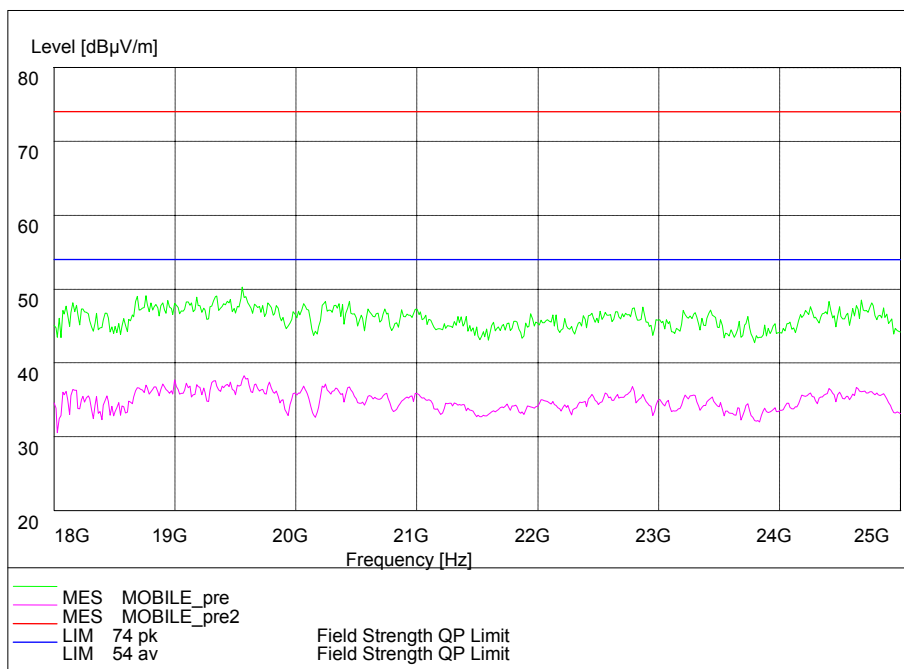

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode


Modulation type: GFSK

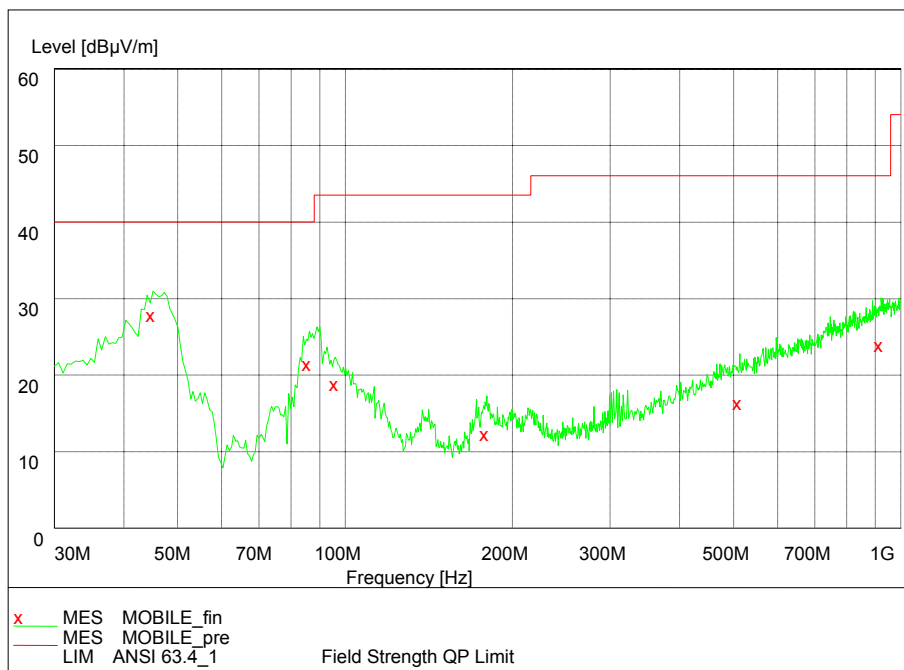


Frequency Range: 30MHz-1000 MHz

Detector: QP mode


Modulation type: $\pi/4$ DQPSK

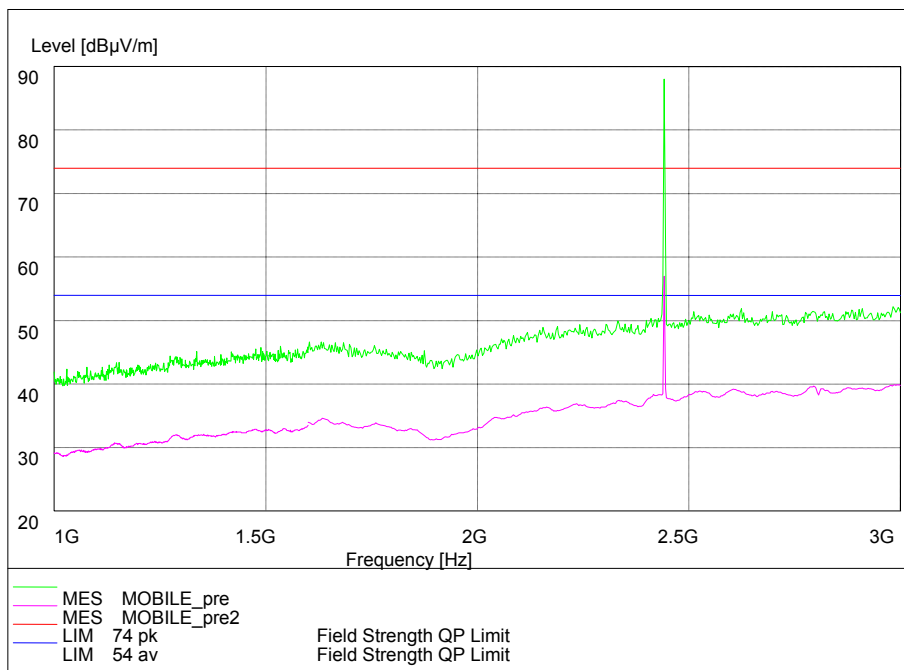

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

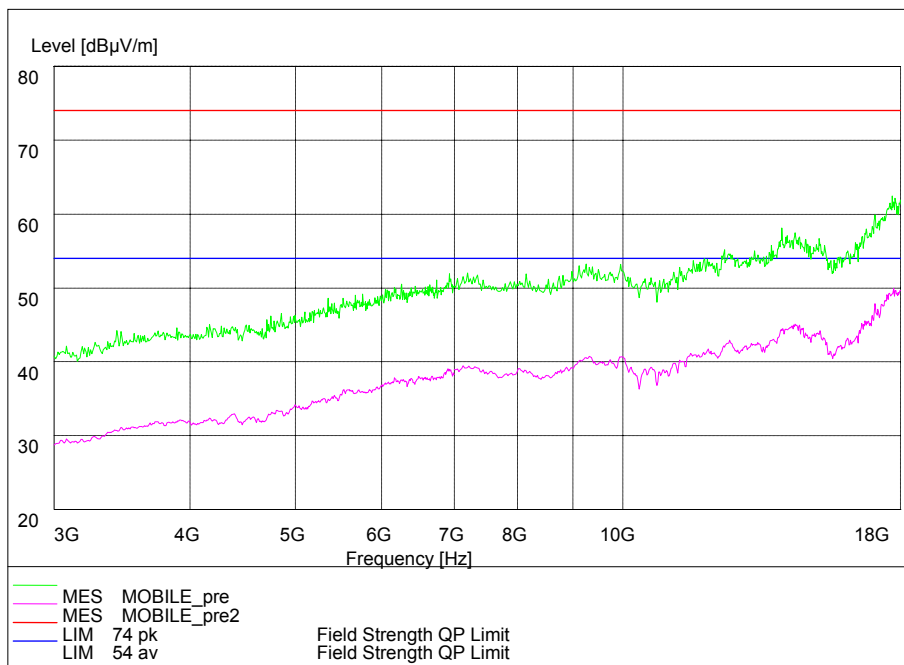


Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: $\pi/4$ DQPSK

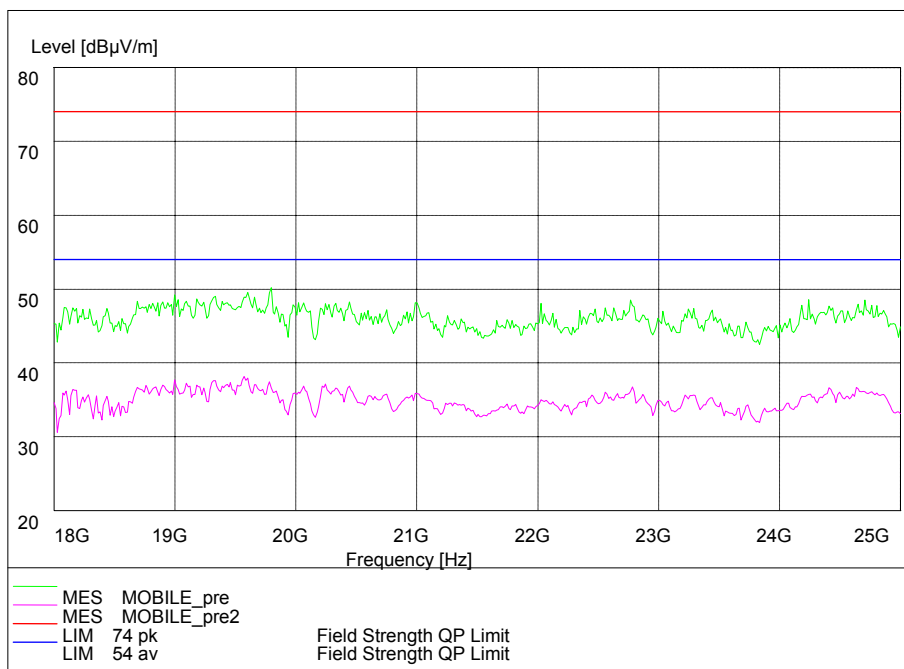

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode


Modulation type: $\pi/4$ DQPSK

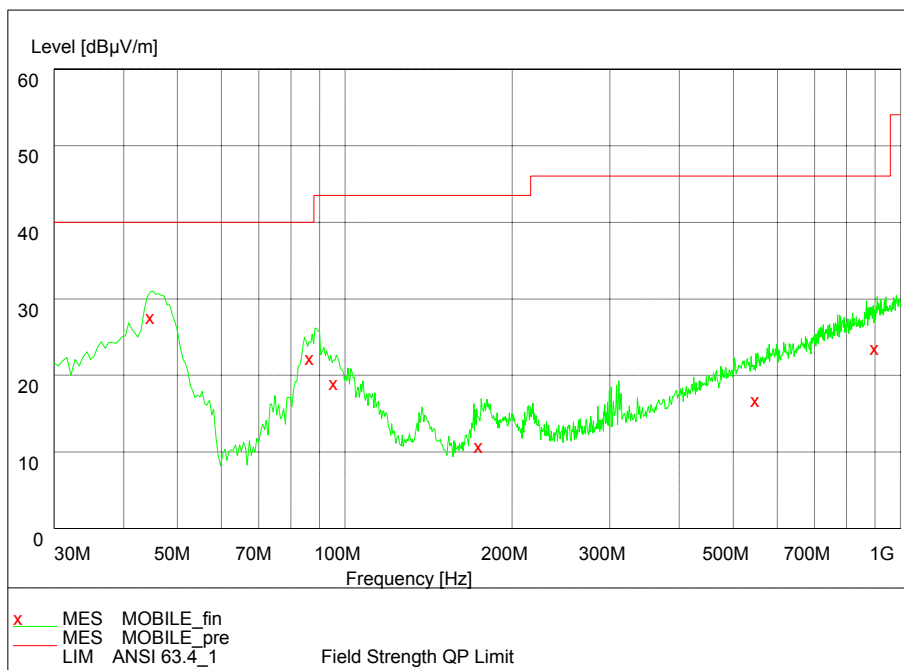


Frequency Range: 30MHz-1000 MHz

Detector: QP mode


Modulation type: 8DPSK

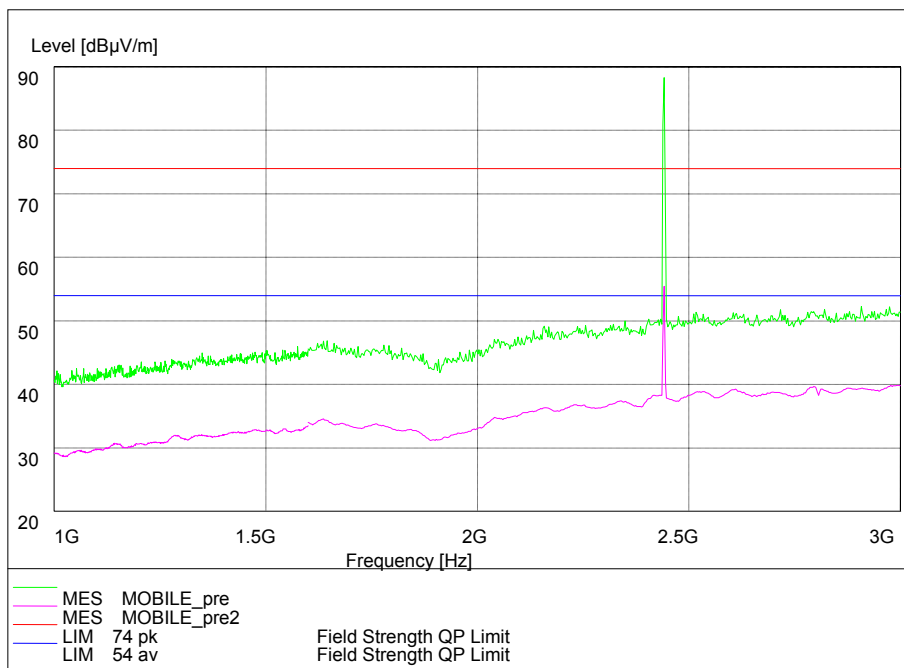

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

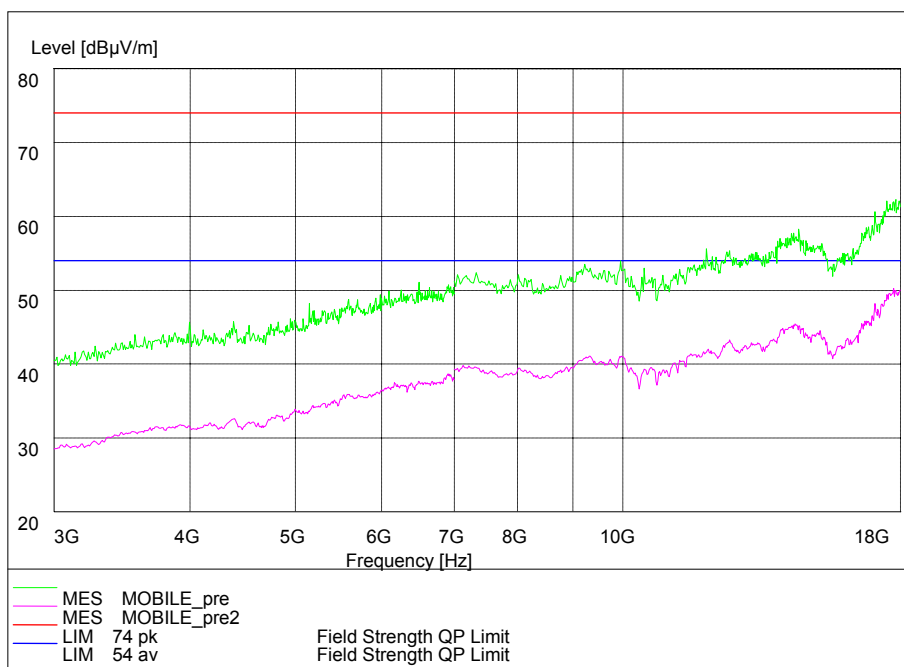

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: 8DPSK

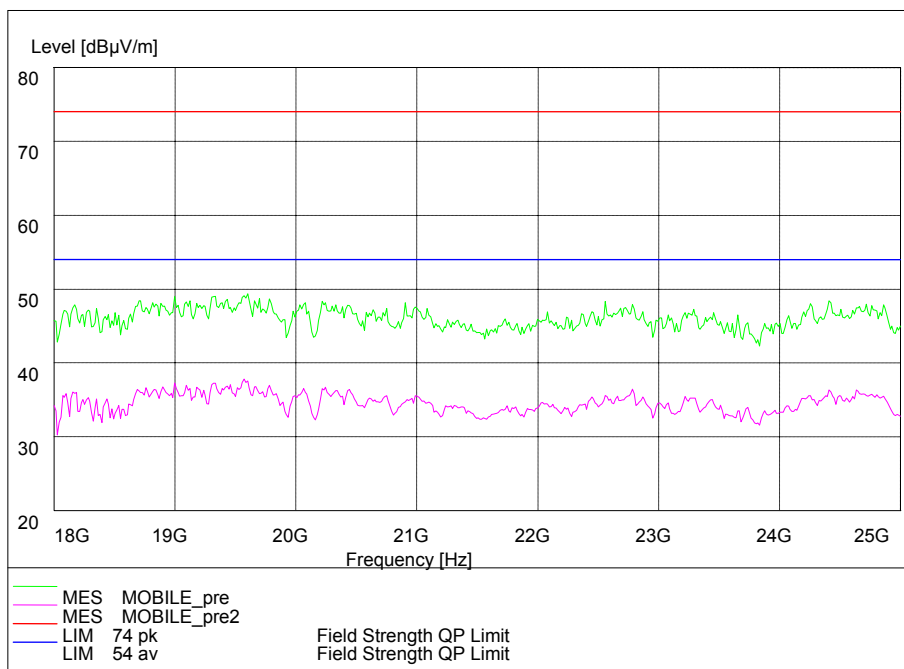

Frequency Range: 18GHz-25GHz

Detector: Av mode and PK mode

Modulation type: 8DPSK

2.2.8 AC Power line Conducted Emission

2.2.8.1 Ambient condition

Temperature	Relative humidity	Pressure
20°C	35%	101.4kPa

2.2.8.2 Test limit

FCC Part15.207


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.4-2009

2.2.8.3 Test result

Noise Level of the Measuring Instrument

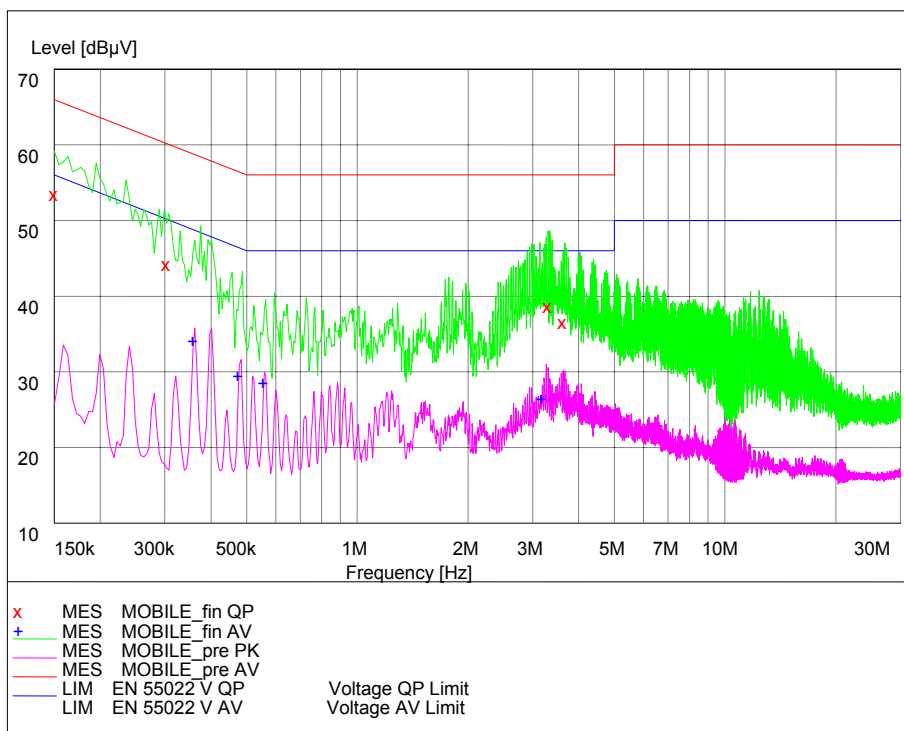


L Line

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.357000	35.50	20.1	49	13.3	---	---
0.474000	30.80	20.1	46	15.7	---	---
0.555000	29.90	20.1	46	16.1	---	---
3.174000	27.80	20.3	46	18.2	---	---

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.150000	54.90	20.1	66	11.1	---	---
0.303000	45.70	20.2	60	14.5	---	---
3.300000	40.20	20.3	56	15.8	---	---
3.624000	38.00	20.3	56	18.0	---	---

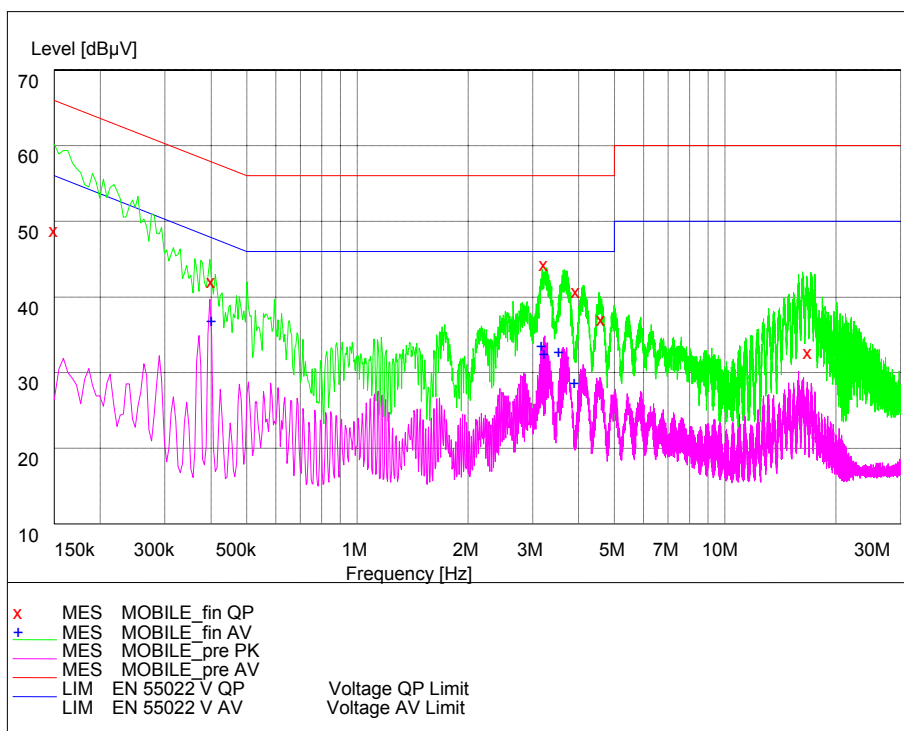

N Line

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.402000	38.20	20.1	48	9.6	---	---
3.174000	34.90	20.3	46	11.1	---	---
3.228000	33.90	20.3	46	12.1	---	---
3.534000	34.20	20.3	46	11.8	---	---
3.912000	30.10	20.3	46	15.9	---	---

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.150000	50.30	20.1	66	15.7	---	---
0.402000	43.50	20.1	58	14.3	---	---
3.228000	45.70	20.3	56	10.3	---	---
3.939000	42.20	20.3	56	13.8	---	---
4.623000	38.50	20.3	56	17.5	---	---
16.899000	34.20	20.7	60	25.8	---	---

2.3. Measurement Uncertainty

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

2.4. List of test equipment

No.	Name/ Model	Manufacturer	S/N	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2014.8
2.	Signal Generator MG3700A	Anritsu	6200677084	2014.8
3.	Bluetooth Test Set MT8852B	Anritsu	1142010	2015.2
4.	Cable 104EA	SUCOFLEX	9272/4EA	2014.8
5.	Cable 104EA	SUCOFLEX	9266/4EA	2014.8
6.	Power Splitter 11850C	Agilent	026057	2014.8
7.	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	-----	-----
8.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	-----
9.	Turn table Diameter:1m	HD	-----	-----
10.	Turn table Diameter:5m	HD	-----	-----
11.	Antenna master FAC(MA4.0)	MATURO	-----	-----
12.	Antenna master SAC(MA4.0)	MATURO	-----	-----
13.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	-----
14.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2014.8
15.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	2014.8
16.	HL562 Ultra log antenna	R&S	100016	2014.8
17.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2014.8
18.	ESI 40 EMI test receiver	R&S	100015	2014.8
19.	Radio tester	CMU 200	114667	2014.8
20.	ESCS30 EMI test receiver	R&S	100029	2014.8
21.	HL562 Receive antenna	R&S	100167	2014.8
22.	ESH3-Z5 LISN	R&S	100020	2014.8

Appendix

Appendix1 Test Setup